


SH	1
----	---

ALL SHEETS SAME REV

1. APPLICABLE STANDARDS/SPECIFICATIONS:
INTERPRET DRAWING IAW ASME Y14.100-2017.
DIMENSIONING AND TOLERANCING IAW ASME Y14.5-2009.
2. REMOVE ALL BURRS AND SHARP EDGES .010 MAX.
3. MATERIAL: .020 THICK PHOTOSENSITIVE ALUMINUM PER MIL-DTL-15024F, TYPE H, STYLE IV.
4. ATTACH 3M 468MP ADHESIVE TRANSFER TAPE TO BACK SIDE OF PLATE. DO NOT REMOVE TAPE LINER ON OPPOSITE SIDE.
5. HUMAN READABLE INFORMATION IAW MIL-STD-130 AND PARAGRAPH 4.7. ALL TEXT TO BE ARIAL FONT TYPE.
6. CHARACTERS .08 INCH HIGH.
7. CHARACTERS .10 INCH HIGH. REPLACE X CHARACTERS WITH APPLICABLE REVISION LEVEL AND SERIAL NUMBER OF RADAR ASSEMBLY TO BE IDENTIFIED. SERIAL NUMBER(S) AND REVISION LEVELS TO BE PROVIDED AT TIME OF PURCHASE BY PROCURING ACTIVITY.
8. CHARACTERS .13 INCH HIGH. BOLD TEXT.
9. DATA MATRIX SYMBOL (2D BAR CODE) IAW MIL-STD-130 PARAGRAPHS 5.2.3.2 AND 5.2.7.2 FOR A SQUARE DATA MATRIX.
10. 2D BAR CODE DATA ELEMENT INFORMATION (CONSTRUCT 2, DI)
DATA ELEMENT 1: SERIAL NUMBER
11. ARTWORK TO BE PROVIDED UPON REQUEST.

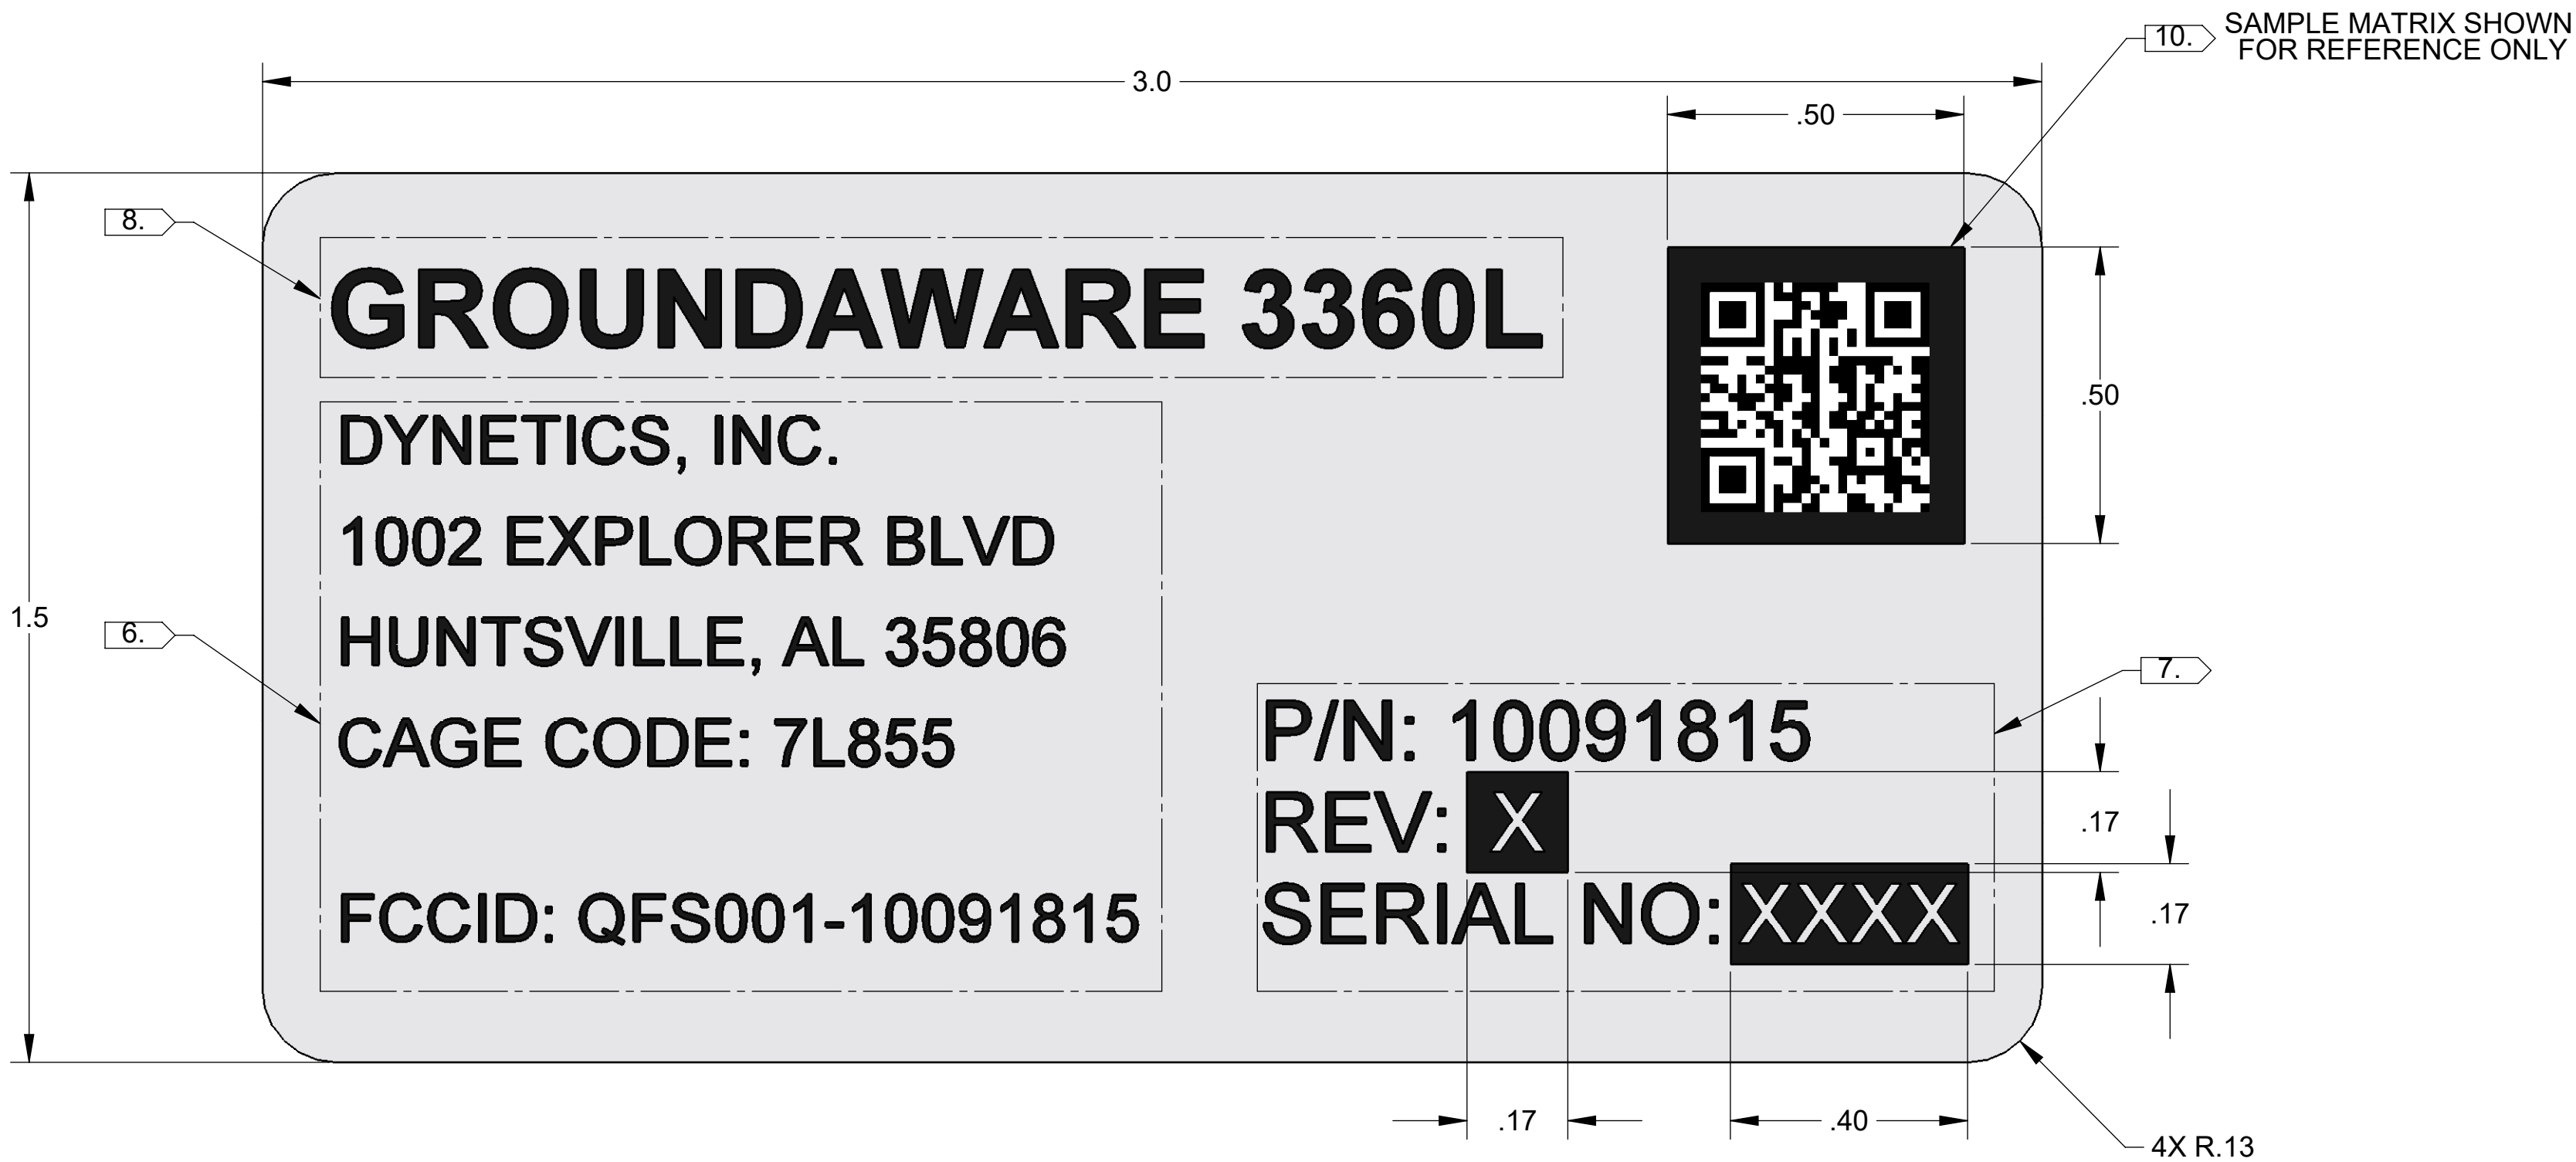

PRELIMINARY

MODEL FILENAME: 10093354 REVISION: -
DRAWING FILENAME: 10093354
MODEL LAST SAVED: Tuesday, November 10, 2020 7:46:48 AM