

Test Report

Report Number:

F251885E6

Equipment under Test (EUT):

Controlunit PILOT3

Applicant:

Fronius International GmbH

Manufacturer:

Fronius International GmbH



Deutsche
Akkreditierungsstelle
D-PL-17186-01-00

References

- [1] ANSI C63.10-2020 + Cor. 1-2023 + C63.10a-2024 + Errata to C63.10a-2024*, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
*Remark: The errata is not in the accreditation scope of the laboratory yet
- [2] FCC CFR 47 Part 15, Radio Frequency Devices
- [3] 558074 D01 15.247 Meas Guidance v05r02 (April 2019), GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
- [4] RSS-247, Issue 4 (2025-07) Digital Transmission Systems, Frequency Hopping Systems and Licence-Exempt Local Area Network Devices in 902-928 MHz, 2400-2483.5 MHz, 5150-5350 MHz, and 5470-5895 MHz bands
- [5] RSS-Gen, Issue 5 Amendment 2 (2021-02) General Requirements for Compliance of Radio Apparatus

Test Result

The requirements of the tests performed as shown in the overview (clause 4) were fulfilled by the equipment under test. The complete test results are presented in the following.

“Passed” indicates that the equipment under test conforms with the relevant limits of the testing standard without taking any measurement uncertainty into account as stated in [1]. However, the measurement uncertainty is calculated and shown in this test report.

Tested by:

Signature

Written by:

Signature

Reviewed and
approved by:

Signature

This test report is only valid in its original form.

Any reproduction of its contents in extracts without written permission of the accredited test laboratory NMI TESTLAB GmbH is prohibited.

The test results herein refer only to the tested sample. NMI TESTLAB GmbH is not responsible for any generalisations or conclusions drawn from these test results concerning further samples. Any modification of the tested samples is prohibited and leads to the invalidity of this test report. Each page necessarily contains the NMI TESTLAB Logo and the TEST REPORT NUMBER.

Contents:	Page
1 Identification	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Test Laboratory	5
1.4 EUT (Equipment under Test).....	6
1.5 Technical Data of Equipment.....	7
1.6 Dates.....	8
2 Operational States.....	9
2.1 Description of function of the EUT	9
3 Additional Information	11
4 Overview	11
5 Results.....	12
5.1 Test setups	12
5.2 Duty cycle.....	21
5.3 DTS bandwidth	22
5.4 Occupied bandwidth – power bandwidth (99%).....	24
5.5 DTS fundamental emission output power	26
5.6 DTS maximum power spectral density	29
5.7 DTS band-edge emission measurements	32
5.8 Radiated emissions	36
5.9 AC power-line conducted emissions.....	46
6 Measurement Uncertainties	48
7 Test Equipment used for Tests	49
8 Test site Verification	50
9 Report History	50
10 List of Annexes	50

1 Identification

1.1 Applicant

Name:	Fronius International GmbH
Address:	Günter-Fronius-Straße 1, 4600 Wels-Thalheim
Country:	Austria
Name for contact purposes:	Mr. Jan HERNDLER
Phone:	+43 7242 241 0
eMail address:	herndler.jan@fronius.com
Applicant represented during the test by the following person:	Partly: Mr. Jan HERNDLER

1.2 Manufacturer

Name:	Fronius International GmbH
Address:	Fronius Straße 5, 4642 Sattledt
Country:	Austria
Name for contact purposes:	Mr. Jan HERNDLER
Phone:	+43 7242 241 0
eMail address:	herndler.jan@fronius.com
Manufacturer represented during the test by the following person:	Partly: Mr. Jan HERNDLER


1.3 Test Laboratory

The tests were carried out by: NMI TESTLAB GmbH formerly PHOENIX TESTLAB GmbH
Königswinkel 10
32825 Blomberg
Germany

accredited by *Deutsche Akkreditierungsstelle GmbH (DAkkS)* according to DIN EN ISO/IEC 17025:2018. The accreditation is only valid for the scope of accreditation listed in the annex of the certificate D-PL-17186-01-00. FCC Test Firm Designation Number DE0004, FCC Test Firm Registration Number 469623, CAB Identifier DE0003 and ISED# 3469A.

1.4 EUT (Equipment under Test)

Test object: *	Control and steering unit for solar inverters
Model name: *	Controlunit PILOT3
Model number: *	43,0001,1844
Order number: *	N/A
FCC ID: *	QKWPILOT3
IC certification number: *	12270A-PILOT3
PMN: *	Controlunit PILOT3
HVIN: *	V1.1A_A
FVIN: *	N/A

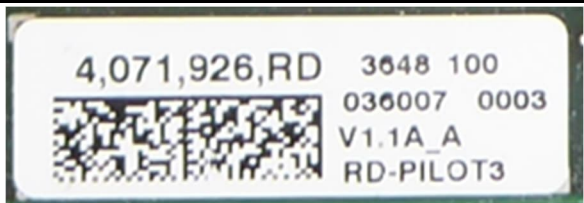	EUT number	
	1	Type plate
Serial number: *	036007 0003	
PCB identifier: *	4,071,926,RD	
Hardware version: *	V1.1A_A	
Software version: *	N/A	

* Declared by the applicant

One EUT was used for all tests.

Note: NMI TESTLAB GmbH does not take samples. The samples used for tests are provided exclusively by the applicant.

1.5 Technical Data of Equipment

General EUT data			
Power supply EUT: *	DC		
Supply voltage EUT: *	$U_{nom} = 12 \text{ V}$	$U_{min} = 10.8 \text{ V}$	$U_{max} = 13.2 \text{ V}$
Supply voltage EUT: *	$U_{nom} = 24 \text{ V}$	$U_{min} = 22.6 \text{ V}$	$U_{max} = 26.4 \text{ V}$
Temperature range: *	-40°C to $+65^{\circ}\text{C}$		
Lowest / highest internal clock frequency: *	10 kHz / 2462 MHz		

Ports / Connectors				
Identification	Connector		Length during test	Shielding (Yes / No)
	EUT	Ancillary		
Power connection cable	Customized	Customized	3m	no
Ethernet	RJ45	RJ45	3m	yes
Ethernet	RJ45	Left open	---	---
RS485	RJ45/ Customized (parallel)	Left open	---	---
DC / IO 16 pin	Customized 16 pol plug	Left open	---	---
IN / OUT 4 pin	Customized 4 pol plug	Left open	---	---
-	-	-	-	-

IEEE 802.11 frequencies	
20 MHz	
Channel 1	2412 MHz
Channel 2	2417 MHz
Channel 3	2422 MHz
Channel 4	2427 MHz
Channel 5	2432 MHz
Channel 6	2437 MHz
Channel 7	2442 MHz
Channel 8	2447 MHz
Channel 9	2452 MHz
Channel 10	2457 MHz
Channel 11	2462 MHz

IEEE 802.11 radio mode				
Fulfil radio specification: *1	IEEE 802.11 b IEEE 802.11 g IEEE 802.11 n (20 MHz)			
Radio chip: *1	Murata LBEE5CJ1XK			
Antenna type: *1	Dipole antenna			
Antenna name: *1	Taoglas GW.40			
Antenna gain: *2	3.15 dBi			
Antenna connector: *1	RP SMA			
Supply voltage WLAN module: *1	$U_{nom} = 3 V_{DC}$	$U_{min} = 2.7 V_{DC}$	$U_{max} = 3.3 V_{DC}$	
Type of modulation: *1	IEEE 802.11b	DSSS (1 Mbps DSSS (2 Mbps DSSS (5.5/11 Mbps		DBPSK) DQPSK) CCK)
	IEEE 802.11g	OFDM (6/9 Mbps OFDM (12 / 18 Mbps OFDM (24/36 Mbps OFDM (48/54 Mbps		BPSK) QPSK) 16-QAM) 64-QAM)
	IEEE 802.11n 20 MHz (SISO 1x1:1)	MCS0 MCS1/2 MCS3/4 MCS5/6/7	OFDM (7 Mbps OFDM (14 – 22 Mbps OFDM (28 – 43 Mbps OFDM (58 - 72 Mbps	BPSK) QPSK) 16-QAM) 64-QAM)
Operating frequency range: *1	IEEE 802.11b	2412 – 2462 MHz		
	IEEE 802.11g	2412 – 2462 MHz		
	IEEE 802.11n 20 MHz	2412 – 2462 MHz		
Number of channels: *1	IEEE 802.11b	11 (5 MHz channel spacing)		
	IEEE 802.11g	11 (5 MHz channel spacing)		
	IEEE 802.11n 20 MHz	11 (5 MHz channel spacing)		

*1 declared by the applicant

*2 based on the antenna data sheet provided by the applicant

1.5.1 Ancillary Equipment / Equipment used for testing

Equipment used for testing	
AC adapter *1	HC24-2.4-AG

*1 Provided by the laboratory

1.6 Dates


Date of receipt of test sample:	17.02.2026
Start of test:	17.02.2026
End of test:	25.03.2026

2 Operational States

2.1 Description of function of the EUT

The EUT is a control and steering unit for solar inverters, equipped with IEEE 802.11 WLAN for communication purposes. An ethernet connection to the test notebook was established and the test modes were set in a terminal session.

The EUT:

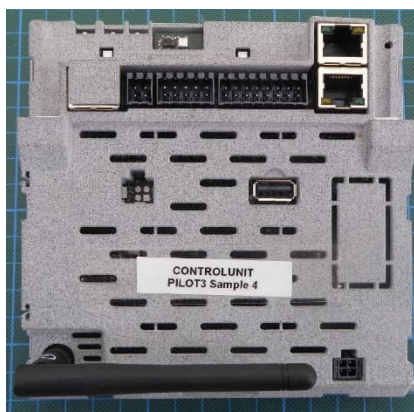


2.1.1 Operation modes

Operation mode #	Radio technology	Frequency [MHz]	Channel / Band	Modulation / Mode	Data rate	Power setting
1	IEEE 802.11, b-mode	2412	01	DSSS	1 Mbit/s	"14 dBm"
2	IEEE 802.11, b-mode	2437	06	DSSS	1 Mbit/s	"14 dBm"
3	IEEE 802.11, b-mode	2462	11	DSSS	1 Mbit/s	"14 dBm"
4	IEEE 802.11, b-mode	2412	01	DSSS	11 Mbit/s	"14 dBm"
5	IEEE 802.11, b-mode	2437	06	DSSS	11 Mbit/s	"14 dBm"
6	IEEE 802.11, b-mode	2462	11	DSSS	11 Mbit/s	"14 dBm"
7	IEEE 802.11, b-mode	2412	01	DSSS	5.5 Mbit/s	"14 dBm"
8	IEEE 802.11, b-mode	2462	06	DSSS	5.5 Mbit/s	"14 dBm"
9	IEEE 802.11, g-mode	2412	01	OFDM	6 Mbit/s	"14 dBm"
10	IEEE 802.11, g-mode	2437	06	OFDM	6 Mbit/s	"14 dBm"
11	IEEE 802.11, g-mode	2462	11	OFDM	6 Mbit/s	"14 dBm"
12	IEEE 802.11, g-mode	2412	01	OFDM	48 Mbit/s	"14 dBm"
13	IEEE 802.11, g-mode	2437	06	OFDM	48 Mbit/s	"14 dBm"
14	IEEE 802.11, g-mode	2462	11	OFDM	48 Mbit/s	"14 dBm"
15	IEEE 802.11, g-mode	2412	01	OFDM	9 Mbit/s	"14 dBm"
16	IEEE 802.11, n20-mode	2412	01	OFDM	MCS1	"14 dBm"
17	IEEE 802.11, n20-mode	2437	06	OFDM	MCS1	"14 dBm"
18	IEEE 802.11, n20-mode	2462	11	OFDM	MCS1	"14 dBm"
19	IEEE 802.11, n20-mode	2412	01	OFDM	MCS5	"14 dBm"
20	IEEE 802.11, n20-mode	2437	06	OFDM	MCS5	"14 dBm"
21	IEEE 802.11, n20-mode	2462	11	OFDM	MCS5	"14 dBm"

2.1.2 Block Diagram (Radiated)



2.1.3 Block Diagram (Conducted)

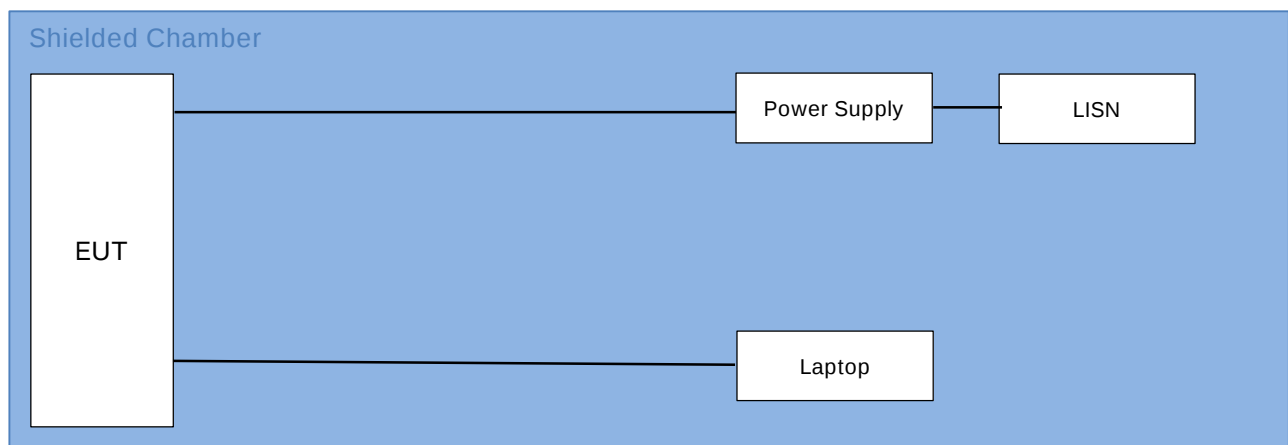

3 Additional Information

The EUT was not labeled as required by FCC / IC.

The EUTs housing was a rapid prototyping housing, not final housing material nor colour.

4 Overview

Application	Frequency range [MHz]	FCC 47 CFR Part 15 section [2]	RSS-247 [4] RSS-Gen [5]	Tested EUT	Status
Maximum (average) conducted output power	2400.0 - 2483.5	15.247 (b) (3), (4)	6.3.2 [4]	1	Passed
DTS Bandwidth / 99% Bandwidth	2400.0 - 2483.5	15.247 (a) (2)	6.3.1 [4]	1	Passed
Peak Power Spectral Density	2400.0 - 2483.5	15.247 (e)	6.3.1 [4]	-	-
Average Power Spectral Density	2400.0 - 2483.5	15.247 (e)	6.3.1 [4]	1	Passed
Band edge compliance	2400.0 - 2483.5	15.247 (d) 15.205 (a) 15.209 (a)	6.6 [4]	1	Passed * ²
Maximum unwanted emissions	0.009 – 2650.0	15.247 (d) 15.205 (a) 15.209 (a)	8.9 [5]	1	Passed * ^{2 3}
Antenna Requirement	-	15.203 15.247 (b)	6.8 [5] 6.5 (c) (ii) [4]	1	Passed
Conducted emissions on supply line	0.15 – 30	15.207 (a)	8.8 [5]	1	Passed

*¹: These tests were not ordered by the applicant

*²: Only the worst-case data rate as pretests have shown was tested

*³: As declared by the applicant the highest radio frequency is 2.462 GHz.

Therefore, the radiated emission measurement must be carried out up to 10th of the highest radio clock frequency in this case 26.5 GHz.

5 Results

5.1 Test setups

5.1.1 Radiated: 9 kHz to 30 MHz


5.1.1.1 Preliminary measurement 9 kHz to 30 MHz

In the first stage a preliminary measurement is performed in a semi-anechoic chamber at a measuring distance of 3 meters. Table-top devices are set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices are placed directly on the turntable / ground plane. The setup of the equipment under test is in accordance with [1].

The frequency range 9 kHz to 30 MHz is monitored with an EMI receiver while the system and its cables are manipulated to find out the configuration with the maximum emission levels if applicable. The EMI receiver is set to MAX hold mode. The EUT and the measuring antenna are rotated around their vertical axis to find the maximum emission levels.

The resolution bandwidth of the EMI receiver is set to the following values:

Frequency range	Resolution bandwidth
9 kHz to 150 kHz	200 Hz
150 kHz to 30 MHz	9 kHz

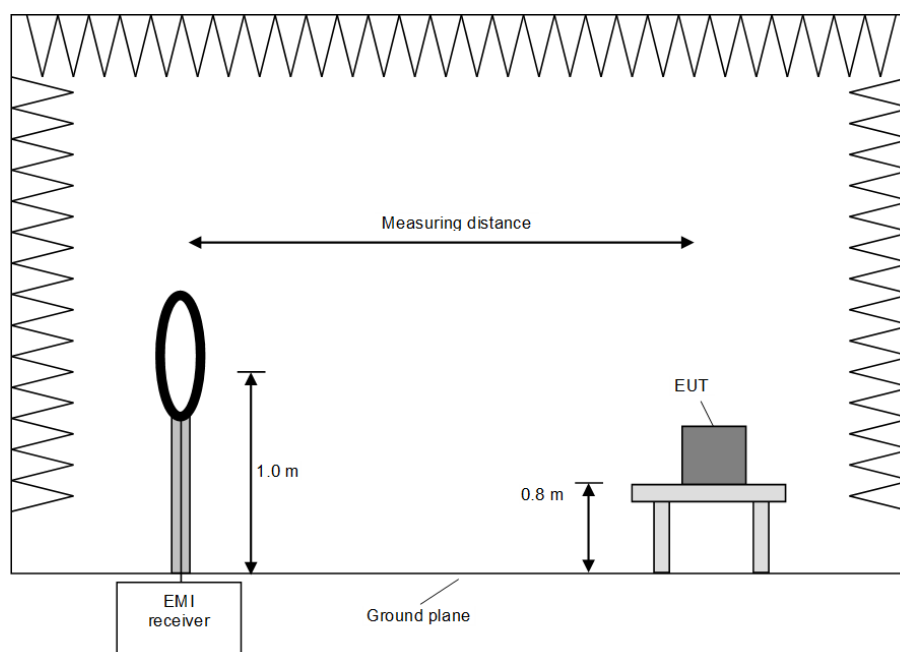

Procedure preliminary measurement:

Pre-scans are performed in the frequency range 9 kHz to 150 kHz and 150 kHz to 30 MHz.

The following procedure is used:

- 1) Monitor the frequency range with the measuring antenna facing the EUT and an EUT / turntable azimuth of 0 °.
- 2) Manipulate the system cables to produce the maximum levels of emissions.
- 3) Rotate the EUT by 360 ° to maximize the detected signals.
- 4) Measure the frequencies of the highest detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency values.
- 5) If the EUT is portable or ceiling mounted, repeat steps 1 to 4 with other orientations (x,y,z) of the EUT.
- 6) Rotate the measuring antenna and repeat steps 1 to 5.


5.1.1.2 Final measurement 9 kHz to 30 MHz

In the second stage a final measurement is performed on an open area test site with no conducting ground plane at a measuring distance of 3 m, 10 m, or 30 m. If the standard requires larger measuring distances for a given frequency, the results are extrapolated according to section 15.31 (f) (2) [2]. The final measurement is performed with an EMI receiver set to Quasi-Peak detector, except for the frequency bands 9 kHz to 90 kHz and 110 kHz to 490 kHz where an Average detector is used according section 15.209 (d) [2].

At the frequencies, which were detected during the preliminary measurements, the final measurement is performed while rotating the EUT and the measuring antenna in the range of 0 ° to 360 ° around their vertical axis until the maximum level value is found.

The resolution bandwidth of the EMI receiver is set to the following values:

Frequency range	Resolution bandwidth	Measuring time
9 kHz to 150 kHz	200 Hz	1 s
150 kHz to 30 MHz	9 kHz	1 s

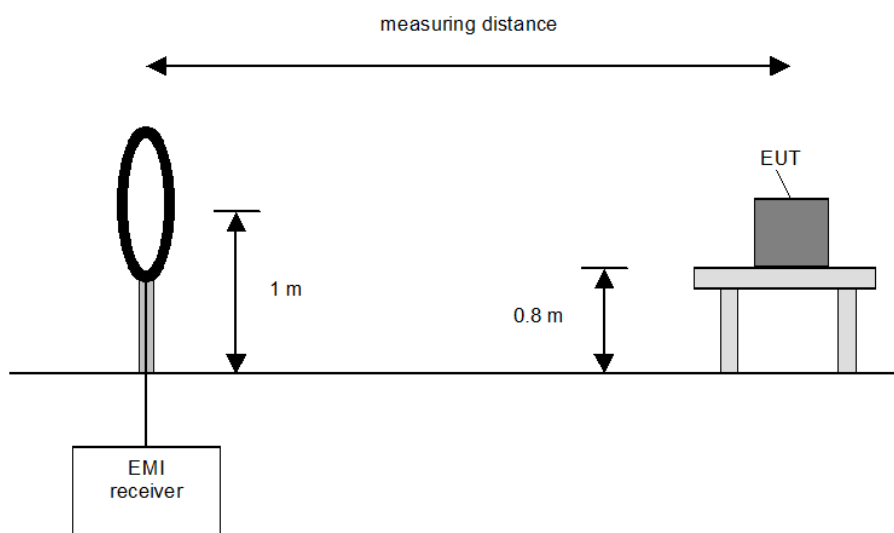

Procedure final measurement:

The following procedure is used:

- 1) Monitor the selected frequencies from the preliminary measurement with the measuring antenna facing the EUT and an EUT azimuth of 0 °.
- 2) Rotate the EUT by 360 ° to maximize the detected signals.
- 3) Rotate the measuring antenna and repeat steps 1 to 2 until the maximum value is found and note it.
- 4) If the EUT is portable or ceiling mounted, repeat steps 1 to 3 with other orientations (x,y,z) of the EUT.

5.1.2 Radiated: 30 MHz to 1 GHz


5.1.2.1 Preliminary and final measurement 30 MHz to 1 GHz

The preliminary and final measurements are performed in a semi-anechoic chamber with a metal ground plane at a measuring distance of 3 meters. Table-top devices are set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices are placed directly on the turntable / ground plane. The setup of the equipment under test is in accordance with [1].

During the tests the EUT is rotated in the range of 0 ° to 360 °, the measuring antenna is set to horizontal and vertical polarization and raised and lowered in the range from 1 m to 4 m to find the maximum level of emissions.

The resolution bandwidth of the EMI receiver is set to the following values:

Test	Frequency range	Step-size	Resolution bandwidth	Measuring time	Detector
Preliminary measurement	30 MHz to 1 GHz	30 kHz	120 kHz	-	Peak Average
Frequency peak search	± 120 kHz	10 kHz	120 kHz	1 s	Peak
Final measurement	30 MHz to 1 GHz	-	120 kHz	1 s	QuasiPeak

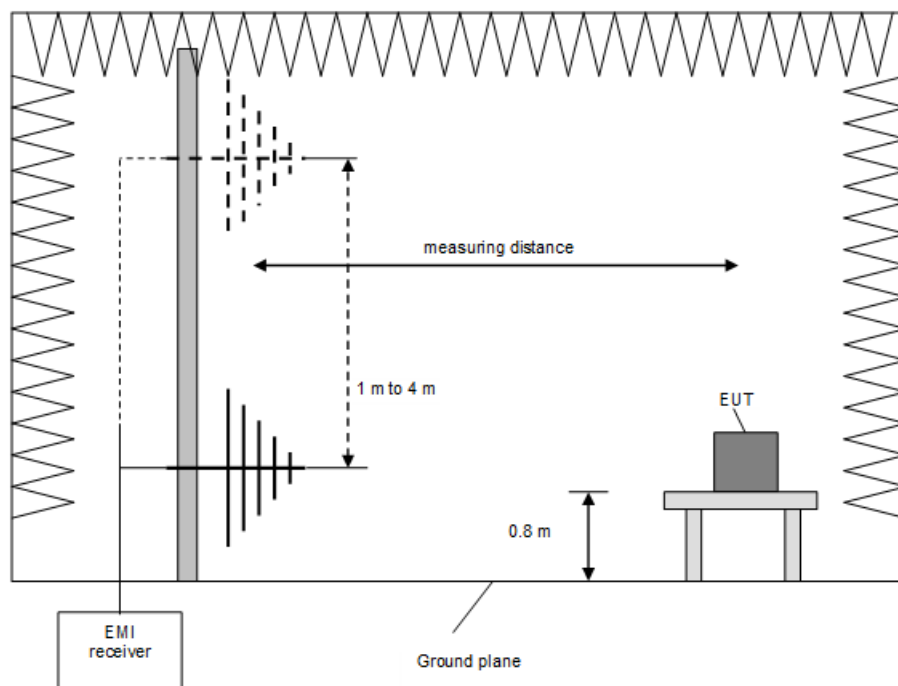

Procedure preliminary measurement:

The following procedure is used:

- 1) Set the measuring antenna to 1 m height.
- 2) Monitor the frequency range at horizontal polarization of the measuring antenna and an EUT / turntable azimuth of 0 °.
- 3) Rotate the EUT by 360° to maximize the detected signals.
- 4) Repeat steps 2 to 3 with the vertical polarization of the measuring antenna.
- 5) Increase the height of the measuring antenna for 0.5 m and repeat steps 2 to 4 until the final height of 4 m is reached.
- 6) The highest values for each frequency are saved by the software, including the measuring antenna height and polarization and the turntable azimuth for that value.

Procedure final measurement:

The following procedure is used:

- 1) Select the highest frequency peaks (lowest margin to the limit) for the final measurement.
- 2) The software determines the exact peak frequencies by doing a partial scan with reduced step size of the pre-scan of the selected peaks.
- 3) If the EUT is portable or ceiling mounted, find the worst-case EUT orientation (x,y,z) for the final test.
- 4) The worst-case measuring antenna height is found via varying the height by +/- 0.5 m from the value obtained in the preliminary measurement while monitoring the emission level.
- 5) The worst-case turntable position is found via varying the turntable azimuth by +/- 30° from the value obtained in the preliminary measurement while monitoring the emission level.
- 6) The final measurement is performed at the worst-case measuring antenna height and the worst-case turntable azimuth.
- 7) Steps 2 to 6 are repeated for each frequency peak selected in step 1.

5.1.3 Radiated: 1 GHz to 40 GHz


5.1.3.1 Preliminary and final measurement 1 to 40 GHz

The preliminary and final measurements are performed in a fully anechoic chamber at a measuring distance of 3 meters. Table-top devices are set up on a non-conducting turn device at the height of 1.5 m. The setup of the equipment under test is in accordance with [1].

During the tests the EUT is rotated in the range of 0 ° to 360 ° and the measuring antenna is set to horizontal and vertical polarization to find the maximum level of emissions. After these steps, the measurement is repeated after reorientating the EUT in 30 ° steps.

The resolution bandwidth of the EMI receiver is set to the following values:

Test	Frequency range	Step-size	Resolution bandwidth	Measuring time	Detector
Preliminary measurement	1 - 40 GHz	250 kHz	1 MHz	-	Peak Average
Final measurement	1 - 40 GHz	-	1 MHz	100 ms	Peak Average

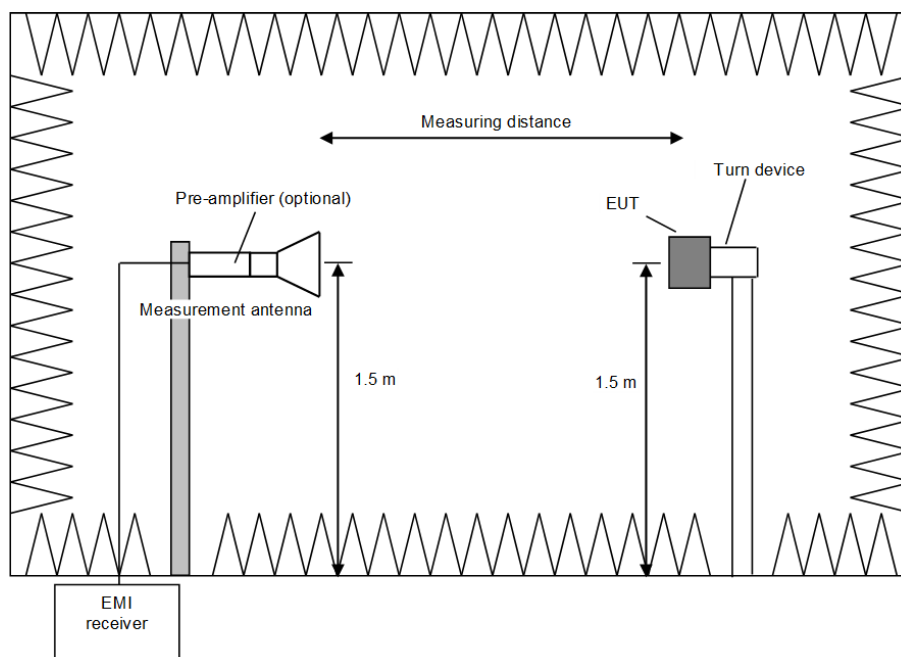

Procedure preliminary measurement:

The following procedure is used:

- 1) Monitor the frequency range at horizontal polarisation of the measuring antenna and an EUT / turntable azimuth of 0 °.
- 2) Rotate the EUT by 360° to maximize the detected signals.
- 3) Repeat steps 1 to 2 with the vertical polarisation of the measuring antenna.
- 4) Repeat steps 1 to 3 with the EUT reorientated by an angle of 30° (60°, 90°, 120° and 150°), according to 6.6.5.4 in [1].
- 5) The highest values for each frequency are saved by the software, including the measuring antenna polarization, the turntable azimuth and the turn device elevation for that value.


Procedure final measurement:

The following procedure is used:

- 1) Set the turntable and the turn device to the position which leads to the highest emission for the first frequency identified in the preliminary measurements.
- 2) Set the measurement antenna to the polarisation which leads to the highest emission for the first frequency identified in the preliminary measurements.
- 3) Set the spectrum analyser to EMI mode with Peak and Average detector activated.
- 4) The worst-case turntable position is found via varying the turntable azimuth by +/- 30° from the value obtained in the preliminary measurement while monitoring the emission level.
- 5) The final measurement is performed at the worst-case turntable azimuth.
- 6) Repeat steps 1 to 5 for each frequency detected during the preliminary measurements.

5.1.4 Conducted: Antenna port

Test setup (conducted)		
Used	Antenna connector	Comment
☒	Temporary antenna connector	As provided by the applicant
☐	Normal antenna connector	-

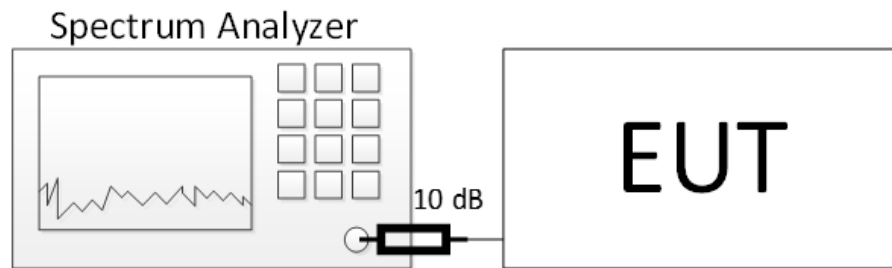


The 10 dB external attenuation are considered in all relevant plots

5.1.5 Conducted: AC power line

The test is carried out in a shielded chamber. Table-top devices are set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm above the ground plane. Floor-standing devices are placed directly on the ground plane. In case of DC powered equipment, which is not exclusively powered by a battery, it is connected to the LISN via a suitable AC/DC adaptor. The setup of the equipment under test is in accordance with [1].

The frequency range 150 kHz to 30 MHz is measured with an EMI receiver set to MAX hold mode with Peak and Average detectors and a resolution bandwidth of 9 kHz. A scan is carried out on the phase and neutral line of the AC mains network. If emissions less than 10 dB below the appropriate limit are detected, these emissions are measured with an Average and Quasi-Peak detector on all lines.

Frequency range	Resolution bandwidth	Measuring time
150 kHz to 30 MHz	9 kHz	5 s

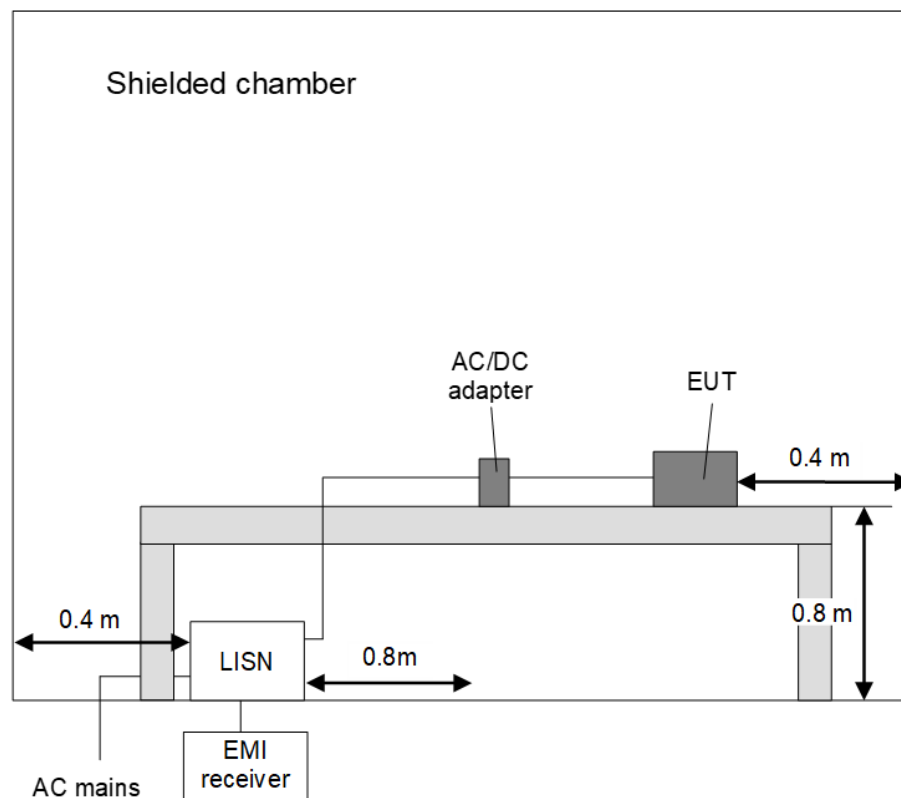

5.2 Duty cycle

5.2.1 Test setup (Duty cycle)

Test setup (Duty cycle)			
Used	Setup	See sub-clause	Comment
☐	Radiated: 1 GHz to 40 GHz	5.1.3	-
☒	Conducted: Antenna port	5.1.4	-

5.2.2 Test method (Duty cycle)

Test method (Duty cycle)				
Used	Sub-Clause [1]	Name of method	Applicability	Comment
☐	11.6. a)	Diode detector	No limitation	-
☒	11.6. b)	Zero span	No limitation	-

5.2.3 Test results (Duty cycle)

Ambient temperature:	21.7 °C
Relative humidity:	30.3 %

Date:	17/18.02.2026
Tested by:	P. NEUFELD

The DCCF (duty cycle correction factor) is calculated by:

$$DCCF_{power} = 10 * \log_{10} \left(\frac{1}{Duty\ cycle} \right)$$

$$DCCF_{fieldstrength} = 20 * \log_{10} \left(\frac{1}{Duty\ cycle} \right)$$

Preliminary tests have shown that the duty cycle is $\geq 98\%$ for every operation mode. Therefore, no DCCF is applied.

Test equipment (please refer to chapter 7 for details)
21

5.3 DTS bandwidth

5.3.1 Test setup (DTS bandwidth)

Test setup (DTS bandwidth)			
Used	Setup	See sub-clause	Comment
☐	Radiated: 1 GHz to 40 GHz	5.1.2	-
☒	Conducted: Antenna port	5.1.3	-

5.3.2 Test method (DTS bandwidth)

Test method (DTS bandwidth)				
Used	Sub-Clause [1]	Name of method	Applicability	Comment
☐	11.8.1	Option 1	No limitations	-
☒	11.8.2	Option 2	No limitations	6 dB down function


The test results are presented on the following page.

5.3.3 Test results (DTS bandwidth)

Ambient temperature:	21.7 °C
Relative humidity:	30.3 %

Date:	17/18.02.2026
Tested by:	P. NEUFELD

Worst case plot (operation mode 2):

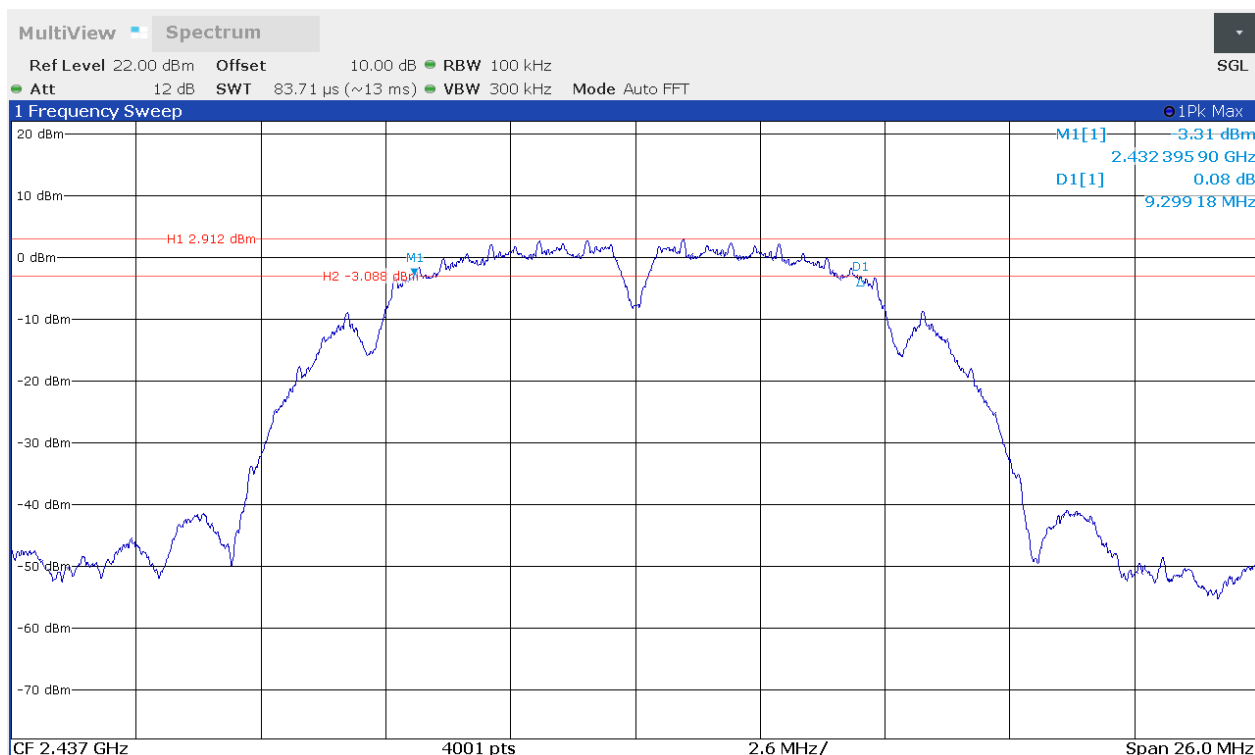

Operation mode #	DTS bandwidth [MHz]	Minimum DTS bandwidth Limit [MHz]
1	9.656	0.500
2	9.299	0.500
3	9.377	0.500
9	16.582	0.500
10	16.564	0.500
11	16.573	0.500
16	17.760	0.500
17	17.752	0.500
18	17.752	0.500

Test result: Passed

Test equipment (please refer to chapter 7 for details)
21

5.4 Occupied bandwidth – power bandwidth (99%)

5.4.1 Test Setup (Occupied bandwidth – power bandwidth (99%))

Test setup (Occupied bandwidth – power bandwidth (99%))			
Used	Setup	See sub-clause	Comment
☐	Radiated: 1 GHz to 40 GHz	5.1.2	-
☒	Conducted: Antenna port	5.1.3	-

5.4.2 Test method (Occupied bandwidth – power bandwidth (99%))

Test method (Occupied bandwidth – power bandwidth (99%))				
Used	Sub-Clause [1]	Name of method	Applicability	Comment
☐	6.9.2	Relative measurement procedure	-	n-dB down
☒	6.9.3	Power bandwidth (99%)	*1	99% power function


*1 See RSS-GEN Issue 5 (2018-05) sub-clause 6.7 for details.

5.4.3 Test results (Occupied bandwidth – power bandwidth (99%))

Ambient temperature:	21.7 °C
Relative humidity:	30.3 %

Date:	17/18.02.2026
Tested by:	P. NEUFELD

Worst case plot (operation mode 18):

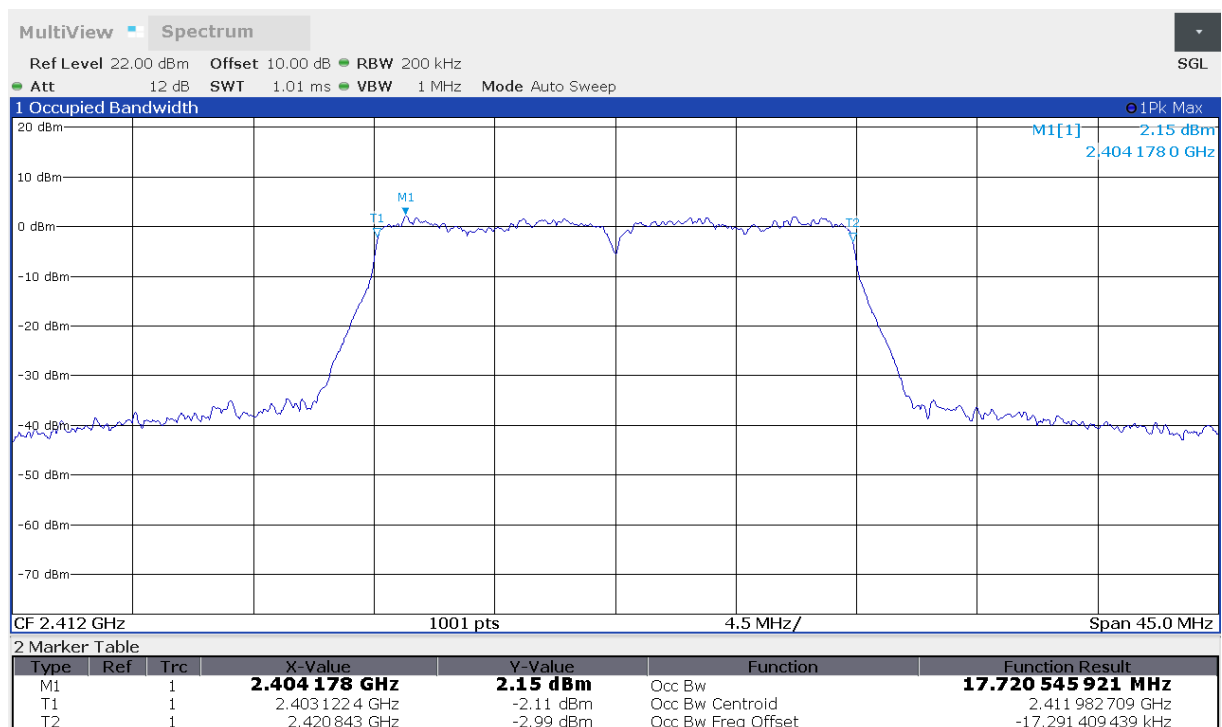

The result table is presented on the following page.

Result table:

Operation mode #	99% bandwidth [MHz]
1	11.972
2	11.966
3	11.961
9	16.705
10	16.726
11	16.730
16	17.720
17	17.720
18	17.717

Test result: Passed

Test equipment (please refer to chapter 7 for details)
21

5.5 DTS fundamental emission output power

5.5.1 Test setup (DTS fundamental emission output power)

Test setup (DTS fundamental emission output power)			
Used	Setup	See sub-clause	Comment
☐	Radiated: 1 GHz to 40 GHz	5.1.2	-
☒	Conducted: Antenna port	5.1.3	-

5.5.2 Test method (DTS fundamental emission output power)

Test method (Maximum peak conducted output power)				
Used	Sub-Clause [1]	Name of method	Applicability	Comment
☐	11.9.1.1	RBW $\geq$ DTS bandwidth	-	Zero span mode
☐	11.9.1.2	PKPM1 Peak power meter method *	-	-

* VBW of the peak power meter has to be $>$ OBW of the fundamental.

Test method (Maximum conducted (average) output power)				
Used	Sub-Clause [1]	Name of method	Applicability	Comment
☒	11.9.2.2.2	Method AVGSA-1	$D \geq 98\%$	-
☐	11.9.2.2.3	Method AVGSA-1A (alternative)	$D \geq 98\%$	-
☐	11.9.2.2.4	Method AVGSA-2	Constant D ($\pm 2\%$)	-
☐	11.9.2.2.5	Method AVGSA-2A (alternative)	Constant D ($\pm 2\%$)	-
☐	11.9.2.2.6	Method AVGSA-3A	-	-
☐	11.9.2.2.7	Method AVGSA-3A (alternative)	-	-
☐	11.9.2.3.1	Method AVGPM	Constant D ($\pm 2\%$)	-
☐	11.9.2.3.2	Method AVGPM-G	-	-

The test results are presented on the following pages.


5.5.3 Test results (DTS fundamental emission output power)

5.5.3.1 Maximum conducted (average) output power

Ambient temperature:	21.7 °C
Relative humidity:	30.3 %

Date:	17/18.02.2026
Tested by:	P. NEUFELD

Worst case plot (operation mode 2):

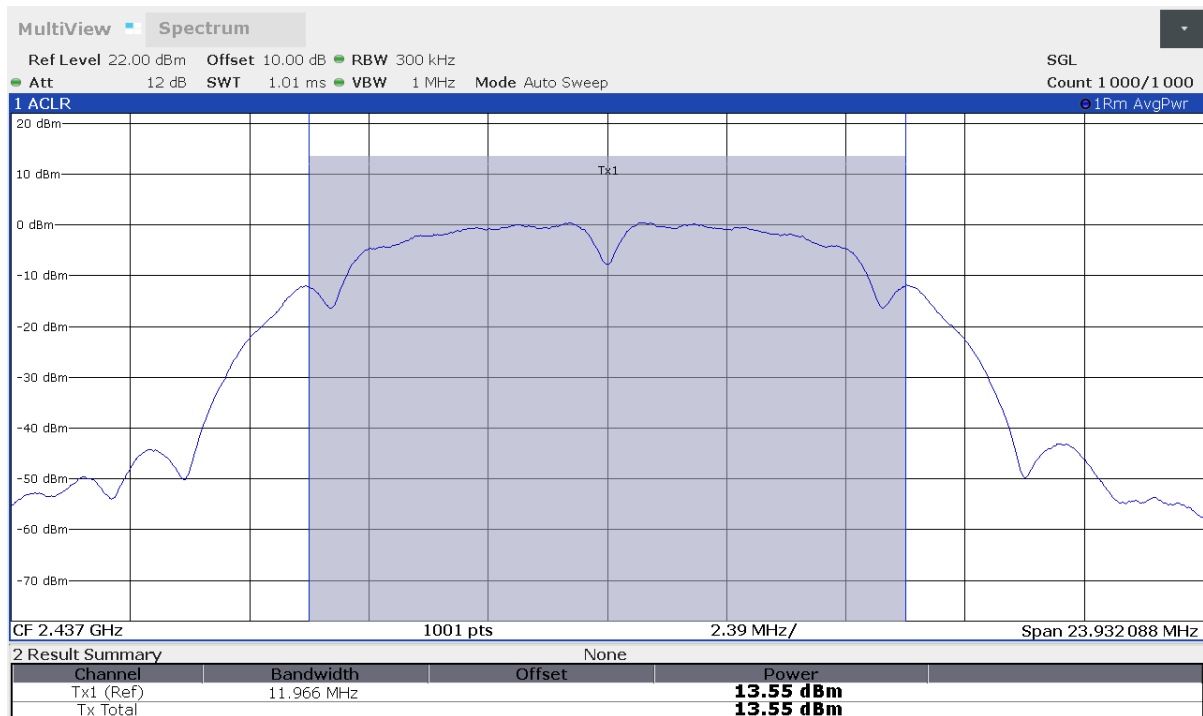

Remark: The cable attenuation and external attenuation were accounted for by the offset at the spectrum analyzer and the correction in the table.

The result table is presented on the following page.

Result table conducted (average) output power:

Operation mode	Reading [dBm]	DCCF _{Power} [dB]	Result [dBm]	Limit [dBm]	Antenna gain [dBi]	e.i.r.p. [dBm]	Limit e.i.r.p. [dBm]
1	13.5	0.0	13.5	30.0	3.15	16.65	36.0
2	13.6	0.0	13.6	30.0	3.15	16.75	36.0
3	13.6	0.0	13.6	30.0	3.15	16.75	36.0
12	12.8	0.0	12.8	30.0	3.15	15.95	36.0
13	12.9	0.0	12.9	30.0	3.15	16.05	36.0
14	13.0	0.0	13.0	30.0	3.15	16.15	36.0
19	13.0	0.0	13.0	30.0	3.15	16.15	36.0
20	13.1	0.0	13.1	30.0	3.15	16.25	36.0
21	13.2	0.0	13.2	30.0	3.15	16.35	36.0

Test result: Passed

Test equipment (please refer to chapter 7 for details)

21

5.6 DTS maximum power spectral density

5.6.1 Test setup (DTS maximum PSD level in the fundamental emission)

Test setup (DTS fundamental emission output power)			
Used	Setup	See sub-clause	Comment
☐	Radiated: 1 GHz to 40 GHz	5.1.2	-
☒	Conducted: Antenna port	5.1.3	-

5.6.2 Test method (DTS maximum PSD level in the fundamental emission)

Test method (Maximum <i>peak</i> power spectral density level in the fundamental emission)				
Used	Sub-Clause [1]	Name of method	Applicability	Comment
☐	11.10.2	Method PKPSD (peak PSD)	No limitations	-

Test method (Maximum <i>average</i> power spectral density level in the fundamental emission)				
Used	Sub-Clause [1]	Name of method	Applicability	Comment
☒	11.10.3	Method AVGPS-1	$D \geq 98\%$	-
☐	11.10.4	Method AVGPS-1A (alternative)	$D \geq 98\%$	-
☐	11.10.5	Method AVGPS-2	Constant D ($\pm 2\%$)	-
☐	11.10.6	Method AVGPS-2A (alternative)	Constant D ($\pm 2\%$)	-
☐	11.10.7	Method AVGPS-3	No limitations	-
☐	11.10.8	Method AVGPS-3A (alternative)	No limitations	-

The test results are presented on the following pages.


5.6.3 Test results (DTS maximum PSD level in the fundamental emission)

Ambient temperature:	21.7 °C
Relative humidity:	30.3 %

Date:	17/18.02.2026
Tested by:	P. NEUFELD

5.6.3.1 Maximum average PSD

Worst case plot (operation mode 6):

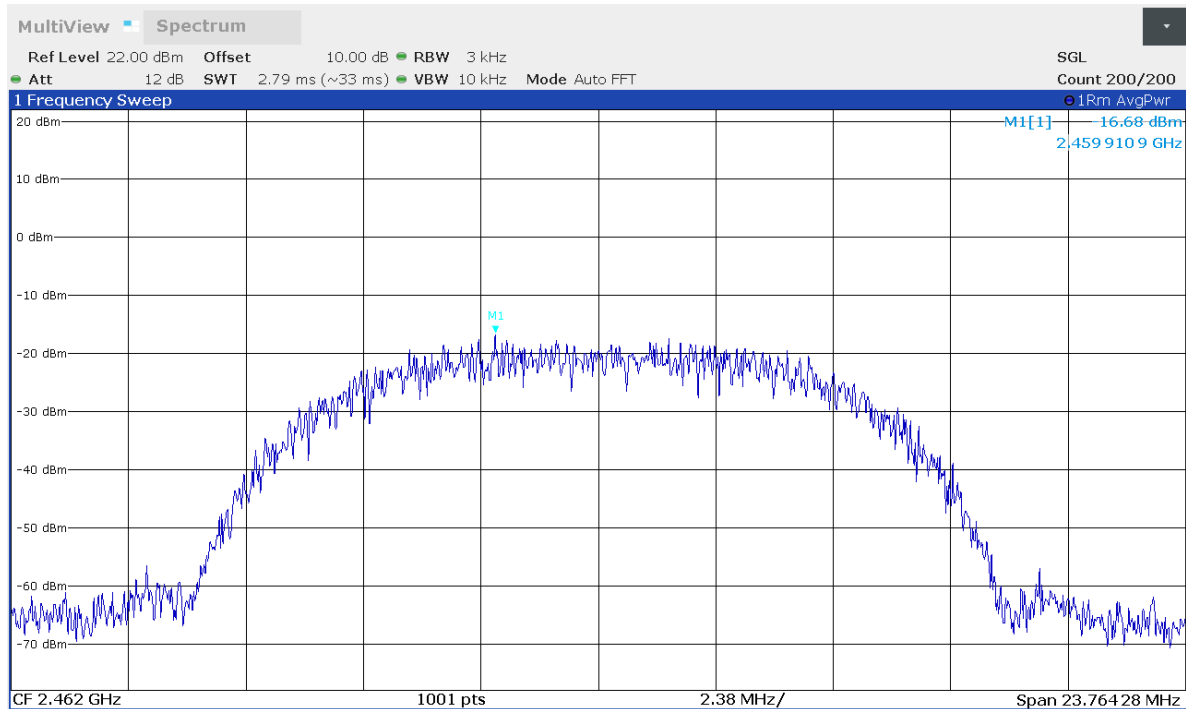

The result table is presented on the following page.

Result table average PSD:

Operation mode	Reading [dBm/3 kHz]	DCCF _{Power} [dB]	Result [dBm/3 kHz]	Limit [dBm/3 kHz]
4	-17.5	0.0	-17.5	8
5	-17.3	0.0	-17.3	8
6	-16.7	0.0	-16.7	8
12	-21.1	0.0	-21.1	8
13	-21.2	0.0	-21.2	8
14	-21.2	0.0	-21.2	8
19	-21.5	0.0	-21.5	8
20	-21.4	0.0	-21.4	8
21	-21.6	0.0	-21.6	8

Test result: Passed

Test equipment (please refer to chapter 7 for details)
21

5.7 DTS band-edge emission measurements

5.7.1 Test setup (Band edge – unrestricted bands)

Test setup (Band edge – unrestricted bands)			
Used	Setup	See sub-clause	Comment
☐	Radiated: 1 GHz to 40 GHz	5.1.3	-
☒	Conducted: Antenna port	5.1.4	-

5.7.2 Test method (Band edge – unrestricted bands)

Test method (Band edge – unrestricted bands)				
Used	Sub-Clause [1]	Name of method	Applicability	Comment
☐	11.11.	20 dBc (Peak)	Peak power	*1
☒	11.11.	30 dBc (Average)	RMS power	*2

*1 As declared in "47 CFR 15.247(d)" In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits


*2 If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

5.7.3 Test results (Band edge – unrestricted bands)

Ambient temperature:	21.7 °C
Relative humidity:	30.3 %

Date:	17/18.02.2026
Tested by:	P. NEUFELD

Worst case plot Lower band edge (operation mode 15):

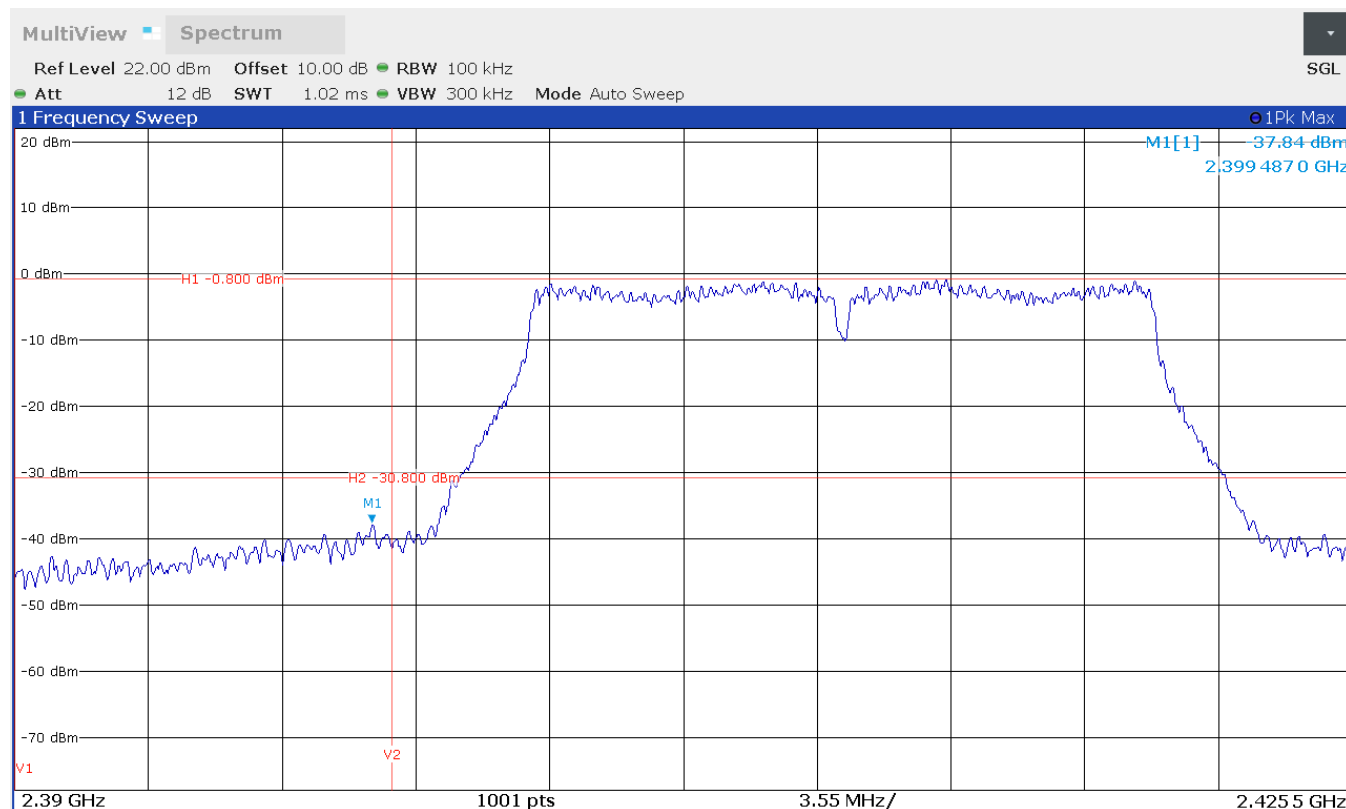

Lower band edge (operation mode7):

Frequency [MHz]	Reference [dBm]	Limit [dBm]	Unrestricted band emission [dBm]	Margin [dB]
2398.485	4.0	-26.0	-39.9	13.9

Lower band edge (operation mode 15):

Frequency [MHz]	Reference [dBm]	Limit [dBm]	Unrestricted band emission [dBm]	Margin [dB]
2399.487	-0.8	-30.8	-37.8	7.0

Lower band edge (operation mode 19):

Frequency [MHz]	Reference [dBm]	Limit [dBm]	Unrestricted band emission [dBm]	Margin [dB]
2397.607	-0.7	-30.7	-38.2	7.5

Test result: Passed

5.7.4 Test setup (Band edge – restricted bands)

Test setup (Band edge – restricted bands)			
Used	Setup	See sub-clause	Comment
☐	Radiated: 1 GHz to 40 GHz	5.1.3	
☒	Conducted: Antenna port	5.1.4	

5.7.5 Test method (Band edge – restricted bands)


Test method (Band edge – restricted bands)				
Used	Sub-Clause [1]	Name of method	Applicability	Comment
☒	11.12.1	Standard method	No limitations	
☐	11.12.3.1	Marker-delta method		See 6.10.6 [3] 2 MHz from band
☐	11.12.3.2	Integration method		2 MHz from band

5.7.6 Test results (Band edge – restricted bands)

Ambient temperature:	21.7 °C
Relative humidity:	30.3 %

Date:	17/18.02.2026
Tested by:	P. NEUFELD

Worst case plot upper band edge (operation mode 8):

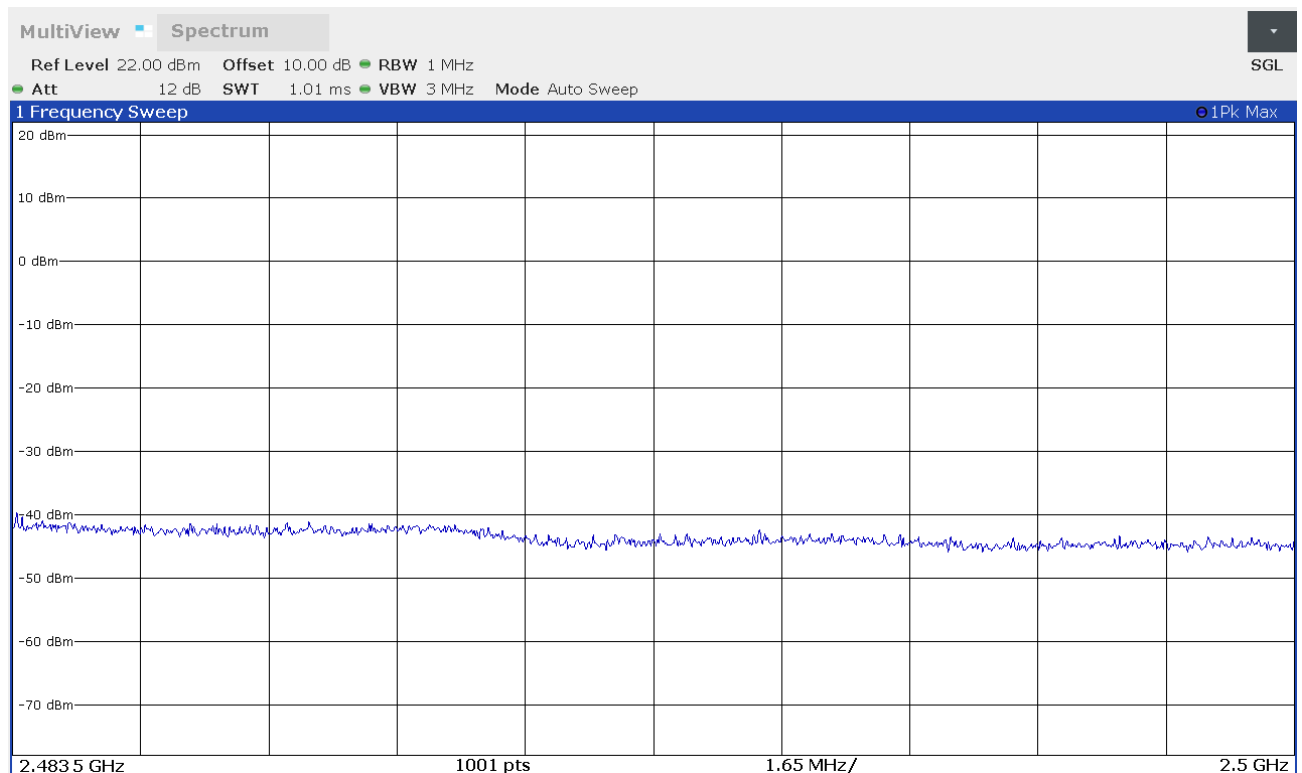

Upper band edge (operation mode 8):

Frequency [MHz]	P _{cond} Reading cond. (Pk) [dBm]	P _{cond} Reading cond. (Av) [dBm]	Gain [dBi]	E _{fieldstrength} Result (Pk) [dB(μV/m)]	E _{fieldstrength} Result (Av) [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
2483.902	-43.0	-	3.15	55.35	-	74.0	18.65
2483.518	-	-52.0	3.15	-	46.35	54.0	7.65

The final result at a measuring distance of 3 m is calculated as follows: $E_{\text{fieldstrength}} = P_{\text{cond}} + 95.16 \text{ dB} + \text{Gain}$

Test result: Passed

Test equipment (please refer to chapter 7 for details)

21

5.8 Radiated emissions

5.8.1 Test setup (Maximum unwanted emissions)

Test setup (Maximum unwanted emissions)			
Used	Setup	See sub-clause	Comment
☒	Radiated: 9 kHz to 30 MHz / 30 MHz to 1 GHz / 1 GHz to 40 GHz	5.1	-
☐	Conducted: Antenna port	5.1.4	-

5.8.2 Test method (Maximum unwanted emissions)

☒ Test method (radiated) see sub-clause 5.1 as described herein

5.8.3 Test results (Maximum unwanted emissions)

5.8.3.1 Test results preliminary measurement 9 kHz to 30 MHz

Ambient temperature:	22.5 °C	Date:	20.02.2026
Relative humidity:	19 %	Tested by:	P. NEUFELD

Position of EUT: For tests for f between 9 kHz to 30 MHz, the EUT was set-up on a table with a height of 80 cm. The distance between EUT and antenna was 3 m.

Cable guide: For detail information of test set-up and the cable guide refer to the pictures in the annex A in the test report.

Test record: The measurement value was already corrected by 40 dB/decade as described in 47 CFR 15.31(f)(2) regarding to the measurement distance as requested in 47 CFR 15.209(a)

Remark: All 3 orthogonal planes were tested separately

Calculations:


Result @ norm. dist. [dBμV/m] = Reading [dBμV] + AF [dB/m] + Distance corr. fact. [dB]

Result @ norm. dist. [dBμA/m] = Result @ norm. dist. [dBμV/m] – 20 x log₁₀ (377 Ω)

Margin [dB] = Limit [dB(μV|μA)/m] - Result [dB(μV|μA)/m]

Worst case plot:

Spurious emissions from 9 kHz to 30 MHz (operation mode 2 – Position 2):

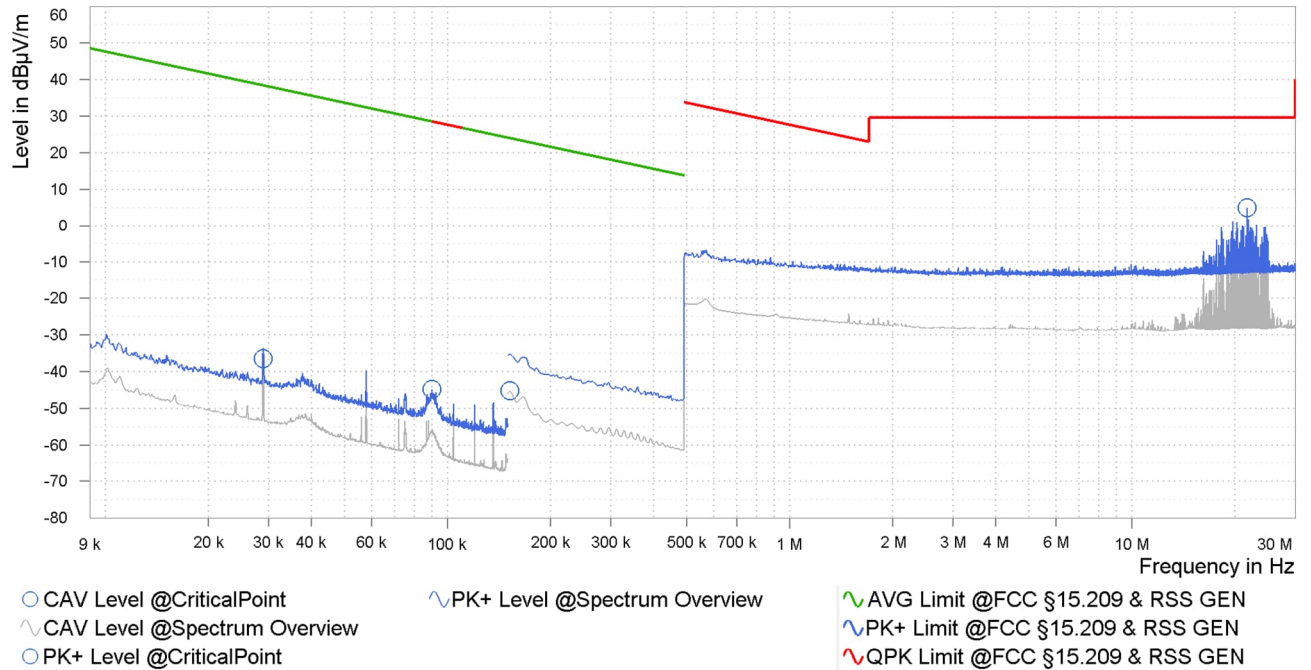

Remark: No emissions closer than 20 dB to the limit, so no final measurement will be carried out.

5.8.3.2 Test results (30 MHz – 1 GHz)

Ambient temperature:	22.5 °C
Relative humidity:	19 %

Date:	19/20.02.2026
Tested by:	P. NEUFELD

Position of EUT: For tests for f between 30 MHz to 1 GHz, the EUT was set-up on a table with a height of 80 cm. The distance between EUT and antenna was 3 m.

Cable guide: For detail information of test set-up and the cable guide refer to the pictures in the annex A in the test report.

Test record: Plots for each frequency range are submitted below.

Remark: All 3 orthogonal planes were tested separately

Calculations:

Result [dBμV/m] = Reading [dBμV] + Correction [dB/m]


Correction [dB/m] = AF [dB/m] + Cable attenuation [dB] + optional preamp gain [dB]

Margin [dB] = Limit [dBμV/m] - Result [dBμV/m]

The measured points and the limit line in the following diagram refer to the standard measurement of the emitted interference in compliance with the above-mentioned standard. The measured points marked with “◊” are the measured results of the standard subsequent measurement in a semi-anechoic chamber.

Worst case plot:

Spurious emissions from 30 MHz to 1 GHz (operation mode 3 – position 3):

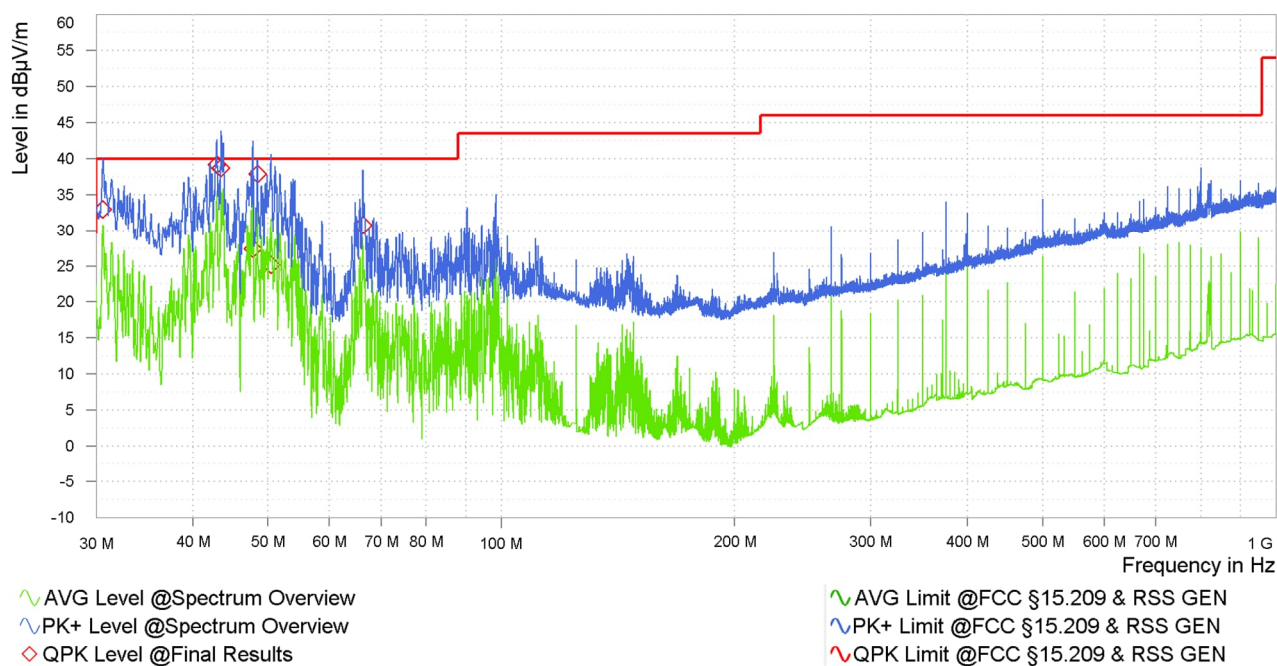

Result tables:

(Operation mode 1 – Position 1):

Frequency [MHz]	Result (QP) [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Correction [dB/m]	Pol. (H/V)	Azimuth [deg]	Height [m]
30.630	27.29	40.00	12.71	26.28	H	190	3.87
31.410	34.57	40.00	5.43	25.78	H	101	3.99
32.040	21.21	40.00	18.79	25.36	H	133	4.33
32.610	25.31	40.00	14.69	25.04	H	133	4.49
32.910	32.44	40.00	7.56	24.87	H	133	3.88
33.450	34.00	40.00	6.00	24.52	H	191	3.88
34.620	31.67	40.00	8.33	23.79	H	139	4.02

(Operation mode 2 – Position 2):

Frequency [MHz]	Result (QP) [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Correction [dB/m]	Pol. (H/V)	Azimuth [deg]	Height [m]
30.630	24.63	40.00	15.37	26.28	H	175	1.28
31.410	35.42	40.00	4.58	25.78	H	191	1.07
32.040	31.12	40.00	8.88	25.36	H	192	1.09
32.610	31.97	40.00	8.03	25.04	H	167	1.20
34.620	21.70	40.00	18.30	23.79	H	221	1.91
41.610	29.60	40.00	10.40	19.22	H	221	2.11
47.790	32.50	40.00	7.50	15.03	V	93	2.24

(Operation mode 3 – Position 3):

Frequency [MHz]	Result (QP) [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Correction [dB/m]	Pol. (H/V)	Azimuth [deg]	Height [m]
30.630	32.97	40.00	7.03	26.28	H	191	3.87
42.930	39.18	40.00	0.82	18.29	V	57	1.08
43.500	38.71	40.00	1.29	17.89	V	17	1.01
47.790	27.33	40.00	12.67	15.03	V	131	1.05
48.450	37.81	40.00	2.19	14.64	V	162	1.06
50.430	25.11	40.00	14.89	13.53	V	161	1.00
66.300	30.67	40.00	9.33	13.67	V	187	1.55

Test result: Passed

Test equipment (please refer to chapter 7 for details)

2 – 7, 12 – 14

5.8.3.3 Test results (radiated 1 GHz to 40 GHz)

Ambient temperature:	22.9 °C
Relative humidity:	34 %

Date:	23/24.02.2026
Tested by:	M. EPPINGER

Position of EUT: For tests for f between 1 GHz and the 10th harmonic, the EUT was set-up on a positioner device with a height of 150 cm. The distance between EUT and antenna was 3 m.

Cable guide: For detail information of test set-up and the cable guide refer to the pictures in the annex A in the test report.

Test record: Plots for each frequency range are submitted below.

Remark: -

Calculation:

Max Peak [dBμV/m] = Reading [dBμV] + Correction [dB/m]

Average [dBμV/m] = Reading [dBμV] + Correction [dB/m]

Correction [dB/m] = AF [dB/m] + Cable attenuation [dB] + optional preamp gain [dB]+DCCF* [dB]
* (if applicable – only for Average values, that are fundamental related)


Margin [dB] = Limit [dBμV/m] – Max Peak | Average [dBμV/m]

The curves in the diagram only represent the maximum measured value for each frequency point of all preliminary measurements, which were carried out with various EUT and antenna positions.


The top measured curve represents the peak measurement. The measured points marked with "◇" are frequency points for the final peak detector measurement. These values are indicated in the following table. The bottom measured curve represents the average measurement. The measured points marked with "◇" are frequency points for the final average detector measurement.

Worst case plots:


Spurious emissions from 1 GHz to 4 GHz (operation mode 1):

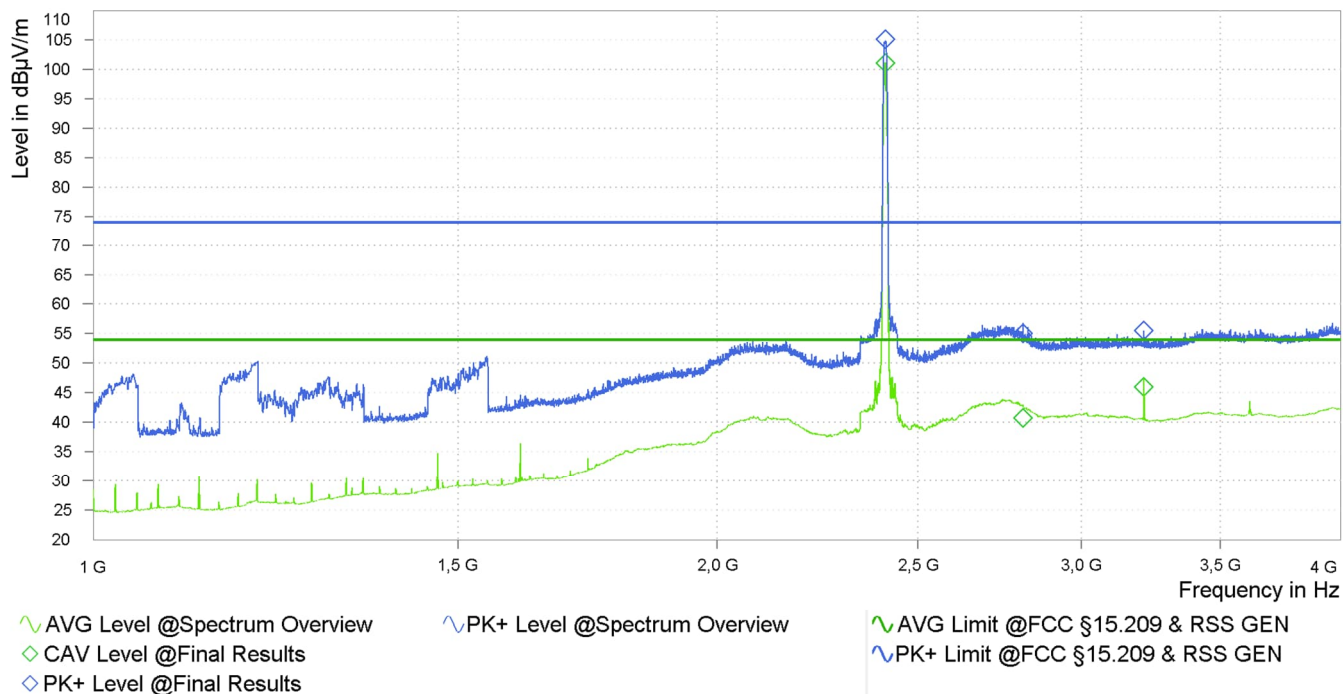

Spurious emissions from 4 GHz to 18 GHz (operation mode 1):

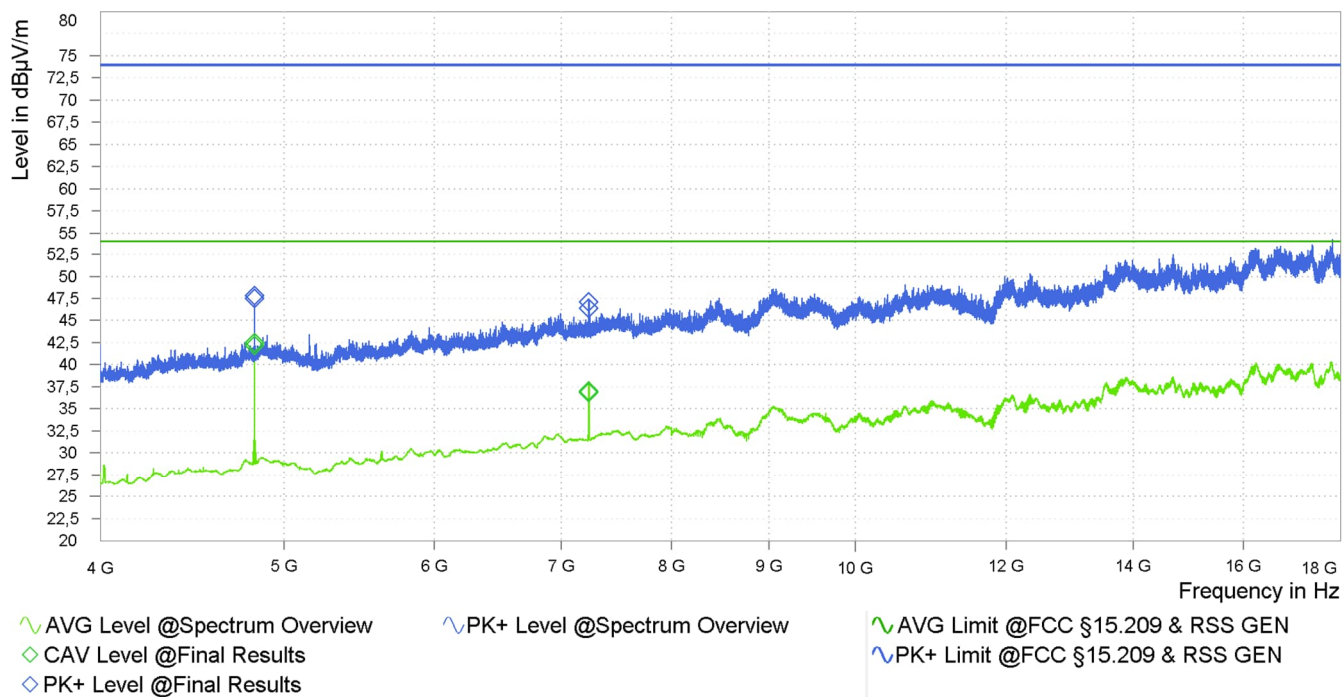

Spurious emissions from 18 GHz to 26.5 GHz (operation mode 2):

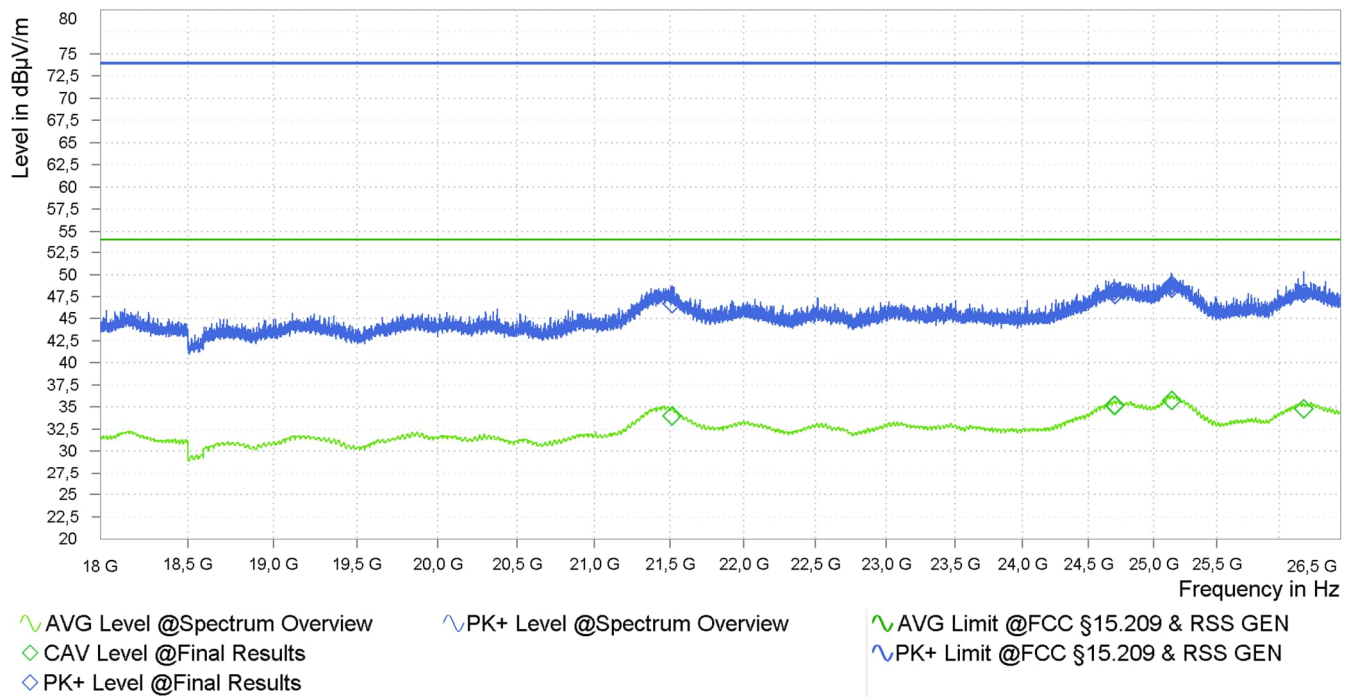

Result tables:

Operation mode 1:

Frequency [MHz]	Pk Level [dB(μV/m)]	Pk Limit [dB(μV/m)]	Pk Margin [dB]	AV Level [dB(μV/m)]	AV Limit [dB(μV/m)]	AV Margin [dB]	Corr. [dB/m]	Pol [H/V]	Elevation [deg]	Azimuth [deg]	Restr. Band Y/N
2412.750	105.09	Fund.		101.08	Fund.		34.64	V	105	5	-*
2812.000	55.00	74.00	19.00	40.75	54.00	13.25	36.60	V	99	357	-*
3216.000	55.57	74.00	18.43	46.04	54.00	7.96	38.03	V	105	342	-*
4824.000	47.49	74.00	26.51	42.46	54.00	11.54	8.97	V	90	318	-*
4824.000	47.79	74.00	26.21	42.18	54.00	11.82	8.97	V	90	320	-*
7234.000	47.13	74.00	26.87	36.85	54.00	17.15	13.16	V	120	38	-*
7234.250	46.37	74.00	27.63	36.98	54.00	17.02	13.16	V	120	38	-*
21449.750	46.70	74.00	27.30	34.30	54.00	19.70	13.48	V	90	318	-*
21479.750	47.17	74.00	26.83	34.27	54.00	19.73	13.50	H	0	358	-*
24673.000	47.99	74.00	26.01	35.04	54.00	18.96	13.90	H	120	22	-*
24906.750	47.33	74.00	26.67	34.48	54.00	19.52	13.93	V	150	209	-*
25138.250	48.48	74.00	25.52	35.68	54.00	18.32	13.83	H	60	4	-*
25169.000	48.00	74.00	26.00	35.59	54.00	18.41	13.79	V	30	292	-*

* All results were below the stricter limits for the restricted bands. Therefore, the indication is omitted.

Operation mode 2:

Frequency [MHz]	Pk Level [dB(μV/m)]	Pk Limit [dB(μV/m)]	Pk Margin [dB]	AV Level [dB(μV/m)]	AV Limit [dB(μV/m)]	AV Margin [dB]	Corr. [dB/m]	Pol [H/V]	Elevation [deg]	Azimuth [deg]	Restr. Band Y/N
2093.000	51.51	74.00	22.49	37.57	54.00	16.43	32.58	V	90	364	-*
2434.250	104.19	74.00	30.19	99.75	54.00	45.75	34.82	V	126	1	-*
2437.750	104.43	Fund.					34.85	V	126	4	-*
2766.750	55.85	74.00	18.15	41.78	54.00	12.22	37.08	V	135	343	-*
2769.500	55.58	74.00	18.42	41.40	54.00	12.60	37.11	V	135	337	
3249.250	54.30	74.00	19.70	43.00	54.00	11.00	37.96	H	12	344	-*
3249.250	54.71	74.00	19.29	43.06	54.00	10.94	37.96	H	15	346	-*
3655.500	54.38	74.00	19.62	40.06	54.00	13.94	39.07	H	12	356	-*
3976.500	54.89	74.00	19.11	39.80	54.00	14.20	39.86	H	75	105	-*
3987.750	54.93	74.00	19.07	39.80	54.00	14.20	39.84	H	15	333	-*
4874.000	46.54	74.00	27.46	40.58	54.00	13.42	9.21	V	90	327	-*
4874.000	46.37	74.00	27.63	40.63	54.00	13.37	9.21	V	90	323	-*
7311.750	45.36	74.00	28.64	35.43	54.00	18.57	13.72	V	60	20	-*
7312.500	48.17	74.00	25.83	39.07	54.00	14.93	13.72	H	0	-3	-*
16192.250	50.72	74.00	23.28	38.31	54.00	15.69	27.64	V	0	319	-*
16750.250	51.12	74.00	22.88	38.63	54.00	15.37	27.75	H	0	279	-*
16909.000	51.58	74.00	22.42	38.47	54.00	15.53	27.74	H	120	207	-*
17401.750	51.76	74.00	22.24	39.03	54.00	14.97	28.99	H	60	35	-*
17792.750	51.32	74.00	22.68	38.90	54.00	15.10	28.86	H	90	271	-*
21514.500	46.70	74.00	27.30	33.99	54.00	20.01	13.50	V	90	197	-*
24697.500	48.14	74.00	25.86	35.19	54.00	18.81	13.93	V	90	228	-*
24701.750	47.71	74.00	26.29	35.18	54.00	18.82	13.94	V	150	118	-*
25144.000	48.80	74.00	25.20	35.74	54.00	18.26	13.82	H	90	103	-*
25145.000	48.45	74.00	25.55	35.74	54.00	18.26	13.82	V	120	62	-*
26200.000	47.87	74.00	26.13	34.79	54.00	19.21	14.09	V	120	97	-*

* All results were below the stricter limits for the restricted bands. Therefore, the indication is omitted.

Operation mode 2:

Frequency [MHz]	Pk Level [dB(μV/m)]	Pk Limit [dB(μV/m)]	Pk Margin [dB]	AV Level [dB(μV/m)]	AV Limit [dB(μV/m)]	AV Margin [dB]	Corr. [dB/m]	Pol [H/V]	Elevation [deg]	Azimuth [deg]	Restr. Band Y/N
1641.250	45.65	74.00	28.35	35.91	54.00	18.09	30.48	H	108	304	-*
1641.250	46.11	74.00	27.89	36.20	54.00	17.80	30.48	H	123	313	-*
2460.250	104.28	74.00	30.28	100.82	54.00	46.82	34.81	V	114	356	-*
2461.000	104.72	Fund.		100.56	Fund.		34.80	V	114	361	-*
2737.500	56.08	74.00	17.92	41.79	54.00	12.21	36.57	V	96	352	
3282.500	55.48	74.00	18.52	43.66	54.00	10.34	37.96	V	104	346	-*
3432.000	54.31	74.00	19.69	38.79	54.00	15.21	39.21	V	105	316	-*
3649.000	53.68	74.00	20.32	38.72	54.00	15.28	39.09	H	42	314	-*
3958.000	54.91	74.00	19.09	39.86	54.00	14.14	39.83	H	9	30	-*
4924.000	45.74	74.00	28.26	39.31	54.00	14.69	9.34	V	90	313	-*
4924.000	45.95	74.00	28.05	39.80	54.00	14.20	9.34	V	90	307	-*
7385.000	48.91	74.00	25.09	39.29	54.00	14.71	13.94	H	0	-3	-*
7386.750	47.17	74.00	26.83	37.71	54.00	16.29	13.94	V	120	47	-*
14689.250	50.34	74.00	23.66	37.32	54.00	16.68	25.73	V	150	55	-*
16189.250	50.66	74.00	23.34	38.27	54.00	15.73	27.62	H	120	137	-*
16653.750	51.50	74.00	22.50	38.60	54.00	15.40	27.48	H	60	209	-*
16723.000	50.92	74.00	23.08	38.78	54.00	15.22	27.80	H	120	65	-*
17403.750	51.73	74.00	22.27	38.97	54.00	15.03	28.93	H	0	199	-*
17808.250	51.73	74.00	22.27	39.08	54.00	14.92	29.00	H	0	363	-*
21404.250	47.22	74.00	26.78	34.10	54.00	19.90	13.50	H	120	203	-*
24710.250	47.93	74.00	26.07	35.19	54.00	18.81	13.95	H	60	344	-*
24741.750	48.09	74.00	25.91	35.05	54.00	18.95	13.86	H	60	376	-*
25140.750	48.07	74.00	25.93	35.68	54.00	18.32	13.83	H	60	248	-*
25160.250	48.18	74.00	25.82	35.63	54.00	18.37	13.80	V	90	-9	-*
26154.250	47.26	74.00	26.74	34.81	54.00	19.19	14.12	H	60	51	-*

* All results were below the stricter limits for the restricted bands. Therefore, the indication is omitted.

Test result: Passed

Test equipment (please refer to chapter 7 for details)
2 – 12,

5.9 AC power-line conducted emissions

5.9.1 Test setup (Conducted emissions on power supply lines)

Test setup (Conducted emissions on power supply lines)			
Used	Setup	See sub-clause	Comment
☒	Conducted: AC power line	5.1.5	-
☐	Not applicable, because ...	-	-

5.9.2 Test method (Conducted emissions on power supply lines)

Test setup (Conducted emissions on power supply lines)				
Used	Clause [3]	Name of method	Sub-clause	Comment
☒	6.2.3.2	Tabletop equipment testing	5.1.5	Provided AC switching power adaptor
☐	6.2.3.3	Floor-standing equipment testing	-	-


The AC power adaptor provided by the laboratory was used for the tests:
 Bel power solutions & protection, HC24-2.4-AG, providing 24 V DC
 The power adaptor itself was supplied by 120V_{AC} 60Hz.

5.9.3 Test results (Conducted emissions on power supply lines)

Ambient temperature:	21.7 °C
Relative humidity:	34 %

Date:	25.03.2026
Tested by:	M. EPPINGER

The curves in the diagrams below only represent for each frequency point the maximum measured value of all preliminary measurements which were made for each power supply line. The top measured curve represents the peak measurement and the bottom measured curve the average measurement. The quasi-peak measured points are marked by ◆ and the average measured points by ◆.

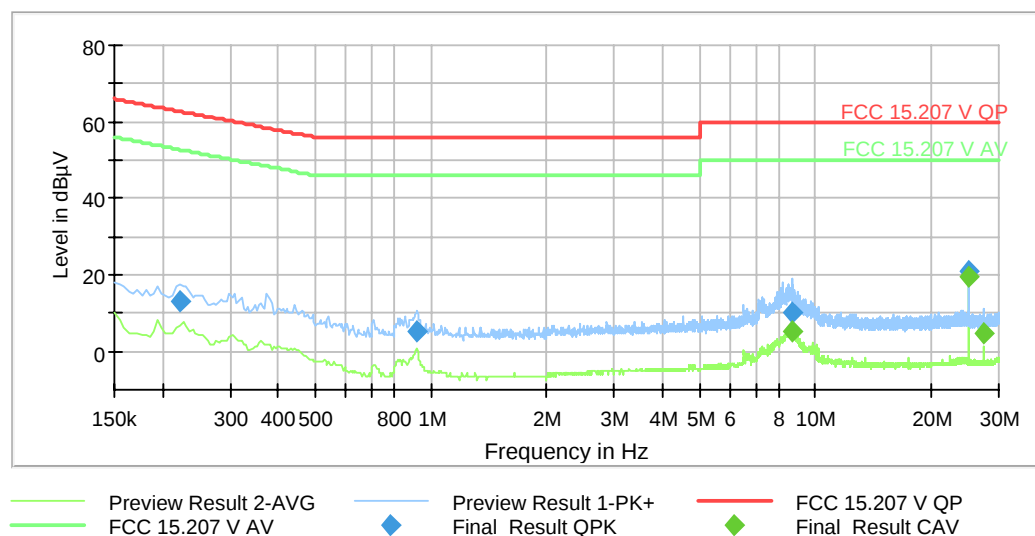

Frequency [MHz]	QuasiPeak [dB(μV)]	Average [dB(μV)]	Limit [dB(μV)]	Margin [dB]	Line	PE	Corr. [dB]
0.223500	13.12	---	62.69	49.57	N	FLO	9.9
0.921000	5.46	---	56.00	50.54	N	GND	9.9
8.675500	---	5.34	50.00	44.66	N	FLO	10.5
8.677500	10.39	---	60.00	49.61	N	GND	10.5
25.000000	---	19.49	50.00	30.51	L1	GND	11.0
25.000500	20.80	---	60.00	39.20	L1	GND	11.0
27.497000	---	4.77	50.00	45.23	L1	GND	11.1

Test result: Passed

Test equipment (please refer to chapter 7 for details)
15 – 20

6 Measurement Uncertainties

Conducted measurements		
Measurement method	Standard used for calculating measurement uncertainty	Expanded measurement uncertainty (95 %) U_{lab}
Frequency error	ETSI TR 100 028	4.5×10^{-8}
Bandwidth measurements	-	9.0×10^{-8}
Conducted emissions using a spectrum analyzer		
< 3.6 GHz	ETSI TR 100 028	2.3 dB
3.6 – 8 GHz	ETSI TR 100 028	2.8 dB
8 – 22 GHz	ETSI TR 100 028	3.2 dB
22 – 40 GHz	ETSI TR 100 028	3.6 dB
Power measurements		
Power meter	ETSI TR 100 028	0.9 dB
Conducted emissions from 150 kHz to 30 MHz with LISN		
	CISPR 16-4-2	2.8 dB

Radiated measurements		
Frequency error		
(Semi-) Anechoic chamber	ETSI TR 100 028	4.5×10^{-8}
OATS	ETSI TR 100 028	4.5×10^{-8}
Test fixture	ETSI TR 100 028	4.5×10^{-8}
Bandwidth measurements		
(Semi-) Anechoic chamber	-	9.0×10^{-8}
OATS	-	9.0×10^{-8}
Test fixture	-	9.1×10^{-8}
Radiated field strength M20		
CBL6112B @ 3 m 30 MHz – 1 GHz	CISPR 16-4-2	5.3 dB
R&S HL050 @ 3 m		
1 – 6 GHz	CISPR 16-4-2	5.1 dB
6 – 18 GHz	CISPR 16-4-2	5.4 dB
Flann Standard Gain Horns 12 – 40 GHz	-	5.9 dB
Radiated field strength M276		
R&S HL562E @ 3 m 30 MHz – 1 GHz	CISPR 16-4-2	4.8 dB
R&S HL050 @ 3 m		
1 – 6 GHz	CISPR 16-4-2	5.1 dB
6 – 18 GHz	CISPR 16-4-2	5.4 dB
Flann Standard Gain Horns 12 – 40 GHz	-	5.9 dB
OATS		
Field strength measurements below 30 MHz on OATS without ground plane	-	4.4 dB

7 Test Equipment used for Tests

No.	Test equipment	Type	Manufacturer	Serial No.	PM. No.	Cal. Date	Cal Due
1	Loop Antenna	FMZB 1519-60D	Schwarzbeck	00215	484105	25.11.2025	11.2027
2	EMC test software	Elektra V5.21	Rohde & Schwarz	---	483755	Calibration not necessary	
3	RF Switch Matrix	OSP220	Rohde & Schwarz	101391	482976	Calibration not necessary	
4	Turntable	TT3.0-3t	Maturo	825/2612/.01	483224	Calibration not necessary	
5	Controller	NCD	Maturo	474/2612.01	483226	Calibration not necessary	
6	Semi Anechoic Chamber M276	SAC5-2	Albatross Projects	C62128-A540-A138-10-0006	483227	Calibration not necessary	
7	EMI receiver / Spectrum analyser	ESW44	Rohde & Schwarz	101828	482979	06.02.2026	02.2028
8	Low Noise Amplifier 10 MHz - 18 GHz	LNA-30-00101800-25-10P	Narda-Miteq	2110917	482967	04.02.2026	02.2028
9	Low Noise Amplifier 18 GHz - 26.5 GHz	LNA-30-18002650-20-10P	Narda-Miteq	2110911	482969	04.02.2026	02.2028
10	Log.-Per. antenna 850 MHz - 26.5 GHz	HL050	Rohde & Schwarz	100908	482977	10.10.2025	10.2028
11	Standard gain horn 18 GHz - 26 GHz	20240-20	Flann	266399	483026	Calibration not necessary	
12	Antenna support tilt mast	BAM 4.5-P-10kg	Maturo	222/2612.01	483225	Calibration not necessary	
13	Attenuator 6 dB	WA2-6	Weinschel	8254	410119	Calibration not necessary	
14	Ultralog antenna 30 MHz - 6 GHz	HL562E	Rohde & Schwarz	101079	482978	24.04.2024	04.2027
15	LISN	NSLK8128	Schwarzbeck	8128155	480058	04.02.2026	02.2028
16	AC / DC power supply	AC6803A AC Power Source 2000VA	Keysight	JPVJ002509	482350	Calibration not necessary	
17	Software	EMC32 V10.60.20	Rohde & Schwarz	100061	481022	Calibration not necessary	
18	Shielded chamber M4	B83117-S1-X158	Siemens	190075	480088	Calibration not necessary	
19	EMI Receiver / Spectrum Analyser	ESIB 26	Rohde & Schwarz	100292	481182	06.02.2026	02.2028
20	Transient Filter Limiter	CFL 9206A	Teseq GmbH	38268	481982	05.02.2026	02.2028
21	Signal & Spektrum analyser	FSW43	Rohde & Schwarz	102954	483957	10.07.2024	07.2026

8 Test site Verification

Test site	PM. No.	Frequency range	Type of validation	According to	Val. Date	Val Due
Shielded chamber M4	480088	9 kHz – 30 MHz	GND-Plane	ANSI C63.4-2014	21.05.2025	21.06.2028
Semi anechoic chamber M276	483227	30 – 1000 MHz	NSA	ANSI C63.4-2014 ANSI C63.4a-2017	01.03.2023	28.02.2026
Semi anechoic chamber M276	483227	1 -18 GHz	SVSWR	CISPR 16-1-4 + Cor1:2010 + A1:2012 +A2:2017	21.02.2024	21.02.2027

9 Report History

Report Number	Date	Comment
F251885E6	29.06.2026	Initial test report
-	-	-
-	-	-

10 List of Annexes

Annex A	Test setup photos	12 pages
Annex B	Void	
Annex C	Void	
Annex D	Void	

----- end of test report -----