


Tested By: Hong, Report No.: 0418711

Scan Settings (1 Range)

Frequencies				Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF 60dB

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
21	9k	30M	EW0698

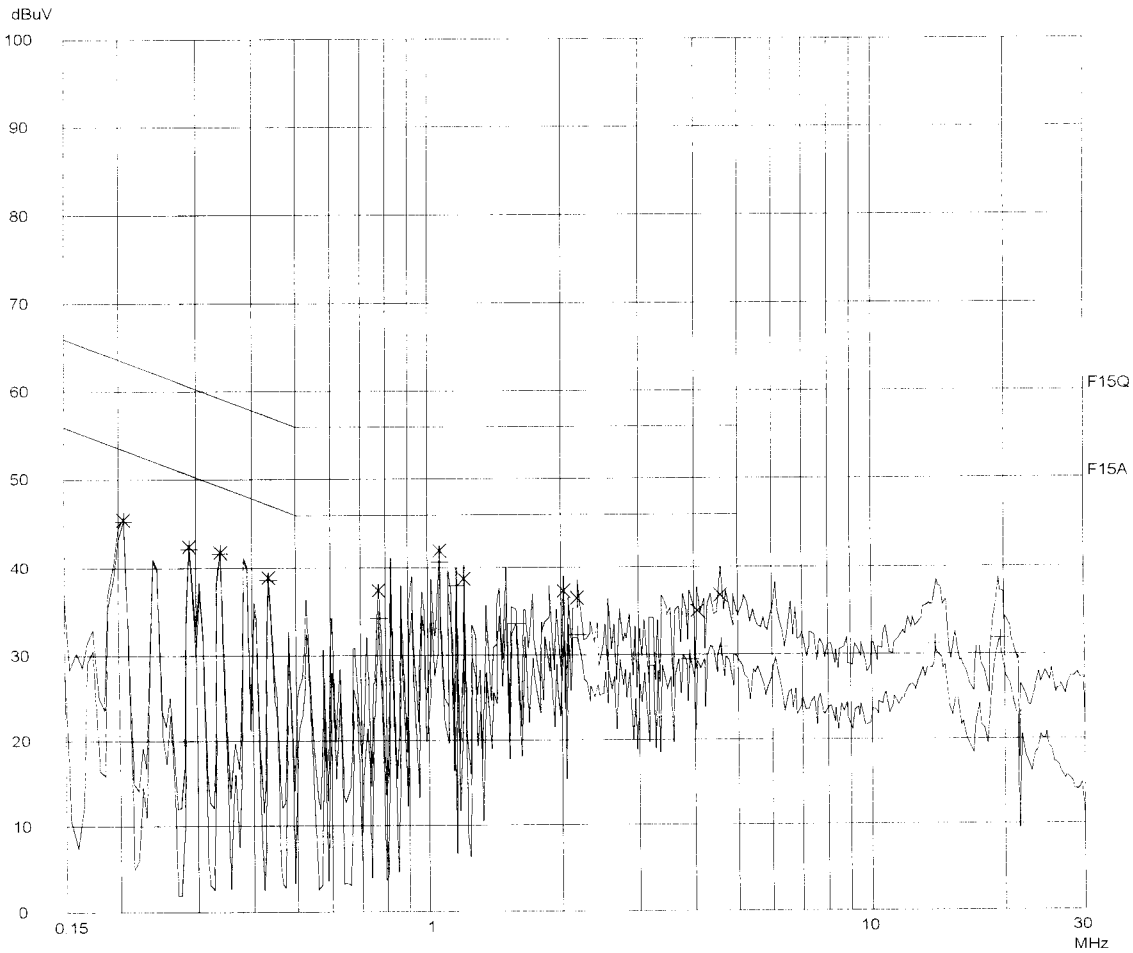

Download

Tested By:Hong, Report No.:0418711

Scan Settings (1 Range)

----- Frequencies -----				----- Receiver Settings -----			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO LN	OFF 60dB

Final Measurement
Results:

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV
0.20500	45.5	63.4
0.29000	42.3	60.6
0.34000	41.8	59.2
0.43500	38.8	57.2
0.77500	37.3	56.0
1.06500	41.8	56.0
1.21000	38.5	56.0
2.03000	37.2	56.0
2.18000	36.5	56.0
4.06500	34.9	56.0
4.59000	36.6	56.0

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV
0.20500	45.3	53.4
0.29000	42.1	50.6
0.34000	41.6	49.2
0.43500	38.5	47.2
0.77500	34.1	46.0
1.06500	40.5	46.0
1.16000	37.8	46.0
1.58000	33.5	46.0
2.18000	32.2	46.0
3.91500	29.4	46.0
4.59000	30.8	46.0
13.98000	31.1	50.0
19.49500	31.6	50.0

* limit
exceeded