

FCC Part 22/24 Compliance Test Report

Test Report no.:	Cph_FCC_0623_04.doc	Date of Report:	15-06-2006
Number of pages:	12	Customer's Contact person:	Hailun Shi
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Client:	Nokia Corporation Nokia Tower Pacific Century Place 2A Gong Ti Bei Lu Chaoyang District 100027 BEIJING, PRC Tel. +86 10 65392828 Fax. +86 10 65393838
FCC listing no.:	99059		
IC recognition no.:	4820 and 4820-1		
Tested devices/ accessories:	Phone: RH-87 (hw0403), Battery: BL-5C, AC-Charger: ACP-7 Headset: HDE-2		
FCC ID:	QTLRH-87	IC:	661AB-RH87
Supplement reports:	None		
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22 and 24, TIA-603-B-2002 and IC standards RSS-GEN, RSS-132 and RSS-133. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Jan Engelbrechtsen, Engineer

1. Summary for FCC Part 22/24 Compliance Test Report

Date of receipt	7-6-2006
Testing completed	14-6-2006
The customer's contact person	Hailun Shi
Test Plan referred to	Sattcc01nmp\Tcc_Salo\Projects\RH-87\TestPlan_RS\RH-87_Testplan_RS.xls
Notes	None
Document name	Sattcc01nmp\Tcc_Salo\Projects\RH-87\EMC\Results\FCC\Cph_FCC_0623_04.doc

1.1. EUT and Accessory Information

The EUT is a dual band (GSM850/1900) mobile phone with GPRS. The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Product	Type	SN	HW	MV	SW	DUT
Phone	RH-87	010927/00/000032/5	0403	-	Vpp3.19	27987
Battery	BL-5C	0670398380257M09241CF30900	-	-	-	28307
AC-Charger	ACP-7U	IG393, Thailand	-	-	-	27980
Headset	HDE-2	-	-	-	-	27985

1.2. Summary of Test Results

GSM 850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.6, 4.4	Conducted RF output power	NP
§22.913(a)	4.6, 4.4	Radiated RF output power	NP
§2.1049(h)	4.4.1	99 % occupied bandwidth	Passed
§22.917(a)	4.7, 4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.7, 4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.7, 4.5	Spurious radiated emissions	NP
§2.1055(a)	4.5, 4.3	Frequency stability, temperature variation	Passed
§2.1055(d)	4.5, 4.3	Frequency stability, voltage variation	Passed

GSM 1900:

Section in CFR 47	Section in RSS-133	Name of the test	Result
§2.1046(a)	6.2	Conducted RF output power	NP
§24.232(b)	6.2	Radiated RF output power	NP
§2.1049(h)	5.6	99 % occupied bandwidth	Passed
§24.238(a)	6.3	Band edge compliance	NP
§24.238(a), §2.1051	6.3	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.3	Spurious radiated emissions	NP
§2.1055(a)	7	Frequency stability, temperature variation	Passed
§2.1055(d)	7	Frequency stability, voltage variation	Passed

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Copenhagen Laboratory.


CONTENTS

1. Summary for FCC Part 22/24 Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. 99 % occupied bandwidth (FCC §2.1049(h), RSS-GEN 4.4.1, RSS-133 5.6)	4
2.1. Test setup	4
2.2. Test method and limit	4
2.3. GSM 850 Test results	5
2.4. GSM 1900 Test results	5
3. Frequency stability, temperature variation (FCC §2.1055(a), §2.1055(a), RSS-GEN 4.5, RSS-132 4.3, RSS-133 7)	7
3.1. Test setup	7
3.2. Test method and limit	7
3.3. GSM 850 Test results	8
3.4. GSM 1900 Test results	8
4. Frequency stability, voltage variation (FCC §2.1055(d), RSS-GEN 4.5, RSS-132 4.3, RSS-133 7)	9
4.1. Test setup	9
4.2. Test method and limit	9
4.3. GSM 850 Test results	10
4.4. GSM 1900 Test results	10
5. Test Equipment	11
5.1. Conducted measurements	11
5.2. Radiated measurements	11

2. 99 % occupied bandwidth (FCC §2.1049(h), RSS-GEN 4.4.1, RSS-133 5.6)

EUT with DUT number	RH-87 dut 27987, BL-5C dut 28307
Accessories with DUT numbers	HDE-2 dut 27985, ACP-7 dut 27980
Operation Voltage [V] / [Hz]	120 / 50
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	25.6 / 48.5 1020.9
Date of measurements	14-06-2006
Measured by	Jan Engelbrechtsen

2.1. Test setup

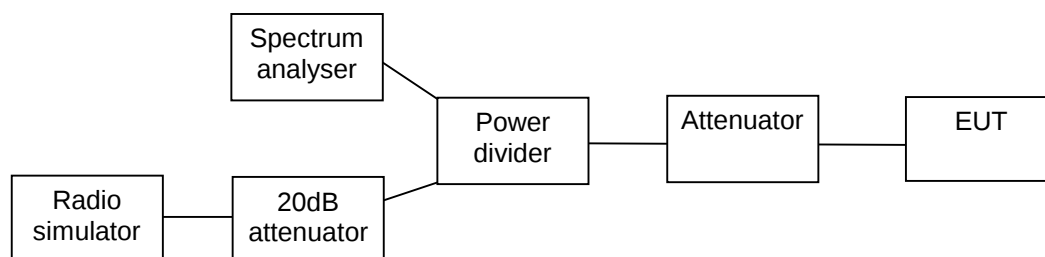


2.2. Test method and limit

The measurement is made according to FCC rules part 22 and 24 and IC standards RSS-GEN and RSS-133.

2.3. GSM 850 Test results

Operation mode (TX on) 99% occupied bandwidth [kHz]
GSM 244.000


GSM mode, channel 190 / 836.6 MHz

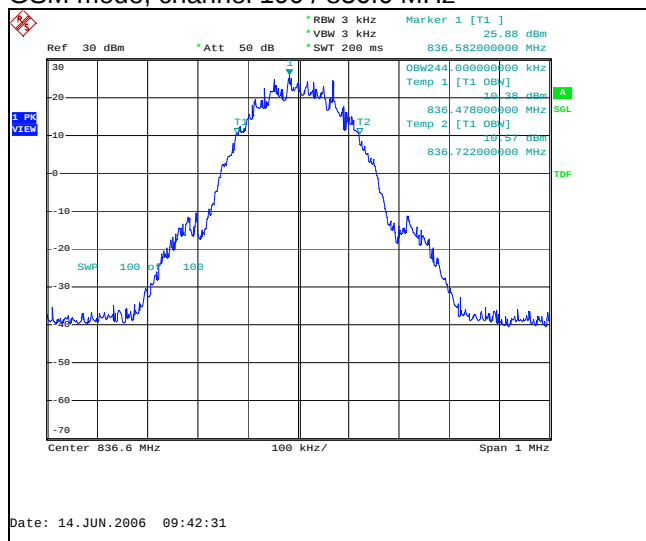

2.4. GSM 1900 Test results

Operation mode (TX on) 99% occupied bandwidth [kHz]
GSM 248.000


GSM mode, channel 661 / 1880.0 MHz

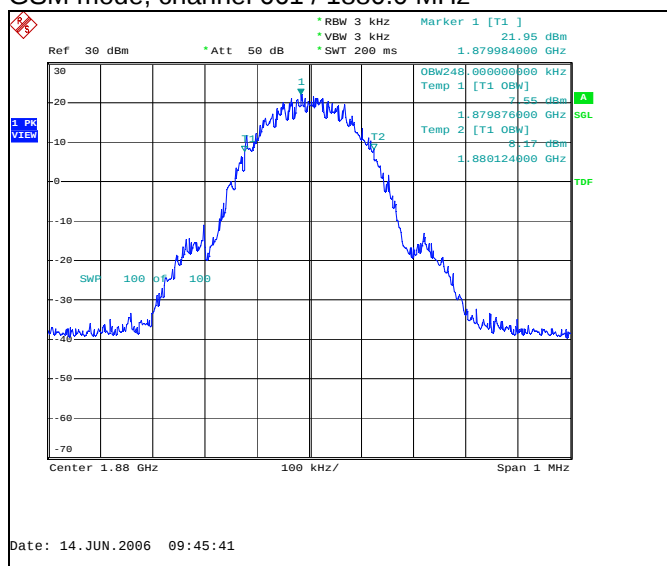

3. Frequency stability, temperature variation (FCC §2.1055(a), §2.1055(a), RSS-GEN 4.5, RSS-132 4.3, RSS-133 7)

EUT with DUT number	RH-87 dut 27987, BL-5C dut 28307
Accessories with DUT numbers	HDE-2 dut 27985, ACP-7 dut 27980
Operation Voltage [V] / [Hz]	120 / 50
Result	Passed
Remarks	The EUT did not operate at -30°C but switched off.
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	25.6 / 48.5 1020.9
Date of measurements	14-06-2006
Measured by	Jan Engelbrechtsen

3.1. Test setup

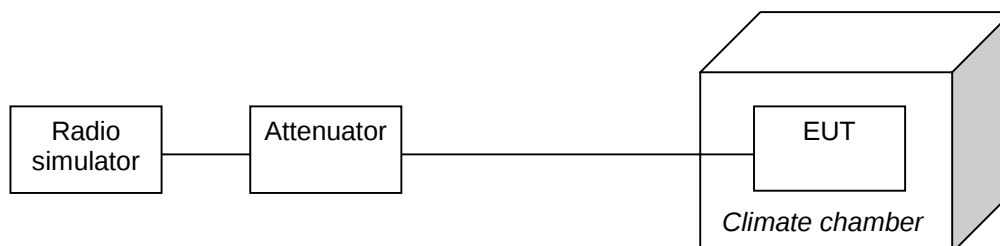

3.2. Test method and limit

The measurement is made according to FCC rules part 22 and 24 and IC standards RSS-GEN, RSS-132 and RSS-133 as follows:

- The climate chamber temperature is set to the maximum value and the temperature is allowed to stabilize.
- The EUT is placed in the chamber.
- The EUT is set in idle mode for 15 minutes.
- The EUT is set to transmit.
- The transmit frequency error was measured immediately.
- The steps c - e were repeated for each temperature.

Limits for frequency stability, temperature variation measurements

Frequency deviation [ppm]
± 2.5

3.3. GSM 850 Test results

GSM mode, channel 190 / 836.6 MHz

Temperature [°C]	Deviation [Hz]	Deviation [ppm]
50	22	0.0263
40	-19	-0.0227
30	-24	-0.0287
20	6	0.0072
10	17	0.0203
0	7	0.0084
-10	-7	-0.0084
-20	9	0.0108

3.4. GSM 1900 Test results


GSM mode, channel 661 / 1880.0 MHz

Temperature [°C]	Deviation [Hz]	Deviation [ppm]
50	-41	-0.0218
40	52	0.0277
30	-24	-0.0128
20	-15	-0.0080
10	16	0.0085
0	-17	-0.0090
-10	44	0.0234
-20	-22	-0.0117

4. Frequency stability, voltage variation (FCC §2.1055(d), RSS-GEN 4.5, RSS-132 4.3, RSS-133 7)

EUT with DUT number	RH-87 dut 27987
Accessories with DUT numbers	SD-4 dummy battery, HDE-2 dut 27985
Operation Voltage [V] / [Hz]	DC Power Supply
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	25.6 / 48.5 1020.9
Date of measurements	14-06-2006
Measured by	Jan Engelbrechtsen

4.1. Test setup



4.2. Test method and limit

The measurement is made according to FCC rules part 22 and 24 and IC standards RSS-GEN, RSS-132 and RSS-133 as follows:

The EUT battery was replaced with an adjustable power supply. The frequency stability was measured at nominal voltage and at the battery cut-off point.

Limits for frequency stability, voltage variation measurements

Frequency deviation [ppm]
± 2.5

4.3. GSM 850 Test results

GSM mode, channel 190 / 836.6 MHz

Voltage level [V]	Deviation [Hz]	Deviation [ppm]
Battery cut-off point / 3.40	-18	-0.0215
Nominal / 3.80	-20	-0.0239

4.4. GSM 1900 Test results

GSM mode, channel 661 / 1880.0 MHz

Voltage level [V]	Deviation [Hz]	Deviation [ppm]
Battery cut-off point / 3.40	-17	-0.0090
Nominal / 3.80	-19	-0.0101

5. Test Equipment

5.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15B,15C
13513	Pulse Limiter 9KHz-30MHz	ESH3Z2	Rohde&Schwarz	15B,15C
13666	EMI Test Receiver 9KHz-2,5GHz	ESPC	Rohde&Schwarz	15B,15C
13935	Two Lines Artificial Mains Network	ESH3-Z5	Rohde&Schwarz	15B,15C
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15B,15C
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15B,15C
19171	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	15B,15C
11386	System DC Power Supply	HP6632A	Hewlett Packard	22.24
11487	Network analyzer 300KHz-3,0GHz	HP8753A	Hewlett Packard	22.24
11584	Spectrum analyzer 50Hz-6,5GHz	HP8561B	Hewlett Packard	22.24
13134	Tracking generator	HP85645A	Hewlett Packard	22.24
13302	Spectrum Analyzer 9KHz-12.8GHz	HP8596E	Hewlett Packard	22.24
13371	Temperature Chamber	S-1,2C	Thermotron	22.24
13524	Digital Radiocomm. Tester	CMD55	Rohde&Schwarz	22.24
14807	S - Parameter Test Set 300KHz-6GHz	HP85047A	Hewlett Packard	22.24
15859	Digital Radio Communication Test Set	4201S	Wavetek	22.24
17277	Multimeter Digital 6 1/2 Digit	AT34401A	Agilent Technologies	22.24
17796	Radio Communication Test Set	4400M	Wavetek	22.24
19374	Resonant Dipole Antenna 850MHz SMA m Conn.	-	NMP Cph	22.24
19375	Resonant Dipole Antenna 1900MHz SMA m Conn.	-	NMP Cph	22.24
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15B,15C

5.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
14020	Programmable Relay Switching System	-	Pickering	15B,15C,22,24
18792	Multi Device Controller	2090	ETS-EMCO	15B,15C,22,24
13829	Turntable Controller	4630-100	Comtest	15B,15C,22,24
14963	RF Preamplifier 100MHz-4GHz (Metal Chassis)	AFS3-00100400	Miteq/NMP Cph	15B,15C,22,24
13668	BiLog Antenna 30-2000MHz	BiLog-CBL6112A	Chase	15B,15C,22,24
18861	EMI Test Receiver 20Hz-26,5GHz	ESI	Rohde & Schwarz	15B,15C,22,24
12679	Dual Log Periodic Antenna 1-18 GHz	HL025	Rohde&Schwarz	15B,15C,22,24
18860	Ultra Broadband Antenna	HL562	Rohde&Schwarz	15B,15C,22,24

Eq. No	Equipment	Type	Manufacturer	Used in
	Ultralog 30-3000MHz			
18773	Shielded Chamber	RFD-100	ETS-Lindgren	15B,15C,22,24
18774	Shielded Chamber	RFSD-F/A-100	ETS-Lindgren	15B,15C,22,24
18324	High Pass Filter 3GHz SMA f Conn	WHJS3000-10SS	Wainwright	15B,15C,22,24
14114	Highpass Filter 1000MHz-4500MHz	WHK1000-12SS	Wainwright	15B,15C,22,24
13918	Highpass Filter 2000-4000MHz 50OHM SMA Conn	WHKS2000-10SS	Wainwright Instruments	15B,15C,22,24
13937	Ultra Stable Notch Filter 902,4MHz	WRCA902.4-0.2/40-6SS	Wainwright Instruments	15B,15C,22,24
13936	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40-10SS	Wainwright Instruments	15B,15C,22,24
13917	Highpass Filter 1000-3000MHz 50OHM SMA Conn	WHKS1000-10SS	Wainwright Instruments	15B,15C,22,24
14188	Ultra Stable Notch Filter 902,4MHz	WRCA902.4-0.2/40-6SS	Wainwright	15B,15C,22,24
14187	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40-10SS	Wainwright	15B,15C,22,24
16633	Ultra Stable Notch Filter 1880,0MHz	WRCD1880.0-0.2/40-10SS	Wainwright	15B,15C,22,24
18323	Band reject filter 1947-1953MHz 40dB	WRCG1947/1953-1940/1960-40/6SS	Wainwright	15B,15C,22,24
15190	Infra Red Remote Control Unit	4630	Emco	22,24,15B,15C
14993	EMI Test Receiver 9KHz-2750MHz	ESCS30	Rohde&Schwarz	22,24,15B,15C
15191	Turntable Controller Unit	G-800SDX	YAESU	22,24,15B,15C
14900	Antenna Controller	HD100	HD GmbH	22,24,15B,15C