

Electromagnetic Emission

FCC MEASUREMENT REPORT

CERTIFICATION OF COMPLIANCE

FCC Part 15 Certification Measurement

PRODUCT : LCD MONITOR
MODEL/TYPE NO : OR1703
FCC ID : QTMOR1703
APPLICANT : YURI ELECTRONICS CO., LTD.
234 KUGAL-RI, KIHUUNG-EUP, YOUNGIN-CITY,
KYUNGKI-DO, KOREA
Attn. : Seong-Jae Park / Manager of Q.C
FCC CLASSIFICATION : Part 15 Class B Unintentional Radiators
Computing Device Peripheral (JBP)
FCC RULE PART(S) : FCC Part 15 Subpart B
FCC PROCEDURE : Certification
TRADE NAME : TopSync
TEST REPORT No. : E03.0621. FCC.365N
DATES OF TEST : June 19 ~ 21, 2003
DATES OF ISSUE : June 21, 2003
TEST LABORATORY : ETL Inc (FCC Registration Number : 95422)
584 Sangwhal-ri, Kanam-myon, Yoju-kun, Kyounggi-do,
469-885, Korea
Tel : (031) 885-0072 Fax : (031) 885-0074

This LCD MONITOR, Model OR1703 has been tested in accordance with the measurement procedures specified in ANSI C63.4-1992 at the ETL/EMC Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part15 Subpart B : Unintentional Radiators.

I attest to the accuracy of data. All measurement herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Yo han, Park

Name : Yo han, park

Title : Chief Engineer & Lab.Manager

E-RAE Testing Laboratory Inc.
584 Sangwhal-ri, Kanam-myon,
Yoju-kun, Kyounggi-do,
469-885, Korea



Table of Contents

ATTACHMENT A: COVER LETTER(S)

FCC Measurement Report

- 1. Introduction**
- 2. Product Information**
- 3. Description of Tests**
- 4. Test Condition**
- 5. Test Results**
 - 5.1 Summary of Test Results**
 - 5.2 Conducted Emissions Measurement**
 - 5.3 Radiated Emissions Measurement**
- 6. Sample Calculations**
- 7. List of test Equipment used for Measurement**

- Appendix A. FCC ID Label and Location**
- Appendix B. Test Setup Photographs**
- Appendix C. External Photographs**
- Appendix D. Internal Photographs**
- Appendix E. Block Diagram**
- Appendix F. User Manual**
- Appendix G. Schematics**

FCC MEASUREMENT REPORT

Scope – Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)

General Information

Applicant Name : YURI ELECTRONICS CO., LTD.

Address : 234 KUGAL-RI, KIHEUNG-EUP, YONGIN-CITY,
KYUNGKI-DO, KOREA

Attention : Seong-Jae, Park / Manager of Q.C

- **EUT Type** : LCD MONITOR
- **Model Number** : OR1703
- **FCC Identifier** : QTMOR1703
- **S/N** : N/A
- **Modulation** : N/A
- **FCC Rule Part(s)** : Part 15 Subpart B Unintentional Radiators
- **Test Procedure** : ANSI C63.4-1992
- **FCC Classification** : Part 15 Class B Unintentional Radiators
Computing Device Peripheral (JBP)
- **Dates of Tests** : June 19 ~ 21, 2003
- **Place of Tests** : ETL Inc
EMC Testing Lab (FCC Registration Number : 95422)
584, Sangwhal-Ri, Kanam-Myun, Yoju-Kun,
Kyounggi-Do, Korea
Tel : (031) 885-0072 Fax : (031) 885-0074
- **Test Report No.** : E03.0621.FCC.365N

1. INTRODUCTION

The measurement test for radiated and conducted emission test were conducted at the open area test site of E-RAE Testing Laboratory Inc. facility located at 584, Sangwhal-ri, Ganam-myun, Youju-kun, Kyounggi-do, Korea. The site is constructed in conformance with the requirements of the ANSI C63.4-1992 and CISPR Publication 16. The ETL has site descriptions on file with the FCC for 3 and 10 meter site configurations. Detailed description of test facility was found to be in compliance with the requirements of Section 2.948 FCC Rules according to the ANSI C63.4-1992 and registered to the Federal Communications Commission(Registration Number : 95422).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C.63.4-1992) was used in determining radiated and conducted emissions from the YURI ELECTRONICS CO., LTD., Model: OR1703

2. PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test(EUT) is the YURI ELECTRONICS CO., LTD. / LCD MONITOR/ OR1703

Please refer to Users manual

2.2 General Specification

- Chassis Type : Plastic & Metal Cover
- List of Each OSC. Or X-Tal. Freq. (≥ 1 MHz) : X-TAL – 24.0MHz, 14.31818MHz
- Chipset Brand & Part No. : MST9111 – M
- Number of Layers : Main board – 4Layers, Inverter board – 4 Layers, Front board – 2 Layers
- Screen size : 17"
- Display size : 337.92mm (H) X 270.34mm (V)
- Screen Coating : Anti-glare & Hard-coating
- Pixel Pitch : 0.264mm X 0.264mm
- Brightness : 250cd/m²
- Contrast Scaling : 500:1
- Viewing Angle : 85/85/85/85 (left/right/up/down)
- Response Time : Tr = 20ms, Tf = 15ms
- RGB Input : Analog RGB 0.7Vp-p
- H-Frequency : 30 ~ 61KHz
- V-Frequency : 55 ~ 75Hz
- Resolution : 1280 X 1024 @60Hz
- Panel color : 16.7M Colors
- Power : 35W (Normal mode)
- Consumption : 5W (Power-Saving mode)

3. DESCRIPTION OF TESTS

3.1 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with § 12.2 in ANSI C63.4-1992 "Measurement of Information Technology Equipment ". The measurement were performed over the frequency range of 0.15MHz to 30MHz using a 50 Ω /50uH LISN as the input transducer to a Spectrum Analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 10KHz or for "quasi-peak" within a bandwidth of 9KHz.

- Procedure of Test

The line-conducted facility is located inside a shielded room 1m X 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 1.5m away from the side wall of the shielded room. Two EMCO 3825/2 LISN are bonded to the shielded room. The EUT is powered from the EMCO LISN and the support equipment is powered from the another EMCO LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner ϕ 1.2cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the EMCO LISN. Non-inductive bundling to a 1m length shortened all interconnecting cables more than 1m. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the EMI Test receiver ESHS 30 to determine the frequency producing the max. emission from the EUT. The frequency producing the max. level was reexamined using to set Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 to 30MHz. The bandwidth of the EMI Test receiver ESHS 30 was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission.

3. DESCRIPTION OF TESTS

3.2 Radiated Emission Measurement

Radiated emission measurements were in accordance with § 12.2 in ANSI C63.4-1992 "Measurement of Information Technology Equipment ". The measurements were performed over the frequency range of 30MHz to 1GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Quasi-peak" within a bandwidth of 120KHz.

- Procedure of Test

Preliminary measurements were made at 3 meter using broadband antennas, and spectrum analyzer to determined the frequency producing the max. emission in shielded room. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 to 1000MHz using SchwarzBeck Log-Bicon antenna. Above 1GHz, linearly polarized double ridge horn antennas were used. Final measurements were made open site at 10-meters. The test equipment was placed on a wooden turn-table. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR Quasi-peak mode and the bandwidth of the receiver was set to 120kHz or 1MHz depending on the frequency of type of signal. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the max. emission for the frequency and were placed on top of a 0.8-meter high nonmetallic 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the max. emission. Each emission was maximized by: varying the mode of operation to the EUT and/or support equipment and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

4. TEST CONDITION

4.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following conditions and configurations were used.

4.2 EUT operation

The EUT was connected as user's guide. And during the test executed test program for EMI Test Program with "H" Pattern display on Monitor.

The max resolution 1280 X 1024 80KHz / 70.0Hz is not supported of PC

Operating Mode	Worst case
Stand by	X
" H " Pattern Display	O

Resolution	H / V Frequency	Worst case
640 X 480	37.5KHz / 75Hz	X
800 X 600	48.1KHz / 72.2Hz	X
1024 X 768	56.5KHz / 70.1Hz	X
1024 X 768	60.0KHz / 75.0Hz	X
1280 x 1024	64.0KHz / 75.0Hz	O

O: Worst case investigated during the Test

4.3 Support Equipment Used

Following peripheral devices and interface cables were connected during the measurement:

EUT – LCD MONITOR (YURI ELECTRONICS CO., LTD.)

FCC ID : QTMOR1703
Model Name : OR1703
Serial No. : N/A
Manufacturer : YURI ELECTRONICS CO., LTD.
Power Supply Type : Switching, DC 12V/3.0A of AC/DC Adapter
Power Cord : Non-shielded, Detachable:1.2m
Port : RGB: 1, DC IN: 1



Support Unit 1 – PC (DELL)

FCC ID : DOC
Model Name : MMP
Serial No. : BK1W31S
Manufacturer : DELL
Power Supply Type : Switching
Power Cord : Non-Shielded, Detachable, 1.2m
Port : RGB IN:1, Parallel:1, RS-232:2, PS/2: 2, USB: 2, RJ-45:1
: Audio in:1, Audio out:1, MIC IN:1

Support Unit 2 – Keyboard (DELL)

FCC ID : DOC
Model Name : SK-8000
Serial No. : MY-0970WY-38843-0CB-3064
Manufacturer : DELL
Power Supply Type : N/A
Power Cord : N/A
Data Cable : Shielded: 1.2m

Support Unit 3 - MOUSE (LOGITECH)

FCC ID : JNZ201213
Model Name : M-S48a
Serial No. : HCA13711225
Manufacturer : LOGITECH
Power Supply Type : N/A
Power Cord : N/A
Data Cable : Shielded, 1.2m

Support Unit 5 – USB MOUSE (LOGITECH)

FCC ID : JNZ211360
Model Name : M-U48a
Serial No. : N/A
Manufacturer : LOGITECH
Power Supply Type : N/A
Power Cord : N/A
Data Cable : Shielded, 1.0m



Support Unit 6 – Serial Mouse (INFO)

FCC ID	: EMJMUSOG
Model Name	: MUSOG
Serial No.	: Q36E
Manufacturer	: INFO
Power Supply Type	: N/A
Power Cord	: N/A
Data Cable	: Un-Shielded, 1.2m

Support Unit 7 – Printer (SINDORICO)

FCC ID	: N/A
Model Name	: Colorcab330
Serial No.	: 11-03098
Manufacturer	: LEXMARK INTERNATIONAL INC.
Power Supply Type	: Switching
Power Cord	: Non-Shielded, Detachable, 1.2m
Data Cable	: Shielded, 1.5m

Support Unit 8 – EAR MIC (JE TECH)

FCC ID	: N/A
Model Name	: N/A
Serial No.	: N/A
Manufacturer	: JE TECH
Power Supply Type	: N/A
Power Cord	: N/A
Data Cable	: Non-Shielded, 1.0m

5. TEST RESULTS

5.1 Summary of Test Results

This equipment is Power Supply system from DC12V of AC/DC Adapter, The Conducted Test data is AC/DC Adapter Power Test data

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

Test Rule Parts	Measurement Required	Result
15.107	Conducted Emissions Measurement	Passed by – 7.31 dB
15.109	Radiated Emissions Measurement	Passed by – 4.28 dB

The data collected shows that the YURI ELECTRONICS CO., LTD., LCD MONITOR, OR1703 complies with technical requirements of above rules part 15.107 and 15.109 Class B Limits.

The equipment is not modified anything, mechanical or circuits to improve EMI status during a measurement. No EMI suppression device(s) was added and/or modified during testing.

5. TEST RESULTS

5.2 Conducted Emissions Measurement

EUT	LCD MONITOR / OR1703 (SN:N/A)
Limit apply to	15.107 Class B
Test Date	June 19, 2003
Operating Condition	"H" Pattern display Mode, Resolution 1280 X 1024 64.0KHz/75Hz
Environment Condition	Humidity Level : 40 %RH, Temperature : 25
Result	Passed by - 7.31dB

Conducted Emission Test Data

The following table shows the highest levels of conducted emissions on both polarization of live and neutral line.

Detector mode : CISPR Quasi-Peak mode (6dB Bandwidth : 9 KHz)

Frequency [MHz]	Reading [dB μ V]		Phase (*H/**N)	Limit [dB μ V]		Margin [dB]	
	Quasi-peak	Average		Quasi-peak	Average	Q.Peak	Average
0.180	55.90	47.18	N	64.49	54.49	8.59	7.31
0.240	50.68	41.94	N	62.09	52.09	11.41	10.15
0.545	34.53	-	H	56.0	46.0	21.47	-
2.240	31.35	-	H			24.65	-
5.025	34.27	-	H	60.0	50.0	25.73	-
8.930	44.02	-	N			15.98	-
23.11	39.20	-	H			20.80	-

NOTES :

1. * H : HOT Line , **N : Neutral Line
2. Margin value = Limit - Reading
3. Measurement were performed at the AC/DC Adapter Power Inlet in the frequency band of 150kHz ~ 30MHz according to the FCC Part 15.107 Class B
4. If the Reading Quasi-Peak value is bellowed the Average Limit, Do not test Average Mode.



Test Engineer : C. S. Kim


5. TEST RESULTS

Line: HOT Line

ETL EMC Laboratory Conducted Emission Test Result

EUT: OR1703
Manuf:
Op Cond:
Operator: Chon Sik, Kim
Test Spec: FCC Part 15 Class B
Comment: Hot

Scan Settings		(3 Ranges)			Receiver Settings			
Frequencies		Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
Start	Stop							
150kHz	5MHz	5kHz	10kHz	PK+AV	10msec	Auto	OFF	60dB
5MHz	10MHz	5kHz	10kHz	PK+AV	10msec	Auto	OFF	60dB
10MHz	30MHz	10kHz	10kHz	PK+AV	10msec	Auto	OFF	60dB
Transducer	No.	Start	Stop	Name				
	1	9kHz	30MHz	Factor				
Prescan Measurement:		Detectors:	X PK / + AV					
		Meas Time:	see scan settings					
		Peaks:	16					
		Acc Margin:	10 dB					

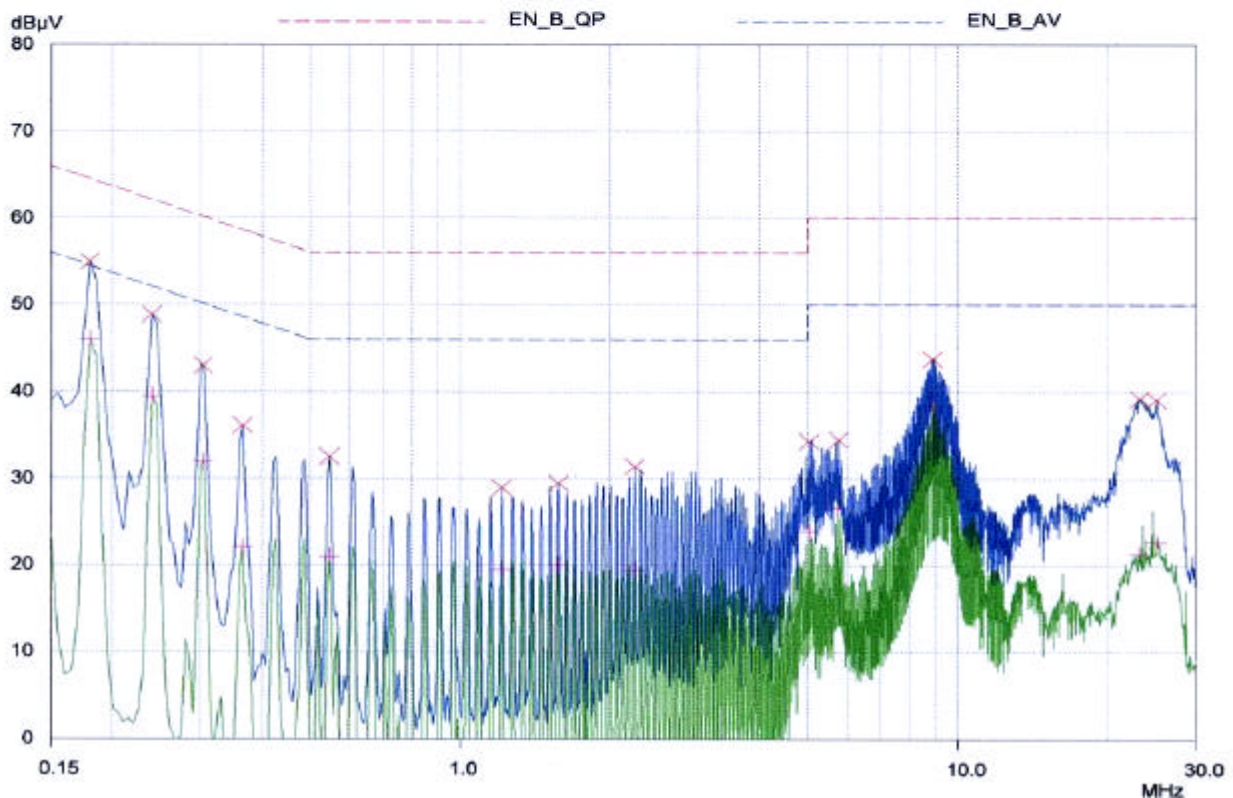


5.TEST RESULTS

Line: Neutral Line

ETL EMC Laboratory Conducted Emission Test Result

EUT: OR1703
Manuf:
Op Cond:
Operator: Chon Sik, Kim
Test Spec: FCC Part 15 Class B
Comment: Neutral
Result File: OR1703-H.dat : New Measurement

Scan Settings		(3 Ranges)			Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	5MHz	5kHz	10kHz	PK+AV	10msec	Auto	OFF	60dB
5MHz	10MHz	5kHz	10kHz	PK+AV	10msec	Auto	OFF	60dB
10MHz	30MHz	10kHz	10kHz	PK+AV	10msec	Auto	OFF	60dB
Transducer	No.	Start	Stop	Name				
	1	9kHz	30MHz	Factor				
Prescan Measurement:		Detectors:	X PK / + AV					
		Meas Time:	see scan settings					
		Peaks:	16					
		Acc Margin:	10 dB					

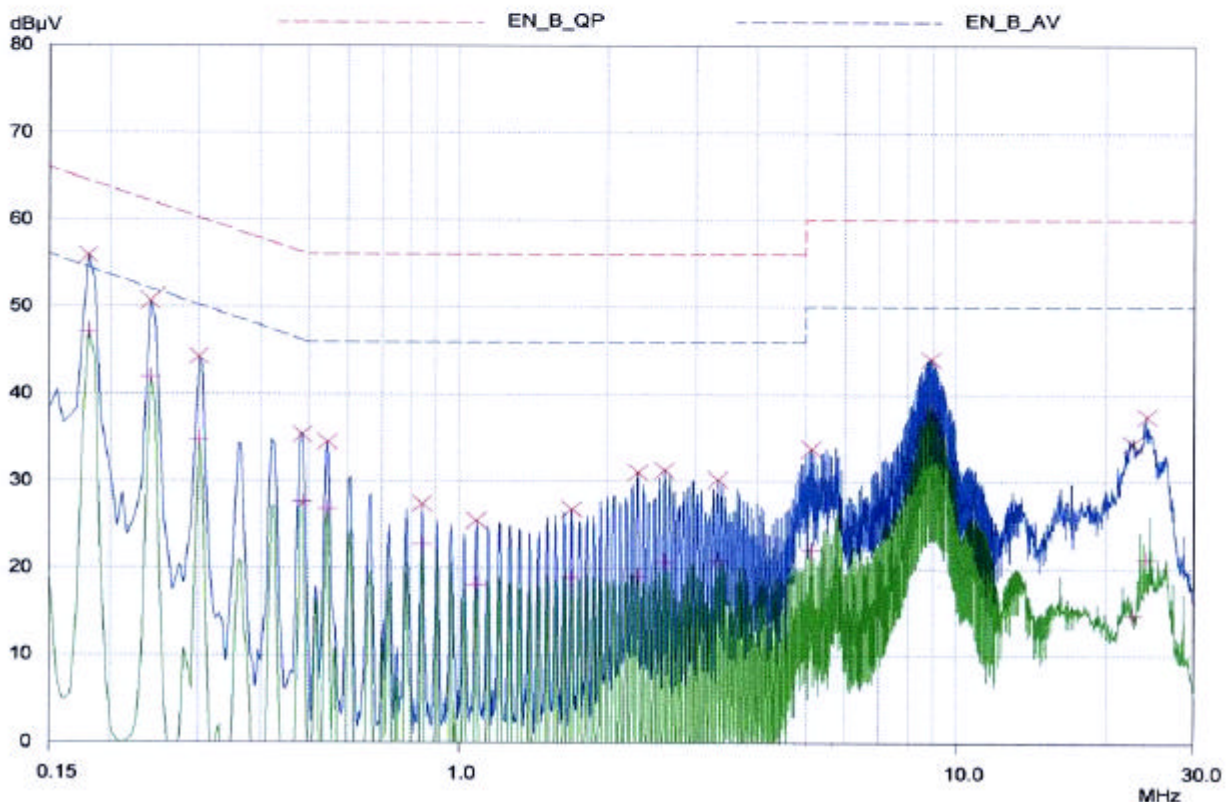

5. TEST RESULTS

5.3 Radiated Emissions Measurement

EUT	LCD MONITOR / OR1703 (SN:N/A)
Limit apply to	15.109, Class B
Test Date	June 20, 2003
Operating Condition	" H " Pattern display Mode Resolution 1280 X 1024 64.0KHz/75Hz
Environment Condition	Humidity Level : 40 %RH, Temperature :16
Result	Passed by – 4.28dB

Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarization of horizontal and vertical.

Detector mode : CISPR Quasi-Peak mode (6dB Bandwidth : 120 kHz)

Measurement Distance : 10 meters

Frequency [MHz]	Reading [dB μ V]	Polarization (*H/**V)	Ant. Factor [dB]	Cable Loss [dB]	Emission Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
108.00	13.04	V	10.12	2.56	25.72	30.0	4.28
161.82	8.48	V	12.95	3.24	24.66		5.34
175.48	10.57	V	11.43	3.70	25.70		4.30
216.04	11.52	V	9.96	4.00	25.48		4.52
216.65	10.27	V	10.02	4.00	24.29		5.71
243.02	8.91	H	10.92	4.13	23.96	37.0	13.04

NOTES :

1. * H : Horizontal polarization , ** V : Vertical polarization
2. Emission Level = Reading + Antenna factor + Cable loss
3. Margin value = Limit - Emission Level
4. The measurement was performed for the frequency range 30MHz ~ 1000MHz according to the CISPR 22 Class B



Test Engineer : C. S. Kim

6. SAMPLE CALCULATION

Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

$$dB(\mu V/m) = 20 \log_{10} (\mu V / m) : \text{Equation 1}$$

$$dB\mu V = dBm + 107 : \text{Equation 2}$$

Example 1 : @ 0.180 MHz

Class B Limit	=	530.27 uV = 54.49 dBuV
Reading	=	47.18 dBuV
Convert to uV	=	228.82 uV
Margin	=	47.18 – 54.49 = - 7.31
	=	- 7.31 dB below Limit

Example 2 : @ 108.0 MHz

Class B Limit	=	31.62 uV = 30.0 dBuV/m
Reading	=	13.04 dBuV
Antenna Factor + Cable Loss	=	12.68 dB
Total	=	25.72 dBuV/m
Margin	=	25.72 – 30.0 = - 4.28
	=	- 4.28 dB below Limit

7. TEST EQUIPMENT LIST

List of Test Equipments Used for Measurements

Test Equipment		Model	Mfg.	Serial No.	Cal. Date
☒	Spectrum Analyzer	R3261A	Advantest	21720033	02-10-21
☒	Receiver	ESVS 10	R & S	835165/001	02-03-21
☒	Receiver	ESHS30	R & S	84190/002	02-01-24
☒	Spectrum Analyzer	E7402A	HP	US39110107	03-05-21
☒	LISN	3825/2	EMCO	9208-1995	02-12-27
☒	LISN	3825/2	EMCO	9006-1669	02-01-10
☒	Preamplifier	HP8447D	HP	2944A07626	03-01-10
☐	Preamplifier	HP 8347A	HP	2834A00544	03-05-23
☒	TriLog Antenna	VULB9160	Schwarz Beck	3082	03-06-19
☐	LogBicon	VULB9165	Schwarz Beck	2023	03-05-28
☒	Dipole Antenna	VHAP	Schwarz Beck	964	03-05-09
☐	Dipole Antenna	VHAP	Schwarz Beck	965	02-07-03
☒	Dipole Antenna	UHAP	Schwarz Beck	949	02-07-03
☐	Dipole Antenna	UHAP	Schwarz Beck	950	03-05-09
☐	Broad-band Horn Antenna	3115	EMCO	9809-2334	02-09-20
☐	Magnetic Loop Antenna	6502	EMCO	9810-2111	02-12-11
☒	Turn-Table	DETT-03	Daeil EMC	-	N/A
☒	Antenna Master	DEAM-03	Daeil EMC	-	N/A
☒	Plotter	7440A	H.P	2725A 75722	N/A
☒	Chamber	DTEC01	DAETONG	-	N/A
☒	Thermo Hygrograph	3-3122	ISUZU	3312201	03-01-10
☒	BaroMeter	-	Regulus	-	-