

FCC TEST REPORT

for

Meiloon Industrial Co., Ltd.

active loudspeaker

Model Number: Bravado

FCC ID: R48BRAVA
IC: 7190A-BRAVA

Prepared for : Meiloon Industrial Co., Ltd.
Address : No.99, Xingfu Road, Taoyuan Dist, Taoyuan City, Taiwan

Prepared by : Keyway Testing Technology Co., Ltd.
Address : Baishun Industrial Zone, Zhangmutou Town,
Dongguan, Guangdong, China


Tel: 86-769-8718 2258
Fax: 86-769-8718 1058

Report No. : 15KWE093046F
Date of Test : Sep.7~Sep.15,2015
Date of Report : Sep.16, 2015

TABLE OF CONTENTS

Test Report Declaration	Page
1. TEST SUMMARY	4
2. GENERAL PRODUCT INFORMATION	4
2.1. Product Function.....	4
2.2. Description of Device (EUT)	4
2.3. Independent Operation Modes	5
2.4. Test Supporting System	5
2.5. Product Version	5
2.6. TEST SITES.....	5
2.7. List of Test and Measurement Instruments	6
3. TEST SET-UP AND OPERATION MODES.....	7
3.1. Principle of Configuration Selection.....	7
3.2. Block Diagram of Test Set-up.....	7
3.3. Test Operation Mode and Test Software.....	7
3.4. Special Accessories and Auxiliary Equipment.....	7
3.5. Countermeasures to Achieve EMC Compliance	7
4. EMISSION TEST RESULTS.....	8
4.1. Conducted Emission at the Mains Terminals Test.....	8
4.2. Radiated Emission Test.....	11
5. BAND EDGE COMPLIANCE TEST	17
5.1. Limits	17
5.2. Test setup	17
6. BANDWIDTH TEST	24
6.1. Limits	24
7. OUTPUT POWER TEST	29
7.1. Limits	29
7.2. Test setup	29
7.3. Test result	29
8. POWER SPECTRAL DENSITY TEST.....	30
8.1. Limits	30
8.2. Test setup	30
8.3. Test result	30
9. ANTENNA REQUIREMENTS	37
9.1. Limits	37
9.2. Result	37
10. PHOTOGRAPHS OF TEST SET-UP	38
11. PHOTOGRAPHS OF THE EUT	40

Keyway Testing Technology Co., Ltd.

Applicant:	Meiloon Industrial Co., Ltd.		
Address:	No.99, Xingfu Road, Taoyuan Dist, Taoyuan City, Taiwan		
Manufacturer:	Martin logan LTD		
Address:	2101 Delaware Street, Lawrence, KS 66046 USA		
Factory:	Dongguan Meiloon Acoustic Equipments Co., Ltd.		
Address:	77, Yuanlin Road Fenghuanggang Ind, Estate, Tangxia Town, 523727 Dongguan City, Guangdong Province, PEOPLE'S REPUBLIC OF CHINA.		
E.U.T:	active loudspeaker		
Model Number:	Bravado		
Trade Name:	MARTIN LOGAN	Serial No.:	-----
Date of Receipt:	Sep. 6 , 2015	Date of Test:	Sep.7~Sep.15,2015
Test Specification:	FCC Part 15, Subpart 15.247: Oct. 1, 2014 ANSI C63.10:2013 KDB558074 D01 DTS Meas Guidance v03r02 RSS-247 Issue 1 May 2015 RSS-Gen Issue 4 November 2014		
Test Result:	The equipment under test was found to be compliance with the requirements of the standards applied.		
Issue Date: Sep.16, 2015			
Tested by:	Reviewed by:	Approved by:	
			
Keven Wu / Engineer	Andy Gao / Supervisor	Jade Yang / Supervisor	
Other Aspects:	None.		
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Keyway Testing Technology Co., Ltd.			

1.TEST SUMMARY

Test Items	Test Requirement	Result
Conducted Emissions	15.207 &RSS-Gen §8.8	PASS
Radiated Emissions	15.205(a)/15.209/15.247(d) &RSS-Gen §6.13	PASS
6dB&99% Bandwidth	15.247(a)(2)& RSS-247 §5.2(1) &RSS-Gen§6.6	PASS
Power density	15.247(e) &RSS-247 §5.2 (2)	PASS
Maximum Peak Output Power	15.247(b)(3)& RSS-247 §5.4&RSS-Gen§6.12	PASS
Emissions from out of band	15.247(d) & RSS-247 §5.5	PASS
Antenna Requirement	15.203&RSS-Gen§8.3	PASS

2.GENERAL PRODUCT INFORMATION

2.1. Product Function

Refer to Technical Construction Form and User Manual.

2.2. Description of Device (EUT)

Product Name:	active loudspeaker
Model No.:	Bravado
Operation Frequency:	2412MHz~2462MHz (802.11b/802.11g/802.11n(H20)) 2422MHz~2452MHz (802.11n(H40)) 5180-5240 MHz; 5745-5805 MHz(5G 802.11a/n(HT20)) 5190-5230 MHz; 5755-5795 MHz(802.11n(HT40))
Channel numbers:	11 for 802.11b/802.11g/802.11n(H20) ,7 for 802.11n(H40) 5channels for 5G 802.11a/n(HT20) 4channels for 802.11n(HT40)
Modulation technology:	Direct Sequence Spread Spectrum (DSSS) for (IEEE 802.11b) Orthogonal Frequency Division Multiplexing(OFDM) for (IEEE 802.11g/802.11n)
Data speed (IEEE 802.11b):	1Mbps, 2Mbps, 5.5Mbps, 11Mbps
Data speed (IEEE 802.11g):	6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps,54Mbps
Data speed (IEEE 802.11n):	Up to 150Mbps
Antenna Type:	PIFA
Antenna gain:	3.3dBi for 2.4GWIFI(declare by Applicant) 3.25 dBi for 5G WIFI
Power supply:	AC 120V/60Hz

2.3. Independent Operation Modes

The basic operation modes are:

2.3.1. EUT work WFI TX mode, and frequency as below:

	Channel	Frequency
802.11b	Low	2412MHz
	Middle	2437MHz
	High	2462MHz
802.11g	Low	2412MHz
	Middle	2437MHz
	High	2462MHz
802.11n(HT20)	Low	2412MHz
	Middle	2437MHz
	High	2462MHz
802.11 n(HT40)	Low	2422MHz
	Middle	2437MHz
	High	2452MHz

Remark: According to ANSI C63.10 standards, the test results are both the "worst case" and "worst setup"

2.4. Test Supporting System

None.

2.5. Product Version

Product SW version	V0.1.3464
Product HW version	V01
Radio SW version	V03
Radio HW version	1.9.1.009
Test SW Version	V1.2
RF power setting in TEST SW	2.4G:11b 15 dBm;11g 14 dBm;11n(HT20) 13 dBm; 11n(HT40) 11 dBm 5G:11n 14 dBm; 11a 13 dBm

Note: SW means software, HW means hardware.

2.6. TEST SITES

2.6.1. Test Facilities

Lab Qualifications : Certificated by Industry Canada
Registration No.: 9868A
Date of registration: December 8, 2011

Certificated by FCC, USA
Registration No.: 370994
Date of registration: February 21, 2012

Certificated by CNAS China
Registration No.: CNAS L5783
Date of registration: August 8, 2012

2.7. List of Test and Measurement Instruments

2.7.1. For conducted emission at the mains terminals test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	Apr. 27,15	Apr. 27,16
Artificial Mains Network	Rohde&Schwarz	ENV216	101315	Apr. 27,15	Apr. 27,16
Artificial Mains Network (AUX)	Rohde&Schwarz	ENV216	101314	Apr. 27,15	Apr. 27,16
RF Cable	FUJIKURA	3D-2W	944 Cable	Apr. 27,15	Apr. 27,16

2.7.2. For radiated emission test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	Apr. 27,15	Apr. 27,16
System Simulator	Agilent	E5515C	GB43130245	Apr. 27,15	Apr. 27,16
Power Splitter	Weinschel	1506A	NW425	Apr. 27,15	Apr. 27,16
Bilog Antenna	ETS-LINDGREEN	3142D	135452	Apr. 27,15	Apr. 27,16
Spectrum Analyzer	Agilent	E4411B	MY4511304	Apr. 27,15	Apr. 27,16
Spectrum Analyzer	R&S	FSV40	132.1.3008K39-100967	Apr. 27,15	Apr. 27,16
3m Semi-anechoic Chamber	ETS-LINDGREEN	966	KW01	Apr. 27,15	Apr. 27,16
Signal Amplifier	SONOMA	310	187016	Apr. 27,15	Apr. 27,16
Signal Amplifier	Agilent	8449B	3008A00251	Apr. 27,15	Apr. 27,16
RF Cable	IMRO	IMRO-400	966 Cable 1#	N/A	N/A
MULTI-DEVICE Controller	ETS-LINDGREEN	2090	126913	N/A	N/A
Horn Antenna	DAZE	ZN30701	11003	Apr. 27,15	Apr. 27,16
Horn Antenna	SCHWARZBECK	BBHA9170	9170-068	Apr. 27,15	Apr. 27,16
Spectrum Analyzer	Agilent	8593E	3911A04271	Apr. 27,15	Apr. 27,16
Spectrum Analyzer	Agilent	E4408B	MY44211125	Apr. 27,15	Apr. 27,16
Signal Amplifier	DAZE	ZN3380C	11001	Apr. 27,15	Apr. 27,16
High Pass filter	Micro	HPM50111	324216	Apr. 27,15	Apr. 27,16
Filter	COM-MW	ZBSF-C836.5-25-X	KW032	Apr. 27,15	Apr. 27,16
Filter	COM-MW	ZBSF-C1747.5-75-X2	KW035	Apr. 27,15	Apr. 27,16
Filter	COM-MW	ZBSF-C1880-60-X2	KW037	Apr. 27,15	Apr. 27,16
DC Power Supply	LongWei	PS-305D	010964729	Apr. 27,15	Apr. 27,16
Constant temperature and humidity box	GF	GTH-800-40-1P	MAA9906-005	Apr. 27,15	Apr. 27,16
Universal radio communication tester	Rohde&Schwarz	CMU200	3215420	Apr. 27,15	Apr. 27,16
Splitter	Agilent	11636B	0025164	Apr. 27,15	Apr. 27,16


3. TEST SET-UP AND OPERATION MODES

3.1. Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the Operating Instructions.

3.2. Block Diagram of Test Set-up

System Diagram of Connections between EUT and Simulators



(EUT: active loudspeaker)

3.3. Test Operation Mode and Test Software

None.


3.4. Special Accessories and Auxiliary Equipment

None.

3.5. Countermeasures to Achieve EMC Compliance


None.

Line

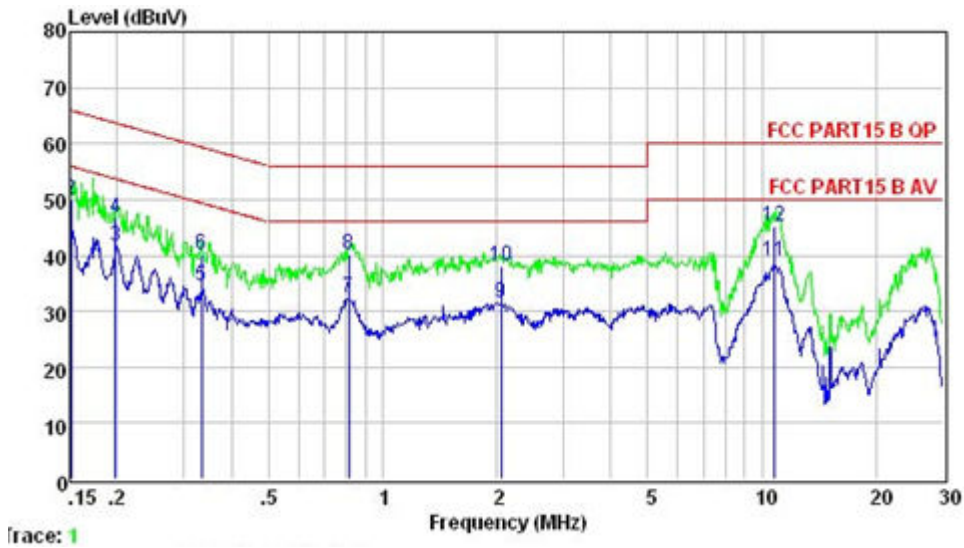

	Freq	Level	Limit	Over	Remark
	MHz	dBuV	Line	Limit	
			dBuV	dB	
1	0.151	44.79	55.96	-11.17	Average
2	0.151	50.02	65.96	-15.94	QP
3	0.198	41.63	53.71	-12.08	Average
4	0.198	46.66	63.71	-17.05	QP
5	0.334	34.48	49.35	-14.87	Average
6	0.334	40.25	59.35	-19.10	QP
7	0.813	32.56	46.00	-13.44	Average
8	0.813	40.20	56.00	-15.80	QP
9	2.055	31.61	46.00	-14.39	Average
10	2.055	38.11	56.00	-17.89	QP
11	10.733	38.89	50.00	-11.11	Average
12	10.733	45.21	60.00	-14.79	QP

Neutral

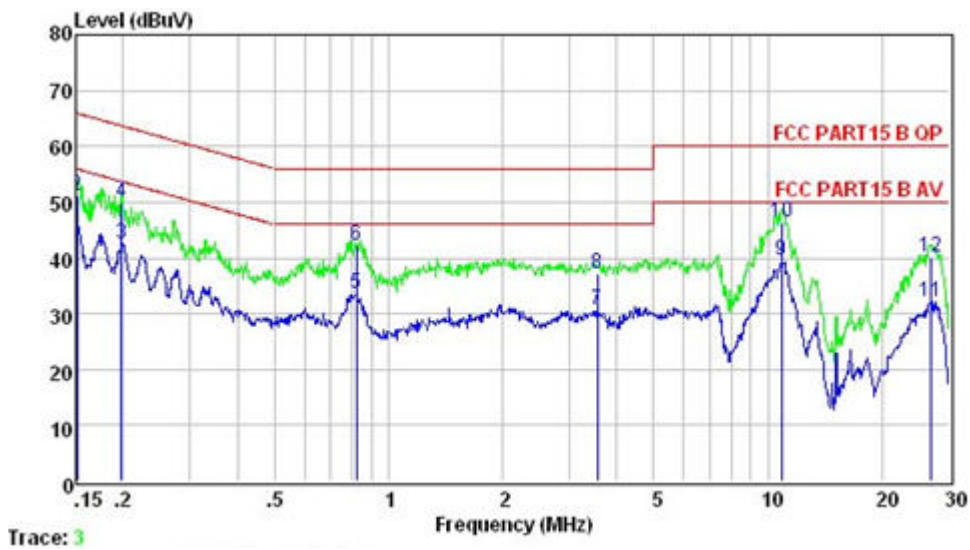

	Freq	Level	Limit	Over	
	MHz	dB	Line	Limit	Remark
1	0.151	46.26	55.96	-9.70	Average
2	0.151	55.30	65.96	-10.66	QP
3	0.171	44.81	54.90	-10.09	Average
4	0.171	51.32	64.90	-13.58	QP
5	0.830	33.89	46.00	-12.11	Average
6	0.830	41.57	56.00	-14.43	QP
7	1.010	32.27	46.00	-13.73	Average
8	1.010	37.69	56.00	-18.31	QP
9	2.033	30.25	46.00	-15.75	Average
10	2.033	36.21	56.00	-19.79	QP
11	7.290	35.30	50.00	-14.70	Average
12	7.290	43.25	60.00	-16.75	QP

4.2. Radiated Emission Test

4.2.1. Limit 15.209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

4.2.2. Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

4.2.3. Test setup

The EUT was placed on a turn table which was 0.8 m (above 1GHz, the high was 1.5m) above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 m away from the receiving antenna which was mounted on an antenna tower. The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 m to 4 m for both horizontal and vertical polarizations.

The EUT was tested in the Chamber Site. It was pre-scanned with a Peak detector from the spectrum, and all the final readings from the test receiver were measured with the Quasi-Peak detector.

The bandwidth of the EMI test receiver is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz, Both PK and AV measure, PK detector is used.

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

Notes: 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading-Preamp Factor.


2. Measurement Uncertainty: ± 3.2 dB at a level of confidence of 95%.

3. For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.


4. For emissions below 1GHz, pretest for all mode, The test data of the worst case condition(s) was reported on the following pages.

5. For Both PK and AV value above 1GHz, PK detector is used.

Below 1GHz

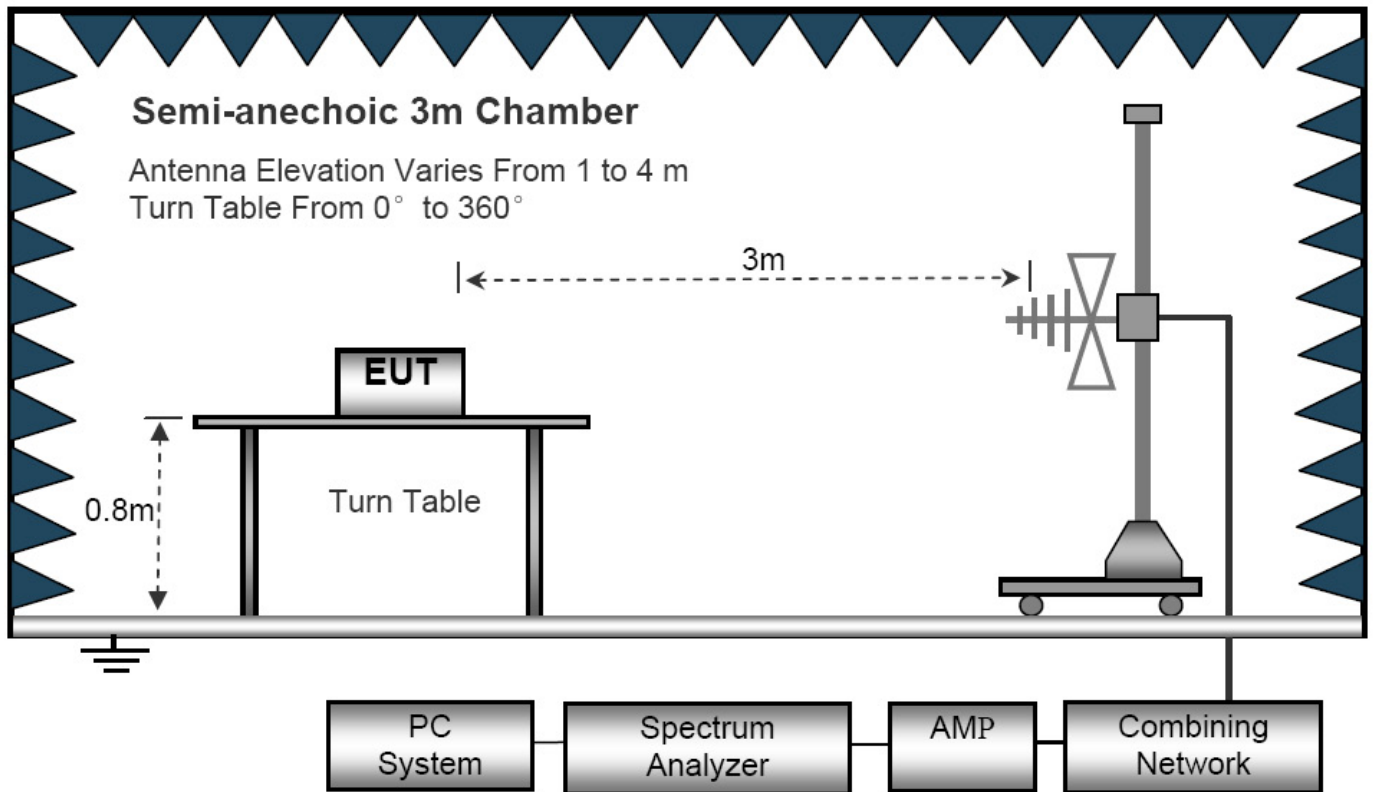


Above 1GHz

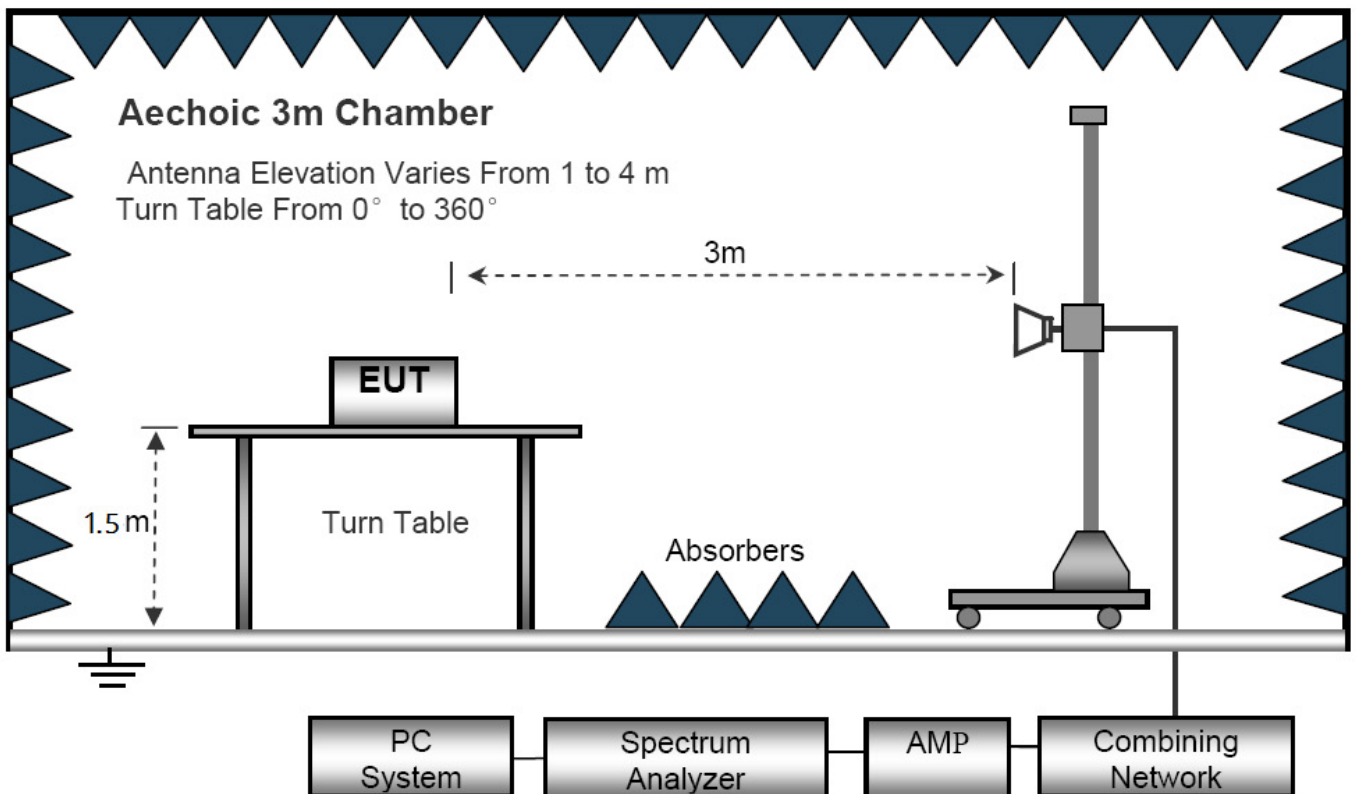


Below 1GHz

Vertical

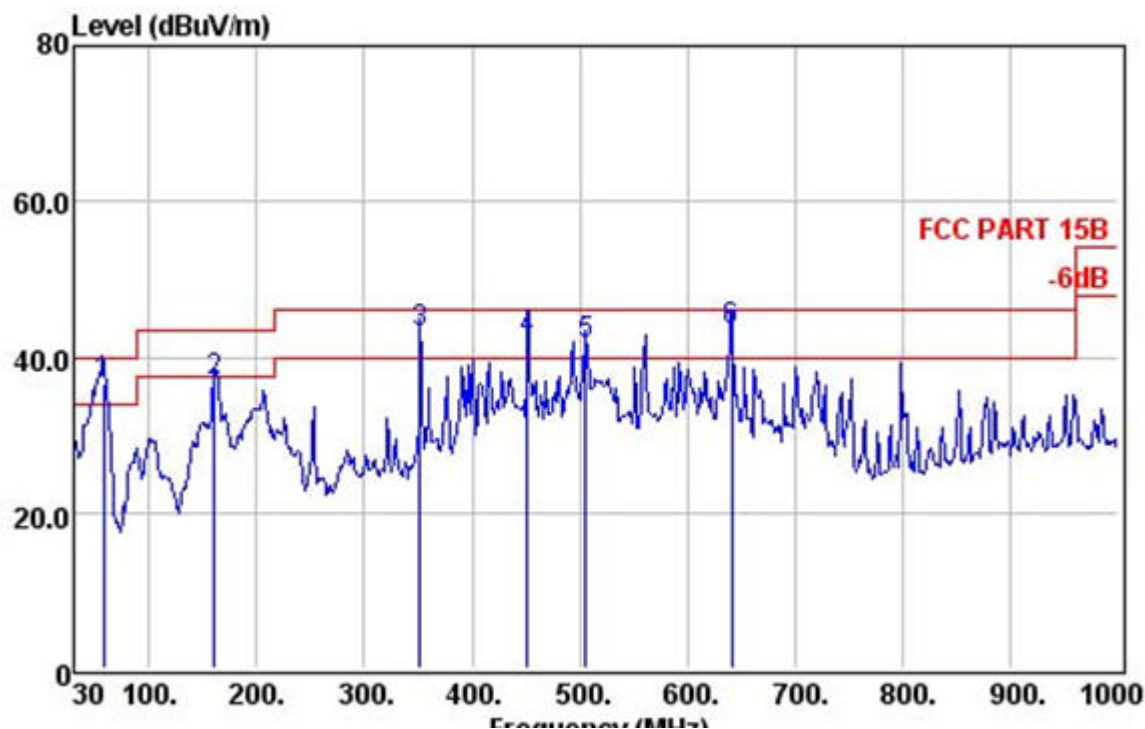

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1 !	57.16	31.36	59.31	0.75	36.43	40.00	-3.57	QP
2	160.95	31.22	57.37	1.30	36.74	43.50	-6.76	QP
3 !	352.04	30.66	55.88	2.10	42.99	46.00	-3.01	QP
4 !	451.95	30.61	52.46	2.62	42.12	46.00	-3.88	QP
5 !	505.30	30.61	50.49	2.85	41.54	46.00	-4.46	QP
6 !	641.10	30.77	49.20	3.58	43.37	46.00	-2.63	QP

Horizontal

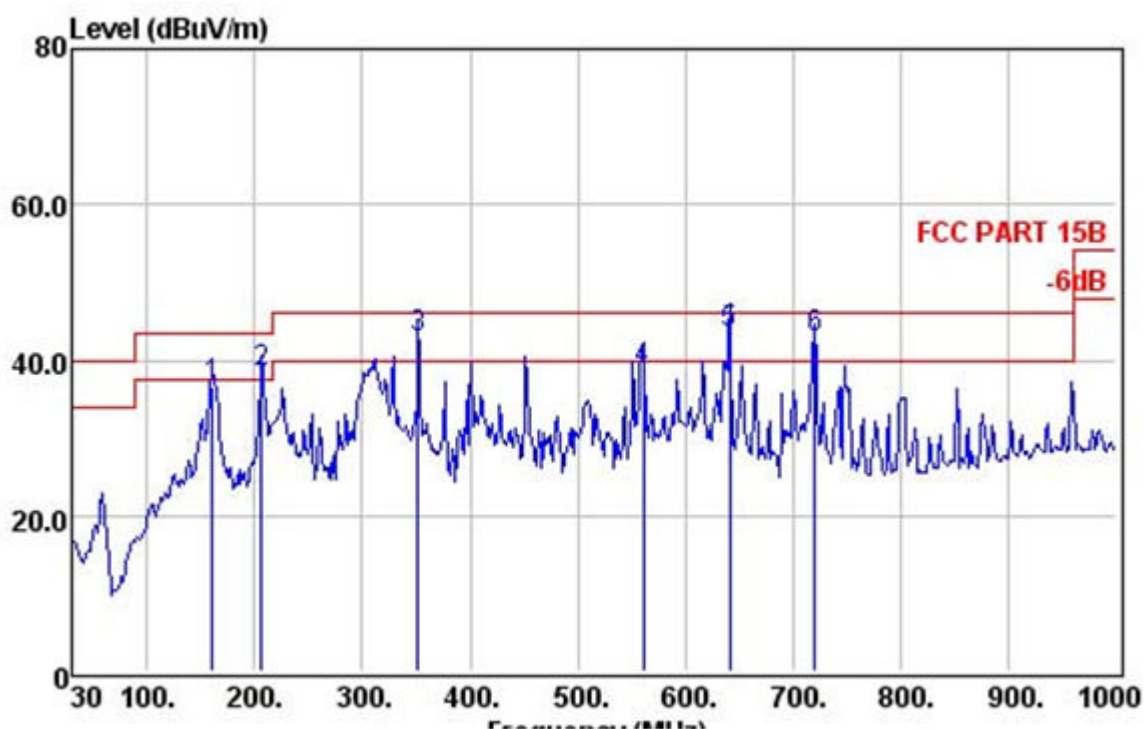

	Freq	Preamp	Read	Cable	Level	Limit	Over	
	MHz	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	160.95	31.22	57.33	1.30	36.70	43.50	-6.80	QP
2 !	206.54	31.09	56.83	1.46	38.51	43.50	-4.99	QP
3 !	352.04	30.66	55.61	2.10	42.72	46.00	-3.28	QP
4	561.56	30.88	46.80	3.12	38.68	46.00	-7.32	QP
5 !	641.10	30.77	49.10	3.58	43.27	46.00	-2.73	QP
6 !	720.64	30.65	46.97	3.96	42.76	46.00	-3.24	QP

Above 1GHz

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (2412 MHz)-Above 1G							
4824.012	47.87	10.44	58.31	74	-15.69	Pk	Vertical
4824.012	38.11	10.44	48.55	54	-5.45	AV	Vertical
7236.000	39.12	12.39	51.51	74	-22.49	pk	Vertical
4824.012	45.74	10.44	56.18	74	-17.82	pk	Horizontal
4824.012	37.54	10.44	47.98	54	-6.02	AV	Horizontal
7236.000	30.54	12.39	42.93	74	-31.07	pk	Horizontal
Mid Channel (2437 MHz)-Above 1G							
4874.043	47.19	10.40	57.59	74	-16.41	pk	Vertical
4874.043	37.76	10.40	48.16	54	-5.84	AV	Vertical
7311.147	36.87	12.75	49.62	74	-24.38	Pk	Vertical
4874.043	47.31	10.40	57.71	74	-16.29	Pk	Horizontal
4874.043	38.11	10.40	48.51	54	-5.49	AVk	Horizontal
7311.147	30.23	12.75	42.98	74	-31.02	Pk	Horizontal
High Channel (2462 MHz)- Above 1G							
4924.124	49.12	10.39	59.51	74	-14.49	pk	Vertical
4924.124	37.99	10.39	48.38	54	-5.62	AV	Vertical
7386.076	39.13	12.68	51.81	74	-22.19	pk	Vertical
4924.124	47.15	10.39	57.54	74	-16.46	pk	Horizontal
4924.124	35.42	10.39	45.81	54	-8.19	AV	Horizontal
7386.033	31.56	12.68	44.24	74	-29.76	pk	Horizontal

Note:"802.11b" mode is the worst mode. When PK value is lower than the Average value limit, average didn't record.

5. BAND EDGE COMPLIANCE TEST

5.1. Limits

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 30dB below the fundamental emissions, or comply with 15.209 limits.

5.2. Test setup

The EUT was placed on a turn table which was 1.5 m above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 m away from the receiving antenna which was mounted on an antenna tower. The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 m to 4 m for both horizontal and vertical polarizations.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure.

For conduct test, VBW is set at 300kHz and RBW is set at 100kHz for measurement.

Note: 1. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

2. For Both PK and AV value above 1GHz, PK detector is used.


Remark : All emission out of band are more than 30dB lower than fundamental.

	Frequency (MHz)	Antenna polarization (H/V)	Emission (dBuV/m)	Band edge Limit (dBuV/m)		Result
			PK	PK	AV	
802.11b	<2400	H	50.67	74.00	54.00	Pass
	<2400	V	49.46	74.00	54.00	Pass
	>2483.5	H	50.24	74.00	54.00	Pass
	>2483.5	V	49.26	74.00	54.00	Pass
802.11g	<2400	H	50.36	74.00	54.00	Pass
	<2400	V	49.92	74.00	54.00	Pass
	>2483.5	H	50.24	74.00	54.00	Pass
	>2483.5	V	49.25	74.00	54.00	Pass
802.11n(HT20)	<2400	H	50.28	74.00	54.00	Pass
	<2400	V	49.76	74.00	54.00	Pass
	>2483.5	H	50.44	74.00	54.00	Pass
	>2483.5	V	49.76	74.00	54.00	Pass
802.11n(HT40)	<2400	H	51.34	74.00	54.00	Pass
	<2400	V	50.42	74.00	54.00	Pass
	>2483.5	H	51.35	74.00	54.00	Pass
	>2483.5	V	50.38	74.00	54.00	Pass


If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

Frequency Band MHz	Delta Peak to band emission (dBc)	> Limit (dBc)	Result
802.11b mode			
2400	45.41	20	Pass
2483.5	46.80	20	Pass
802.11g mode			
2400	38.48	20	Pass
2483.5	39.69	20	Pass
802.11n-HT20 mode			
2400	36.74	20	Pass
2483.5	39.26	20	Pass
802.11n-HT40 mode			
2400	34.57	20	Pass
2483.5	33.51	20	Pass


802.11b: Band Edge, Right Side

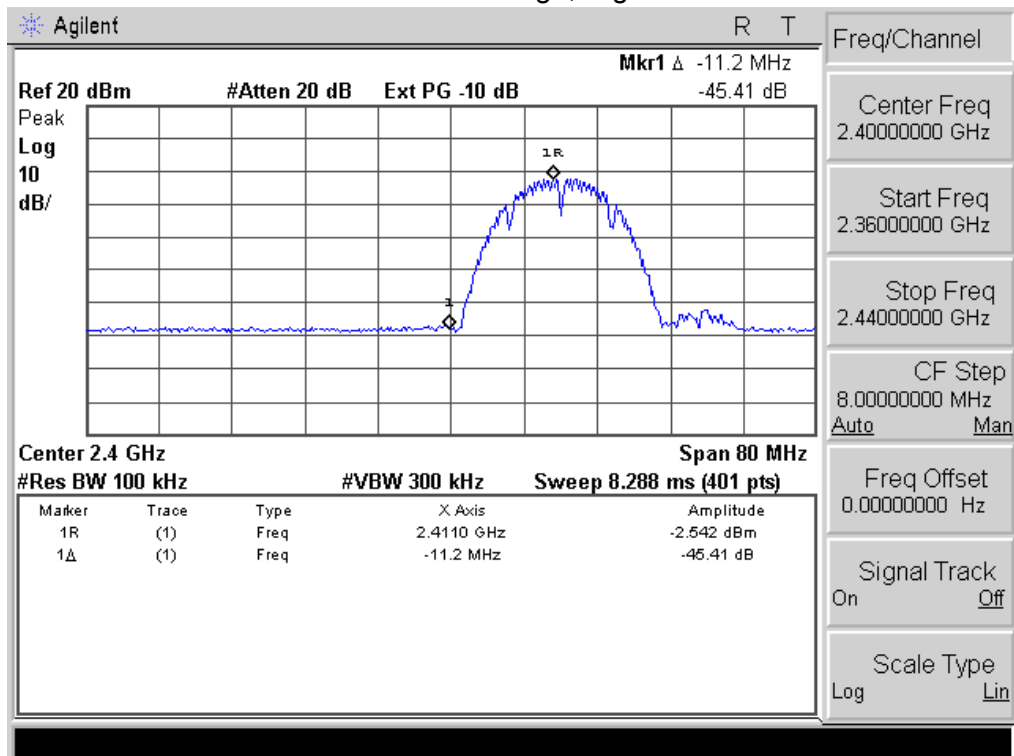


802.11b: Band Edge, Left Side

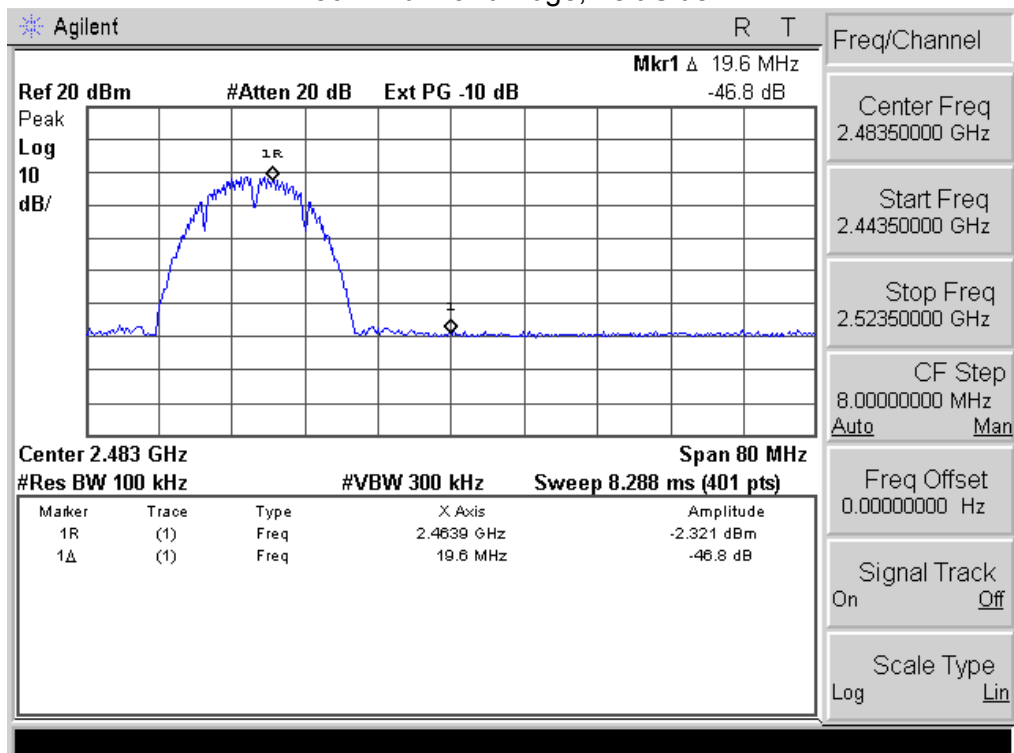


802.11g: Band Edge, Right Side

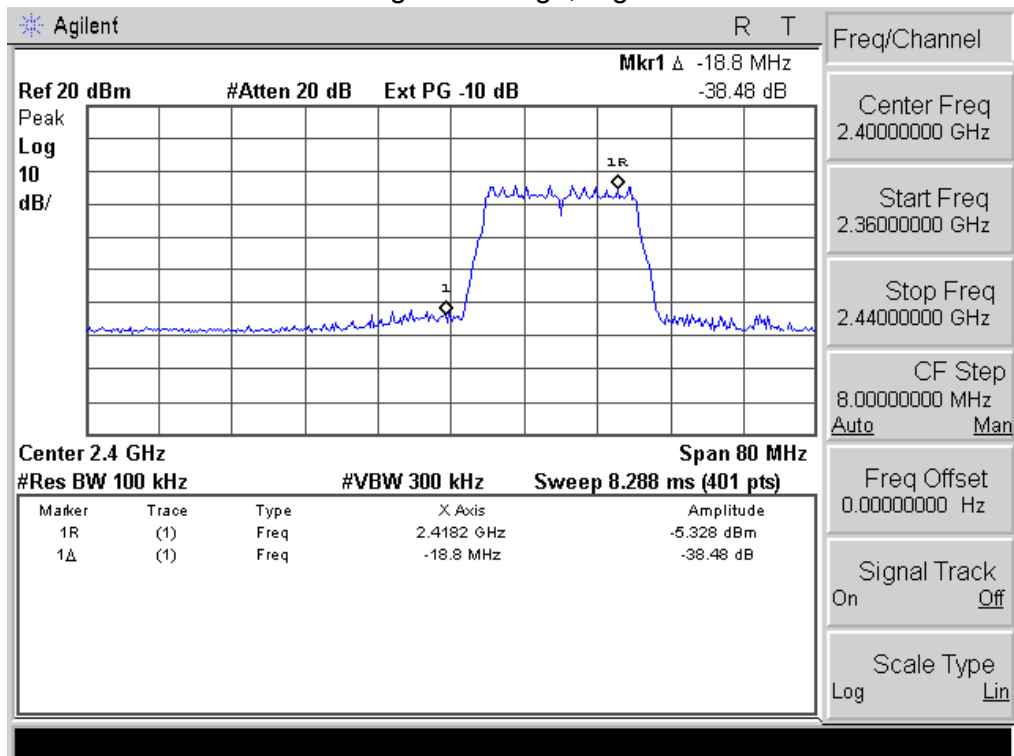


802.11g: Band Edge, Left Side

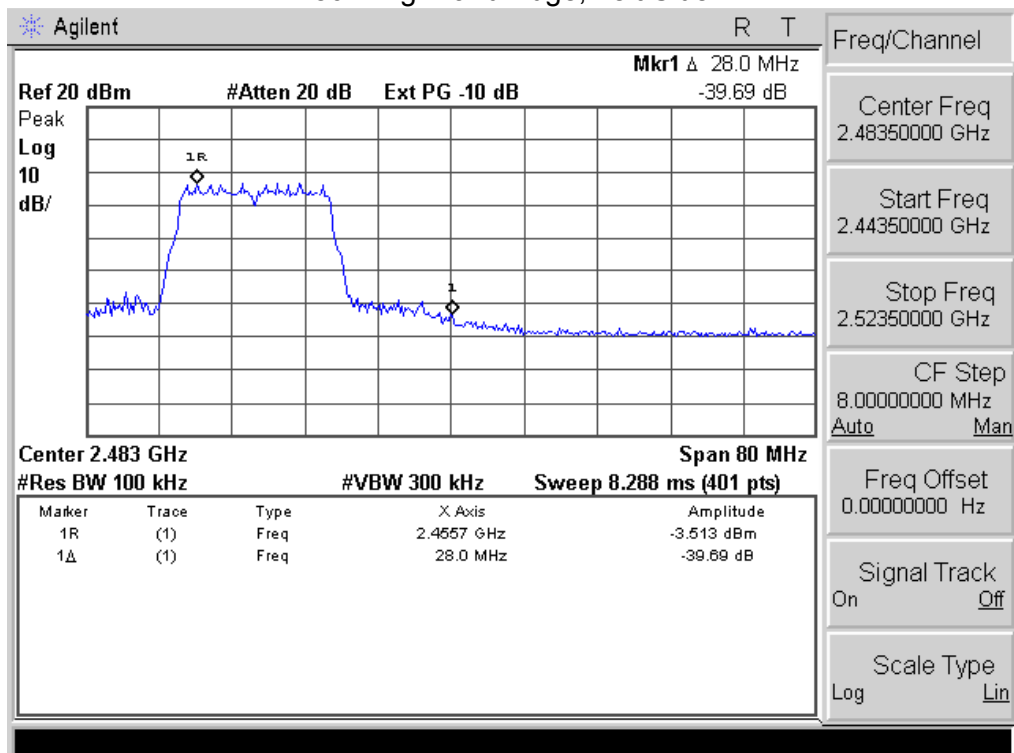


802.11n-HT20: Band Edge, Right Side

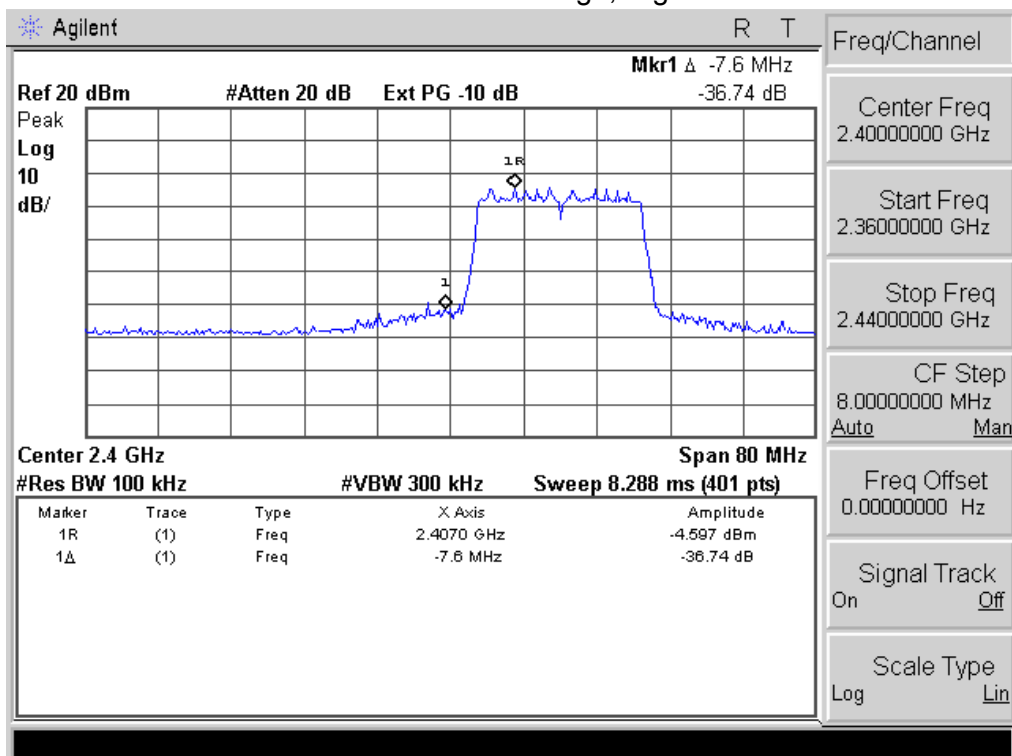


802.11n-HT20: Band Edge, Left Side

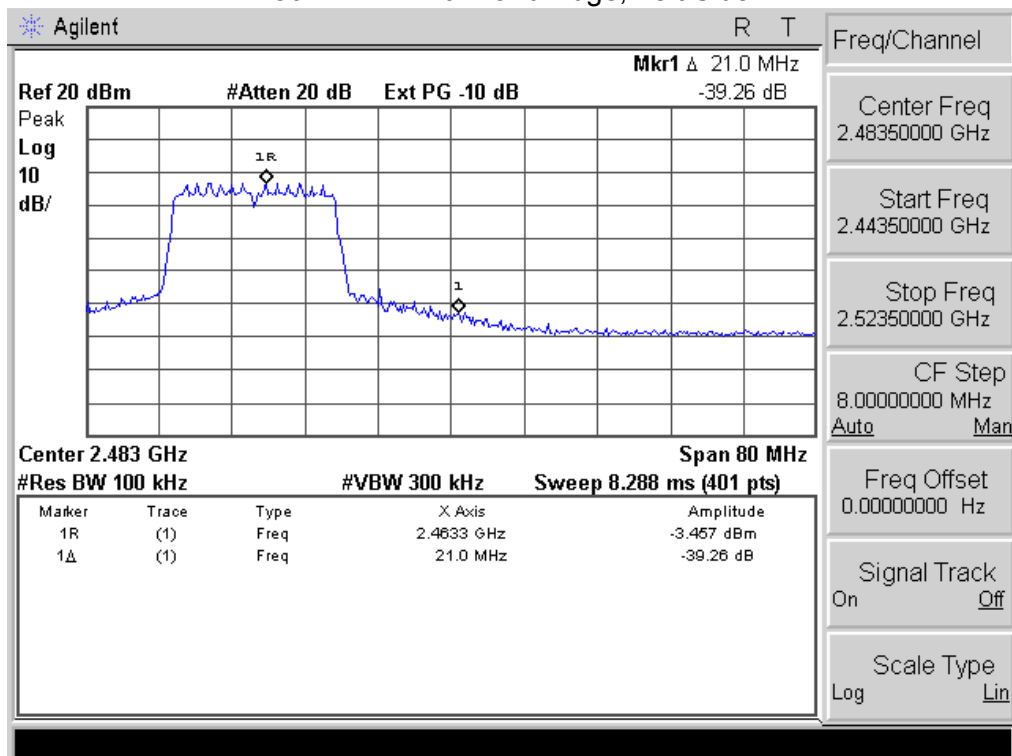

802.11n-HT40: Band Edge, Right Side

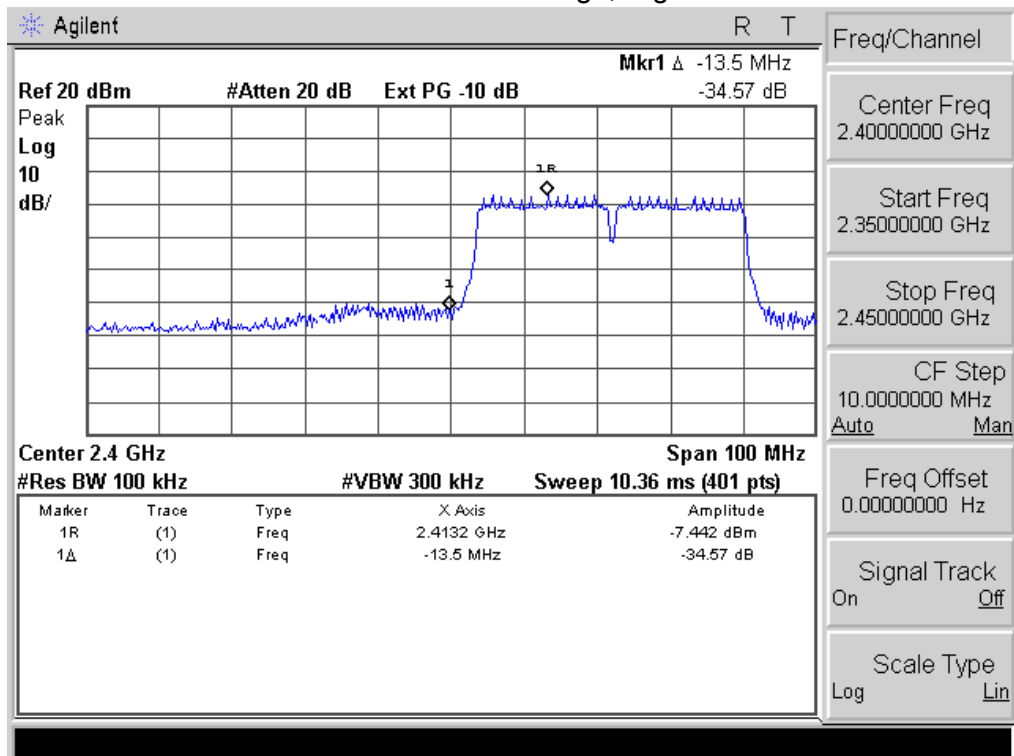

802.11n-HT40: Band Edge, Left Side

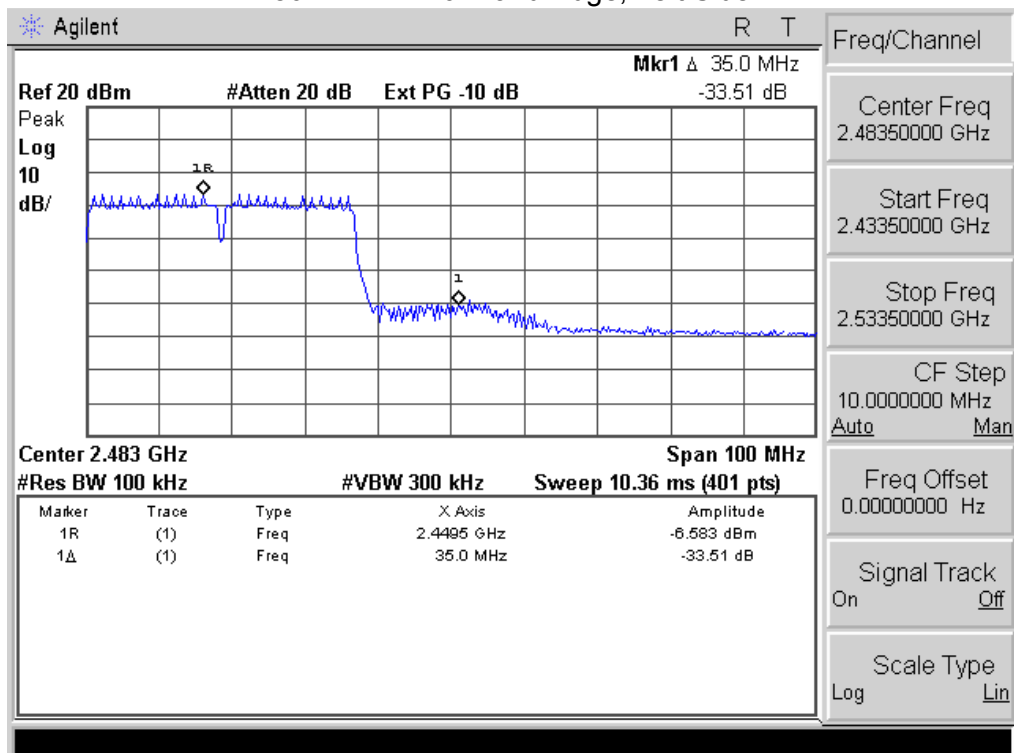

6. BANDWIDTH TEST

6.1. Limits

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz


Test data:

	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)	Result
802.11b	2412	10.009	14.954	>0.5	Pass
	2437	10.091	14.871	>0.5	Pass
	2462	10.105	14.921	>0.5	Pass
802.11g	2412	16.541	16.937	>0.5	Pass
	2437	16.534	16.943	>0.5	Pass
	2462	16.508	16.916	>0.5	Pass
802.11n (HT20)	2412	17.748	17.991	>0.5	Pass
	2437	17.759	17.966	>0.5	Pass
	2462	17.943	17.943	>0.5	Pass
802.11n (HT40)	2422	36.409	36.609	>0.5	Pass
	2437	36.426	36.566	>0.5	Pass
	2452	36.409	36.522	>0.5	Pass


Test plot as follows:

99% bandwidth


802.11b 2412MHz

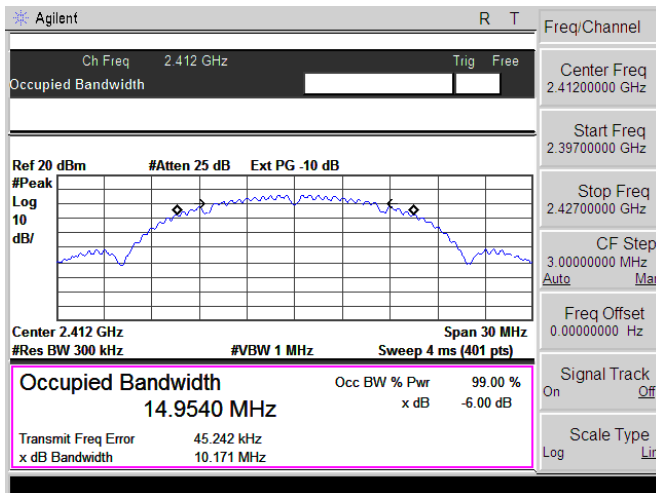


802.11g 2412MHz

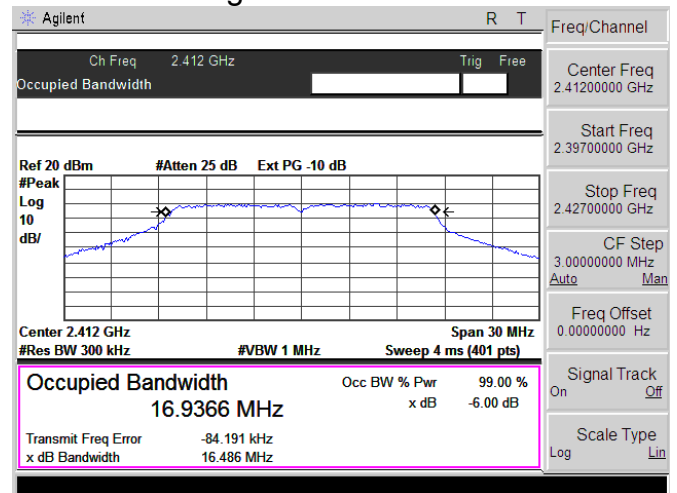


802.11b 2437MHz

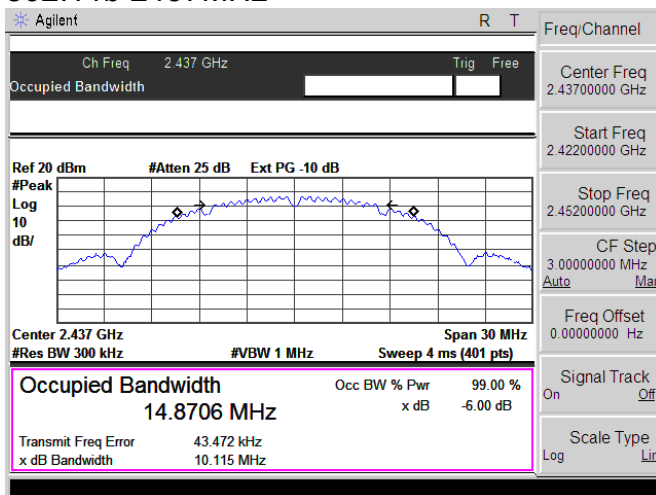


802.11g 2437MHz

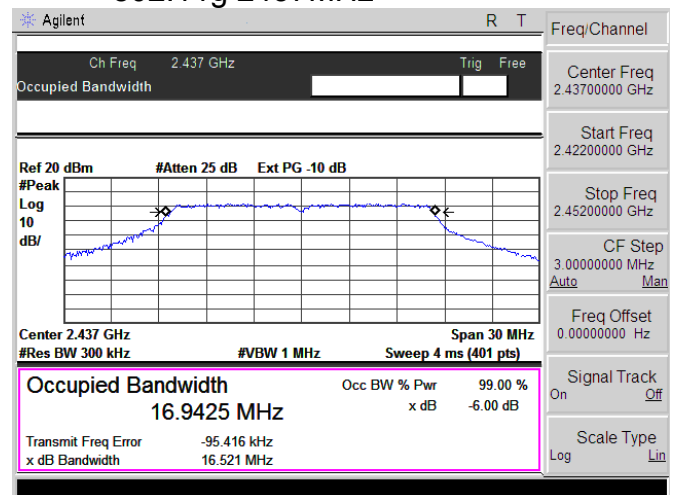


802.11b 2462MHz

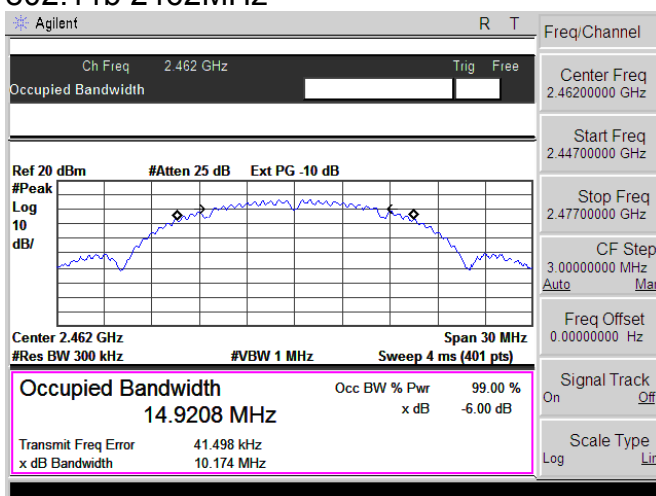


802.11g 2462MHz

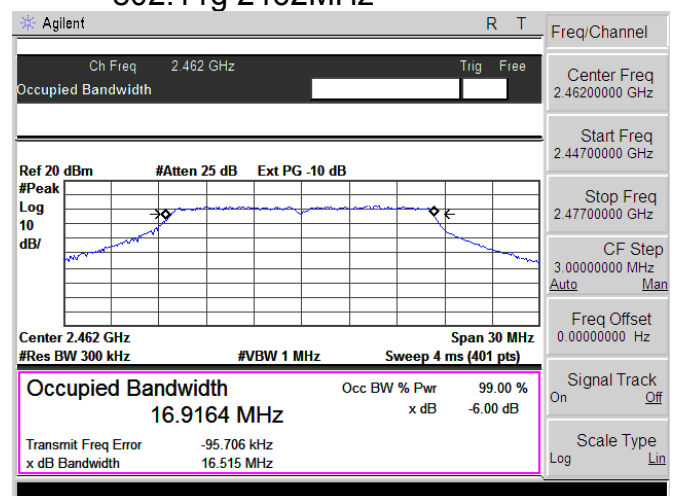


802.11n (HT20) 2412MHz

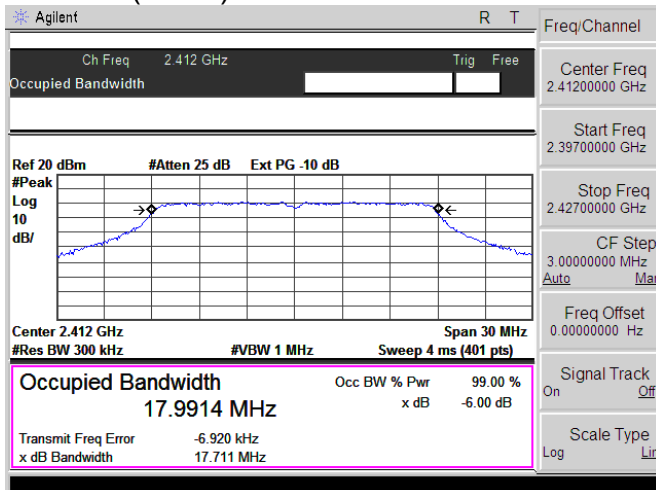


802.11n (HT40) 2422MHz

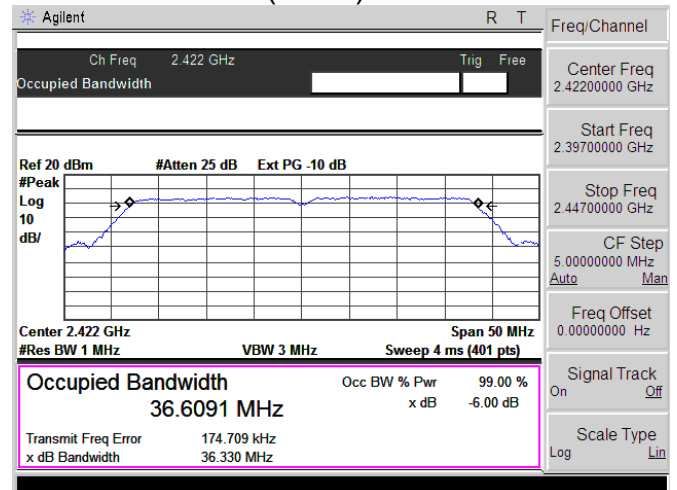


802.11n (HT20) 2437MHz

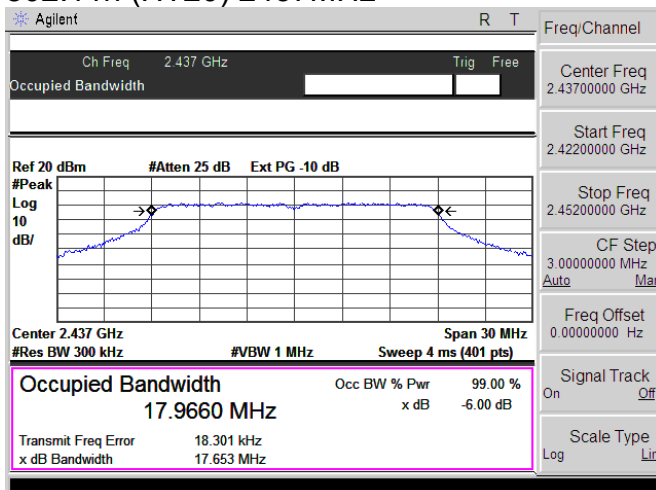


802.11n (HT40) 2437MHz

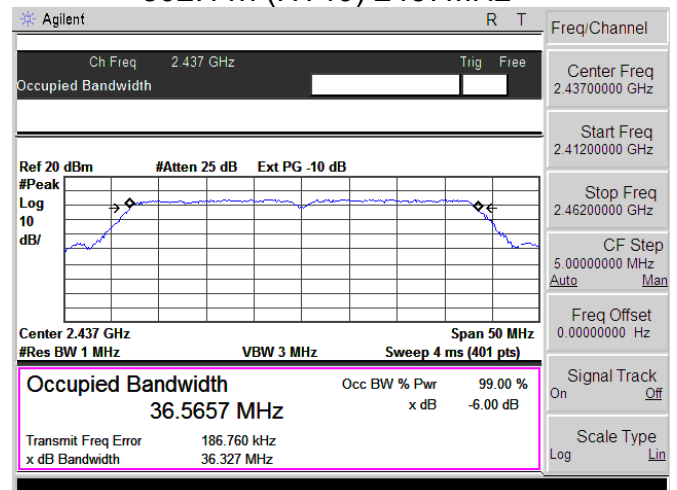

802.11n(HT20) 2462MHz

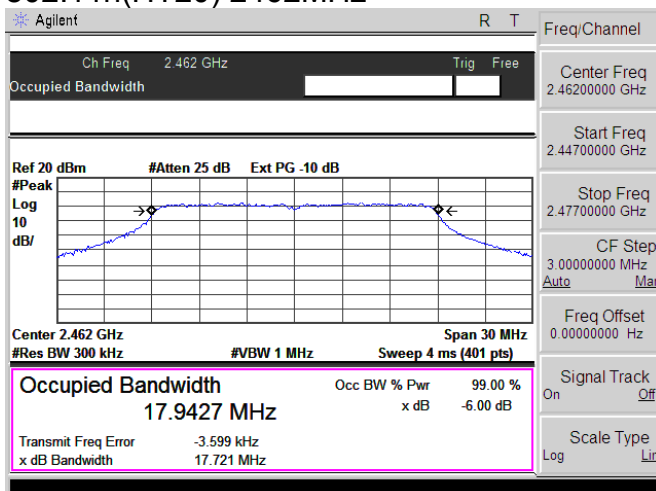


802.11n (HT40)2452MHz

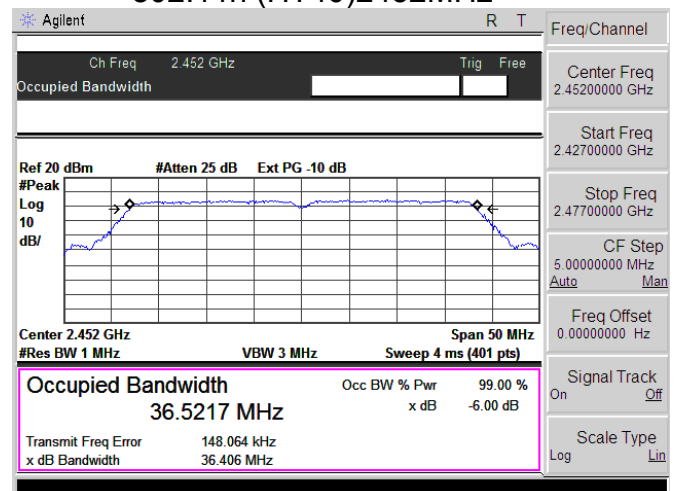


6dB bandwidth


802.11b 2412MHz

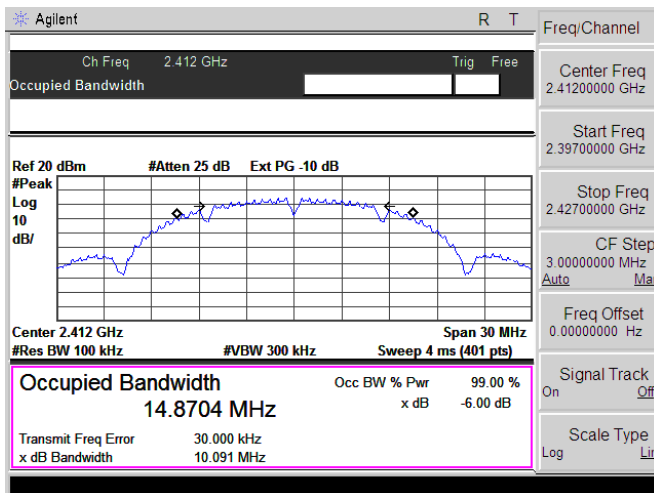


802.11g 2412MHz

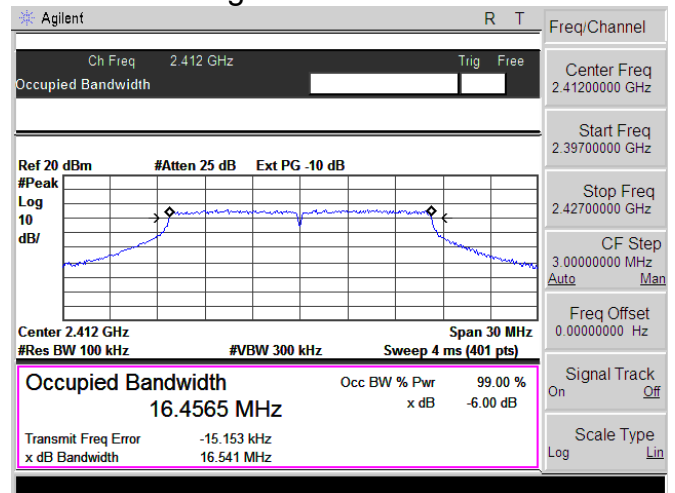


802.11b 2437MHz

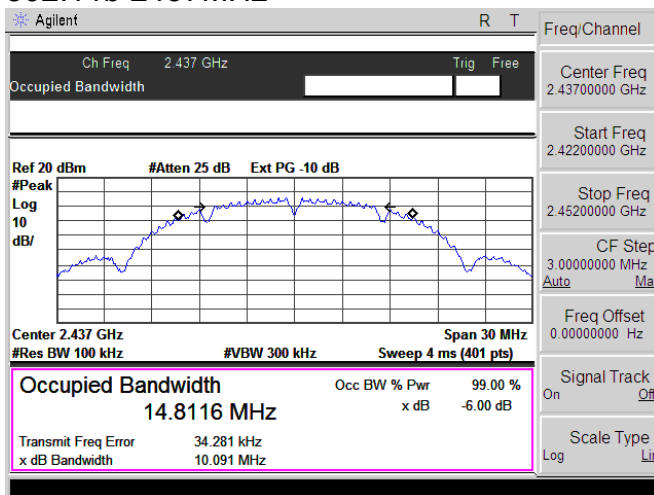


802.11g 2437MHz

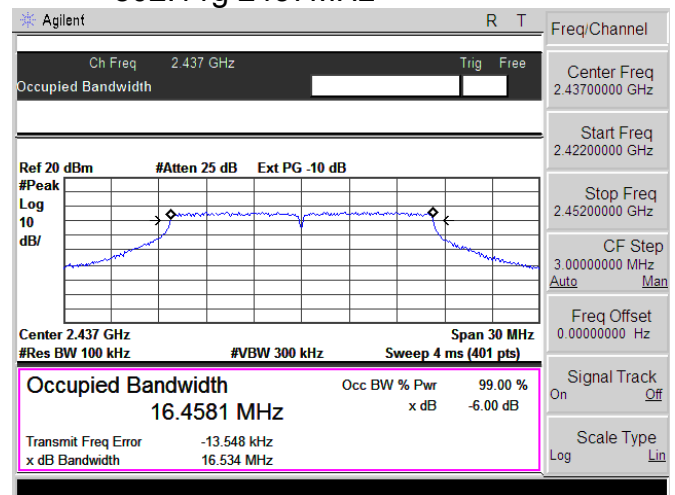


802.11b 2462MHz

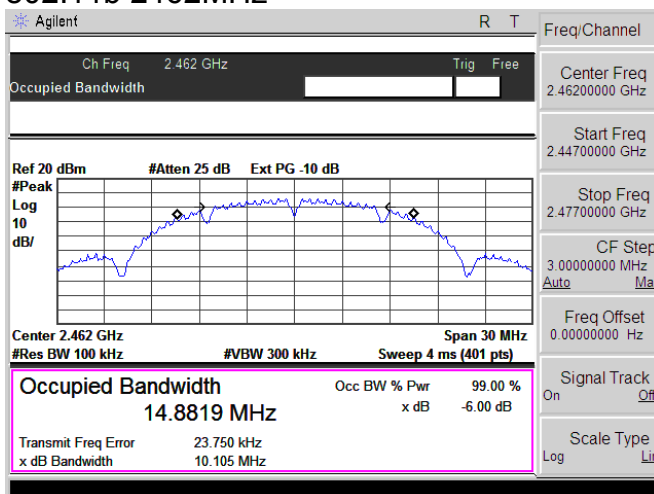


802.11g 2462MHz

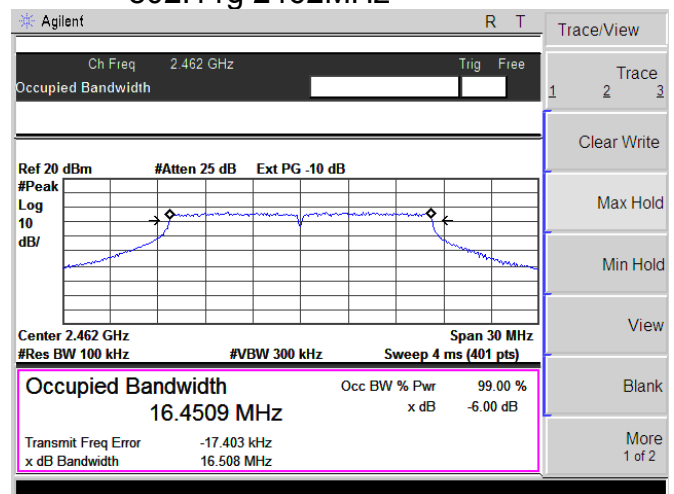


802.11n (HT20) 2412MHz

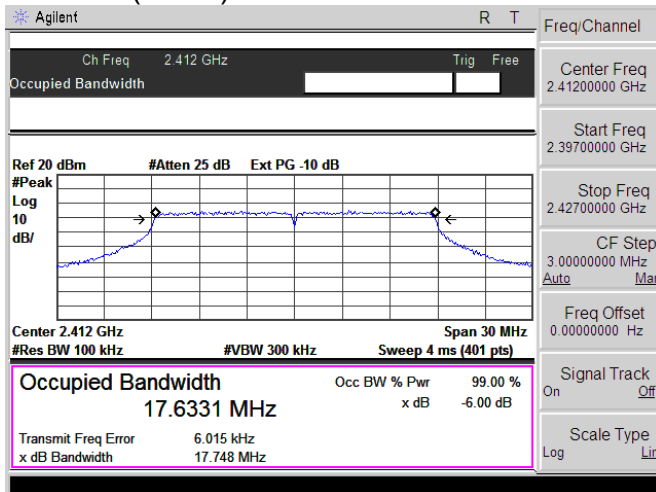


802.11n (HT40) 2422MHz

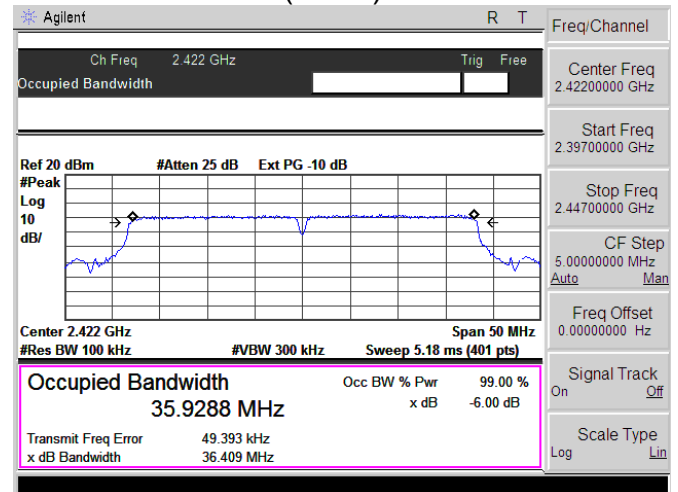


802.11n (HT20) 2437MHz

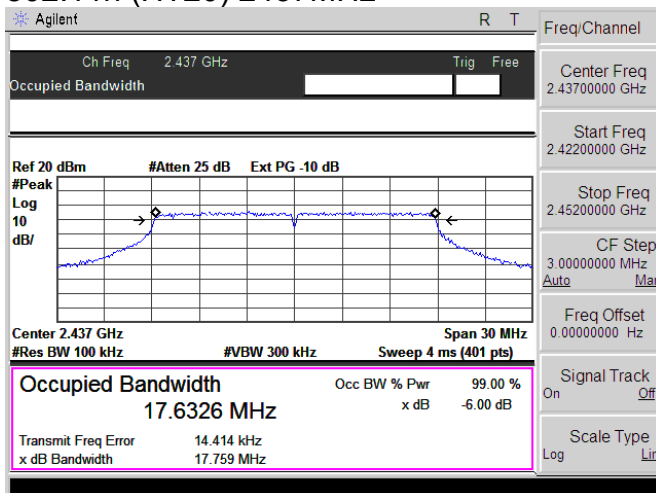


802.11n (HT40) 2437MHz

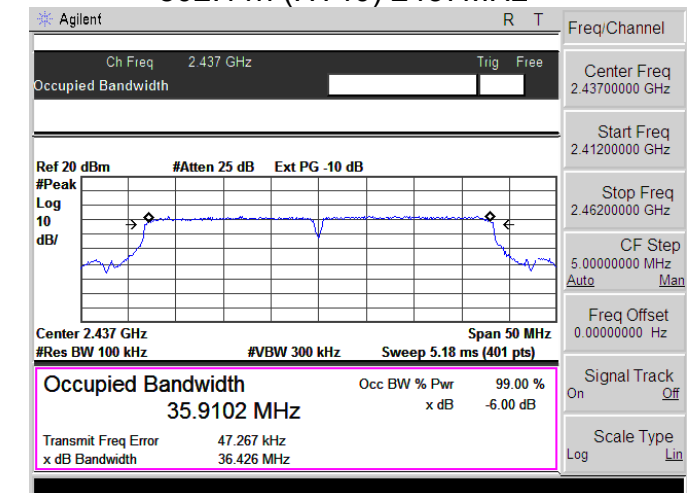

802.11n(HT20) 2462MHz

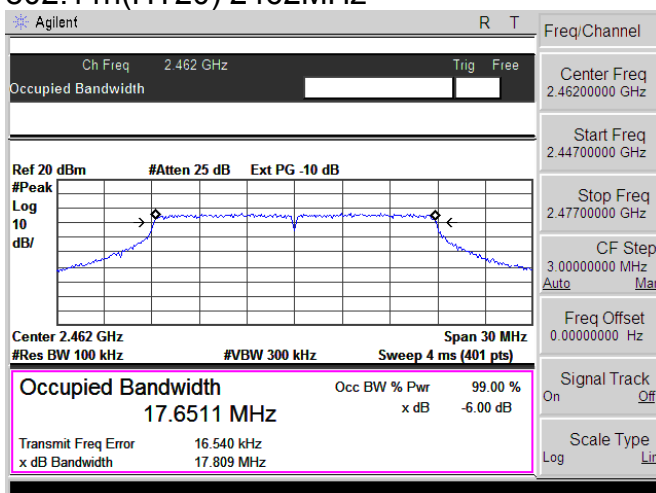

802.11n (HT40)2452MHz

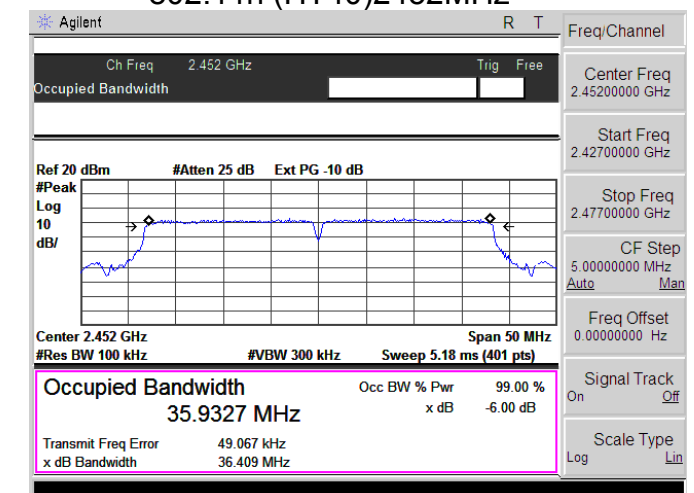

7. OUTPUT POWER TEST

7.1. Limits

For systems using digital modulation in the 2400~2483.5MHz, The out put Power shall not exceed 1W (30dBm)

7.2. Test setup

1. The Transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the power value.
3. Repeat above procedures on all channels needed to be tested.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

7.3. Test result

Test Channe	Frequency	Maximum Peak Conducted Output Power (PK)	Maximum Peak Conducted Output Power (AV)	LIMIT
	(MHz)	(dBm)	(dBm)	dBm
TX 802.11b Mode				
CH01	2412	15.53	12.42	30
CH06	2437	15.64	12.61	30
CH11	2462	15.41	12.35	30
TX 802.11g Mode				
CH01	2412	14.32	11.31	30
CH06	2437	14.37	11.52	30
CH11	2462	14.22	11.28	30
TX 802.11n(20) Mode				
CH01	2412	13.51	10.19	30
CH06	2437	13.46	10.12	30
CH11	2462	13.43	10.08	30
TX 802.11n(40) Mode				
CH03	2422	12.43	9.44	30
CH06	2437	12.18	9.32	30
CH09	2452	12.64	9.77	30

8. POWER SPECTRAL DENSITY TEST

8.1. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.


8.2. Test setup

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW =3kHz.
4. Set the VBW ≥ 3 times RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.


8.3. Test result

	Channel Frequency (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Result
802.11b	2412	-12.53	8	Pass
	2437	-12.30	8	Pass
	2462	-12.08	8	Pass
802.11g	2412	-13.57	8	Pass
	2437	-14.32	8	Pass
	2462	-13.99	8	Pass
802.11n (HT20)	2412	-13.73	8	Pass
	2437	-13.73	8	Pass
	2462	-14.01	8	Pass
802.11n (HT40)	2422	-16.99	8	Pass
	2437	-18.10	8	Pass
	2452	-18.13	8	Pass


802.11b 2412MHz

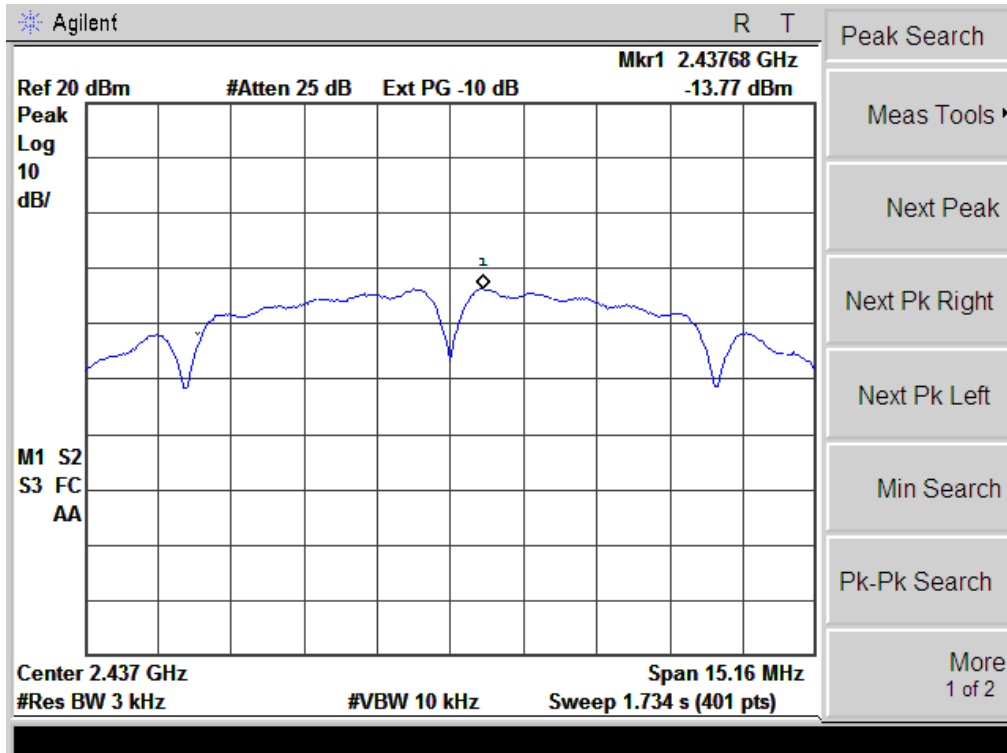


802.11b 2437MHz

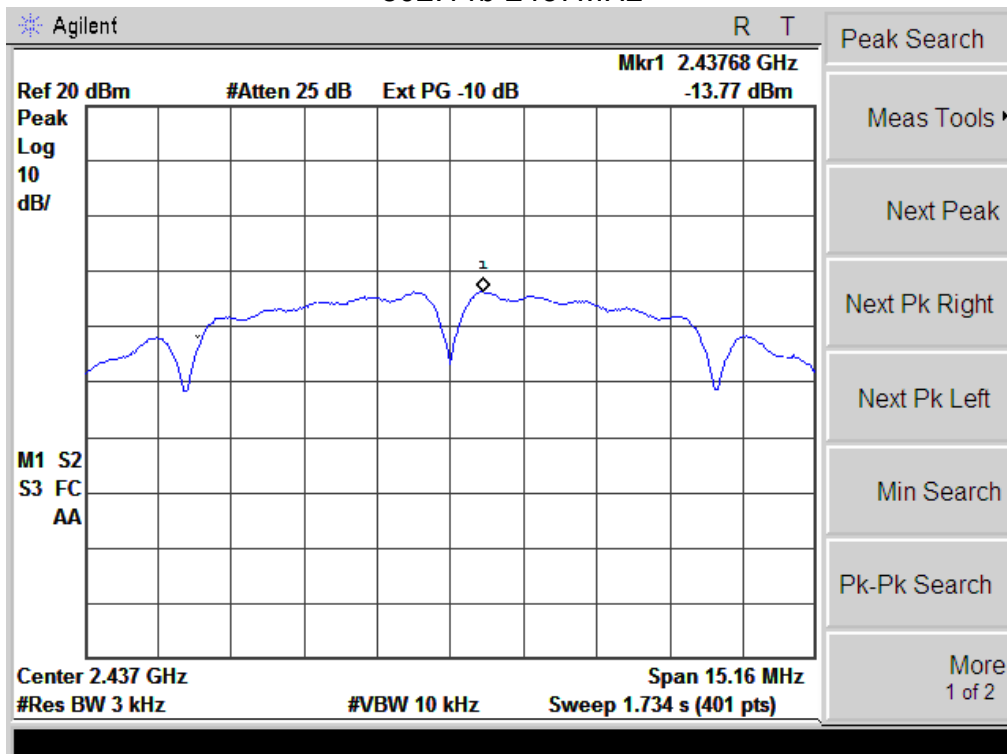


802.11b 2462MHz

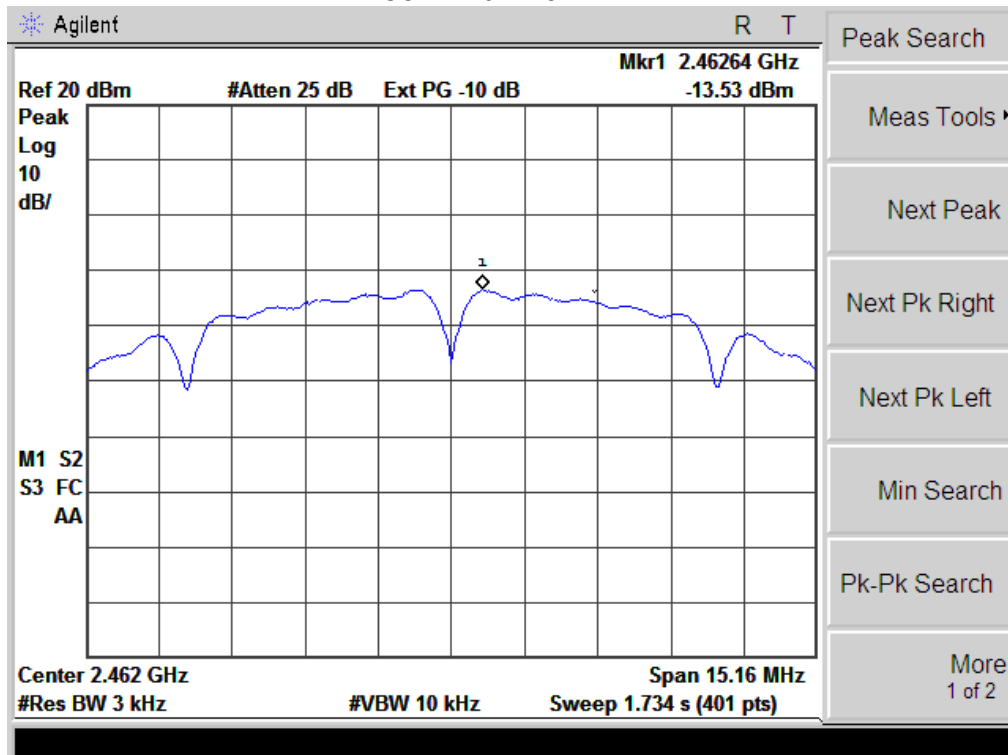


802.11g 2412MHz

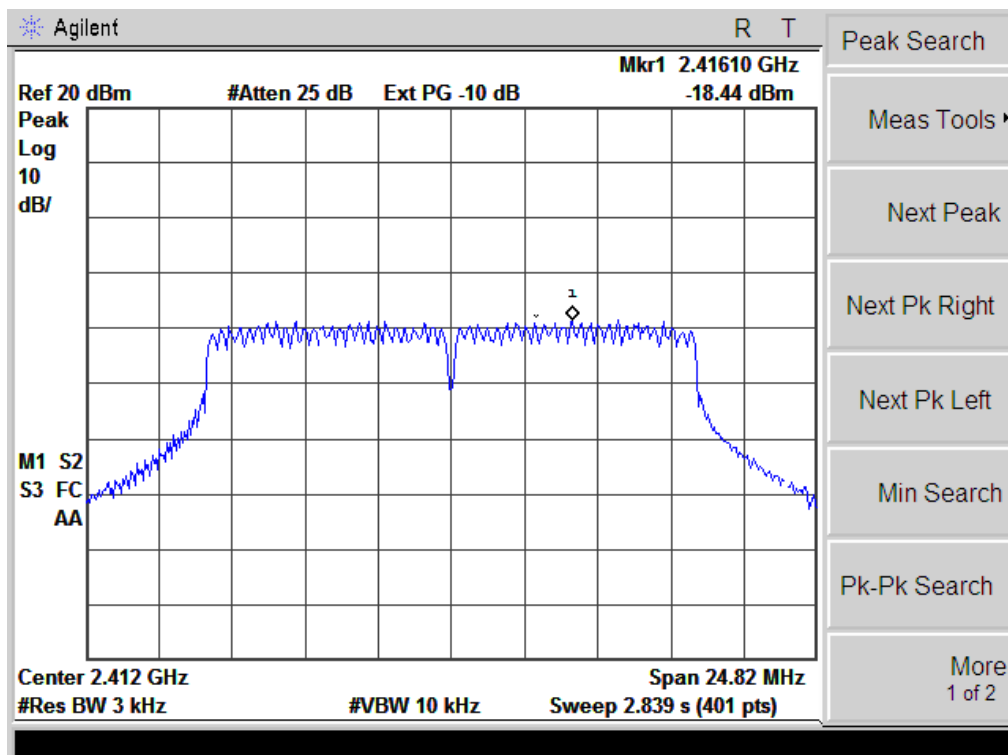


802.11g 2437MHz

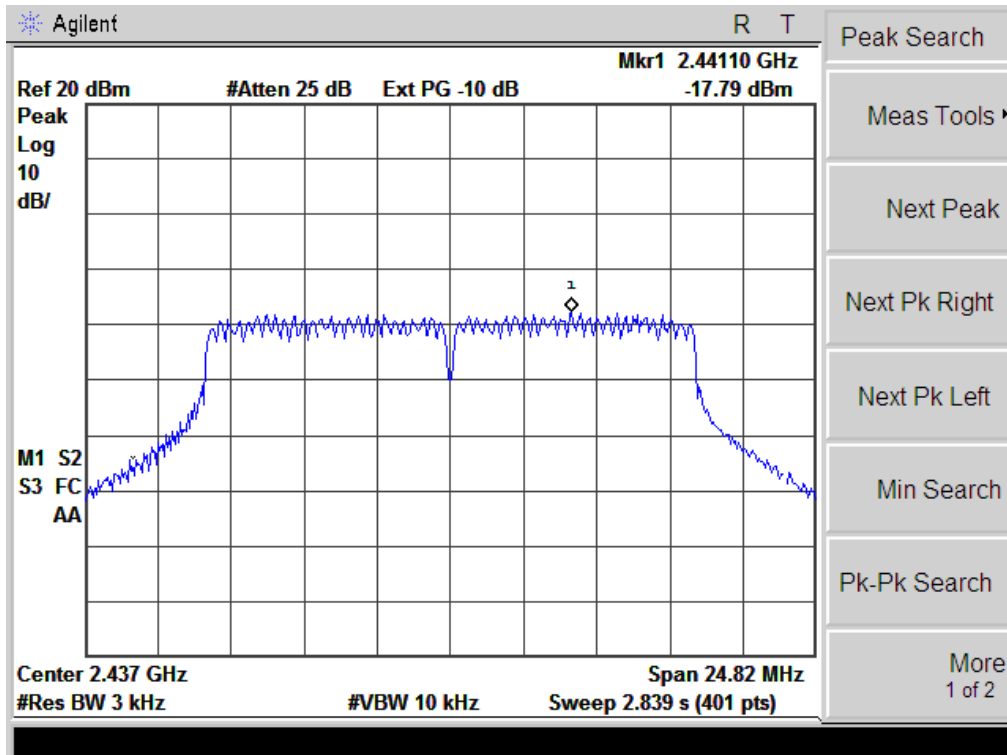


802.11g 2462MHz

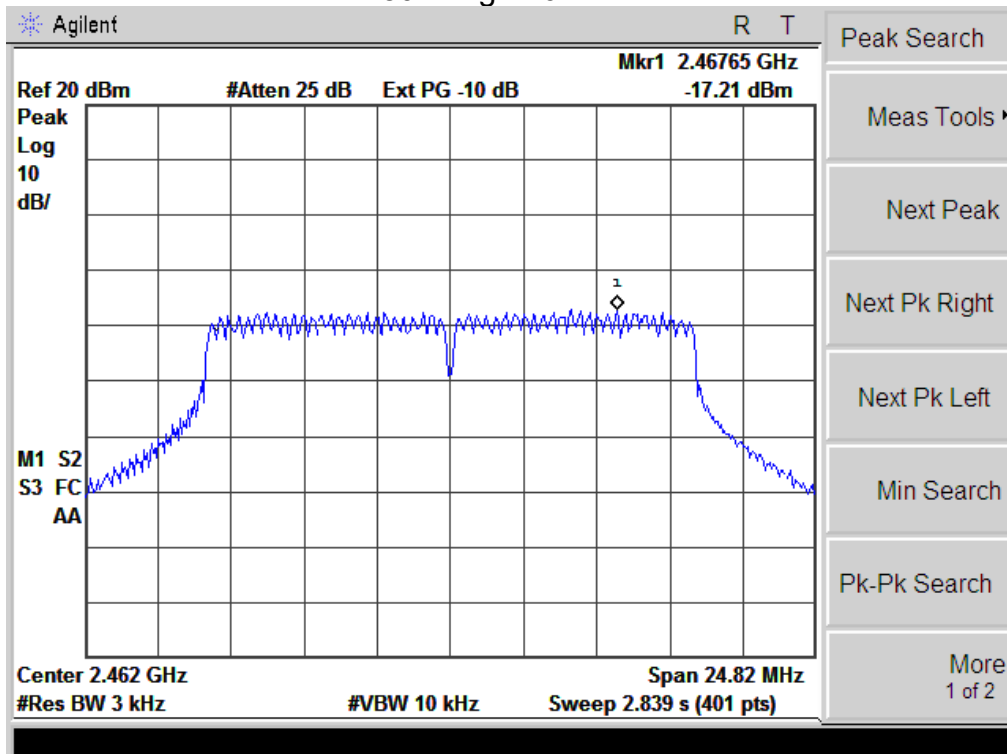


802.11n (HT20) 2412MHz

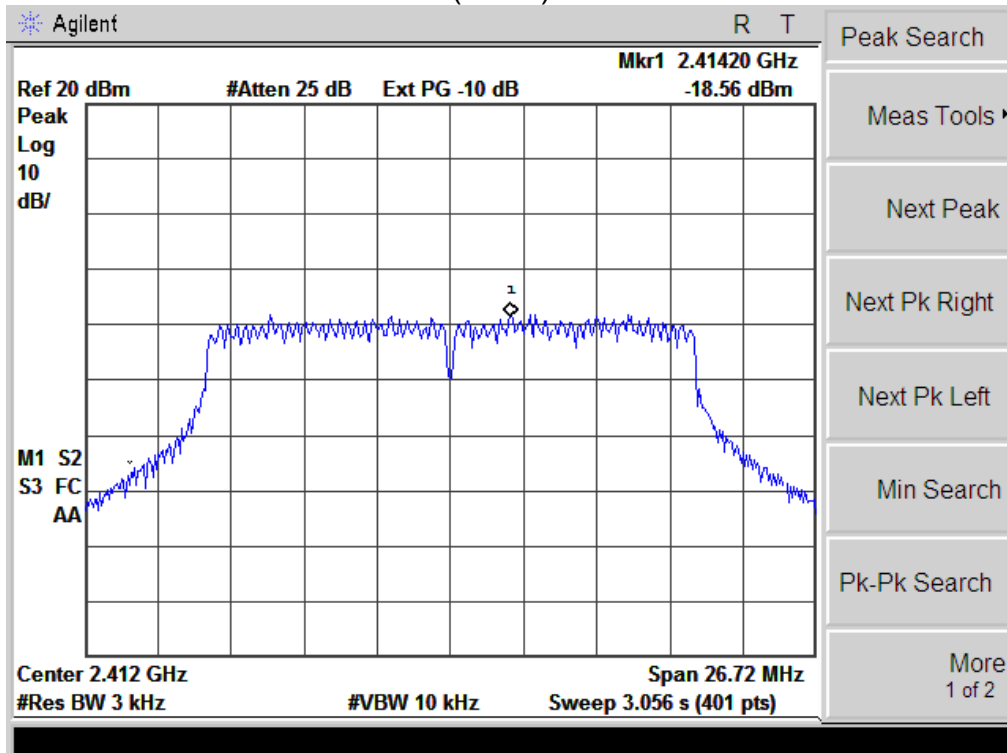


802.11n (HT20) 2437MHz

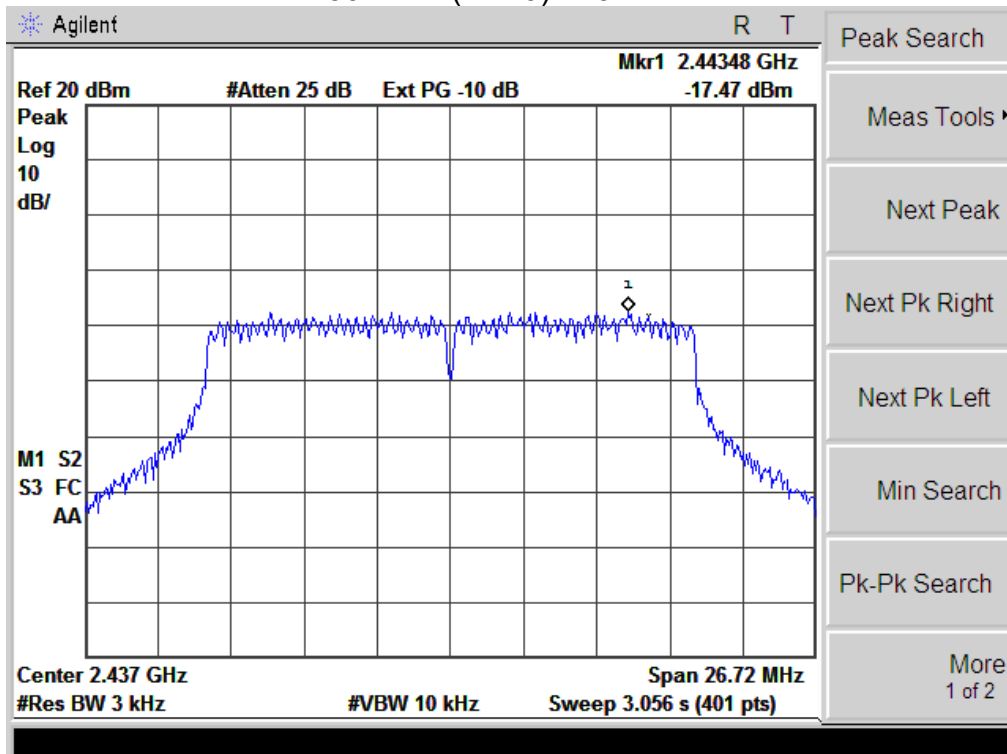


802.11n(HT20) 2462MHz

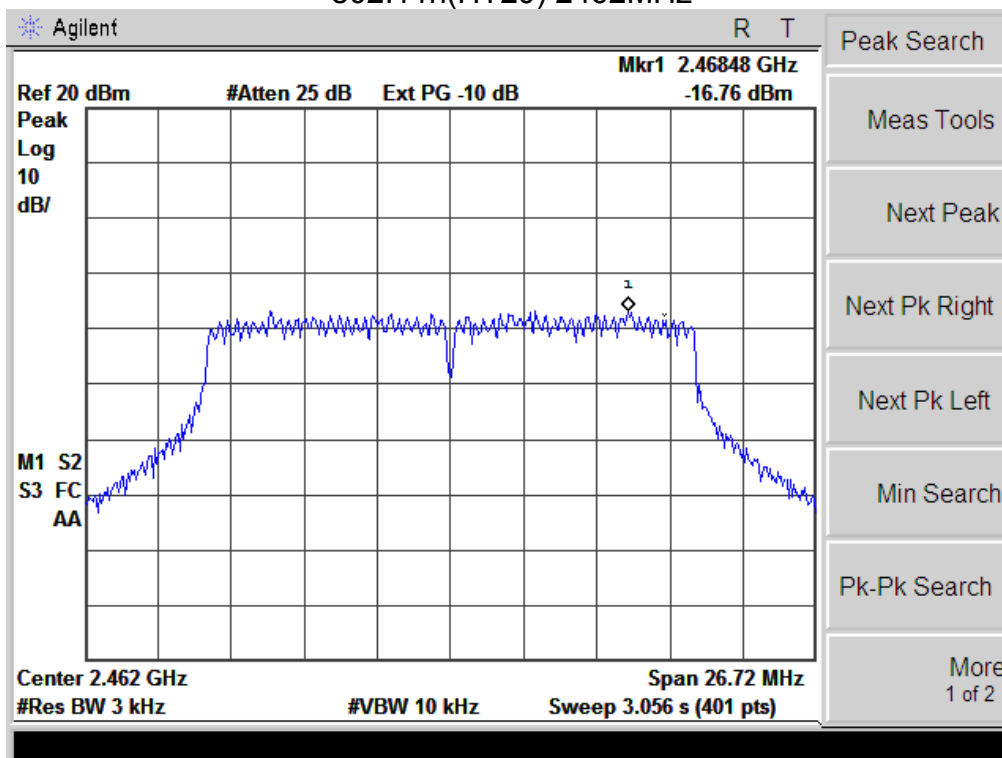


802.11 n (HT40) 2422MHz

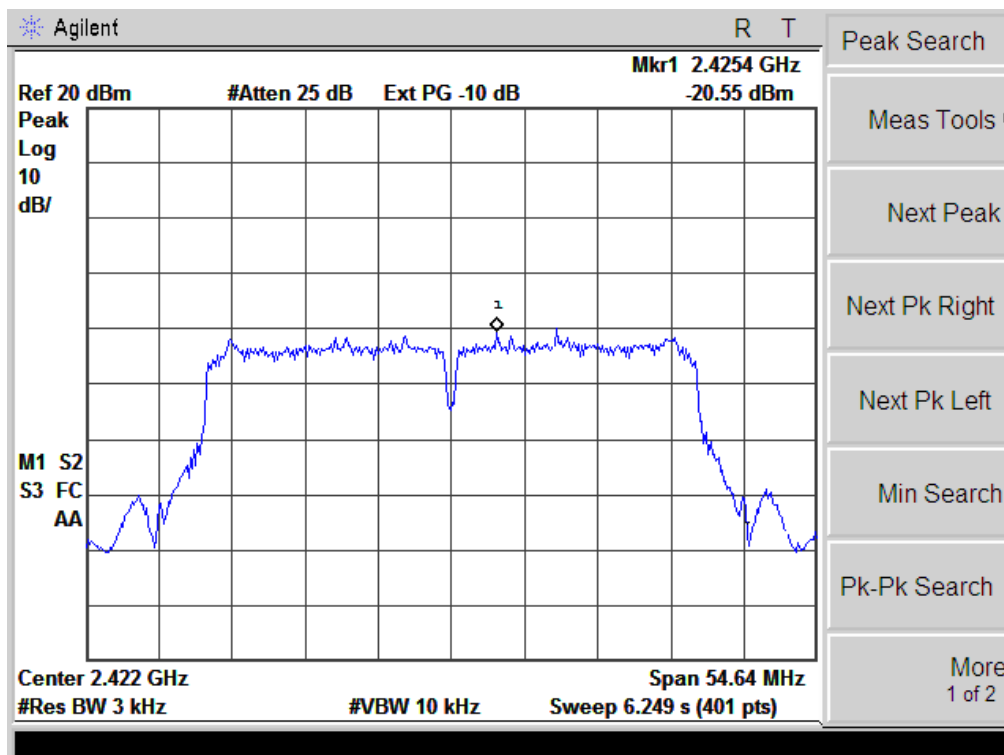

802.11 n (HT40) 2437MHz

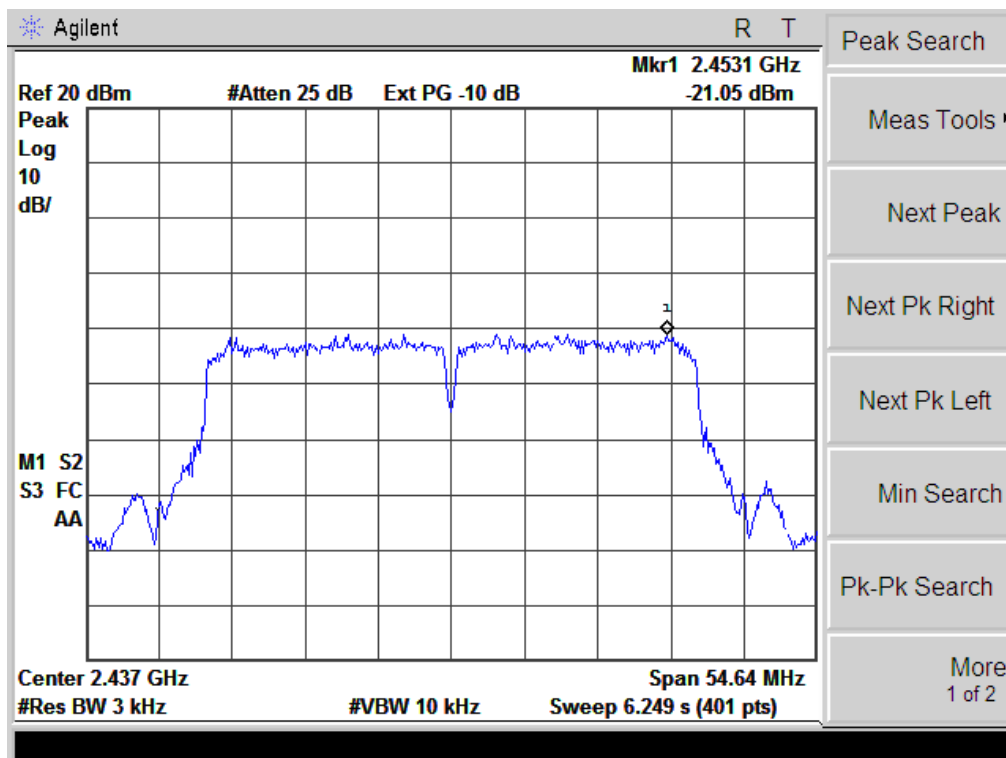

802.11 n (HT40)2452MHz

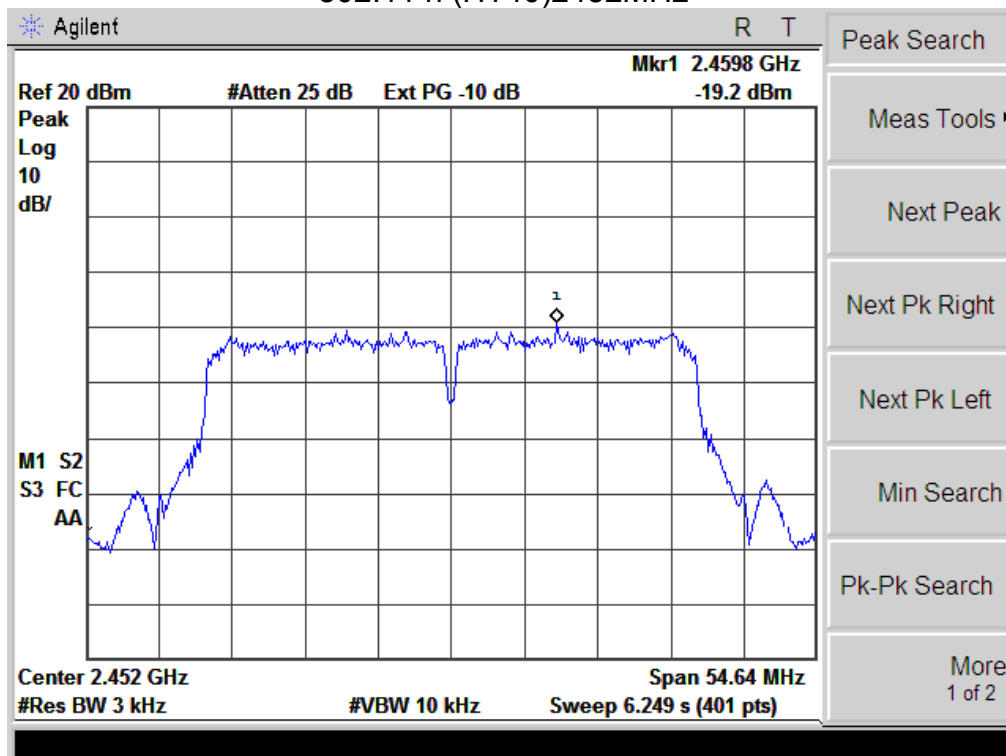

9. ANTENNA REQUIREMENTS

9.1. Limits

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

9.2. Result



The antennas used for this product is external antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 3.3dBi.

10. PHOTOGRAPHS OF TEST SET-UP



Conducted Emission






Radiated Emission Test

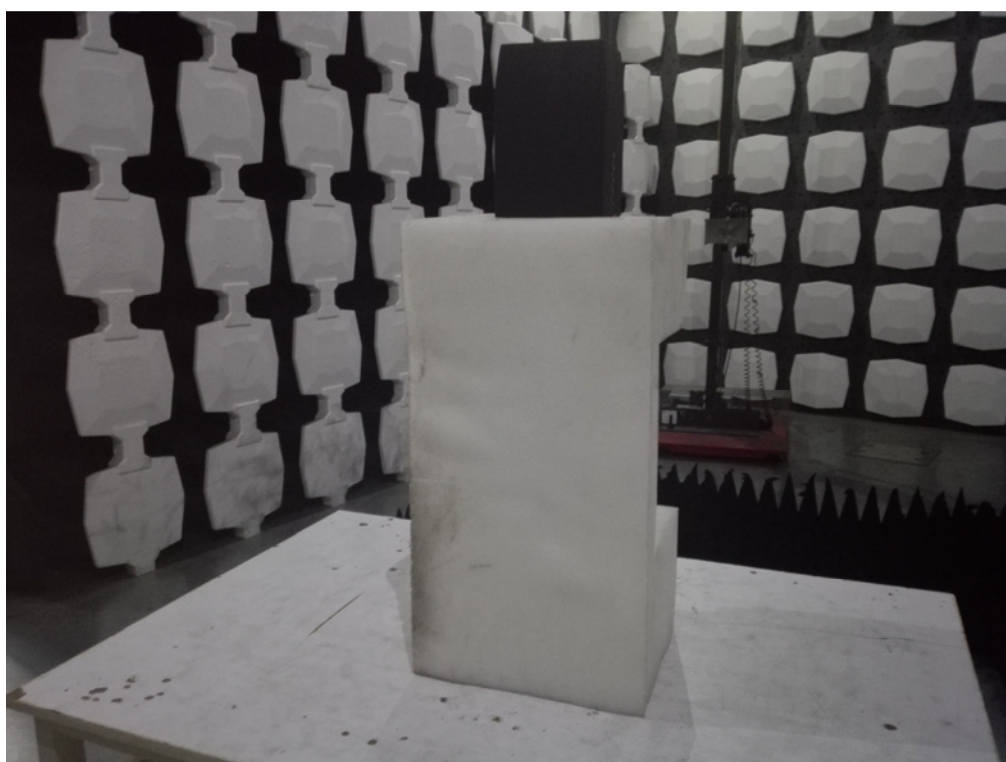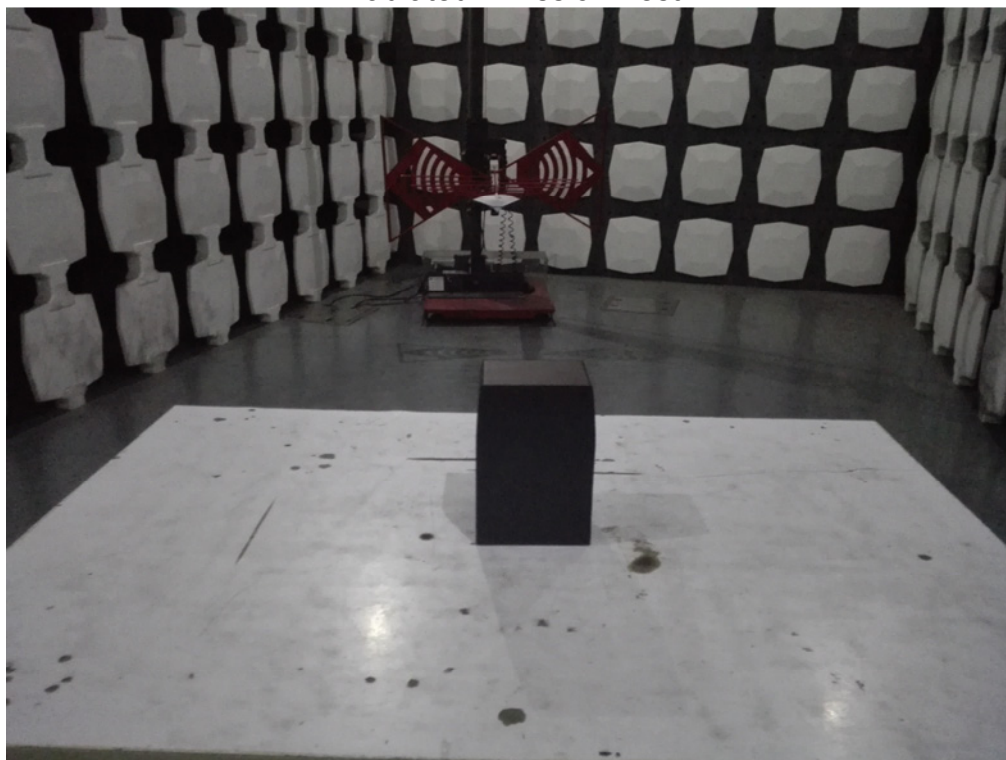



11. PHOTOGRAPHS OF THE EUT

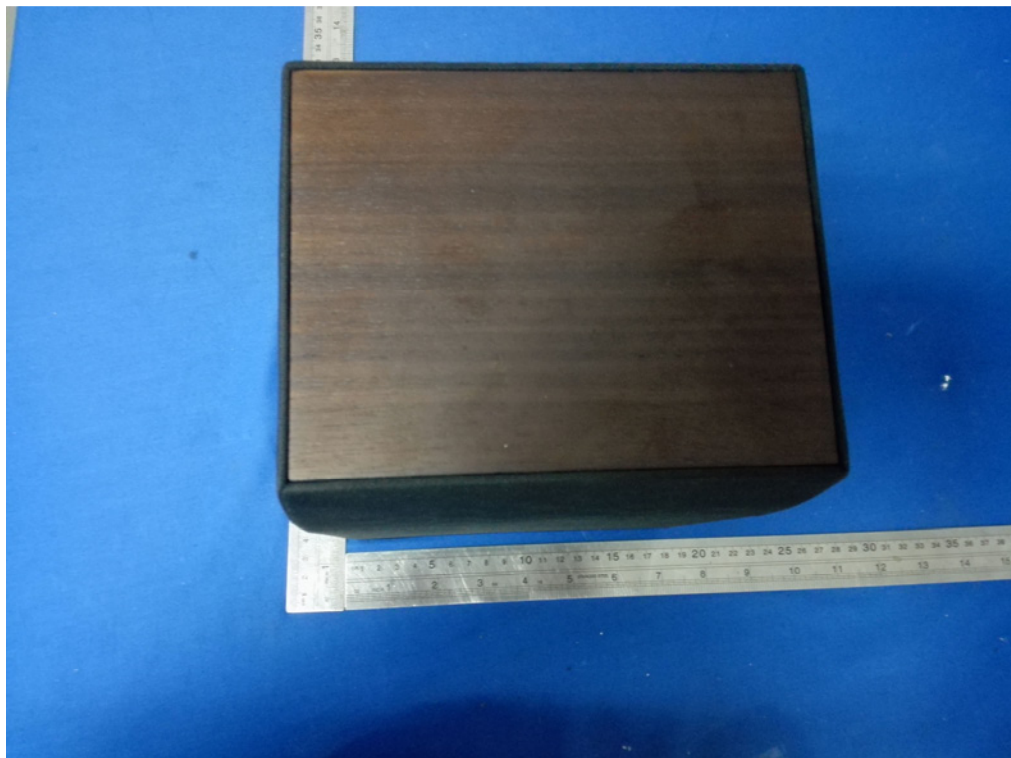
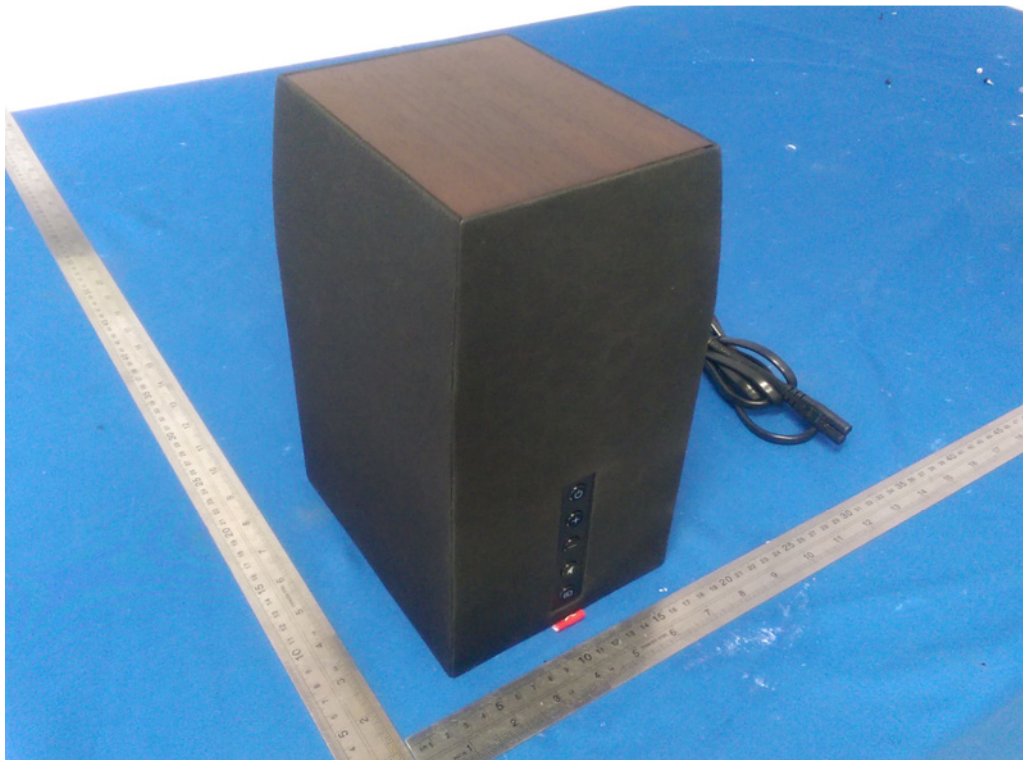



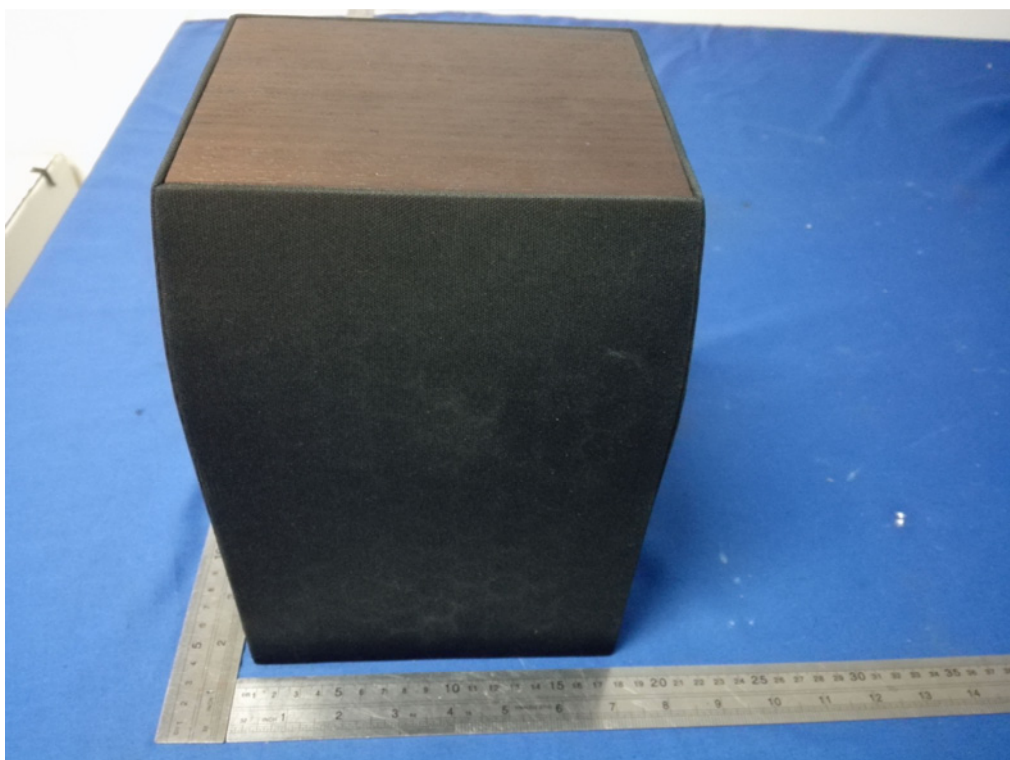


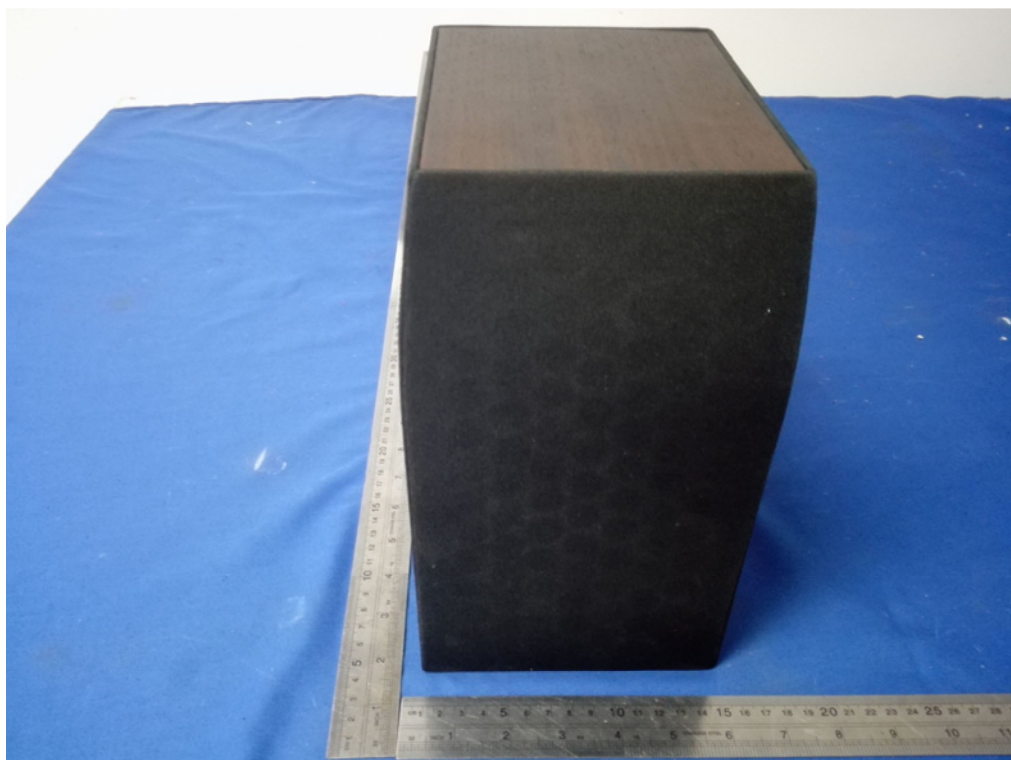
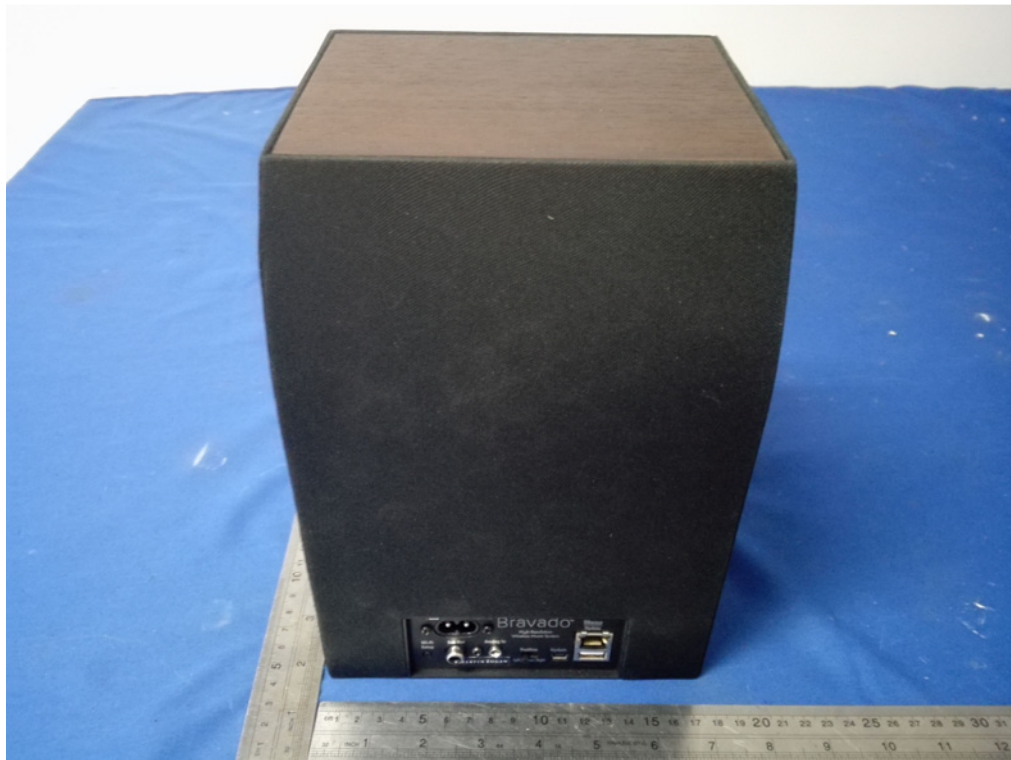


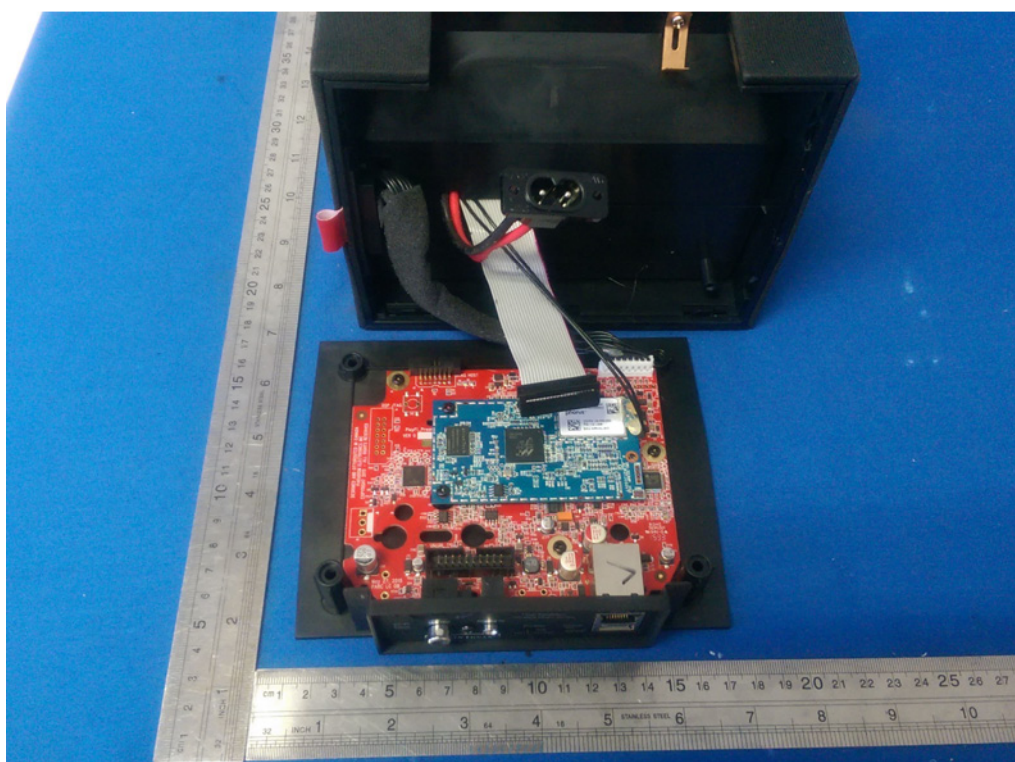


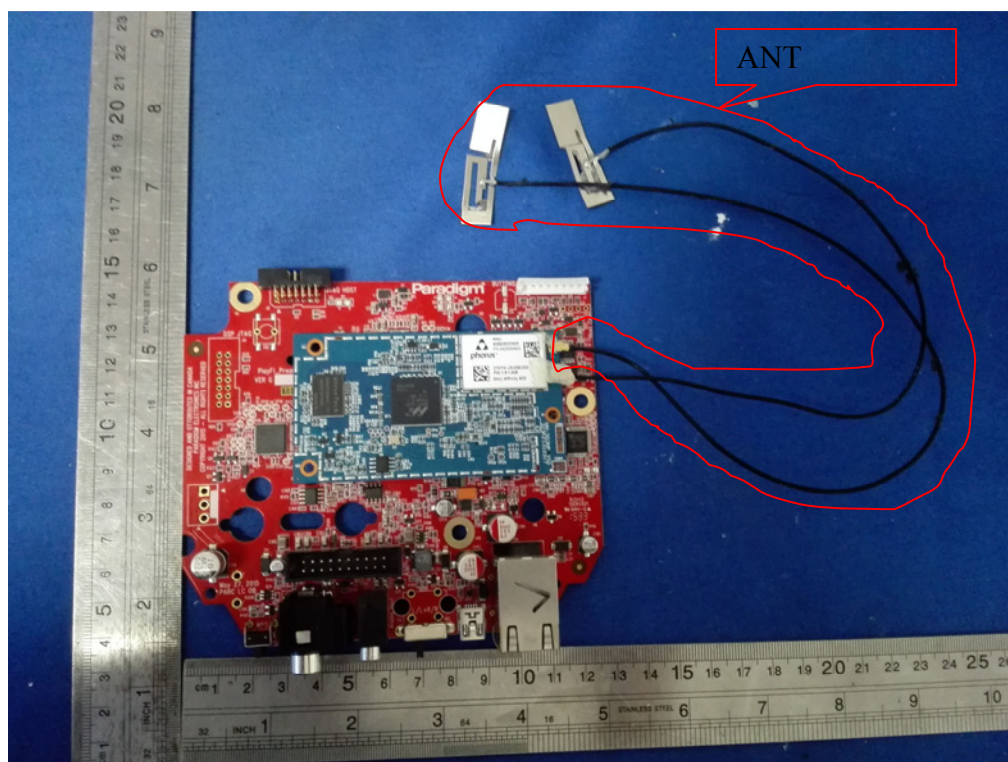

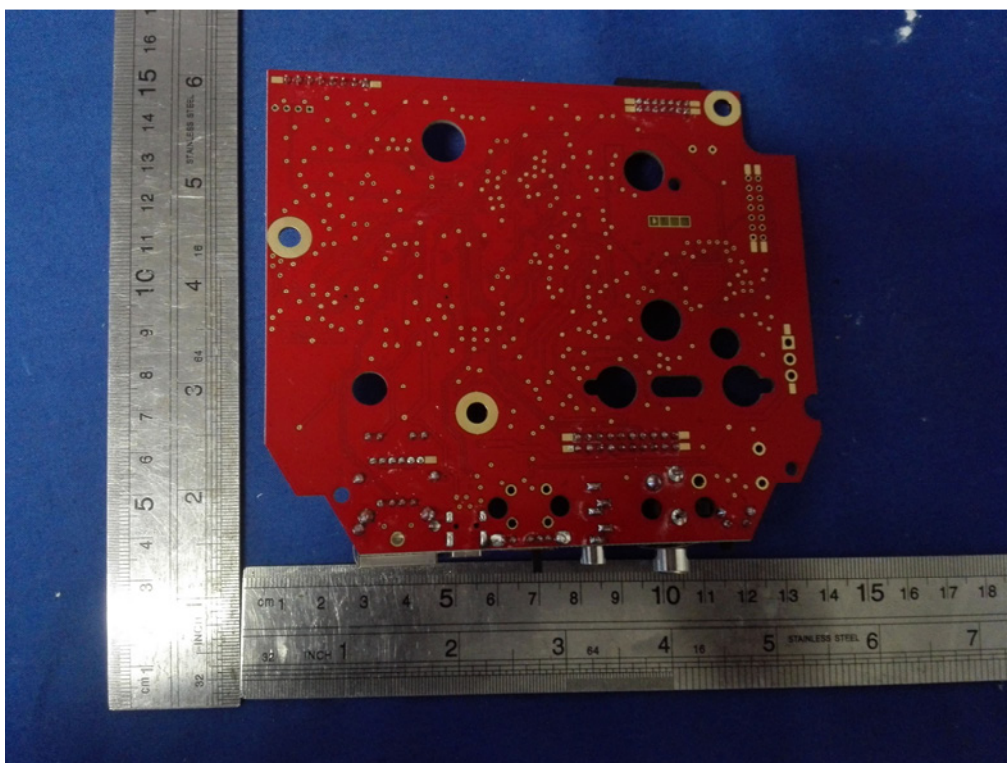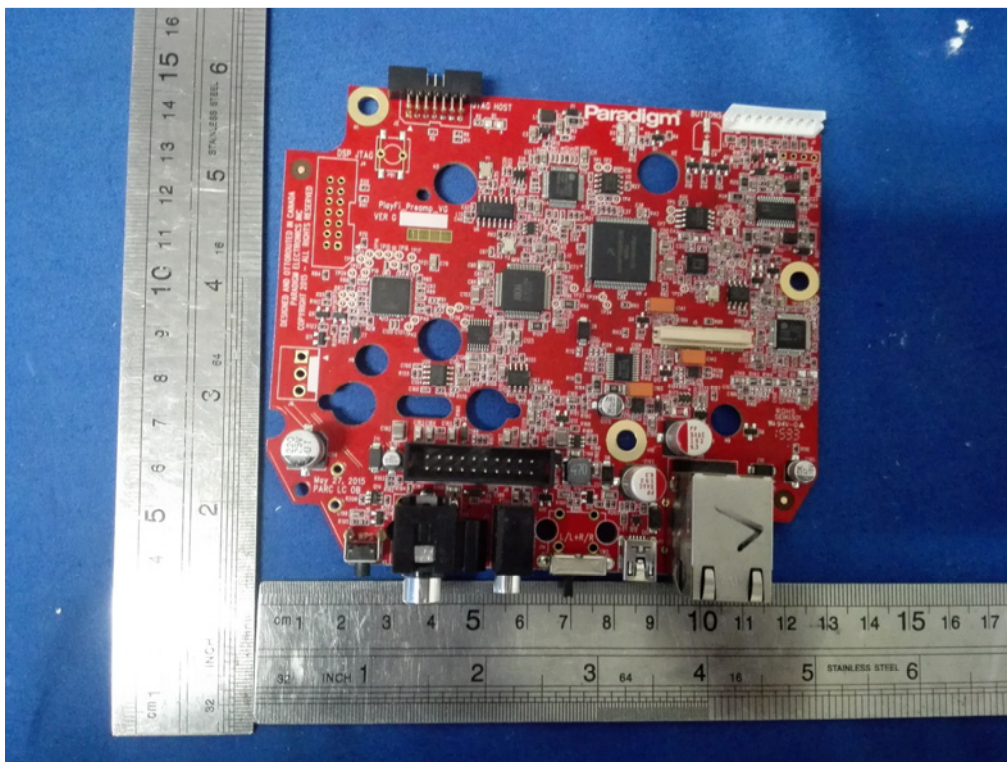

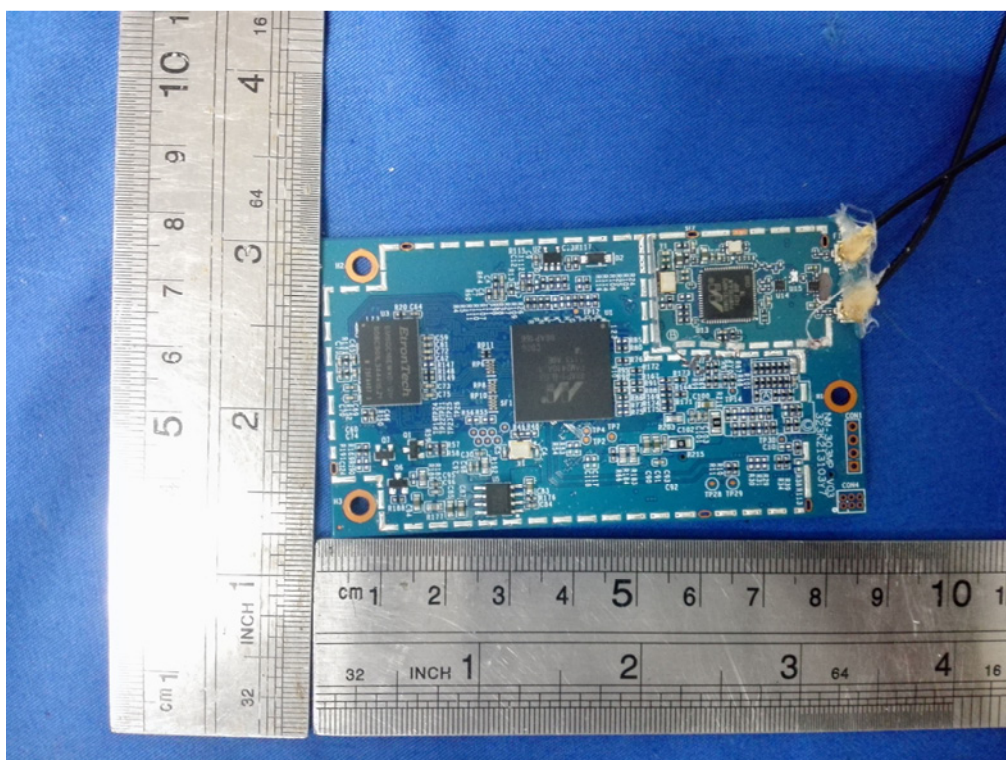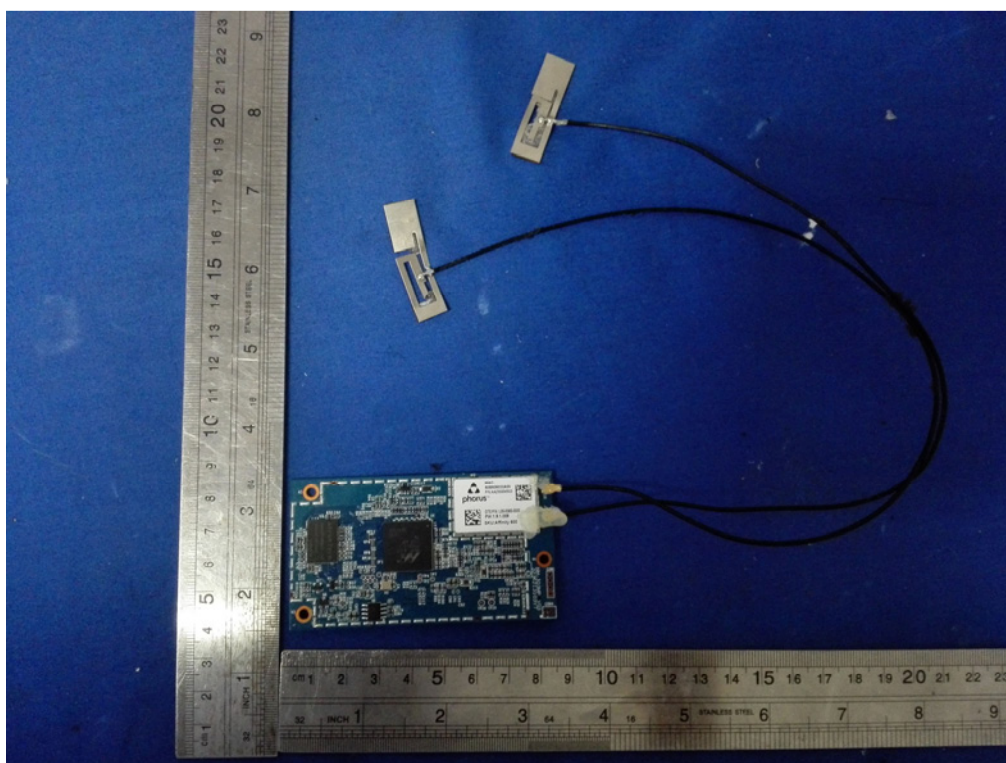

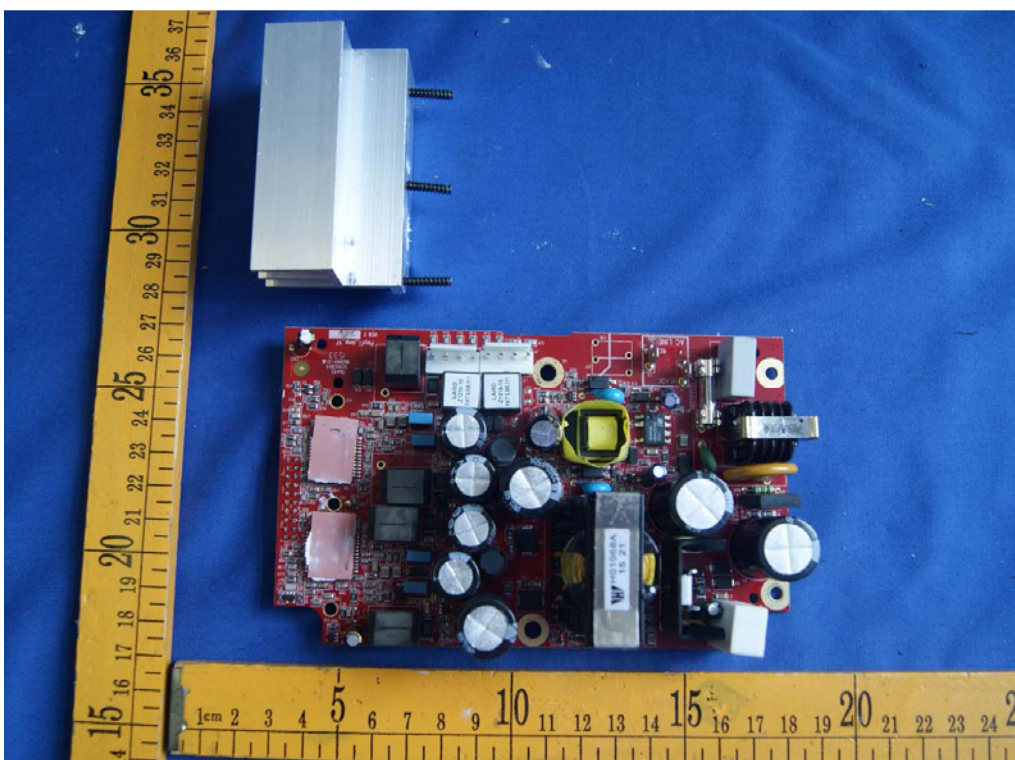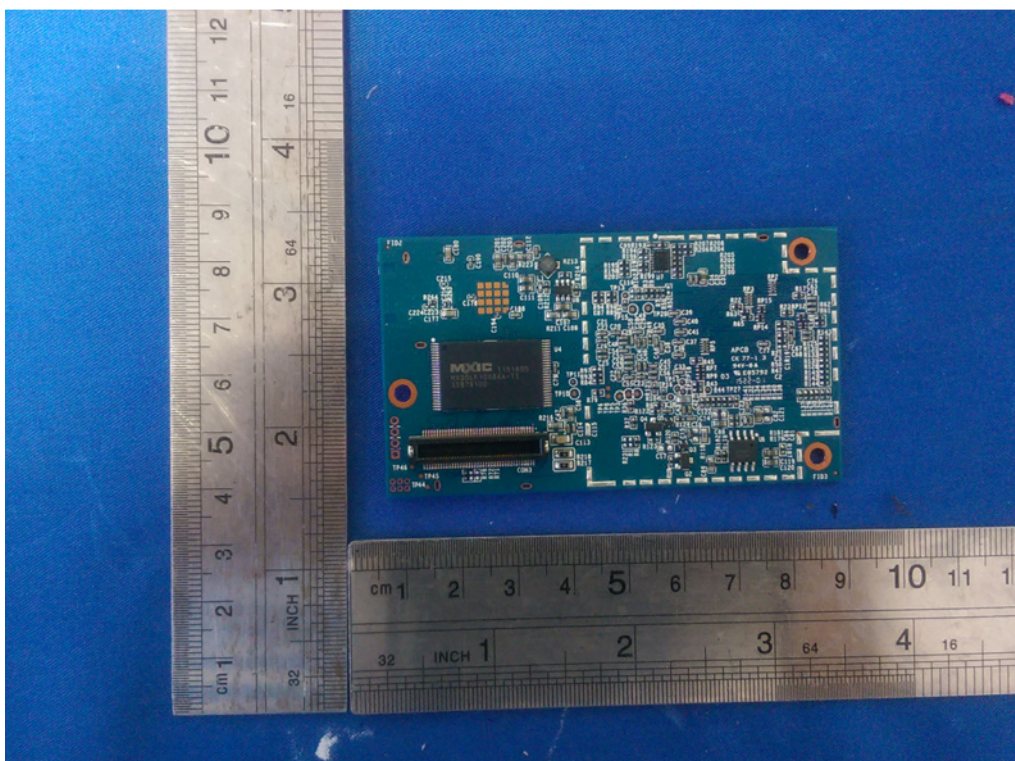

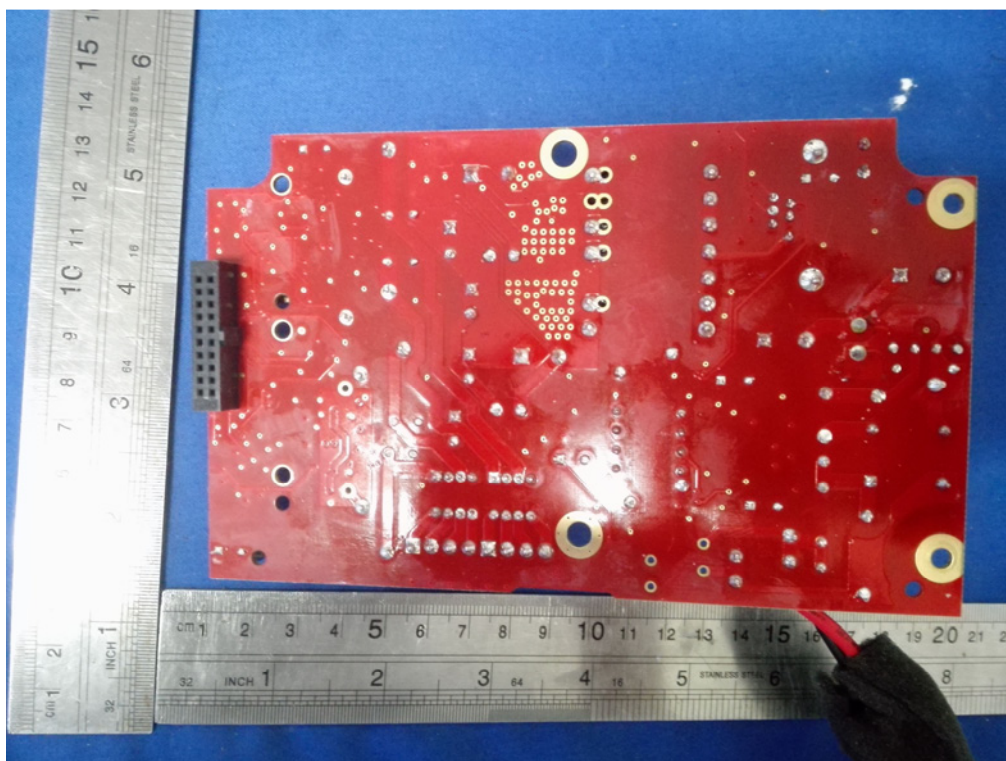

-----END-----