

A.7. Dynamic Frequency Selection

The EUT is Client without radar detection (only support client mode).

Measurement of method: See KDB 905462-D02.

Measurement Limit:

Standard	Test Items	Limit
FCC 47 CFR Part 15.407 (h)	Channel Move Time	< 10 s
	Channel Closing Transmission Time	< 200 ms + 60 ms
	Non-Occupancy Period	> 1800 s

The measurement is made according to KDB 905462.

1). Parameters of DFS test signal:


Interference threshold values, master or client incorporation in service monitoring. For device Power less than 23dBm (E.I.R.P.), the threshold level is -62 dBm at the antenna port after Correction for antenna gain and procedural adjustments.

Because of conducted measurement performed, the calibration power from radar signal generator to antenna port of DFS test equipment is -62 dBm.

Maximum Transmit Power	Value
> 200 mW	-64 dBm
< 200 mW	-62 dBm

2). Parameters of the reference DFS test signal:

Pulse width W (μs)	Pulse repetition frequency PRF (PPS)	Pulses per burst (PPB)
1	700	18

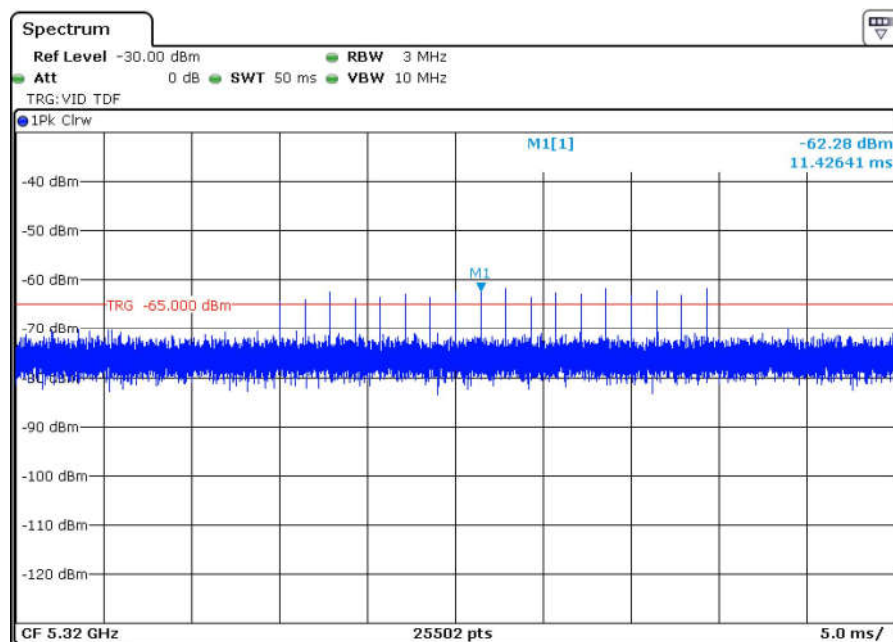

Radar Signal (Type 0)



Measurement Results:

Channel Move Time & Channel Closing Transmission Time:

Mode	Frequency (MHz)	Test Results	Conclusion
802.11a	5320MHz(Ch64)	Fig.59	P
802.11ac-VHT80	5530MHz(Ch106)	Fig.60	P

Non-Occupancy Period:

Mode	Frequency (MHz)	Test Results	Conclusion
802.11a	5320MHz(Ch64)	Fig.61	P
802.11ac-VHT80	5530MHz(Ch106)	Fig.62	P

See below for test graphs.

Conclusion: PASS

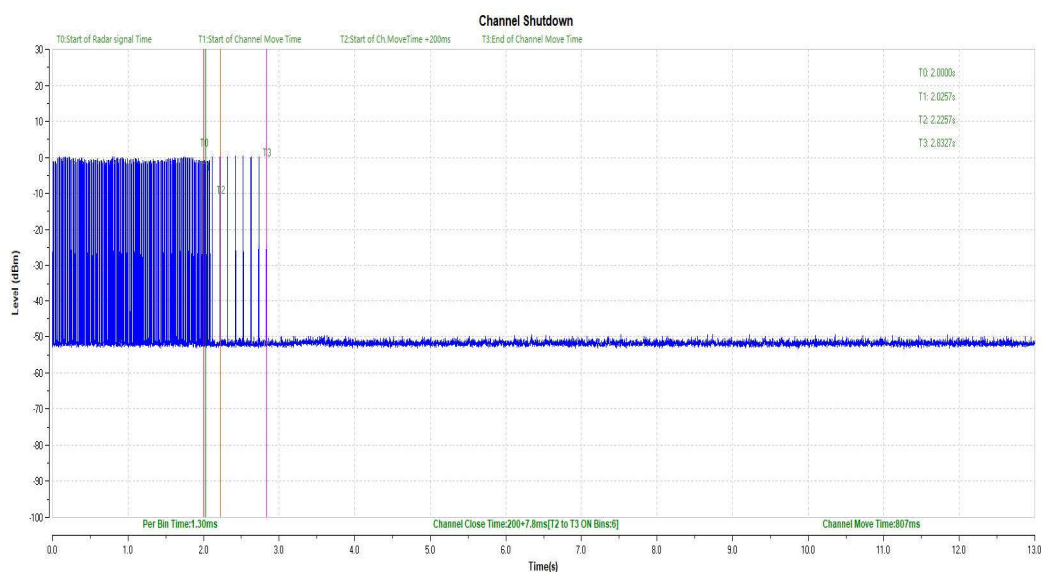


Fig. 59 Channel Move Time & Channel Closing Transmission Time (802.11a Frequency Band: 5250MHz ~ 5350MHz)

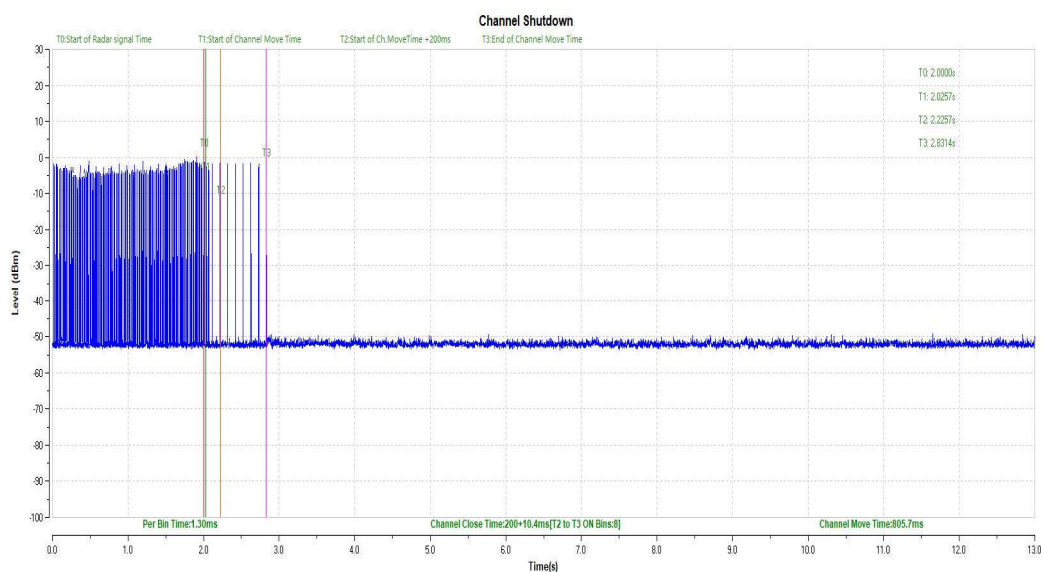


Fig. 60 Channel Move Time & Channel Closing Transmission Time (802.11ac-VHT80 Frequency Band: 5470MHz~5725MHz)

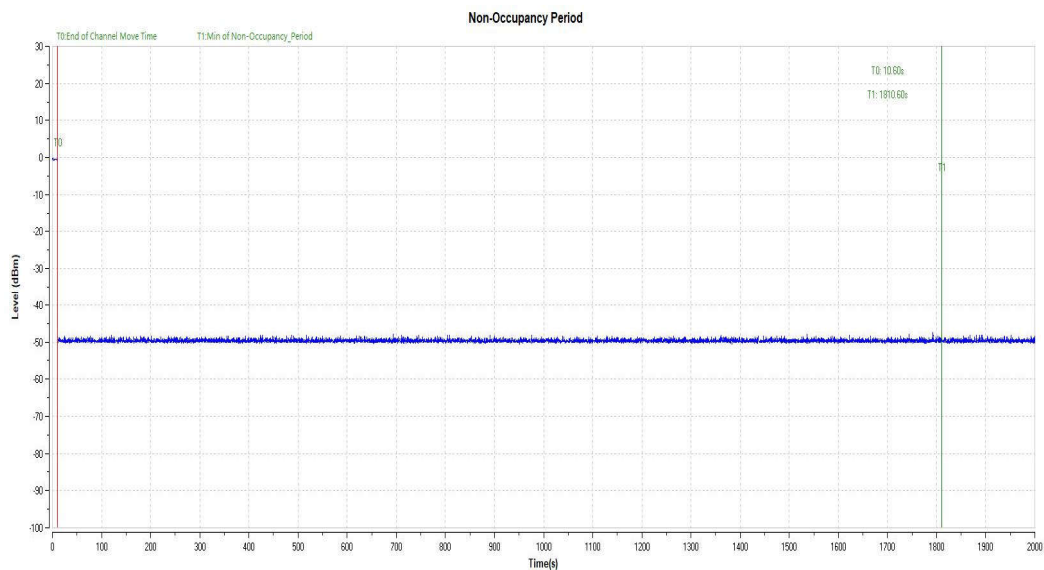


Fig. 61 Non-Occupancy Period (802.11a Frequency Band: 5250MHz ~ 5350MHz)

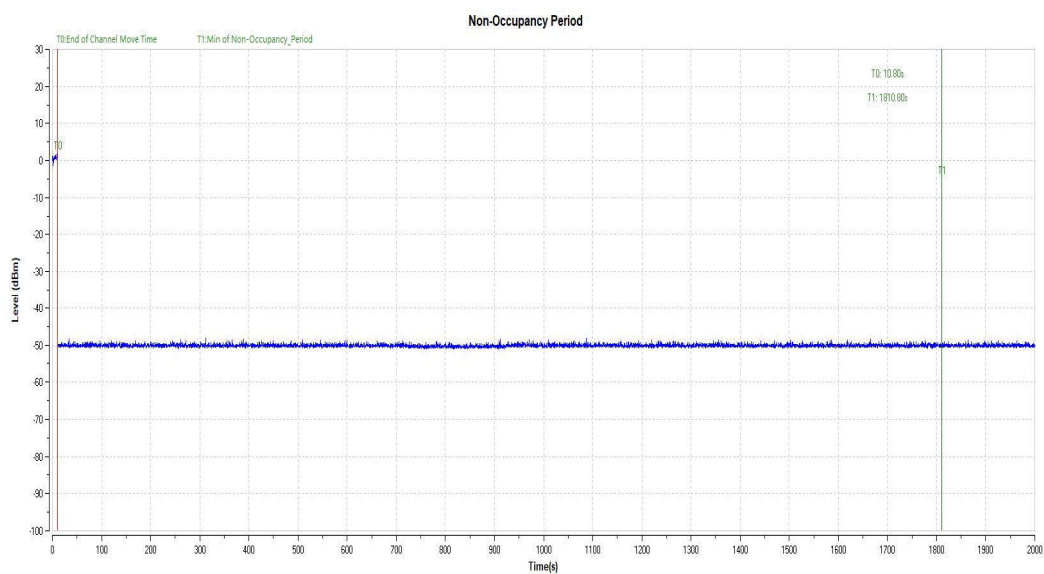


Fig. 62 Non-Occupancy Period (802.11ac-VHT80 Frequency Band: 5470MHz~5725MHz)

A.8. Band Edges Compliance

Method of Measurement: See ANSI C63.10-clause 6.10.

Measurement Limit:

Standard	Limit (dBμV/m)	
FCC 47 CFR Part 15.209	Peak	74
	Average	54

The measurement is made according to KDB 789033

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Measurement Result:

Mode	Frequency (MHz)	Test Results	Conclusion
802.11a	5180MHz(CH36)	Fig.63	P
	5320MHz(CH64)	Fig.64	P
	5500MHz(CH100)	Fig.65	P
	5700MHz(CH140)	Fig.66	P
	5745MHz(CH149)	Fig.67	P
	5825MHz(CH165)	Fig.68	P
802.11n-HT40	5190MHz(CH38)	Fig.69	P
	5310MHz(CH62)	Fig.70	P
	5510MHz(CH102)	Fig.71	P
	5670MHz(CH134)	Fig.72	P
	5755MHz(CH151)	Fig.73	P
	5795MHz(CH159)	Fig.74	P
802.11ac-VHT80	5210MHz(CH42)	Fig.75	P
	5290MHz(CH58)	Fig.76	P
	5530MHz(CH106)	Fig.77	P
	5610MHz(Ch122)	Fig.78	P
	5775MHz(CH155)	Fig.79	P

See below for test graphs.

Conclusion: PASS

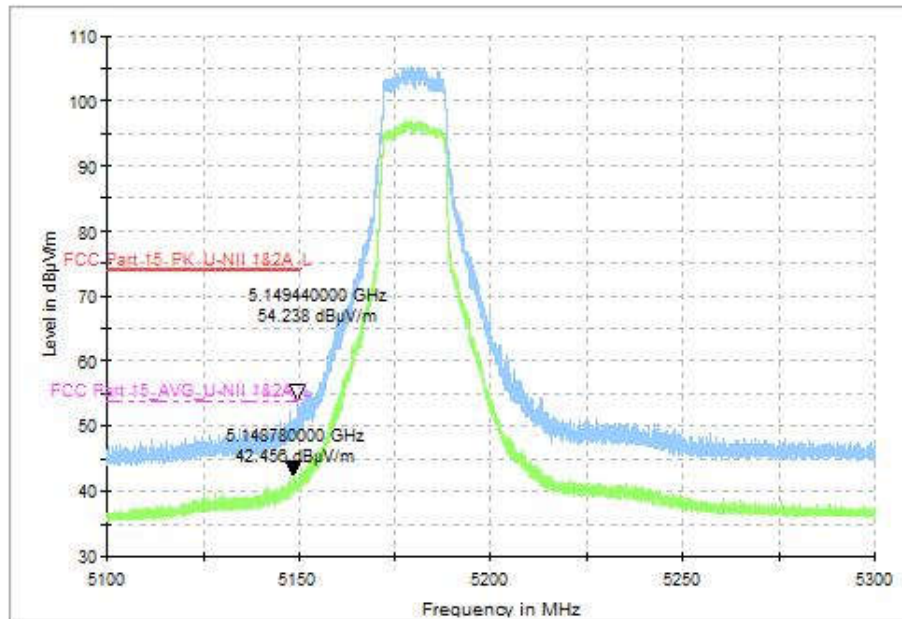


Fig. 63 Band Edges (802.11a, CH36 5180MHz)

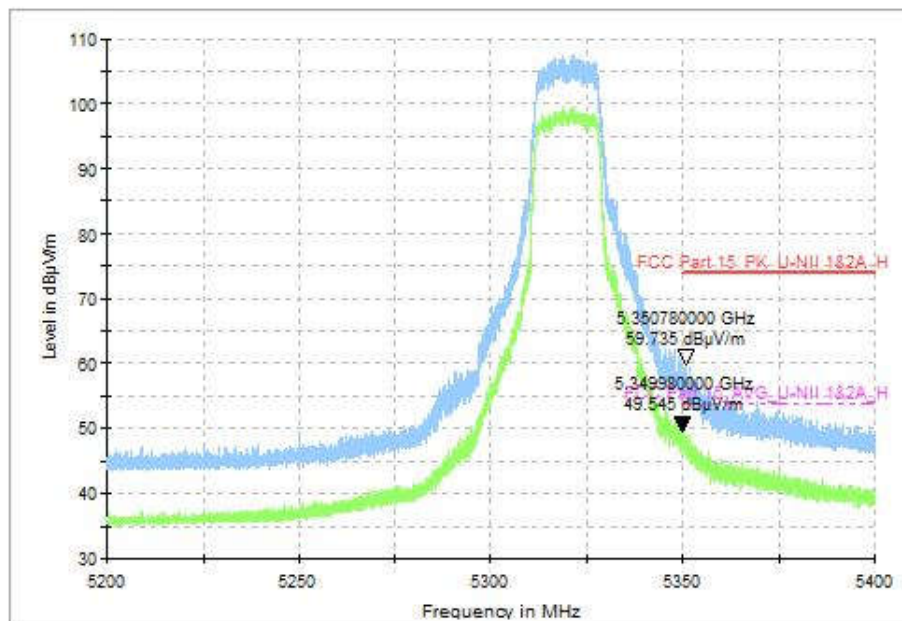


Fig. 64 Band Edges (802.11a, CH64 5320MHz)

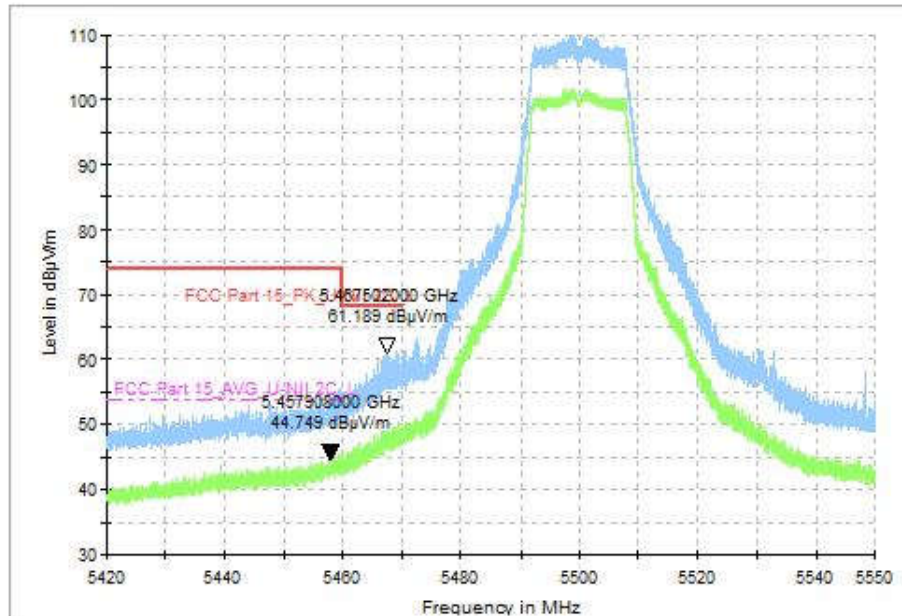


Fig. 65 Band Edges (802.11a, CH100 5500MHz)

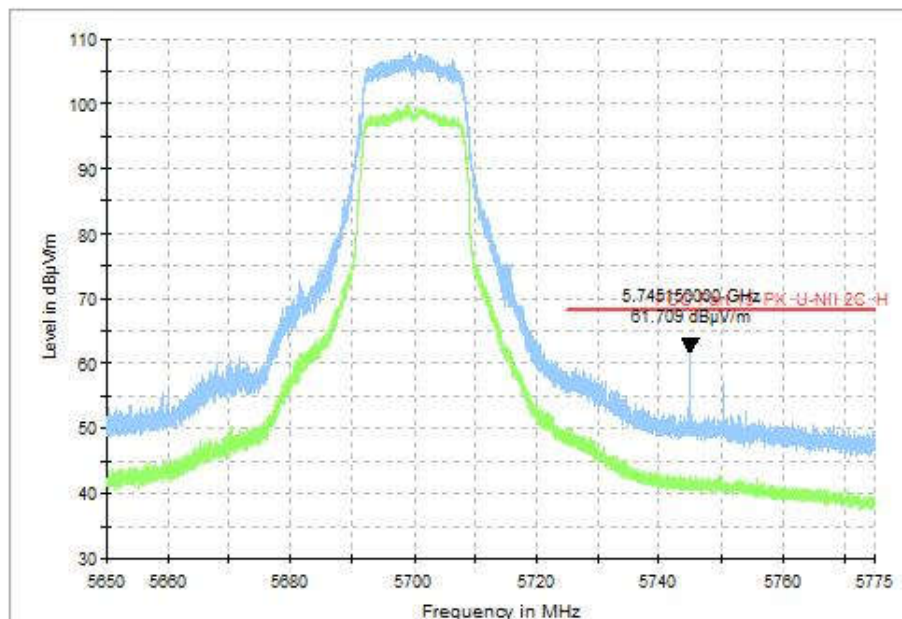


Fig. 66 Band Edges (802.11a, CH140 5700MHz)

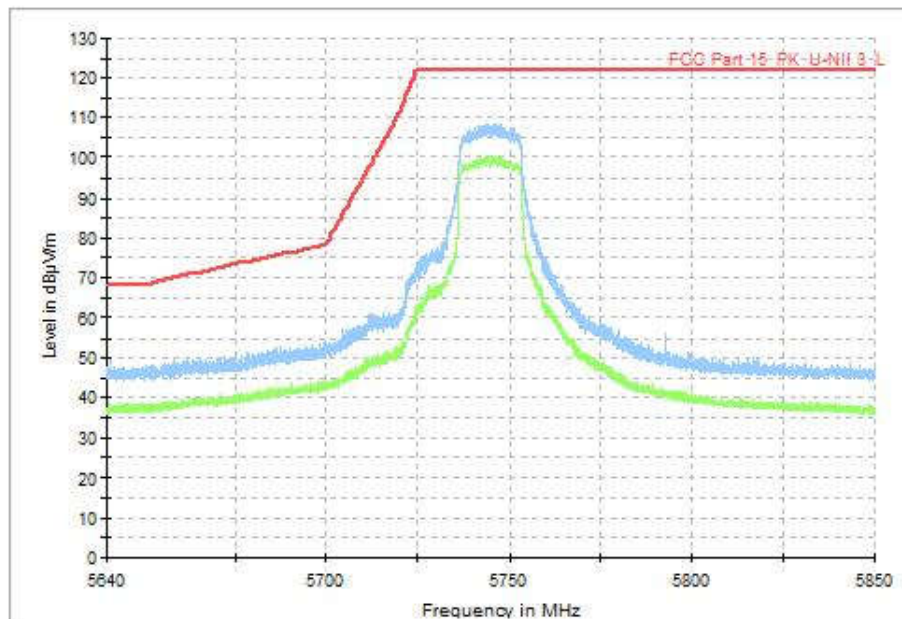


Fig. 67 Band Edges (802.11a, CH149 5745MHz)

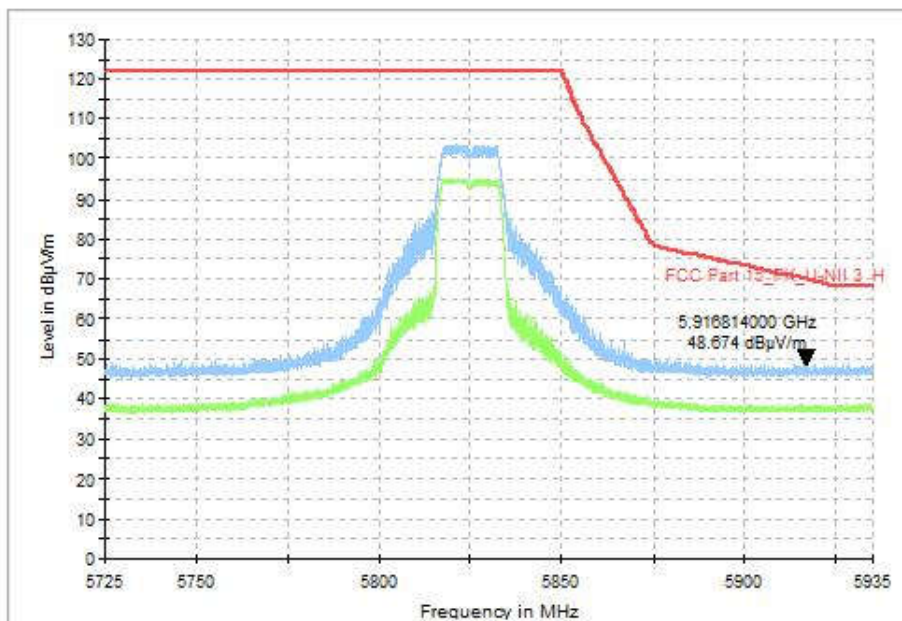


Fig. 68 Band Edges (802.11a, CH165 5825MHz)

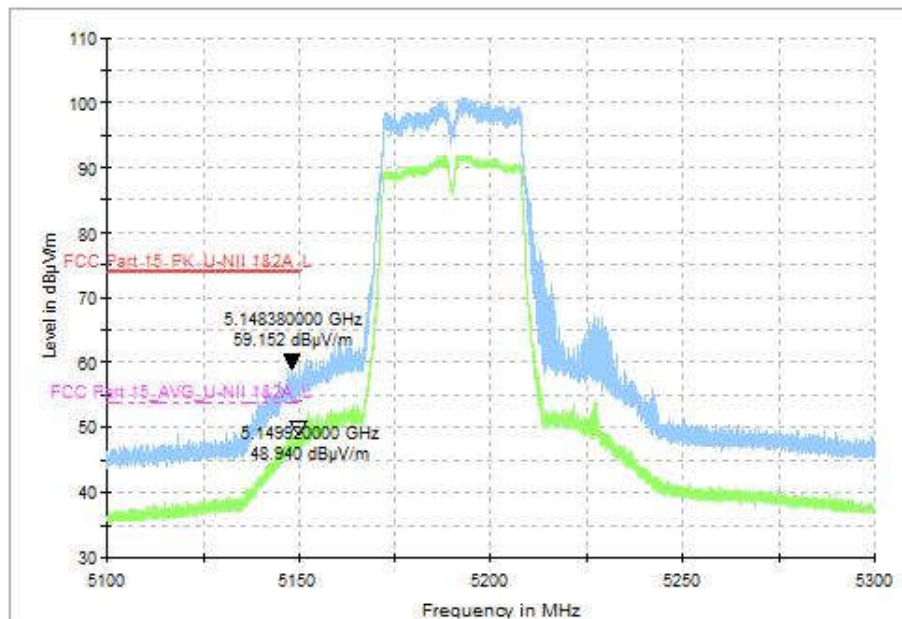


Fig. 69 Band Edges (802.11n-HT40, CH38 5190MHz)

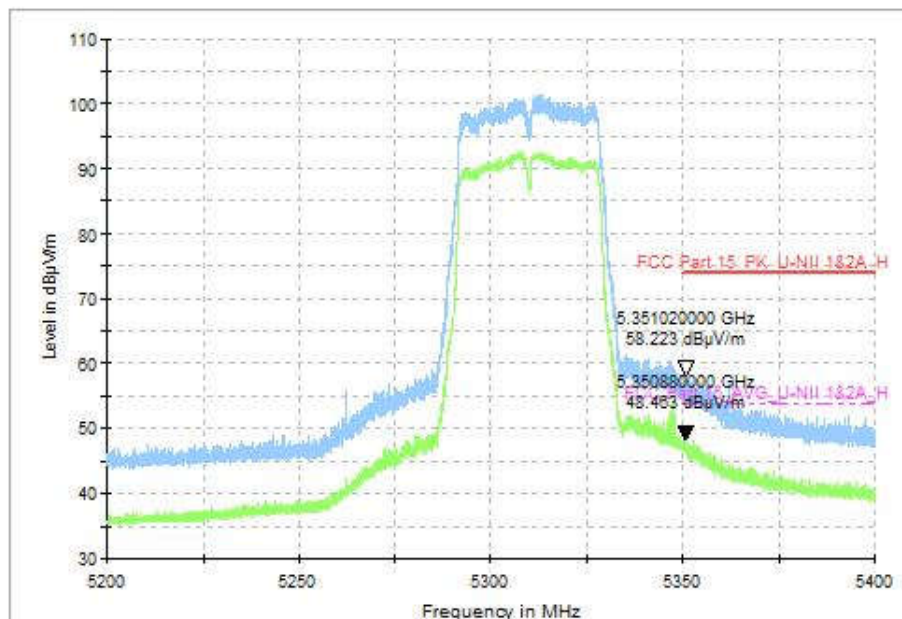


Fig. 70 Band Edges (802.11n-HT40, CH62 5310MHz)

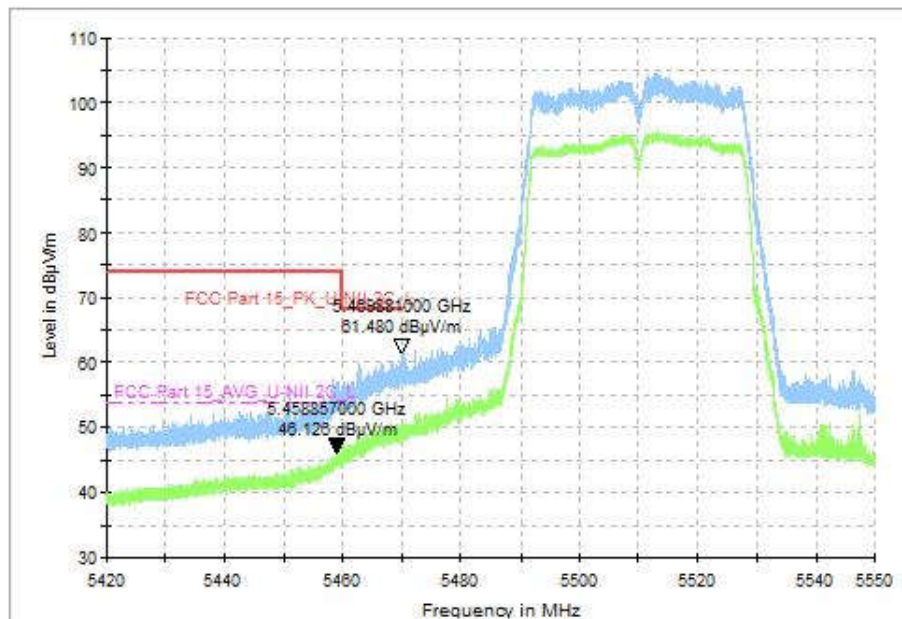


Fig. 71 Band Edges (802.11n-HT40, CH102 5510MHz)

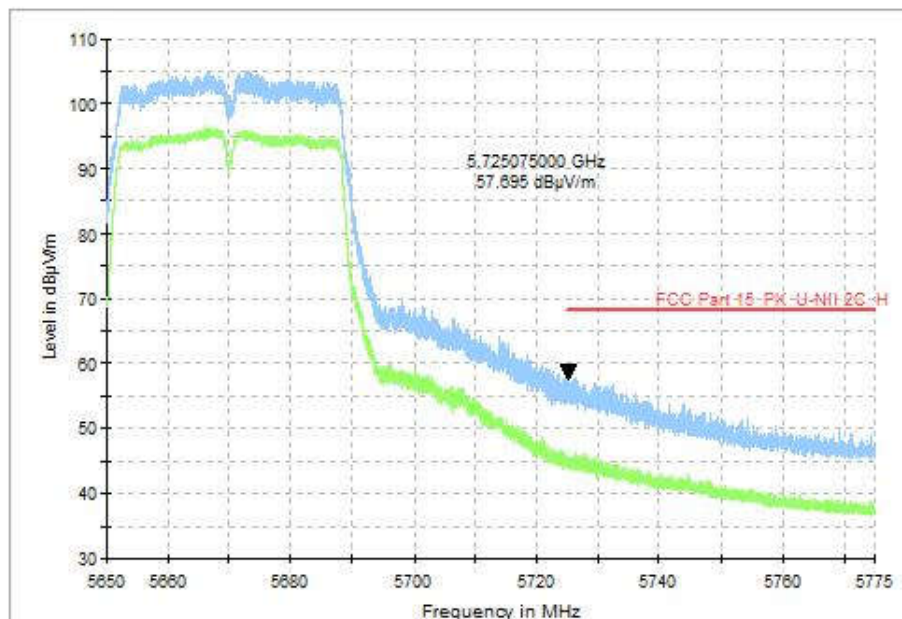


Fig. 72 Band Edges (802.11n-HT40, CH134 5670MHz)

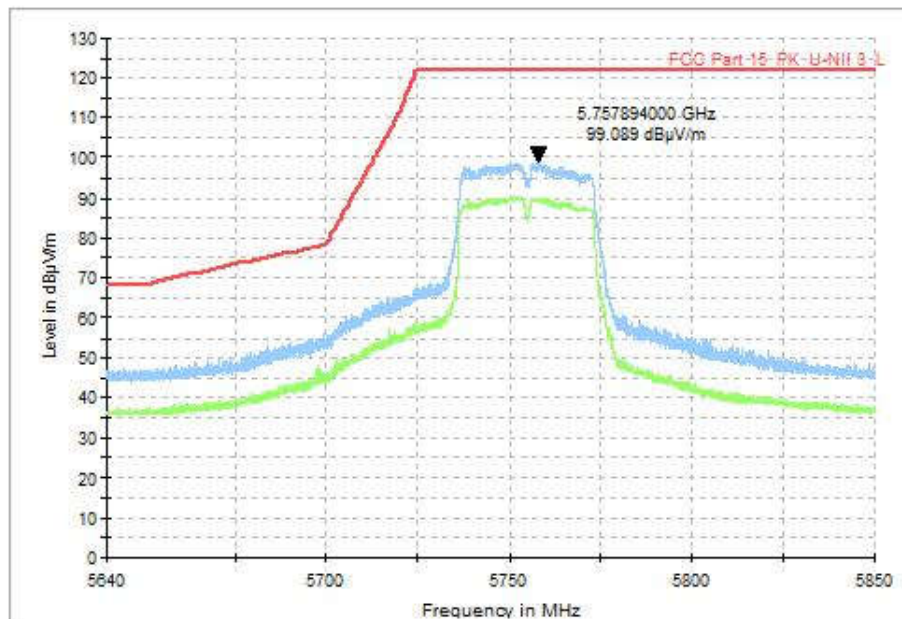


Fig. 73 Band Edges (802.11n-HT40, CH151 5755MHz)

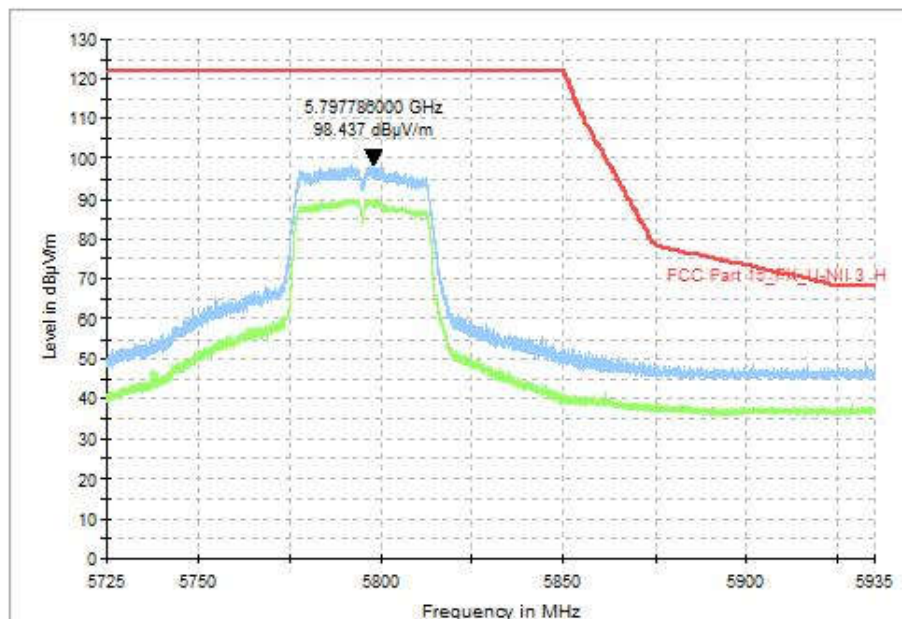


Fig. 74 Band Edges (802.11n-HT40, CH159 5795MHz)

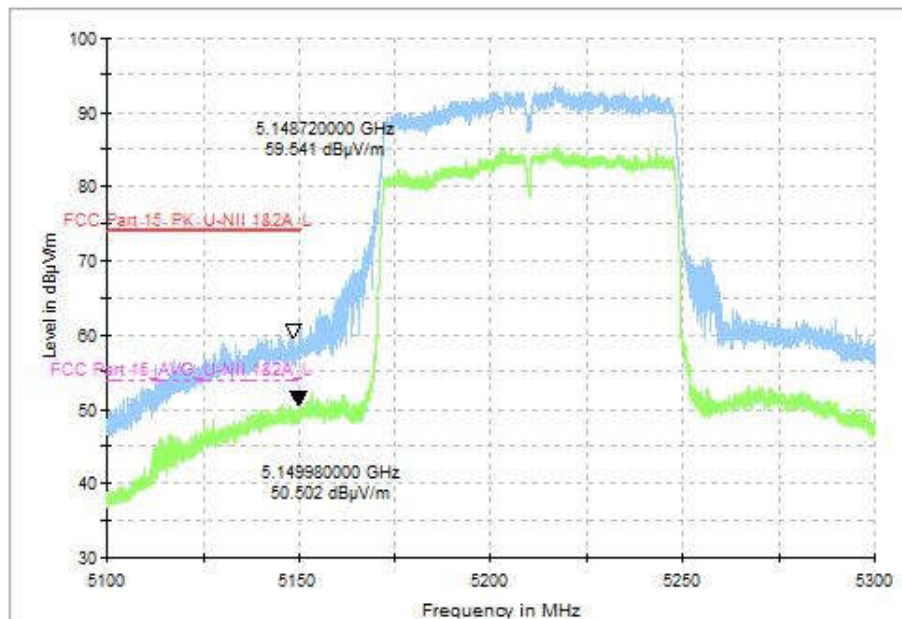


Fig. 75 Band Edges (802.11ac-VHT80, CH42 5210MHz)

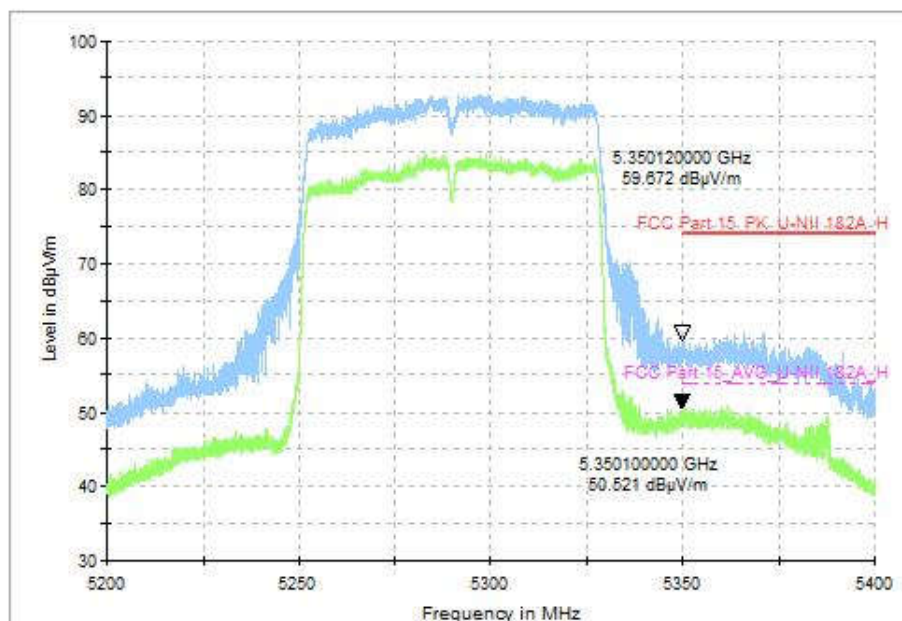


Fig. 76 Band Edges (802.11ac-VHT80, CH58 5290MHz)

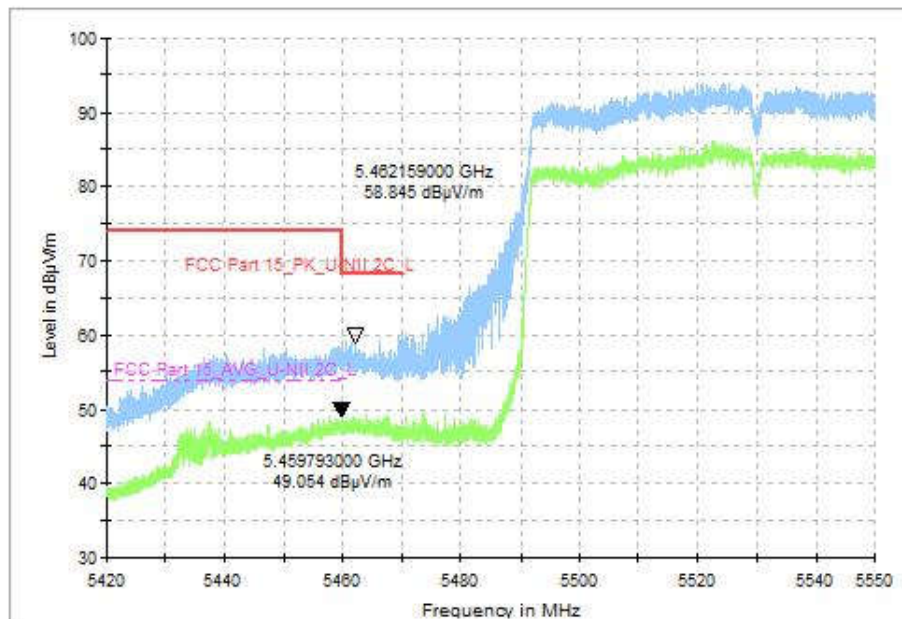


Fig. 77 Band Edges (802.11ac-VHT80, CH106 5530MHz)

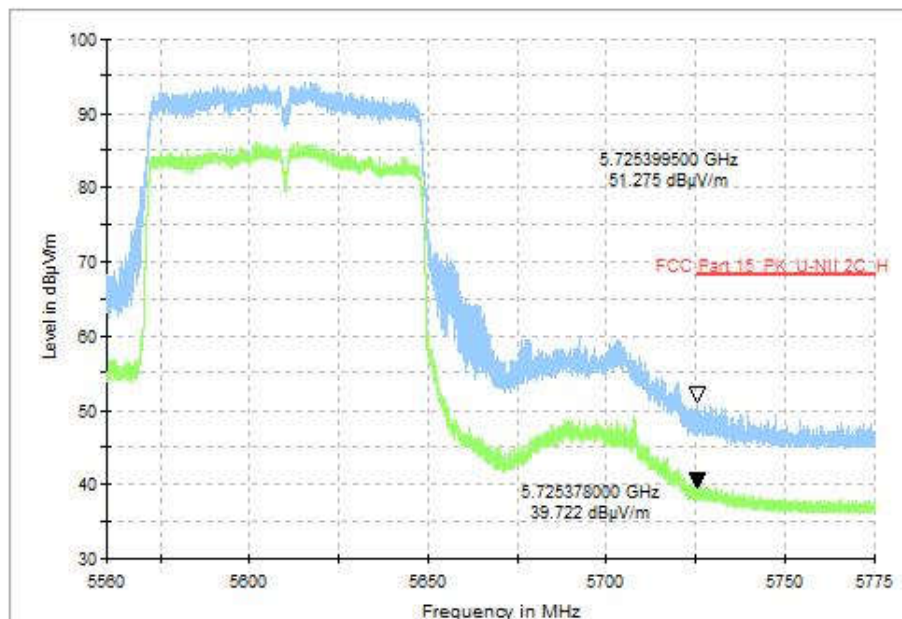


Fig. 78 Band Edges (802.11ac-VHT80, CH122 5610MHz)

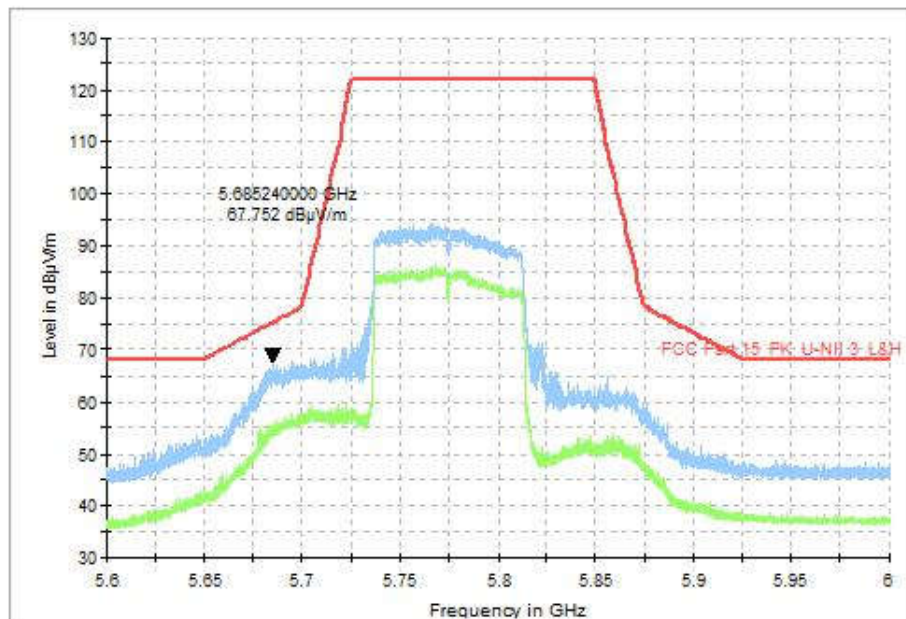


Fig. 79 Band Edges (802.11ac-VHT80, CH155 5775MHz)

A.9. Transmitter Spurious Emission

Measurement of method: See KDB 789033 D02 v02r01, Section G.3, G.4, G.5 and G.6.

Measurement Limit:

Standard	Limit (dBμV/m)	
FCC 47 CFR Part 15.209	Peak	74
	Average	54

The measurement is made according to KDB 789033.

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength (dBμV/m)	Measurement distance (m)
30-88	40.0	3
88-216	43.5	3
216-960	46.0	3
Above 960	54.0	3

Note: For frequency range below 960MHz, the limit in 15.209 is defined in 10m test distance. The limit used above is calculated from 10m to 3m.

The measurement results include the horizontal polarization and vertical polarization measurements. For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

Measurement Result:

Mode	Frequency (MHz)	Frequency Range	Test Results	Conclusion
802.11a	5180MHz(Ch36)	1 GHz ~18 GHz	Fig.80	P
	5200MHz(Ch40)	1 GHz ~18 GHz	Fig.81	P
	5240MHz(Ch48)	1 GHz ~18 GHz	Fig.82	P
	5260MHz(Ch52)	1 GHz ~18 GHz	Fig.83	P
	5280MHz(Ch56)	1 GHz ~18 GHz	Fig.84	P
	5320MHz(Ch64)	1 GHz ~18 GHz	Fig.85	P
	5500MHz(Ch100)	1 GHz ~18 GHz	Fig.86	P
	5600MHz(Ch120)	1 GHz ~18 GHz	Fig.87	P
	5700MHz(Ch140)	1 GHz ~18 GHz	Fig.88	P
	5745MHz(Ch149)	1 GHz ~18 GHz	Fig.89	P
	5785MHz(Ch157)	1 GHz ~18 GHz	Fig.90	P
	5825MHz(Ch165)	1 GHz ~18 GHz	Fig.91	P
802.11n-HT40	5190MHz(Ch38)	1 GHz ~18 GHz	Fig.92	P
	5230MHz(Ch46)	1 GHz ~18 GHz	Fig.93	P
	5270MHz(Ch54)	1 GHz ~18 GHz	Fig.94	P
	5310MHz(Ch62)	1 GHz ~18 GHz	Fig.95	P

	5510MHz(Ch102)	1 GHz ~18 GHz	Fig.96	P
	5580MHz(Ch118)	1 GHz ~18 GHz	Fig.97	P
	5670MHz(Ch134)	1 GHz ~18 GHz	Fig.98	P
	5755MHz(Ch151)	1 GHz ~18 GHz	Fig.99	P
	5795MHz(Ch159)	1 GHz ~18 GHz	Fig.100	P
802.11ac -VHT80	5210MHz(Ch42)	1 GHz ~18 GHz	Fig.101	P
	5290MHz(Ch58)	1 GHz ~18 GHz	Fig.102	P
	5530MHz(Ch106)	1 GHz ~18 GHz	Fig.103	P
	5610MHz(Ch122)	1 GHz ~18 GHz	Fig.104	P
	5775MHz(Ch155)	1 GHz ~18 GHz	Fig.105	P
All channels		30 MHz ~1 GHz	Fig.106	P
		18 GHz ~26.5 GHz	Fig.107	P
		26.5GHz~40GHz	Fig.108	P

Worst Case Result:

802.11a CH157

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
8212.615385	44.79	74.00	29.21	H	5.9
10962.000000	47.03	74.00	26.97	H	9.6
11624.769231	47.35	74.00	26.65	V	9.9
12492.461539	47.01	74.00	26.99	V	11.3
15894.461539	50.82	74.00	23.18	H	14.0
17932.153846	54.01	74.00	19.99	V	18.9

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
8212.615385	33.37	54.00	20.63	H	5.9
10962.000000	36.00	54.00	18.00	H	9.6
11624.769231	36.62	54.00	17.38	V	9.9
12492.461539	36.79	54.00	17.21	V	11.3
15894.461539	40.93	54.00	13.07	H	14.0
17932.153846	43.10	54.00	10.90	V	18.9

802.11n-HT40 CH46

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
7498.153846	45.36	74.00	28.64	H	5.7
8284.153846	44.21	74.00	29.79	H	6.0
11489.538462	48.04	74.00	25.96	V	10.1
12213.230769	47.78	74.00	26.22	V	10.8
15894.923077	52.16	74.00	21.84	V	14.0
17996.769231	54.27	74.00	19.73	V	19.2

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
7498.153846	35.52	54.00	18.48	H	5.7
8284.153846	35.78	54.00	18.22	H	6.0
11489.538462	36.74	54.00	17.26	V	10.1
12213.230769	38.62	54.00	15.38	V	10.8
15894.923077	40.62	54.00	13.38	V	14.0
17996.769231	43.57	54.00	10.43	V	19.2

802.11ac-VHT80 CH155

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
8224.153846	44.62	74.00	29.38	V	5.9
10847.076923	46.03	74.00	27.97	H	9.2
11647.846154	47.07	74.00	26.93	V	9.9
12341.076923	47.28	74.00	26.72	V	11.2
15906.461539	51.27	74.00	22.73	V	14.1
17898.461539	53.37	74.00	20.63	H	18.8

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
8224.153846	33.61	54.00	20.39	V	5.9
10847.076923	35.35	54.00	18.65	H	9.2
11647.846154	36.79	54.00	17.21	V	9.9
12341.076923	37.07	54.00	16.93	V	11.2
15906.461539	40.53	54.00	13.47	V	14.1
17898.461539	43.00	54.00	11.00	H	18.8

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss. P_{Mea} is the field strength recorded from the instrument. The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

See below for test graphs.

Conclusion: PASS

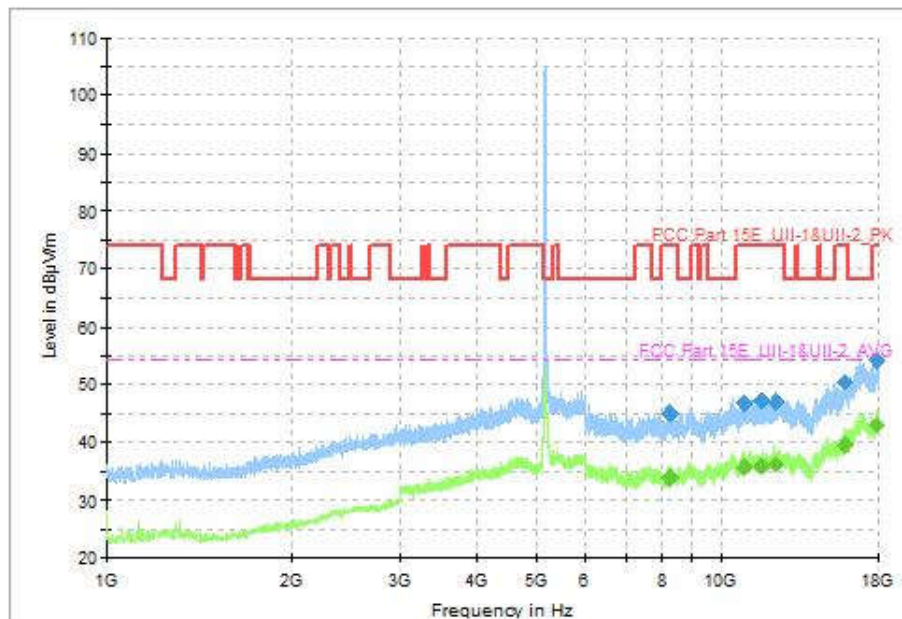


Fig. 80 Transmitter Spurious Emission (802.11a, CH36 5180MHz, 1GHz-18GHz)

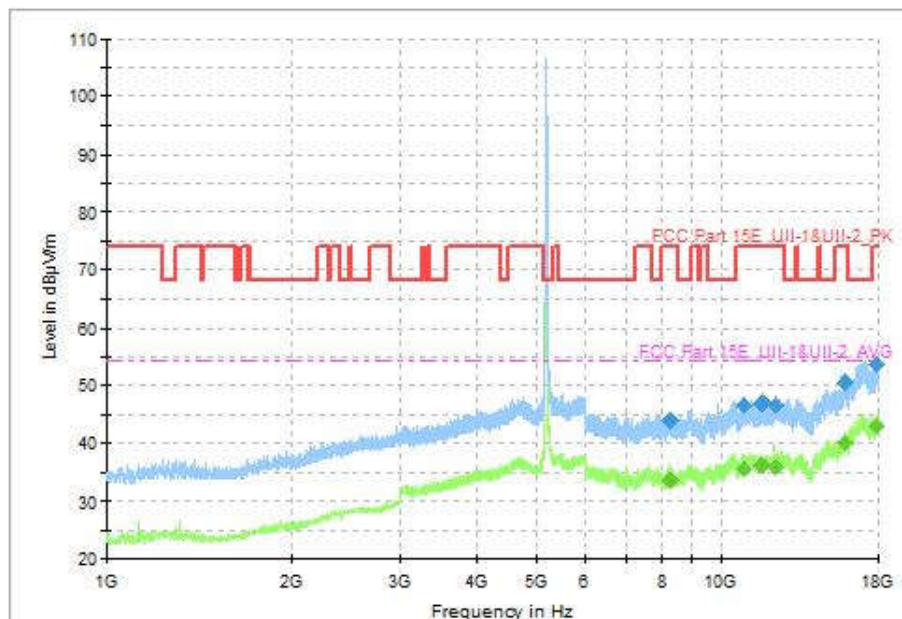


Fig. 81 Transmitter Spurious Emission (802.11a, CH40 5200MHz, 1GHz-18GHz)

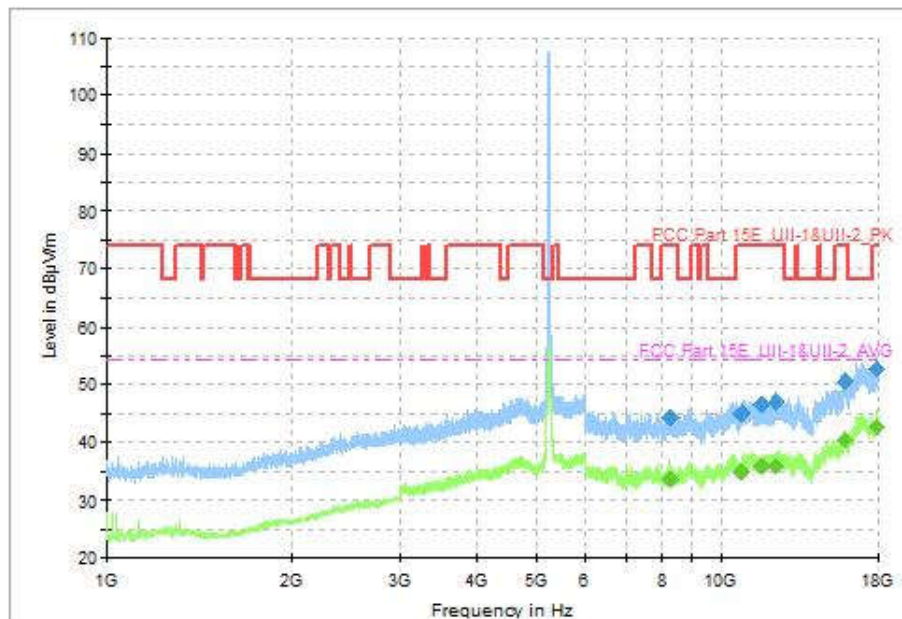


Fig. 82 Transmitter Spurious Emission (802.11a, CH48 5240MHz, 1GHz-18GHz)

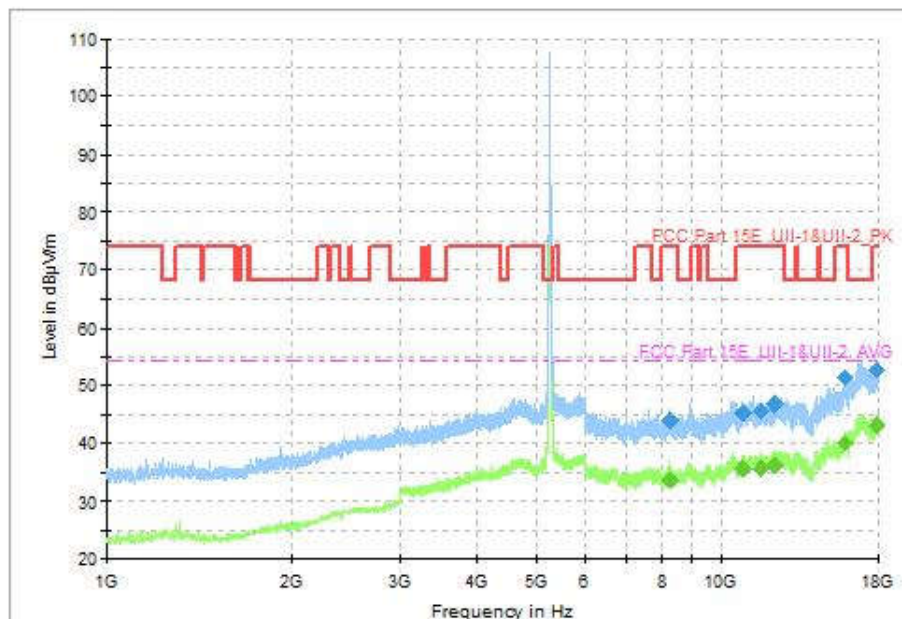


Fig. 83 Transmitter Spurious Emission (802.11a, CH52 5260MHz, 1GHz-18GHz)

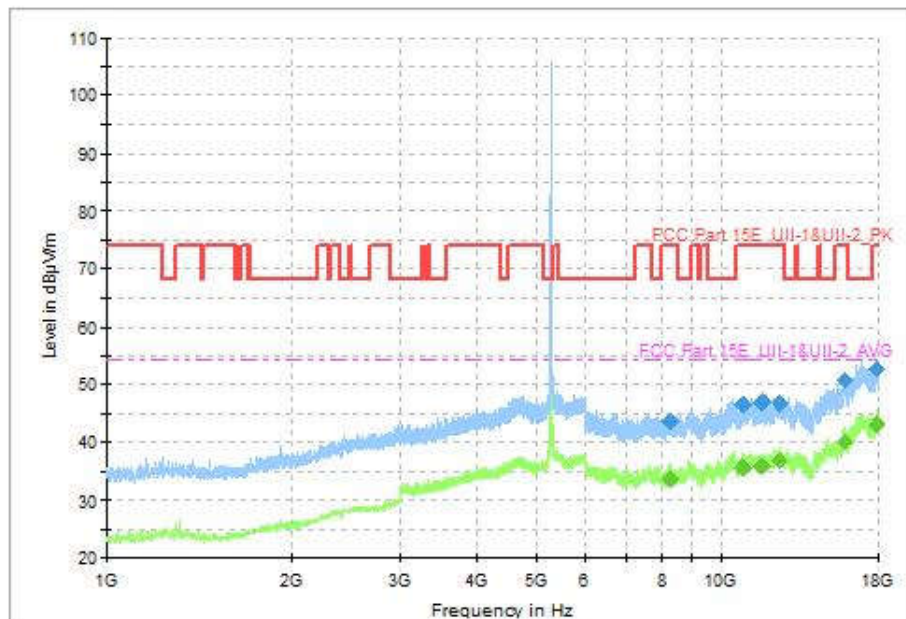


Fig. 84 Transmitter Spurious Emission (802.11a, CH56 5280MHz, 1GHz-18GHz)

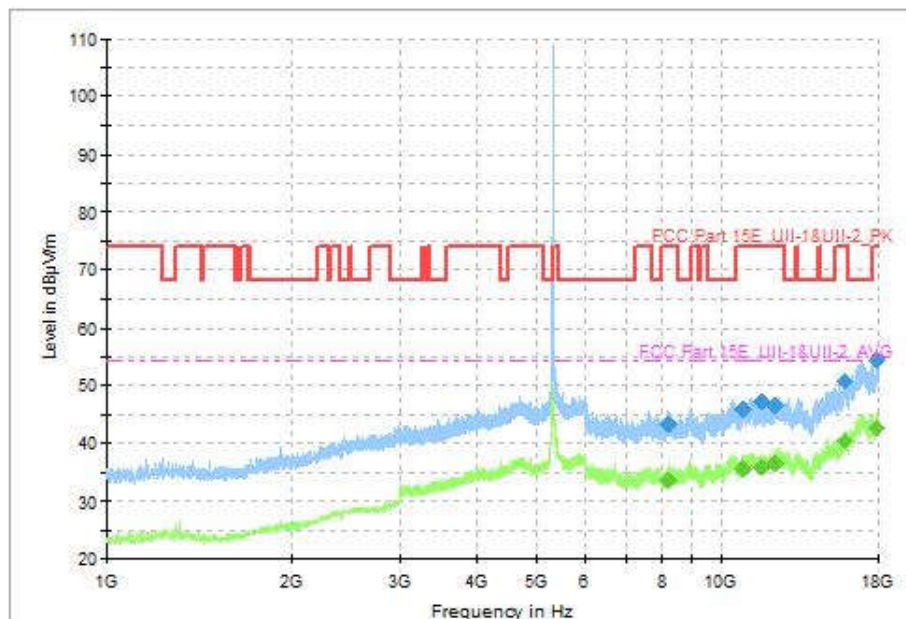


Fig. 85 Transmitter Spurious Emission (802.11a, CH64 5320MHz, 1GHz-18GHz)

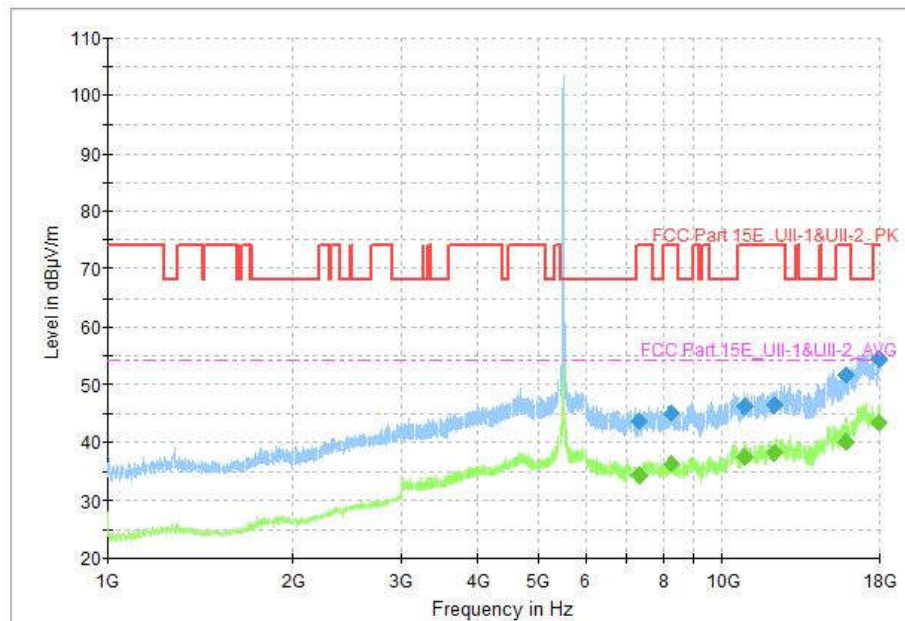


Fig. 86 Transmitter Spurious Emission (802.11a, CH100 5500MHz, 1GHz-18GHz)

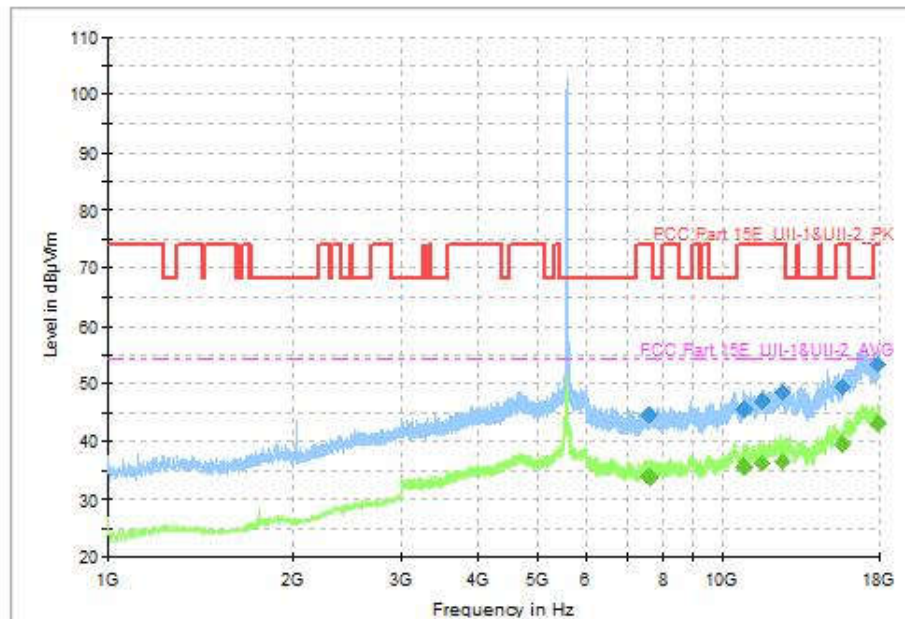


Fig. 87 Transmitter Spurious Emission (802.11a, CH120 5600MHz, 1GHz-18GHz)

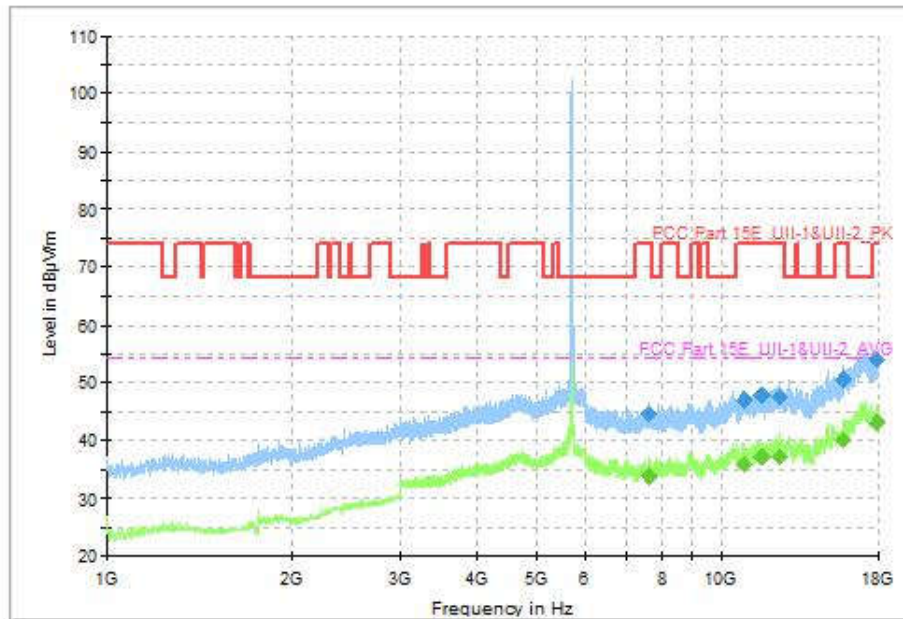


Fig. 88 Transmitter Spurious Emission (802.11a, CH140 5700MHz, 1GHz-18GHz)

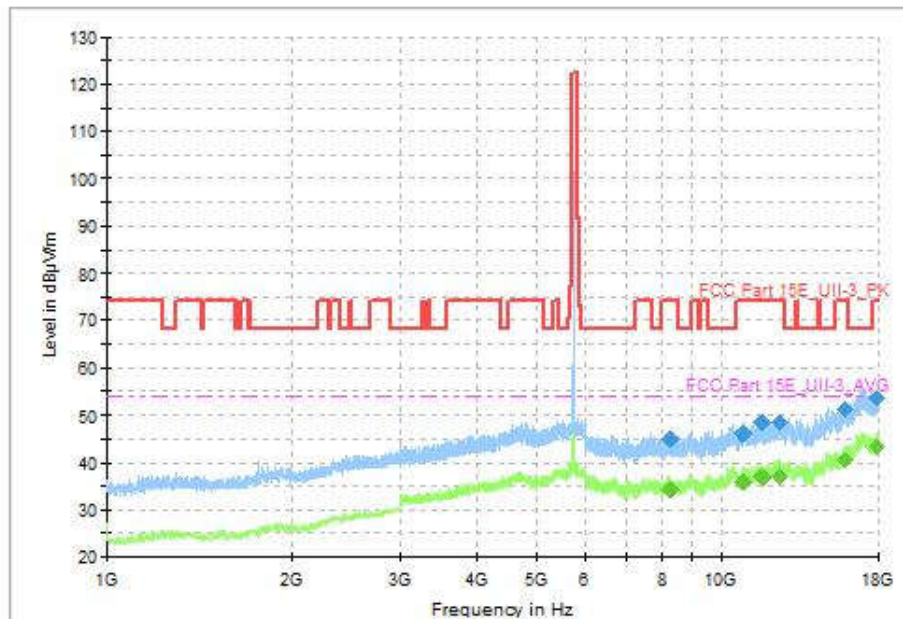


Fig. 89 Transmitter Spurious Emission (802.11a, CH149 5745MHz, 1GHz-18GHz)

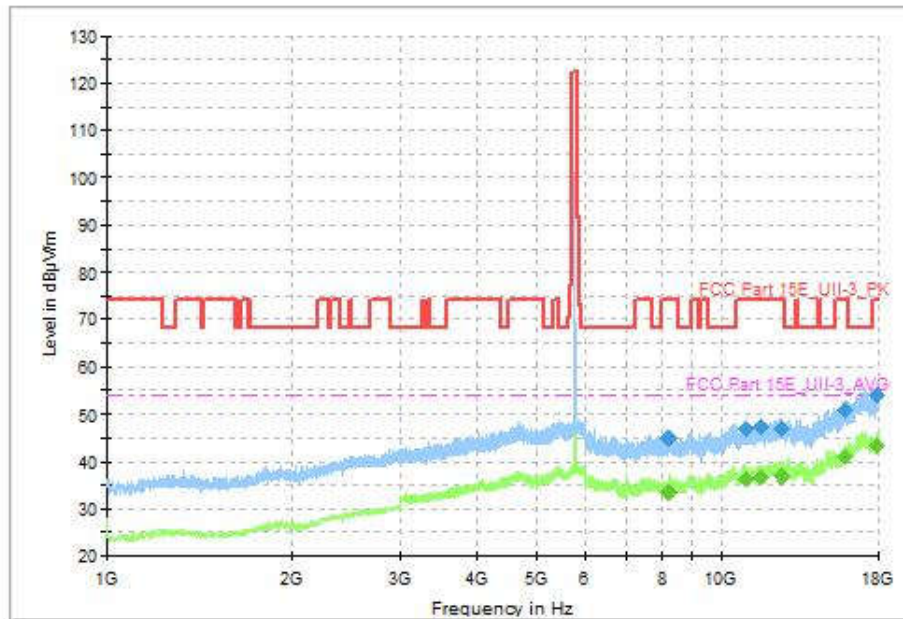


Fig. 90 Transmitter Spurious Emission (802.11a, CH157 5785MHz, 1GHz-18GHz)

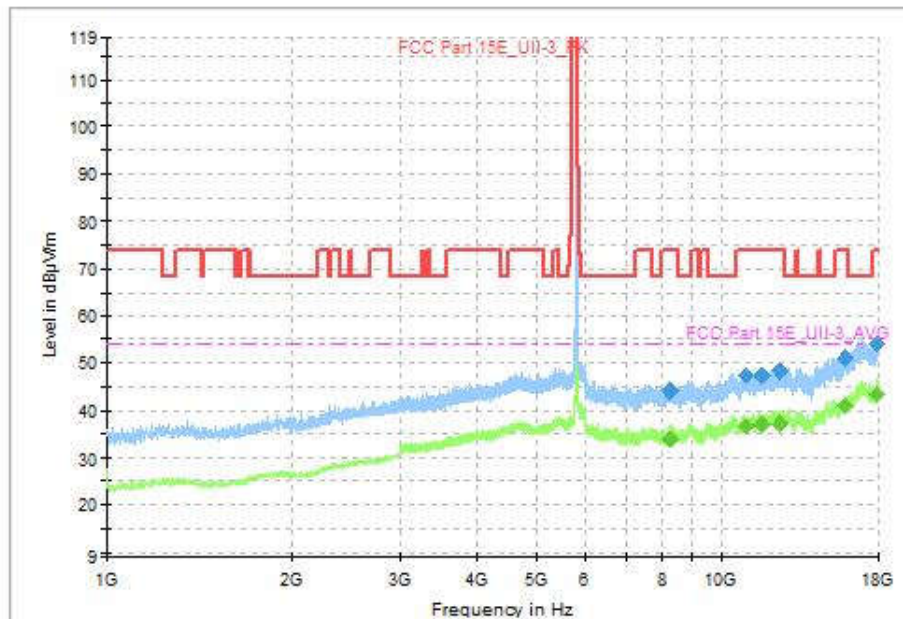


Fig. 91 Transmitter Spurious Emission (802.11a, CH165 5825MHz, 1GHz-18GHz)

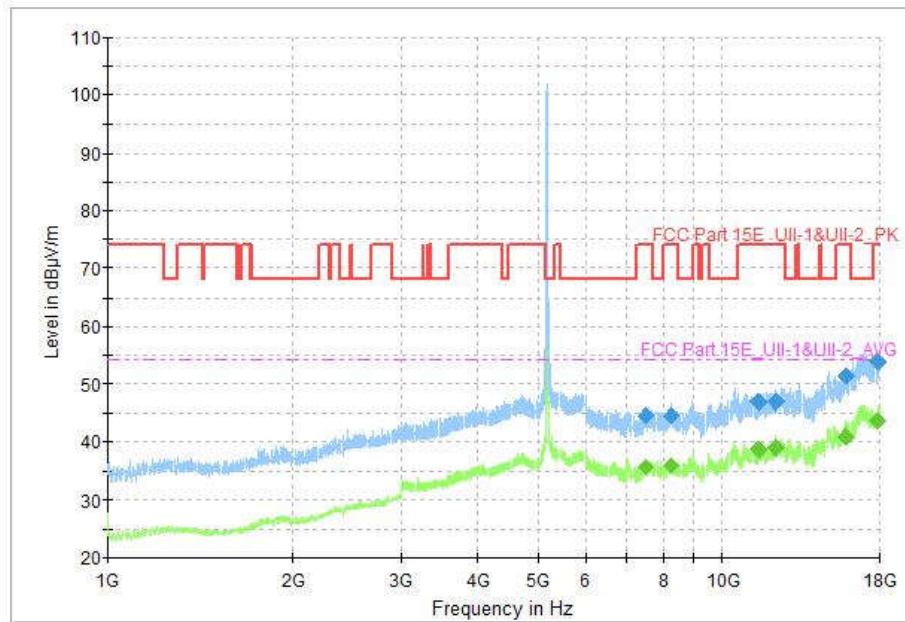


Fig. 92 Transmitter Spurious Emission (802.11n-HT40, CH38 5190MHz, 1GHz-18GHz)

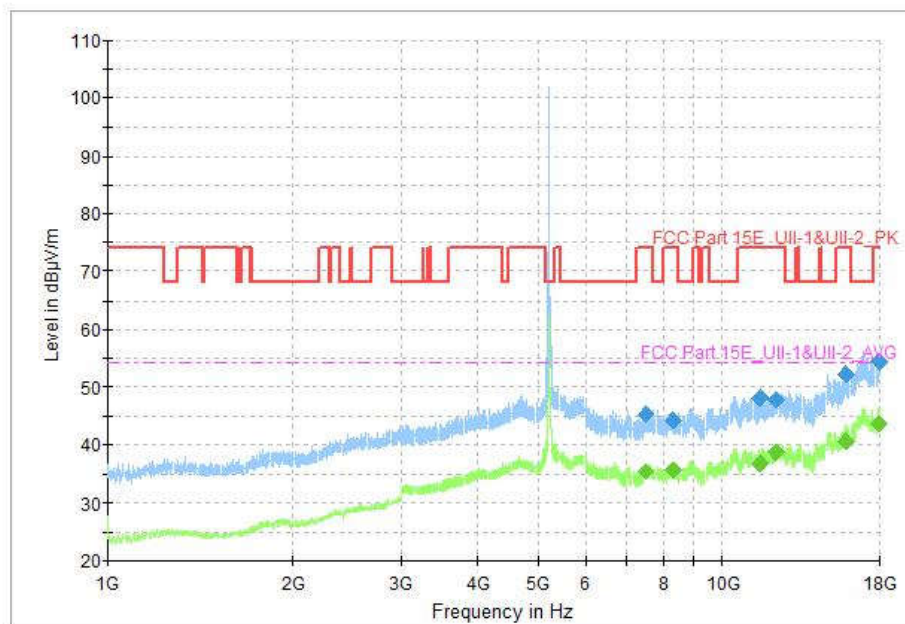


Fig. 93 Transmitter Spurious Emission (802.11n-HT40, CH46 5230MHz, 1GHz-18GHz)

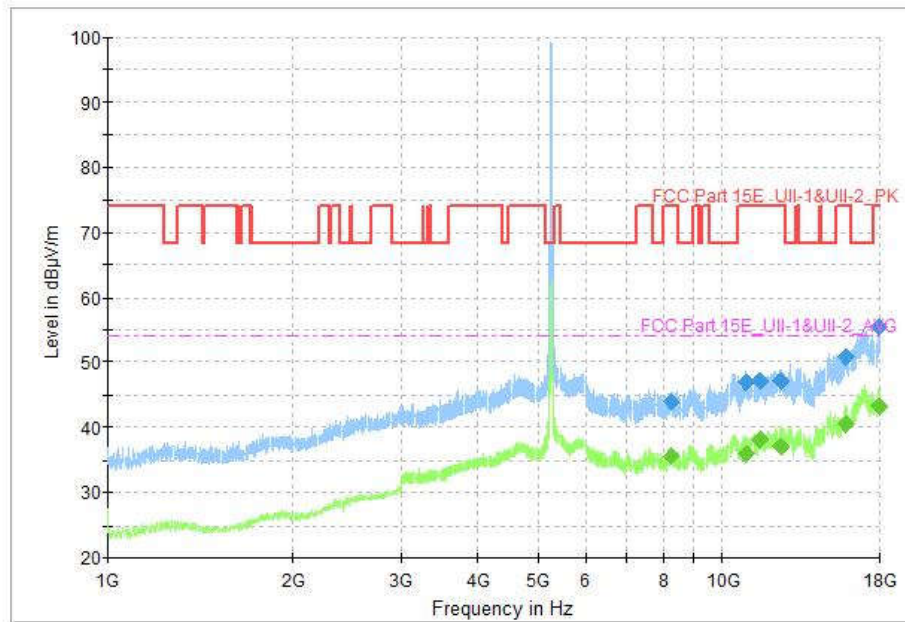


Fig. 94 Transmitter Spurious Emission (802.11n-HT40, CH54 5270MHz, 1GHz-18GHz)

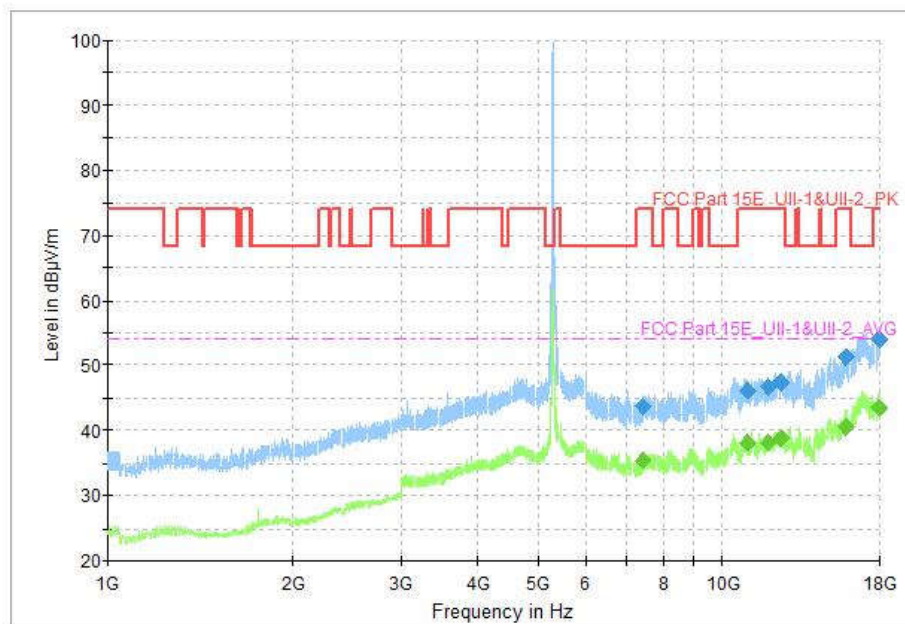


Fig. 95 Transmitter Spurious Emission (802.11n-HT40, CH62 5310MHz, 1GHz-18GHz)

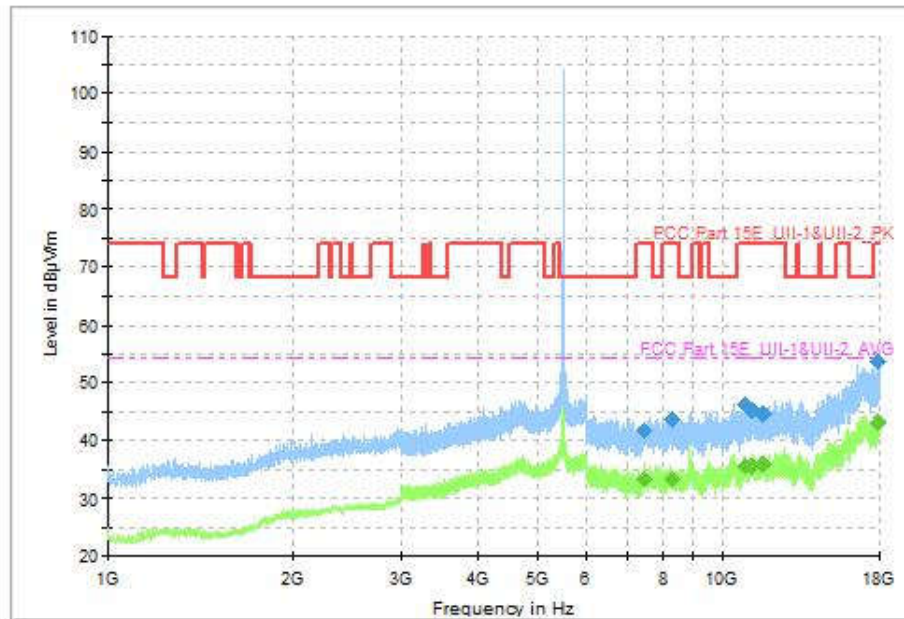


Fig. 96 Transmitter Spurious Emission (802.11n-HT40, CH102 5510MHz, 1GHz-18GHz)

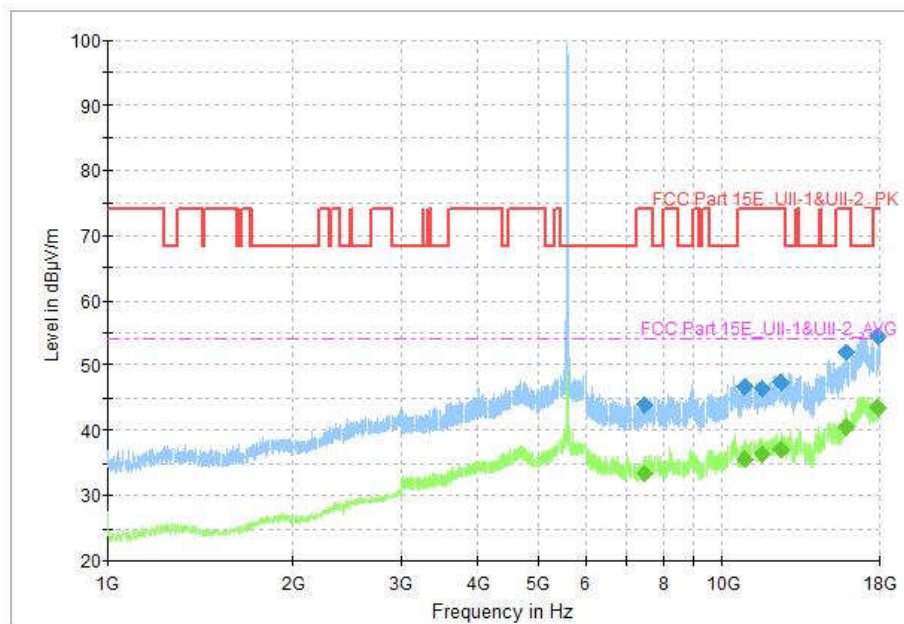


Fig. 97 Transmitter Spurious Emission (802.11n-HT40, CH118 5580MHz, 1GHz-18GHz)

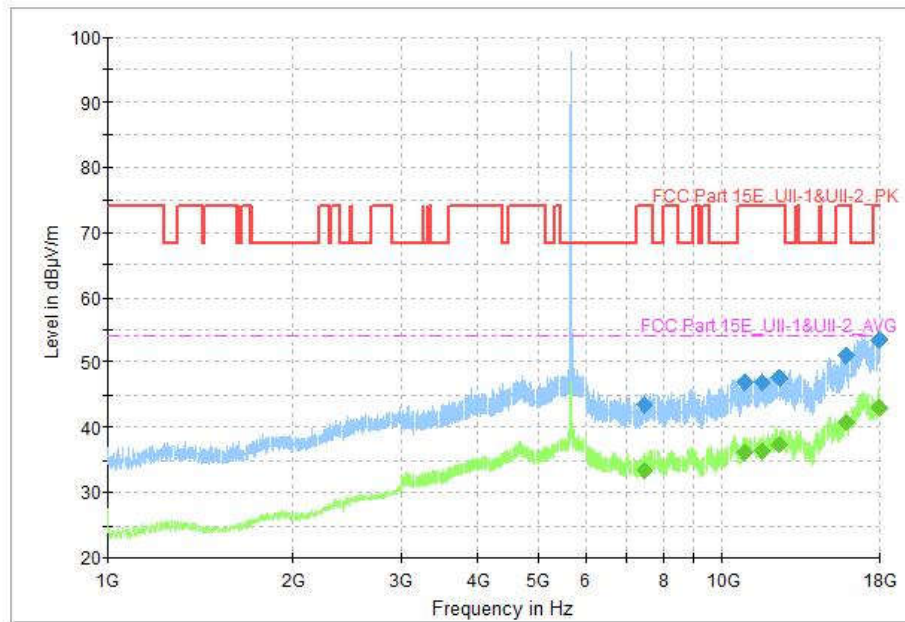


Fig. 98 Transmitter Spurious Emission (802.11n-HT40, CH134 5670MHz, 1GHz-18GHz)

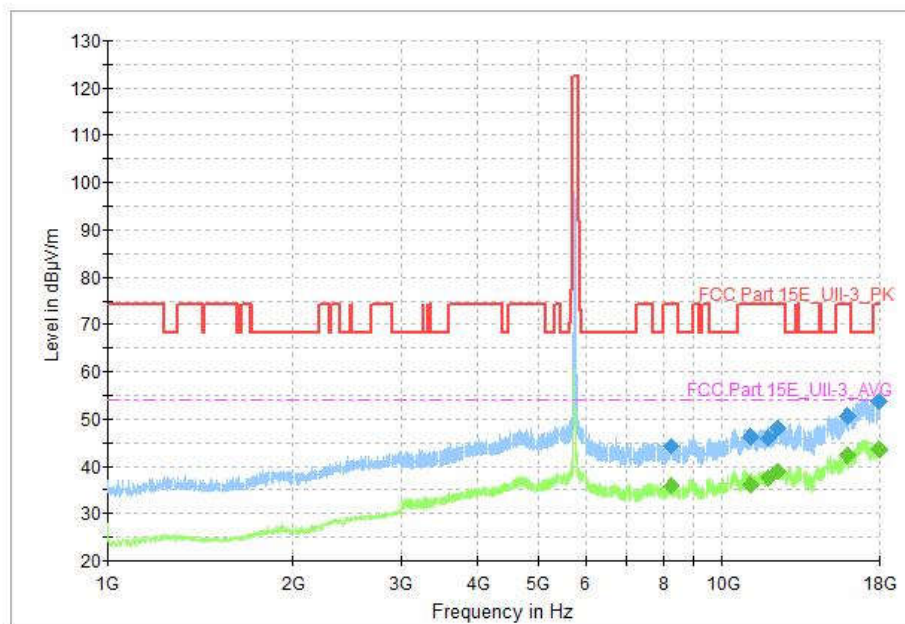


Fig. 99 Transmitter Spurious Emission (802.11n-HT40, CH151 5755MHz, 1GHz-18GHz)


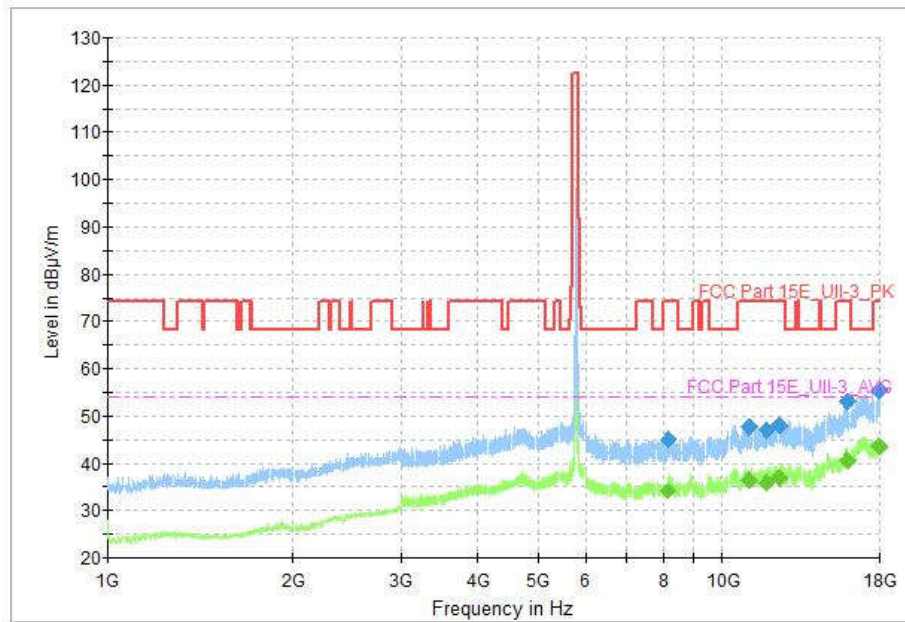


Fig. 100 Transmitter Spurious Emission (802.11n-HT40, CH159 5795MHz, 1GHz-18GHz)

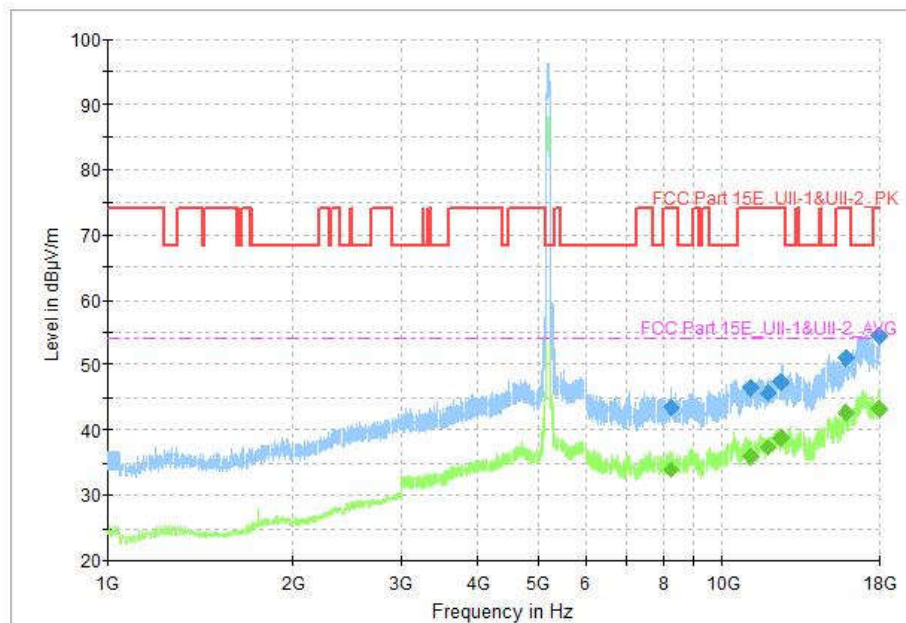

9

Fig. 101 Transmitter Spurious Emission (802.11ac-VHT80, CH42 5210MHz, 1GHz-18GHz)

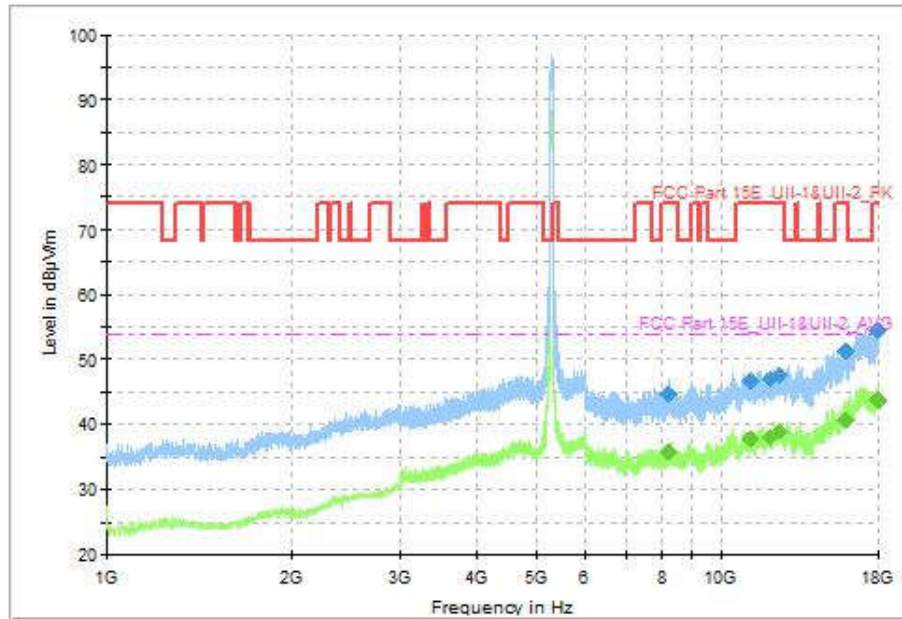


Fig. 102 Transmitter Spurious Emission (802.11ac-VHT80, CH58 5290MHz, 1GHz-18GHz)

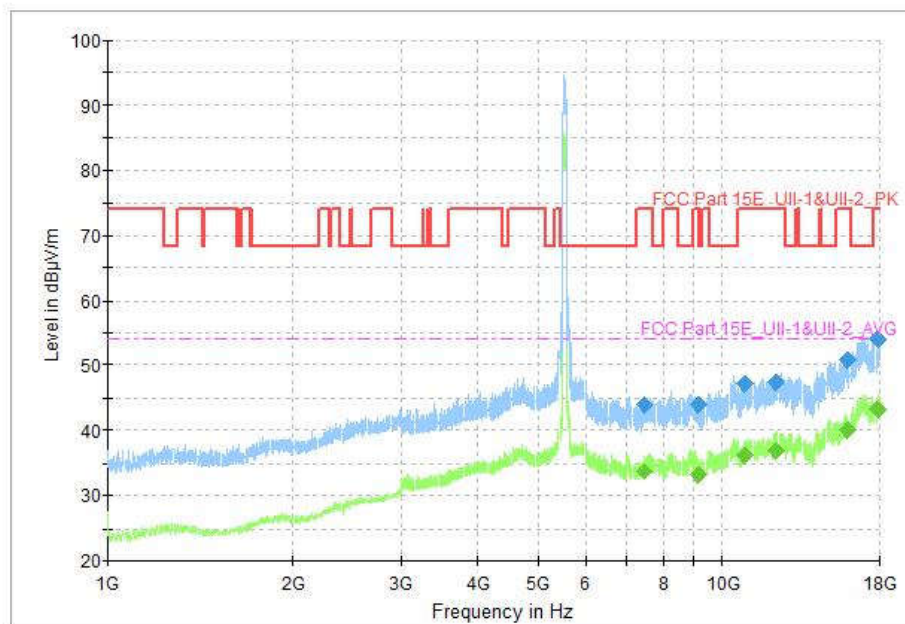


Fig. 103 Transmitter Spurious Emission (802.11ac-VHT80, CH106 5530MHz, 1GHz-18GHz)

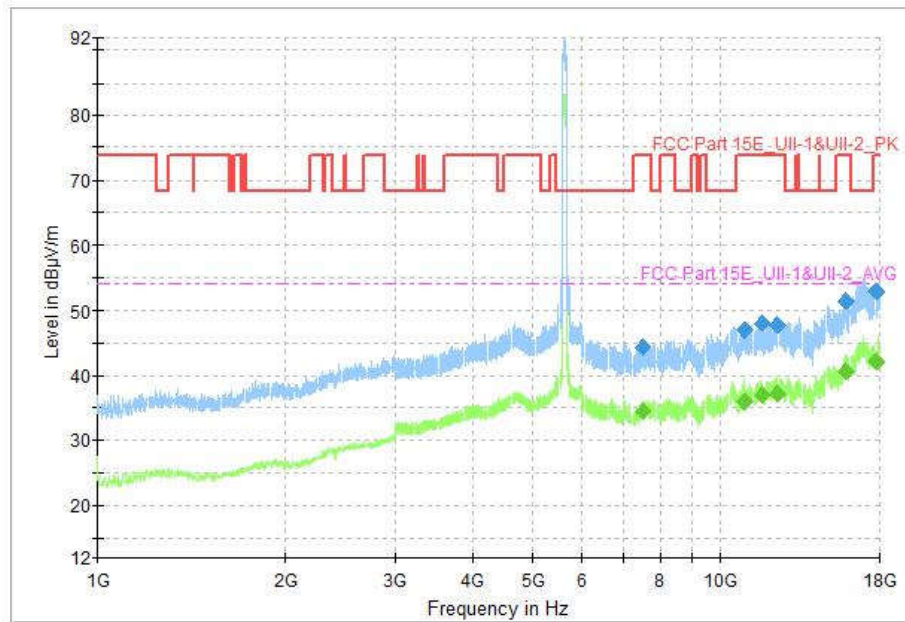


Fig. 104 Transmitter Spurious Emission (802.11ac-VHT80, CH122 5610MHz, 1GHz-18GHz)

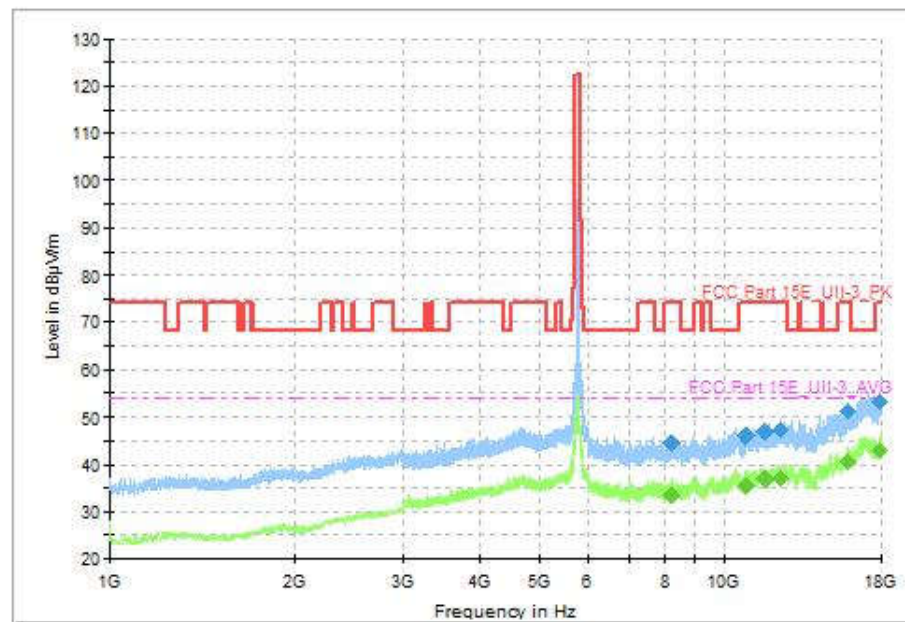


Fig. 105 Transmitter Spurious Emission (802.11ac-VHT80, CH155 5775MHz, 1GHz-18GHz)

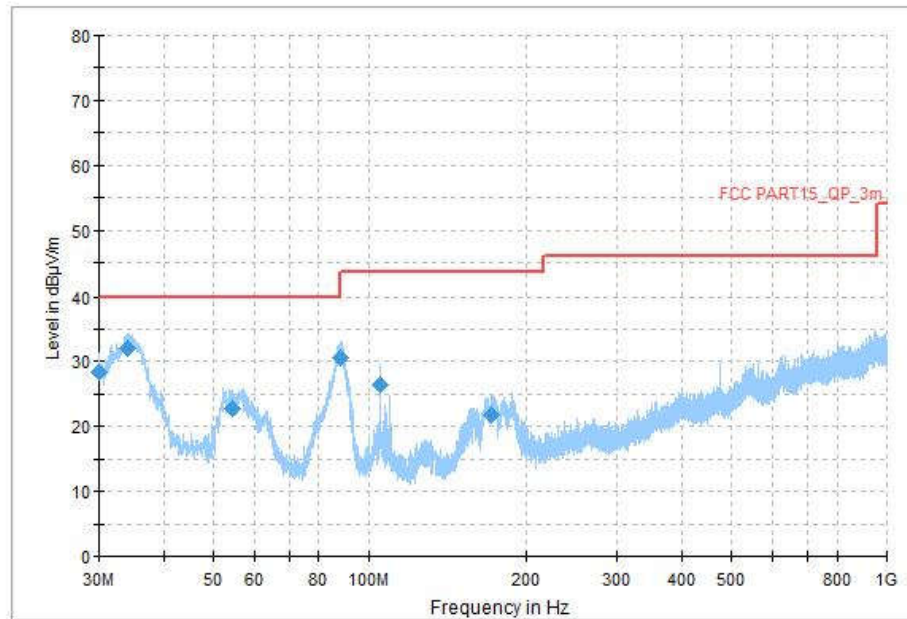


Fig. 106 Transmitter Spurious Emission (All channel, 30MHz~1GHz)

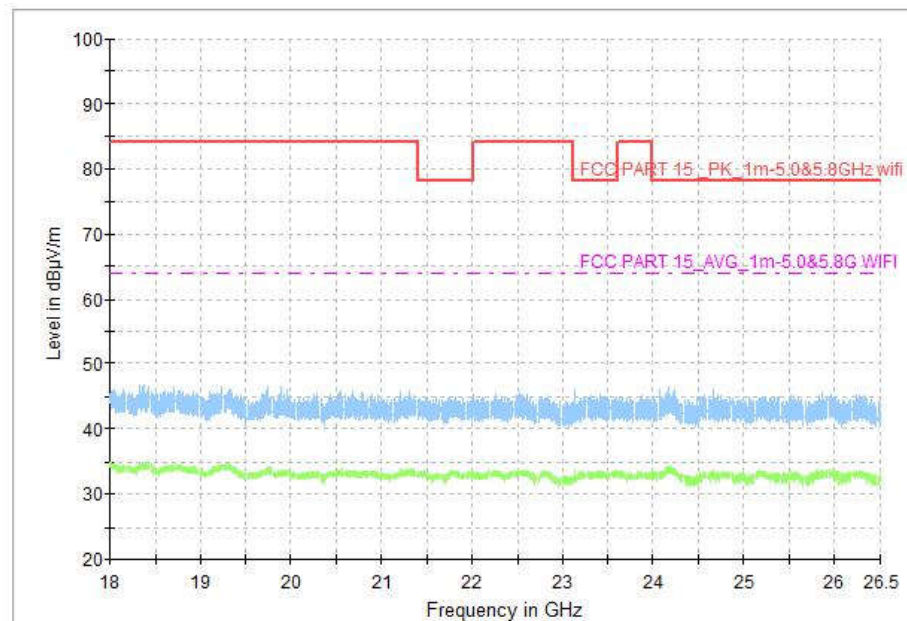


Fig. 107 Transmitter Spurious Emission (All channel, 18GHz~26.5GHz)

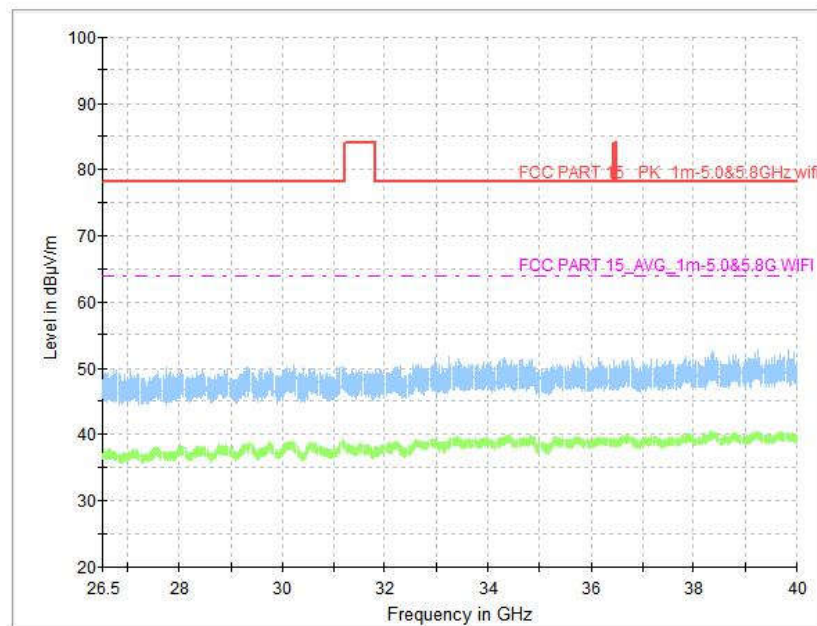


Fig. 108 Transmitter Spurious Emission (All channel, 26.5GHz~40GHz)

A.10. Radiated Spurious Emissions < 30MHz

Method of Measurement: See ANSI C63.10-clause 6.4.

Measurement Limit (15.209, 9kHz-30MHz):

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

The measurement is made according to KDB 789033.

Note: The measurement distance during the test is 3m. The limit used in plots recalculated based on the extrapolation factor of 40 dB/decade.

Measurement Result (Worst case):

Mode	Frequency Range	Test Results	Conclusion
All Channel	9 kHz ~30 MHz	Fig.109	P

See below for test graphs.

Conclusion: PASS

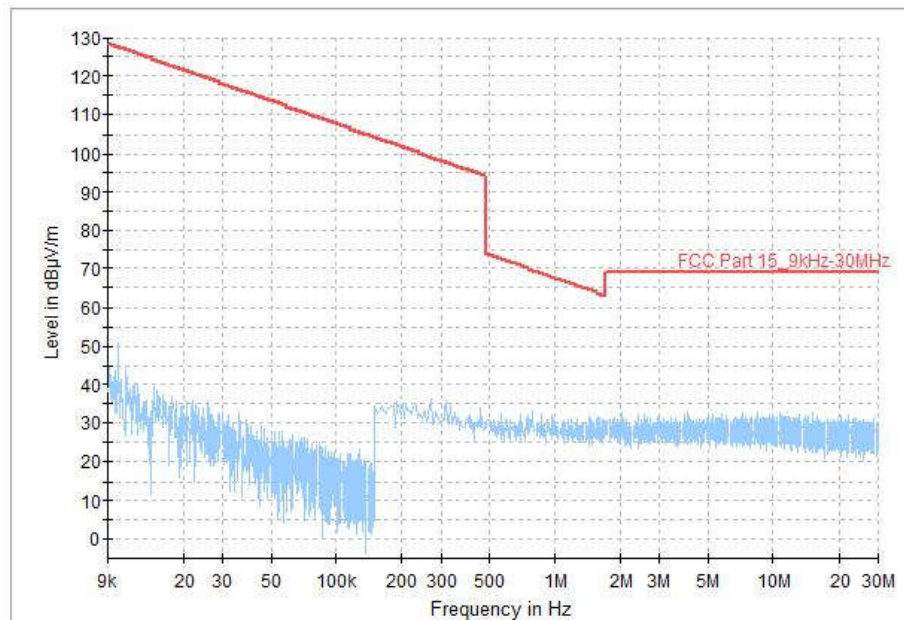


Fig. 109 Radiated Spurious Emission (All Channel, 9 kHz ~30 MHz)

**A.11. AC Power Line Conducted Emission****Method of Measurement:** See ANSI C63.10-clause 6.2.**Test Condition:**

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Average-peak Limit (dBμV)	Result (dBμV)		Conclusion
			Traffic	Idle	
0.15 to 0.5	66 to 56	56 to 46	Fig.110	Fig.111	P
0.5 to 5	56	46			
5 to 30	60	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Note: The measurement results include the L1 and N measurements.**See below for test graphs.****Conclusion: PASS**

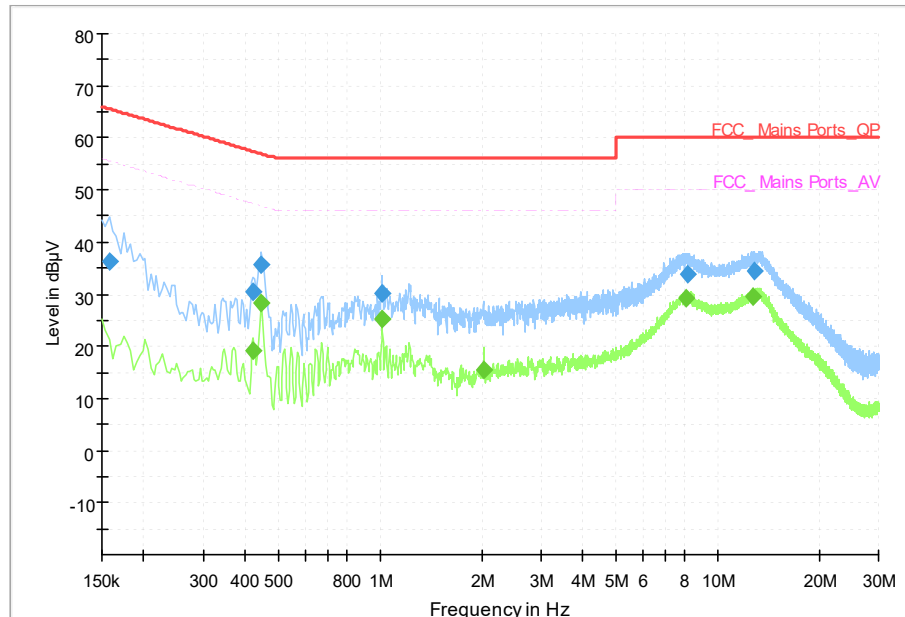


Fig. 110 AC Power line Conducted Emission (Traffic)

Measurement Result: Quasi Peak

Frequency (MHz)	Quasi Peak (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.158000	36.34	65.57	29.22	L1	ON	10
0.422000	30.54	57.41	26.87	N	ON	10
0.446000	35.65	56.95	21.30	N	ON	10
1.014000	30.10	56.00	25.90	L1	ON	10
8.158000	33.96	60.00	26.04	N	ON	10
12.870000	34.52	60.00	25.48	N	ON	10

Measurement Result: Average

Frequency (MHz)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.422000	19.26	47.41	28.15	N	ON	10
0.446000	28.34	46.95	18.61	N	ON	10
1.014000	25.13	46.00	20.87	L1	ON	10
2.030000	15.61	46.00	30.39	L1	ON	10
8.026000	29.13	50.00	20.87	L1	ON	10
12.726000	29.64	50.00	20.36	L1	ON	10

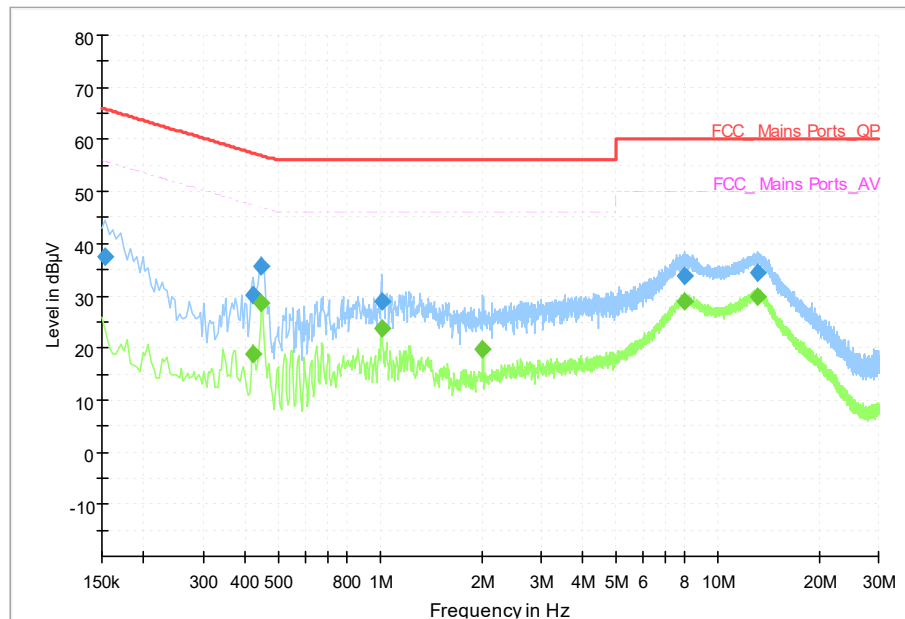


Fig. 111 AC Power line Conducted Emission (Idle)

Measurement Result: Quasi Peak

Frequency (MHz)	Quasi Peak (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.154000	37.58	65.78	28.20	L1	ON	10
0.422000	30.25	57.41	27.15	L1	ON	10
0.446000	35.51	56.95	21.44	L1	ON	10
1.010000	28.99	56.00	27.01	N	ON	10
7.990000	33.80	60.00	26.20	L1	ON	10
13.110000	34.44	60.00	25.56	N	ON	10

Measurement Result: Average

Frequency (MHz)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.422000	18.86	47.41	28.55	L1	ON	10
0.446000	28.51	46.95	18.44	N	ON	10
1.010000	23.73	46.00	22.27	N	ON	10
2.018000	19.70	46.00	26.30	L1	ON	10
8.018000	29.01	50.00	20.99	L1	ON	10
13.078000	29.91	50.00	20.09	L1	ON	10



A.12. Power control

A Transmission Power Control mechanism is not required for systems with an e.i.r.p. of less than 27dBm (500mW).

*****END OF REPORT*****