



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

MEILOON INDUSTRIAL CO., LTD.

DLP PROJECTOR

Model Number:

**DHT100: Meiloon (DHT100), Armio (DHT100),
Provox (DHT100) & PiXA (DHT-100)**

**DHT200: Meiloon (DHT200), Armio (DHT200),
Provox (DHT200), PiXA (DHT-200), EIKI (EIP-10V) &
KINDERMANN (KXD 1000)**

Trade Name: Meiloon, Arimo, Provox, PiXA, EIKI & KINDERMANN

Prepared for

**MEILOON INDUSTRIAL CO., LTD.
8F, No.20, Lane 478, Rueiguang Rd.,
Neihu Chiu, Taipei,
Taiwan, 114, R.O.C.**

Prepared by

**Compliance Certification Services Inc.
No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang,
Taoyuan Hsien, (338) Taiwan, R.O.C.
TEL: 886-3-324-0332
FAX: 886-3-324-5235**



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	3
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE.....	5
3.3 GENERAL TEST PROCEDURES.....	5
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	6
3.5 DESCRIPTION OF TEST MODES	6
4. INSTRUMENT CALIBRATION.....	7
5. FACILITIES AND ACCREDITATIONS	8
5.1 FACILITIES	8
5.2 EQUIPMENT.....	8
5.3 LABORATORY ACCREDITATIONS AND LISTING.....	8
5.4 TABLE OF ACCREDITATIONS AND LISTINGS.....	9
6. SETUP OF EQUIPMENT UNDER TEST	10
6.1 SETUP CONFIGURATION OF EUT.....	10
6.2 SUPPORT EQUIPMENT	10
7. FCC PART 15.249 REQUIREMENTS.....	11
7.1 BAND EDGES MEASUREMENT	11
7.2 SPURIOUS EMISSION	21
7.3 POWERLINE CONDUCTED EMISSIONS.....	36



1. TEST RESULT CERTIFICATION

Applicant: MEILOON INDUSTRIAL CO., LTD.
8F, No.20, Lane 478, Rugiguang Rd., Neihu Chiu, Taipei,
Taiwan, 114, R.O.C.

Equipment Under Test: DLP PROJECTOR

Trade Name: Meiloon, Armio, Provox, PiXA, EIKI & KINDERMANN

Model Number: DHT100: Meiloon (DHT100), Armio (DHT100),
Provox (DHT100) & PiXA (DHT-100)
DHT200: Meiloon (DHT200), Armio (DHT200),
Provox (DHT200), PiXA (DHT-200), EIKI (EIP-10V) &
KINDERMANN (KXD 1000)

Date of Test: October 30, 2003 ~ March 29, 2004

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209 and 15.249.

The test results of this report relate only to the tested sample identified in this report.

Approved by:

Reviewed by:

Harris W.Lai
Executive Vice President
Compliance Certification Services Inc.

Miro Chueh
Section Manager
Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	DLP PROJECTOR
Trade Name	Meiloon, Armio, Provox, PiXA, EIKI & KINDERMANN
Model Number	DHT100: Meiloon (DHT100), Armio (DHT100), Provax (DHT100) & PiXA (DHT-100) DHT200: Meiloon (DHT200), Armio (DHT200), Provax (DHT200), PiXA (DHT-200), EIKI (EIP-10V) & KINDERMANN (KXD 1000)
Module Trade Name	ELANsat Technologies Inc. (Model#: DIO-S001)
Model Discrepancy	DHT100: with an optional detachable DVD player. DHT200: built-in slot-in DVD player (non-detachable)
Power Supply	Powered by Switching Power Supply (Built-in) Model: Meiloon QP-6310 Rating: I/P: 100-240Vac; 6.0A; 50-60Hz
Frequency Range	2410, 2417 ~ 2459 MHz
Modulation Technique	FSK
Antenna Gain	1.68 dBi (Max)
Antenna Designation	2 Printed Inverted-F Antenna

Note: This submittal(s) (test report) is intended for FCC ID: RRT480200 filing to comply with Section 15.207, 15.209 and 15.249 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.249.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.249 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4.

3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel 1(2410MHz), Channel 4(2431MHz) and Channel 8(2459MHz) are chosen for the final testing. Each test are applied to both model (DHT100 & DHT200) and recorded in the testing report by the mean of the mode.

A 1k-tone audio signal is applied. And, the playback is continuous with files stored in the memory card with the built-in media player during the measurement.)



4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

☒ No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang, Taoyuan Hsien, Taiwan, R.O.C.

☐ No. 199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code: 200600-0 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government. In addition, the test facilities are listed with Federal Communications Commission (Registration no: 93105 and 90471).

5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	NVLAP*	EN 55011, EN 55014-1, AS/NZS 1044, CNS 13783-1, EN 55022, CNS 13438, EN 61000-3-2, EN 61000-3-3, ANSI C63.4, FCC OST/MP-5, AS/NZS CISPR 22, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11	 200600-0
USA	FCC	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	 93105, 90471
Japan	VCCI	4 3/10 meter Open Area Test Sites to perform conducted/radiated measurements	 R-393/1066/725/879 C-402/747/912
Norway	NEMKO	EN 50081-1/2, EN 50082-1/2, IEC 61000-6-1/2, EN 50091-2, EN 50130-4, EN 55011, EN 55013, EN 55014-1/2, EN 55015, EN 55022, EN 55024, EN 61000-3-2/3, EN 61326-1, IEC 61000-4-2/3/4/5/6/8/11, EN 60601-1-2, EN 300 328-2, EN 300 422-2, EN 301 419-1, EN 301 489-01/03/07/08/09/17, EN 301 419-2/3, EN 300 454-2, EN 301 357-2	 ELA 124a ELA 124b ELA 124c
Taiwan	CNLA	EN 300 328-1/2, EN 300 220-1/2/3, EN 300 440-1/2, EN 61000-3-2, EN 61000-3-3, 47 CFR FCC Part 15 Subpart C/D/E, EN 55013, CNS 13439, EN 55014-1, CNS 13783-1, EN 55022, CNS 13438, CISPR 22, AS/NZS 3548, EN 61000-4-2/3/4/5/6/8/11, ENV 50204, IEEE Std 1528, FCC OET Bulletin, 65+Supplement C, EN50360, EN50361, EN50371, RSS102	 0363 ILAC MRA
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	 SL2-IS-E-0014 SL2-IN-E-0014 SL2-A1-E-0014 SL2-R1-E-0014 SL2-R2-E-0014 SL2-L1-E-0014
Canada	Industry Canada	RSS212, Issue 1	 IC 3991-3 IC 3991-4

* No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

Device Type	Brand	Model	FCC ID	Series No.	Data Cable	Power Cord
TV	PROTON	FT-21S	N/A	FT-21S00002CA00112	N/A	Unshielded, 1.8m
Monitor (For DHT200 Test Only)	SAMSUNG	959NF	FCC DoC	AQ19H2RT706137Y	Shielded, 1.8m with two cores	Unshielded, 1.8m

Notes:

- All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*

7. FCC PART 15.249 REQUIREMENTS

7.1 BAND EDGES MEASUREMENT

LIMIT

1. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength ($\mu\text{V}/\text{m}$ at 3-meter)	Field Strength ($\text{dB}\mu\text{V}/\text{m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54


2. As shown in Section 15.35(b), for frequencies above 1000 MHz, the above field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	04/28/2004
Spectrum Analyzer	R&S	FSP30	1093.4495.30	07/22/2004

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

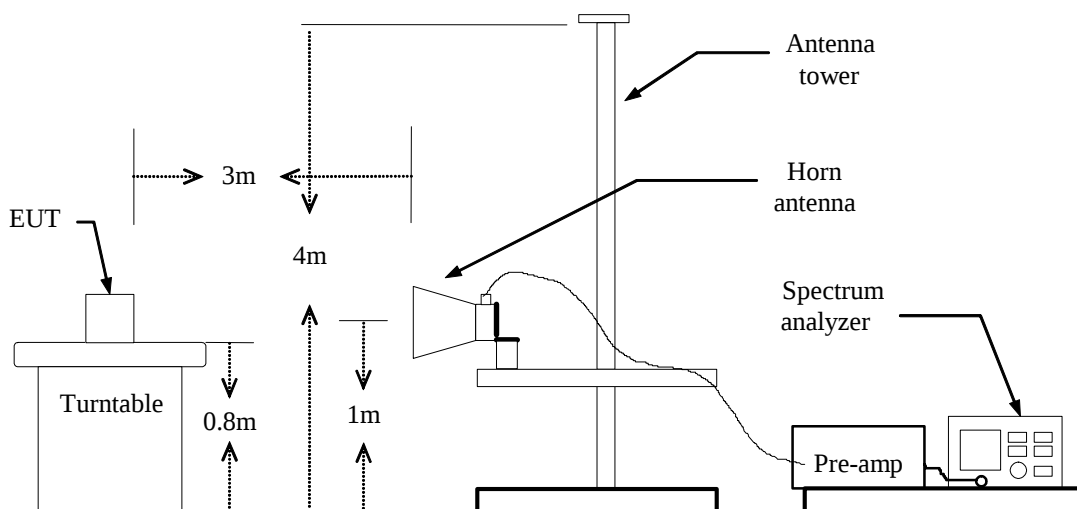

TEST PROCEDURE


1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS


Refer to attach spectrum analyzer data chart.

Band Edges (DHT100 / CH Low)


Peak measurement-Vertical

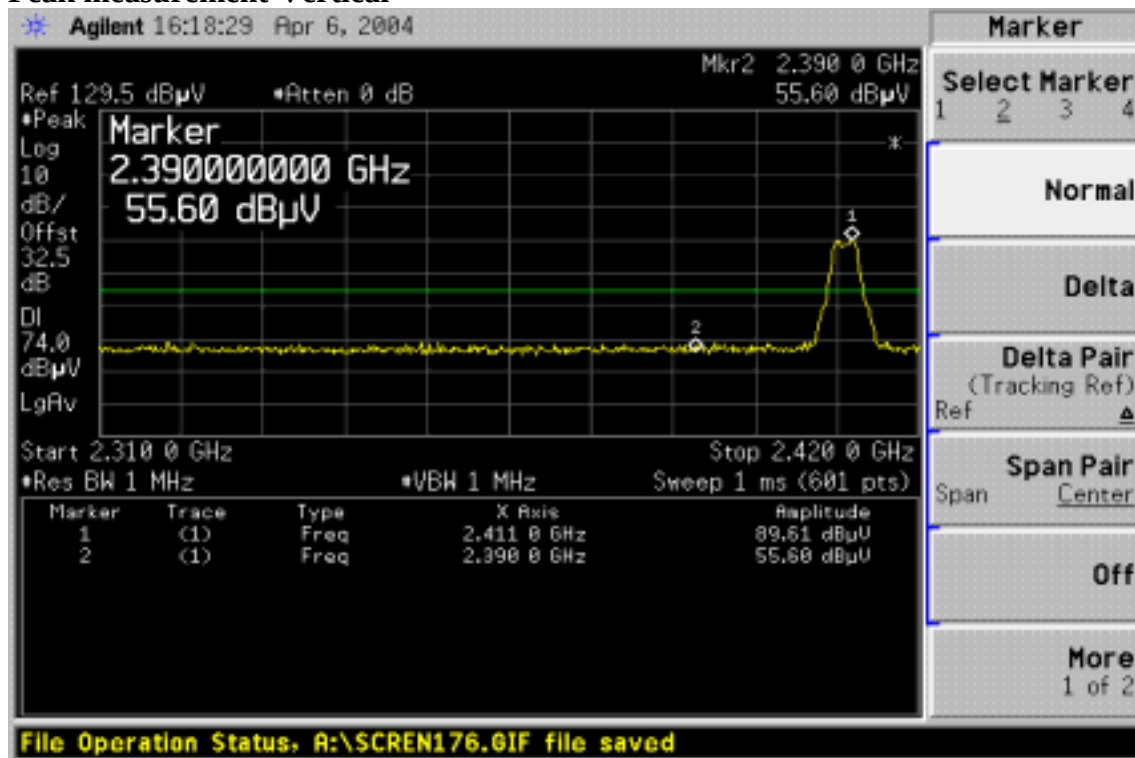

Peak measurement-Horizontal

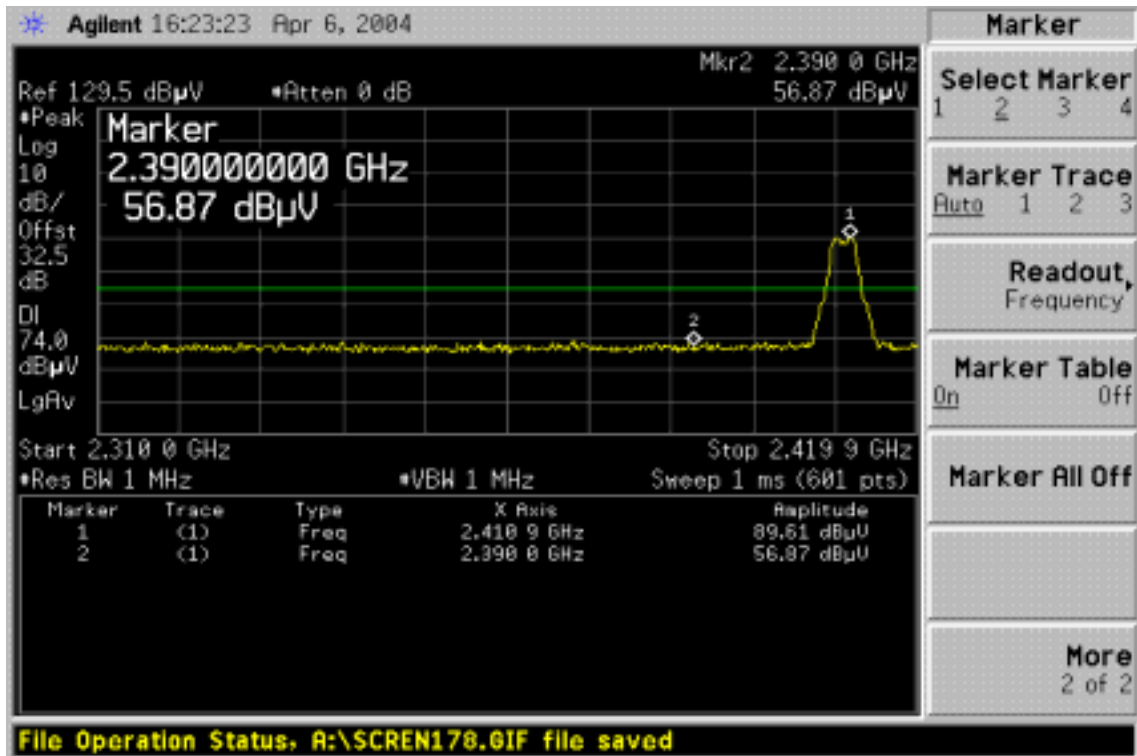


Average measurement-Vertical

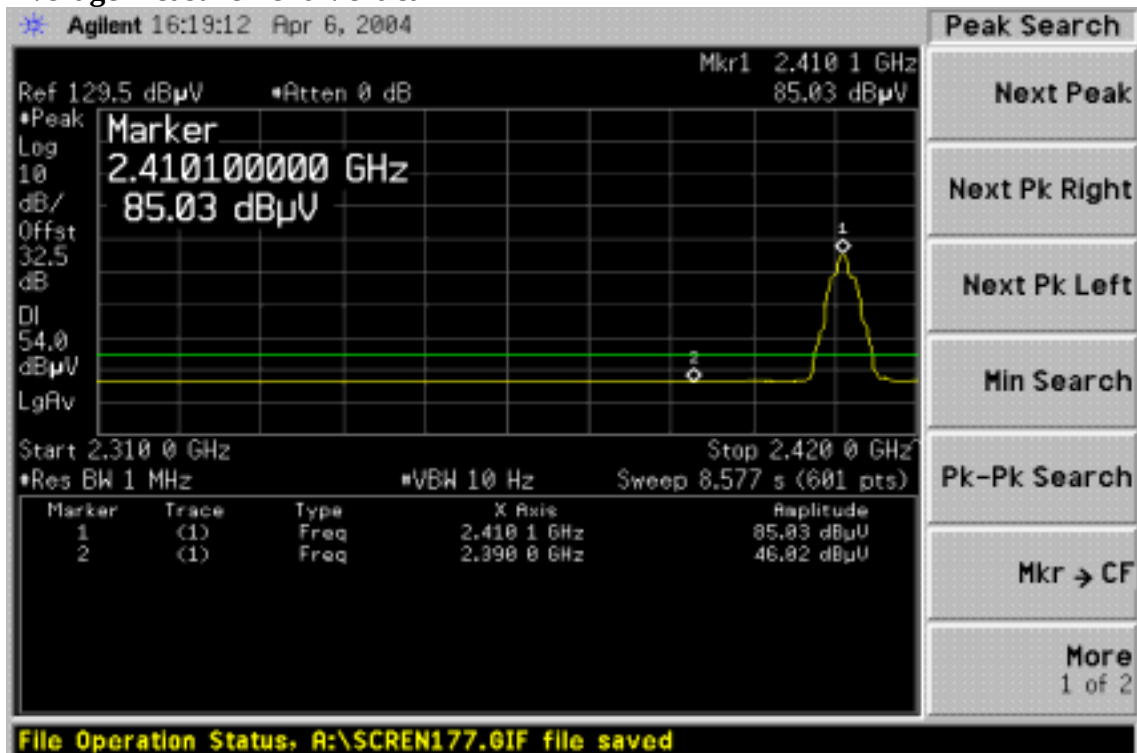




Average measurement- Horizontal

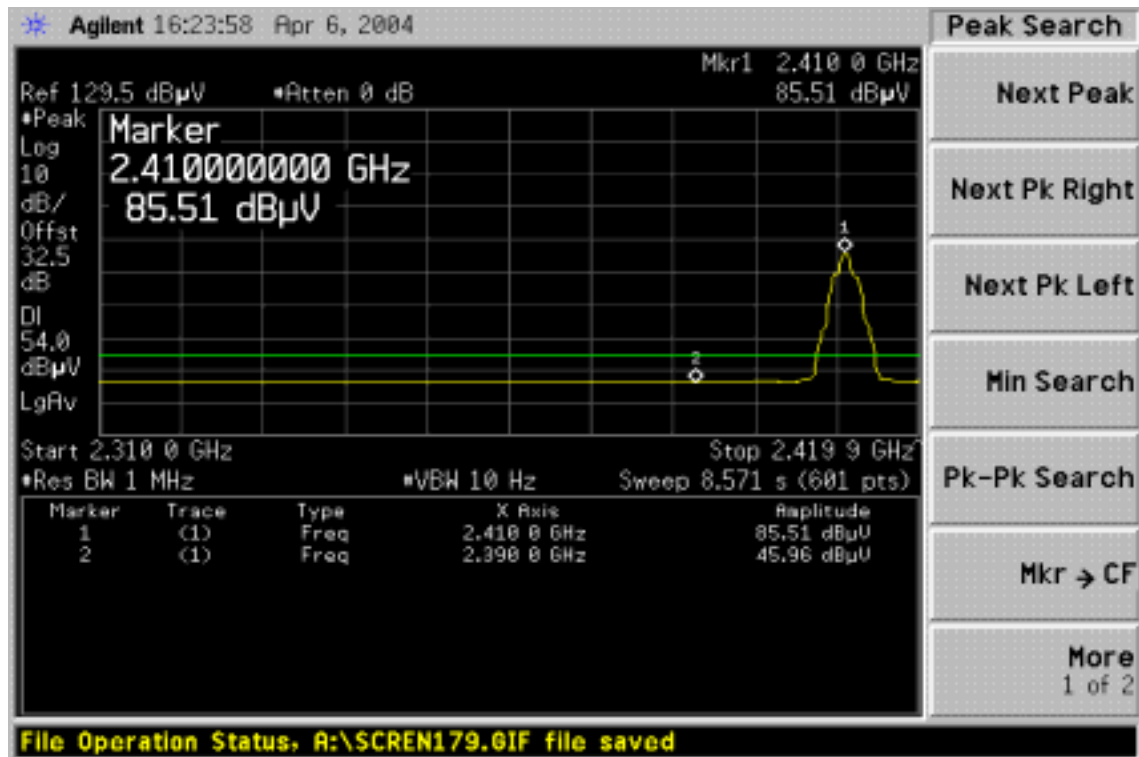


Band Edges (DHT100 / CH High)


Peak measurement-Vertical

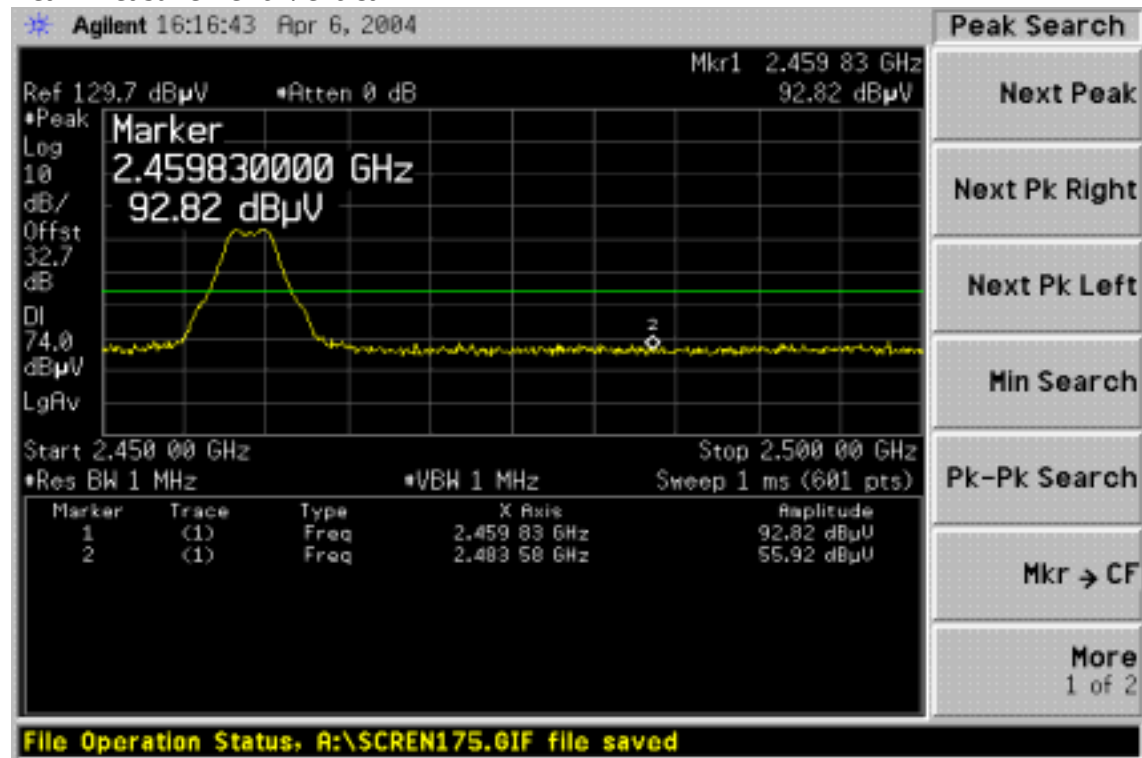


Peak measurement-Horizontal

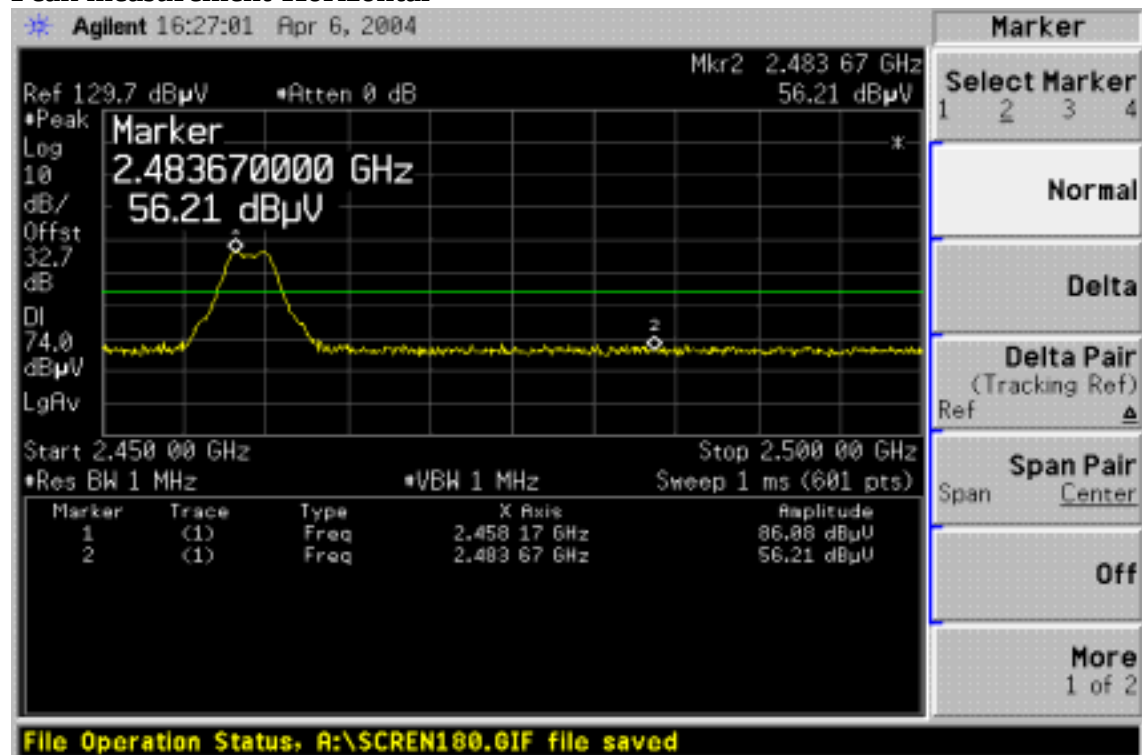

Average measurement-Vertical

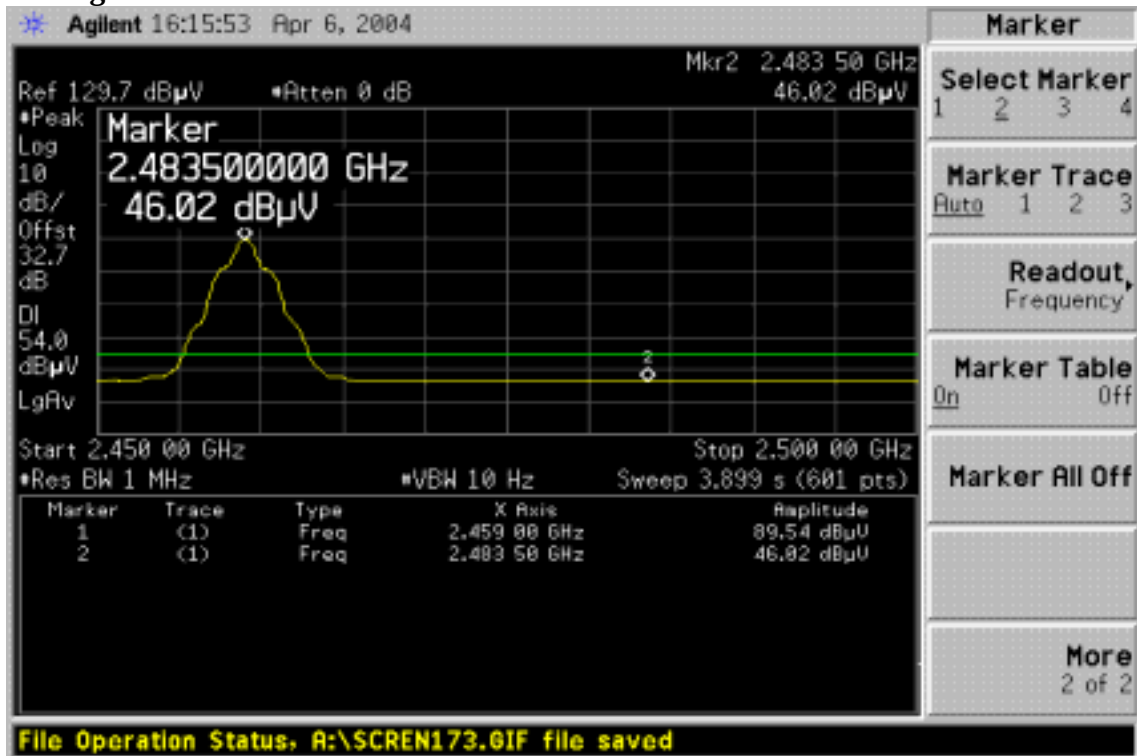


Average measurement- Horizontal

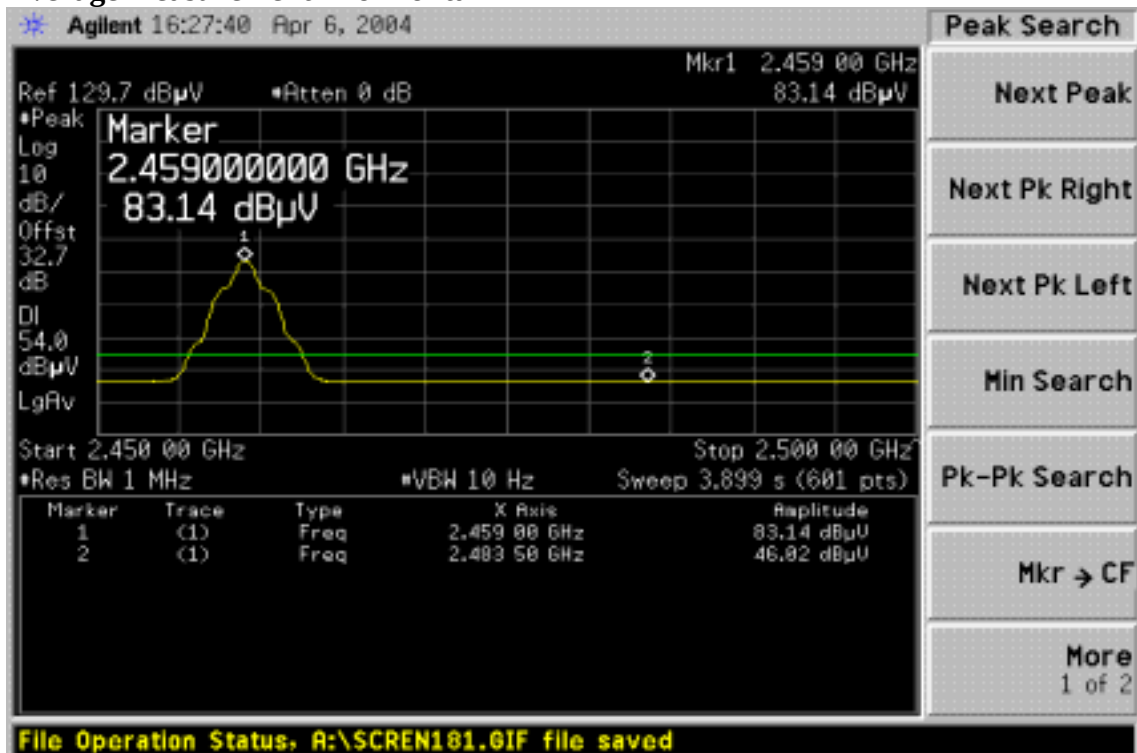


Band Edges (DHT200 / CH Low)


Peak measurement-Vertical

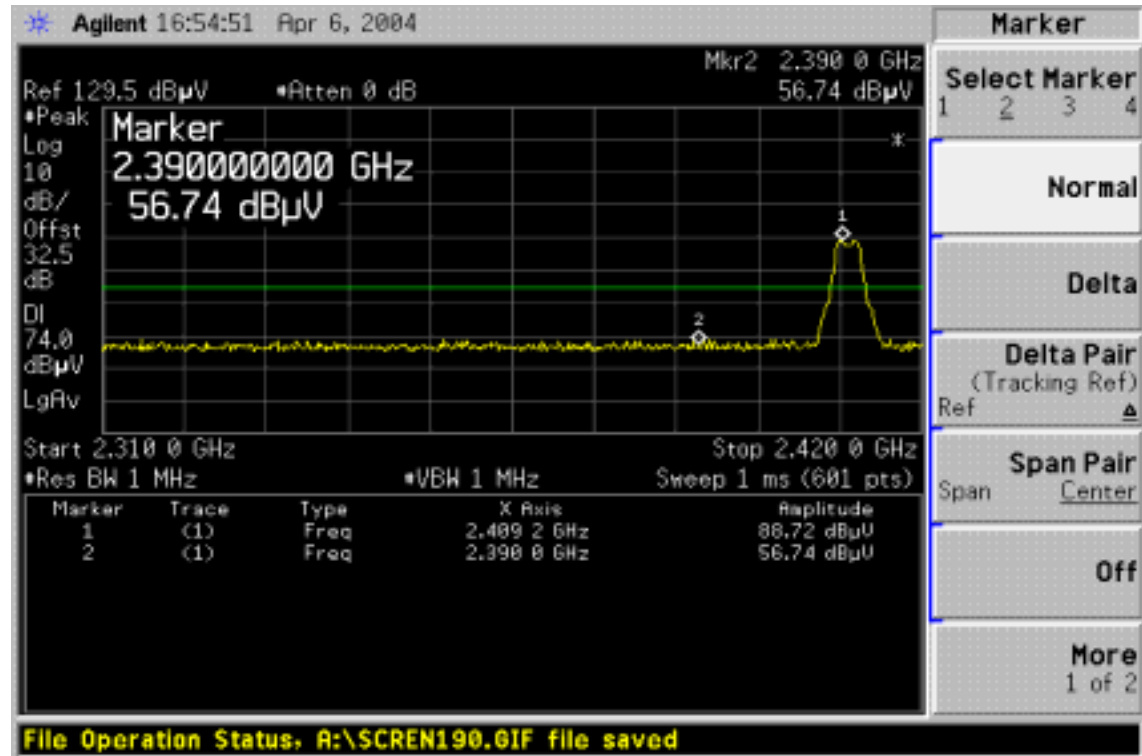


Peak measurement-Horizontal

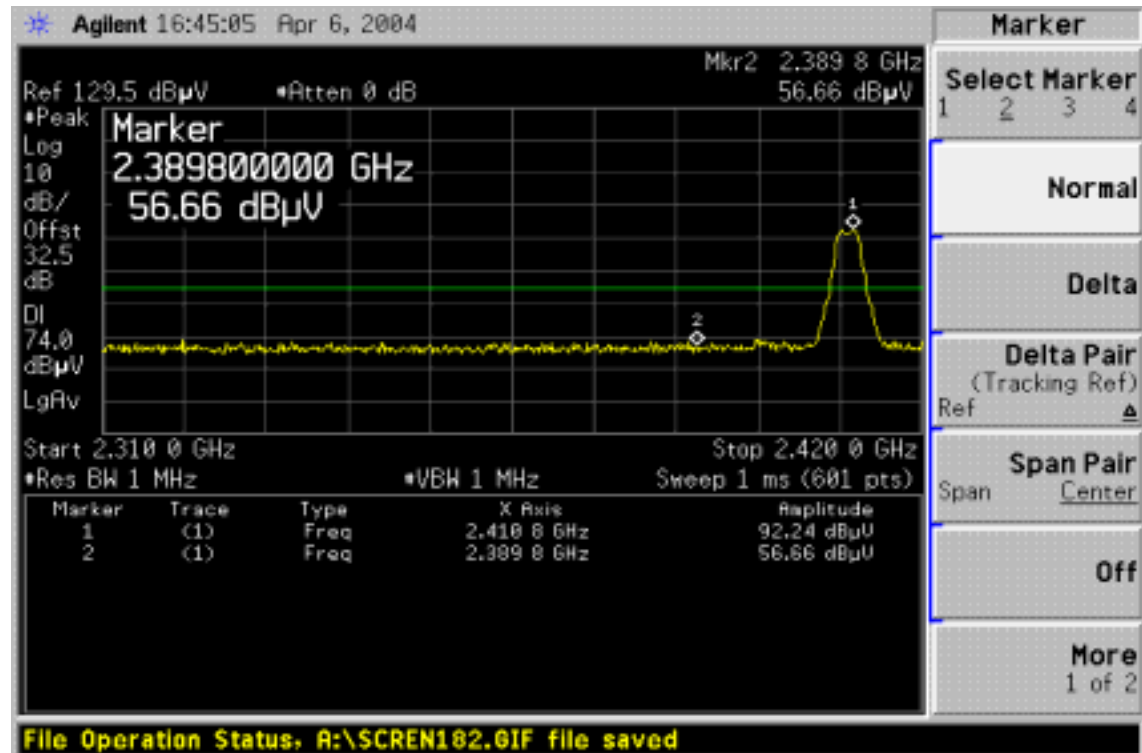

Average measurement-Vertical

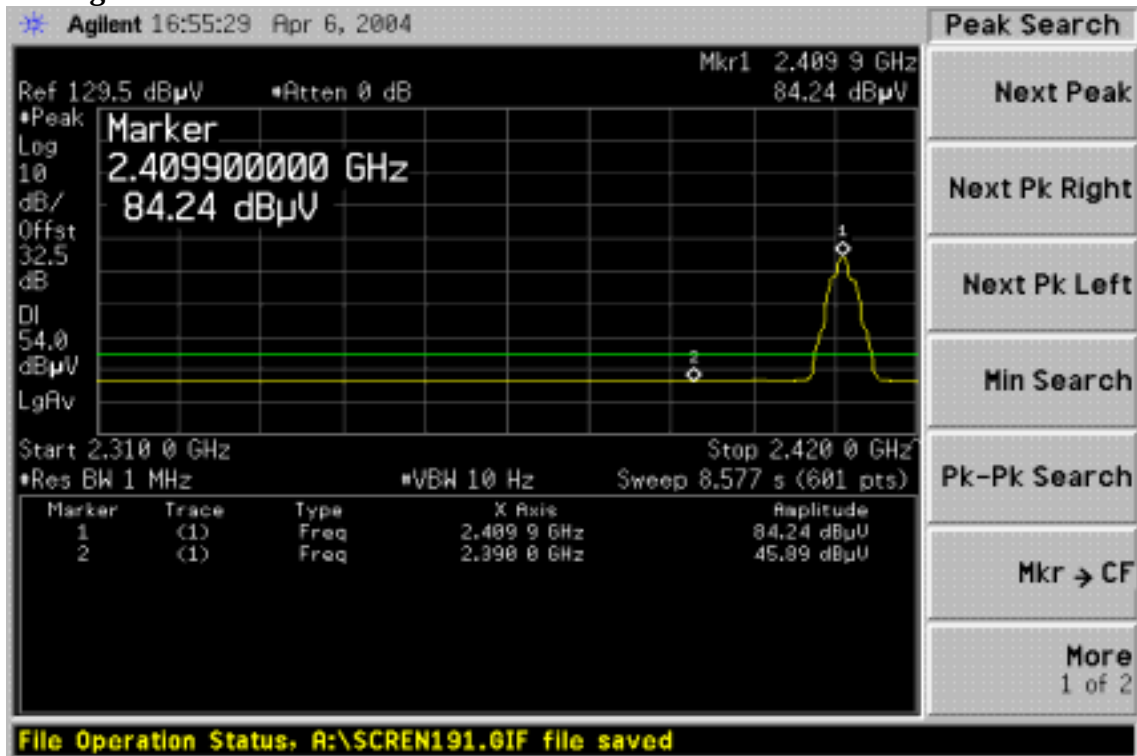


Average measurement- Horizontal

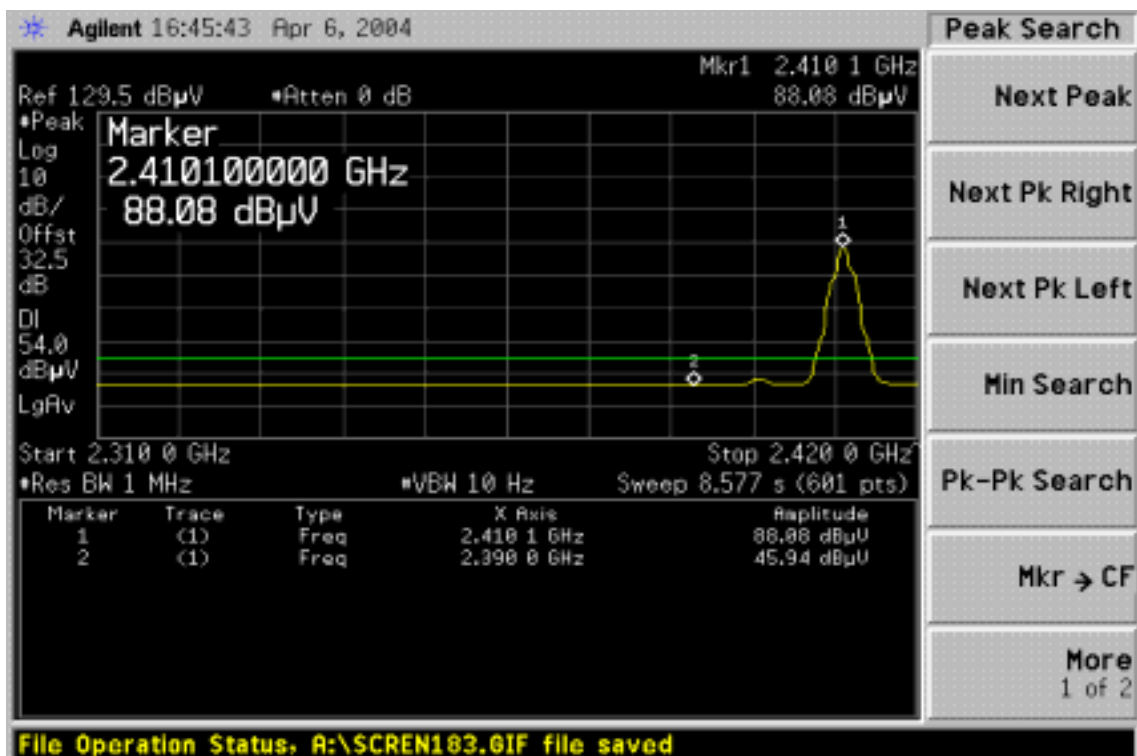


Band Edges (DHT200 / CH High)


Peak measurement-Vertical

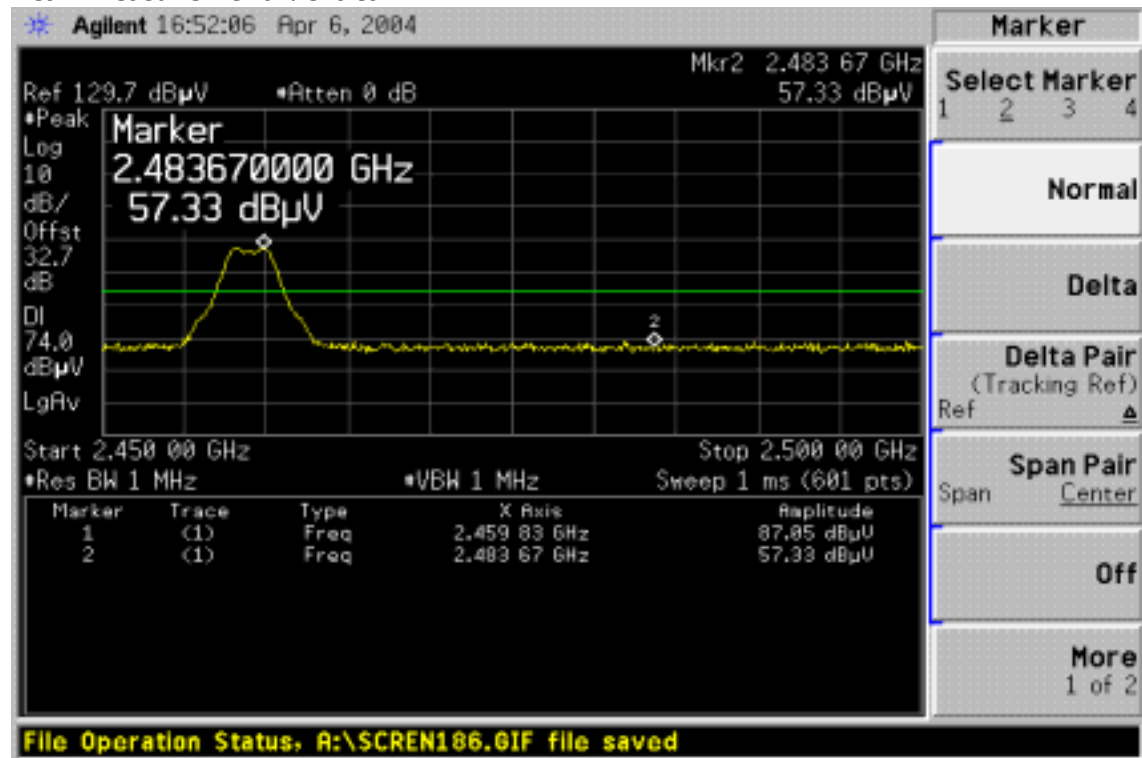


Peak measurement-Horizontal

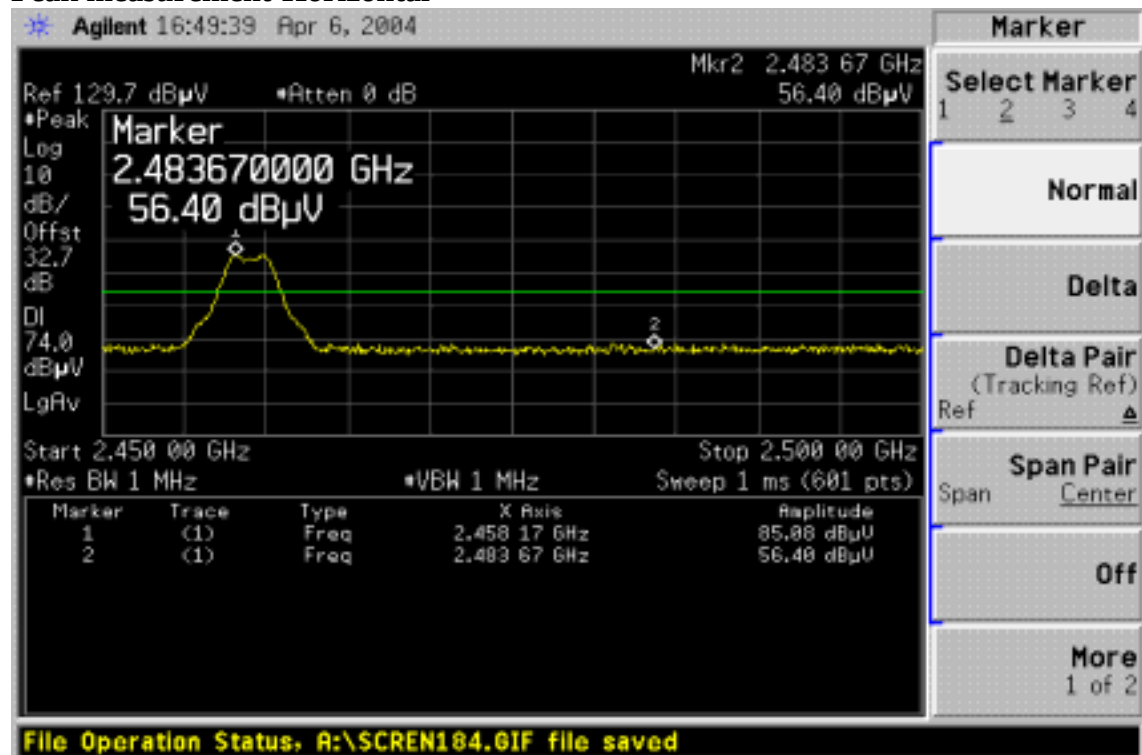

Average measurement-Vertical

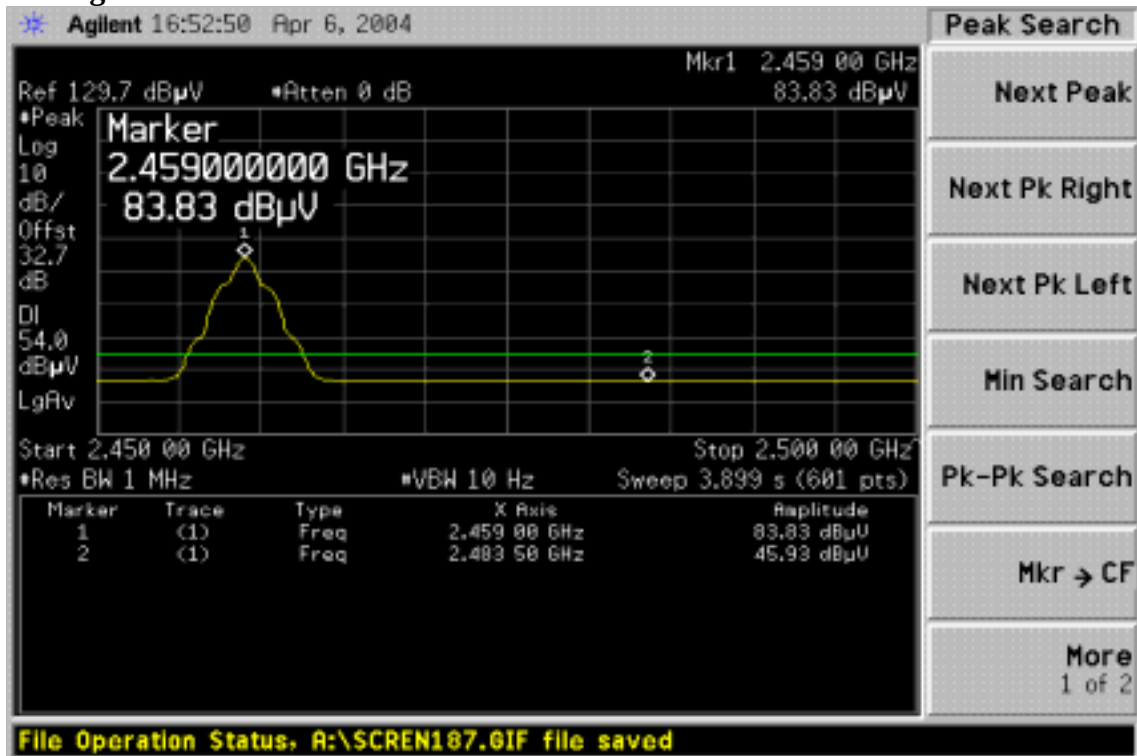

Average measurement- Horizontal

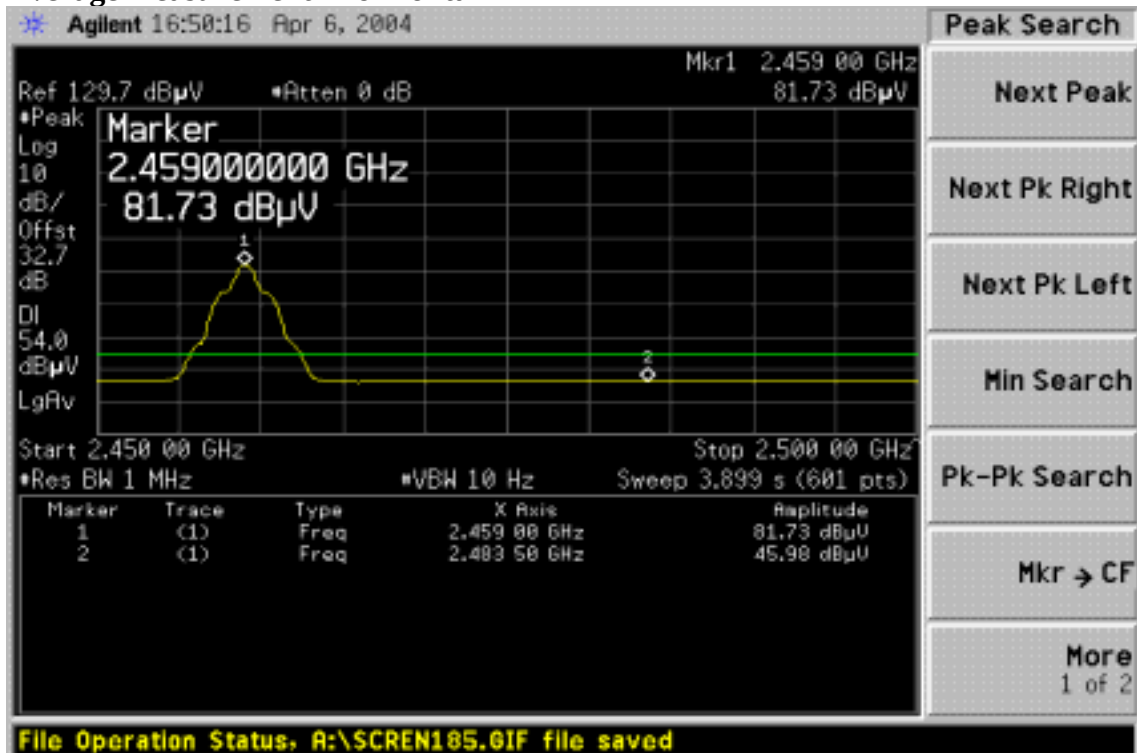

7.2 SPURIOUS EMISSION

7.2.1 Radiated Emissions

LIMIT

1. In the section 15.249(a):

Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field Strength of Fundamental Field Strength (mV/m)	Field Strength of Harmonics (µV/m)
902-928 MHz	50	500
2400 - 2483.5 MHz	50	500
5725 - 5875 MHz	50	500
24.0 - 24.25 GHz	250	2500

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Note: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength (µV/m at 3-meter)	Field Strength (dBµV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54


MEASUREMENT EQUIPMENT USED


Open Area Test Site # 3				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	ADVANTEST	R3261A	N/A	N.C.R
EMI Test Receiver	R&S	ESVS20	838804/004	01/08/2005
Pre-Amplifier	HP	8447D	2944A09173	03/02/2005
Bi-log Antenna	SCHWAZBECK	VULB9163	145	12/26/2004
Turn Table	EMCO	2081-1.21	9709-1885	N.C.R
Antenna Tower	EMCO	2075-2	9707-2060	N.C.R
Controller	EMCO	2090	9709-1256	N.C.R
RF Switch	ANRITSU	MP59B	M53867	N.C.R
Site NSA	C&C	N/A	N/A	09/05/2004
Horn antenna	Schwarzbeck	BBHA 9120	D210	02/23/2005
Loop Antenna	EMCO	6502	2356	07/10/2004
Pre-Amplifier	HP	8449B	3008B00965	10/02/2004

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

Below 1 GHz

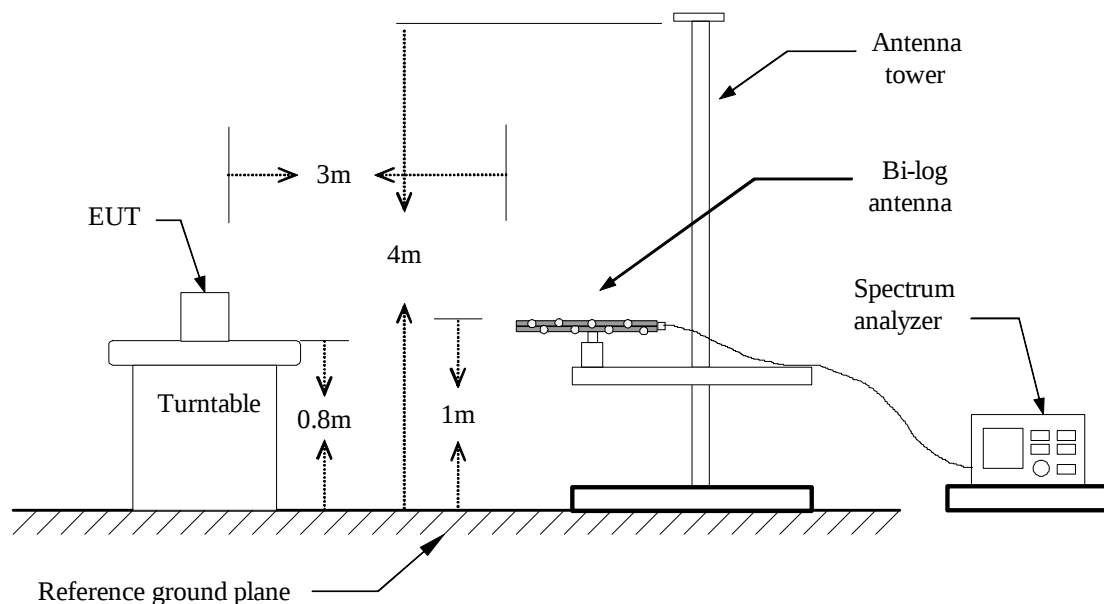

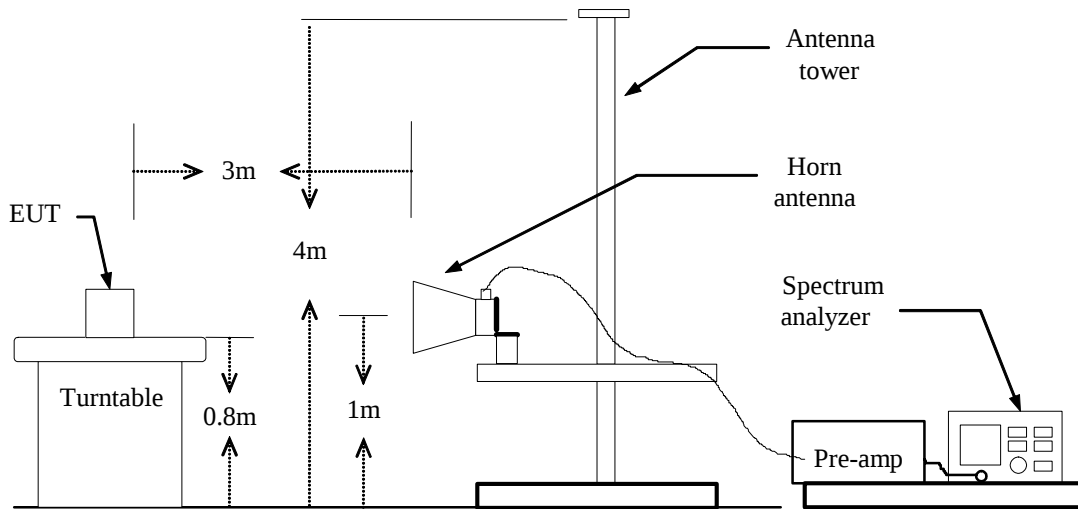Above 1 GHz**TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.



TEST RESULTS

Below 1 GHz

Operation Mode: TX / DHT100 / CH Low**Test Date:** March 16, 2004**Temperature:** 21°C**Tested by:** Jacky**Humidity:** 76 % RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
175.80	V	Peak	58.17	-17.36	40.81	43.50	-2.69
296.40	V	Peak	55.50	-12.60	42.90	46.00	-3.10
303.50	V	Peak	51.34	-12.40	38.94	46.00	-7.06
436.50	V	Peak	50.67	-9.87	40.80	46.00	-5.20
520.50	V	Peak	47.67	-8.06	39.61	46.00	-6.39
624.33	V	Peak	42.84	-6.85	35.99	46.00	-10.01
177.15	H	Peak	50.50	-17.30	33.20	43.50	-10.30
183.90	H	Peak	49.67	-16.66	33.01	43.50	-10.49
296.40	H	Peak	53.17	-12.60	40.57	46.00	-5.43
303.50	H	Peak	46.34	-12.40	33.94	46.00	-12.06
360.67	H	Peak	41.00	-10.92	30.08	46.00	-15.92
479.67	H	Peak	38.17	-8.49	29.68	46.00	-16.32

Notes:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

**Operation Mode:** TX / DHT100 / CH Mid**Test Date:** March 16, 2004**Temperature:** 21°C**Tested by:** Jacky**Humidity:** 76 % RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
184.35	V	Peak	58.67	-16.61	42.06	43.50	-1.44
296.40	V	Peak	53.17	-12.60	40.57	46.00	-5.43
303.50	V	Peak	52.50	-12.40	40.10	46.00	-5.90
435.33	V	Peak	50.84	-9.92	40.92	46.00	-5.08
520.50	V	Peak	45.84	-8.06	37.78	46.00	-8.22
624.33	V	Peak	43.50	-6.85	36.65	46.00	-9.35
176.25	H	Peak	56.34	-17.34	39.00	43.50	-4.50
296.40	H	Peak	49.50	-12.60	36.90	46.00	-9.10
303.50	H	Peak	48.84	-12.40	36.44	46.00	-9.56
436.50	H	Peak	40.17	-9.87	30.30	46.00	-15.70
480.83	H	Peak	38.34	-8.47	29.87	46.00	-16.13
840.17	H	Peak	34.17	-4.33	29.84	46.00	-16.16

Notes:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

**Operation Mode:** TX / DHT100 / CH High**Test Date:** March 16, 2004**Temperature:** 21°C**Tested by:** Jacky**Humidity:** 76 % RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
169.05	V	Peak	57.00	-17.66	39.34	43.50	-4.16
176.25	V	Peak	57.67	-17.34	40.33	43.50	-3.17
296.40	V	Peak	56.17	-12.60	43.57	46.00	-2.43
303.50	V	Peak	51.50	-12.40	39.10	46.00	-6.90
436.50	V	Peak	50.17	-9.87	40.30	46.00	-5.70
624.33	V	Peak	43.84	-6.85	36.99	46.00	-9.01
183.90	H	Peak	55.34	-16.66	38.68	43.50	-4.82
296.40	H	Peak	48.17	-12.60	35.57	46.00	-10.43
303.50	H	Peak	49.17	-12.40	36.77	46.00	-9.23
435.33	H	Peak	41.34	-9.92	31.42	46.00	-14.58
480.83	H	Peak	38.00	-8.47	29.53	46.00	-16.47
840.17	H	Peak	32.67	-4.33	28.34	46.00	-17.66

Notes:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

**Operation Mode:** TX / DHT200 / CH Low**Test Date:** March 16, 2004**Temperature:** 21°C**Tested by:** Jacky**Humidity:** 76 % RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
183.90	V	Peak	56.17	-16.66	39.51	43.50	-3.99
296.40	V	Peak	54.17	-12.60	41.57	46.00	-4.43
303.50	V	Peak	54.67	-12.40	42.27	46.00	-3.73
323.33	V	Peak	53.00	-12.07	40.93	46.00	-5.07
436.50	V	Peak	49.17	-9.87	39.30	46.00	-6.70
479.67	V	Peak	46.17	-8.49	37.68	46.00	-8.32
183.90	H	Peak	52.50	-16.66	35.84	43.50	-7.66
240.15	H	Peak	41.17	-14.37	26.80	46.00	-19.20
296.40	H	Peak	44.34	-12.60	31.74	46.00	-14.26
423.67	H	Peak	46.84	-10.34	36.50	46.00	-9.50
436.50	H	Peak	43.17	-9.87	33.30	46.00	-12.70
959.17	H	Peak	35.50	-2.88	32.62	46.00	-13.38

Notes:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

**Operation Mode:** TX / DHT200 / CH Mid**Test Date:** March 16, 2004**Temperature:** 21°C**Tested by:** Jacky**Humidity:** 76 % RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit 3m (dBUV/m)	Safe Margin (dB)
183.90	V	Peak	55.17	-16.66	38.51	43.50	-4.99
240.15	V	Peak	49.17	-14.37	34.80	46.00	-11.20
296.40	V	Peak	54.00	-12.60	41.40	46.00	-4.60
323.33	V	Peak	52.34	-12.07	40.27	46.00	-5.73
435.33	V	Peak	49.50	-9.92	39.58	46.00	-6.42
479.67	V	Peak	46.84	-8.49	38.35	46.00	-7.65
183.90	H	Peak	54.34	-16.66	37.68	43.50	-5.82
240.15	H	Peak	39.17	-14.37	24.80	46.00	-21.20
296.40	H	Peak	45.67	-12.60	33.07	46.00	-12.93
423.67	H	Peak	48.50	-10.34	38.16	46.00	-7.84
479.67	H	Peak	42.67	-8.49	34.18	46.00	-11.82
959.17	H	Peak	35.17	-2.88	32.29	46.00	-13.71

Notes:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

**Operation Mode:** TX / DHT200 / CH High**Test Date:** March 16, 2004**Temperature:** 21°C**Tested by:** Jacky**Humidity:** 76 % RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit 3m (dBUV/m)	Safe Margin (dB)
183.90	V	Peak	55.50	-16.60	38.90	43.50	-4.60
240.15	V	Peak	50.34	-14.37	35.97	46.00	-10.03
296.40	V	Peak	54.17	-12.60	41.57	46.00	-4.43
324.50	V	Peak	55.50	-12.04	43.46	46.00	-2.54
416.67	V	Peak	51.50	-10.22	41.28	46.00	-4.72
720.00	V	Peak	43.50	-5.40	38.10	46.00	-7.90
183.90	H	Peak	52.67	-16.66	36.01	43.50	-7.49
240.15	H	Peak	40.67	-14.37	26.30	46.00	-19.70
296.40	H	Peak	48.17	-12.60	35.57	46.00	-10.43
415.50	H	Peak	49.84	-10.20	39.64	46.00	-6.36
479.67	H	Peak	41.84	-8.49	33.35	46.00	-12.65
959.17	H	Peak	37.34	-2.88	34.46	46.00	-11.54

Notes:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

**Above 1 GHz****Operation Mode:** TX / DHT100 / CH Low**Test Date:** March 16, 2004**Temperature:** 21°C**Tested by:** Jacky**Humidity:** 76 % RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
2410.00	V	57.11	52.53	32.5	89.61	85.03	114.00	94.00	-8.97	Average
2610.00	V	40.60	---	-2.50	38.10	---	74.00	54.00	-15.90	Peak
3908.33	V	46.77	---	2.24	49.01	---	74.00	54.00	-4.99	Peak
4350.00	V	46.94	---	2.61	49.55	---	74.00	54.00	-4.45	Peak
N/A										
N/A										
N/A										
2410.00	H	57.11	53.01	32.5	89.61	85.51	114.00	94.00	-8.49	Average
3916.67	H	35.94	---	2.28	38.22	---	74.00	54.00	-15.78	Peak
4350.00	H	42.10	---	2.61	44.71	---	74.00	54.00	-9.29	Peak
N/A										
N/A										
N/A										
N/A										

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.

**Operation Mode:** TX / DHT100 / CH Mid**Test Date:** March 16, 2004**Temperature:** 21°C**Tested by:** Jacky**Humidity:** 76 % RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
2431.00	V	59.2	54.9	32.6	91.80	87.50	114.00	94.00	-6.50	Average
3908.33	V	46.94	---	2.24	49.18	---	74.00	54.00	-4.82	Peak
4350.00	V	45.44	---	2.61	48.05	---	74.00	54.00	-5.95	Peak
N/A										
N/A										
N/A										
N/A										
2431.00	H	55.4	51.5	32.6	88.00	84.10	114.00	94.00	-9.9	Average
4341.67	H	41.77	---	2.62	44.39	---	74.00	54.00	-9.61	Peak
N/A										
N/A										
N/A										
N/A										
N/A										

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.

Operation Mode: TX / DHT100 / CH High

Test Date: March 16, 2004

Temperature: 21°C

Tested by: Jacky

Humidity: 76 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
2459.00	V	60.10	56.84	32.7	92.80	89.54	114.00	94.00	-4.46	Average
3916.67	V	45.60	---	2.28	47.88	---	74.00	54.00	-6.12	Peak
4350.00	V	46.10	---	2.61	48.71	---	74.00	54.00	-5.29	Peak
N/A										
N/A										
N/A										
N/A										
2459.00	H	53.38	50.44	32.7	86.08	83.14	114.00	94.00	-10.86	Average
4341.67	H	41.27	---	2.62	43.89	---	74.00	54.00	-10.11	Peak
N/A										
N/A										
N/A										
N/A										
N/A										

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.

Operation Mode: TX / DHT200 / CH Low

Test Date: March 16, 2004

Temperature: 21°C

Tested by: Jacky

Humidity: 76 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
2410.00	V	56.22	51.74	32.5	88.72	84.24	114.00	94.00	-9.76	Average
4325.00	V	41.77	---	2.62	44.39	---	74.00	54.00	-9.61	Peak
N/A										
N/A										
N/A										
N/A										
N/A										
2410.00	H	59.74	55.58	32.5	92.24	88.08	114.00	94.00	-5.92	Average
4325.00	H	34.94	---	2.62	37.56	---	74.00	54.00	-16.44	Peak
N/A										
N/A										
N/A										
N/A										
N/A										

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.

Operation Mode: TX / DHT200 / CH Mid

Test Date: March 16, 2004

Temperature: 21°C

Tested by: Jacky

Humidity: 76 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
2431.00	V	55.40	51.40	32.6	88.00	84.00	114.00	94.00	-10.00	Average
4325.00	V	43.44	---	2.62	46.06	---	74.00	54.00	-7.94	Peak
N/A										
N/A										
N/A										
N/A										
N/A										
2431.00	H	56.64	52.40	32.6	89.24	85.00	114	94.00	-9.00	Average
4325.00	H	36.10	---	2.62	38.72	---	74.00	54.00	-15.28	Peak
N/A										
N/A										
N/A										
N/A										
N/A										

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.

**Operation Mode:** TX / DHT200 / CH High**Test Date:** March 16, 2004**Temperature:** 21°C**Tested by:** Jacky**Humidity:** 76 % RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
2459.00	V	54.35	51.13	32.7	87.05	83.83	114.00	94.00	-10.17	Average
4325.00	V	43.10	---	2.62	45.72	---	74.00	54.00	-8.28	P
N/A										
N/A										
N/A										
N/A										
N/A										
2459.00	H	52.38	49.03	32.7	85.08	81.73	114	94.00	-12.27	Average
4325.00	H	35.27	---	2.62	37.89	---	74.00	54.00	-16.11	P
N/A										
N/A										
N/A										
N/A										
N/A										

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.



7.3 POWERLINE CONDUCTED EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCS30	845552/030	03/14/2005
LISN	R&S	ESH2-Z5	843285/010	01/08/2005
LISN	EMCO	3825/2	9003-1628	07/27/2004
Spectrum Analyzer	ADVANTEST	R3261C	81720301	N.C.R
ISN	FCC	FCC-TLISN-T4	20065	05/08/2004
ISN	FCC	FCC-TLISN-T8-02	20148	02/06/2005

Remark: Each piece of equipment is scheduled for calibration once a year.



Test Configuration

1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4.
2. The EUT was plug-in the host PC via USB port. The host PC system was placed on the center of the back edge on the test table. The peripherals like modem, monitor printer, K/B, and mouse were placed on the side of the host PC system. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
3. The keyboard was placed directly in the front of the monitor, flushed with the front tabletop. The mouse was placed next to the Keyboard, flushed with the back of keyboard.
4. The spacing between the peripherals was 10 centimeters.
5. External I/O cables were draped along the edge of the test table and bundle when necessary.
6. The host PC system was connected with 110Vac/60Hz power source.

The EUT is set to transmit in a continuous mode.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Operation Mode: DHT100 / Operating **Test Date:** March 29, 2004
Temperature: 22°C **Tested by:** Jim
Humidity: 55 % RH

Freq. (MHz)	Q.P. Raw (dBuV)	AVG Raw (dBuV)	Q.P. Limit (dBuV)	AVG Limit (dBuV)	Q.P. Margin (dB)	AVG Margin (dB)	Note
0.167	56.90	50.10	65.11	55.11	-8.21	-5.01	L1
1.173	43.90	---	56.00	46.00	-12.10	---	L1
2.511	39.40	---	56.00	46.00	-16.60	---	L1
5.255	39.20	---	60.00	50.00	-20.80	---	L1
6.627	45.10	---	60.00	50.00	-14.90	---	L1
7.463	47.80	---	60.00	50.00	-12.20	---	L1
0.167	56.20	51.20	65.11	55.11	-8.91	-3.91	L2
1.091	40.90	---	56.00	46.00	-15.10	---	L2
3.345	35.80	---	56.00	46.00	-20.20	---	L2
5.364	37.50	---	60.00	50.00	-22.50	---	L2
7.783	53.30	48.50	60.00	50.00	-6.70	-1.50	L2
8.703	47.80	---	60.00	50.00	-12.20	---	L2

Note:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. “---” denotes the emission level was or more than 2dB below the Average limit
4. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
5. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)

Operation Mode: DHT200 / Operating **Test Date:** March 29, 2004
Temperature: 22°C **Tested by:** Jacky
Humidity: 55 % RH

Freq. (MHz)	Q.P. Raw (dBuV)	AVG Raw (dBuV)	Q.P. Limit (dBuV)	AVG Limit (dBuV)	Q.P. Margin (dB)	AVG Margin (dB)	Note
0.170	54.30	49.70	64.96	54.96	-10.66	-5.26	L1
1.821	42.50	---	56.00	46.00	-13.50	---	L1
3.326	41.10	---	56.00	46.00	-14.90	---	L1
6.832	42.70	---	60.00	50.00	-17.30	---	L1
9.151	50.20	47.30	60.00	50.00	-9.80	-2.70	L1
10.262	48.40	43.50	60.00	50.00	-11.60	-6.50	L1
0.172	54.00	50.50	64.86	54.86	-10.86	-4.36	L2
1.038	40.30	---	56.00	46.00	-15.70	---	L2
3.502	40.70	---	56.00	46.00	-15.30	---	L2
6.694	42.30	---	60.00	50.00	-17.70	---	L2
7.962	47.30	---	60.00	50.00	-12.70	---	L2
8.744	48.40	44.20	60.00	50.00	-11.60	-5.80	L2

Note:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. "—" denotes the emission level was or more than 2dB below the Average limit
4. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
5. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)