

Test Laboratory: BTL Inc.

Date: 2024/5/14

B06_2.4G SRD_CH0_Rear Face_0mm

DUT: Keyboard;

Communication System: UID 0, BT (0);

Frequency: 2402 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 39.807$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.8 °C; Liquid Temperature: 21.9 °C

DASY Configuration:

- Probe: EX3DV4 - SN7515; ConvF(7.45, 7.45, 7.45) @ 2402 MHz; Calibrated: 2023/12/14
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2023/11/20
- Phantom: ELI v5.0_Left; Type: QDOVA002AA; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (8x8x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.192 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.778 W/kg

SAR(1 g) = 0.326 W/kg; SAR(10 g) = 0.125 W/kg

Maximum value of SAR (measured) = 0.618 W/kg

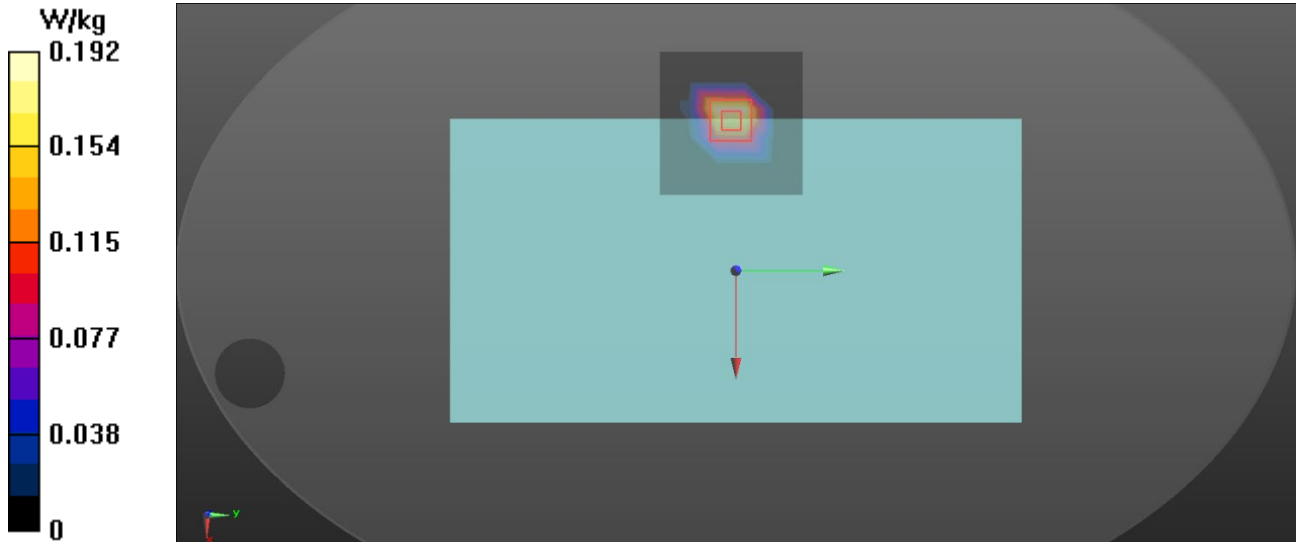

Test Laboratory: BTL Inc.

Date: 2024/5/14

B14_BLE_CH0_Rear Face_0mm

DUT: Keyboard;

Communication System: UID 10670 - AAA, Bluetooth Low Energy;

Frequency: 2402 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 39.807$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.8 °C; Liquid Temperature: 21.9 °C

DASY Configuration:

- Probe: EX3DV4 - SN7515; ConvF(7.45, 7.45, 7.45) @ 2402 MHz; Calibrated: 2023/12/14
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2023/11/20
- Phantom: ELI v5.0_Left; Type: QDOVA002AA; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (8x8x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.170 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.787 W/kg

SAR(1 g) = 0.327 W/kg; SAR(10 g) = 0.124 W/kg

Maximum value of SAR (measured) = 0.622 W/kg

