


|           |                               |                |           |
|-----------|-------------------------------|----------------|-----------|
| Test_Mode | $\pi$ /4DQPSK<br>Transmitting | Test_Frequency | 2402MHz   |
| Remark:   | /                             | Test_Date      | 2026/6/10 |


Test Graph

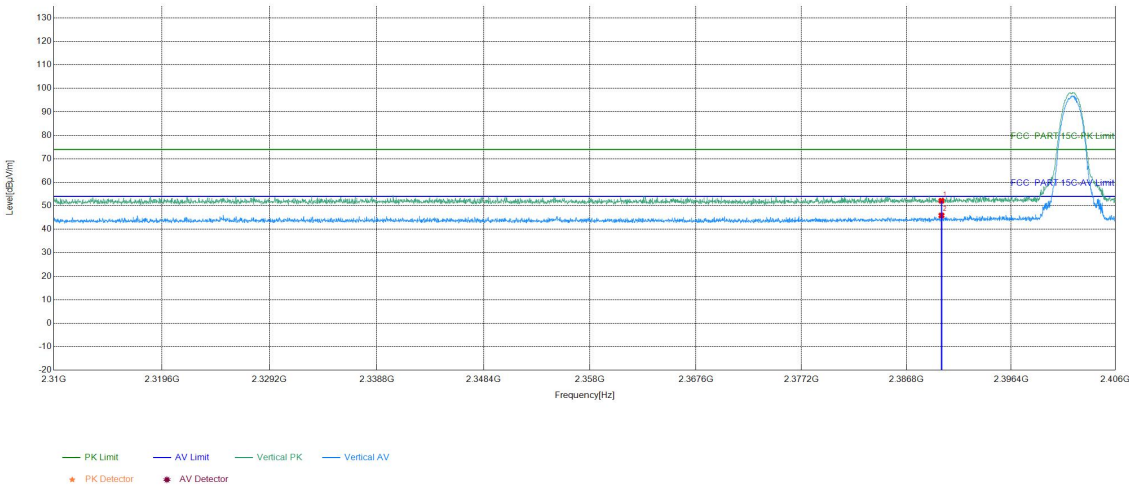

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 2390        | 15.96       | 36.17          | 52.13          | 74.00          | 21.87       | PASS   | Vertical | PK     |
| 2              | 2390        | 15.96       | 29.91          | 45.87          | 54.00          | 8.13        | PASS   | Vertical | AV     |

|           |                               |                |           |
|-----------|-------------------------------|----------------|-----------|
| Test_Mode | $\pi$ /4DQPSK<br>Transmitting | Test_Frequency | 2480MHz   |
| Remark:   | /                             | Test_Date      | 2026/6/10 |


Test Graph

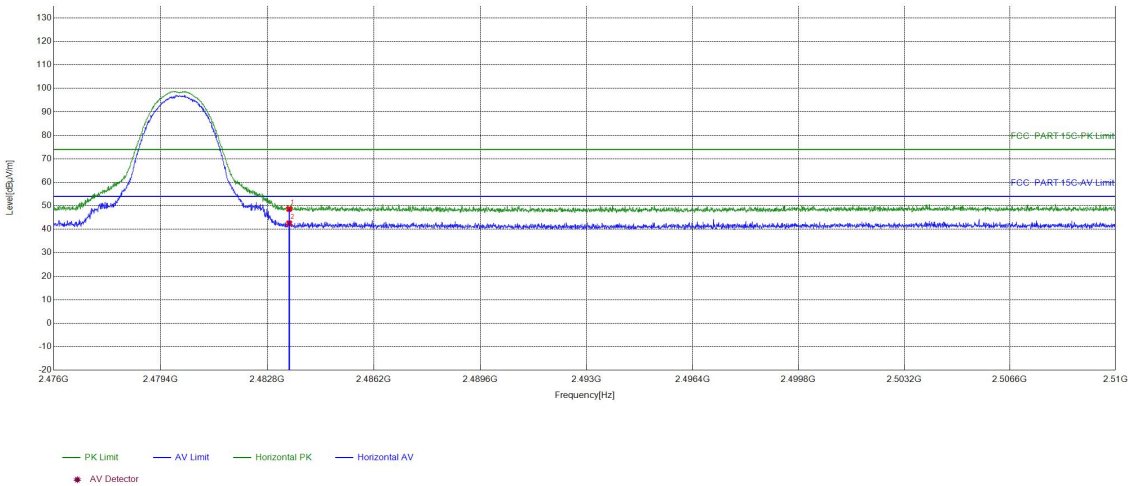

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 2483.5      | 16.29       | 32.34          | 48.63          | 74.00          | 25.37       | PASS   | Horizont | PK     |
| 2              | 2483.5      | 16.29       | 26.27          | 42.56          | 54.00          | 11.44       | PASS   | Horizont | AV     |

|           |                               |                |           |
|-----------|-------------------------------|----------------|-----------|
| Test_Mode | $\pi$ /4DQPSK<br>Transmitting | Test_Frequency | 2480MHz   |
| Remark:   | /                             | Test_Date      | 2026/6/10 |


Test Graph

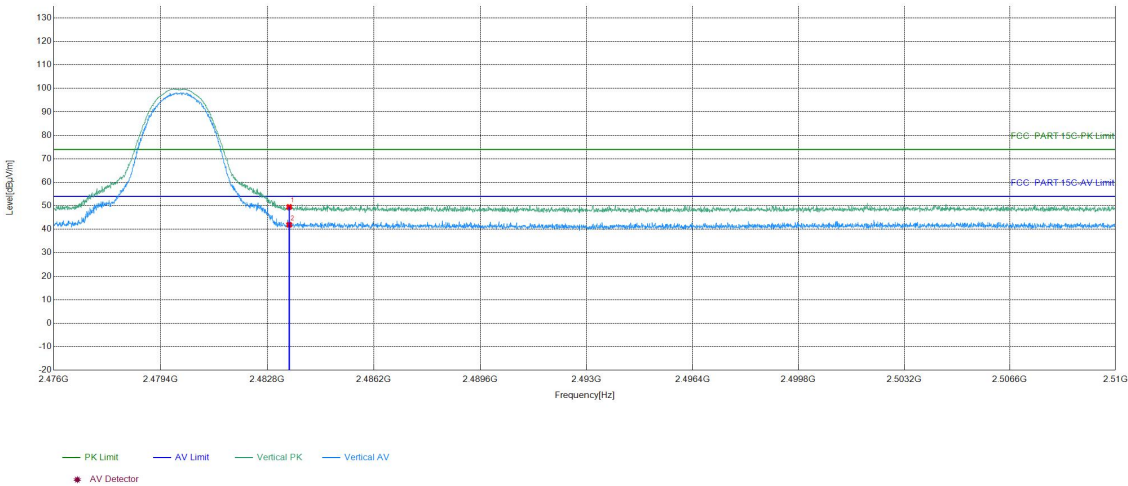

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 2483.5      | 16.29       | 33.20          | 49.49          | 74.00          | 24.51       | PASS   | Vertical | PK     |
| 2              | 2483.5      | 16.29       | 25.63          | 41.92          | 54.00          | 12.08       | PASS   | Vertical | AV     |

|           |                    |                |           |
|-----------|--------------------|----------------|-----------|
| Test_Mode | 8DPSK Transmitting | Test_Frequency | 2402MHz   |
| Remark:   | /                  | Test_Date      | 2026/6/10 |


Test Graph

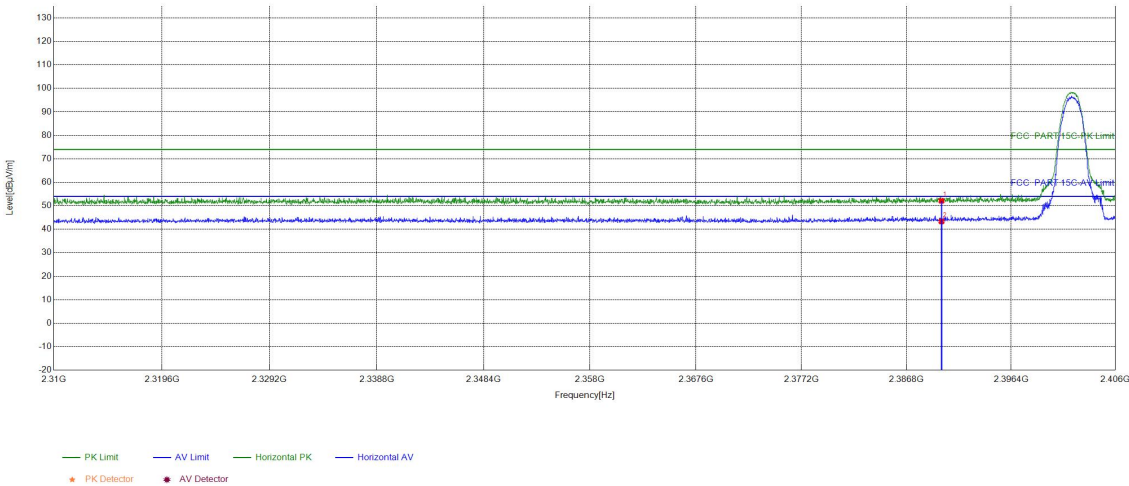

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 2390        | 15.96       | 36.19          | 52.15          | 74.00          | 21.85       | PASS   | Horizont | PK     |
| 2              | 2390        | 15.96       | 27.39          | 43.35          | 54.00          | 10.65       | PASS   | Horizont | AV     |

|           |                    |                |           |
|-----------|--------------------|----------------|-----------|
| Test_Mode | 8DPSK Transmitting | Test_Frequency | 2402MHz   |
| Remark:   | /                  | Test_Date      | 2026/6/10 |


Test Graph

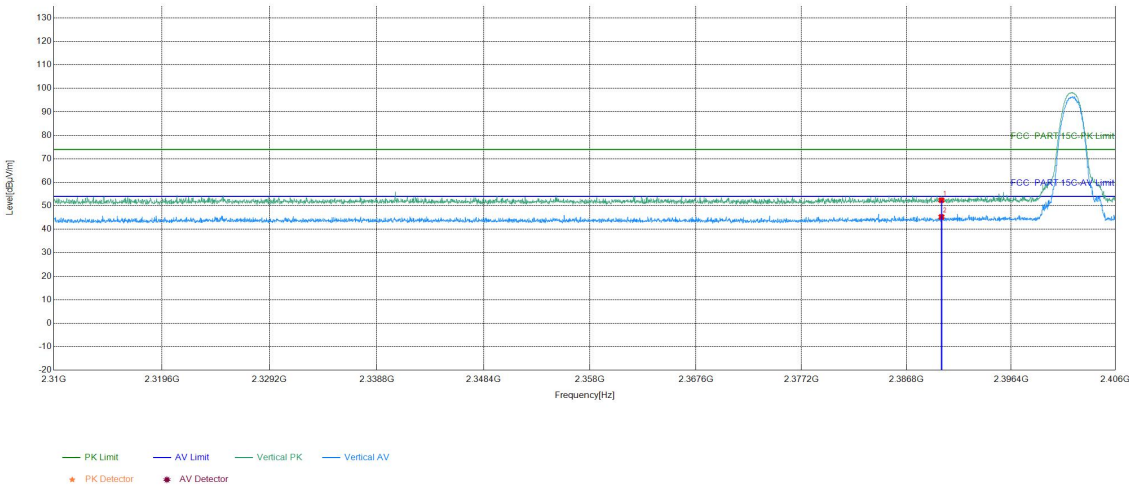

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 2390        | 15.96       | 36.43          | 52.39          | 74.00          | 21.61       | PASS   | Vertical | PK     |
| 2              | 2390        | 15.96       | 29.28          | 45.24          | 54.00          | 8.76        | PASS   | Vertical | AV     |

|           |                    |                |           |
|-----------|--------------------|----------------|-----------|
| Test_Mode | 8DPSK Transmitting | Test_Frequency | 2480MHz   |
| Remark:   | /                  | Test_Date      | 2026/6/10 |


Test Graph

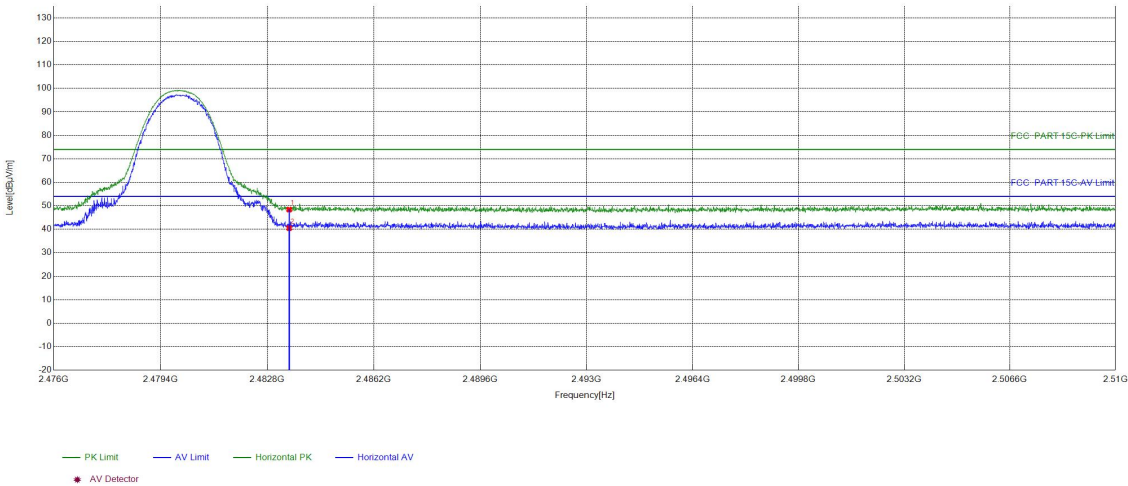

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 2483.5      | 16.29       | 32.11          | 48.40          | 74.00          | 25.60       | PASS   | Horizont | PK     |
| 2              | 2483.5      | 16.29       | 24.21          | 40.50          | 54.00          | 13.50       | PASS   | Horizont | AV     |

|           |                    |                |           |
|-----------|--------------------|----------------|-----------|
| Test_Mode | 8DPSK Transmitting | Test_Frequency | 2480MHz   |
| Remark:   | /                  | Test_Date      | 2026/6/10 |

Test Graph

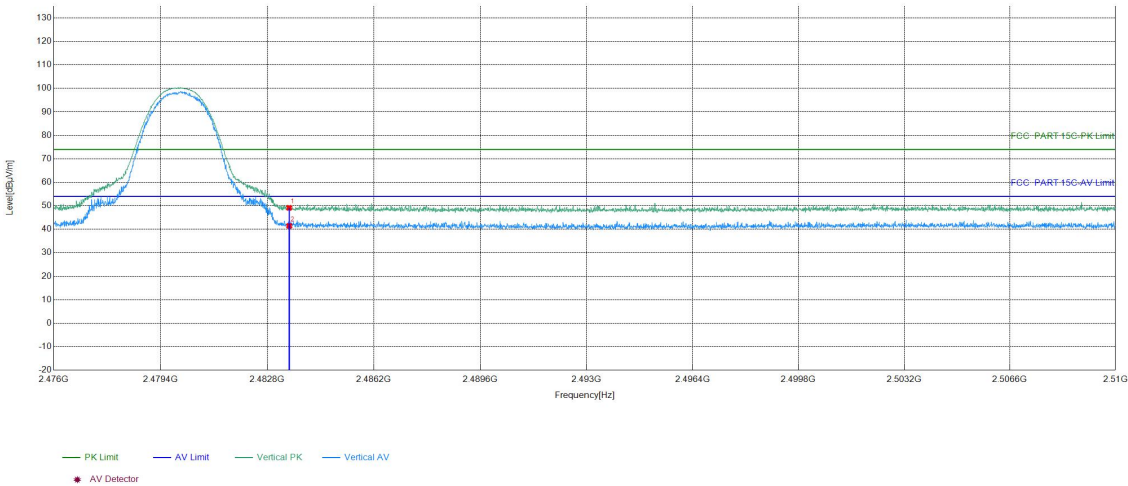

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 2483.5      | 16.29       | 32.84          | 49.13          | 74.00          | 24.87       | PASS   | Vertical | PK     |
| 2              | 2483.5      | 16.29       | 25.14          | 41.43          | 54.00          | 12.57       | PASS   | Vertical | AV     |

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

## 5 Appendix A

Refer to Appendix: Bluetooth Classic of EED32S80651002

## 6 PHOTOGRAPHS

Refer to Appendix Photographs of Report No. EED32S80651001.

## Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

\*\*\* End of Report \*\*\*