

TEST REPORT

Report No.	CISRR26010501101V1
Project No.	CISR260105011
FCC ID	SMQUWM3
Applicant	Edan Instruments, Inc.
Address	#15 Jinhui Road, Jinsha Community, Kengzi Sub-District, Pingshan District, 518122 Shenzhen P.R.China
Manufacturer	Edan Instruments, Inc.
Address	#15 Jinhui Road, Jinsha Community, Kengzi Sub-District, Pingshan District, 518122 Shenzhen P.R.China
Product Name	WiFi module
Trade mark	Edan
Model/Type reference	UWM3
Listed Model(s)	-
Standard	47 CFR Part 15.247
Date of sample receipt	January 8, 2026
Test date	January 8, 2026 to June 5, 2026
Issue date	June 5, 2026
Test result	Complied

Morgan Tan

Reviewed by: Morgan Tan



Approved by: Hans Hu

The test results relate only to the tested samples.

The test report should not be reproduced except in full without the written approval of Shenzhen Bangce Testing Technology Co., Ltd.

Contents

1. STANDARD AND APPLICABLE TEST METHODS	3
2. REPORT VERSION	3
3. TEST DESCRIPTION	4
4. SUMMARY	5
4.1. Product Description *	5
4.2. Radio Specification Description *	5
4.3. Modification of EUT	6
4.4. Deviation from standards	6
4.5. Testing Site	6
5. TEST CONFIGURATION	7
5.1. Test frequency list	7
5.2. Descriptions of test mode	7
5.3. Support unit used in test configuration	7
5.4. Test sample information	7
5.5. Environmental conditions	7
5.6. Statement of the measurement uncertainty	8
5.7. Equipment Used during the Test	9
6. TEST RESULTS	11
6.1. Evaluation Results (Evaluation)	11
6.1.1. Antenna Requirement	11
6.2. Radio Spectrum Matter Test Results (RF)	12
6.2.1. 6dB Bandwidth	12
6.2.2. Maximum Conducted Output Power	14
6.2.3. Power Spectral Density	15
6.2.4. Conducted band edge and spurious emission	16
6.2.5. Radiated band edge emission	17
6.2.6. Radiated Spurious Emission (below 1GHz)	27
6.2.7. Radiated Spurious Emission (Above 1GHz)	31

1. STANDARD AND APPLICABLE TEST METHODS

The tests were performed according to following standards:

47 CFR Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

ANSI C63.10-2020: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

2. REPORT VERSION

Version No.	Issue date	Description
00	June 5, 2026	Original

3. TEST DESCRIPTION

No.	Test Item	Standard Requirement	Result
1	Antenna Requirement	47 CFR 15.203	Pass
2	6dB Bandwidth	47 CFR 15.247(a)(2)	Pass
3	Maximum Conducted Output Power	47 CFR 15.247(b)(3)	Pass
4	Power Spectral Density	47 CFR 15.247(e)	Pass
5	Conducted band edge and spurious emission	47 CFR 15.247(d)	Pass
6	Radiated band edge emission	47 CFR 15.247(d), 15.209, 15.205	Pass
7	Radiated Spurious Emission (below 1GHz)	47 CFR 15.247(d), 15.209, 15.205	Pass
8	Radiated Spurious Emission (Above 1GHz)	47 CFR 15.247(d), 15.209, 15.205	Pass

Note:

- The measurement uncertainty is not included in the test result.

4. SUMMARY

4.1. Product Description *

Main unit information:	
Product Name:	WiFi module
Trade mark:	Edan
Model No.:	UWM3
Listed Model(s):	-
Model difference:	-
Power supply:	DC 3.3V
Hardware version:	-
Software version:	-
Accessory unit (AU) information:	
AU-1	-

4.2. Radio Specification Description *

Modulation type:	802.11b: DSSS(CCK, DQPSK, DBPSK); 802.11g/n(HT20)/n(HT40)/ax(HE20)/ax(HE40): OFDM(BPSK, QPSK, 16QAM, 64QAM, 1024QAM)
Operation frequency:	802.11b/g/n(HT20)/ax(HE20): 2412MHz to 2462MHz; 802.11n(HT40)/ax(HE40): 2422MHz to 2452MHz
Channel number:	802.11b/g/n(HT20)/ax(HE20): 11 Channels; 802.11n(HT40)/ax(HE40): 7 Channels
Channel separation:	5MHz
Antenna type:	FPC Antenna or PCB Antenna
Antenna gain:	Ant6:2.92dBi;Ant7:2.39dBi

Note:

- 1) *: As the above information is provided by the applicant, all relevant results and conclusions of this report are based solely on such information. Bangce lab shall not be liable for the authenticity, integrity, and resulting outcomes of the information, and/or the validity of the conclusions herein.
- 2) Operation frequency list as follow:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	/	/

4.3. Modification of EUT

No modifications are made to the EUT during all test items.

4.4. Deviation from standards

None

4.5. Testing Site

Laboratory Name	Shenzhen Bangce Testing Technology Co., Ltd.
Laboratory Location	101, building 10, Yunli Intelligent Park, Shutianpu community, Matian Street, Guangming District, Shenzhen, Guangdong, China
Contact information	Tel: 86-755-2319 6848, email: service@cis-cn.net Website: http://www.cis-cn.net/
FCC registration number	736346
FCC designation number	CN1372

5. TEST CONFIGURATION

5.1. Test frequency list

Bandwidth (MHz)	Lowest Channel (LCH) (MHz)	Middle Channel (MCH) (MHz)	Highest Channel (HCH) (MHz)
20	2412	2437	2462
40	2422	2437	2452

5.2. Descriptions of test mode

No	Test mode	Description
TM1	802.11b mode	Keep the EUT in 802.11b transmitting mode at lowest, middle and highest channel.
TM2	802.11g mode	Keep the EUT in 802.11g transmitting mode at lowest, middle and highest channel.
TM3	802.11n(HT20) mode	Keep the EUT in 802.11n(HT20) transmitting mode at lowest, middle and highest channel.
TM4	802.11n(HT40) mode	Keep the EUT in 802.11n(HT40) transmitting mode at lowest, middle and highest channel.
TM5	802.11ax(HE20) mode	Keep the EUT in 802.11ax(HE40) transmitting mode at lowest, middle and highest channel.
TM6	802.11ax(HE40) mode	Keep the EUT in 802.11ax(HE40) transmitting mode at lowest, middle and highest channel.
TM7	Link mode	Keep the EUT in WiFi linking mode with AE.

Note: The sample is equipped with five antennas, hence the report presents five sets of radiation test data. This module has only one antenna input port.

5.3. Support unit used in test configuration

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Item	Equipment name	Trade Name	Model No.
1	PC	Lenovo	ThinkPad

5.4. Test sample information

Type	Sample No.
Engineer sample	CISR260105011-S01
Normal sample	CISR260105011-S02

5.5. Environmental conditions

Type	Requirement
Temperature:	15~35°C
Relative Humidity:	25~75%
Air Pressure:	860~1060mbar

5.6. Statement of the measurement uncertainty

No.	Test Items	Measurement Uncertainty
1	Bandwidth	0.19%
2	Conducted output power	1.38dB
3	Power spectral density	1.39dB
4	Conducted spurious emission	1.40dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

5.7. Equipment Used during the Test

6dB Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in non-restricted frequency bands						
Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	Spectrum analyzer	ROHDE&SCHWARZ	FSV-40N	CIS-EE076	2026-01-06	2027-01-05
2	Notch Filter Assembly	WCS	SMU-1003	CIS-EE093	2026-01-06	2027-01-05
3	Vector Signal Generator	Agilent	N5182A	CIS-RE012	2026-01-06	2027-01-05
4	Analog Signal Generator	Agilent	N5181A	CIS-RE013	2026-01-06	2027-01-05
5	Test software	WCS	WCN-Regulator y	CIS-EE103	/	/

Emissions in frequency bands (above 1GHz) Band edge emissions (Radiated) Emissions in frequency bands (below 1GHz)						
Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	9*6*6 anechoic chamber	SKET	9.3*6.3*6	N/A	2024-09-02	2027-09-01
2	Spectrum analyzer	Agilent	N9020A	MY50530263	2026-01-06	2027-01-05
3	Spectrum analyzer	R&S	FSV-40N	102130	2026-01-06	2027-01-05
4	Bilog Antenna	Schwarzbeck	VULB 9163	1463	2026-01-06	2029-01-05
5	Horn Antenna	SCHWARZBECK	BBHA 9120 D	2487	2026-01-06	2029-01-05
6	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	/	2026-01-06	2029-01-05
7	RF Cable	Tonscend	Cable 1	/	2026-01-06	2027-01-05
8	RF Cable	Tonscend	Cable 2	/	2026-01-06	2027-01-05
9	RF Cable	SKET	Cable 3	/	2026-01-06	2027-01-05
10	L.I.S.N.#1	Schwarzbeck	NSLK8127	/	2026-01-06	2027-01-05
11	L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	2026-01-06	2027-01-05
12	Horn Antenna	SCHWARZBECK	BBHA9170	1130	2026-01-06	2029-01-05
13	Preamplifier	Tonscend	TAP18040048	AP21C806126	2026-01-06	2027-01-05
14	Variable-frequency power source	Pinhong	PH1110	/	2026-01-06	2027-01-05

15	6dB Attenuator	SKET	DC-6G	/	2026-01-06	2027-01-05
16	Antenna tower	SKT	Bk-4AT-BS	AT202104010 1-V1	2026-01-06	2027-01-05

6. TEST RESULTS

6.1. Evaluation Results (Evaluation)

6.1.1. Antenna Requirement

Test Requirement:	Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
Test Method:	---

6.1.1.1. Test Result

Pass

6.1.1.2. Conclusion:

The EUT antenna is FPC Antenna or PCB Antenna. It comply with the standard requirement. In case of replacement of broken antenna the same antenna type must be used. Antenna structure please refer to the EUT internal photographs antenna photo.

6.2. Radio Spectrum Matter Test Results (RF)


6.2.1. 6dB Bandwidth

Test Requirement:	47 CFR 15.247(a)(2)
Test Limit:	Refer to 47 CFR 15.247(a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	ANSI C63.10-2020, section 11.8
Procedure:	11.8.1 Option 1 The steps for the first option are as follows: a) Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz. b) Set the VBW $\geq [3 \times \text{RBW}]$. c) Detector = peak. d) Trace mode = max-hold. e) Sweep = No faster than coupled (auto) time. f) Allow the trace to stabilize. g) Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value. 11.8.2 Option 2 The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW $\geq 3 \times \text{RBW}$, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

6.2.1.1. E.U.T. Operation

Operating Environment:					
Temperature:	22.4 °C	Humidity:	55.4 %	Atmospheric Pressure:	102.3 kPa
Pre test mode:	TM1, TM2, TM3, TM4, TM5, TM6				
Final test mode:	TM1, TM2, TM3, TM4, TM5, TM6				

6.2.1.2. Test Setup Diagram

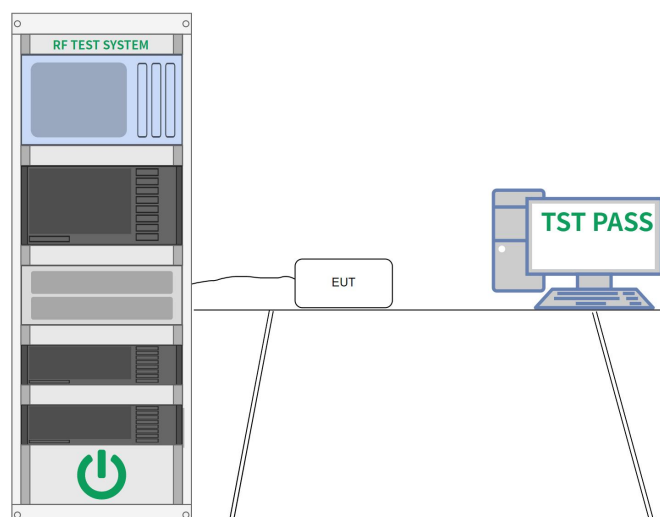

6.2.1.3. Test Result

Pass

6.2.1.4. Test Data

Please Refer to Appendix for Details.


6.2.2. Maximum Conducted Output Power

Test Requirement:	47 CFR 15.247(b)(3)
Test Limit:	Refer to 47 CFR 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	ANSI C63.10-2020 section 11.9.1
Procedure:	ANSI C63.10-2020, section 11.9.1 Maximum peak conducted output power

6.2.2.1. E.U.T. Operation

Operating Environment:					
Temperature:	23 °C	Humidity:	55.3 %	Atmospheric Pressure:	102.3 kPa
Pre test mode:	TM1, TM2, TM3, TM4, TM5, TM6				
Final test mode:	TM1, TM2, TM3, TM4, TM5, TM6				

6.2.2.2. Test Setup Diagram

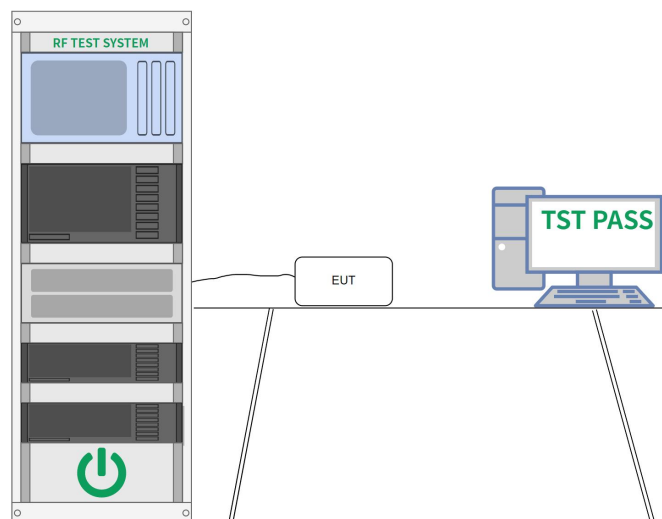

6.2.2.3. Test Result

Pass

6.2.2.4. Test Data

Please Refer to Appendix for Details.


6.2.3. Power Spectral Density

Test Requirement:	47 CFR 15.247(e)
Test Limit:	Refer to 47 CFR 15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	ANSI C63.10-2020, section 11.10
Procedure:	ANSI C63.10-2020, section 11.10, Maximum power spectral density level in the fundamental emission

6.2.3.1. E.U.T. Operation

Operating Environment:					
Temperature:	23.2 °C	Humidity:	55.9 %	Atmospheric Pressure:	102.3 kPa
Pre test mode:	TM1, TM2, TM3, TM4, TM5, TM6				
Final test mode:	TM1, TM2, TM3, TM4, TM5, TM6				

6.2.3.2. Test Setup Diagram

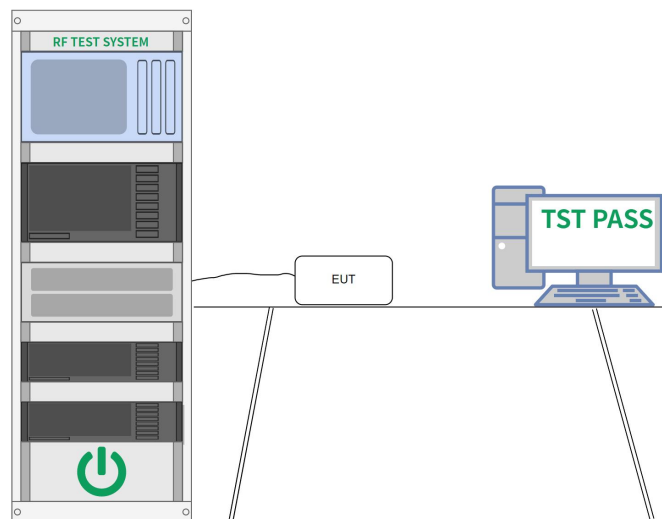

6.2.3.3. Test Result

Pass

6.2.3.4. Test Data

Please Refer to Appendix for Details.


6.2.4. Conducted band edge and spurious emission

Test Requirement:	47 CFR 15.247(d)
Test Limit:	Refer to 47 CFR 15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	ANSI C63.10-2020 section 11.11
Procedure:	ANSI C63.10-2020 Section 11.11.1, Section 11.11.2, Section 11.11.3

6.2.4.1. E.U.T. Operation

Operating Environment:					
Temperature:	22.5 °C	Humidity:	56.7 %	Atmospheric Pressure:	102.3 kPa
Pre test mode:	TM1, TM2, TM3, TM4, TM5, TM6				
Final test mode:	TM1, TM2, TM3, TM4, TM5, TM6				

6.2.4.2. Test Setup Diagram

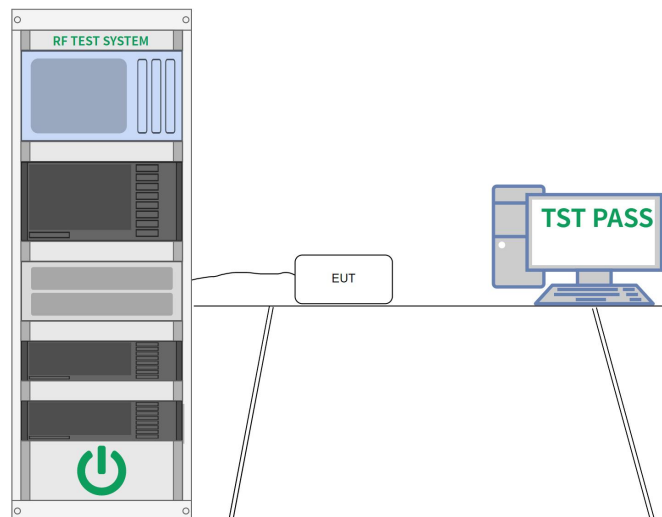

6.2.4.3. Test Result

Pass

6.2.4.4. Test Data

Please Refer to Appendix for Details.


6.2.5. Radiated band edge emission

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2020 section 6.10		
Procedure:	1>. EUT was setup and tested according to ANSI C63.10 . 2>. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. 3>. The EUT was positioned such that the distance from antenna to the EUT was 3 meters. 4>. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 on radiated measurement. 5>. Use the following spectrum analyzer settings: a) Span shall wide enough to fully capture the emission being measured b) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement For average measurement: use duty cycle correction factor method (DCCF), Average level = Peak level + DCCF		

6.2.5.1. E.U.T. Operation

Operating Environment:					
Temperature:	22.1 °C	Humidity:	56.2 %	Atmospheric Pressure:	103 kPa
Pre test mode:	TM1, TM2, TM3, TM4, TM5, TM6				
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (TM6) is recorded in the report				

6.2.5.2. Test Setup Diagram

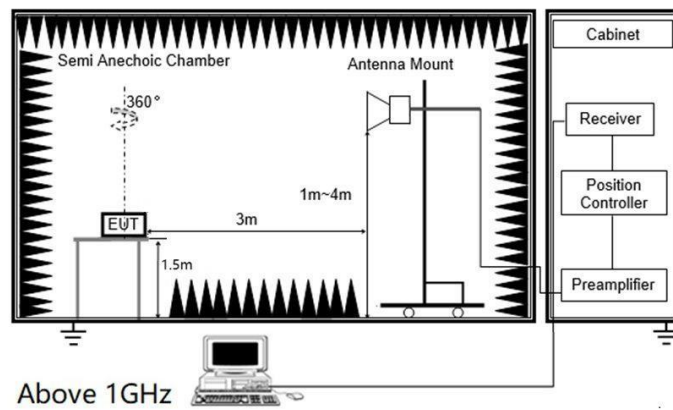


6.2.5.3. Test Result

Pass

6.2.5.4. Test Data


Ant6:

Mode6 / Polarization: Horizontal / CH: L

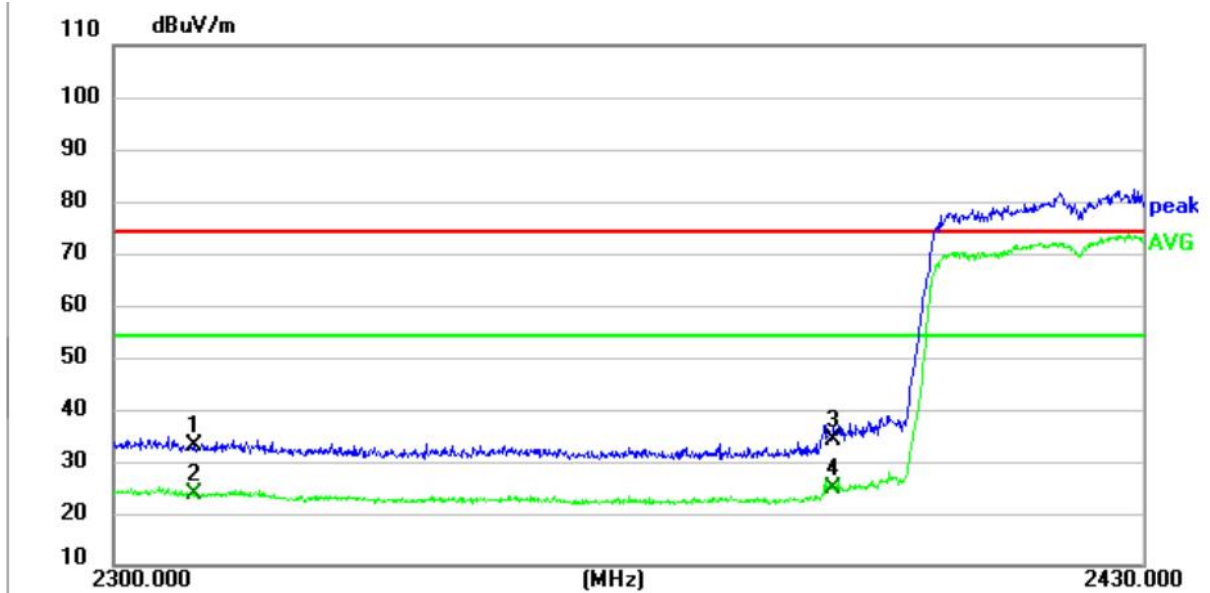


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2310.0000	50.73	-17.52	33.21	74.00	40.79	peak
2	2310.0000	41.18	-17.52	23.66	54.00	30.34	AVG
3	2390.0000	51.48	-17.32	34.16	74.00	39.84	peak
4 *	2390.0000	42.09	-17.32	24.77	54.00	29.23	AVG

Mode6 / Polarization: Vertical / CH: L

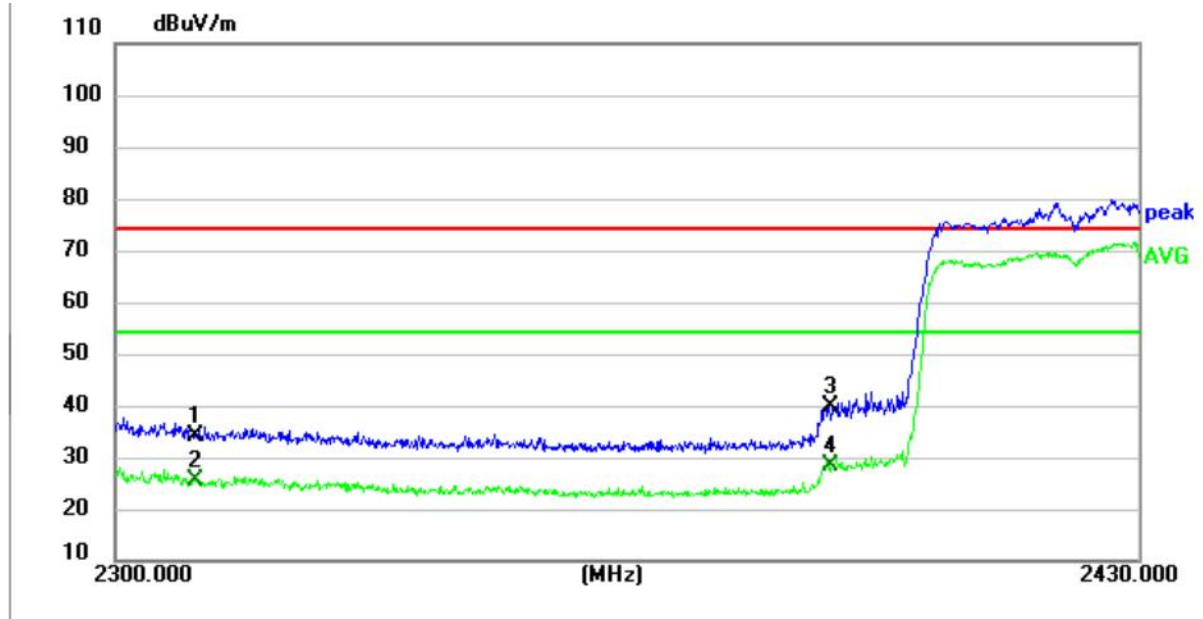


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2310.0000	51.63	-17.52	34.11	74.00	39.89	peak
2	2310.0000	43.04	-17.52	25.52	54.00	28.48	AVG
3	2390.0000	57.21	-17.32	39.89	74.00	34.11	peak
4 *	2390.0000	45.71	-17.32	28.39	54.00	25.61	AVG

Mode6 / Polarization: Horizontal / CH: H

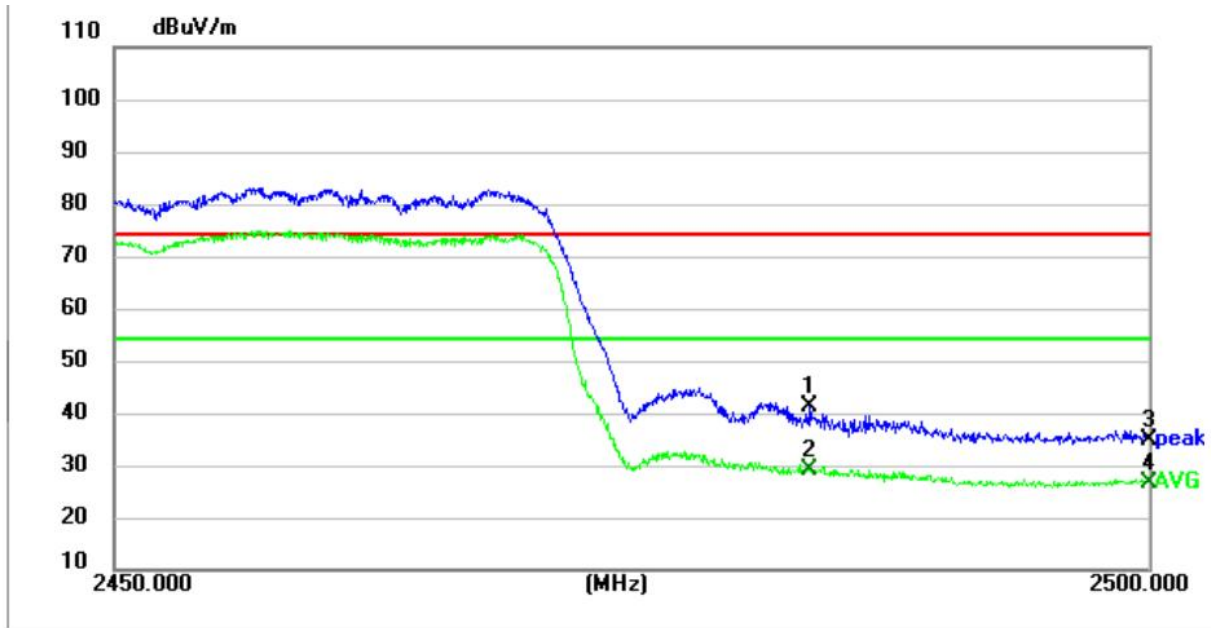

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.5000	58.40	-17.03	41.37	74.00	32.63	peak
2 *	2483.5000	46.27	-17.03	29.24	54.00	24.76	AVG
3	2500.0000	51.69	-16.94	34.75	74.00	39.25	peak
4	2500.0000	43.56	-16.94	26.62	54.00	27.38	AVG


Mode6 / Polarization: Vertical / CH: H

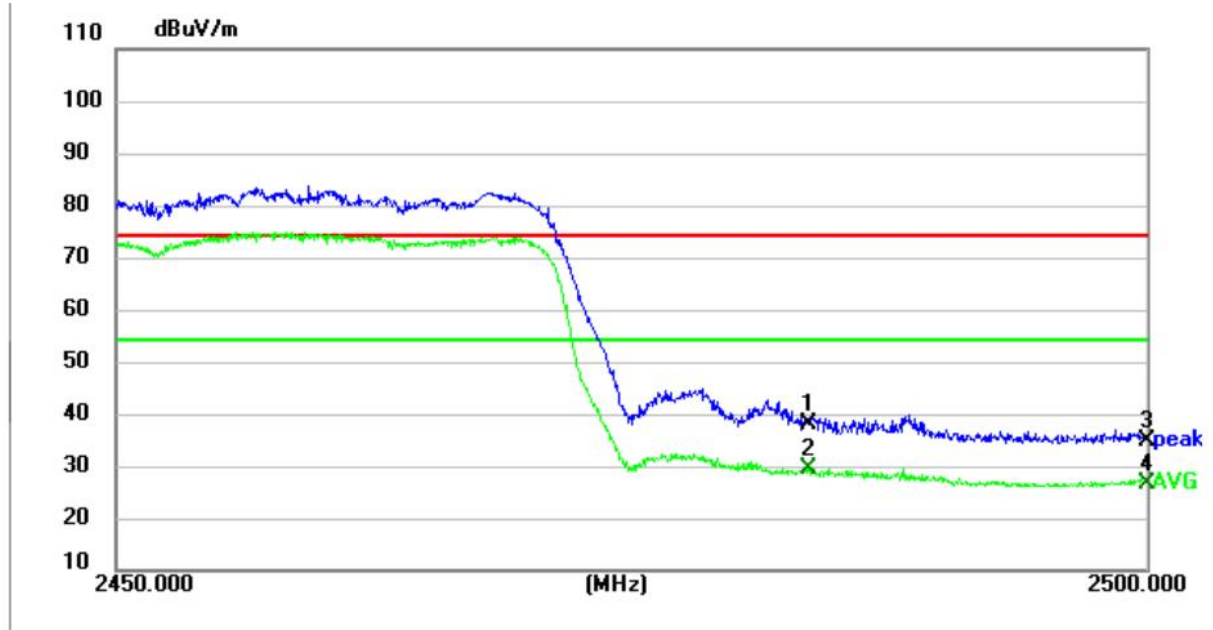

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.5000	54.96	-17.03	37.93	74.00	36.07	peak
2 *	2483.5000	46.45	-17.03	29.42	54.00	24.58	AVG
3	2500.0000	51.90	-16.94	34.96	74.00	39.04	peak
4	2500.0000	43.62	-16.94	26.68	54.00	27.32	AVG


Ant7:

Mode6 / Polarization: Horizontal / CH: L

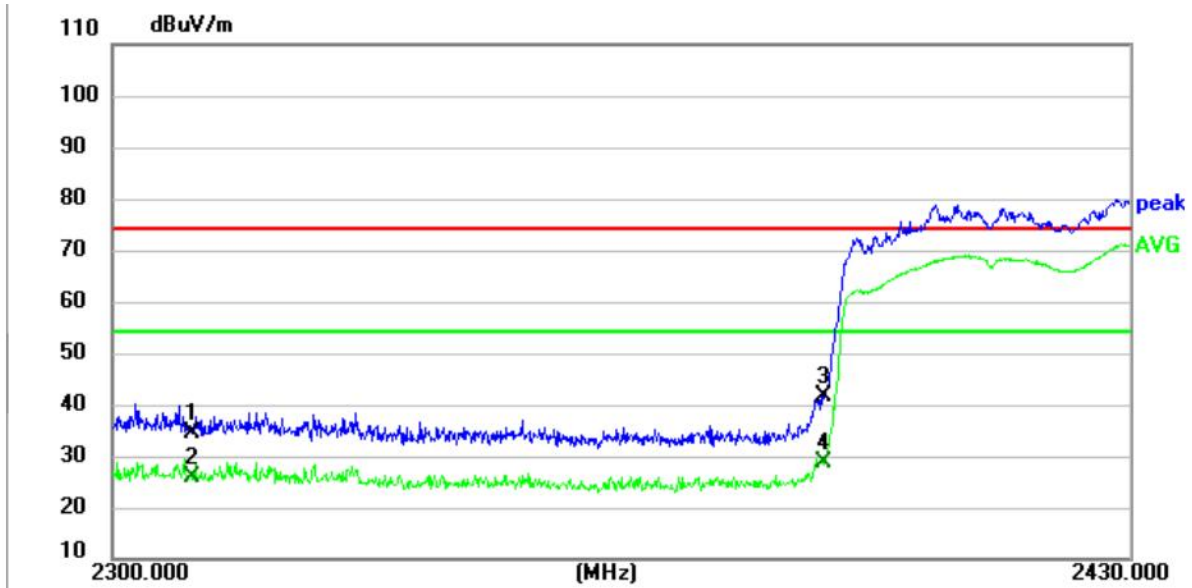


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2310.0000	52.13	-17.52	34.61	74.00	39.39	peak
2	2310.0000	43.59	-17.52	26.07	54.00	27.93	AVG
3	2390.0000	58.90	-17.32	41.58	74.00	32.42	peak
4 *	2390.0000	46.18	-17.32	28.86	54.00	25.14	AVG

Mode6 / Polarization: Vertical / CH: L

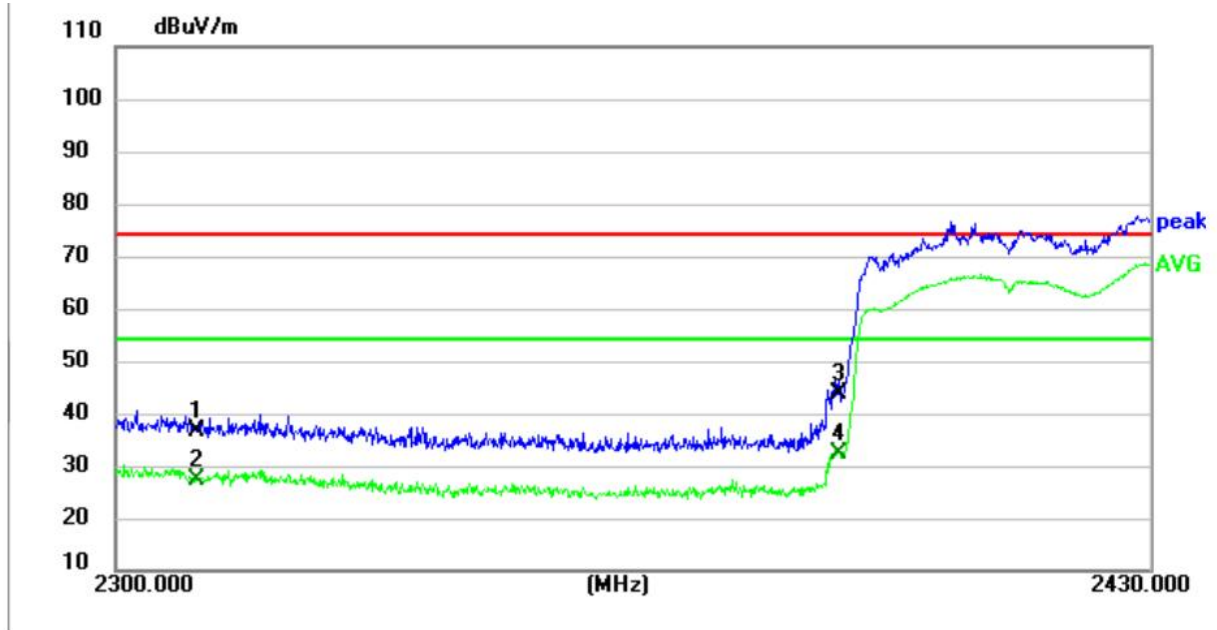


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2310.0000	54.10	-17.52	36.58	74.00	37.42	peak
2	2310.0000	44.97	-17.52	27.45	54.00	26.55	AVG
3	2390.0000	61.02	-17.32	43.70	74.00	30.30	peak
4 *	2390.0000	49.59	-17.32	32.27	54.00	21.73	AVG

Mode6 / Polarization: Horizontal / CH: H

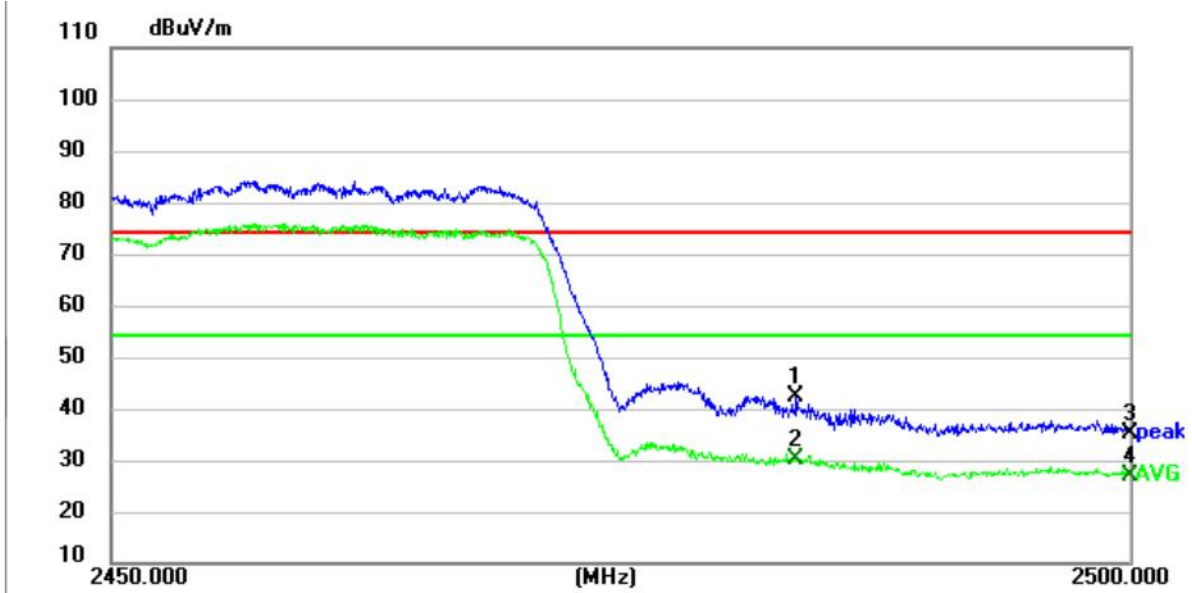

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.5000	59.40	-17.03	42.37	74.00	31.63	peak
2 *	2483.5000	47.27	-17.03	30.24	54.00	23.76	AVG
3	2500.0000	52.19	-16.94	35.25	74.00	38.75	peak
4	2500.0000	44.06	-16.94	27.12	54.00	26.88	AVG

Mode6 / Polarization: Vertical / CH: H

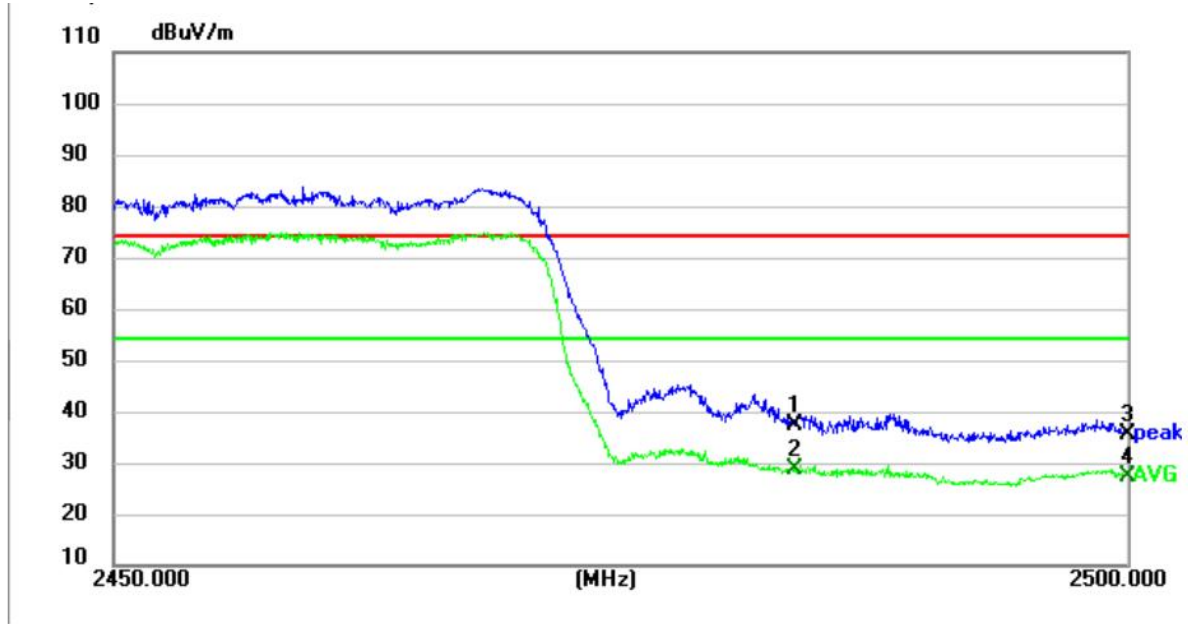

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.5000	54.46	-17.03	37.43	74.00	36.57	peak
2 *	2483.5000	45.95	-17.03	28.92	54.00	25.08	AVG
3	2500.0000	52.40	-16.94	35.46	74.00	38.54	peak
4	2500.0000	44.12	-16.94	27.18	54.00	26.82	AVG


6.2.6. Radiated Spurious Emission (below 1GHz)

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2020 section 6.6.4		
Procedure:	1>. The EUT was setup and tested according to ANSI C63.10. 2>. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level. 3>. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower. 4>. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines. 5>. Set to the maximum power setting and enable the EUT transmit continuously. 6>. Use the following spectrum analyzer settings a) Span shall wide enough to fully capture the emission being measured; b) RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold; If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.		

6.2.6.1. E.U.T. Operation

Operating Environment:					
Temperature:	22.3 °C	Humidity:	55.5 %	Atmospheric Pressure:	103 kPa
Pre test mode:	TM1, TM2, TM3, TM4, TM5, TM6				
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (TM6) is recorded in the report				

6.2.6.2. Test Setup Diagram

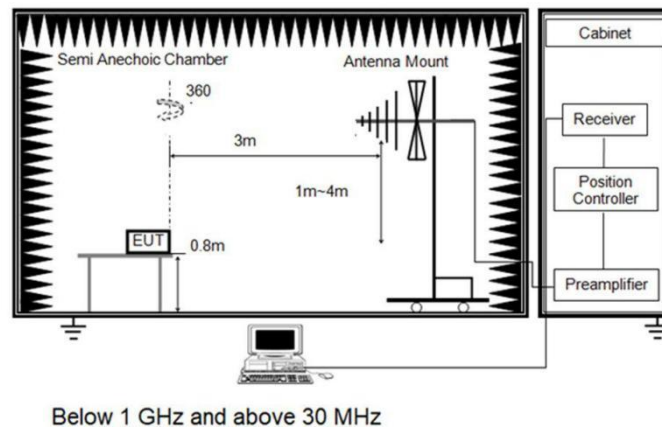

6.2.6.3. Test Result

Pass


6.2.6.4. Test Data

Mode6 / Polarization: Horizontal / CH: L



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	48.8428	49.79	-29.18	20.61	40.00	19.39	QP
2	70.5835	53.98	-33.16	20.82	40.00	19.18	QP
3	99.1797	56.53	-31.07	25.46	43.50	18.04	QP
4	150.5377	61.45	-33.34	28.11	43.50	15.39	QP
5 *	250.3011	63.24	-28.32	34.92	46.00	11.08	QP
6	750.1082	51.55	-17.25	34.30	46.00	11.70	QP

Mode6 / Polarization: Vertical / CH: L

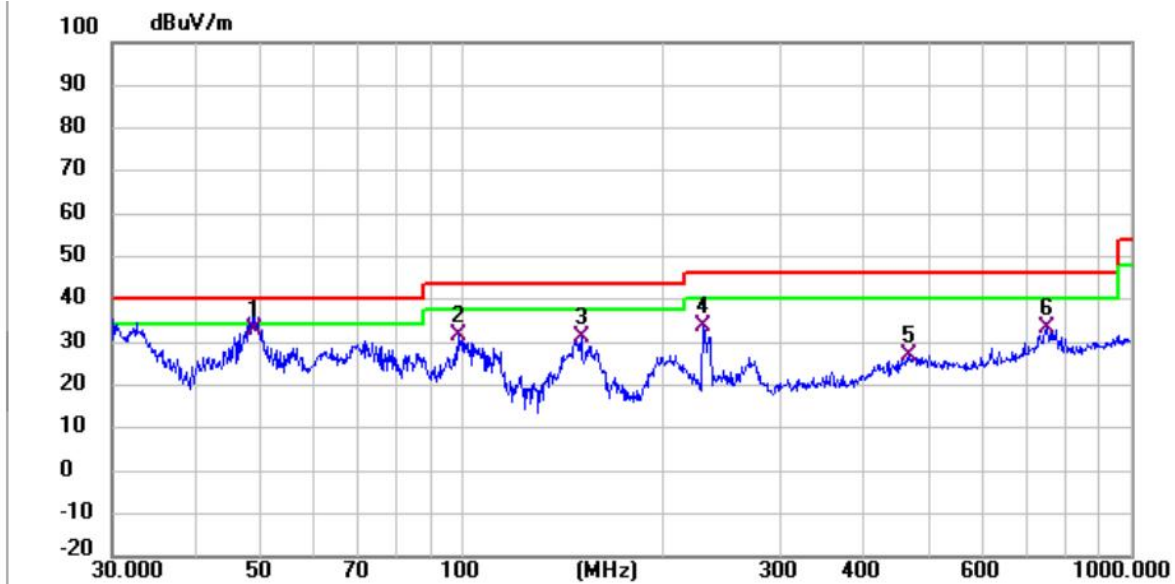

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	48.8428	62.32	-29.18	33.14	40.00	6.86	QP
2	99.1797	62.86	-31.07	31.79	43.50	11.71	QP
3	151.0665	64.50	-33.33	31.17	43.50	12.33	QP
4	230.0985	62.69	-29.05	33.64	46.00	12.36	QP
5	465.5994	49.98	-22.93	27.05	46.00	18.95	QP
6	747.4825	50.67	-17.16	33.51	46.00	12.49	QP

Note:

1>. For 9 kHz ~ 30 MHz Measurement

The EUT was pre-scanned this frequency band, found the radiated level 20dB lower than the limit, so don't show data on this report.

2>. Level= Reading + Factor (Antenna Factor+ Cable Loss- Preamp Factor)

3>. Margin = Limit – Level


6.2.7. Radiated Spurious Emission (Above 1GHz)

Test Requirement:	Refer to 47 CFR 15.247(d), in addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2020 section 6.6.4		
Procedure:	1>. The EUT was setup and tested according to ANSI C63.10. 2>. The EUT is placed on a turn table which is 0.8 meter above ground for 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level. 3>. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower. 4>. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines. 5>. Set to the maximum power setting and enable the EUT transmit continuously. 6>. Use the following spectrum analyzer settings a) Span shall wide enough to fully capture the emission being measured; b) Set RBW=1MHz, VBW=3MHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement For average measurement: use duty cycle correction factor method (DCCF) Average level = Peak level + DCCF		

6.2.7.1. E.U.T. Operation

Operating Environment:					
Temperature:	22.8 °C	Humidity:	55 %	Atmospheric Pressure:	103 kPa
Pre test mode:	TM1, TM2, TM3, TM4, TM5, TM6				
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (TM6) is recorded in the report				

6.2.7.2. Test Setup Diagram

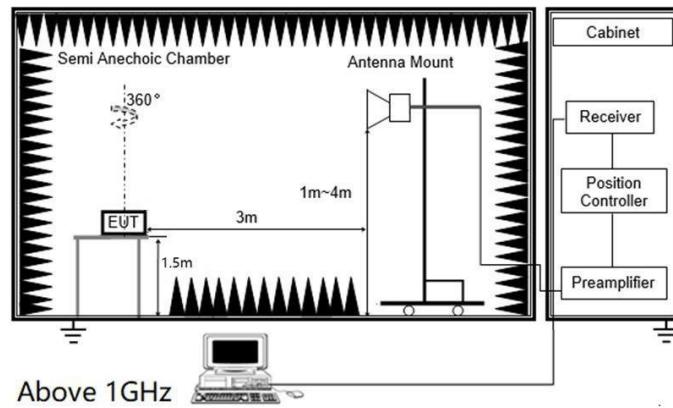


6.2.7.3. Test Result

Pass

6.2.7.4. Test Data


Ant6:

Mode6 / Polarization: Horizontal / CH: L

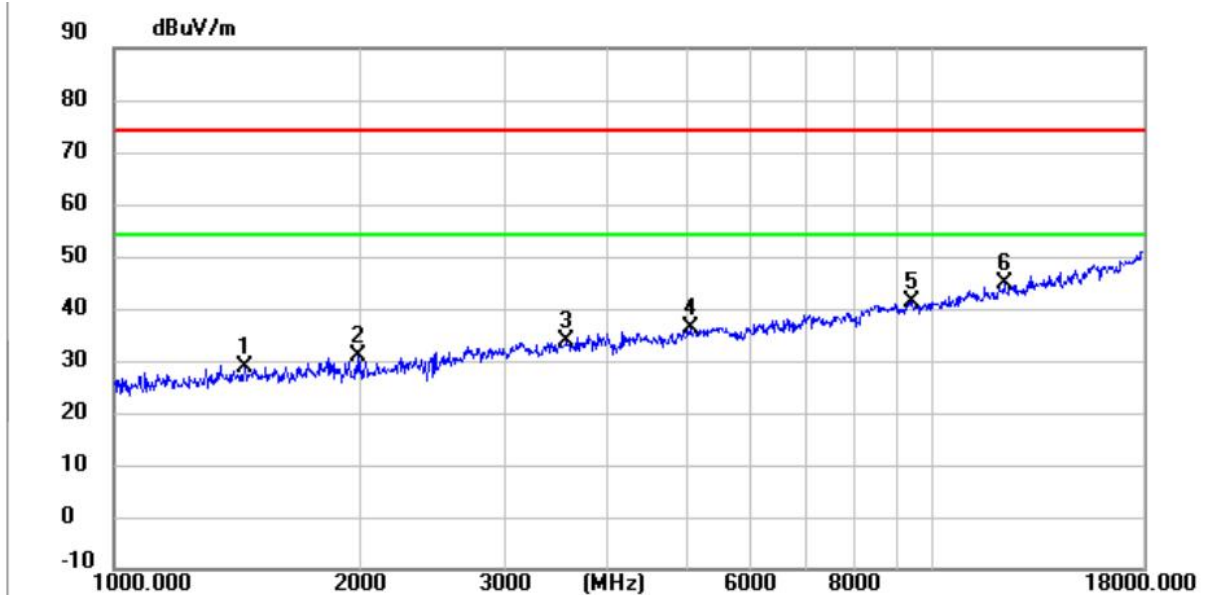


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1448.8000	49.64	-20.83	28.81	74.00	45.19	peak
2	1987.7000	49.41	-18.63	30.78	74.00	43.22	peak
3	3568.7000	47.42	-13.53	33.89	74.00	40.11	peak
4	5059.6000	44.58	-8.33	36.25	74.00	37.75	peak
5	9433.7000	31.54	9.59	41.13	74.00	32.87	peak
6 *	12191.1000	30.05	14.66	44.71	74.00	29.29	peak

Mode6 / Polarization: Vertical / CH: L

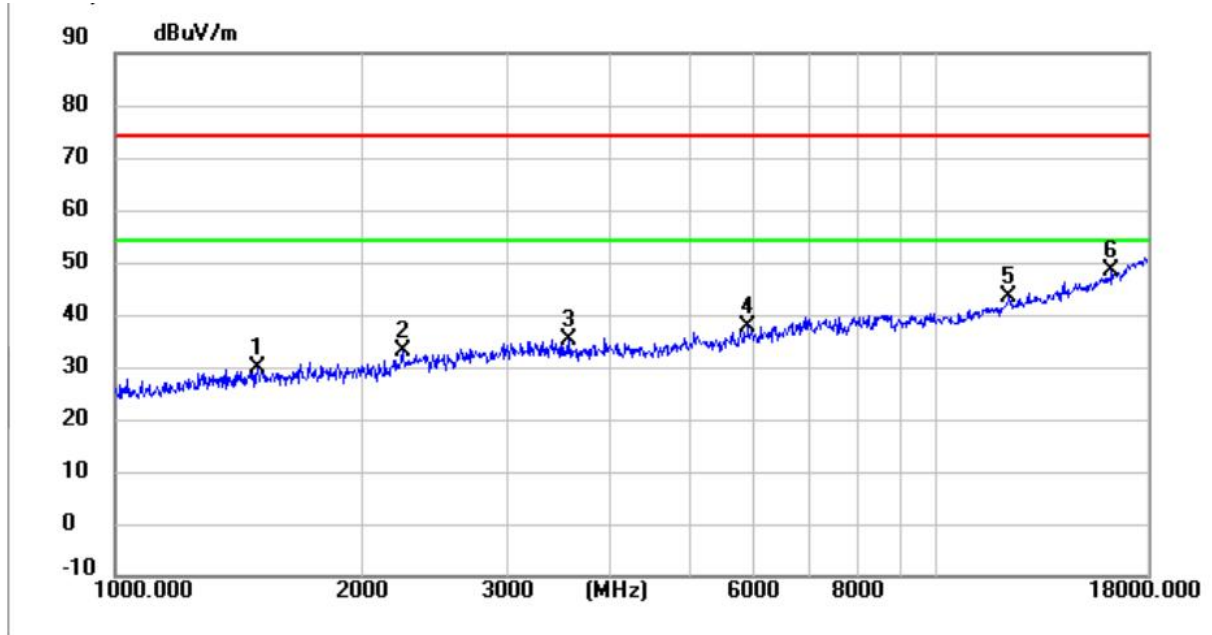


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1493.0000	50.70	-20.75	29.95	74.00	44.05	peak
2	2237.6000	50.62	-17.72	32.90	74.00	41.10	peak
3	3563.6000	48.76	-13.54	35.22	74.00	38.78	peak
4	5885.8000	43.88	-6.07	37.81	74.00	36.19	peak
5	12237.0000	28.56	14.68	43.24	74.00	30.76	peak
6 *	16293.2000	31.70	16.53	48.23	74.00	25.77	peak

Mode6 / Polarization: Horizontal / CH: M

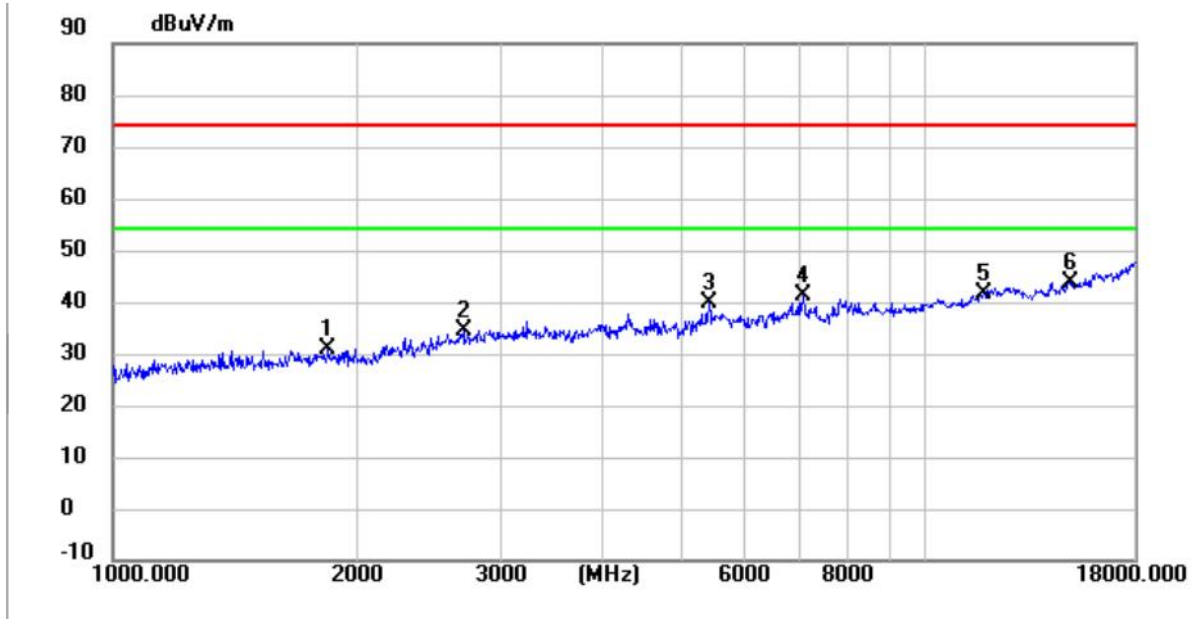


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1844.9000	50.41	-19.43	30.98	74.00	43.02	peak
2	2698.3000	50.36	-15.75	34.61	74.00	39.39	peak
3	5411.5000	46.34	-6.50	39.84	74.00	34.16	peak
4	7074.1000	37.25	3.95	41.20	74.00	32.80	peak
5	11769.5000	27.42	14.18	41.60	74.00	32.40	peak
6 *	15035.2000	25.99	17.69	43.68	74.00	30.32	peak

Mode6 / Polarization: Vertical / CH: M

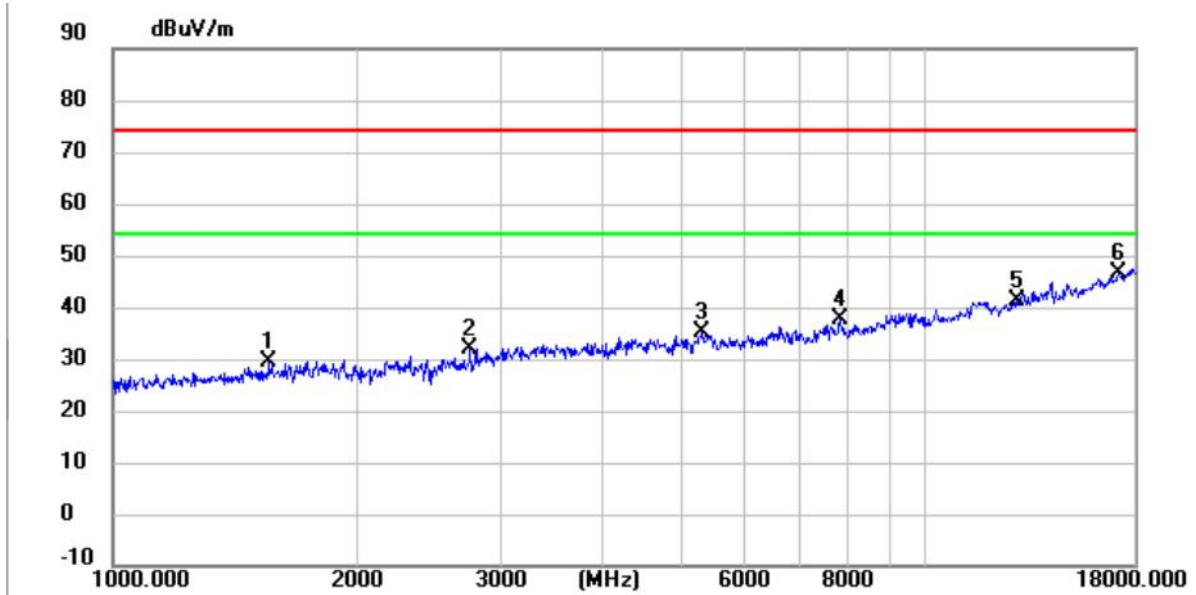


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1557.6000	50.13	-20.62	29.51	74.00	44.49	peak
2	2751.0000	47.56	-15.67	31.89	74.00	42.11	peak
3	5304.4000	42.85	-7.60	35.25	74.00	38.75	peak
4	7837.4000	31.81	5.89	37.70	74.00	36.30	peak
5	12947.6000	25.69	15.47	41.16	74.00	32.84	peak
6 *	17226.5000	27.57	19.02	46.59	74.00	27.41	peak

Mode6 / Polarization: Horizontal / CH: H

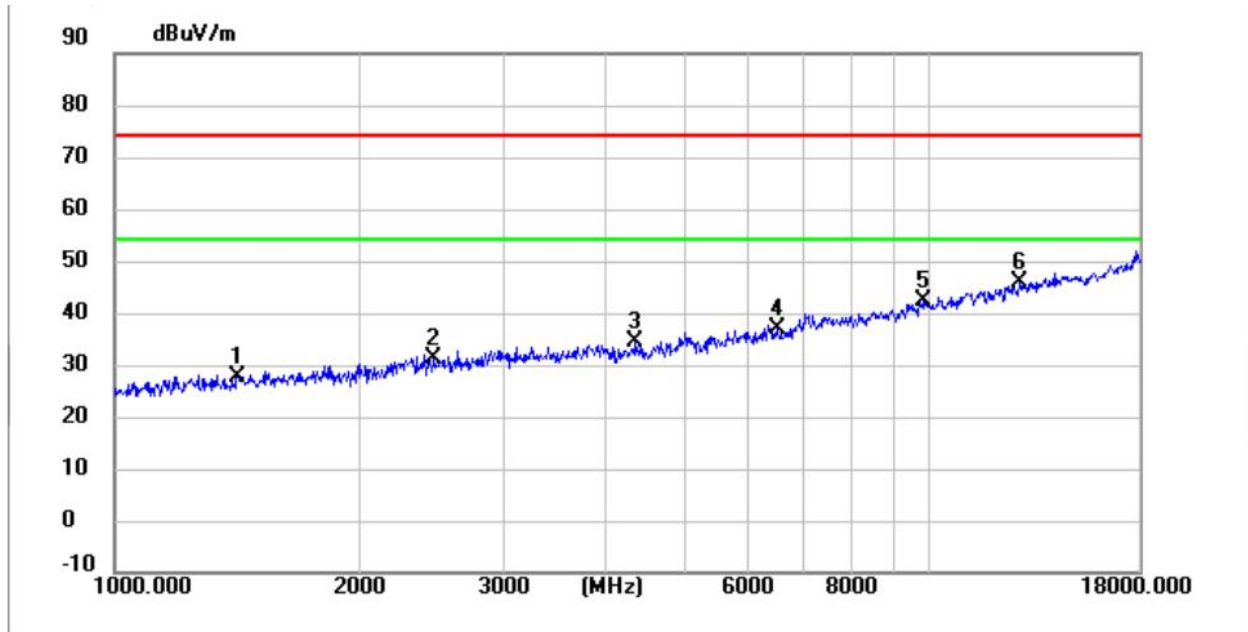

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1416.5000	48.79	-21.01	27.78	74.00	46.22	peak
2	2470.5000	48.41	-17.11	31.30	74.00	42.70	peak
3	4366.0000	45.90	-11.45	34.45	74.00	39.55	peak
4	6504.6000	37.77	-0.80	36.97	74.00	37.03	peak
5	9807.7000	31.67	10.62	42.29	74.00	31.71	peak
6 *	12859.2000	30.42	15.35	45.77	74.00	28.23	peak


Mode6 / Polarization: Vertical / CH: H

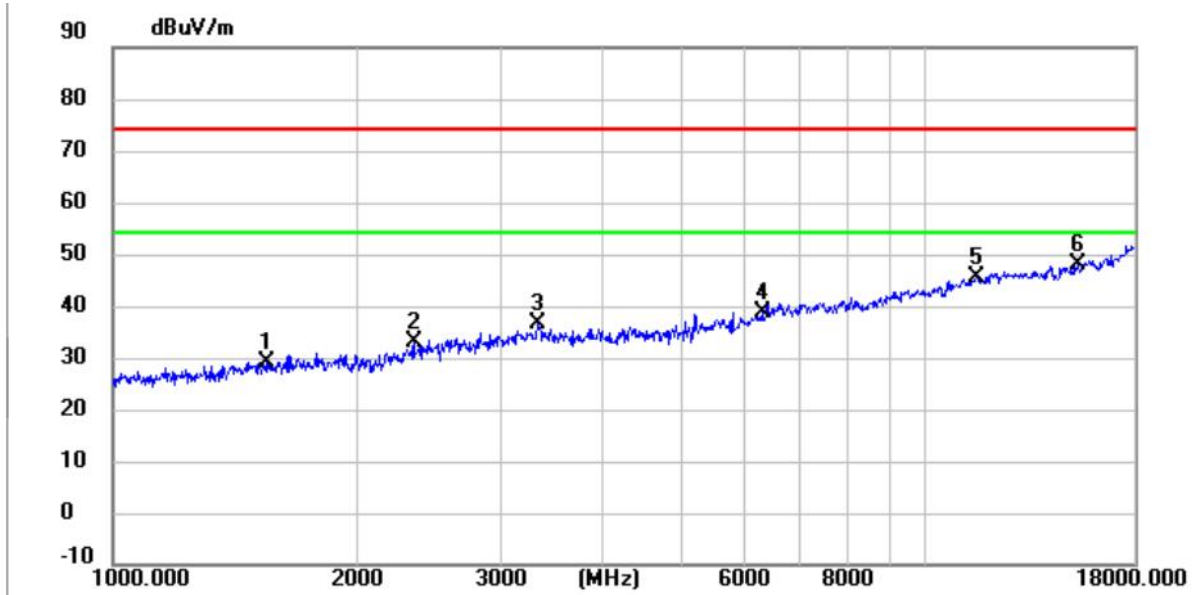

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1544.0000	49.85	-20.66	29.19	74.00	44.81	peak
2	2348.1000	50.49	-17.46	33.03	74.00	40.97	peak
3	3337.5000	50.46	-13.87	36.59	74.00	37.41	peak
4	6317.6000	41.40	-2.67	38.73	74.00	35.27	peak
5	11540.0000	31.63	14.03	45.66	74.00	28.34	peak
6 *	15382.0000	30.37	17.49	47.86	74.00	26.14	peak


Ant7:

Mode6 / Polarization: Horizontal / CH: L

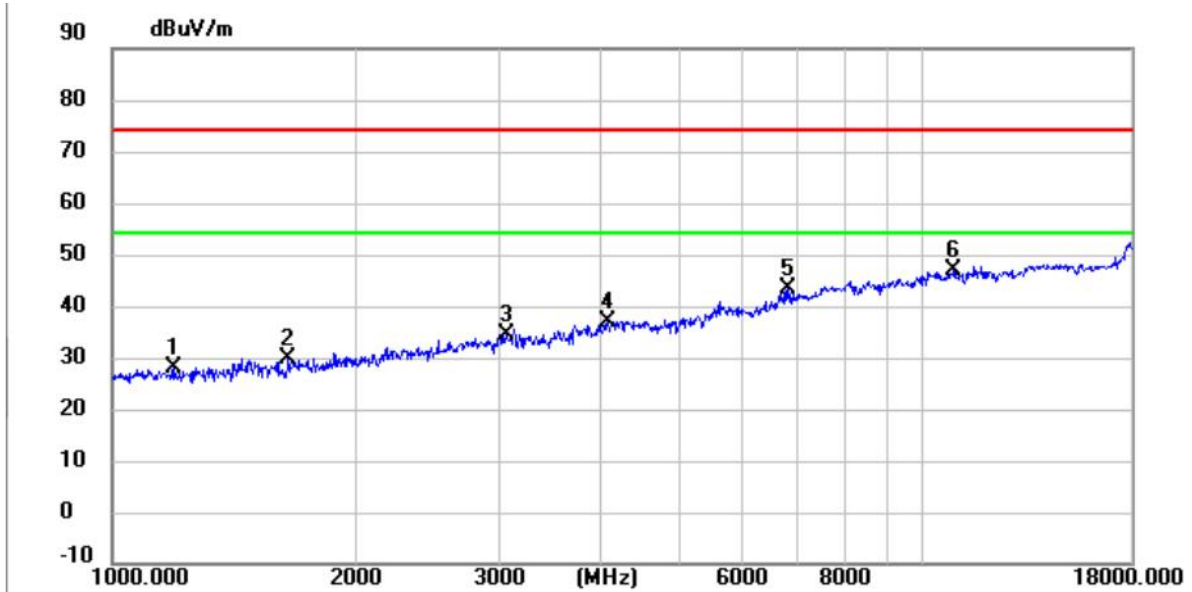


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1192.1000	49.68	-21.49	28.19	74.00	45.81	peak
2	1649.4000	50.05	-20.37	29.68	74.00	44.32	peak
3	3068.9000	49.13	-14.49	34.64	74.00	39.36	peak
4	4082.1000	49.13	-12.09	37.04	74.00	36.96	peak
5	6805.5000	41.37	1.87	43.24	74.00	30.76	peak
6 *	10909.3000	34.11	12.99	47.10	74.00	26.90	peak

Mode6 / Polarization: Vertical / CH: L

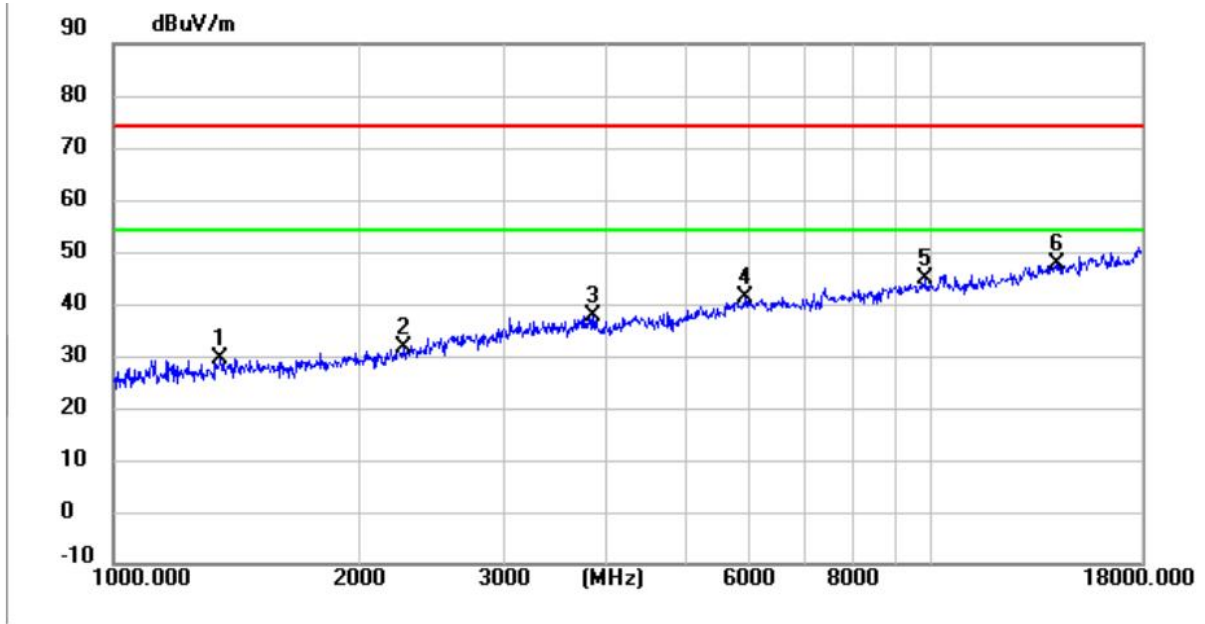


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1351.9000	50.81	-21.20	29.61	74.00	44.39	peak
2	2271.6000	49.16	-17.63	31.53	74.00	42.47	peak
3	3847.5000	50.56	-12.71	37.85	74.00	36.15	peak
4	5913.0000	47.36	-6.01	41.35	74.00	32.65	peak
5	9826.4000	34.11	10.64	44.75	74.00	29.25	peak
6 *	14186.9000	28.93	18.62	47.55	74.00	26.45	peak

Mode6 / Polarization: Horizontal / CH: M

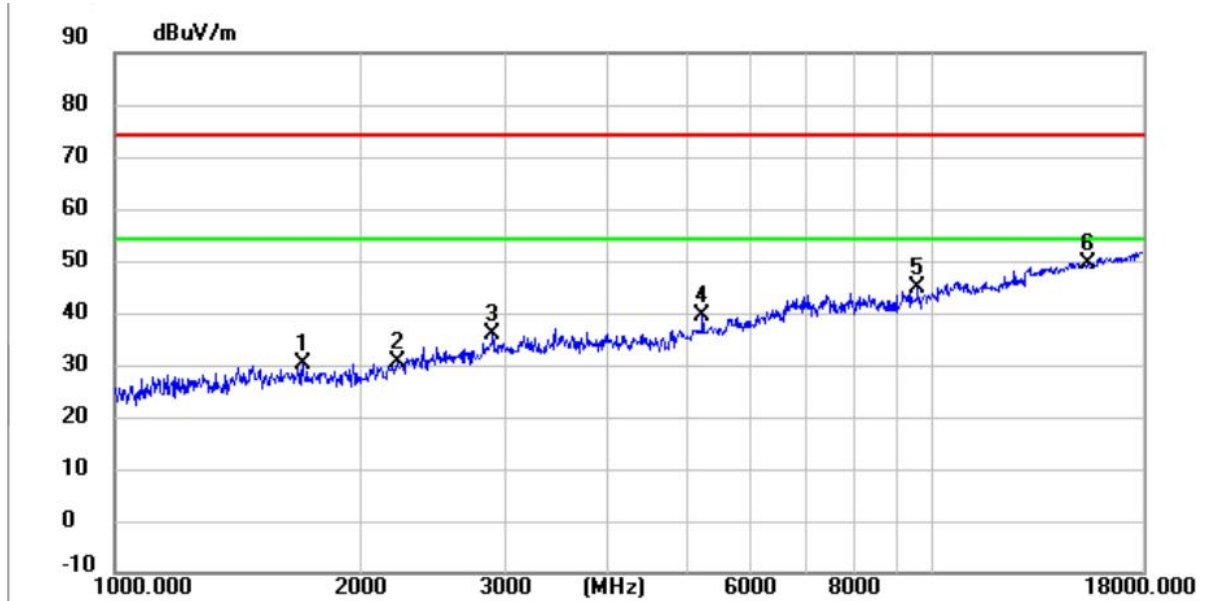


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1700.4000	50.11	-20.08	30.03	74.00	43.97	peak
2	2218.9000	48.14	-17.75	30.39	74.00	43.61	peak
3	2902.3000	50.63	-14.86	35.77	74.00	38.23	peak
4	5236.4000	47.29	-7.91	39.38	74.00	34.62	peak
5	9574.8000	35.03	9.97	45.00	74.00	29.00	peak
6 *	15443.2000	32.19	17.40	49.59	74.00	24.41	peak

Mode6 / Polarization: Vertical / CH: M

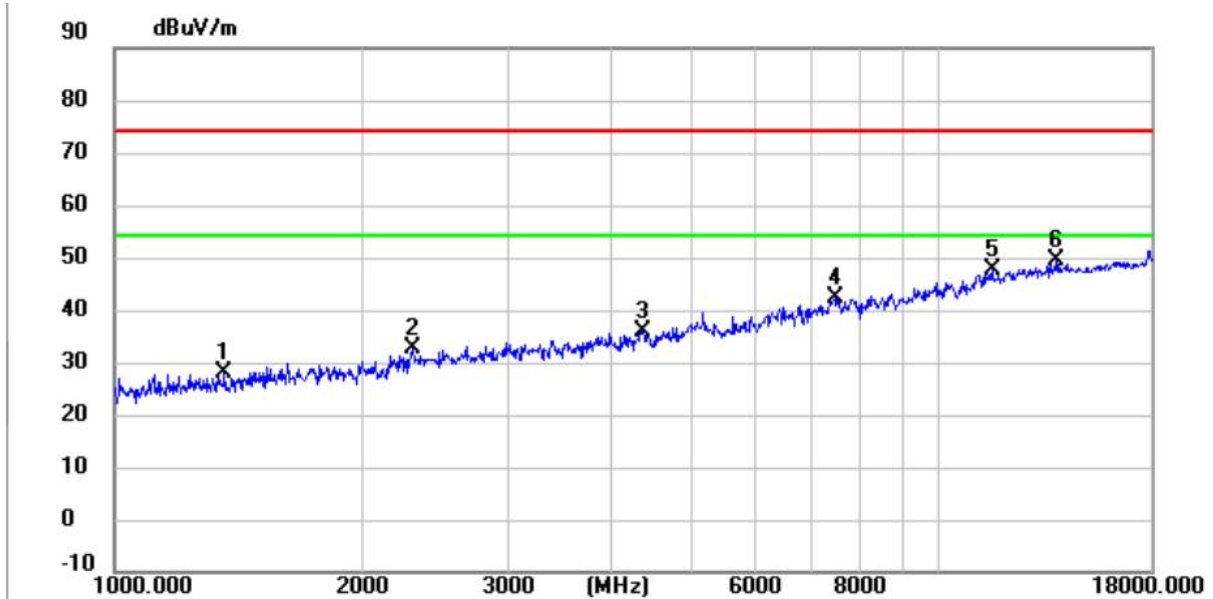


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1362.1000	49.31	-21.17	28.14	74.00	45.86	peak
2	2303.9000	50.37	-17.52	32.85	74.00	41.15	peak
3	4374.5000	47.48	-11.41	36.07	74.00	37.93	peak
4	7461.7000	37.15	5.13	42.28	74.00	31.72	peak
5	11592.7000	33.60	14.02	47.62	74.00	26.38	peak
6 *	13809.5000	31.43	17.88	49.31	74.00	24.69	peak

Mode6 / Polarization: Horizontal / CH: H

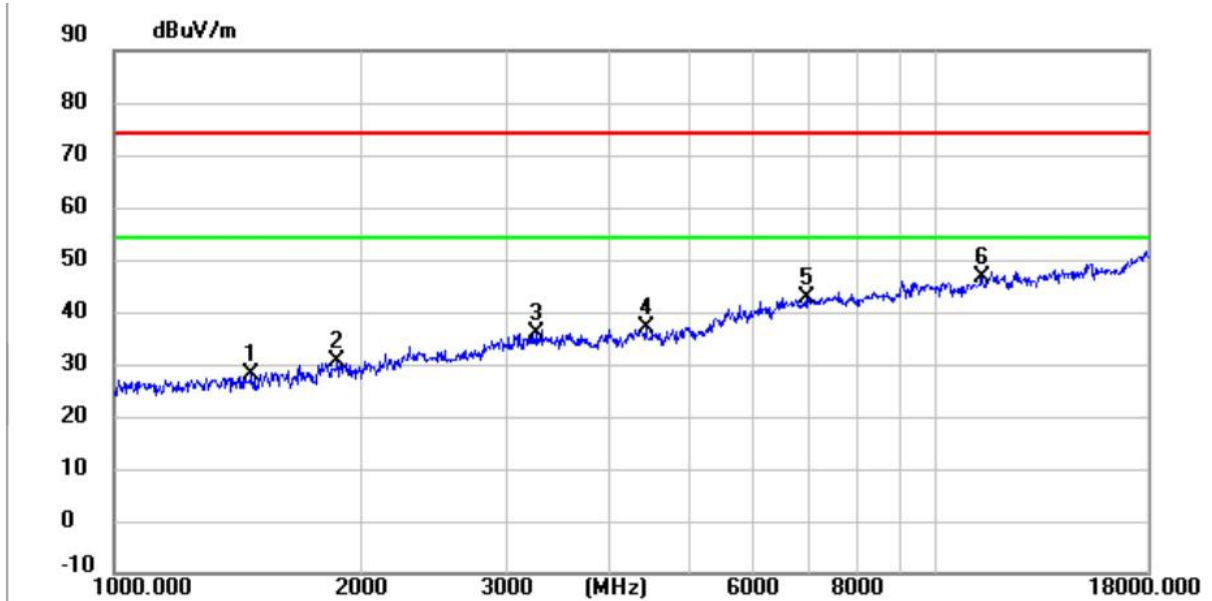

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1472.6000	48.93	-20.78	28.15	74.00	45.85	peak
2	1867.0000	49.98	-19.37	30.61	74.00	43.39	peak
3	3262.7000	50.00	-13.94	36.06	74.00	37.94	peak
4	4442.5000	47.97	-11.07	36.90	74.00	37.10	peak
5	6970.4000	39.43	3.39	42.82	74.00	31.18	peak
6 *	11358.1000	32.74	13.86	46.60	74.00	27.40	peak

Mode6 / Polarization: Vertical / CH: H

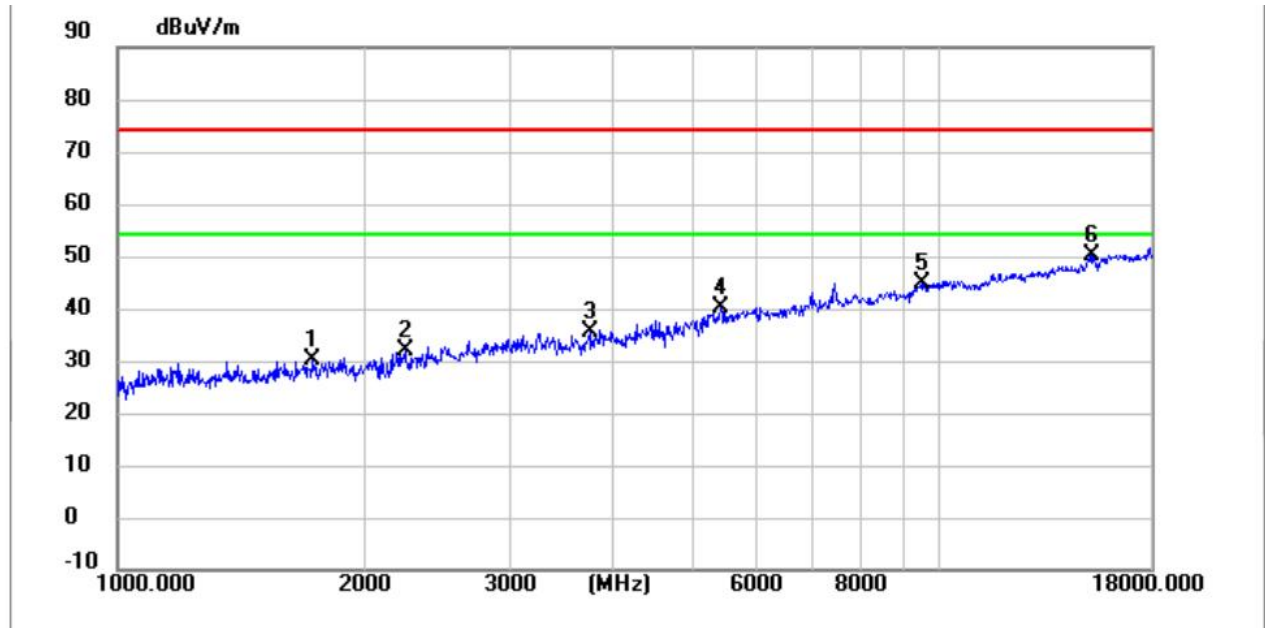

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1724.2000	50.25	-19.95	30.30	74.00	43.70	peak
2	2239.3000	49.82	-17.71	32.11	74.00	41.89	peak
3	3752.3000	48.51	-12.98	35.53	74.00	38.47	peak
4	5423.4000	46.86	-6.70	40.16	74.00	33.84	peak
5	9479.6000	35.09	9.69	44.78	74.00	29.22	peak
6 *	15332.7000	32.63	17.57	50.20	74.00	23.80	peak

Note:

1>. Level= Reading + Factor (Antenna Factor+ Cable Loss- Preamp Factor)

2>. Margin = Limit – Level

3>. Average measurement was not performed if peak level is lower than average limit (54dBuV/m) above 1GHz.

-----End of the report-----