



中国认可
国际互认
检测
TESTING
CNAS L2264

RF TEST REPORT

Applicant ZTE CORPORATION

FCC ID SRQ-BLADEV8

Product LTE/WCDMA/GSM (GPRS)
Mutil-Mode Digital Mobile Phone

Model ZTE BLADE V8/BLADE V8/ZTE
BLADE V0800

Report No. RXA1612-0288RF01

Issue Date January 24, 2017

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2016)/ FCC CFR 47 Part 22H (2016)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Xianqing Li

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the Test Report	4
1.2. Test facility	4
1.3. Testing Location	5
2. General Description of Equipment under Test	6
3. Applied Standards	7
4. Test Configuration	8
5. Test Case Results	9
5.1. RF Power Output	9
5.2. Effective Radiated Power	11
5.3. Occupied Bandwidth	14
5.4. Band Edge Compliance	18
5.5. Frequency Stability	21
5.6. Spurious Emissions at Antenna Terminals	24
5.7. Radiates Spurious Emission	26
6. Main Test Instruments	32
ANNEX A: EUT Appearance and Test Setup	33
A.1 EUT Appearance	33
A.2 Test Setup	34



Summary of measurement results

No.	Test Type	Clause in FCC rules	Verdict
1	RF power output	2.1046	PASS
2	Effective Radiated Power	22.913(a)(2)	PASS
3	Occupied Bandwidth	2.1049	PASS
4	Band Edge Compliance	2.1051 / 22.917(a)	PASS
5	Frequency Stability	2.1055 / 22.355	PASS
6	Spurious Emissions at Antenna Terminals	2.1051 / 22.917(a)	PASS
7	Radiates Spurious Emission	2.1053 / 22.917 (a)	PASS
Date of Testing: December 28, 2016~ January 17, 2017			



1. Test Laboratory

1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement by CNAS or any government agencies.

1.2. Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (recognition number is 428261)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

Client Information

Applicant	ZTE CORPORATION
Applicant address	ZTE Plaza,Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R. China
Manufacturer	ZTE CORPORATION
Manufacturer address	ZTE Plaza,Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R. China

General Information

EUT Description			
Model:	ZTE BLADE V8/BLADE V8/ZTE BLADE V0800		
Product IMEI:	862121030052824		
Hardware Version:	uy4A		
Software Version:	TEL_MX_BLADE_V8V1.0.0		
Power Supply:	Battery/AC adapter		
Antenna Type:	Internal Antenna		
Test Mode(s):	GSM 850: WCDMA Band V;		
Test Modulation:	(GSM)GMSK,8PSK; (WCDMA)QPSK;		
GPRS/ EGPRS Multislot Class:	33		
HSDPA UE Category:	24		
HSUPA UE Category:	6		
Maximum E.R.P.	GSM 850: 26.32 dBm WCDMA Band V:16.71 dBm		
Rated Power Supply Voltage:	3.87V		
Extreme Voltage:	Minimum: 3.65V Maximum: 4.4V		
Extreme Temperature:	Lowest: -10°C Highest: +55°C		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM850	824 ~ 849	869 ~ 894
	WCDMA Band V	824 ~ 849	869 ~ 894
EUT Accessory			
Battery	Manufacturer: HARBIN COSLIGHT POWER CO LTD Model: Li3927T44P8h786035 Ratings:3.87Vdc,2730mAh,10.6Wh		
USB Cable	100cm		
Note: The information of the EUT is declared by the manufacturer. Please refer to the specifications or user manual for details.			



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR47 Part 2 (2016)

FCC CFR 47 Part 22H (2016)

ANSI/TIA-603-D (2010)

KDB 971168 D01 Power Meas License Digital Systems v02r02

4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (Z axis, vertical polarization) and the worst case was recorded.

All mode and data rates and positions were investigated.

The following testing in GSM/WCDMA is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below:

	Test items	Modes/Modulation	
		GSM 850	WCDMA Band V
Conducted Test cases	RF power output	GSM/GPRS/EGPRS	RMC HSDPA/HSUPA DC-HSDPA/HSPA+
	Occupied Bandwidth	GSM/GPRS/EGPRS	RMC
	Band Edge Compliance	GSM/GPRS/EGPRS	RMC
	Frequency Stability	GSM/GPRS/EGPRS	RMC
	Spurious Emissions at Antenna Terminals	GSM	RMC
Radiated Test cases	Effective Radiated Power	GSM/GPRS/EGPRS	RMC
	Radiates Spurious Emission	GSM	RMC

5. Test Case Results

5.1. RF Power Output


Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

Test Setup

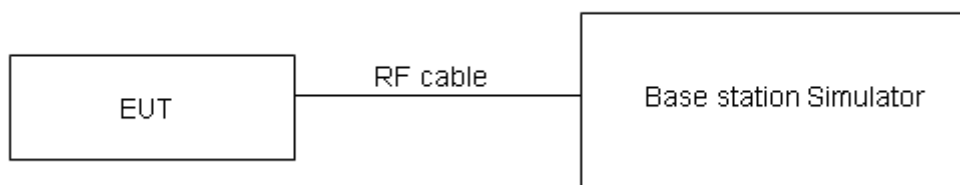

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

Limits

No specific RF power output requirements in part 2.1046.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

Test Results

GSM 850		Conducted Power(dBm)		
		Channel 128	Channel 190	Channel 251
		824.2 (MHz)	836.6 (MHz)	848.8 (MHz)
GSM	Results	32.89	32.67	32.71
GPRS (GMSK)	1TXslot	32.77	32.59	32.42
	2TXslots	29.52	29.57	28.98
	3TXslots	27.13	27.08	27.01
	4TXslots	25.46	25.42	25.44
EGPRS (8PSK)	1TXslot	25.37	25.43	25.54
	2TXslots	23.41	23.31	23.22
	3TXslots	21.39	21.45	21.33
	4TXslots	20.45	20.60	20.54
Note: 1) The maximum RF Output Power numbers are marks in bold. 2) The following testing in GSM based on the maximum RF Output Power.				

WCDMA Band V		Conducted Power(dBm)		
		Channel 4132	Channel 4183	Channel 4233
		826.4(MHz)	836.6(MHz)	846.6(MHz)
RMC		23.59	23.54	23.53
HSDPA	Sub - Test 1	23.49	23.37	23.37
	Sub - Test 2	23.43	23.38	23.36
	Sub - Test 3	22.92	22.98	22.94
	Sub - Test 4	22.93	22.97	22.96
HSUPA	Sub - Test 1	23.42	23.46	23.45
	Sub - Test 2	21.67	21.62	21.61
	Sub - Test 3	22.49	22.44	22.43
	Sub - Test 4	21.68	21.63	21.62
	Sub - Test 5	23.47	23.42	23.41
DC-HSDPA	Sub - Test 1	23.46	23.41	23.40
	Sub - Test 2	23.55	23.39	23.39
	Sub - Test 3	23.04	22.88	22.88
	Sub - Test 4	23.03	22.87	22.87
Note: 1) The maximum RF Output Power numbers are marks in bold. 2) The following testing in RMC based on the maximum RF Output Power.				

5.2. Effective Radiated Power

Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%


Methods of Measurement

The measurement procedures in TIA- 603-D are used.

1. The EUT was placed on a turntable with 1.5 meter height in a fully anechoic chamber.
2. The EUT was set at 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. GSM operating modes: Set RBW= 1MHz, VBW= 3MHz, RMS detector over burst;
UMTS operating modes: Set RBW= 100 KHz, VBW= 300 KHz, RMS detector over frame, and use channel power option with bandwidth=5MHz, per section 4.0 of KDB 971168 D01.
4. The table was rotated 360 degrees to determine the position of the highest radiated power.
5. The height of the receiving antenna is adjusted to look for the maximum ERP/EIRP.
6. Taking the record of maximum ERP/EIRP.
7. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
8. The conducted power at the terminal of the dipole antenna is measured.
9. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
10. $ERP/EIRP = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$
 P_s (dBm) : Input power to substitution antenna.
 G_s (dBi or dBd) : Substitution antenna Gain.
 $E_t = R_t + AF$
 $E_s = R_s + AF$
 AF (dB/m) : Receive antenna factor
 R_t : The highest received signal in spectrum analyzer for EUT.
 R_s : The highest received signal in spectrum analyzer for substitution antenna.

$$EIRP = E.R.P + 2.15$$

Test Setup

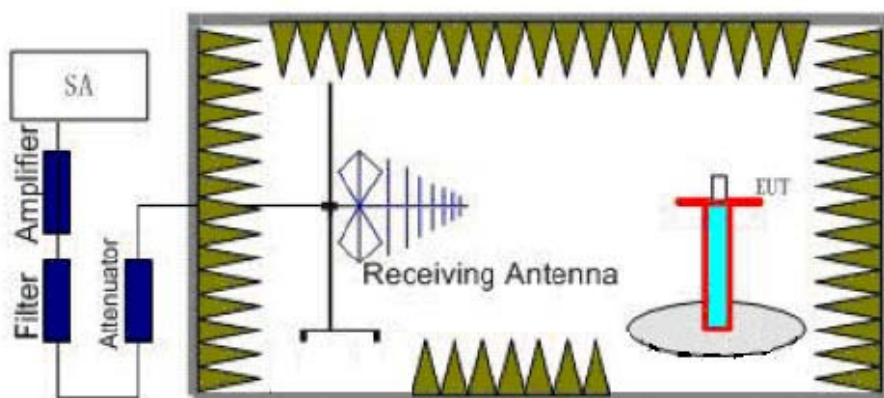

Limits

Rule Part 22.913(a) specifies that "Mobile/portable stations are limited to 7 watts ERP".

Limit	$\leq 7 \text{ W}$ (38.45 dBm)
-------	--------------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 1.19 \text{ dB}$

Test Results:

Mode	Polarization	Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	Limit (dBm)	Conclusion
GSM 850	H	824.2	-19.07	-45.53	0.00	1.06	25.37	38.45	Pass
	H	836.6	-18.58	-45.38	0.00	1.24	25.89	38.45	Pass
	H	848.8	-18.28	-45.37	0.00	1.38	26.32	38.45	Pass
	V	824.2	-32.11	-45.65	0.00	1.06	12.45	38.45	Pass
	V	836.6	-31.23	-45.46	0.00	1.24	13.32	38.45	Pass
	V	848.8	-30.38	-45.49	0.00	1.38	14.34	38.45	Pass
GPRS 850	H	824.2	-24.38	-45.53	0.00	1.06	20.06	38.45	Pass
	H	836.6	-24.85	-45.38	0.00	1.24	19.62	38.45	Pass
	H	848.8	-25.27	-45.37	0.00	1.38	19.33	38.45	Pass
	V	824.2	-28.28	-45.65	0.00	1.06	16.28	38.45	Pass
	V	836.6	-27.19	-45.46	0.00	1.24	17.36	38.45	Pass
	V	848.8	-37.77	-45.49	0.00	1.38	6.95	38.45	Pass
EGPRS 850	H	824.2	-24.16	-45.53	0.00	1.06	20.28	38.45	Pass
	H	836.6	-24.88	-45.38	0.00	1.24	19.59	38.45	Pass
	H	848.8	-25.23	-45.37	0.00	1.38	19.37	38.45	Pass
	V	824.2	-37.36	-45.65	0.00	1.06	7.20	38.45	Pass
	V	836.6	-37.54	-45.46	0.00	1.24	7.01	38.45	Pass
	V	848.8	-37.48	-45.49	0.00	1.38	7.24	38.45	Pass
WCDMA	H	826.4	-28.61	-45.44	0.00	1.13	15.81	38.45	Pass



Band V	H	836.6	-28.27	-45.38	0.00	1.24	16.20	38.45	Pass
	H	846.6	-27.87	-45.38	0.00	1.35	16.71	38.45	Pass
	V	826.4	-41.69	-45.54	0.00	1.13	2.83	38.45	Pass
	V	836.6	-41.03	-45.46	0.00	1.24	3.52	38.45	Pass
	V	846.6	-40.69	-45.49	0.00	1.35	4.00	38.45	Pass

5.3. Occupied Bandwidth

Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Method of Measurement


The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 3kHz, VBW is set to 10kHz for GSM 850,

RBW is set to 51kHz, VBW is set to 160kHz for WCDMA Band V,

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

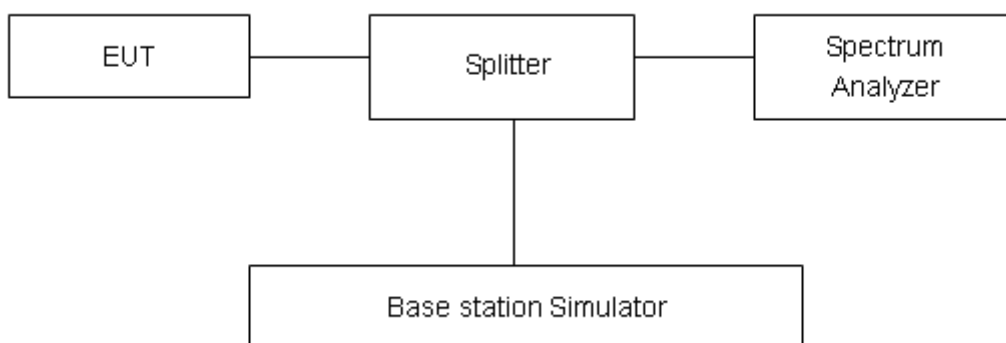

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 624\text{Hz}$.

Test Result

Mode	Channel	Frequency (MHz)	99% Power Bandwidth (kHz)	-26dBc Bandwidth(kHz)
GSM 850 (GSM)	128	824.2	243.82	323.4
	190	836.6	248.44	311.4
	251	848.8	248.45	310.6
GPRS 850 (GMSK)	128	824.2	247.09	310.2
	190	836.6	244.01	310.7
	251	848.8	243.56	308.6
EGPRS 850 (8-PSK)	128	824.2	244.47	312.2
	190	836.6	240.80	302.8
	251	848.8	244.33	305.1
WCDMA Band V (RMC)	4132	826.4	4111.9	4703.0
	4183	836.6	4115.3	4636.0
	4233	846.6	4113.8	4705.0




GSM 850 CH-Low




GSM 850 GPRS CH-Low




GSM 850 CH-Middle

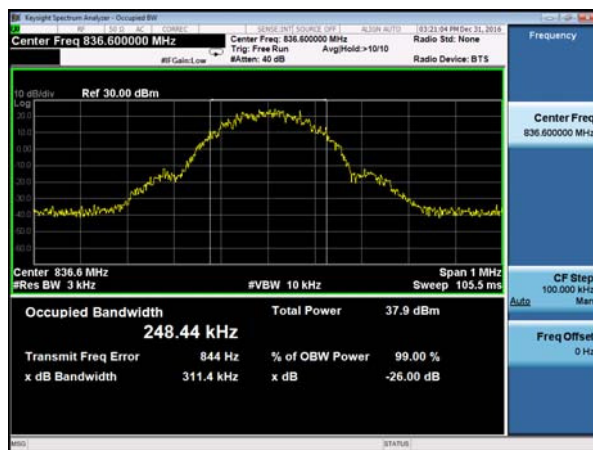

GSM 850 GPRS CH-Middle

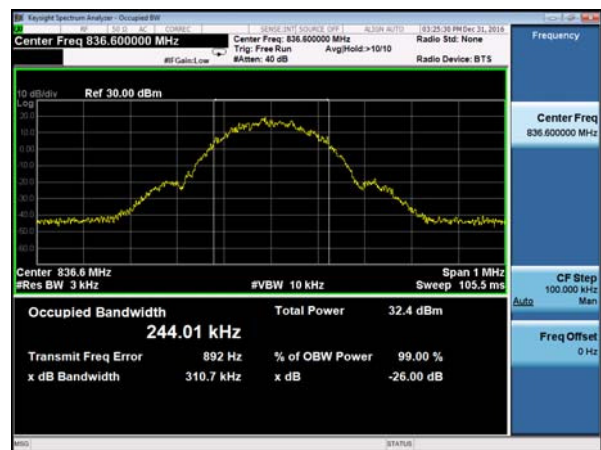

GSM 850 CH-High

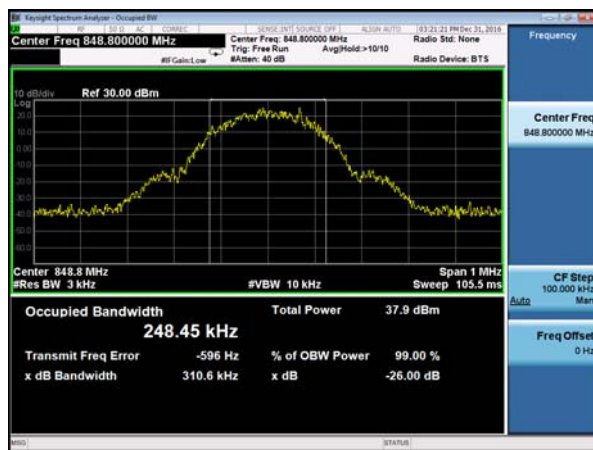


GSM 850 GPRS CH-High







GSM 850 EGPRS CH-Low

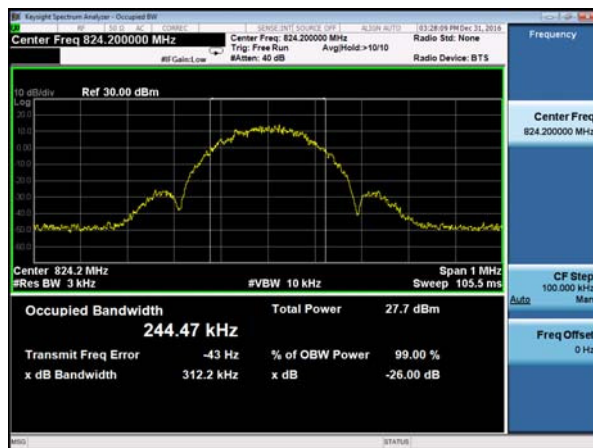


WCDMA Band V CH-Low

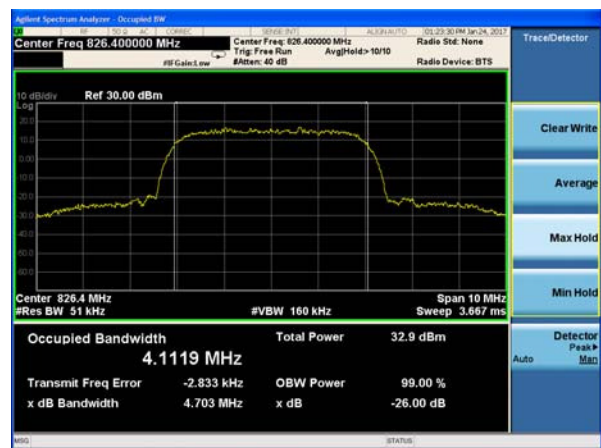


GSM 850 EGPRS CH-Middle

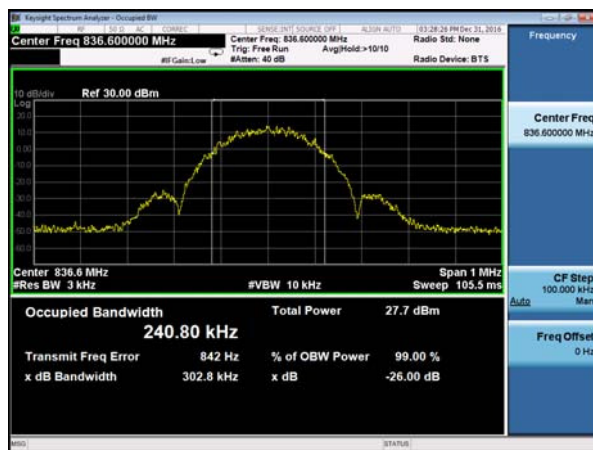


WCDMA Band V CH-Middle

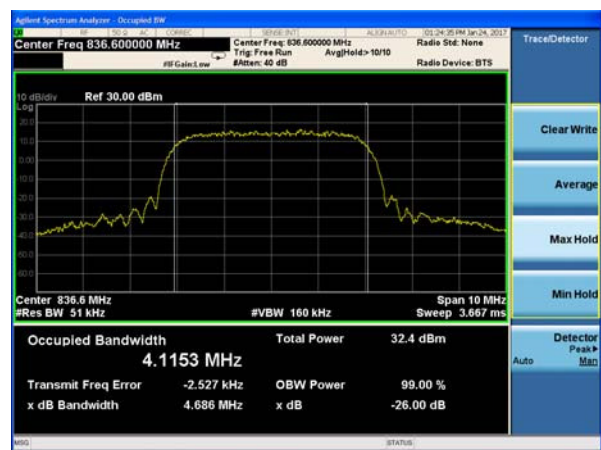

GSM 850 EGPRS CH-High

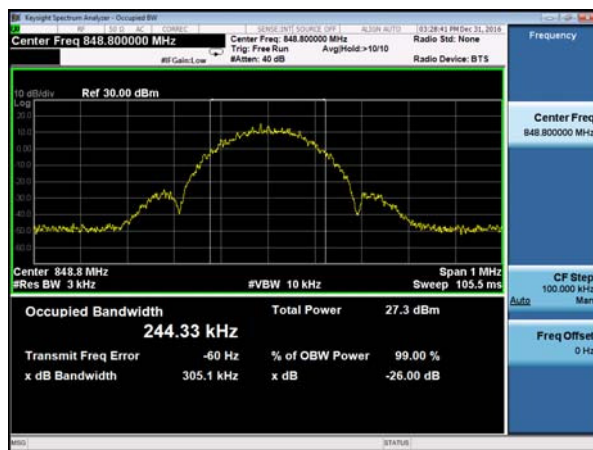

WCDMA Band V CH-High

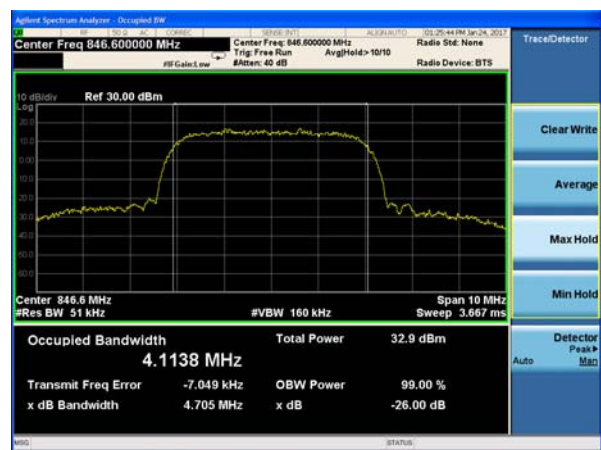

5.4. Band Edge Compliance


Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The average detector is used. RBW is set to 3kHz,VBW is set to 10kHz for GSM 850, RBW is set to 51kHz,VBW is set to 160kHz for WCDMA Band V, Spectrum analyzer plots are included on the following pages.

Test Setup

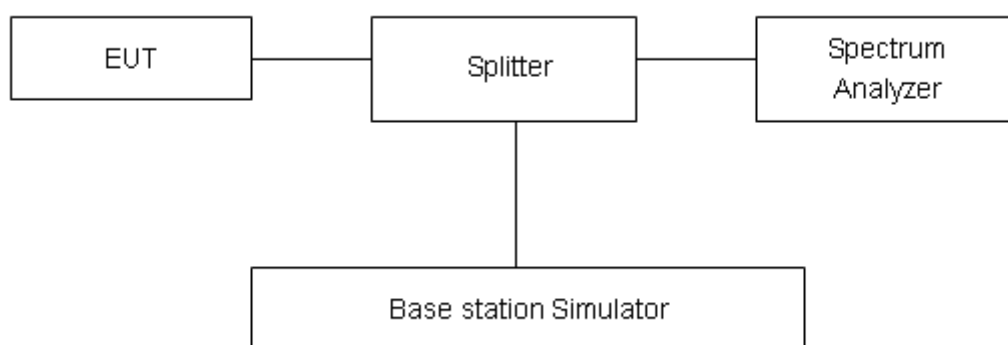

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.”

Limit	-13 dBm
-------	---------


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684$ dB.



Test Result:


GSM 850 CH-Low

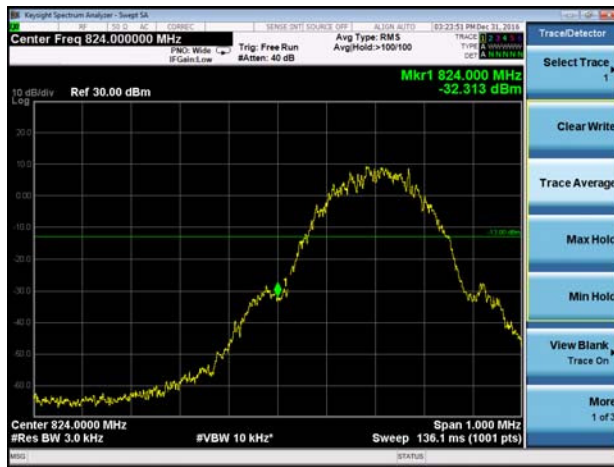

GSM 850 CH-High




GSM 850 GPRS CH-Low

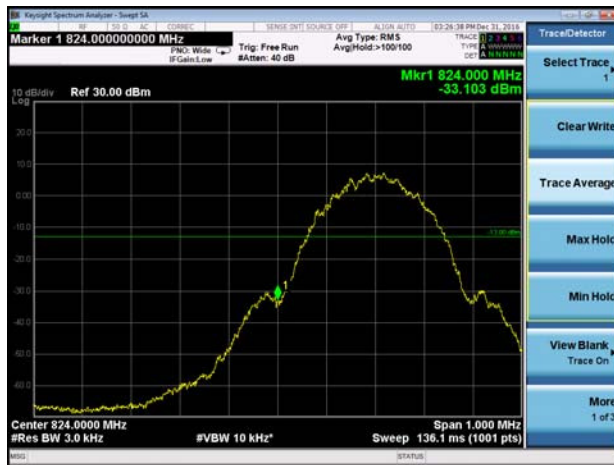

GSM 850 GPRS CH-High



GSM 850 EGPRS CH-Low

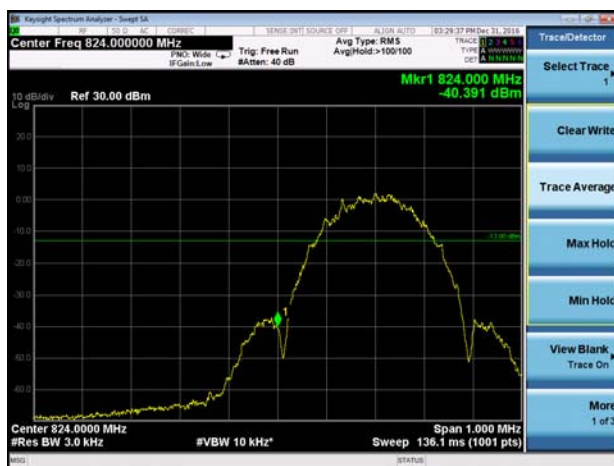

GSM 850 EGPRS CH-High





WCDMA Band V CH-Low



5.5. Frequency Stability

Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Method of Measurement

1. Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +50°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

2. Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.65 V and 4.4 V, with a nominal voltage of 3.87V.

Test setup

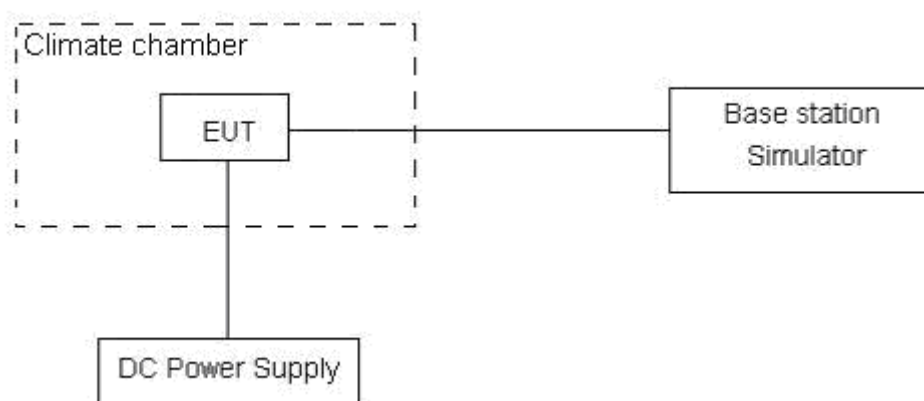

**Limits**

According to the Sec. 22.355, the frequency stability of the carrier shall be accurate to within 2.5 ppm of the received frequency for mobile stations.

Limits	≤ 2.5 ppm
--------	----------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3$, $U = 0.01$ ppm.

Test Result

Mode	Test status	Test Results (ppm)			Limit (ppm)	Conclusion
		GSM (GMSK)	GPRS (GMSK)	EGPRS (8PSK)		
GSM 850 Channel 190	-30°C/3.87V	0.0188	0.0222	0.0245	2.5	PASS
	-20°C/3.87V	0.0222	0.0238	0.0255	2.5	PASS
	-10°C/3.87V	0.0185	0.0184	0.0243	2.5	PASS
	0°C/3.87V	0.0081	0.0224	0.0261	2.5	PASS
	10°C/3.87V	0.0213	0.0249	0.0247	2.5	PASS
	20°C/3.87V	0.0202	0.0243	0.0234	2.5	PASS
	30°C/3.87V	0.0106	0.0248	0.0222	2.5	PASS
	40°C/3.87V	0.0166	0.0185	0.0224	2.5	PASS
	50°C/3.87V	0.0110	0.0180	0.0241	2.5	PASS
	20°C/3.65 V	0.0095	0.0235	0.0185	2.5	PASS
	20°C/4.40 V	-0.0052	0.0255	0.0166	2.5	PASS
/	/	RMC			/	/
WCDMA Band V Channel 4183	-30°C/3.87V	-0.000325			2.5	PASS
	-20°C/3.87V	-0.000582			2.5	PASS
	-10°C/3.87V	0.000048			2.5	PASS
	0°C/3.87V	0.000321			2.5	PASS
	10°C/3.87V	0.000146			2.5	PASS
	20°C/3.87V	0.000375			2.5	PASS
	30°C/3.87V	-0.000467			2.5	PASS
	40°C/3.87V	-0.000265			2.5	PASS
	50°C/3.87V	0.000174			2.5	PASS
	20°C/3.65 V	-0.000158			2.5	PASS
	20°C/4.40 V	0.0002160			2.5	PASS

5.6. Spurious Emissions at Antenna Terminals


Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. RBW and VBW are set to 100 kHz, Sweep is set to ATUO.

Test setup

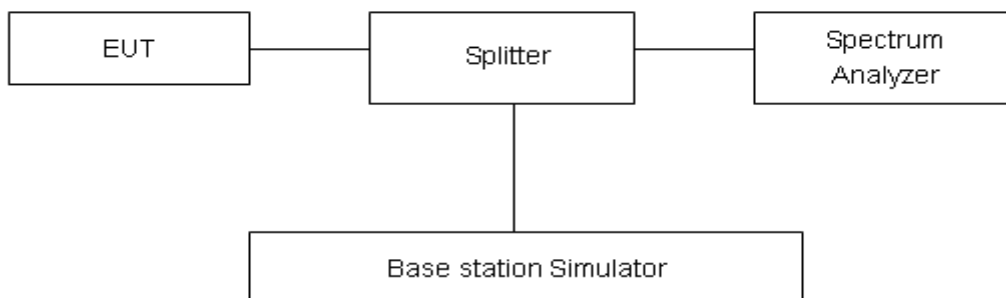

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-12.75GHz	1.407 dB

Test Result


Sweep from 9 kHz to 30MHz, and the emissions more than 20 dB below the permissible value are not reported.

If disturbances were found more than 20dB below limit line, the mark is not required for the EUT.
The signal beyond the limit is carrier.


GSM 850 CH-Low 30MHz~9GHz

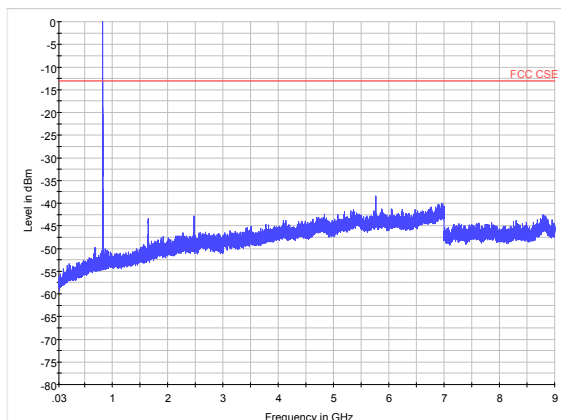


WCDMA Band V CH-Low 30MHz~9GHz

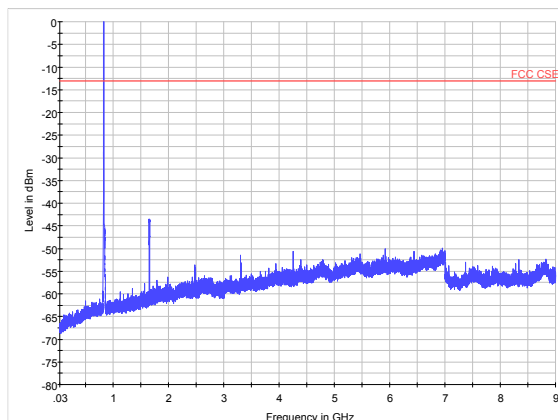


GSM 850 CH-Middle 30MHz~9GHz

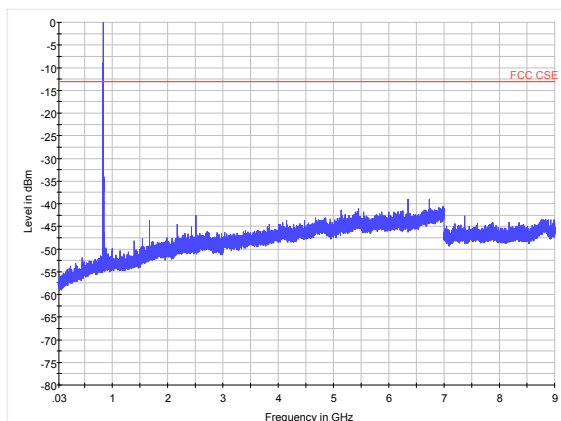


WCDMA Band V CH-Middle 30MHz~9GHz

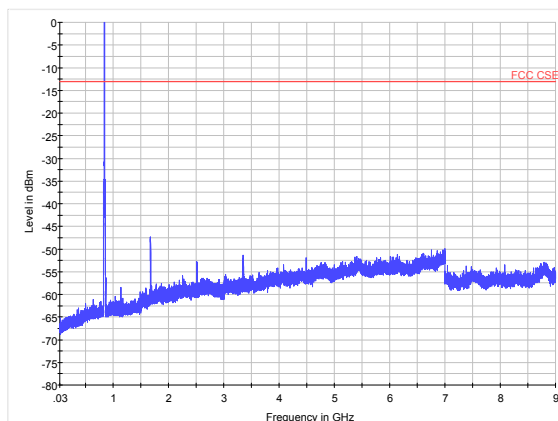

GSM 850 CH-High 30MHz~9GHz

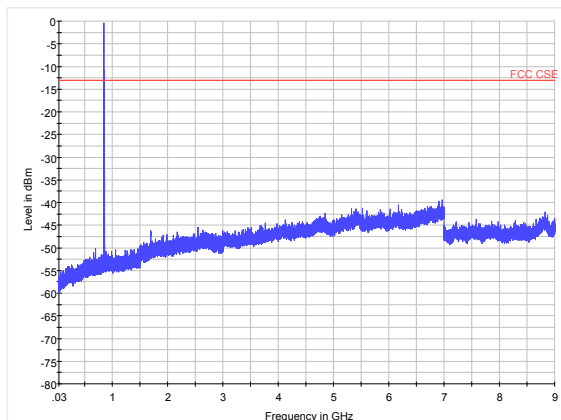

WCDMA Band V CH-High 30MHz~9GHz

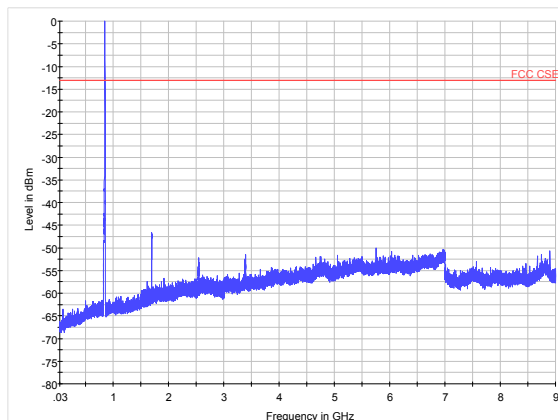

5.7. Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Method of Measurement


1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. Above 30MHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$

The measurement results are amend as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$


7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

Test setup

30MHz~~~ 1GHz

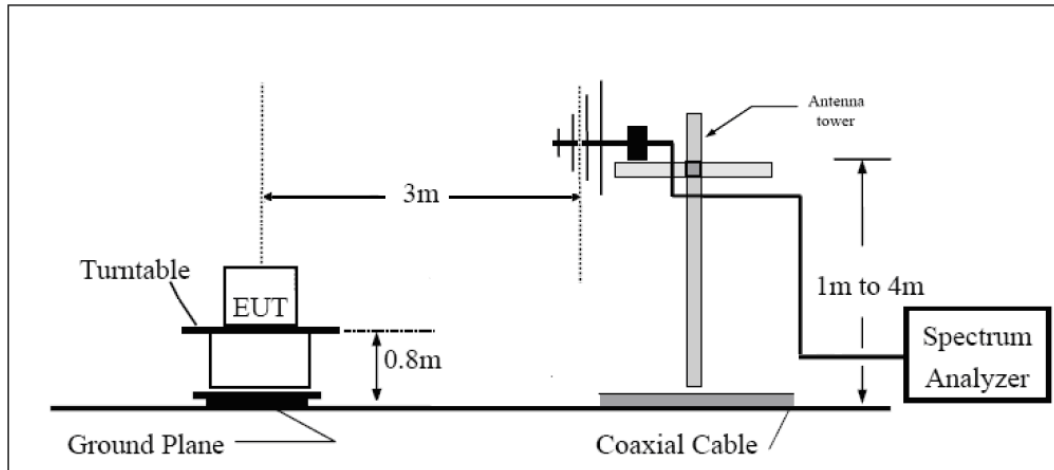

Above 1GHz

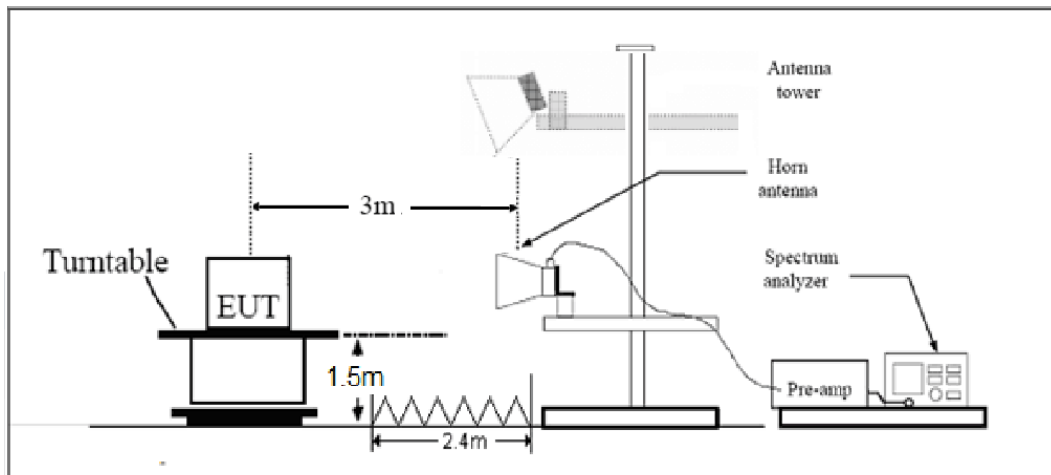

Note: Area side: 2.4mX3.6m

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

Limits



Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

Test Result

Receiver antenna polarization (horizontal and vertical), the worst emission was found in vertical polarization, and the worst case in vertical polarization was recorded.

GSM 850 CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1648.4	-54.79	2	10.15	Vertical	-48.79	-13.00	35.8	135
3	2472.6	-47.58	2.51	11.35	Vertical	-40.89	-13.00	27.9	225
4	3296.8	-57.70	4.2	10.85	Vertical	-53.20	-13.00	40.2	225
5	4121.0	-54.10	5.2	11.35	Vertical	-50.10	-13.00	37.1	135
6	4945.2	-52.60	5.5	11.95	Vertical	-48.30	-13.00	35.3	225
7	5769.4	-53.10	5.7	13.55	Vertical	-47.40	-13.00	34.4	90
8	6593.6	-50.50	6.3	13.75	Vertical	-45.20	-13.00	32.2	90
9	7417.8	-48.70	6.8	13.85	Vertical	-43.80	-13.00	30.8	45
10	8242.0	-49.10	6.9	14.25	Vertical	-43.90	-13.00	30.9	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

GSM 850 CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1661.1	-57.86	2	10.75	Vertical	-51.26	-13.00	38.3	45
3	2491.9	-57.55	2.51	11.05	Vertical	-51.16	-13.00	38.2	0
4	3346.4	-52.00	4.2	11.15	Vertical	-47.20	-13.00	34.2	135
5	4183.0	-50.60	5.2	11.15	Vertical	-46.80	-13.00	33.8	225
6	5019.6	-49.66	5.5	11.95	Vertical	-45.36	-13.00	32.4	90
7	5856.2	-49.38	5.7	13.55	Vertical	-43.68	-13.00	30.7	45
8	6692.8	-48.49	6.3	13.75	Vertical	-43.19	-13.00	30.2	180
9	7529.4	-56.16	6.8	13.85	Vertical	-51.26	-13.00	38.3	45
10	8366.0	-56.36	6.9	14.25	Vertical	-51.16	-13.00	38.2	0

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.



GSM 850 CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1697.3	-59.14	2	10.15	Vertical	-53.14	-13.00	40.1	45
3	2546.4	-50.95	2.51	11.05	Vertical	-44.56	-13.00	31.6	180
4	3395.2	-57.44	4.2	11.15	Vertical	-52.64	-13.00	39.6	225
5	4244.0	-49.17	5.2	11.15	Vertical	-45.37	-13.00	32.4	135
6	5092.8	-51.94	5.5	11.95	Vertical	-47.64	-13.00	34.6	225
7	5941.6	-52.70	5.7	13.55	Vertical	-47.00	-13.00	34.0	90
8	6790.4	-51.15	6.3	13.75	Vertical	-45.85	-13.00	32.8	90
9	7639.2	-47.94	6.8	13.85	Vertical	-43.04	-13.00	30.0	45
10	8488.0	-48.65	6.9	14.25	Vertical	-43.45	-13.00	30.4	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

WCDMA Band V CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1652.8	-62.21	2	10.15	Vertical	-56.21	-13.00	43.2	180
3	2479.2	-58.27	2.51	11.35	Vertical	-51.58	-13.00	38.6	45
4	3305.6	-54.46	4.2	10.85	Vertical	-49.96	-13.00	37.0	225
5	4132.0	-52.05	5.2	11.35	Vertical	-48.05	-13.00	35.1	180
6	4958.4	-50.26	5.5	11.95	Vertical	-45.96	-13.00	33.0	270
7	5784.8	-51.13	5.7	13.55	Vertical	-45.43	-13.00	32.4	135
8	6611.2	-48.57	6.3	13.75	Vertical	-43.27	-13.00	30.3	225
9	7437.6	-47.08	6.8	13.85	Vertical	-42.18	-13.00	29.2	135
10	8264.0	-47.98	6.9	14.25	Vertical	-42.78	-13.00	29.8	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

WCDMA Band V CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.2	-62.75	2	10.75	Vertical	-56.15	-13.00	43.1	0
3	2509.8	-57.54	2.51	11.05	Vertical	-51.15	-13.00	38.1	135
4	3346.4	-53.44	4.2	11.15	Vertical	-48.64	-13.00	35.6	45
5	4183.0	-51.57	5.2	11.15	Vertical	-47.77	-13.00	34.8	180
6	5019.6	-50.55	5.5	11.95	Vertical	-46.25	-13.00	33.2	45
7	5856.2	-49.91	5.7	13.55	Vertical	-44.21	-13.00	31.2	0
8	6692.8	-48.96	6.3	13.75	Vertical	-43.66	-13.00	30.7	135
9	7529.4	-47.24	6.8	13.85	Vertical	-42.34	-13.00	29.3	225
10	8366.0	-47.62	6.9	14.25	Vertical	-42.42	-13.00	29.4	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

WCDMA Band V CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1693.2	-60.70	2	10.15	Vertical	-54.70	-13.00	41.7	225
3	2543.4	-59.24	2.51	11.05	Vertical	-52.85	-13.00	39.8	90
4	3391.1	-54.27	4.2	11.15	Vertical	-49.47	-13.00	36.5	45
5	4233.0	-52.03	5.2	11.15	Vertical	-48.23	-13.00	35.2	180
6	5079.6	-50.31	5.5	11.95	Vertical	-46.01	-13.00	33.0	135
7	5926.2	-50.93	5.7	13.55	Vertical	-45.23	-13.00	32.2	225
8	6772.8	-49.57	6.3	13.75	Vertical	-44.27	-13.00	31.3	90
9	7619.4	-46.38	6.8	13.85	Vertical	-41.48	-13.00	28.5	45
10	8466.0	-47.74	6.9	14.25	Vertical	-42.54	-13.00	29.5	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

6. Main Test Instruments

Name	Type	Manufacturer	Serial Number	Calibration Date	Expiration Time
Base Station Simulator	CMW500	R&S	113645	2016-05-21	2017-05-20
Power Splitter	SHX-GF2-2-13	Hua Xiang	10120101	NA	NA
Spectrum Analyzer	N9010A	Agilent	MY47191109	2016-05-21	2017-05-20
Universal Radio Communication Tester	E5515C	Agilent	MY48367192	2016-05-21	2017-05-20
Signal Analyzer	FSV30	R&S	100815	2016-12-16	2017-12-15
Signal generator	SMB 100A	R&S	102594	2016-05-22	2017-05-21
Signal generator	SMR27	R&S	100365	2016-05-22	2017-05-21
EMI Test Receiver	ESCI	R&S	100948	2016-06-01	2017-05-31
Trilog Antenna	VUBL 9163	SCHWARZBECK	9163-201	2014-12-06	2017-12-05
Trilog Antenna	VUBL 9163	SCHWARZBECK	9163-391	2014-12-06	2017-12-05
Horn Antenna	HF907	R&S	100126	2014-12-06	2017-12-05
Horn Antenna	HF907	R&S	100125	2014-12-06	2017-12-05
Climatic Chamber	PT-30B	Re Ce	20101891	2015-07-18	2018-07-17
RF Cable	SMA 15cm	Agilent	0001	2016-12-04	2017-03-03

*****END OF REPORT *****

ANNEX A: EUT Appearance and Test Setup

A.1 EUT Appearance





Front Side



Back Side

Picture 1 EUT

A.2 Test Setup

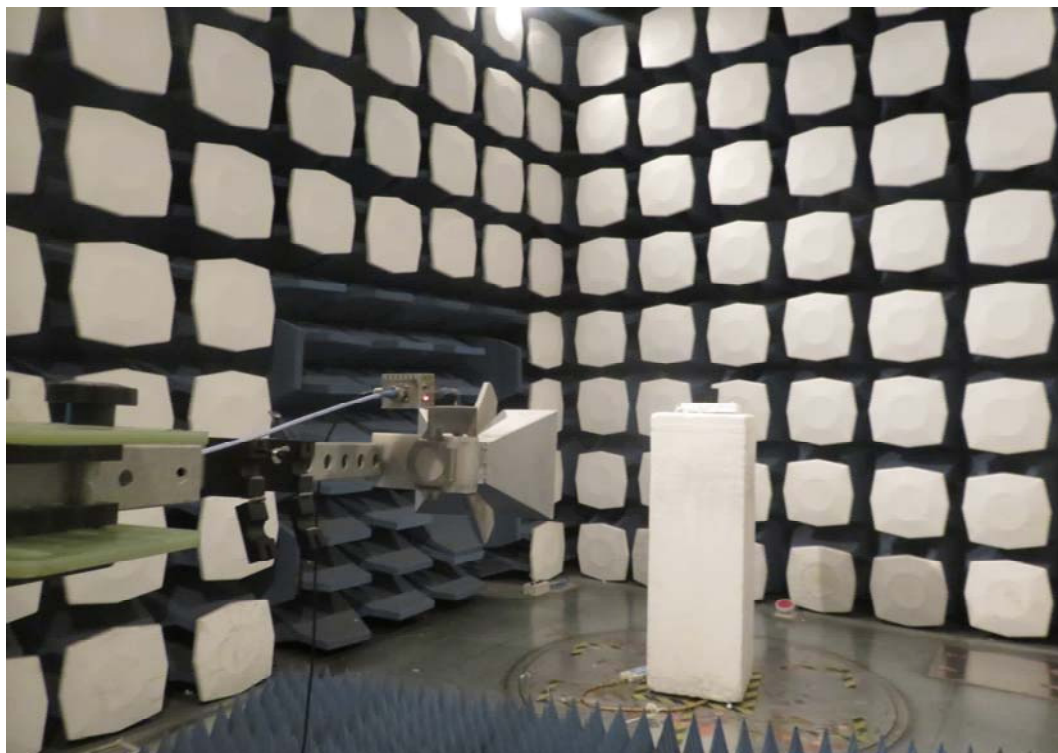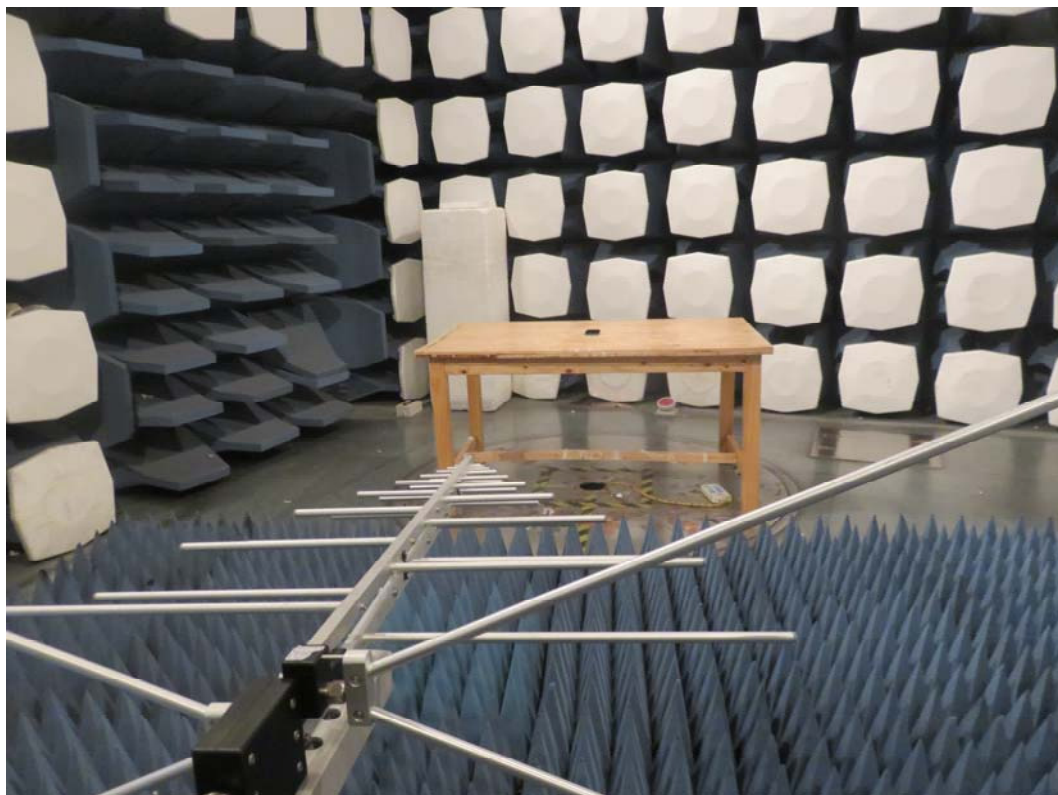

Picture 2: Radiated Spurious Emissions Test setup