



RF TEST REPORT

Applicant	ZTE Corporation
FCC ID	SRQ-VFD510
Brand	ZTE
Product	LTE/WCDMA/GSM (GPRS) Multi-Mode Digital Mobile Phone
Model	VFD 511
Report No.	RXC1703-0087RF07
Issue Date	May 24 ,2017

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2017)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Xianqing Li

Reviewed by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the test report.....	4
1.2. Test facility	4
1.3. Testing Location	5
2. General Description of Equipment under Test.....	6
3. Applied Standards	7
4. Test Configuration	8
5. Test Case Results	9
5.1. 20dB Bandwidth	9
5.2. Frequency Stability.....	11
5.3. Radiates Emission	14
5.4. Conducted Emission	22
6. Main Test Instruments.....	25
ANNEX A: EUT Appearance and Test Setup	26
A.1 EUT Appearance	26
A.2 Test Setup	28

Summary of measurement results

Number	Summary of measurements of results	Clause in FCC rules	Verdict
1	20 dB bandwidth	2.1049	PASS
2	Frequency Stability Tolerance	15.225(e)	PASS
3	Radiated Emissions	15.225 (a) (b) (c) (d) and 15.209	PASS
4	Conducted Emissions	15.207	PASS
Date of Testing: March 30, 2017~ May 10, 2017			

1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement by CNAS or any government agencies.

1.2. Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (recognition number is 428261)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

Client Information

Applicant	ZTE Corporation
Applicant address	ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R. China
Manufacturer	ZTE Corporation
Manufacturer address	ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R. China

General information

EUT Description	
Model:	VFD 511
IMEI:	357848080011159
Hardware Version:	VFD 511 MP
Software Version:	VFD-511_ATPB03
Power Supply:	Battery/AC adapter
Antenna Type:	Internal Antenna
Test Mode:	NFC
Modulation Type:	ASK
Operating Frequency Range(s)	13.56MHz
EUT Accessory	
Adapter(Note 3)	Manufacturer: DOKOCOM Model: STC-A51-I Input power:100-240 V ~ 50/60Hz 250mA
Battery	Manufacturer: BYD Model: Li3822T43P4h736040 Power Rating: DC 3.8V, 2200mAh, Li-ion
Earphone	Manufacturer: Shen zhen FDC Electronic Co.,Ltd. Model: DEM-94A
Note: 1.The information of the EUT is declared by the manufacturer. 2. Please refer to the specifications or user manual for details. 3.The EUT don't have standard Adapter. The adapter used for testing in this report is the after-market accessory.	

3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

- FCC CFR47 Part 2 (2017)
- FCC CFR47 Part 15C (2017)
- ANSI C63.10 (2013)

4. Test Configuration

Test Mode

The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

5. Test Case Results

5.1. 20dB Bandwidth


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 10 kHz; VBW is set to 3 times thw RBW on spectrum analyzer.

Test Setup



Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.

**Test Results:**

Carrier frequency (MHz)	99% Bandwidth (kHz)	20dB Bandwidth (kHz)	Conclusion
13.56MHz	21.671	25.32	PASS

5.2. Frequency Stability

Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Method of Measurement

1. Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -20°C to +50°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -20°C to +50°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

2. Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.6 V and 4.35 V, with a nominal voltage of 3.8V.

Test setup

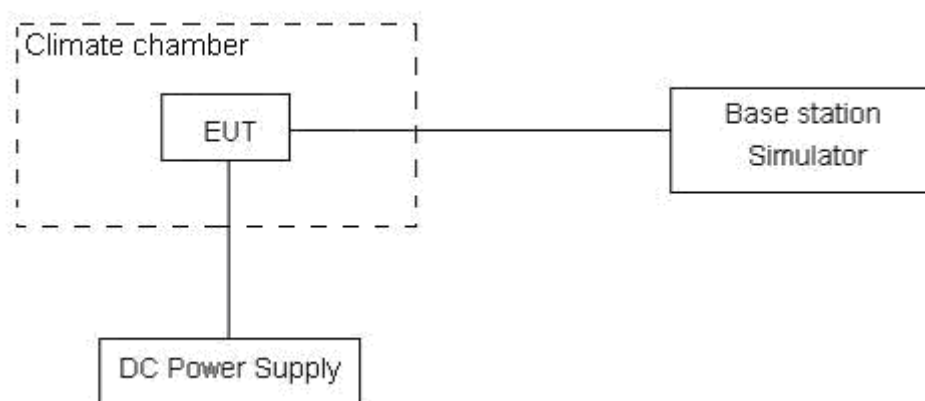

Limits

Rule Part 15.225 (e) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+ 50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3$, $U = 0.01\text{ppm}$.

Test Result

Test status	Frequency				Tolerance (MHz)			
	13.56MHz							
	1min	2min	5min	10min	1min	2min	5min	10min
-20°C/3.8 V	13.559112	13.559062	13.559076	13.559054	0.000888	0.000938	0.000924	0.000946
-10°C/3.8 V	13.559082	13.559056	13.55907	13.55905	0.000918	0.000944	0.000930	0.000950
0°C/3.8 V	13.559066	13.559053	13.55906	13.559047	0.000934	0.000947	0.000940	0.000953
10°C/3.8 V	13.559062	13.559051	13.559054	13.559043	0.000938	0.000949	0.000946	0.000957
20°C/3.8 V	13.559048	13.559046	13.559048	13.559041	0.000952	0.000954	0.000952	0.000959
30°C/3.8 V	13.559038	13.559045	13.559041	13.55904	0.000962	0.000955	0.000959	0.000960
40°C/3.8 V	13.55903	13.559041	13.559037	13.559036	0.000970	0.000959	0.000963	0.000964
50°C/3.8 V	13.559025	13.559037	13.559033	13.559031	0.000975	0.000963	0.000967	0.000969
20°C/3.6 V	13.559041	13.559043	13.559046	13.559037	0.000959	0.000957	0.000954	0.000963
20°C/4.35 V	13.559038	13.559038	13.559041	13.559036	0.000962	0.000962	0.000959	0.000964

Test status	Tolerance (%)				Limit(%)	Conclusion
	1min	2min	5min	10min		
-20°C/3.8 V	0.000065	0.000069	0.000068	0.000070	0.01	PASS
-10°C/3.8 V	0.000068	0.000070	0.000069	0.000070	0.01	PASS
0°C/3.8 V	0.000069	0.000070	0.000069	0.000070	0.01	PASS
10°C/3.8 V	0.000069	0.000070	0.000070	0.000071	0.01	PASS
20°C/3.8 V	0.000070	0.000070	0.000070	0.000071	0.01	PASS
30°C/3.8 V	0.000071	0.000070	0.000071	0.000071	0.01	PASS
40°C/3.8 V	0.000072	0.000071	0.000071	0.000071	0.01	PASS
50°C/3.8 V	0.000072	0.000071	0.000071	0.000071	0.01	PASS
20°C/3.6 V	0.000071	0.000071	0.000070	0.000071	0.01	PASS
20°C/4.35 V	0.000071	0.000071	0.000071	0.000071	0.01	PASS

5.3. Radiates Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	102.5kPa

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10-2013. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, below 30MHz, the center of the loop shall be 1 meters; above 30MHz, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

Below 1GHz (detector: Peak and Quasi-Peak)

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz (detector: Peak):

(a) PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO


(b) AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.


The test is in transmitting mode.

Test setup


9kHz~~~ 30MHz

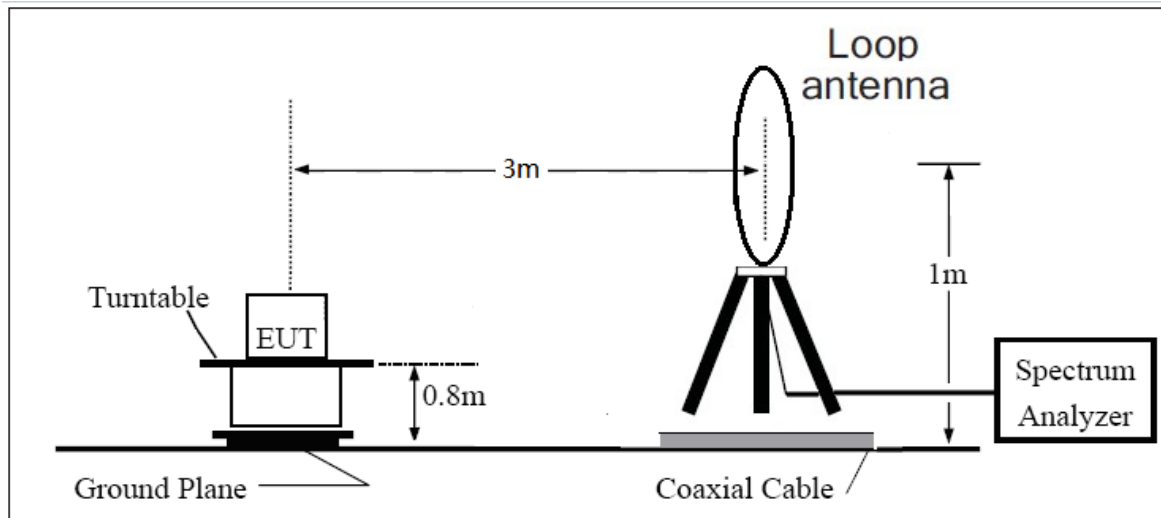

30MHz~~~ 1GHz

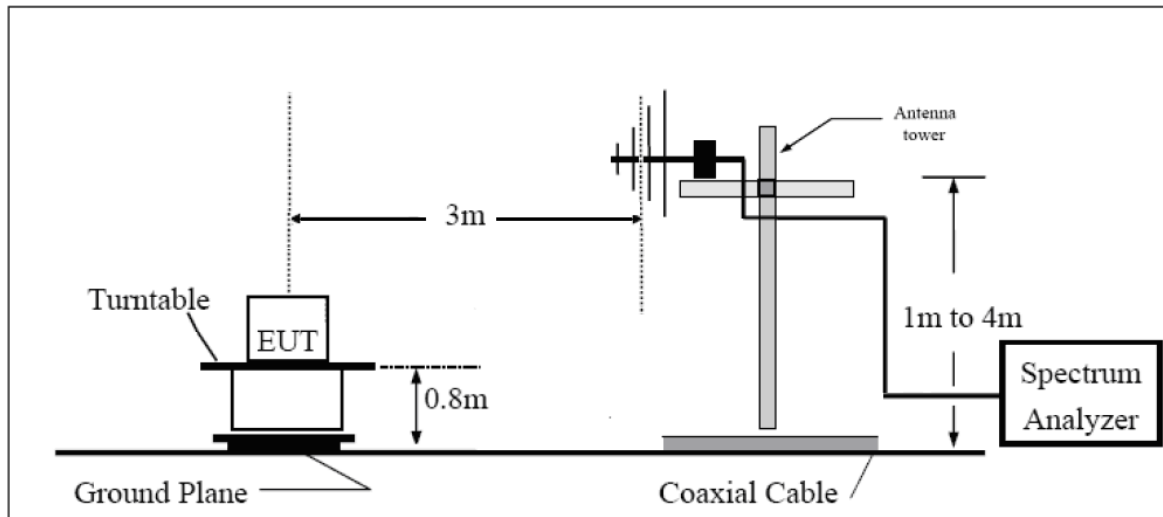

Above 1GHz

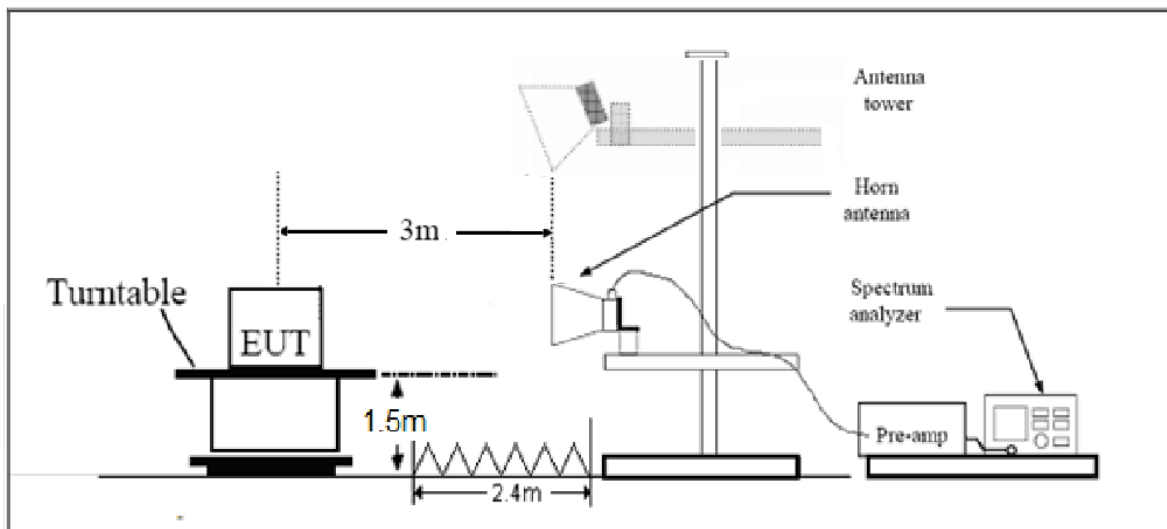

Note: Area side:2.4mX3.6m

Limits

Clause 15.225(a) the field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

Clause 15.225(b) within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

Clause 15.225(c) within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

Clause 15.225(d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

§15.209 (d) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9kHz-30MHz	3.55 dB
30MHz-200MHz	4.19 dB
200MHz-1GHz	3.63 dB
Above 1GHz	3.68 dB

Test result

In-band

FCC RE Part15C 13.56M

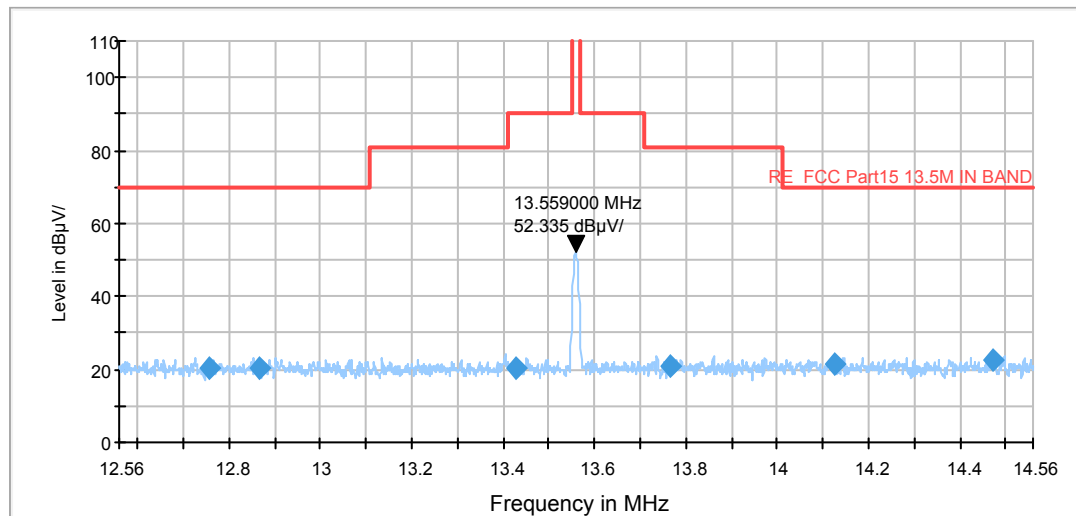


Radiates Emission from 12.56MHz to 14.56MHz

Note: This graph displays the maximum values of horizontal and vertical by software

Out-of-band


The following graphs display the maximum values of horizontal and vertical by software.
For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

FCC RE 9K-90KHz AV

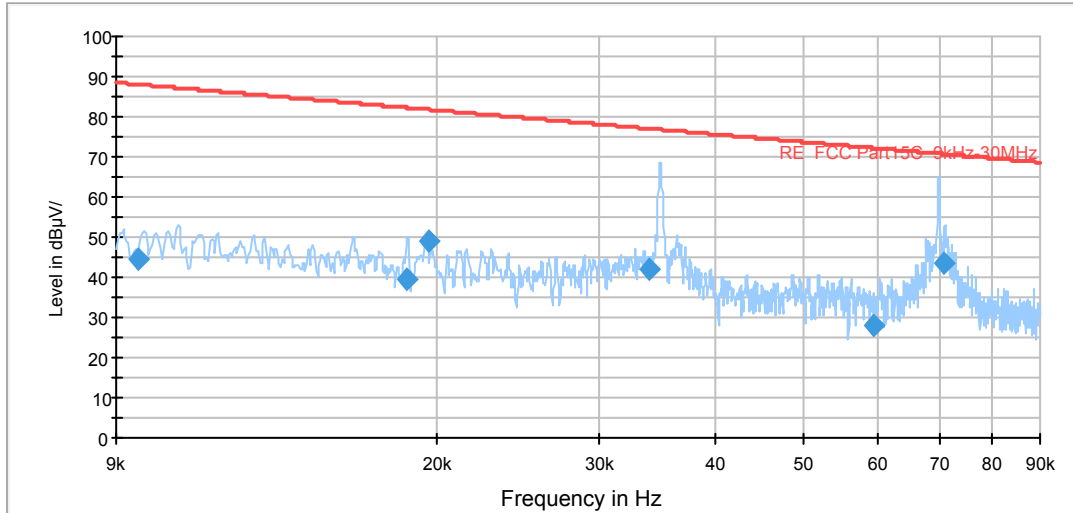


Radiates Emission from 9kHz to 90kHz

FCC RE 90K-110KHz QP

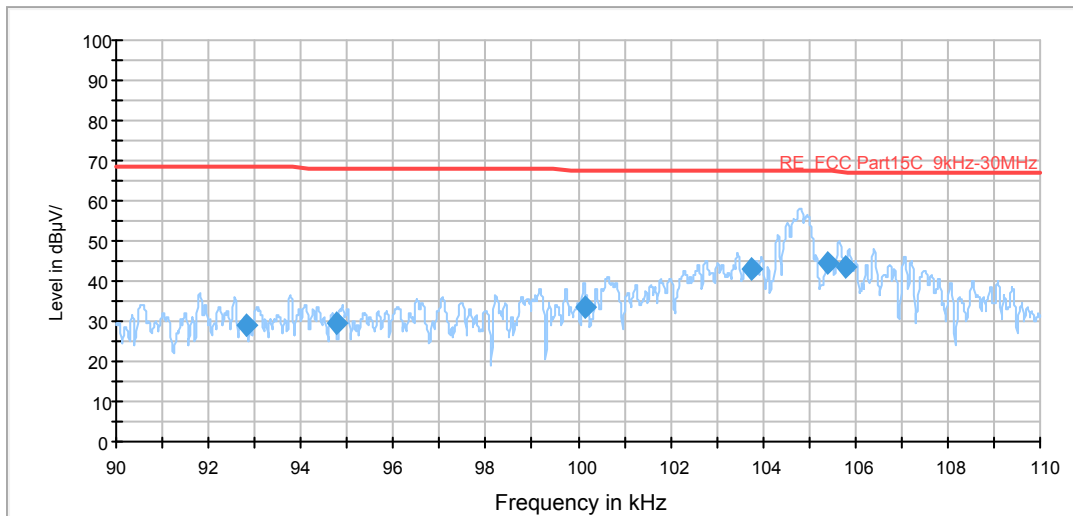


Radiates Emission from 90kHz to 110kHz

FCC RE 110K-490KHz AV

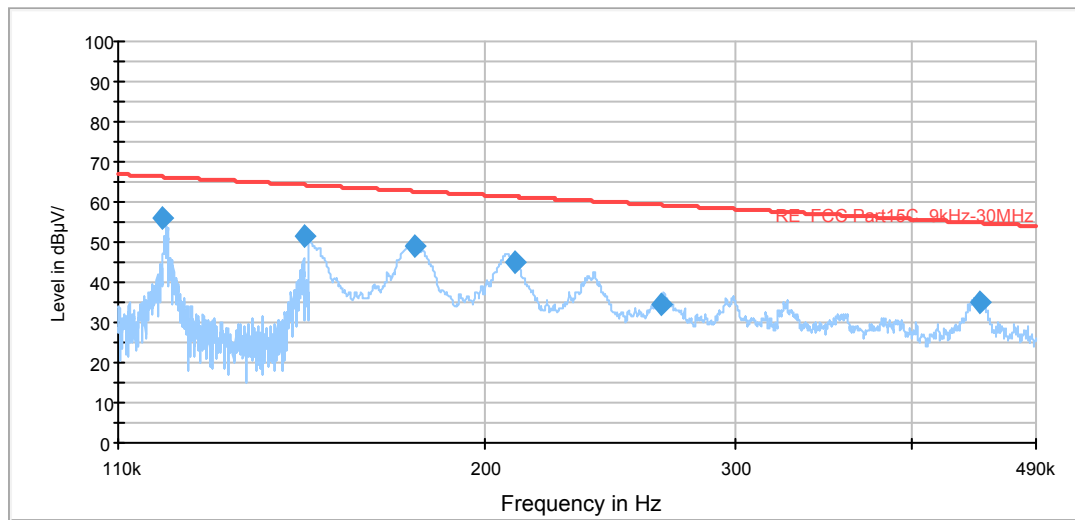

Radiates Emission from 110kHz to 490kHz

FCC RE 490K-30MHz QP

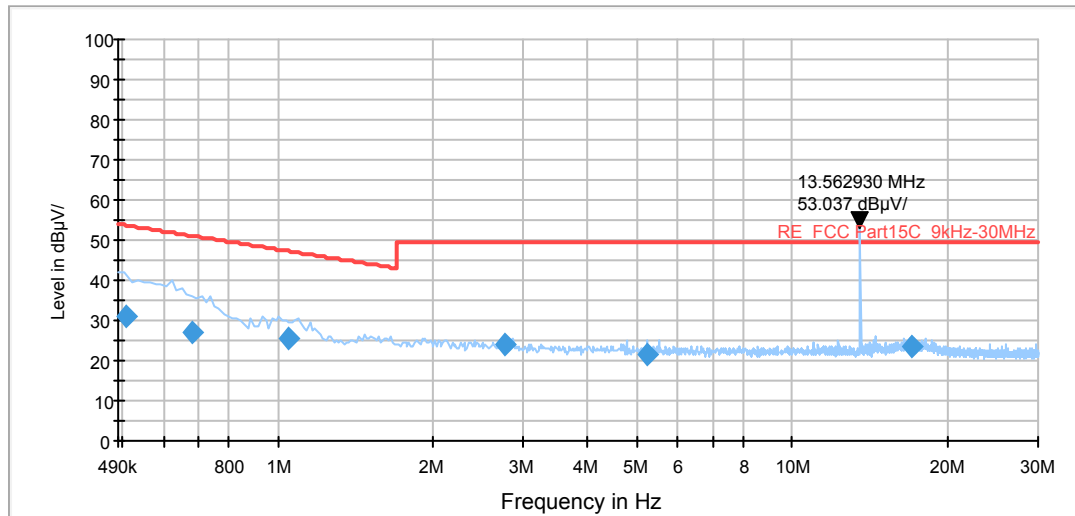

Radiates Emission from 490kHz to 30MHz


Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
0.510000	31.1	100.0	V	0.0	11.5	19.6	22.5	53.6
0.682325	27.2	100.0	V	0.0	7.7	19.5	23.9	51.1
1.049955	25.4	100.0	V	0.0	6.1	19.3	21.9	47.3
2.768025	23.8	100.0	V	0.0	4.7	19.1	25.7	49.5
5.237355	21.6	100.0	V	0.0	2.4	19.2	27.9	49.5
17.056375	23.5	100.0	V	281.0	4.0	19.5	26.0	49.5

Remark: 1. Quasi-Peak = Reading value + Correction factor

2. Correction Factor = Antenna factor+ Insertion loss (cable loss+amplifier gain)

3. Margin = Limit – Quasi-Peak

FCC RE 0.03-1GHz QP Class B

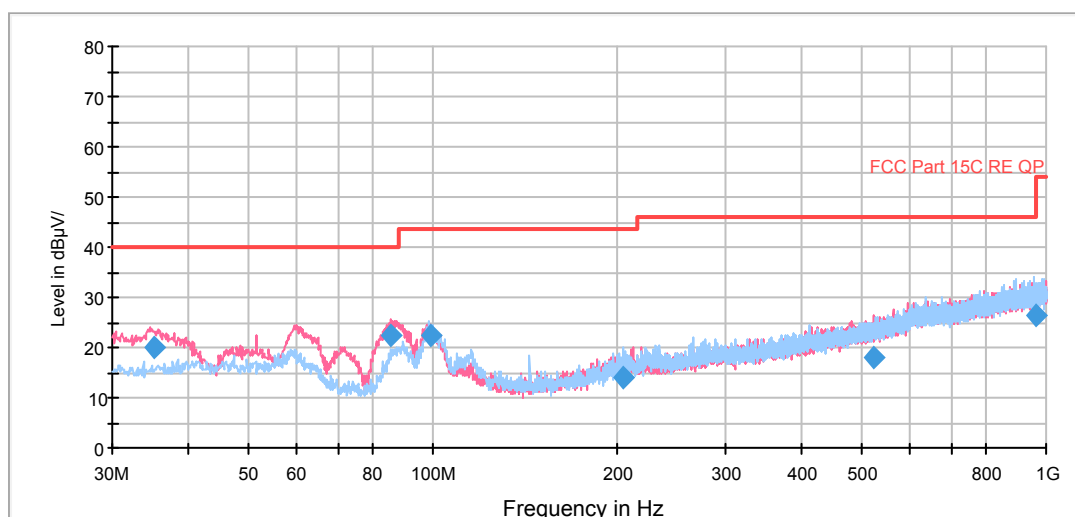

Radiates Emission from 30MHz to 1GHz

Note: This graph displays the maximum values of horizontal and vertical by software

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
35.007500	19.9	100.0	V	176.0	7.8	12.1	20.1	40.0
85.530000	22.3	125.0	V	92.0	11.8	10.5	17.7	40.0
98.907500	22.4	125.0	H	31.0	9.2	13.2	21.1	43.5
204.920000	14.0	125.0	H	71.0	1.6	12.4	29.5	43.5
522.960000	18.1	114.0	V	107.0	-2.9	21.0	27.9	46.0
959.700000	26.3	100.0	H	22.0	-1.1	27.4	19.7	46.0

5.4. Conducted Emission

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10-2013. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

The test is in transmitting mode.

Test Setup

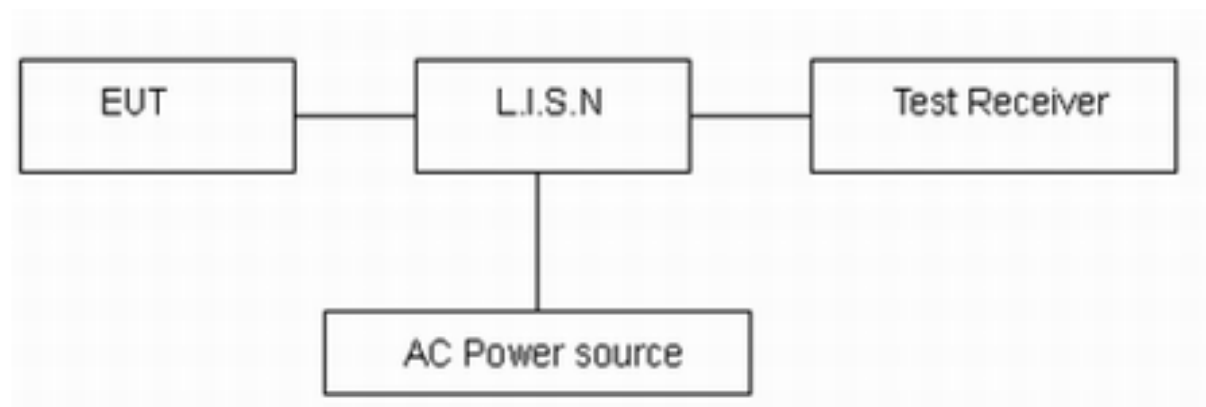

Note: AC Power source is used to change the voltage 110V/60Hz.

Limits

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.


Frequency (MHz)	Conducted Limits(dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50
*: Decreases with the logarithm of the frequency.		

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 2.69$ dB.

**Test Results:**

Following plots, Blue trace uses the peak detection and Green trace uses the average detection.

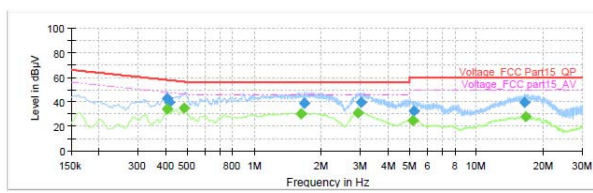L Line**Final Result**

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.406500	---	33.79	47.72	13.93	1000.0	9.000	L1	ON	19.2
0.406500	42.82	---	57.72	14.90	1000.0	9.000	L1	ON	19.2
0.413250	39.36	---	57.58	18.22	1000.0	9.000	L1	ON	19.2
0.485250	---	34.79	46.25	11.46	1000.0	9.000	L1	ON	19.2
1.614750	---	30.40	46.00	15.60	1000.0	9.000	L1	ON	19.2
1.684500	39.05	---	56.00	16.95	1000.0	9.000	L1	ON	19.2
2.935500	---	30.69	46.00	15.31	1000.0	9.000	L1	ON	19.1
3.912000	39.16	---	56.00	16.84	1000.0	9.000	L1	ON	19.1
5.151750	---	25.11	50.00	24.89	1000.0	9.000	L1	ON	19.1
5.212500	32.18	---	60.00	27.82	1000.0	9.000	L1	ON	19.1
16.498500	39.27	---	60.00	20.73	1000.0	9.000	L1	ON	19.5
16.701000	---	27.72	50.00	22.28	1000.0	9.000	L1	ON	19.5

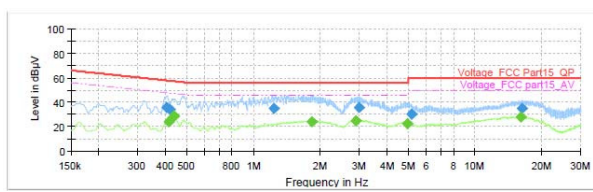N Line**Final Result**

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.404250	35.93	---	57.77	21.84	1000.0	9.000	N	ON	19.2
0.413250	---	23.80	47.58	23.78	1000.0	9.000	N	ON	19.2
0.420000	33.80	---	57.45	23.65	1000.0	9.000	N	ON	19.2
0.435750	---	28.71	47.14	18.43	1000.0	9.000	N	ON	19.2
1.241250	34.75	---	56.00	21.25	1000.0	9.000	N	ON	19.2
1.839750	---	24.23	46.00	21.77	1000.0	9.000	N	ON	19.2
2.901750	---	25.16	46.00	20.84	1000.0	9.000	N	ON	19.1
3.007500	35.87	---	56.00	20.13	1000.0	9.000	N	ON	19.1
4.953750	---	22.81	46.00	23.19	1000.0	9.000	N	ON	19.1
5.190000	30.36	---	60.00	29.64	1000.0	9.000	N	ON	19.1
16.152000	---	27.69	50.00	22.31	1000.0	9.000	N	ON	19.4
16.264500	34.54	---	60.00	25.46	1000.0	9.000	N	ON	19.4

6. Main Test Instruments

Name	Type	Manufacturer	Serial Number	Calibration Date	Expiration Time
Spectrum Analyzer	FSV30	R&S	100815	2016-12-16	2017-12-15
EMI Test Receiver	ESCI	R&S	100948	2016-06-01	2017-05-31
TRILOG Broadband Antenna	VULB 9163	Schwarzbeck	9163-201	2014-12-06	2017-12-05
Loop Antenna	FMZB1519	SCHWARZBECK	1519-047	2014-02-19	2017-02-18
EMI Test Receiver	ESCS30	R&S	100138	2016-12-16	2017-12-15
LISN	ENV216	R&S	101171	2016-12-17	2019-12-16
Spectrum Analyzer	N9010A	Agilent	MY47191109	2016-05-21	2017-05-20
MOB COMMS DC SUPPLY	66319D	Agilent	MY43004105	2016-05-21	2017-05-20
Peak Power Meter	U2021XA	Keysight	MY55240003	2016-06-26	2017-06-25
RF Cable	SMA 15cm	Agilent	0001	2017-03-02	2017-06-01

*****END OF REPORT *****

ANNEX A: EUT Appearance and Test Setup


A.1 EUT Appearance



Front Side



Back Side
a: EUT

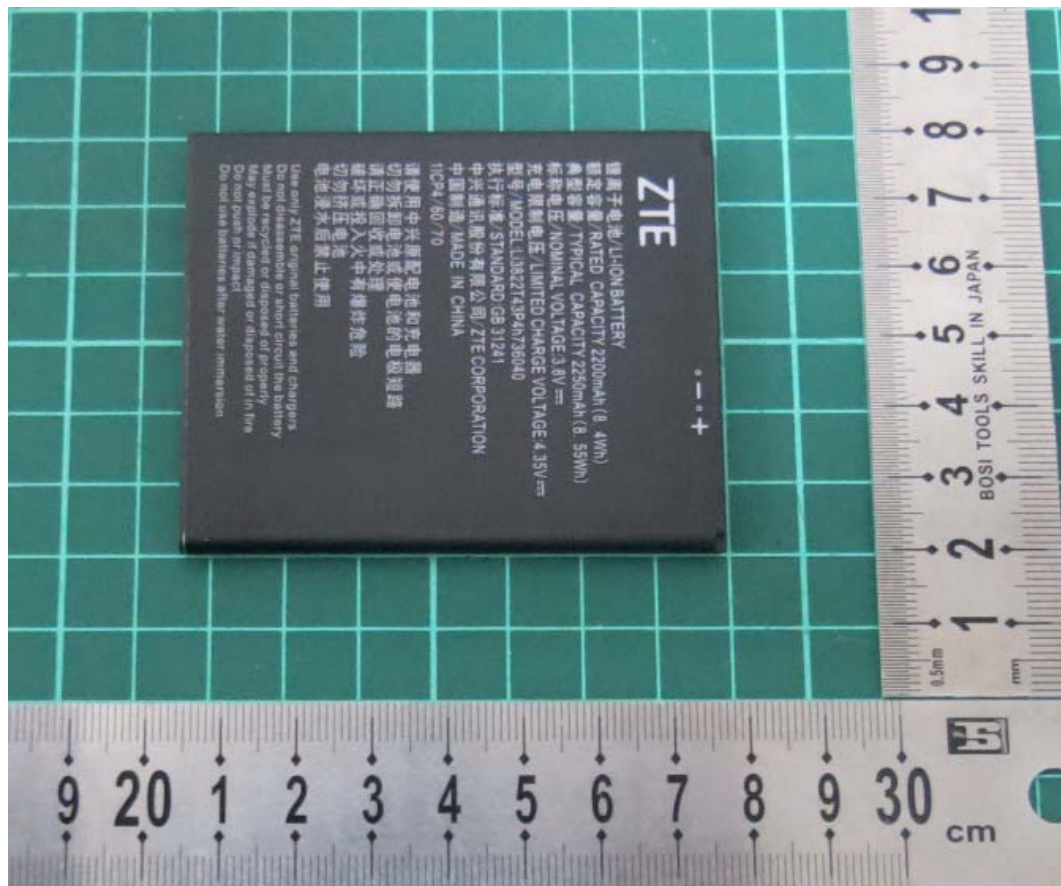


b: Battery

Picture 1 EUT and Accessory

A.2 Test Setup



9kHz - 30MHz

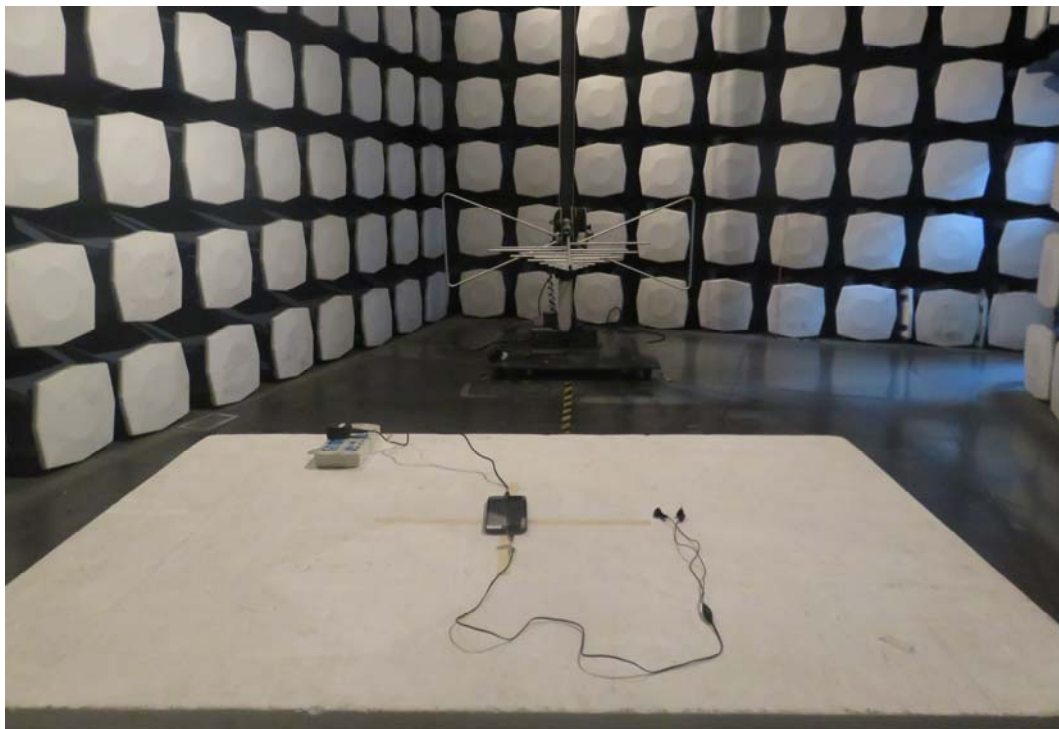

30M Hz-1GHz

Picture 2 Radiated Emission Test Setup



Picture 3 Conducted Emission Test Setup