

FCC TEST REPORT

Product Name: Smart Tablet Computer

Trade Mark:



Model No.: T10

Report Number: 24122015364RFC-4

Test Standards: FCC 47 CFR Part 15 Subpart E

FCC ID: SS4T10F1

Test Result: PASS

Date of Issue: January 23, 2025

Prepared for:

Bluebird Inc.

3F, 115, Irwon-ro, Gangnam-gu, Seoul, Republic of Korea

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.

**16/F, Block A, Building 6th, Baoneng Science and Technology Park,
Longhua Street, Longhua District, Shenzhen, China**

TEL: +86-755-2823 0888

FAX: +86-755-2823 0886

Prepared by:

David Chen

David Chen
Senior Project Engineer

Reviewed by:

Henry Lu

Henry Lu
Team Leader

Approved by:

Robben Chen

Robben Chen
Assistant Manager

Date:

January 23, 2025

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

Version

Version No.	Date	Description
V1.0	January 23, 2025	Original



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	5
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	6
1.4 OTHER INFORMATION	7
1.5 DESCRIPTION OF SUPPORT UNITS	7
1.6 TEST LOCATION	7
1.7 TEST FACILITY	7
1.8 DEVIATION FROM STANDARDS	8
1.9 ABNORMALITIES FROM STANDARD CONDITIONS	8
1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
1.11 MEASUREMENT UNCERTAINTY	8
2. TEST SUMMARY	9
3. EQUIPMENT LIST	10
4. TEST CONFIGURATION	11
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	11
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	11
4.1.2 RECORD OF NORMAL ENVIRONMENT AND TEST SAMPLE	11
4.2 TEST CHANNELS	12
4.3 EUT TEST STATUS	13
4.4 PRE-SCAN	13
4.5 TEST SETUP	14
4.5.1 FOR RADIATED EMISSIONS TEST SETUP	14
4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP	15
4.5.3 FOR CONDUCTED RF TEST SETUP	16
4.6 SYSTEM TEST CONFIGURATION	16
4.7 DUTY CYCLE	17
5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION	21
5.1 REFERENCE DOCUMENTS FOR TESTING	21
5.2 ANTENNA REQUIREMENT	21
5.3 26 dB BANDWIDTH	22
5.4 6 dB BANDWIDTH	23
5.5 MAXIMUM CONDUCTED OUTPUT POWER	24
5.6 PEAK POWER SPECTRAL DENSITY	27
5.7 RADIATED EMISSIONS AND BAND EDGE MEASUREMENT	29
5.8 DYNAMIC FREQUENCY SELECTION	60
5.9 AC POWER LINE CONDUCTED EMISSION	67
APPENDIX A RF TEST DATA	70
A.1 26dB BANDWIDTH	70
A.2 PEAK POWER SPECTRAL DENSITY	106
A.3 6dB BANDWIDTH	147
APPENDIX 1 PHOTOS OF TEST SETUP	158
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS	158

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	Bluebird Inc.
Address of Applicant:	3F, 115, Irwon-ro, Gangnam-gu, Seoul, Republic of Korea
Manufacturer:	Bluebird Inc.
Address of Manufacturer:	3F, 115, Irwon-ro, Gangnam-gu, Seoul, Republic of Korea

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	Smart Tablet Computer		
Model No.:	T10		
Trade Mark:	 BLUEBIRD A TSC Company		
DUT Stage:	Identical Prototype		
EUT Supports Function: (Provided by the customer)	GSM Bands:	GSM850 /PCS 1900	
	UTRA Bands:	WCDMA Band II/IV/V	
	E-UTRA Bands:	FDD Band 2/4/5/7/12/13/14/17/66	
		TDD Band 38	
	2.4 GHz ISM Band:	IEEE 802.11b/g/n	
		Bluetooth V5.0	
	5 GHz U-NII Bands:	5 150 MHz to 5 250 MHz	IEEE 802.11a/n/ac
		5 250 MHz to 5 350 MHz	IEEE 802.11a/n/ac
		5 470 MHz to 5 725 MHz	IEEE 802.11a/n/ac
		5 725 MHz to 5 850 MHz	IEEE 802.11a/n/ac
RNSS Band:	1559 MHz to 1610 MHz	GPS/ BDS/ GLONASS/ Galileo/ SBAS	
NFC:	13.553 MHz to 13.567 MHz		
Software Version:	R1.00 (Provided by the customer)		
Hardware Version:	REV_C (Provided by the customer)		
Sample Received Date:	November 29, 2024		
Sample Tested Date:	December 23, 2024 to January 17, 2025		
Remark:	The above EUT's information was provided by customer. Please refer to the specifications or user's manual for more detailed description.		

1.2.2 Description of Accessories

Adapter	
Model No.:	ICP20-050-3000B
Input:	100-240V~50/60Hz 0.6A
Output:	5.0V $\overline{\text{---}}$ 3.0A

Battery	
Model No.:	BAT-800001
Battery Type:	Lithium-ion Polymer Battery
Rated Voltage:	3.8Vdc
Limited Charge Voltage:	4.35Vdc
Rated Capacity:	8000mAh

Cable	
Description:	USB Type-C to USB 3.0 Type A Cable
Connector:	USB Type-C / USB 3.0 Type A
Cable Type:	Shielded without ferrite
Length:	1 Meter

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Frequency Bands:	5150 MHz to 5250 MHz (U-NII-1)				
	5250 MHz to 5350 MHz (U-NII-2A)				
	5470 MHz to 5725 MHz (U-NII-2C)				
	5 725 MHz to 5 850 MHz (U-NII-3)				
Frequency Ranges:	5180 MHz to 5240 MHz				
	5260 MHz to 5320 MHz				
	5500 MHz to 5720 MHz				
	5745 MHz to 5825 MHz				
Support Standards:	IEEE 802.11a/n/ac				
TPC Function:	Not Support				
DFS Operational mode:	Slave without radar Interference detection function				
Type of Modulation:	IEEE 802.11a: OFDM(64QAM, 16QAM, QPSK, BPSK)				
	IEEE 802.11n: OFDM(64QAM, 16QAM, QPSK, BPSK)				
	IEEE 802.11ac: OFDM(256QAM, 64QAM, 16QAM, QPSK, BPSK)				
Channel Spacing:	IEEE 802.11a/n-HT20/ac-VHT20: 20 MHz				
	IEEE 802.11n-HT40/ac-VHT40: 40 MHz				
	IEEE 802.11ac-VHT80: 80 MHz				
Data Rate:	IEEE 802.11a: Up to 54 Mbps				
	IEEE 802.11n-HT20: Up to MCS7				
	IEEE 802.11n-HT40: Up to MCS7				
	IEEE 802.11ac-VHT20: Up to MCS8				
	IEEE 802.11ac-VHT40: Up to MCS9				
	IEEE 802.11ac-VHT80: Up to MCS9				
Number of Channels:	5150 MHz to 5250 MHz: 4 for IEEE 802.11a/n-HT20/ac-VHT20 2 for IEEE 802.11n-HT40/ac-VHT40 1 for IEEE 802.11acVHT80				
	5250 MHz to 5350 MHz: 4 for IEEE 802.11a/n-HT20/ac-VHT20 2 for IEEE 802.11n-HT40/ac-VHT40 1 for IEEE 802.11acVHT80				
	5470 MHz to 5725 MHz: 12 for IEEE 802.11a/n-HT20/ac-VHT20 6 for IEEE 802.11n-HT40/ac-VHT40 3 for IEEE 802.11ac-VHT80				
	5725 MHz to 5850 MHz: 5 for IEEE 802.11a/n-HT20/ac-VHT20 2 for IEEE 802.11n-HT40/ac-VHT40 1 for IEEE 802.11ac-VHT80				
Antenna Type: (Provided by the customer)	PIFA Antenna				
Antenna Gain: (Provided by the customer)	1.15 dBi				
Maximum conducted output power (dBm):		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
	IEEE 802.11a:	10.86	10.11	10.38	9.58
	IEEE 802.11n-HT20:	9.99	9.25	9.51	8.74
	IEEE 802.11n-HT40:	10.68	9.94	10.45	9.40
	IEEE 802.11ac-VHT20:	10.01	9.87	9.51	8.73
	IEEE 802.11ac-VHT40:	10.69	9.94	10.42	9.40

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

	IEEE 802.11ac-VHT80:	10.30	9.42	9.83	8.91
Normal Test Voltage:	3.8 Vdc				

1.4 OTHER INFORMATION

None.

1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	FCC ID	Supplied by
Notebook	DELL	Inspiron 5409	EX: 13030041123	N/A	UnionTrust
Mouse	DELL	MS116t1	CN-0RWN6P-LO300-18N-0GVP	N/A	UnionTrust
Wireless Home Router	SAGEMCOM	FAST5280	N/A	VW3FAST5280	UnionTrust

2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Antenna Cable	SMA	0.3 Meter	UnionTrust

1.6 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

1.7 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.8 DEVIATION FROM STANDARDS

None.

1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9kHz-150kHz	±3.2 dB
2	Conducted emission 150kHz-30MHz	±2.7 dB
3	Radiated emission 9kHz-30MHz	± 4.7 dB
4	Radiated emission 30MHz-1GHz	± 4.6 dB
5	Radiated emission 1GHz-18GHz	± 4.4 dB
6	Radiated emission 18GHz-26GHz	± 4.6 dB
7	Radiated emission 26GHz-40GHz	± 4.6 dB
8	Conducted spurious emissions	± 2.7 dB
9	RF Power, Conducted	± 0.68 dB
10	Occupied Bandwidth	± 1.86 %
11	Radio Frequency	± 6.4 x 10 ⁻⁸
12	Transmission Time	± 0.19 %

2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart E Test Cases			
Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC 47 CFR Part 15 Subpart C Section 15.203 FCC 47 CFR Part 15 Subpart E Section 15.407(a)(1) (2)	N/A	PASS
26 dB emission bandwidth	FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(2)(5)	KDB 789033 D02 v02r01 Section C.1	PASS
6 dB bandwidth	FCC 47 CFR Part 15 Subpart E Section 15.407 (e)	KDB 789033 D02 v02r01 Section C.2	PASS
Maximum conducted output power	FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(1)(2)(3)	KDB 789033 D02 v02r01 Section E.3.a (Method PM)	PASS
Peak Power Spectral Density	FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(1)(2)(3)	KDB 789033 D02 v02r01 Section F	PASS
Radiated Emissions and Band Edge Measurement	FCC 47 CFR Part 15 Subpart E Section 15.407 (b)(1)(2)(3)(4)(6) FCC 47 CFR Part 15 Subpart C Section 15.209/205	KDB 789033 D02 v02r01 Section G.3, G.4, G.5, and G.6	PASS
Dynamic Frequency Selection	FCC 47 CFR Part 15 Subpart E Section 15.407 (h)	KDB 905462 D03 Client Without DFS New Rules v01r02	PASS
AC Power Line Conducted Emission	FCC 47 CFR Part 15 Subpart E Section 15.407 (b)(6) FCC 47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013, Section 6.2.	PASS
Disclaimer and Explanations: The declared of product specification and data (e.g., antenna gain, RF specification, etc) for EUT presented in the report are provided by the customer, and the customer takes all the responsibilities for the accuracy of product specification.			

For Dynamic Frequency Selection

Test Case	Result
Channel Availability Check Time	N/A ^{Note 1}
U-NII Detection Bandwidth	N/A ^{Note 1}
Channel Closing Transmission Time	PASS
Channel Move Time	PASS
DFS Detection Threshold	N/A ^{Note 1}
Non- Occupancy Period	N/A ^{Note 1}
Note: 1) The EUT is slave, NA In this whole report not applicable.	

3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	3m SAC	ETS-LINDGREN	3M	Euroshiedpn-CT001270-1317	11-Nov-2023	10-Nov-2026
☒	Receiver	R&S	ESIB26	100114	25-Oct-2024	24-Oct-2025
☒	Loop Antenna	ETS-LINDGREN	6502	00202525	28-Oct-2024	27-Oct-2025
☒	Broadband Antenna	ETS-LINDGREN	3142E	00201566	29-Oct-2024	28-Oct-2025
☒	6dB Attenuator	Talent	RA6A5-N-18	18103001	29-Oct-2024	28-Oct-2025
☒	Preamplifier	HP	8447F	2805A02960	25-Oct-2024	24-Oct-2025
☒	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201541	01-Apr-2024	31-Mar-2025
☒	Pre-amplifier	ETS-LINDGREN	00118385	00201874	01-Apr-2024	31-Mar-2025
☒	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	28-Oct-2024	27-Oct-2025
☒	Band Rejection Filter (5150MHz~5880MHz)	Micro-Tronics	BRM50716	G186	25-Oct-2024	24-Oct-2025
☒	Pre-amplifier	ETS-LINDGREN	00118384	00202652	28-Oct-2024	27-Oct-2025
☒	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
☒	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	Receiver	R&S	ESC13	1166.5950.03	25-Oct-2024	24-Oct-2025
☒	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	25-Oct-2024	24-Oct-2025
☒	LISN	R&S	EVN216	3560.6550.12	26-Sep-2024	25-Sep-2025
☐	LISN	ETS-Lindgren	3816/2SH	00201088	25-Oct-2024	24-Oct-2025
☒	Test Software	EZ-EMC	EZ-CON	Software Version: EMC-CON 3A1.1		

RF Conducted Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	29-Mar-2024	28-Mar-2025
☒	EXA Spectrum Analyzer	KEYSIGHT	N9020A	MY51286807	25-Oct-2024	24-Oct-2025
☒	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430035	25-Oct-2024	24-Oct-2025
☒	MXG-B RF Vector Signal Generator	KEYSIGHT	N5182B	MY61350133	29-Mar-2024	28-Mar-2025
☒	Automatic control switch	Tonscend	JS0806-2	24G80620875	N/A	N/A
☒	Test Software	Tonscend	JS1120-3 Test System	Software Version: V3.5.39(BT&WIFI)		

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage	Relative Humidity (%)
NT/NV	+15 to +35	3.8Vdc and/or 120 Vac	20 to 75
Remark: 1) NV: Normal Voltage; NT: Normal Temperature			

4.1.2 Record of Normal Environment and Test Sample

Test Item	Temp. (°C)	Relative Humidity (%)	Pressure (kPa)	Sample No.	Tested by
AC Power Line Conducted Emission	21.3	52.8	100.4	S20211294756-ZJA01/9	Linson Xie
26 dB emission bandwidth	22.2	33.2	101.1	S20211294756-ZJA04/9	Allen Zhou
Maximum conducted output power					
Peak Power Spectral Density					
6 dB bandwidth					
Dynamic Frequency Selection	23.3	43.5	100.7	S20211294756-ZJA09/9	Fire Huo
Radiated Emissions and Band Edge Measurement					

4.2 TEST CHANNELS

Mode	Tx/Rx Frequency	Test RF Channel Lists		
		Lowest(L)	Middle(M)	Highest(H)
IEEE 802.11a IEEE 802.11n-HT20 IEEE 802.11ac-VHT20	5150 MHz to 5250 MHz	Channel 36	Channel 44	Channel 48
		5180 MHz	5220 MHz	5240 MHz
	5250 MHz to 5350 MHz	Channel 52	Channel 60	Channel 64
		5260 MHz	5300 MHz	5320 MHz
	5470 MHz to 5725 MHz	Channel 100	Channel 116	Channel 140/ Channel 144
		5500 MHz	5580 MHz	5700 MHz/ 5720MHz
	5725 MHz to 5850 MHz	Channel 144/ Channel 149	Channel 157	Channel 165
		5720MHz/ 5745 MHz	5785 MHz	5825 MHz
IEEE 802.11n-HT40 IEEE 802.11ac-VHT40	5150 MHz to 5250 MHz	Channel 38	--	Channel 46
		5190 MHz	--	5230 MHz
	5250 MHz to 5350 MHz	Channel 54	--	Channel 62
		5270 MHz	--	5310 MHz
	5470 MHz to 5725 MHz	Channel 102	Channel 110	Channel 134/ Channel 142
		5510 MHz	5550 MHz	5670 MHz/ 5710MHz
	5725 MHz to 5850 MHz	Channel 142/ Channel 151	--	Channel 159
		5710MHz/ 5755 MHz	--	5795 MHz
IEEE 802.11ac-VHT80	5150 MHz to 5250 MHz	--	Channel 42	--
		--	5210 MHz	--
	5250 MHz to 5350 MHz	--	Channel 58	--
		--	5290 MHz	--
	5470 MHz to 5725 MHz	Channel 106	--	Channel 122/ Channel 138
		5530 MHz	--	5610 MHz/ 5569 MHz
	5725 MHz to 5850 MHz	Channel 138	Channel 155	--
		5610 MHz/ 5775 MHz	5775 MHz	--

4.3 EUT TEST STATUS

Mode	Tx/Rx Function	Description
IEEE 802.11a/n/ac	1Tx/1Rx	1. Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.

Power Setting (Provided by the customer)				
Mode	U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
IEEE 802.11a	11	11	11	11
IEEE 802.11n-HT20	10	10	10	10
IEEE 802.11n-HT40	10	10	10	10
IEEE 802.11ac-VHT20	10	10	10	10
IEEE 802.11ac-VHT40	10	10	10	10
IEEE 802.11ac-VHT80	10	10	10	10
Test Software (Provided by the customer)				
QRCT4				



4.4 PRE-SCAN


Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. Following data rate was (were) selected for the final test as listed below

Mode	Worst-case data rates
IEEE 802.11a	6 Mbps
IEEE 802.11n-HT20	MCS0
IEEE 802.11n-HT40	MCS0
IEEE 802.11ac-VHT20	MCS0
IEEE 802.11ac-VHT40	MCS0
IEEE 802.11ac-VHT80	MCS0


4.5 TEST SETUP

4.5.1 For Radiated Emissions test setup

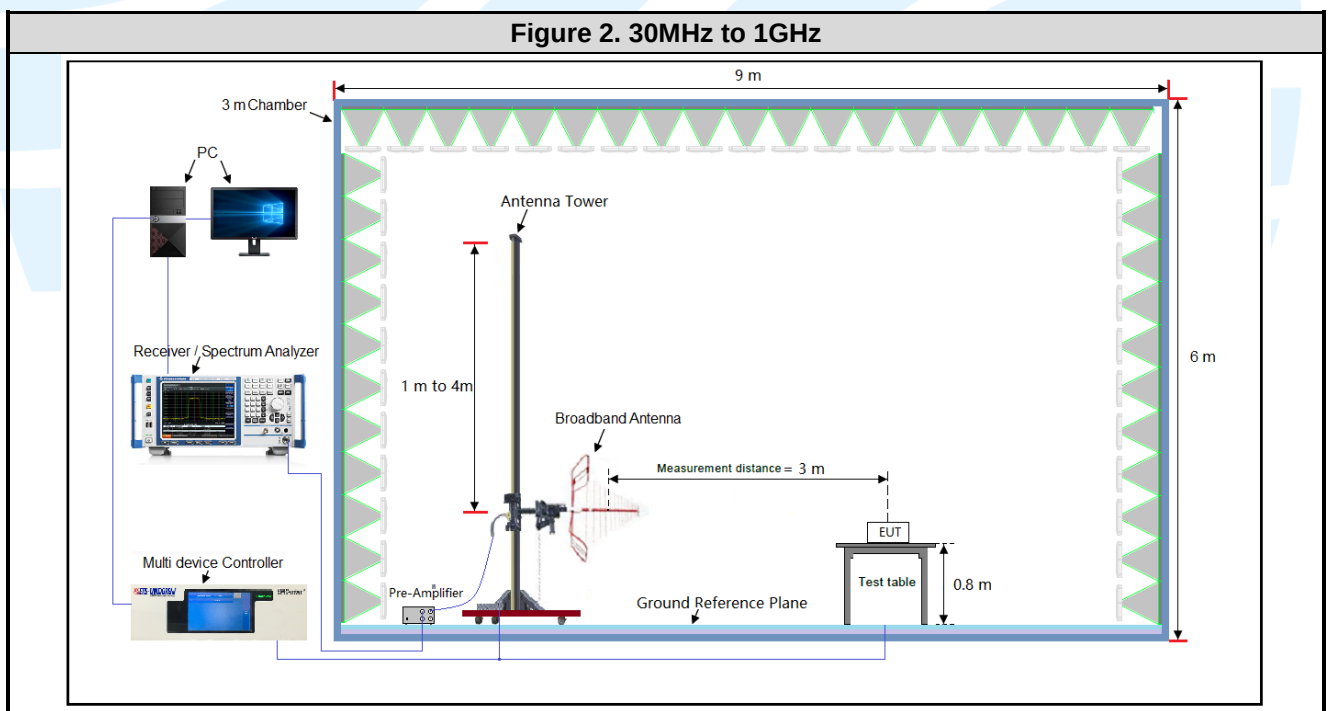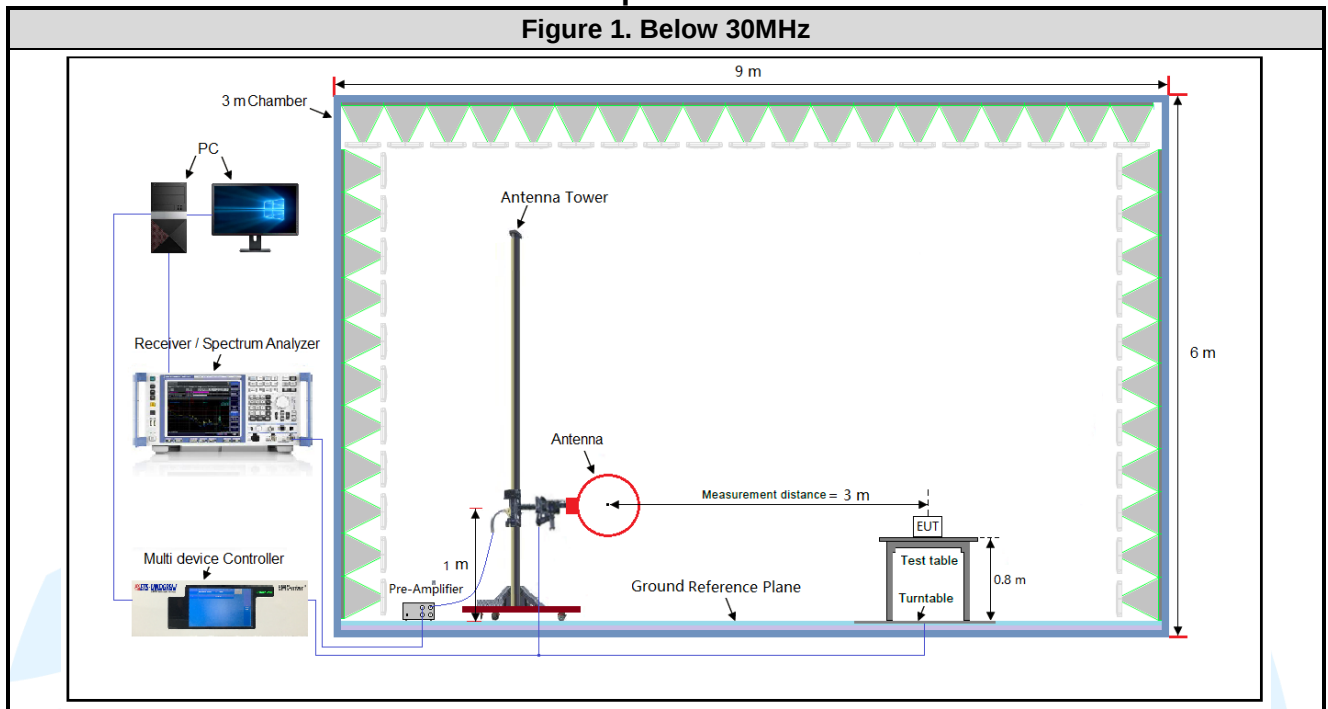


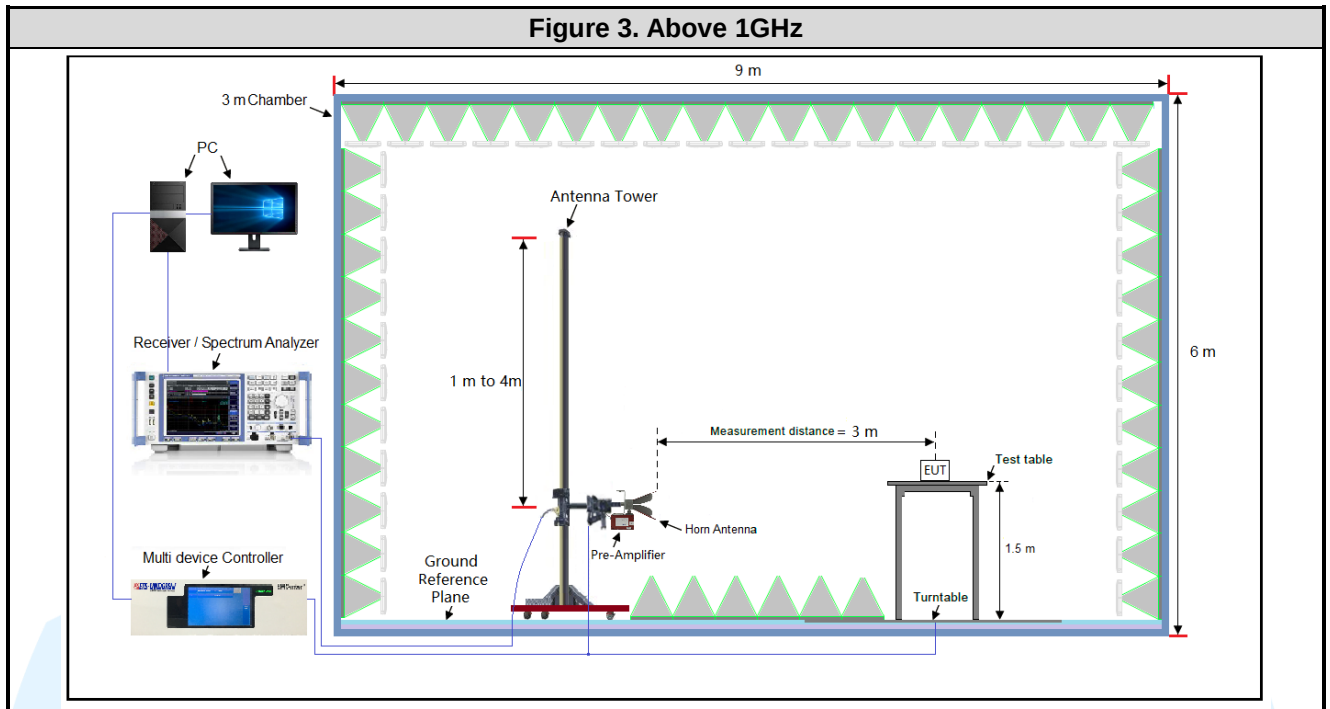

4.5.2 For Conducted Emissions test setup

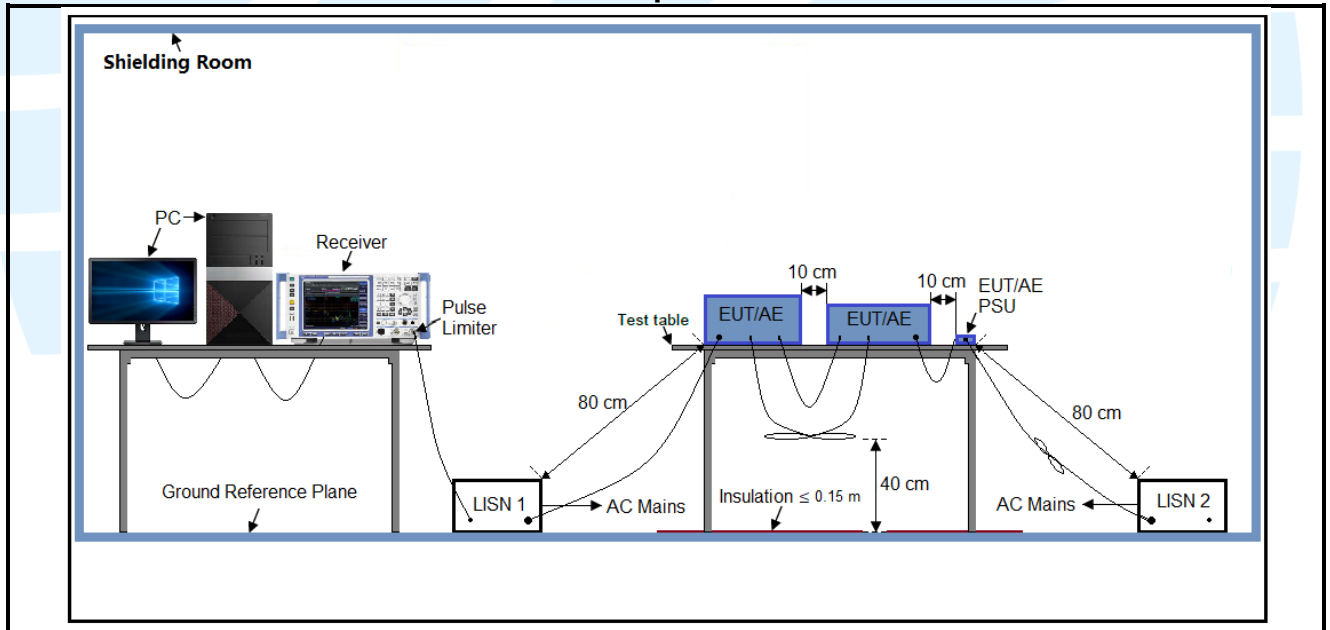

4.5.3 For Conducted RF test setup

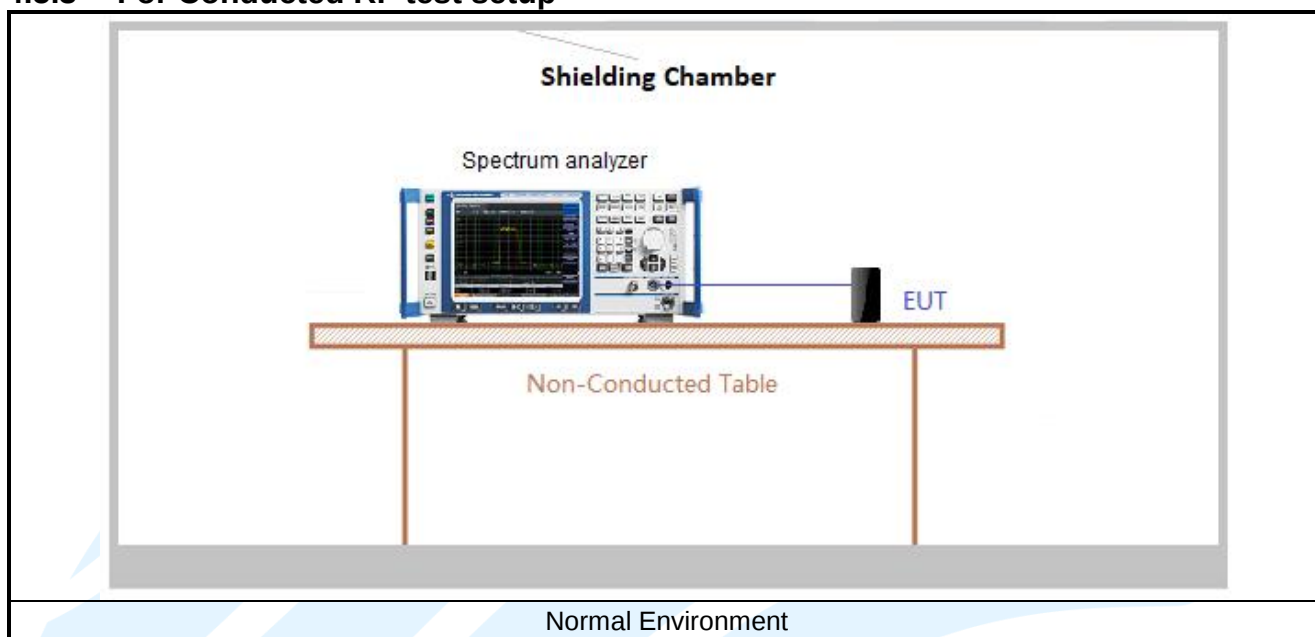

4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3.8V battery. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Therefore, all final radiated testing was performed with the EUT in orientation.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

4.7 DUTY CYCLE

Test Procedure: ANSI C63.10-2013 Clause 12.2.


Test Results


Mode	Data Rates	On Time (msec)	Period (msec)	Duty Cycle (linear)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/T Minimum VBW (kHz)
IEEE 802.11a	6 Mbps	2.070	2.100	0.99	98.57	0.00	0.01
IEEE 802.11n-HT20	MCS 0	1.730	1.770	0.98	97.74	0.10	0.58
IEEE 802.11n-HT40	MCS 0	0.850	0.890	0.96	95.51	0.20	1.18
IEEE 802.11ac-VHT20	MCS 0	1.740	1.780	0.98	97.75	0.10	0.57
IEEE 802.11ac-VHT40	MCS 0	0.860	0.900	0.96	95.56	0.20	1.16
IEEE 802.11ac-VHT80	MCS 0	0.420	0.460	0.91	91.30	0.40	2.38



Remark:


- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = 10 * log(1/ Duty cycle);

The test plots as follows

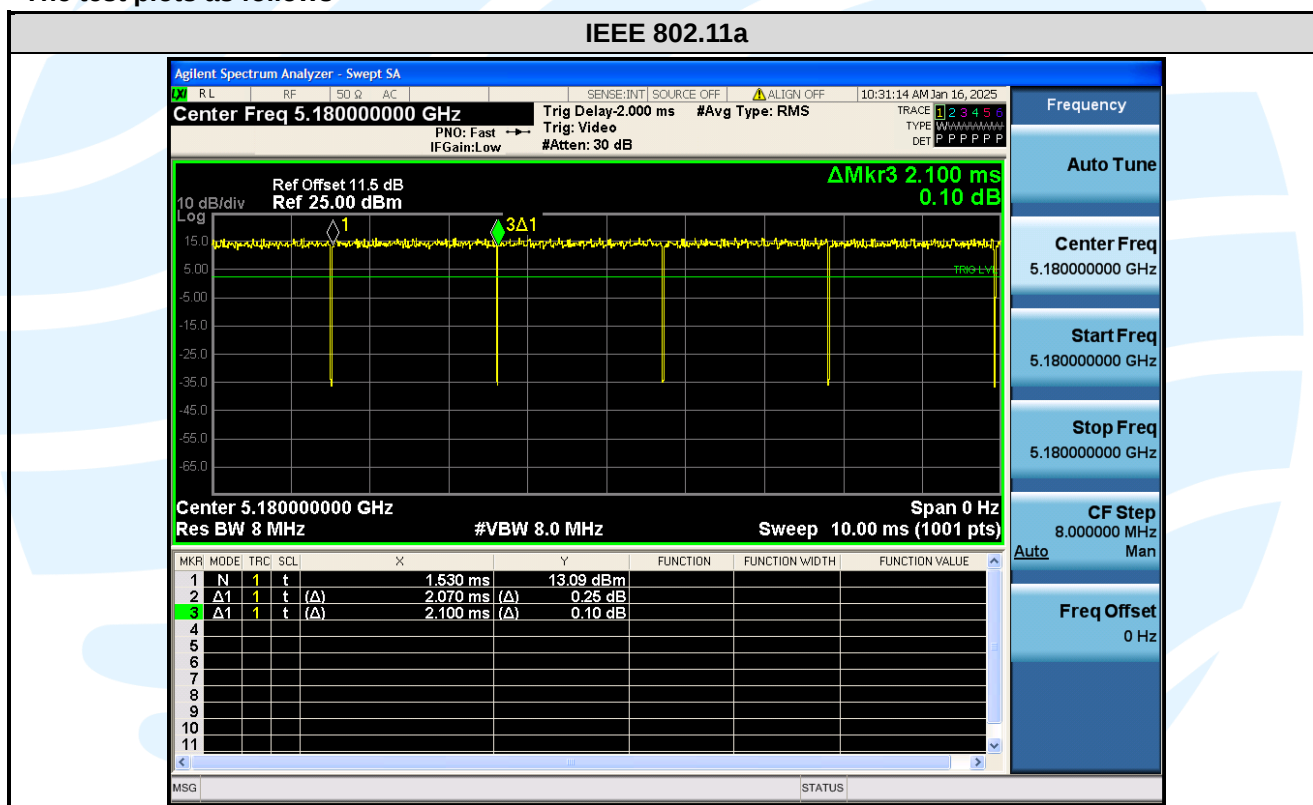

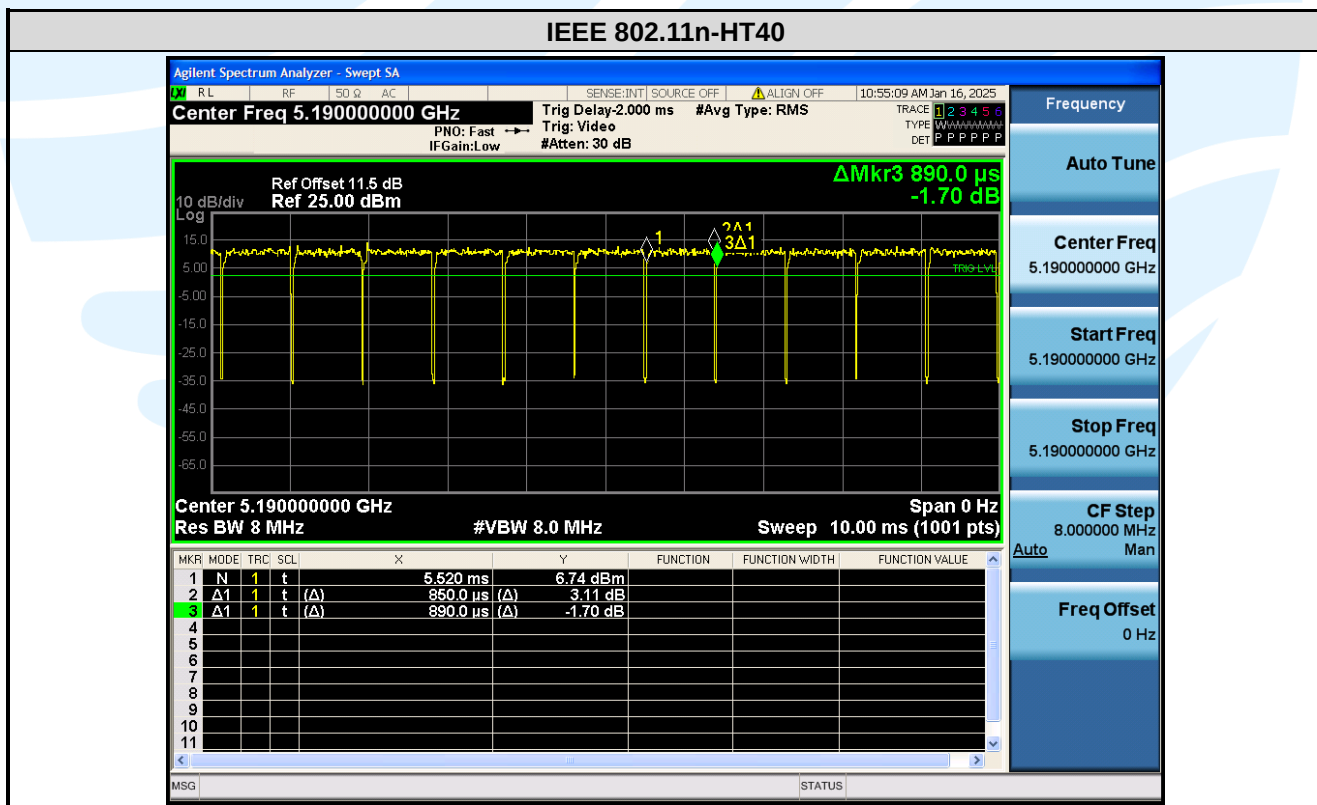

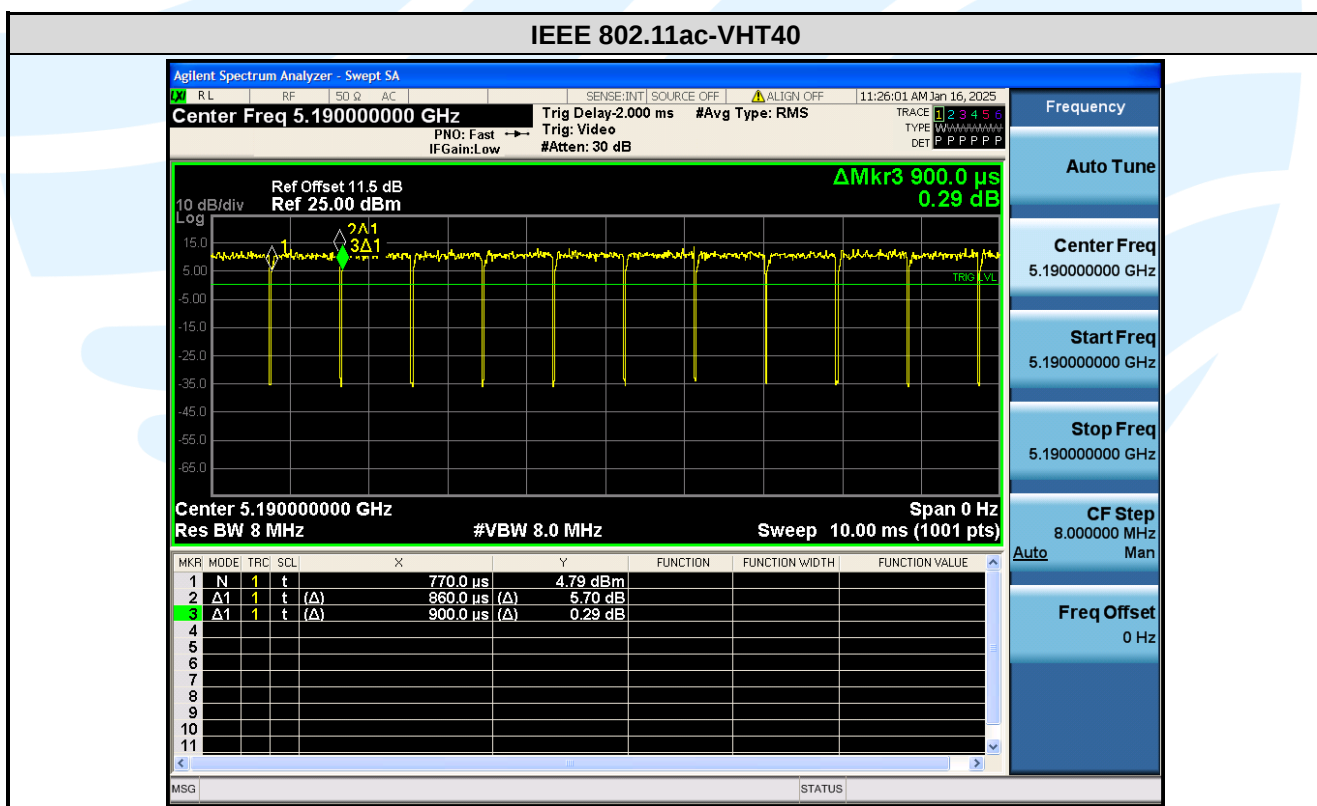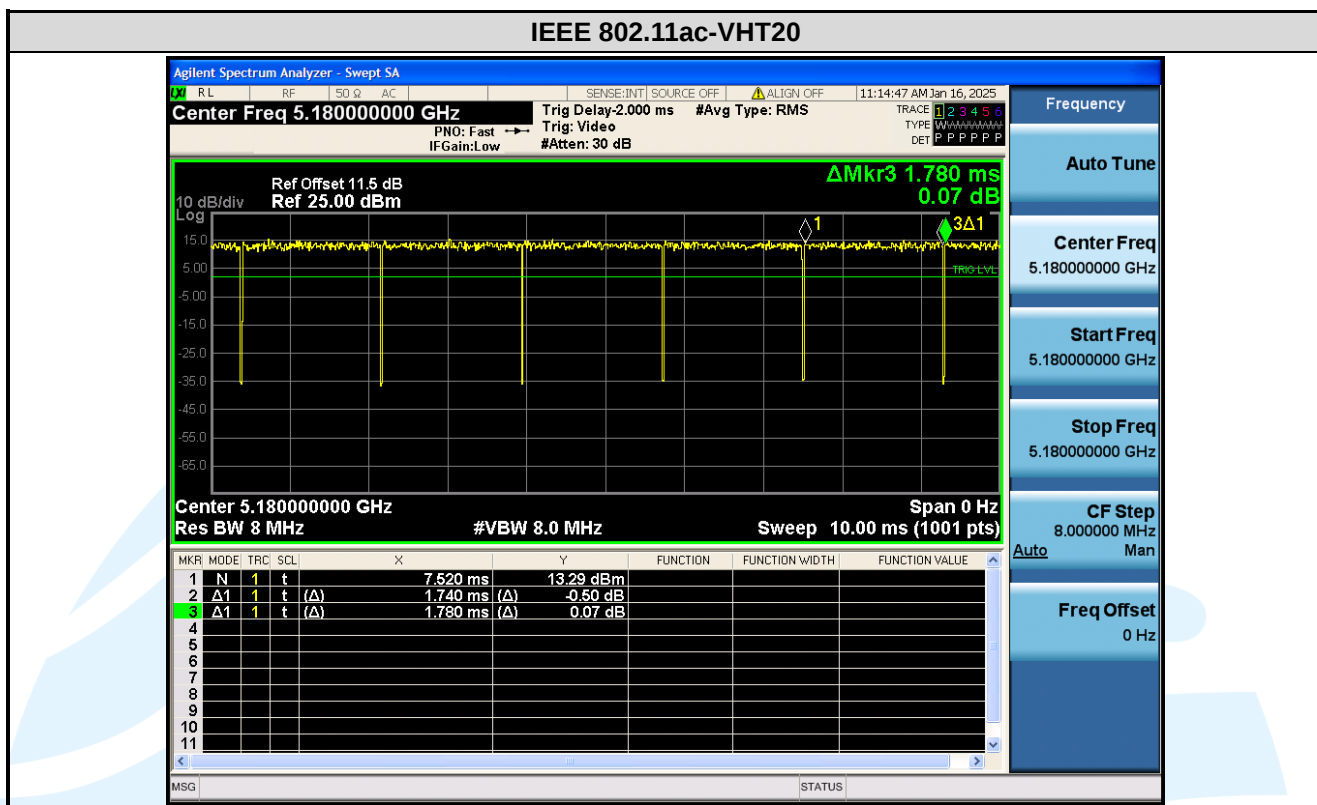

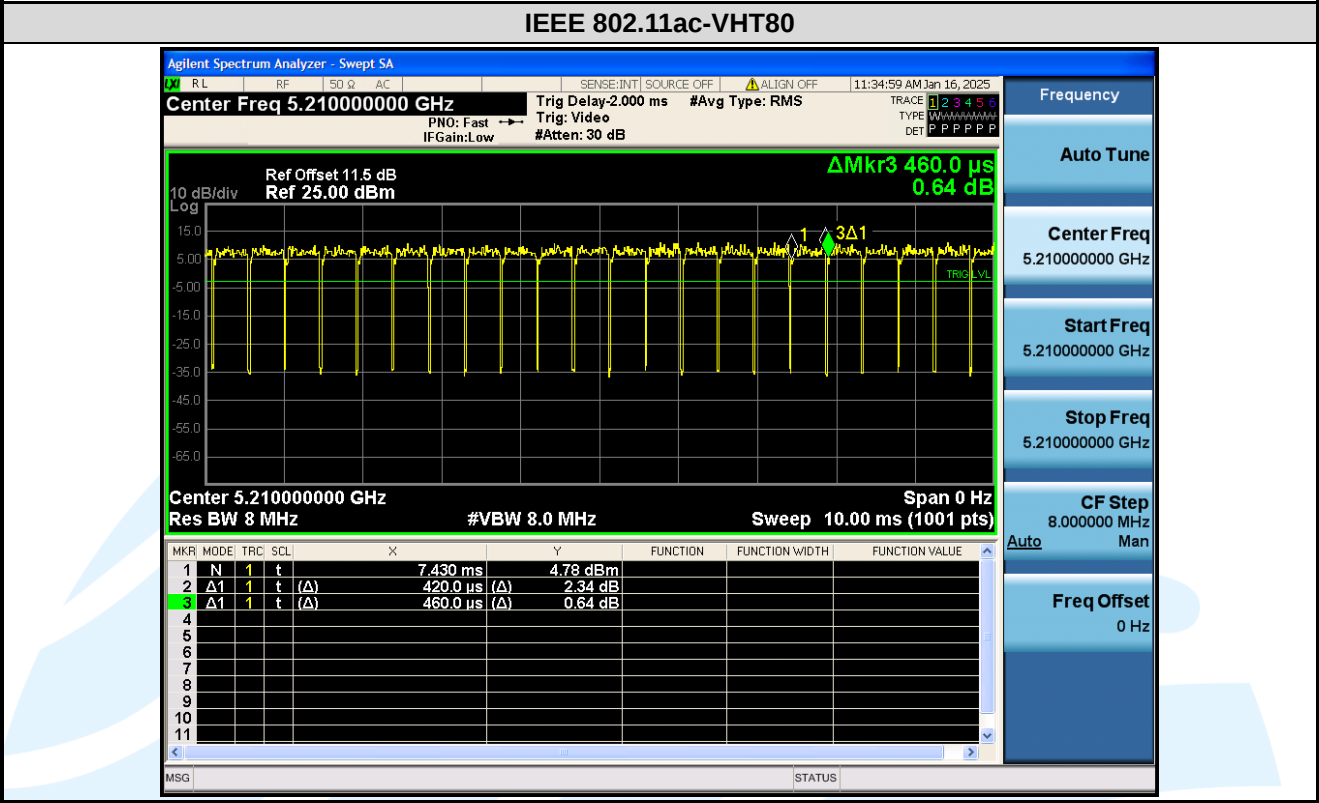

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 789033 D02 General UNII Test Procedures New Rules v02r01	Guidelines for compliance testing of unlicensed national information infrastructure (U-NII) device part 15, subpart E
5	KDB 905462 D06 802.11 Channel Plans New Rules v02	Operation in U-NII bands -802.11 channel PLAN(\$15.407)
6	KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02	Compliance measurement procedures for Unlicensed –National Information Infrastructure devices operates in the frequency bands 5250 MHz to 5350 MHz and 5470 MHz to 5725 MHz bands incorporating dynamic frequency selection
7	KDB 905462 D03 Client Without DFS New Rules v01r02	U-NII client devices without radar detection capability

5.2 ANTENNA REQUIREMENT

Standard Requirement
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.407(a)(1) (2) requirement: The conducted output power limit specified in paragraph (a) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (a) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power and the peak power spectral density shall be reduced by the by the amount in dB that the directional gain of the antenna exceeds 6 dBi. EUT Antenna: Antenna in the interior of the equipment and no consideration of replacement. The max gain of the antenna is 0.86 dBi.

5.326 DB BANDWIDTH

Test Requirement: FCC 47 CFR Part 15 Subpart E Section 15.407 (a) (2)(5)

Test Method: KDB 789033 D02 v02r01 Section C.1

Limit: None; for reporting purposes only.

Test Procedure:

The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum analyzer.

Spectrum analyzer according to the following Settings:

a) Set RBW = approximately 1 % of the emission bandwidth.

b) Set the VBW > RBW.

c) Detector = Peak.

d) Trace mode = max hold.

e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Please refer to Appendix A

5.46 DB BANDWIDTH

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.407 (e)

Test Method: KDB 789033 D02 v02r01Section C.2

Limit: Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure:

The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum Analyzer.

Spectrum analyzer according to the following Settings:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 * \text{RBW}$.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Please refer to Appendix A

5.5 MAXIMUM CONDUCTED OUTPUT POWER

Test Requirement: FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(1)(2)(3)

Test Method: KDB 789033 D02 v02r01 Section E.3.a(Method PM)

Limits:

1. For the band 5.15-5.25 GHz.
 - (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
 - (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
 - (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
 - (iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure:

1. Connected the EUT's antenna port to measure device by 10dB attenuator.
2. Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of Tx on burst.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Transmitter mode

Test Results: Pass

Test Data:

Antenna gain and the maximum output power limit.

Frequency Band	Antenna Gain (dBi)	Peak Power Limits (dBm)
U-NII-1	1.15	24.0
U-NII-2A	1.15	24.0
U-NII-2C	1.15	24.0
U-NII-3	1.15	30.0

Mode	Band	Channel	Freq. (MHz)	CONDUCTED AVG POWER			
				Meas Value (dBm)	Corr'd Value (dBm)	Limit (dBm)	Result
IEEE 802.11a	U-NII-1	36	5180	10.86	10.86	24.00	Pass
		44	5220	10.72	10.72	24.00	Pass
		48	5240	10.33	10.33	24.00	Pass
	U-NII-2A	52	5260	10.11	10.11	24.00	Pass
		60	5300	9.74	9.74	24.00	Pass
		64	5320	9.85	9.85	24.00	Pass
	U-NII-2C	100	5500	9.41	9.41	24.00	Pass
		120	5600	10.21	10.21	24.00	Pass
		140	5700	10.38	10.38	24.00	Pass
	U-NII-3	144	5720	10.28	10.28	24.00	Pass
		149	5745	9.58	9.58	30.00	Pass
		157	5785	9.24	9.24	30.00	Pass
IEEE 802.11n-HT20	U-NII-1	165	5825	8.89	8.89	30.00	Pass
	U-NII-1	36	5180	9.89	9.99	24.00	Pass
		44	5220	9.72	9.82	24.00	Pass
	U-NII-2A	48	5240	9.39	9.49	24.00	Pass
		52	5260	9.15	9.25	24.00	Pass
		60	5300	8.74	8.84	24.00	Pass
	U-NII-2C	64	5320	8.67	8.77	24.00	Pass
		100	5500	8.37	8.47	24.00	Pass
		120	5600	9.10	9.20	24.00	Pass
	U-NII-3	140	5700	9.41	9.51	24.00	Pass
		144	5720	9.24	9.34	24.00	Pass
		149	5745	8.64	8.74	30.00	Pass
IEEE 802.11n-HT40	U-NII-1	157	5785	8.16	8.26	30.00	Pass
	U-NII-1	165	5825	7.66	7.76	30.00	Pass
	U-NII-1	38	5190	10.48	10.68	24.00	Pass
	U-NII-2A	46	5230	10.30	10.50	24.00	Pass
		54	5270	9.74	9.94	24.00	Pass
	U-NII-2C	62	5310	9.34	9.54	24.00	Pass
		102	5510	9.14	9.34	24.00	Pass
		118	5590	9.54	9.74	24.00	Pass
	U-NII-3	134	5670	10.25	10.45	24.00	Pass
		142	5710	10.08	10.28	24.00	Pass
		151	5755	9.20	9.40	30.00	Pass
		159	5795	8.72	8.92	30.00	Pass

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

Mode	Band	Channel	Freq. (MHz)	CONDUCTED AVG POWER			
				Meas Value (dBm)	Corr'd Value (dBm)	Limit (dBm)	Result
IEEE 802.11ac-VHT20	U-NII-1	36	5180	9.91	10.01	24.00	Pass
		44	5220	9.74	9.84	24.00	Pass
		48	5240	9.42	9.52	24.00	Pass
	U-NII-2A	52	5260	9.19	9.29	24.00	Pass
		60	5300	9.77	9.87	24.00	Pass
		64	5320	8.68	8.78	24.00	Pass
	U-NII-2C	100	5500	8.36	8.46	24.00	Pass
		120	5600	9.11	9.21	24.00	Pass
		140	5700	9.41	9.51	24.00	Pass
	U-NII-3	144	5720	9.26	9.36	24.00	Pass
		149	5745	8.63	8.73	30.00	Pass
		157	5785	8.15	8.25	30.00	Pass
IEEE 802.11ac-VHT40	U-NII-1	38	5190	10.49	10.69	24.00	Pass
		46	5230	10.28	10.48	24.00	Pass
	U-NII-2A	54	5270	9.74	9.94	24.00	Pass
		62	5310	9.33	9.53	24.00	Pass
	U-NII-2C	102	5510	9.11	9.31	24.00	Pass
		118	5590	9.51	9.71	24.00	Pass
		134	5670	10.22	10.42	24.00	Pass
	U-NII-3	142	5710	10.06	10.26	24.00	Pass
		151	5755	9.20	9.40	30.00	Pass
		159	5795	8.71	8.91	30.00	Pass
IEEE 802.11ac-VHT80	U-NII-1	42	5210	9.90	10.30	24.00	Pass
	U-NII-2A	58	5290	9.02	9.42	24.00	Pass
	U-NII-2C	106	5530	8.69	9.09	24.00	Pass
		122	5610	9.43	9.83	24.00	Pass
	U-NII-3	138	5690	9.34	9.74	24.00	Pass
		155	5775	8.51	8.91	30.00	Pass

Remark:

1. Corr'd Power = Meas Power + Duty Cycle Factor

For U-NII-2A Band:

For IEEE 802.11a, the minimum 26 dB emission bandwidth is 21.26 MHz

$11 \text{ dBm} + 10\log_{10}(21.26) = 24.28 \text{ dBm} < 24 \text{ dBm} (250\text{mW})$

So the 24 dB limit applicable

For IEEE 802.11n-HT20/ac-VHT20, the minimum 26 dB emission bandwidth is 21.54 MHz

$11 \text{ dBm} + 10\log_{10}(21.54) = 24.33 \text{ dBm} < 24 \text{ dBm} (250\text{mW})$

So the 24 dB limit applicable

For IEEE 802.11n-HT40/ac-VHT40/ac-VHT80, the minimum 26 dB emission bandwidth is 40.02 MHz

$11 \text{ dBm} + 10\log_{10}(40.02) = 27.02 \text{ dBm} > 24 \text{ dBm} (250\text{mW})$

So the 24 dB limit applicable

For U-NII-2C Band:

For IEEE 802.11 a, the minimum 26 dB emission bandwidth is 21.24 MHz

$11 \text{ dBm} + 10\log_{10}(21.24) = 24.27 \text{ dBm} < 24 \text{ dBm} (250\text{mW})$

So the 24 dB limit applicable

For IEEE 802.11n-HT20/ac-VHT20, the minimum 26 dB emission bandwidth is 21.89 MHz

$11 \text{ dBm} + 10\log_{10}(21.89) = 24.40 \text{ dBm} (250\text{mW})$

So the 24 dB limit applicable

For IEEE 802.11n-HT40/ac-VHT40/ac-VHT80, the minimum 26 dB emission bandwidth is 40.26 MHz

$11 \text{ dBm} + 10\log_{10}(40.26) = 27.05 \text{ dBm} > 24 \text{ dBm} (250\text{mW})$

So the 24 dB limit applicable

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

5.6 PEAK POWER SPECTRAL DENSITY

Test Requirement: FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(1)(2)(3)

Test Method: KDB 789033 D02 v02r01 Section F

Limits:

1. For the band 5.15-5.25 GHz.
 - (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
 - (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
 - (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
 - (iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure:

The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum Analyzer.

Spectrum analyzer according to the following Settings:

1. For U-NII-1, U-NII-2A, U-NII-2C band:

Using method SA-2

- a) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- b) Set RBW = 1 MHz, Set VBW $\geq$ 3 RBW, Detector = RMS
- c) Sweep time = auto, trigger set to "free run".
- d) Trace average at least 100 traces in power averaging mode.
- e) Record the max value and add 10 log (1/duty cycle)

2. For U-NII-3 band:

- a) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- b) Set RBW = 500 kHz, Set VBW $\geq$ 3 RBW, Detector = RMS
- c) Use the peak marker function to determine the maximum power level in any 500 kHz band segment within the fundamental EBW.
- d) Sweep time = auto, trigger set to "free run".
- e) Trace average at least 100 traces in power averaging mode.
- f) Record the max value and add 10 log (1/duty cycle)

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Please refer to Appendix A

Antenna gain and the maximum output power limit.

Frequency Band	Antenna Gain (dBi)	PSD Limits (dBm/MHz or dBm/500kHz)
U-NII-1	1.15	11.0
U-NII-2A	1.15	11.0
U-NII-2C	1.15	11.0
U-NII-3	1.15	30.0

5.7 RADIATED EMISSIONS AND BAND EDGE MEASUREMENT

Test Requirement: FCC 47 CFR Part 15 Subpart E Section 15.407 (b)(1)(2)(3)(4)(6)
FCC 47 CFR Part 15 Subpart C Section 15.209/205

Test Method: KDB 789033 D02 v02r01 Section G.3, G.4, G.5, and G.6

Receiver Setup:

Frequency	RBW
0.009 MHz-0.150 MHz	200/300 kHz
0.150 MHz -30 MHz	9/10 kHz
30 MHz-1 GHz	100/120 kHz
Above 1 GHz	1 MHz

Limits:

1. Limits of Radiated Emission and Band edge Measurement

Radiated emissions that fall in the restricted bands must comply with the general emissions limits in 15.209(a) as below table. Other emissions shall be at least 20 dB below the highest level of the desired power.

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009 MHz-0.490 MHz	2400/F(kHz)	--	--	300
0.490 MHz-1.705 MHz	24000/F(kHz)	--	--	30
1.705 MHz-30 MHz	30	--	--	30
30 MHz-88 MHz	100	40.0	Quasi-peak	3
88 MHz-216 MHz	150	43.5	Quasi-peak	3
216 MHz-960 MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1 GHz	500	54.0	Average	3

Remark:

- The lower limit shall apply at the transition frequencies.
- Emission level (dBuV/m) = 20 log Emission level (uV/m).
- For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

2. Limits of Unwanted Emission Out of the Restricted Bands

Applicable To	Limit	
789033 D02 General U-NII Test Procedures New Rules v01r04	Field Strength at 3 m	
	PK: 74 (dBμV/m)	AV: 54 (dBμV/m)
Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
FCC Part 15.407 (b)(1)	PK: -27 (dBm/MHz)	PK: 74 (dBμV/m)
FCC Part 15.407 (b)(2)	PK: -27 (dBm/MHz)	PK: 74 (dBμV/m)
FCC Part 15.407 (b)(3)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)
FCC Part 15.407 (b)(4)	27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;	PK: 68.2 (dBμV/m)
	15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;	
	10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges;	
	-27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.	

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

Test Setup: Refer to section 4.5.1 for details.

Test Procedures:

1. The EUT was placed on the top of a rotating table 0.8 meters (for below 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
6. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Remark:

- a) The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
- b) The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
- c) The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for RMS Average (Duty cycle < 98 %) for Average detection (AV) at frequency above 1 GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
- d) The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz (Duty cycle $\geq 98\%$) or $\geq 1/T$ (duty cycle is < 98%) for Average detection (AV) at frequency above 1 GHz.
- e) All modes of operation were investigated and the worst-case emissions are reported.


Equipment Used: Refer to section 3 for details.

Test Result: Pass

The measurement data as follows:

Radiated Emission Test Data (9 kHz ~ 30 MHz):

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

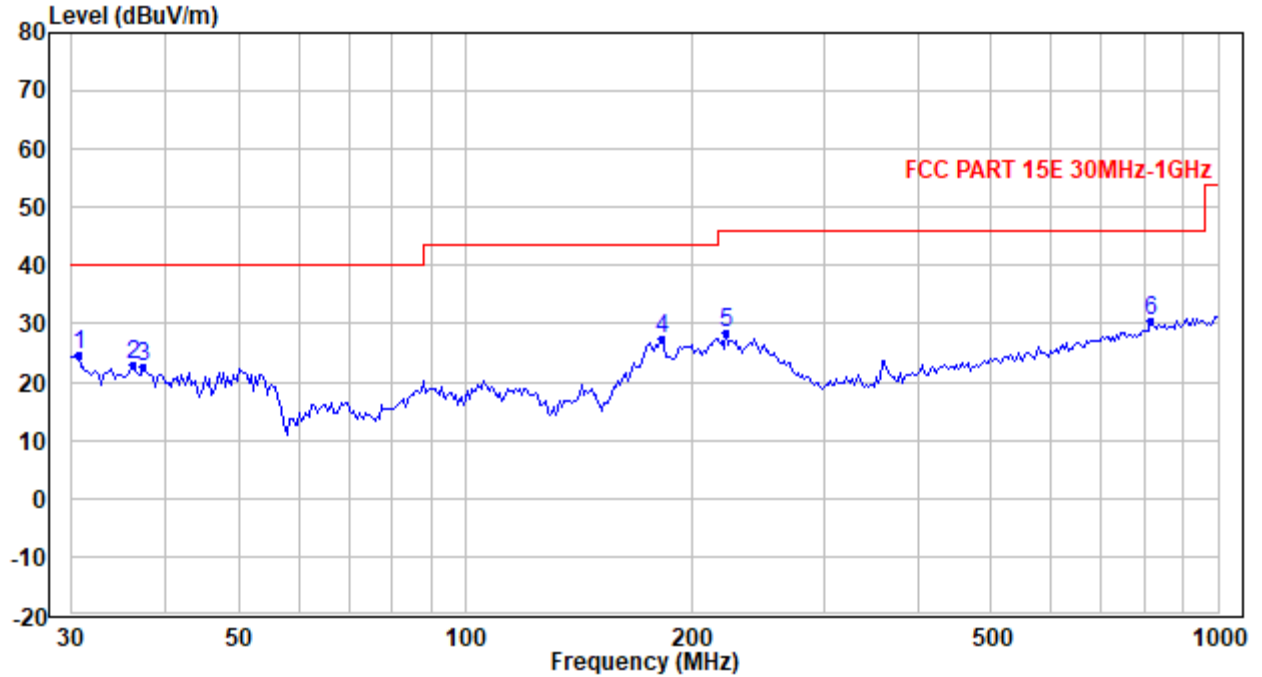Radiated Emission Test Data (30 MHz ~ 1 GHz):
Worst-Case Configuration
Horizontal


No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.639	30.16	-5.54	24.62	40.00	-15.38	Peak
2	36.268	29.85	-7.00	22.85	40.00	-17.15	Peak
3	37.302	29.92	-7.28	22.64	40.00	-17.36	Peak
4	182.578	39.30	-12.00	27.30	43.50	-16.20	Peak
5	222.281	39.42	-11.04	28.38	46.00	-17.62	Peak
6	815.635	27.15	3.25	30.40	46.00	-15.60	Peak

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

Vertical

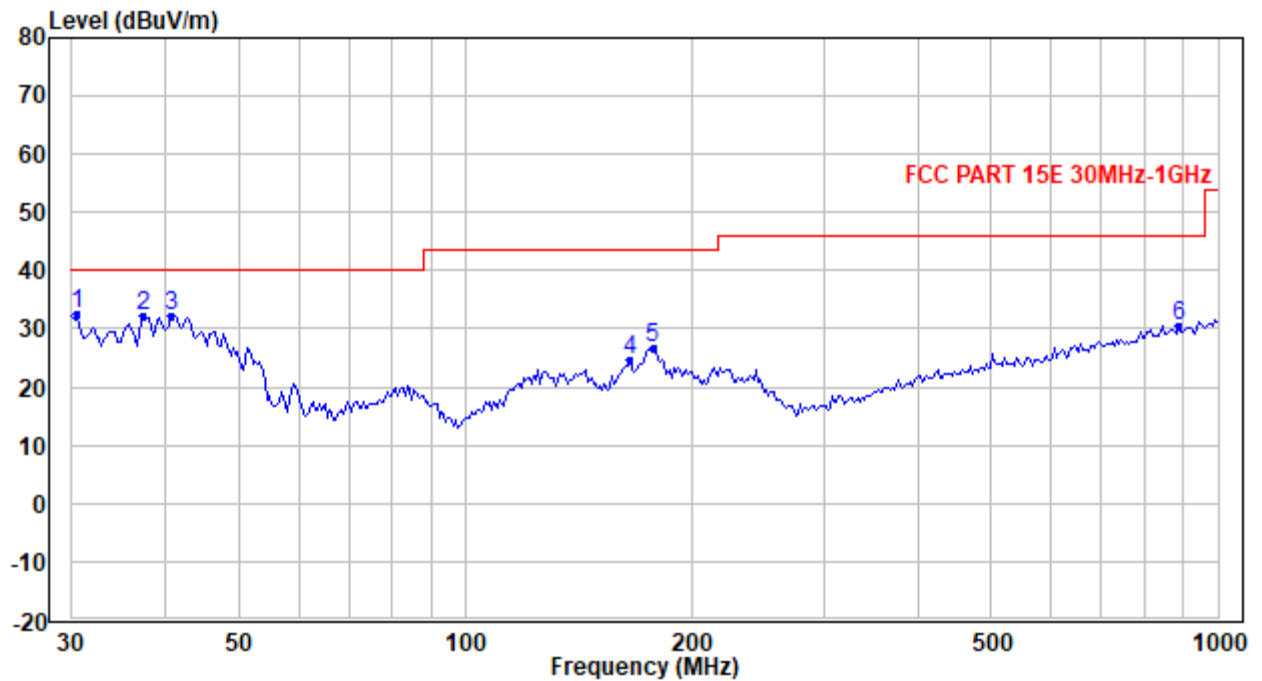

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.425	37.55	-5.12	32.43	40.00	-7.57	Peak
2	37.302	39.38	-7.28	32.10	40.00	-7.90	Peak
3	40.584	41.68	-9.41	32.27	40.00	-7.73	Peak
4	165.472	37.58	-13.08	24.50	43.50	-19.00	Peak
5	177.518	38.45	-11.84	26.61	43.50	-16.89	Peak
6	887.398	26.26	4.43	30.69	46.00	-15.31	Peak

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

Radiated Emission Test Data (Above 1GHz): Worst-Case Configuration								
No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11a_Channel 36								
1	10360.000	33.83	3.38	37.21	54.00	-16.79	Average	Horizontal
2	10360.000	46.30	3.38	49.68	74.00	-24.32	Peak	Horizontal
3	15540.000	31.76	7.56	39.32	54.00	-14.68	Average	Horizontal
4	15540.000	45.00	7.56	52.56	74.00	-21.44	Peak	Horizontal
5	10360.000	33.80	3.38	37.18	54.00	-16.82	Average	Vertical
6	10360.000	46.16	3.38	49.54	74.00	-24.46	Peak	Vertical
7	15540.000	31.83	7.56	39.39	54.00	-14.61	Average	Vertical
8	15540.000	44.12	7.56	51.68	74.00	-22.32	Peak	Vertical
IEEE 802.11a_Channel 44								
1	10440.000	34.04	3.38	37.42	54.00	-16.58	Average	Horizontal
2	10440.000	48.37	3.38	51.75	74.00	-22.25	Peak	Horizontal
3	15660.000	32.46	7.46	39.92	54.00	-14.08	Average	Horizontal
4	15660.000	45.21	7.46	52.67	74.00	-21.33	Peak	Horizontal
5	10440.000	34.04	3.38	37.42	54.00	-16.58	Average	Vertical
6	10440.000	46.60	3.38	49.98	74.00	-24.02	Peak	Vertical
7	15660.000	32.46	7.46	39.92	54.00	-14.08	Average	Vertical
8	15660.000	45.10	7.46	52.56	74.00	-21.44	Peak	Vertical
IEEE 802.11a_Channel 48								
1	10480.000	33.09	3.39	36.48	54.00	-17.52	Average	Horizontal
2	10480.000	45.44	3.39	48.83	74.00	-25.17	Peak	Horizontal
3	15720.000	32.01	7.40	39.41	54.00	-14.59	Average	Horizontal
4	15720.000	44.34	7.40	51.74	74.00	-22.26	Peak	Horizontal
5	10480.000	33.03	3.39	36.42	54.00	-17.58	Average	Vertical
6	10480.000	47.05	3.39	50.44	74.00	-23.56	Peak	Vertical
7	15720.000	32.05	7.40	39.45	54.00	-14.55	Average	Vertical
8	15720.000	44.49	7.40	51.89	74.00	-22.11	Peak	Vertical
IEEE 802.11a_Channel 52								
1	10520.000	33.04	3.35	36.39	54.00	-17.61	Average	Horizontal
2	10520.000	45.69	3.35	49.04	74.00	-24.96	Peak	Horizontal
3	15780.000	32.10	7.35	39.45	54.00	-14.55	Average	Horizontal
4	15780.000	44.49	7.35	51.84	74.00	-22.16	Peak	Horizontal
5	10520.000	33.04	3.35	36.39	54.00	-17.61	Average	Vertical
6	10520.000	46.72	3.35	50.07	74.00	-23.93	Peak	Vertical
7	15780.000	32.10	7.35	39.45	54.00	-14.55	Average	Vertical
8	15780.000	44.94	7.35	52.29	74.00	-21.71	Peak	Vertical

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11a_Channel 60								
1	10600.000	32.58	3.19	35.77	54.00	-18.23	Average	Horizontal
2	10600.000	45.39	3.19	48.58	74.00	-25.42	Peak	Horizontal
3	15900.000	30.33	7.24	37.57	54.00	-16.43	Average	Horizontal
4	15900.000	43.19	7.24	50.43	74.00	-23.57	Peak	Horizontal
5	10600.000	32.58	3.19	35.77	54.00	-18.23	Average	Vertical
6	10600.000	45.39	3.19	48.58	74.00	-25.42	Peak	Vertical
7	15900.000	30.33	7.24	37.57	54.00	-16.43	Average	Vertical
8	15900.000	43.19	7.24	50.43	74.00	-23.57	Peak	Vertical
IEEE 802.11a_Channel 64								
1	10640.000	32.60	3.10	35.70	54.00	-18.30	Average	Horizontal
2	10640.000	45.39	3.10	48.49	74.00	-25.51	Peak	Horizontal
3	15960.000	30.51	7.19	37.70	54.00	-16.30	Average	Horizontal
4	15960.000	44.33	7.19	51.52	74.00	-22.48	Peak	Horizontal
5	10640.000	32.63	3.10	35.73	54.00	-18.27	Average	Vertical
6	10640.000	45.43	3.10	48.53	74.00	-25.47	Peak	Vertical
7	15960.000	30.38	7.19	37.57	54.00	-16.43	Average	Vertical
8	15960.000	44.08	7.19	51.27	74.00	-22.73	Peak	Vertical
IEEE 802.11a_Channel 100								
1	11000.000	33.68	2.36	36.04	54.00	-17.96	Average	Horizontal
2	11000.000	46.52	2.36	48.88	74.00	-25.12	Peak	Horizontal
3	16500.000	31.60	8.00	39.60	54.00	-14.40	Average	Horizontal
4	16500.000	43.92	8.00	51.92	74.00	-22.08	Peak	Horizontal
5	11000.000	33.59	2.36	35.95	54.00	-18.05	Average	Vertical
6	11000.000	45.75	2.36	48.11	74.00	-25.89	Peak	Vertical
7	16500.000	31.52	8.00	39.52	54.00	-14.48	Average	Vertical
8	16500.000	44.47	8.00	52.47	74.00	-21.53	Peak	Vertical
IEEE 802.11a_Channel 116								
1	11160.000	32.70	2.24	34.94	54.00	-19.06	Average	Horizontal
2	11160.000	45.27	2.24	47.51	74.00	-26.49	Peak	Horizontal
3	16740.000	31.27	8.39	39.66	54.00	-14.34	Average	Horizontal
4	16740.000	43.33	8.39	51.72	74.00	-22.28	Peak	Horizontal
5	11160.000	32.46	2.24	34.70	54.00	-19.30	Average	Vertical
6	11160.000	44.95	2.24	47.19	74.00	-26.81	Peak	Vertical
7	16740.000	31.27	8.39	39.66	54.00	-14.34	Average	Vertical
8	16740.000	44.59	8.39	52.98	74.00	-21.02	Peak	Vertical

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11a_Channel 140								
1	11400.000	32.37	2.11	34.48	54.00	-19.52	Average	Horizontal
2	11400.000	44.36	2.11	46.47	74.00	-27.53	Peak	Horizontal
3	17100.000	31.23	8.79	40.02	54.00	-13.98	Average	Horizontal
4	17100.000	44.06	8.79	52.85	74.00	-21.15	Peak	Horizontal
5	11400.000	32.40	2.11	34.51	54.00	-19.49	Average	Vertical
6	11400.000	44.97	2.11	47.08	74.00	-26.92	Peak	Vertical
7	17100.000	31.15	8.79	39.94	54.00	-14.06	Average	Vertical
8	17100.000	43.76	8.79	52.55	74.00	-21.45	Peak	Vertical
IEEE 802.11a_Channel 144								
1	11440.000	32.28	2.09	34.37	54.00	-19.63	Average	Horizontal
2	11440.000	45.10	2.09	47.19	74.00	-26.81	Peak	Horizontal
3	17160.000	31.00	8.88	39.88	54.00	-14.12	Average	Horizontal
4	17160.000	44.37	8.88	53.25	74.00	-20.75	Peak	Horizontal
5	11440.000	32.20	2.09	34.29	54.00	-19.71	Average	Vertical
6	11440.000	44.45	2.09	46.54	74.00	-27.46	Peak	Vertical
7	17160.000	30.92	8.88	39.80	54.00	-14.20	Average	Vertical
8	17160.000	43.59	8.88	52.47	74.00	-21.53	Peak	Vertical
IEEE 802.11a_Channel 149								
1	11490.000	32.32	2.06	34.38	54.00	-19.62	Average	Horizontal
2	11490.000	45.12	2.06	47.18	74.00	-26.82	Peak	Horizontal
3	17235.000	30.70	8.99	39.69	54.00	-14.31	Average	Horizontal
4	17235.000	43.50	8.99	52.49	74.00	-21.51	Peak	Horizontal
5	11490.000	32.35	2.06	34.41	54.00	-19.59	Average	Vertical
6	11490.000	44.89	2.06	46.95	74.00	-27.05	Peak	Vertical
7	17235.000	30.65	8.99	39.64	54.00	-14.36	Average	Vertical
8	17235.000	43.44	8.99	52.43	74.00	-21.57	Peak	Vertical
IEEE 802.11a_Channel 157								
1	11570.000	32.27	2.05	34.32	54.00	-19.68	Average	Horizontal
2	11570.000	45.54	2.05	47.59	74.00	-26.41	Peak	Horizontal
3	17355.000	30.32	9.16	39.48	54.00	-14.52	Average	Horizontal
4	17355.000	43.27	9.16	52.43	74.00	-21.57	Peak	Horizontal
5	11570.000	32.27	2.05	34.32	54.00	-19.68	Average	Vertical
6	11570.000	44.41	2.05	46.46	74.00	-27.54	Peak	Vertical
7	17355.000	30.37	9.16	39.53	54.00	-14.47	Average	Vertical
8	17355.000	43.73	9.16	52.89	74.00	-21.11	Peak	Vertical

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11a_Channel 165								
1	11650.000	32.87	2.08	34.95	54.00	-19.05	Average	Horizontal
2	11650.000	45.50	2.08	47.58	74.00	-26.42	Peak	Horizontal
3	17475.000	29.56	9.33	38.89	54.00	-15.11	Average	Horizontal
4	17475.000	42.23	9.33	51.56	74.00	-22.44	Peak	Horizontal
5	11650.000	32.87	2.08	34.95	54.00	-19.05	Average	Vertical
6	11650.000	45.31	2.08	47.39	74.00	-26.61	Peak	Vertical
7	17475.000	29.56	9.33	38.89	54.00	-15.11	Average	Vertical
8	17475.000	42.30	9.33	51.63	74.00	-22.37	Peak	Vertical
IEEE 802.11n-HT20_Channel 36								
1	10360.000	33.92	3.38	37.30	54.00	-16.70	Average	Horizontal
2	10360.000	46.18	3.38	49.56	74.00	-24.44	Peak	Horizontal
3	15540.000	31.90	7.56	39.46	54.00	-14.54	Average	Horizontal
4	15540.000	45.55	7.56	53.11	74.00	-20.89	Peak	Horizontal
5	10360.000	33.86	3.38	37.24	54.00	-16.76	Average	Vertical
6	10360.000	46.00	3.38	49.38	74.00	-24.62	Peak	Vertical
7	15540.000	31.83	7.56	39.39	54.00	-14.61	Average	Vertical
8	15540.000	45.02	7.56	52.58	74.00	-21.42	Peak	Vertical
IEEE 802.11n-HT20_Channel 44								
1	10440.000	34.13	3.38	37.51	54.00	-16.49	Average	Horizontal
2	10440.000	47.10	3.38	50.48	74.00	-23.52	Peak	Horizontal
3	15660.000	32.46	7.46	39.92	54.00	-14.08	Average	Horizontal
4	15660.000	45.06	7.46	52.52	74.00	-21.48	Peak	Horizontal
5	10440.000	33.98	3.38	37.36	54.00	-16.64	Average	Vertical
6	10440.000	46.65	3.38	50.03	74.00	-23.97	Peak	Vertical
7	15660.000	32.46	7.46	39.92	54.00	-14.08	Average	Vertical
8	15660.000	44.88	7.46	52.34	74.00	-21.66	Peak	Vertical
IEEE 802.11n-HT20_Channel 48								
1	10480.000	33.12	3.39	36.51	54.00	-17.49	Average	Horizontal
2	10480.000	45.41	3.39	48.80	74.00	-25.20	Peak	Horizontal
3	15720.000	32.01	7.40	39.41	54.00	-14.59	Average	Horizontal
4	15720.000	43.89	7.40	51.29	74.00	-22.71	Peak	Horizontal
5	10480.000	33.22	3.39	36.61	54.00	-17.39	Average	Vertical
6	10480.000	45.47	3.39	48.86	74.00	-25.14	Peak	Vertical
7	15720.000	32.05	7.40	39.45	54.00	-14.55	Average	Vertical
8	15720.000	44.88	7.40	52.28	74.00	-21.72	Peak	Vertical

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11n-HT20_Channel 52								
1	10520.000	33.07	3.35	36.42	54.00	-17.58	Average	Horizontal
2	10520.000	45.67	3.35	49.02	74.00	-24.98	Peak	Horizontal
3	15780.000	32.06	7.35	39.41	54.00	-14.59	Average	Horizontal
4	15780.000	45.48	7.35	52.83	74.00	-21.17	Peak	Horizontal
5	10520.000	33.04	3.35	36.39	54.00	-17.61	Average	Vertical
6	10520.000	46.33	3.35	49.68	74.00	-24.32	Peak	Vertical
7	15780.000	32.20	7.35	39.55	54.00	-14.45	Average	Vertical
8	15780.000	44.51	7.35	51.86	74.00	-22.14	Peak	Vertical
IEEE 802.11n-HT20_Channel 60								
1	10600.000	32.54	3.19	35.73	54.00	-18.27	Average	Horizontal
2	10600.000	45.04	3.19	48.23	74.00	-25.77	Peak	Horizontal
3	15900.000	30.38	7.24	37.62	54.00	-16.38	Average	Horizontal
4	15900.000	44.01	7.24	51.25	74.00	-22.75	Peak	Horizontal
5	10600.000	32.54	3.19	35.73	54.00	-18.27	Average	Vertical
6	10600.000	45.04	3.19	48.23	74.00	-25.77	Peak	Vertical
7	15900.000	30.38	7.24	37.62	54.00	-16.38	Average	Vertical
8	15900.000	44.01	7.24	51.25	74.00	-22.75	Peak	Vertical
IEEE 802.11n-HT20_Channel 64								
1	10640.000	32.63	3.10	35.73	54.00	-18.27	Average	Horizontal
2	10640.000	44.62	3.10	47.72	74.00	-26.28	Peak	Horizontal
3	15960.000	30.43	7.19	37.62	54.00	-16.38	Average	Horizontal
4	15960.000	43.59	7.19	50.78	74.00	-23.22	Peak	Horizontal
5	10640.000	32.67	3.10	35.77	54.00	-18.23	Average	Vertical
6	10640.000	44.78	3.10	47.88	74.00	-26.12	Peak	Vertical
7	15960.000	30.43	7.19	37.62	54.00	-16.38	Average	Vertical
8	15960.000	43.40	7.19	50.59	74.00	-23.41	Peak	Vertical
IEEE 802.11n-HT20_Channel 100								
1	11000.000	33.71	2.36	36.07	54.00	-17.93	Average	Horizontal
2	11000.000	45.57	2.36	47.93	74.00	-26.07	Peak	Horizontal
3	16500.000	31.56	8.00	39.56	54.00	-14.44	Average	Horizontal
4	16500.000	44.21	8.00	52.21	74.00	-21.79	Peak	Horizontal
5	11000.000	33.65	2.36	36.01	54.00	-17.99	Average	Vertical
6	11000.000	45.53	2.36	47.89	74.00	-26.11	Peak	Vertical
7	16500.000	31.48	8.00	39.48	54.00	-14.52	Average	Vertical
8	16500.000	43.83	8.00	51.83	74.00	-22.17	Peak	Vertical

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11n-HT20_Channel 116								
1	11160.000	32.46	2.24	34.70	54.00	-19.30	Average	Horizontal
2	11160.000	45.34	2.24	47.58	74.00	-26.42	Peak	Horizontal
3	16740.000	31.27	8.39	39.66	54.00	-14.34	Average	Horizontal
4	16740.000	44.48	8.39	52.87	74.00	-21.13	Peak	Horizontal
5	11160.000	32.63	2.24	34.87	54.00	-19.13	Average	Vertical
6	11160.000	44.67	2.24	46.91	74.00	-27.09	Peak	Vertical
7	16740.000	31.27	8.39	39.66	54.00	-14.34	Average	Vertical
8	16740.000	43.57	8.39	51.96	74.00	-22.04	Peak	Vertical
IEEE 802.11n-HT20_Channel 140								
1	11400.000	32.26	2.11	34.37	54.00	-19.63	Average	Horizontal
2	11400.000	44.92	2.11	47.03	74.00	-26.97	Peak	Horizontal
3	17100.000	31.19	8.79	39.98	54.00	-14.02	Average	Horizontal
4	17100.000	43.93	8.79	52.72	74.00	-21.28	Peak	Horizontal
5	11400.000	32.19	2.11	34.30	54.00	-19.70	Average	Vertical
6	11400.000	44.66	2.11	46.77	74.00	-27.23	Peak	Vertical
7	17100.000	31.19	8.79	39.98	54.00	-14.02	Average	Vertical
8	17100.000	44.12	8.79	52.91	74.00	-21.09	Peak	Vertical
IEEE 802.11n-HT20_Channel 144								
1	11440.000	32.17	2.09	34.26	54.00	-19.74	Average	Horizontal
2	11440.000	44.58	2.09	46.67	74.00	-27.33	Peak	Horizontal
3	17160.000	30.96	8.88	39.84	54.00	-14.16	Average	Horizontal
4	17160.000	43.97	8.88	52.85	74.00	-21.15	Peak	Horizontal
5	11440.000	32.24	2.09	34.33	54.00	-19.67	Average	Vertical
6	11440.000	46.04	2.09	48.13	74.00	-25.87	Peak	Vertical
7	17160.000	30.96	8.88	39.84	54.00	-14.16	Average	Vertical
8	17160.000	43.74	8.88	52.62	74.00	-21.38	Peak	Vertical
IEEE 802.11n-HT20_Channel 149								
1	11490.000	32.28	2.06	34.34	54.00	-19.66	Average	Horizontal
2	11490.000	44.40	2.06	46.46	74.00	-27.54	Peak	Horizontal
3	17235.000	30.65	8.99	39.64	54.00	-14.36	Average	Horizontal
4	17235.000	43.10	8.99	52.09	74.00	-21.91	Peak	Horizontal
5	11490.000	32.35	2.06	34.41	54.00	-19.59	Average	Vertical
6	11490.000	44.79	2.06	46.85	74.00	-27.15	Peak	Vertical
7	17235.000	30.57	8.99	39.56	54.00	-14.44	Average	Vertical
8	17235.000	42.93	8.99	51.92	74.00	-22.08	Peak	Vertical

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11n-HT20_Channel 157								
1	11570.000	32.23	2.05	34.28	54.00	-19.72	Average	Horizontal
2	11570.000	44.76	2.05	46.81	74.00	-27.19	Peak	Horizontal
3	17355.000	30.41	9.16	39.57	54.00	-14.43	Average	Horizontal
4	17355.000	43.22	9.16	52.38	74.00	-21.62	Peak	Horizontal
5	11570.000	32.30	2.05	34.35	54.00	-19.65	Average	Vertical
6	11570.000	45.01	2.05	47.06	74.00	-26.94	Peak	Vertical
7	17355.000	30.28	9.16	39.44	54.00	-14.56	Average	Vertical
8	17355.000	42.68	9.16	51.84	74.00	-22.16	Peak	Vertical
IEEE 802.11n-HT20_Channel 165								
1	11650.000	32.87	2.08	34.95	54.00	-19.05	Average	Horizontal
2	11650.000	45.52	2.08	47.60	74.00	-26.40	Peak	Horizontal
3	17475.000	29.51	9.33	38.84	54.00	-15.16	Average	Horizontal
4	17475.000	42.48	9.33	51.81	74.00	-22.19	Peak	Horizontal
5	11650.000	32.83	2.08	34.91	54.00	-19.09	Average	Vertical
6	11650.000	45.77	2.08	47.85	74.00	-26.15	Peak	Vertical
7	17475.000	29.51	9.33	38.84	54.00	-15.16	Average	Vertical
8	17475.000	42.48	9.33	51.81	74.00	-22.19	Peak	Vertical
IEEE 802.11n-HT40_Channel 38								
1	10380.000	33.80	3.38	37.18	54.00	-16.82	Average	Horizontal
2	10380.000	46.25	3.38	49.63	74.00	-24.37	Peak	Horizontal
3	15570.000	31.81	7.54	39.35	54.00	-14.65	Average	Horizontal
4	15570.000	44.69	7.54	52.23	74.00	-21.77	Peak	Horizontal
5	10380.000	33.86	3.38	37.24	54.00	-16.76	Average	Vertical
6	10380.000	47.17	3.38	50.55	74.00	-23.45	Peak	Vertical
7	15570.000	31.85	7.54	39.39	54.00	-14.61	Average	Vertical
8	15570.000	44.29	7.54	51.83	74.00	-22.17	Peak	Vertical
IEEE 802.11n-HT40_Channel 46								
1	10460.000	33.99	3.40	37.39	54.00	-16.61	Average	Horizontal
2	10460.000	46.53	3.40	49.93	74.00	-24.07	Peak	Horizontal
3	15690.000	32.53	7.42	39.95	54.00	-14.05	Average	Horizontal
4	15690.000	44.90	7.42	52.32	74.00	-21.68	Peak	Horizontal
5	10460.000	34.08	3.40	37.48	54.00	-16.52	Average	Vertical
6	10460.000	46.93	3.40	50.33	74.00	-23.67	Peak	Vertical
7	15690.000	32.46	7.42	39.88	54.00	-14.12	Average	Vertical
8	15690.000	45.05	7.42	52.47	74.00	-21.53	Peak	Vertical

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11n-HT40_Channel 54								
1	10540.000	32.73	3.30	36.03	54.00	-17.97	Average	Horizontal
2	10540.000	44.82	3.30	48.12	74.00	-25.88	Peak	Horizontal
3	15810.000	31.08	7.33	38.41	54.00	-15.59	Average	Horizontal
4	15810.000	43.78	7.33	51.11	74.00	-22.89	Peak	Horizontal
5	10540.000	32.70	3.30	36.00	54.00	-18.00	Average	Vertical
6	10540.000	45.63	3.30	48.93	74.00	-25.07	Peak	Vertical
7	15810.000	31.20	7.33	38.53	54.00	-15.47	Average	Vertical
8	15810.000	43.69	7.33	51.02	74.00	-22.98	Peak	Vertical
IEEE 802.11n-HT40_Channel 62								
1	10620.000	32.53	3.14	35.67	54.00	-18.33	Average	Horizontal
2	10620.000	44.97	3.14	48.11	74.00	-25.89	Peak	Horizontal
3	15930.000	30.45	7.21	37.66	54.00	-16.34	Average	Horizontal
4	15930.000	43.42	7.21	50.63	74.00	-23.37	Peak	Horizontal
5	10620.000	32.56	3.14	35.70	54.00	-18.30	Average	Vertical
6	10620.000	45.56	3.14	48.70	74.00	-25.30	Peak	Vertical
7	15930.000	30.54	7.21	37.75	54.00	-16.25	Average	Vertical
8	15930.000	44.57	7.21	51.78	74.00	-22.22	Peak	Vertical
IEEE 802.11n-HT40_Channel 102								
1	11020.000	33.75	2.35	36.10	54.00	-17.90	Average	Horizontal
2	11020.000	45.81	2.35	48.16	74.00	-25.84	Peak	Horizontal
3	16530.000	31.52	8.04	39.56	54.00	-14.44	Average	Horizontal
4	16530.000	43.96	8.04	52.00	74.00	-22.00	Peak	Horizontal
5	11020.000	33.75	2.35	36.10	54.00	-17.90	Average	Vertical
6	11020.000	45.81	2.35	48.16	74.00	-25.84	Peak	Vertical
7	16530.000	31.52	8.04	39.56	54.00	-14.44	Average	Vertical
8	16530.000	43.96	8.04	52.00	74.00	-22.00	Peak	Vertical
IEEE 802.11n-HT40_Channel 110								
1	11100.000	32.52	2.25	34.77	54.00	-19.23	Average	Horizontal
2	11100.000	45.52	2.25	47.77	74.00	-26.23	Peak	Horizontal
3	16650.000	31.31	8.35	39.66	54.00	-14.34	Average	Horizontal
4	16650.000	43.71	8.35	52.06	74.00	-21.94	Peak	Horizontal
5	11100.000	32.62	2.25	34.87	54.00	-19.13	Average	Vertical
6	11100.000	45.62	2.25	47.87	74.00	-26.13	Peak	Vertical
7	16650.000	31.31	8.35	39.66	54.00	-14.34	Average	Vertical
8	16650.000	43.54	8.35	51.89	74.00	-22.11	Peak	Vertical

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11n-HT40_Channel 134								
1	11340.000	32.00	2.16	34.16	54.00	-19.84	Average	Horizontal
2	11340.000	44.81	2.16	46.97	74.00	-27.03	Peak	Horizontal
3	17010.000	31.40	8.67	40.07	54.00	-13.93	Average	Horizontal
4	17010.000	43.81	8.67	52.48	74.00	-21.52	Peak	Horizontal
5	11340.000	31.96	2.16	34.12	54.00	-19.88	Average	Vertical
6	11340.000	45.58	2.16	47.74	74.00	-26.26	Peak	Vertical
7	17010.000	31.36	8.67	40.03	54.00	-13.97	Average	Vertical
8	17010.000	44.71	8.67	53.38	74.00	-20.62	Peak	Vertical
IEEE 802.11n-HT40_Channel 142								
1	11420.000	32.24	2.10	34.34	54.00	-19.66	Average	Horizontal
2	11420.000	44.58	2.10	46.68	74.00	-27.32	Peak	Horizontal
3	17130.000	31.22	8.84	40.06	54.00	-13.94	Average	Horizontal
4	17130.000	43.69	8.84	52.53	74.00	-21.47	Peak	Horizontal
5	11420.000	32.34	2.10	34.44	54.00	-19.56	Average	Vertical
6	11420.000	45.43	2.10	47.53	74.00	-26.47	Peak	Vertical
7	17130.000	31.14	8.84	39.98	54.00	-14.02	Average	Vertical
8	17130.000	44.30	8.84	53.14	74.00	-20.86	Peak	Vertical
IEEE 802.11n-HT40_Channel 151								
1	11510.000	32.29	2.05	34.34	54.00	-19.66	Average	Horizontal
2	11510.000	44.32	2.05	46.37	74.00	-27.63	Peak	Horizontal
3	17265.000	30.57	9.03	39.60	54.00	-14.40	Average	Horizontal
4	17265.000	43.09	9.03	52.12	74.00	-21.88	Peak	Horizontal
5	11510.000	32.43	2.05	34.48	54.00	-19.52	Average	Vertical
6	11510.000	44.32	2.05	46.37	74.00	-27.63	Peak	Vertical
7	17265.000	30.61	9.03	39.64	54.00	-14.36	Average	Vertical
8	17265.000	43.63	9.03	52.66	74.00	-21.34	Peak	Vertical
IEEE 802.11n-HT40_Channel 159								
1	11590.000	32.21	2.07	34.28	54.00	-19.72	Average	Horizontal
2	11590.000	44.20	2.07	46.27	74.00	-27.73	Peak	Horizontal
3	17385.000	30.27	9.21	39.48	54.00	-14.52	Average	Horizontal
4	17385.000	44.13	9.21	53.34	74.00	-20.66	Peak	Horizontal
5	11590.000	32.21	2.07	34.28	54.00	-19.72	Average	Vertical
6	11590.000	44.66	2.07	46.73	74.00	-27.27	Peak	Vertical
7	17385.000	30.36	9.21	39.57	54.00	-14.43	Average	Vertical
8	17385.000	43.83	9.21	53.04	74.00	-20.96	Peak	Vertical

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11ac-VHT80_Channel 42								
1	10420.000	34.09	3.39	37.48	54.00	-16.52	Average	Horizontal
2	10420.000	46.06	3.39	49.45	74.00	-24.55	Peak	Horizontal
3	15630.000	32.40	7.48	39.88	54.00	-14.12	Average	Horizontal
4	15630.000	44.70	7.48	52.18	74.00	-21.82	Peak	Horizontal
5	10420.000	34.15	3.39	37.54	54.00	-16.46	Average	Vertical
6	10420.000	47.10	3.39	50.49	74.00	-23.51	Peak	Vertical
7	15630.000	32.47	7.48	39.95	54.00	-14.05	Average	Vertical
8	15630.000	44.57	7.48	52.05	74.00	-21.95	Peak	Vertical

IEEE 802.11ac-VHT80_Channel 58								
1	10580.000	32.73	3.23	35.96	54.00	-18.04	Average	Horizontal
2	10580.000	44.99	3.23	48.22	74.00	-25.78	Peak	Horizontal
3	15870.000	31.22	7.27	38.49	54.00	-15.51	Average	Horizontal
4	15870.000	44.49	7.27	51.76	74.00	-22.24	Peak	Horizontal
5	10580.000	32.77	3.23	36.00	54.00	-18.00	Average	Vertical
6	10580.000	45.57	3.23	48.80	74.00	-25.20	Peak	Vertical
7	15870.000	31.18	7.27	38.45	54.00	-15.55	Average	Vertical
8	15870.000	43.77	7.27	51.04	74.00	-22.96	Peak	Vertical

IEEE 802.11ac-VHT80_Channel 106								
1	11060.000	33.83	2.32	36.15	54.00	-17.85	Average	Horizontal
2	11060.000	46.25	2.32	48.57	74.00	-25.43	Peak	Horizontal
3	16590.000	30.30	8.11	38.41	54.00	-15.59	Average	Horizontal
4	16590.000	43.09	8.11	51.20	74.00	-22.80	Peak	Horizontal
5	11060.000	33.77	2.32	36.09	54.00	-17.91	Average	Vertical
6	11060.000	45.69	2.32	48.01	74.00	-25.99	Peak	Vertical
7	16590.000	30.30	8.11	38.41	54.00	-15.59	Average	Vertical
8	16590.000	43.78	8.11	51.89	74.00	-22.11	Peak	Vertical

IEEE 802.11ac-VHT80_Channel 122								
1	11220.000	32.55	2.22	34.77	54.00	-19.23	Average	Horizontal
2	11220.000	44.69	2.22	46.91	74.00	-27.09	Peak	Horizontal
3	16830.000	31.50	8.43	39.93	54.00	-14.07	Average	Horizontal
4	16830.000	44.88	8.43	53.31	74.00	-20.69	Peak	Horizontal
5	11220.000	32.62	2.22	34.84	54.00	-19.16	Average	Vertical
6	11220.000	45.03	2.22	47.25	74.00	-26.75	Peak	Vertical
7	16830.000	31.54	8.43	39.97	54.00	-14.03	Average	Vertical
8	16830.000	44.28	8.43	52.71	74.00	-21.29	Peak	Vertical

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11ac-VHT80_Channel 138								
1	11380.000	32.21	2.13	34.34	54.00	-19.66	Average	Horizontal
2	11380.000	45.58	2.13	47.71	74.00	-26.29	Peak	Horizontal
3	17070.000	31.35	8.75	40.10	54.00	-13.90	Average	Horizontal
4	17070.000	44.52	8.75	53.27	74.00	-20.73	Peak	Horizontal
5	11380.000	32.21	2.13	34.34	54.00	-19.66	Average	Vertical
6	11380.000	45.58	2.13	47.71	74.00	-26.29	Peak	Vertical
7	17070.000	31.35	8.75	40.10	54.00	-13.90	Average	Vertical
8	17070.000	44.52	8.75	53.27	74.00	-20.73	Peak	Vertical



No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11ac-VHT80_Channel 155								
1	11550.000	32.39	2.06	34.45	54.00	-19.55	Average	Horizontal
2	11550.000	44.93	2.06	46.99	74.00	-27.01	Peak	Horizontal
3	17325.000	30.57	9.12	39.69	54.00	-14.31	Average	Horizontal
4	17325.000	42.57	9.12	51.69	74.00	-22.31	Peak	Horizontal
5	11550.000	32.39	2.06	34.45	54.00	-19.55	Average	Vertical
6	11550.000	44.39	2.06	46.45	74.00	-27.55	Peak	Vertical
7	17325.000	30.52	9.12	39.64	54.00	-14.36	Average	Vertical
8	17325.000	42.60	9.12	51.72	74.00	-22.28	Peak	Vertical

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result – Limit

Band Edge Measurements (Radiated): Worst-Case Configuration

IEEE 802.11a

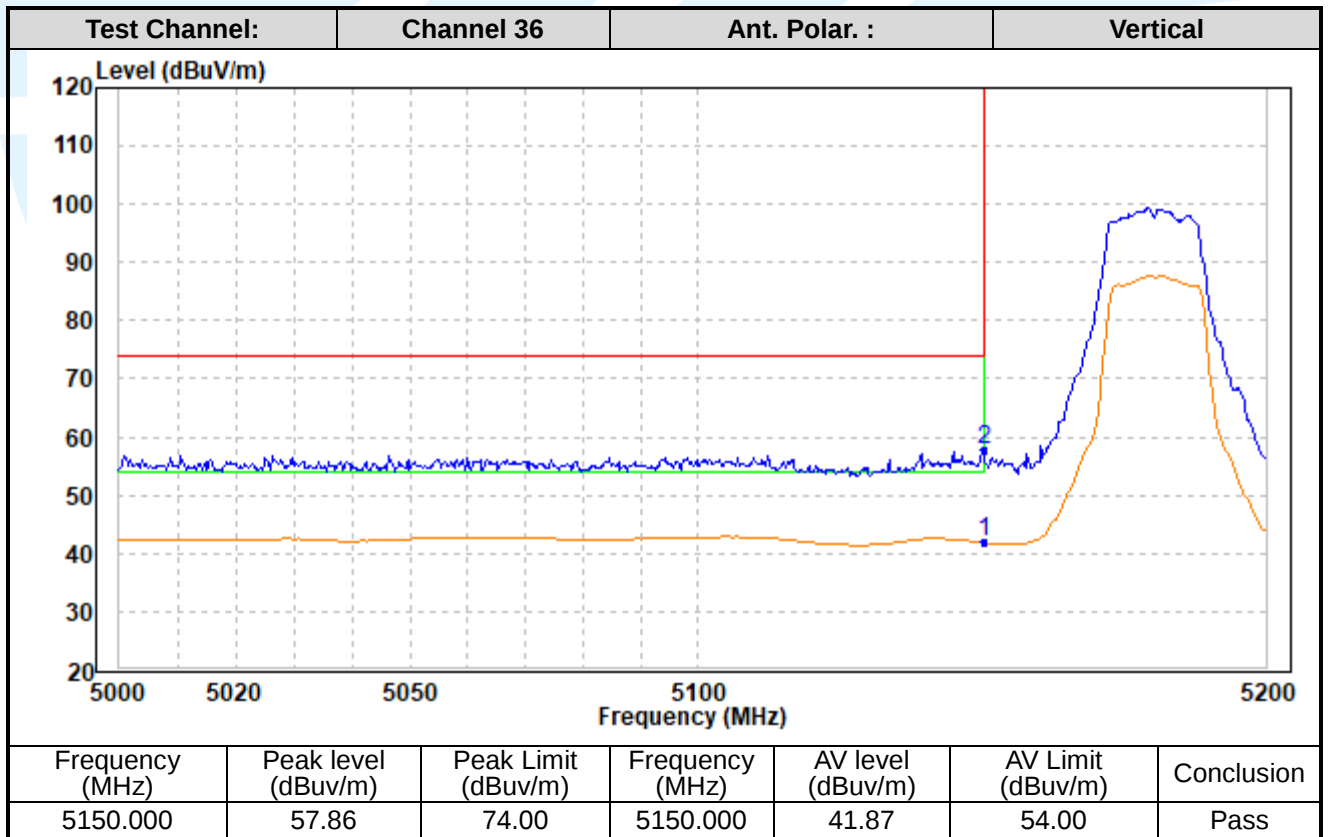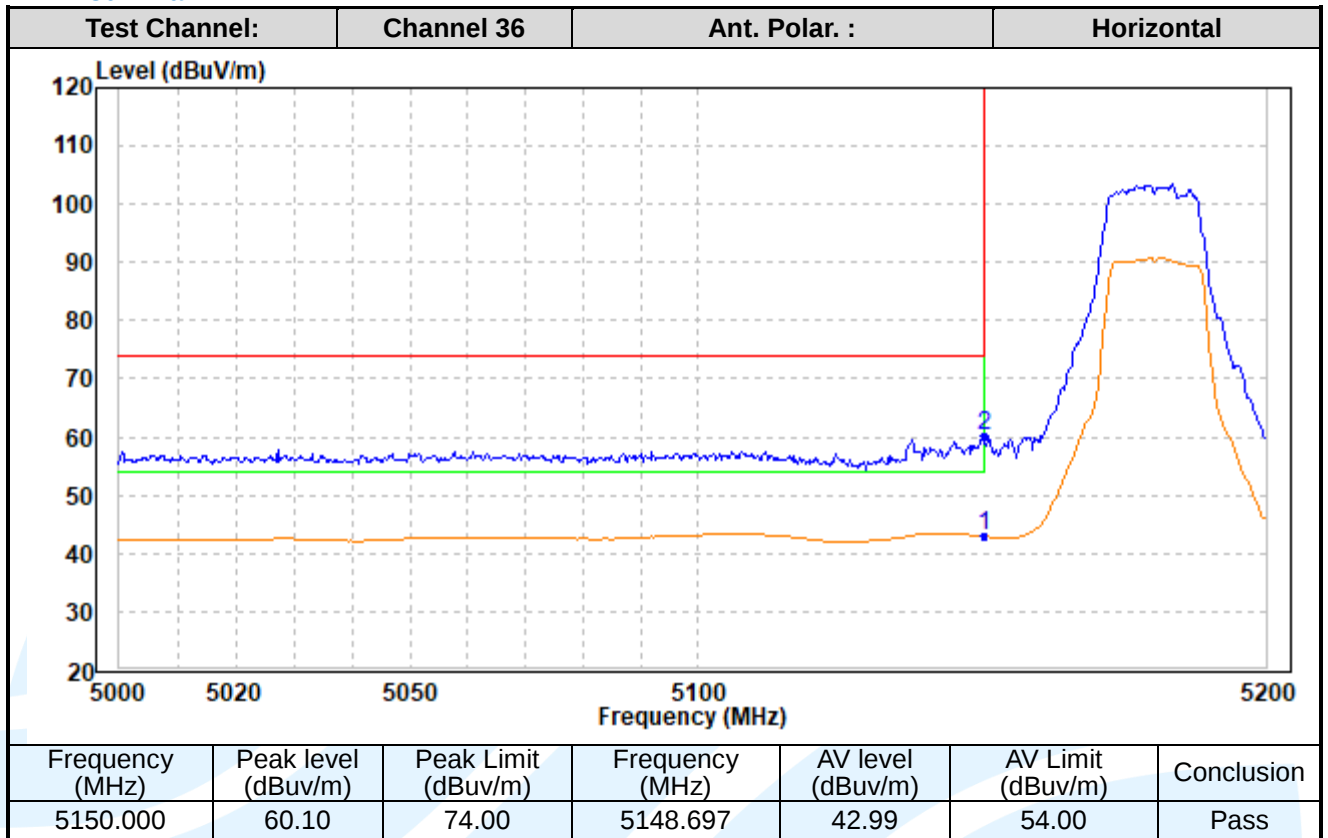

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

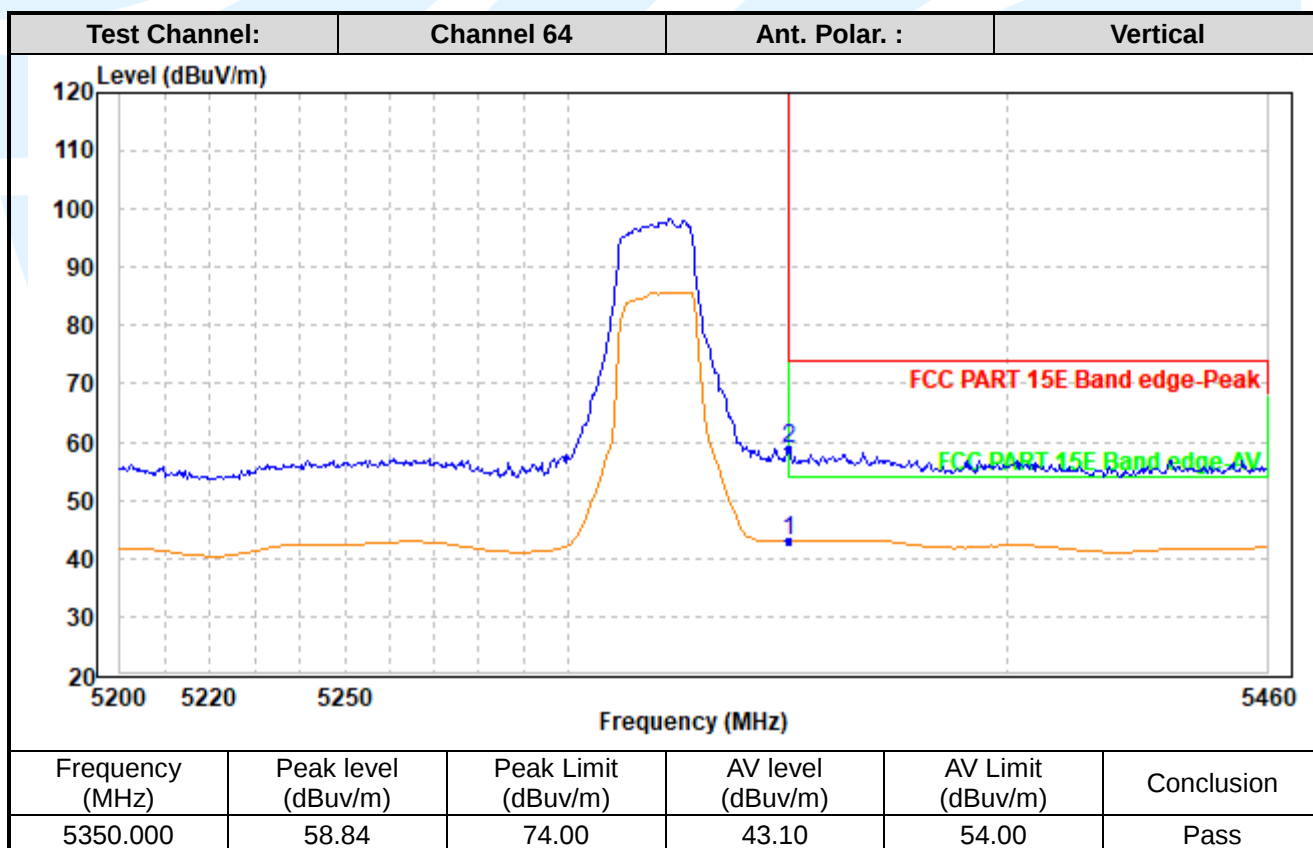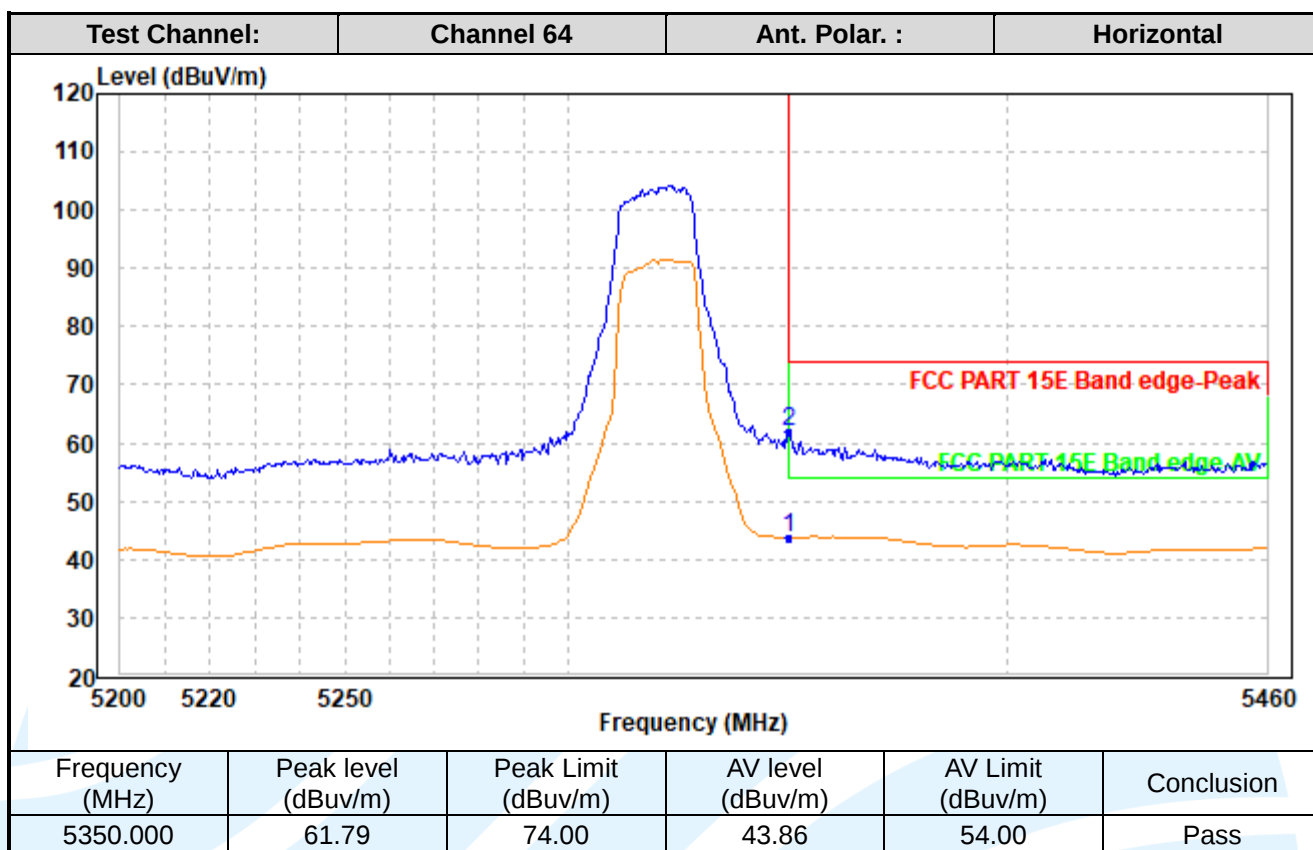

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

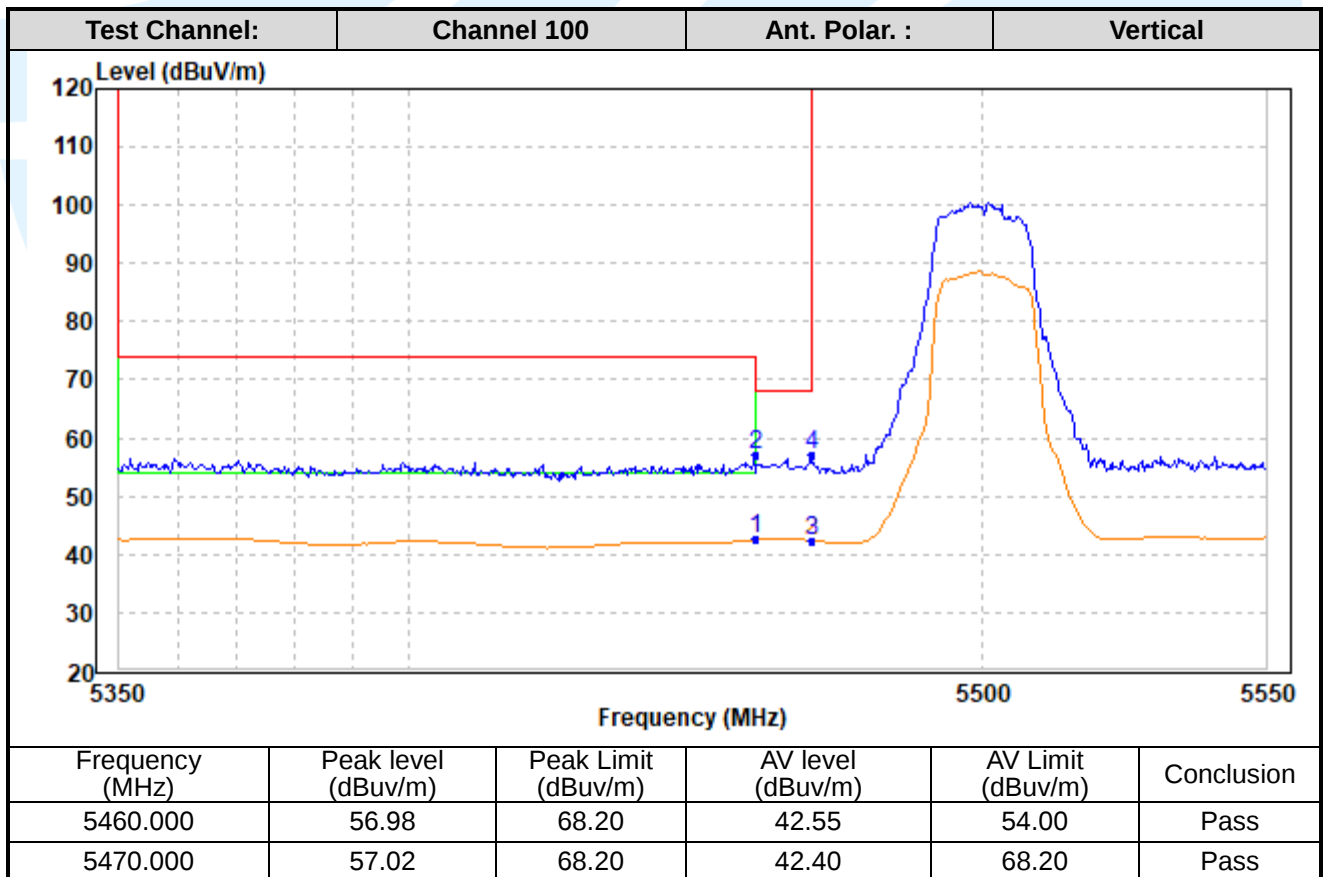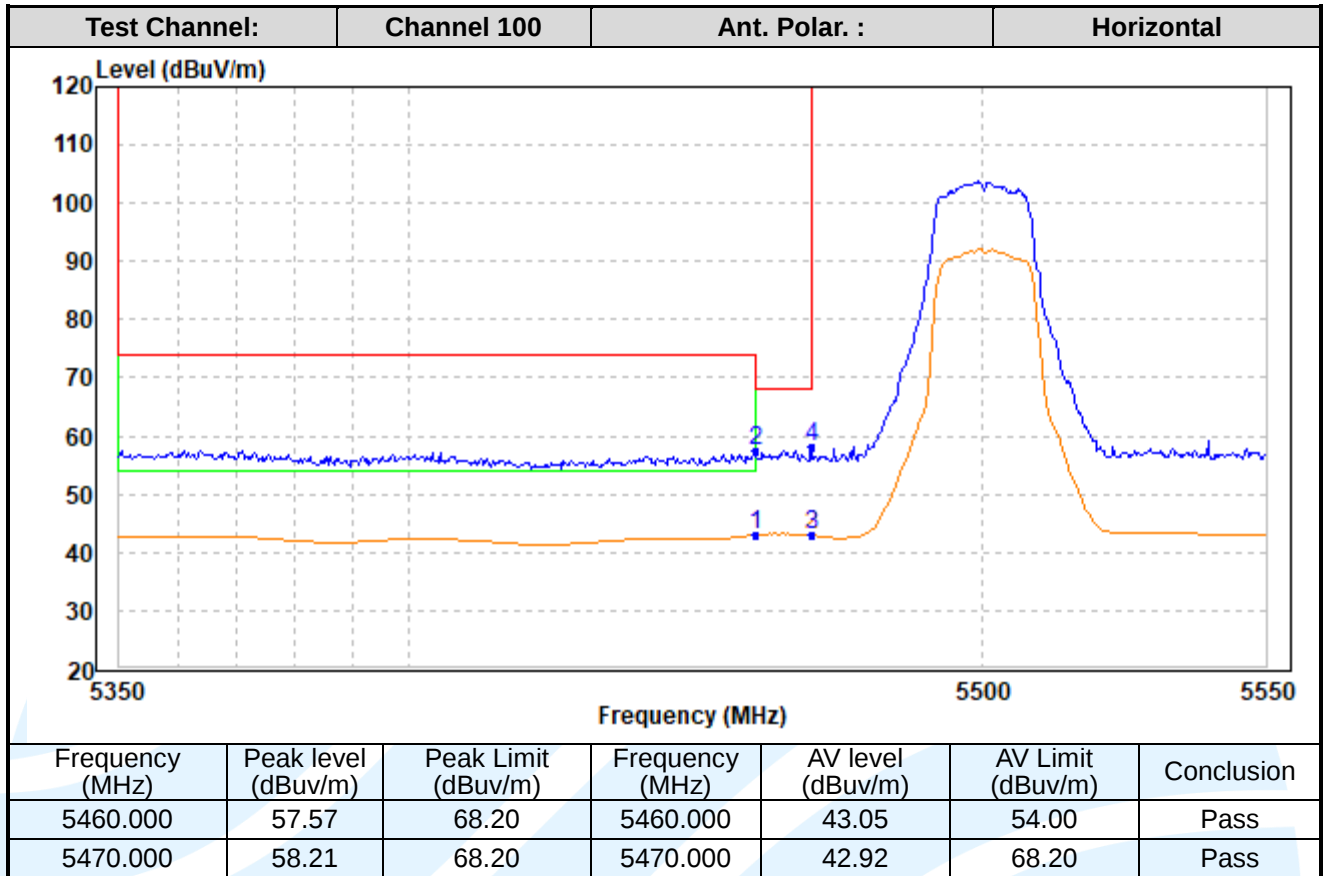

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

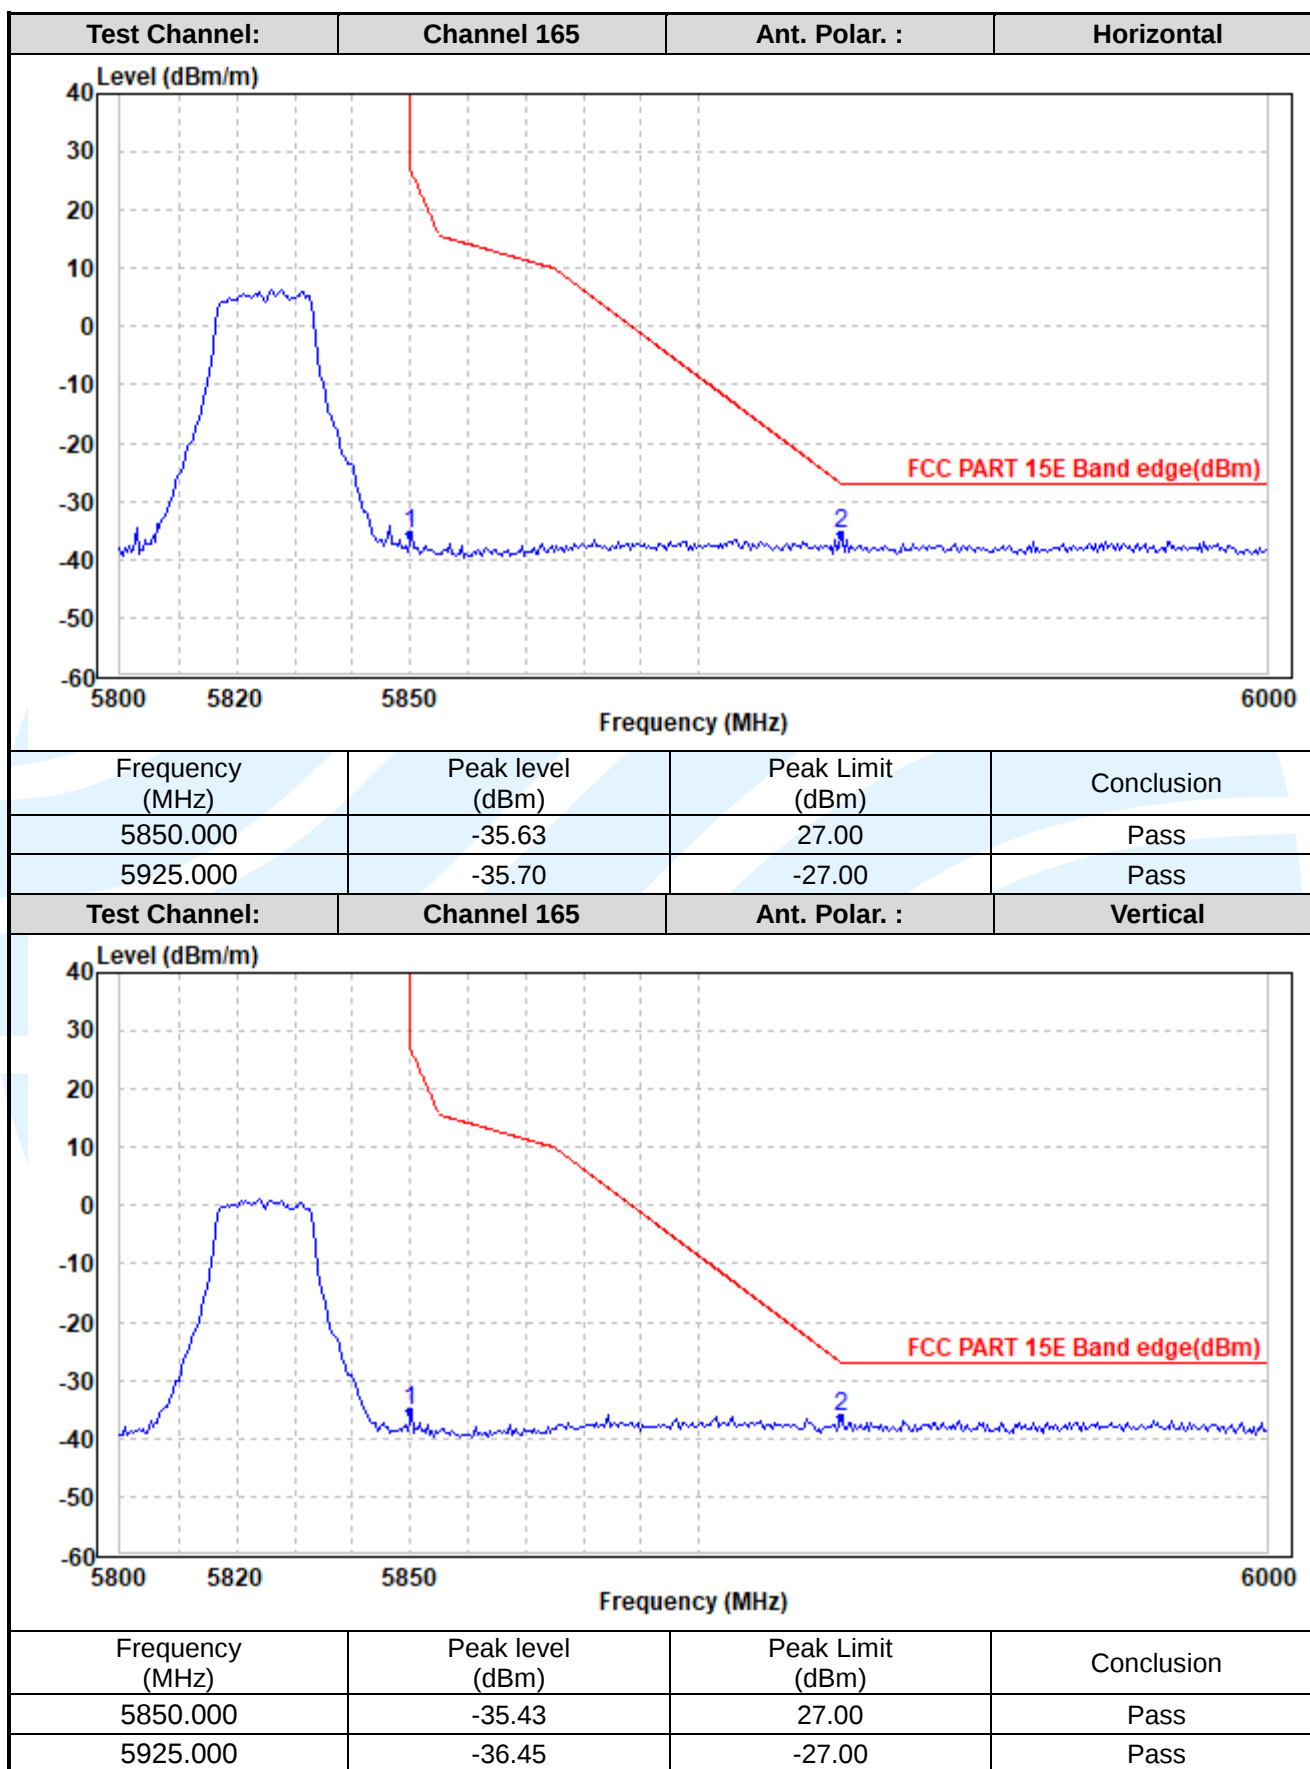

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888



Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

IEEE 802.11n-HT20

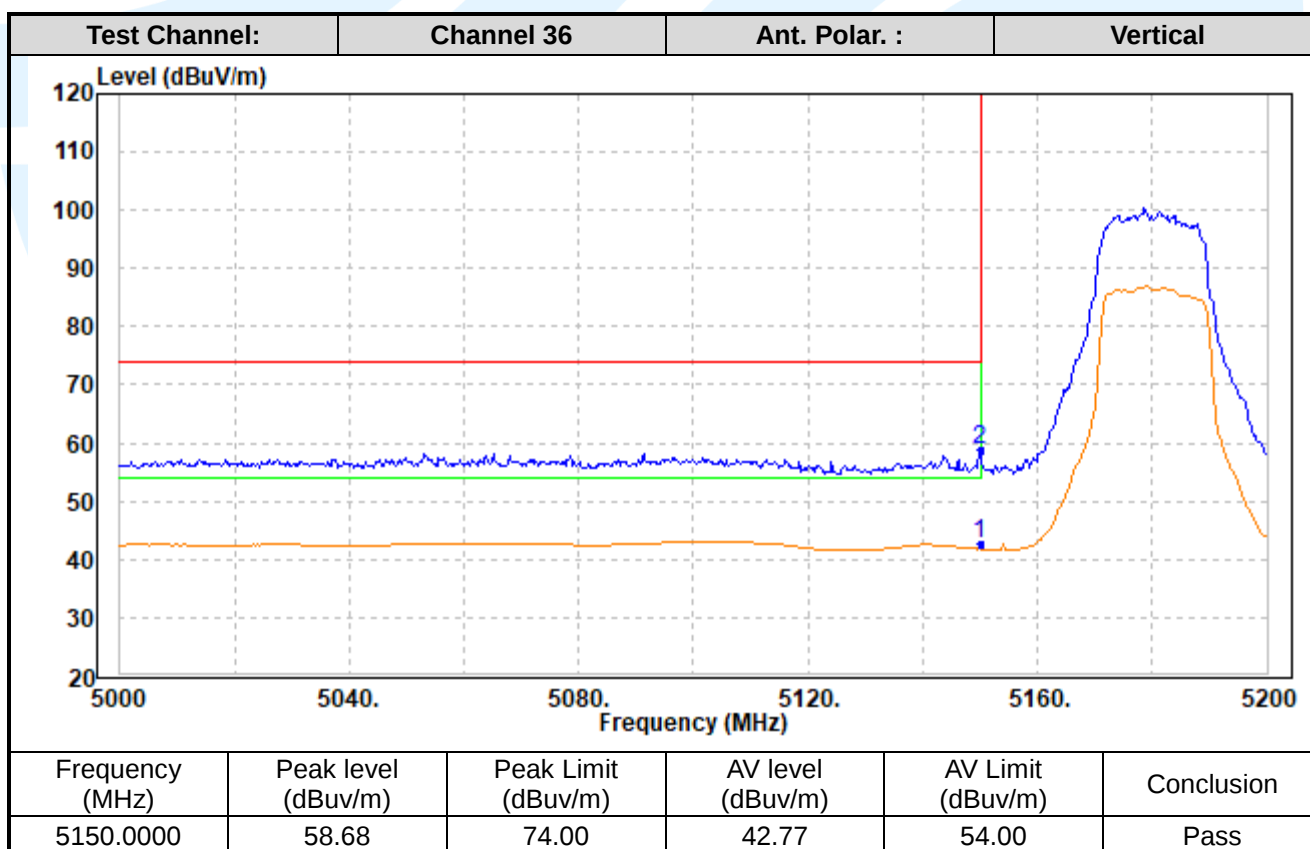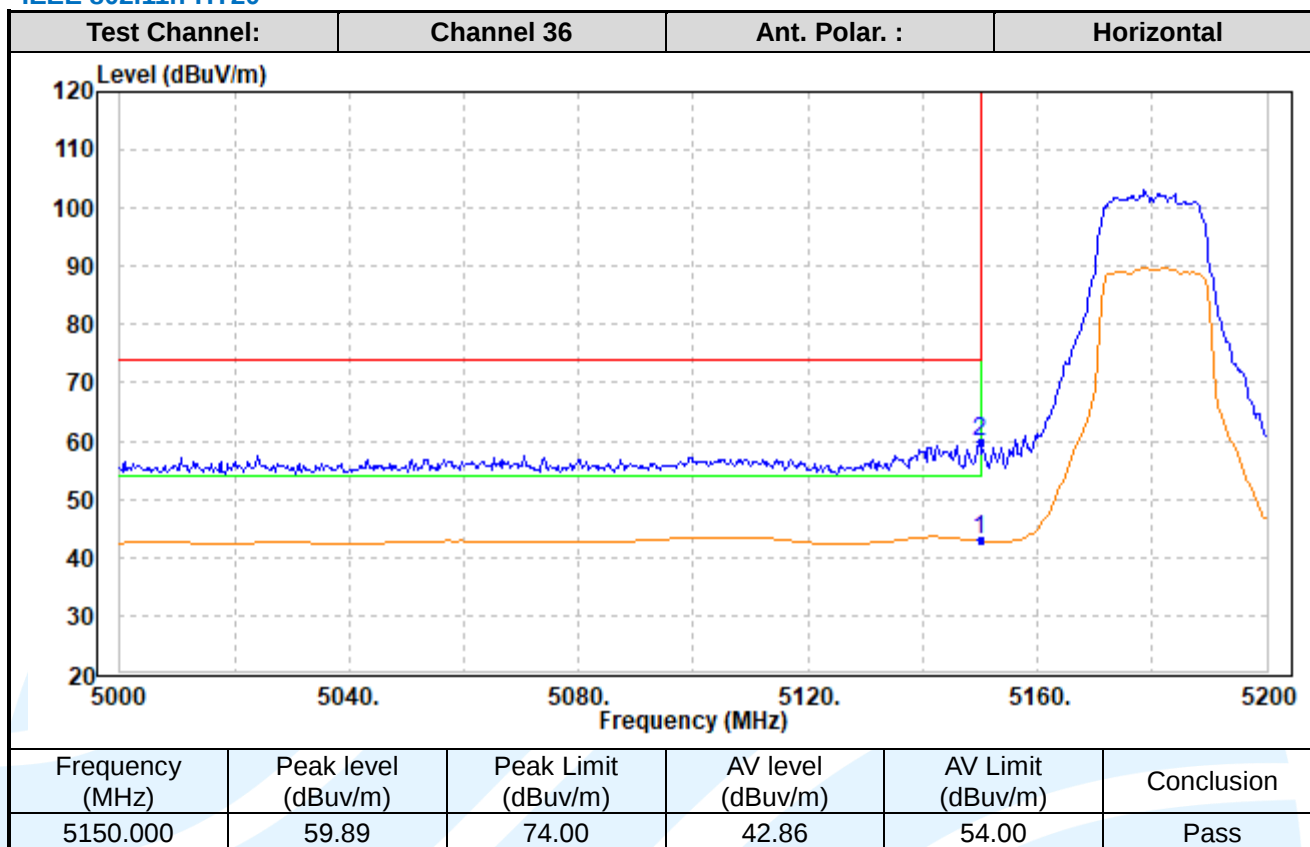

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China



Tel: +86-755-28230888



Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

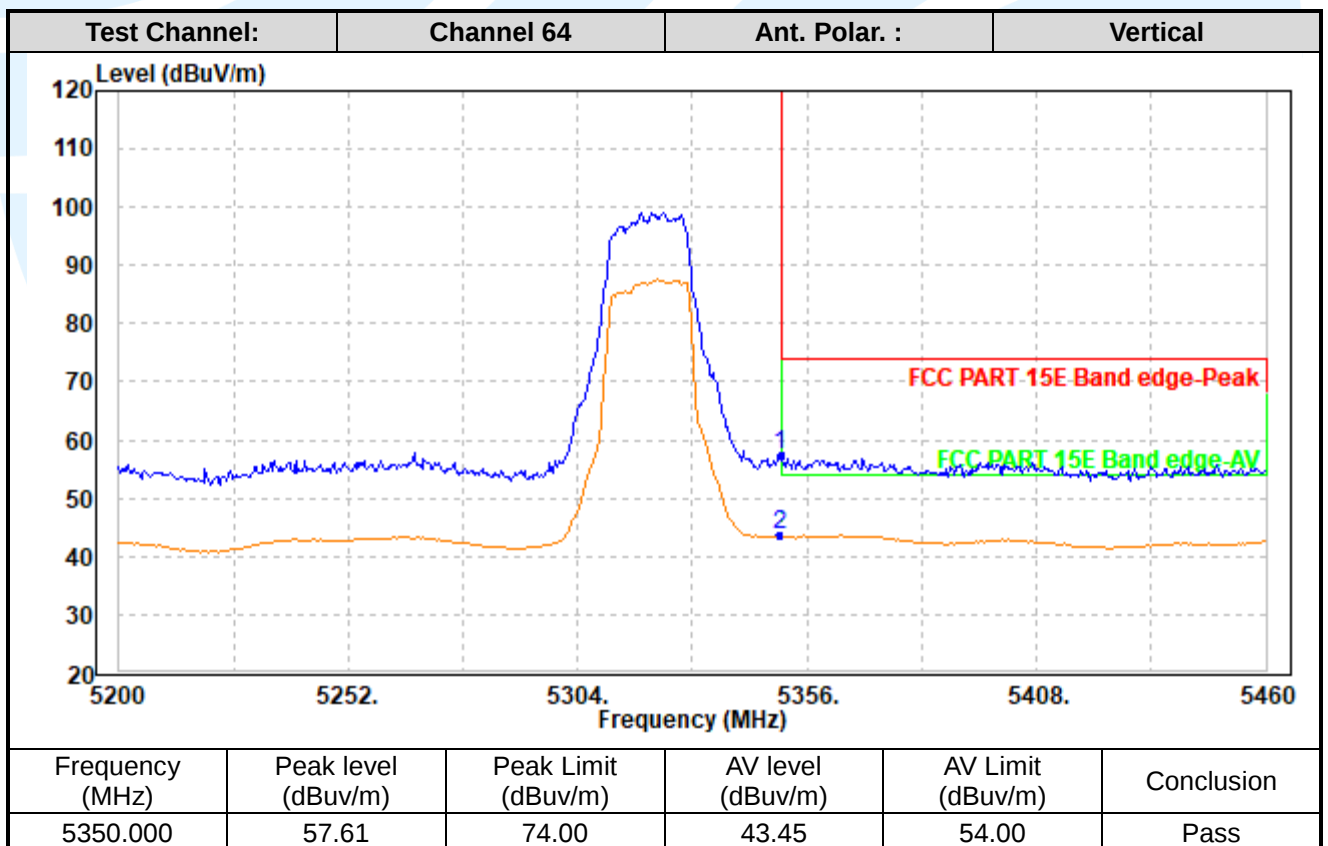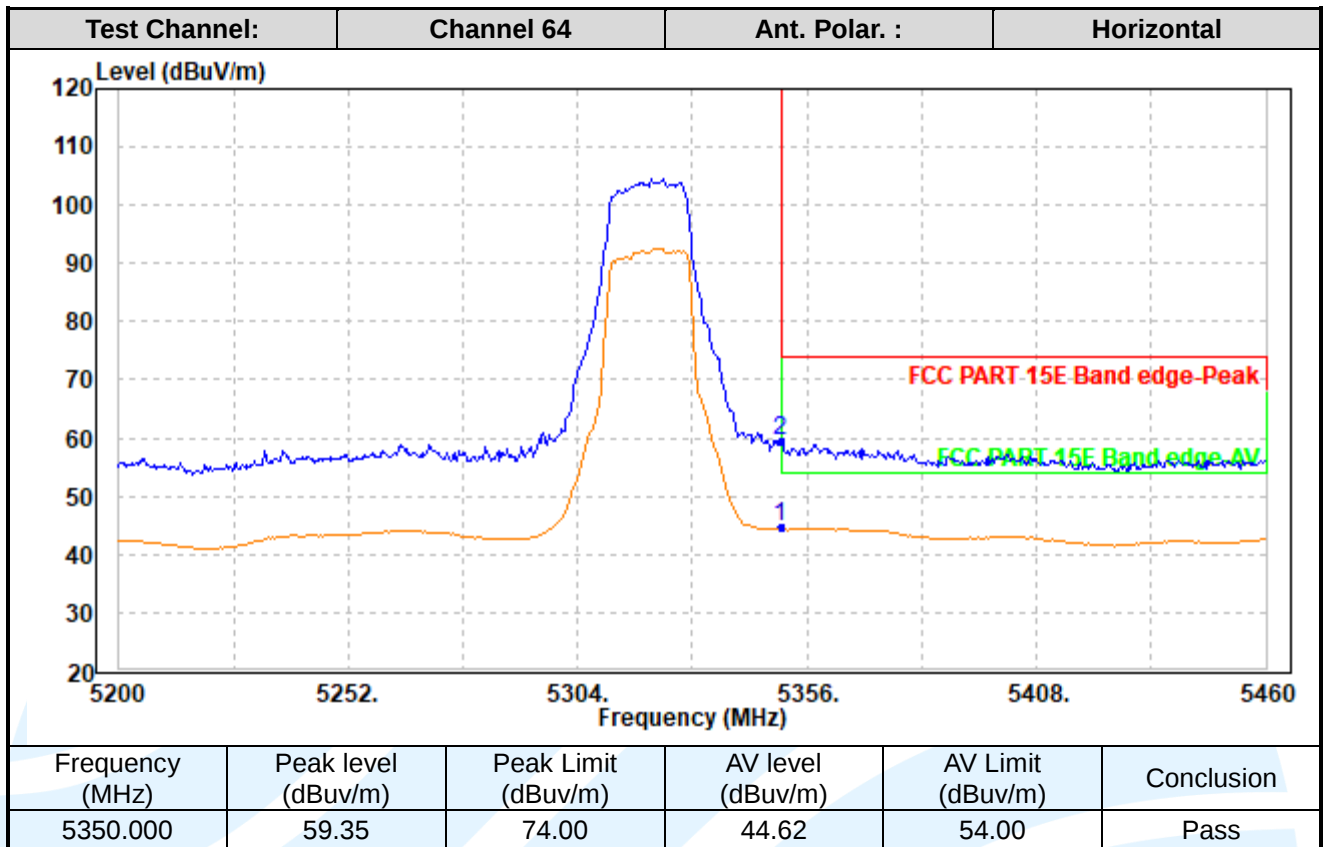

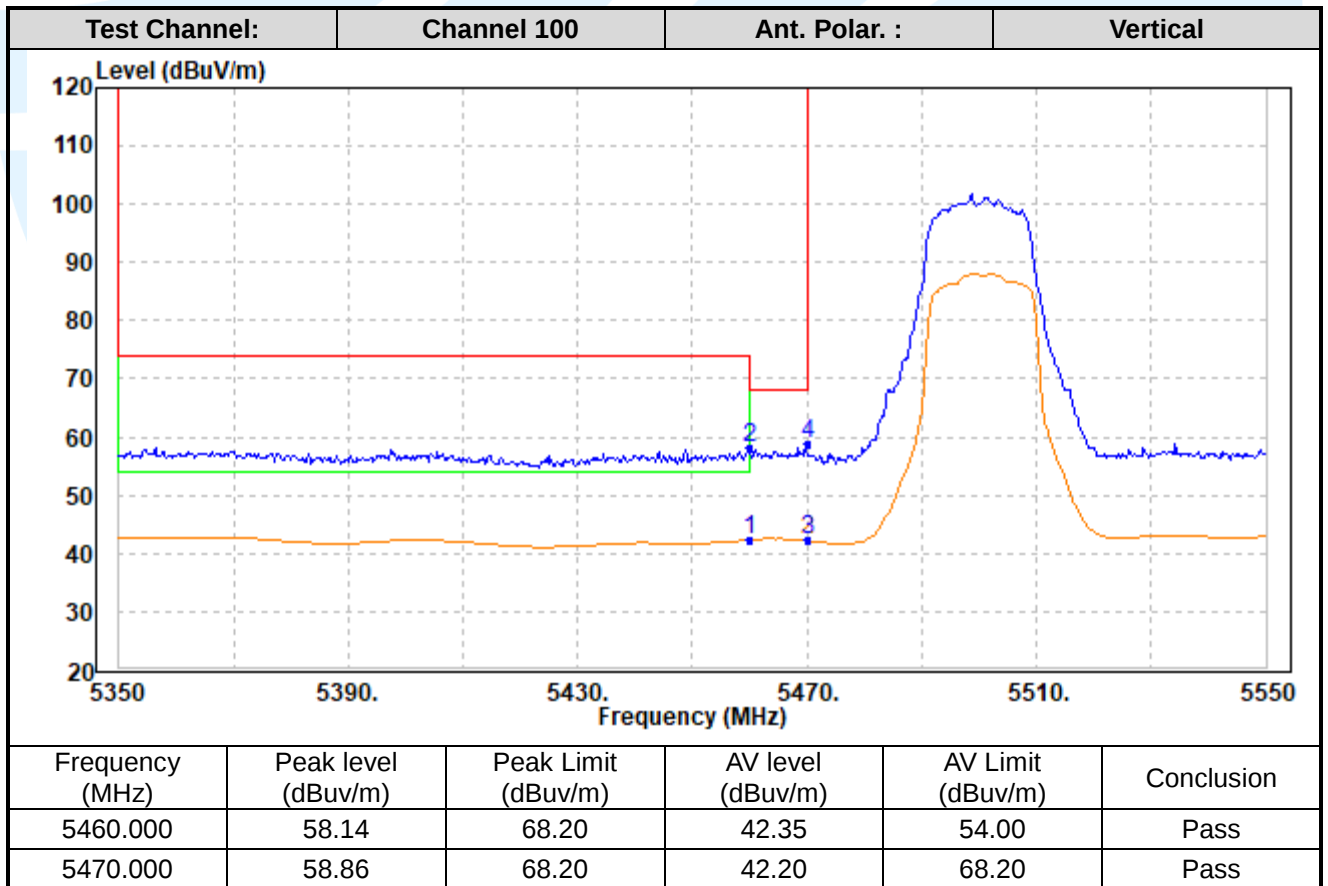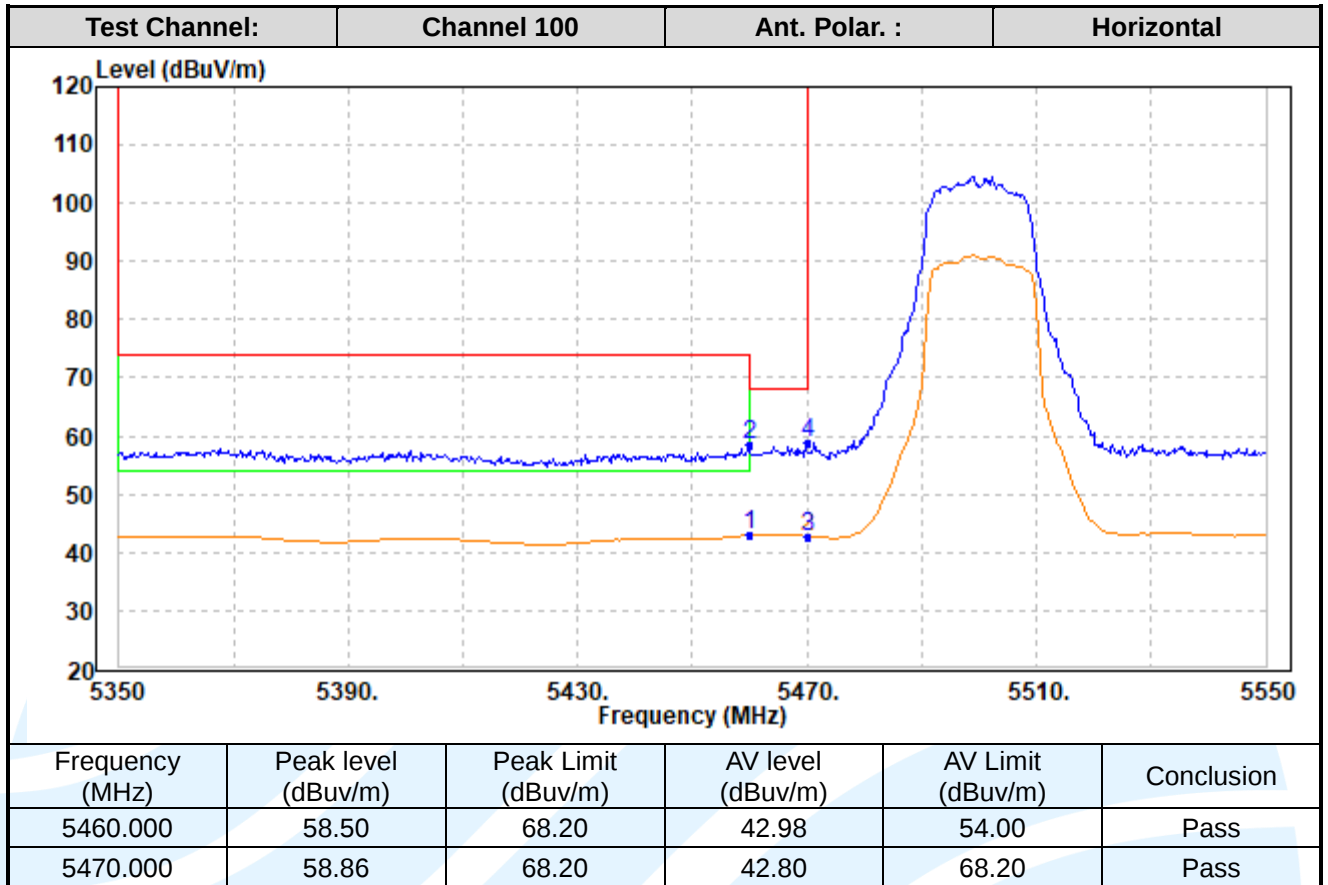

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886



E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

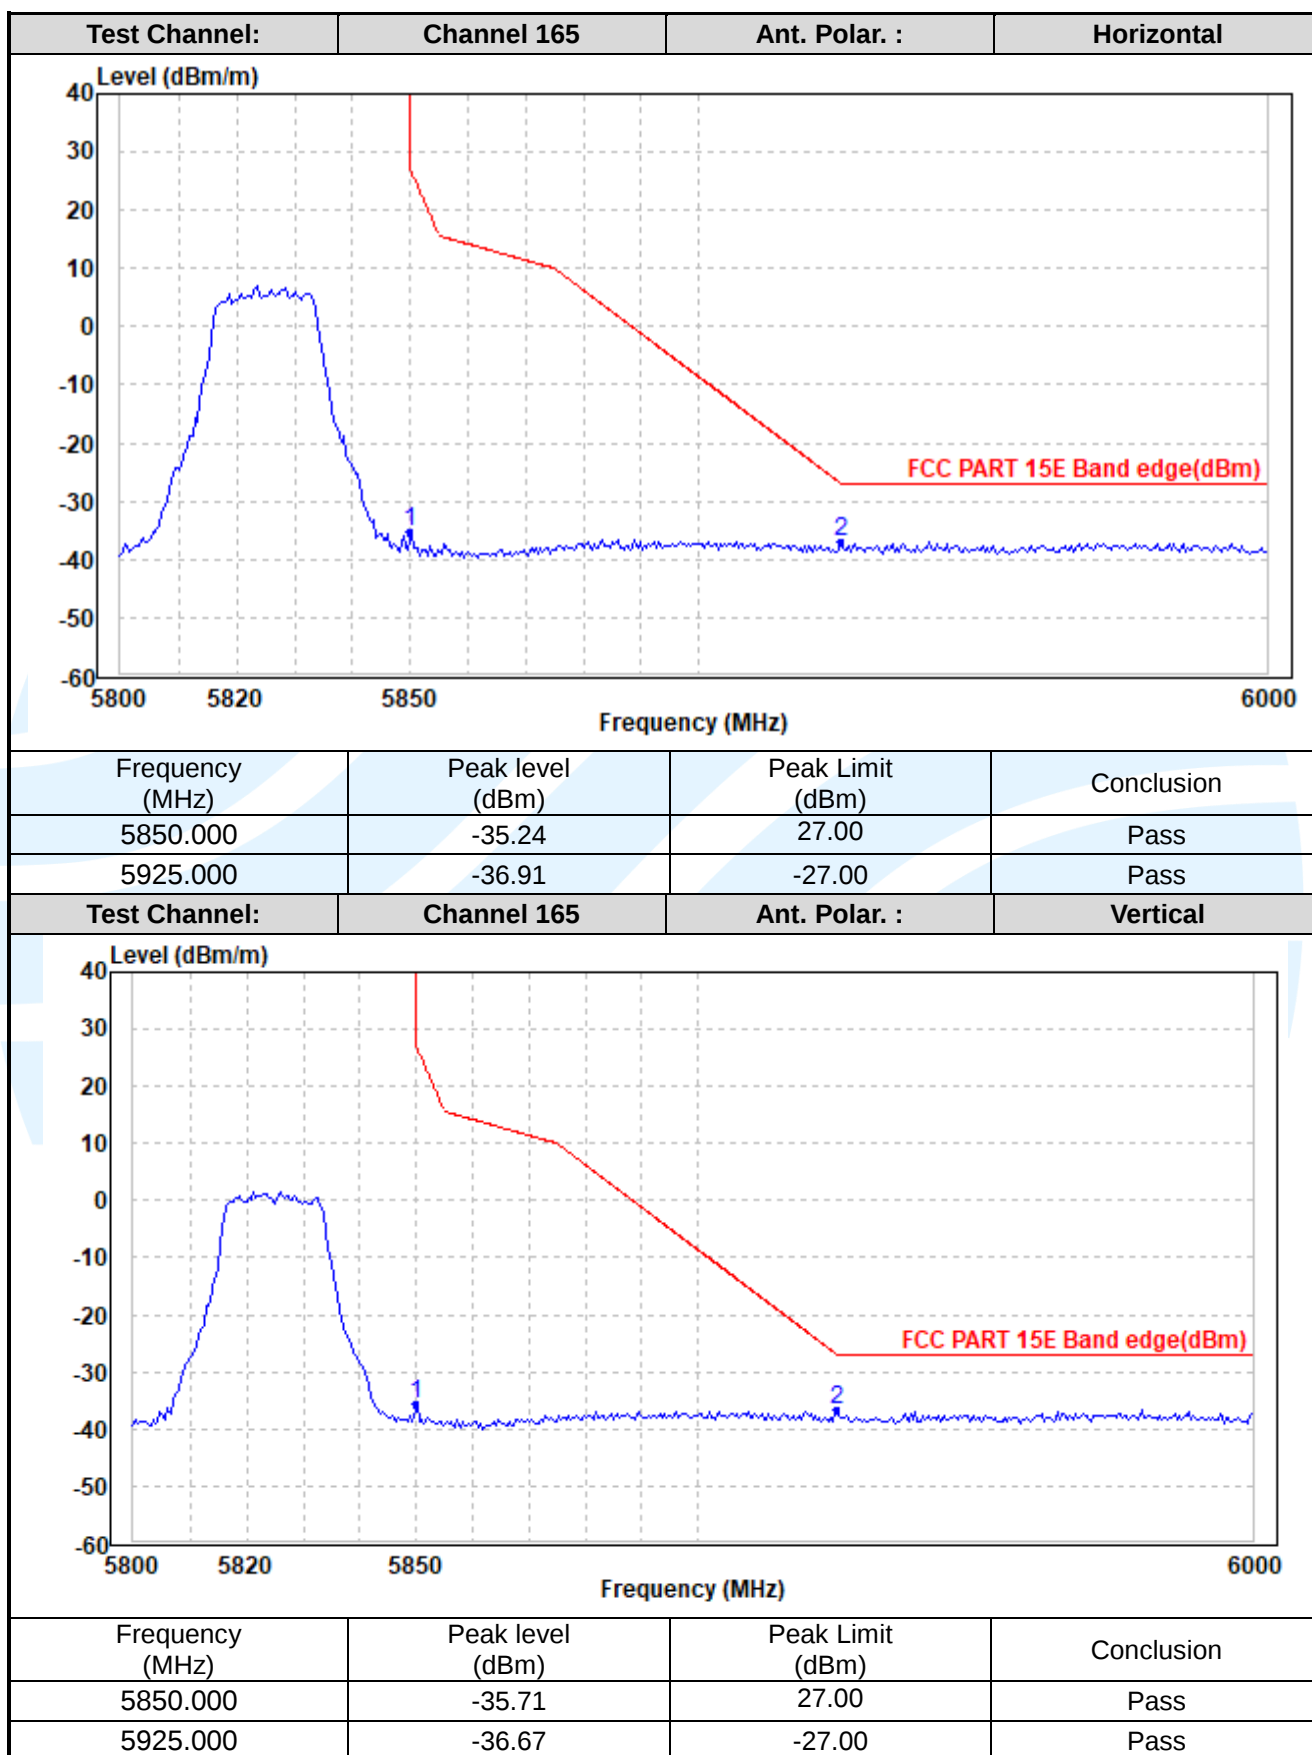

IEEE 802.11n-HT40

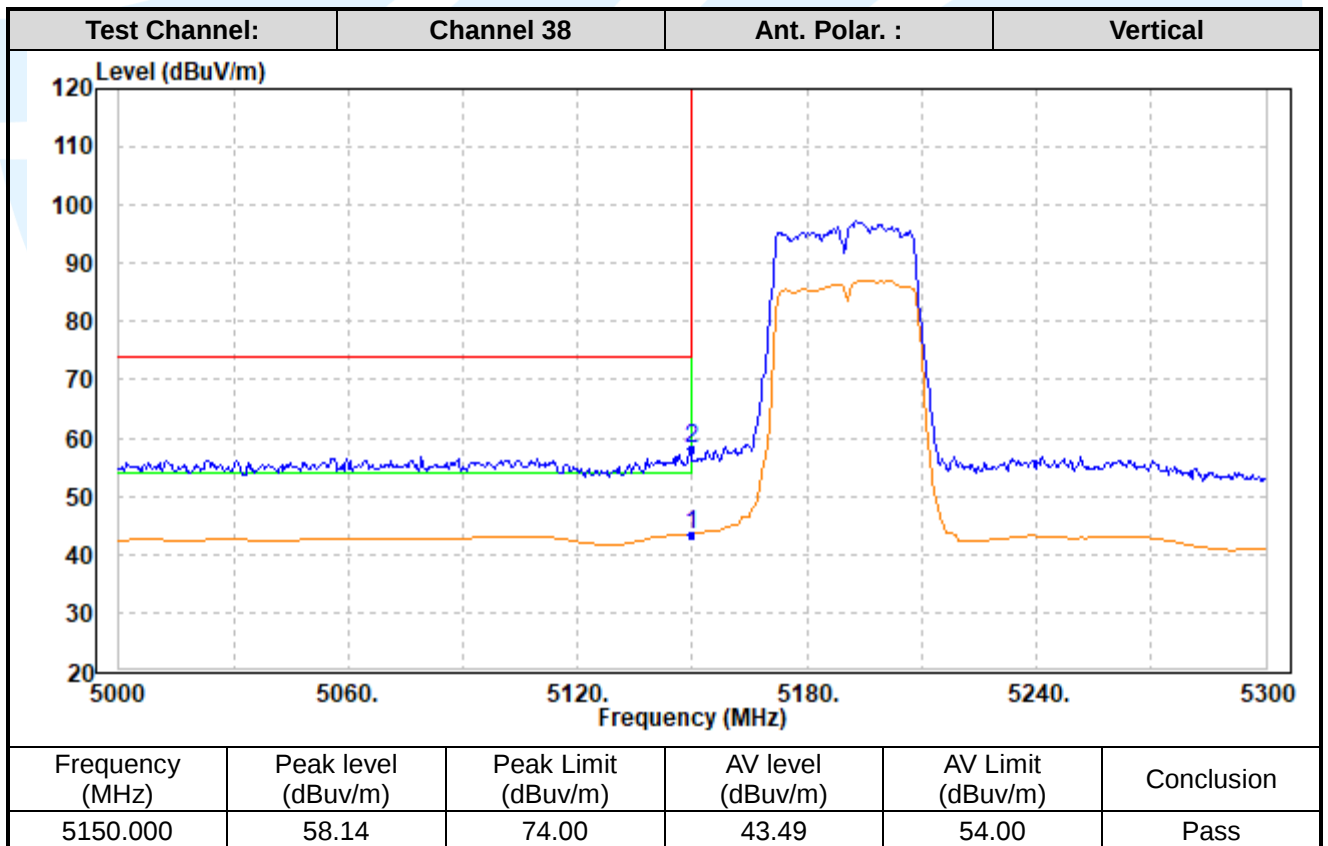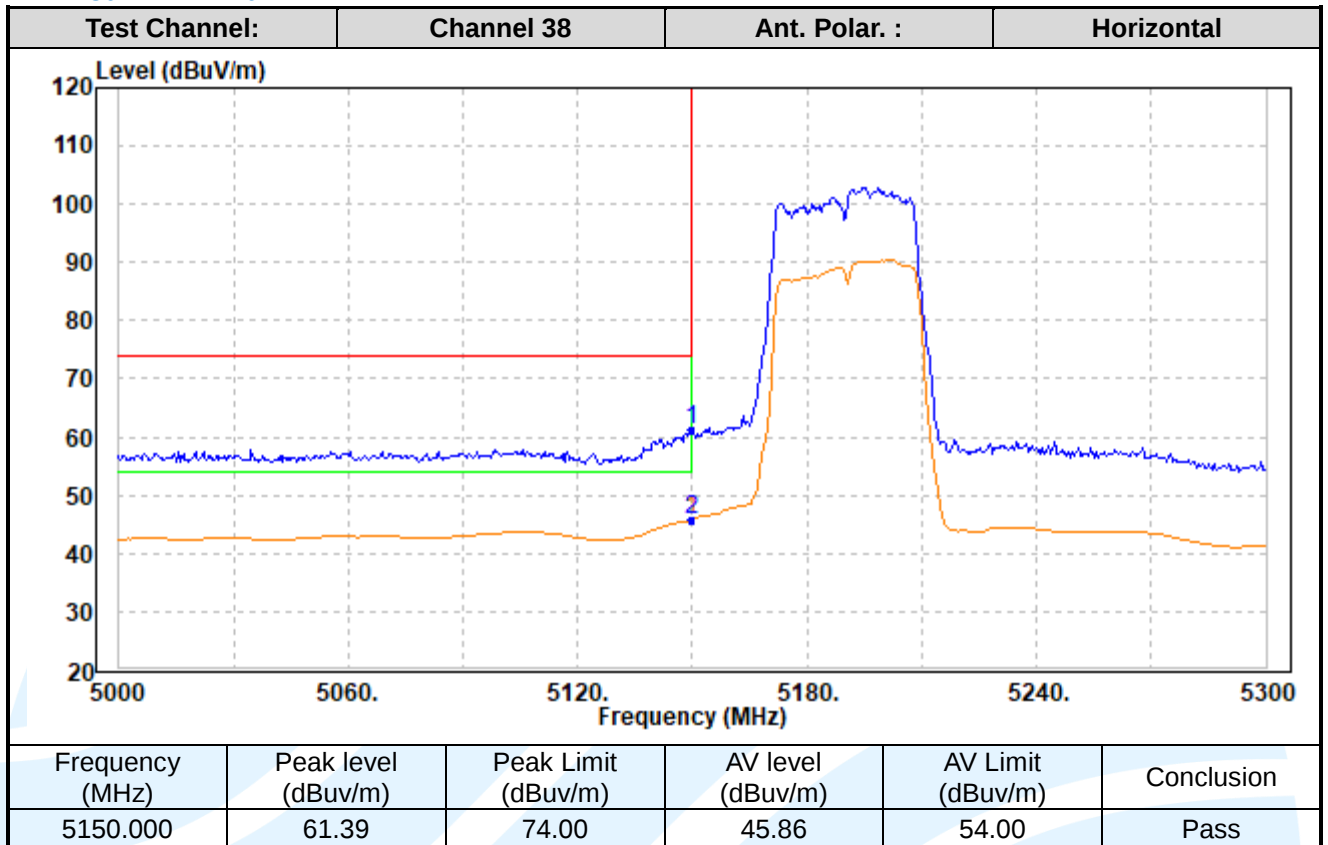

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China



Tel: +86-755-28230888


Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>



UTTR-RF-FCCPART15.407-V1.2

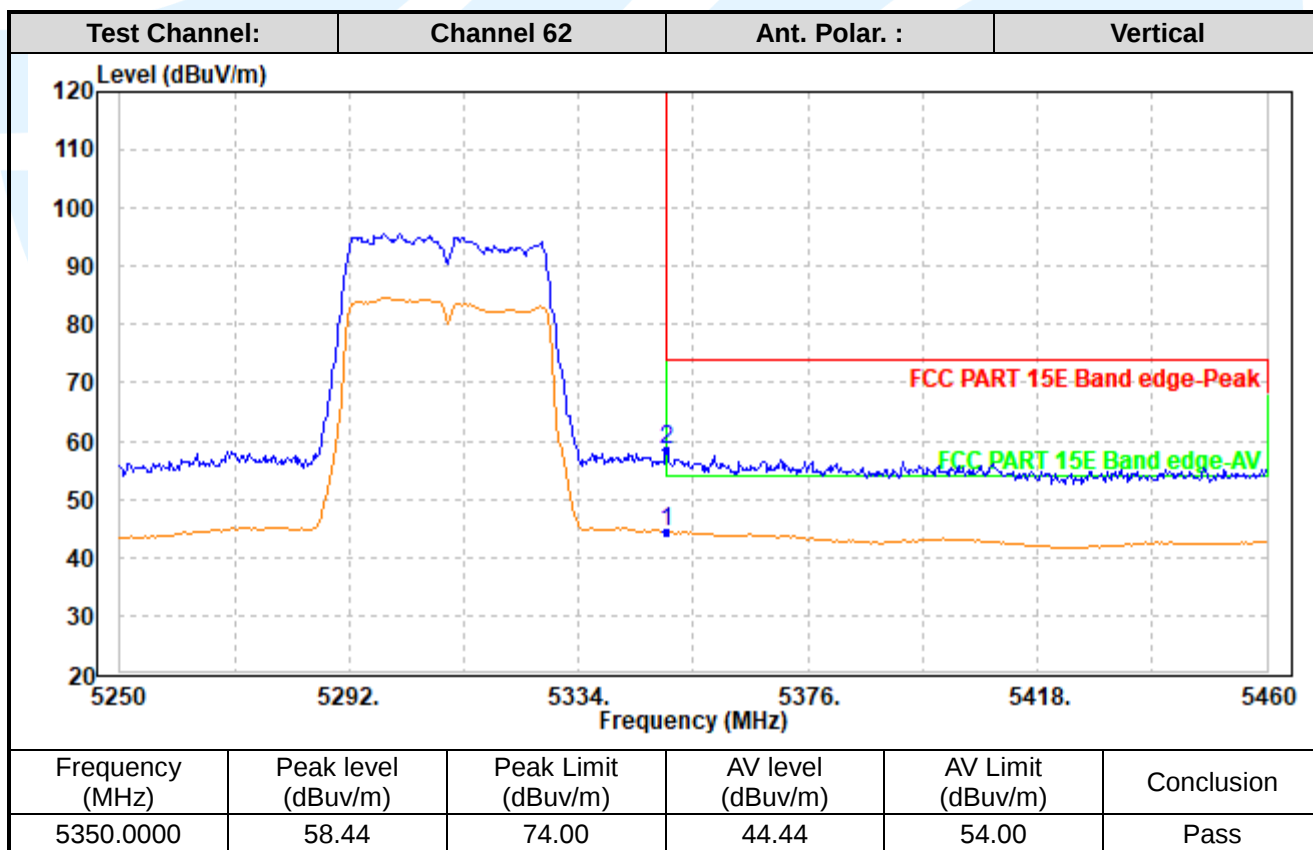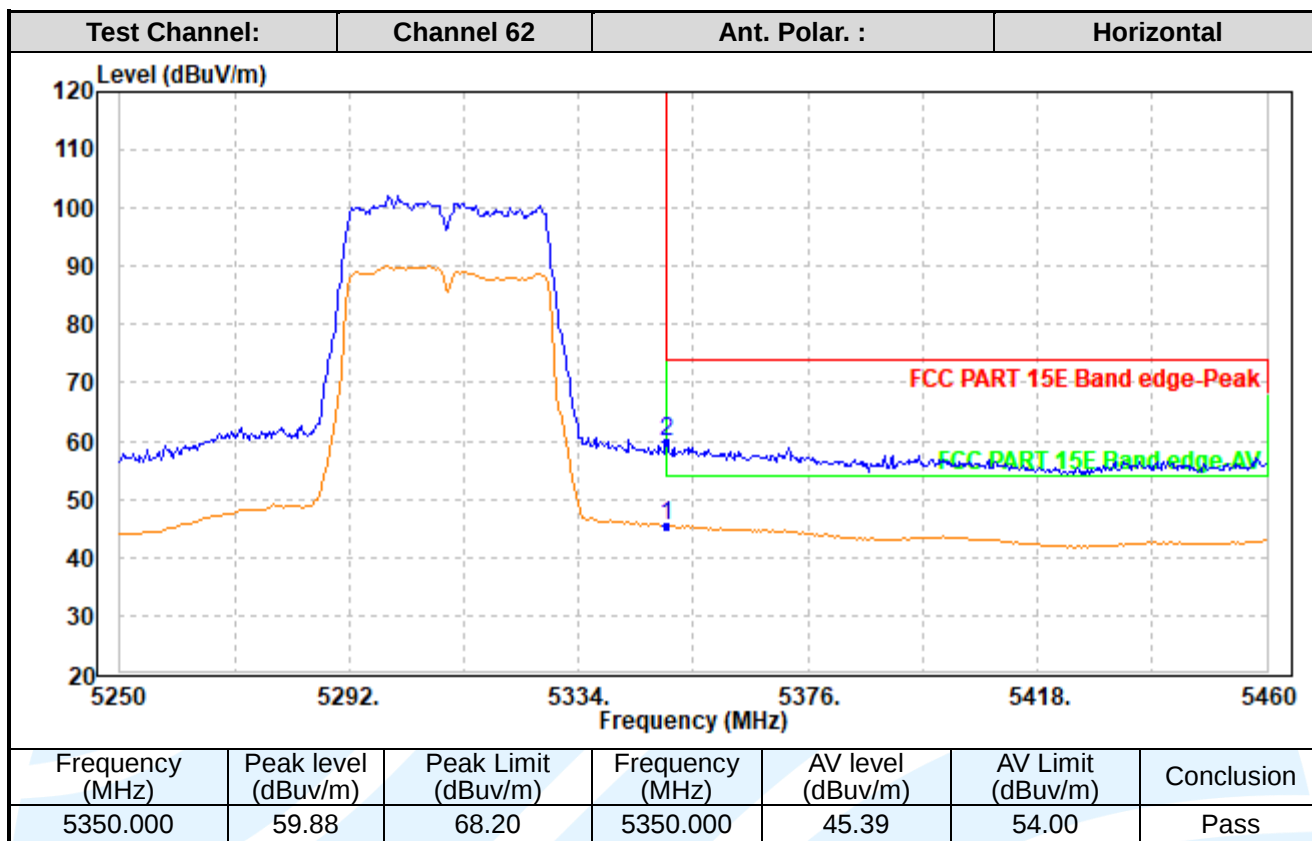

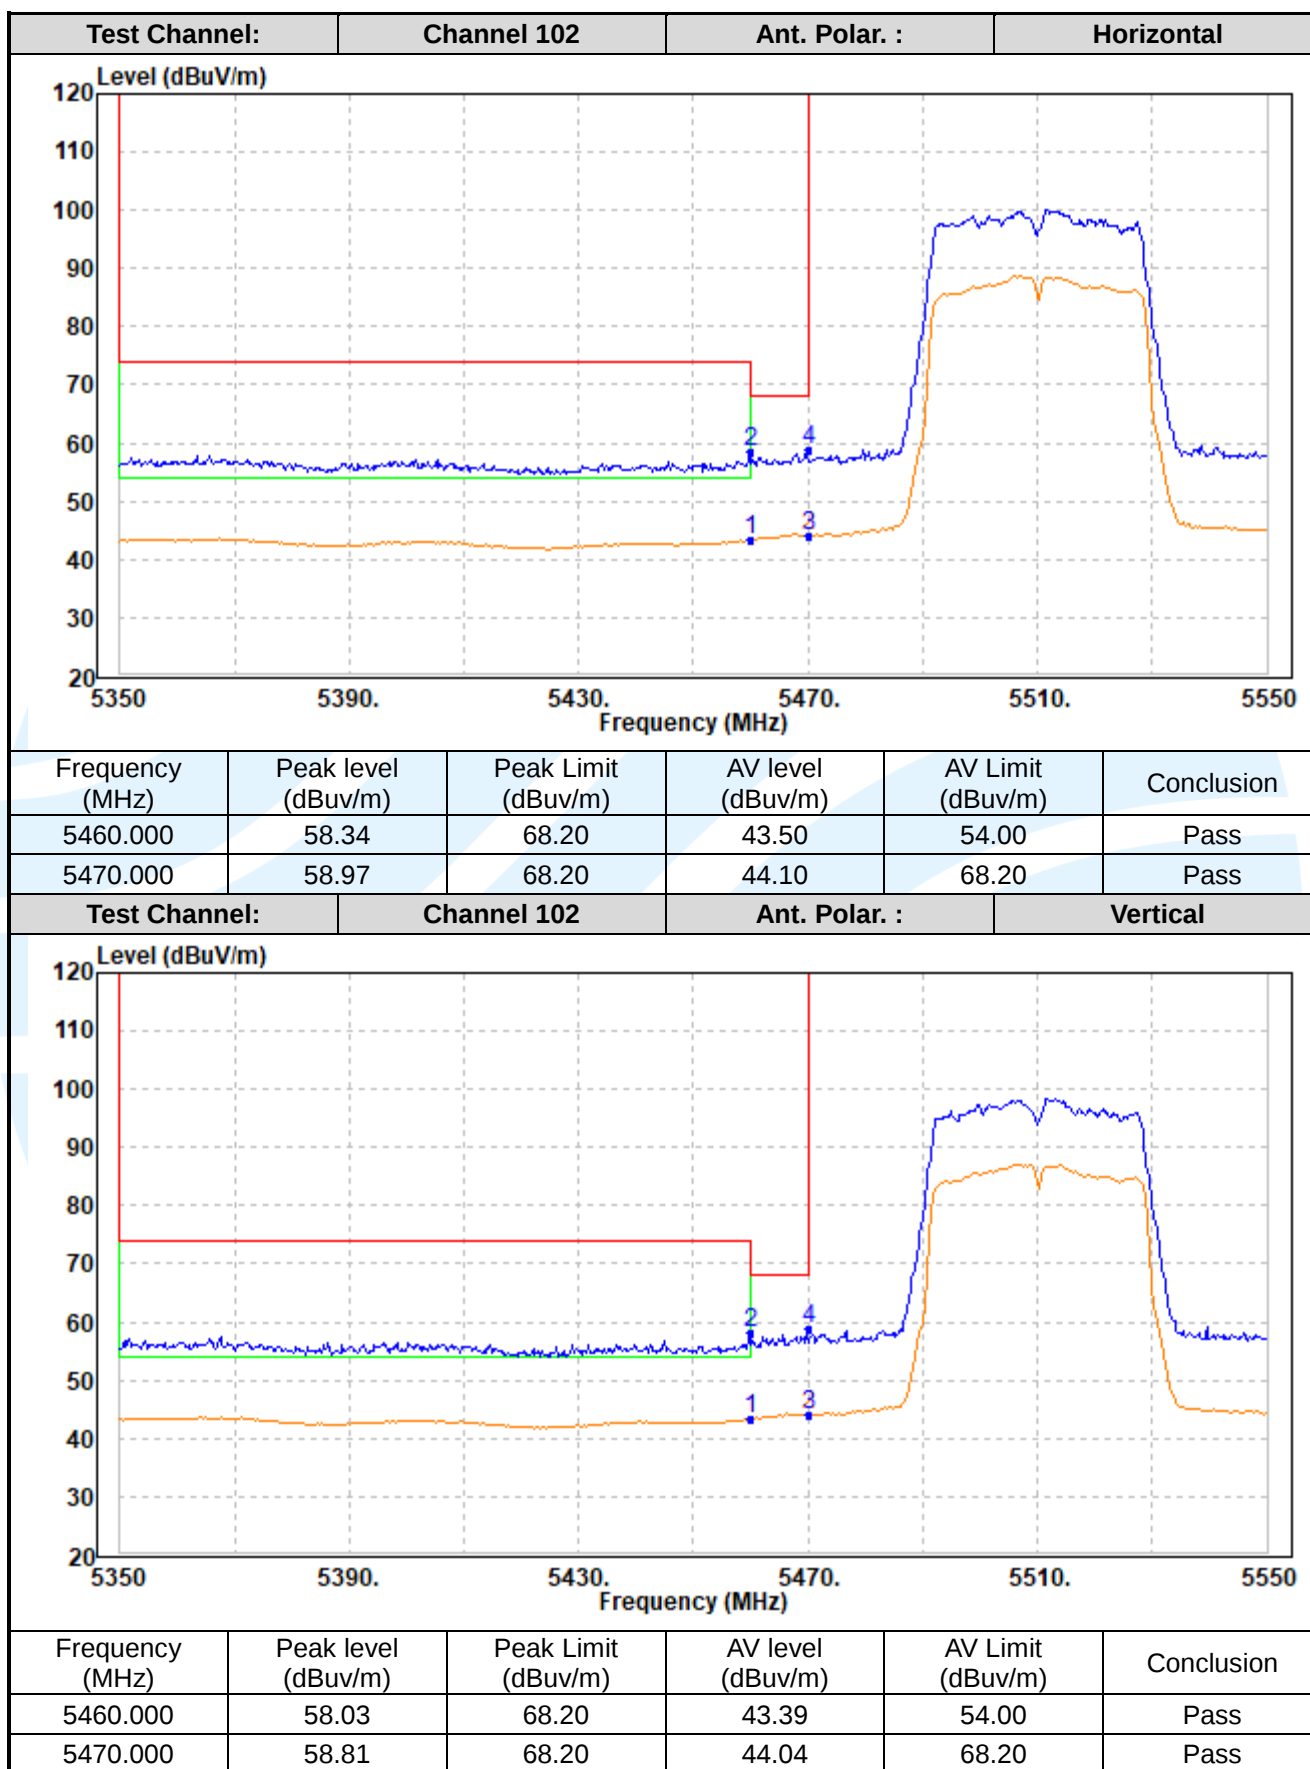

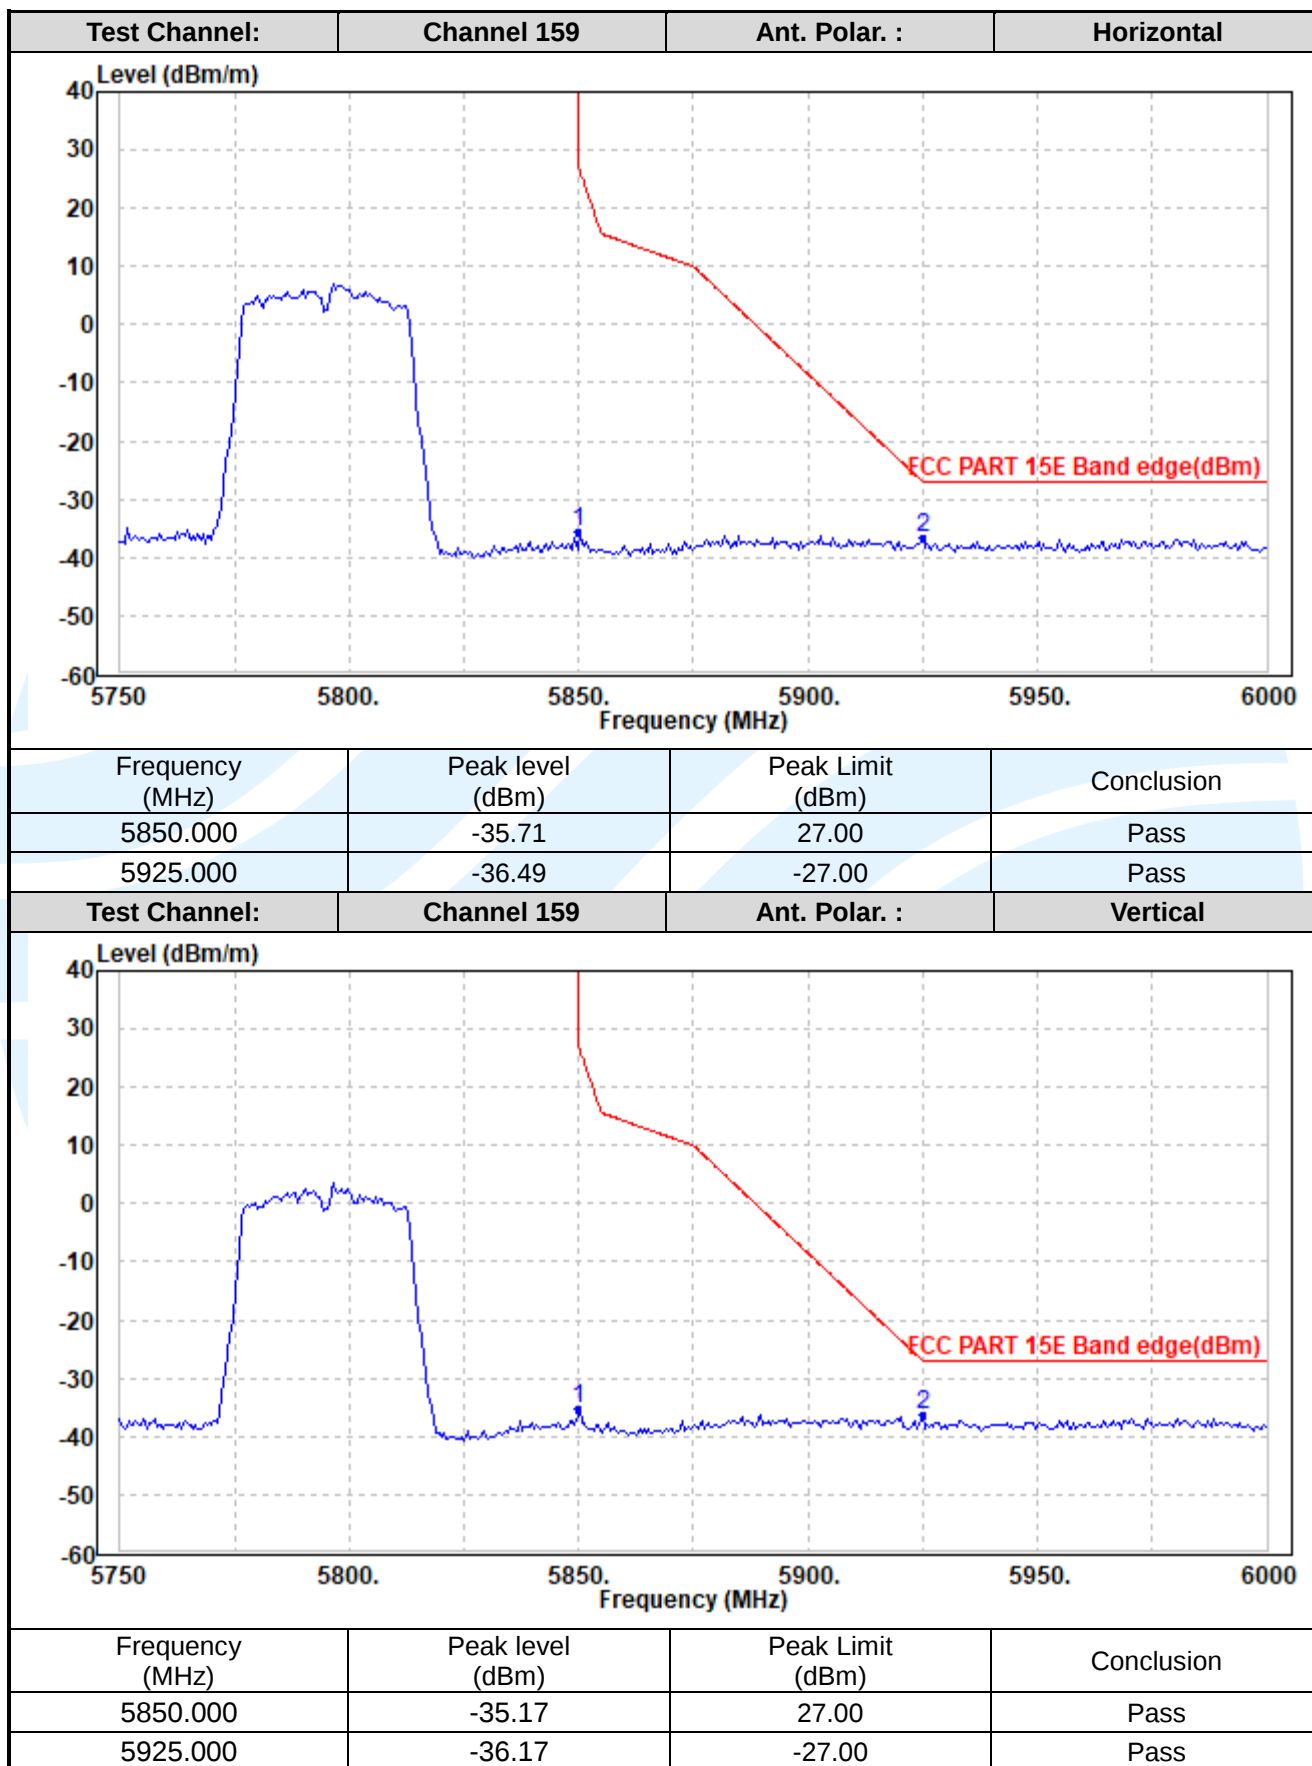

IEEE 802.11ac-VHT80

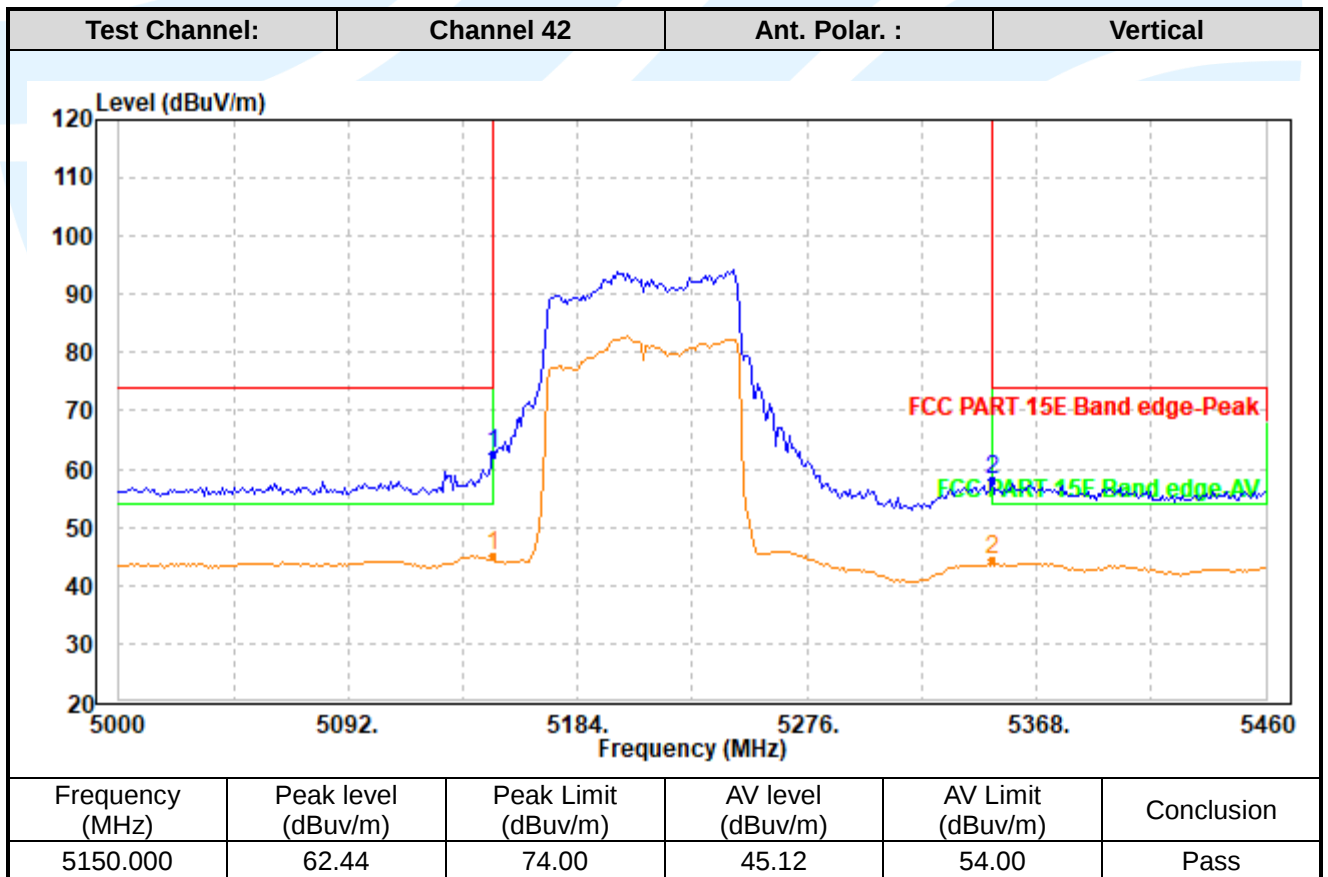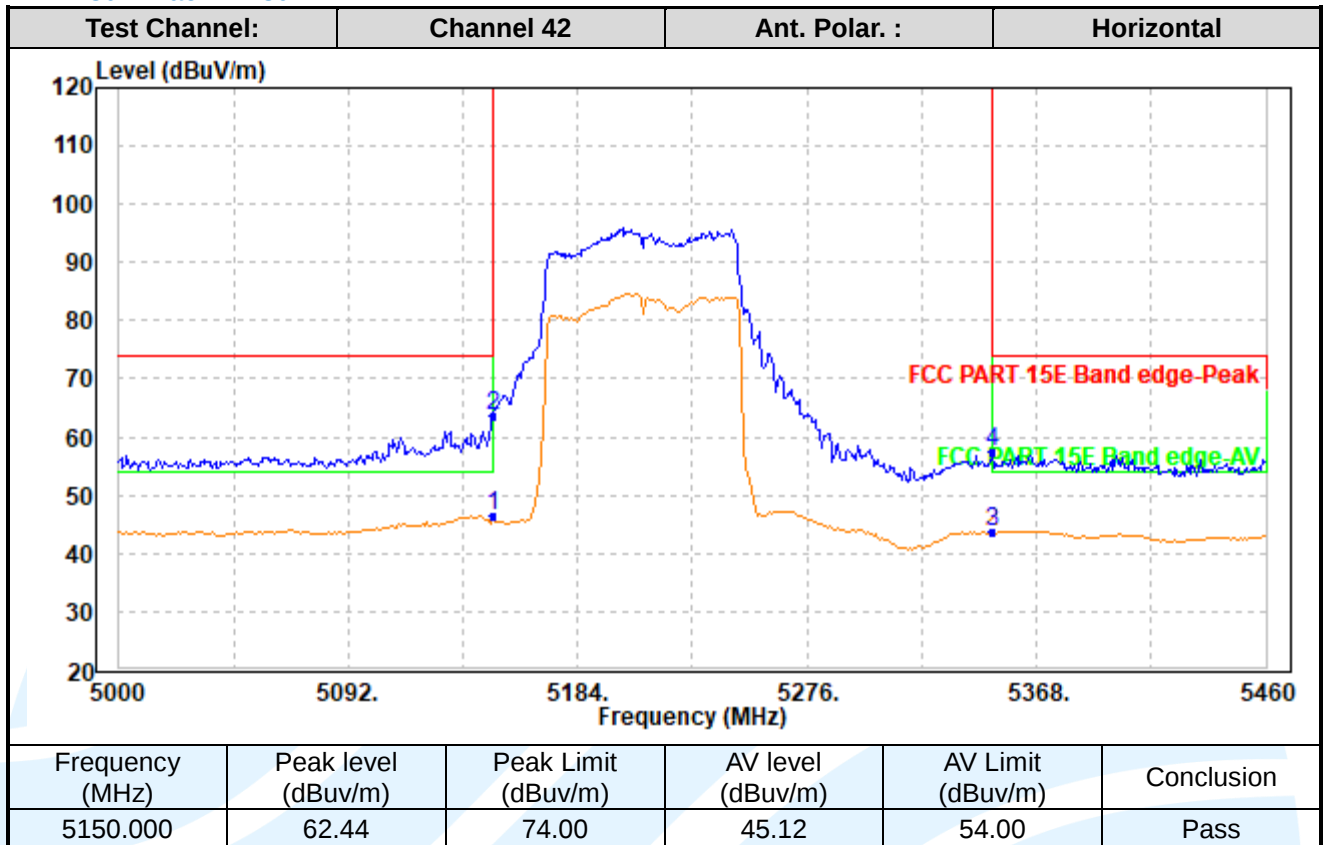

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

