


Measurement Report

FCC ID:SSR050301BT1This report concerns (check one) : ☒ Original Grant ☐ Class II Change**Issued Date :** Jun. 21, 2005**Project No. :** 0505003**Equipment :** Blue Tango**Model No. :** BSR-50**Applicant :** Innovation Lab Corp.10FL., 285 Sec. 2, Tiding Blvd., Taipei, Taiwan
114**Tested by:**

Neutron Engineering Inc. EMC Laboratory

Data of Test:

May. 11, 2005 ~ May. 20, 2005

Testing Engineer :
(Alan Liu)**Technical Manager :**
(James Chiu)**Authorized Signatory :**
(Andy Chiu)**NEUTRON ENGINEERING INC.**No. 132-1, Lane 329, Sec. 2, Palain Rd.,
Shijr City, Taipei, Taiwan
TEL : (02) 2646-5426 FAX : (02) 2646-6815

Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (NML) of R.O.C., or National Institute of Standards and Technology (NIST) of U.S.A.

Neutron's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron's** authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Assessment Authorities**Test Standard/Scope/Item Acceptance**

FCC Part 15 Subpart B
IEC/CISPR22
AS/NZS CISPR 22
CNS 13438

FCC Part 15 Subpart B
CISPR 22/EN 55022
AS/NZS CISPR 22
VCCI -Technical Requirement
CNS 13438
SS IEC/CISPR 22
IEC/EN 61000-3-2 IEC/EN 61000-4-5
IEC/EN 61000-3-3 IEC/EN 61000-4-6
IEC/EN 61000-4-2 IEC/EN 61000-4-8
IEC/EN 61000-4-3 IEC/EN 61000-4-11
IEC/EN 61000-4-4

Table of Contents	Page
1 . General Information	5
1.1 Applicant	5
1.2 Manufacturer	5
1.4 OEM Brand/Model	5
1.5 Model Difference	5
1.6 Product Descriptions	7
1.7 Connecting I/O Port(s)	7
1.8 Power Supplied	7
1.9 Products Covered	7
1.10 Description of Test Mode(s)	7
1.11 EUT Modifications	7
2 . RFI Emissions Measurement	8
2.1 Test Facility	8
2.2 Standard Compliance	8
2.3 Test Conditions and Channel	8
2.4 Test Methodolog	8
2.5 Deviations from Standard Test Method	9
2.6 Sample(s) Tested	9
2.7 Measurement Instruments	9
2.8 Measurement Uncertainty	9
2.9 Tested System Set-Up/Configuration Details	9
2.10 EUT Operating Conditions	13
3 . Justification	14
3.1 Limitations	14
3.1.1 Power Line Conducted Emission	14
3.1.2 Radiated Emission Limits	14
3.2 Measurement Justification	15
3.2.1 Conducted Emission	15
3.2.2 Radiated Emission	15
3.2.3 Field Strength Calculation	16
3.3 Measurement Justification	16
Table 4 Conducted Emission Data	18
Table 5 Radiated Emission Data	19

Table of Contents	Page
4 . Hopping Channel Carrier Frequency Separated	24
4.1 Applied Standard / limit	24
4.2 Test Setup	24
4.3 Test Result	24
5 . Number of Hopping Channel	25
5.1 Applied Standard / limit	25
5.2 Test Setup	25
5.3 Test Result	25
6 . Average Time of Occupancy	26
6.1 Applied Standard / limit	26
6.2 Test Setup	26
6.3 Test Result	26
7 . Bandwidth	27
7.1 Applied Standard / limit	27
7.2 Test Setup	27
7.3 Test Result	27
8 . Peak Output Power	28
8.1 Applied Standard / limit	28
8.2 Test Setup	28
8.3 Test Result	28
9 . Antenna conducted Spurious Emission	29
9.2 Test Setup	29
9.3 Test Result	29
10 . Maximum Permissible Exposure (MPE)	30
10.1 Applied Standard / limit	30
10.2 Test Result	30
Attachment	31

1. General Information**1.1 Applicant**

Name : Innovation Lab Corp.

Address : 10FL., 285 Sec. 2, Tiding Blvd., Taipei, Taiwan 114

1.2 Manufacturer

Name : N/A

Address : N/A

1.3 Equipment Under Tested

Name : Blue Tango

Trade Name : INNOVATION LAB

Model No. : BSR-50

1.4 OEM Brand/Model (if applicable)

OEM Brand(s)/Model(s) except the basic model in sub-clause 1.3 is (are) the follows:

OEM Brand : N/A

Model No. : N/A

1.5 Model Difference (Series, Versions, if any)

Except the basic model no. (model designation of the sample tested in this test report), additional model no. covered is(are) :

N/A.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2402	31	2432	61	2462
02	2403	32	2433	62	2463
03	2404	33	2434	63	2464
04	2405	34	2435	64	2465
05	2406	35	2436	65	2466
06	2407	36	2437	66	2467
07	2408	37	2438	67	2468
08	2409	38	2439	68	2469
09	2410	39	2440	69	2470
10	2411	40	2441	70	2471
11	2412	41	2442	71	2472
12	2413	42	2443	72	2473
13	2414	43	2444	73	2474
14	2415	44	2445	74	2475
15	2416	45	2446	75	2476
16	2417	46	2447	76	2477
17	2418	47	2448	77	2478
18	2419	48	2449	78	2479
19	2420	49	2450	79	2480
20	2421	50	2451		
21	2422	51	2452		
22	2423	52	2453		
23	2424	53	2454		
24	2425	54	2455		
25	2426	55	2456		
26	2427	56	2457		
27	2428	57	2458		
28	2429	58	2459		
29	2430	59	2460		
30	2431	60	2461		

1.6 Product Descriptions (Application/Features/Specification)

The EUT is a Blue Tango. A major technical descriptions of EUT is described as following:

A .Operation Frequency	2402-2480 MHz
B. Modulation Type	FHSS
C. Bit Rate of Transmitter	1 Mb/s
D. Channel Spacing	1MHz
E. Antenna Designation	Integral Antenna
G. Number Of Channel	79 Channel
H. Channel List	Please refer to the page 6
I. Antenna gain	2dBi

Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.

1.7 Connecting I/O Port(s)

Please refer to the User's Manual

1.8 Power Supplied

Power Source : DC Voltage supplied from AC/DC adapter.

Power Cord : Detachable, shielded type, attached with a ferrite core.

Power Rating : AC I/P 100-240V, 1.6A(MAX), 50-60Hz / DC O/P 24V, 2.5A

1.9 Products Covered (if applicable)

The sample tested including the following sub-system/module/accessory:

Sub-system/ Module/ Accessory	Model/Type No.	Int. Inst./ Ext. Cont.
Adaptor	TG-6001-24V	Ext. Cont.
Speaker	N/A	N/A

1.10 Description of Test Mode(s)

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

1.11 EUT Modifications (if applicable)

No any modification required for the EUT to comply with the standards.

2. RFI Emissions Measurement

2.1 Test Facility

The test facilities used to collect the test data in this report is C01/OS02 at the location of No.132-1, Lane 329, Sec. 2, Palain Road, Shijr City, Taipei, Taiwan.

2.2 Standard Compliance

The test data contained in this report relate only to the item(s) listed below:

FCC Part15, Subpart C (15.249) / ANCI C63.4 : 2003

2.3 Test Conditions and Channel

Test Mode	EUT Channel	Test Frequency(MHz)
1	CH 01	2402
2	CH 40	2441
3	CH 79	2480

Note:

(1)The measurements are performed at the highest, middle and lowest available channels with the modulation enabled.

2.4 Test Methodolog

Both conducted and radiated tests were performed during the max. EMI emission evaluation.

Test procedures according to the technical standards : (Antenna to EUT distance is 3 m)

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.207	Conducted Emission	Class B	0.15-30	PASS
15.247 (a)(1)	Hopping Channel Carrier Frequency Separated	$\geq 25\text{KHz}$ or the 20dB bandwidth of the hopping channel	2400-2483.5	PASS
15.247 (a)(1)(ii)	Number of Hopping Channel		2400-2483.5	PASS
15.247 (a)(1)(ii)	Average Time of Occupancy	≤ 0.4 sec (a 30 second period)	2400-2483.5	PASS
15.247 (a)(1)(ii)	Bandwidth	$\leq 1\text{MHz}$ (20dB bandwidth)	2400-2483.5	PASS
15.247 (b)(1)	Peak Output Power	1 watt or 30dBm (at least 75 hopping channel)	2400-2483.5	PASS
15.247 (c)	Antenna conducted Spurious Emission	20dB less than the peak value of fundamental frequency	30-25000	PASS
15.247 (c)	Radiated Spurious Emission	15.209(a)	30-25000	PASS

2.5 Deviations from Standard Test Method

N/A

2.6 Sample(s) Tested

The representative sample tested in this reports is(are): BSR-50

Test results in this test report relate only to the sample(s) tested.

The EUT has been tested according to the following environmental condition:

Input Power	120Vac/60Hz
Environmental Conditions	Please refer to the measurement data.

2.7 Measurement Instruments

Valid measurement instruments used in this report refer to **Table-1** enclosed.

2.8 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

A. Conducted Measurement :5.05dB

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)	NOTE
OS-01	ANSI	30MHz ~ 200MHz	H	4.59	
		30MHz ~ 200MHz	V	4.80	
		200MHz ~ 1,000MHz	H	4.47	
		200MHz ~ 1,000MHz	V	5.03	

2.9 Tested System Set-Up/Configuration Details

The system was configured for testing in a typical fashion (as a user would normally use) or in-accordance with the operating configuration specified in the user's manual. A Block Diagram (please refer to the Diagram - 1) and Photos (please refer to the attachment - **A**) showing the set-up/configuration of system tested. In addition, **Table-2** and **Table-3** provide a detail of all equipment items and cables information used in the system tested.

Table 1 Measurement Instruments List


Item	Instruments	Mfr/Brand	Model/Type No.	Serial No.	Calibrated Date	Next Cali. Date	Note
1	LISN	EMCO	3825/2	9605-2539	2004-10-01	2005-09-30	
2	LISN	Rolf Heine	NNB-2/16Z	98083	2004-08-03	2005-08-02	
3	LISN	Rolf Heine	NNB-2/16Z	98053	2004-12-24	2005-12-23	✓
4	4L-V-LISN	Rolf Heine	NNB-4/63TL	02/10040	2005-04-08	2006-04-07	✓
5	LISN	EMCO	3816/2	00042991	2005-01-12	2007-01-11	
6	LISN	EMCO	4825/2	00028234	2005-04-01	2006-03-31	
7	ISN	SCHAFFNER	ISN T400	16017	2004-12-07	2005-12-06	
8	Pulse Limiter	Electro-Metrics	EM-7600	112644	2004-12-07	2005-12-06	✓
9	50Ω Terminator	N/A	N/A	N/A	2005-05-12	2007-05-11	✓
10	Test Cable	N/A	C01	N/A	2004-12-08	2005-12-07	✓
11	Log-Bicon Antenna	MESS-ELEKTRONIK	VULB 9160	3058	2004-10-20	2005-10-19	✓
12	Log-Bicon Antenna	MESS-ELEKTRONIK	VULB 9160	3177	2005-02-07	2007-02-06	
13	Log-Bicon Antenna	MESS-ELEKTRONIK	VULB 9161	4022	2004-07-15	2005-07-14	
14	Test Cable	N/A	10M_OS01	N/A	2004-12-08	2005-12-07	
15	Test Cable	N/A	OS01-1/-2	N/A	2004-12-08	2005-12-07	
16	Test Cable	N/A	10M_OS02	N/A	2004-12-08	2005-12-07	✓
17	Test Cable	N/A	OS02-1/-2/-3	N/A	2004-12-08	2005-12-07	✓
18	RF Switch	Anritsu	MP59B	M65982	2004-12-07	2005-12-06	
19	Pre-Amplifier	Anritsu	MH648A	M09961	2004-11-24	2005-11-23	✓
20	Spectrum Analyzer	ADVAN TEST	R3261C	81720298	2004-09-01	2005-08-31	✓
21	Spectrum Analyzer	ADVAN TEST	R3132	81700025	2005-02-23	2006-02-22	
22	EMI Test Receiver	R&S	ESCI	1166.5950.03	2005-02-02	2007-02-01	✓
23	Test Receiver	R&S	ESH3	860156/018	2004-12-31	2005-12-30	
24	Test Receiver	R&S	ESVP	860687/009	2004-12-31	2005-12-30	
25	Test Receiver	MEB	SMV41	130	2004-12-06	2005-12-05	✓
26	Test Receiver	PMM	PMM 9000	4310J01002	2005-02-25	2006-02-24	
27	Horn Antenna	EMCO	3115	9605-4803	2004-05-28	2005-05-27	
28	Absorbing Clamp	R&S	MDS-21	841077/011	2004-09-09	2005-09-08	✓
29	Voltage Probe	R&S	ESH2-Z3	841.800/023	2004-09-07	2005-09-06	
30	Antenna Mast	Chance Most	CMTB-1.5	N/A	N/A	N/A	✓
31	Turn Table	Chance Most	CMTB-1.5	N/A	N/A	N/A	✓
32	Loop Ant	R&S	HFH2-Z2	830749/020	2004-10-01	2005-09-30	
33	Loop Ant	EMCO	6502	00042960	2005-01-14	2008-01-13	

Remark :

(1)" ✓" indicates the instrument used in Test Report.

(2)" N/A" denotes No Model No. / Serial No. and No Calibration specified.

Diagram - 1
Block diagram showing the configuration of system tested

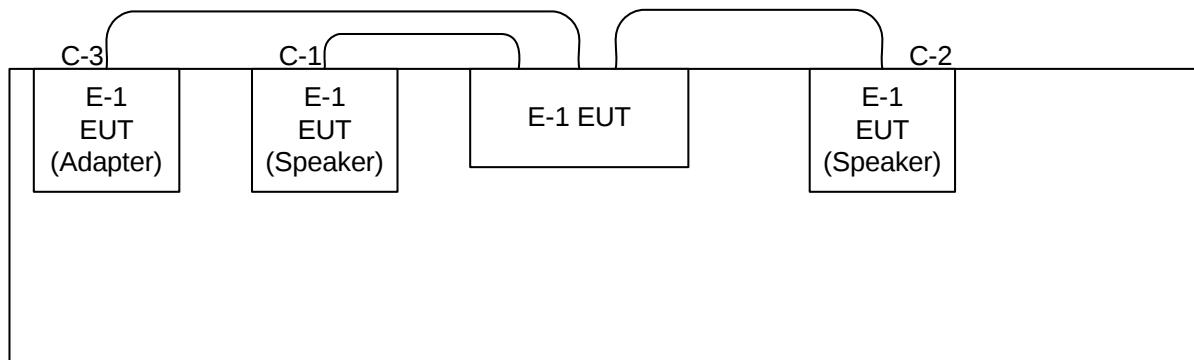

C-1 Audio Cable
C-2 Audio Cable
C-3 Power Cable

Table 2 Equipments Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	Blue Tango	INNOVATION LAB	BSR-50	SSR050301BT1		EUT

Note:

- (1) Unless otherwise denoted as EUT in 『Remark』 column , device(s) used in tested system is a support equipment.
- (2) Unless otherwise marked as ※ in 『Remark』 column, Neutron consigns the support equipment to the tested system.
- (3) The support equipment was authorized by Declaration of Confirmation.

Table 3 Information of Interface Cable

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	YES	1.9M	
C-2	NO	YES	1.9M	
C-3	YES	YES	1.4M	

Note:

- (1) Unless otherwise marked as ※ in 『Remark』 column, Neutron consigns the support equipment to the tested system.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.10 EUT Operating Conditions

- (a) Both conducted and radiated tests were performed during the max. EMI emission evaluation.
- (b) The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit & receive during test. This operating condition was tested and used to collect the included data.
- (c) The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use. The measurements are performed at the highest (CH1), middle (CH40), lowest (CH79) available channels with the hopping function disabled. Unless otherwise specified the above condition, the test was performed while EUT had its hopping function enabled.

3. Justification

3.1 Limitations

3.1.1 Power Line Conducted Emission (Frequency Range 150KHz-30MHz)

Measurement Frequency Range (MHz)	Mains Terminal Class A Limits (dBuV)		Mains Terminals Class B Limits (dBuV)		Note CISPR FCC Std.
	QP Mode	AV Mode	QP Mode	AV Mode	
0.15 - 0.50	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 - 5.00	73.00	60.00	56.00	46.00	CISPR
5.00 - 30.0	73.00	60.00	60.00	50.00	CISPR
0.45-1.705	60.00	N/A	48.00	N/A	FCC
1.705-30.0	60.00	N/A	48.00	N/A	FCC

Notes:

- (1). The tighter limit applies at the band edges.
- (2). The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

3.1.2 Radiated Emission Limits (Frequency Range 30MHz-1000MHz)

Measurement Frequency Range (MHz)	Quasi-Peak Mode Class A Limits (dBuV/m)		Quasi-Peak Mode Class B Limits (dBuV/m)		Note CISPR FCC Std.
	10m	30m	10m	3m	
30.00 -230.00	40.00	30.00	30.00	40.00	CISPR
230.0 -1000.0	47.00	37.00	37.00	47.00	CISPR
30.00 - 88.00	39.00	N/A	30.00	40.00	FCC
88.00 - 216.0	43.50	N/A	33.50	43.50	FCC
216.0 -960.0	46.00	N/A	36.00	46.00	FCC
above 960.0	49.50	N/A	46.00	54.00	FCC

Notes:

- (1). The tighter limit applies at the band edges.
- (2). Emission level (dBuV/m)=20log Emission level (uV/m).
- (3). A measuring distance Of 10m is a primary used. However, either 3m or 10m (instead of 10m) distance may be allowed. If the distance is 3m, add 10dB to the QP-limit above. If the distance is 10m, subtract 10dB from the QP-limit above.

3.2 Measurement Justification

3.2.1 Conducted Emission

The EUT is placed on a table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-1992. Conducted emissions from the EUT measured in the **frequency range between 0.15 MHz and 30MHz** were made with a **Spectrum Analyzer** using **CISPR Quasi-Peak detector mode**.

The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and these signals are then Quasi Peak detector mode and/or Average detector mode re-measured.

Data of **Table - 4** lists the significant emission frequencies, measured levels, limits and safe margins. All readings are Peak Mode measured unless otherwise stated as QP or AV in column of " Remark ".

If the Peak Mode measured value lower than both QP Mode and AV Mode Limit, EUT shall be deemed to compliance with both QP & AV Limits and then no additional QP Mode or AV Mode measurement performed.

If additional QP or AV Mode measurement needed, and if the QP Mode measured value compliance with the QP Mode Limit and lower than AV Mode Limit, the EUT shall be deemed to meet both QP & AV Limits and then only QP Mode was measured, but AV Mode was not performed °

3.2.2 Radiated Emission

The EUT is placed on a turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2003.

The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak, Peak or Average detector mode re-measured.

Data of **Table – 5** lists the significant emission frequencies, measured levels, limits and safe margins. All readings are Peak Mode measured unless otherwise stated as QP or AV in column of " Remark ".

If the Peak Mode measured value compliance with and lower than Quasi Peak or Average Mode Limit, the EUT shall be deemed to meet QP/AV Limits and then no additional QP/AV Mode measurement performed.

3.2.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as **$FS = RA + AF + CL - AG$**

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor (1)

CL = Cable Attenuation Factor(Cable Loss) (1)

AG = Amplifier Gain (1)

Remark :

(1) The Correction Factor = $AF + CL - AG$, as shown in the data tables' Correction Factor column.


3.3 Measurement Justification

Table - 4. Conducted Emission Data (0.15-30MHz)

Table - 5. Radiated Emission Data (30-1000MHz)

Radiated Emission Data (above 1000MHz)

Radiated Emission Test Set-Up, Frequency Below 1000MHz

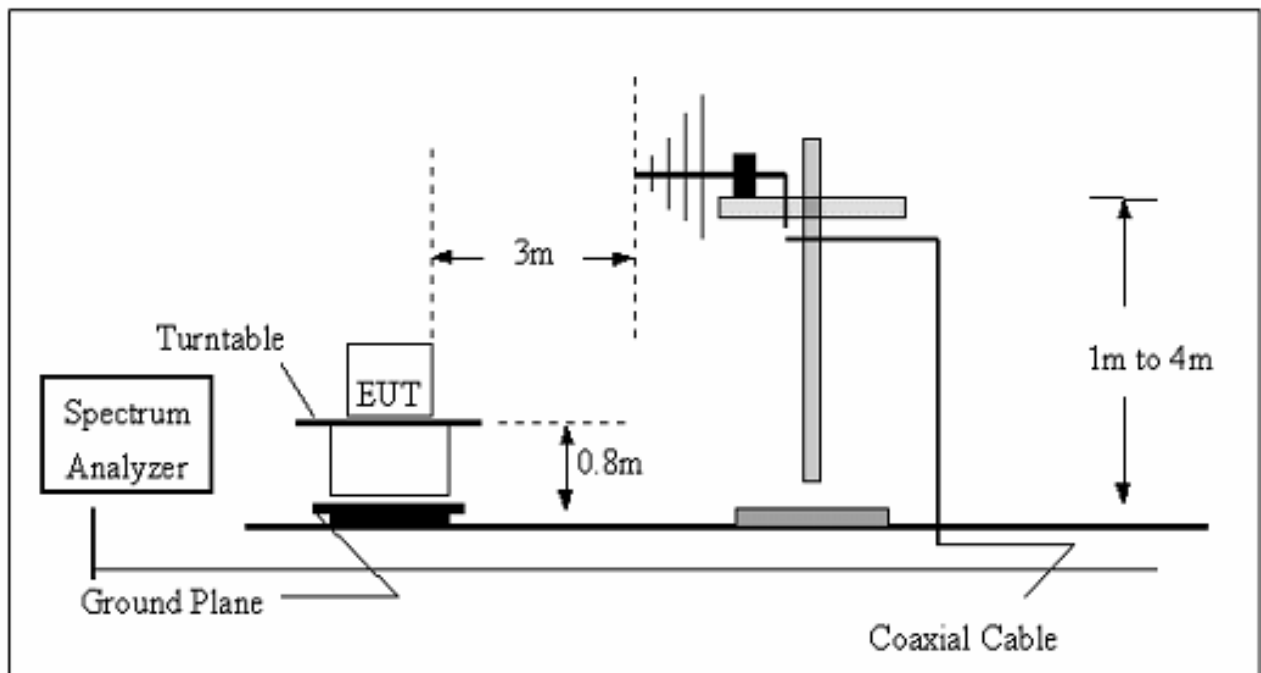

Radiated Emission Test Set-Up, Frequency Over 1GHz

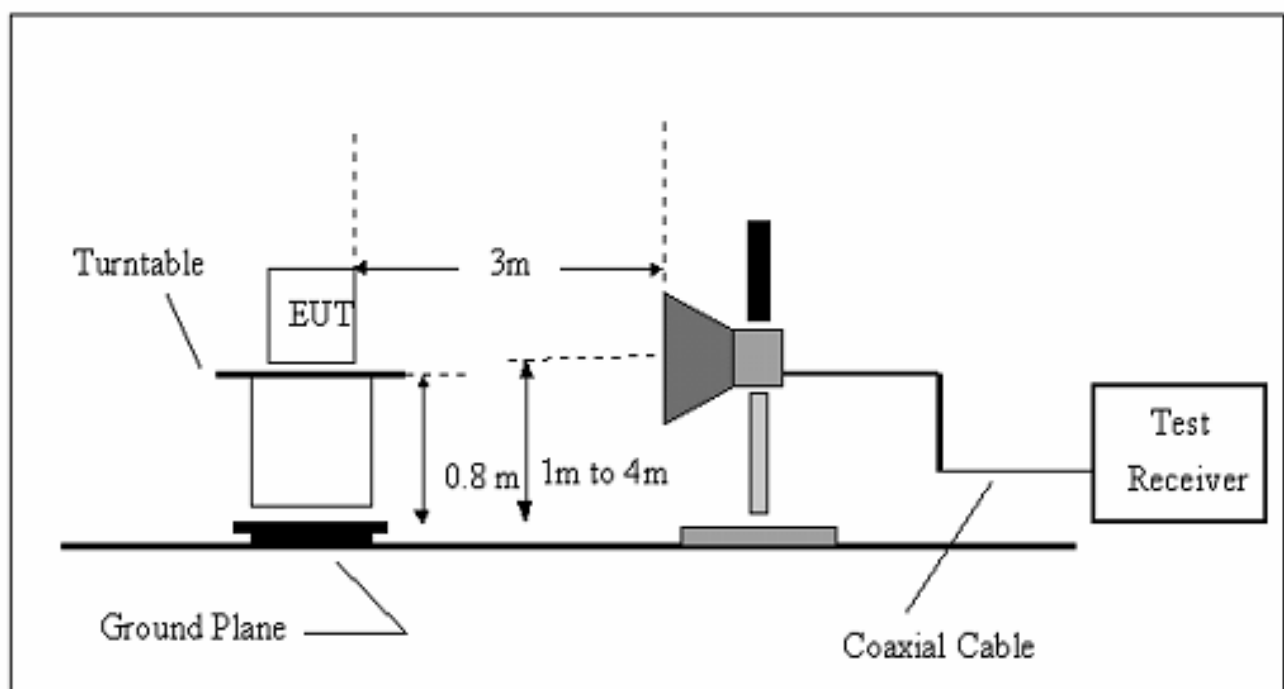


Table 4 Conducted Emission Data

EUT : Blue Tango

Model/Type No. : BSR-50

Temperature : 31 °C Relative Humidity : 69 % Pressure : 1007 hPa

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

Minimum passing margin is -12.12dB at 0.18MHz

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limits(dBuV)		Safe Margins	
		QP-Mode	AV-Mode	QP-Mode	AV-Mode	(dBuV)	Note
0.15	Line	45.55	30.95	65.73	55.73	-20.18	(QP)
0.17	Line	39.75	28.85	65.08	55.08	-25.33	(QP)
0.39	Line	39.15	*	58.08	48.08	-18.93	(QP)
2.48	Line	36.11	*	56.00	46.00	-19.89	(QP)
4.57	Line	39.47	*	56.00	46.00	-16.53	(QP)
9.80	Line	40.22	*	60.00	50.00	-19.78	(QP)
0.17	Neutral	49.15	25.75	65.21	55.21	-16.06	(QP)
0.18	Neutral	52.35	*	64.47	54.47	-12.12	(QP)
0.23	Neutral	49.15	*	62.56	52.56	-13.41	(QP)
0.40	Neutral	41.55	*	57.95	47.95	-16.40	(QP)
2.48	Neutral	40.51	*	56.00	46.00	-15.49	(QP)
9.28	Neutral	33.35	*	60.00	50.00	-26.65	(QP)

Remark :

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz ; SPA setting in RBW=10KHz,VBW =10KHz, Swp. Time = 0.3 sec./MHz . Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=1MHz,VBW=10Hz, Swp. Time =0.3 sec./MHz .
- (2) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』 . If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform . In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured .
- (3) Measuring frequency range from 150KHz to 30MHz .

Table 5 Radiated Emission DataEUT : Blue Tango Model/Type No. : BSR-50Temperature : 25.9 °C Relative Humidity : 80 % Pressure : 1011 hPa

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

The following table lists worst case data from TX / RX with various bitrates on various channels.

Minimum passing margin is -1.37dB at 67.76MHz

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Safe Margins (dBuV/m)	Note
45.17	H	36.03	- 7.01	29.02	40.00	- 10.98	
45.18	V	38.28	- 7.01	31.27	40.00	- 8.73	
56.46	V	39.28	- 7.31	31.97	40.00	- 8.03	
56.47	H	31.34	- 7.31	24.03	40.00	- 15.97	
67.76	V	46.90	- 8.27	38.63	40.00	- 1.37	(QP)
67.76	H	39.08	- 8.27	30.81	40.00	- 9.19	
350.15	V	36.97	- 3.26	33.71	46.00	- 12.29	
395.32	H	36.27	- 1.80	34.47	46.00	- 11.53	
417.91	V	37.43	- 1.26	36.17	46.00	- 9.83	
417.92	H	37.97	- 1.26	36.71	46.00	- 9.29	
440.50	H	36.70	- 0.78	35.92	46.00	- 10.08	
440.51	V	34.74	- 0.78	33.96	46.00	- 12.04	

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz ◦
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz ◦
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table ◦

Table 5 Radiated Emission Data(above 1000MHz)

EUT : Blue Tango Model/Type No. : BSR-50

Temperature : 25 °C Relative Humidity : 60 % Pressure : 1023 hPa

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

The following table lists worst case data from TX / RX with various orthogonal planes on the EUT antenna.

CH 01

Freq. (MHz)	Ant.Pol. (H/V)	Peak Reading (dBuV)	AV (dBuV)	Ant./CF CF(dB)	Peak Act. (dBuV/m)	AV (dBuV/m)	Peak Limit (dBuV/m)	AV (dBuV/m)	NOTE
1602.9	V	54.74	-	-15.35	39.39	-	74.00	54.00	X/H
2579.1	V	45.47	-	-11.18	34.29	-	74.00	54.00	X/H
4808.7	V	45.05	-	-5.29	39.76	-	74.00	54.00	X/H
7370.0	V	42.10	-	1.22	43.32	-	74.00	54.00	X/H
12010.0	V	39.71	-	6.47	46.18	-	74.00	54.00	X/H
16814.0	V	41.32	-	9.20	50.52	-	74.00	54.00	X/H
1602.9	H	57.71	-	-15.35	42.36	-	74.00	54.00	X/H
4914.4	H	48.82	-	-5.01	43.81	-	74.00	54.00	X/H
7206.0	H	37.79	-	0.91	38.70	-	74.00	54.00	X/H
9608.0	H	39.01	-	3.12	42.13	-	74.00	54.00	X/H
14412.0	H	36.18	-	10.50	46.68	-	74.00	54.00	X/H
16814.0	H	38.40	-	9.20	47.60	-	74.00	54.00	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ “F” denotes fundamental frequency; “ H” denotes spurious frequency. “E” denotes band edge frequency.
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
(This judgment method include the Band Edge Requirement.)
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand

Table 5 Radiated Emission Data(above 1000MHz)

EUT : Blue Tango Model/Type No. : BSR-50

Temperature : 25 °C Relative Humidity : 60 % Pressure : 1023 hPa

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

The following table lists worst case data from TX / RX with various orthogonal planes on the EUT antenna.

CH 40

Freq.	Ant.Pol.	Peak	AV		Peak	AV	Peak	AV	
(MHz)	(H/V)	Reading	Ant./CF		Act.	Limit			NOTE
(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)			
1627.2	V	55.08	-	-15.27	39.81	-	74.00	54.00	X/H
2548.9	V	42.92	-	-11.25	31.67	-	74.00	54.00	X/H
4884.2	V	41.22	-	-5.09	36.13	-	74.00	54.00	X/H
9764.0	V	43.08	-	3.44	46.52	-	74.00	54.00	X/H
14646.0	V	36.24	-	9.71	45.95	-	74.00	54.00	X/H
17087.0	V	38.97	-	10.39	49.36	-	74.00	54.00	X/H
1627.2	H	57.73	-	-15.27	42.46	-	74.00	54.00	X/H
4914.4	H	50.32	-	-5.01	45.31	-	74.00	54.00	X/H
7380.0	H	45.08	-	1.24	46.32	-	74.00	54.00	X/H
9830.0	H	40.88	-	3.57	44.45	-	74.00	54.00	X/H
14646.0	H	34.96	-	9.71	44.67	-	74.00	54.00	X/H
17087.0	H	39.72	-	10.39	50.11	-	74.00	54.00	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ "F" denotes fundamental frequency; " H" denotes spurious frequency. "E" denotes band edge frequency.
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
(This judgment method include the Band Edge Requirement.)
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

Table 5 Radiated Emission Data(above 1000MHz)

EUT : Blue Tango Model/Type No. : BSR-50

Temperature : 25 °C Relative Humidity : 60 % Pressure : 1023 hPa

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

The following table lists worst case data from TX / RX with various orthogonal planes on the EUT antenna.

CH 79

Freq. (MHz)	Ant.Pol. (H/V)	Peak Reading (dBuV)	AV (dBuV)	Ant./CF CF(dB)	Peak Act. (dBuV/m)	AV (dBuV/m)	Peak Limit (dBuV/m)	AV (dBuV/m)	NOTE
1652.4	V	54.43	-	-15.19	39.24	-	74.00	54.00	X/H
4914.4	V	45.94	-	-5.01	40.93	-	74.00	54.00	X/H
7370.0	V	47.52	-	1.22	48.74	-	74.00	54.00	X/H
9930.0	V	40.82	-	3.78	44.60	-	74.00	54.00	X/H
14886.0	V	36.75	-	8.72	45.47	-	74.00	54.00	X/H
17367.0	V	37.72	-	11.70	49.42	-	74.00	54.00	X/H
1652.4	H	58.59	-	-15.19	43.40	-	74.00	54.00	X/H
2374.8	H	50.13	-	-12.02	38.11	-	74.00	54.00	X/H
4962.0	H	39.44	-	-4.89	34.55	-	74.00	54.00	X/H
9924.0	H	39.24	-	3.77	43.01	-	74.00	54.00	X/H
14886.0	H	35.45	-	8.72	44.17	-	74.00	54.00	X/H
17367.0	H	38.09	-	11.7	49.79	-	74.00	54.00	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ "F" denotes fundamental frequency; " H" denotes spurious frequency. "E" denotes band edge frequency.
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
(This judgment method include the Band Edge Requirement.)
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

Table 5 Radiated Emission Data (Restricted Bands Requirements)

EUT : Blue Tango Model/Type No. : BSR-50

Temperature : 25 °C Relative Humidity : 60 % Pressure : 1023 hPa

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

The emission of the carrier radiated field strength is measured for channel 1 and channel 79 (Peak and AV) as following:

1. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH 79). Then the field strength was measured at 2483.5-2500 MHz.
2. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH 01). Then the field strength was measured at 2310-2390 MHz.

Please refer to the attachment L about the Restricted Bands emission plot.

Freq. (MHz)	Ant.Pol. (H/V)	Peak Reading (dBuV)	AV (dBuV)	Ant./CF CF(dB)	Peak Act. (dBuV/m)	AV (dBuV/m)	Peak Limit (dBuV/m)	AV (dBuV/m)	NOTE
2399.7	V	77.59	34.88	-11.89	65.70	22.99	74.00	54.00	
2483.8	V	63.86	-	-11.44	52.42	-	74.00	54.00	
2399.8	H	74.88	37.67	-11.89	62.99	25.78	74.00	54.00	
2485.1	H	62.87	-	-11.43	51.44	-	74.00	54.00	

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission °
- (3) EUT Orthogonal Axes :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand


4. Hopping Channel Carrier Frequency Separated

4.1 Applied Standard / limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)	Hopping Channel Carrier Frequency Separated	$\geq 25\text{KHz}$ or the 20dB bandwidth of the hopping channel	2400-2483.5	PASS

4.2 Test Setup

- (1) EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
(2) Spectrum Setting : RBW= 100KHz, VBW=100KHz,Sweep time = 20 ms.



4.3 Test Result

EUT : Blue Tango Model/Type No. : BSR-50

Temperature : 25 °C Relative Humidity : 60 % Pressure : 1023 hPa

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

Please refer to the attachment C.

Hopping Channel Carrier Frequency Separated	LIMIT (KHz)
1 MHz	≥ 25


5. Number of Hopping Channel

5.1 Applied Standard / limit

FCC Part15 (15.247) , Subpart C		
Section	Test Item	Frequency Range (MHz)
15.247 (a)(1)(ii)	Number of Hopping Channel	2400-2483.5

5.2 Test Setup

- (1) EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- (2) Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.



5.3 Test Result

EUT : Blue Tango Model/Type No. : BSR-50

Temperature : 25 °C Relative Humidity : 60 % Pressure : 1023 hPa

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

Please refer to the attachment D.

Number of Hopping Channel	79
---------------------------	----


6. Average Time of Occupancy

6.1 Applied Standard / limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)(ii)	Average Time of Occupancy	≤ 0.4 sec (a 30 second period)	2400-2483.5	PASS

6.2 Test Setup

- (1) EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- (2) Spectrum Setting : RBW= 1000KHz, VBW=1000KHz, Sweep time = 20 ms.



6.3 Test Result

EUT : Blue Tango Model/Type No. : BSR-50

Temperature : 25 °C Relative Humidity : 60 % Pressure : 1023 hPa

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

Please refer to the attachment E.

The EUT total hops / second (1)	1600 times (Bluetooth Standard)
Total channel (2)	79
each channel hops/second (3)=(1)/(2)	20.25 times
each channel hops in 30 second (4)=30 x(3)	607.5 times
Average time of signal channel occupancy (5)	0.16ms(see plot below)
Average Time of Occupancy (6)=(4) x (5)	0.097 second
LIMIT(second)	≤ 0.4 second


7. Bandwidth

7.1 Applied Standard / limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)(ii)	Bandwidth	$\leq 1\text{MHz}$ (20dB bandwidth)	2400-2483.5	PASS

7.2 Test Setup

- (1) EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- (2) Spectrum Setting : RBW= 30KHz, VBW=30KHz, Sweep time = 20 ms.



7.3 Test Result

EUT : Blue Tango Model/Type No. : BSR-50

Temperature : 25 °C Relative Humidity : 60 % Pressure : 1023 hPa

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

Please refer to the attachment F.

CH	CH Frequency (MHz)	Bandwidth (KHz)	LIMIT (MHz)
1	2402	888	≤ 1
40	2441	888	≤ 1
79	2480	888	≤ 1


8. Peak Output Power

8.1 Applied Standard / limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (b)(1)	Peak Output Power	1 watt or 30dBm (at least 75 hopping channel)	2400-2483.5	PASS

8.2 Test Setup

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- (2) Spectrum Setting : RBW= 3MHz, VBW= 3MHz, Sweep time = 200 ms.



8.3 Test Result

EUT : Blue Tango Model/Type No. : BSR-50

Temperature : 25 °C Relative Humidity : 60 % Pressure : 1023 hPa

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

Please refer to the attachment G.

CH	CH Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
1	2402	2.63	30	1
40	2441	3.07	30	1
79	2480	3.04	30	1


9. Antenna conducted Spurious Emission

9.1 Applied Standard / limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (c)	Antenna conducted Spurious Emission	20dB less than the peak value of fundamental frequency	30-25000	PASS

9.2 Test Setup

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- (2) Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = 100 ms.



9.3 Test Result

EUT : Blue Tango Model/Type No. : BSR-50

Temperature : 25 °C Relative Humidity : 60 % Pressure : 1023 hPa

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

Please refer to the attachment H.

The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2496.598	-29.93	2480.00	6.40
Result			
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band, that contains the highest lever of the desired power.			

10. Maximum Permissible Exposure (MPE)

10.1 Applied Standard / limit

Based upon the new TCB exclusion list published by FCC on July 2002	
Frequency Range(MHz)	Limit (mw)
2402-2480	60/f(GHz) note: f (GHz) is the mid band frequency of transmitter

10.2 Test Result

EUT : Blue Tango Model/Type No. : BSR-50

Temperature : 25 °C Relative Humidity : 60 % Pressure : 1023 hPa

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

Please refer to the attachment I.

802.11b WLAN					
Peak output power (dBm)	Ant Gain (dBi)	EIRP (1)		LIMIT(2) (mw)	Result
		(dBm)	mW		
6.4	2	8.4	9.24	24.5	Note(3)

NOTE:

1. EIRP= Peak output power + Ant Gain
2. LIMIT=60/2.441(GHz)=24.5(mw)
3. This device hasn't to submit the test report of SAR evaluation.

Attachment

Table Contents

- A. EUT Test Photos
- B. Product Labeling
- C. Hopping Channel Carrier Frequency Separated
- D. Number of Hopping Channel
- E. Average Time of Occupancy
- F. Bandwidth
- G. Peak Output Power
- H. Antenna conducted Spurious Emission
- I. Restricted Bands Requirements