
SAR Test Report

Report No.: AGC03397251102FH01

FCC ID : SV8-W7

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION : 4G POC Radio

BRAND NAME : YANTON, Hearclear

MODEL NAME : W7, HC25

APPLICANT : Quanzhou YANTON Electronics Co., Ltd.

DATE OF ISSUE : Dec. 30, 2025

STANDARD(S) : IEEE Std. 1528:2013
FCC 47 CFR Part 2§2.1093
IEEE Std C95.1™-2019

REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd.



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Dec. 30, 2025	Valid	Initial Release

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

Test Report

Applicant Name	Quanzhou YANTON Electronics Co., Ltd.
Applicant Address	YANTON Building, Jinxia Road , Xiamei Town, Nan'an, China
Manufacturer Name	Quanzhou YANTON Electronics Co., Ltd.
Manufacturer Address	YANTON Building, Jinxia Road , Xiamei Town, Nan'an, China
Factory Name	Quanzhou YANTON Electronics Co., Ltd.
Factory Address	YANTON Building, Jinxia Road , Xiamei Town, Nan'an, China
Product Designation	4G POC Radio
Brand Name	YANTON, Hearclear
Model Name	W7
Series Model	HC25
Different Description	All the same except for different model name and brand name.
EUT Voltage	DC 3.7V by battery
Applicable Standard	IEEE Std. 1528:2013 FCC 47 CFR Part 2§2.1093 IEEE Std C95.1™-2019
Date of receipt of test item	Nov. 19, 2025
Test Date	Dec. 09, 2025 to Dec. 12, 2025
Report Template	AGCRT-US-4G/SAR (2021-04-20)

Note: The results of testing in this report apply to the product/system which was tested only.

Prepared By



Bibo Zhang (Project Engineer)

Dec. 30, 2025

Reviewed By



Jack Gui (Reviewer)

Dec. 30, 2025

Approved By



Angela Li (Authorized Officer)

Dec. 30, 2025

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

TABLE OF CONTENTS

1. SUMMARY OF MAXIMUM SAR VALUE	5
2. GENERAL INFORMATION	6
2.1. EUT DESCRIPTION	6
3. SAR MEASUREMENT SYSTEM	7
3.1. THE SATIMO SYSTEM USED FOR PERFORMING COMPLIANCE TESTS CONSISTS OF FOLLOWING ITEMS	7
3.2. COMOSAR E-FIELD PROBE	8
3.3. ROBOT	8
3.4. VIDEO POSITIONING SYSTEM	9
3.5. DEVICE HOLDER	9
3.6. SAM TWIN PHANTOM	10
4. SAR MEASUREMENT PROCEDURE	11
4.1. SPECIFIC ABSORPTION RATE (SAR)	11
4.2. SAR MEASUREMENT PROCEDURE	12
4.3. RF EXPOSURE CONDITIONS	14
5. TISSUE SIMULATING LIQUID	15
5.1. THE COMPOSITION OF THE TISSUE SIMULATING LIQUID	15
5.2. TISSUE DIELECTRIC PARAMETERS FOR HEAD AND BODY PHANTOMS	16
5.3. TISSUE CALIBRATION RESULT	17
6. SAR SYSTEM CHECK PROCEDURE	18
6.1. SAR SYSTEM CHECK PROCEDURES	18
6.2. SAR SYSTEM CHECK	19
7. EUT TEST POSITION	21
7.1. TEST POSITION	21
8. SAR EXPOSURE LIMITS	22
9. TEST FACILITY	23
10. TEST EQUIPMENT LIST	24
11. MEASUREMENT UNCERTAINTY	25
12. CONDUCTED POWER MEASUREMENT	28
13. TEST RESULTS	43
13.1. SAR TEST RESULTS SUMMARY	43
APPENDIX A. SAR SYSTEM CHECK DATA	50
APPENDIX B. SAR MEASUREMENT DATA	58
APPENDIX C. TEST SETUP PHOTOGRAPHS	90
APPENDIX D. CALIBRATION DATA	94

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

1. SUMMARY OF MAXIMUM SAR VALUE

The maximum results of Specific Absorption Rate (SAR) found during testing for EUT are as follows:

Frequency Band	Highest Reported 1g-SAR(W/kg)		SAR Test Result
	Body back with all accessories(with 0mm separation)	Limb with all accessories(with 0mm separation)	
LTE Band 2	1.447	3.166	PASS
LTE Band 4	1.368	3.456	
LTE Band 5	0.202	0.852	
LTE Band 7	1.275	3.533	
LTE Band 66	0.665	3.057	
SAR Test Limit (W/kg)	1.6	4.0	

This device is compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6W/kg/4.0W/kg) specified in IEEE Std. 1528:2013; FCC 47CFR § 2.1093; IEEE/ANSI C95.1:2019 and the following specific FCC Test Procedures:

- KDB 447498 D01 General RF Exposure Guidance v06
- KDB 648474 D04 Handset SAR v01r03
- KDB 865664 D01 SAR Measurement 100MHz to 6GHz v01r04
- KDB 941225 D05 SAR for LTE Devices v02r05

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

2. GENERAL INFORMATION

2.1. EUT Description

General Information	
Product Designation	4G POC Radio
Test Model	W7
Hardware Version	W7-M10C-V4
Software Version	V6.1
Device Category	Portable
RF Exposure Environment	Uncontrolled
Antenna Type	PIFA antenna
LTE	
Support Band	☒ FDD Band 2 ☒ FDD Band 4 ☒ FDD Band 5 ☒ FDD Band 7 ☒ FDD Band 66
TX Frequency Range	Band 2:1850-1910MHz; Band 4:1710-1755MHz; Band 5:824-849MHz; Band 7:2500-2570MHz; Band 66:1710-1780MHz;
RX Frequency Range	Band 2:1930-1990MHz; Band 4:2110-2155MHz; Band 5:869-894MHz; Band 7:2620-2690MHz; Band 66:2110-2200MHz;
Type of modulation	QPSK, 16QAM
Antenna Gain	Band 2: 2.0dBi; Band 4: 2.0dBi; Band 5: 2.0dBi; Band 7: 2.0dBi; Band 66: 2.0dBi;
Max. Average Power	Band 2: 23.11dBm; Band 4: 23.53dBm; Band 5: 23.37dBm; Band 7:23.29dBm; Band 66: 23.61dBm;
Accessories	
Battery	Brand name: N/A Model No. : TB-W708L Voltage and Capacitance: DC 3.7 V & 800mAh
Earphone	Brand name: N/A Model No. : N/A


- Note:1.CMU200 can measure the average power and Peak power at the same time
2.The sample used for testing is end product.
3. The test sample has no any deviation to the test method of standard mentioned in page 1.

Product	Type
	☒ Production unit ☐ Identical Prototype

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

3. SAR MEASUREMENT SYSTEM

3.1. The SATIMO system used for performing compliance tests consists of following items

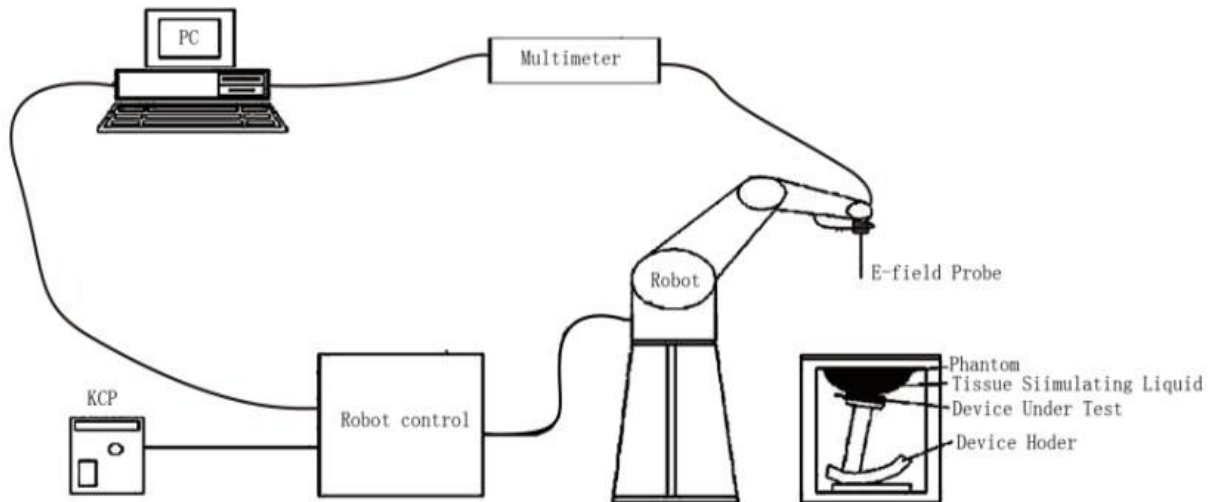

The COMOSAR system for performing compliance tests consists of the following items:

- The PC. It controls most of the bench devices and stores measurement data. A computer running WinXP and the Opensar software.
- The E-Field probe. The probe is a 3-axis system made of 3 distinct dipoles. Each dipole returns a voltage in function of the ambient electric field.
- The Keithley multimeter measures each probe dipole voltages.
- The SAM phantom simulates a human head. The measurement of the electric field is made inside the phantom.
- The liquids simulate the dielectric properties of the human head tissues.
- The network emulator controls the mobile phone under test.
- The validation dipoles are used to measure a reference SAR. They are used to periodically check the bench to make sure that there is no drift of the system characteristics over time.
- The phantom, the device holder and other accessories according to the targeted measurement.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

3.2. COMOSAR E-Field Probe

The SAR measurement is conducted with the dosimetric probe manufactured by SATIMO. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. SATIMO conducts the probe calibration in compliance with international and national standards (e.g. IEEE 1528 and relevant KDB files.) The calibration data are in Appendix D.

Isotropic E-Field Probe Specification

Model	SSE2	
Manufacture	MVG	
Identification No.	2023-EPGO-414	
Frequency	0.15GHz-7.5GHz Linearity:±0.10dB(0.15GHz-7.5GHz)	
Dynamic Range	0.01W/kg-100W/kg Linearity:±0.10dB	
Dimensions	Overall length:330mm Length of individual dipoles:2mm Maximum external diameter:8mm Probe Tip external diameter:2.5mm Distance between dipoles/ probe extremity:1mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precisin of better 30%.	

3.3. Robot

The COMOSAR system uses the KUKA robot from SATIMO SA (France).For the 6-axis controller COMOSAR system, the KUKA robot controller version from SATIMO is used.

The XL robot series have many features that are important for our application:


- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- 6-axis controller



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


3.4. Video Positioning System

The video positioning system is used in OpenSAR to check the probe. Which is composed of a camera, LED, mirror and mechanical parts. The camera is piloted by the main computer with firewire link. During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip. The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.

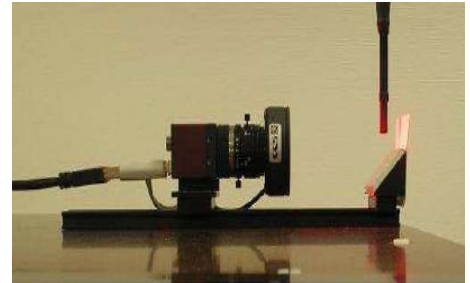

3.5. Device Holder

The COMOSAR device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR). Thus the device needs no repositioning when changing the angles. The COMOSAR device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon_r = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

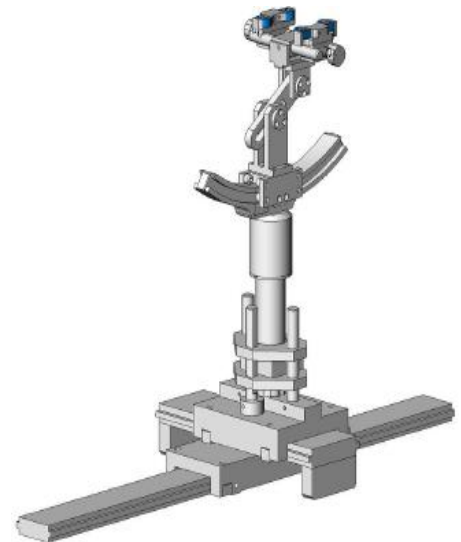

3.6. SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:

- Left head
- Right head
- Flat phantom



The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

ELLI39 Phantom

The Flat phantom is a fiberglass shellphantom with 2mm+/- 0.2 mm shell thickness. It has only one measurement area for Flat phantom



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

4. SAR MEASUREMENT PROCEDURE

4.1. Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and occupational/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element(dv) of given mass density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR can be obtained using either of the following equations:

$$SAR = \frac{\sigma E^2}{\rho}$$

$$SAR = c_h \left. \frac{dT}{dt} \right|_{t=0}$$

Where

SAR	is the specific absorption rate in watts per kilogram;
E	is the r.m.s. value of the electric field strength in the tissue in volts per meter;
σ	is the conductivity of the tissue in siemens per metre;
ρ	is the density of the tissue in kilograms per cubic metre;
c _h	is the heat capacity of the tissue in joules per kilogram and Kelvin;

$\left. \frac{dT}{dt} \right|_{t=0}$ is the initial time derivative of temperature in the tissue in kelvins per second

4.2. SAR Measurement Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurement are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface is 2.7mm This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties,

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in SATIMO software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in db) is specified in the standards for compliance testing. For example, a 2db range is required in IEEE Standard 1528 standards, whereby 3db is a requirement when compliance is assessed in accordance with the ARIB standard (Japan) If one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximum are detected, the number of Zoom Scan has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100MHz to 6GHz

	$\leq 3 \text{ GHz}$	$> 3 \text{ GHz}$
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	$\leq 2 \text{ GHz}: \leq 15 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 12 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 12 \text{ mm}$ $4 - 6 \text{ GHz}: \leq 10 \text{ mm}$
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scan are used to assess the peak spatial SAR value within a cubic average volume containing 1g and 10g of simulated tissue. The Zoom Scan measures points(refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1g and 10g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB865664 d01 SAR Measurement 100MHz to 6GHz

Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power Drift Measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the same settings. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.


4.3. RF Exposure Conditions

Test Configuration and setting:

The EUT is a model of LTE Portable Mobile Station (MS). It supports LTE and not supports hot spot mode.

For WWAN SAR testing, the device was controlled by using a base station emulator. Communication between the device and the emulator were established by air link. The distance between the EUT and the antenna is larger than 50cm, and the output power radiated from the emulator antenna is at least 30db smaller than the output power of EUT.

Antenna Location: (the back view)

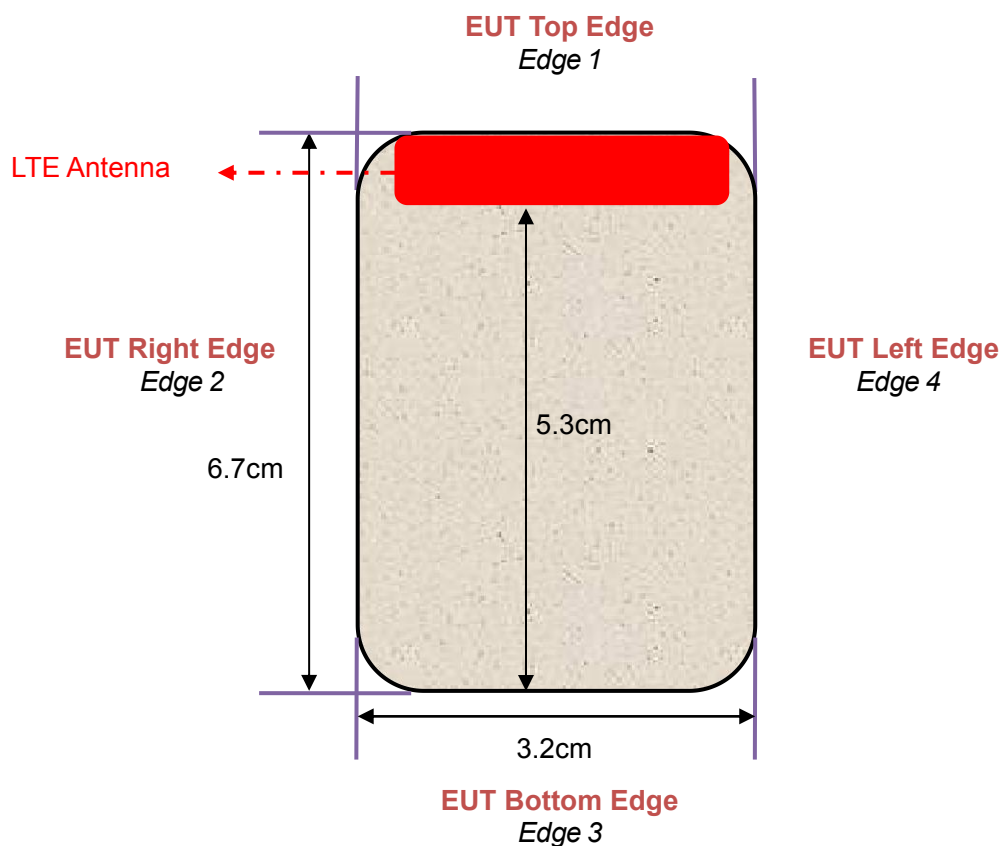

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

5. TISSUE SIMULATING LIQUID

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15cm. For head SAR testing the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15cm For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in 5.2

5.1. The composition of the tissue simulating liquid

Ingredient (% Weight) Frequency (MHz)	Water	Nacl	Polysorbate 20	DGBE	1,2 Propanediol	Triton X-100
835 Head	50.36	1.25	48.39	0.0	0.0	0.0
1750 Head	52.64	0.36	0.0	47	0.0	0.0
1900 Head	54.9	0.18	0.0	44.92	0.0	0.0
2300 Head	62.82	0.51	0.0	36.67	0.0	0.0
2450 Head	71.88	0.16	0.0	7.99	0.0	19.97
2600 Head	55.242	0.306	0	44.452	0	0

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

5.2. Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE 1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in IEEE 1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in IEEE 1528.

Target Frequency (MHz)	head		body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
300	45.3	0.87	45.3	0.87
450	43.5	0.87	43.5	0.87
750	41.9	0.89	41.9	0.89
835	41.5	0.90	41.5	0.90
900	41.5	0.97	41.5	0.97
915	41.5	1.01	41.5	1.01
1450	40.5	1.20	40.5	1.20
1610	40.3	1.29	40.3	1.29
1750	40.1	1.37	40.1	1.37
1800 – 2000	40.0	1.40	40.0	1.40
2300	39.5	1.67	39.5	1.67
2450	39.2	1.80	39.2	1.80
2600	39.0	1.96	39.0	1.96
3000	38.5	2.40	38.5	2.40

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

5.3. Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using SATIMO Dielectric Probe Kit and R&S Network Analyzer ZVL6.

Tissue Stimulant Measurement for 835MHz							
Head	Fr. (MHz)	Dielectric Parameters ($\pm 5\%$)		Ambient Temp [°C]	Relative Humidity (%)	Tissue Temp [°C]	Test time
		ϵ_r 41.5 (39.425-43.575)	δ [s/m] 0.90 (0.855-0.945)				
	835	41.62	0.89	21.4	61.7	21.1	Dec. 12, 2025
	836.5	40.97	0.91				

Tissue Stimulant Measurement for 1750MHz							
Head	Fr. (MHz)	Dielectric Parameters ($\pm 5\%$)		Ambient Temp [°C]	Relative Humidity (%)	Tissue Temp [°C]	Test time
		ϵ_r 40.1 (38.095-42.105)	δ [s/m] 1.37 (1.302-1.439)				
	1720	41.93	1.32	22.8	50.9	22.2	Dec. 09, 2025
	1732.5	41.81	1.33				
	1745	41.69	1.34				
	1750	41.36	1.36				
	1770	39.76	1.38				

Tissue Stimulant Measurement for 1900MHz							
Head	Fr. (MHz)	Dielectric Parameters ($\pm 5\%$)		Ambient Temp [°C]	Relative Humidity (%)	Tissue Temp [°C]	Test time
		ϵ_r 40.00 (38.00-42.00)	δ [s/m] 1.40 (1.33-1.47)				
	1860	40.16	1.38	22.3	50.3	21.8	Dec. 10, 2025
	1880	39.33	1.41				
	1900	39.02	1.43				

Tissue Stimulant Measurement for 2600MHz							
Head	Fr. (MHz)	Dielectric Parameters ($\pm 5\%$)		Ambient Temp [°C]	Relative Humidity (%)	Tissue Temp [°C]	Test time
		ϵ_r 39 (37.05-40.95)	δ [s/m] 1.96(1.86-2.06)				
	2510	39.68	1.88	21.9	54.8	21.3	Dec. 11, 2025
	2535	39.35	1.90				
	2560	39.13	1.92				
	2600	38.99	1.93				

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


6. SAR SYSTEM CHECK PROCEDURE

6.1. SAR System Check Procedures

SAR system check is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are remeasured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

Each SATIMO system is equipped with one or more system check kits. These units, together with the predefined measurement procedures within the SATIMO software, enable the user to conduct the system check and system validation. System kit includes a dipole, and dipole device holder.


The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system check setup is shown as below.

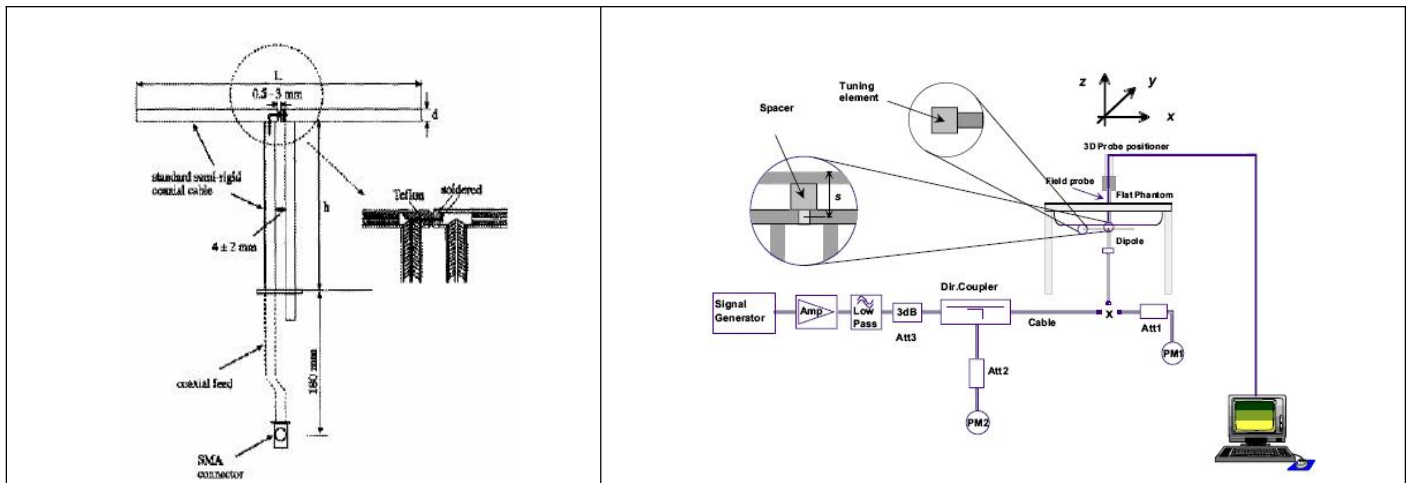

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

6.2. SAR System Check

6.2.1. Dipoles

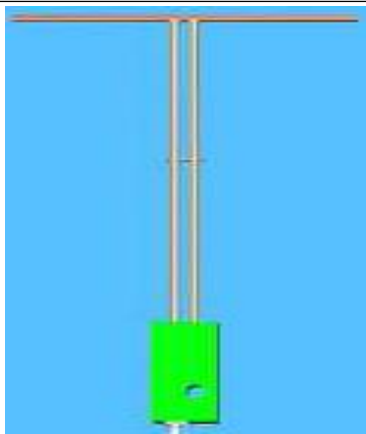	The dipoles used is based on the IEEE-1528 standard, and is complied with mechanical and electrical specifications in line with the requirements of IEEE. the table below provides details for the mechanical and electrical Specifications for the dipoles.
---	---

Frequency	L (mm)	h (mm)	d (mm)
835MHz	161.0	89.8	3.6
1800MHz	71.6	41.7	3.6
1900MHz	68	39.5	3.6
2600MHz	48.5	28.8	3.6

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

6.2.2. System Check Result

System Performance Check at 835MHz &1800MHz &1900MHz &2600MHz for Head							
Validation Kit: SN 1516 DIP 0G835-399& SN 4611 DIP 1G800-186& SN 2915 DIP 1G900-389& SN 2216 DIP 2G600-407							
Frequency [MHz]	Target Value(W/kg)		Reference Result ($\pm 10\%$)		Tested Value(W/kg)		Test time
	1g	10g	1g	10g	1g	10g	
835	9.67	6.29	8.70-10.64	5.66-6.92	9.61	6.14	Dec. 12, 2025
1800	36.11	19.04	32.50-39.72	17.14-20.94	39.31	19.46	Dec. 09, 2025
1900	39.83	20.59	35.85-43.81	18.53-22.65	39.67	20.07	Dec. 10, 2025
2600	55.22	25.01	49.70-60.74	22.51-27.51	53.01	24.24	Dec. 11, 2025

Note:

(1) We use a CW signal of 18dBm for system check, and then all SAR value are normalized to 1W forward power. The result must be within $\pm 10\%$ of target value.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

7. EUT TEST POSITION

This EUT was tested in **Body back with all accessories, Limb front, Edge 1 (Top), Edge 2 (Right), Edge 3 (Bottom) Edge 4 (Left).**

7.1. Test Position

- (1) To position the EUT parallel to the phantom surface.
- (2) To adjust the EUT parallel to the flat phantom.
- (3) To adjust the distance between the EUT surface and the flat phantom to **0mm**.

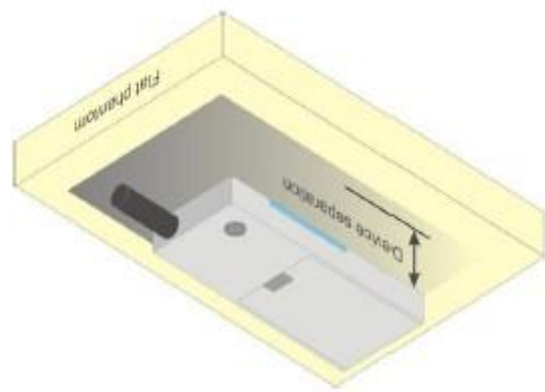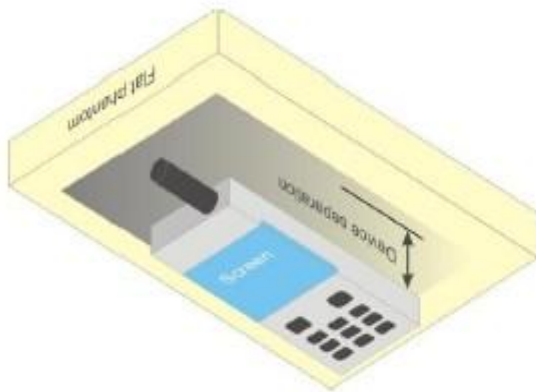

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

8. SAR EXPOSURE LIMITS

Limits for General Population/Uncontrolled Exposure (W/kg)

Type Exposure	Uncontrolled Environment Limit (W/kg)
Spatial Peak SAR (1g cube tissue for brain or body)	1.60
Spatial Average SAR (Whole body)	0.08
Spatial Peak SAR (Limbs)	4.0

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

9. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

10. TEST EQUIPMENT LIST

No.	Equipment description	Manufacturer/ Model	Identification No.	Software version	Current calibration date	Next calibration date
AGC-HE-A103	SAR Probe	MVG	2023-EPGO-414	N/A	2025-05-06	2026-05-05
AGC-HE-E016	Phantom	SATIMO	SN_4511_SAM90	N/A	Validated. No cal required.	Validated. No cal required.
AGC-ER-E020	WIRELESS COMMUNICATION TEST SET	Agilent-8960	GB46200384	N/A	2025-05-21	2026-05-20
AGC-ER-E032	Wireless communication instrument	R&S- CMW500	121209	N/A	2025-05-16	2026-05-15
AGC-HE-E005	Multimeter	Keithley 2000	1350784	N/A	2025-05-16	2026-05-15
AGC-HE-S001	SAR Software	SATIMO-OpenSAR	N/A	OpenSAR V4_02_32	N/A	N/A
AGC-HE-A056	Dipole	SATIMO SID835	SN 1516 DIP 0G835-399	N/A	2025-05-15	2028-05-14
AGC-HE-A016	Dipole	SATIMO SID1800	SN 4611 DIP 1G800-186	N/A	2025-05-12	2028-05-11
AGC-HE-A059	Dipole	SATIMO SID1900	SN 2915 DIP 1G900-389	N/A	2025-05-15	2028-05-14
AGC-HE-A062	Dipole	SATIMO SID2600	SN 2216 DIP 2G600-407	N/A	2025-05-16	2028-05-15
AGC-HE-E021	Signal Generator	Agilent-E4438C	US41461365	V5.03	2025-05-21	2026-05-20
AGC-EM-E061	EXA Signal Analyzer	Agilent / N9010A	MY53470504	N/A	2025-05-08	2026-05-07
AGC-HE-E004	Network Analyzer	Rhode & Schwarz ZVL6	101443	3.2	2025-07-18	2026-07-17
AGC-ER-A001	Attenuator	SMA-JK	N/A	N/A	2025-09-05	2027-09-04
AGC-EM-E019	Amplifier	AS0104-55_55	1004793	N/A	N/A	N/A
AGC-EM-E040	Directional Couple	Werlatone/ C5571-10	SN99463	N/A	2024-02-01	2026-01-31
AGC-EM-E041	Directional Couple	Werlatone/ C6026-10	SN99482	N/A	2024-02-01	2026-01-31
AGC-BQ-E016	Power Sensor	NRP-Z21	104604	N/A	2025-05-16	2026-05-15
AGC-HE-E023	Power Sensor	NRP-Z23	100323	N/A	2025-01-14	2026.01-13
AGC-HE-S004	Power Viewer	R&S	V2.3.1.0	N/A	N/A	N/A
AGC-HE-A001	Calibration standard parts for network sub - port	R&S/ ZV-Z132	100707	V2.3.1.0	2025-10-30	2026-10-29
AGC-HE-A002	Thermometer	DigiMate/TP677	3811930452	N/A	2025-05-24	2027-05-23

Note: Per KDB 865664 Dipole SAR Validation, AGC Lab has adopted 3 years calibration intervals. On annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole;
2. System validation with specific dipole is within 10% of calibrated value;
3. Return-loss is within 20% of calibrated measurement;
4. Impedance is within 5Ω of calibrated measurement.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

11. MEASUREMENT UNCERTAINTY

SATIMO Uncertainty- 2023-EPGO-414 Measurement uncertainty for DUT averaged over 1 gram / 10 gram.									
Uncertainty Component	Sec.	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Measurement System									
Probe calibration	E.2.1	7.000	N	1	1	1	7.000	7.000	∞
Axial Isotropy	E.2.2	0.105	R	1.732	0.707	0.707	0.043	0.043	∞
Hemispherical Isotropy	E.2.2	0.105	R	1.732	0.707	0.707	0.043	0.043	∞
Boundary effect	E.2.3	1.000	R	1.732	1	1	0.577	0.577	∞
Linearity	E.2.4	1.105	R	1.732	1	1	0.638	0.638	∞
System detection limits	E.2.4	1.000	R	1.732	1	1	0.577	0.577	∞
Modulation response	E.2.5	3.000	R	1.732	1	1	1.732	1.732	∞
Readout Electronics	E.2.6	0.021	N	1	1	1	0.021	0.021	∞
Response Time	E.2.7	0.000	R	1.732	1	1	0.000	0.000	∞
Integration Time	E.2.8	1.400	R	1.732	1	1	0.808	0.808	∞
RF ambient conditions-Noise	E.6.1	3.000	R	1.732	1	1	1.732	1.732	∞
RF ambient conditions-reflections	E.6.1	3.000	R	1.732	1	1	1.732	1.732	∞
Probe positioner mechanical tolerance	E.6.2	1.400	R	1.732	1	1	0.808	0.808	∞
Probe positioning with respect to phantom shell	E.6.3	1.400	R	1.732	1	1	0.808	0.808	∞
Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation	E.5	2.300	R	1.732	1	1	1.328	1.328	∞
Test sample Related									
Test sample positioning	E.4.2	2.6	N	1	1	1	2.60	2.60	∞
Device holder uncertainty	E.4.1	3	N	1	1	1	3.00	3.00	∞
Output power variation—SAR drift measurement	E.2.9	5	R	1.732	1	1	2.89	2.89	∞
SAR scaling	E.6.5	5	R	1.732	1	1	2.89	2.89	∞
Phantom and tissue parameters									
Phantom shell uncertainty—shape, thickness, and permittivity	E.3.1	4	R	1.732	1	1	2.309	2.309	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E.3.2	1.9	N	1	1	0.84	1.900	1.596	∞
Liquid conductivity measurement	E.3.3	4	N	1	0.78	0.71	3.120	2.840	M
Liquid permittivity measurement	E.3.3	5	N	1	0.23	0.26	1.150	1.300	M
Liquid conductivity—temperature uncertainty	E.3.4	2.5	R	1.732	0.78	0.71	1.126	1.025	∞
Liquid permittivity—temperature uncertainty	E.3.4	2.5	R	1.732	0.23	0.26	0.332	0.375	∞
Combined Standard Uncertainty			RSS				10.533	10.348	
Expanded Uncertainty (95% Confidence interval)			K=2				21.065	20.695	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

SATIMO Uncertainty- 2023-EPGO-414									
System Validation uncertainty for DUT averaged over 1 gram / 10 gram.									
Uncertainty Component	Sec.	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Measurement System									
Probe calibration	E.2.1	7.000	N	1	1	1	7.000	7.000	∞
Axial Isotropy	E.2.2	0.105	R	1.732	1.000	1.000	0.061	0.061	∞
Hemispherical Isotropy	E.2.2	0.105	R	1.732	0.000	0.000	0.000	0.000	∞
Boundary effect	E.2.3	1.000	R	1.732	1.000	1.000	0.577	0.577	∞
Linearity	E.2.4	1.105	R	1.732	1.000	1.000	0.638	0.638	∞
System detection limits	E.2.4	1.000	R	1.732	1.000	1.000	0.577	0.577	∞
Modulation response	E.2.5	3.000	R	1.732	0.000	0.000	0.000	0.000	∞
Readout Electronics	E.2.6	0.021	N	1.000	1.000	1.000	0.021	0.021	∞
Response Time	E.2.7	0.000	R	1.732	0.000	0.000	0.000	0.000	∞
Integration Time	E.2.8	1.400	R	1.732	0.000	0.000	0.000	0.000	∞
RF ambient conditions-Noise	E.6.1	3.000	R	1.732	1.000	1.000	1.732	1.732	∞
RF ambient conditions-reflections	E.6.1	3.000	R	1.732	1.000	1.000	1.732	1.732	∞
Probe positioner mechanical tolerance	E.6.2	1.400	R	1.732	1.000	1.000	0.808	0.808	∞
Probe positioning with respect to phantom shell	E.6.3	1.400	R	1.732	1.000	1.000	0.808	0.808	∞
Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation	E.5	2.300	R	1.732	1.000	1.000	1.328	1.328	∞
System validation source									
Deviation of experimental dipole from numerical dipole	E.6.4	5	N	1	1	1	5	5	∞
Input power and SAR drift measurement	8,6.6.4	5	R	1.732	1	1	2.887	2.887	∞
Dipole axis to liquid distance	8,E.6.6	2	R	1.732	1	1	1.155	1.155	∞
Phantom and set-up									
Phantom shell uncertainty—shape, thickness, and permittivity	E.3.1	4	R	1.732	1	1	2.309	2.309	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E.3.2	1.9	N	1	1	0.84	1.9	1.596	∞
Liquid conductivity (temperature uncertainty)	E.3.3	4	N	1	0.78	0.71	3.12	2.84	∞
Liquid conductivity (measured)	E.3.3	5	N	1	0.23	0.26	1.15	1.3	M
Liquid permittivity (temperature uncertainty)	E.3.4	2.5	R	1.732	0.78	0.71	1.126	1.025	∞
Liquid permittivity (measured)	E.3.4	2.5	R	1.732	0.23	0.26	0.332	0.375	M
Combined Standard Uncertainty			RSS				10.466	10.279	
Expanded Uncertainty (95% Confidence interval)			K=2				20.931	20.559	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

SATIMO Uncertainty- 2023-EPGO-414									
System Check uncertainty for DUT averaged over 1 gram / 10 gram.									
Uncertainty Component	Sec.	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Measurement System									
Probe calibration drift	E.2.1.3	0.500	N	1	1	1	0.5	0.5	∞
Axial Isotropy	E.2.2	0.105	R	1.732	0	0	0	0	∞
Hemispherical Isotropy	E.2.2	0.105	R	1.732	0	0	0	0	∞
Boundary effect	E.2.3	1.000	R	1.732	0	0	0	0	∞
Linearity	E.2.4	1.105	R	1.732	0	0	0	0	∞
System detection limits	E.2.4	1	R	1.732	0	0	0	0	∞
Modulation response	E.2.5	3	R	1.732	0	0	0	0	∞
Readout Electronics	E.2.6	0.021	N	1	0	0	0	0	∞
Response Time	E.2.7	0	R	1.732	0	0	0	0	∞
Integration Time	E.2.8	1.4	R	1.732	0	0	0	0	∞
RF ambient conditions-Noise	E.6.1	3	R	1.732	0	0	0	0	∞
RF ambient conditions-reflections	E.6.1	3	R	1.732	0	0	0	0	∞
Probe positioner mechanical tolerance	E.6.2	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	E.6.3	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation	E.5	2.3	R	$\sqrt{3}$	0	0	0	0.00	∞
System check source (dipole)									
Deviation of experimental dipoles	E.6.4	2	N	1	1	1	2	2	∞
Input power and SAR drift measurement	8,6.6.4	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Dipole axis to liquid distance	8,E.6.6	2	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and tissue parameters									
Phantom shell uncertainty—shape, thickness, and permittivity	E.3.1	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E.3.2	1.9	N	1.000	1	0.84	1.90	1.60	∞
Liquid conductivity measurement	E.3.3	4	N	1.000	0.78	0.71	3.12	2.84	∞
Liquid permittivity measurement	E.3.3	5	N	1.000	0.23	0.26	1.15	1.30	M
Liquid conductivity—temperature uncertainty	E.3.4	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid permittivity—temperature uncertainty	E.3.4	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	M
Combined Standard Uncertainty			RSS				5.562	5.203	
Expanded Uncertainty (95% Confidence interval)			K=2				11.124	10.406	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

12. CONDUCTED POWER MEASUREMENT

LTE Band

Conducted Power of LTE Band 2(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					18607	18900	19193
1.4MHz	QPSK	1	0	0	22.91	22.88	22.93
			3	0	23.10	23.05	23.04
			5	0	22.90	22.93	22.92
		3	0	0	23.07	23.02	23.08
			2	0	23.09	23.02	23.11
			3	0	23.05	23.07	23.09
		6	0	1	22.04	21.94	21.96
	16QAM	1	0	1	21.87	21.87	21.72
			3	1	22.17	22.22	22.06
			5	1	21.87	21.81	21.71
		3	0	1	21.87	21.95	21.82
			2	1	22.01	22.01	21.93
			3	1	21.89	21.94	21.81
		6	0	2	21.04	20.81	20.93
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					18615	18900	19185
3MHz	QPSK	1	0	0	22.60	22.51	22.47
			7	0	22.51	22.49	22.46
			14	0	22.50	22.49	22.48
		8	0	1	21.56	21.51	21.50
			4	1	21.63	21.54	21.51
			7	1	21.55	21.45	21.48
		15	0	1	21.57	21.50	21.44
	16QAM	1	0	1	21.61	21.47	21.23
			7	1	21.54	21.66	21.48
			14	1	21.54	21.39	21.28
		8	0	2	20.64	20.54	20.52
			4	2	20.64	20.51	20.45
			7	2	20.61	20.50	20.45
		15	0	2	20.64	20.45	20.41

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Conducted Power of LTE Band 2(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					18625	18900	19175
5MHz	QPSK	1	0	0	22.51	22.37	22.43
			13	0	22.96	22.60	22.62
			24	0	22.45	22.34	22.35
		12	0	1	21.49	21.50	21.51
			6	1	21.63	21.52	21.51
			13	1	21.61	21.53	21.42
		25	0	1	21.64	21.57	21.52
	16QAM	1	0	1	21.47	21.57	21.35
			13	1	21.52	21.86	21.64
			24	1	21.45	21.49	21.34
		12	0	2	20.51	20.58	20.55
			6	2	20.66	20.60	20.53
			13	2	20.60	20.58	20.46
		25	0	2	20.67	20.52	20.56
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					18650	18900	19150
10MHz	QPSK	1	0	0	22.54	22.53	22.50
			25	0	22.64	22.59	22.55
			49	0	22.42	22.42	22.41
		25	0	1	21.53	21.59	21.66
			13	1	21.57	21.53	21.50
			25	1	21.62	21.56	21.46
		50	0	1	21.59	21.51	21.55
	16QAM	1	0	1	21.65	21.46	21.28
			25	1	21.65	21.79	21.65
			49	1	21.50	21.39	21.23
		25	0	2	20.53	20.64	20.70
			13	2	20.58	20.58	20.54
			25	2	20.70	20.60	20.54
		50	0	2	20.62	20.67	20.64

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Conducted Power of LTE Band 2(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					18675	18900	19125
15MHz	QPSK	1	0	0	22.49	22.40	22.39
			38	0	22.44	22.56	22.40
			74	0	22.30	22.20	22.27
		36	0	1	21.50	21.49	21.52
			18	1	21.52	21.51	21.52
			39	1	21.52	21.52	21.51
		75	0	1	21.48	21.53	21.50
	16QAM	1	0	1	21.57	21.61	21.18
			38	1	21.48	21.58	21.48
			74	1	21.32	21.45	21.08
		36	0	2	21.47	21.53	21.48
			18	2	20.51	20.53	20.48
			39	2	21.51	21.52	21.52
		75	0	2	20.45	20.54	20.52
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					18700	18900	19100
20MHz	QPSK	1	0	0	22.32	22.30	22.16
			50	0	22.52	22.60	22.56
			99	0	22.12	22.09	22.03
		50	0	1	21.37	21.54	21.54
			25	1	21.54	21.55	21.48
			50	1	21.43	21.50	21.25
		100	0	1	21.40	21.51	21.37
	16QAM	1	0	1	21.34	21.51	21.08
			50	1	21.61	21.80	21.52
			99	1	21.13	21.28	20.99
		50	0	2	20.42	20.63	20.66
			25	2	20.55	20.59	20.51
			50	2	20.43	20.56	20.38
		100	0	2	20.46	20.61	20.43

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Conducted Power of LTE Band 4(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					19957	20175	20393
1.4MHz	QPSK	1	0	0	22.95	22.54	22.49
			3	0	23.11	22.67	22.69
			5	0	22.47	22.49	22.52
		3	0	0	22.66	22.59	22.64
			2	0	22.67	22.62	22.60
			3	0	22.61	22.65	22.67
		6	0	1	21.58	21.55	21.53
	16QAM	1	0	1	21.98	21.43	21.30
			3	1	21.77	21.85	21.71
			5	1	21.47	21.40	21.29
		3	0	1	21.50	21.54	21.44
			2	1	21.61	21.61	21.58
			3	1	21.47	21.49	21.45
		6	0	2	20.65	20.42	20.52
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					19965	20175	20385
3MHz	QPSK	1	0	0	22.60	22.55	22.54
			7	0	22.53	22.56	22.51
			14	0	22.52	22.50	22.54
		8	0	1	21.56	21.51	21.52
			4	1	21.59	21.55	21.63
			7	1	21.62	21.48	21.53
		15	0	1	21.56	21.54	21.54
	16QAM	1	0	1	21.64	21.45	21.34
			7	1	21.60	21.73	21.57
			14	1	21.60	21.43	21.37
		8	0	2	20.62	20.49	20.54
			4	2	20.63	20.53	20.51
			7	2	20.64	20.54	20.57
		15	0	2	20.64	20.50	20.50

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Conducted Power of LTE Band 4(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					19975	20175	20375
5MHz	QPSK	1	0	0	22.52	22.41	22.44
			13	0	22.71	22.69	22.78
			24	0	22.47	22.35	22.44
		12	0	1	21.59	21.55	21.60
			6	1	21.68	21.62	21.58
			13	1	21.61	21.56	21.54
		25	0	1	21.61	21.58	21.61
	16QAM	1	0	1	21.54	21.58	21.44
			13	1	21.79	21.88	21.79
			24	1	21.50	21.50	21.40
		12	0	2	20.57	20.61	20.57
			6	2	20.68	20.68	20.59
			13	2	20.56	20.59	20.59
		25	0	2	20.65	20.56	20.69
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20000	20175	20350
10MHz	QPSK	1	0	0	23.18	23.08	23.20
			25	0	23.10	23.36	23.21
			49	0	23.13	23.25	23.23
		25	0	1	22.13	22.21	22.24
			13	1	22.07	22.25	22.35
			25	1	22.17	22.33	22.35
		50	0	1	22.13	22.18	22.41
	16QAM	1	0	1	22.16	22.03	22.79
			25	1	22.64	22.63	22.91
			49	1	22.08	22.02	22.71
		25	0	2	21.13	21.34	21.29
			13	2	21.05	21.38	21.45
			25	2	21.10	21.40	21.36
		50	0	2	21.16	21.34	21.49

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Conducted Power of LTE Band 4(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20025	20175	20325
15MHz	QPSK	1	0	0	23.16	22.85	23.26
			38	0	23.06	23.31	23.10
			74	0	23.04	22.81	23.22
		36	0	1	22.10	22.15	22.25
			18	1	22.21	22.11	22.08
			39	1	22.08	22.18	22.10
		75	0	1	22.07	22.17	22.19
	16QAM	1	0	1	22.14	21.89	22.87
			38	1	22.69	22.88	22.62
			74	1	21.99	21.91	22.69
		36	0	2	22.08	22.16	22.26
			18	2	21.06	21.27	21.33
			39	2	22.08	22.17	22.09
		75	0	2	21.10	21.30	21.27
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20050	20175	20300
20MHz	QPSK	1	0	0	23.27	23.12	23.53
			50	0	23.03	23.08	23.16
			99	0	23.10	23.19	23.41
		50	0	1	22.15	22.18	22.50
			25	1	22.10	22.12	22.27
			50	1	22.00	22.17	22.39
		100	0	1	22.06	22.16	22.23
	16QAM	1	0	1	22.45	21.82	21.75
			50	1	22.40	21.86	21.27
			99	1	22.34	21.92	21.70
		50	0	2	21.16	21.54	21.54
			25	2	21.47	21.33	21.32
			50	2	21.12	21.28	21.32
		100	0	2	21.56	21.25	21.24

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Conducted Power of LTE Band 5(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20407	20525	20643
1.4MHz	QPSK	1	0	0	22.92	22.83	22.70
			3	0	23.16	23.07	23.10
			5	0	22.94	22.81	22.81
		3	0	0	23.08	22.89	22.83
			2	0	22.92	22.97	22.85
			3	0	22.85	23.00	22.83
		6	0	1	21.99	21.96	21.89
	16QAM	1	0	1	21.38	22.03	21.30
			3	1	22.08	22.64	22.05
			5	1	21.17	22.06	21.26
		3	0	1	21.57	21.45	21.30
			2	1	21.64	21.81	21.48
			3	1	21.60	21.39	21.42
		6	0	2	20.86	21.04	20.91
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20415	20525	20635
3MHz	QPSK	1	0	0	22.98	22.86	22.76
			7	0	23.05	23.02	23.07
			14	0	22.82	22.87	22.80
		8	0	1	22.03	22.00	21.78
			4	1	21.93	21.84	21.67
			7	1	21.96	21.92	21.87
		15	0	1	21.90	21.87	21.67
	16QAM	1	0	1	21.48	21.55	21.45
			7	1	22.48	22.53	22.05
			14	1	21.49	21.44	21.18
		8	0	2	21.08	21.53	21.04
			4	2	20.95	20.93	20.97
			7	2	21.03	21.07	20.90
		15	0	2	20.96	20.95	20.66

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Conducted Power of LTE Band 5(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20425	20525	20625
5MHz	QPSK	1	0	0	22.91	22.96	22.91
			13	0	22.89	22.90	22.78
			24	0	23.37	22.96	22.89
		12	0	1	21.98	21.89	21.75
			6	1	21.82	21.95	21.81
			13	1	21.95	22.01	21.73
		25	0	1	21.95	21.96	21.76
	16QAM	1	0	1	21.25	21.34	21.94
			13	1	21.57	21.51	22.15
			24	1	21.63	21.76	21.93
		12	0	2	20.90	21.25	20.93
			6	2	20.94	20.94	20.95
			13	2	20.85	20.86	20.99
		25	0	2	21.06	21.01	21.02
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20450	20525	20600
10MHz	QPSK	1	0	0	22.92	22.88	22.99
			25	0	23.30	23.16	22.68
			49	0	22.99	22.69	22.80
		25	0	1	21.89	21.94	21.94
			13	1	22.40	21.85	21.79
			25	1	21.96	22.20	21.67
		50	0	1	22.32	21.87	21.77
	16QAM	1	0	1	21.97	21.69	22.90
			25	1	22.82	22.39	22.49
			49	1	21.90	21.57	22.31
		25	0	2	20.97	21.46	20.85
			13	2	21.23	20.99	20.78
			25	2	20.96	21.44	20.91
		50	0	2	21.33	21.02	20.85

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Conducted Power of LTE Band 7 (dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20775	21100	21425
5MHz	QPSK	1	0	0	22.83	23.19	23.11
			12	0	22.75	23.08	22.86
			24	0	22.82	23.14	23.04
		12	0	1	21.77	22.08	21.88
			6	1	21.83	22.07	21.84
			13	1	21.79	22.08	21.84
		25	0	1	21.85	22.14	21.91
	16QAM	1	0	1	21.80	21.95	21.85
			12	1	21.93	22.17	21.82
			24	1	21.88	22.00	21.92
		12	0	2	20.86	21.11	20.91
			6	2	20.90	21.08	20.88
			13	2	20.88	21.07	20.82
		25	0	2	20.80	21.15	20.91
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20800	21100	21400
10MHz	QPSK	1	0	0	22.86	23.09	22.92
			24	0	22.84	23.14	22.87
			49	0	22.92	23.11	22.84
		25	0	1	21.86	22.14	21.93
			12	1	21.85	22.08	21.87
			25	1	21.89	22.12	21.88
		50	0	1	21.88	22.10	21.93
	16QAM	1	0	1	21.97	22.03	21.76
			24	1	21.71	22.26	21.94
			49	1	21.94	22.03	21.65
		25	0	2	20.82	21.13	20.95
			12	2	20.85	21.09	20.89
			25	2	20.87	21.14	20.91
		50	0	2	20.87	21.08	20.92

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Conducted Power of LTE Band 7 (dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20825	21100	21375
15MHz	QPSK	1	0	0	22.96	23.01	23.08
			37	0	22.91	23.24	23.01
			74	0	22.84	22.95	22.84
		37	0	1	21.91	22.13	21.98
			16	1	21.88	22.11	21.94
			35	1	21.93	22.13	21.96
		75	0	1	21.91	22.14	21.97
	16QAM	1	0	1	21.88	22.14	21.83
			37	1	21.84	22.16	22.10
			74	1	21.84	22.10	21.64
		37	0	2	21.93	22.13	21.97
			16	2	20.92	21.15	20.98
			35	2	21.92	22.11	21.97
		75	0	2	20.90	21.17	21.00
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20850	21100	21350
20MHz	QPSK	1	0	0	22.90	23.01	23.01
			49	0	22.86	23.29	23.13
			99	0	22.90	23.10	22.75
		50	0	1	21.96	22.18	22.11
			25	1	21.97	22.20	22.04
			49	1	21.94	22.17	21.98
		100	0	1	21.94	22.19	22.02
	16QAM	1	0	1	21.78	22.28	22.05
			49	1	21.99	22.43	21.94
			99	1	21.77	22.37	21.75
		50	0	2	20.94	21.21	21.16
			25	2	20.92	21.23	21.05
			49	2	20.91	21.18	21.02
		100	0	2	20.94	21.17	21.03

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Conducted Power of LTE Band 66(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					131979	132322	132665
1.4MHz	QPSK	1	0	0	23.00	23.33	23.40
			2	0	23.25	23.36	23.30
			5	0	22.98	23.27	23.42
		3	0	0	23.06	23.28	23.53
			1	0	23.13	23.28	23.37
			3	0	23.09	23.30	23.43
		6	0	1	22.03	22.22	22.39
	16QAM	1	0	1	22.52	21.86	22.20
			2	1	22.80	22.11	22.14
			5	1	22.48	21.91	22.23
		3	0	1	21.83	22.02	22.36
			1	1	22.09	22.08	22.13
			3	1	21.61	21.94	22.09
		6	0	2	21.33	21.31	21.51
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					131987	132322	132657
3MHz	QPSK	1	0	0	23.08	23.38	23.41
			8	0	23.29	23.42	23.33
			14	0	23.20	23.41	23.49
		8	0	1	22.27	22.31	22.52
			4	1	22.15	22.29	22.33
			7	1	22.15	22.15	22.38
		15	0	1	22.11	22.23	22.35
	16QAM	1	0	1	21.92	21.90	22.28
			8	1	22.66	22.21	22.14
			14	1	21.85	21.91	22.15
		8	0	2	21.38	21.49	21.58
			4	2	21.12	21.46	21.31
			7	2	21.31	21.42	21.26
		15	0	2	21.22	21.21	21.30

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Conducted Power of LTE Band 66(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					131997	132322	132647
5MHz	QPSK	1	0	0	23.15	23.23	23.35
			12	0	23.13	23.19	23.24
			24	0	23.18	23.22	23.34
		12	0	1	22.17	22.26	22.36
			6	1	22.15	22.28	22.45
			13	1	22.10	22.30	22.38
		25	0	1	22.15	22.23	22.39
	16QAM	1	0	1	21.54	22.36	22.40
			12	1	21.89	22.65	22.74
			24	1	21.57	22.40	22.46
		12	0	2	21.19	21.39	21.68
			6	2	21.12	21.36	21.65
			13	2	21.20	21.46	21.42
		25	0	2	21.19	21.36	21.70
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					132022	132322	132622
10MHz	QPSK	1	0	0	23.09	23.47	23.25
			24	0	23.16	23.56	23.61
			49	0	23.10	23.46	23.36
		25	0	1	22.07	22.35	22.40
			12	1	22.17	22.33	22.38
			25	1	22.30	22.37	22.44
		50	0	1	22.04	22.19	22.28
	16QAM	1	0	1	22.17	22.10	22.21
			24	1	22.68	23.29	22.84
			49	1	22.01	22.06	22.18
		25	0	2	21.18	21.45	21.50
			12	2	21.26	21.38	21.44
			25	2	21.17	21.43	21.67
		50	0	2	21.37	21.30	21.30

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Conducted Power of LTE Band 66(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					132047	132322	132597
15MHz	QPSK	1	0	0	23.17	23.16	23.41
			38	0	23.20	23.43	23.17
			74	0	23.06	23.00	23.40
		38	0	1	22.27	22.34	22.39
			18	1	22.16	22.34	22.41
			37	1	22.26	22.20	22.28
		75	0	1	22.14	22.14	22.38
	16QAM	1	0	1	22.17	22.39	22.96
			38	1	22.77	22.99	22.97
			74	1	22.00	22.23	22.81
		38	0	2	22.29	22.35	22.38
			18	2	21.15	21.33	21.45
			37	2	22.26	22.14	22.38
		75	0	2	21.10	21.26	21.41
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					132072	132322	132572
20MHz	QPSK	1	0	0	23.39	23.54	23.34
			49	0	23.18	23.40	23.26
			99	0	23.30	23.47	23.33
		50	0	1	22.14	22.41	22.26
			25	1	22.10	22.39	22.40
			50	1	22.15	22.30	22.19
		100	0	1	22.14	22.35	22.33
	16QAM	1	0	1	22.02	22.68	22.05
			49	1	21.45	22.64	22.20
			99	1	21.96	22.70	22.08
		50	0	2	21.49	21.38	21.47
			25	2	21.17	21.48	21.42
			50	2	21.57	21.41	21.37
		100	0	2	21.29	21.45	21.39

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3.3-1 of the 3GPP TS36.101.

Table 6.2.3.3-1 Maximum Power Reduction (MPR) for Power class3

Modulation	Maximum Power Reduction (MPR) for Power[RB]						MPR(dB)
	1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.3-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".3

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

Table 6.2.4.3-1: Additional Maximum Power Reduction (A-MPR) / Spectrum Emission requirements

Network Signaling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.2-1	1.4,3,5,10,15,20	Table 5.4.2-1	N/A
NS_03	6.6.2.2.3.1	2,4,10, 23, 25,35,36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.3.2	41	5	>6	≤ 1
			10, 15, 20	Table 6.2.4.3-4	
NS_05	6.6.3.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.4.2-1	N/A
NS_07	6.6.2.2.3.3 6.6.3.3.3.2	13	10	Table 6.2.4.3-2	Table 6.2.4.3-2
NS_08	6.6.3.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4.3-3	Table 6.2.4.3-3
NS_11	6.6.2.2.1 6.6.3.3.13	231	1.4, 3, 5, 10,15,20	Table 6.2.4.3-5	Table 6.2.4.3-5
NS_12	6.6.3.3.5	26	1.4, 3, 5	Table 6.2.4.3-6	Table 6.2.4.3-6
NS_13	6.6.3.3.6	26	5	Table 6.2.4.3-7	Table 6.2.4.3-7
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4.3-8	Table 6.2.4.3-8
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4.3-9 Table 6.2.4.3-10	Table 6.2.4.3-9, Table 6.2.4.3-10
NS_16	6.6.3.3.9	27	3, 5, 10	Table 6.2.4.3-11, Table 6.2.4.3-12, Table 6.2.4.3-13	
NS_17	6.6.3.3.10	28	5, 10	Table 5.4.2-1	N/A
	6.6.3.3.11	28	5	≥ 2	≤ 1
NS_18			10, 15, 20	≥ 1	≤ 4
NS_19			10, 15, 20	Table 6.2.4.3-15	Table 6.2.4.3-15
NS_20			5, 10, 15, 20	Table 6.2.4.3-14	Table 6.2.4.3-14
...					
NS_20	-	-	-	-	-

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

13. TEST RESULTS

13.1. SAR Test Results Summary

13.1.1. Test position and configuration

Body and Limb SAR was performed with the device configured with all accessories close to the Flat Phantom.

13.1.2. Operation Mode

1. Per KDB 447498 D01 v06 ,for each exposure position, if the highest 1-g SAR is ≤ 0.8 W/kg, testing for low and high channel is optional.
2. Per KDB 865664 D01 v01r04,for each frequency band, if the measured SAR is ≥ 0.8 W/kg, testing for repeated SAR measurement is required , that the highest measured SAR is only to be tested. When the SAR results are near the limit, the following procedures are required for each device to verify these types of SAR measurement related variation concerns by repeating the highest measured SAR configuration in each frequency band.
 - (1) When the original highest measured SAR is ≥ 0.8 W/kg, repeat that measurement once.
 - (2) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is >1.20 or when the original or repeated measurement is ≥ 1.45 W/kg.
 - (3) Perform a third repeated measurement only if the original, first and second repeated measurement is ≥ 1.5 W/kg and ratio of largest to smallest SAR for the original, first and second measurement is ≥ 1.20 .
3. Maximum Scaling SAR in order to calculate the Maximum SAR values to test under the standard Peak Power, Calculation method is as follows:
Maximum Scaling SAR =tested SAR (Max.) $\times$ [maximum turn-up power (mW)/ maximum measurement output power(mW)]
4. Proximity sensor, just for avoiding the wrong operation in the phone screen when call, and has no influence on output power or SAR result
5. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1RB allocation using the RB offset and required test channel combination with highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
6. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
7. Per KDB 941225 D05v02r05. For QPSK with 100% RB allocation. SAR is not required when the highest maximum output power for 100% RB allocation is less than the highest maximum output power in 50% and 1RB allocation and the highest reported SAR is >1.45 W/kg, the remaining required test channels must also be tested.
8. Per KDB 941225 D05v02r05. 16QAM output power for each RB allocation configuration is not 1/2 dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg, Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
9. Per KDB 941225 D05v02r05. Smaller bandwidth output power for each RB allocation configuration is >not 1/2 dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg. Per KDB 941125 D05v02r05, smaller bandwidth SAR testing is not required.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

13.1.3. Test Result

SAR MEASUREMENT													
Depth of Liquid (cm):>15													
Product: 4G POC Radio													
Test Mode: LTE Band 2													
BM MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tune up Power (dBm)	Meas. Output Power (dBm)	Tune-up Scaling factor	Scaled SAR (W/kg)	Limit (W/kg)
			UL RB Allocation	UL RB START									
20	QPSK	Body back with all accessories	1	0	18700	1860	-0.71	1.281	22.70	22.32	1.091	1.398	1.6
		Body back with all accessories	1	0	18900	1880	-0.89	1.320	22.70	22.30	1.096	1.447	1.6
		Body back with all accessories	1	0	19100	1900	0.17	1.164	22.70	22.16	1.132	1.318	1.6
BM MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	10-g extremity SAR (W/kg)	Max. Tune up Power (dBm)	Meas. Output Power (dBm)	Tune-up Scaling factor	Scaled SAR (W/kg)	Limit (W/kg)
			UL RB Allocation	UL RB START									
20	QPSK	Limb Front with all accessories	1	0	18700	1860	-0.62	2.793	22.70	22.32	1.091	3.048	4.0
		Limb Front with all accessories	1	0	18900	1880	-0.63	2.791	22.70	22.30	1.096	3.060	4.0
		Limb Front with all accessories	1	0	19100	1900	0.86	2.796	22.70	22.16	1.132	3.166	4.0
		Limb Edge 1 (Top) with all accessories	1	0	18900	1880	-0.11	0.167	22.70	22.30	1.096	0.183	4.0
		Limb Edge 2 (Right) with all accessories	1	0	18900	1880	0.39	0.220	22.70	22.30	1.096	0.241	4.0
		Limb Edge 3 (Bottom) with all accessories	1	0	18900	1880	-0.21	0.263	22.70	22.30	1.096	0.288	4.0
		Limb Edge 4 (Left) with all accessories	1	0	18700	1860	0.88	1.794	22.70	22.32	1.091	1.958	4.0
		Limb Edge 4 (Left) with all accessories	1	0	18900	1880	-0.28	1.914	22.70	22.30	1.096	2.099	4.0
		Limb Edge 4 (Left) with all accessories	1	0	19100	1900	0.06	2.130	22.70	22.16	1.132	2.412	4.0

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

SAR MEASUREMENT													
Depth of Liquid (cm):>15													
Product: 4G POC Radio													
Test Mode: LTE Band 4													
BM MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tuneup Power (dBm)	Meas. Output Power (dBm)	Tune-up Scaling factor	Scaled SAR (W/kg)	Limit (W/kg)
			UL RB Allocation	UL RB START									
20	QPSK	Body back with all accessories	1	0	20050	1720	-0.31	1.202	23.60	23.27	1.079	1.297	1.6
		Body back with all accessories	1	0	20175	1732.5	-0.16	1.225	23.60	23.12	1.117	1.368	1.6
		Body back with all accessories	1	0	20300	1745	0.25	1.211	23.60	23.53	1.016	1.231	1.6
BM MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	10-g extremity SAR (W/kg)	Max. Tuneup Power (dBm)	Meas. Output Power (dBm)	Tune-up Scaling factor	Scaled SAR (W/kg)	Limit (W/kg)
			UL RB Allocation	UL RB START									
20	QPSK	Limb Front with all accessories	1	0	20050	1720	-0.51	2.859	23.60	23.27	1.079	3.085	4.0
		Limb Front with all accessories	1	0	20175	1732.5	-0.68	3.010	23.60	23.12	1.117	3.362	4.0
		Limb Front with all accessories	1	0	20300	1745	0.83	3.034	23.60	23.53	1.016	3.083	4.0
		Limb Edge 1 (Top) with all accessories	1	0	20175	1732.5	-0.85	1.477	23.60	23.12	1.117	1.650	4.0
		Limb Edge 2 (Right) with all accessories	1	0	20175	1732.5	-0.09	0.148	23.60	23.12	1.117	0.165	4.0
		Limb Edge 3 (Bottom) with all accessories	1	0	20175	1732.5	0.36	0.184	23.60	23.12	1.117	0.206	4.0
		Limb Edge 4 (Left) with all accessories	1	0	20050	1720	-0.26	2.886	23.60	23.27	1.079	3.114	4.0
		Limb Edge 4 (Left) with all accessories	1	0	20175	1732.5	0.86	3.094	23.60	23.12	1.117	3.456	4.0
		Limb Edge 4 (Left) with all accessories	1	0	20300	1745	0.12	2.938	23.60	23.53	1.016	2.986	4.0

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

SAR MEASUREMENT													
Depth of Liquid (cm):>15													
Product: 4G POC Radio													
Test Mode: LTE Band 5													
BM MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tuneup Power (dBm)	Meas. Output Power (dBm)	Tune-up Scaling factor	Scaled SAR (W/kg)	Limit (W/kg)
			UL RB Allocation	UL RB START									
10	QPSK	Body back with all accessories	1	0	20525	836.5	0.13	0.179	23.40	22.88	1.127	0.202	1.6
BM MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	10-g extremity SAR (W/kg)	Max. Tuneup Power (dBm)	Meas. Output Power (dBm)	Tune-up Scaling factor	Scaled SAR (W/kg)	Limit (W/kg)
			UL RB Allocation	UL RB START									
10	QPSK	Limb Front with all accessories	1	0	20525	836.5	-0.65	0.756	23.40	22.88	1.127	0.852	4.0
		Limb Edge 1 (Top) with all accessories	1	0	20525	836.5	-0.80	0.498	23.40	22.88	1.127	0.561	4.0
		Limb Edge 2 (Right) with all accessories	1	0	20525	836.5	0.16	0.030	23.40	22.88	1.127	0.034	4.0
		Limb Edge 3 (Bottom) with all accessories	1	0	20525	836.5	-0.35	0.437	23.40	22.88	1.127	0.493	4.0
		Limb Edge 4 (Left) with all accessories	1	0	20525	836.5	-0.42	0.207	23.40	22.88	1.127	0.233	4.0

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

SAR MEASUREMENT													
Depth of Liquid (cm):>15													
Product: 4G POC Radio													
Test Mode: LTE Band 7													
BM MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tuneup Power (dBm)	Meas. Output Power (dBm)	Tune-up Scaling factor	Scaled SAR (W/kg)	Limit (W/kg)
			UL RB Allocation	UL RB START									
20	QPSK	Body back with all accessories	1	0	20850	2510	-0.43	1.163	23.30	22.90	1.096	1.275	1.6
		Body back with all accessories	1	0	21100	2535	0.81	1.182	23.30	23.01	1.069	1.264	1.6
		Body back with all accessories	1	0	21350	2560	-0.83	1.182	23.30	23.01	1.069	1.264	1.6
BM MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	10-g extremity SAR (W/kg)	Max. Tuneup Power (dBm)	Meas. Output Power (dBm)	Tune-up Scaling factor	Scaled SAR (W/kg)	Limit (W/kg)
			UL RB Allocation	UL RB START									
20	QPSK	Limb Front with all accessories	1	0	21100	2535	-0.70	1.625	23.30	23.01	1.069	1.737	4.0
		Limb Edge 1 (Top) with all accessories	1	0	20850	2510	0.68	3.222	23.30	22.90	1.096	3.533	4.0
		Limb Edge 1 (Top) with all accessories	1	0	21100	2535	-0.46	3.138	23.30	23.01	1.069	3.355	4.0
		Limb Edge 1 (Top) with all accessories	1	0	21350	2560	0.75	3.224	23.30	23.01	1.069	3.447	4.0
		Limb Edge 2 (Right) with all accessories	1	0	21100	2535	-0.93	0.552	23.30	23.01	1.069	0.590	4.0
		Limb Edge 3 (Bottom) with all accessories	1	0	21100	2535	-1.10	0.034	23.30	23.01	1.069	0.036	4.0
		Limb Edge 4 (Left) with all accessories	1	0	21100	2535	0.04	0.818	23.30	23.01	1.069	0.874	4.0

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

SAR MEASUREMENT													
Depth of Liquid (cm):>15													
Product: LTE smartphone													
Test Mode: LTE Band 66													
BW MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tuneup Power (dBm)	Meas. Output Power (dBm)	Tune-up Scaling factor	Scaled SAR (W/Kg)	Limit (W/kg)
			UL RB Allocation	UL RB START									
20	QPSK	Body back with all accessories	1	0	132322	1745	0.33	0.641	23.70	23.54	1.038	0.665	1.6
BW MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	10-g extremity SAR (W/kg)	Max. Tuneup Power (dBm)	Meas. Output Power (dBm)	Tune-up Scaling factor	Scaled SAR (W/Kg)	Limit (W/kg)
			UL RB Allocation	UL RB START									
20	QPSK	Limb Front with all accessories	1	0	132072	1720	-0.65	2.564	23.70	23.39	1.074	2.754	4.0
		Limb Front with all accessories	1	0	132322	1745	-0.62	2.946	23.70	23.54	1.038	3.057	4.0
		Limb Front with all accessories	1	0	132572	1770	0.65	2.589	23.70	23.34	1.086	2.813	4.0
		Limb Edge 1 (Top) with all accessories	1	0	132322	1745	-0.43	0.395	23.70	23.54	1.038	0.410	4.0
		Limb Edge 2 (Right) with all accessories	1	0	132322	1745	0.81	0.158	23.70	23.54	1.038	0.164	4.0
		Limb Edge 3 (Bottom) with all accessories	1	0	132322	1745	-0.83	0.149	23.70	23.54	1.038	0.155	4.0
		Limb Edge 4 (Left) with all accessories	1	0	132322	1745	1.11	1.111	23.70	23.54	1.038	1.153	4.0

Note:

·The test separation for body back, body front and 4 Edges is 0mm of all above table

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

Repeated SAR											
Product: 4G POC Radio											
Test Mode: LTE Band 2& LTE Band 4& LTE Band 7& LTE Band 66											
Position	Mode		Ch.	Fr. (MHz)	Power Drift (<±5%)	Once 10-g extremity SAR (W/kg)	Power Drift (<±5%)	Twice 10-g extremity SAR (W/kg)	Power Drift (<±5%)	Third 10-g extremity SAR (W/kg)	Limit W/kg
	UL RB Allocation	UL RB START									
Limb Front with all accessories	1	0	19100	1900	-0.16	2.734	--	--	--	--	4.0
Limb Edge 4 (Left) with all accessories	1	0	20175	1732.5	0.32	3.031	--	--	--	--	4.0
Limb Edge 1 (Top) with all accessories	1	0	21350	2560	-0.06	3.184	--	--	--	--	4.0
Limb Front with all accessories	1	0	132322	1745	-0.39	2.619	--	--	--	--	4.0

The second repeated SAR judge reference									
Product: 4G POC Radio									
Band	Position	Mode		Ch.	Fr. (MHz)	Original 10-g extremity SAR (W/kg)	First 10-g extremity SAR (W/kg)	Ratio	Limit
		UL RB Allocation	UL RB START						
LTE Band 2	Limb Front with all accessories	1	0	19100	1900	2.796	2.734	1.023	<1.2
LTE Band 4	Limb Edge 4 (Left) with all accessories	1	0	20175	1732.5	3.094	3.031	1.021	<1.2
LTE Band 7	Limb Edge 1 (Top) with all accessories	1	0	21350	2560	3.224	3.184	1.013	<1.2
LTE Band 66	Limb Front with all accessories	1	0	132322	1745	2.946	2.619	1.125	<1.2

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

APPENDIX A. SAR SYSTEM CHECK DATA

Test Laboratory: AGC Lab

Date: Dec. 12, 2025

System Check Head 835 MHz

DUT: Dipole 835 MHz Type: SID 835


Communication System CW; Communication System Band: D835 (835.0 MHz); Duty Cycle: 1:1; Conv.F=2.23
Frequency: 835 MHz; Medium parameters used: $f = 835$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 41.62$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section; Input Power=18dBm

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2025-05-06; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V5.3.15.8

Configuration/System Check 835MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/System Check 835MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

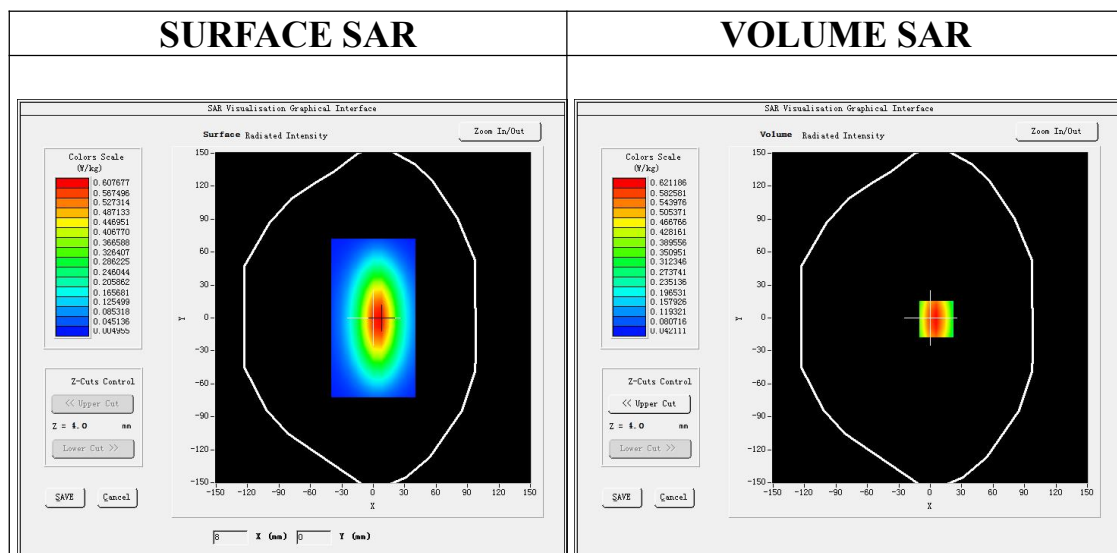

Maximum location: X=6.00, Y=-1.00

SAR Peak: 0.89 W/kg



SAR 10g (W/Kg)	0.387524
SAR 1g (W/Kg)	0.606385

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

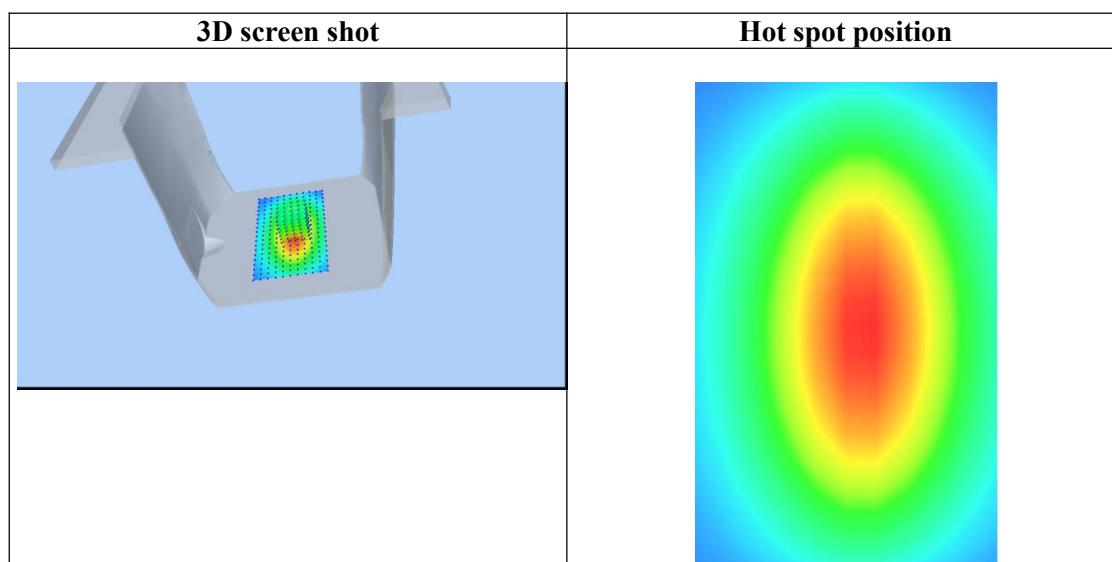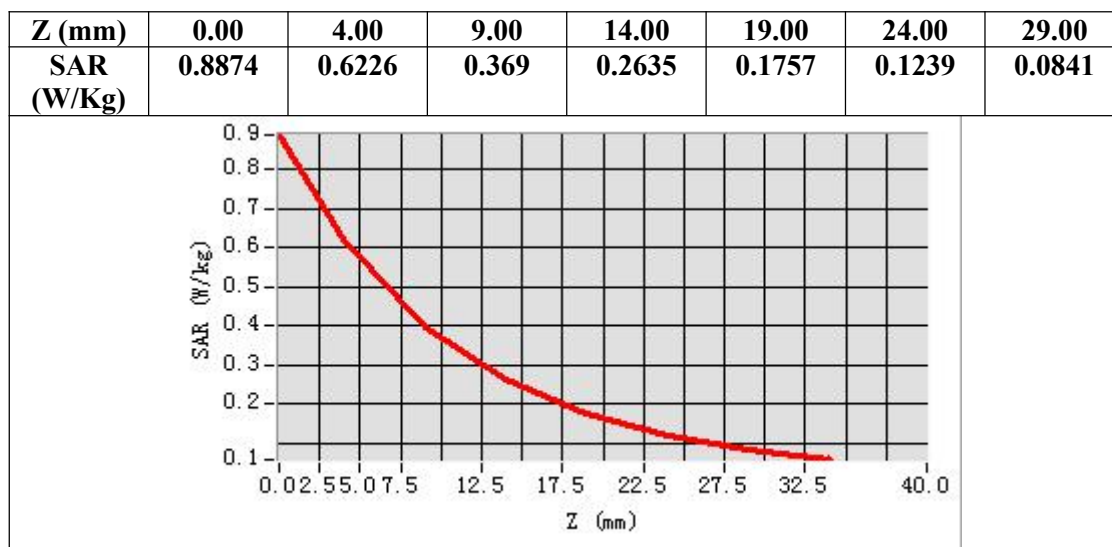

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Laboratory: AGC Lab
System Check Head 1750MHz
DUT: Dipole 1800 MHz; Type: SID 1800

Date: Dec. 09, 2025


Communication System: CW; Communication System Band: D1700 (1750.0 MHz); Duty Cycle:1:1; Conv.F=2.33
Frequency: 1750 MHz; Medium parameters used: $f = 1750\text{MHz}$; $\sigma = 1.36 \text{ mho/m}$; $\epsilon_r = 41.36$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section; Input Power=18dBm

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2025-05-06; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V5.3.15.8

Configuration/System Check 1750MHz Head/Area Scan: Measurement grid: $dx=8\text{mm}, dy=8\text{mm}$

Configuration/System Check 1750MHz Head/Zoom Scan: Measurement grid: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

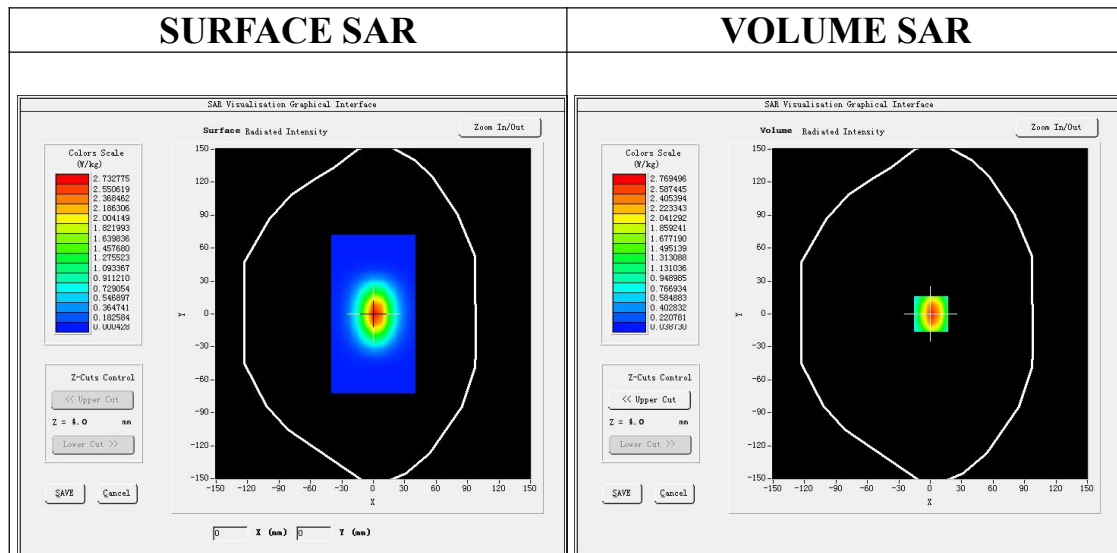



Maximum location: X=1.00, Y=0.00

SAR Peak: 4.52 W/kg

SAR 10g (W/Kg)	1.227856
SAR 1g (W/Kg)	2.480127

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

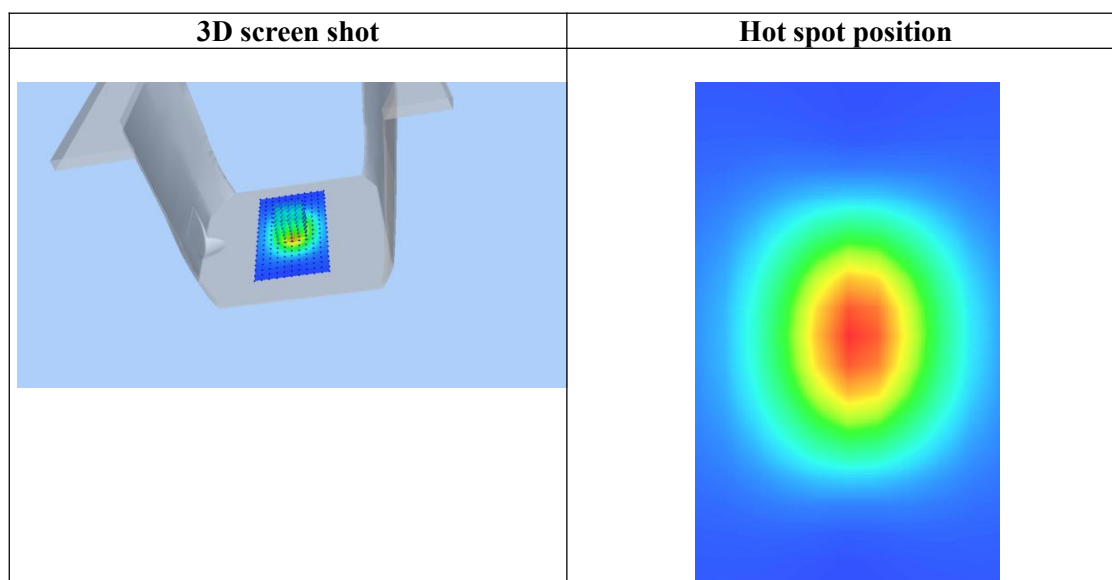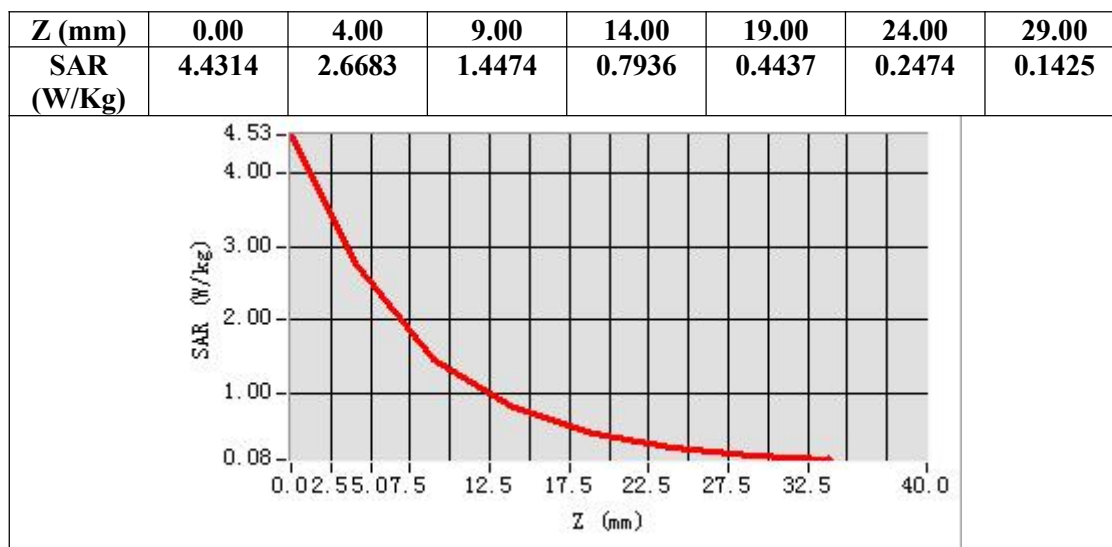

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Laboratory: AGC Lab
System Check Head 1900MHz
DUT: Dipole 1900 MHz; Type: SID 1900

Date: Dec. 10, 2025


Communication System: CW; Communication System Band: D1900 (1900.0 MHz); Duty Cycle:1:1; Conv.F=2.25
Frequency: 1900 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.02$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section; Input Power=18dBm

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2025-05-06; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V5.3.15.8

Configuration/System Check 1900MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/System Check 1900MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

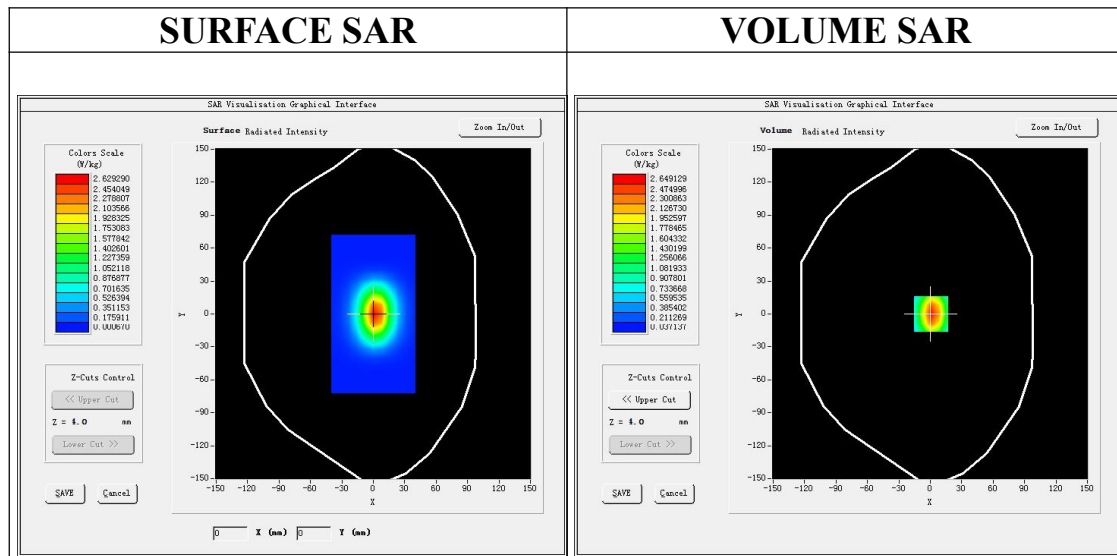



Maximum location: X=1.00, Y=0.00

SAR Peak: 4.33 W/kg

SAR 10g (W/Kg)	1.266586
SAR 1g (W/Kg)	2.502751

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

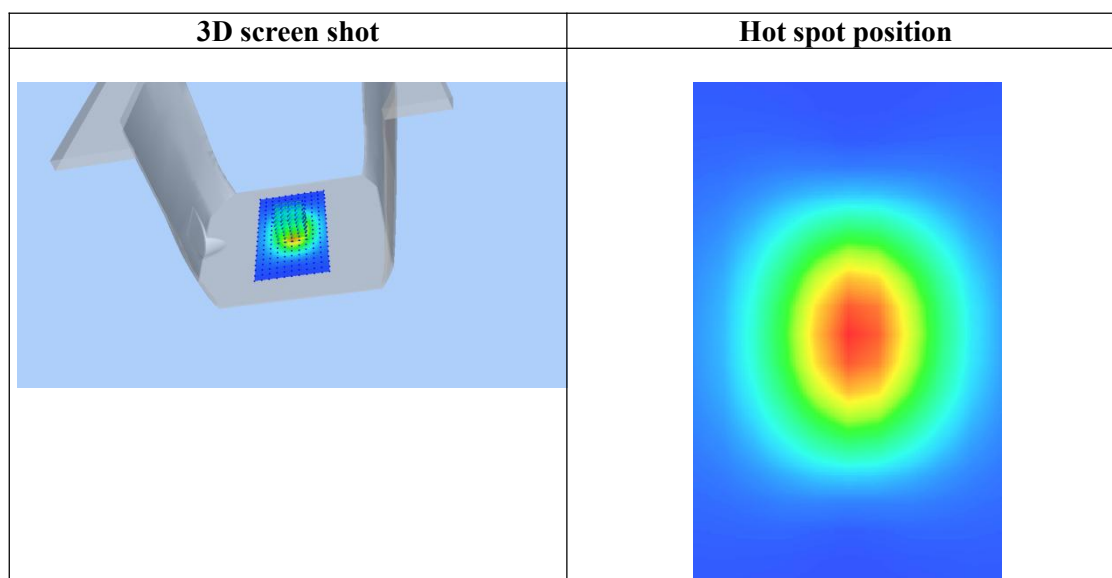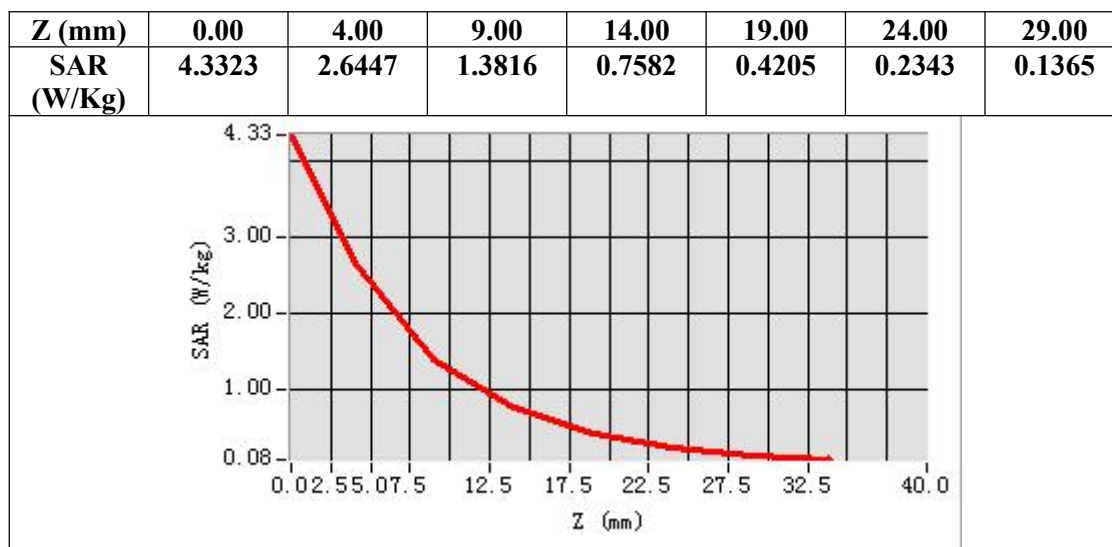

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Laboratory: AGC Lab
System Check Head 2600MHz
DUT: Dipole 2600 MHz; Type: SID 2600

Date: Dec. 11, 2025


Communication System: CW; Communication System Band: D2600 (2600.0 MHz); Duty Cycle: 1:1; Conv.F=2.19
Frequency:2600 MHz; Medium parameters used: $f = 2600$ MHz; $\sigma = 1.93$ mho/m; $\epsilon_r = 38.99$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section; Input Power=18dBm

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2025-05-06; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V5.3.15.8

Configuration/System Check 2600 Head/Area Scan: Measurement grid: dx=8mm,dy=8mm

Configuration/System Check 2600 Head/Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm

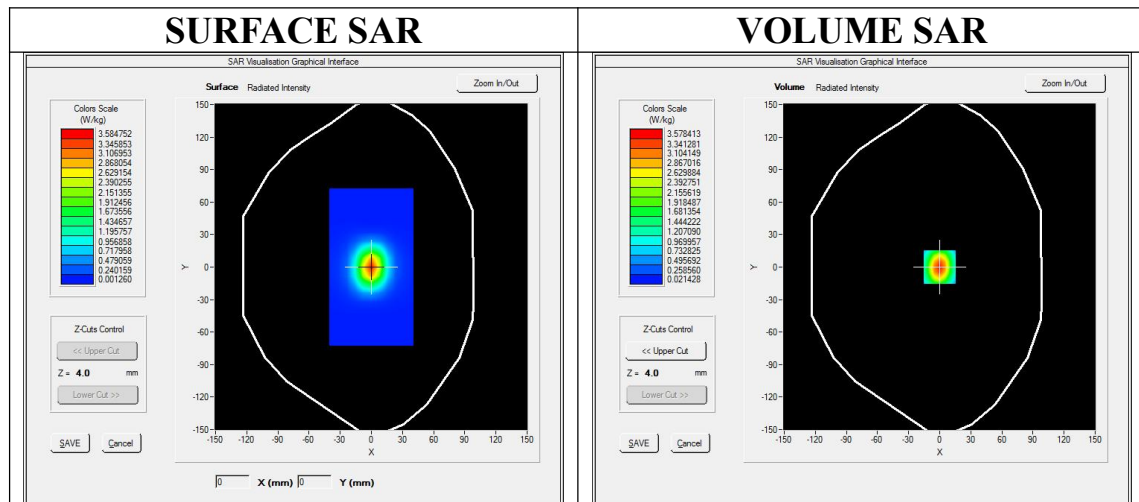



Maximum location: X=0.00, Y=0.00

SAR Peak: 6.00 W/kg

SAR 10g (W/Kg)	1.529358
SAR 1g (W/Kg)	3.344509

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

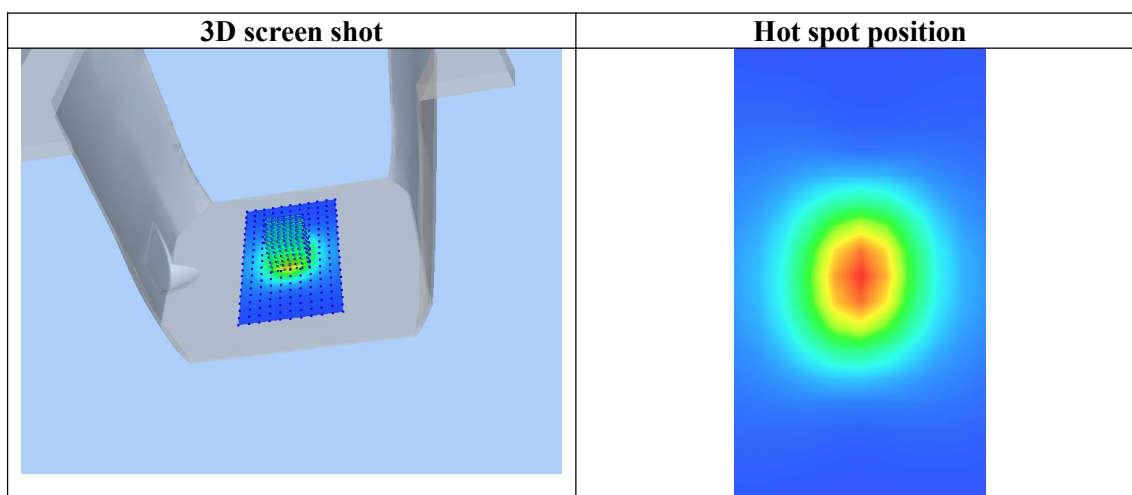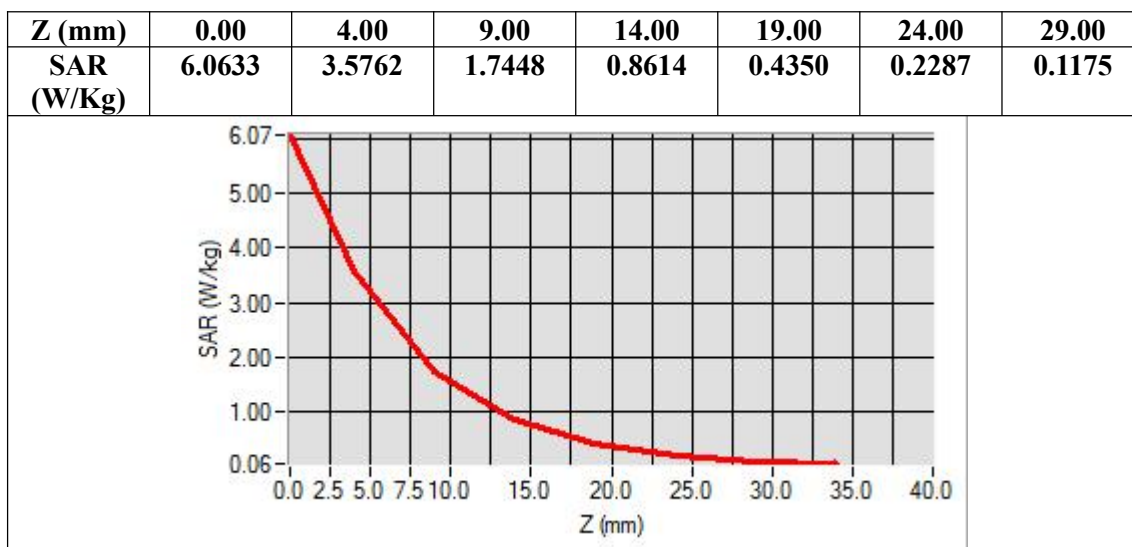

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

APPENDIX B. SAR MEASUREMENT DATA

Test Laboratory: AGC Lab

Date: Dec. 10, 2025

LTE Band 2 Mid-Body back with all accessories (1 RB#0)

DUT: 4G POC Radio; Type: W7

Communication System: LTE; Communication System Band: LTE Band 2; Duty Cycle:1:1; Conv.F=2.25;
Frequency:1880MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.33$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section


SATIMO Configuration:

- Probe: SSE2; Calibrated: 2025-05-06; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 2 Mid-Body back with all accessories/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/ LTE Band 2 Mid-Body back with all accessories/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back with all accessories
Band	LTE Band 2
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

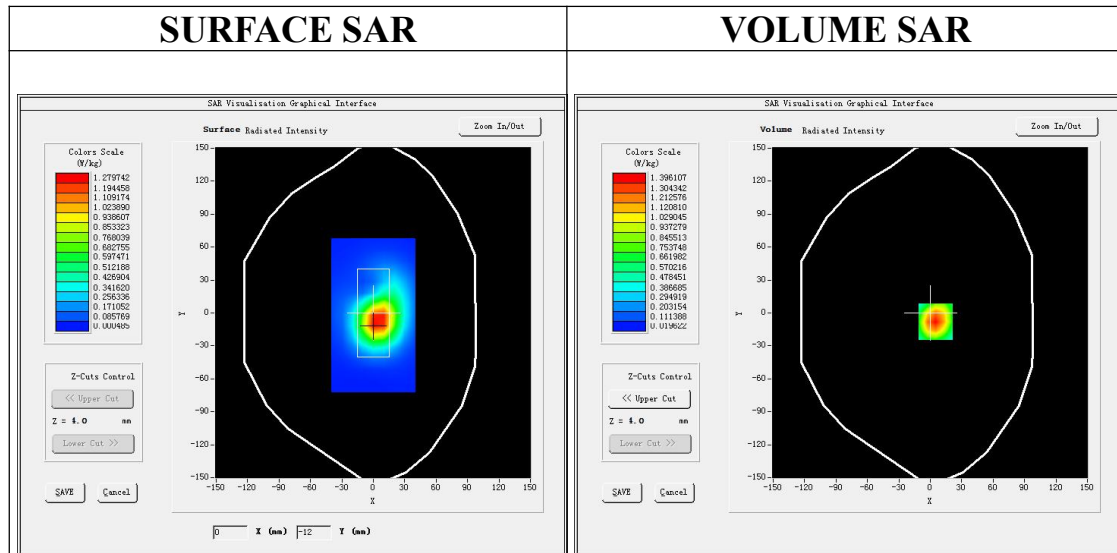

Maximum location: X=5.00, Y=-8.00

SAR Peak: 2.09 W/kg


SAR 10g (W/Kg)	0.720015
SAR 1g (W/Kg)	1.319859

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

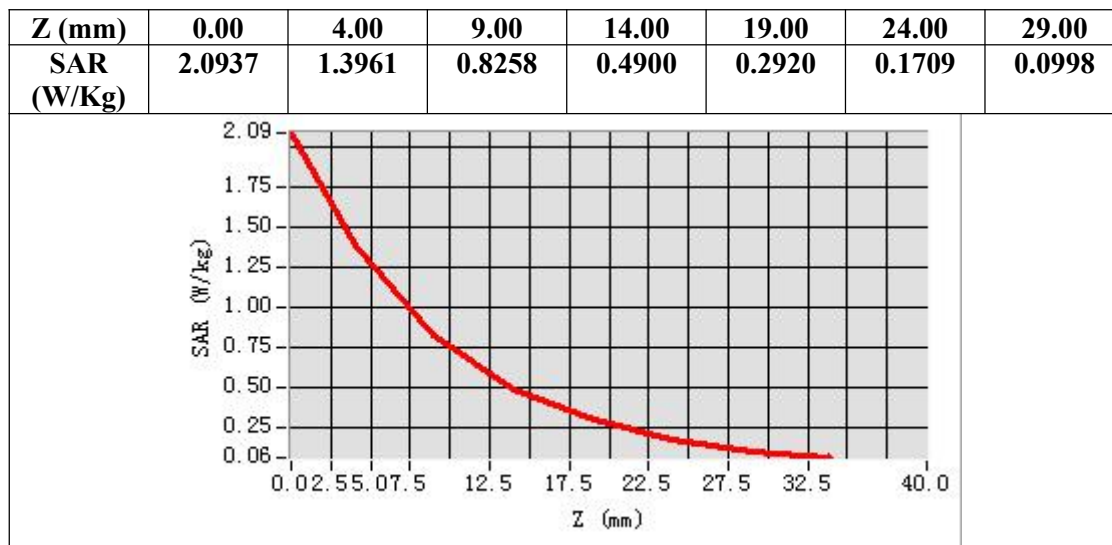

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Laboratory: AGC Lab
LTE Band 2 High-Limb Front with all accessories (1 RB#0)
DUT: 4G POC Radio; Type: W7

Date: Dec. 10, 2025

Communication System: LTE; Communication System Band: LTE Band 2; Duty Cycle:1:1; Conv.F=2.25;
Frequency:1900MHz; Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 39.02$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section


SATIMO Configuration:

- Probe: SSE2; Calibrated: 2025-05-06; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 2 High-Limb Front with all accessories/Area Scan: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$

Configuration/ LTE Band 2 High-Limb Front with all accessories/Zoom Scan: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7, $dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$
Phantom	Validation plane
Device Position	Limb Front with all accessories
Band	LTE Band 2
Channels	High
Signal	OFDM (Crest factor: 1.0)


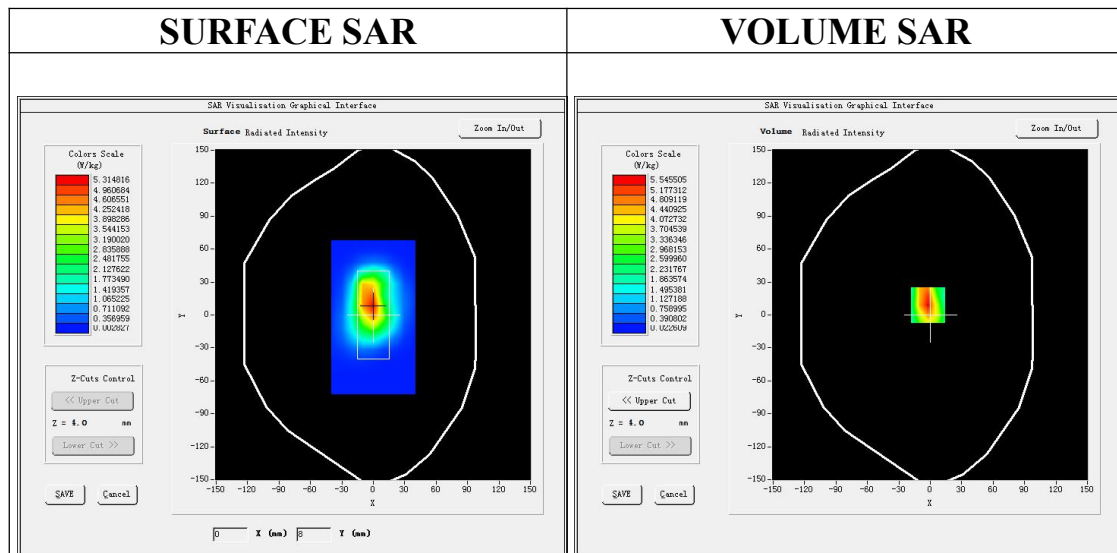


Maximum location: X=-2.00, Y=9.00
SAR Peak: 10.24 W/kg

SAR 10g (W/Kg)	2.795659
SAR 1g (W/Kg)	5.436059

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

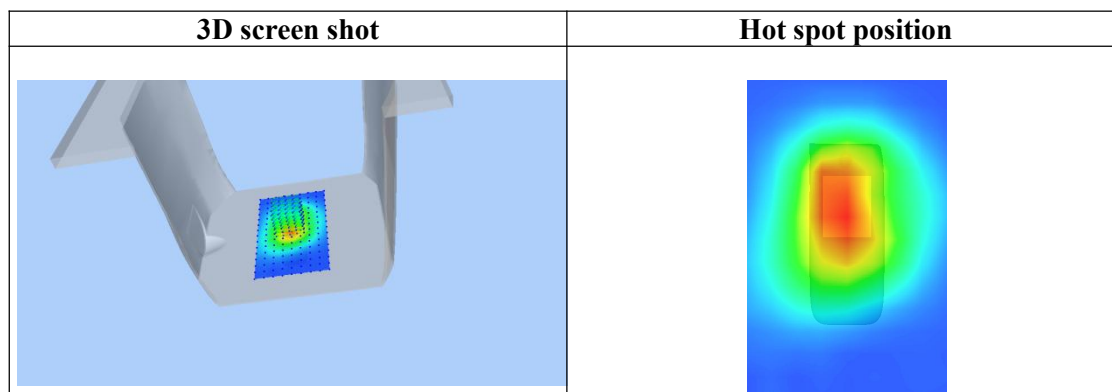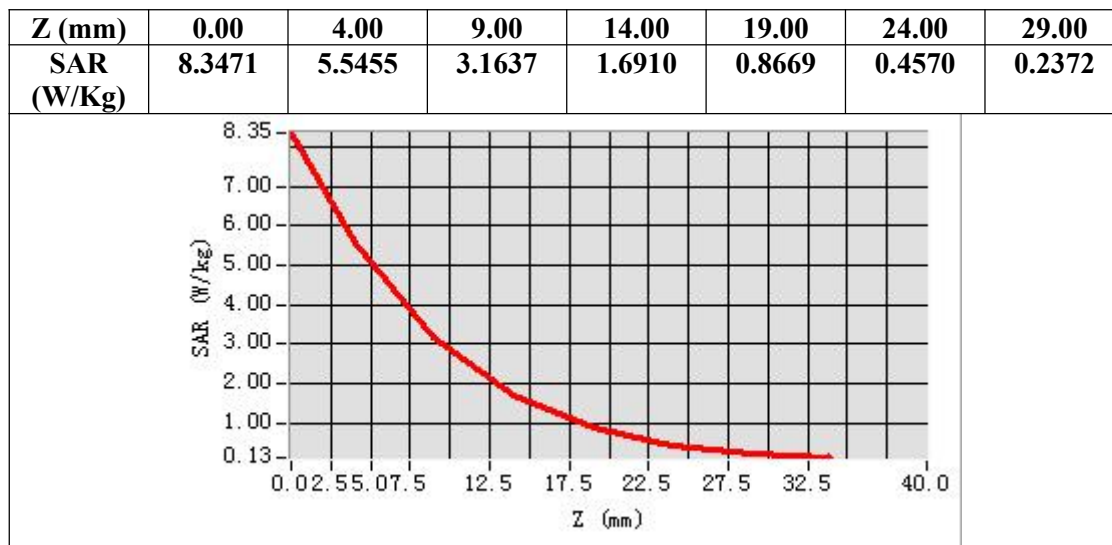

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Laboratory: AGC Lab
LTE Band 4 Mid-Body back with all accessories (1 RB#0)
DUT: 4G POC Radio; Type: W7

Date: Dec. 09, 2025

Communication System: LTE; Communication System Band: LTE Band 4; Duty Cycle:1:1; Conv.F=2.33;
Frequency:1732.5 MHz; Medium parameters used: $f = 1750$ MHz; $\sigma = 1.33$ mho/m; $\epsilon_r = 41.81$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section


SATIMO Configuration:

- Probe: SSE2; Calibrated: 2025-05-06; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 4 Mid-Body back with all accessories/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/ LTE Band 4 Mid-Body back with all accessories/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back with all accessories
Band	LTE Band 4
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

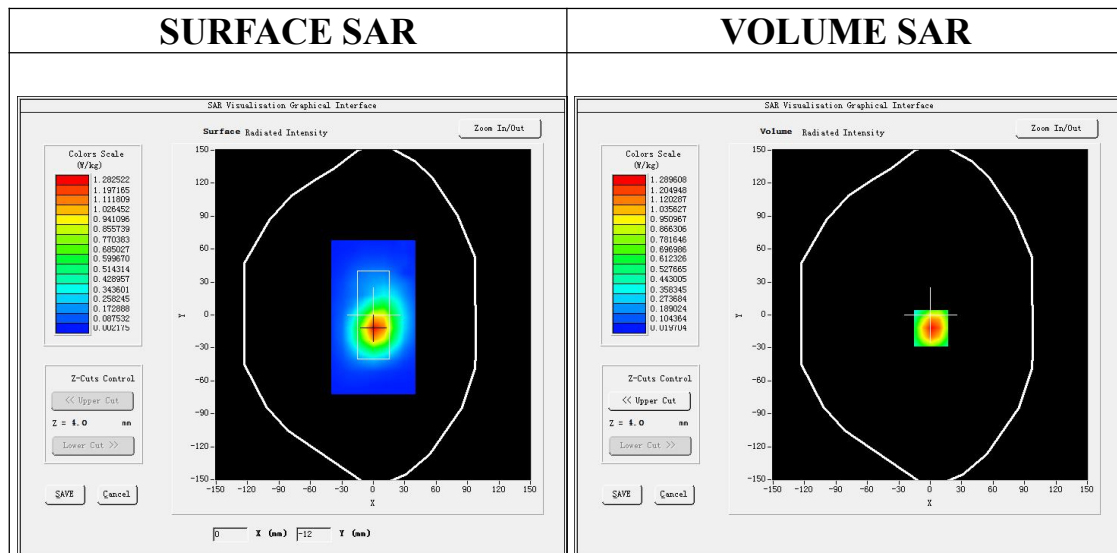



Maximum location: X=1.00, Y=-12.00

SAR Peak: 1.89 W/kg

SAR 10g (W/Kg)	0.689654
SAR 1g (W/Kg)	1.224861

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

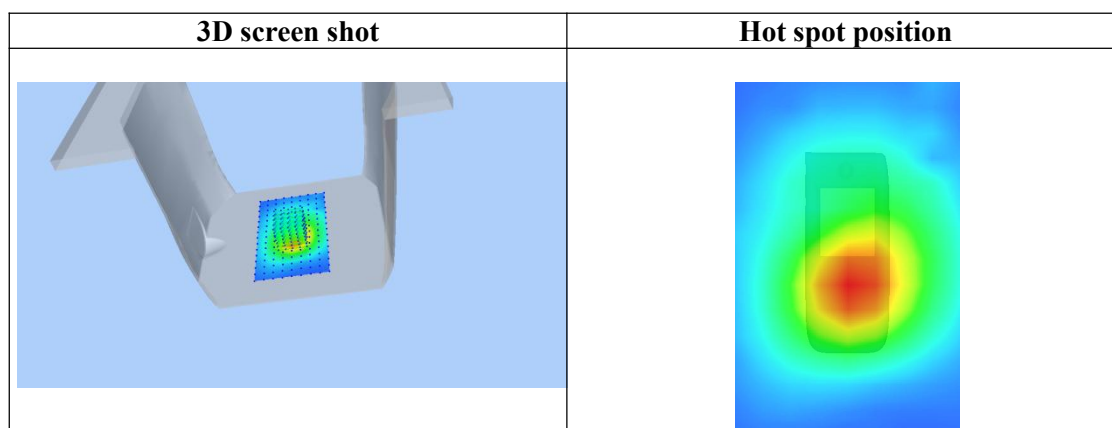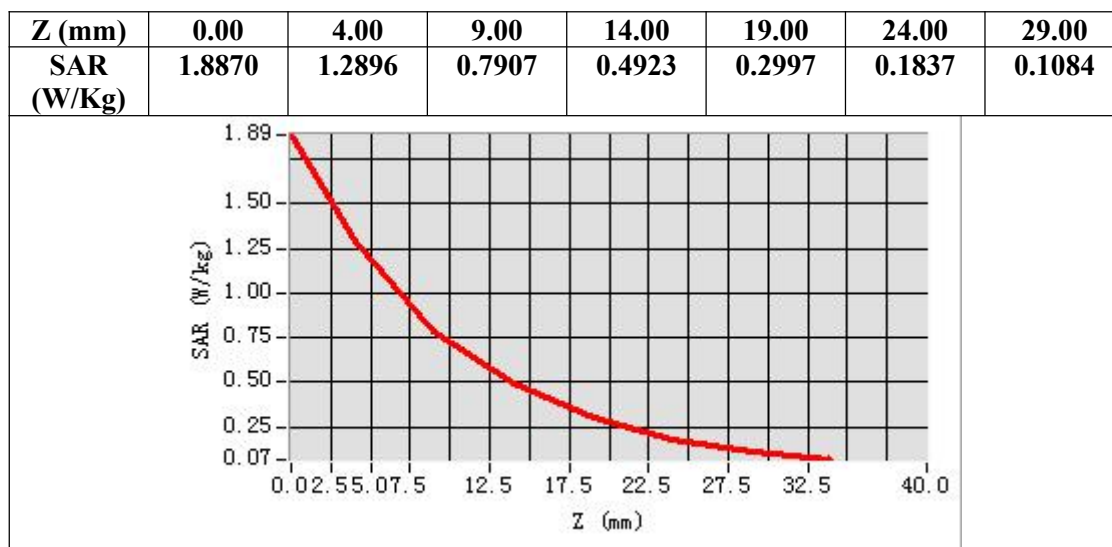

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Laboratory: AGC Lab
LTE Band 4 Mid-Limb Edge 4 (Left) with all accessories (1 RB#0)
DUT: 4G POC Radio; Type: W7

Date: Dec. 09, 2025

Communication System: LTE; Communication System Band: LTE Band 4; Duty Cycle:1:1; Conv.F=2.33;
Frequency:1732.5 MHz; Medium parameters used: $f = 1750$ MHz; $\sigma = 1.33$ mho/m; $\epsilon_r = 41.81$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section


SATIMO Configuration:

- Probe: SSE2; Calibrated: 2025-05-06; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 4 Mid-Limb Edge 4 (Left) with all accessories/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/ LTE Band 4 Mid-Limb Edge 4 (Left) with all accessories/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Limb Edge 4 (Left) with all accessories
Band	LTE Band 4
Channels	Middle
Signal	OFDM (Crest factor: 1.0)


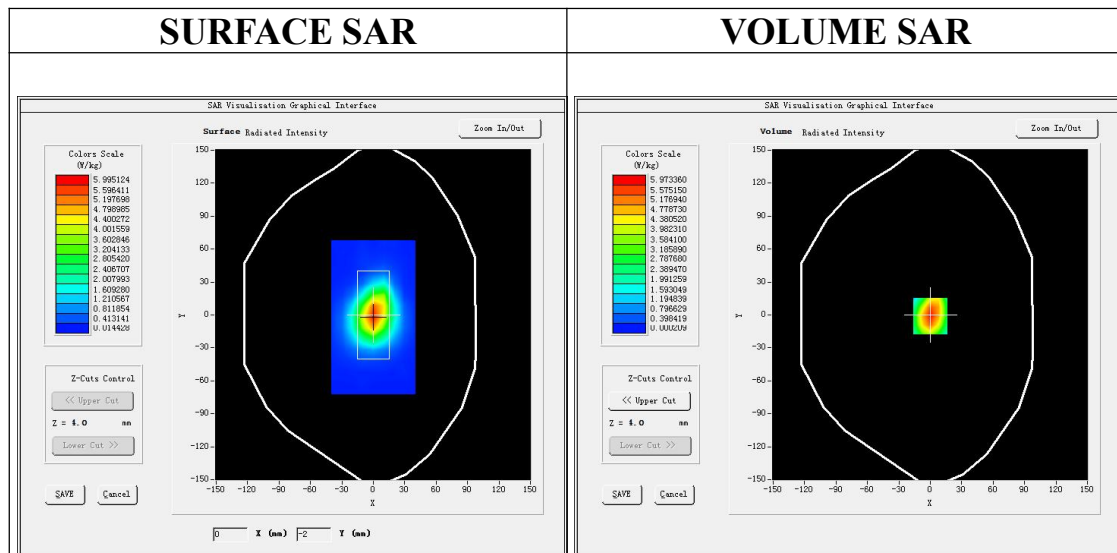


Maximum location: X=0.00, Y=-1.00
SAR Peak: 8.92 W/kg

SAR 10g (W/Kg)	3.093670
SAR 1g (W/Kg)	5.625622

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

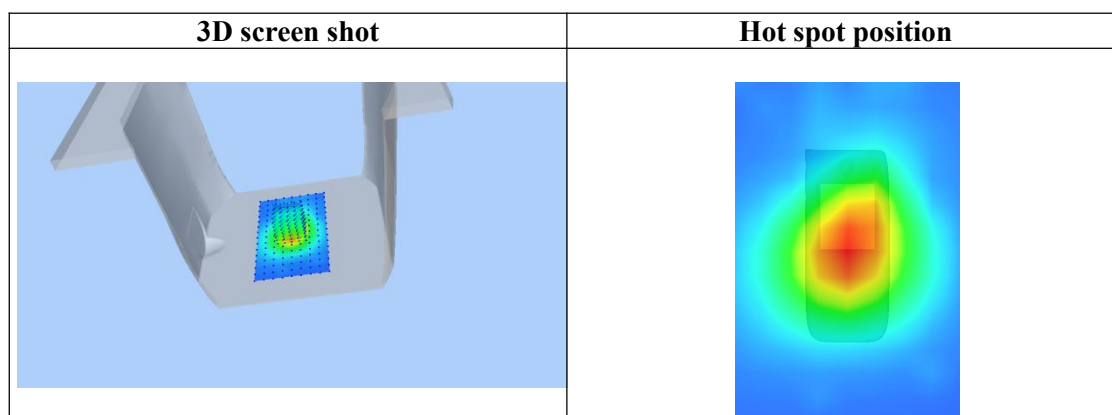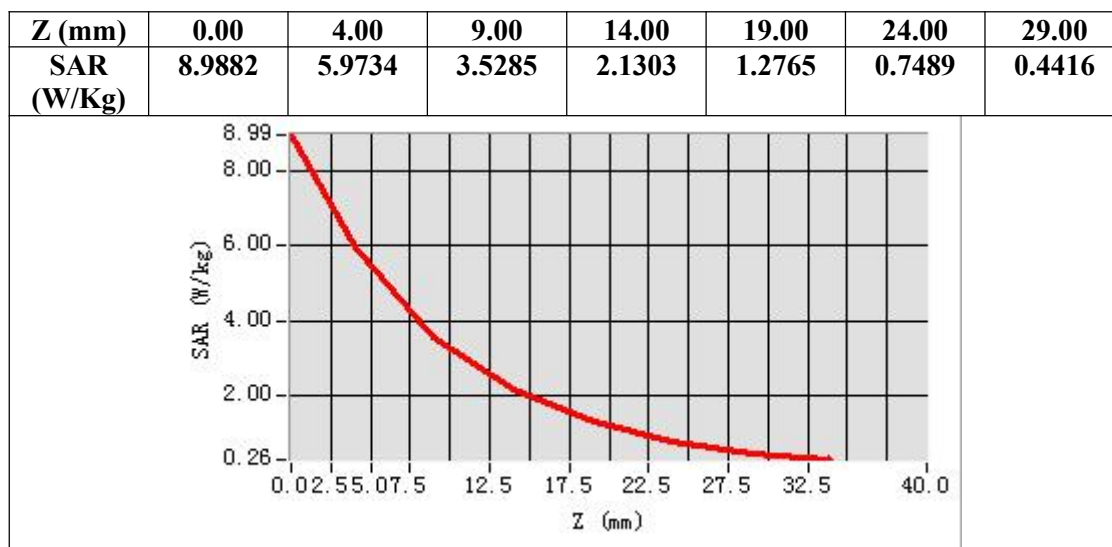

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Laboratory: AGC Lab
LTE Band 5 Mid-Body back with all accessories (1 RB#0)
DUT: 4G POC Radio; Type: W7

Date: Dec. 12, 2025

Communication System: LTE; Communication System Band: LTE Band 5; Duty Cycle:1:1; Conv.F=2.23
Frequency:836.5 MHz; Medium parameters used: $f = 835$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 40.97$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section


SATIMO Configuration:

- Probe: SSE2; Calibrated: 2025-05-06; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 5 Mid-Body back with all accessories/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/ LTE Band 5 Mid-Body back with all accessories/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE Band 5
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

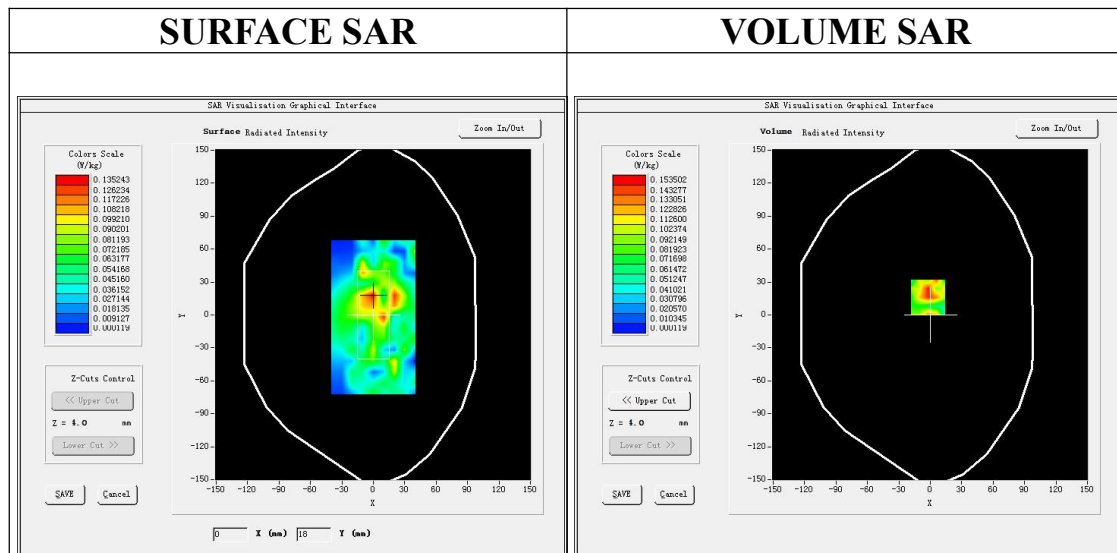


Maximum location: X=-2.00, Y=16.00

SAR Peak: 0.45 W/kg

SAR 10g (W/Kg)	0.100045
SAR 1g (W/Kg)	0.179424

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

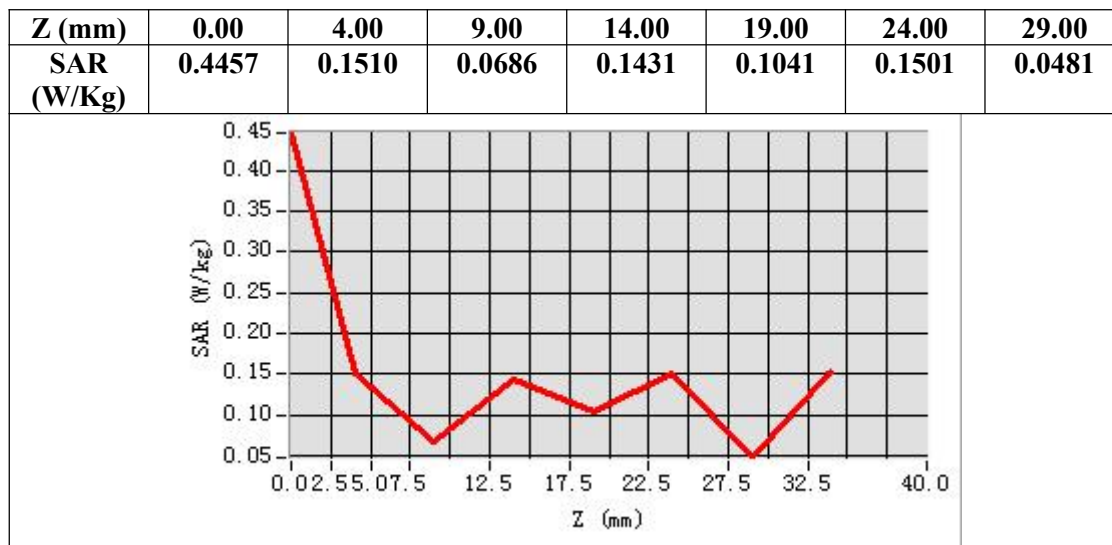

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Laboratory: AGC Lab
LTE Band 5 Mid-Limb Front with all accessories (1 RB#0)
DUT: 4G POC Radio; Type: W7

Date: Dec. 12, 2025

Communication System: LTE; Communication System Band: LTE Band 5; Duty Cycle:1:1; Conv.F=2.23
Frequency:836.5 MHz; Medium parameters used: $f = 835$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 40.97$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section


SATIMO Configuration:

- Probe: SSE2; Calibrated: 2025-05-06; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 5 Mid-Limb Front with all accessories/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/ LTE Band 5 Mid-Limb Front with all accessories/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Limb Front
Band	LTE Band 5
Channels	Middle
Signal	OFDM (Crest factor: 1.0)


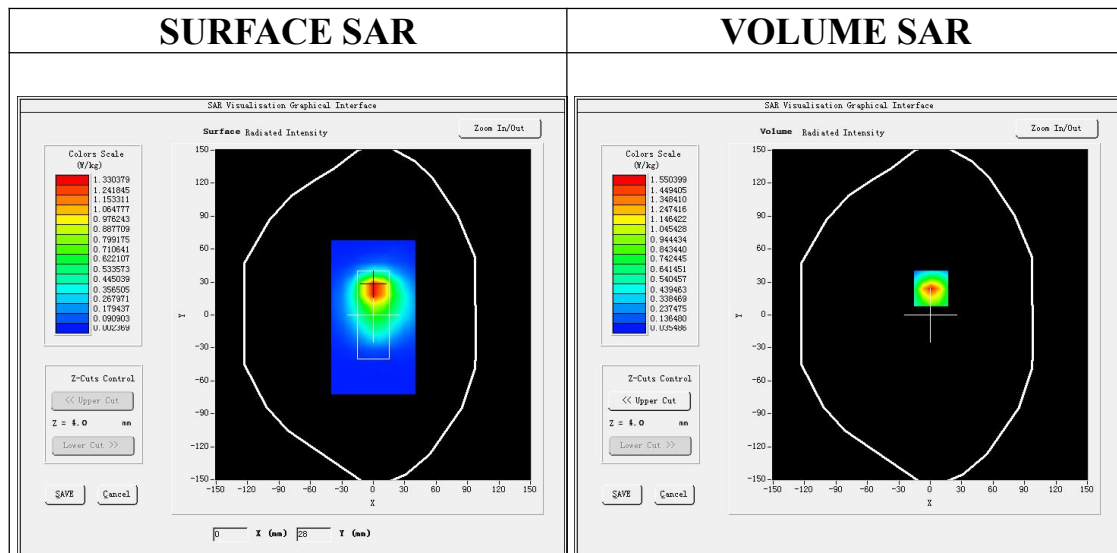


Maximum location: X=1.00, Y=24.00
SAR Peak: 2.52 W/kg

SAR 10g (W/Kg)	0.756053
SAR 1g (W/Kg)	1.428169

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

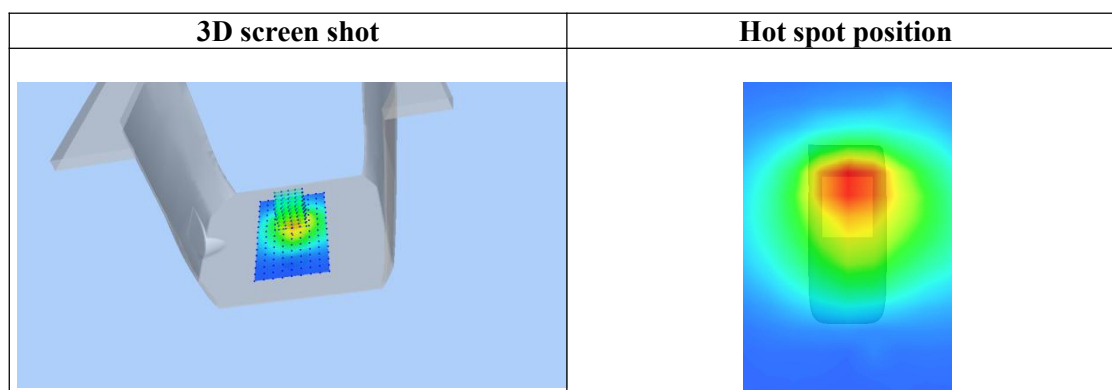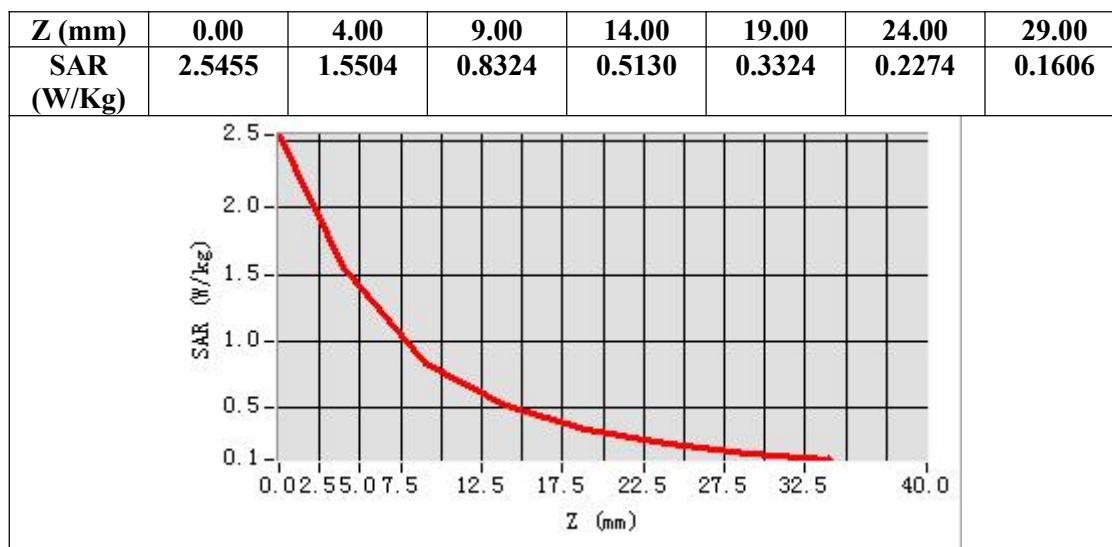

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Laboratory: AGC Lab
LTE Band 7 Low-Body back with all accessories (1RB#0)
DUT: 4G POC Radio; Type: W7

Date: Dec. 11, 2025

Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1; Conv.F=2.19
Frequency: 2510MHz; Medium parameters used: $f = 2600$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 39.68$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section


SATIMO Configuration:

- Probe: SSE2; Calibrated: 2025-05-06; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 7 Low-Body back with all accessories /Area Scan: Measurement grid: dx=10mm, y=10mm

Configuration/ LTE BAND 7 Low-Body back with all accessories /Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE BAND 7
Channels	Low
Signal	OFDM (Crest factor: 1.0)

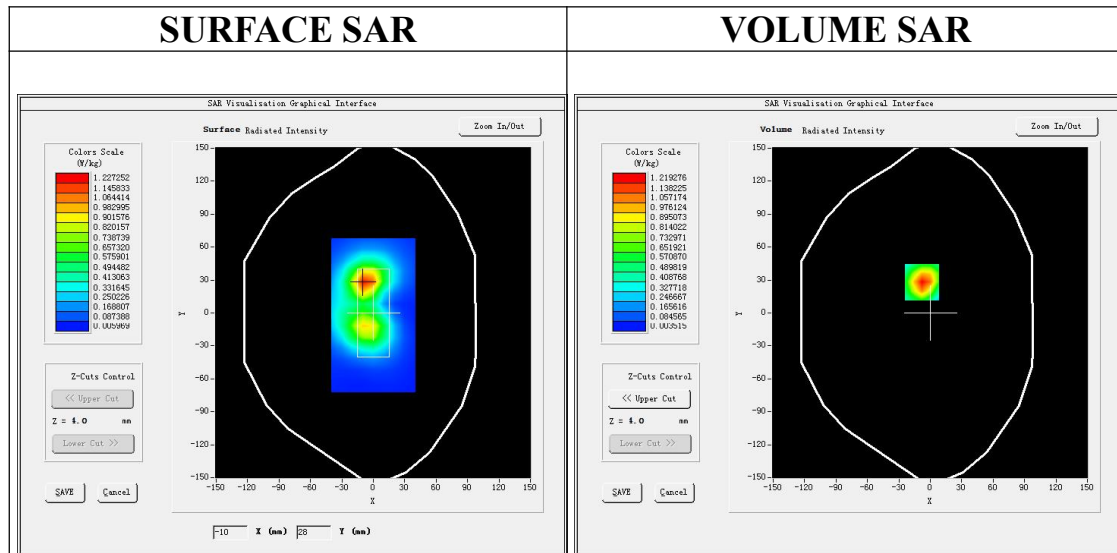

Maximum location: X=-8.00, Y=28.00

SAR Peak: 2.17 W/kg



SAR 10g (W/Kg)	0.528805
SAR 1g (W/Kg)	1.162916

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

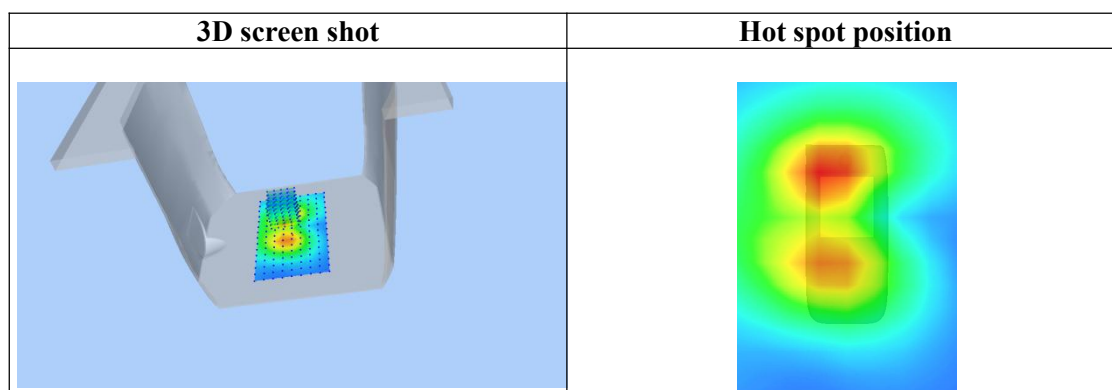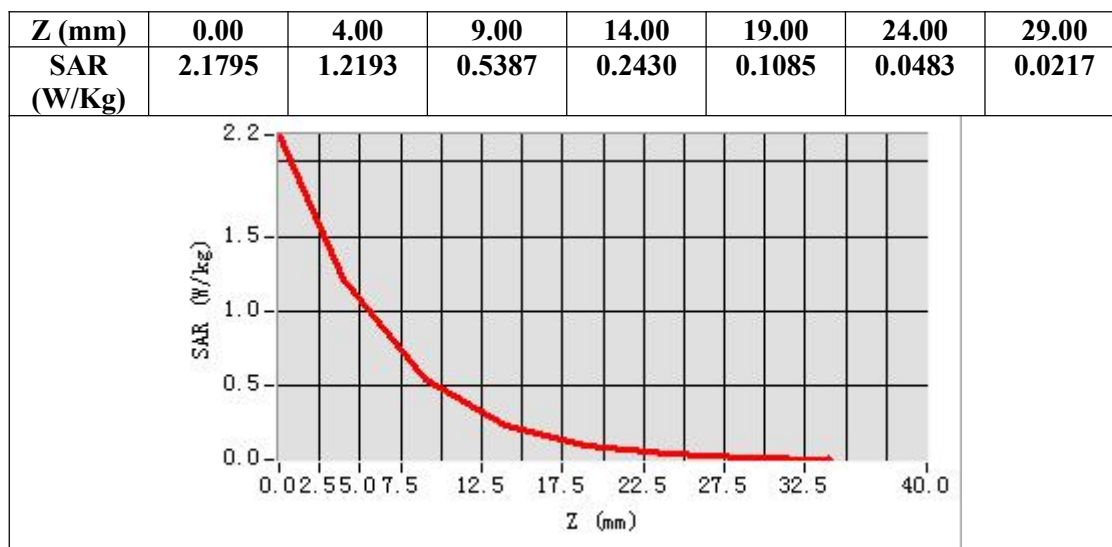

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Laboratory: AGC Lab
LTE Band 7 High-Body back with all accessories (1RB#0)
DUT: 4G POC Radio; Type: W7

Date: Dec. 11, 2025

Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1; Conv.F=2.19
Frequency: 2560MHz; Medium parameters used: $f = 2600$ MHz; $\sigma = 1.92$ mho/m; $\epsilon_r = 39.13$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section


SATIMO Configuration:

- Probe: SSE2; Calibrated: 2025-05-06; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 7 High-Body back with all accessories /Area Scan: Measurement grid: dx=10mm, y=10mm

Configuration/ LTE BAND 7 High-Body back with all accessories /Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE BAND 7
Channels	High
Signal	OFDM (Crest factor: 1.0)

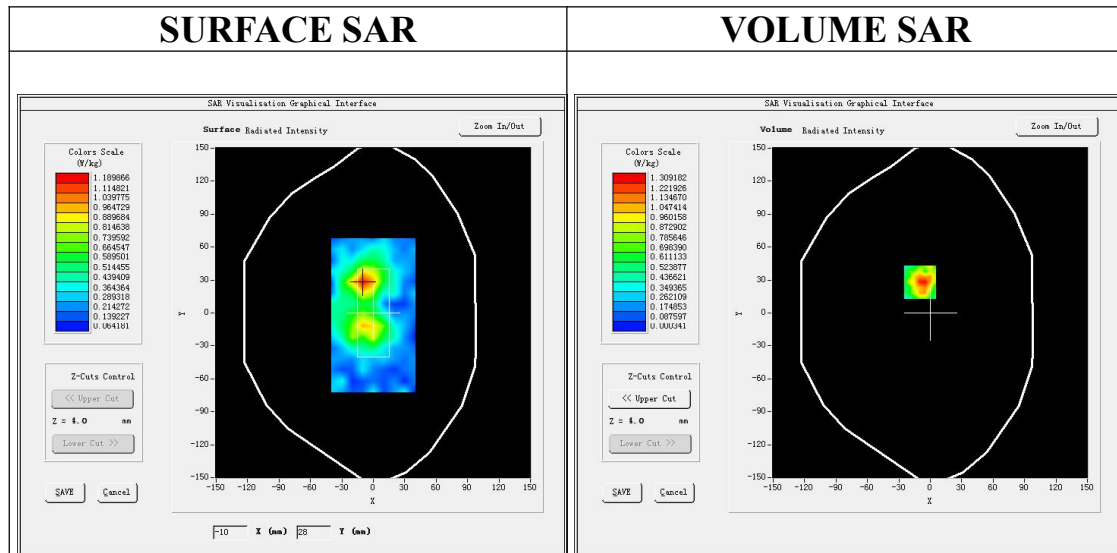

Maximum location: X=-10.00, Y=28.00

SAR Peak: 2.51 W/kg



SAR 10g (W/Kg)	0.598454
SAR 1g (W/Kg)	1.182216

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

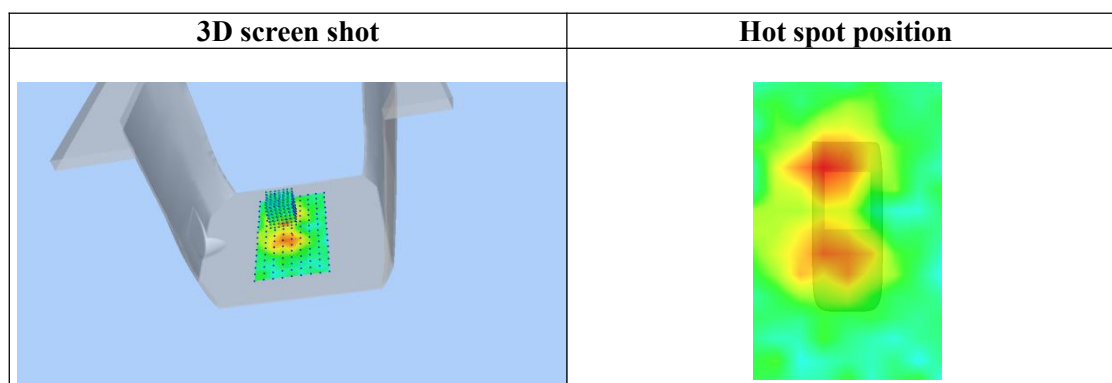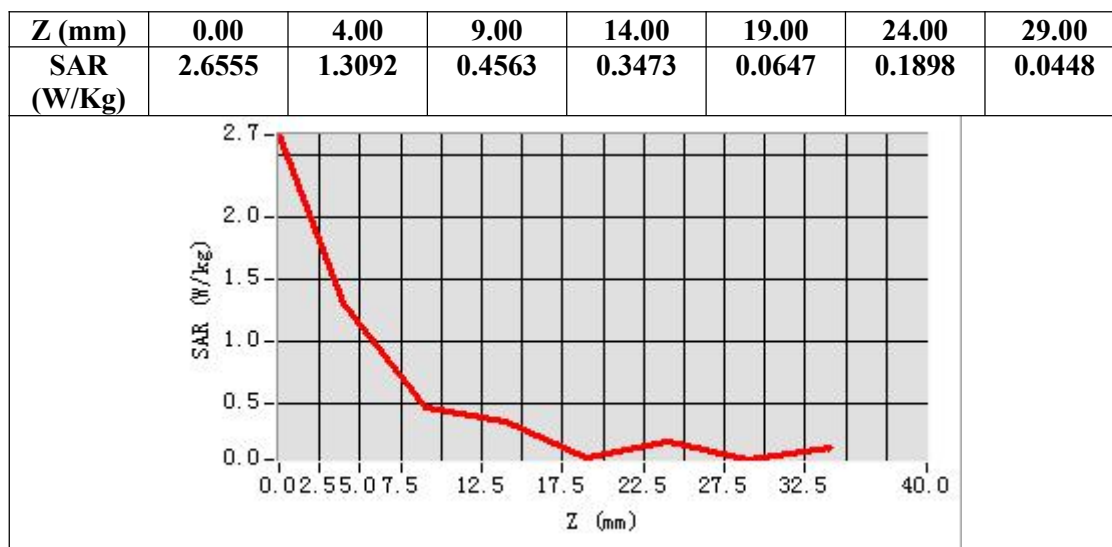

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Laboratory: AGC Lab
LTE Band 7 Low-Limb Edge 1 (Top) with all accessories (1RB#0)
DUT: 4G POC Radio; Type: W7

Date: Dec. 11, 2025

Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1; Conv.F=2.19
Frequency: 2510MHz; Medium parameters used: $f = 2600$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 39.68$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section


SATIMO Configuration:

- Probe: SSE2; Calibrated: 2025-05-06; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 7 Low-Limb Edge 1 (Top) with all accessories /Area Scan: Measurement grid:
dx=10mm, y=10mm

Configuration/ LTE BAND 7 Low- Limb Edge 1 (Top) with all accessories /Zoom Scan: Measurement grid:
dx=5mm, dy=5mm, dz=5mm

Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Limb Edge 1 (Top) with all accessories
Band	LTE BAND 7
Channels	Low
Signal	OFDM (Crest factor: 1.0)

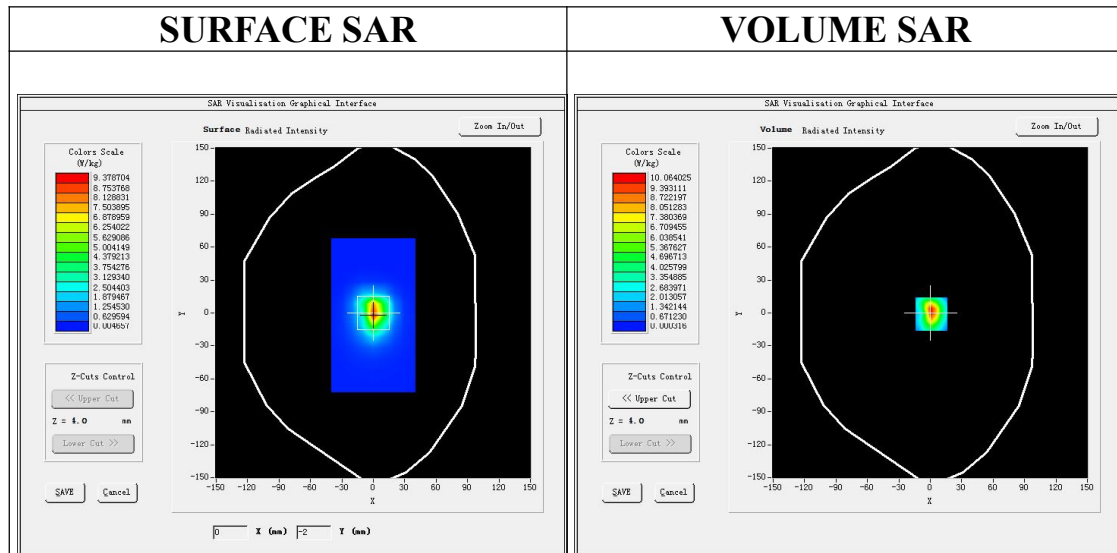

Maximum location: X=1.00, Y=-1.00

SAR Peak: 20.52 W/kg



SAR 10g (W/Kg)	3.222191
SAR 1g (W/Kg)	9.024376

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

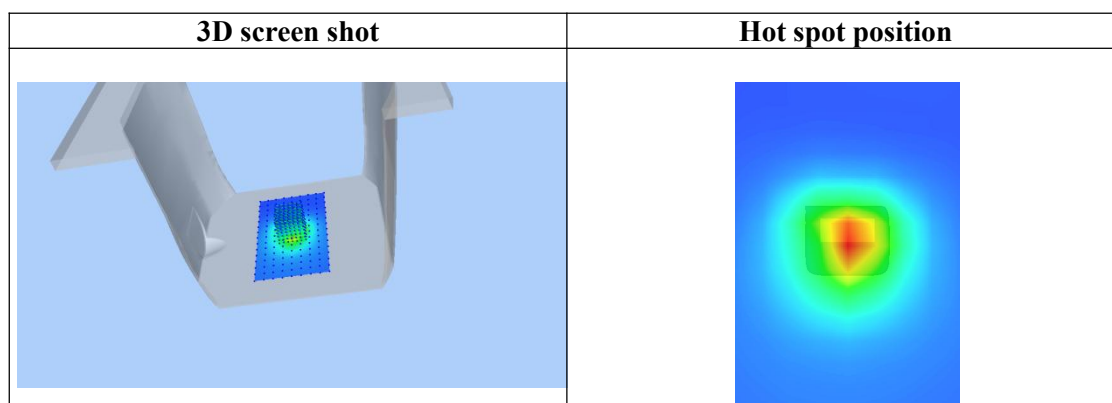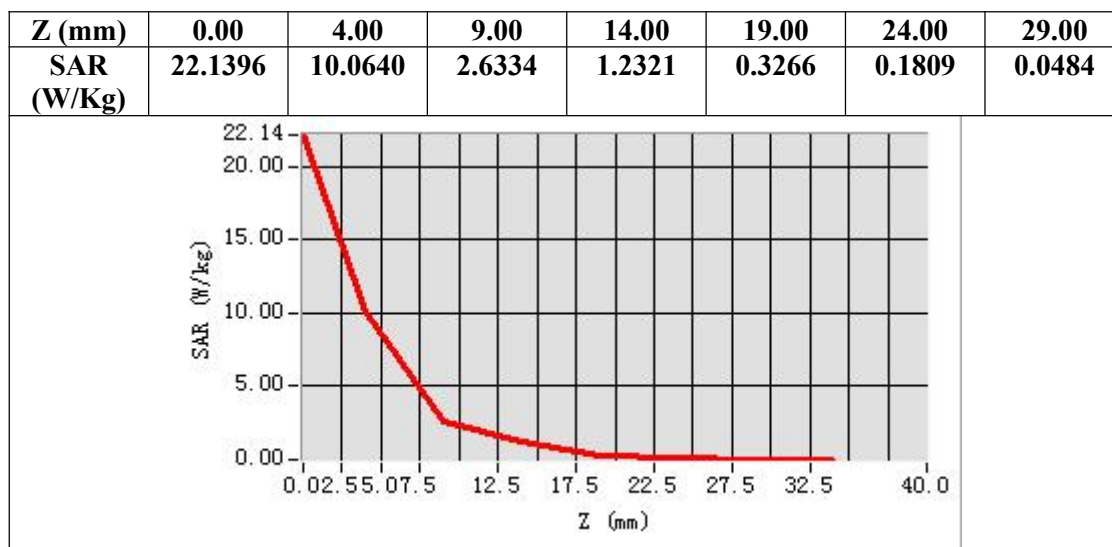

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Laboratory: AGC Lab
LTE Band 7 High-Limb Edge 1 (Top) with all accessories (1RB#0)
DUT: 4G POC Radio; Type: W7

Date: Dec. 11, 2025

Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1; Conv.F=2.19
Frequency: 2560MHz; Medium parameters used: $f = 2600$ MHz; $\sigma = 1.92$ mho/m; $\epsilon_r = 39.13$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section


SATIMO Configuration:

- Probe: SSE2; Calibrated: 2025-05-06; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 7 High-Limb Edge 1 (Top) with all accessories /Area Scan: Measurement grid:
dx=10mm, y=10mm

Configuration/ LTE BAND 7 High- Limb Edge 1 (Top) with all accessories /Zoom Scan: Measurement grid:
dx=5mm, dy=5mm, dz=5mm

Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Limb Edge 1 (Top) with all accessories
Band	LTE BAND 7
Channels	High
Signal	OFDM (Crest factor: 1.0)

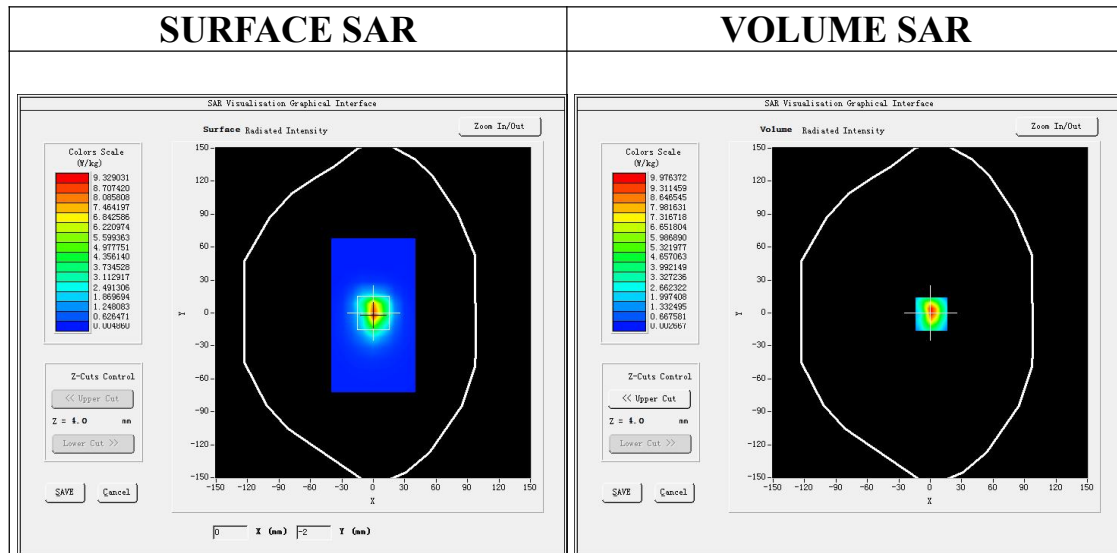

Maximum location: X=1.00, Y=-1.00

SAR Peak: 20.40 W/kg



SAR 10g (W/Kg)	3.223835
SAR 1g (W/Kg)	8.990385

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

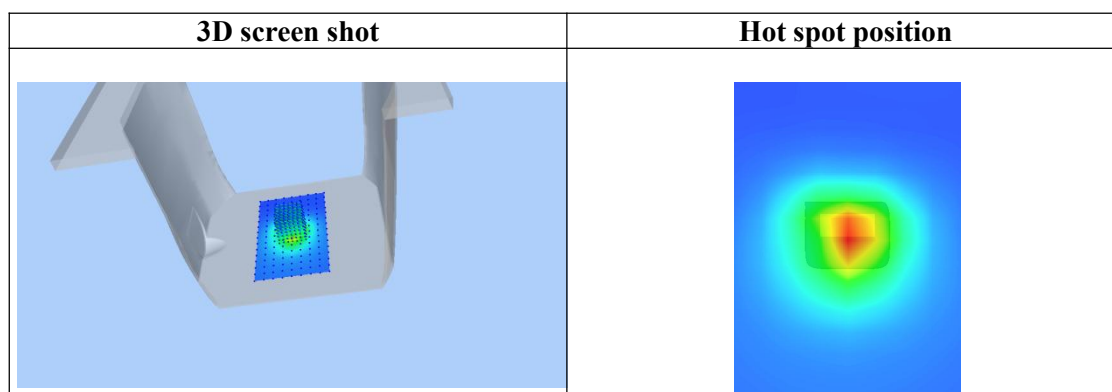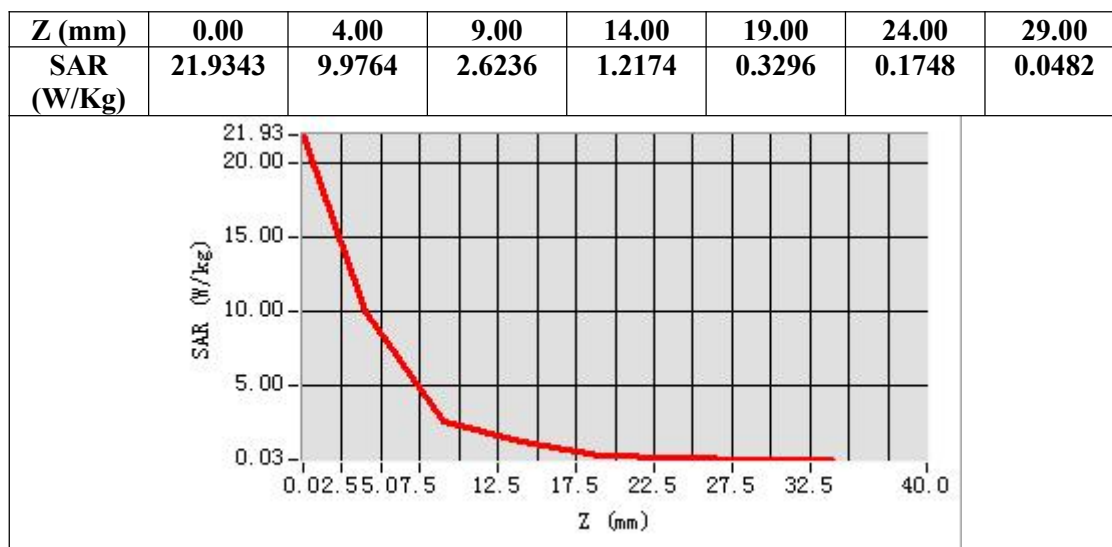

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Laboratory: AGC Lab
LTE Band 66 Mid-Body back with all accessories (1 RB#0)
DUT: 4G POC Radio; Type: W7

Date: Dec. 09, 2025

Communication System: LTE; Communication System Band: LTE Band 66; Duty Cycle:1:1; Conv.F=2.33;
Frequency:1745 MHz; Medium parameters used: $f = 1750$ MHz; $\sigma = 1.34$ mho/m; $\epsilon_r = 41.69$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section


SATIMO Configuration:

- Probe: SSE2; Calibrated: 2025-05-06; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 66 Mid-Body back with all accessories/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/ LTE Band 66 Mid-Body back with all accessories/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE Band 66
Channels	Middle
Signal	OFDM (Crest factor: 1.0)


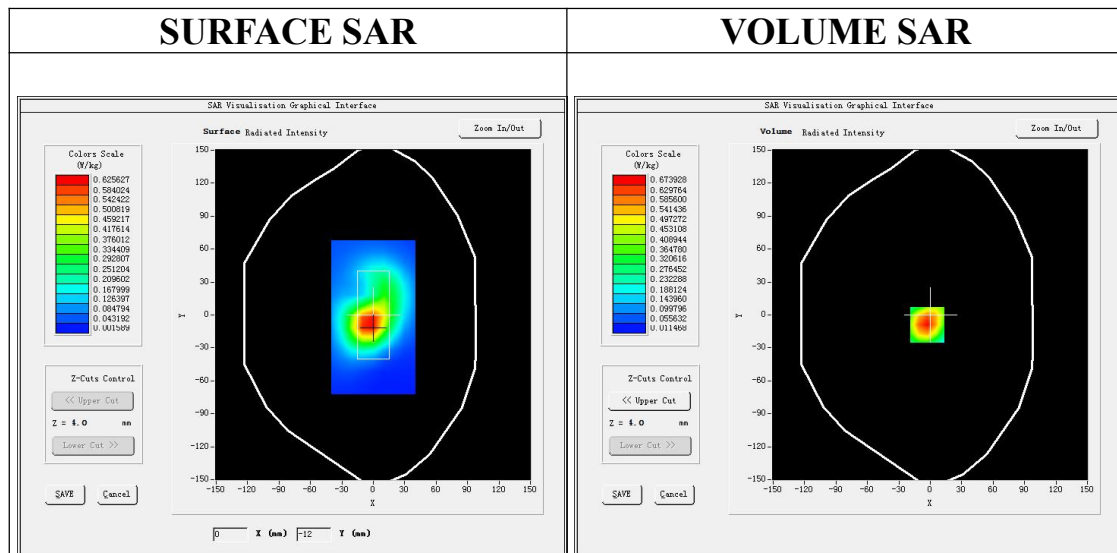


Maximum location: X=-3.00, Y=-9.00
SAR Peak: 1.01 W/kg

SAR 10g (W/Kg)	0.357447
SAR 1g (W/Kg)	0.640993

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

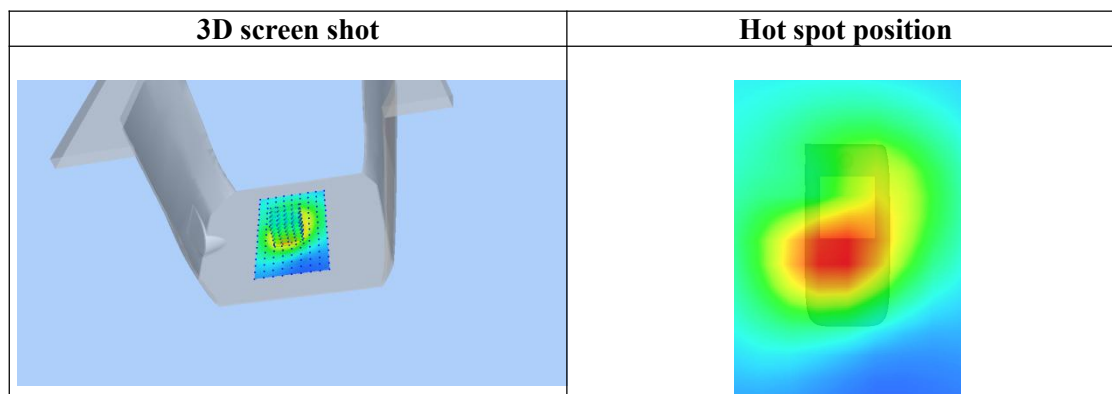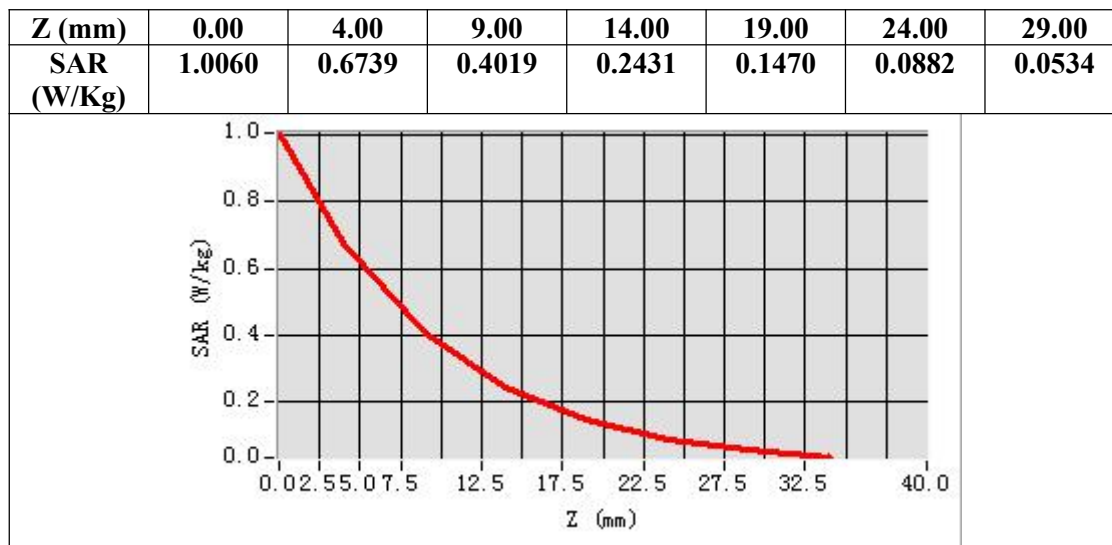

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Laboratory: AGC Lab
LTE Band 66 Mid-Limb Front with all accessories (1 RB#0)
DUT: 4G POC Radio; Type: W7

Date: Dec. 09, 2025

Communication System: LTE; Communication System Band: LTE Band 66; Duty Cycle:1:1; Conv.F=2.33;
Frequency:1745 MHz; Medium parameters used: $f = 1750$ MHz; $\sigma = 1.34$ mho/m; $\epsilon_r = 41.69$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section


SATIMO Configuration:

- Probe: SSE2; Calibrated: 2025-05-06; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 66 Mid-Limb Front with all accessories/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/ LTE Band 66 Mid- Limb Front with all accessories/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Limb Front with all accessories
Band	LTE Band 66
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

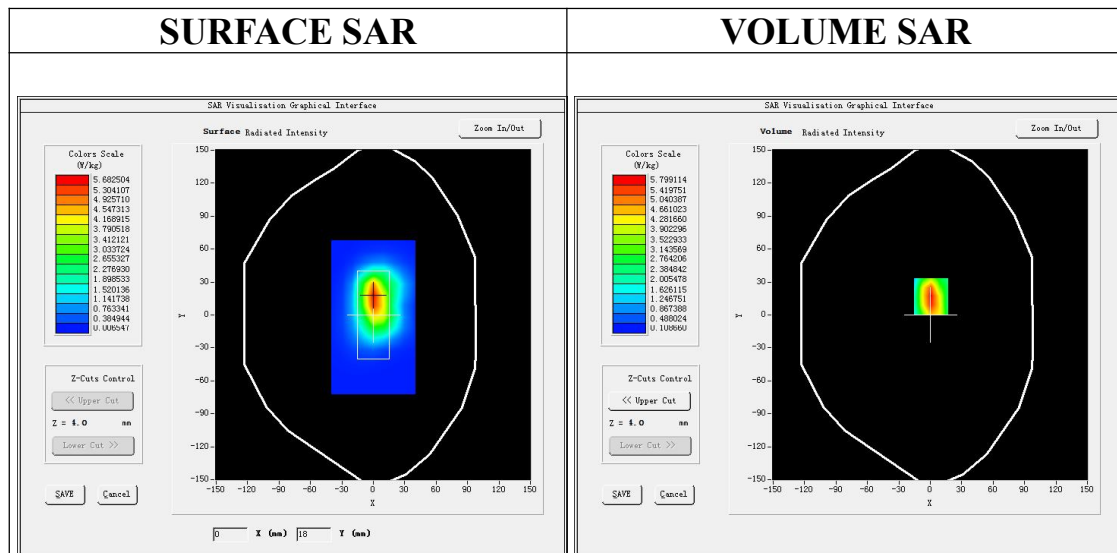

Maximum location: X=1.00, Y=17.00

SAR Peak: 10.99 W/kg


SAR 10g (W/Kg)	2.945921
SAR 1g (W/Kg)	5.736734

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

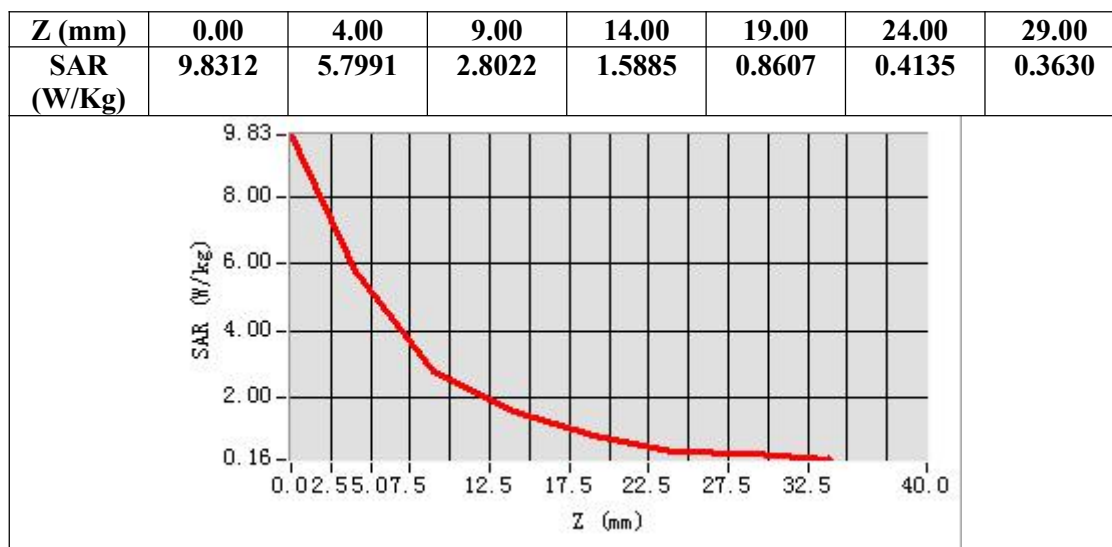

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Repeated SAR

Test Laboratory: AGC Lab

Date: Dec. 10, 2025

LTE Band 2 High-Limb Front with all accessories (1 RB#0)

DUT: 4G POC Radio; Type: W7

Communication System: LTE; Communication System Band: LTE Band 2; Duty Cycle:1:1; Conv.F=2.25;
Frequency:1900MHz; Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 39.02$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section


SATIMO Configuration:

- Probe: SSE2; Calibrated: 2025-05-06; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 2 High-Limb Front with all accessories/Area Scan: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$

Configuration/ LTE Band 2 High-Limb Front with all accessories/Zoom Scan: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Limb Front with all accessories
Band	LTE Band 2
Channels	High
Signal	OFDM (Crest factor: 1.0)

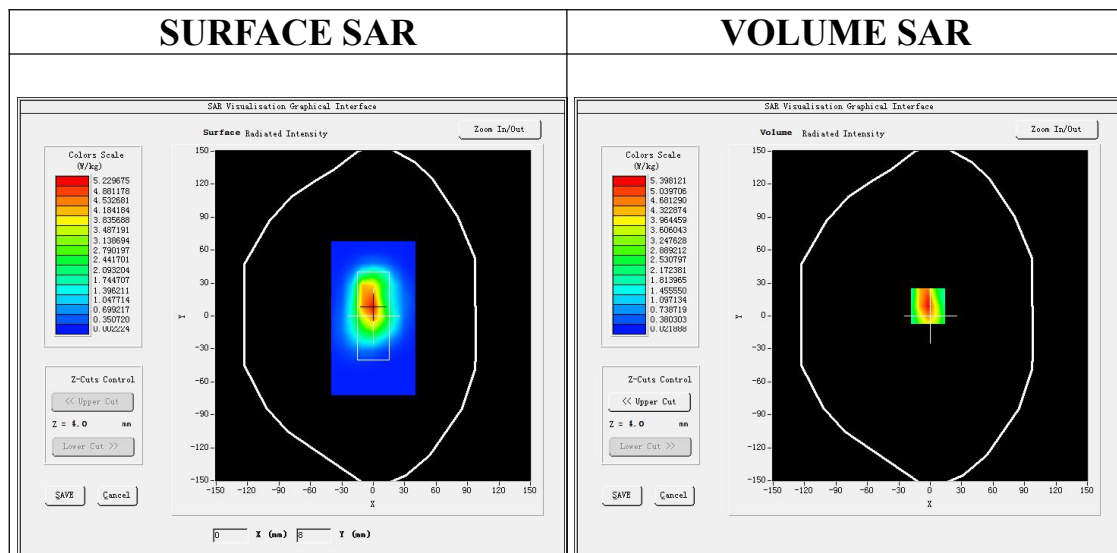

Maximum location: X=-2.00, Y=9.00

SAR Peak: 9.97 W/kg



SAR 10g (W/Kg)	2.733775
SAR 1g (W/Kg)	5.304130

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

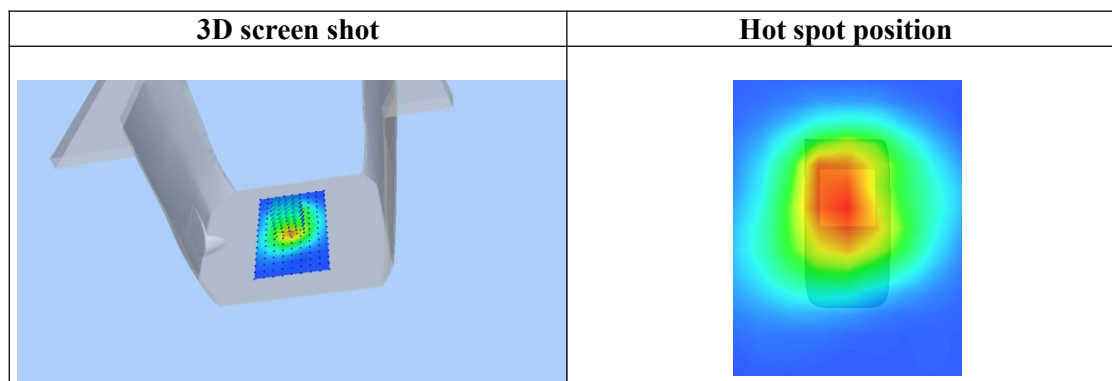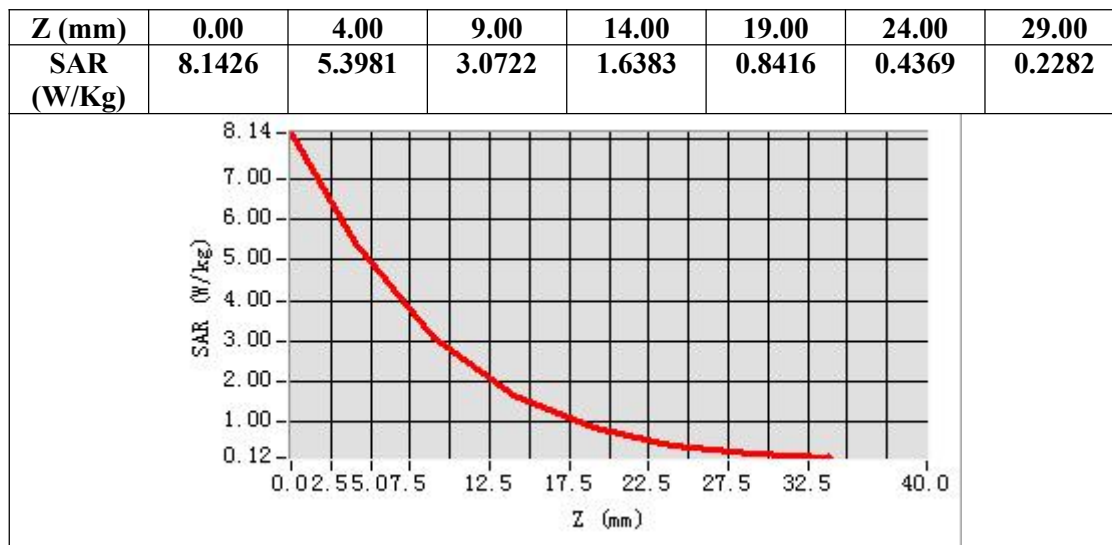

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Laboratory: AGC Lab
LTE Band 4 Mid-Limb Edge 4 (Left) with all accessories (1 RB#0)
DUT: 4G POC Radio; Type: W7

Date: Dec. 09, 2025

Communication System: LTE; Communication System Band: LTE Band 4; Duty Cycle:1:1; Conv.F=2.33;
Frequency:1732.5 MHz; Medium parameters used: $f = 1750$ MHz; $\sigma = 1.33$ mho/m; $\epsilon_r = 41.81$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section


SATIMO Configuration:

- Probe: SSE2; Calibrated: 2025-05-06; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 4 Mid-Limb Edge 4 (Left) with all accessories/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/ LTE Band 4 Mid-Limb Edge 4 (Left) with all accessories/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Limb Edge 4 (Left) with all accessories
Band	LTE Band 4
Channels	Middle
Signal	OFDM (Crest factor: 1.0)


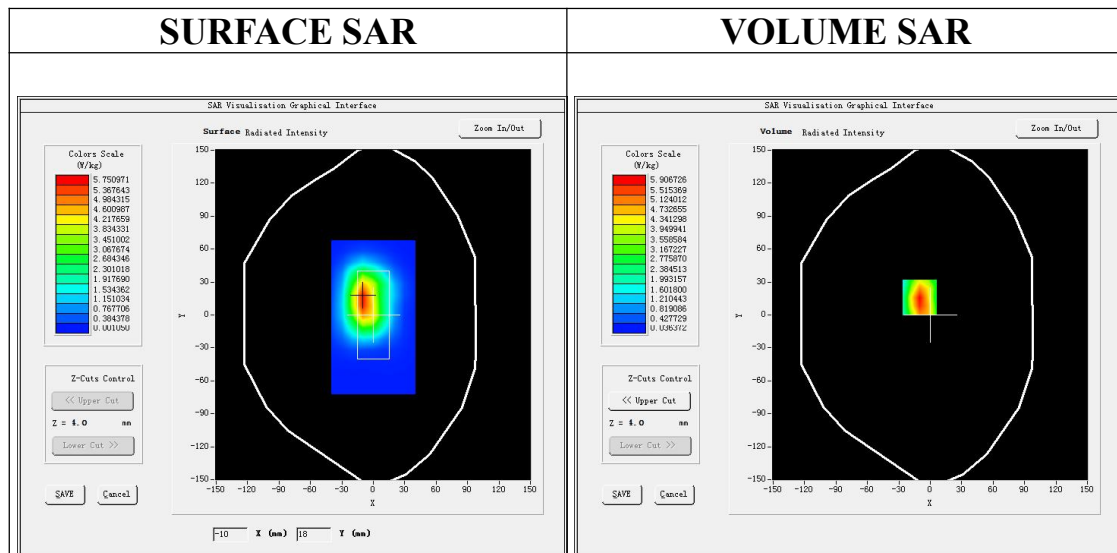


Maximum location: X=-10.00, Y=16.00
SAR Peak: 9.60 W/kg

SAR 10g (W/Kg)	3.030581
SAR 1g (W/Kg)	5.637303

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

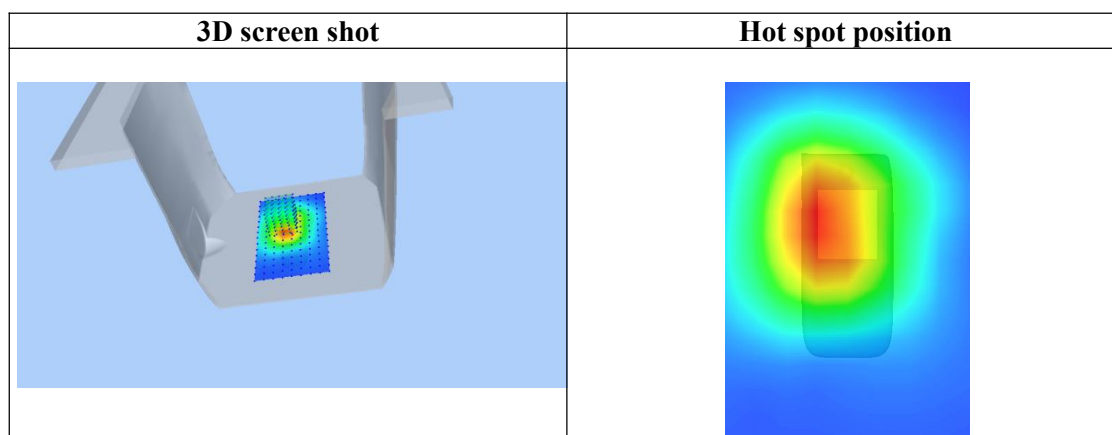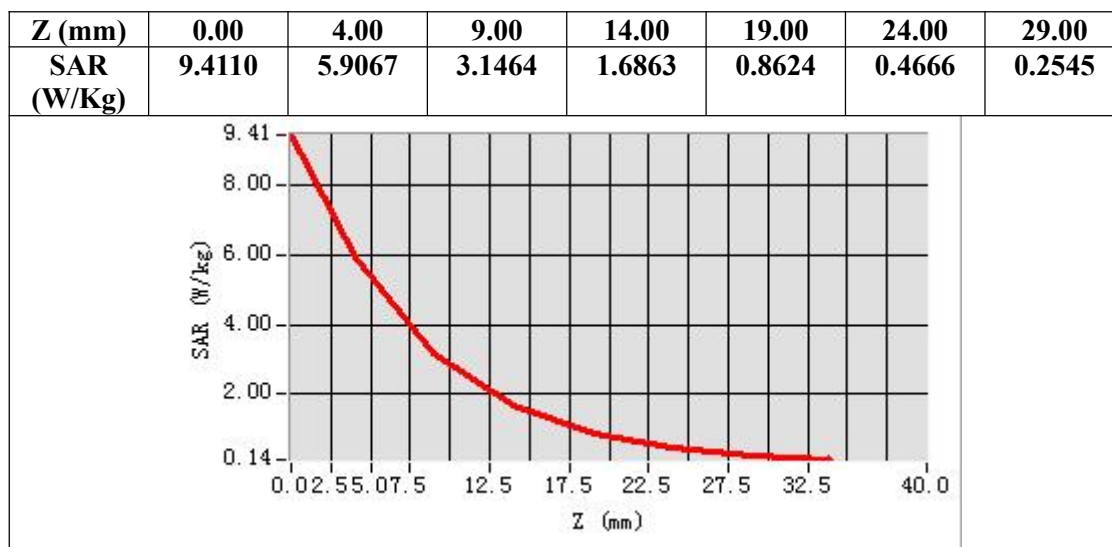

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Laboratory: AGC Lab
LTE Band 7 High-Limb Edge 1 (Top) with all accessories (1RB#0)
DUT: 4G POC Radio; Type: W7

Date: Dec. 11, 2025

Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1; Conv.F=2.19
Frequency: 2560MHz; Medium parameters used: $f = 2600$ MHz; $\sigma = 1.92$ mho/m; $\epsilon_r = 39.13$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section


SATIMO Configuration:

- Probe: SSE2; Calibrated: 2025-05-06; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 7 High-Limb Edge 1 (Top) with all accessories /Area Scan: Measurement grid:
dx=10mm, y=10mm

Configuration/ LTE BAND 7 High- Limb Edge 1 (Top) with all accessories /Zoom Scan: Measurement grid:
dx=5mm, dy=5mm, dz=5mm

Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Limb Edge 1 (Top) with all accessories
Band	LTE BAND 7
Channels	High
Signal	OFDM (Crest factor: 1.0)

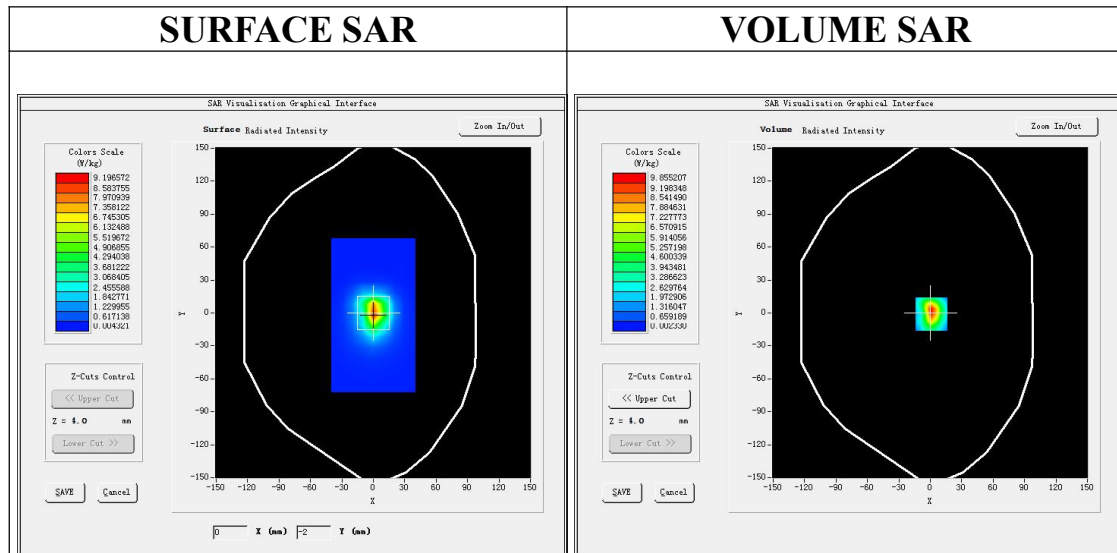



Maximum location: X=1.00, Y=-1.00

SAR Peak: 20.22 W/kg

SAR 10g (W/Kg)	3.184070
SAR 1g (W/Kg)	8.892578

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

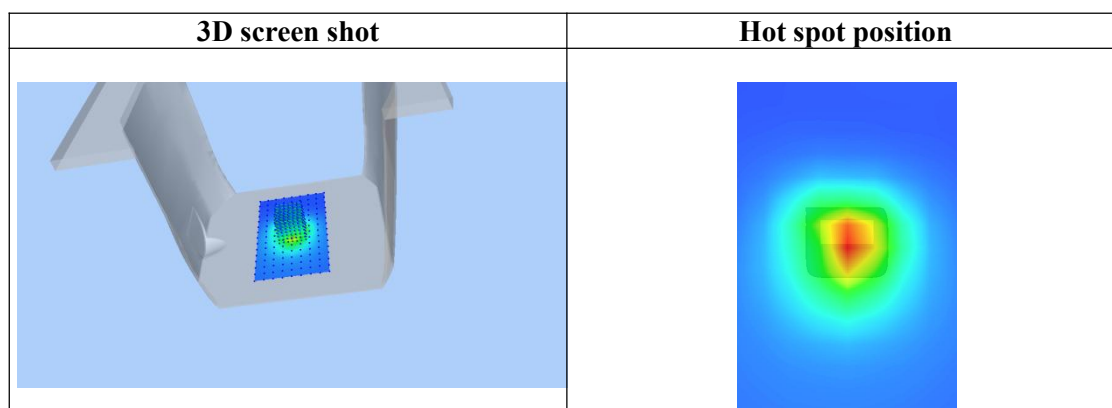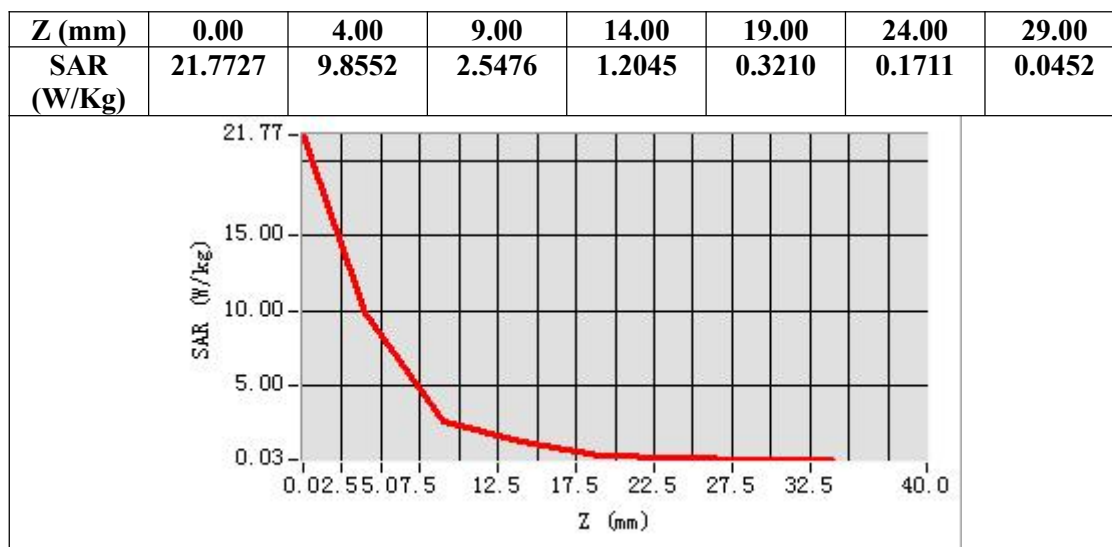

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Laboratory: AGC Lab
LTE Band 66 Mid-Limb Front with all accessories (1 RB#0)
DUT: 4G POC Radio; Type: W7

Date: Dec. 09, 2025

Communication System: LTE; Communication System Band: LTE Band 66; Duty Cycle:1:1; Conv.F=2.33;
Frequency:1745 MHz; Medium parameters used: $f = 1750$ MHz; $\sigma = 1.34$ mho/m; $\epsilon_r = 41.69$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section


SATIMO Configuration:

- Probe: SSE2; Calibrated: 2025-05-06; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 66 Mid-Limb Front with all accessories/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/ LTE Band 66 Mid- Limb Front with all accessories/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Limb Front with all accessories
Band	LTE Band 66
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

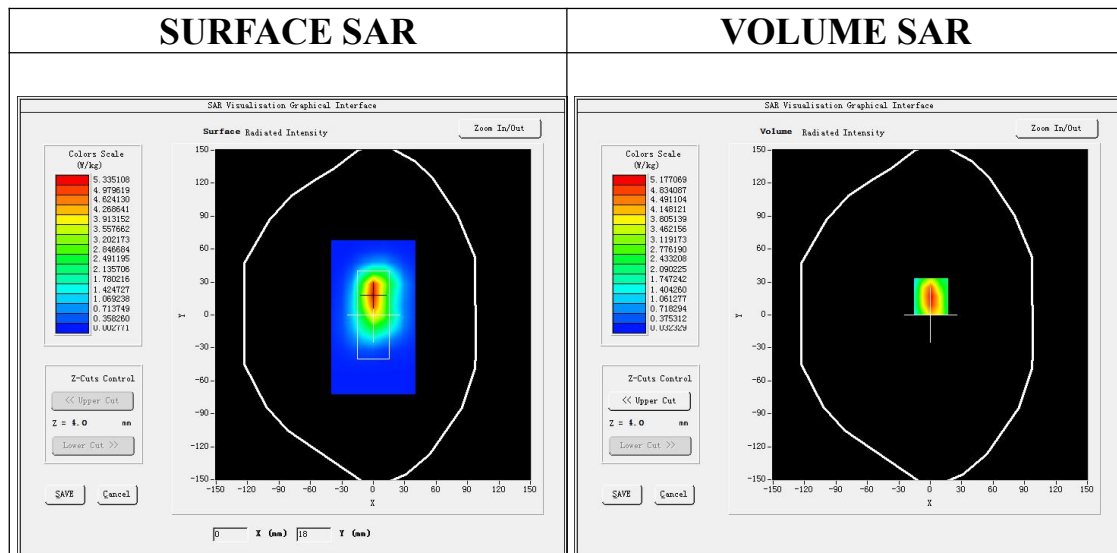



Maximum location: X=0.00, Y=19.00

SAR Peak: 10.54 W/kg

SAR 10g (W/Kg)	2.619202
SAR 1g (W/Kg)	5.315765

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

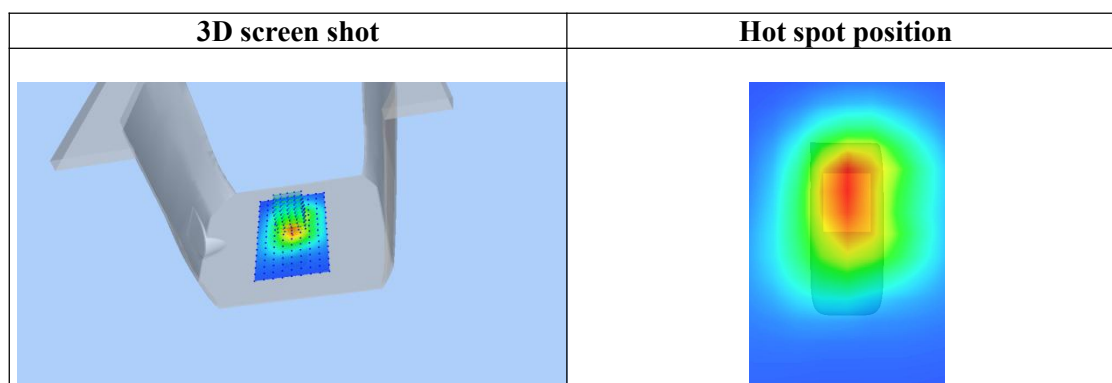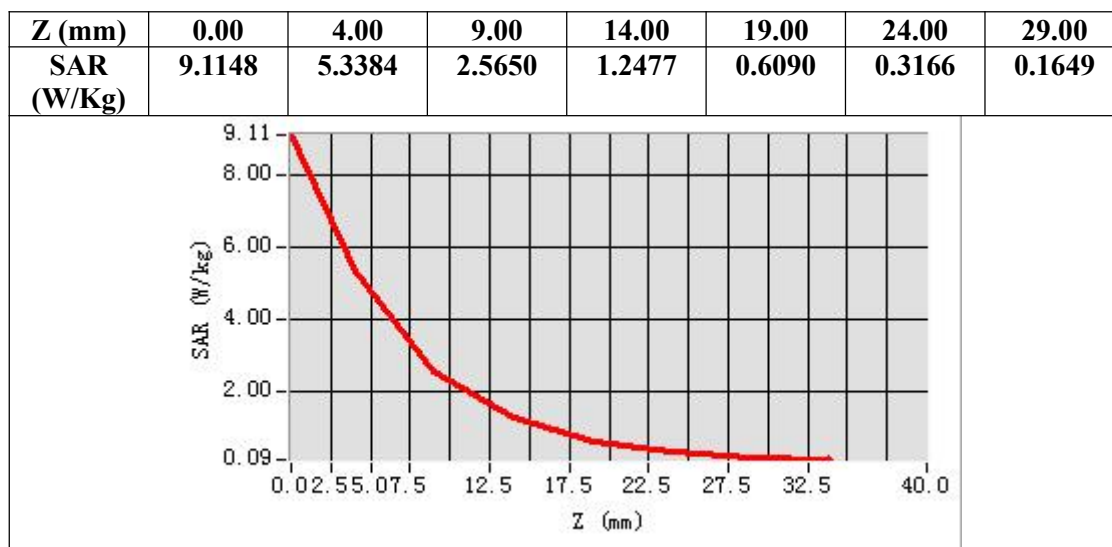

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

APPENDIX C. TEST SETUP PHOTOGRAPHS

Body Back with all accessories 0mm

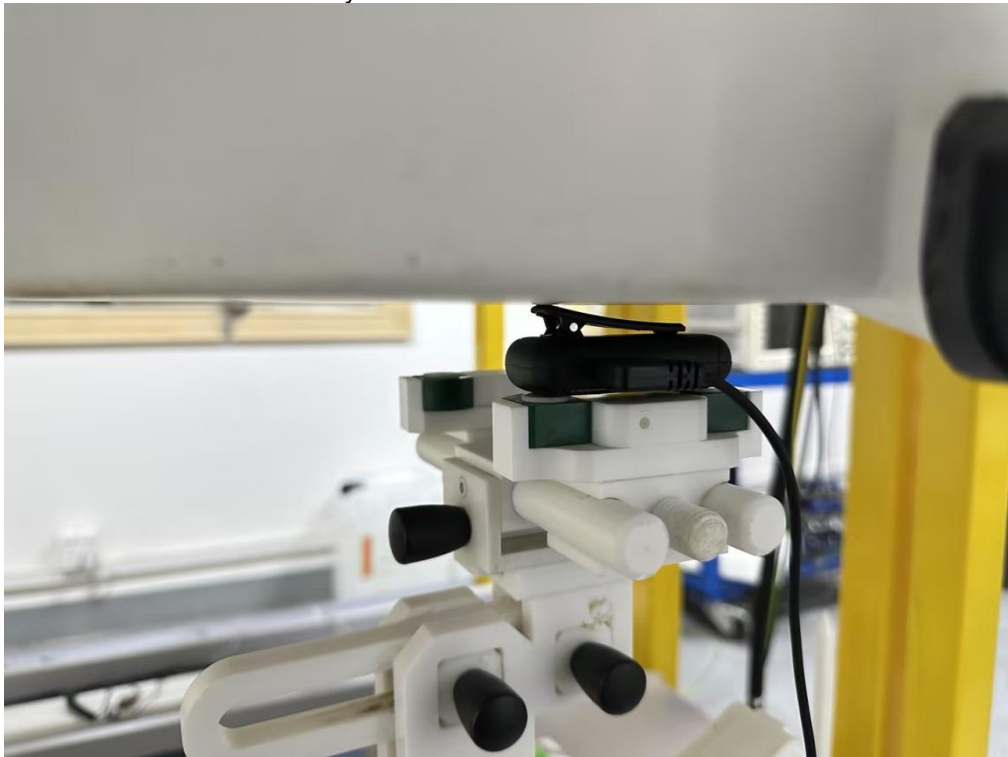

Limb Front with all accessories 0mm



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>