


802.11ac VHT20_Nss1,(MCS0)_2TX

5165MHz_TX

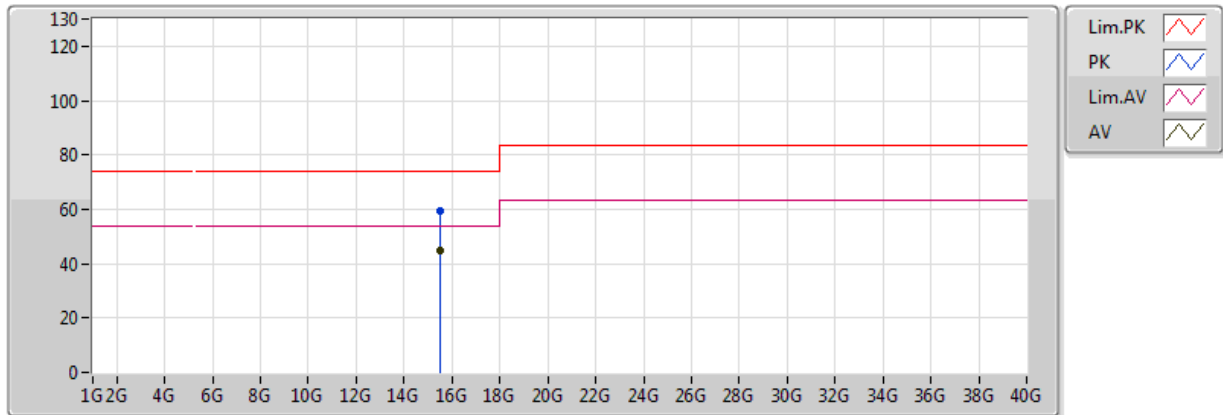


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	15.495G	44.73	54.00	-9.27	14.96	3	Horizontal	151	1.01	-	29.77	39.07	10.82	34.93
PK	15.495G	59.34	74.00	-14.66	14.96	3	Horizontal	151	1.01	-	44.38	39.07	10.82	34.93

802.11ac VHT20_Nss1,(MCS0)_2TX

5200MHz_TX

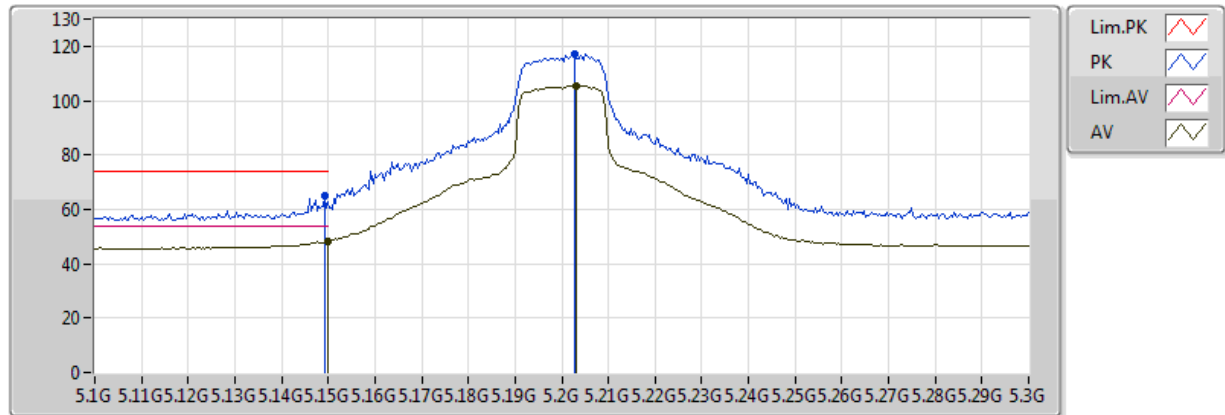


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.149995G	48.20	54.00	-5.80	2.80	3	Vertical	183	1.72	-	45.40	31.66	5.62	34.48
AV	5.2032G	105.55	Inf	-Inf	2.83	3	Vertical	183	1.72	-	102.72	31.68	5.63	34.48
PK	5.1492G	64.87	74.00	-9.13	2.80	3	Vertical	183	1.72	-	62.07	31.66	5.62	34.48
PK	5.2028G	117.06	Inf	-Inf	2.83	3	Vertical	183	1.72	-	114.23	31.68	5.63	34.48

802.11ac VHT20_Nss1,(MCS0)_2TX

5200MHz_TX

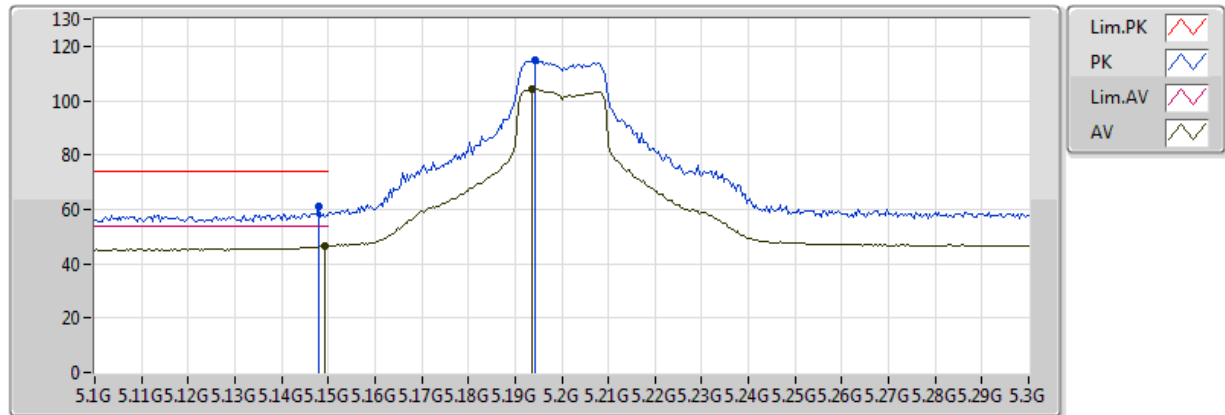


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.1492G	46.48	54.00	-7.52	2.80	3	Horizontal	188	1.65	-	43.68	31.66	5.62	34.48
AV	5.1936G	104.11	Inf	-Inf	2.83	3	Horizontal	188	1.65	-	101.28	31.68	5.63	34.48
PK	5.148G	61.33	74.00	-12.67	2.80	3	Horizontal	188	1.65	-	58.53	31.66	5.62	34.48
PK	5.1944G	114.92	Inf	-Inf	2.83	3	Horizontal	188	1.65	-	112.10	31.68	5.63	34.48

802.11ac VHT20_Nss1,(MCS0)_2TX

5200MHz_TX

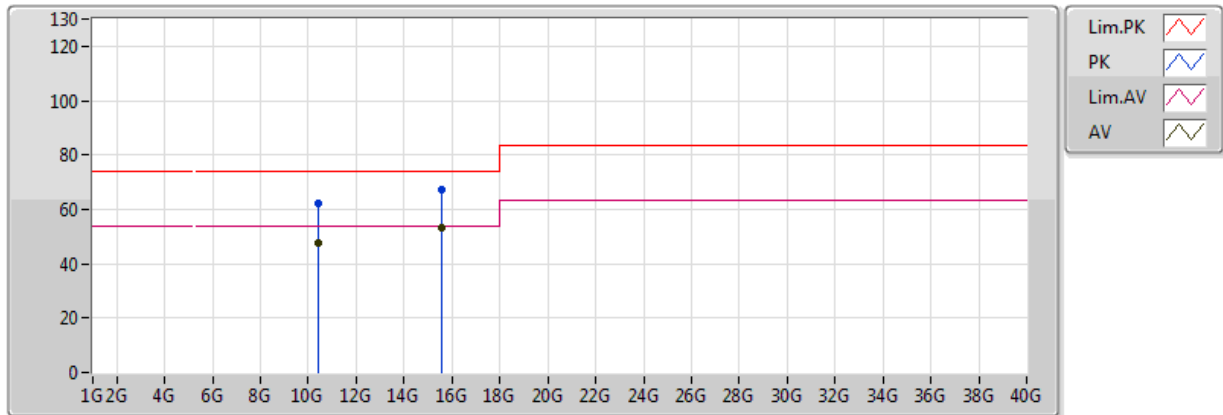


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	10.40732G	47.42	54.00	-6.58	12.56	3	Vertical	148	1.49	-	34.86	39.57	7.95	34.97
AV	15.60024G	53.40	54.00	-0.60	13.84	3	Vertical	349	1.02	-	39.56	38.62	9.97	34.75
PK	10.40948G	61.98	74.00	-12.02	12.56	3	Vertical	148	1.49	-	49.42	39.57	7.95	34.97
PK	15.59712G	67.07	74.00	-6.93	13.85	3	Vertical	349	1.02	-	53.22	38.63	9.97	34.75

802.11ac VHT20_Nss1,(MCS0)_2TX

5200MHz_TX

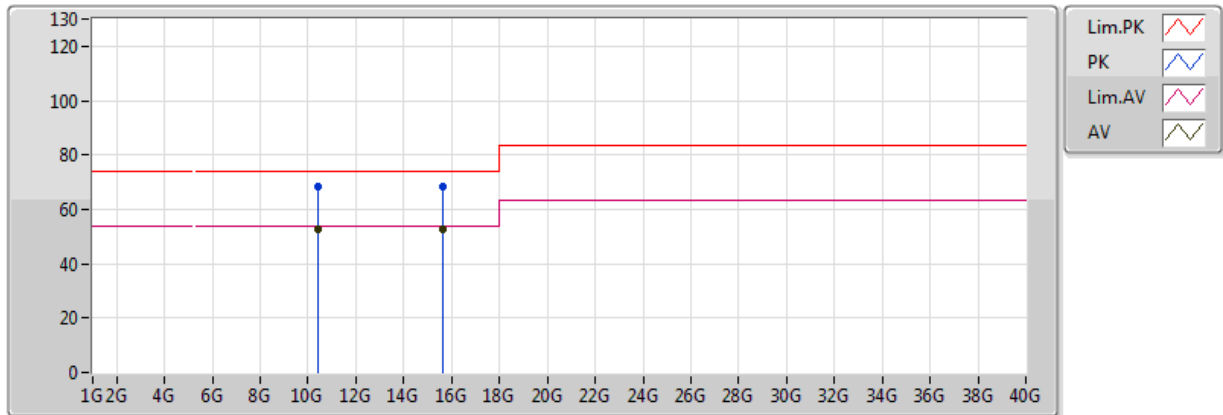


EUY = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	10.40612G	52.68	54.00	-1.32	12.55	3	Horizontal	58	1.45	-	40.13	39.57	7.95	34.97
AV	15.60348G	52.65	54.00	-1.35	13.82	3	Horizontal	30	1.41	-	38.82	38.61	9.97	34.76
PK	10.40624G	68.30	74.00	-5.70	12.55	3	Horizontal	58	1.45	-	55.75	39.57	7.95	34.97
PK	15.60552G	68.27	74.00	-5.73	13.81	3	Horizontal	30	1.41	-	54.46	38.60	9.97	34.76

802.11ac VHT20_Nss1,(MCS0)_2TX

5240MHz_TX

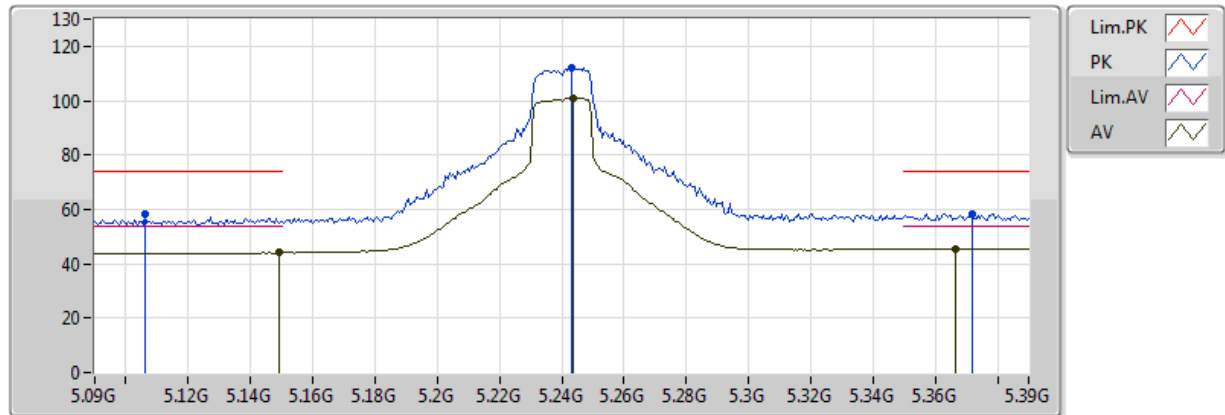


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.1494G	44.00	54.00	-10.00	2.97	3	Vertical	351	1.02	-	41.03	31.68	5.64	34.35
AV	5.2436G	101.14	Inf	-Inf	3.17	3	Vertical	351	1.02	-	97.97	31.79	5.73	34.35
AV	5.3666G	45.51	54.00	-8.49	3.44	3	Vertical	351	1.02	-	42.07	31.94	5.85	34.35
PK	5.1062G	58.31	74.00	-15.69	2.87	3	Vertical	351	1.02	-	55.43	31.63	5.60	34.35
PK	5.243G	112.04	Inf	-Inf	3.17	3	Vertical	351	1.02	-	108.87	31.79	5.73	34.35
PK	5.372G	58.45	74.00	-15.55	3.45	3	Vertical	351	1.02	-	55.00	31.95	5.85	34.35

802.11ac VHT20_Nss1,(MCS0)_2TX

5240MHz_TX

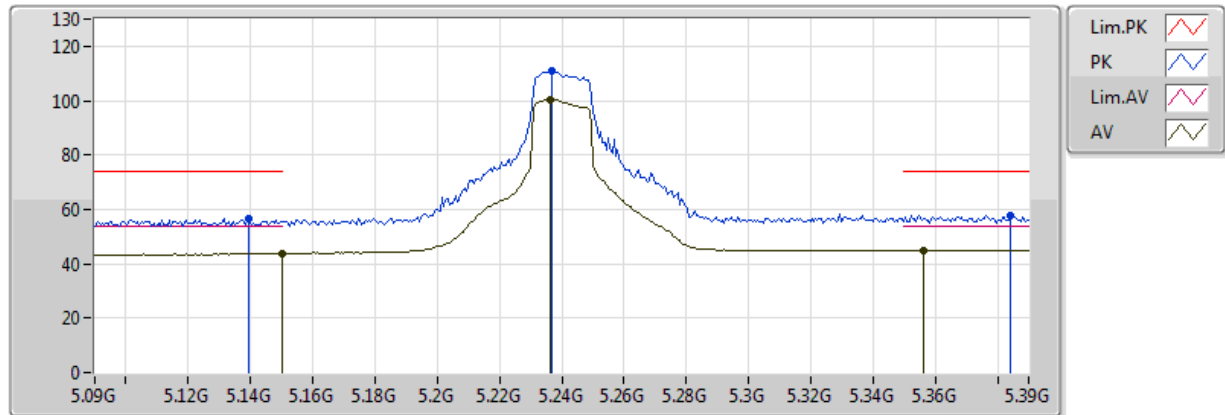


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.149995G	43.90	54.00	-10.10	2.97	3	Horizontal	1	1.50	-	40.93	31.68	5.64	34.35
AV	5.2364G	100.38	Inf	-Inf	3.16	3	Horizontal	1	1.50	-	97.23	31.78	5.72	34.35
AV	5.3564G	45.08	54.00	-8.92	3.41	3	Horizontal	1	1.50	-	41.66	31.93	5.84	34.35
PK	5.1392G	56.71	74.00	-17.29	2.95	3	Horizontal	1	1.50	-	53.77	31.67	5.63	34.35
PK	5.237G	111.00	Inf	-Inf	3.16	3	Horizontal	1	1.50	-	107.84	31.78	5.72	34.35
PK	5.384G	57.99	74.00	-16.01	3.47	3	Horizontal	1	1.50	-	54.52	31.96	5.86	34.35

802.11ac VHT20_Nss1,(MCS0)_2TX

5240MHz_TX

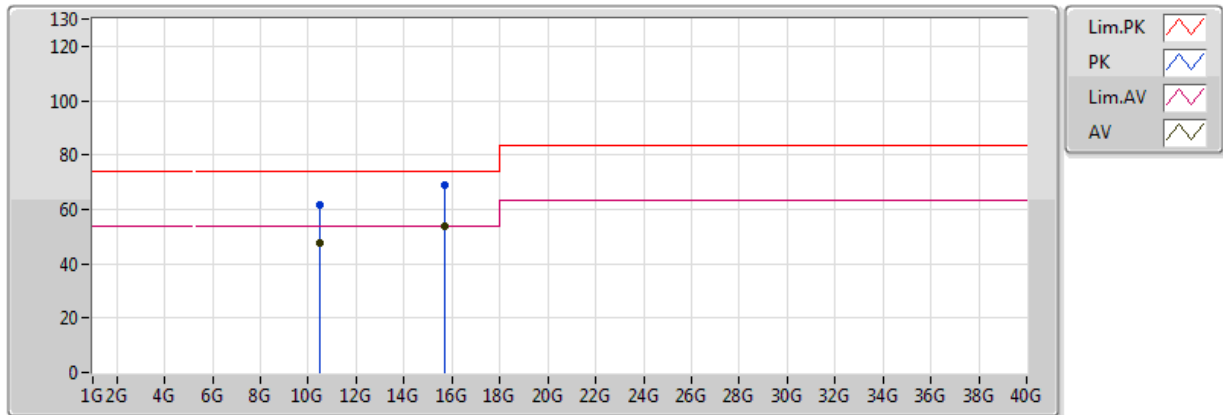


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	10.48G	47.47	54.00	-6.53	13.44	3	Vertical	187	1.37	-	34.03	39.32	9.05	34.94
AV	15.72G	53.58	54.00	-0.42	14.13	3	Vertical	153	1.16	-	39.45	38.19	11.00	35.06
PK	10.48G	61.87	74.00	-12.13	13.44	3	Vertical	187	1.37	-	48.43	39.32	9.05	34.94
PK	15.72G	69.04	74.00	-4.96	14.13	3	Vertical	153	1.16	-	54.91	38.19	11.00	35.06

802.11ac VHT20_Nss1,(MCS0)_2TX

5240MHz_TX

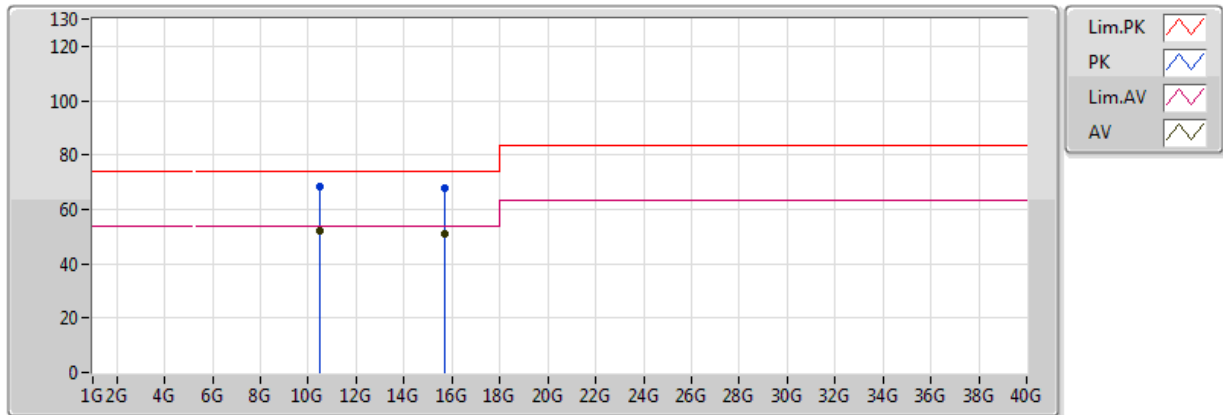


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	10.48G	52.32	54.00	-1.68	13.44	3	Horizontal	227	1.50	-	38.88	39.32	9.05	34.94
AV	15.72G	51.18	54.00	-2.82	14.13	3	Horizontal	177	1.56	-	37.05	38.19	11.00	35.06
PK	10.48G	68.32	74.00	-5.68	13.44	3	Horizontal	227	1.50	-	54.88	39.32	9.05	34.94
PK	15.72G	67.53	74.00	-6.47	14.13	3	Horizontal	177	1.56	-	53.40	38.19	11.00	35.06

802.11ac VHT20_Nss1,(MCS0)_2TX

5740MHz_TX

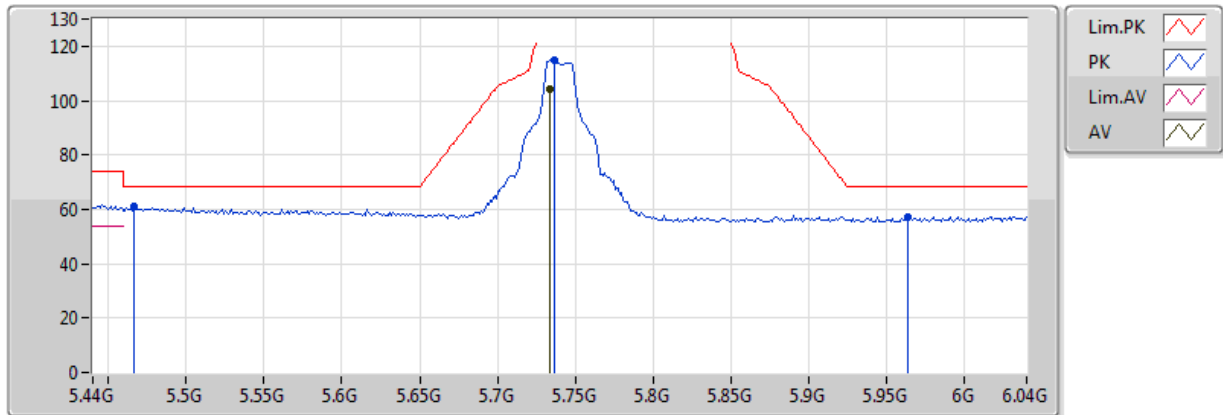


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.734G	103.98	Inf	-Inf	3.46	3	Vertical	199	1.65	-	100.52	32.17	5.84	34.55
PK	5.4664G	61.10	68.20	-7.10	2.96	3	Vertical	199	1.65	-	58.14	31.79	5.67	34.49
PK	5.7364G	115.02	Inf	-Inf	3.47	3	Vertical	199	1.65	-	111.55	32.18	5.84	34.55
PK	5.9632G	57.38	68.20	-10.82	3.94	3	Vertical	199	1.65	-	53.44	32.54	6.00	34.60

802.11ac VHT20_Nss1,(MCS0)_2TX

5740MHz_TX

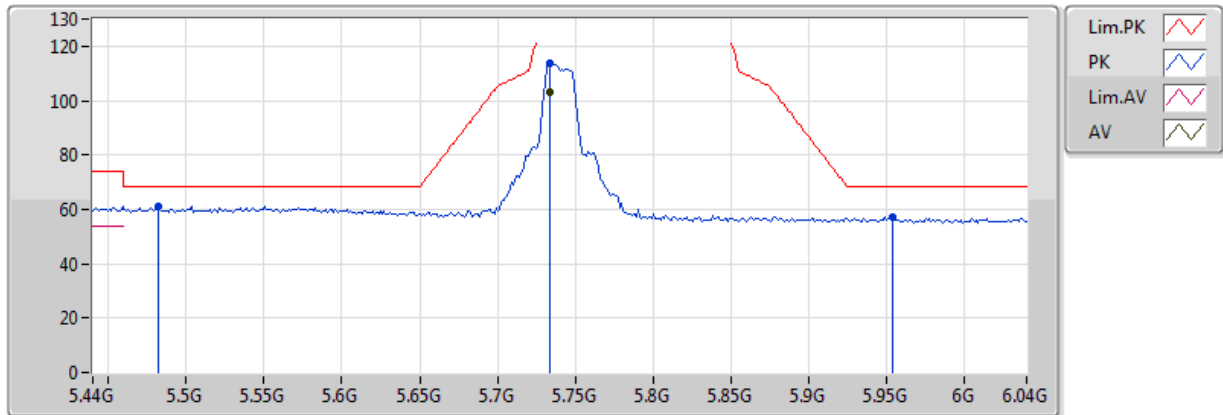


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.734G	102.88	Inf	-Inf	3.46	3	Horizontal	186	1.88	-	99.41	32.17	5.84	34.55
PK	5.482G	61.03	68.20	-7.17	2.97	3	Horizontal	186	1.88	-	58.06	31.79	5.67	34.49
PK	5.734G	113.82	Inf	-Inf	3.46	3	Horizontal	186	1.88	-	110.36	32.17	5.84	34.55
PK	5.9536G	57.16	68.20	-11.04	3.92	3	Horizontal	186	1.88	-	53.23	32.53	6.00	34.60

802.11ac VHT20_Nss1,(MCS0)_2TX

5740MHz_TX

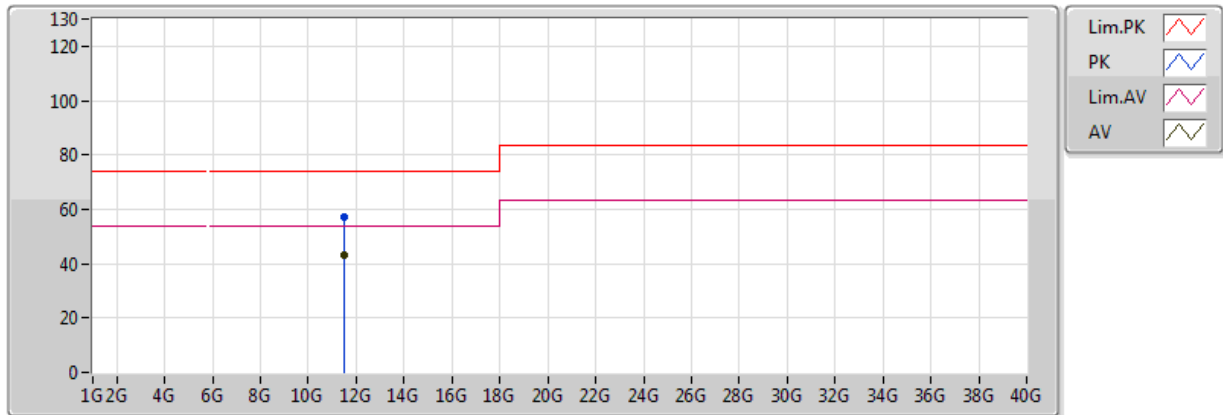


EUT = Y

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	11.4839G	43.38	54.00	-10.62	13.42	3	Vertical	356	2.44	-	29.97	39.72	8.35	34.66
PK	11.48528G	57.00	74.00	-17.00	13.42	3	Vertical	356	2.44	-	43.58	39.72	8.35	34.66

802.11ac VHT20_Nss1,(MCS0)_2TX

5740MHz_TX

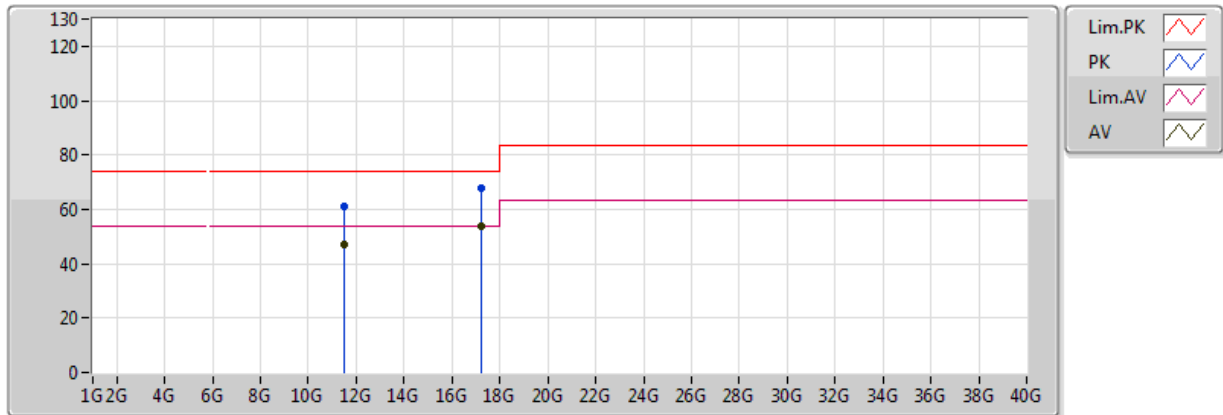


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	11.47484G	47.16	54.00	-6.84	13.43	3	Horizontal	234	1.50	-	33.73	39.74	8.35	34.65
AV	17.22066G	53.87	54.00	-0.13	18.15	3	Horizontal	210	1.64	-	35.72	41.50	10.46	33.82
PK	11.47556G	61.04	74.00	-12.96	13.43	3	Horizontal	234	1.50	-	47.61	39.73	8.35	34.65
PK	17.2218G	67.56	74.00	-6.44	18.15	3	Horizontal	210	1.64	-	49.41	41.51	10.46	33.82

802.11ac VHT20_Nss1,(MCS0)_2TX

5790MHz_TX

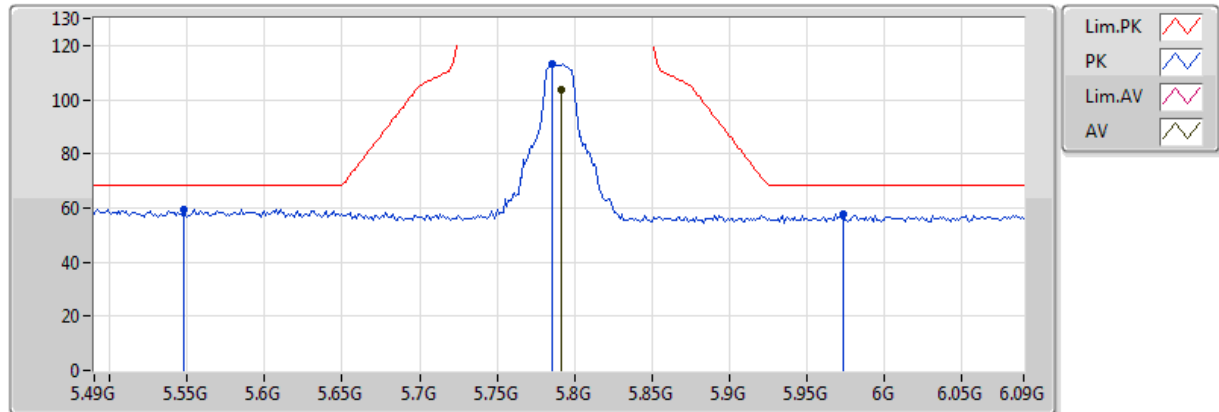


EUT = Y

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.7912G	103.51	Inf	-Inf	3.59	3	Vertical	189	1.99	-	99.92	32.27	5.88	34.56
PK	5.5476G	59.66	68.20	-8.54	3.08	3	Vertical	189	1.99	-	56.58	31.88	5.70	34.50
PK	5.7852G	113.28	Inf	-Inf	3.58	3	Vertical	189	1.99	-	109.70	32.26	5.88	34.56
PK	5.9736G	57.58	68.20	-10.62	3.96	3	Vertical	189	1.99	-	53.61	32.56	6.01	34.60

802.11ac VHT20_Nss1,(MCS0)_2TX

5790MHz_TX

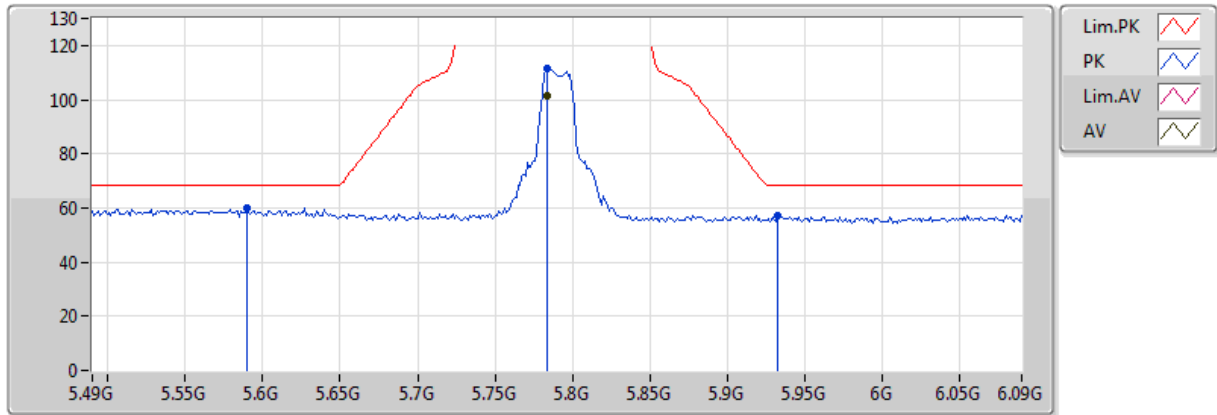


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.784G	101.59	Inf	-Inf	3.57	3	Horizontal	196	2.20	-	98.02	32.25	5.88	34.56
PK	5.5896G	60.13	68.20	-8.07	3.17	3	Horizontal	196	2.20	-	56.96	31.94	5.73	34.51
PK	5.784G	111.37	Inf	-Inf	3.57	3	Horizontal	196	2.20	-	107.80	32.25	5.88	34.56
PK	5.9328G	57.20	68.20	-11.00	3.88	3	Horizontal	196	2.20	-	53.32	32.49	5.98	34.60

802.11ac VHT20_Nss1,(MCS0)_2TX

5790MHz_TX

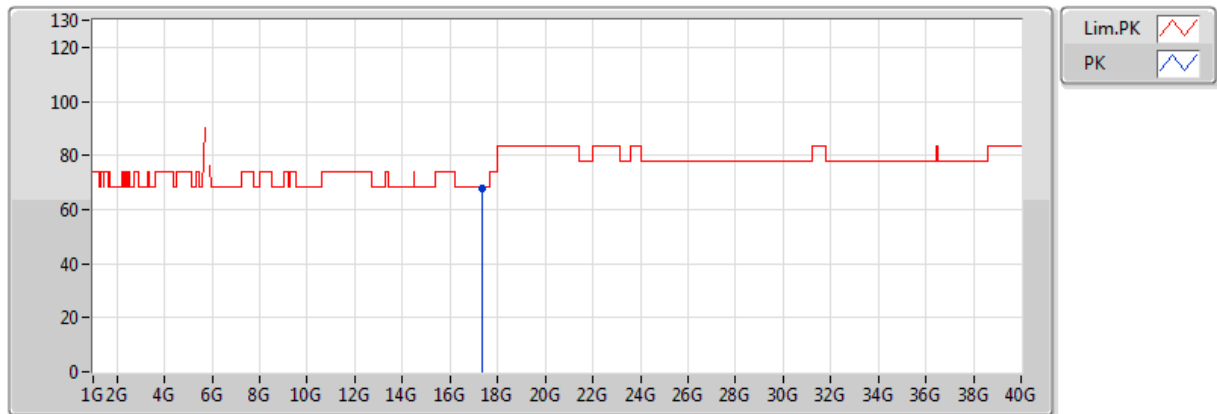


EUT = Y

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	17.373G	67.56	68.20	-0.64	19.18	3	Vertical	347	2.49	-	48.38	42.54	10.54	33.89

802.11ac VHT20_Nss1,(MCS0)_2TX

5790MHz_TX

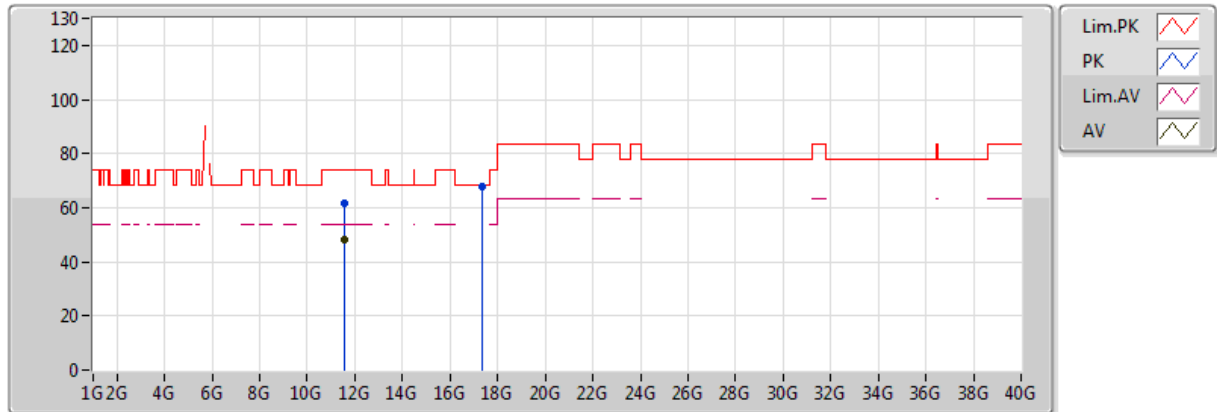


EUT = Y

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	11.58162G	48.42	54.00	-5.58	13.28	3	Horizontal	314	1.49	-	35.14	39.59	8.38	34.68
PK	11.58378G	61.86	74.00	-12.14	13.28	3	Horizontal	314	1.49	-	48.58	39.58	8.38	34.68
PK	17.37G	67.95	68.20	-0.25	19.16	3	Horizontal	346	1.47	-	48.79	42.52	10.53	33.89

802.11ac VHT20_Nss1,(MCS0)_2TX

5835MHz_TX

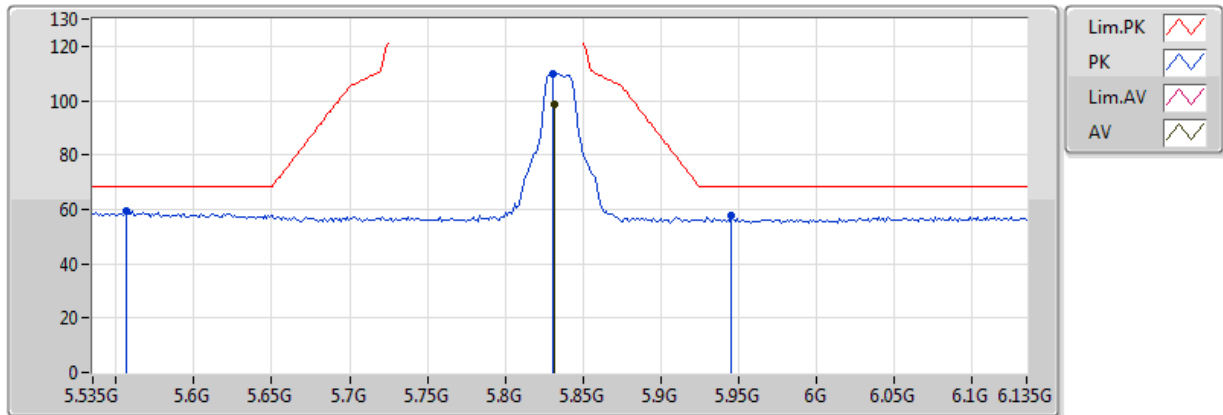


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.8314G	98.85	Inf	-Inf	3.67	3	Vertical	202	1.50	-	95.18	32.33	5.91	34.57
PK	5.5566G	59.22	68.20	-8.98	3.10	3	Vertical	202	1.50	-	56.12	31.89	5.71	34.50
PK	5.8302G	110.03	Inf	-Inf	3.67	3	Vertical	202	1.50	-	106.36	32.33	5.91	34.57
PK	5.9454G	57.48	68.20	-10.72	3.91	3	Vertical	202	1.50	-	53.58	32.51	5.99	34.60

802.11ac VHT20_Nss1,(MCS0)_2TX

5835MHz_TX

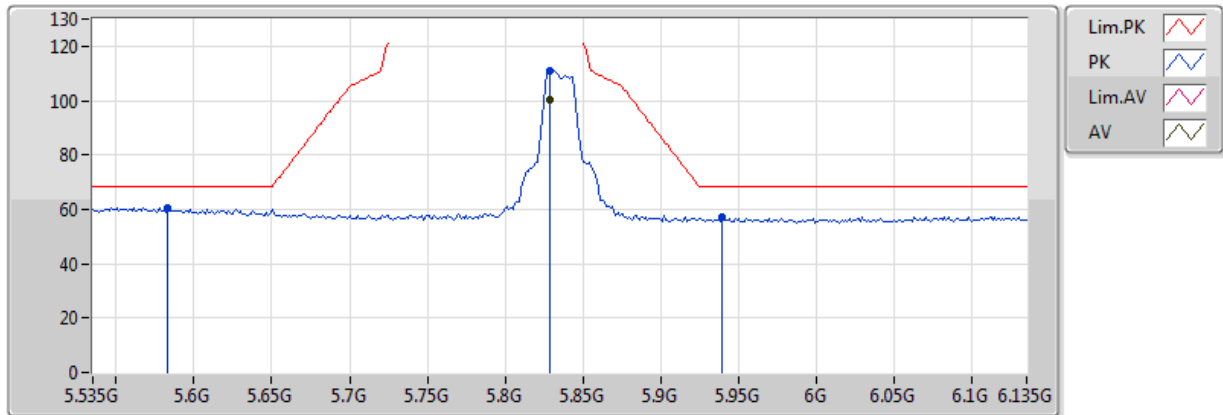


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.829G	100.25	Inf	-Inf	3.67	3	Horizontal	200	1.85	-	96.58	32.33	5.91	34.57
PK	5.583G	60.52	68.20	-7.68	3.15	3	Horizontal	200	1.85	-	57.37	31.93	5.73	34.51
PK	5.829G	111.16	Inf	-Inf	3.67	3	Horizontal	200	1.85	-	107.49	32.33	5.91	34.57
PK	5.9394G	57.30	68.20	-10.90	3.89	3	Horizontal	200	1.85	-	53.41	32.50	5.99	34.60

802.11ac VHT20_Nss1,(MCS0)_2TX

5835MHz_TX

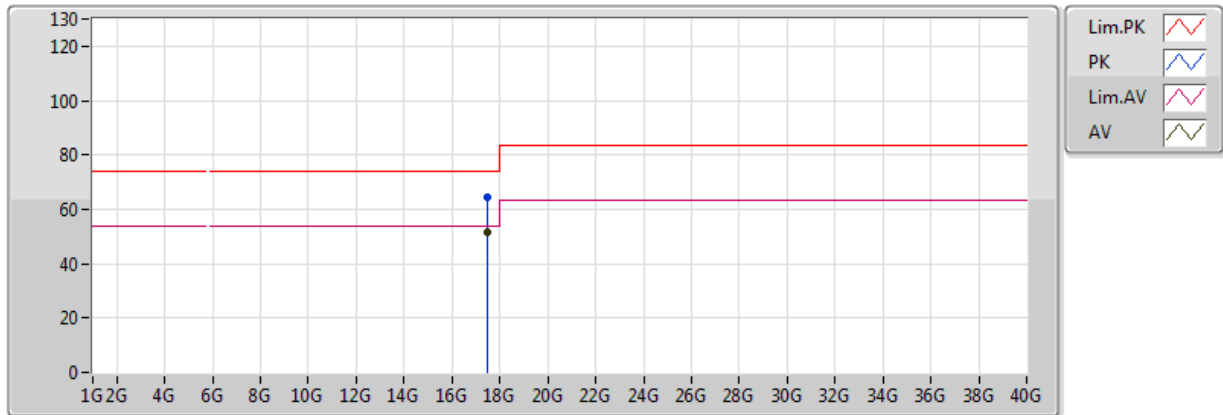


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	17.50338G	51.50	54.00	-2.50	20.06	3	Vertical	197	1.48	-	31.44	43.42	10.60	33.96
PK	17.50332G	64.67	74.00	-9.33	20.06	3	Vertical	197	1.48	-	44.60	43.42	10.60	33.96

802.11ac VHT20_Nss1,(MCS0)_2TX

5835MHz_TX

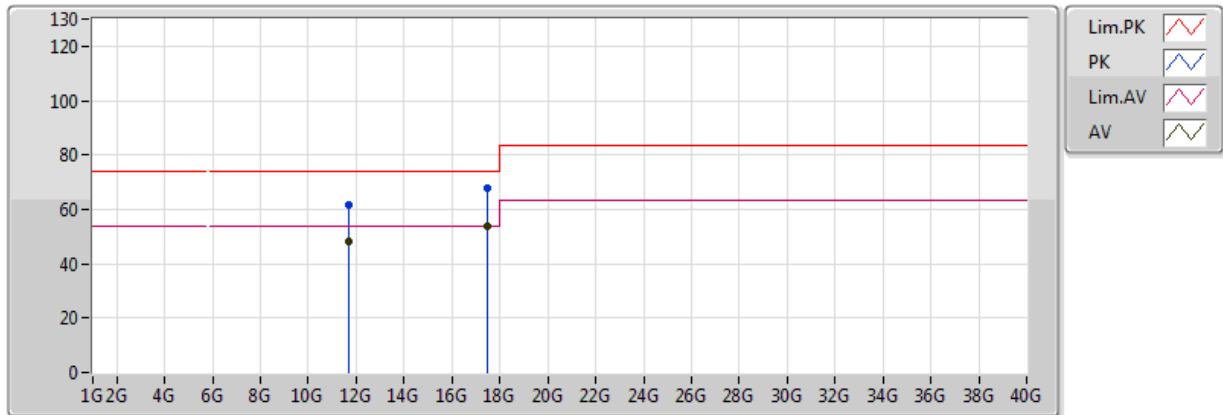


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	11.67138G	48.04	54.00	-5.96	13.16	3	Horizontal	123	1.94	-	34.88	39.46	8.40	34.70
AV	17.5014G	53.58	54.00	-0.42	20.05	3	Horizontal	211	1.50	-	33.54	43.41	10.60	33.96
PK	11.67102G	61.73	74.00	-12.27	13.16	3	Horizontal	123	1.94	-	48.57	39.46	8.40	34.70
PK	17.50158G	67.96	74.00	-6.04	20.05	3	Horizontal	211	1.50	-	47.91	43.41	10.60	33.96

802.11ac VHT30_Nss1,(MCS0)_2TX

5170MHz_TX

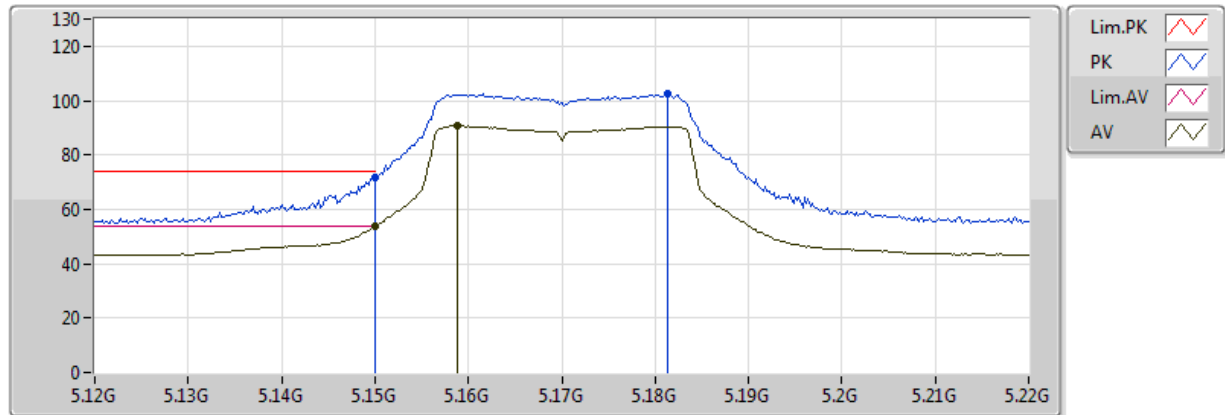


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.149995G	53.87	54.00	-0.13	2.80	3	Vertical	0	1.30	-	51.07	31.66	5.62	34.48
AV	5.1588G	90.74	Inf	-Inf	2.81	3	Vertical	0	1.30	-	87.93	31.66	5.62	34.48
PK	5.149995G	71.89	74.00	-2.11	2.80	3	Vertical	0	1.30	-	69.09	31.66	5.62	34.48
PK	5.1814G	102.45	Inf	-Inf	2.82	3	Vertical	0	1.30	-	99.63	31.67	5.63	34.48

802.11ac VHT30_Nss1,(MCS0)_2TX

5170MHz_TX

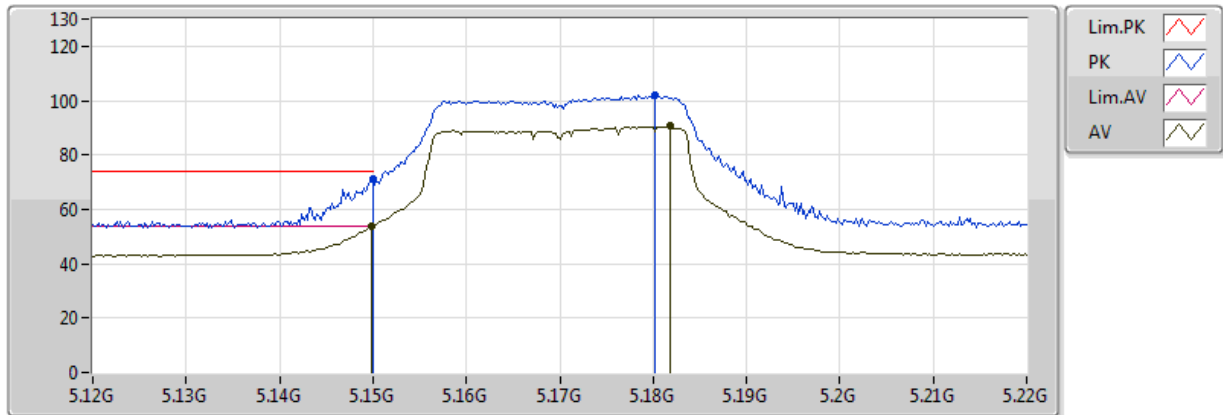


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.1498G	53.76	54.00	-0.24	2.80	3	Horizontal	14	1.76	-	50.96	31.66	5.62	34.48
AV	5.1818G	90.57	Inf	-Inf	2.82	3	Horizontal	14	1.76	-	87.75	31.67	5.63	34.48
PK	5.149995G	71.01	74.00	-2.99	2.80	3	Horizontal	14	1.76	-	68.21	31.66	5.62	34.48
PK	5.1802G	101.94	Inf	-Inf	2.82	3	Horizontal	14	1.76	-	99.12	31.67	5.63	34.48

802.11ac VHT30_Nss1,(MCS0)_2TX

5170MHz_TX

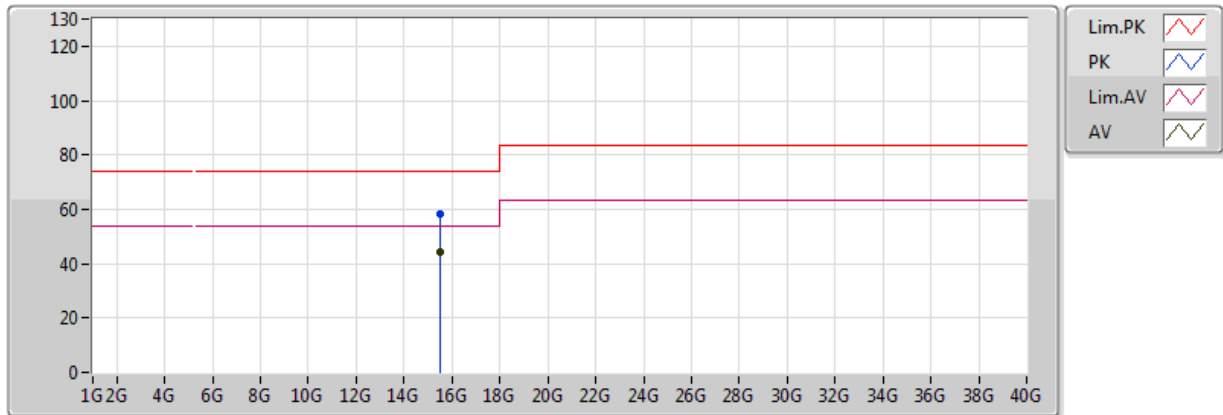


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	15.51G	44.43	54.00	-9.57	14.90	3	Vertical	360	1.50	-	29.53	39.01	10.83	34.95
PK	15.51G	58.51	74.00	-15.49	14.90	3	Vertical	360	1.50	-	43.61	39.01	10.83	34.95

802.11ac VHT30_Nss1,(MCS0)_2TX

5170MHz_TX

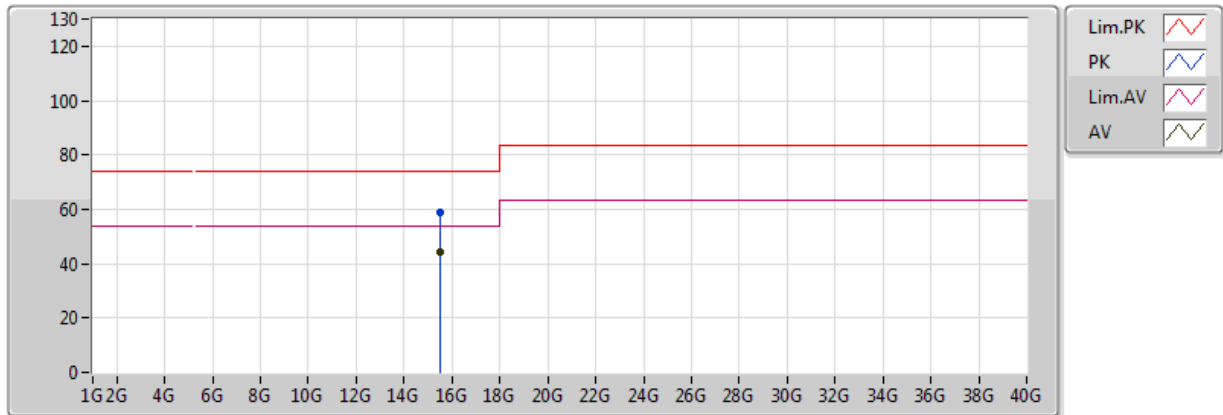


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	15.51G	44.37	54.00	-9.63	14.90	3	Horizontal	9	1.50	-	29.47	39.01	10.83	34.95
PK	15.51G	58.92	74.00	-15.08	14.90	3	Horizontal	9	1.50	-	44.02	39.01	10.83	34.95

802.11ac VHT30_Nss1,(MCS0)_2TX

5200MHz_TX

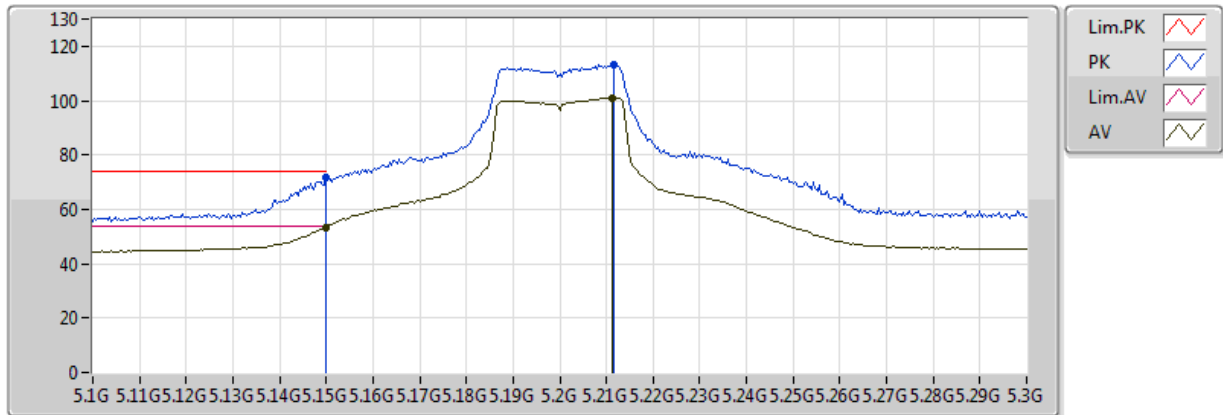


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.149995G	53.50	54.00	-0.50	2.80	3	Vertical	187	1.90	-	50.70	31.66	5.62	34.48
AV	5.2112G	101.10	Inf	-Inf	2.83	3	Vertical	187	1.90	-	98.27	31.68	5.63	34.48
PK	5.149995G	71.66	74.00	-2.34	2.80	3	Vertical	187	1.90	-	68.86	31.66	5.62	34.48
PK	5.2116G	113.00	Inf	-Inf	2.83	3	Vertical	187	1.90	-	110.16	31.68	5.63	34.48

802.11ac VHT30_Nss1,(MCS0)_2TX

5200MHz_TX

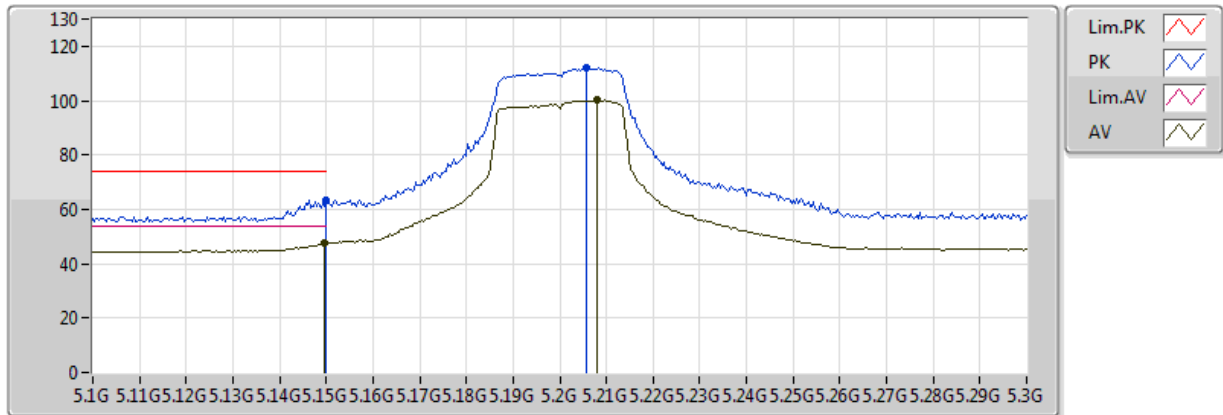


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.1496G	47.78	54.00	-6.22	2.80	3	Horizontal	189	1.68	-	44.98	31.66	5.62	34.48
AV	5.208G	100.11	Inf	-Inf	2.83	3	Horizontal	189	1.68	-	97.28	31.68	5.63	34.48
PK	5.149995G	63.56	74.00	-10.44	2.80	3	Horizontal	189	1.68	-	60.76	31.66	5.62	34.48
PK	5.2056G	112.25	Inf	-Inf	2.83	3	Horizontal	189	1.68	-	109.42	31.68	5.63	34.48

802.11ac VHT30_Nss1,(MCS0)_2TX

5200MHz_TX

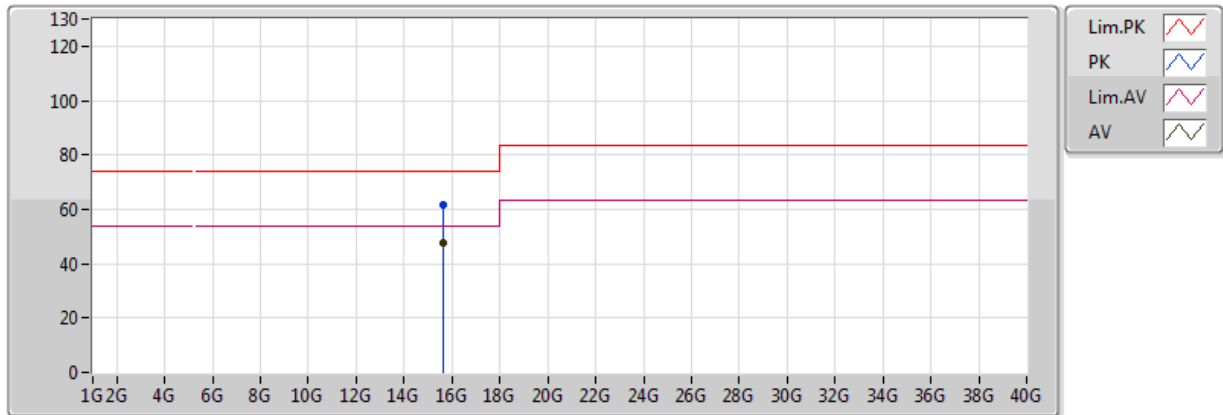


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	15.61404G	47.79	54.00	-6.21	13.77	3	Vertical	345	1.13	-	34.02	38.57	9.97	34.77
PK	15.6168G	61.47	74.00	-12.53	13.76	3	Vertical	345	1.13	-	47.71	38.56	9.97	34.77

802.11ac VHT30_Nss1,(MCS0)_2TX

5200MHz_TX

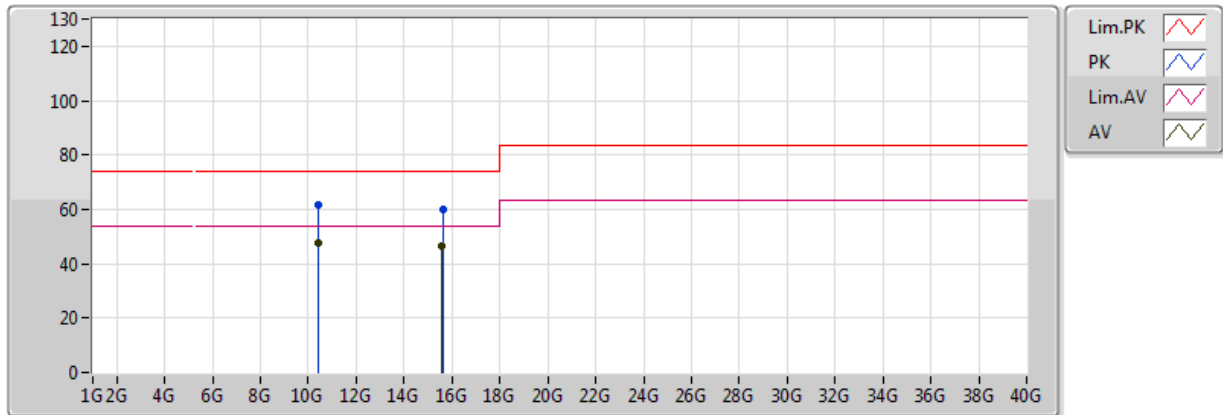


EUT = Y

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	10.40048G	47.57	54.00	-6.43	12.54	3	Horizontal	317	1.37	-	35.03	39.56	7.95	34.97
AV	15.5964G	46.56	54.00	-7.44	13.86	3	Horizontal	308	1.46	-	32.71	38.63	9.97	34.75
PK	10.40132G	61.48	74.00	-12.52	12.54	3	Horizontal	317	1.37	-	48.94	39.56	7.95	34.97
PK	15.60312G	59.81	74.00	-14.19	13.82	3	Horizontal	308	1.46	-	45.98	38.61	9.97	34.76

802.11ac VHT30_Nss1,(MCS0)_2TX

5235MHz_TX

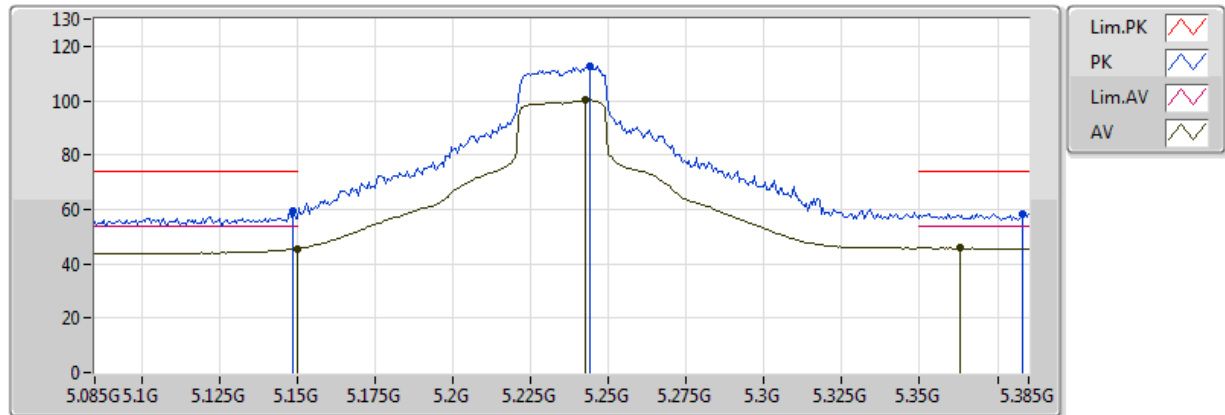


EUT = Y

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.149995G	45.56	54.00	-8.44	2.97	3	Vertical	355	1.13	-	42.59	31.68	5.64	34.35
AV	5.2428G	100.11	Inf	-Inf	3.17	3	Vertical	355	1.13	-	96.94	31.79	5.73	34.35
AV	5.3628G	45.87	54.00	-8.13	3.43	3	Vertical	355	1.13	-	42.44	31.94	5.84	34.35
PK	5.1486G	59.30	74.00	-14.70	2.97	3	Vertical	355	1.13	-	56.34	31.68	5.64	34.35
PK	5.244G	112.42	Inf	-Inf	3.17	3	Vertical	355	1.13	-	109.25	31.79	5.73	34.35
PK	5.3832G	58.54	74.00	-15.46	3.47	3	Vertical	355	1.13	-	55.06	31.96	5.86	34.35

802.11ac VHT30_Nss1,(MCS0)_2TX

5235MHz_TX

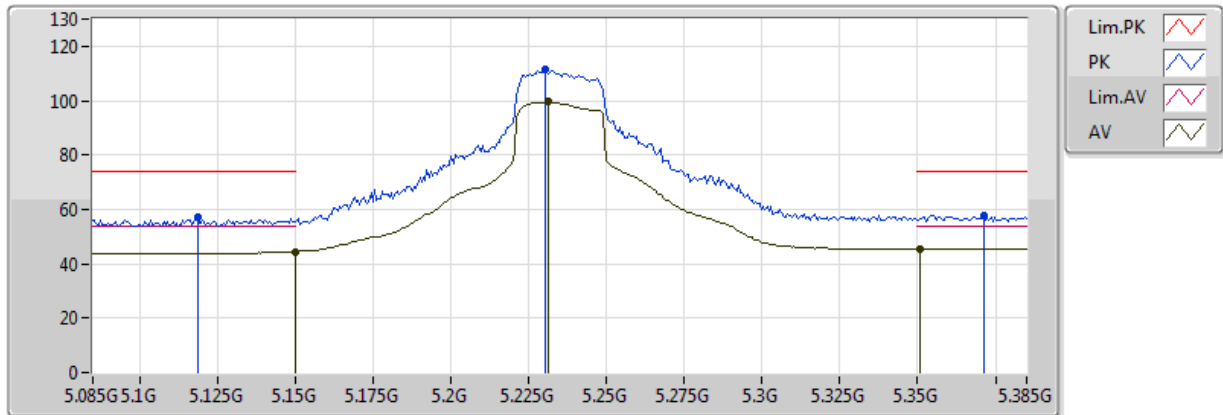


EUT = Y

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.149995G	44.49	54.00	-9.51	2.97	3	Horizontal	3	1.50	-	41.52	31.68	5.64	34.35
AV	5.2314G	99.51	Inf	-Inf	3.15	3	Horizontal	3	1.50	-	96.36	31.78	5.72	34.35
AV	5.3508G	45.47	54.00	-8.53	3.40	3	Horizontal	3	1.50	-	42.06	31.92	5.83	34.35
PK	5.1186G	57.00	74.00	-17.00	2.90	3	Horizontal	3	1.50	-	54.10	31.64	5.61	34.35
PK	5.2302G	111.46	Inf	-Inf	3.14	3	Horizontal	3	1.50	-	108.31	31.78	5.72	34.35
PK	5.3712G	57.91	74.00	-16.09	3.45	3	Horizontal	3	1.50	-	54.46	31.95	5.85	34.35

802.11ac VHT30_Nss1,(MCS0)_2TX

5235MHz_TX

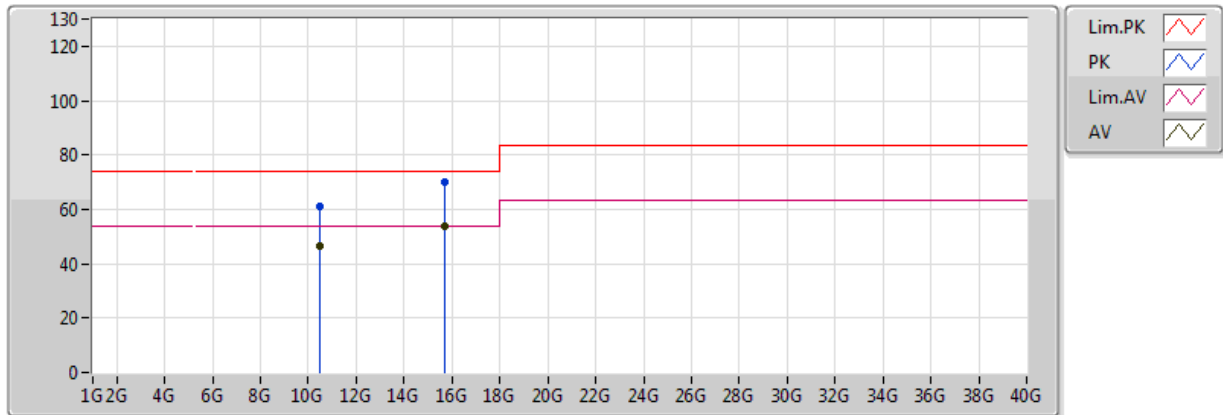


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	10.47G	46.55	54.00	-7.45	13.41	3	Vertical	186	1.49	-	33.14	39.31	9.05	34.94
AV	15.705G	53.82	54.00	-0.18	14.19	3	Vertical	154	1.15	-	39.63	38.25	10.99	35.05
PK	10.47G	61.15	74.00	-12.85	13.41	3	Vertical	186	1.49	-	47.74	39.31	9.05	34.94
PK	15.705G	70.01	74.00	-3.99	14.19	3	Vertical	154	1.15	-	55.82	38.25	10.99	35.05

802.11ac VHT30_Nss1,(MCS0)_2TX

5235MHz_TX

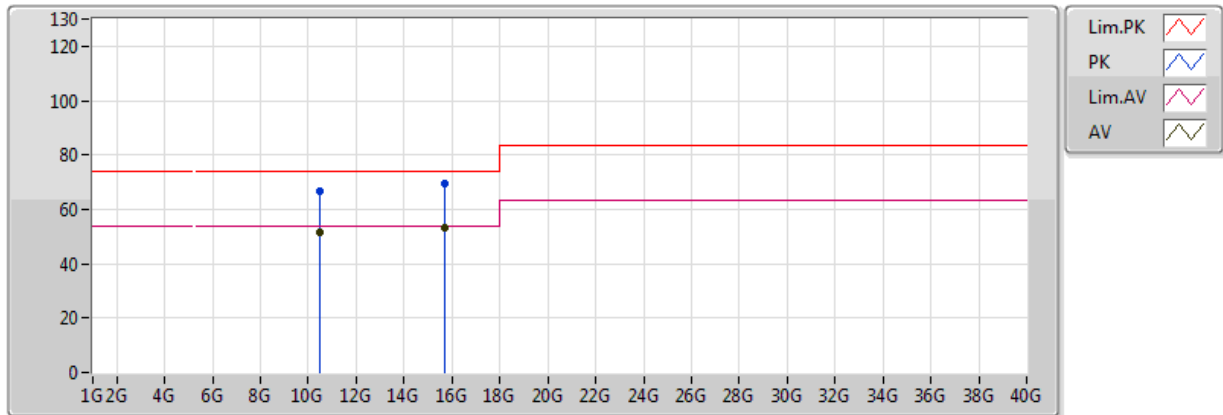


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	10.47G	51.37	54.00	-2.63	13.41	3	Horizontal	229	1.50	-	37.96	39.31	9.05	34.94
AV	15.705G	53.20	54.00	-0.80	14.19	3	Horizontal	174	1.18	-	39.01	38.25	10.99	35.05
PK	10.47G	66.52	74.00	-7.48	13.41	3	Horizontal	229	1.50	-	53.11	39.31	9.05	34.94
PK	15.705G	69.27	74.00	-4.73	14.19	3	Horizontal	174	1.18	-	55.08	38.25	10.99	35.05

802.11ac VHT30_Nss1,(MCS0)_2TX

5745MHz_TX

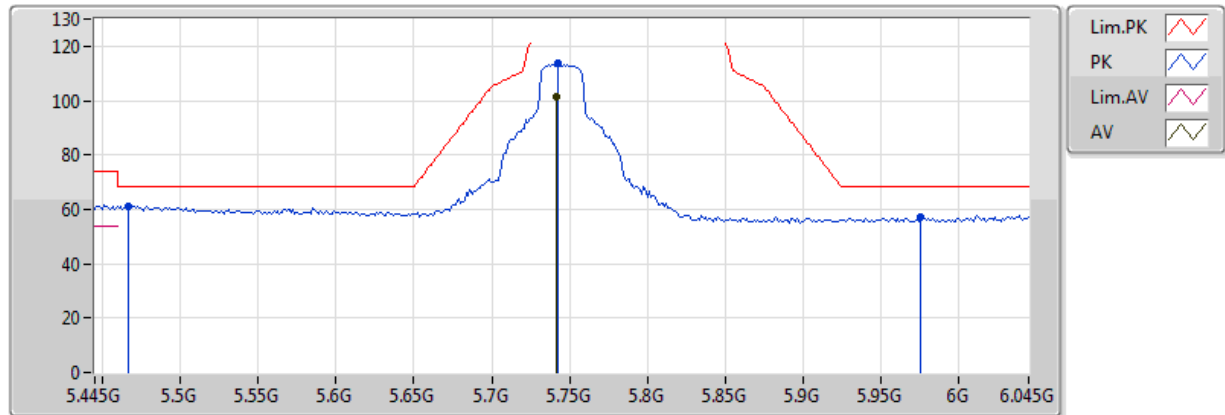


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.7414G	101.23	Inf	-Inf	3.48	3	Vertical	193	1.65	-	97.75	32.19	5.84	34.55
PK	5.4666G	61.28	68.20	-6.92	2.96	3	Vertical	193	1.65	-	58.32	31.79	5.67	34.49
PK	5.7426G	113.67	Inf	-Inf	3.48	3	Vertical	193	1.65	-	110.19	32.19	5.84	34.55
PK	5.9754G	57.33	68.20	-10.87	3.97	3	Vertical	193	1.65	-	53.37	32.56	6.01	34.61

802.11ac VHT30_Nss1,(MCS0)_2TX

5745MHz_TX

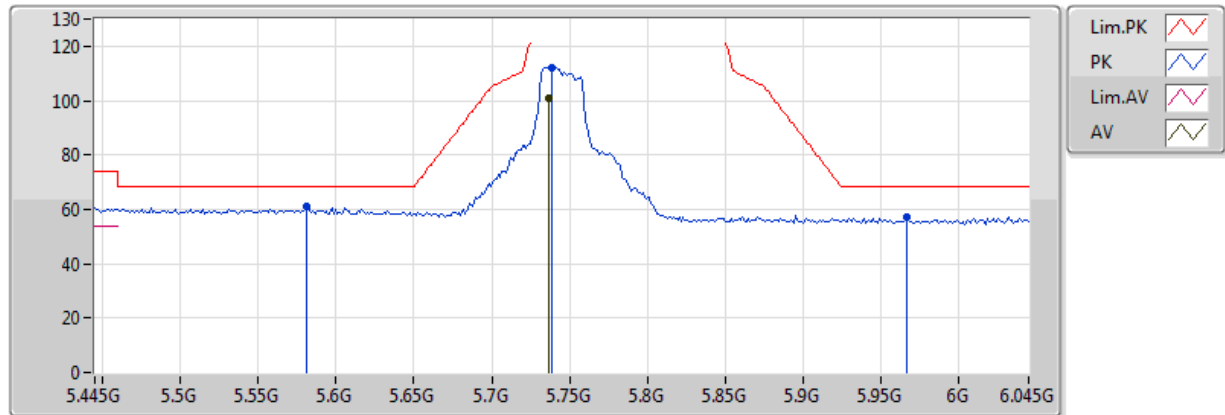


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.7366G	100.65	Inf	-Inf	3.47	3	Horizontal	182	1.82	-	97.18	32.18	5.84	34.55
PK	5.5806G	60.98	68.20	-7.22	3.15	3	Horizontal	182	1.82	-	57.83	31.93	5.73	34.51
PK	5.739G	112.26	Inf	-Inf	3.48	3	Horizontal	182	1.82	-	108.79	32.18	5.84	34.55
PK	5.967G	56.89	68.20	-11.31	3.95	3	Horizontal	182	1.82	-	52.93	32.55	6.01	34.60

802.11ac VHT30_Nss1,(MCS0)_2TX

5745MHz_TX

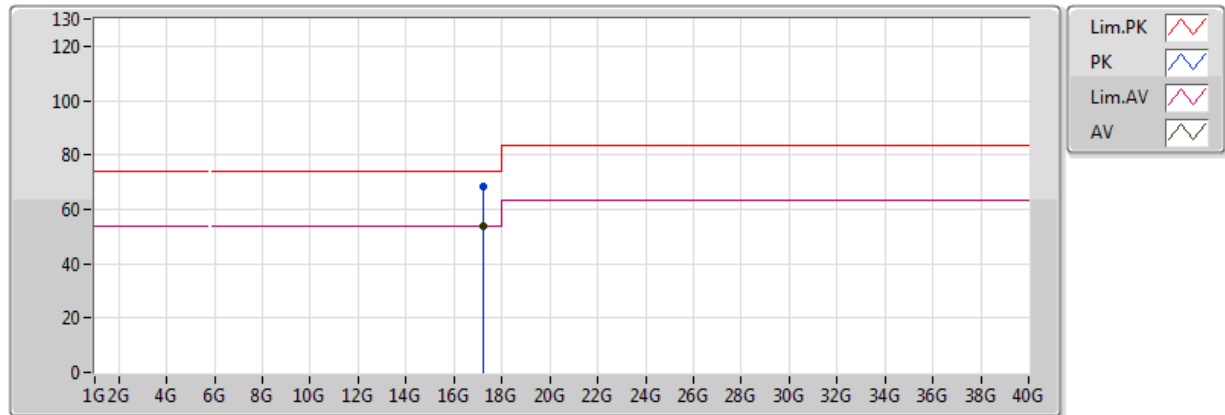


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	17.23506G	53.82	54.00	-0.18	18.24	3	Vertical	147	1.31	-	35.58	41.60	10.47	33.83
PK	17.24004G	68.36	74.00	-5.64	18.28	3	Vertical	147	1.31	-	50.08	41.63	10.47	33.83

802.11ac VHT30_Nss1,(MCS0)_2TX

5745MHz_TX

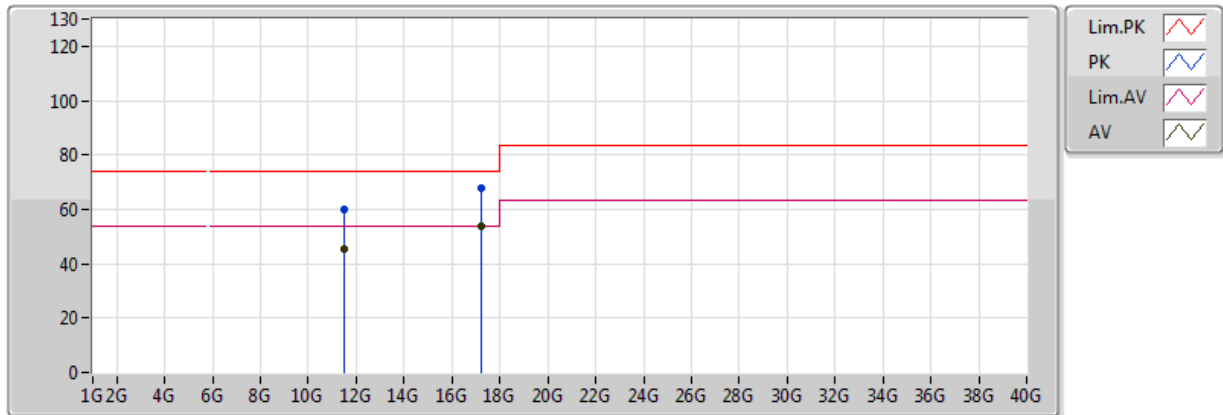


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	11.47944G	45.58	54.00	-8.42	13.42	3	Horizontal	236	1.50	-	32.15	39.73	8.35	34.66
AV	17.2359G	53.61	54.00	-0.39	18.25	3	Horizontal	212	1.50	-	35.36	41.60	10.47	33.83
PK	11.48808G	59.76	74.00	-14.24	13.41	3	Horizontal	236	1.50	-	46.35	39.72	8.35	34.66
PK	17.23596G	67.60	74.00	-6.40	18.25	3	Horizontal	212	1.50	-	49.35	41.60	10.47	33.83

802.11ac VHT30_Nss1,(MCS0)_2TX

5790MHz_TX

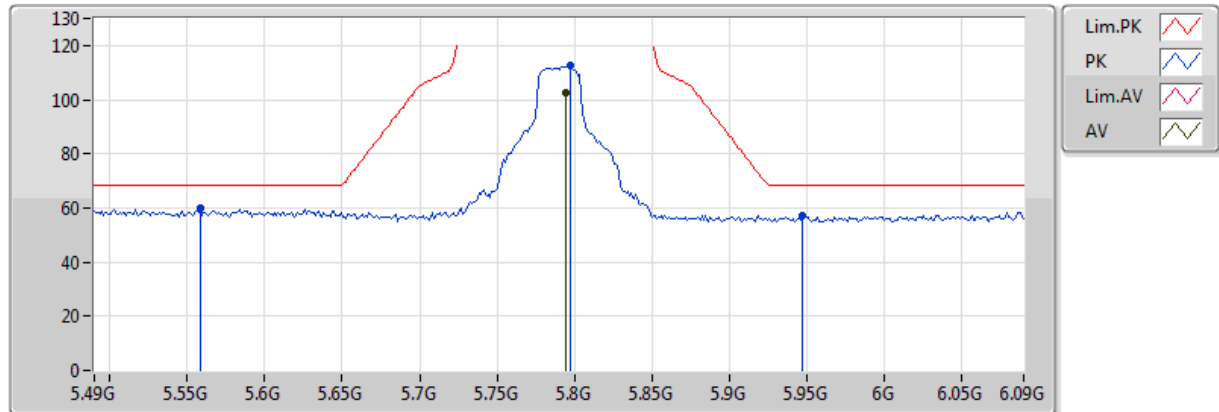


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.7948G	102.66	Inf	-Inf	3.60	3	Vertical	192	2.17	-	99.06	32.27	5.89	34.56
PK	5.5584G	59.77	68.20	-8.43	3.10	3	Vertical	192	2.17	-	56.66	31.89	5.71	34.50
PK	5.7972G	112.58	Inf	-Inf	3.60	3	Vertical	192	2.17	-	108.97	32.28	5.89	34.56
PK	5.9472G	57.01	68.20	-11.19	3.91	3	Vertical	192	2.17	-	53.10	32.52	5.99	34.60

802.11ac VHT30_Nss1,(MCS0)_2TX

5790MHz_TX

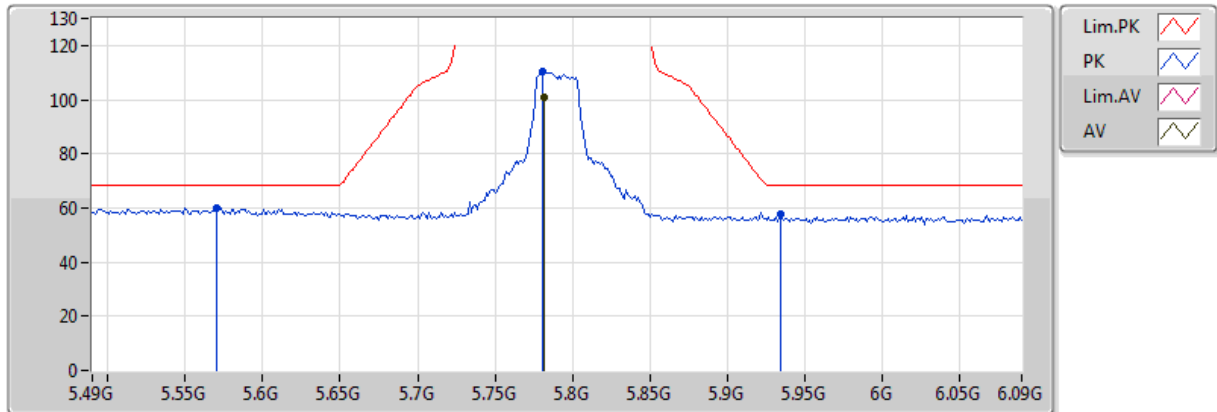


EUT = Y

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.7816G	100.78	Inf	-Inf	3.57	3	Horizontal	195	1.95	-	97.21	32.25	5.88	34.56
PK	5.5704G	60.15	68.20	-8.05	3.13	3	Horizontal	195	1.95	-	57.03	31.91	5.72	34.50
PK	5.7804G	110.14	Inf	-Inf	3.57	3	Horizontal	195	1.95	-	106.57	32.25	5.87	34.56
PK	5.934G	57.78	68.20	-10.42	3.88	3	Horizontal	195	1.95	-	53.90	32.49	5.98	34.60

802.11ac VHT30_Nss1,(MCS0)_2TX

5790MHz_TX

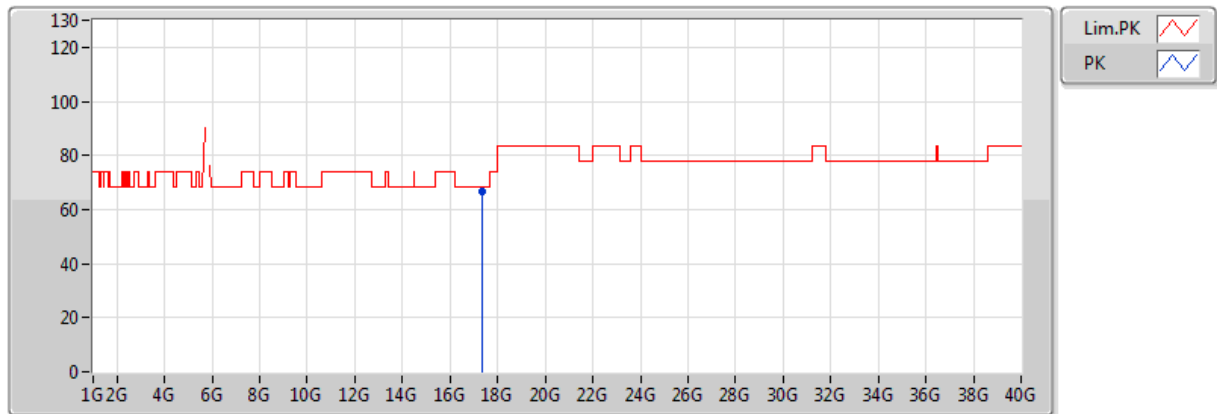


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
PK	17.37324G	66.66	68.20	-1.54	19.18	3	Vertical	30	1.21	-	47.48	42.54	10.54	33.89

802.11ac VHT30_Nss1,(MCS0)_2TX

5790MHz_TX

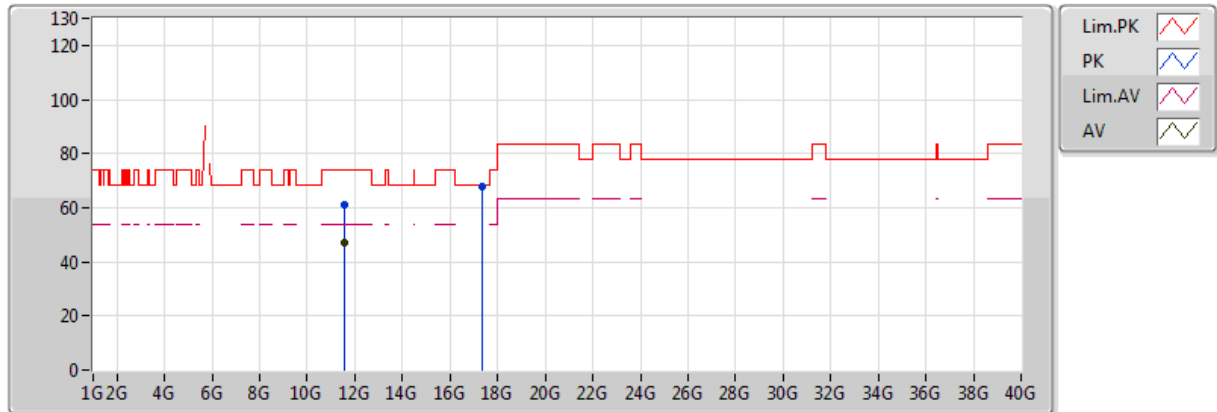


EUT = Y

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	11.58474G	46.87	54.00	-7.13	13.28	3	Horizontal	314	1.50	-	33.59	39.58	8.38	34.68
PK	11.58426G	61.31	74.00	-12.69	13.28	3	Horizontal	314	1.50	-	48.03	39.58	8.38	34.68
PK	17.37456G	68.07	68.20	-0.13	19.19	3	Horizontal	347	1.50	-	48.88	42.55	10.54	33.89

802.11ac VHT30_Nss1,(MCS0)_2TX

5830MHz_TX

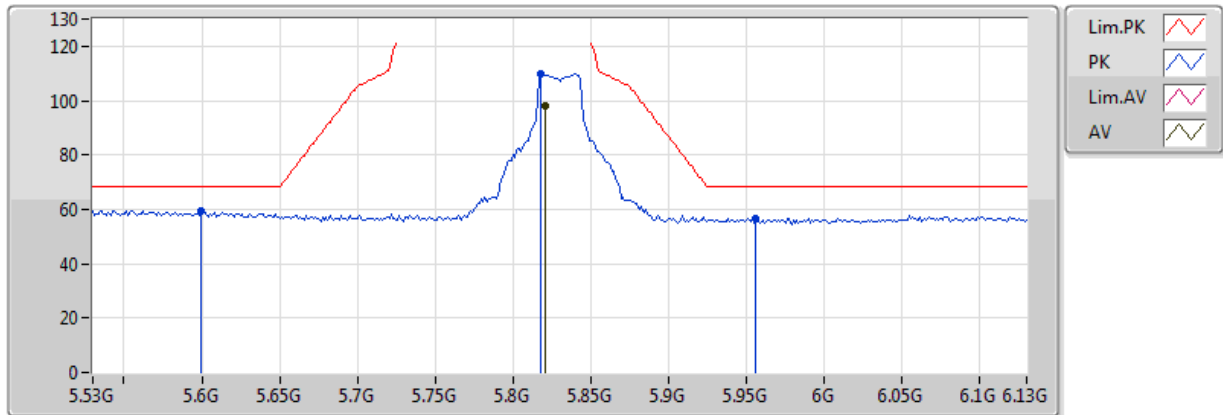


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.8204G	97.84	Inf	-Inf	3.65	3	Vertical	194	1.56	-	94.19	32.31	5.90	34.57
PK	5.5996G	59.48	68.20	-8.72	3.19	3	Vertical	194	1.56	-	56.29	31.96	5.74	34.51
PK	5.818G	109.61	Inf	-Inf	3.65	3	Vertical	194	1.56	-	105.96	32.31	5.90	34.57
PK	5.956G	56.54	68.20	-11.66	3.93	3	Vertical	194	1.56	-	52.62	32.53	6.00	34.60

802.11ac VHT30_Nss1,(MCS0)_2TX

5830MHz_TX

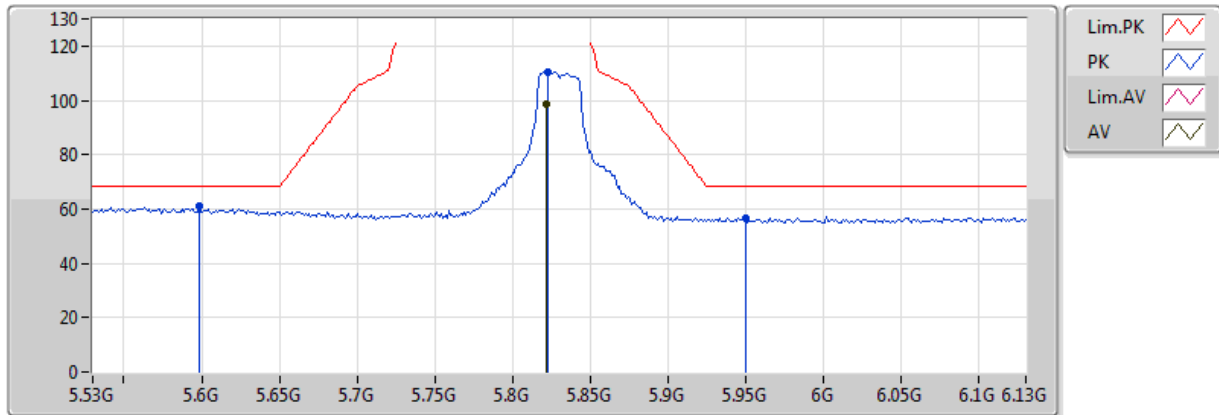


EUT = Y

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.8216G	98.62	Inf	-Inf	3.65	3	Horizontal	189	1.91	-	94.96	32.31	5.91	34.57
PK	5.5984G	60.99	68.20	-7.21	3.19	3	Horizontal	189	1.91	-	57.80	31.96	5.74	34.51
PK	5.8228G	110.62	Inf	-Inf	3.66	3	Horizontal	189	1.91	-	106.96	32.32	5.91	34.57
PK	5.95G	56.74	68.20	-11.46	3.91	3	Horizontal	189	1.91	-	52.82	32.52	6.00	34.60

802.11ac VHT30_Nss1,(MCS0)_2TX

5830MHz_TX

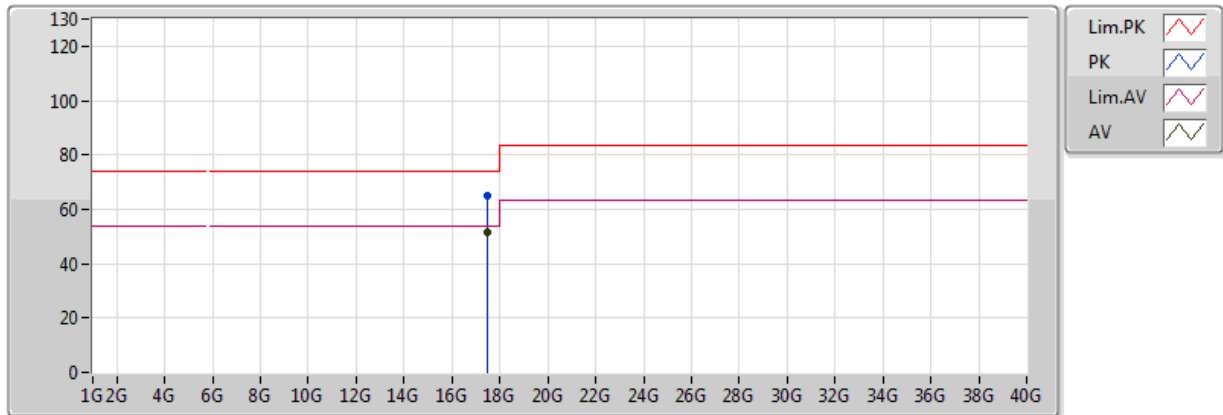


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	17.49342G	51.56	54.00	-2.44	20.00	3	Vertical	194	1.75	-	31.57	43.36	10.59	33.95
PK	17.49426G	64.92	74.00	-9.08	20.00	3	Vertical	194	1.75	-	44.92	43.36	10.59	33.95

802.11ac VHT30_Nss1,(MCS0)_2TX

5830MHz_TX

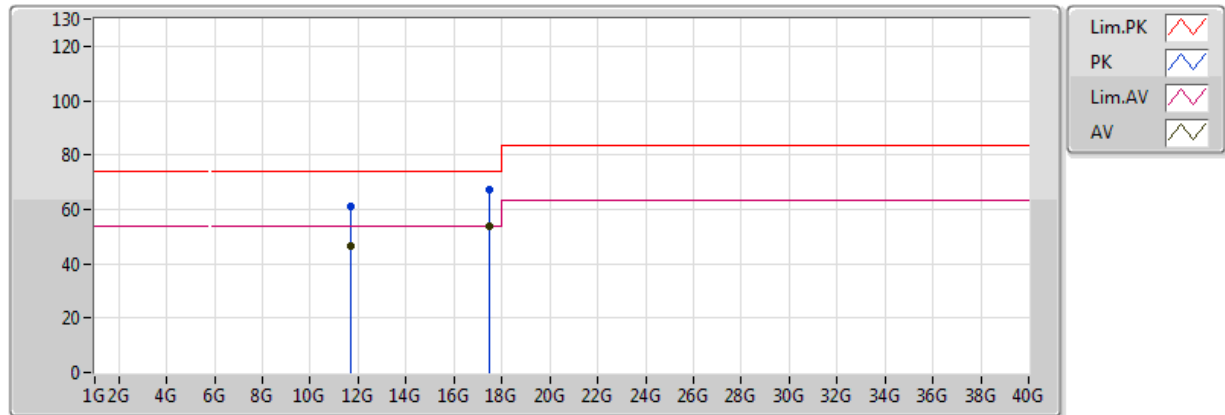


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	11.66996G	46.28	54.00	-7.72	13.16	3	Horizontal	234	1.50	-	33.12	39.46	8.40	34.70
AV	17.48724G	53.87	54.00	-0.13	19.95	3	Horizontal	204	1.49	-	33.92	43.31	10.59	33.95
PK	11.67464G	61.34	74.00	-12.66	13.16	3	Horizontal	234	1.50	-	48.18	39.46	8.40	34.70
PK	17.48976G	67.32	74.00	-6.68	19.97	3	Horizontal	204	1.49	-	47.35	43.33	10.59	33.95

802.11ac VHT40_Nss1,(MCS0)_2TX

5175MHz_TX

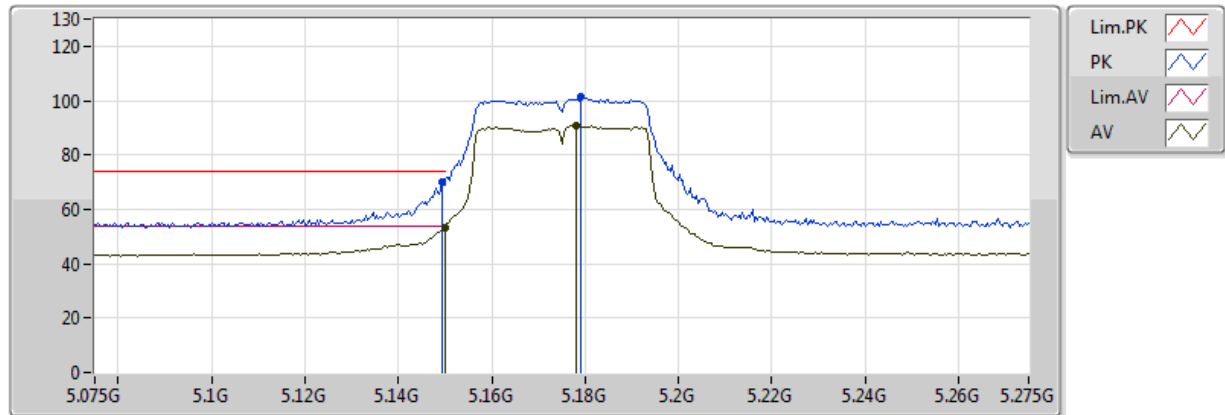


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.149995G	53.47	54.00	-0.53	2.80	3	Vertical	7	1.50	-	50.67	31.66	5.62	34.48
AV	5.1782G	90.70	Inf	-Inf	2.82	3	Vertical	7	1.50	-	87.88	31.67	5.63	34.48
PK	5.1494G	69.89	74.00	-4.11	2.80	3	Vertical	7	1.50	-	67.09	31.66	5.62	34.48
PK	5.179G	101.23	Inf	-Inf	2.82	3	Vertical	7	1.50	-	98.41	31.67	5.63	34.48

802.11ac VHT40_Nss1,(MCS0)_2TX

5175MHz_TX

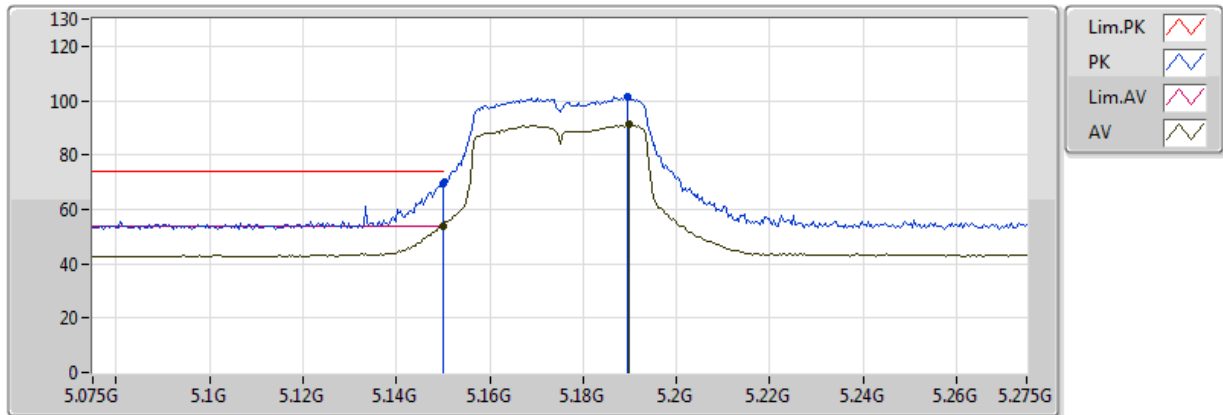


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.149995G	53.74	54.00	-0.26	2.80	3	Horizontal	7	1.48	-	50.94	31.66	5.62	34.48
AV	5.1898G	91.07	Inf	-Inf	2.82	3	Horizontal	7	1.48	-	88.24	31.68	5.63	34.48
PK	5.149995G	69.35	74.00	-4.65	2.80	3	Horizontal	7	1.48	-	66.55	31.66	5.62	34.48
PK	5.1894G	101.49	Inf	-Inf	2.82	3	Horizontal	7	1.48	-	98.67	31.68	5.63	34.48

802.11ac VHT40_Nss1,(MCS0)_2TX

5175MHz_TX

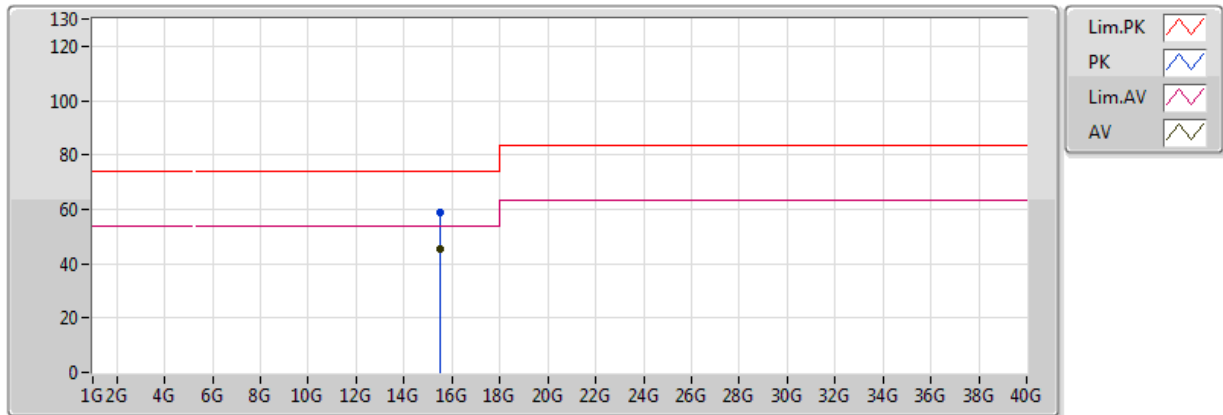


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	15.51012G	45.27	54.00	-8.73	14.27	3	Vertical	24	1.08	-	31.00	38.96	9.95	34.64
PK	15.52608G	58.69	74.00	-15.31	14.19	3	Vertical	24	1.08	-	44.50	38.90	9.95	34.66

802.11ac VHT40_Nss1,(MCS0)_2TX

5175MHz_TX

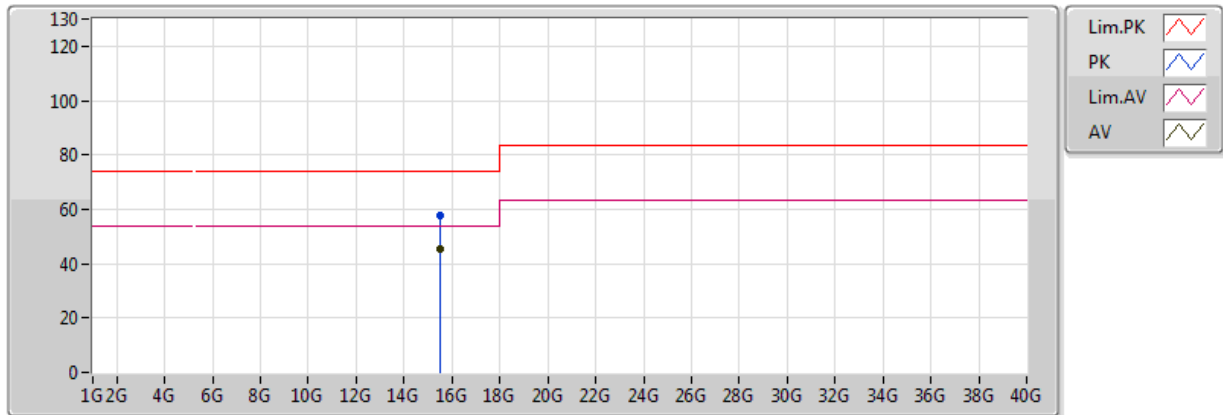


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	15.51138G	45.19	54.00	-8.81	14.26	3	Horizontal	172	1.49	-	30.93	38.96	9.95	34.64
PK	15.51354G	57.82	74.00	-16.18	14.25	3	Horizontal	172	1.49	-	43.57	38.95	9.95	34.65

802.11ac VHT40_Nss1,(MCS0)_2TX

5200MHz_TX

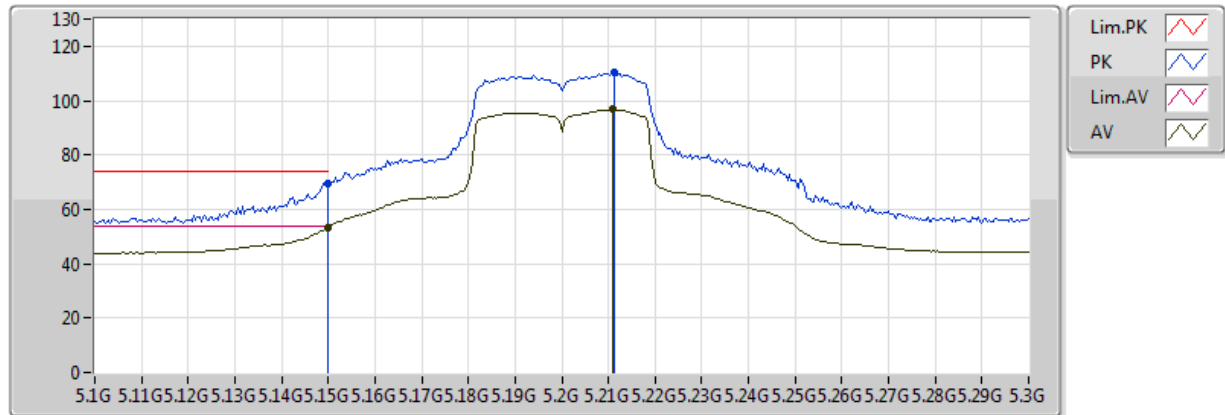


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.149995G	53.38	54.00	-0.62	2.80	3	Vertical	189	1.88	-	50.58	31.66	5.62	34.48
AV	5.2108G	96.76	Inf	-Inf	2.83	3	Vertical	189	1.88	-	93.93	31.68	5.63	34.48
PK	5.149995G	69.35	74.00	-4.65	2.80	3	Vertical	189	1.88	-	66.55	31.66	5.62	34.48
PK	5.2112G	110.16	Inf	-Inf	2.83	3	Vertical	189	1.88	-	107.33	31.68	5.63	34.48

802.11ac VHT40_Nss1,(MCS0)_2TX

5200MHz_TX

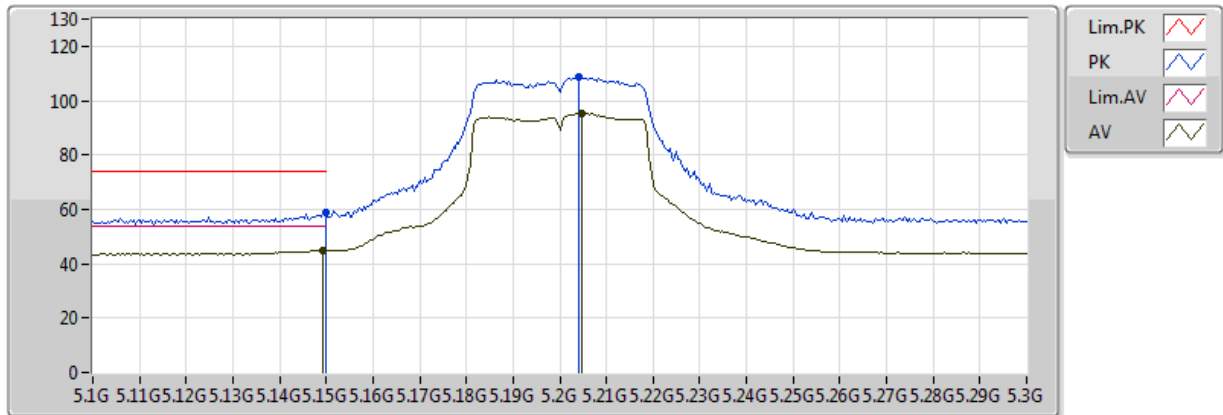


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.1492G	44.82	54.00	-9.18	2.80	3	Horizontal	188	1.67	-	42.02	31.66	5.62	34.48
AV	5.2048G	95.20	Inf	-Inf	2.83	3	Horizontal	188	1.67	-	92.37	31.68	5.63	34.48
PK	5.149995G	58.68	74.00	-15.32	2.80	3	Horizontal	188	1.67	-	55.88	31.66	5.62	34.48
PK	5.204G	108.65	Inf	-Inf	2.83	3	Horizontal	188	1.67	-	105.82	31.68	5.63	34.48

802.11ac VHT40_Nss1,(MCS0)_2TX

5200MHz_TX

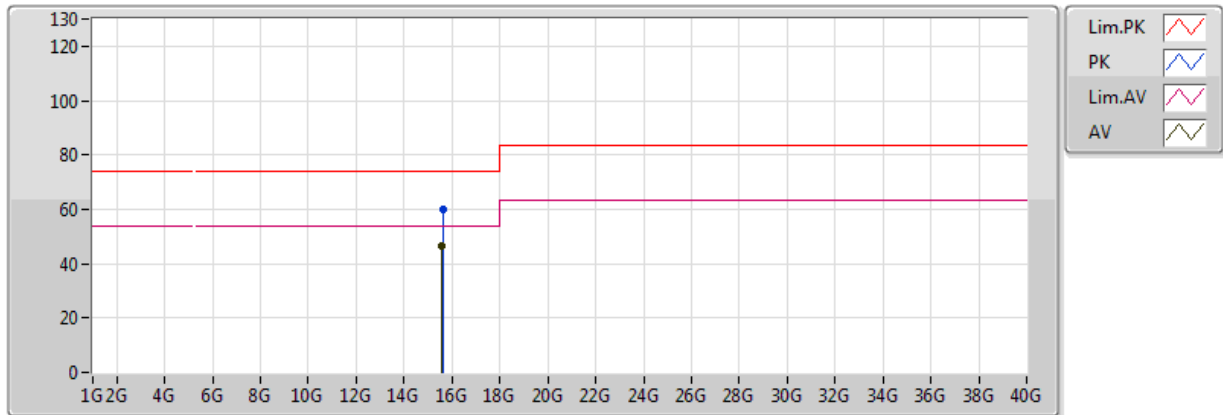


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	15.60108G	46.78	54.00	-7.22	13.83	3	Vertical	23	1.09	-	32.95	38.62	9.97	34.75
PK	15.60348G	59.90	74.00	-14.10	13.82	3	Vertical	23	1.09	-	46.08	38.61	9.97	34.76

802.11ac VHT40_Nss1,(MCS0)_2TX

5200MHz_TX

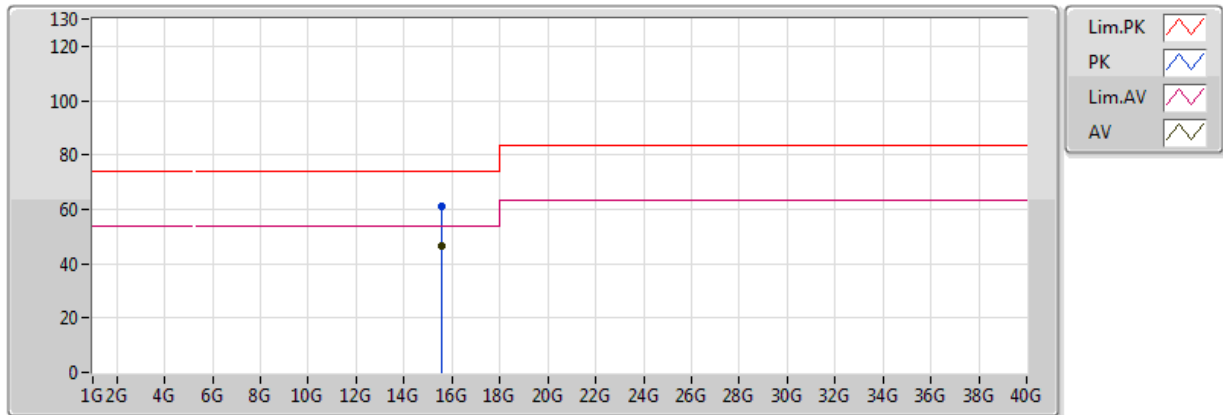


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	15.59604G	46.51	54.00	-7.49	13.86	3	Horizontal	93	1.56	-	32.65	38.64	9.97	34.75
PK	15.59772G	61.14	74.00	-12.86	13.85	3	Horizontal	93	1.56	-	47.29	38.63	9.97	34.75

802.11ac VHT40_Nss1,(MCS0)_2TX

5230MHz_TX

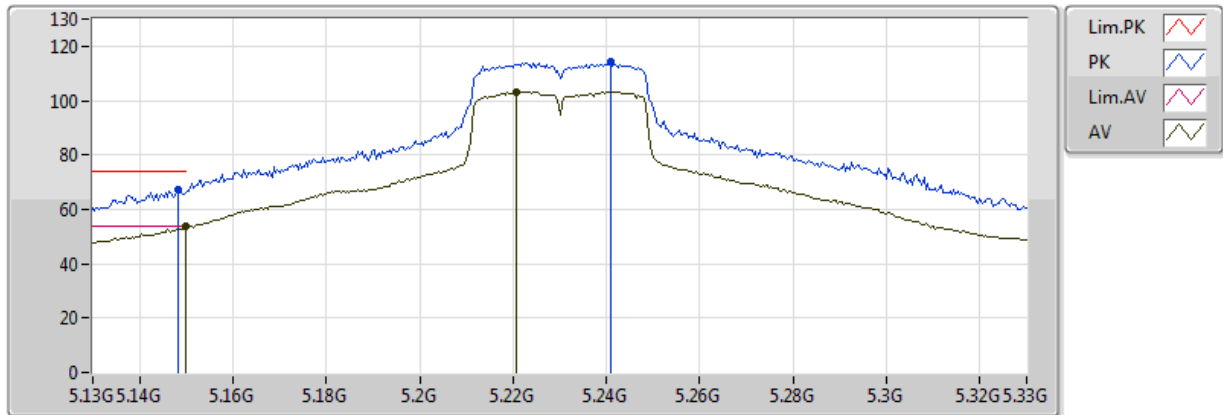


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.149995G	53.60	54.00	-0.40	2.80	3	Vertical	0	1.49	-	50.80	31.66	5.62	34.48
AV	5.2208G	103.34	Inf	-Inf	2.84	3	Vertical	0	1.49	-	100.50	31.69	5.63	34.48
PK	5.1484G	67.41	74.00	-6.59	2.80	3	Vertical	0	1.49	-	64.62	31.66	5.62	34.48
PK	5.2408G	114.40	Inf	-Inf	2.85	3	Vertical	0	1.49	-	111.55	31.70	5.63	34.48

802.11ac VHT40_Nss1,(MCS0)_2TX

5230MHz_TX

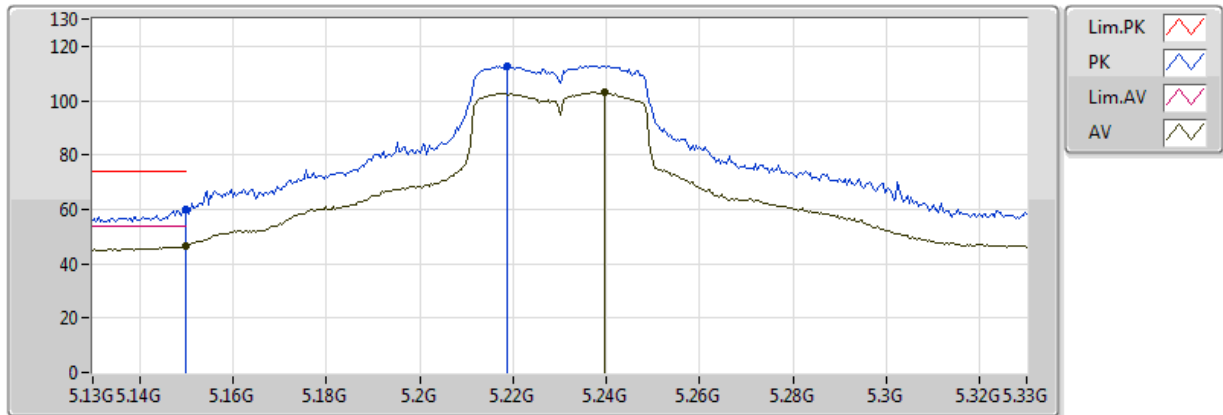


EUT = Y

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.149995G	46.58	54.00	-7.42	2.80	3	Horizontal	12	1.50	-	43.78	31.66	5.62	34.48
AV	5.2396G	103.07	Inf	-Inf	2.85	3	Horizontal	12	1.50	-	100.23	31.70	5.63	34.48
PK	5.149995G	59.72	74.00	-14.28	2.80	3	Horizontal	12	1.50	-	56.92	31.66	5.62	34.48
PK	5.2188G	112.84	Inf	-Inf	2.84	3	Horizontal	12	1.50	-	110.00	31.69	5.63	34.48

802.11ac VHT40_Nss1,(MCS0)_2TX

5230MHz_TX

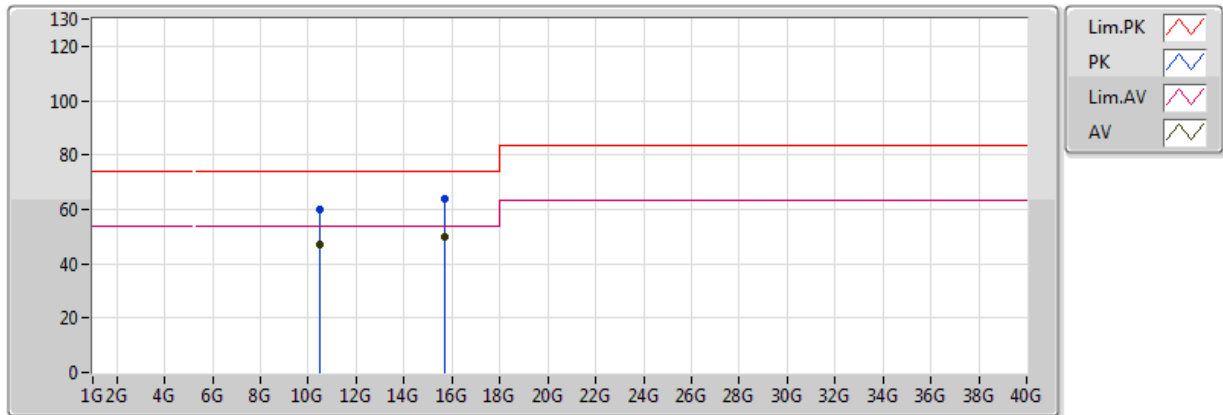


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	10.46024G	47.27	54.00	-6.73	12.69	3	Vertical	202	1.47	-	34.57	39.64	7.98	34.93
AV	15.69732G	49.95	54.00	-4.05	13.37	3	Vertical	169	1.41	-	36.58	38.25	9.99	34.87
PK	10.46012G	60.21	74.00	-13.79	12.69	3	Vertical	202	1.47	-	47.51	39.64	7.98	34.93
PK	15.69444G	63.75	74.00	-10.25	13.39	3	Vertical	169	1.41	-	50.37	38.26	9.99	34.87

802.11ac VHT40_Nss1,(MCS0)_2TX

5230MHz_TX

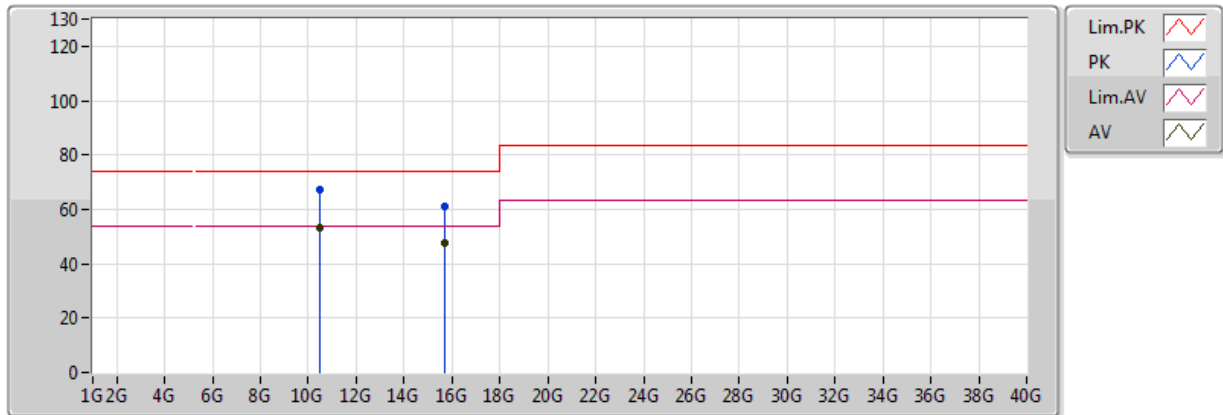


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	10.46492G	53.06	54.00	-0.94	12.70	3	Horizontal	235	1.50	-	40.35	39.65	7.98	34.93
AV	15.68712G	47.38	54.00	-6.62	13.42	3	Horizontal	161	1.57	-	33.96	38.29	9.99	34.86
PK	10.46492G	67.28	74.00	-6.72	12.70	3	Horizontal	235	1.50	-	54.58	39.65	7.98	34.93
PK	15.7068G	60.87	74.00	-13.13	13.33	3	Horizontal	161	1.57	-	47.54	38.21	10.00	34.88

802.11ac VHT40_Nss1,(MCS0)_2TX

5750MHz_TX

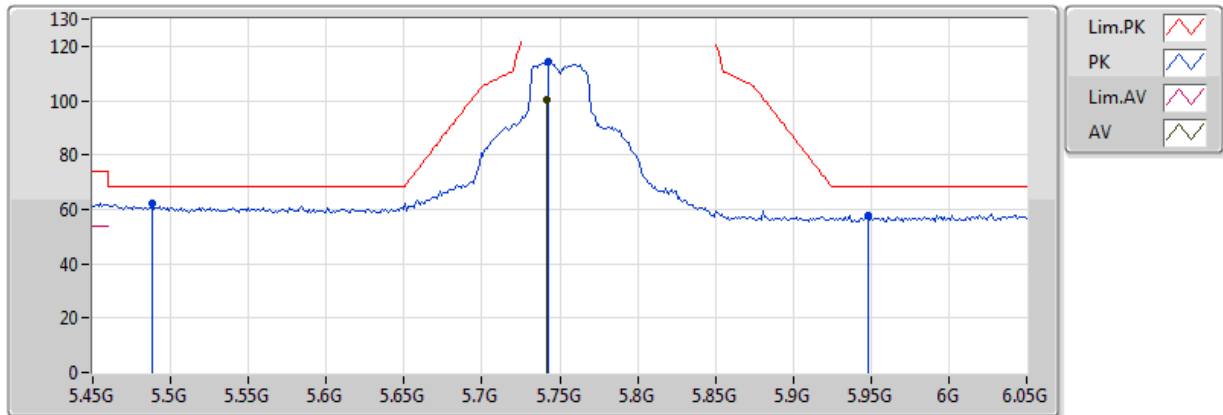


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.7416G	100.41	Inf	-Inf	3.48	3	Vertical	192	1.54	-	96.93	32.19	5.84	34.55
PK	5.4884G	62.03	68.20	-6.17	2.97	3	Vertical	192	1.54	-	59.06	31.80	5.67	34.49
PK	5.7428G	114.10	Inf	-Inf	3.48	3	Vertical	192	1.54	-	110.61	32.19	5.84	34.55
PK	5.948G	57.80	68.20	-10.40	3.91	3	Vertical	192	1.54	-	53.89	32.52	5.99	34.60

802.11ac VHT40_Nss1,(MCS0)_2TX

5750MHz_TX

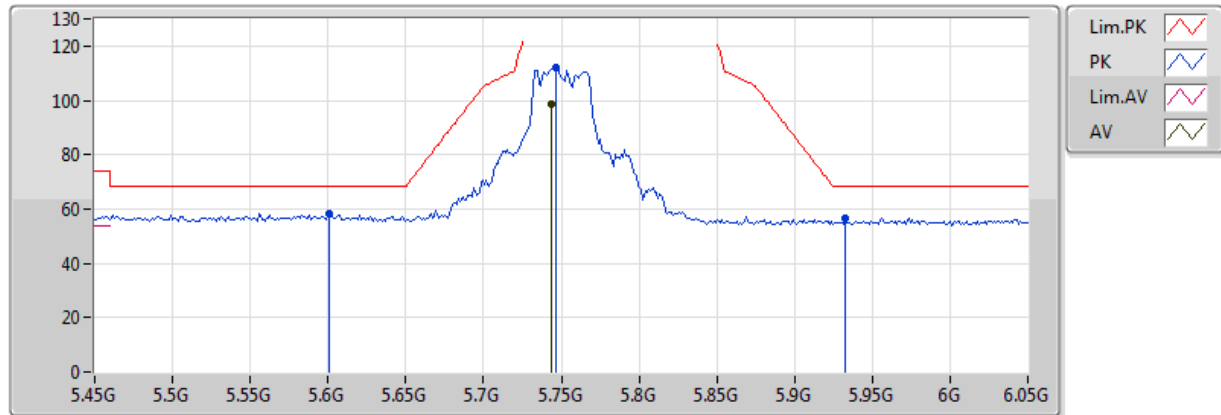


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.744G	98.60	Inf	-Inf	3.49	3	Horizontal	170	1.71	-	95.11	32.19	5.85	34.55
PK	5.6012G	58.10	68.20	-10.10	3.19	3	Horizontal	170	1.71	-	54.90	31.96	5.74	34.51
PK	5.7464G	112.14	Inf	-Inf	3.49	3	Horizontal	170	1.71	-	108.65	32.19	5.85	34.55
PK	5.9324G	56.39	68.20	-11.81	3.88	3	Horizontal	170	1.71	-	52.51	32.49	5.98	34.60

802.11ac VHT40_Nss1,(MCS0)_2TX

5750MHz_TX

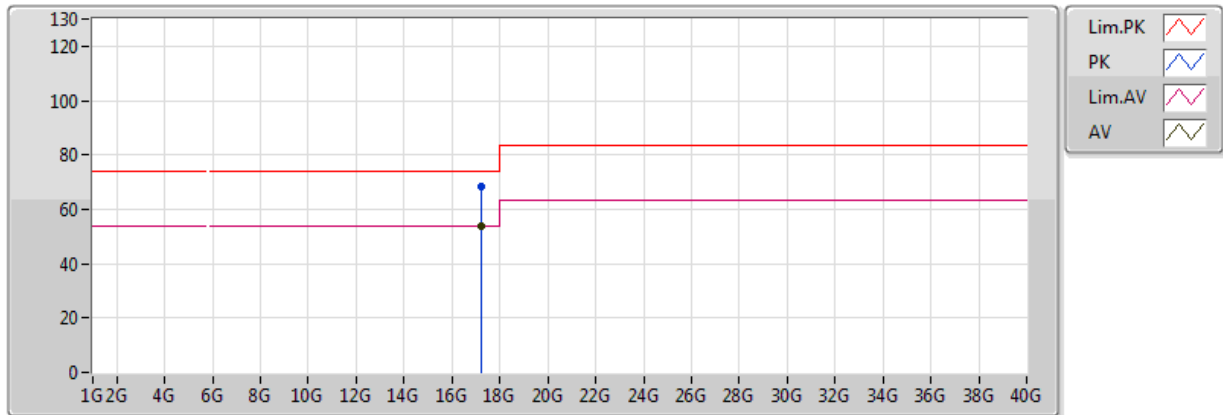


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	17.25336G	53.80	54.00	-0.20	18.37	3	Vertical	145	1.28	-	35.43	41.72	10.48	33.83
PK	17.2518G	68.18	74.00	-5.82	18.36	3	Vertical	145	1.28	-	49.82	41.71	10.48	33.83

802.11ac VHT40_Nss1,(MCS0)_2TX

5750MHz_TX

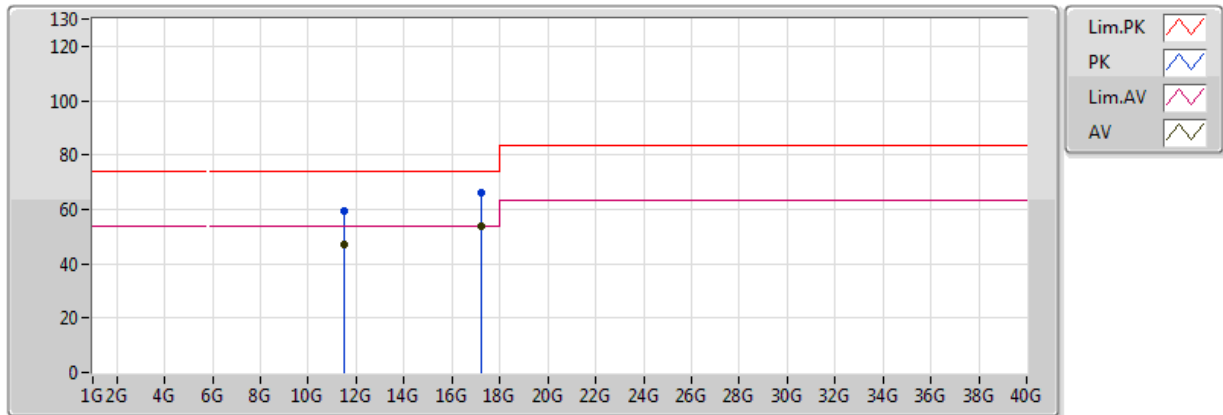


EUT = Y

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	11.49274G	47.00	54.00	-7.00	13.40	3	Horizontal	234	1.49	-	33.60	39.71	8.35	34.66
AV	17.25084G	53.86	54.00	-0.14	18.35	3	Horizontal	204	1.49	-	35.51	41.71	10.48	33.83
PK	11.48926G	59.64	74.00	-14.36	13.41	3	Horizontal	234	1.49	-	46.23	39.72	8.35	34.66
PK	17.25216G	66.07	74.00	-7.93	18.36	3	Horizontal	204	1.49	-	47.71	41.71	10.48	33.83

802.11ac VHT40_Nss1,(MCS0)_2TX

5790MHz_TX

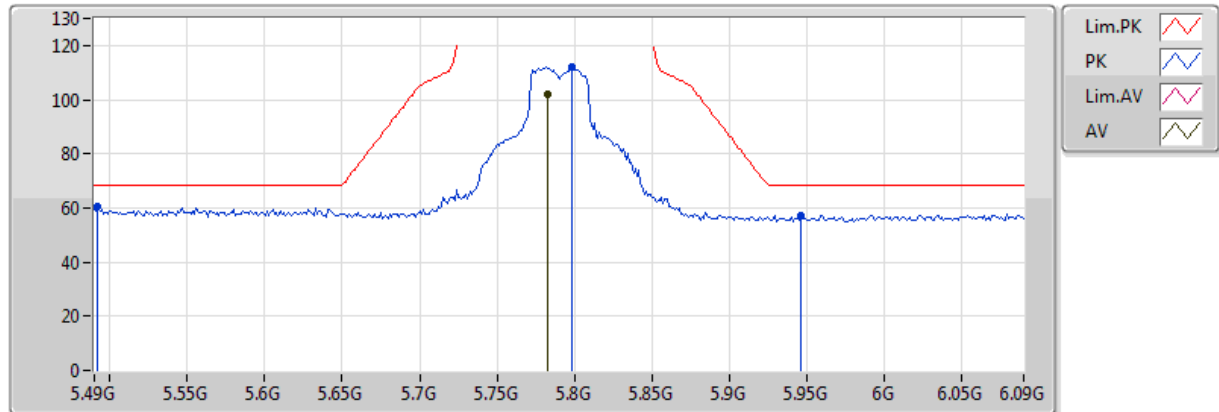


EUT = Y

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.7828G	102.15	Inf	-Inf	3.57	3	Vertical	186	1.99	-	98.58	32.25	5.88	34.56
PK	5.4924G	60.25	68.20	-7.95	2.98	3	Vertical	186	1.99	-	57.27	31.80	5.67	34.49
PK	5.7984G	111.89	Inf	-Inf	3.61	3	Vertical	186	1.99	-	108.29	32.28	5.89	34.56
PK	5.946G	57.41	68.20	-10.79	3.91	3	Vertical	186	1.99	-	53.51	32.51	5.99	34.60

802.11ac VHT40_Nss1,(MCS0)_2TX

5790MHz_TX

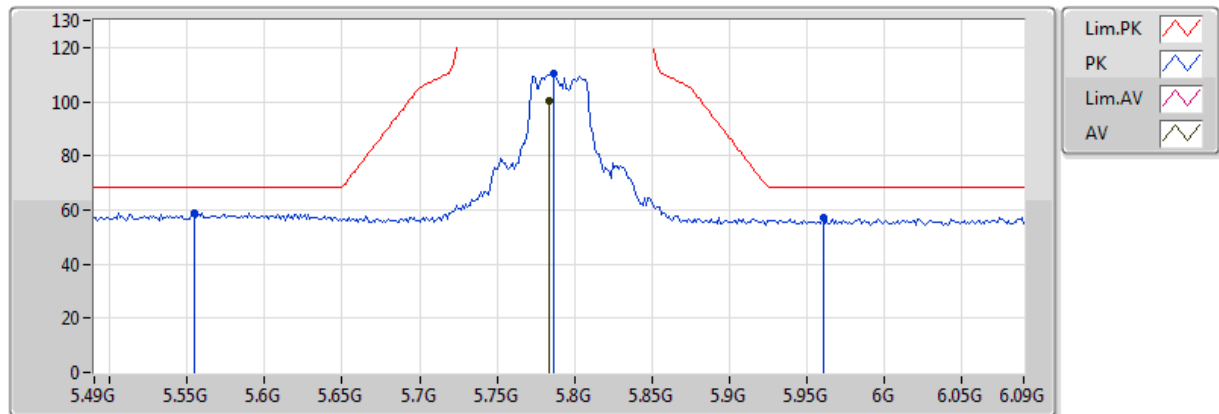


EUT = Y

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.784G	100.56	Inf	-Inf	3.57	3	Horizontal	177	2.10	-	96.98	32.25	5.88	34.56
PK	5.5548G	58.96	68.20	-9.24	3.10	3	Horizontal	177	2.10	-	55.86	31.89	5.71	34.50
PK	5.7864G	110.11	Inf	-Inf	3.58	3	Horizontal	177	2.10	-	106.53	32.26	5.88	34.56
PK	5.9604G	57.31	68.20	-10.89	3.94	3	Horizontal	177	2.10	-	53.37	32.54	6.00	34.60

802.11ac VHT40_Nss1,(MCS0)_2TX

5790MHz_TX

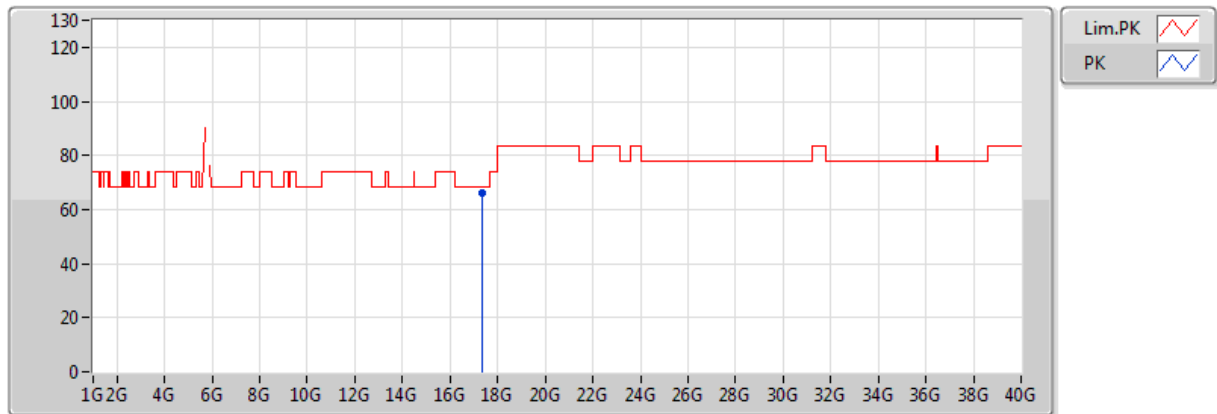


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
PK	17.35812G	66.06	68.20	-2.14	19.08	3	Vertical	49	1.32	-	46.98	42.44	10.53	33.89

802.11ac VHT40_Nss1,(MCS0)_2TX

5790MHz_TX

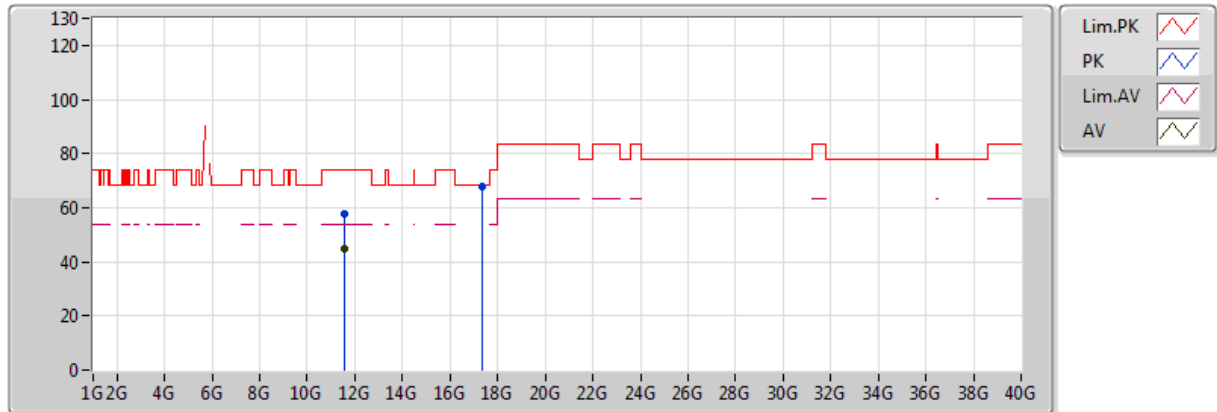


EUT = Y

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	11.58624G	44.75	54.00	-9.25	13.28	3	Horizontal	129	1.50	-	31.48	39.58	8.38	34.68
PK	11.5674G	57.81	74.00	-16.19	13.30	3	Horizontal	129	1.50	-	44.51	39.61	8.37	34.68
PK	17.34444G	67.71	68.20	-0.49	18.99	3	Horizontal	347	1.50	-	48.73	42.34	10.52	33.88

802.11ac VHT40_Nss1,(MCS0)_2TX

5825MHz_TX

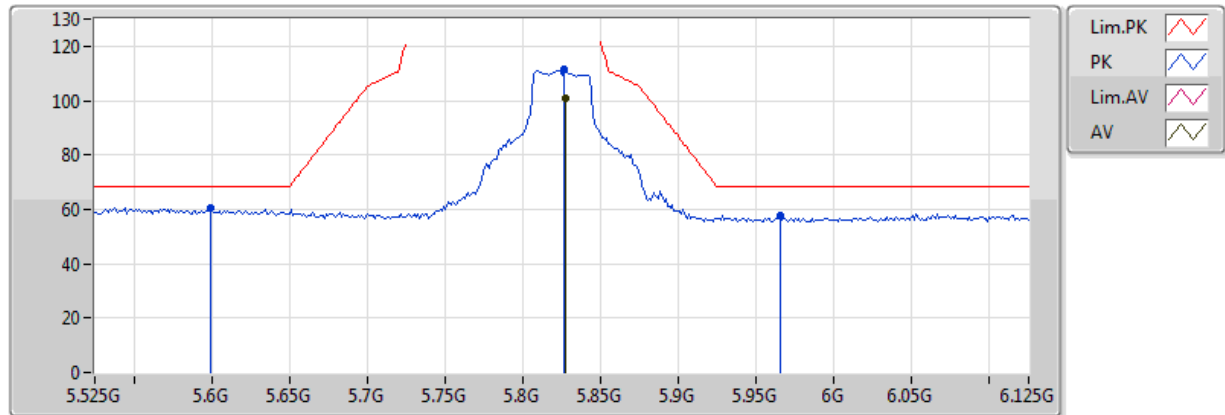


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.8274G	100.65	Inf	-Inf	3.66	3	Vertical	189	1.70	-	96.98	32.32	5.91	34.57
PK	5.5994G	60.63	68.20	-7.57	3.19	3	Vertical	189	1.70	-	57.44	31.96	5.74	34.51
PK	5.8262G	111.30	Inf	-Inf	3.66	3	Vertical	189	1.70	-	107.64	32.32	5.91	34.57
PK	5.9654G	57.60	68.20	-10.60	3.95	3	Vertical	189	1.70	-	53.65	32.54	6.01	34.60

802.11ac VHT40_Nss1,(MCS0)_2TX

5825MHz_TX

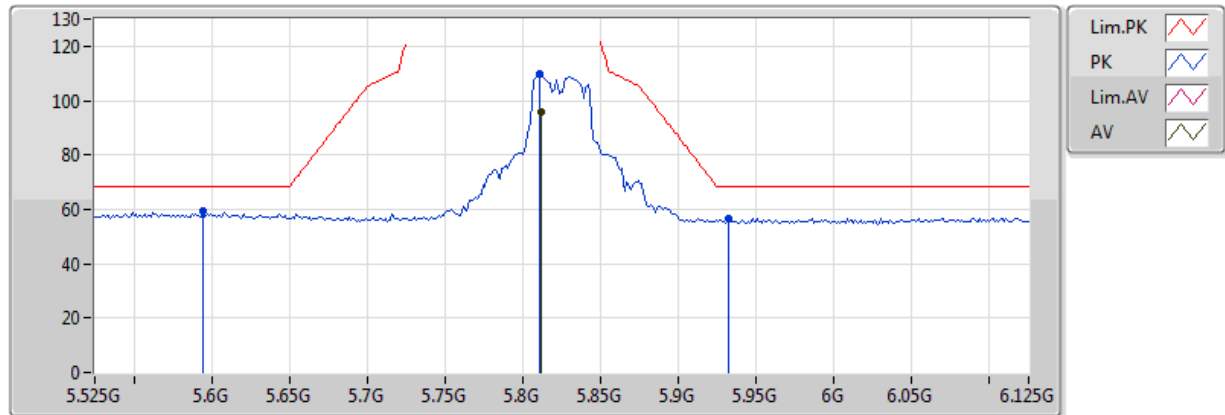


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.8118G	96.09	Inf	-Inf	3.63	3	Horizontal	171	1.71	-	92.46	32.30	5.90	34.56
PK	5.5946G	59.17	68.20	-9.03	3.18	3	Horizontal	171	1.71	-	56.00	31.95	5.74	34.51
PK	5.8106G	109.67	Inf	-Inf	3.63	3	Horizontal	171	1.71	-	106.04	32.30	5.90	34.56
PK	5.9318G	56.85	68.20	-11.35	3.88	3	Horizontal	171	1.71	-	52.97	32.49	5.98	34.60

802.11ac VHT40_Nss1,(MCS0)_2TX

5825MHz_TX

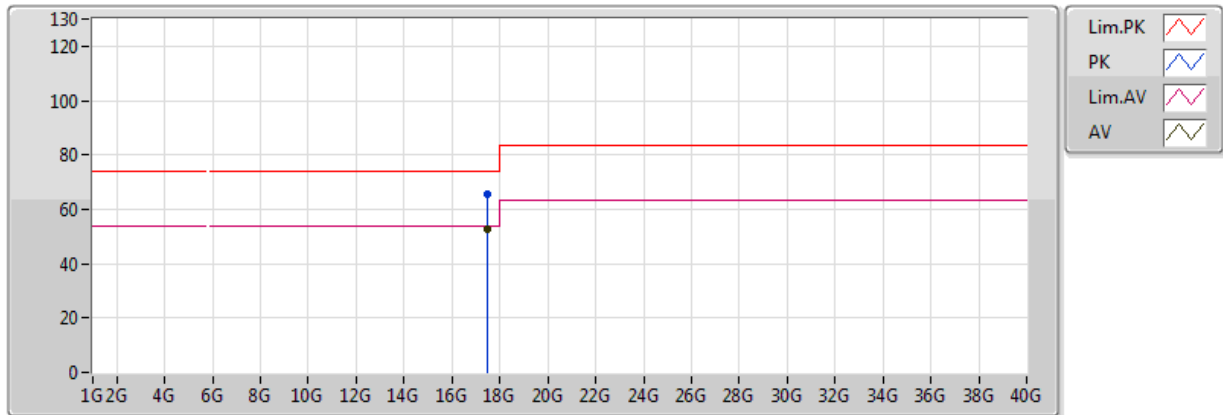


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	17.46972G	52.71	54.00	-1.29	19.83	3	Vertical	141	1.27	-	32.88	43.19	10.58	33.94
PK	17.4609G	65.41	74.00	-8.59	19.77	3	Vertical	141	1.27	-	45.64	43.13	10.58	33.94

802.11ac VHT40_Nss1,(MCS0)_2TX

5825MHz_TX

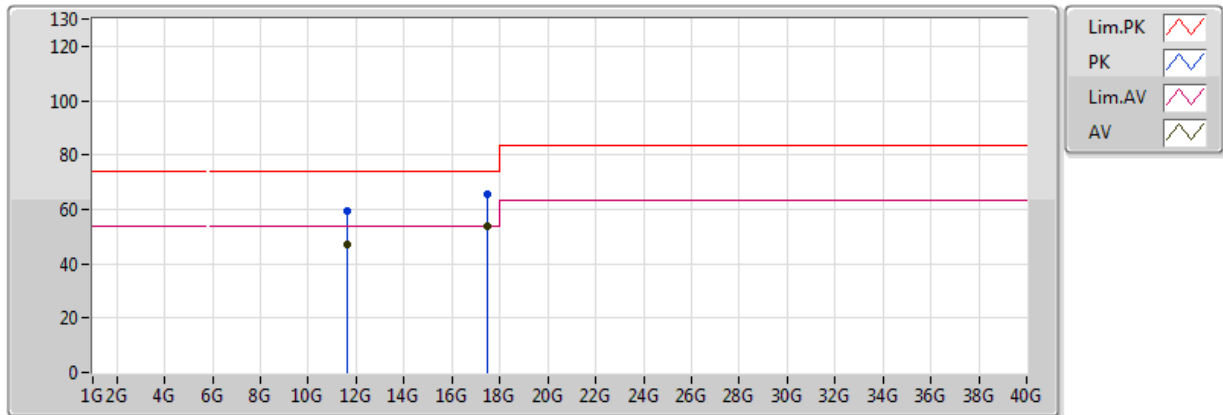


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	11.64052G	47.11	54.00	-6.89	13.20	3	Horizontal	232	1.50	-	33.91	39.50	8.39	34.69
AV	17.4729G	53.83	54.00	-0.17	19.86	3	Horizontal	202	1.49	-	33.98	43.22	10.58	33.94
PK	11.64148G	59.43	74.00	-14.57	13.20	3	Horizontal	232	1.50	-	46.22	39.50	8.39	34.69
PK	17.47578G	65.53	74.00	-8.47	19.88	3	Horizontal	202	1.49	-	45.66	43.24	10.58	33.94

802.11ac VHT50_Nss1,(MCS0)_2TX

5180MHz_TX

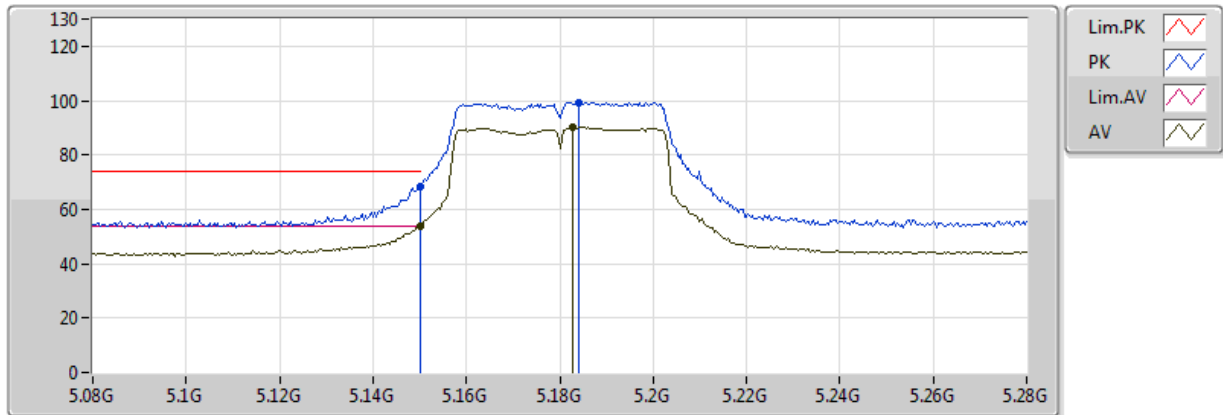


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.149995G	53.87	54.00	-0.13	2.80	3	Vertical	3	1.50	-	51.07	31.66	5.62	34.48
AV	5.1828G	90.18	Inf	-Inf	2.82	3	Vertical	3	1.50	-	87.36	31.67	5.63	34.48
PK	5.149995G	68.63	74.00	-5.37	2.80	3	Vertical	3	1.50	-	65.83	31.66	5.62	34.48
PK	5.184G	99.41	Inf	-Inf	2.82	3	Vertical	3	1.50	-	96.59	31.67	5.63	34.48

802.11ac VHT50_Nss1,(MCS0)_2TX

5180MHz_TX

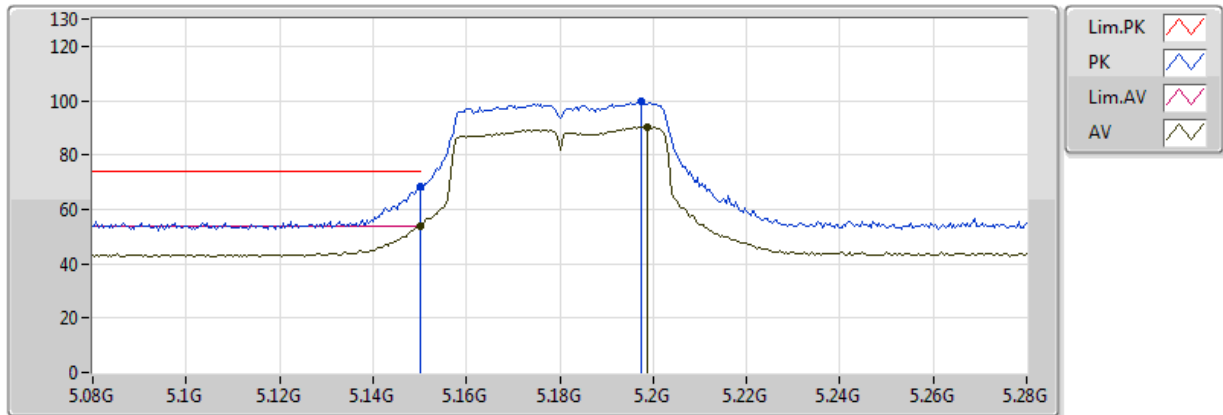


EUT = Y

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.149995G	53.80	54.00	-0.20	2.80	3	Horizontal	9	1.47	-	51.00	31.66	5.62	34.48
AV	5.1988G	90.16	Inf	-Inf	2.83	3	Horizontal	9	1.47	-	87.33	31.68	5.63	34.48
PK	5.149995G	68.30	74.00	-5.70	2.80	3	Horizontal	9	1.47	-	65.50	31.66	5.62	34.48
PK	5.1976G	99.55	Inf	-Inf	2.83	3	Horizontal	9	1.47	-	96.72	31.68	5.63	34.48

802.11ac VHT50_Nss1,(MCS0)_2TX

5180MHz_TX

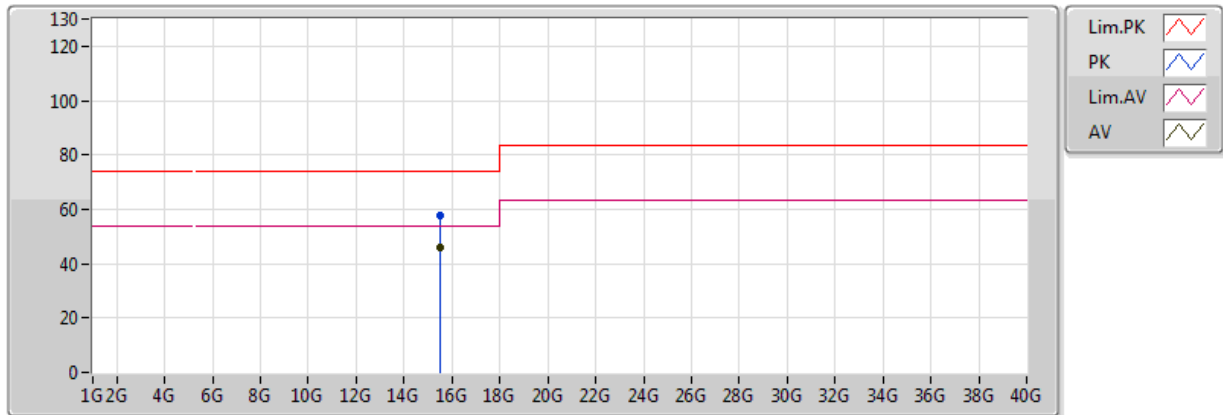


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	15.52854G	45.72	54.00	-8.28	14.18	3	Vertical	48	1.55	-	31.54	38.89	9.95	34.66
PK	15.53052G	57.91	74.00	-16.09	14.17	3	Vertical	48	1.55	-	43.74	38.88	9.95	34.67

802.11ac VHT50_Nss1,(MCS0)_2TX

5180MHz_TX

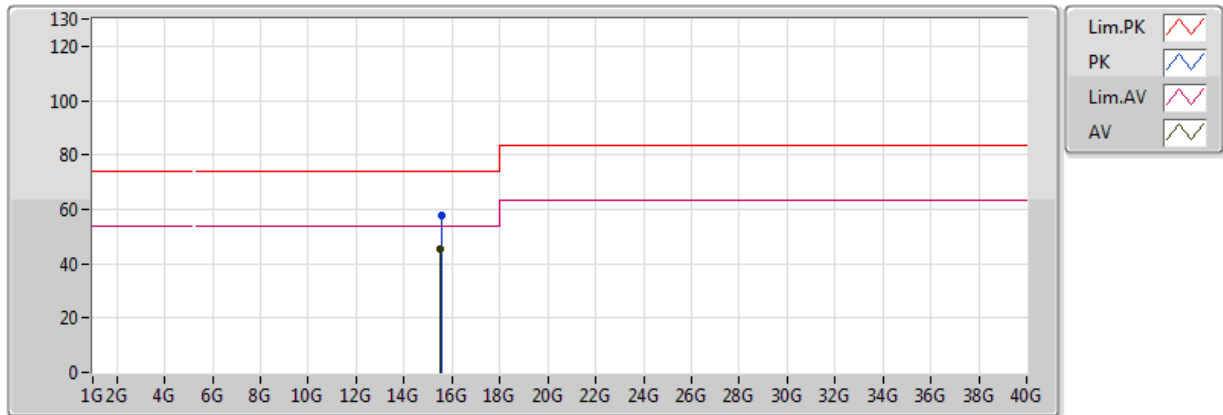


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	15.53544G	45.56	54.00	-8.44	14.15	3	Horizontal	104	2.08	-	31.42	38.87	9.95	34.67
PK	15.55152G	57.74	74.00	-16.26	14.07	3	Horizontal	104	2.08	-	43.67	38.80	9.96	34.69

802.11ac VHT50_Nss1,(MCS0)_2TX

5200MHz_TX

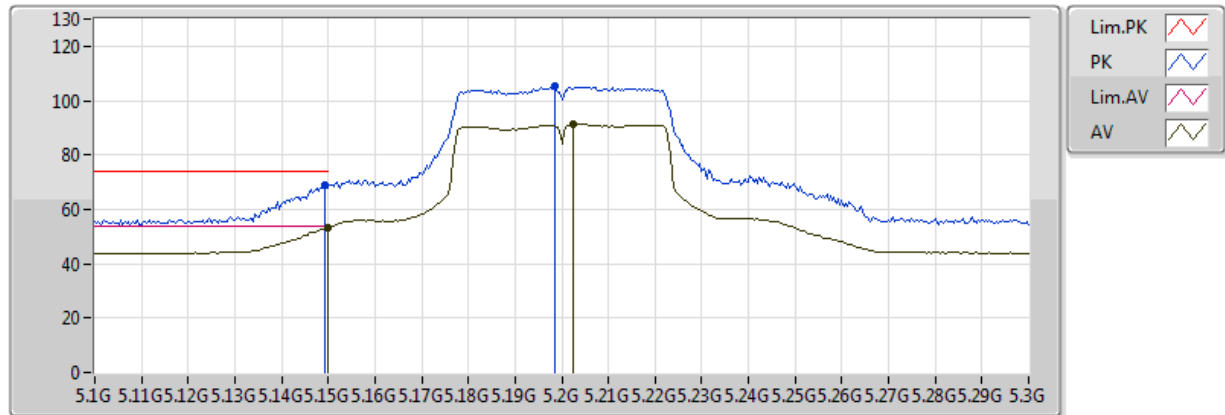


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.149995G	53.51	54.00	-0.49	2.80	3	Vertical	188	1.91	-	50.71	31.66	5.62	34.48
AV	5.2024G	91.43	Inf	-Inf	2.83	3	Vertical	188	1.91	-	88.60	31.68	5.63	34.48
PK	5.1492G	68.97	74.00	-5.03	2.80	3	Vertical	188	1.91	-	66.17	31.66	5.62	34.48
PK	5.1984G	105.26	Inf	-Inf	2.83	3	Vertical	188	1.91	-	102.43	31.68	5.63	34.48

802.11ac VHT50_Nss1,(MCS0)_2TX

5200MHz_TX

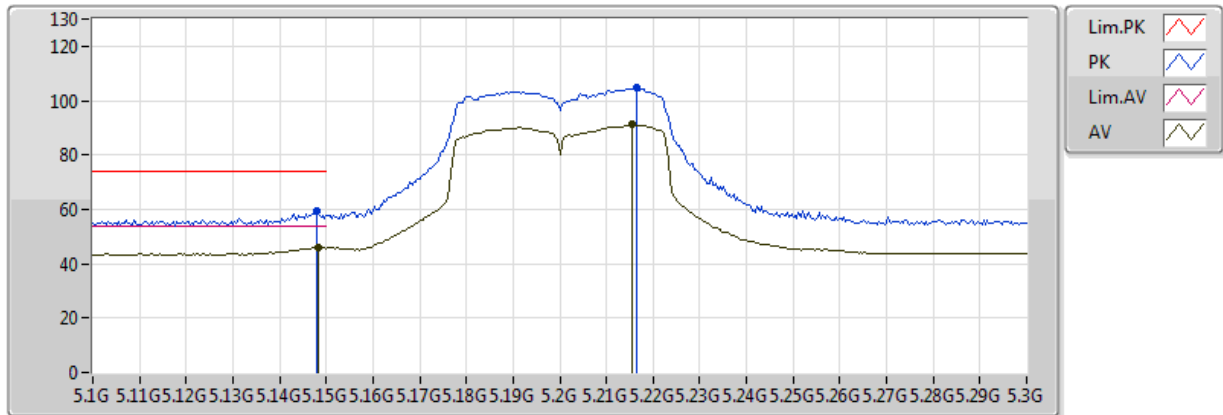


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.1484G	45.94	54.00	-8.06	2.80	3	Horizontal	184	1.64	-	43.14	31.66	5.62	34.48
AV	5.2156G	91.07	Inf	-Inf	2.84	3	Horizontal	184	1.64	-	88.24	31.69	5.63	34.48
PK	5.148G	59.30	74.00	-14.70	2.80	3	Horizontal	184	1.64	-	56.50	31.66	5.62	34.48
PK	5.2164G	105.05	Inf	-Inf	2.84	3	Horizontal	184	1.64	-	102.22	31.69	5.63	34.48

802.11ac VHT50_Nss1,(MCS0)_2TX

5200MHz_TX

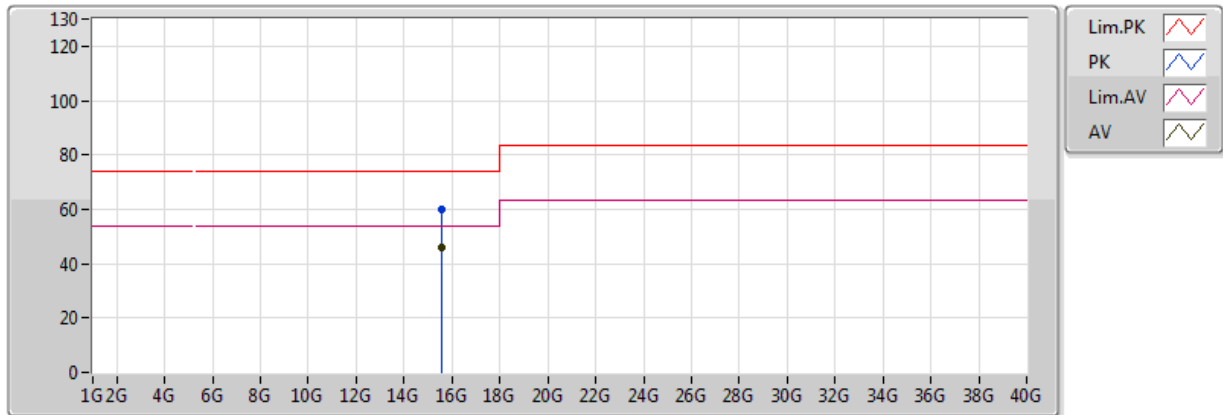


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	15.57024G	45.93	54.00	-8.07	13.98	3	Vertical	0	1.13	-	31.95	38.73	9.96	34.72
PK	15.59736G	59.86	74.00	-14.14	13.85	3	Vertical	0	1.13	-	46.00	38.63	9.97	34.75

802.11ac VHT50_Nss1,(MCS0)_2TX

5200MHz_TX

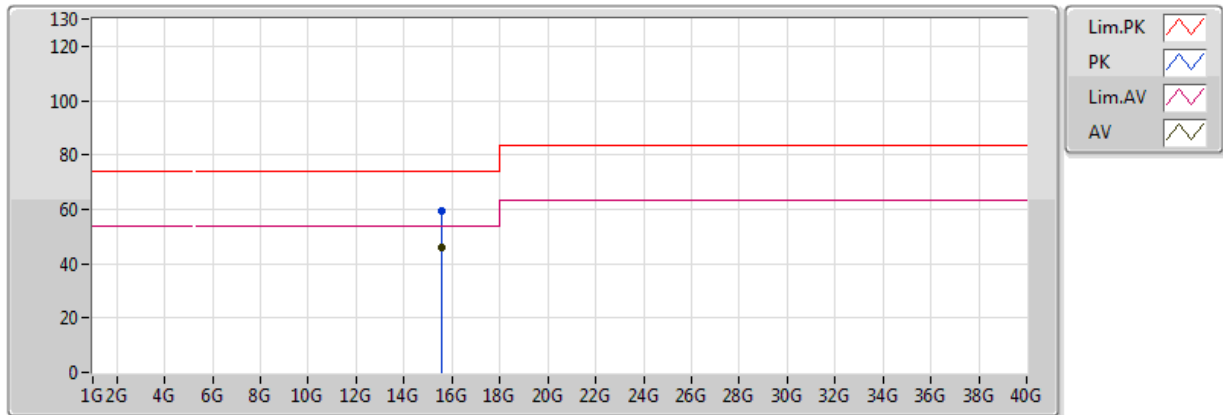


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	15.58032G	45.89	54.00	-8.11	13.93	3	Horizontal	111	1.61	-	31.96	38.69	9.97	34.73
PK	15.59532G	59.22	74.00	-14.78	13.86	3	Horizontal	111	1.61	-	45.36	38.64	9.97	34.75

802.11ac VHT50_Nss1,(MCS0)_2TX

5225MHz_TX

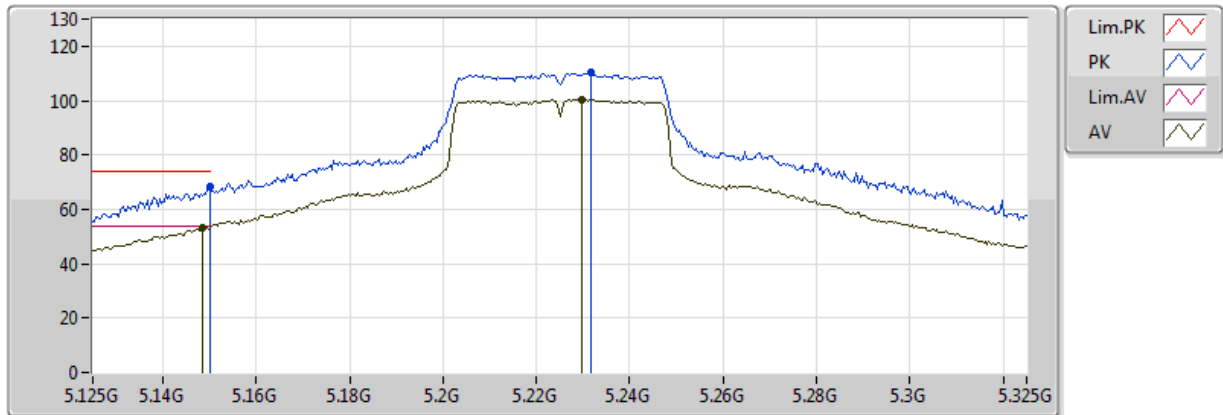


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.1486G	53.42	54.00	-0.58	2.80	3	Vertical	3	1.49	-	50.62	31.66	5.62	34.48
AV	5.2298G	100.55	Inf	-Inf	2.84	3	Vertical	3	1.49	-	97.71	31.69	5.63	34.48
PK	5.149995G	68.62	74.00	-5.38	2.80	3	Vertical	3	1.49	-	65.82	31.66	5.62	34.48
PK	5.2318G	110.13	Inf	-Inf	2.84	3	Vertical	3	1.49	-	107.29	31.69	5.63	34.48

802.11ac VHT50_Nss1,(MCS0)_2TX

5225MHz_TX

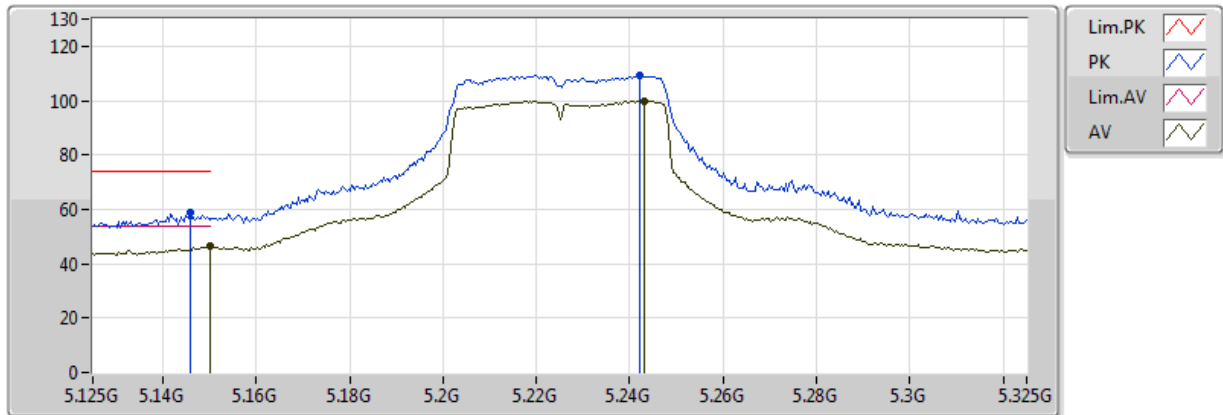


EUT = Y

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.149995G	46.30	54.00	-7.70	2.80	3	Horizontal	4	1.71	-	43.50	31.66	5.62	34.48
AV	5.243G	99.84	Inf	-Inf	2.85	3	Horizontal	4	1.71	-	97.00	31.70	5.63	34.48
PK	5.1458G	58.67	74.00	-15.33	2.80	3	Horizontal	4	1.71	-	55.87	31.66	5.62	34.48
PK	5.2422G	109.26	Inf	-Inf	2.85	3	Horizontal	4	1.71	-	106.42	31.70	5.63	34.48

802.11ac VHT50_Nss1,(MCS0)_2TX

5225MHz_TX

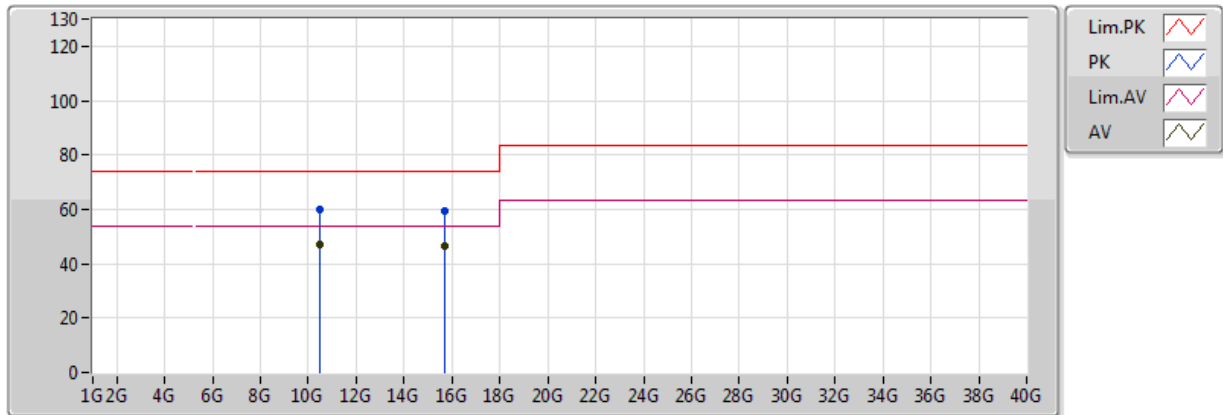


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	10.45096G	47.33	54.00	-6.67	12.67	3	Vertical	198	1.49	-	34.67	39.63	7.97	34.94
AV	15.67824G	46.56	54.00	-7.44	13.46	3	Vertical	159	1.45	-	33.10	38.32	9.99	34.85
PK	10.45108G	60.09	74.00	-13.91	12.67	3	Vertical	198	1.49	-	47.42	39.63	7.97	34.94
PK	15.67536G	59.16	74.00	-14.84	13.48	3	Vertical	159	1.45	-	45.69	38.33	9.99	34.84

802.11ac VHT50_Nss1,(MCS0)_2TX

5225MHz_TX

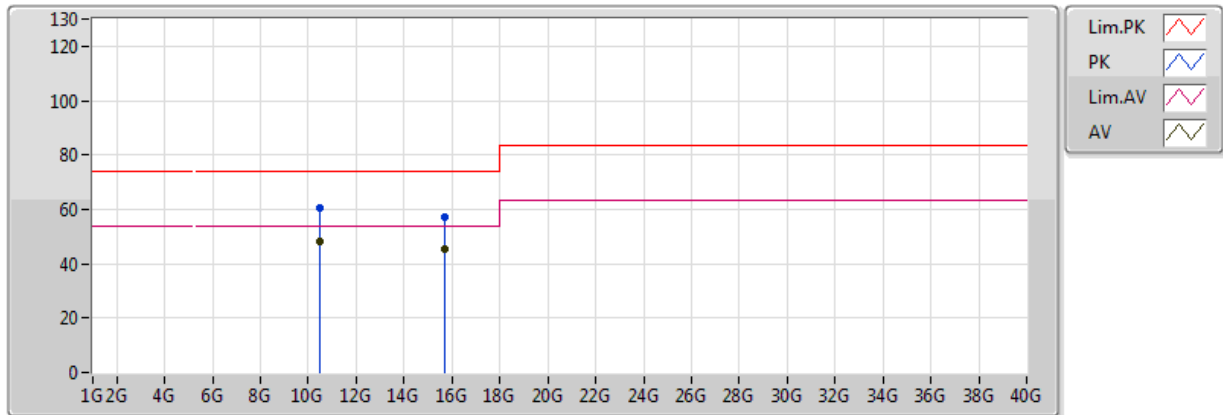


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	10.45492G	48.04	54.00	-5.96	12.68	3	Horizontal	234	1.50	-	35.36	39.64	7.97	34.93
AV	15.68016G	45.30	54.00	-8.70	13.46	3	Horizontal	337	1.50	-	31.84	38.32	9.99	34.85
PK	10.45564G	60.70	74.00	-13.30	12.68	3	Horizontal	234	1.50	-	48.02	39.64	7.98	34.93
PK	15.68304G	57.18	74.00	-16.82	13.44	3	Horizontal	337	1.50	-	43.74	38.30	9.99	34.85

802.11ac VHT50_Nss1,(MCS0)_2TX

5755MHz_TX

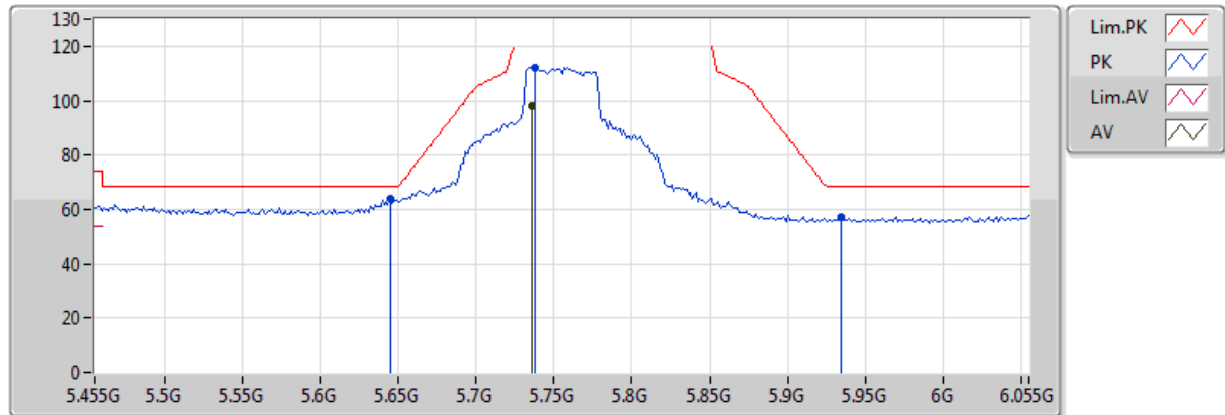


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.7358G	98.19	Inf	-Inf	3.47	3	Vertical	192	1.66	-	94.72	32.18	5.84	34.55
PK	5.6446G	63.62	68.20	-4.58	3.28	3	Vertical	192	1.66	-	60.34	32.03	5.77	34.52
PK	5.7382G	112.22	Inf	-Inf	3.47	3	Vertical	192	1.66	-	108.74	32.18	5.84	34.55
PK	5.935G	57.09	68.20	-11.11	3.88	3	Vertical	192	1.66	-	53.20	32.50	5.98	34.60

802.11ac VHT50_Nss1,(MCS0)_2TX

5755MHz_TX

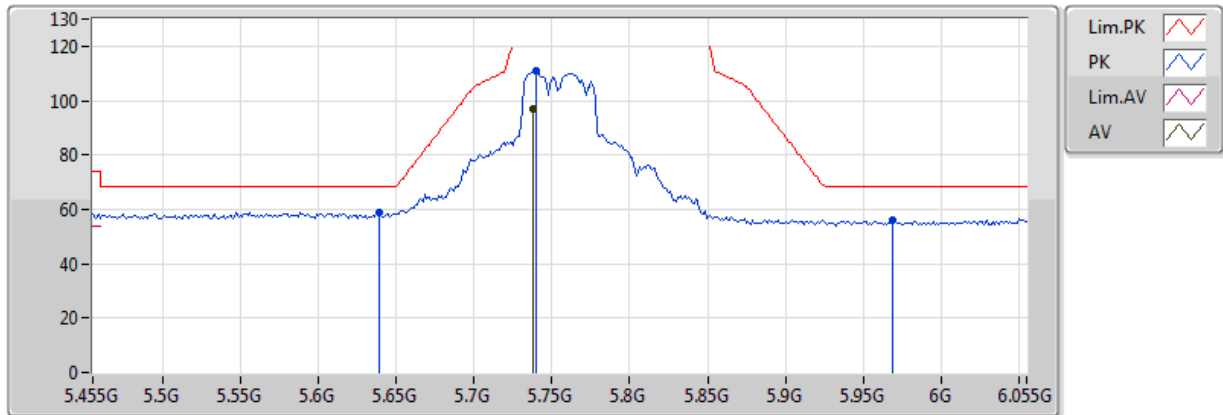


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.7382G	96.86	Inf	-Inf	3.47	3	Horizontal	170	1.71	-	93.38	32.18	5.84	34.55
PK	5.6386G	58.87	68.20	-9.33	3.27	3	Horizontal	170	1.71	-	55.60	32.02	5.77	34.52
PK	5.7394G	111.02	Inf	-Inf	3.48	3	Horizontal	170	1.71	-	107.54	32.18	5.84	34.55
PK	5.9686G	56.18	68.20	-12.02	3.95	3	Horizontal	170	1.71	-	52.23	32.55	6.01	34.60

802.11ac VHT50_Nss1,(MCS0)_2TX

5755MHz_TX

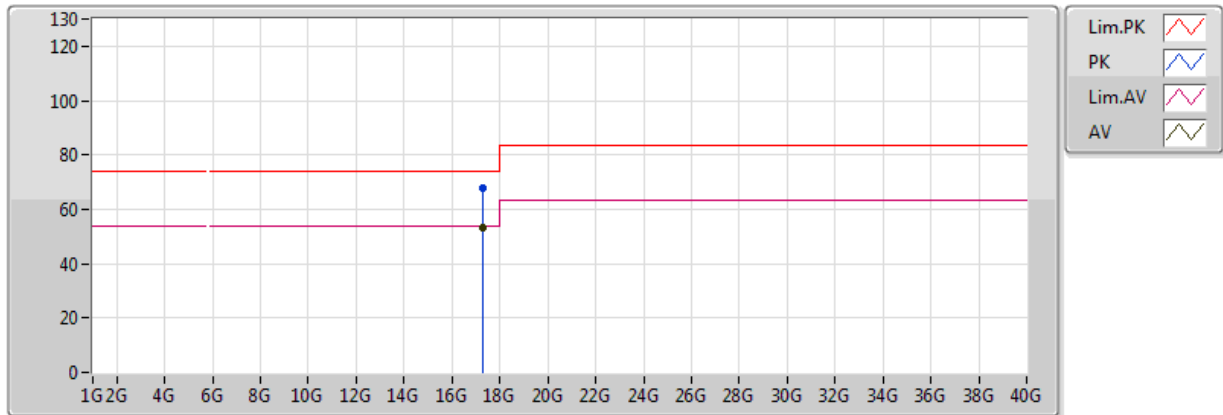


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	17.26746G	53.20	54.00	-0.80	18.46	3	Vertical	143	1.40	-	34.74	41.82	10.49	33.84
PK	17.26836G	67.65	74.00	-6.35	18.47	3	Vertical	143	1.40	-	49.18	41.82	10.49	33.84

802.11ac VHT50_Nss1,(MCS0)_2TX

5755MHz_TX

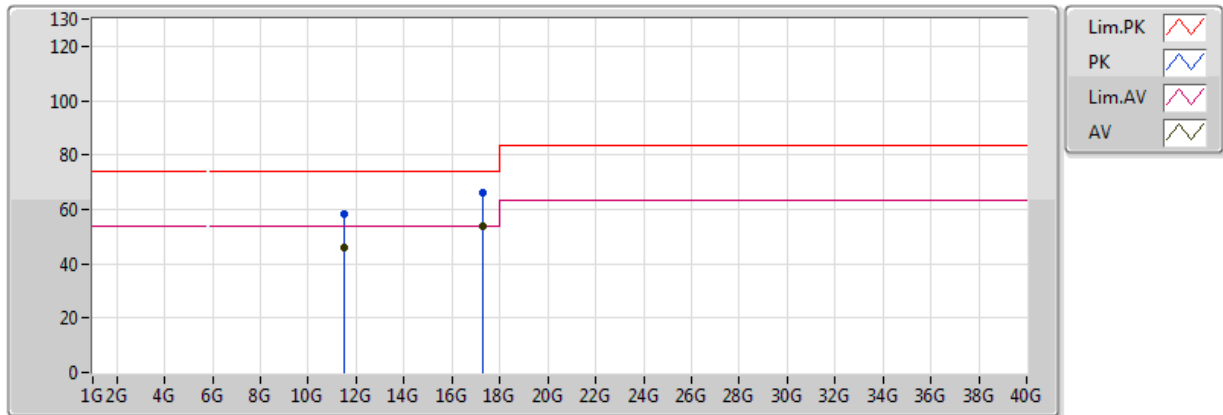


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	11.50088G	45.71	54.00	-8.29	13.39	3	Horizontal	233	1.50	-	32.31	39.70	8.36	34.66
AV	17.26278G	53.55	54.00	-0.45	18.43	3	Horizontal	204	1.53	-	35.12	41.79	10.48	33.84
PK	11.50844G	58.43	74.00	-15.57	13.38	3	Horizontal	233	1.50	-	45.05	39.69	8.36	34.66
PK	17.2662G	66.15	74.00	-7.85	18.45	3	Horizontal	204	1.53	-	47.70	41.81	10.49	33.84

802.11ac VHT50_Nss1,(MCS0)_2TX

5790MHz_TX

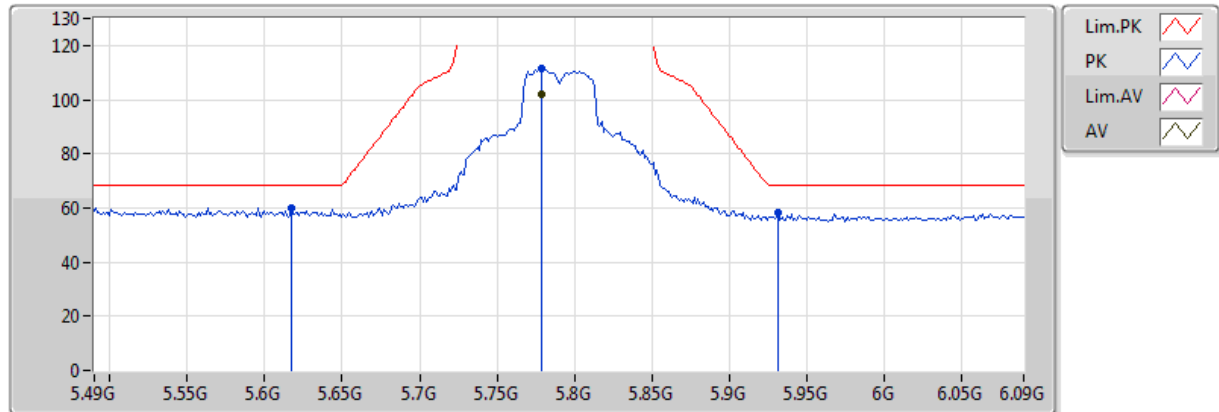


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.7792G	102.02	Inf	-Inf	3.56	3	Vertical	189	2.17	-	98.46	32.25	5.87	34.56
PK	5.6172G	59.93	68.20	-8.27	3.22	3	Vertical	189	2.17	-	56.70	31.99	5.75	34.52
PK	5.7792G	111.50	Inf	-Inf	3.56	3	Vertical	189	2.17	-	107.94	32.25	5.87	34.56
PK	5.9316G	58.14	68.20	-10.06	3.88	3	Vertical	189	2.17	-	54.26	32.49	5.98	34.60

802.11ac VHT50_Nss1,(MCS0)_2TX

5790MHz_TX

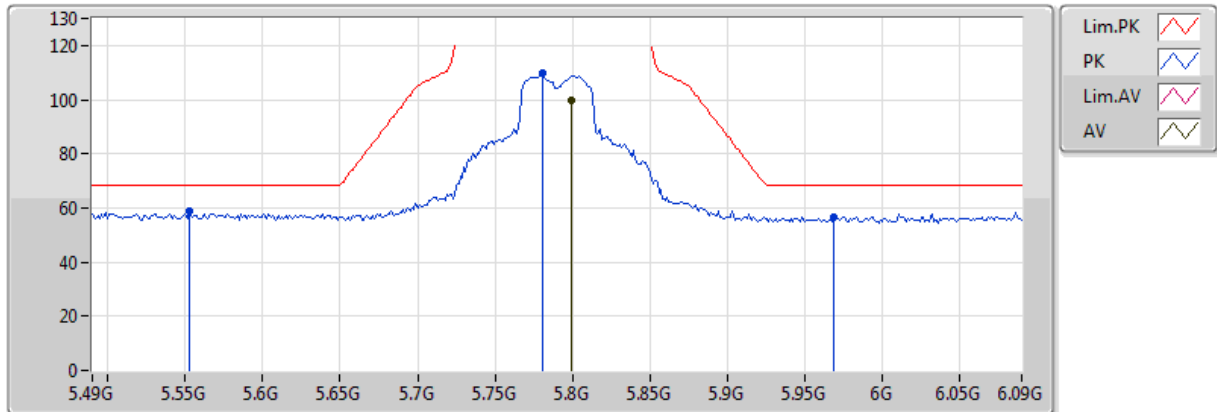


EUT = Y

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.7996G	99.52	Inf	-Inf	3.61	3	Horizontal	174	1.89	-	95.91	32.28	5.89	34.56
PK	5.5524G	58.75	68.20	-9.45	3.09	3	Horizontal	174	1.89	-	55.66	31.88	5.71	34.50
PK	5.7804G	109.55	Inf	-Inf	3.57	3	Horizontal	174	1.89	-	105.99	32.25	5.87	34.56
PK	5.9688G	56.68	68.20	-11.52	3.95	3	Horizontal	174	1.89	-	52.72	32.55	6.01	34.60

802.11ac VHT50_Nss1,(MCS0)_2TX

5790MHz_TX

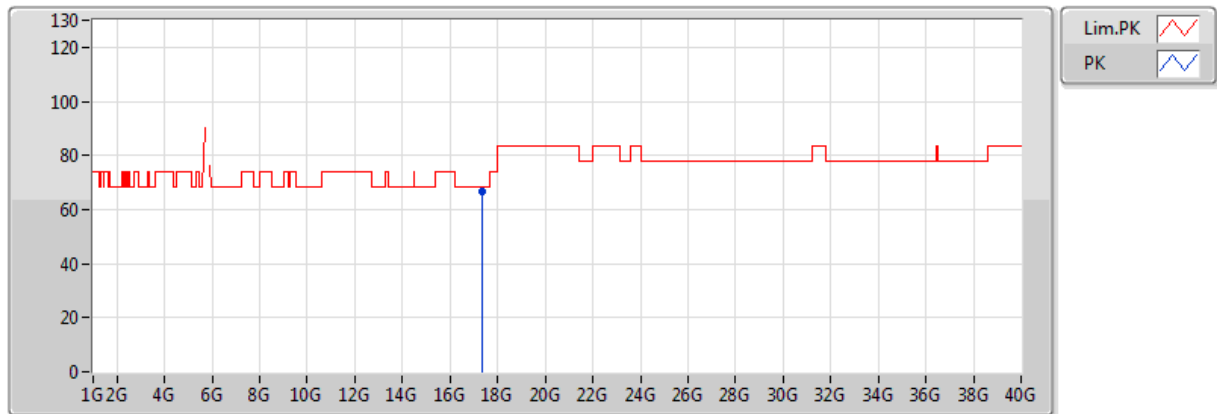


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
PK	17.3484G	66.84	68.20	-1.36	19.01	3	Vertical	34	1.21	-	47.83	42.37	10.52	33.88

802.11ac VHT50_Nss1,(MCS0)_2TX

5790MHz_TX

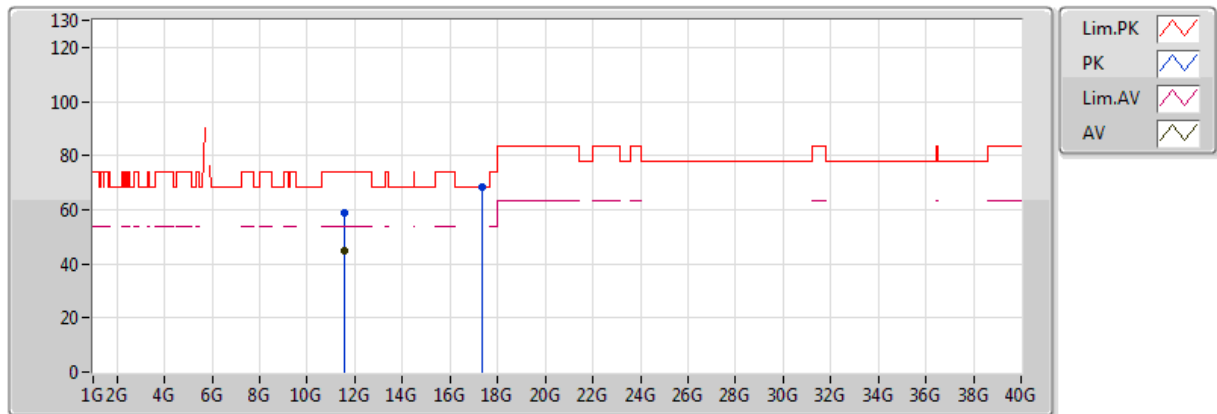


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	11.5878G	44.89	54.00	-9.11	13.27	3	Horizontal	68	1.56	-	31.61	39.58	8.38	34.68
PK	11.58174G	59.04	74.00	-14.96	13.28	3	Horizontal	68	1.56	-	45.76	39.59	8.38	34.68
PK	17.36076G	68.10	68.20	-0.10	19.10	3	Horizontal	347	1.50	-	49.00	42.45	10.53	33.89

802.11ac VHT50_Nss1,(MCS0)_2TX

5820MHz_TX

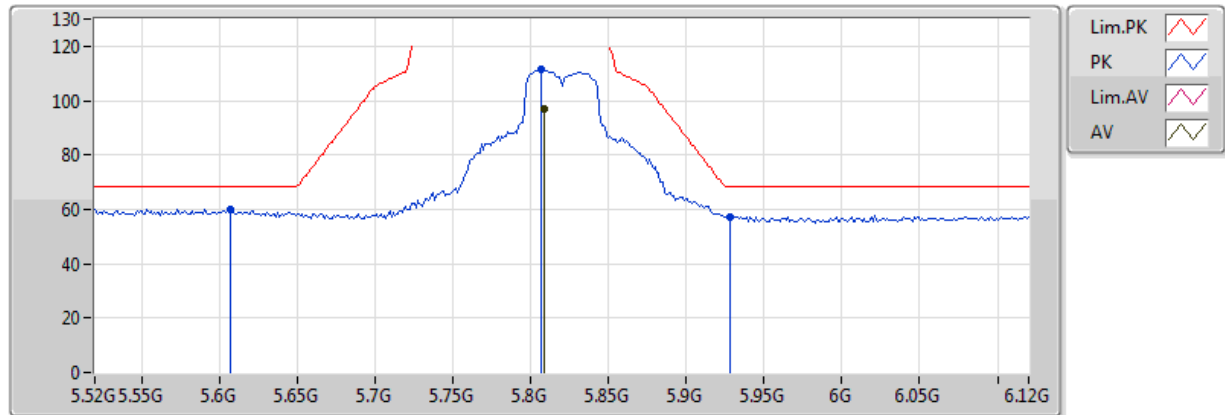


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.8092G	96.81	Inf	-Inf	3.63	3	Vertical	190	1.89	-	93.18	32.29	5.90	34.56
PK	5.6076G	60.14	68.20	-8.06	3.21	3	Vertical	190	1.89	-	56.93	31.97	5.75	34.51
PK	5.8068G	111.38	Inf	-Inf	3.62	3	Vertical	190	1.89	-	107.76	32.29	5.89	34.56
PK	5.928G	57.34	68.20	-10.86	3.87	3	Vertical	190	1.89	-	53.47	32.48	5.98	34.60

802.11ac VHT50_Nss1,(MCS0)_2TX

5820MHz_TX

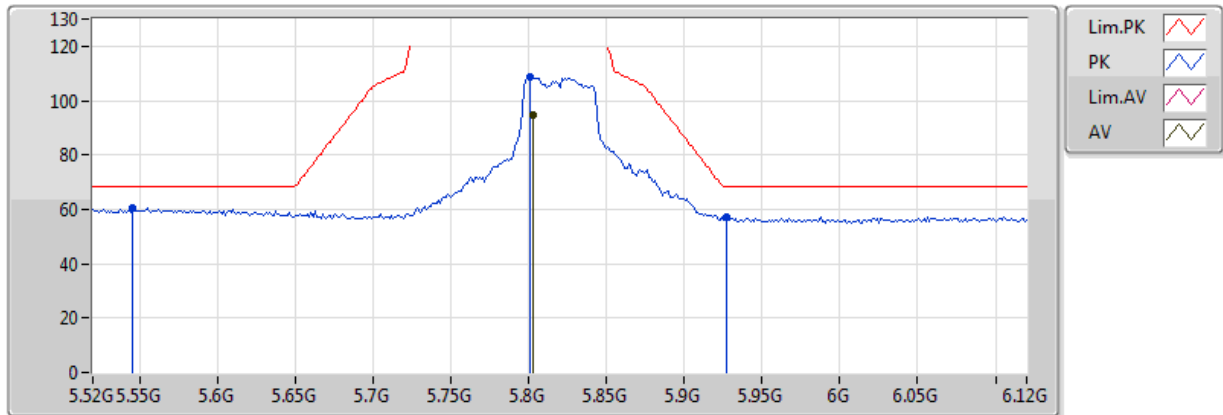


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.8032G	94.70	Inf	-Inf	3.62	3	Horizontal	199	2.01	-	91.09	32.29	5.89	34.56
PK	5.5452G	60.43	68.20	-7.77	3.07	3	Horizontal	199	2.01	-	57.35	31.87	5.70	34.50
PK	5.8008G	108.53	Inf	-Inf	3.61	3	Horizontal	199	2.01	-	104.92	32.28	5.89	34.56
PK	5.9268G	57.16	68.20	-11.04	3.87	3	Horizontal	199	2.01	-	53.29	32.48	5.98	34.60

802.11ac VHT50_Nss1,(MCS0)_2TX

5820MHz_TX

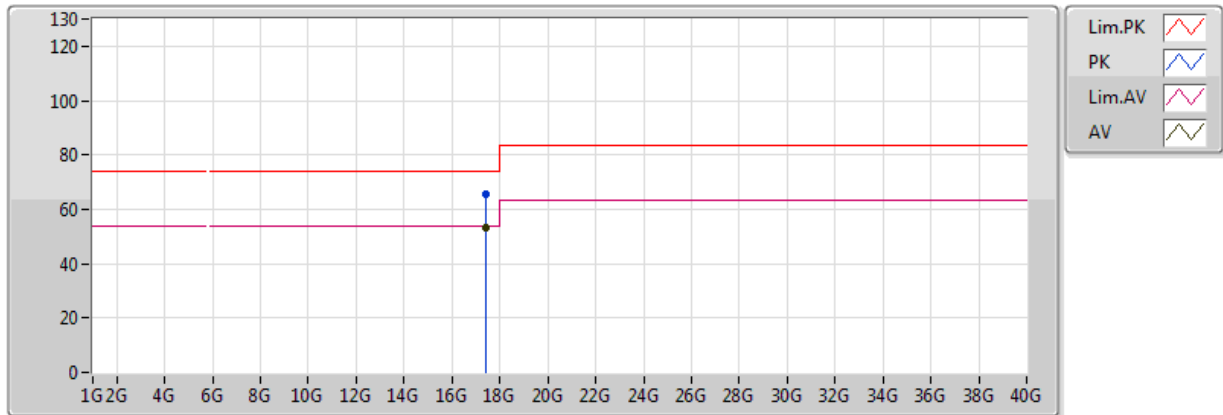


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	17.4456G	53.26	54.00	-0.74	19.67	3	Vertical	139	1.40	-	33.59	43.03	10.57	33.93
PK	17.4434G	65.49	74.00	-8.51	19.66	3	Vertical	139	1.40	-	45.84	43.02	10.57	33.93

802.11ac VHT50_Nss1,(MCS0)_2TX

5820MHz_TX

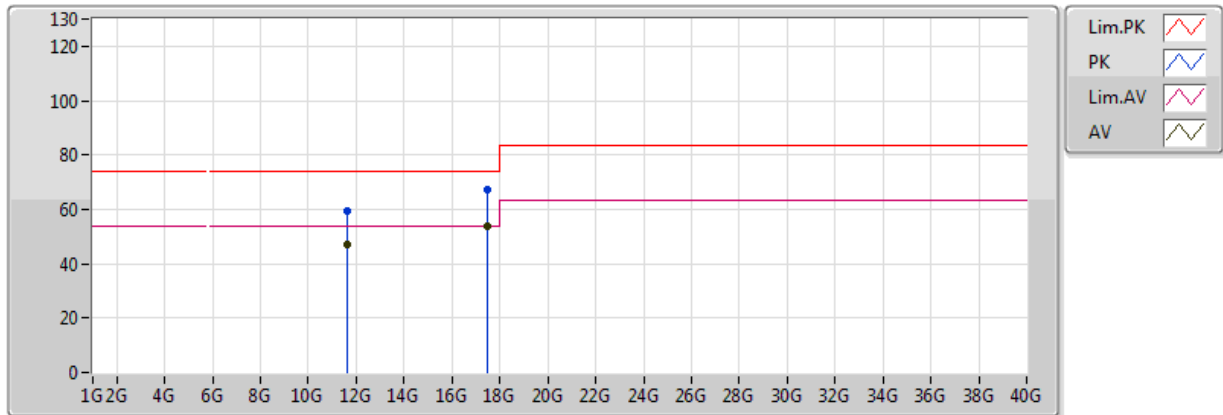


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	11.65026G	47.10	54.00	-6.90	13.19	3	Horizontal	233	1.50	-	33.91	39.49	8.40	34.70
AV	17.46804G	53.53	54.00	-0.47	19.82	3	Horizontal	202	1.49	-	33.71	43.18	10.58	33.94
PK	11.65302G	59.28	74.00	-14.72	13.19	3	Horizontal	233	1.50	-	46.09	39.49	8.40	34.70
PK	17.44644G	67.12	74.00	-6.88	19.68	3	Horizontal	202	1.49	-	47.44	43.04	10.57	33.93

802.11ac VHT60_Nss1,(MCS0)_2TX

5185MHz_TX

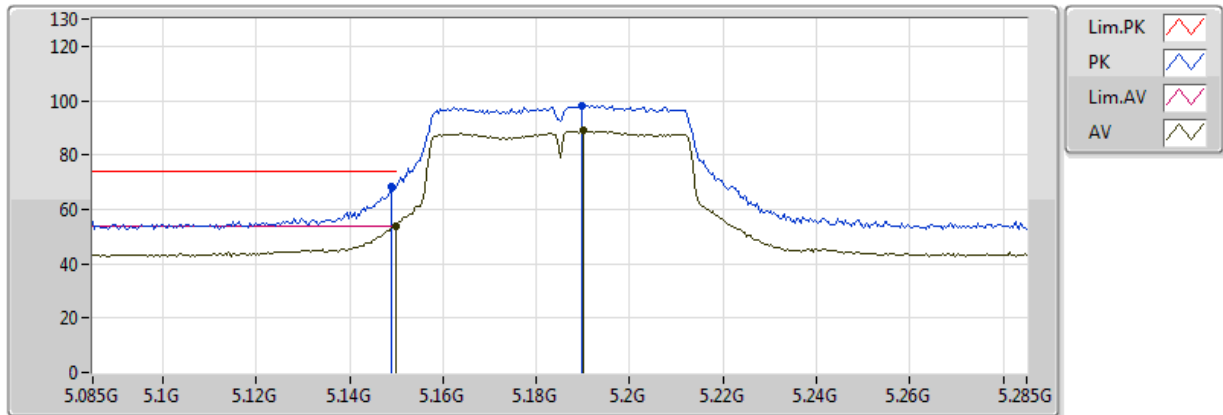


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.149995G	53.80	54.00	-0.20	2.80	3	Vertical	360	1.50	-	51.00	31.66	5.62	34.48
AV	5.1902G	88.85	Inf	-Inf	2.82	3	Vertical	360	1.50	-	86.02	31.68	5.63	34.48
PK	5.149G	68.17	74.00	-5.83	2.80	3	Vertical	360	1.50	-	65.37	31.66	5.62	34.48
PK	5.1898G	98.24	Inf	-Inf	2.82	3	Vertical	360	1.50	-	95.42	31.68	5.63	34.48

802.11ac VHT60_Nss1,(MCS0)_2TX

5185MHz_TX

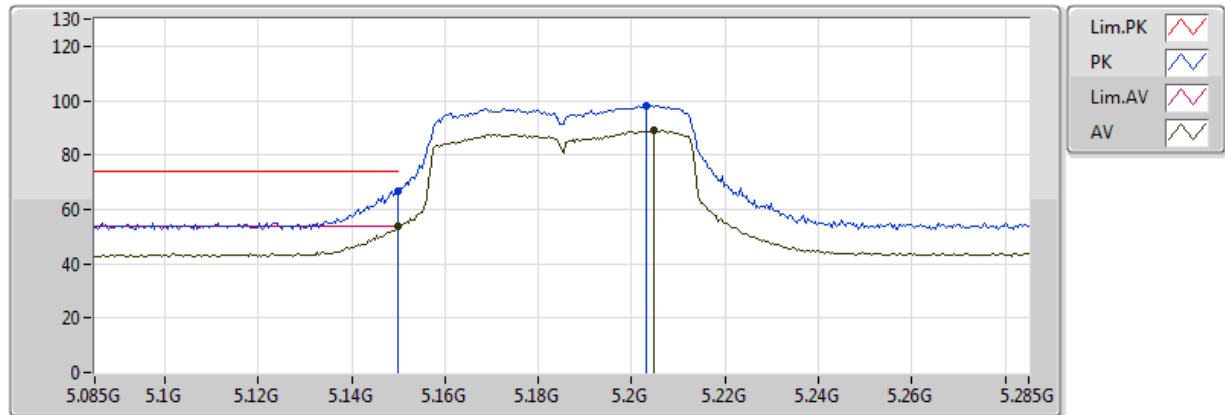


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.149995G	53.61	54.00	-0.39	2.80	3	Horizontal	359	1.38	-	50.81	31.66	5.62	34.48
AV	5.2046G	88.85	Inf	-Inf	2.83	3	Horizontal	359	1.38	-	86.01	31.68	5.63	34.48
PK	5.149995G	66.96	74.00	-7.04	2.80	3	Horizontal	359	1.38	-	64.16	31.66	5.62	34.48
PK	5.203G	98.27	Inf	-Inf	2.83	3	Horizontal	359	1.38	-	95.44	31.68	5.63	34.48

802.11ac VHT60_Nss1,(MCS0)_2TX

5185MHz_TX

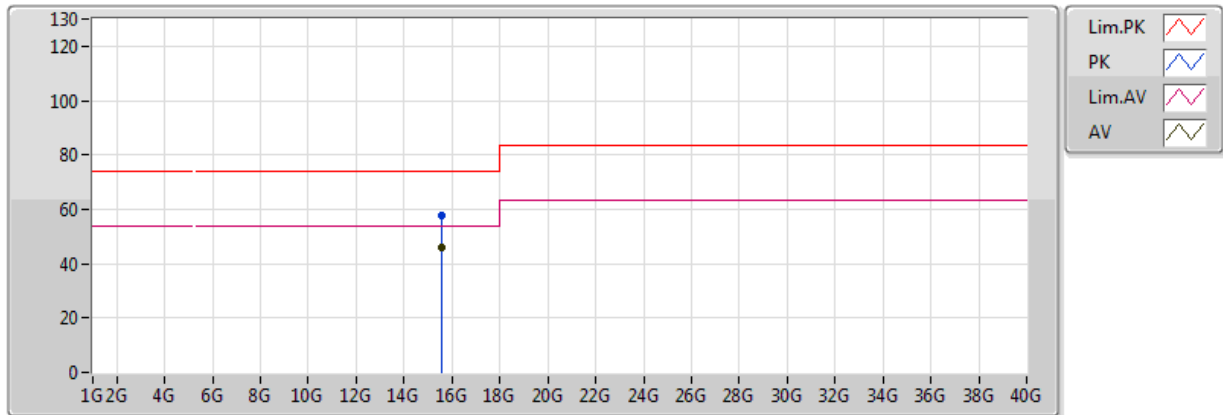


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	15.54336G	45.70	54.00	-8.30	14.11	3	Vertical	321	2.18	-	31.59	38.84	9.96	34.68
PK	15.55212G	57.62	74.00	-16.38	14.07	3	Vertical	321	2.18	-	43.55	38.80	9.96	34.69

802.11ac VHT60_Nss1,(MCS0)_2TX

5185MHz_TX

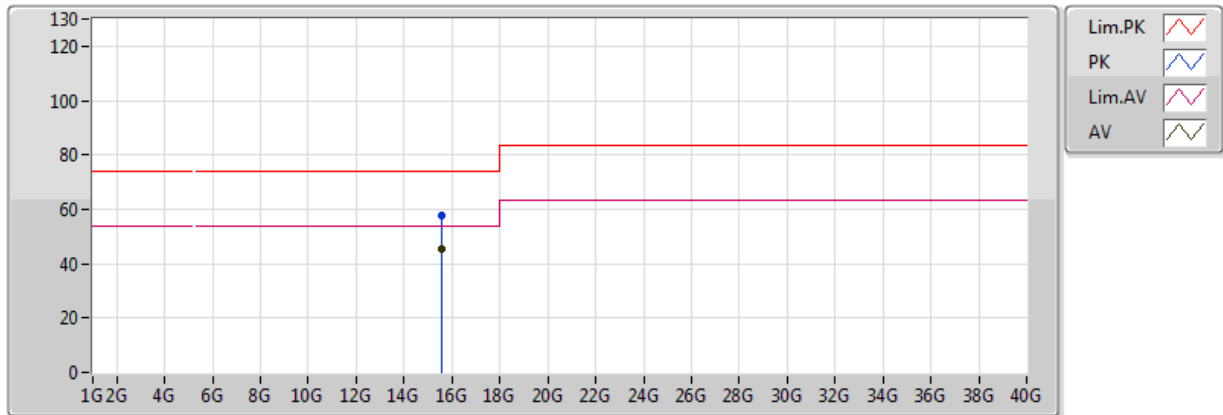


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	15.55098G	45.49	54.00	-8.51	14.07	3	Horizontal	121	1.94	-	31.41	38.81	9.96	34.69
PK	15.5451G	57.65	74.00	-16.35	14.10	3	Horizontal	121	1.94	-	43.55	38.83	9.96	34.69

802.11ac VHT60_Nss1,(MCS0)_2TX

5200MHz_TX

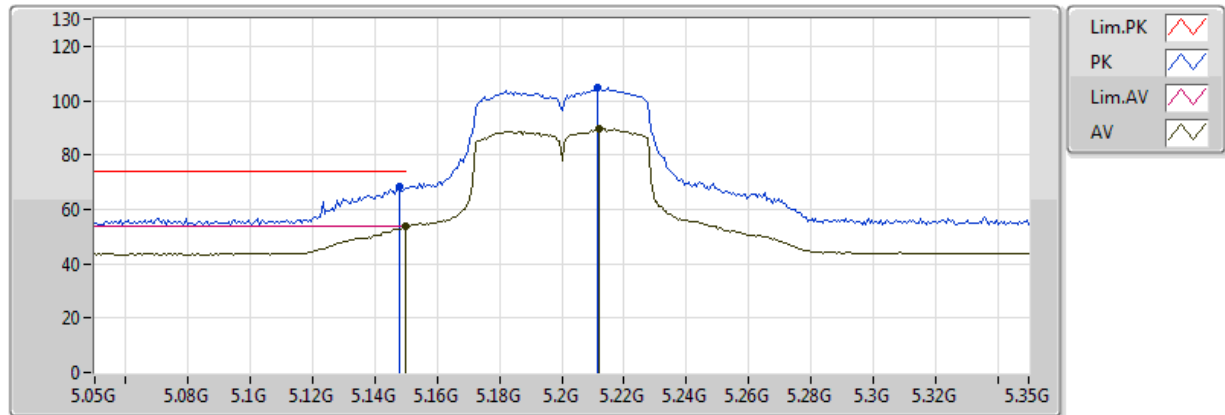


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.149995G	53.64	54.00	-0.36	2.80	3	Vertical	191	1.88	-	50.84	31.66	5.62	34.48
AV	5.212G	89.68	Inf	-Inf	2.83	3	Vertical	191	1.88	-	86.85	31.68	5.63	34.48
PK	5.1478G	68.44	74.00	-5.56	2.80	3	Vertical	191	1.88	-	65.64	31.66	5.62	34.48
PK	5.2114G	104.61	Inf	-Inf	2.83	3	Vertical	191	1.88	-	101.77	31.68	5.63	34.48

802.11ac VHT60_Nss1,(MCS0)_2TX

5200MHz_TX

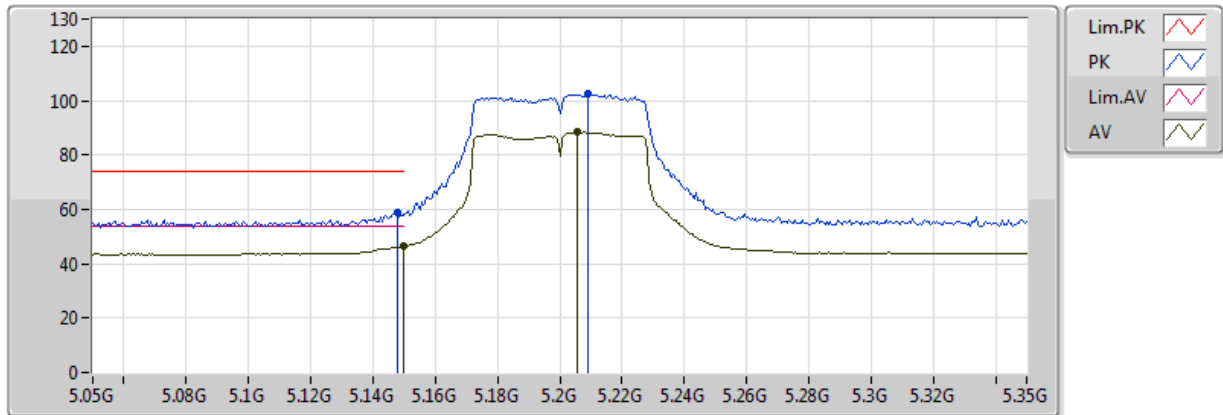


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.1496G	46.74	54.00	-7.26	2.80	3	Horizontal	188	1.69	-	43.94	31.66	5.62	34.48
AV	5.2054G	88.34	Inf	-Inf	2.83	3	Horizontal	188	1.69	-	85.51	31.68	5.63	34.48
PK	5.1478G	58.62	74.00	-15.38	2.80	3	Horizontal	188	1.69	-	55.82	31.66	5.62	34.48
PK	5.209G	102.44	Inf	-Inf	2.83	3	Horizontal	188	1.69	-	99.60	31.68	5.63	34.48

802.11ac VHT60_Nss1,(MCS0)_2TX

5200MHz_TX

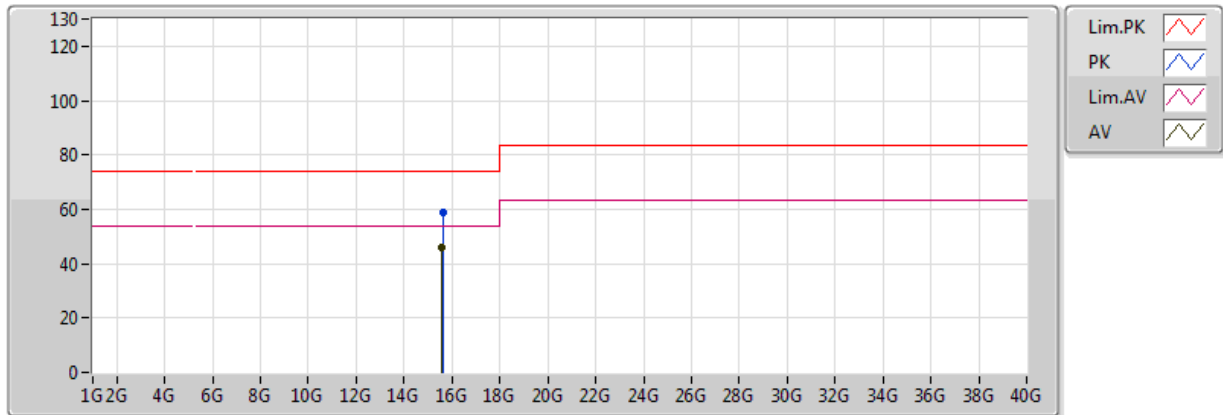


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	15.58596G	45.84	54.00	-8.16	13.90	3	Vertical	95	1.95	-	31.93	38.67	9.97	34.73
PK	15.60156G	59.04	74.00	-14.96	13.83	3	Vertical	95	1.95	-	45.21	38.61	9.97	34.75

802.11ac VHT60_Nss1,(MCS0)_2TX

5200MHz_TX

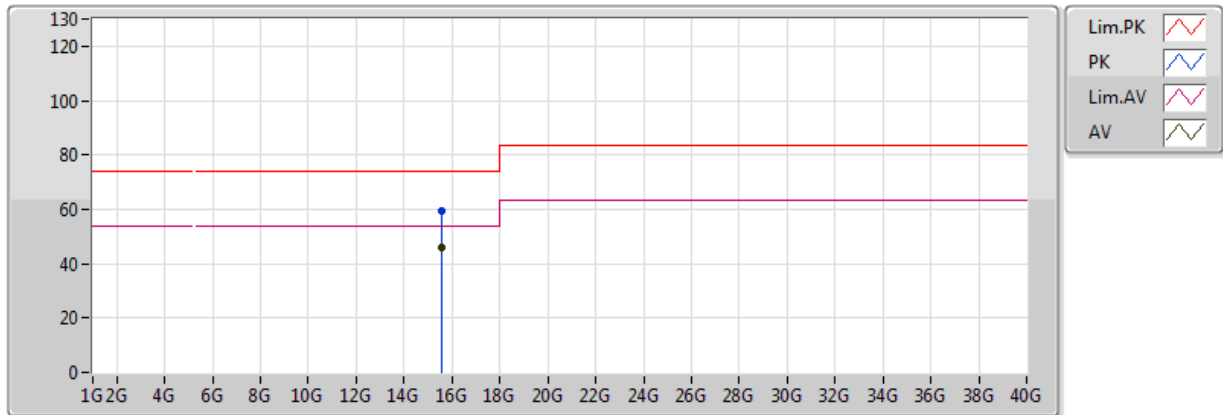


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	15.57288G	45.95	54.00	-8.05	13.97	3	Horizontal	323	1.89	-	31.98	38.72	9.96	34.72
PK	15.5748G	59.32	74.00	-14.68	13.96	3	Horizontal	323	1.89	-	45.36	38.72	9.96	34.72

802.11ac VHT60_Nss1,(MCS0)_2TX

5220MHz_TX

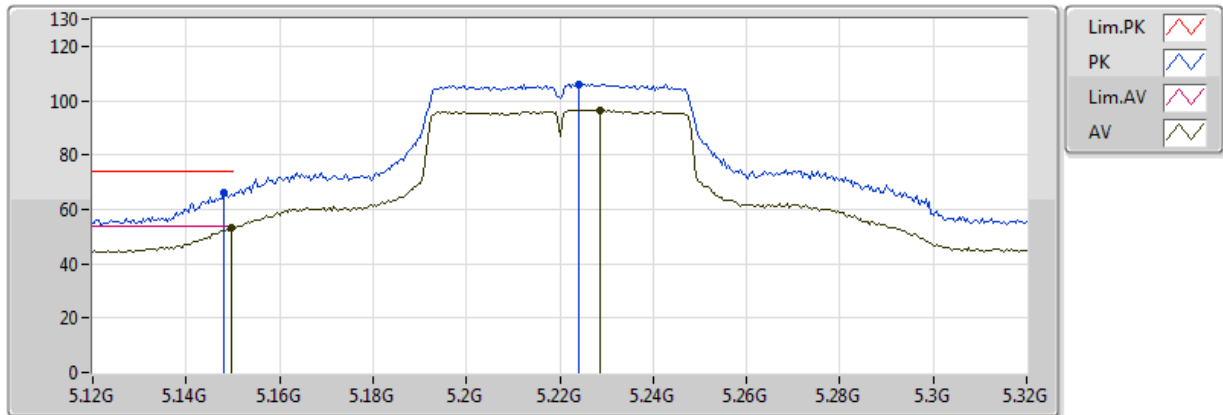


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.1496G	53.34	54.00	-0.66	2.80	3	Vertical	1	1.50	-	50.54	31.66	5.62	34.48
AV	5.2288G	96.65	Inf	-Inf	2.84	3	Vertical	1	1.50	-	93.81	31.69	5.63	34.48
PK	5.148G	66.02	74.00	-7.98	2.80	3	Vertical	1	1.50	-	63.22	31.66	5.62	34.48
PK	5.224G	106.11	Inf	-Inf	2.84	3	Vertical	1	1.50	-	103.27	31.69	5.63	34.48

802.11ac VHT60_Nss1,(MCS0)_2TX

5220MHz_TX

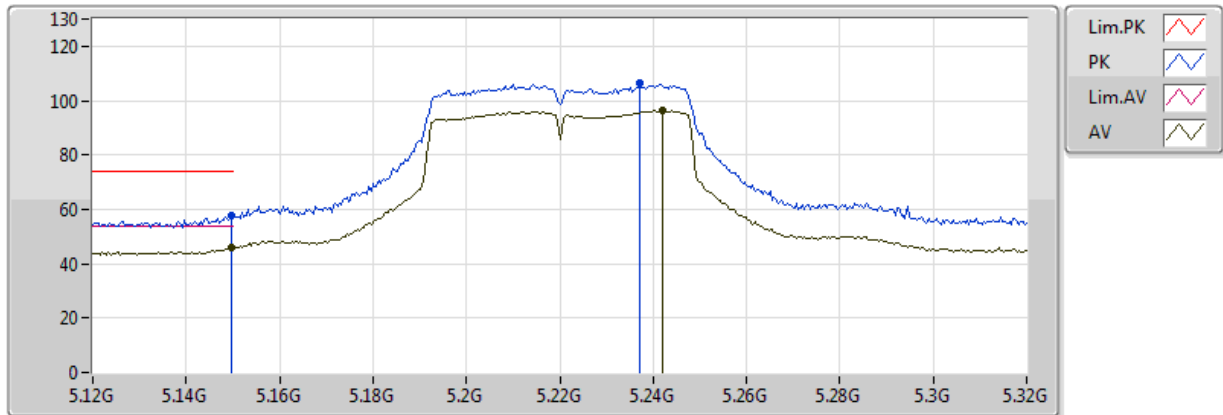


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.1496G	45.70	54.00	-8.30	2.80	3	Horizontal	4	1.50	-	42.90	31.66	5.62	34.48
AV	5.242G	96.28	Inf	-Inf	2.85	3	Horizontal	4	1.50	-	93.43	31.70	5.63	34.48
PK	5.1496G	57.67	74.00	-16.33	2.80	3	Horizontal	4	1.50	-	54.87	31.66	5.62	34.48
PK	5.2372G	106.24	Inf	-Inf	2.84	3	Horizontal	4	1.50	-	103.40	31.69	5.63	34.48

802.11ac VHT60_Nss1,(MCS0)_2TX

5220MHz_TX

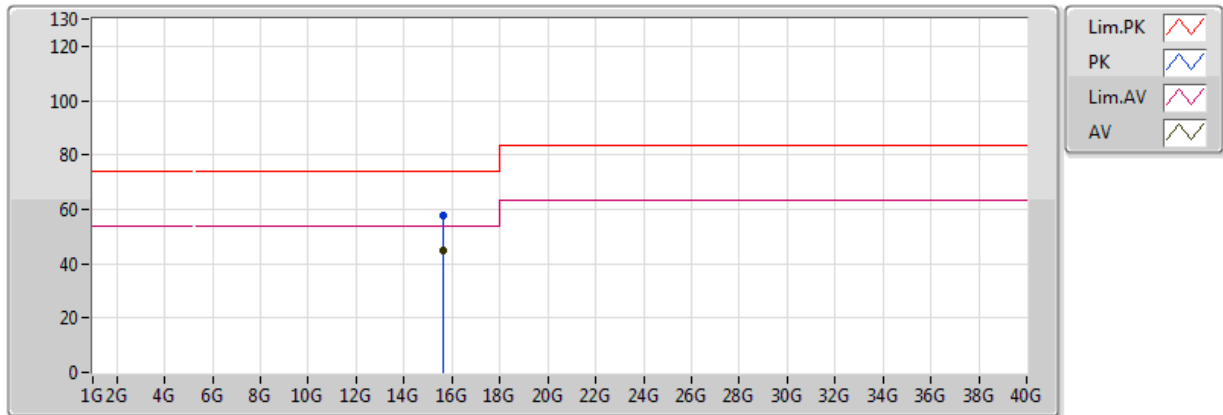


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	15.65352G	44.91	54.00	-9.09	13.58	3	Vertical	28	1.79	-	31.33	38.42	9.98	34.82
PK	15.648G	57.62	74.00	-16.38	13.61	3	Vertical	28	1.79	-	44.01	38.44	9.98	34.81

802.11ac VHT60_Nss1,(MCS0)_2TX

5220MHz_TX

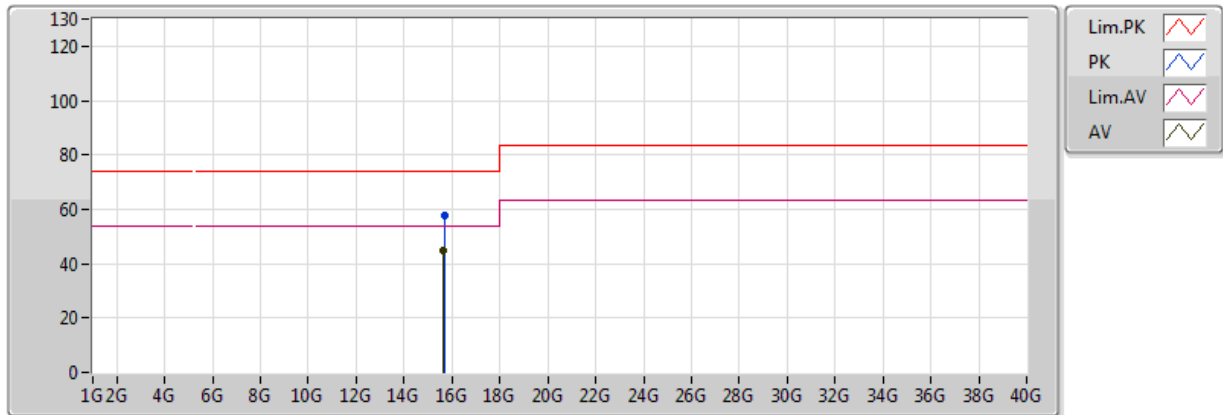


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	15.645G	44.79	54.00	-9.21	13.62	3	Horizontal	202	1.51	-	31.17	38.45	9.98	34.81
PK	15.66546G	57.70	74.00	-16.30	13.53	3	Horizontal	202	1.51	-	44.18	38.37	9.99	34.83

802.11ac VHT60_Nss1,(MCS0)_2TX

5760MHz_TX

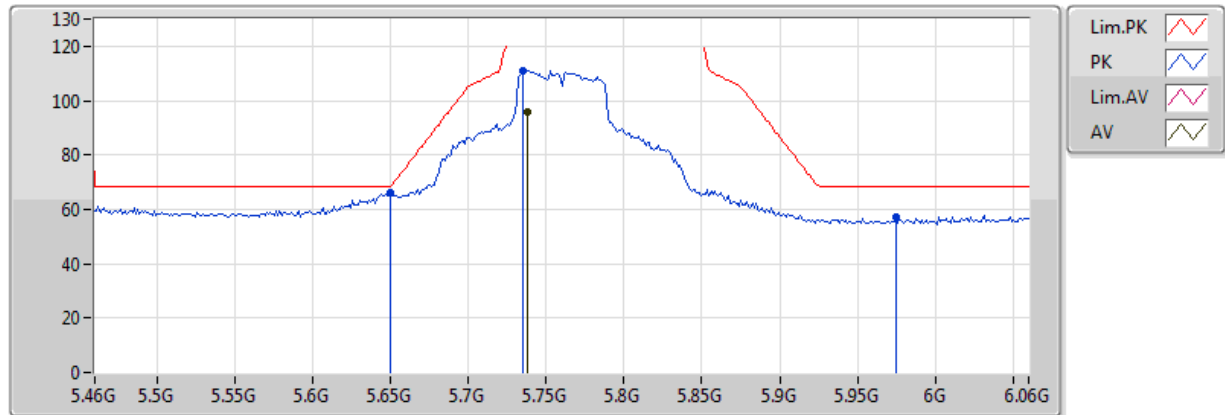


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.7384G	95.56	Inf	-Inf	3.47	3	Vertical	198	2.04	-	92.09	32.18	5.84	34.55
PK	5.6496G	65.92	68.20	-2.28	3.29	3	Vertical	198	2.04	-	62.63	32.04	5.77	34.52
PK	5.7348G	110.94	Inf	-Inf	3.47	3	Vertical	198	2.04	-	107.47	32.18	5.84	34.55
PK	5.9748G	56.93	68.20	-11.27	3.97	3	Vertical	198	2.04	-	52.96	32.56	6.01	34.60

802.11ac VHT60_Nss1,(MCS0)_2TX

5760MHz_TX

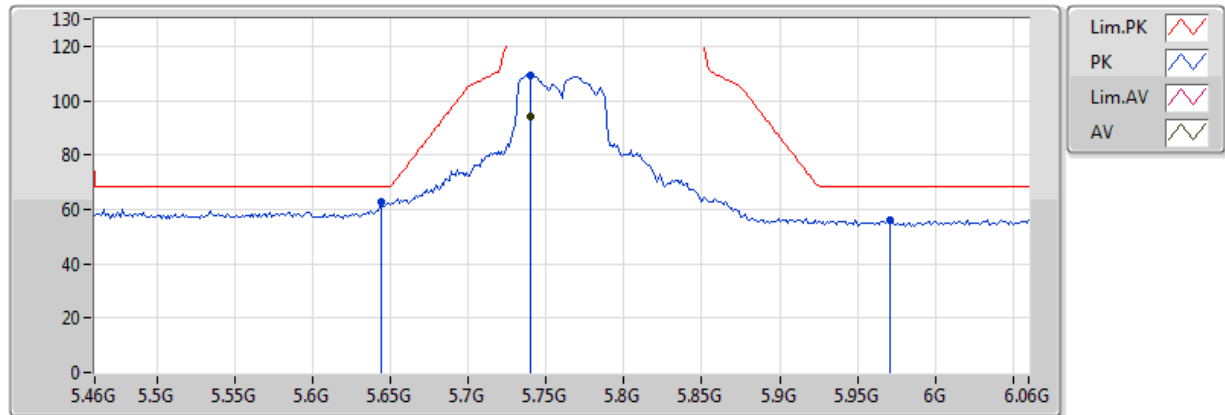


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.7396G	94.12	Inf	-Inf	3.48	3	Horizontal	178	2.33	-	90.64	32.18	5.84	34.55
PK	5.6436G	62.66	68.20	-5.54	3.28	3	Horizontal	178	2.33	-	59.38	32.03	5.77	34.52
PK	5.7396G	109.25	Inf	-Inf	3.48	3	Horizontal	178	2.33	-	105.77	32.18	5.84	34.55
PK	5.9712G	56.26	68.20	-11.94	3.96	3	Horizontal	178	2.33	-	52.30	32.55	6.01	34.60

802.11ac VHT60_Nss1,(MCS0)_2TX

5760MHz_TX

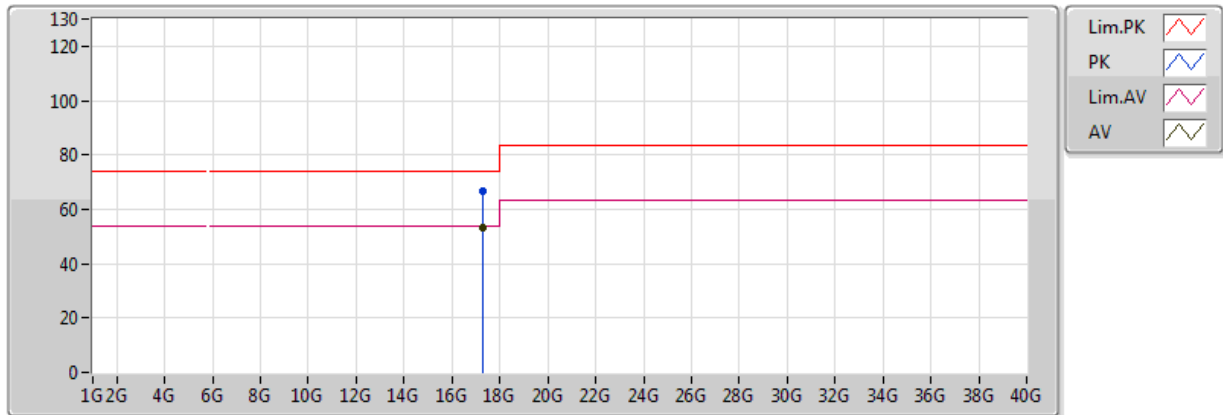


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	17.26896G	53.12	54.00	-0.88	18.47	3	Vertical	142	1.38	-	34.65	41.83	10.49	33.84
PK	17.27028G	66.92	74.00	-7.08	18.48	3	Vertical	142	1.38	-	48.44	41.84	10.49	33.84

802.11ac VHT60_Nss1,(MCS0)_2TX

5760MHz_TX

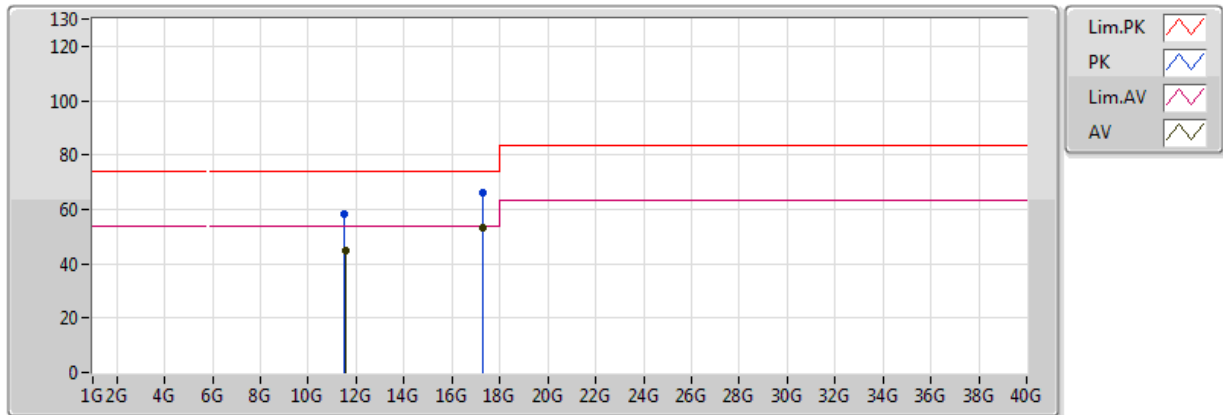


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	11.53002G	45.04	54.00	-8.96	13.35	3	Horizontal	290	1.50	-	31.69	39.66	8.36	34.67
AV	17.26536G	53.29	54.00	-0.71	18.45	3	Horizontal	204	1.50	-	34.84	41.80	10.48	33.84
PK	11.5287G	58.18	74.00	-15.82	13.36	3	Horizontal	290	1.50	-	44.82	39.66	8.36	34.67
PK	17.265G	66.24	74.00	-7.76	18.45	3	Horizontal	204	1.50	-	47.79	41.80	10.48	33.84

802.11ac VHT60_Nss1,(MCS0)_2TX

5790MHz_TX

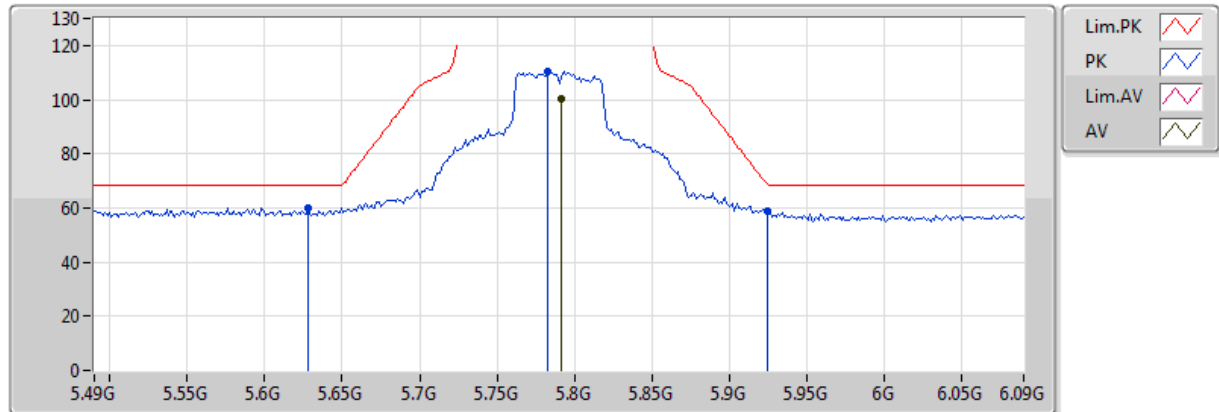


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.7912G	100.52	Inf	-Inf	3.59	3	Vertical	188	2.20	-	96.93	32.27	5.88	34.56
PK	5.628G	59.92	68.20	-8.28	3.25	3	Vertical	188	2.20	-	56.68	32.00	5.76	34.52
PK	5.7828G	110.66	Inf	-Inf	3.57	3	Vertical	188	2.20	-	107.09	32.25	5.88	34.56
PK	5.9244G	58.81	68.64	-9.84	3.86	3	Vertical	188	2.20	-	54.94	32.48	5.98	34.59

802.11ac VHT60_Nss1,(MCS0)_2TX

5790MHz_TX

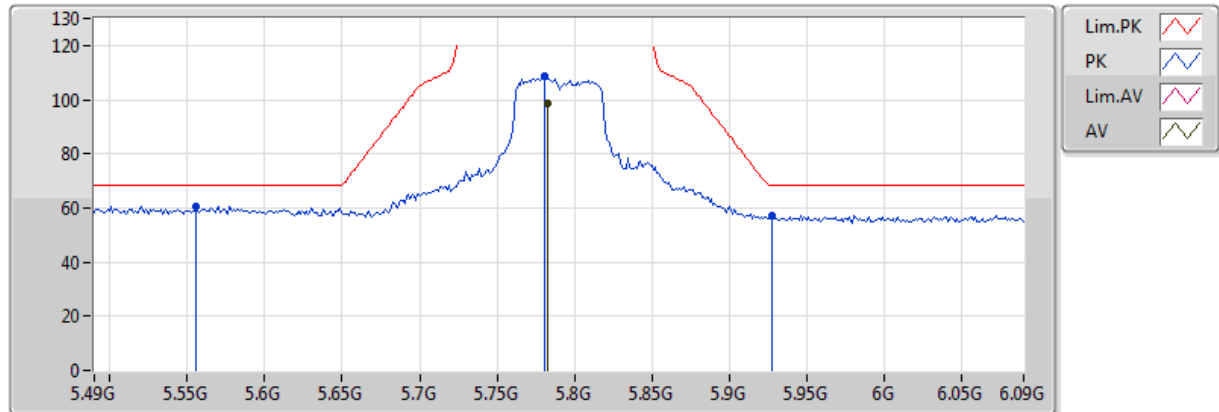


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.7828G	98.47	Inf	-Inf	3.57	3	Horizontal	195	1.93	-	94.90	32.25	5.88	34.56
PK	5.556G	60.49	68.20	-7.71	3.10	3	Horizontal	195	1.93	-	57.40	31.89	5.71	34.50
PK	5.7804G	108.63	Inf	-Inf	3.57	3	Horizontal	195	1.93	-	105.07	32.25	5.87	34.56
PK	5.928G	57.06	68.20	-11.14	3.87	3	Horizontal	195	1.93	-	53.19	32.48	5.98	34.60

802.11ac VHT60_Nss1,(MCS0)_2TX

5790MHz_TX

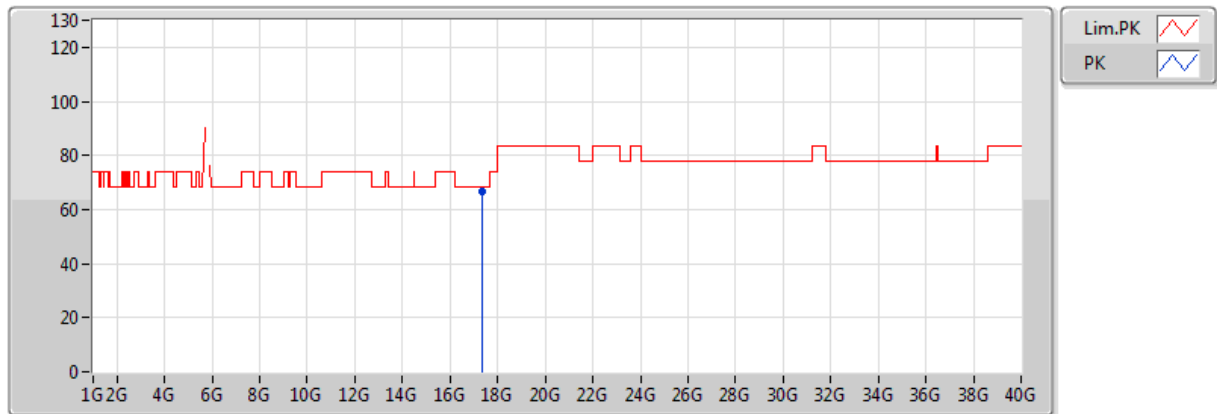


EUT = Y

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	17.35528G	66.70	68.20	-1.5	19.06	3	Vertical	29	1.04	-	47.64	42.42	10.53	33.88

802.11ac VHT60_Nss1,(MCS0)_2TX

5790MHz_TX

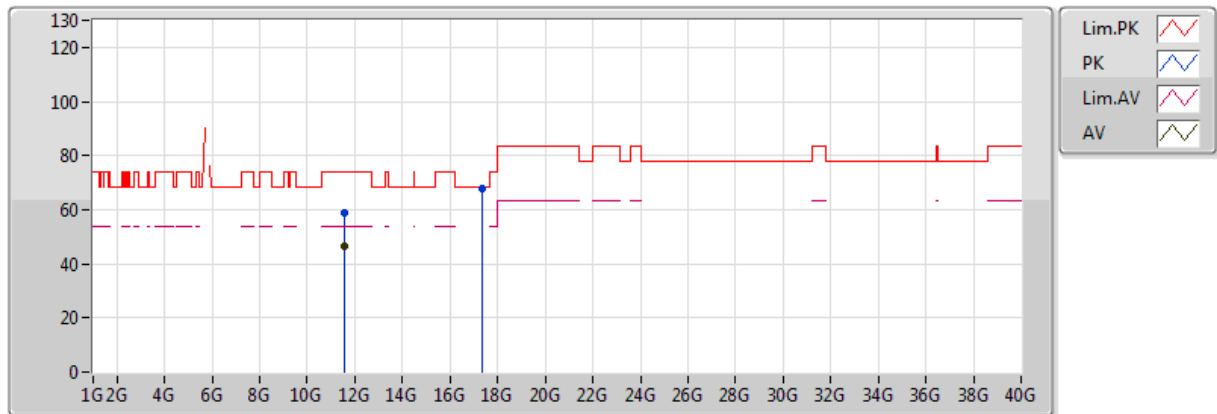


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	11.58276G	46.67	54.00	-7.33	13.28	3	Horizontal	314	1.50	-	33.39	39.58	8.38	34.68
PK	11.58192G	59.09	74.00	-14.91	13.28	3	Horizontal	314	1.50	-	45.81	39.59	8.38	34.68
PK	17.35512G	67.99	68.20	-0.21	19.06	3	Horizontal	348	1.50	-	48.93	42.41	10.53	33.88

802.11ac VHT60_Nss1,(MCS0)_2TX

5815MHz_TX

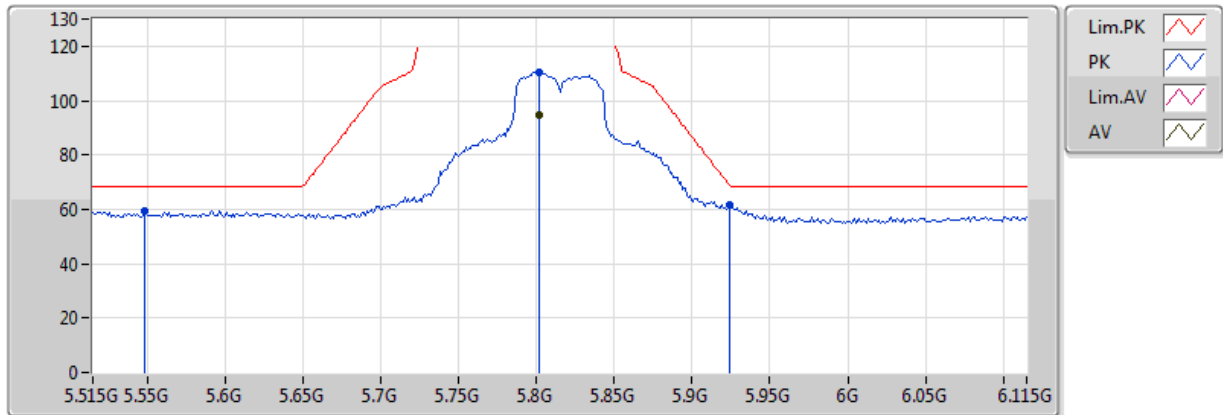


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.8018G	94.67	Inf	-Inf	3.61	3	Vertical	191	1.89	-	91.05	32.28	5.89	34.56
PK	5.5486G	59.38	68.20	-8.82	3.08	3	Vertical	191	1.89	-	56.30	31.88	5.70	34.50
PK	5.8018G	110.38	Inf	-Inf	3.61	3	Vertical	191	1.89	-	106.77	32.28	5.89	34.56
PK	5.9242G	61.75	68.79	-7.04	3.86	3	Vertical	191	1.89	-	57.89	32.48	5.98	34.59

802.11ac VHT60_Nss1,(MCS0)_2TX

5815MHz_TX

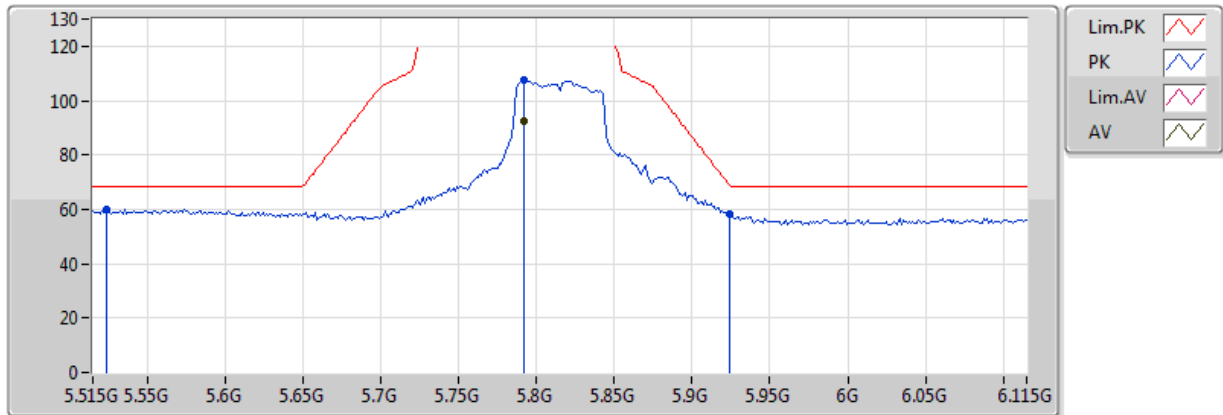


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.7922G	92.70	Inf	-Inf	3.59	3	Horizontal	196	2.13	-	89.10	32.27	5.88	34.56
PK	5.5234G	59.99	68.20	-8.21	3.03	3	Horizontal	196	2.13	-	56.96	31.84	5.69	34.49
PK	5.7922G	107.51	Inf	-Inf	3.59	3	Horizontal	196	2.13	-	103.92	32.27	5.88	34.56
PK	5.9242G	58.44	68.79	-10.35	3.86	3	Horizontal	196	2.13	-	54.58	32.48	5.98	34.59

802.11ac VHT60_Nss1,(MCS0)_2TX

5815MHz_TX

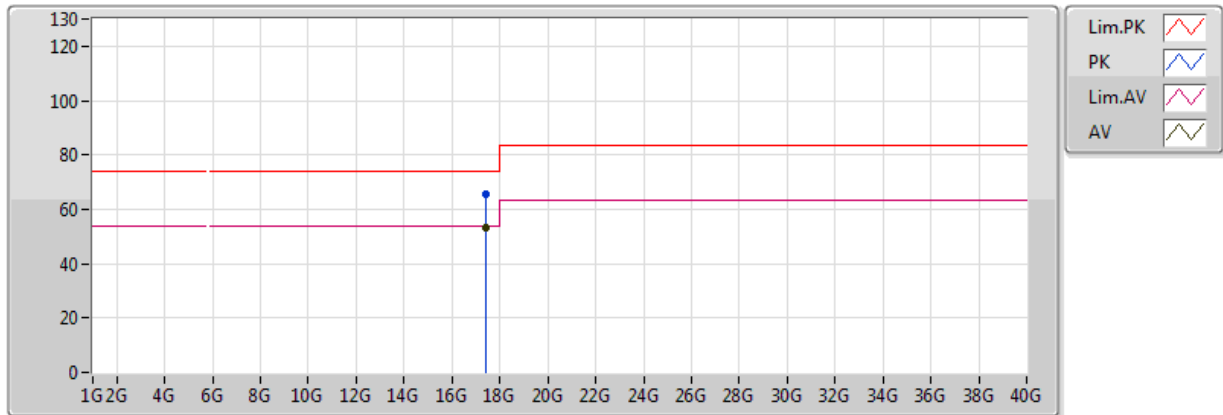


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	17.43972G	53.00	54.00	-1.00	19.63	3	Vertical	140	1.33	-	33.37	42.99	10.57	33.93
PK	17.4351G	65.42	74.00	-8.58	19.60	3	Vertical	140	1.33	-	45.82	42.96	10.56	33.92

802.11ac VHT60_Nss1,(MCS0)_2TX

5815MHz_TX

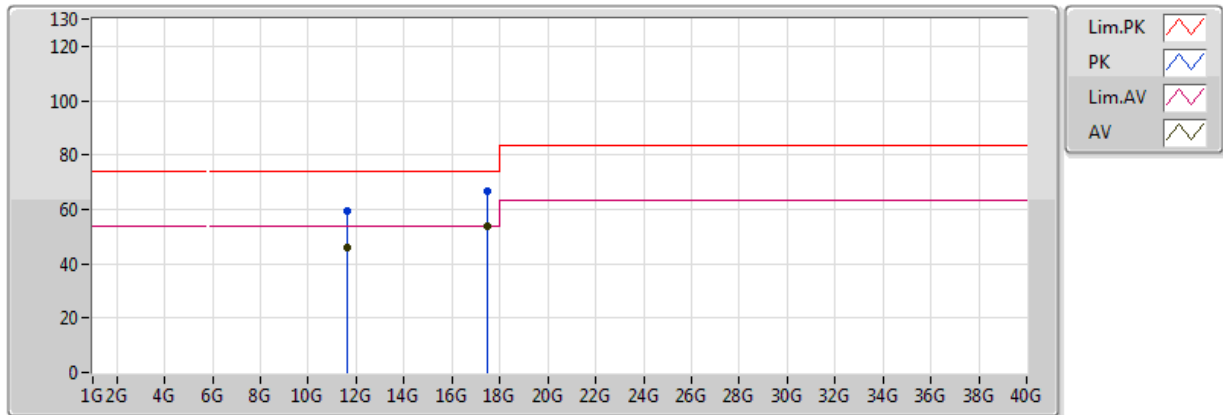


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	11.64236G	46.20	54.00	-7.80	13.20	3	Horizontal	234	1.50	-	33.00	39.50	8.39	34.69
AV	17.45826G	53.56	54.00	-0.44	19.76	3	Horizontal	201	1.48	-	33.80	43.12	10.58	33.93
PK	11.6321G	59.19	74.00	-14.81	13.21	3	Horizontal	234	1.50	-	45.98	39.52	8.39	34.69
PK	17.457G	66.82	74.00	-7.18	19.75	3	Horizontal	201	1.48	-	47.07	43.11	10.57	33.93

802.11ac VHT80_Nss1,(MCS0)_2TX

5190MHz_TX

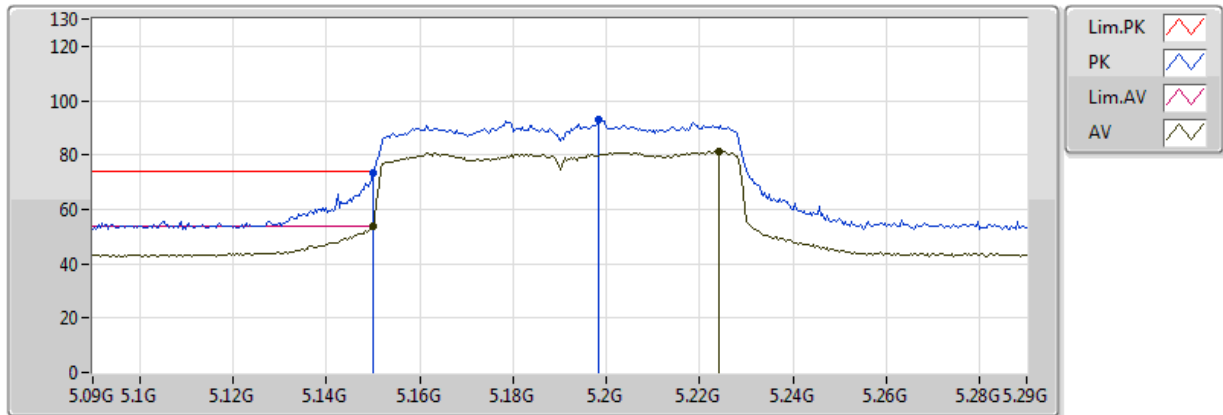


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.149995G	53.88	54.00	-0.12	2.80	3	Vertical	356	1.47	-	51.08	31.66	5.62	34.48
AV	5.224G	81.41	Inf	-Inf	2.84	3	Vertical	356	1.47	-	78.57	31.69	5.63	34.48
PK	5.149995G	73.43	74.00	-0.57	2.80	3	Vertical	356	1.47	-	70.63	31.66	5.62	34.48
PK	5.1984G	93.09	Inf	-Inf	2.83	3	Vertical	356	1.47	-	90.26	31.68	5.63	34.48

802.11ac VHT80_Nss1,(MCS0)_2TX

5190MHz_TX

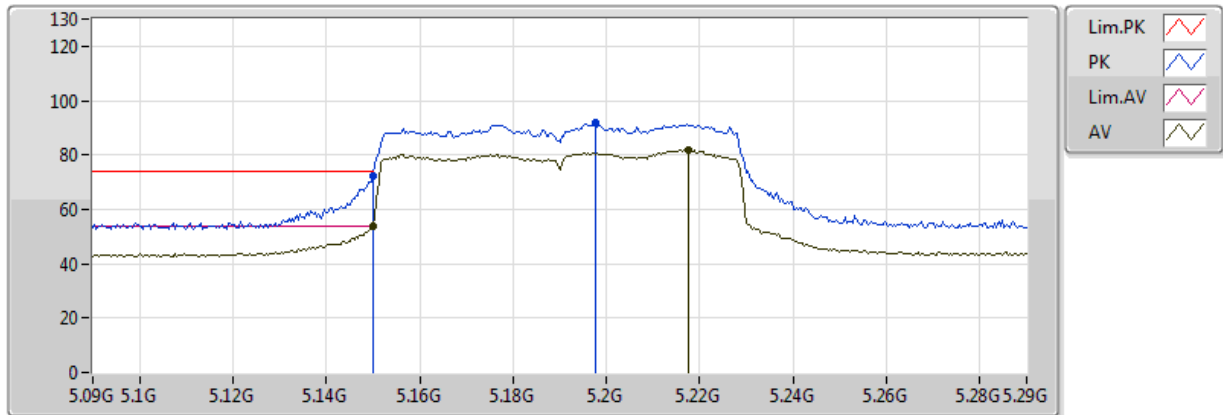


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.149995G	53.62	54.00	-0.38	2.80	3	Horizontal	7	1.67	-	50.82	31.66	5.62	34.48
AV	5.2176G	81.94	Inf	-Inf	2.84	3	Horizontal	7	1.67	-	79.10	31.69	5.63	34.48
PK	5.149995G	72.11	74.00	-1.89	2.80	3	Horizontal	7	1.67	-	69.31	31.66	5.62	34.48
PK	5.1976G	91.79	Inf	-Inf	2.83	3	Horizontal	7	1.67	-	88.96	31.68	5.63	34.48

802.11ac VHT80_Nss1,(MCS0)_2TX

5190MHz_TX

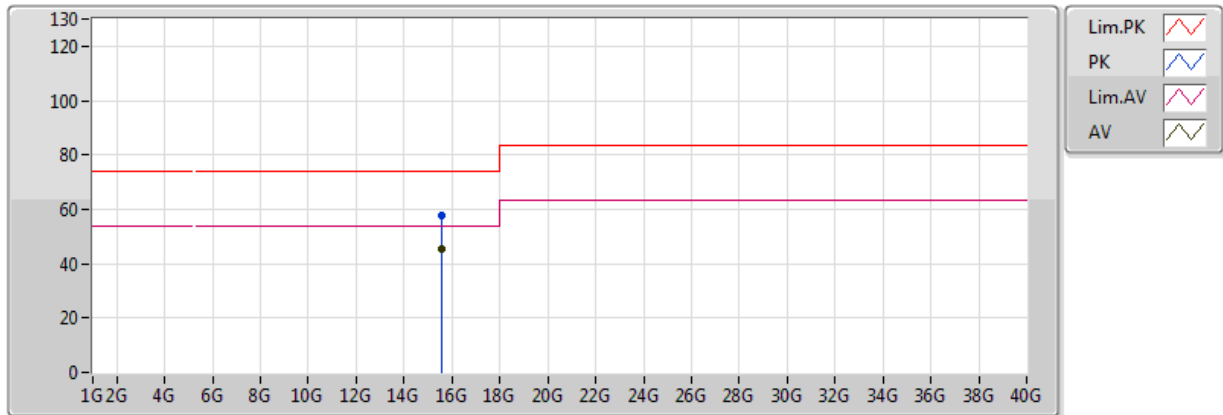


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	15.56598G	45.43	54.00	-8.57	14.00	3	Vertical	213	2.38	-	31.43	38.75	9.96	34.71
PK	15.57462G	57.55	74.00	-16.45	13.96	3	Vertical	213	2.38	-	43.59	38.72	9.96	34.72

802.11ac VHT80_Nss1,(MCS0)_2TX

5190MHz_TX

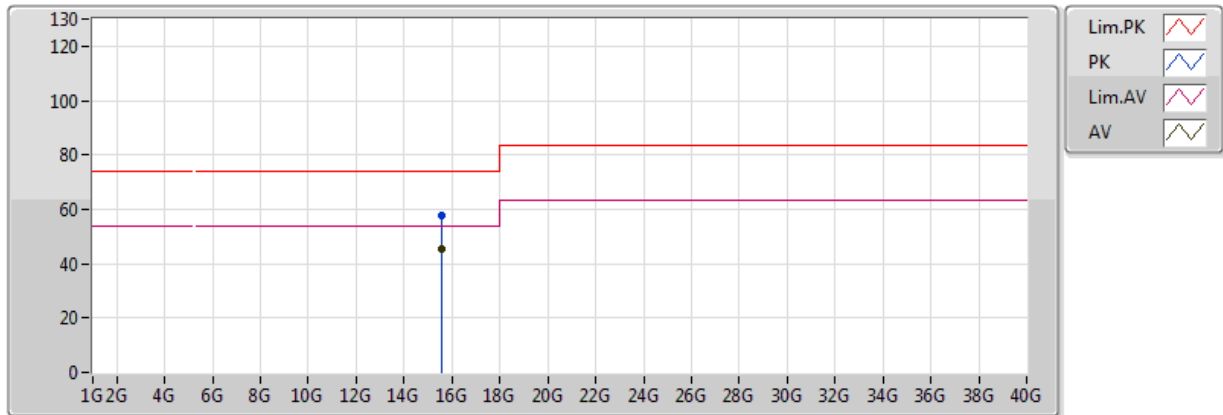


EUT = Y

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	15.55974G	45.40	54.00	-8.60	14.03	3	Horizontal	345	2.07	-	31.37	38.77	9.96	34.70
PK	15.55692G	57.47	74.00	-16.53	14.04	3	Horizontal	345	2.07	-	43.43	38.78	9.96	34.70

802.11ac VHT80_Nss1,(MCS0)_2TX

5200MHz_TX

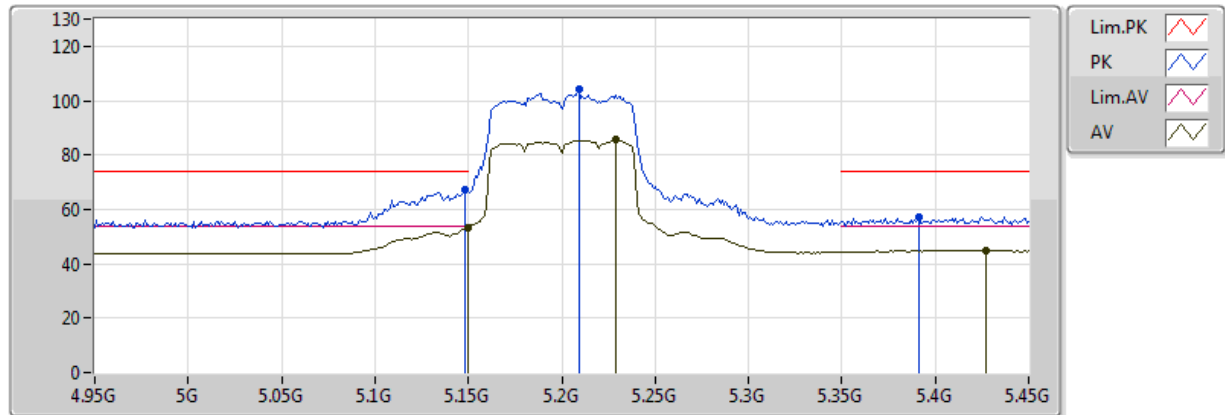


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.149995G	53.23	54.00	-0.77	2.80	3	Vertical	190	1.92	-	50.43	31.66	5.62	34.48
AV	5.229G	85.50	Inf	-Inf	2.84	3	Vertical	190	1.92	-	82.66	31.69	5.63	34.48
AV	5.427G	44.78	54.00	-9.22	2.94	3	Vertical	190	1.92	-	41.83	31.77	5.66	34.49
PK	5.148G	67.00	74.00	-7.00	2.80	3	Vertical	190	1.92	-	64.20	31.66	5.62	34.48
PK	5.209G	104.19	Inf	-Inf	2.83	3	Vertical	190	1.92	-	101.36	31.68	5.63	34.48
PK	5.391G	57.24	74.00	-16.76	2.92	3	Vertical	190	1.92	-	54.31	31.76	5.66	34.49

802.11ac VHT80_Nss1,(MCS0)_2TX

5200MHz_TX

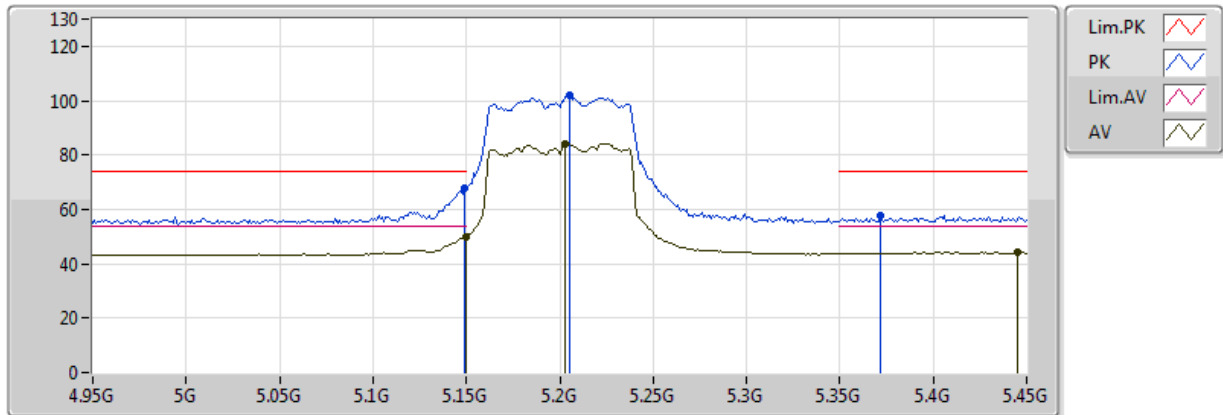


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.149995G	49.80	54.00	-4.20	2.80	3	Horizontal	183	1.69	-	47.00	31.66	5.62	34.48
AV	5.203G	84.15	Inf	-Inf	2.83	3	Horizontal	183	1.69	-	81.32	31.68	5.63	34.48
AV	5.445G	44.44	54.00	-9.56	2.95	3	Horizontal	183	1.69	-	41.49	31.78	5.66	34.49
PK	5.149G	68.08	74.00	-5.92	2.80	3	Horizontal	183	1.69	-	65.28	31.66	5.62	34.48
PK	5.205G	101.88	Inf	-Inf	2.83	3	Horizontal	183	1.69	-	99.05	31.68	5.63	34.48
PK	5.372G	57.82	74.00	-16.18	2.91	3	Horizontal	183	1.69	-	54.91	31.75	5.65	34.49

802.11ac VHT80_Nss1,(MCS0)_2TX

5200MHz_TX

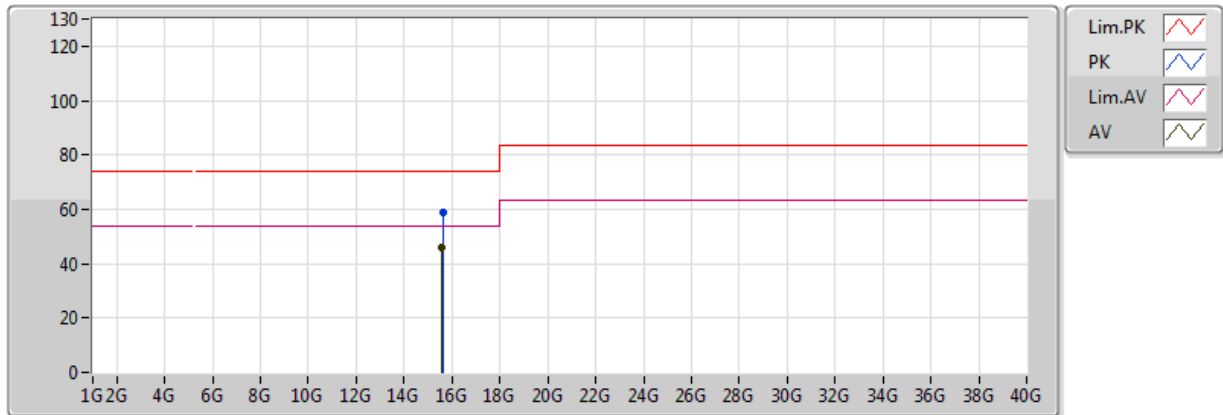


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	15.57372G	45.97	54.00	-8.03	13.96	3	Vertical	62	1.84	-	32.00	38.72	9.96	34.72
PK	15.6132G	59.10	74.00	-14.90	13.78	3	Vertical	62	1.84	-	45.33	38.57	9.97	34.77

802.11ac VHT80_Nss1,(MCS0)_2TX

5200MHz_TX

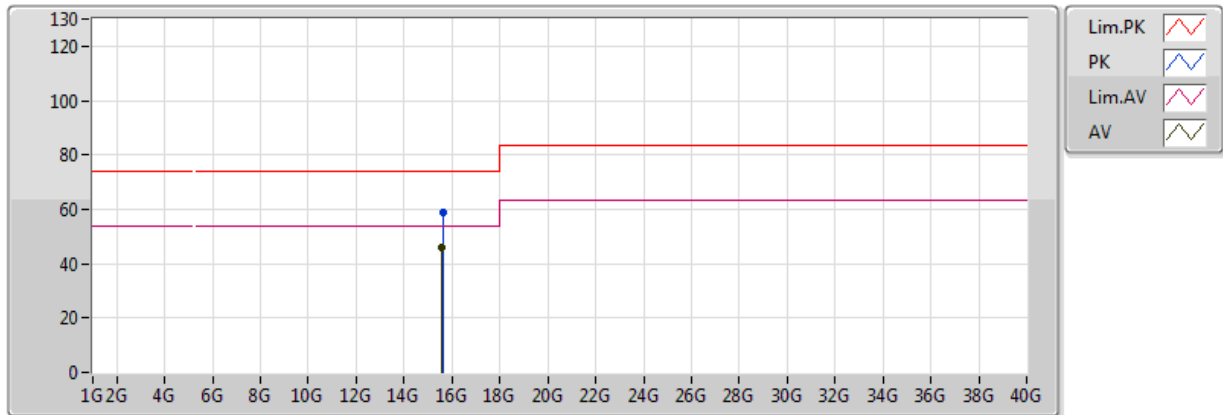


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	15.57516G	45.98	54.00	-8.02	13.96	3	Horizontal	305	2.18	-	32.02	38.71	9.96	34.72
PK	15.61368G	58.92	74.00	-15.08	13.77	3	Horizontal	305	2.18	-	45.15	38.57	9.97	34.77

802.11ac VHT80_Nss1,(MCS0)_2TX

5210MHz_TX

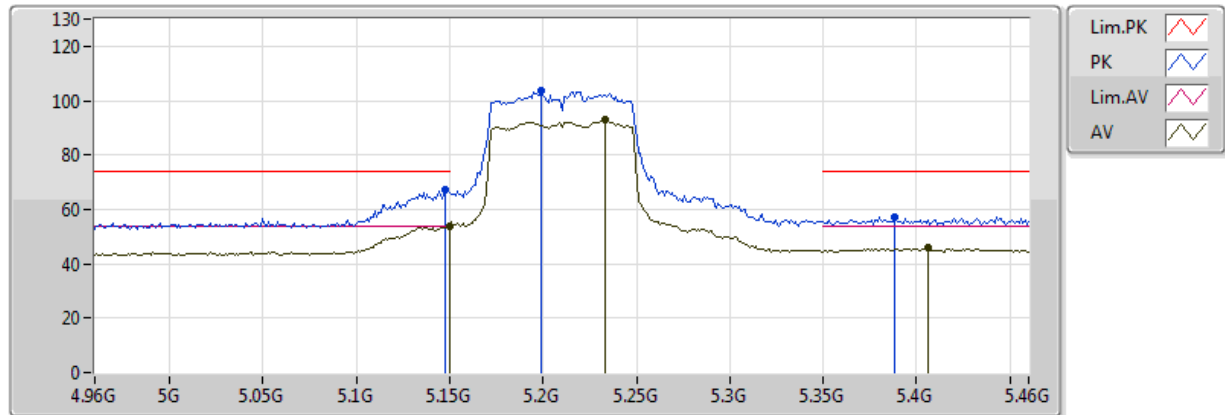


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.149995G	53.87	54.00	-0.13	2.80	3	Vertical	359	1.50	-	51.07	31.66	5.62	34.48
AV	5.233G	92.75	Inf	-Inf	2.84	3	Vertical	359	1.50	-	89.91	31.69	5.63	34.48
AV	5.406G	45.76	54.00	-8.24	2.93	3	Vertical	359	1.50	-	42.83	31.76	5.66	34.49
PK	5.148G	67.48	74.00	-6.52	2.80	3	Vertical	359	1.50	-	64.68	31.66	5.62	34.48
PK	5.199G	103.61	Inf	-Inf	2.83	3	Vertical	359	1.50	-	100.78	31.68	5.63	34.48
PK	5.388G	57.29	74.00	-16.71	2.92	3	Vertical	359	1.50	-	54.37	31.76	5.66	34.49

802.11ac VHT80_Nss1,(MCS0)_2TX

5210MHz_TX

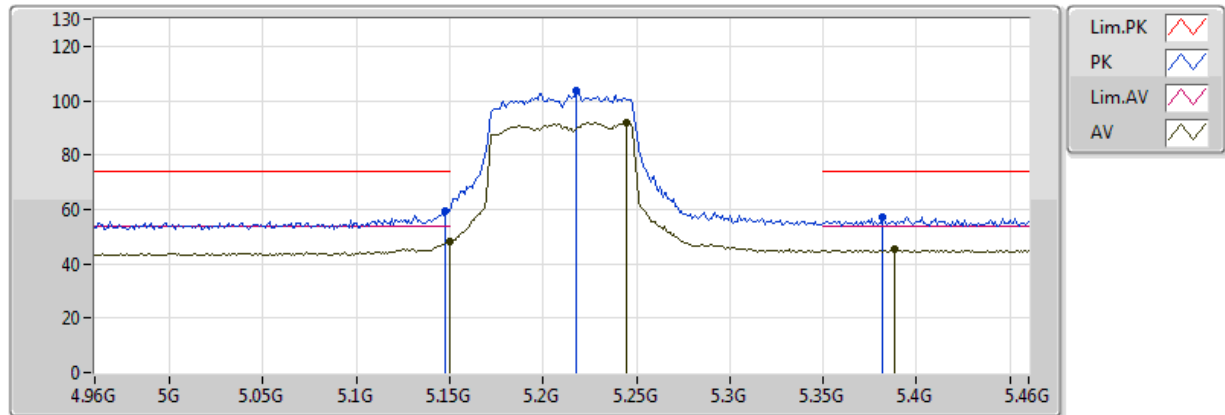


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.149995G	48.25	54.00	-5.75	2.80	3	Horizontal	4	1.50	-	45.45	31.66	5.62	34.48
AV	5.245G	91.80	Inf	-Inf	2.85	3	Horizontal	4	1.50	-	88.96	31.70	5.63	34.48
AV	5.388G	45.18	54.00	-8.82	2.92	3	Horizontal	4	1.50	-	42.26	31.76	5.66	34.49
PK	5.148G	59.46	74.00	-14.54	2.80	3	Horizontal	4	1.50	-	56.66	31.66	5.62	34.48
PK	5.218G	103.39	Inf	-Inf	2.84	3	Horizontal	4	1.50	-	100.56	31.69	5.63	34.48
PK	5.382G	57.21	74.00	-16.79	2.92	3	Horizontal	4	1.50	-	54.29	31.75	5.66	34.49

802.11ac VHT80_Nss1,(MCS0)_2TX

5210MHz_TX

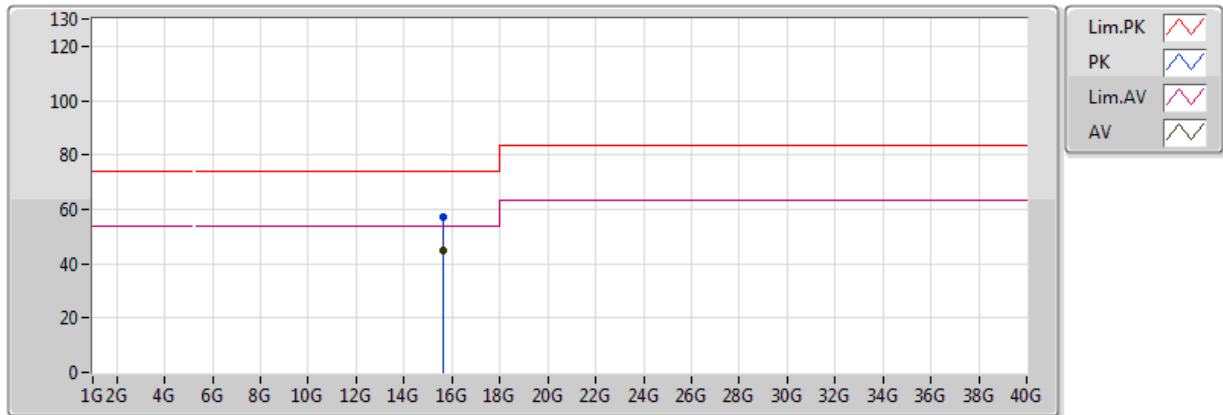


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	15.63018G	44.99	54.00	-9.01	13.69	3	Vertical	187	1.50	-	31.30	38.51	9.98	34.79
PK	15.61578G	57.22	74.00	-16.78	13.76	3	Vertical	187	1.50	-	43.46	38.56	9.97	34.77

802.11ac VHT80_Nss1,(MCS0)_2TX

5210MHz_TX

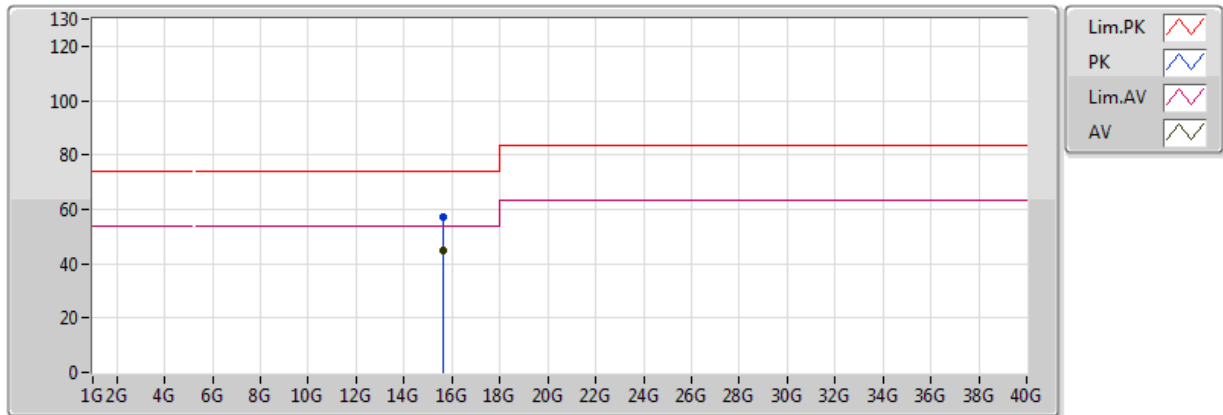


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	15.62154G	44.99	54.00	-9.01	13.74	3	Horizontal	32	1.50	-	31.25	38.54	9.98	34.78
PK	15.62946G	57.41	74.00	-16.59	13.70	3	Horizontal	32	1.50	-	43.71	38.51	9.98	34.79

802.11ac VHT80_Nss1,(MCS0)_2TX

5770MHz_TX

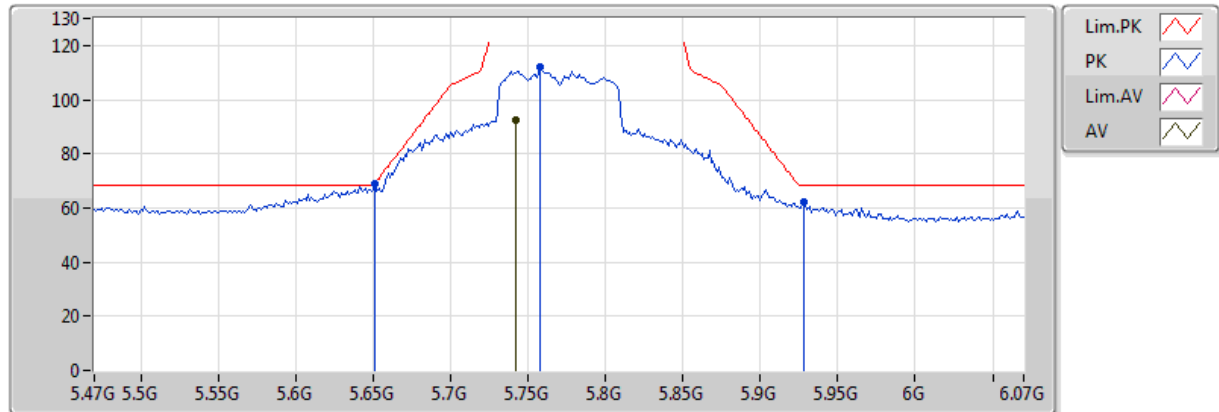


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.7424G	92.31	Inf	-Inf	3.48	3	Vertical	197	2.04	-	88.83	32.19	5.84	34.55
PK	5.6512G	68.86	69.09	-0.23	3.29	3	Vertical	197	2.04	-	65.56	32.04	5.78	34.53
PK	5.758G	111.82	Inf	-Inf	3.52	3	Vertical	197	2.04	-	108.30	32.21	5.86	34.55
PK	5.9284G	62.28	68.20	-5.92	3.87	3	Vertical	197	2.04	-	58.41	32.49	5.98	34.60

802.11ac VHT80_Nss1,(MCS0)_2TX

5770MHz_TX

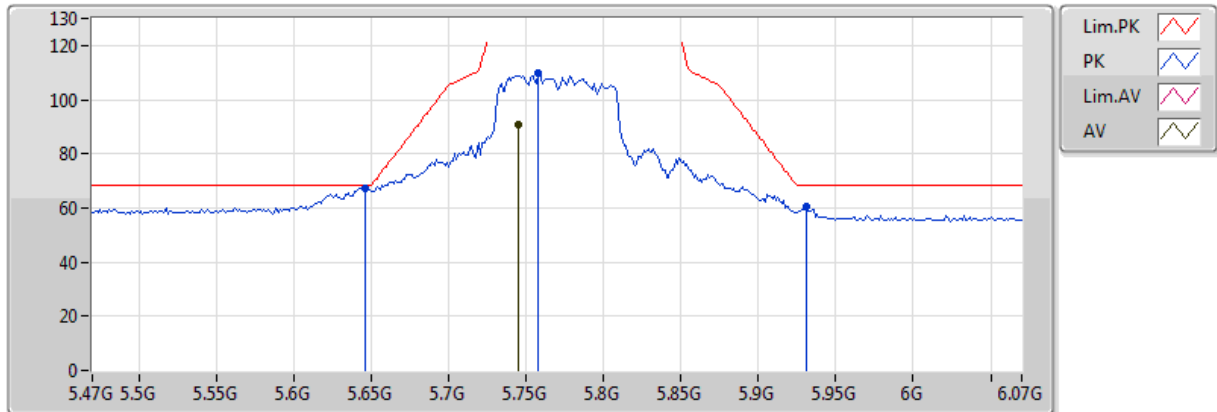


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.7448G	90.67	Inf	-Inf	3.49	3	Horizontal	178	2.21	-	87.18	32.19	5.85	34.55
PK	5.6464G	67.46	68.20	-0.74	3.28	3	Horizontal	178	2.21	-	64.17	32.03	5.77	34.52
PK	5.758G	110.00	Inf	-Inf	3.52	3	Horizontal	178	2.21	-	106.48	32.21	5.86	34.55
PK	5.9308G	60.44	68.20	-7.76	3.87	3	Horizontal	178	2.21	-	56.56	32.49	5.98	34.60

802.11ac VHT80_Nss1,(MCS0)_2TX

5770MHz_TX

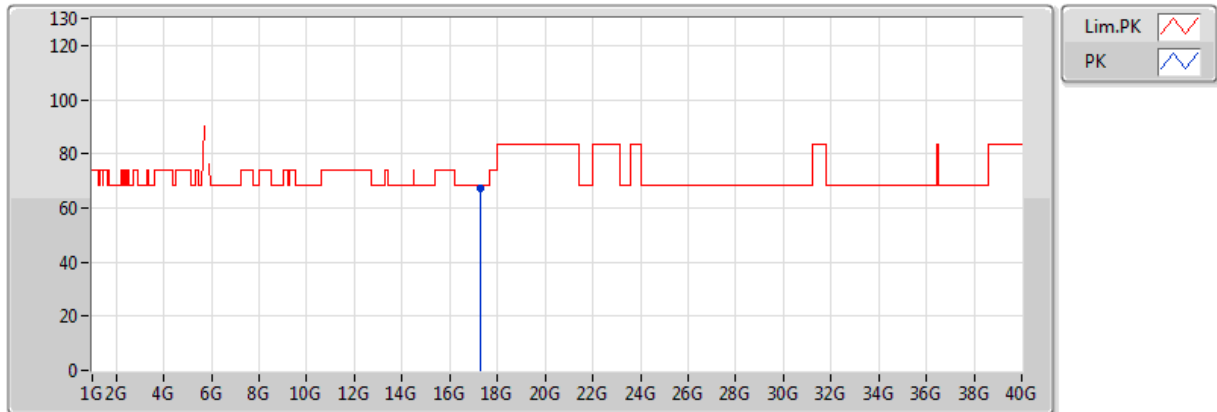


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
PK	17.31018G	67.46	68.20	-0.74	18.75	3	Vertical	137	1.38	-	48.70	42.11	10.51	33.86

802.11ac VHT80_Nss1,(MCS0)_2TX

5770MHz_TX

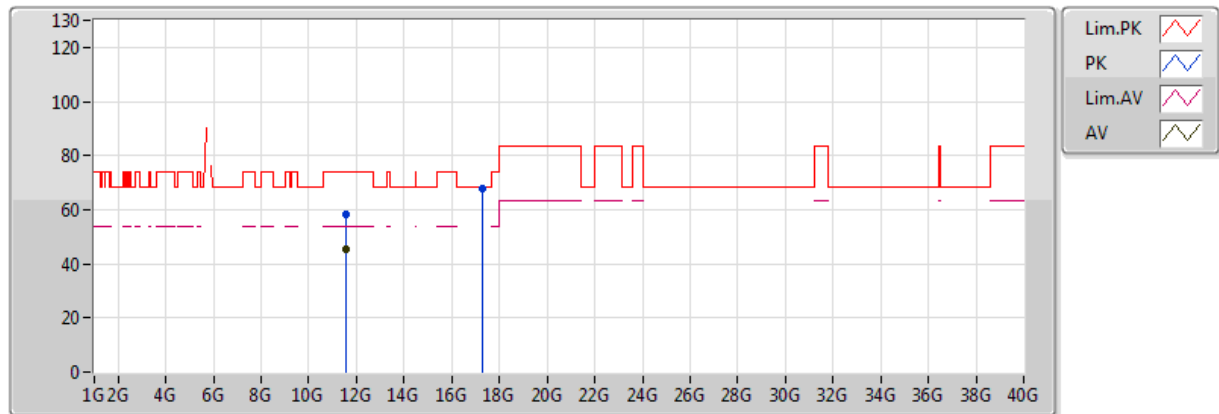


EUT = Y

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	11.53034G	45.44	54.00	-8.56	13.35	3	Horizontal	231	2.25	-	32.09	39.66	8.36	34.67
PK	11.55266G	58.51	74.00	-15.49	13.32	3	Horizontal	231	2.25	-	45.19	39.63	8.37	34.67
PK	17.30244G	67.83	68.20	-0.37	18.70	3	Horizontal	204	1.50	-	49.13	42.06	10.50	33.86

802.11ac VHT80_Nss1,(MCS0)_2TX

5790MHz_TX

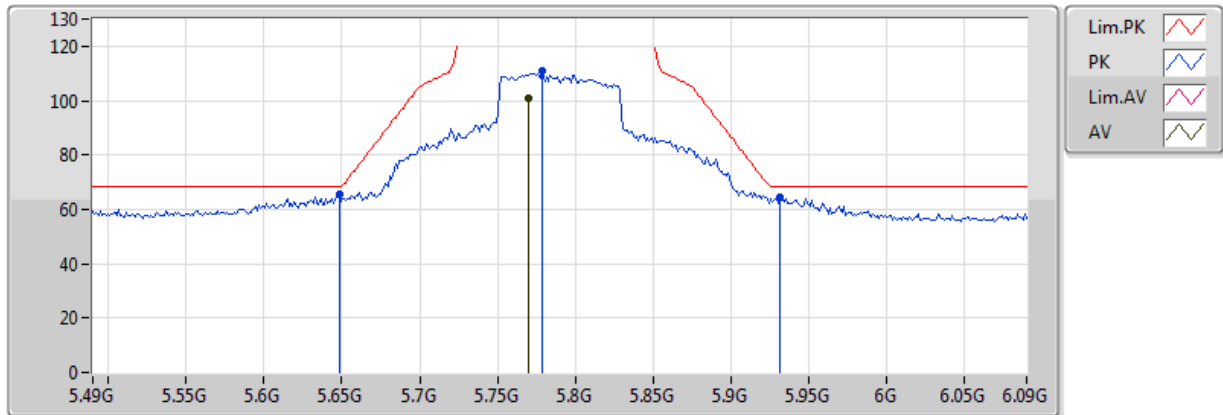


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.7696G	100.72	Inf	-Inf	3.54	3	Vertical	183	2.02	-	97.18	32.23	5.87	34.55
PK	5.6484G	65.57	68.20	-2.63	3.29	3	Vertical	183	2.02	-	62.28	32.04	5.77	34.52
PK	5.7792G	111.00	Inf	-Inf	3.56	3	Vertical	183	2.02	-	107.44	32.25	5.87	34.56
PK	5.9316G	64.59	68.20	-3.61	3.88	3	Vertical	183	2.02	-	60.72	32.49	5.98	34.60

802.11ac VHT80_Nss1,(MCS0)_2TX

5790MHz_TX

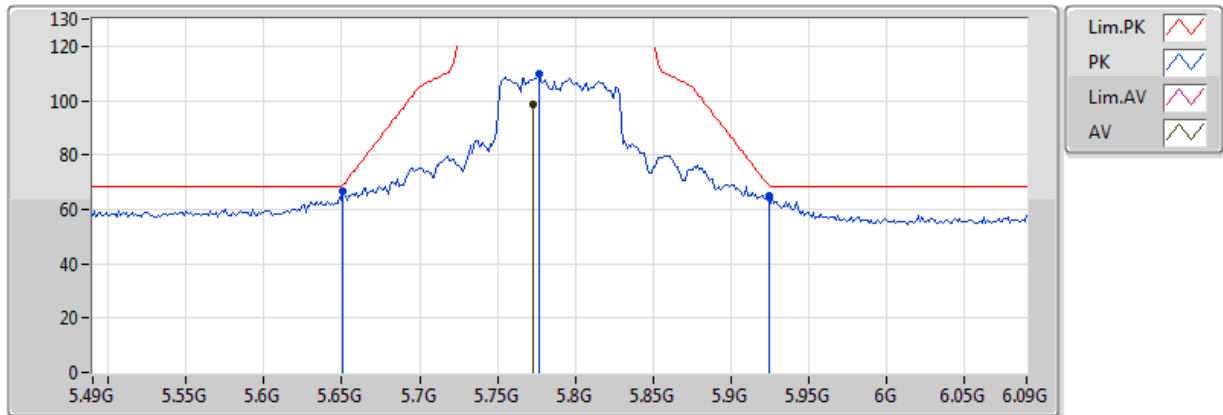


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.7732G	98.85	Inf	-Inf	3.55	3	Horizontal	176	2.10	-	95.30	32.24	5.87	34.55
PK	5.6508G	66.56	68.79	-2.23	3.29	3	Horizontal	176	2.10	-	63.27	32.04	5.78	34.53
PK	5.7768G	109.71	Inf	-Inf	3.56	3	Horizontal	176	2.10	-	106.16	32.24	5.87	34.56
PK	5.9244G	64.94	68.64	-3.70	3.86	3	Horizontal	176	2.10	-	61.08	32.48	5.98	34.59

802.11ac VHT80_Nss1,(MCS0)_2TX

5790MHz_TX

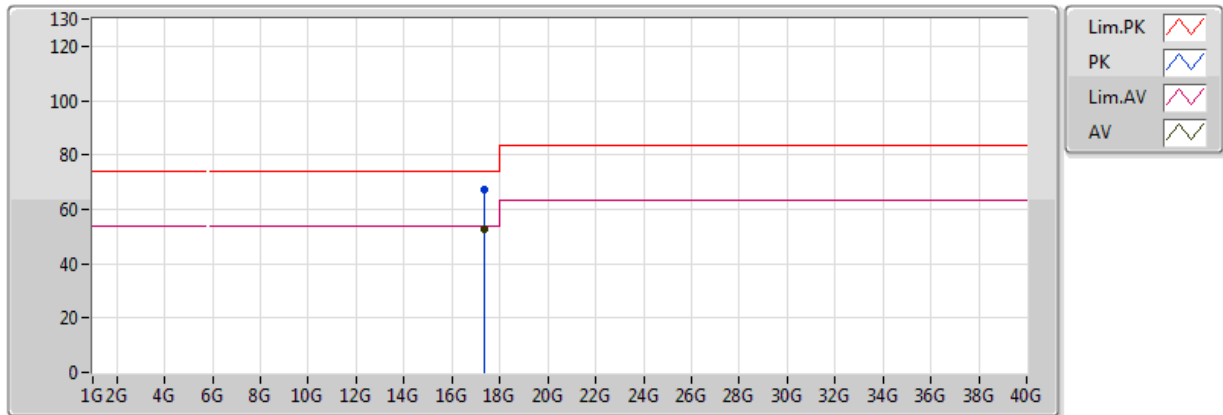


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	17.35512G	52.60	54.00	-1.40	19.06	3	Vertical	28	1.22	-	33.54	42.41	10.53	33.88
PK	17.3516G	67.22	74.00	-6.78	19.03	3	Vertical	28	1.22	-	48.19	42.39	10.53	33.88

802.11ac VHT80_Nss1,(MCS0)_2TX

5790MHz_TX

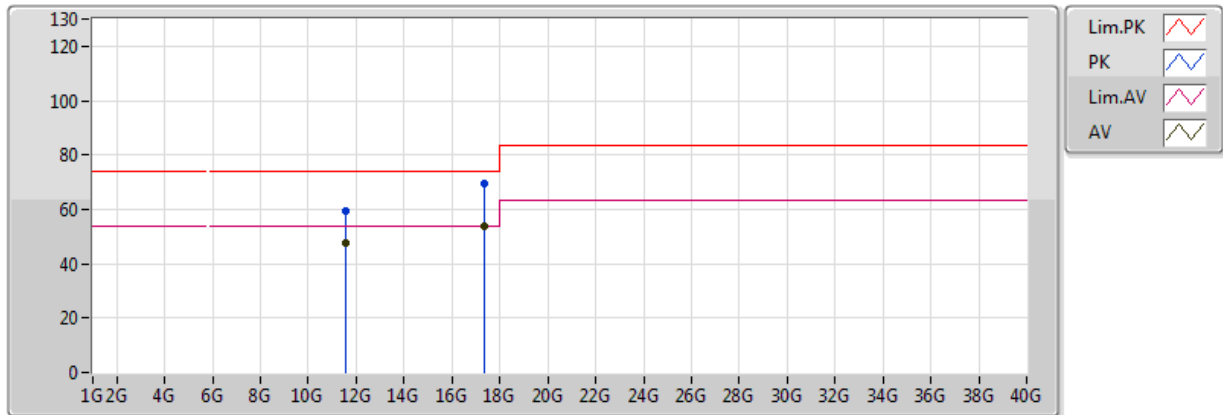


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	11.583G	47.45	54.00	-6.55	13.28	3	Horizontal	314	1.50	-	34.17	39.58	8.38	34.68
AV	17.35288G	53.82	54.00	-0.18	19.04	3	Horizontal	347	1.49	-	34.78	42.40	10.53	33.88
PK	11.583G	59.67	74.00	-14.33	13.28	3	Horizontal	314	1.50	-	46.39	39.58	8.38	34.68
PK	17.3308G	69.60	74.00	-4.40	18.89	3	Horizontal	347	1.49	-	50.71	42.25	10.52	33.87

802.11ac VHT80_Nss1,(MCS0)_2TX

5805MHz_TX

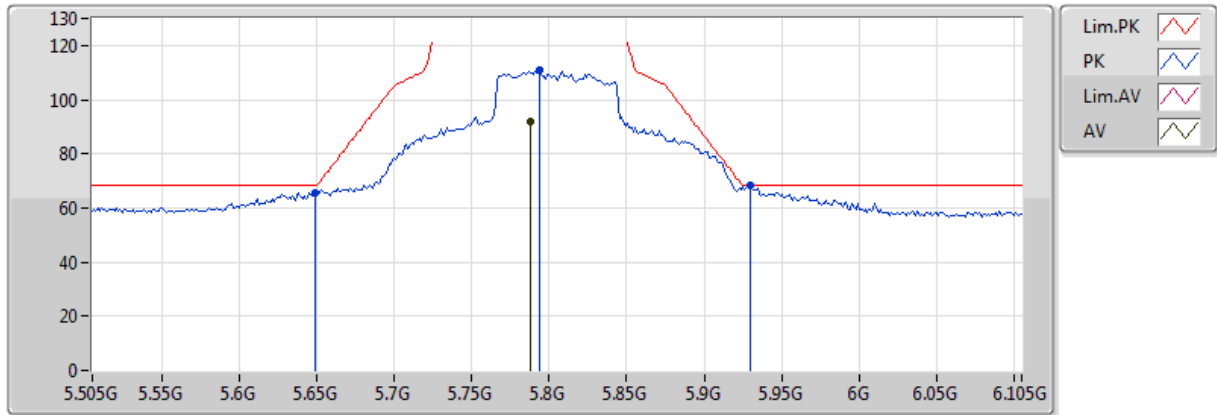


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.7882G	92.07	Inf	-Inf	3.58	3	Vertical	197	1.90	-	88.49	32.26	5.88	34.56
PK	5.649G	65.47	68.20	-2.73	3.29	3	Vertical	197	1.90	-	62.18	32.04	5.77	34.52
PK	5.7942G	110.82	Inf	-Inf	3.60	3	Vertical	197	1.90	-	107.22	32.27	5.89	34.56
PK	5.9298G	68.09	68.20	-0.11	3.87	3	Vertical	197	1.90	-	64.21	32.49	5.98	34.60

802.11ac VHT80_Nss1,(MCS0)_2TX

5805MHz_TX

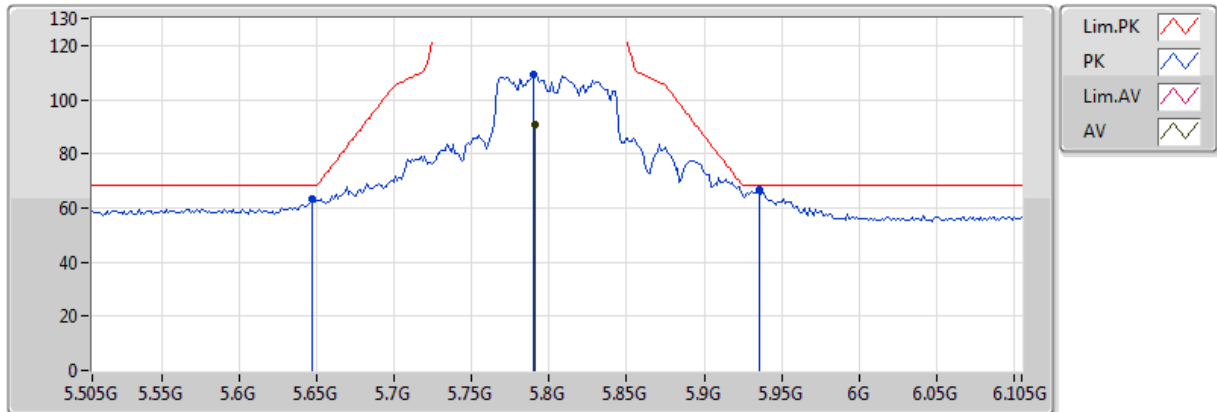


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
AV	5.7906G	90.68	Inf	-Inf	3.59	3	Horizontal	173	2.14	-	87.09	32.26	5.88	34.56
PK	5.6466G	63.12	68.20	-5.08	3.28	3	Horizontal	173	2.14	-	59.83	32.03	5.77	34.52
PK	5.7894G	109.33	Inf	-Inf	3.59	3	Horizontal	173	2.14	-	105.74	32.26	5.88	34.56
PK	5.9358G	66.86	68.20	-1.34	3.89	3	Horizontal	173	2.14	-	62.98	32.50	5.99	34.60

802.11ac VHT80_Nss1,(MCS0)_2TX

5805MHz_TX

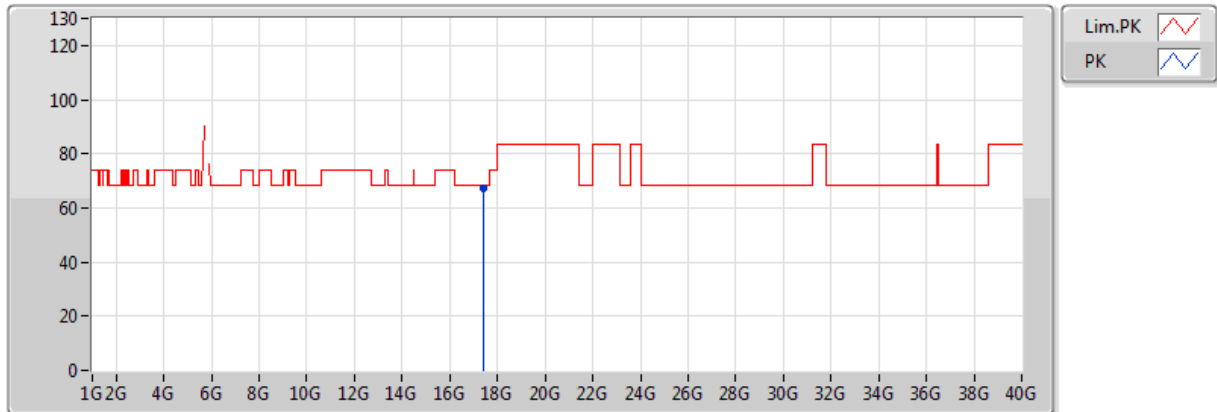


EUT = Y

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
PK	17.42856G	67.45	68.2	-0.75	19.56	3	Vertical	139	1.35	-	47.90	42.91	10.56	33.92

802.11ac VHT80_Nss1,(MCS0)_2TX

5805MHz_TX

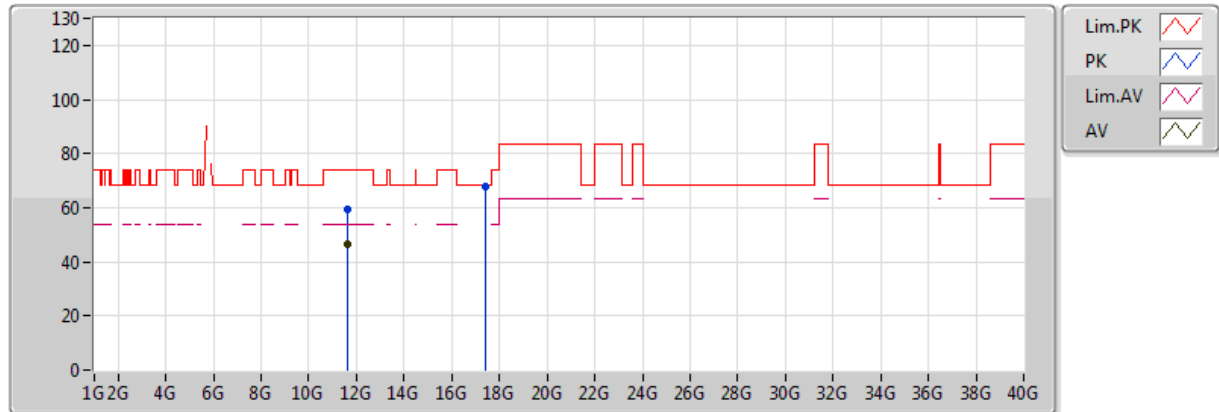

EUT = Y

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	11.59992G	46.25	54.00	-7.75	13.26	3	Horizontal	232	1.50	-	32.99	39.56	8.38	34.68
PK	11.5992G	59.13	74.00	-14.87	13.26	3	Horizontal	232	1.50	-	45.87	39.56	8.38	34.68
PK	17.4267G	67.76	68.20	-0.44	19.54	3	Horizontal	201	1.48	-	48.22	42.90	10.56	33.92



Frequency Stability Result (P to M)

Appendix F

Summary

Mode	Result	Ch (Hz)	Center (Hz)	ppm	Limit (ppm)	Port	Remark
5.725-5.85GHz	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	Pass	5.79G	5.790045G	7.771	20	1	5 min

**Result**

Mode	Result	Ch (Hz)	Center (Hz)	ppm	Limit (ppm)	Port	Remark
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-
5790MHz_-20°C	Pass	5.79G	5.790028G	4.857	20	1	0 min
5790MHz_-20°C	Pass	5.79G	5.79003G	5.181	20	1	2 min
5790MHz_-20°C	Pass	5.79G	5.790045G	7.771	20	1	5 min
5790MHz_-20°C	Pass	5.79G	5.790026G	4.533	20	1	10 min
5790MHz_-10°C	Pass	5.79G	5.790032G	5.504	20	1	0 min
5790MHz_-10°C	Pass	5.79G	5.790034G	5.828	20	1	2 min
5790MHz_-10°C	Pass	5.79G	5.790034G	5.828	20	1	5 min
5790MHz_-10°C	Pass	5.79G	5.790039G	6.8	20	1	10 min
5790MHz_0°C	Pass	5.79G	5.790019G	3.238	20	1	0 min
5790MHz_0°C	Pass	5.79G	5.790028G	4.857	20	1	2 min
5790MHz_0°C	Pass	5.79G	5.790024G	4.209	20	1	5 min
5790MHz_0°C	Pass	5.79G	5.790032G	5.504	20	1	10 min
5790MHz_10°C	Pass	5.79G	5.790009G	1.619	20	1	0 min
5790MHz_10°C	Pass	5.79G	5.790009G	1.619	20	1	2 min
5790MHz_10°C	Pass	5.79G	5.790024G	4.209	20	1	5 min
5790MHz_10°C	Pass	5.79G	5.790017G	2.914	20	1	10 min
5790MHz_20°C	Pass	5.79G	5.790006G	0.971	20	1	0 min
5790MHz_20°C	Pass	5.79G	5.790007G	1.295	20	1	2 min
5790MHz_20°C	Pass	5.79G	5.789996G	0.648	20	1	5 min
5790MHz_20°C	Pass	5.79G	5.790006G	0.971	20	1	10 min
5790MHz_30°C	Pass	5.79G	5.790004G	0.648	20	1	0 min
5790MHz_30°C	Pass	5.79G	5.790004G	0.648	20	1	2 min
5790MHz_30°C	Pass	5.79G	5.790004G	0.648	20	1	5 min
5790MHz_30°C	Pass	5.79G	5.789998G	0.324	20	1	10 min
5790MHz_40°C	Pass	5.79G	5.789996G	0.648	20	1	0 min
5790MHz_40°C	Pass	5.79G	5.789993G	1.295	20	1	2 min
5790MHz_40°C	Pass	5.79G	5.790007G	1.295	20	1	5 min
5790MHz_40°C	Pass	5.79G	5.789989G	1.943	20	1	10 min
5790MHz_50°C	Pass	5.79G	5.790011G	1.943	20	1	0 min
5790MHz_50°C	Pass	5.79G	5.79G	0	20	1	2 min
5790MHz_50°C	Pass	5.79G	5.790009G	1.619	20	1	5 min
5790MHz_50°C	Pass	5.79G	5.789991G	1.619	20	1	10 min
5790MHz_55°C	Pass	5.79G	5.790013G	2.267	20	1	0 min
5790MHz_55°C	Pass	5.79G	5.790017G	2.914	20	1	2 min
5790MHz_55°C	Pass	5.79G	5.790011G	1.943	20	1	5 min
5790MHz_55°C	Pass	5.79G	5.790017G	2.914	20	1	10 min
5790MHz_138V	Pass	5.79G	5.790006G	0.971	20	1	0 min
5790MHz_138V	Pass	5.79G	5.790004G	0.648	20	1	2 min
5790MHz_138V	Pass	5.79G	5.790009G	1.619	20	1	5 min
5790MHz_138V	Pass	5.79G	5.790007G	1.295	20	1	10 min
5790MHz_120V	Pass	5.79G	5.790007G	1.295	20	1	0 min
5790MHz_120V	Pass	5.79G	5.790009G	1.619	20	1	2 min
5790MHz_120V	Pass	5.79G	5.790009G	1.619	20	1	5 min



Frequency Stability Result (P to M)

Appendix F

Mode	Result	Ch (Hz)	Center (Hz)	ppm	Limit (ppm)	Port	Remark
5790MHz_120V	Pass	5.79G	5.790011G	1.943	20	1	10 min
5790MHz_102V	Pass	5.79G	5.790011G	1.943	20	1	0 min
5790MHz_102V	Pass	5.79G	5.789998G	0.324	20	1	2 min
5790MHz_102V	Pass	5.79G	5.790009G	1.619	20	1	5 min
5790MHz_102V	Pass	5.79G	5.790007G	1.295	20	1	10 min



Frequency Stability Result (P to P)

Appendix F

Summary

Mode	Result	Ch (Hz)	Center (Hz)	ppm	Limit (ppm)	Port	Remark
5.725-5.85GHz	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	Pass	5.79G	5.790045G	7.771	20	1	5 min



Frequency Stability Result (P to P)

Appendix F

Result

Mode	Result	Ch (Hz)	Center (Hz)	ppm	Limit (ppm)	Port	Remark
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-
5790MHz_-20°C	Pass	5.79G	5.790028G	4.857	20	1	0 min
5790MHz_-20°C	Pass	5.79G	5.79003G	5.181	20	1	2 min
5790MHz_-20°C	Pass	5.79G	5.790045G	7.771	20	1	5 min
5790MHz_-20°C	Pass	5.79G	5.790026G	4.533	20	1	10 min
5790MHz_-10°C	Pass	5.79G	5.790032G	5.504	20	1	0 min
5790MHz_-10°C	Pass	5.79G	5.790034G	5.828	20	1	2 min
5790MHz_-10°C	Pass	5.79G	5.790034G	5.828	20	1	5 min
5790MHz_-10°C	Pass	5.79G	5.790039G	6.8	20	1	10 min
5790MHz_0°C	Pass	5.79G	5.790019G	3.238	20	1	0 min
5790MHz_0°C	Pass	5.79G	5.790028G	4.857	20	1	2 min
5790MHz_0°C	Pass	5.79G	5.790024G	4.209	20	1	5 min
5790MHz_0°C	Pass	5.79G	5.790032G	5.504	20	1	10 min
5790MHz_10°C	Pass	5.79G	5.790009G	1.619	20	1	0 min
5790MHz_10°C	Pass	5.79G	5.790009G	1.619	20	1	2 min
5790MHz_10°C	Pass	5.79G	5.790024G	4.209	20	1	5 min
5790MHz_10°C	Pass	5.79G	5.790017G	2.914	20	1	10 min
5790MHz_20°C	Pass	5.79G	5.790006G	0.971	20	1	0 min
5790MHz_20°C	Pass	5.79G	5.790007G	1.295	20	1	2 min
5790MHz_20°C	Pass	5.79G	5.789996G	0.648	20	1	5 min
5790MHz_20°C	Pass	5.79G	5.790006G	0.971	20	1	10 min
5790MHz_30°C	Pass	5.79G	5.790004G	0.648	20	1	0 min
5790MHz_30°C	Pass	5.79G	5.790004G	0.648	20	1	2 min
5790MHz_30°C	Pass	5.79G	5.790004G	0.648	20	1	5 min
5790MHz_30°C	Pass	5.79G	5.789998G	0.324	20	1	10 min
5790MHz_40°C	Pass	5.79G	5.789996G	0.648	20	1	0 min
5790MHz_40°C	Pass	5.79G	5.789993G	1.295	20	1	2 min
5790MHz_40°C	Pass	5.79G	5.790007G	1.295	20	1	5 min
5790MHz_40°C	Pass	5.79G	5.789989G	1.943	20	1	10 min
5790MHz_50°C	Pass	5.79G	5.790011G	1.943	20	1	0 min
5790MHz_50°C	Pass	5.79G	5.79G	0	20	1	2 min
5790MHz_50°C	Pass	5.79G	5.790009G	1.619	20	1	5 min
5790MHz_50°C	Pass	5.79G	5.789991G	1.619	20	1	10 min
5790MHz_55°C	Pass	5.79G	5.790013G	2.267	20	1	0 min
5790MHz_55°C	Pass	5.79G	5.790017G	2.914	20	1	2 min
5790MHz_55°C	Pass	5.79G	5.790011G	1.943	20	1	5 min
5790MHz_55°C	Pass	5.79G	5.790017G	2.914	20	1	10 min
5790MHz_138V	Pass	5.79G	5.790006G	0.971	20	1	0 min
5790MHz_138V	Pass	5.79G	5.790004G	0.648	20	1	2 min
5790MHz_138V	Pass	5.79G	5.790009G	1.619	20	1	5 min
5790MHz_138V	Pass	5.79G	5.790007G	1.295	20	1	10 min
5790MHz_120V	Pass	5.79G	5.790007G	1.295	20	1	0 min
5790MHz_120V	Pass	5.79G	5.790009G	1.619	20	1	2 min
5790MHz_120V	Pass	5.79G	5.790009G	1.619	20	1	5 min



Frequency Stability Result (P to P)

Appendix F

Mode	Result	Ch (Hz)	Center (Hz)	ppm	Limit (ppm)	Port	Remark
5790MHz_120V	Pass	5.79G	5.790011G	1.943	20	1	10 min
5790MHz_102V	Pass	5.79G	5.790011G	1.943	20	1	0 min
5790MHz_102V	Pass	5.79G	5.789998G	0.324	20	1	2 min
5790MHz_102V	Pass	5.79G	5.790009G	1.619	20	1	5 min
5790MHz_102V	Pass	5.79G	5.790007G	1.295	20	1	10 min