



RADIO TEST REPORT

Report No.: STS2008308W11

Issued for

RTX HONG KONG LTD

8TH FL CORPORATION SQUARE, 8 LAM LOK ST., KOW-
LOON BAY, HK.

Product Name:	Wireless Mono Headset Wireless Stereo Headset Wireless Stereo ANC Headset
Brand Name:	RTX
Model Name:	RTX7254
Series Model:	RTX7251,RTX7252
FCC ID:	T7HHT7254
Test Standard:	Title 47 of the CFR, Part 15 Subpart D

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.



**TEST RESULT CERTIFICATION**

Applicant's Name : RTX HONG KONG LTD
Address : 8TH FL CORPORATION SQUARE, 8 LAM LOK ST., KOWLOON BAY, HK.
Manufacturer's Name : RTX HONG KONG LTD
Address : 8TH FL CORPORATION SQUARE, 8 LAM LOK ST., KOWLOON BAY, HK.

Product Description

Product Name : Wireless Mono Headset
Wireless Stereo Headset
Wireless Stereo ANC Headset

Brand Name : RTX

Model Name : RTX7254

Series Model : RTX7251, RTX7252

Test Standards : Title 47 of the CFR, Part 15. Subpart D

Test procedure : ANSI C63.17-2013

This device described above has been tested by STS and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document only be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test :

Date of receipt of test item : 26 Aug. 2020

Date of performance of tests : 26 Aug. 2020 ~ 21 Sept. 2020

Date of Issue : 22 Sept. 2020

Test Result : **Pass**

Testing Engineer :

(Chris Chen)

Technical Manager :

(Sean she)

Authorized Signatory :

(Vita Li)





TABLE OF CONTENTS	Page
1 INTRODUCTION	7
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2 PRODUCT INFORMATION	8
3 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
3.1 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	9
3.2 SYSTEM TEST CONFIGURATION	10
4 MEASUREMENT INSTRUMENTS	11
5 TEST ITEMS	12
5.1 ANTENNA REQUIREMENT	12
5.2 MODULATION TECHNIQUES	12
5.3 EMISSION BANDWIDTH	13
5.4 PEAK TRANSMIT POWER	23
5.5 POWER SPECTRAL DENSITY	32
5.6 POWER ADJUSTMENT FOR ANTENNA GAIN	41
5.7 AUTOMATICALLY DISCONTINUE TRANSMISSION	42
5.8 SYSTEM ACKNOWLEDGE-MENT TEST	43
5.9 MONITORING THRESHOLD	45
5.10 DURATION OF TRANSMISSION	47
5.11SELECTED CHANNEL CONFIRMATION,POWER ACCURACY,SEGMENT OCCUPANCY	51
5.12 RANDOM WAITING	53
5.13 MONITORING REQUIREMENTS	54
5.14 MONITORING ANTENNA	55
5.15 DUPLEX CONNECTIONS	55
5.16 ALTERNATIVE MONITORING INTERVAL FOR CO-LOCATED DEVICES	56
5.17 FAIR ACCESS	56
5.18 SPURIOUS EMISSIONS	57
5.19 FRAME PERIOD	89
5.20 FREQUENCY STABILITY	91
5.21 CONDUCTED EMISSION MEASUREMENT	99
5.22 RADIATED SPURIOUS EMISSION	103

**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	22 Sept. 2020	STS2008308W11	ALL	Initial Issue





SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart D.

Requirement	FCC Part	Test Procedure	Result
Emission Bandwidth	15.323 (a)	6.1.3	Compliant
Labeling Requirements	15.19(a)(3)	--	Compliant
Conducted Emissions	15.315 & 15.207	ANSI C63.4	Compliant
Antenna Requirements	15.317 & 15.203	Declaration	Compliant
Use digital modulation	15.319 (b)	6.1.4	Compliant
Peak transmit power	15.319 (c)	6.1.2	Compliant
Power spectral density	15.319 (d)	6.1.5	Compliant
Power adjustment for antenna gain	15.319 (e)	4.3.1	Compliant
Automatically discontinue transmission	15.319 (f)	--	Compliant
Spurious emissions conducted	15.323 (d) (1) & 15.323 (d) (2)	6.1.6	Compliant
RF Exposure	15.319 (i) & 1.1307(b), 2.1091 and 2.1093	ANSI/IEEE C95.1	Compliant (The test data please refer to RF exposure report)
Monitoring time	15.323 (c)(1)	7.3.4	Compliant
Monitoring threshold	15.323 (c)(2)	7.3	Compliant
Duration of transmission	15.323 (c)(3)	8.2.2	Not Applicable
System acknowledgment test	15.323(c)(4)	8.2.1	Compliant
Channel confirmation, Power accuracy, Segment occupancy	15.323 (c)(5)	7.3.3 & 7.3.4	Compliant
Random waiting	15.323 (c)(6)	8.1.3	Not Applicable



Monitoring bandwidth	15.323 (c)(7)	7.4	Compliant
Monitoring reaction time	15.323 (c)(1)	7.5	Compliant
Monitoring antenna	15.323 (c)(8)	4	Compliant
Monitoring thresh-old relaxation	15.323 (c)(9)	4	Compliant
Duplex connections	15.323 (c)(10)	8.3	Not Applicable
Alternate monitoring interval	15.323 (c)(11)	8.4	Not Applicable
Fair access	15.323 (c)(12)	Declaration	Not Applicable
Frame period	15.323 (e)	6.2.2 & 6.2.3	Compliant
Frequency stability	15.323 (f)	6.2.1	Compliant
Radiated Out of Band Emissions	15.319 (g), 15.309 (b) & FCC Part 15 Subpart B, 15.109 and 15.209	--	Compliant



1 INTRODUCTION

1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.68\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.988\text{dB}$
3	All emissions, radiated 30-1GHz	$\pm 5.6\text{dB}$
4	All emissions, radiated 1G-6GHz	$\pm 5.5\text{dB}$
5	All emissions, radiated >6G	$\pm 5.8\text{dB}$
6	Conducted Emission (9KHz-150KHz)	$\pm 3.37\text{dB}$
7	Conducted Emission (150KHz-30MHz)	$\pm 3.83\text{dB}$



2 PRODUCT INFORMATION

Product Name	Wireless Mono Headset Wireless Stereo Headset Wireless Stereo ANC Headset
Brand Name	RTX
Model Name	RTX7254
Series Model	RTX7251, RTX7252
Product Differences	RTX7251 is mono headset, RTX7252 is stereo headset, RTX7254 is stereo headset with ANC function. They share the same main PCB layout.
Hardware version number	V3
Software version number	V0095B001
EUT Frequency Ranges	1921.536-1928.448MHz
Type of Modulations	GFSK
Packet type	PP32Z, PP64Z
Number of Channels	5 CH. Please see Note 2.
Antenna Type	PCB Antenna
Antenna Gain	Ant 1: 1dBi Ant 2: 1dBi
Power Rating	Input: DC 3.8V battery, Type-C 5V
Battery	Model: BP1729/A Brand: Tianmao DC 3.8V 600mAh 2.28Wh
Extreme Temp. Tolerance:	-10°C to 55°C

Note: 1. Antenna 1 and Antenna 2 cannot transmit simultaneously.


2. Channel list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
04	1921.536	03	1923.264	02	1924.992
01	1926.720	00	1928.448	--	--



3 TEST CONFIGURATION OF EQUIPMENT UNDER TEST

Conducted Emission Test

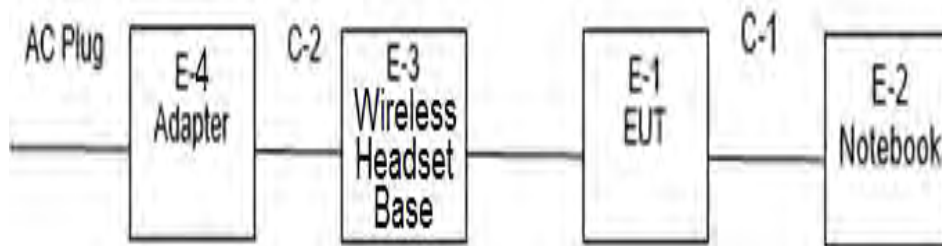

3.1 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
/	Battery	Tianmao	BP1729/A	N/A	DC 3.8V 600mAh 2.28Wh

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
E-2	Notebook	Lenovo	ThinkPad E470	N/A	N/A
/	Wireless Headset Base	RTX	RTX7451	N/A	N/A
/	Adapter	N/A	S008ACM0500150	190cm	N/A

Note:


- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

3.2 SYSTEM TEST CONFIGURATION

Figure 1:



Figure 2:

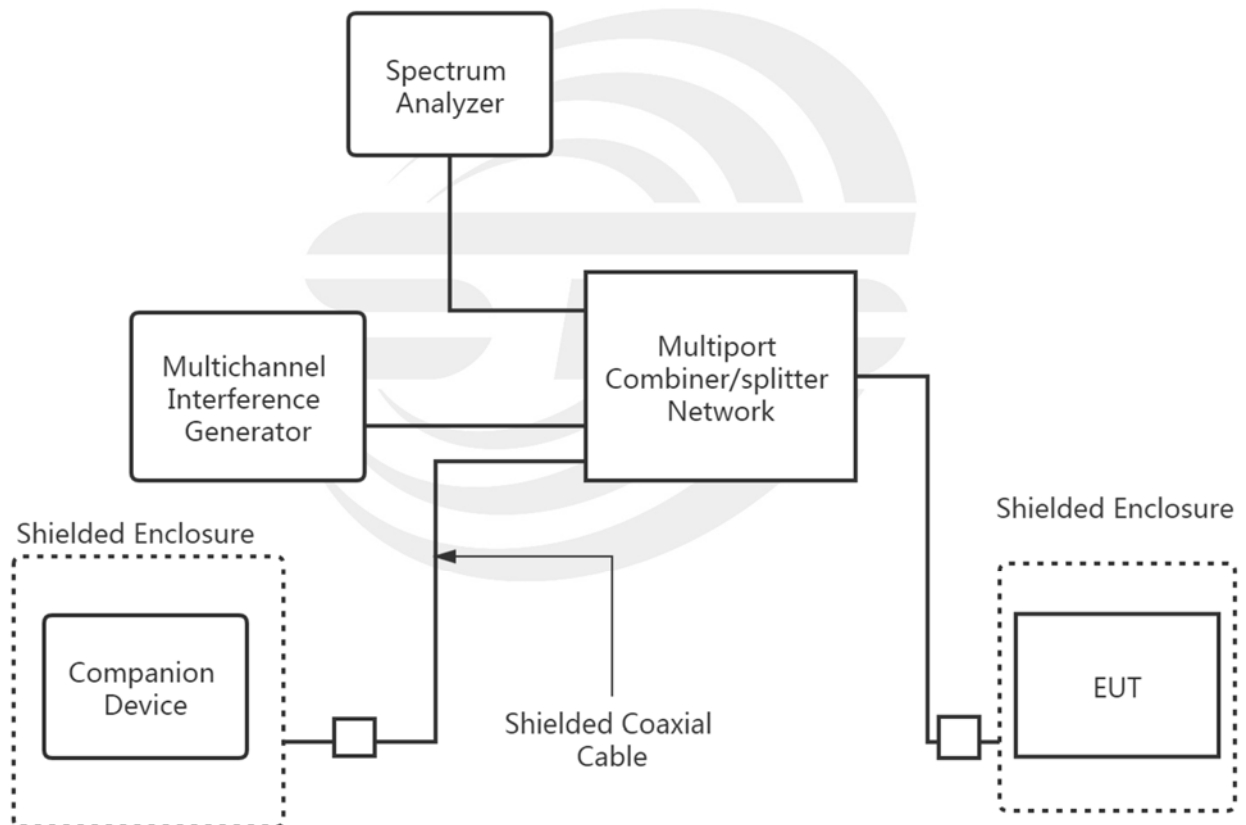



4 MEASUREMENT INSTRUMENTS

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Signal Analyzer	Agilent	N9020A	MY51110105	2020.03.05	2021.03.04
Signal Analyzer	R&S	FSV 40-N	101823	2019.10.11	2020.10.10
Active loop Antenna	ZHINAN	ZN30900C	16035	2018.03.11	2021.03.10
Test Receiver	R&S	ESCI	101427	2019.10.09	2020.10.08
RF Test Platform for DECT	RTX	RTX 2012 HS	1138-6122	2020.03.05	2021.03.04
Bilog Antenna	TESEQ	CBL6111D	34678	2017.11.02	2020.11.01
Horn Antenna	SCHWARZBECK	BBHA 9120D	1343	2018.10.19	2021.10.18
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	J211020657	2018.03.11	2021.03.10
Temperature& Humidity test chamber	Safety test	AG80L	171200018	2020.03.05	2021.03.04
Turn table	EM	SC100_1	60531	N/A	N/A
Antenna mast	EM	SC100	N/A	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N.C.R	N.C.R
Programmable power supply	Agilent	E3642A	MY40002025	2019.10.11	2020.10.10
Temperature & Humidity	HH660	Mieo	N/A	2019.10.12	2020.10.11
Attenuator	HP	8494B	DC-18G	2020.04.30	2021.04.29

Equipment with a calibration date of "NCR" shown in this list was not used to make direct calibrated measurements.



5 TEST ITEMS

5.1 ANTENNA REQUIREMENT

TEST OVERVIEW

§ 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

TEST RESULT

The EUT as tested is compliant the criteria of §15.203. The antenna is permanently attached to the unit.

5.2 MODULATION TECHNIQUES

TEST REQUIREMENT

All transmissions must use only digital modulation techniques.

TEST PROCEDURES

Attestation of manufacturer supported by reference to relevant DECT specifications.

ATTESTATION

This device is compliant with the DECT standards described in European Standards EN 300 175-2 and EN 300 175-3. DECT transmissions are MC/TDMA/TDD (Multi carrier / Time Division Multiple Access / Time Division Duplex) using Digital GFSK modulation. For further details see operational description or relevant portions of the DECT standards.

TEST RESULTS

The EUT as tested is compliant the criteria of §15.319(b).



5.3 EMISSION BANDWIDTH

TEST OVERVIEW

§ 15.323(a): For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Compliance with the emissions limits is based on the use of measurement instrumentation employing a peak detector function with an instrument resolutions bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

TEST PROCEDURE

Operation shall be contained within the 1920-1930 MHz band. The emission bandwidth shall be less than 2.5 MHz. The power level shall be as specified in §15.319(c), but in no event shall the emission bandwidth be less than 50 kHz.

TEST SETUP

The test setup is shown in section 3.2 figure 1.

TEST RESULTS

The Eut was compliant with this requirement.

PP32Z
Antenna 1

Channel	26dB BW(MHz)	99% BW(MHz)	Limit
LOW(4)	1.196	1.167	<2.5MHz
MID(2)	1.197	1.167	
HIGH(0)	1.192	1.166	
AVG	1.195000	1.166533	


Antenna 2

Channel	26dB BW(MHz)	99% BW(MHz)	Limit
LOW(4)	1.225	1.167	<2.5MHz
MID(2)	1.194	1.168	
HIGH(0)	1.195	1.166	
AVG	1.204667	1.166700	




Antenna 1

Plot 1. Emission Bandwidth, Channel 4 @ 1921.536 MHz

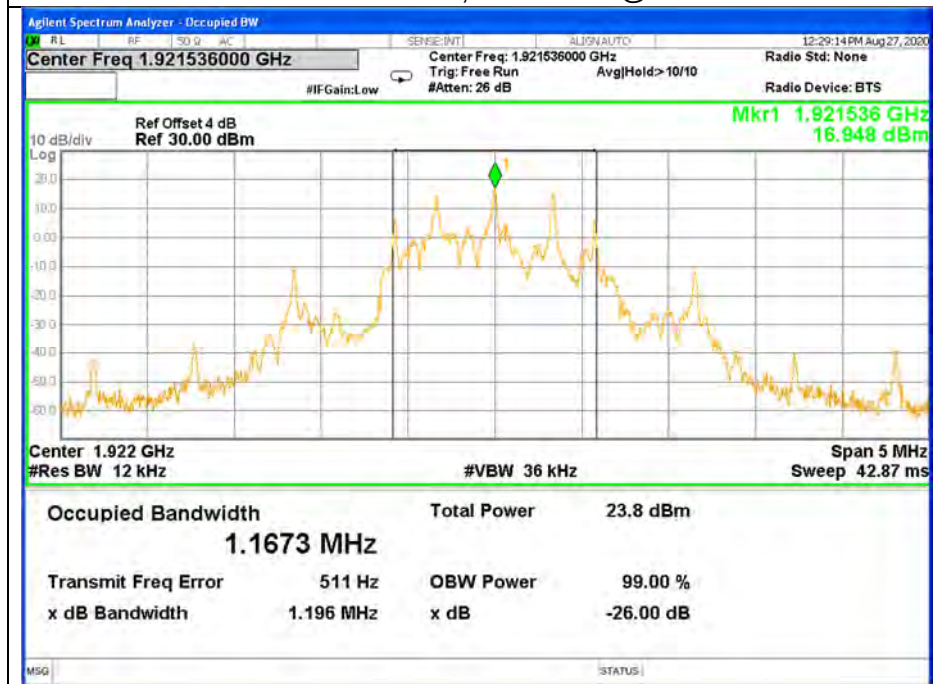


Plot 2. Emission Bandwidth, Channel 2 @ 1924.992 MHz

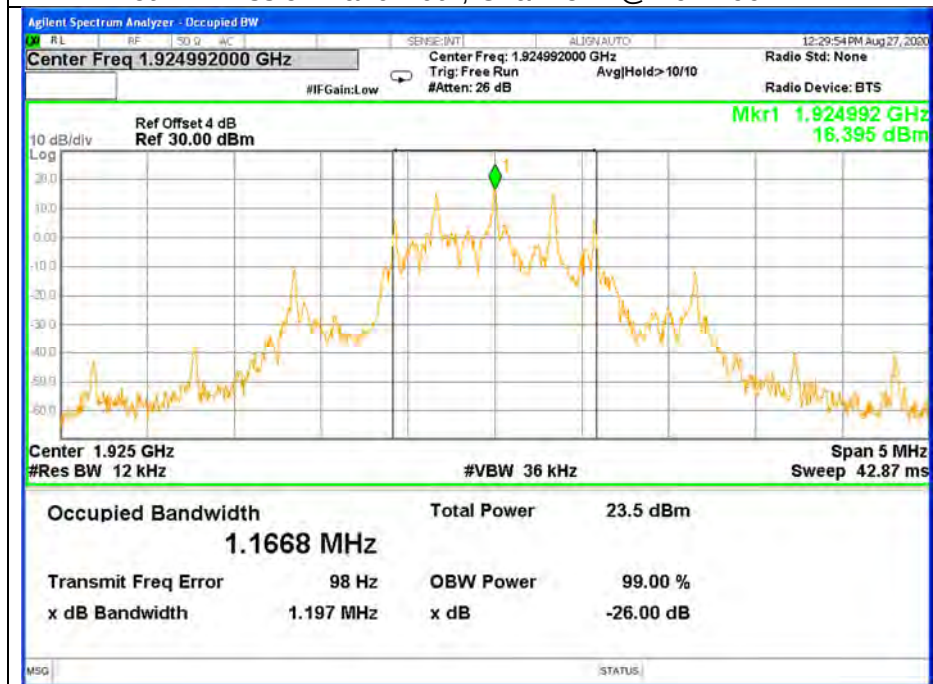




Plot 3. Emission Bandwidth, Channel 0 @ 1928.448 MHz

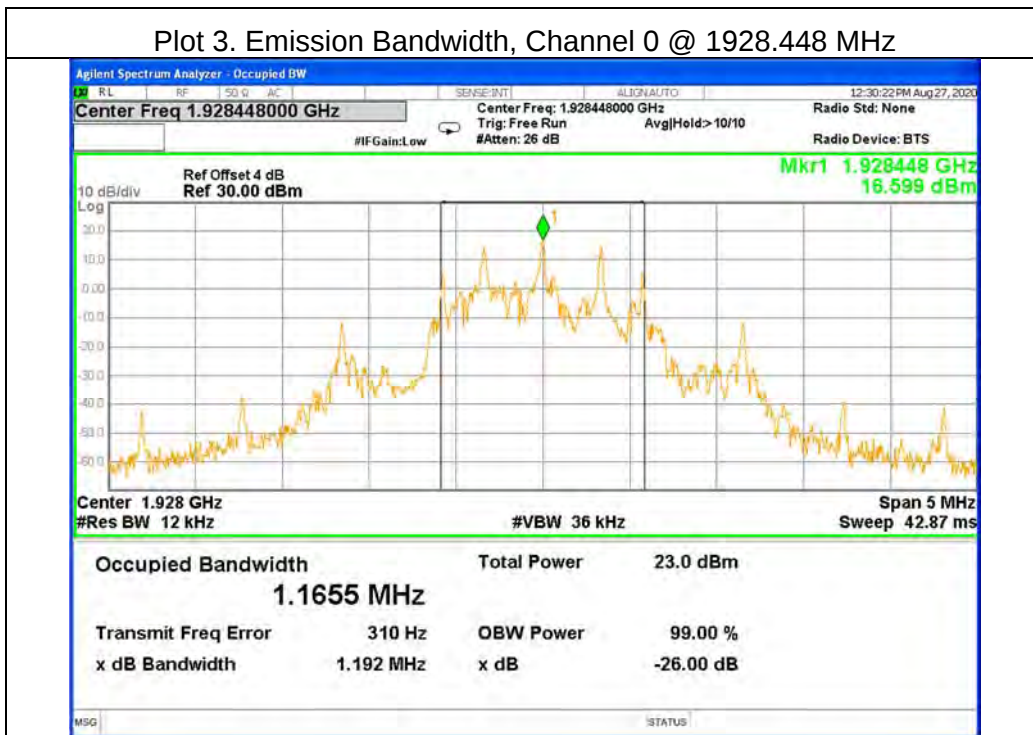




Antenna 2

Plot 1. Emission Bandwidth, Channel 4 @ 1921.536 MHz

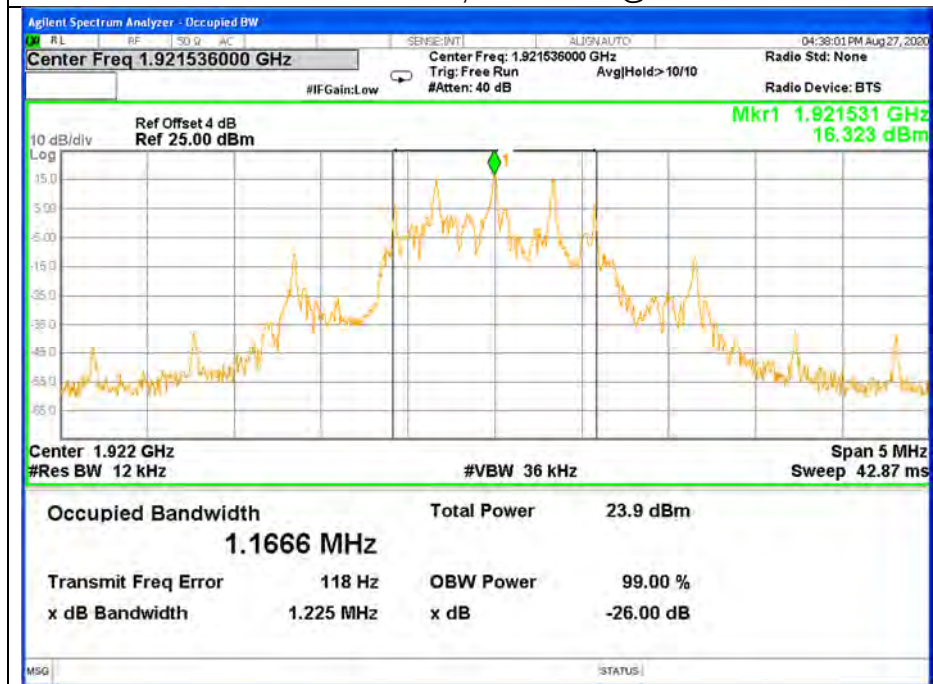


Plot 2. Emission Bandwidth, Channel 2 @ 1924.992 MHz

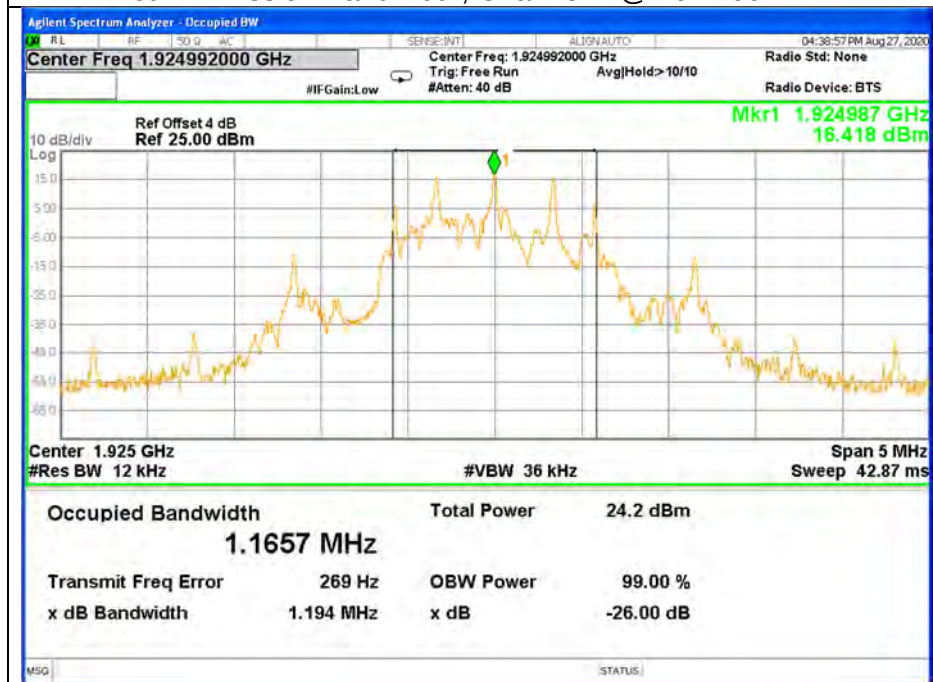



Plot 3. Emission Bandwidth, Channel 0 @ 1928.448 MHz

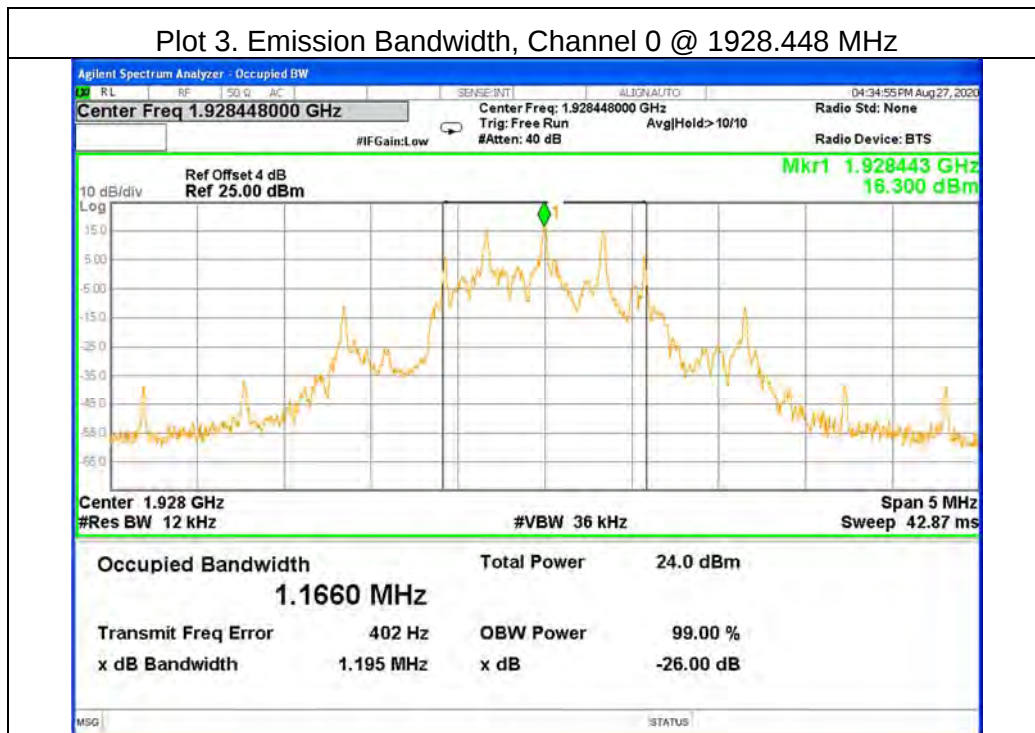

PP64Z
Antenna 1

Channel	26dB BW(MHz)	99% BW(MHz)	Limit
LOW(4)	1.194	1.166	<2.5MHz
MID(2)	1.195	1.167	
HIGH(0)	1.194	1.167	
AVG	1.194333	1.166567	

Antenna 2


Channel	26dB BW(MHz)	99% BW(MHz)	Limit
LOW(4)	1.194	1.166	<2.5MHz
MID(2)	1.192	1.165	
HIGH(0)	1.194	1.166	
AVG	1.193333	1.165700	






Antenna 1

Plot 1. Emission Bandwidth, Channel 4 @ 1921.536 MHz

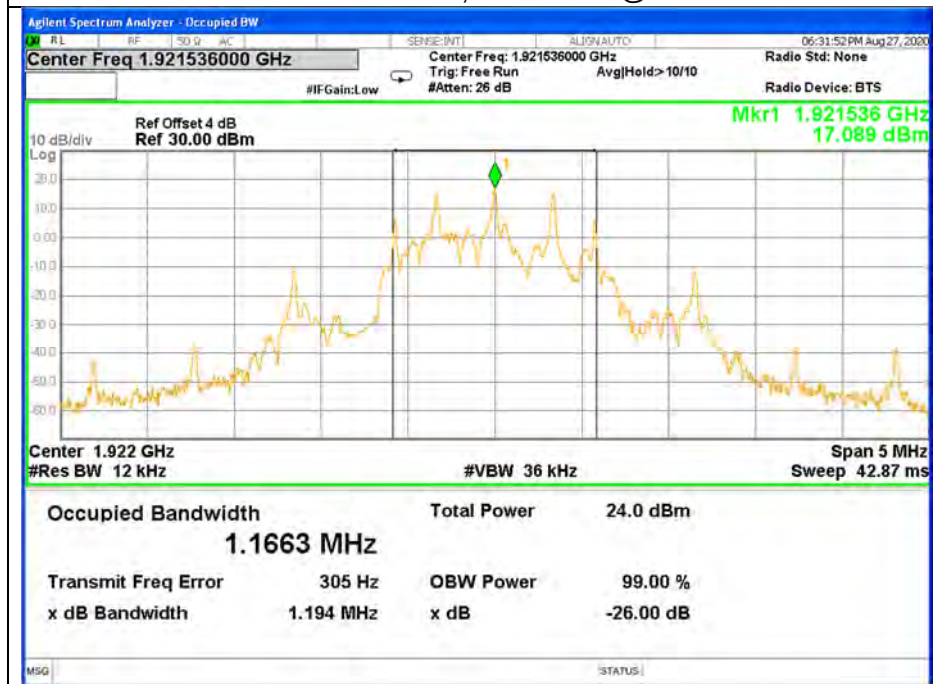


Plot 2. Emission Bandwidth, Channel 2 @ 1924.992 MHz

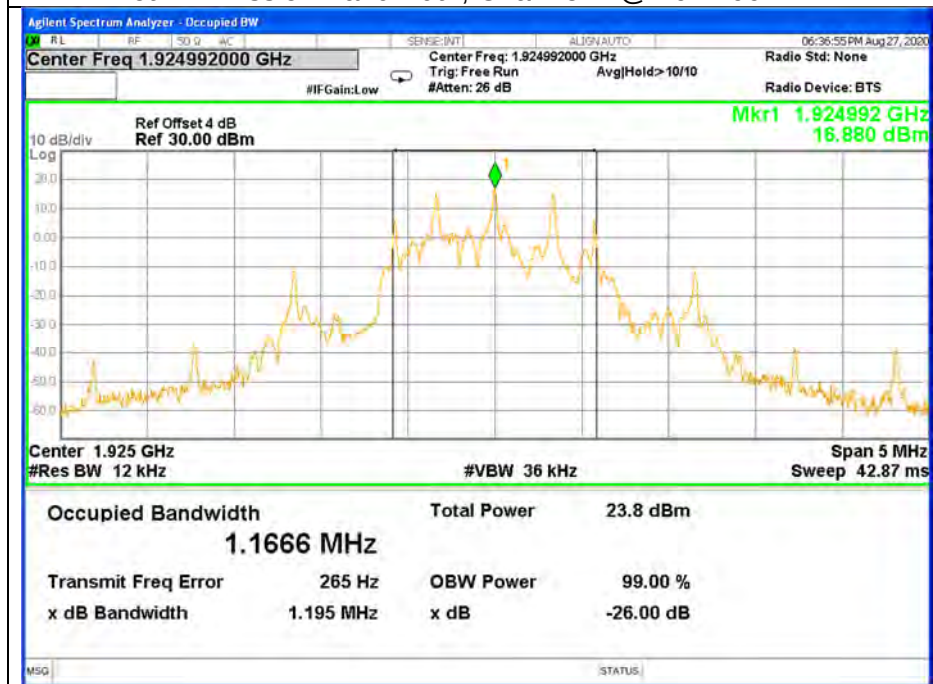




Plot 3. Emission Bandwidth, Channel 0 @ 1928.448 MHz

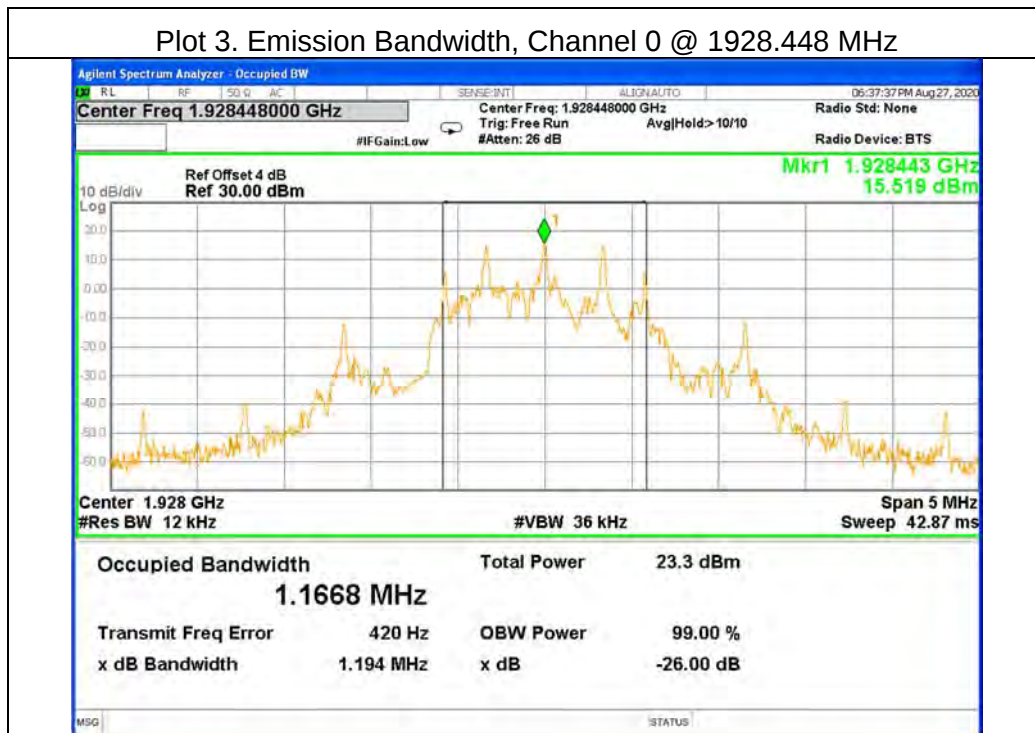




Antenna 2

Plot 1. Emission Bandwidth, Channel 4 @ 1921.536 MHz

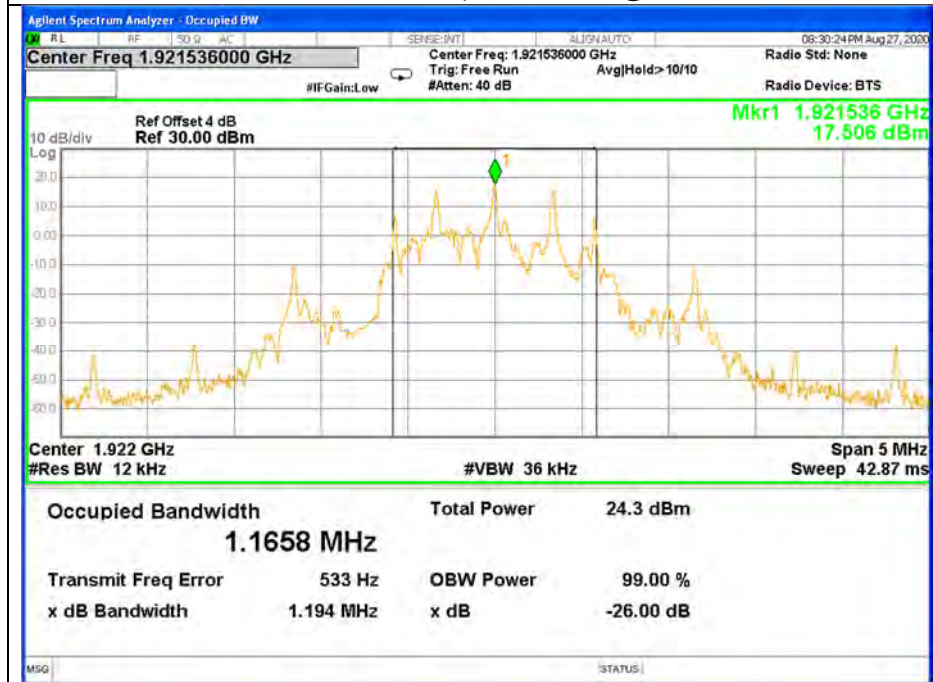


Plot 2. Emission Bandwidth, Channel 2 @ 1924.992 MHz

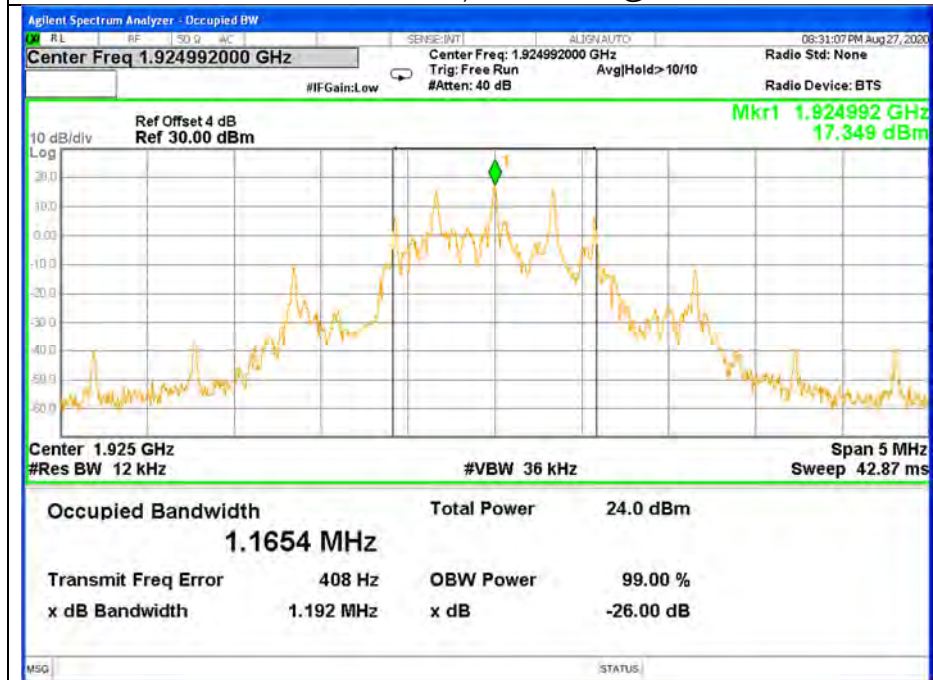



Plot 3. Emission Bandwidth, Channel 0 @ 1928.448 MHz

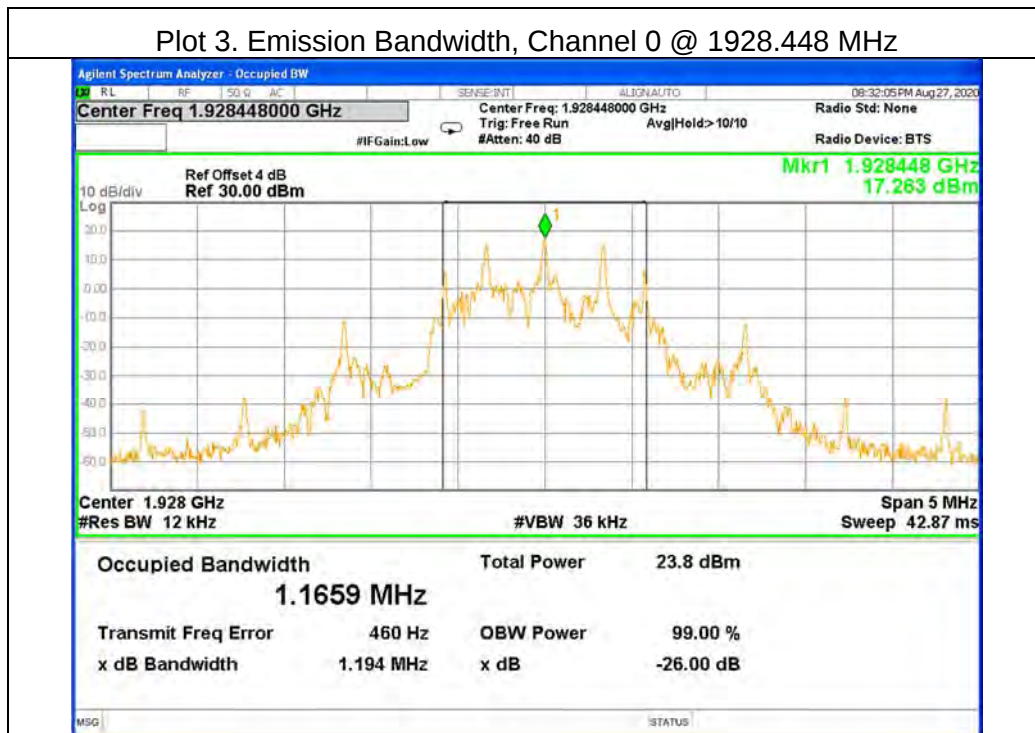



5.4 PEAK TRANSMIT POWER

TEST OVERVIEW

§15.319(c)&RSS 213(5.6): The peak transmit power shall not exceed 100 microwatts multiplied by the square root of the emission bandwidth in hertz. Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

TEST PROCEDURE

Testing to ANSI C63.17-2013 Clause 6.1.2, which provides the test methodology for this provision. The EUT is controlled from a personal computer and set into continuous transmission mode.

TEST SETUP

The test setup is shown in section 3.2 figure 1.

TEST RESULTS

PP32Z
Antenna 1

Carrier Channel	Frequency (MHz)	Measured Peak Output Power (dBm)	Limit(uw)	Limit(dBm)
Low	1921.536	18.74	108042	20.34
Mid	1924.992	18.58	108019	20.33
High	1928.448	18.45	107958	20.33
EBWLow Channel=	1167300			Hz
EBWMid Channel=	1166800			Hz
EBWHigh Channel=	1165500			Hz
Note:Peak Transmitter Power Limit=100(EBW)1/2μW				




Channel 4, 1921.536 MHz



Channel 2, 1924.992 MHz




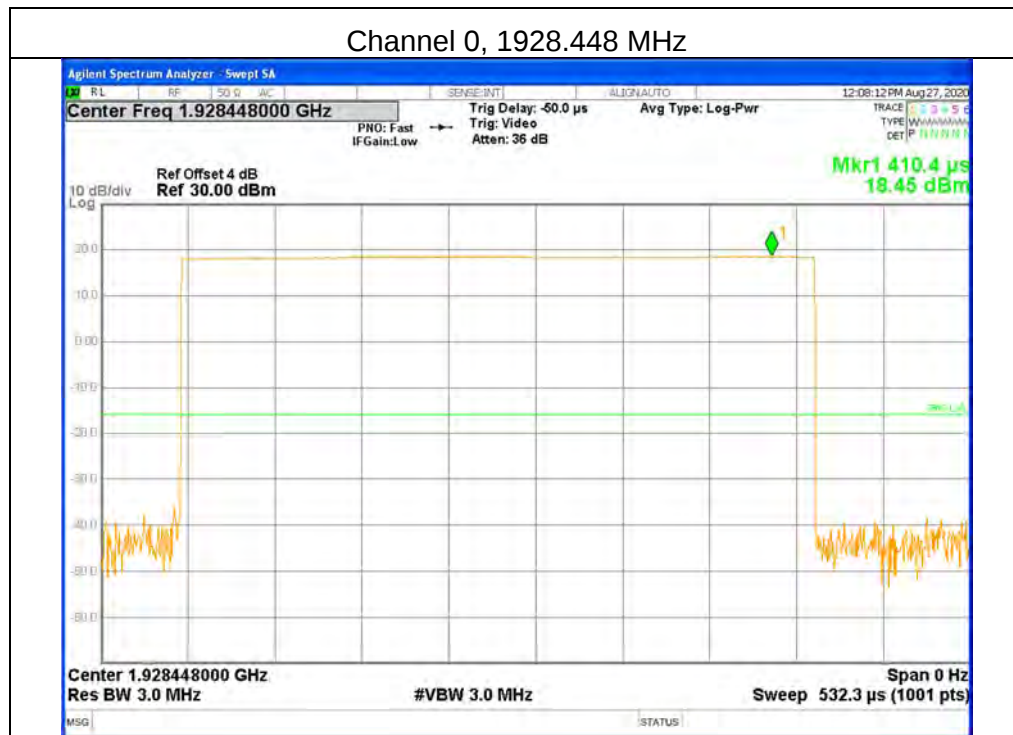



Antenna 2

Carrier Channel	Frequency (MHz)	Measured Peak Output Power (dBm)	Limit(uw)	Limit(dBm)
Low	1921.536	19.09	108009	20.33
Mid	1924.992	18.97	108051	20.34
High	1928.448	18.88	107981	20.33
EBWLow Channel=	1166600			Hz
EBWMid Channel=	1167500			Hz
EBWHigh Channel=	1166000			Hz
Note:Peak Transmitter Power Limit=100(EBW)1/2μW				

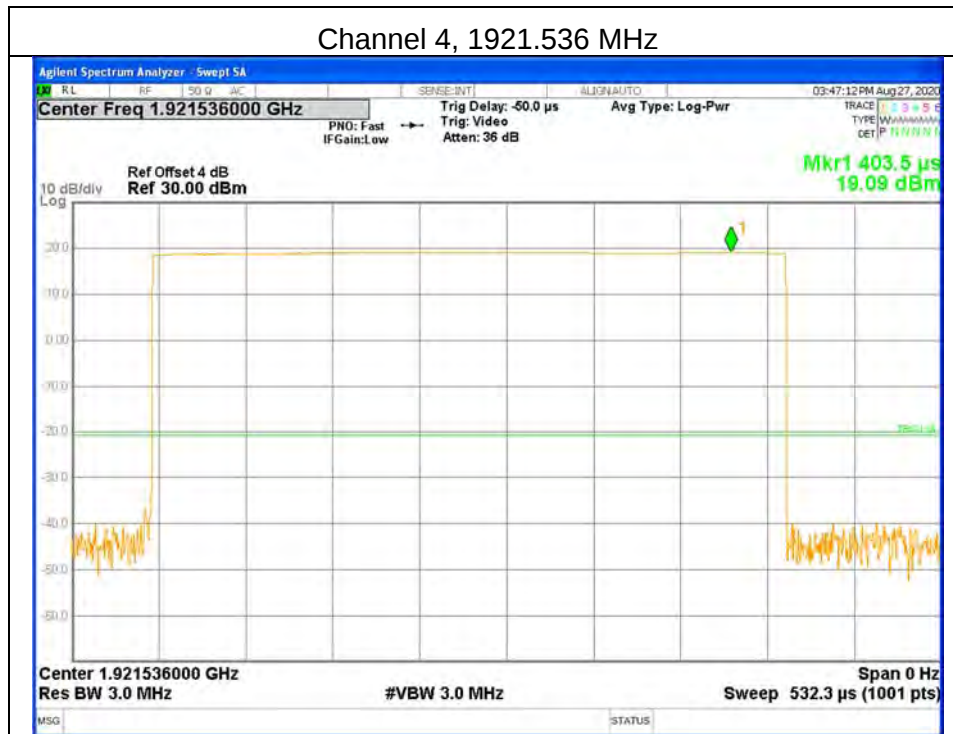



Channel 2, 1924.992 MHz




Channel 0, 1928.448 MHz





PP64Z
Antenna 1

Carrier Channel	Frequency (MHz)	Measured Peak Output Power (dBm)	Limit(uw)	Limit(dBm)
Low	1921.536	18.52	107995	20.33
Mid	1924.992	18.36	108009	20.33
High	1928.448	18.2	108019	20.33
EBWLow Channel=	1166300			Hz
EBWMid Channel=	1166600			Hz
EBWHigh Channel=	1166800			Hz
Note:Peak Transmitter Power Limit=100(EBW)1/2μW				

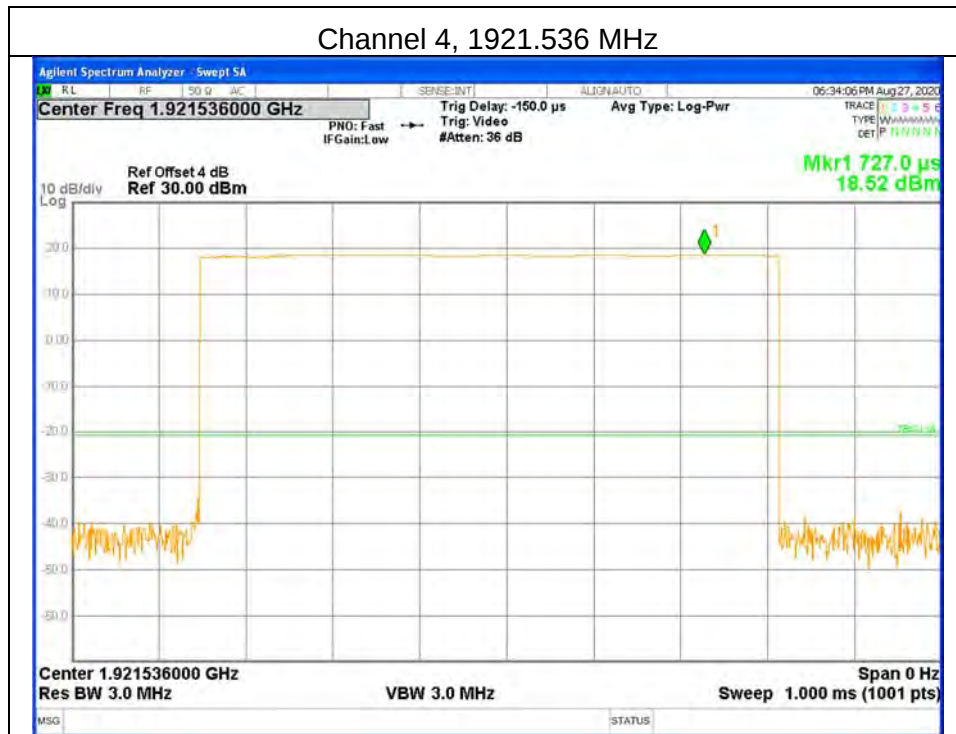



Channel 2, 1924.992 MHz




Channel 0, 1928.448 MHz





Antenna 2

Carrier Channel	Frequency (MHz)	Measured Peak Output Power (dBm)	Limit(uw)	Limit(dBm)
Low	1921.536	18.91	107972	20.33
Mid	1924.992	18.82	107954	20.33
High	1928.448	18.68	107977	20.33
EBWLow Channel=	1165800			Hz
EBWMid Channel=	1165400			Hz
EBWHigh Channel=	1165900			Hz
Note:Peak Transmitter Power Limit=100(EBW)1/2μW				

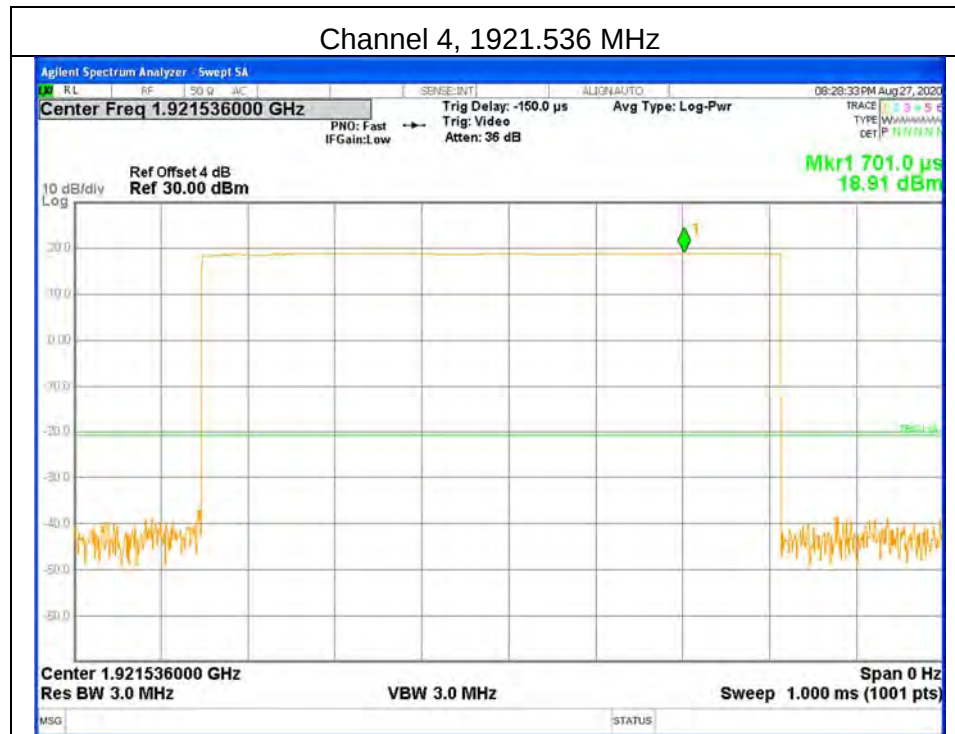



Channel 2, 1924.992 MHz



Channel 0, 1928.448 MHz





5.5 POWER SPECTRAL DENSITY TEST OVERVIEW

§15.319(d): Power spectral density shall not exceed 3 milliwatts in any 3 kHz bandwidth as measured with a spectrum analyzer having a resolution bandwidth of 3 kHz.

TEST PROCEDURE

Testing to ANSI C63.17-2013 Clause 6.1.5, which provides the test methodology for this provision.

TEST SETUP

The test setup is shown in section 3.2 figure 1.


TEST RESULTS

PP32Z
Antenna 1


Carrier Channel	Frequency (MHz)	Measured Peak Power Spectral Density (dBm)	Limit(mw)	Limit(dBm)
Low(4)	1921.536	-4.24	3	4.77
Mid(2)	1924.992	-4.38		
High(0)	1928.448	-4.35		




Channel 4, 1921.536 MHz

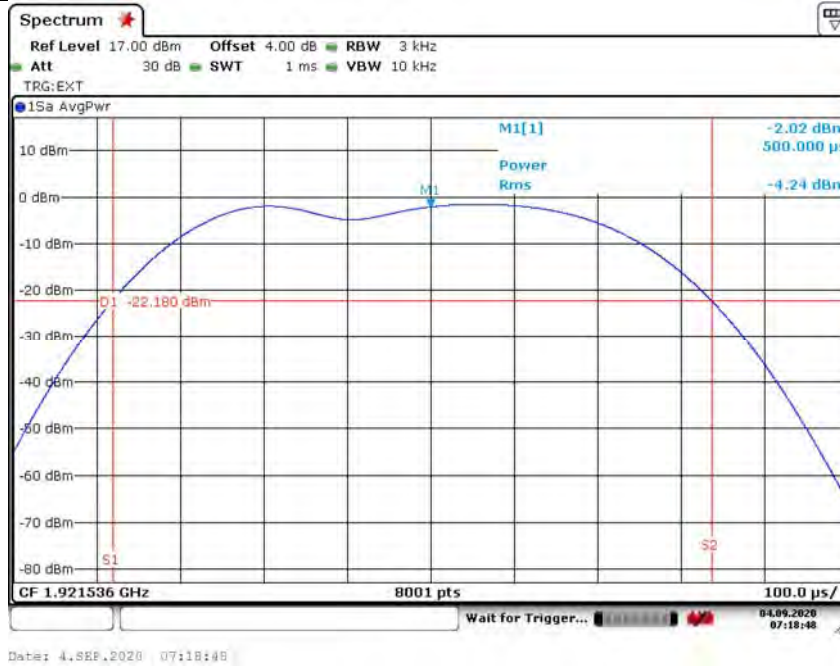

Channel 2, 1924.992 MHz

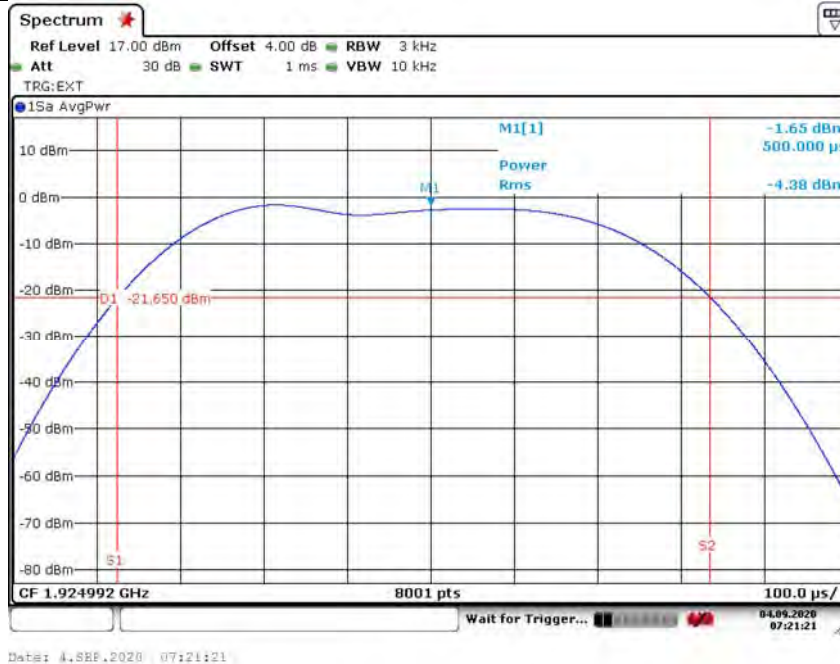


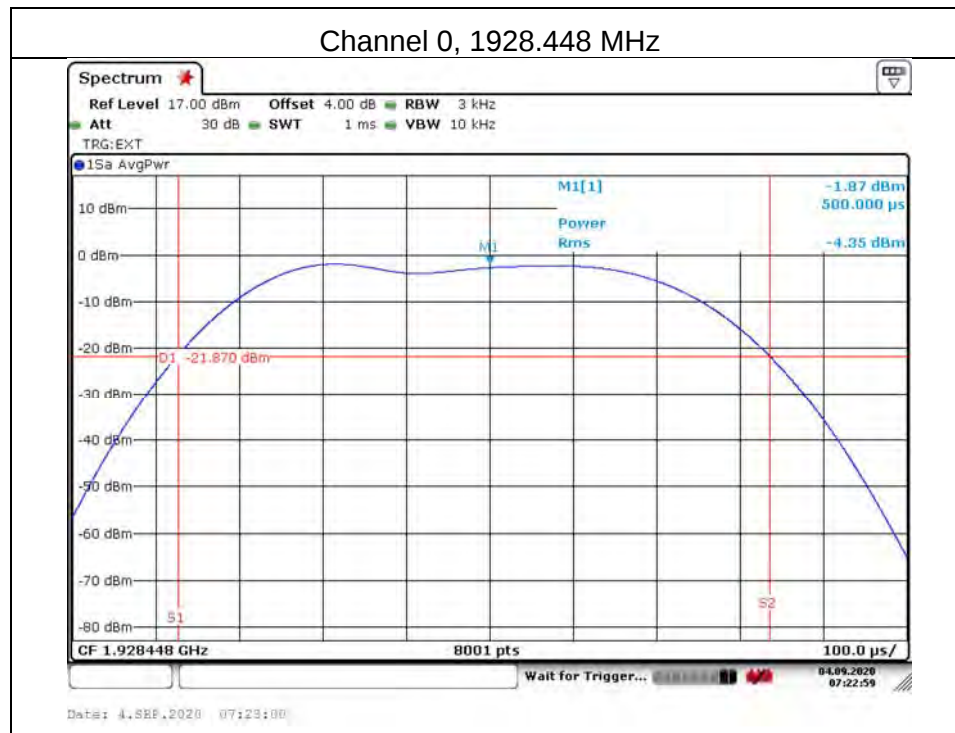




Antenna 2

Carrier Channel	Frequency (MHz)	Measured Peak Power Spectral Density (dBm)	Limit(mw)	Limit(dBm)
Low(4)	1921.536	-5.26	3	4.77
Mid(2)	1924.992	-4.74		
High(0)	1928.448	-5.11		

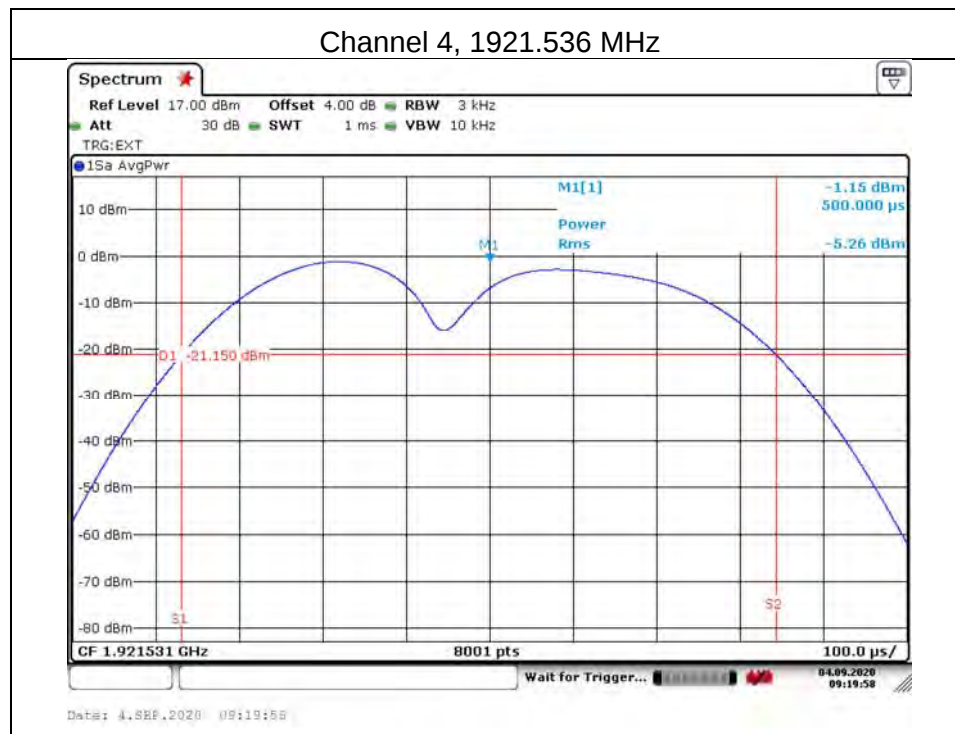




Channel 2, 1924.992 MHz

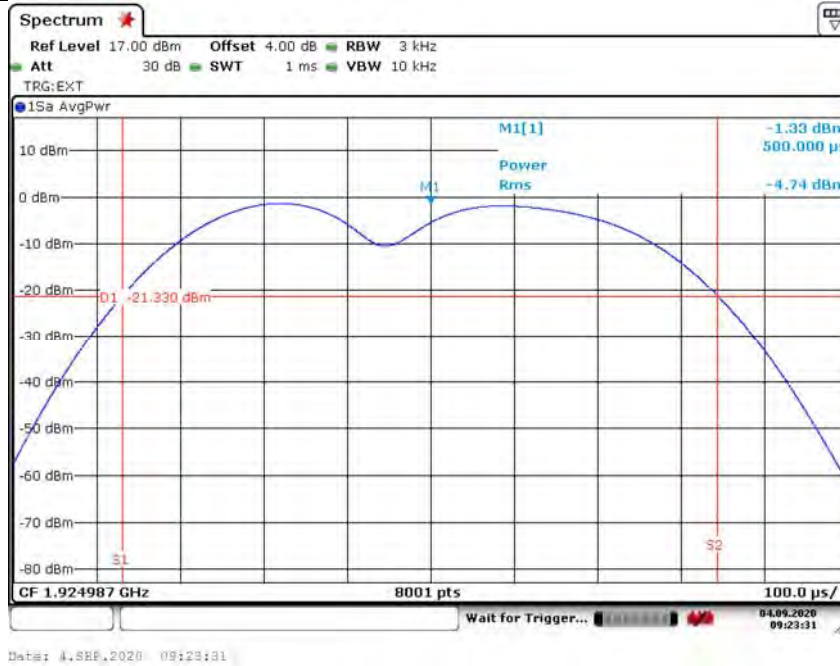


Channel 0, 1928.448 MHz

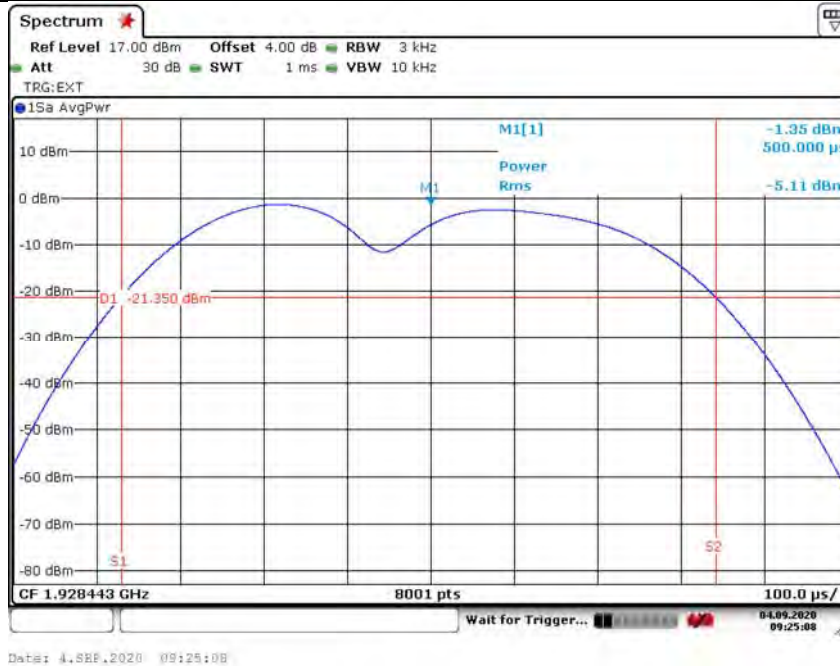

PP64Z
Antenna 1

Carrier Channel	Frequency (MHz)	Measured Peak Power Spectral Density (dBm)	Limit(mw)	Limit(dBm)
Low(4)	1921.536	-4.66	3	4.77
Mid(2)	1924.992	-5.17		
High(0)	1928.448	-5.87		

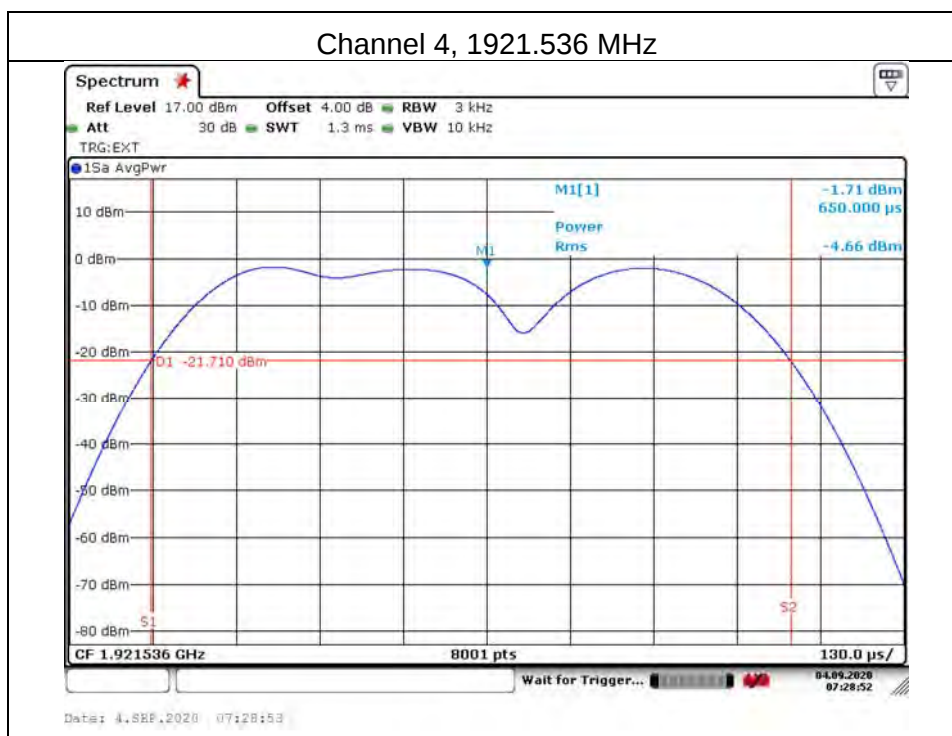




Channel 2, 1924.992 MHz




Channel 0, 1928.448 MHz

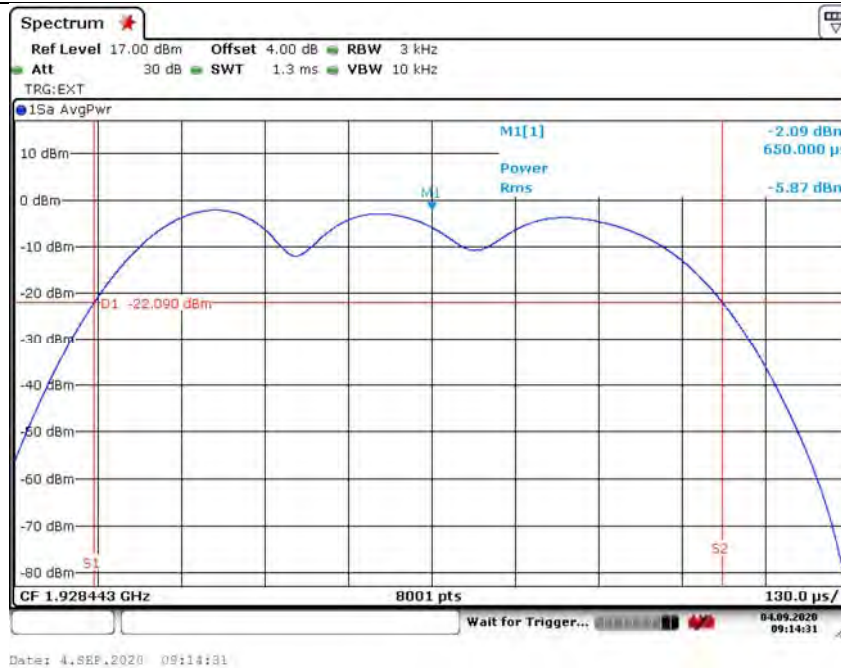




Antenna 2

Carrier Channel	Frequency (MHz)	Measured Peak Power Spectral Density (dBm)	Limit(mw)	Limit(dBm)
Low(4)	1921.536	-4.13	3	4.77
Mid(2)	1924.992	-4.76		
High(0)	1928.448	-4.69		

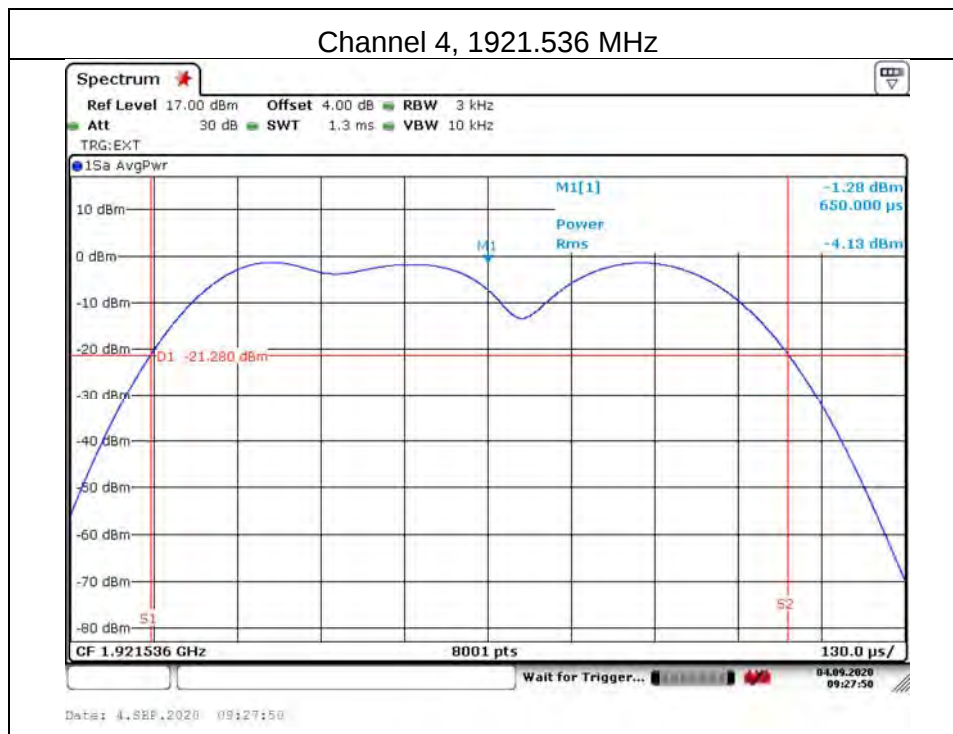




Channel 2, 1924.992 MHz

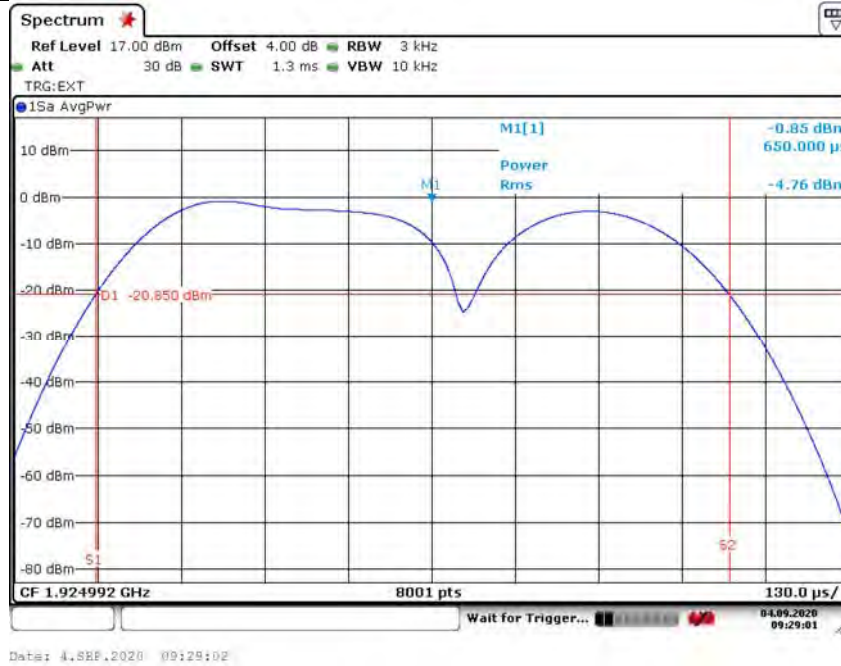

Channel 0, 1928.448 MHz

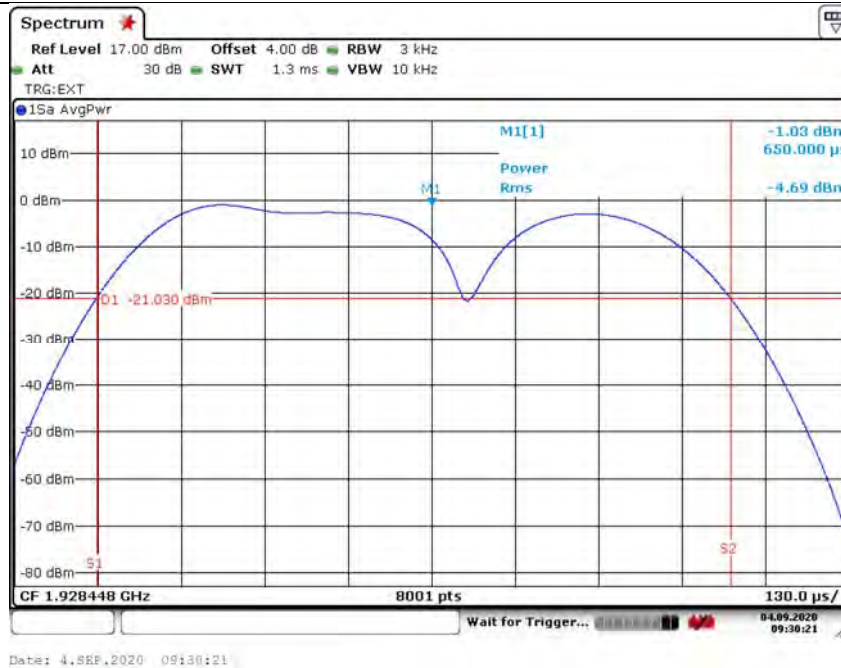



5.6 POWER ADJUSTMENT FOR ANTENNA GAIN

TEST OVERVIEW

§15.319(e): The peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.

TEST PROCEDURE

Testing to ANSI C63.17-2013 Clause 4.3.1, which provides the test methodology for this provision.

TEST RESULT

Equipment Employs a 1 dBi Antenna. Max output power allowed with this gain by the EUT is 19.09dBm.

The Max output power does not need to be reduced.

The Output Power complies with the Power Adjustment for Antenna Gain requirements of §15.319(e).





5.7 AUTOMATICALLY DISCONTINUE TRANSMISSION

OVERVIEW

§15.319(f): The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude transmission of control and signaling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

TEST RESULTS

	Test	Reaction of EUT	Result
1	Remove Power from Companion Device	A	Pass
2	Switch off the companion device	A	Pass
3	Terminate call at the companion device	NA1	Pass
4	Switch off the EUT	NA2	Pass
5	Terminate call at the EUT	NA3	Pass

A - Connection was terminated and transmission ceased.

B - Connection was terminated but the EUT transmits control or signaling information.

C - Connection was terminated but the companion device transmits control or signaling information.

NA 1 - Companion Device does not have an on/off switch for terminate call.

NA 2 - EUT does not have an on/off switch.

NA 3 – EUT does not have a switch for terminate call.



5.8 SYSTEM ACKNOWLEDGE-MENT TEST

TEST OVERVIEW

§ 15.323(c)(4): Once access to specific combined time and spectrum windows is obtained an acknowledgment from a system participant must be received by the initiating transmitter within one second or transmission must cease. Periodic acknowledgments must be received at least every 30 seconds or transmission must cease. Channels used exclusively for control and signaling information may transmit continuously for 30 seconds without receiving an acknowledgment, at which time the access criteria must be repeated.

TEST PROCEDURE

Measurement method according to ANSI C63.17 2013 clause 8.2.1

During testing initial transmission without acknowledgement, the signal from the EUT to the companion device is blocked by the circulator.

The test of the transmission time after loss of acknowledgements is performed by cutting off the signal from the companion device by a RF switch and measuring the time until the EUT stops transmitting.

TEST SETUP

The test setup is shown in section 3.2 figure 2.

TEST RESULTS

PP32Z
Antenna 1

Test	Time taken (second)	Limit (second)	Result
Initial Connection acknowledgement	0.82	1	Pass
Change of access criteria for control information	N/A	30	N/A
Transmission cease time after loss of acknowledgement	4.22	30	Pass

Antenna 2

Test	Time taken (second)	Limit (second)	Result
Initial Connection acknowledgement	0.74	1	Pass
Change of access criteria for control information	N/A	30	N/A
Transmission cease time after loss of acknowledgement	4.16	30	Pass

PP34Z
Antenna 1

Test	Time taken (second)	Limit (second)	Result
Initial Connection acknowledgement	0.52	1	Pass
Change of access criteria for control information	N/A	30	N/A
Transmission cease time after loss of acknowledgement	4.5	30	Pass

Antenna 2

Test	Time taken (second)	Limit (second)	Result
Initial Connection acknowledgement	0.62	1	Pass
Change of access criteria for control information	N/A	30	N/A
Transmission cease time after loss of acknowledgement	3.94	30	Pass



5.9 MONITORING THRESHOLD

TEST OVERVIEW

§15.323 (c)(2). The monitoring threshold must not be more than 30 dB above the thermal noise power for a bandwidth equivalent to the emission bandwidth used by the device.

§15.323 (c)(9). Devices that have a power output lower than the maximum permitted under this sub-part may increase their monitoring detection threshold by one decibel for each one decibel that the transmitter power is below the maximum permitted.

TEST PROCEDURE

Testing to ANSI C63.17-2013 Clause 7.3, which provides the test methodology for this provision. The Clause states that the lower threshold is for devices that do not use the LIC procedure. The equation for the lower monitoring threshold is given in ANSI C63.17 Clause 4.3.4.

TEST SETUP

The test setup is shown in section 3.2 figure 2.

TEST RESULTS

PP32Z
Antenna 1

Upper Threshold		
B	1166533	MHz
Mu	50	dB
Peut	18.45	dBm
TU	-61.447	dBm
Lower Threshold		
B	1166533	MHz
MI	30	dB
Peut	18.74	dBm
TL	-81.737	dBm

Antenna 2

Upper Threshold		
B	1166700	MHz
Mu	50	dB
Peut	18.88	dBm
TU	-61.876	dBm
Lower Threshold		
B	1166700	MHz
MI	30	dB
Peut	19.09	dBm
TL	-82.086	dBm

PP64Z
Antenna 1

Upper Threshold		
B	1166567	MHz
Mu	50	dB
Peut	18.2	dBm
TU	-61.196	dBm
Lower Threshold		
B	1166567	MHz
MI	30	dB
Peut	18.52	dBm
TL	-81.516	dBm

Antenna 2

Upper Threshold		
B	1165700	MHz
Mu	50	dB
Peut	18.68	dBm
TU	-61.681	dBm
Lower Threshold		
B	1165700	MHz
MI	30	dB
Peut	18.91	dBm
TL	-81.911	dBm

ATTESTATION

The sensor will go into hibernation after a few minutes. It is not possible to keep a connection running very long. Therefore, this requirement is not applicable.



5.10 DURATION OF TRANSMISSION

TEST OVERVIEW

§15.323 (c)(3) If no signal above the threshold level is detected, transmission may commence and continue with the same emission bandwidth in the monitored time and spectrum windows without further monitoring. However, occupation of the same combined time and spectrum windows by a device or group of cooperating devices continuously over a period of time longer than 8 hours is not permitted without repeating the access criteria.

TEST PROCEDURE

Testing to ANSI C63.17-2013 Clause 4, which provides the test methodology for this provision. A communication link is established between BS and MS in a conducted mode and in a room without other US DECT devices to prevent influence from other transmissions. According to FCC Part 15.323(c)(3), the access criteria have to be verified at least every 8 hours. The following test is performed:

TEST SETUP

The test setup is shown in section 3.2 figure 2.

TEST RESULT

PP32Z
Antenna 1

Test ref. to ANSI C63.17:2013 clause 8.2.2	Observation result(H)	Limit(H)	Verdict
Transmission duration on same time and frequency window	0.30	8	Pass





Antenna 2

Test ref. to ANSI C63.17:2013 clause 8.2.2	Observation result(H)	Limit(H)	Verdict
Transmission duration on same time and frequency window	0.30	8	Pass



PP64Z
Antenna 1


Test ref. to ANSI C63.17:2013 clause 8.2.2	Observation result(H)	Limit(H)	Verdict
Transmission duration on same time and frequency window	0.30	8	Pass





Antenna 2

Test ref. to ANSI C63.17:2013 clause 8.2.2	Observation result(H)	Limit(H)	Verdict
Transmission duration on same time and frequency window	0.30	8	Pass

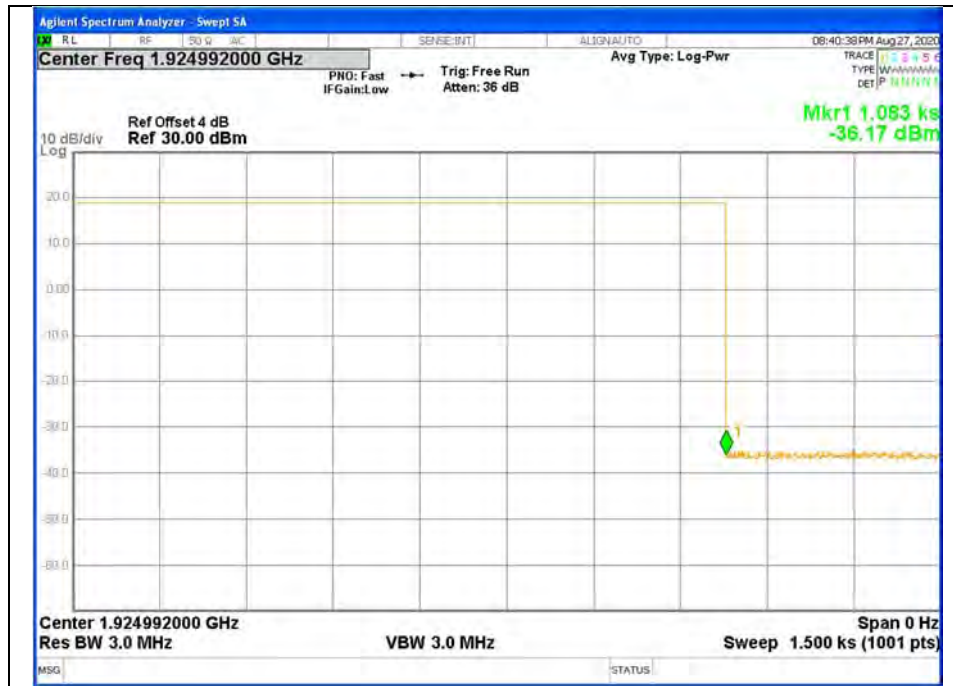



5.11 SELECTED CHANNEL CONFIRMATION, POWER ACCURACY, SEGMENT OCCUPANCY TEST OVERVIEW

§15.323 (c)(5) If access to spectrum is not available as determined by the above, and a minimum of 40 duplex system access channels are defined for the system, the time and spectrum windows with the lowest power level below a monitoring threshold of 50 dB above the thermal noise power determined for the emission bandwidth may be accessed. A device utilizing the provisions of this paragraph must have monitored all access channels defined for its system within the last 10 seconds and must verify, within the 20 milliseconds (40 milliseconds for devices designed to use a 20 milliseconds frame period) immediately preceding actual channel access that the detected power of the selected time and spectrum windows is no higher than the previously detected value. The power measurement resolution for this comparison must be accurate to within 6 dB. No device or group of co-operating devices located within 1 meter of each other shall during any frame period occupy more than 6 MHz of aggregate bandwidth, or alternatively, more than one third of the time and spectrum windows defined by the system.

TEST PROCEDURE

Testing to ANSI C63.17-2013 Clause 7.3.2. & 7.3.3, which provides the test methodology for this provision. The current product offers 12 duplex channels per frequency channel and therefore 12x5=60 duplex channels in total. Hence Part §15.323(c)(5) applies. The equation for the upper monitoring threshold is given in ANSI C63.17 Clause 4.3.3. Max measured interference level (dBm) = -85.02 dBm

TEST SETUP

The test setup is shown in section 3.2 figure 2.

MONITORING LIMIT THRESHOLD

The EUT's monitoring limit threshold power at the monitoring antenna terminals shall be less than a maximum, shown in Equation (3):

$$T_L \leq (-174 + 10 \log B + M_L + P_{MAX} - P_{EUT}) \text{ dBm}$$

M_L is a level specified by the manufacturer and is the maximum amount in decibels by which the limiting threshold may exceed thermal noise for an EUT transmitting the maximum allowed power.

Calculation of monitoring threshold limits for isochroous devices:

$$\text{Lower threshold: } T_L = -174 + 10 \log_{10} B + M_L + P_{MAX} - P_{EUT} \text{ (dBm)}$$

Where: B= Emission bandwidth (Hz)

M_L = dB the threshold may exceed thermal noise (30 for T_L)

$$P_{MAX} = 5 \log_{10} B - 10 \text{ (dBm)}$$

$$P_{EUT} = \text{Transmitted power (dBm)}$$

Monitor Threshold	B(MHz)	M_L (dB)	P_{MAX} (dBm)	P_{EUT} (dBm)	Threshold(dBm)
Lower threshold	1.167	30	30.53	19.09	-81.516

Note: 1. The upper threshold is applicable as the EUT utilizes more than 20 duplex system channels



TEST RESULTS

1) LIC procedure test:

Interference (Refer to ANSI C63.17 clause 7.3.3)	Reaction fo EUT	Results
a) Apply the interference on f_1 at level $T_L+U_M+7\text{dB}$ and the interference on f_2 at level T_L+U_M . Initiate transmission and verify the transmission only on f_2 . Repeat 5 times.	EUT transmits on f_2	Pass
b) Apply the interference on f_1 at level T_L+U_M and the interference on f_2 at level $T_L+U_M+7\text{dB}$. Initiate transmission and verify the transmission only on f_1 . Repeat 5 times.	EUT transmits on f_1	Pass
c) Apply the interference on f_1 at level $T_L+U_M+1\text{dB}$ and the interference on f_2 at level $T_L+U_M-6\text{dB}$. Initiate transmission and verify the transmission only on f_2 . Repeat 5 times.	EUT transmits on f_2	Pass
d) Apply the interference on f_1 at level $T_L+U_M-6\text{dB}$ and the interference on f_2 at level $T_L+U_M+1\text{dB}$. Initiate transmission and verify the transmission only on f_2 . Repeat 5 times.	EUT transmits on f_1	Pass

2) Selected channel confirmation:

Interference (Refer to ANSI C63.17 clause 7.3.4)	Reaction fo EUT	Results
a) Apply the interference on f_1 at level T_L+U_M and no interference on f_2 . Initiate transmission and verify the transmission only on f_2 . Then terminate it.	EUT transmits on f_2	Pass
b) Apply the interference on f_2 at level T_L+U_M and immediately remove all interference from f_1 . The EUT should immediately attempt transmission f_1 (but at least 20ms after the interference on f_2 is applied), verify the transmission only on f_1 .	EUT transmits on f_1	Pass



5.12 RANDOM WAITING

TEST CRITERIA

§15.323 (c)(6)) if the selected combined time and spectrum windows are unavailable, the device may either monitor and select different windows or seek to use the same windows after waiting an amount of time, randomly chosen from a uniform random distribution between 10 and 150 milliseconds, commencing when the channel becomes available.

TEST PROCEDURE

Testing to ANSI C63.17-2013 Clause 8.1.3, which provides the test methodology for this provision.

ATTESTATION

The Manufacturer declared that this provision is not utilized by the EUT.





5.13 MONITORING REQUIREMENTS

TEST CRITERIA

§15.323 (c)(7) The monitoring system bandwidth must be equal to or greater than the emission bandwidth of the intended transmission and have a maximum reaction time less than $50 \times \text{SQRT}(1.25/\text{emission bandwidth in MHz})$ microseconds for signals at the applicable threshold level but shall not be required to be less than 50 microseconds. If a signal is detected that is 6 dB or more above the applicable threshold level, the maximum reaction time shall be $35 \times \text{SQRT}(1.25/\text{emission bandwidth in MHz})$ microseconds but shall not be required to be less than 35 microseconds.

TEST PROCEDURE

Measurement method according to ANXI C63.17 2013 clause 7.5

- Restrict the EUT to a single transmit carrier frequency f_1 , and verify that the EUT can establish a connection with no interference applied on f_1 .
- Apply time-synchronized, pulsed interference on f_1 at the pulsed level $TL+UM$, verify that the EUT does not establish a connection when the width of the interference pulse exceeds the largest of $50\mu s$ and $50 \sqrt{1.25 / B} \mu s$, where B is the emission bandwidth of the EUT in megahertz.
- With the channel interference level 6dB above $TL+UM$, verify that the EUT does not establish a connection when the width of the interference pulse exceeds the largest of $35\mu s$ and $35 \sqrt{1.25/B} \mu s$, where B is the emission bandwidth of the EUT in megahertz.

Test pulse width Equation(μs)	B(bandwidth)(MHz)	Pulse width(μs)	Limit(Largest)(μs)
$50(1.25/B)^{1/2}$	1.167	51.75	50
$35(1.25/B)^{1/2}$	1.167	36.22	35

TEST SETUP

The test setup is shown in section 3.2 figure 2.

TEST RESULTS

1) Monitoring Bandwidth:

The antenna of the EUT used for monitoring is the same interior antenna that used for transmission, so the monitoring system bandwidth is equal to the emission bandwidth of the intended transmission.

2) Reaction Time Test:

No.	Interference Pulse width(μs)	Reaction of EUT	Observing time(μs)	Result
1	$50 \mu s$ with level T_L+U_m	No transmission	25.2	Pass
2	$35 \mu s$ with level $T_L+U_m +6dB$	No transmission	18.71	Pass



5.14 MONITORING ANTENNA

TEST CRITERIA

§15.323 (c)(8) Transmission is intended to occupy. The following criteria must be met: (8) The monitoring system shall use the same antenna used for transmission, or an antenna that yields equivalent reception at that location.

TEST PROCEDURE

Testing to ANSI C63.17-2013 Clause 4, which provides the test methodology for this provision.

ATTESTATION

The EUT uses the same antennas for transmission and reception as for monitoring

5.15 DUPLEX CONNECTIONS

TEST CRITERIA

§15.323 (c)(10) An initiating device may attempt to establish a duplex connection by monitoring both its intended transmit and receive time and spectrum windows. If both the intended transmit and receive time and spectrum windows meet the access criteria, then the initiating device can initiate a transmission in the intended transmit time and spectrum window. If the power detected by the responding device can be decoded as a duplex connection signal from the initiating device, then the responding device may immediately begin transmitting on the receive time and spectrum window monitored by the initiating device.

TEST PROCEDURE

Testing to ANSI C63.17-2013 Clause 8.3, which provides the test methodology for this provision. The MS is the initiating device and the BS is the companion device.

TEST RESULTS

The Manufacturer declares that this provision is not utilized by the EUT.



5.16 ALTERNATIVE MONITORING INTERVAL FOR CO-LOCATED DEVICES

TEST CRITERIA

§15.323 (c)(11) an initiating device that is prevented from monitoring during its intended transmit window due to monitoring system blocking from the transmissions of a co-located (within one meter) transmitter of the same system, may monitor the portions of the time and spectrum windows in which they intend to receive over a period of at least 10 milliseconds. The Monitored time and spectrum window must total at least 50 percent of the 10 millisecond frame interval and the monitored spectrum must be within the 1.25 mhz frequency channel(s) already occupied by that device or co-located co-operating devices. If the access criteria is met for the intended receive time and spectrum window under the above conditions, then transmission in The intended transmit window by the initiating device may commence.

TEST PROCEDURE

Testing to ANSI C63.17-2013 Clause 8.4, which provides the test methodology for this provision. The MS is initiating device and the BS is the companion device.

TEST RESULTS

The Manufacturer declares that this provision is not utilized by the EUT.

5.17 FAIR ACCESS

TEST CRITERIA

§15.323 (c)(12) The provisions of (c)(10) or (c)(11) of this section shall not be used to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other devices.

TEST PROCEDURE

The manufacturer supplies an attestation.

ATTESTATION

The manufacturer declares that the EUT does not work in a mode which denies fair access to spectrum for other devices.



5.18 SPURIOUS EMISSIONS

TEST CRITERIA

§15.323(d)(1): Out of Band Emissions

Emissions shall be attenuated below a reference power of 112 milliwatts as follows: 30 dB between the band edge and 1.25 MHz above or below the band; 50 dB between 1.25 and 2.5 MHz above or below the band; and 60 dB at 2.5 MHz or greater above or below the band.

§15.323(d)(2): In-Band Emissions

Emissions inside the band must comply with the following emission mask: In the bands between 1B and 2B measured from the center of the emission bandwidth, the total power emitted by the device shall be at least 30 dB below the transmit power permitted for that device; in the bands between 2B and 3B measured from the center of the emission bandwidth, the total power emitted by an intentional radiator shall be at least 50 dB below the transmit power permitted for that radiator; in the bands between 3B and the band edge, the total power emitted by an intentional radiator in the measurement bandwidth shall be at least 60 dB below the transmit power permitted for that radiator. "B" is defined as the emission bandwidth of the device in hertz. Compliance with the emission limits is based on the use of measurement instrumentation employing peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

TEST PROCEDURE

For both in and out of band emissions the EUT was connected directly to a spectrum analyzer. The RBW of the spectrum analyzer was set to a minimum 1% of the emission band width.

TEST SETUP


The test setup is shown in section 3.2 figure 1.

TEST RESULTS

Equipment complies with the Spurious Emission limits of § 15.323(d)(1).

In-Band Emissions

PP32Z
Antenna 1

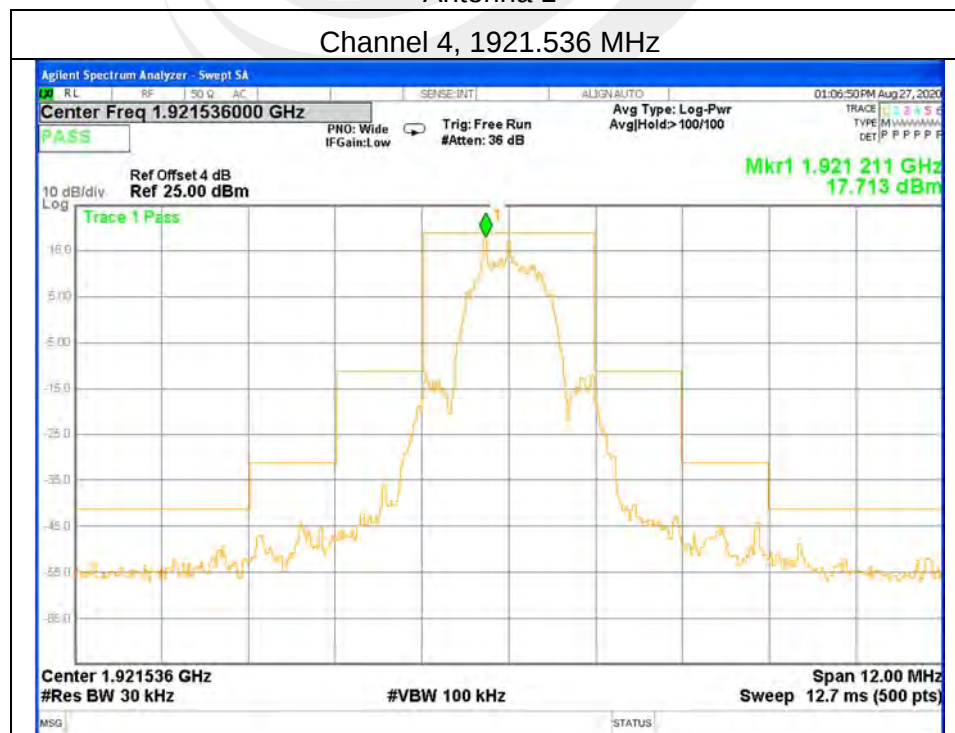



Channel 2, 1924.992 MHz




Channel 0, 1928.448 MHz







Antenna 2

Channel 4, 1921.536 MHz

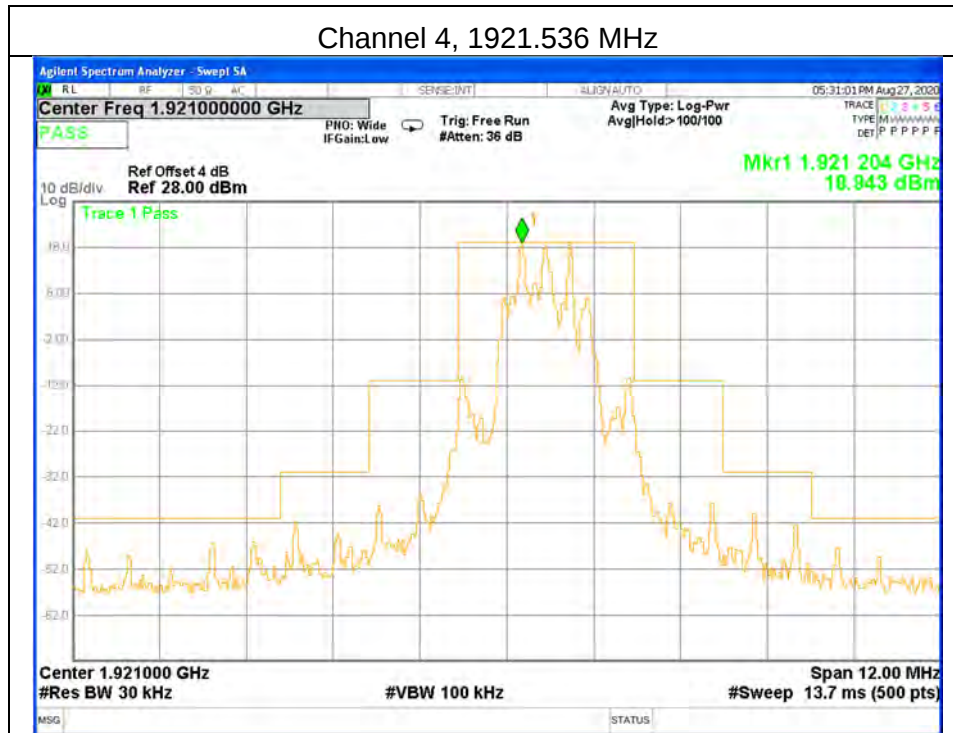

Channel 2, 1924.992 MHz

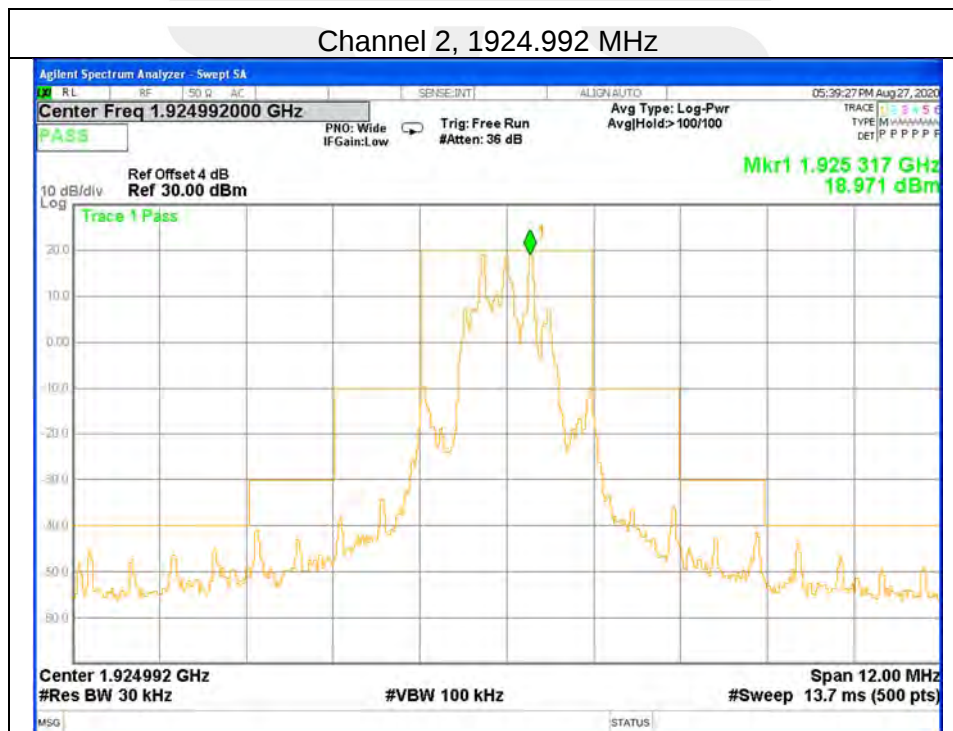


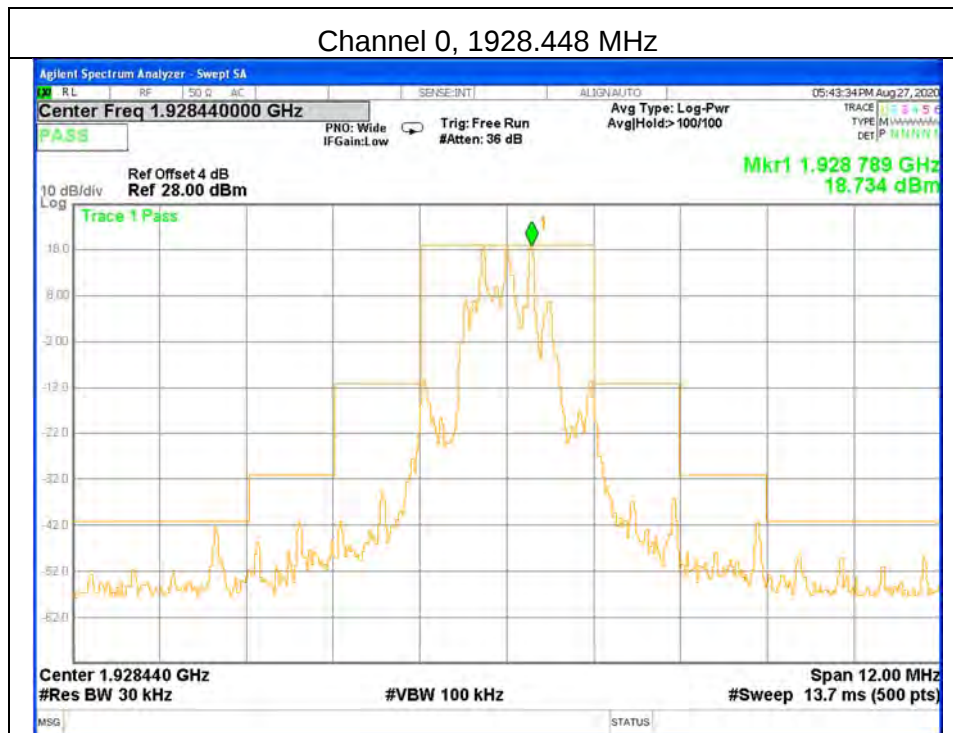





PP64Z
Antenna 1

Channel 4, 1921.536 MHz

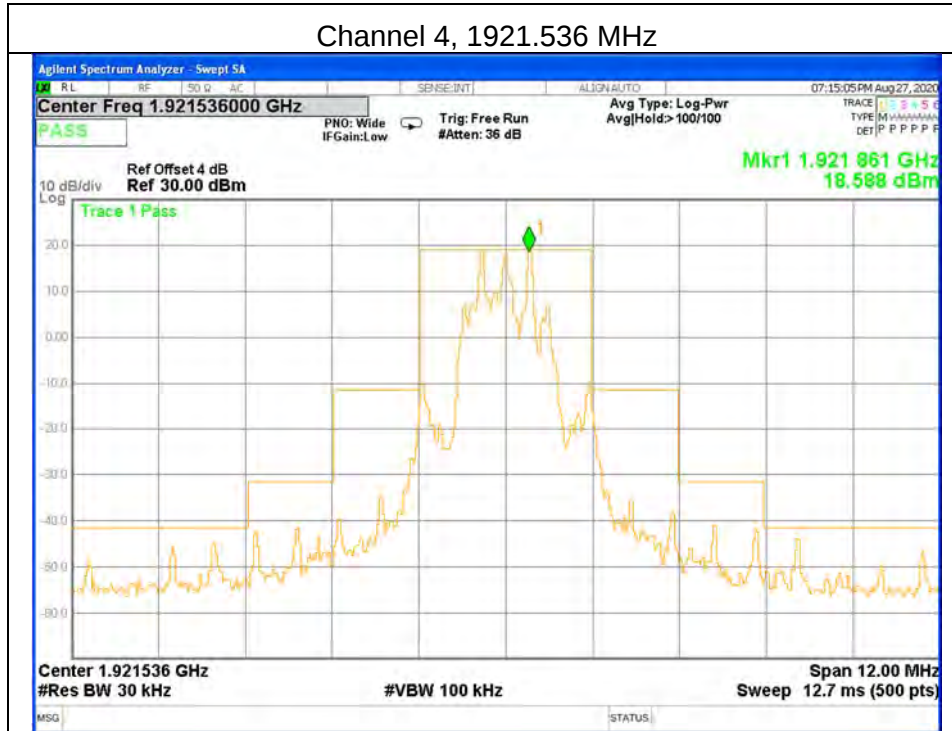

Channel 2, 1924.992 MHz

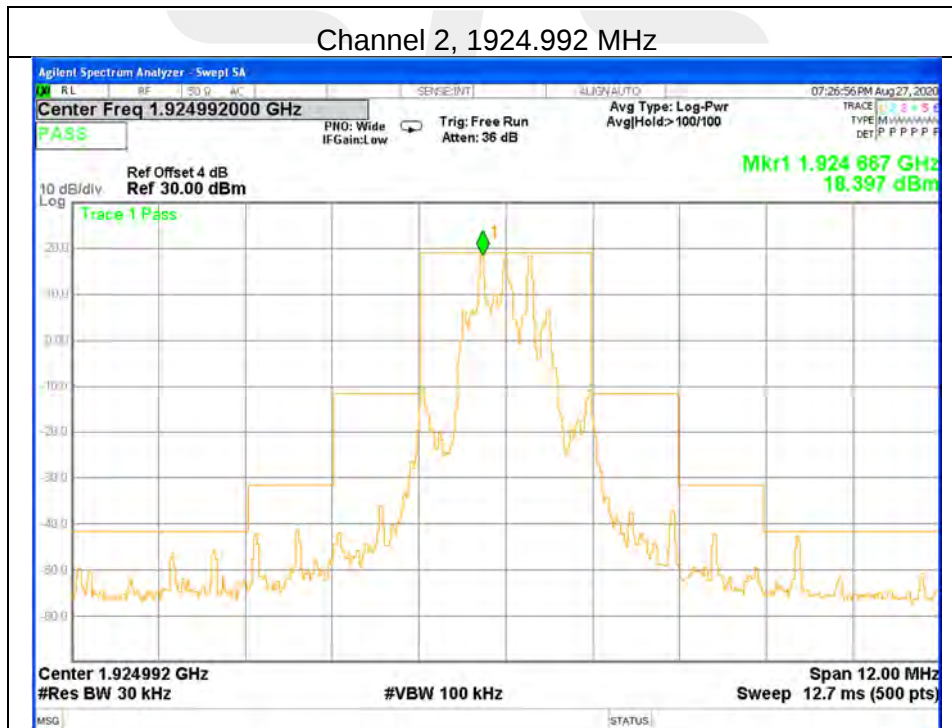


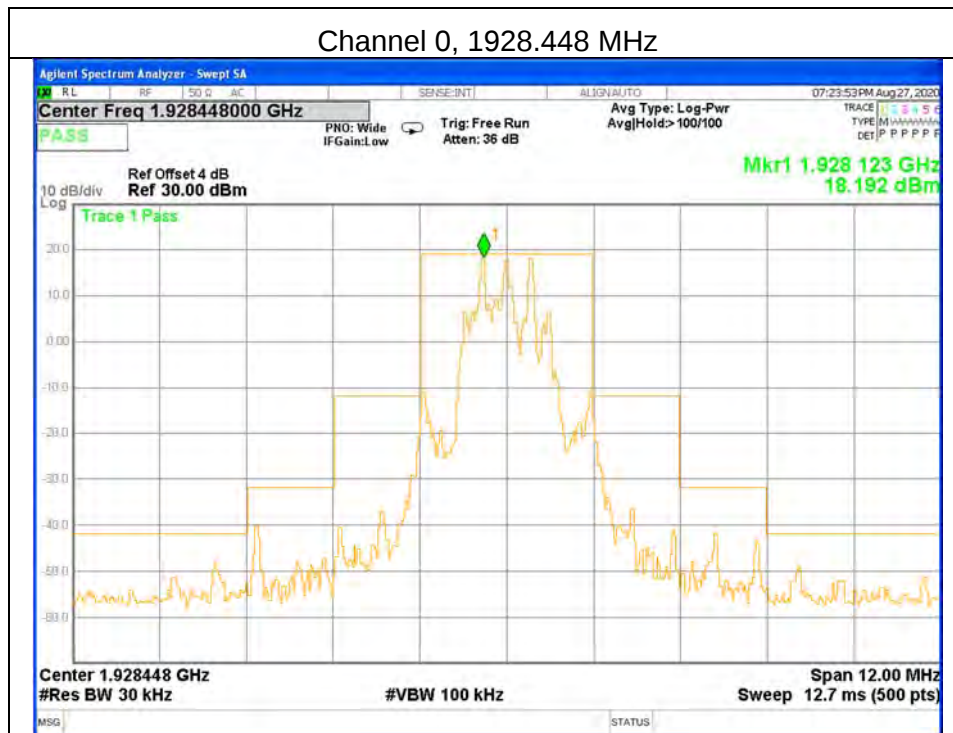





Antenna 2

Channel 4, 1921.536 MHz

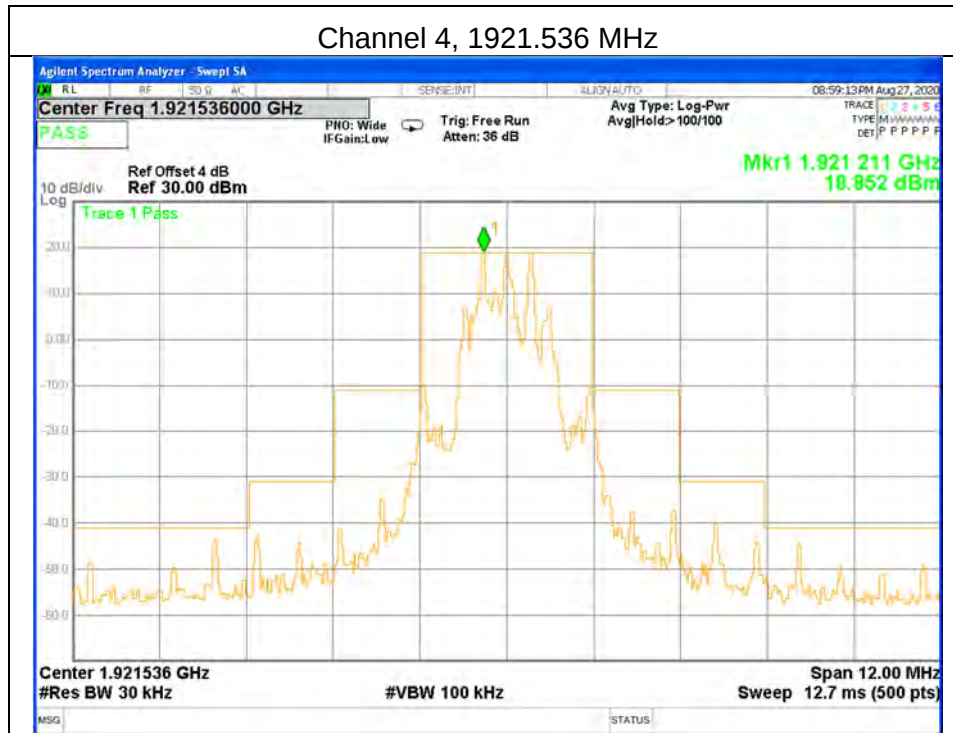

Channel 2, 1924.992 MHz

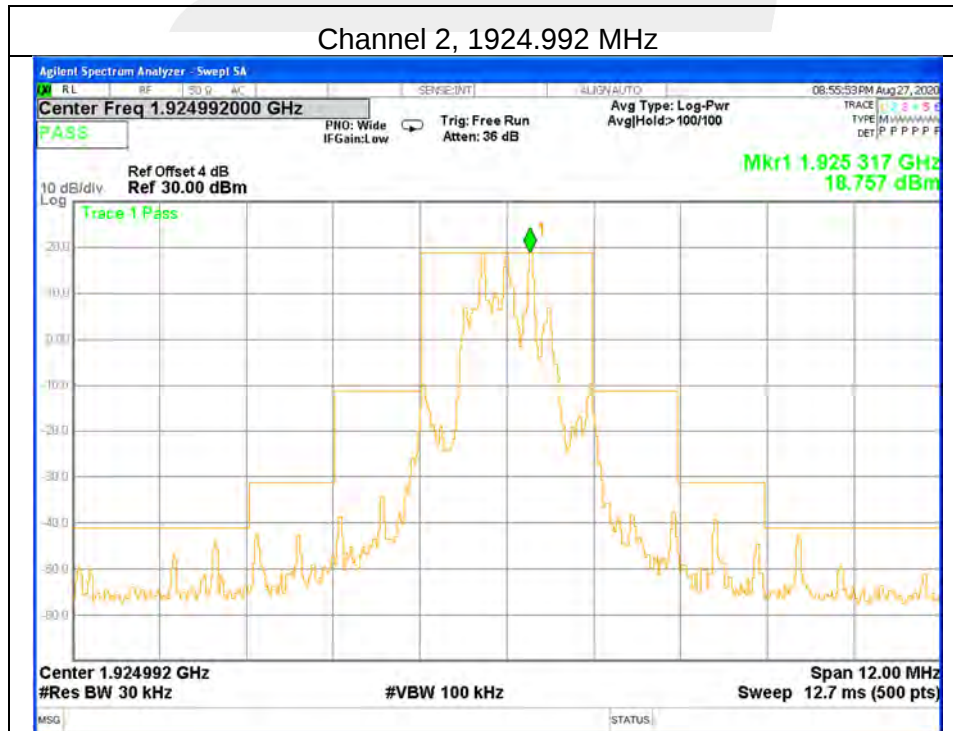

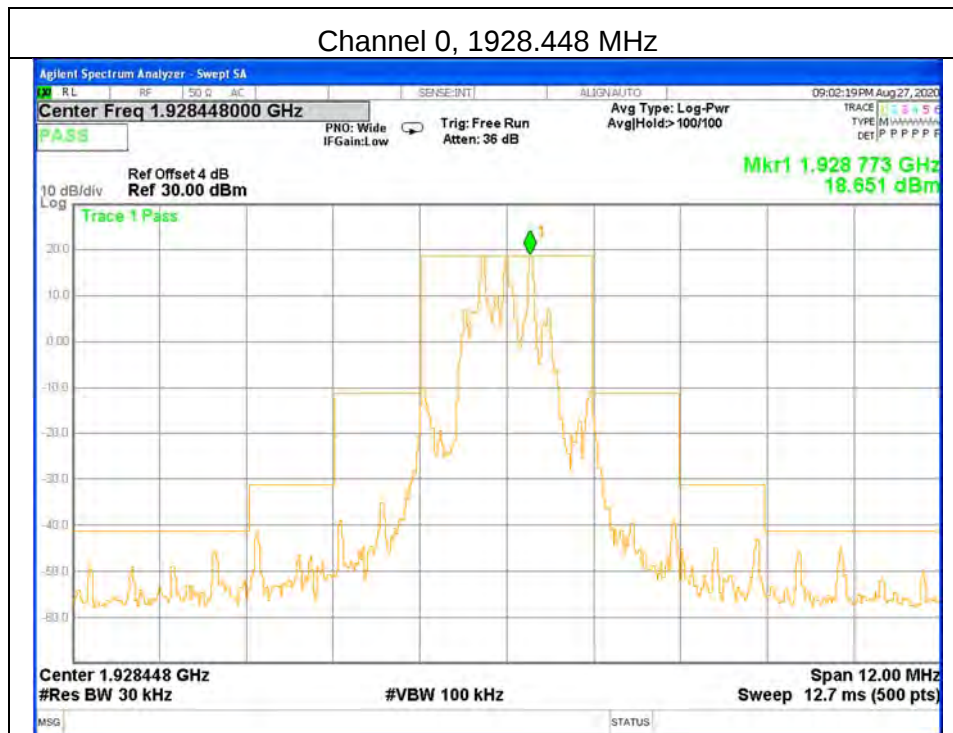




Out of Band Emissions


PP32Z

Antenna 1

Low, Channel 4, 30MHz - 1915 MHz

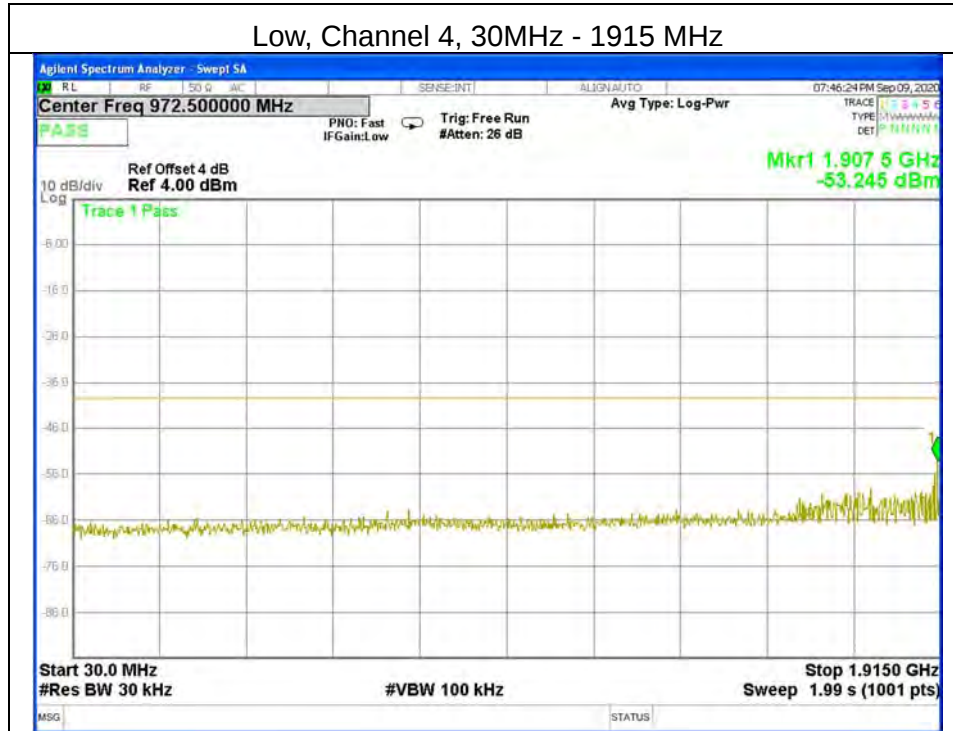

Low, Channel 4, 1915 MHz – 1920 MHz

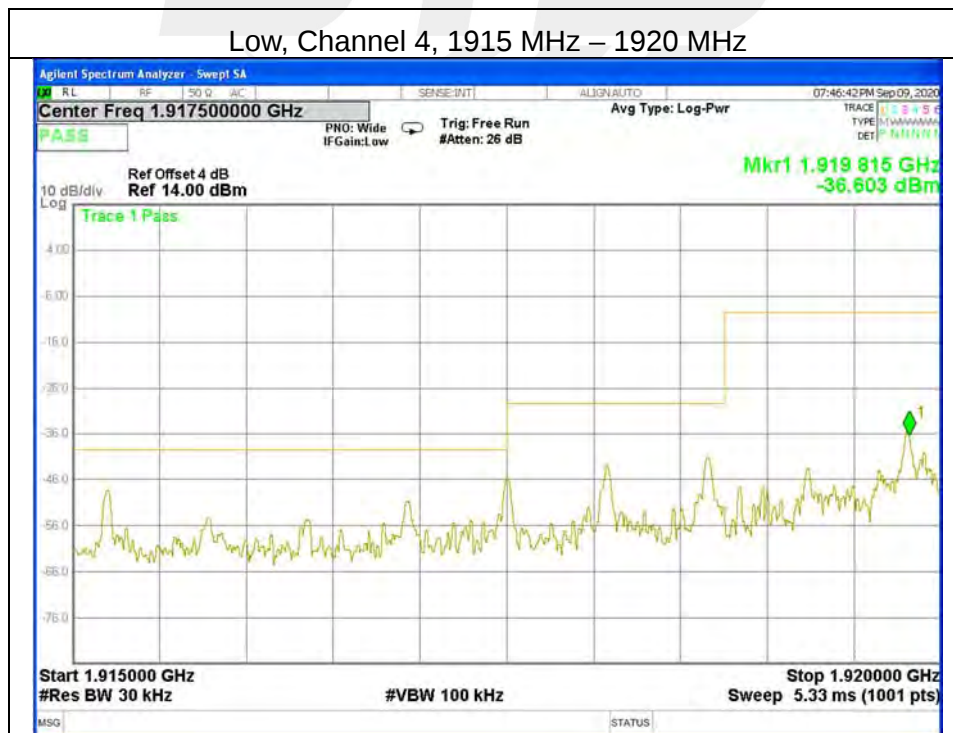



High, Channel 4, 1930 MHz – 1935 MHz




High, Channel 4, 1935 MHz – 20GHz





Low, Channel 2, 30MHz - 1915 MHz

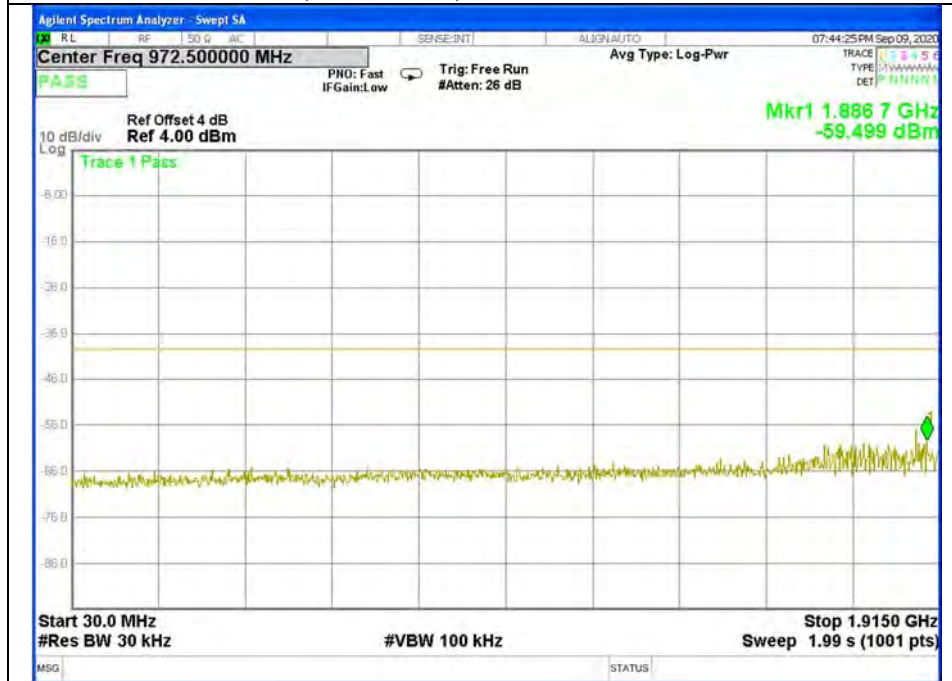


Low, Channel 2, 1915 MHz – 1920 MHz





High, Channel 2, 1930 MHz – 1935 MHz

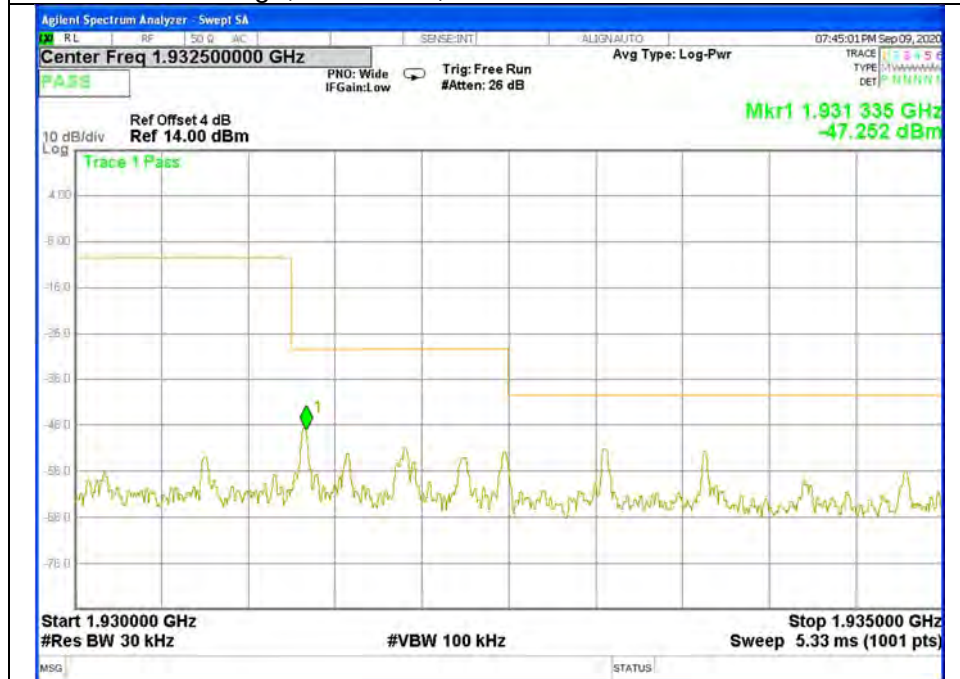


High, Channel 2, 1935 MHz – 20GHz






Low, Channel 0, 30MHz - 1915 MHz

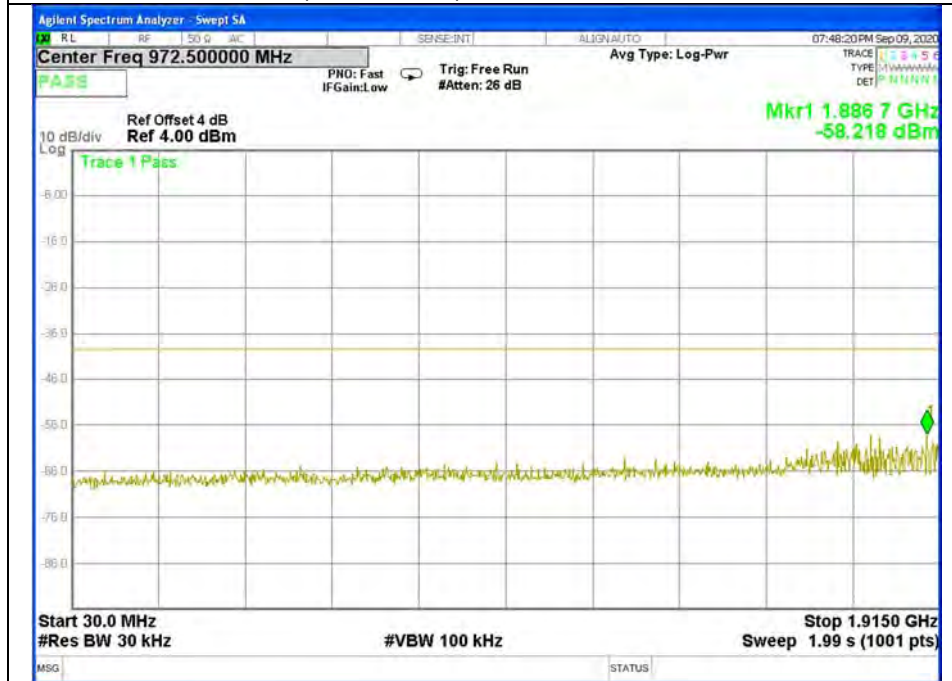

Low, Channel 0, 1915 MHz - 1920 MHz

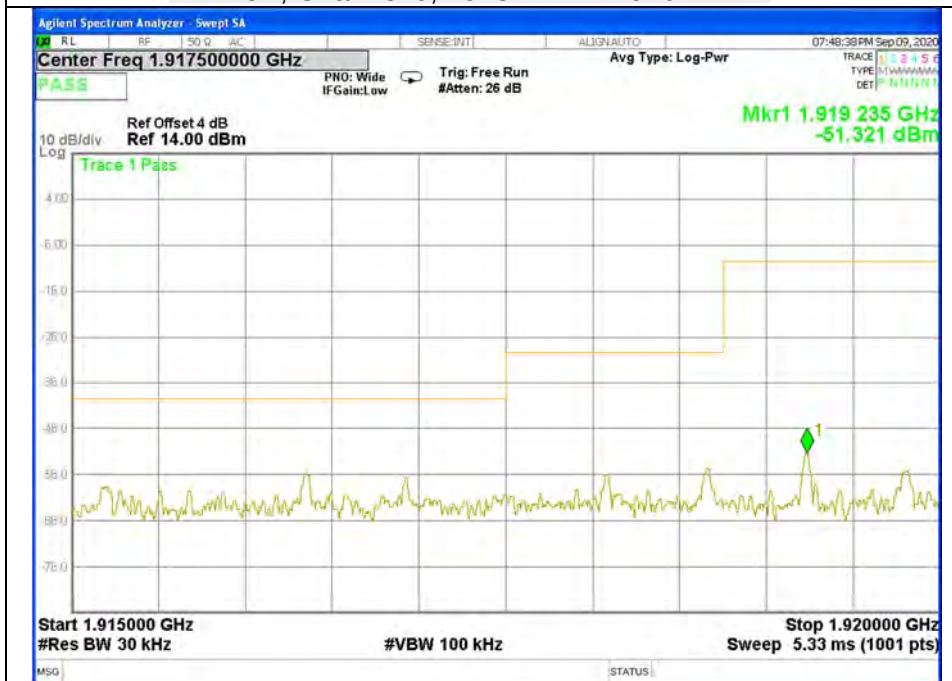




High, Channel 0, 1930 MHz – 1935 MHz




High, Channel 0, 1935 MHz – 20GHz

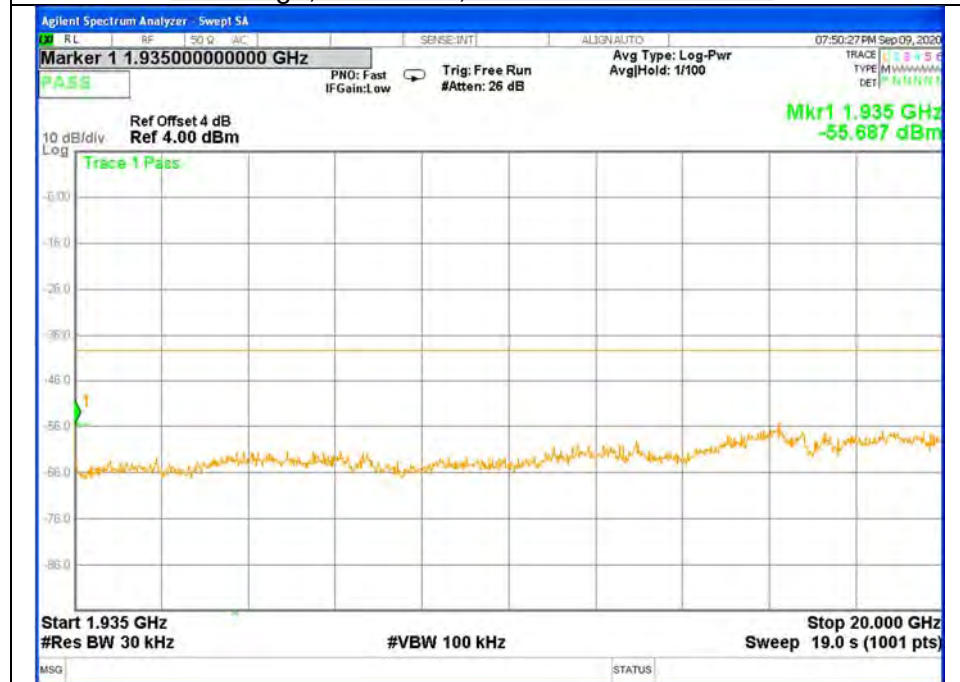




Antenna 2

Low, Channel 4, 30MHz - 1915 MHz

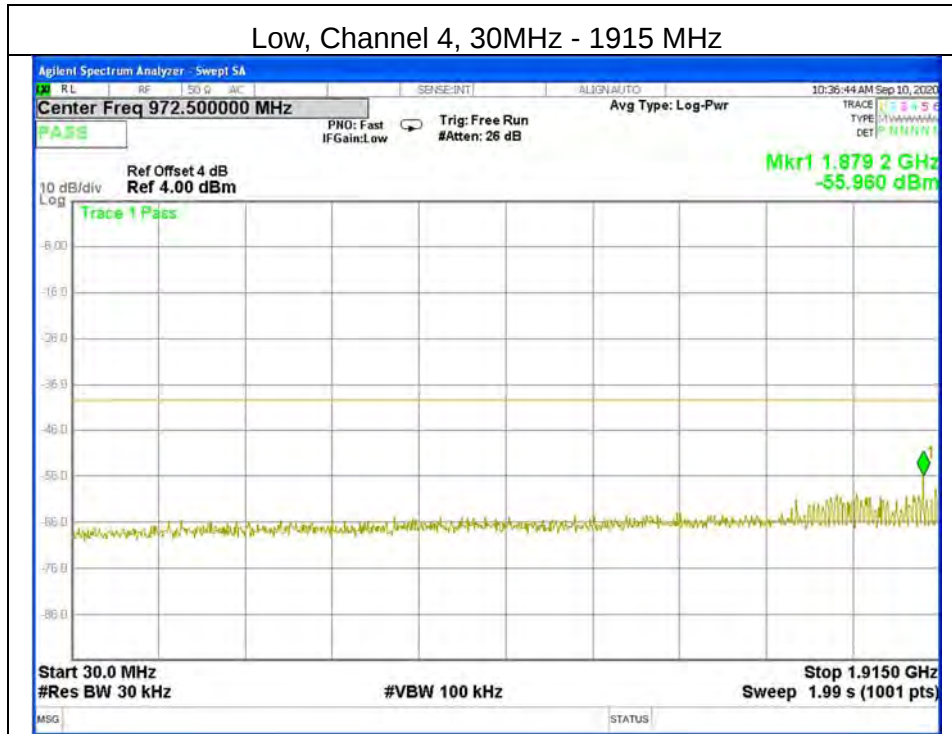

Low, Channel 4, 1915 MHz – 1920 MHz

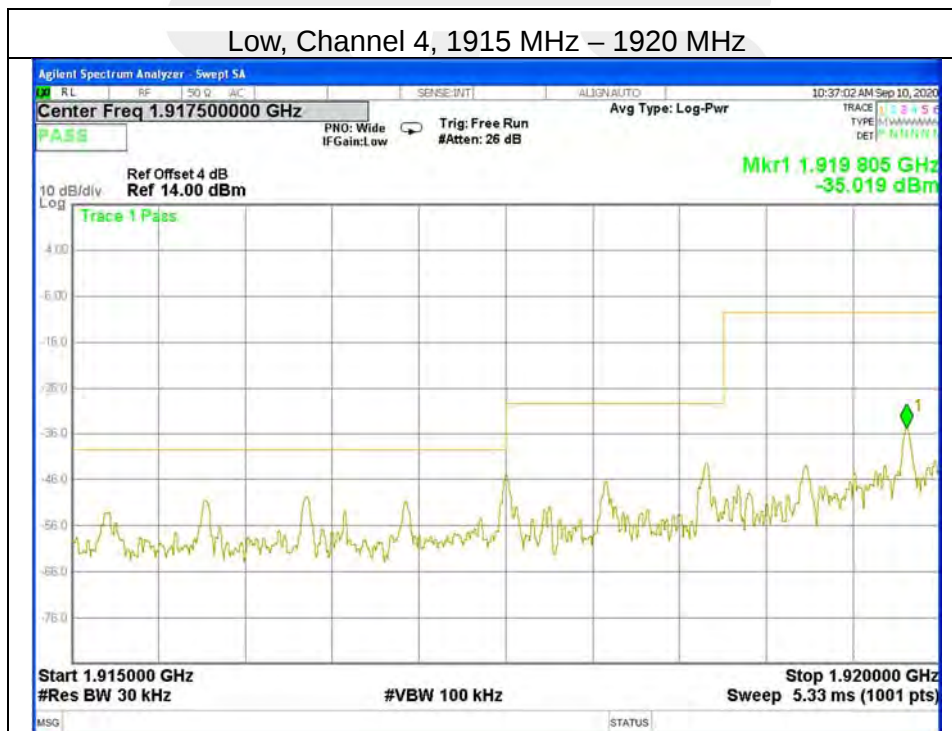



High, Channel 4, 1930 MHz – 1935 MHz




High, Channel 4, 1935 MHz – 20GHz






Low, Channel 2, 30MHz - 1915 MHz

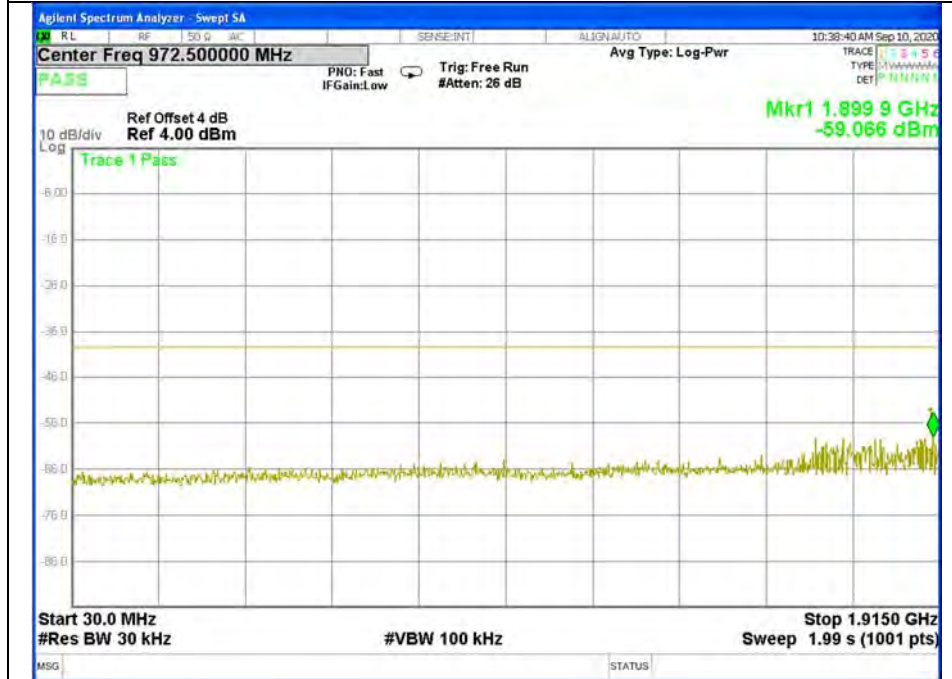


Low, Channel 2, 1915 MHz – 1920 MHz

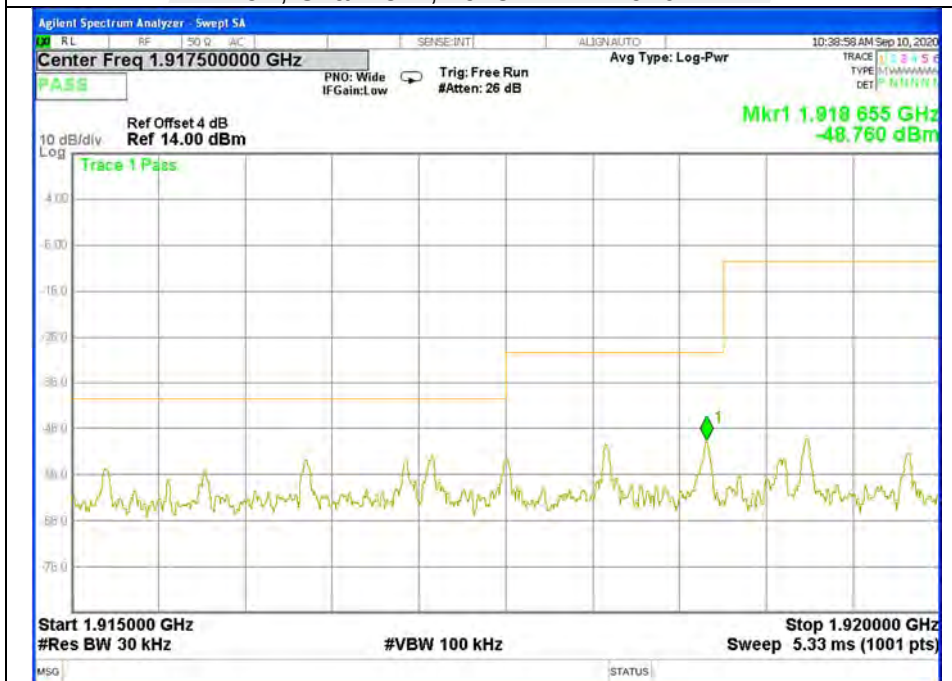




High, Channel 2, 1930 MHz – 1935 MHz

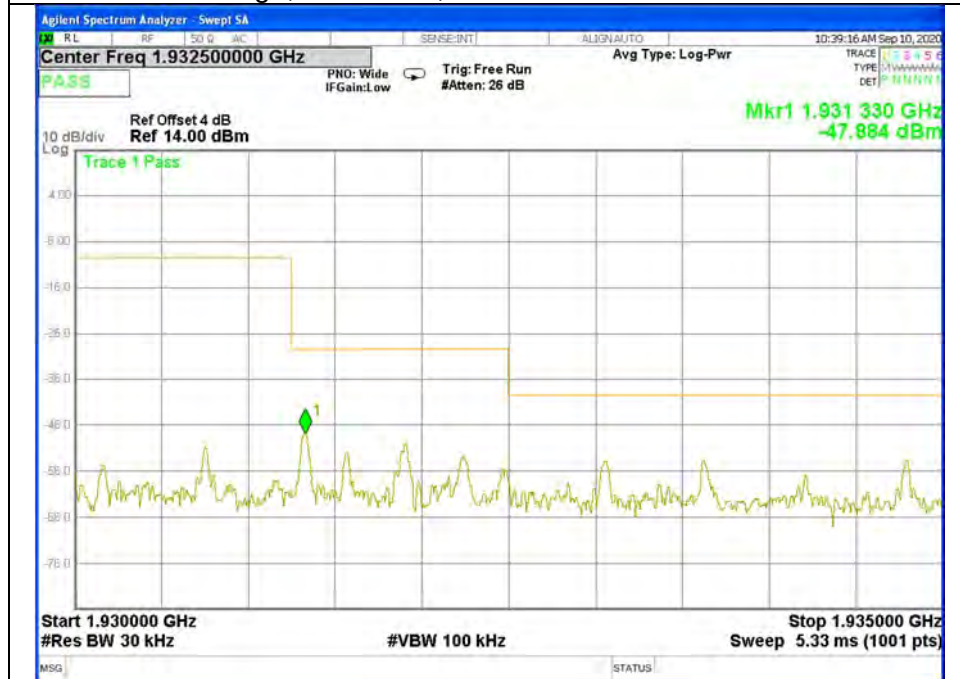


High, Channel 2, 1935 MHz – 20GHz

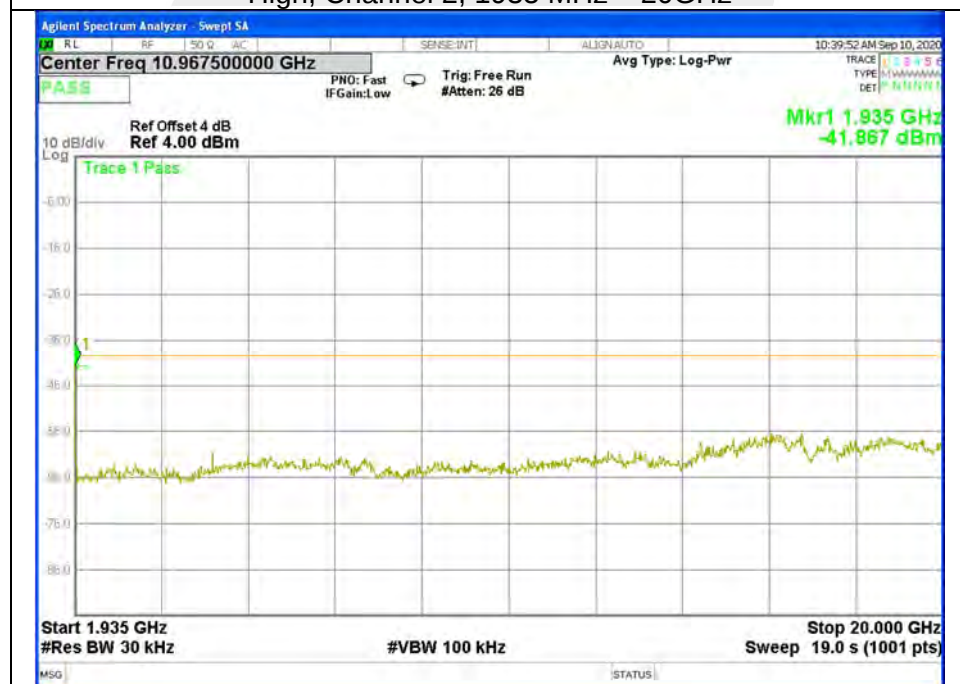



Low, Channel 0, 30MHz - 1915 MHz

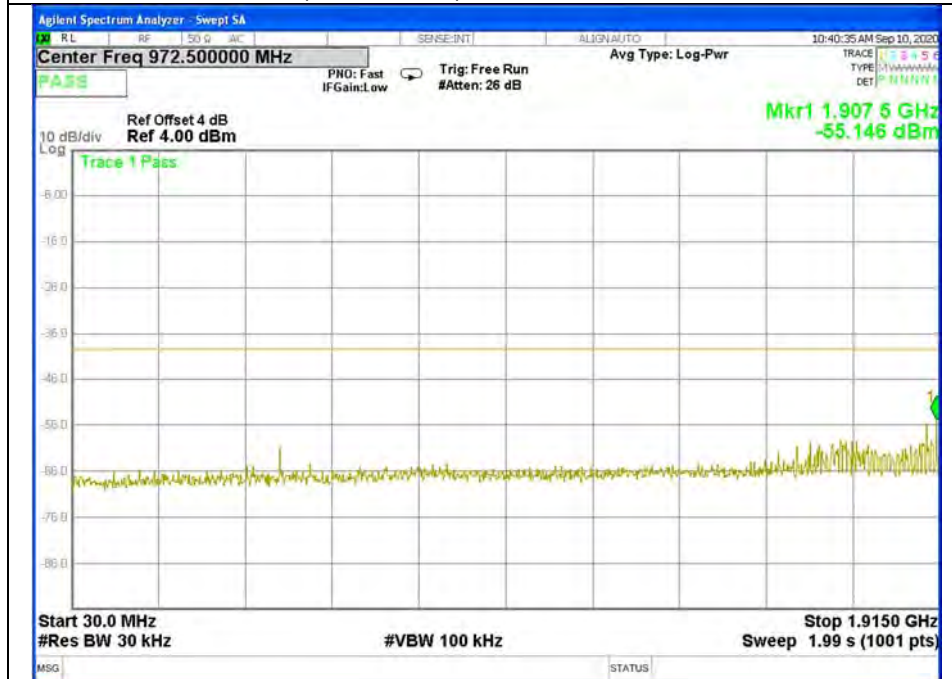


Low, Channel 0, 1915 MHz - 1920 MHz





High, Channel 0, 1930 MHz – 1935 MHz

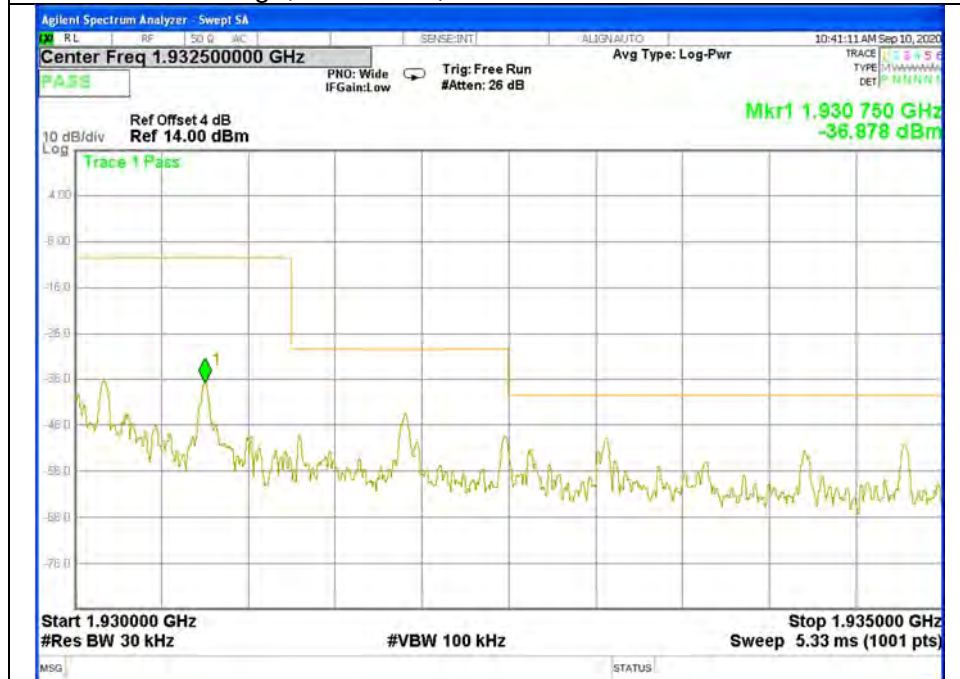

High, Channel 0, 1935 MHz – 20GHz







PP64Z

Antenna 1

Low, Channel 4, 30MHz - 1915 MHz

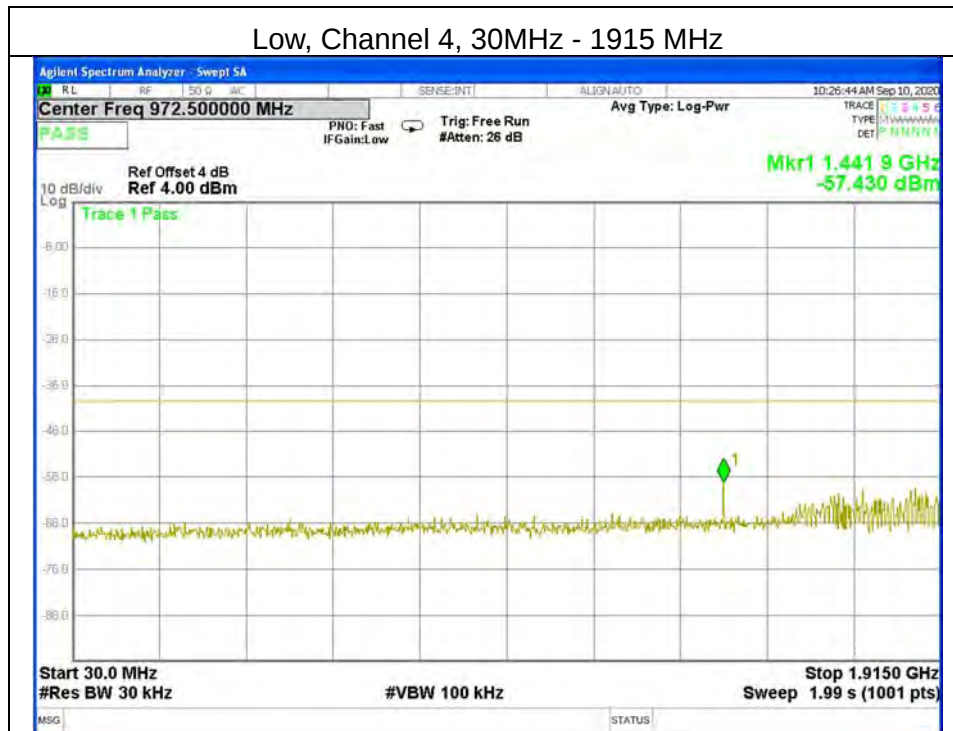


Low, Channel 4, 1915 MHz – 1920 MHz

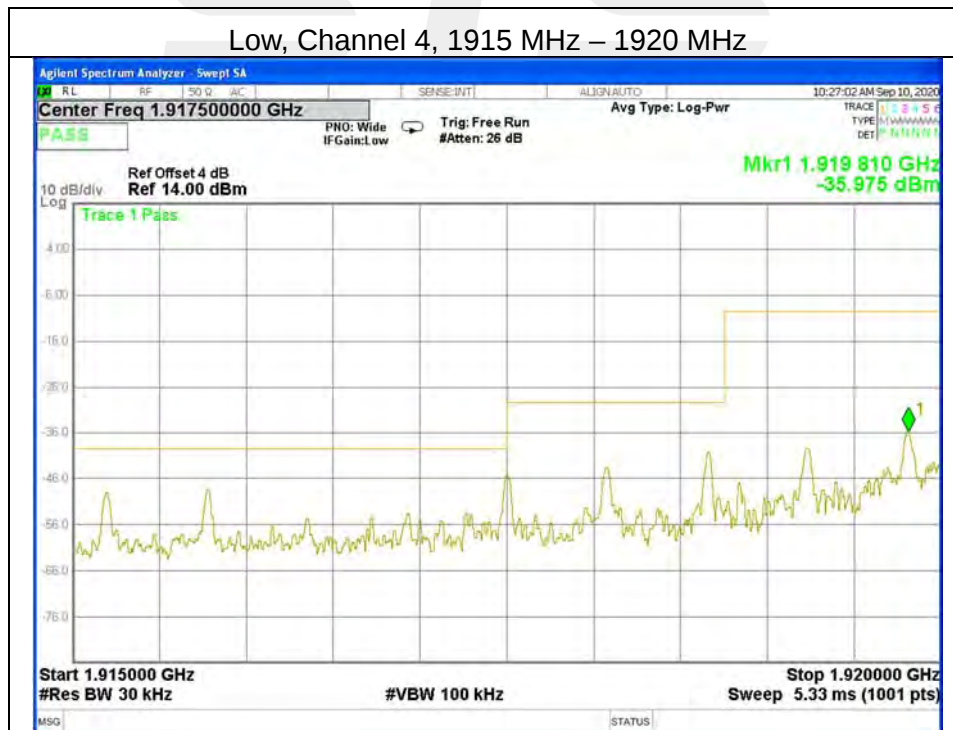



High, Channel 4, 1930 MHz – 1935 MHz

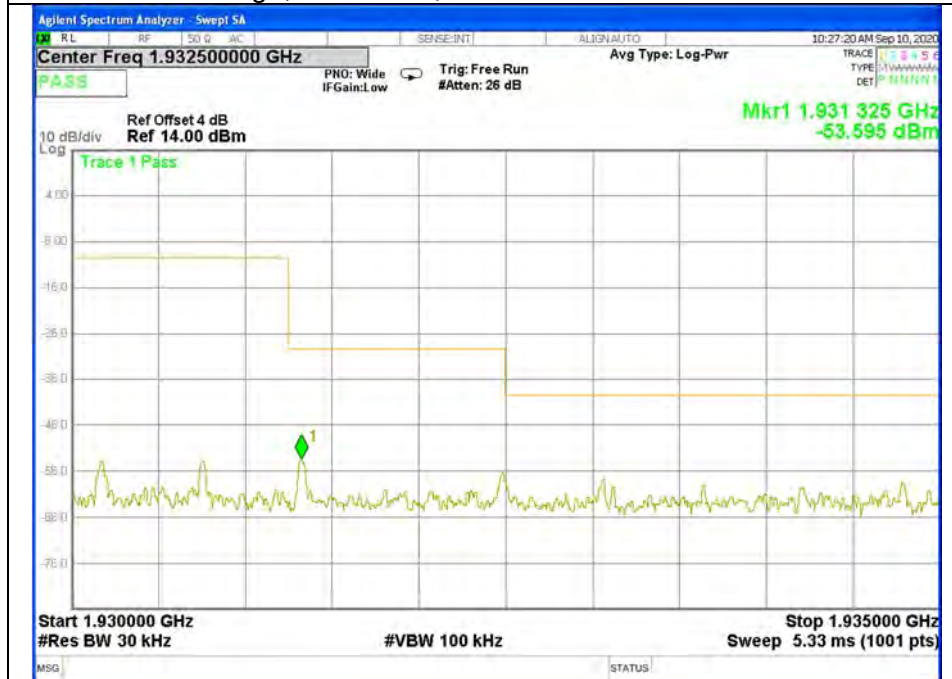


High, Channel 4, 1935 MHz – 20GHz






Low, Channel 2, 30MHz - 1915 MHz

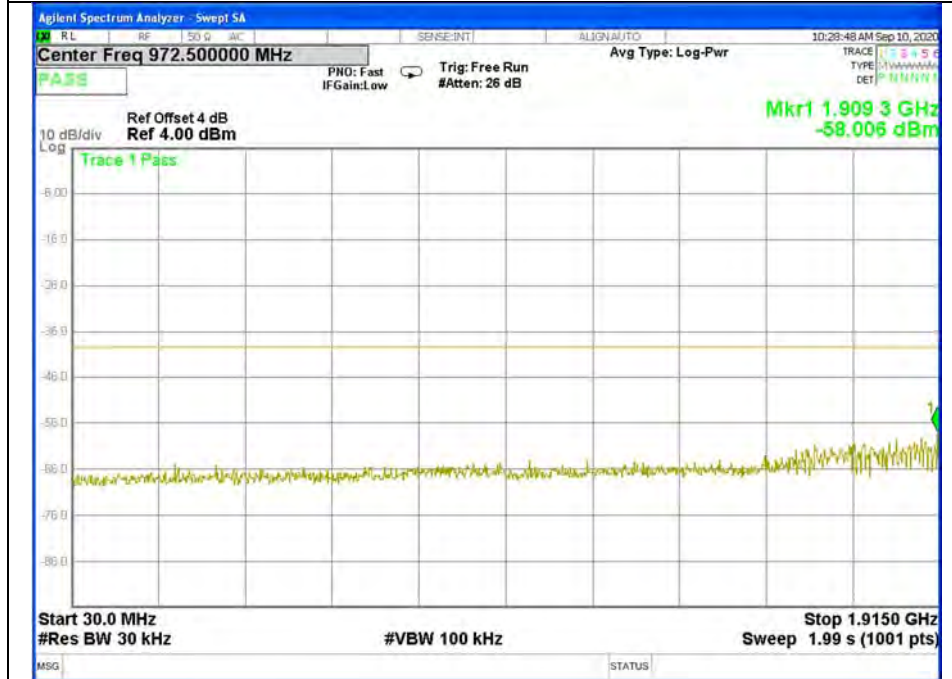

Low, Channel 2, 1915 MHz – 1920 MHz

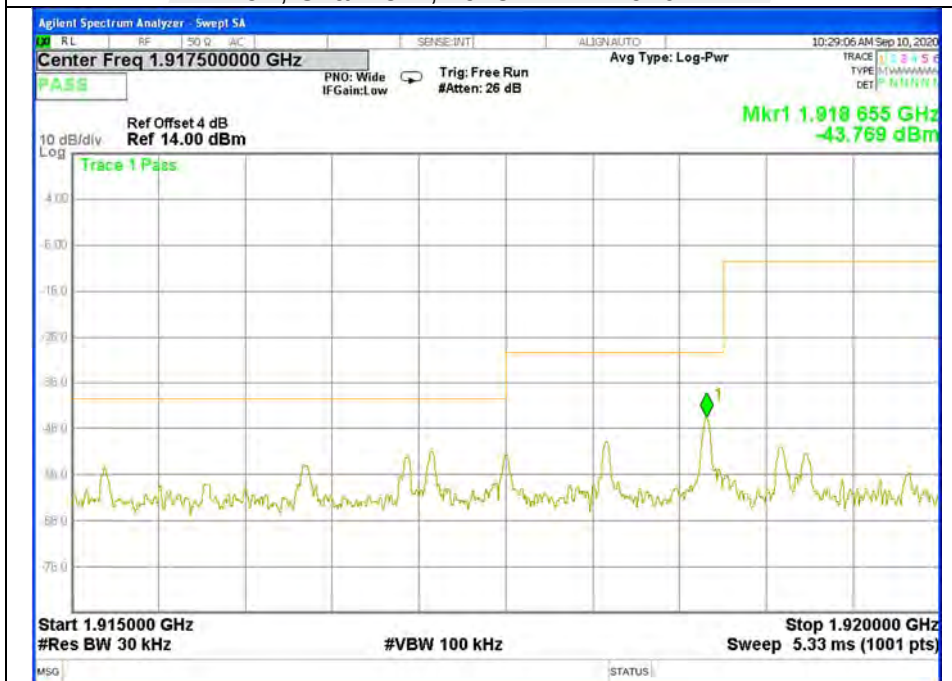




High, Channel 2, 1930 MHz – 1935 MHz




High, Channel 2, 1935 MHz – 20GHz

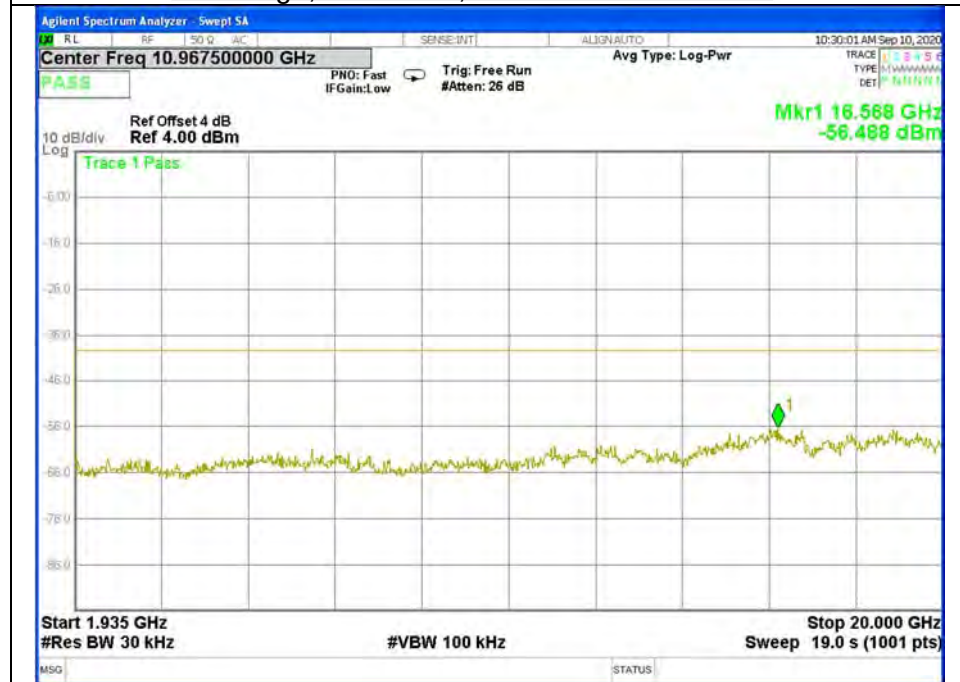



Low, Channel 0, 30MHz - 1915 MHz

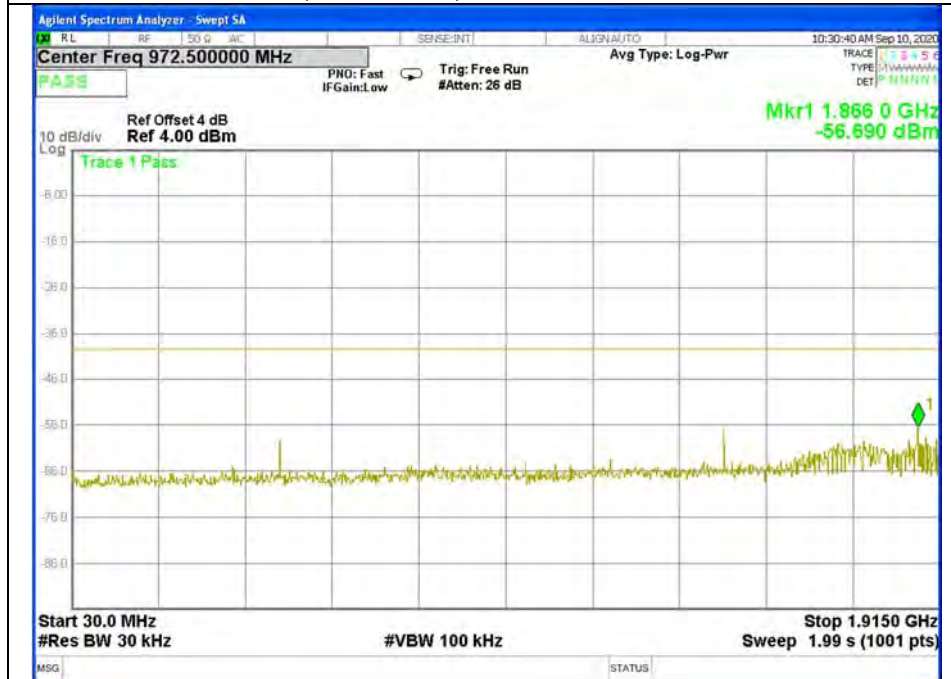

Low, Channel 0, 1915 MHz – 1920 MHz






High, Channel 0, 1930 MHz – 1935 MHz




High, Channel 0, 1935 MHz – 20GHz

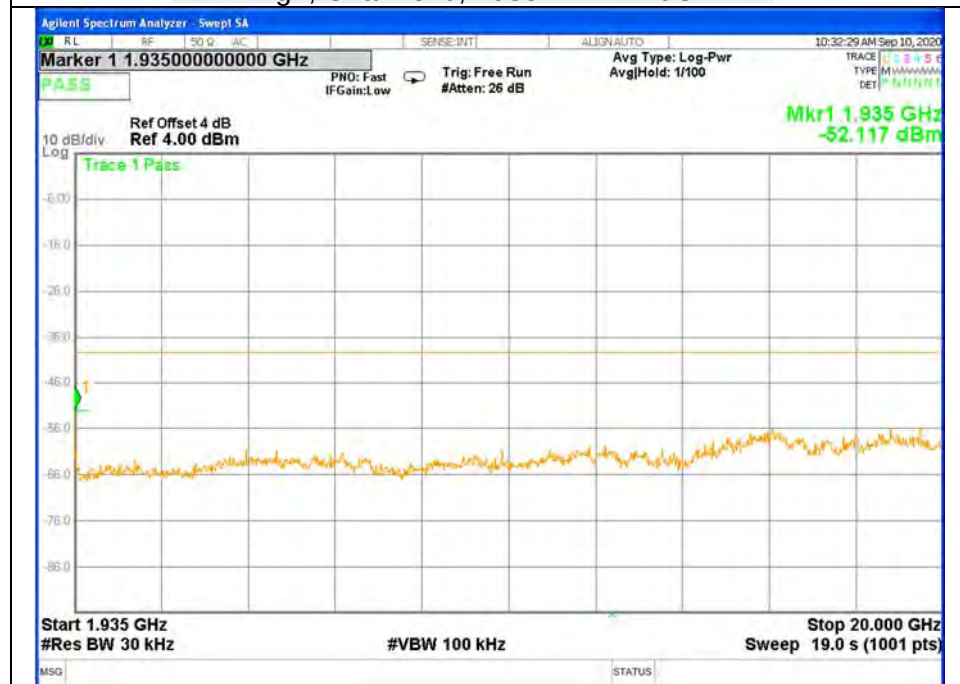




Antenna 2

Low, Channel 4, 30MHz - 1915 MHz

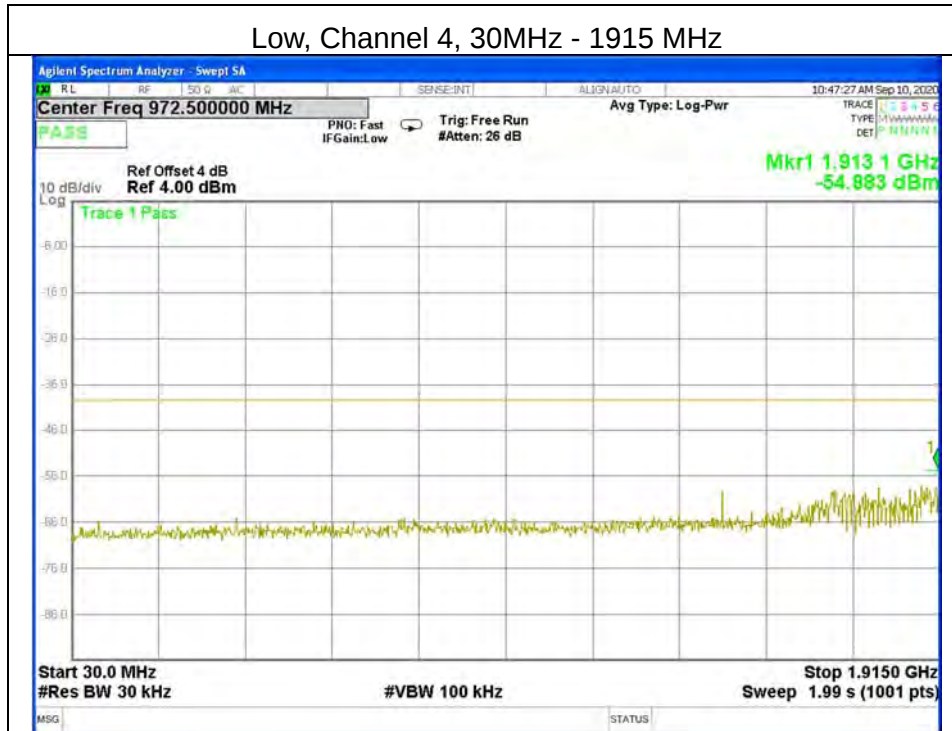

Low, Channel 4, 1915 MHz – 1920 MHz

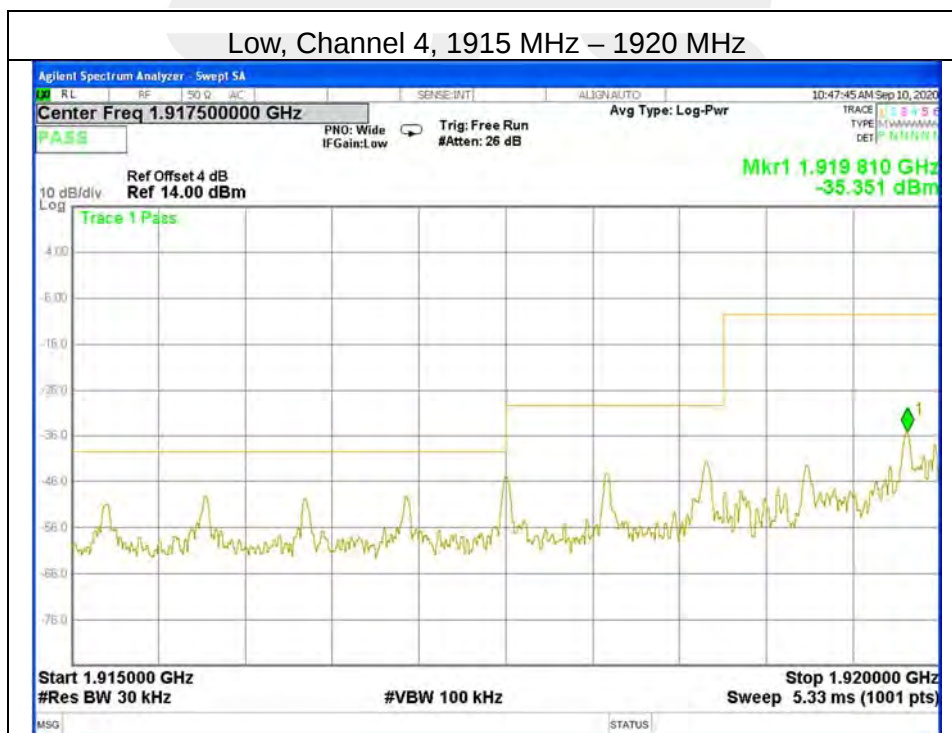



High, Channel 4, 1930 MHz – 1935 MHz




High, Channel 4, 1935 MHz – 20GHz






Low, Channel 2, 30MHz - 1915 MHz

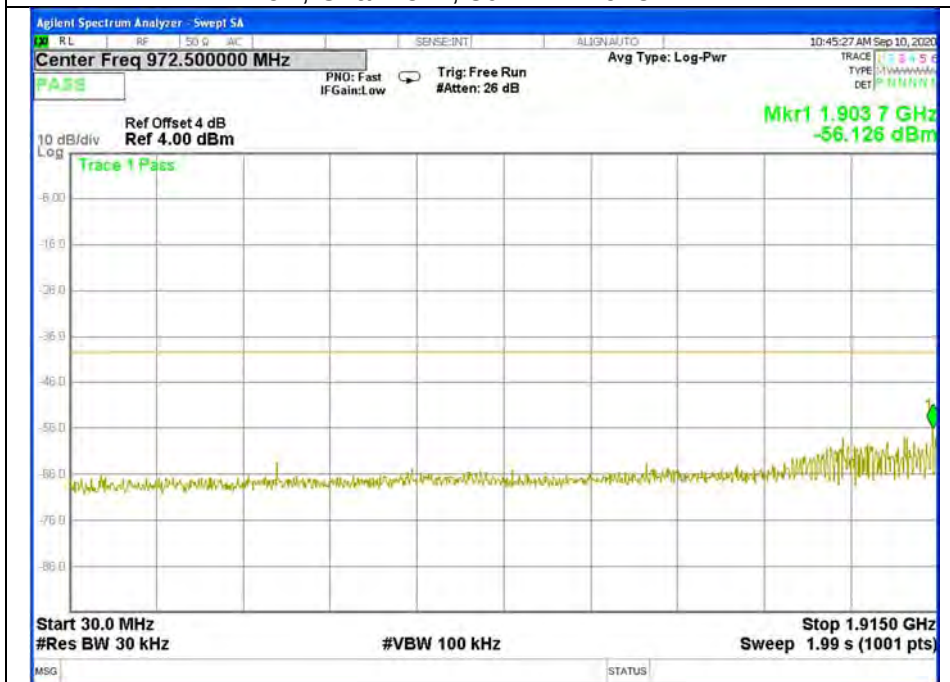

Low, Channel 2, 1915 MHz – 1920 MHz

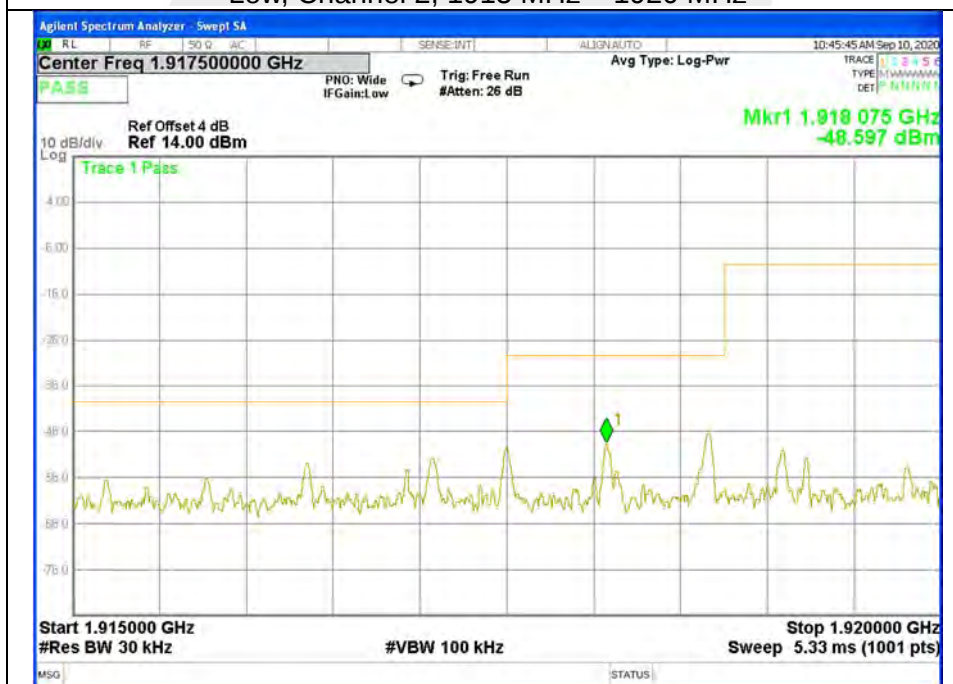




High, Channel 2, 1930 MHz – 1935 MHz




High, Channel 2, 1935 MHz – 20GHz

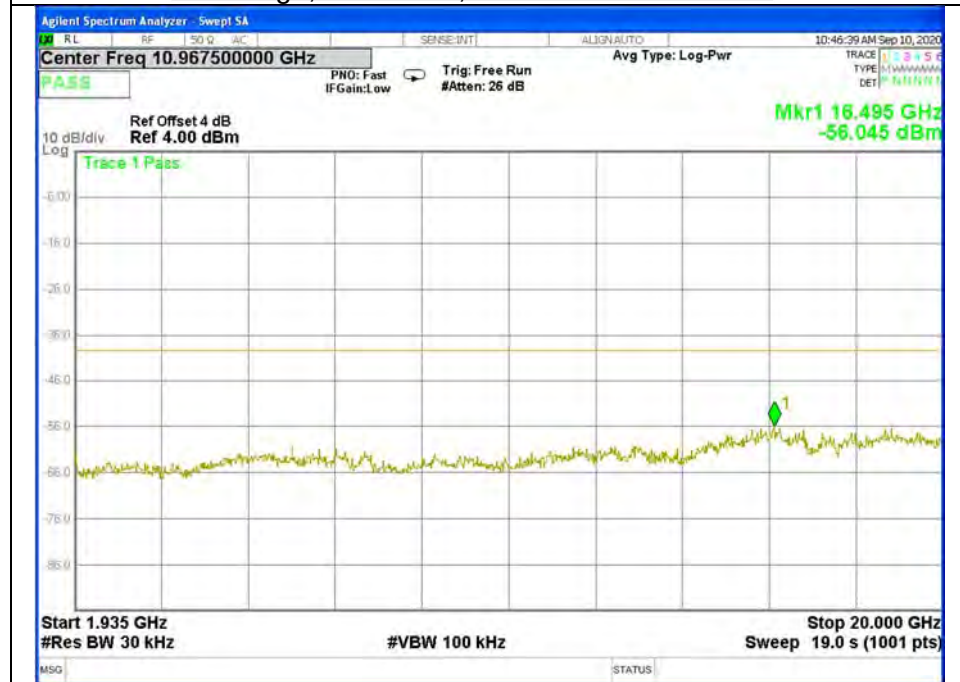




Low, Channel 0, 30MHz - 1915 MHz

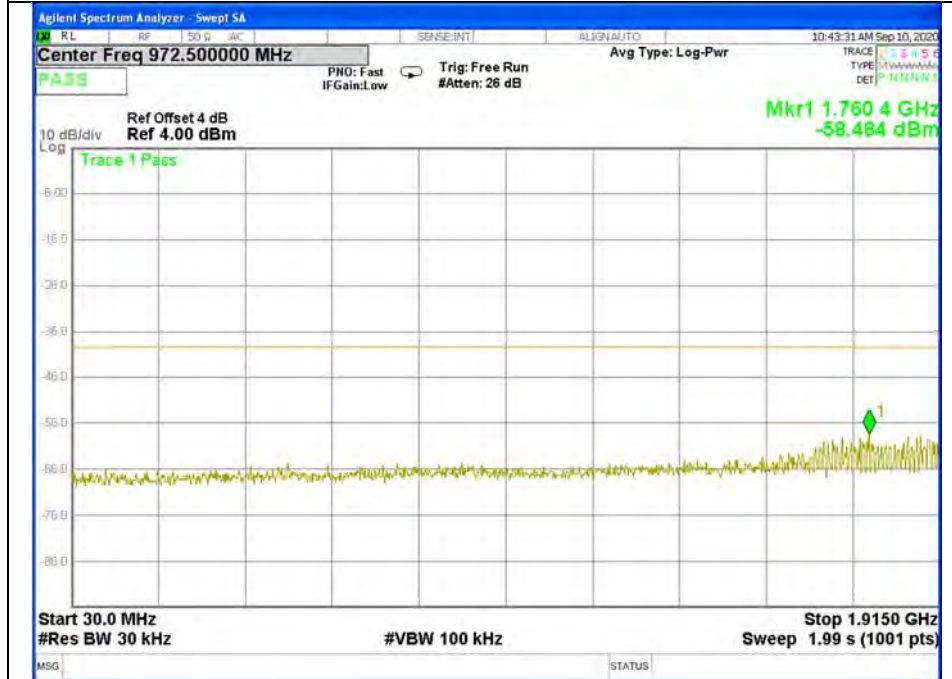

Low, Channel 0, 1915 MHz - 1920 MHz

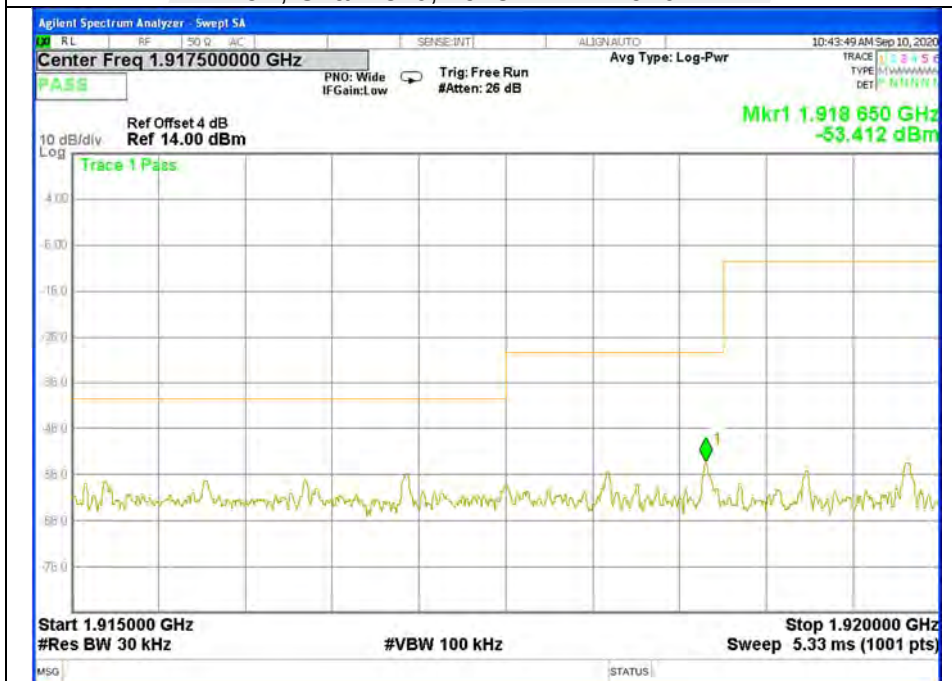




High, Channel 0, 1930 MHz – 1935 MHz



High, Channel 0, 1935 MHz – 20GHz

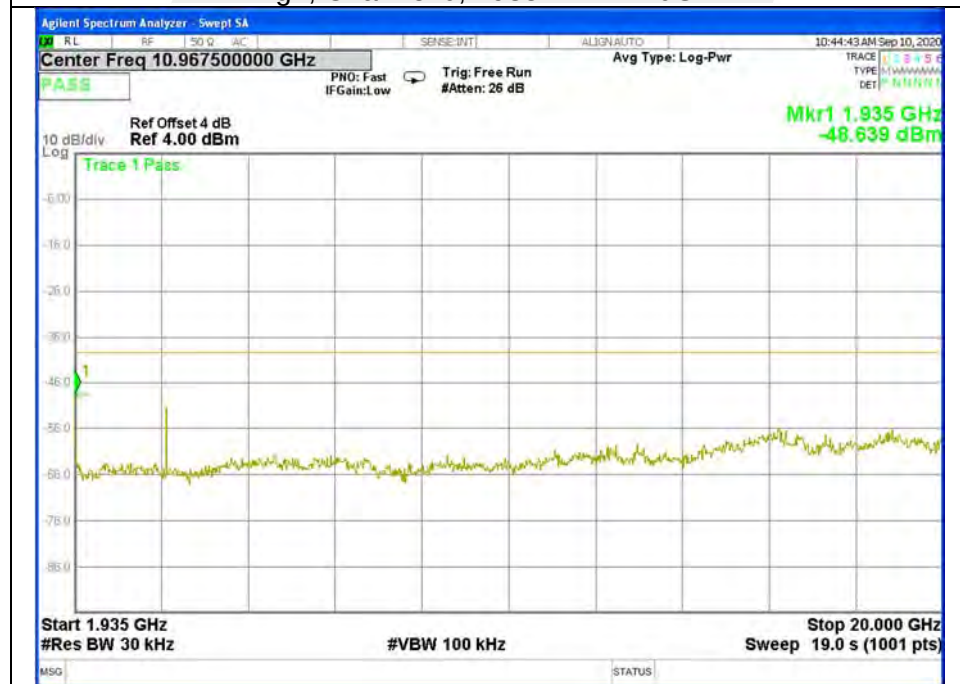



5.19 FRAME PERIOD

TEST CRITERIA

§15.323 (e) The frame period (a set of consecutive time slots in which the position of each time slot can be identified by reference to a synchronizing source) of an intentional radiator operating in these sub-bands shall be 20 milliseconds or 10 milliseconds/X where X is a positive whole number. Each device that implements time division for the purposes of maintaining a duplex connection on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 50 parts per million (ppm). Each device which further divides access in time in order to support multiple communication links on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 10 ppm.

Timing Jitter

§ 15.323 (e) Specific requirements for isochronous devices operating in the 1920–1930 MHz sub-band. The jitter (time-related, abrupt, spurious variations in the duration of the frame interval) introduced at the two ends of such a communication link shall not exceed 25 microseconds for any two consecutive transmissions. Transmissions shall be continuous in every time and spectrum window during the frame period defined for the device.

TEST LIMIT

Frame Period	20 or 10ms
Max Jitter	25 μ s
3 times St.Dev of Jitter	12.5 μ s

TEST SETUP

The test setup is shown in section 3.2 figure 2.

TEST PROCEDURE

The manufacturer supplies an attestation

TEST RESULTS

The Frame Repetition Stability is measured with the RF Test Platform for DECT. The Frame Repetition Stability is 3 times the standard deviation.

PP32Z
Antenna 1

Channel	Standard Deviation(ppm)	Frame Repetition	The limit of Frame Repetition Stability(ppm)	Verdict
Middle	0.9214	2.7642	± 10	Pass

Channel	Frame Period(ms)	Max Jitter(μ s)	3xStandard Deviation of Jitter(μ s)	Limit(μ s)		Verdict
				Max Jitter	3 times St.Dev.of Jitter	
Middle	10.0000	-0.5000	2.7642	25	12.5	Pass



Antenna 2

Channel	Standard Deviation(ppm)	Frame Repetition	The limit of Frame Repetition Stability(ppm)	Verdict
Middle	0.2511	0.7533	±10	Pass

Channel	Frame Period(ms)	Max Jitter(μs)	3xStandard Deviation of Jitter(μs)	Limit(μs)		Verdict
				Max Jitter	3 times St.Dev.of Jitter	
Middle	10.0000	-0.5000	0.7533	25	12.5	Pass

PP64Z
Antenna 1

Channel	Standard Deviation(ppm)	Frame Repetition	The limit of Frame Repetition Stability(ppm)	Verdict
Middle	0.8944	2.6832	±10	Pass

Channel	Frame Period(ms)	Max Jitter(μs)	3xStandard Deviation of Jitter(μs)	Limit(μs)		Verdict
				Max Jitter	3 times St.Dev.of Jitter	
Middle	10.0000	-0.5000	2.6832	25	12.5	Pass

Antenna 2

Channel	Standard Deviation(ppm)	Frame Repetition	The limit of Frame Repetition Stability(ppm)	Verdict
Middle	0.4212	1.2636	±10	Pass

Channel	Frame Period(ms)	Max Jitter(μs)	3xStandard Deviation of Jitter(μs)	Limit(μs)		Verdict
				Max Jitter	3 times St.Dev.of Jitter	
Middle	10.0000	-0.5000	1.2636	25	12.5	Pass

Max Jitter= $(1/(\text{Frame Period} + \text{Pk-Pk})/2) - (1/\text{Frame Period})$. When Pk-Pk and Frame period are in Hz.

3x St.Dev. Jitter $3 \times (1/(\text{Frame Period} + \text{St. Dev})) - (1/\text{St.Dev}) \times 10^6$



5.20 FREQUENCY STABILITY

TEST CRITERIA

§15.323 (f) The frequency stability of the carrier frequency of the intentional radiator shall be maintained within ± 10 ppm over 1hour or the interval between channel access monitoring, whichever is shorter. The frequency stability shall be maintained over a temperature variation of -20° to $+50^{\circ}$ C at normal supply voltage and over a variation in the primary supply voltage of 85% to 115% of the rated supply voltage at a temperature of 200° C. For equipment that is capable only of operating from a battery, the frequency stability tests shall be performed using a new battery without any further requirement to vary supply voltage.

TEST PROCEDURE

The EUT was placed in the Environmental Chamber and support equipment are outside the chamber on a table. A CW signal was injected into the EUT at the appropriate RF level. The frequency counter option on the Spectrum Analyzer was used to measure frequency deviations.

The frequency drift was investigated for every 10° C increment until the unit is stabilized then recorded the reading in tabular format with the temperature range of -20° to $+50^{\circ}$ C.

Voltage supplied to EUT is DC 3.8V reference temperature was done at 20° C. The voltage was varied by $\pm 15\%$ of nominal

TEST SETUP

The test setup is shown in section 3.2 figure 1.

TEST RESULTS

The EUT was compliant with this requirement

PP32Z
Antenna 1

(Low Channel)					
Reference Frequency (MHz)	Voltage (V)	Temperature ($^{\circ}$ C)	Frequency (MHz)	Deviation (ppm)	Limit (ppm)
1921.536	3.8	50	1921.52369	6.41	± 10
		40	1921.52485	5.80	
		30	1921.52730	4.53	
		20	1921.53653	-0.28	
		10	1921.53614	-0.07	
		0	1921.53659	-0.31	
		-10	1921.54776	-6.12	
		-20	1921.54351	-3.91	
	3.23	20	1921.54476	-4.56	
	4.37	20	1921.54935	-6.95	



(Mid Channel)					
Reference Frequency (MHz)	Voltage (V)	Temperature (°C)	Frequency (MHz)	Deviation (ppm)	Limit (ppm)
1924.992	3.8	50	1924.99563	-1.89	±10
		40	1924.99641	-2.29	
		30	1924.99833	-3.29	
		20	1925.00024	-4.28	
		10	1924.99854	-3.40	
		0	1925.00139	-4.88	
		-10	1924.98535	3.45	
		-20	1924.98727	2.46	
	3.23	20	1924.98344	4.45	
	4.37	20	1924.98642	2.90	

(High Channel)					
Reference Frequency (MHz)	Voltage (V)	Temperature (°C)	Frequency (MHz)	Deviation (ppm)	Limit (ppm)
1928.448	3.8	50	1928.44333	2.42	±10
		40	1928.44252	2.84	
		30	1928.44442	1.86	
		20	1928.44213	3.04	
		10	1928.44913	-0.59	
		0	1928.44734	0.34	
		-10	1928.44589	1.09	
		-20	1928.45395	-3.09	
	3.23	20	1928.45372	-2.97	
	4.37	20	1928.45350	-2.85	



Antenna 2

(Low Channel)					
Reference Frequency (MHz)	Voltage (V)	Temperature (°C)	Frequency (MHz)	Deviation (ppm)	Limit (ppm)
1921.536	3.8	50	1921.53039	2.92	±10
		40	1921.52318	6.67	
		30	1921.52465	5.91	
		20	1921.53643	-0.22	
		10	1921.53733	-0.69	
		0	1921.53851	-1.31	
		-10	1921.54730	-5.88	
		-20	1921.54847	-6.49	
	3.23	20	1921.54280	-3.54	
	4.37	20	1921.54834	-6.42	

(Mid Channel)					
Reference Frequency (MHz)	Voltage (V)	Temperature (°C)	Frequency (MHz)	Deviation (ppm)	Limit (ppm)
1924.992	3.8	50	1924.99603	-2.09	±10
		40	1924.99939	-3.84	
		30	1924.99602	-2.09	
		20	1925.00043	-4.38	
		10	1925.00408	-6.28	
		0	1925.00103	-4.69	
		-10	1924.98469	3.80	
		-20	1924.98603	3.10	
	3.23	20	1924.98338	4.48	
	4.37	20	1924.98389	4.21	



(High Channel)					
Reference Frequency (MHz)	Voltage (V)	Temperature (°C)	Frequency (MHz)	Deviation (ppm)	Limit (ppm)
1928.448	3.8	50	1928.44020	4.04	±10
		40	1928.44304	2.57	
		30	1928.44165	3.29	
		20	1928.44457	1.78	
		10	1928.44733	0.35	
		0	1928.44586	1.11	
		-10	1928.44893	-0.48	
		-20	1928.45154	-1.84	
	3.23	20	1928.45332	-2.76	
	4.37	20	1928.45119	-1.65	

PP64Z
Antenna 1

(Low Channel)					
Reference Frequency (MHz)	Voltage (V)	Temperature (°C)	Frequency (MHz)	Deviation (ppm)	Limit (ppm)
1921.536	3.8	50	1921.52488	5.79	±10
		40	1921.52285	6.84	
		30	1921.52288	6.83	
		20	1921.53609	-0.05	
		10	1921.53665	-0.34	
		0	1921.53464	0.71	
		-10	1921.54633	-5.38	
		-20	1921.54585	-5.13	
	3.23	20	1921.54553	-4.96	
	4.37	20	1921.54359	-3.95	

(Mid Channel)					
Reference Frequency (MHz)	Voltage (V)	Temperature (°C)	Frequency (MHz)	Deviation (ppm)	Limit (ppm)
1924.992	3.8	50	1925.00292	-5.67	±10
		40	1924.99963	-3.96	
		30	1925.00034	-4.33	
		20	1925.00153	-4.95	
		10	1925.00089	-4.62	
		0	1925.00100	-4.68	
		-10	1924.98524	3.51	
		-20	1924.98675	2.73	
	3.23	20	1924.98688	2.66	
	4.37	20	1924.98624	2.99	



(High Channel)					
Reference Frequency (MHz)	Voltage (V)	Temperature (°C)	Frequency (MHz)	Deviation (ppm)	Limit (ppm)
1928.448	3.8	50	1928.44116	3.55	±10
		40	1928.43785	5.26	
		30	1928.44174	3.25	
		20	1928.44396	2.09	
		10	1928.44888	-0.46	
		0	1928.44603	1.02	
		-10	1928.44845	-0.23	
		-20	1928.45190	-2.02	
	3.23	20	1928.44978	-0.92	
	4.37	20	1928.45183	-1.99	



Antenna 2

(Low Channel)					
Reference Frequency (MHz)	Voltage (V)	Temperature (°C)	Frequency (MHz)	Deviation (ppm)	Limit (ppm)
1921.536	3.8	50	1921.53027	2.98	±10
		40	1921.53040	2.91	
		30	1921.52531	5.56	
		20	1921.53793	-1.00	
		10	1921.53713	-0.59	
		0	1921.53591	0.05	
		-10	1921.54788	-6.18	
		-20	1921.54483	-4.60	
	3.23	20	1921.54577	-5.08	
	4.37	20	1921.54936	-6.95	

(Mid Channel)					
Reference Frequency (MHz)	Voltage (V)	Temperature (°C)	Frequency (MHz)	Deviation (ppm)	Limit (ppm)
1924.992	3.8	50	1924.99777	-3.00	±10
		40	1925.00017	-4.24	
		30	1924.99605	-2.10	
		20	1925.00010	-4.21	
		10	1925.00013	-4.22	
		0	1924.99791	-3.07	
		-10	1924.98531	3.48	
		-20	1924.98564	3.30	
	3.23	20	1924.98595	3.14	
	4.37	20	1924.98795	2.10	



(High Channel)					
Reference Frequency (MHz)	Voltage (V)	Temperature (°C)	Frequency (MHz)	Deviation (ppm)	Limit (ppm)
1928.448	3.8	50	1928.44167	3.28	±10
		40	1928.44012	4.09	
		30	1928.44155	3.34	
		20	1928.44528	1.41	
		10	1928.45062	-1.36	
		0	1928.45131	-1.72	
		-10	1928.44795	0.03	
		-20	1928.45280	-2.49	
	3.23	20	1928.45206	-2.11	
	4.37	20	1928.45165	-1.89	



5.21 CONDUCTED EMISSION MEASUREMENT

POWER LINE CONDUCTED EMISSION LIMITS

Operating frequency band. In case the emission fall within the restricted band specified on Part 207(a) limit in the table below has to be followed.

FREQUENCY (MHz)	Conducted Emission limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

TEST PROCEDURE

- The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

TEST SETUP

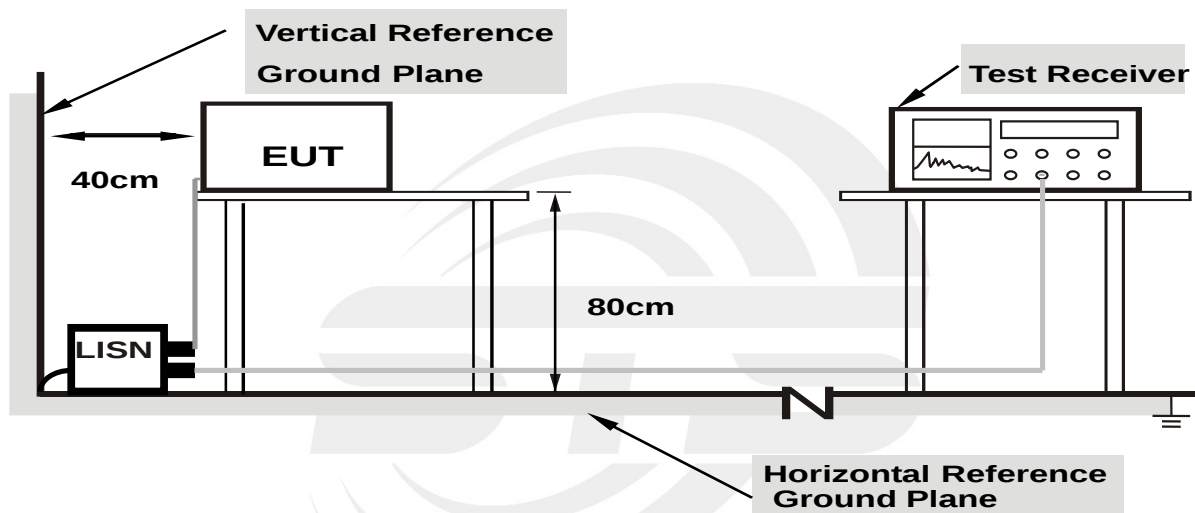

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes


EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



TEST RESULTS


Temperature:	27.7(C)	Relative Humidity:	66%RH
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	TX Mode		

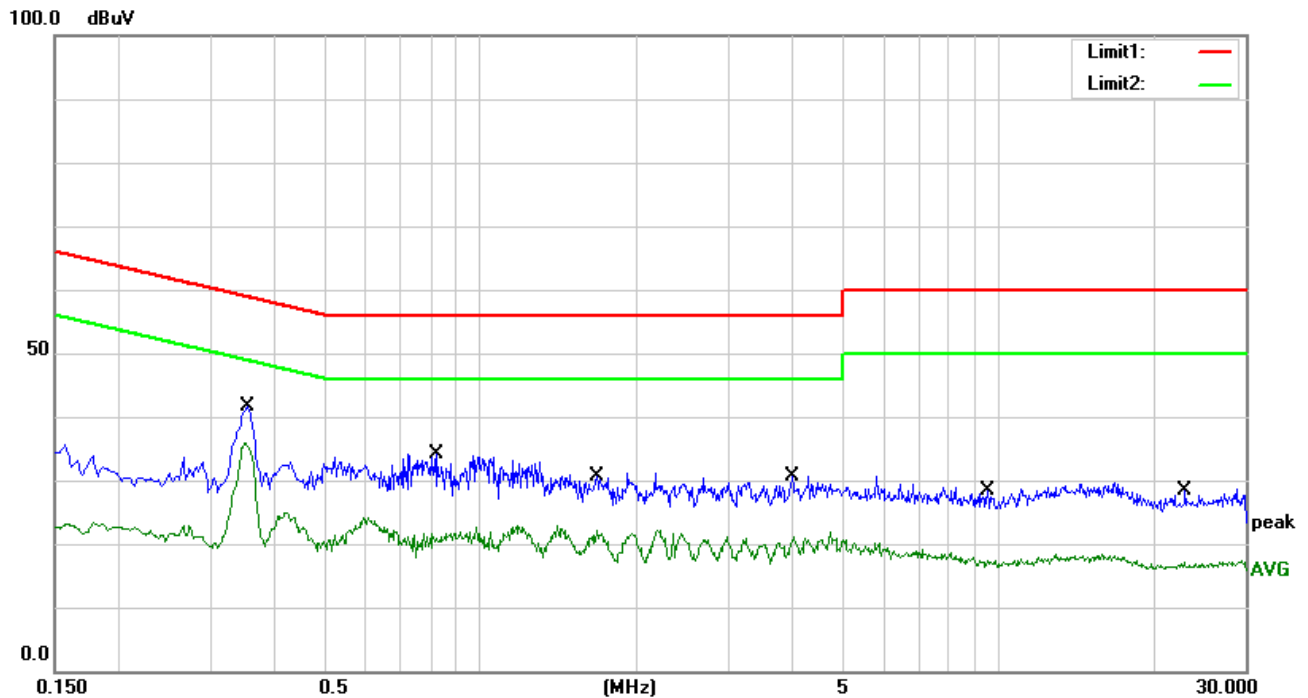

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.3540	20.99	20.63	41.62	58.87	-17.25	QP
2	0.3540	15.16	20.63	35.79	48.87	-13.08	AVG
3	0.8220	13.92	20.23	34.15	56.00	-21.85	QP
4	0.8220	0.89	20.23	21.12	46.00	-24.88	AVG
5	1.6740	10.41	20.16	30.57	56.00	-25.43	QP
6	1.6740	2.02	20.16	22.18	46.00	-23.82	AVG
7	3.9980	10.60	20.06	30.66	56.00	-25.34	QP
8	3.9980	1.00	20.06	21.06	46.00	-24.94	AVG
9	9.5140	8.38	19.87	28.25	60.00	-31.75	QP
10	9.5140	-2.52	19.87	17.35	50.00	-32.65	AVG
11	23.0020	7.60	20.67	28.27	60.00	-31.73	QP
12	23.0020	-3.54	20.67	17.13	50.00	-32.87	AVG



Temperature:	27.7(C)	Relative Humidity:	66%RH
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	TX Mode		

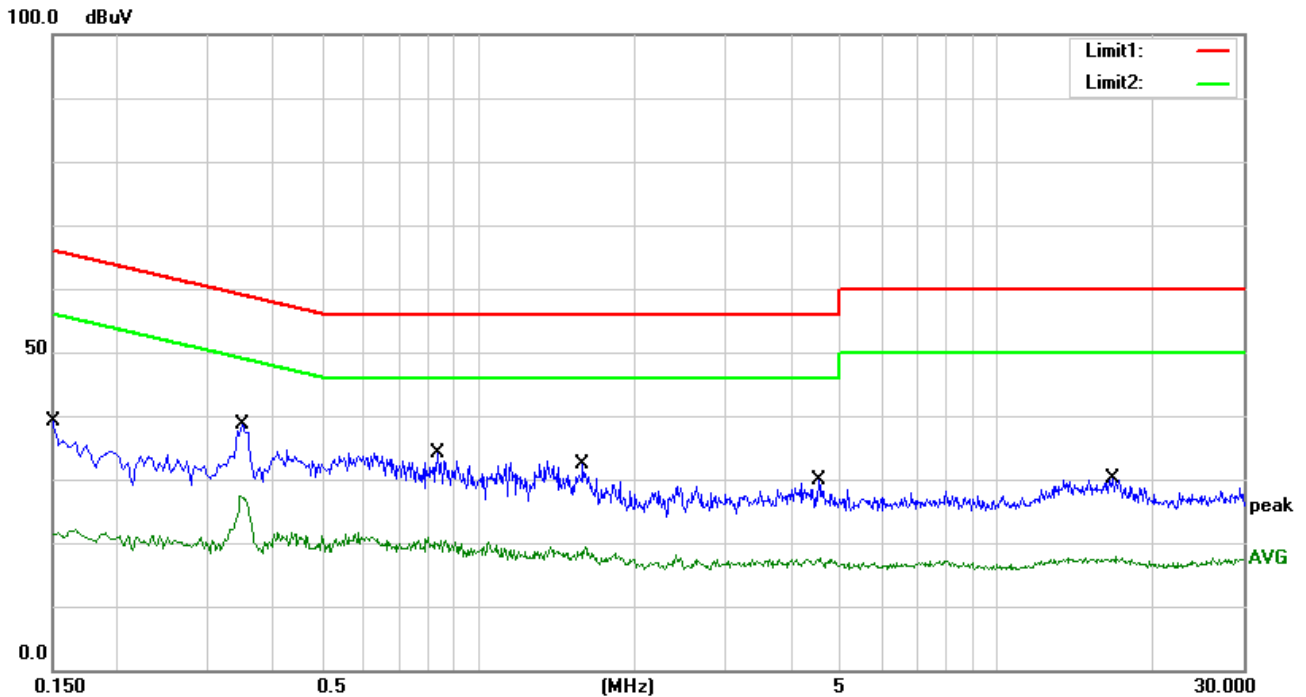

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1500	18.82	20.19	39.01	66.00	-26.99	QP
2	0.1500	1.36	20.19	21.55	56.00	-34.45	AVG
3	0.3500	18.08	20.64	38.72	58.96	-20.24	QP
4	0.3500	6.75	20.64	27.39	48.96	-21.57	AVG
5	0.8340	13.85	20.23	34.08	56.00	-21.92	QP
6	0.8340	0.55	20.23	20.78	46.00	-25.22	AVG
7	1.5900	12.28	20.15	32.43	56.00	-23.57	QP
8	1.5900	-0.73	20.15	19.42	46.00	-26.58	AVG
9	4.5380	9.81	20.04	29.85	56.00	-26.15	QP
10	4.5380	-2.47	20.04	17.57	46.00	-28.43	AVG
11	16.7700	9.93	20.27	30.20	60.00	-29.80	QP
12	16.7700	-2.41	20.27	17.86	50.00	-32.14	AVG



5.22 RADIATED SPURIOUS EMISSION

RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a) limit in the table and according to ANSI C63.10-2013 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (Frequency Range 9kHz-1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 3 MHz

Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP




TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meters(above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m(above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarizations of the Antenna 1re set to make the measurement
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.


Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

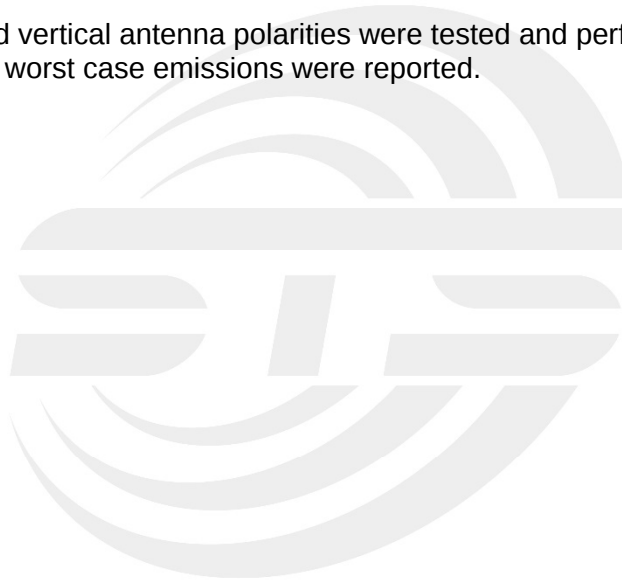


TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

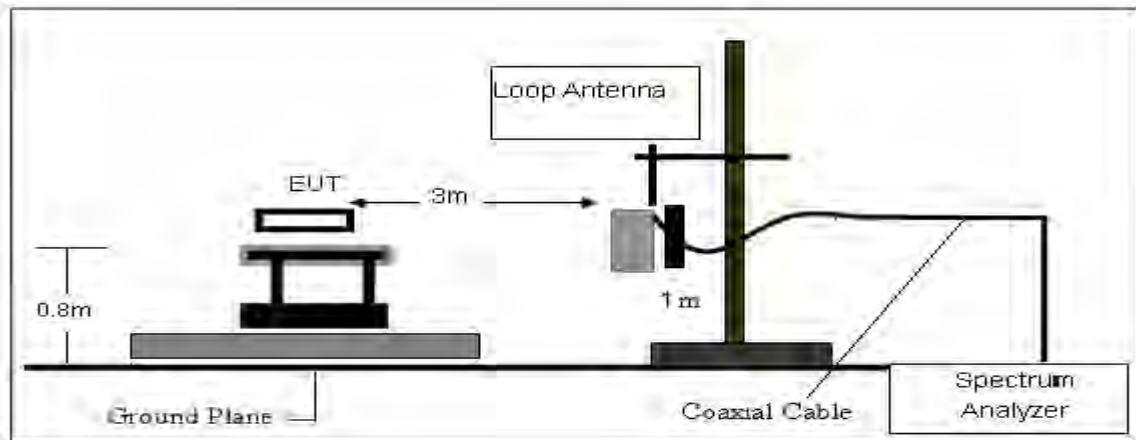

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

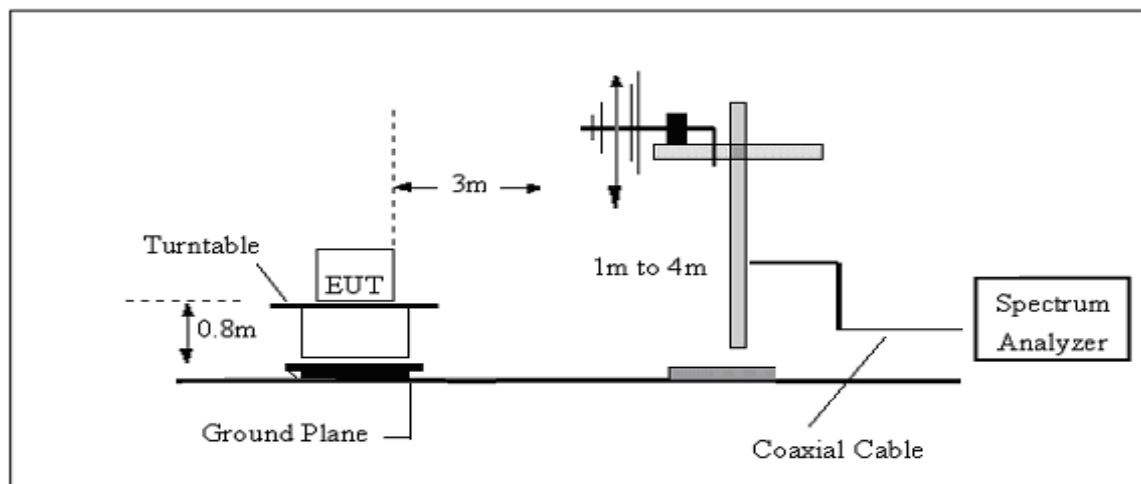

(C) Radiated Emission Test-Up Frequency Above 1GHz

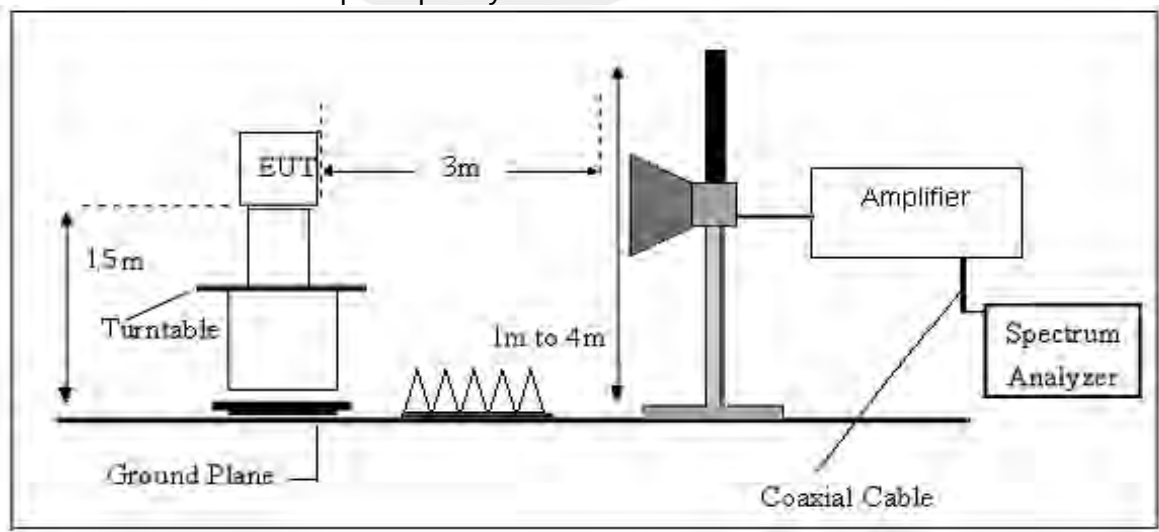

EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

Margin=PL-PK L or AL- AV L; Margin only shown the worst case.

Where

PR = Peak Reading

AR = Average Reading

PL = Peak Level

AL = Average Level

AF = Antenna Factor

PK L = Peak Limit

AV L = AV Limit

For example


Frequency	PR	AR	AF	PL	AL	PK L	AV L	Margin
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dB)
2178	40.23	30.31	9.83	50.06	40.14	74.00	54.00	-13.86

Factor=AF+CL-AG



TEST RESULTS(30MHz – 1GHz)

Temperature:	23.5(C)	Relative Humidity:	60%RH
Test Voltage:	AC 120V/60Hz	Phase:	Horizontal
Test Mode:	TX Mode of ANT 1(PP32Z)		

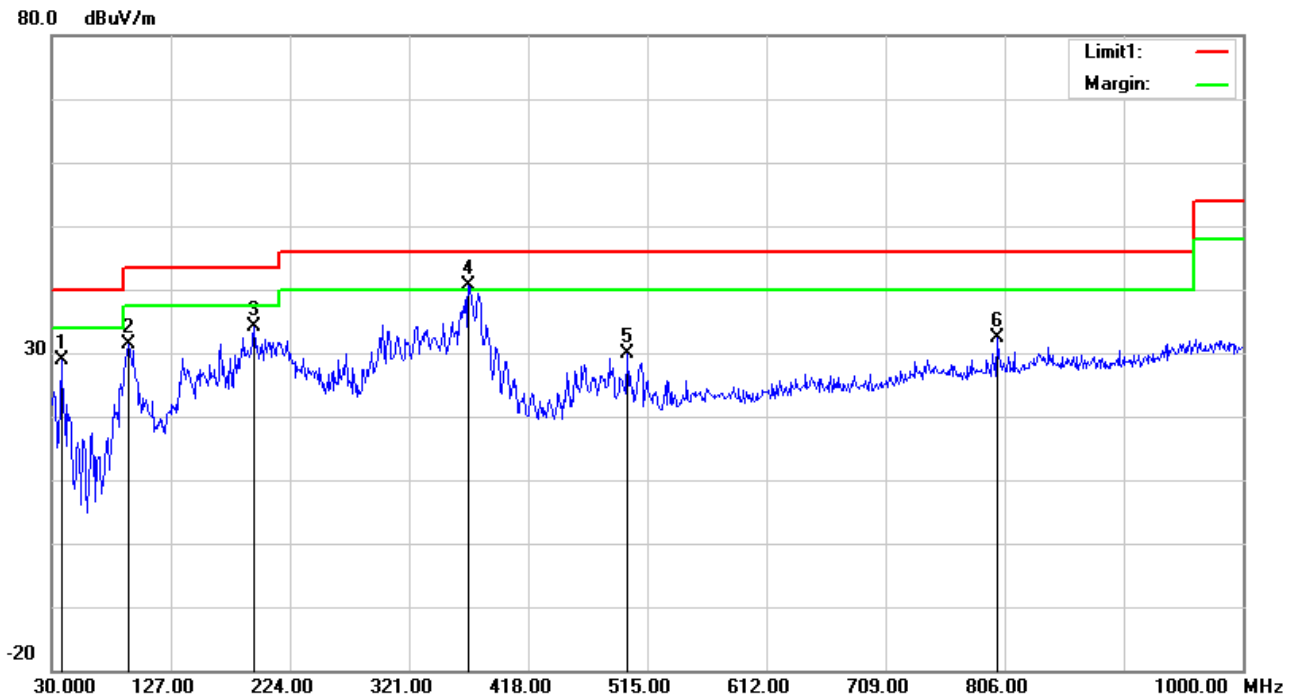


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	37.7600	45.83	-16.85	28.98	40.00	-11.02	QP
2	92.0800	52.61	-21.20	31.41	43.50	-12.09	QP
3	194.9000	55.31	-21.14	34.17	43.50	-9.33	QP
4	369.5000	53.17	-12.51	40.66	46.00	-5.34	QP
5	498.5100	37.81	-8.04	29.77	46.00	-16.23	QP
6	800.1800	34.37	-2.05	32.32	46.00	-13.68	QP



Temperature:	23.5(C)	Relative Humidity:	60%RH
Test Voltage:	AC 120V/60Hz	Phase:	Vertical
Test Mode:	TX Mode of ANT 1(PP32Z)		


80.0 dBuV/m

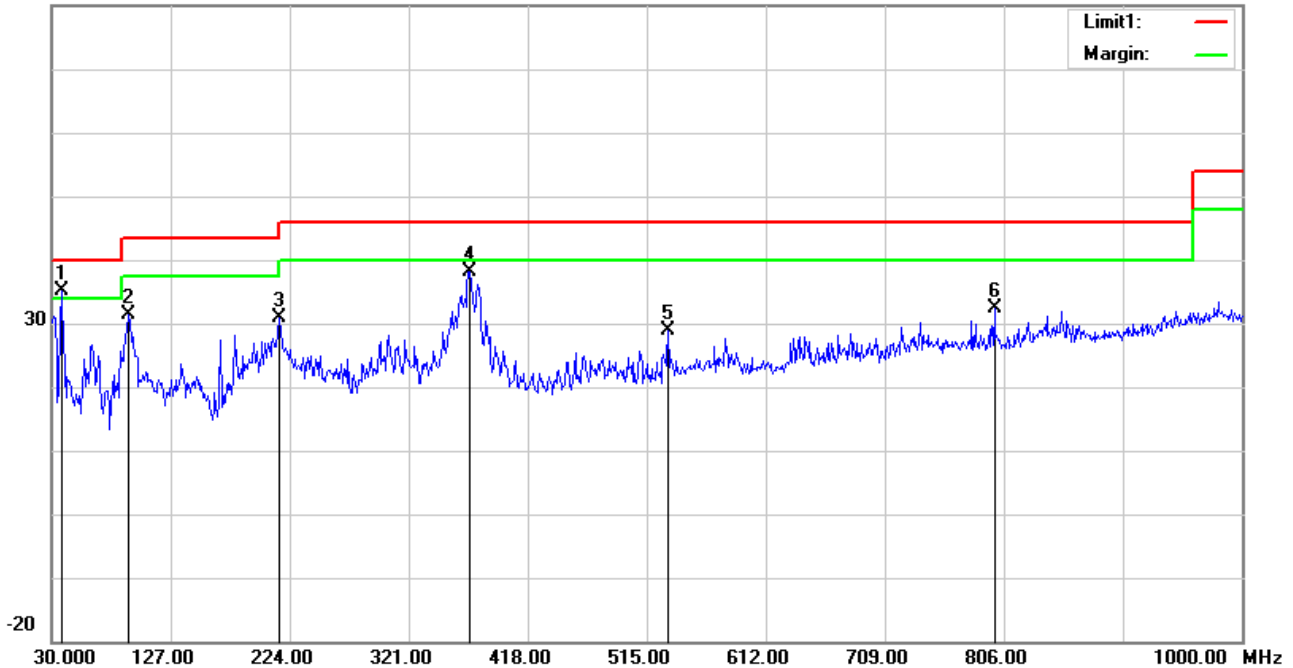

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	37.7600	51.89	-16.85	35.04	40.00	-4.96	QP
2	93.0500	52.43	-21.04	31.39	43.50	-12.11	QP
3	215.2700	50.96	-20.17	30.79	43.50	-12.71	QP
4	370.4700	50.72	-12.48	38.24	46.00	-7.76	QP
5	532.4600	36.08	-7.31	28.77	46.00	-17.23	QP
6	798.2400	34.31	-2.03	32.28	46.00	-13.72	QP



Temperature:	23.5(C)	Relative Humidity:	60%RH
Test Voltage:	AC 120V/60Hz	Phase:	Horizontal
Test Mode:	TX Mode of ANT 2(PP32Z)		

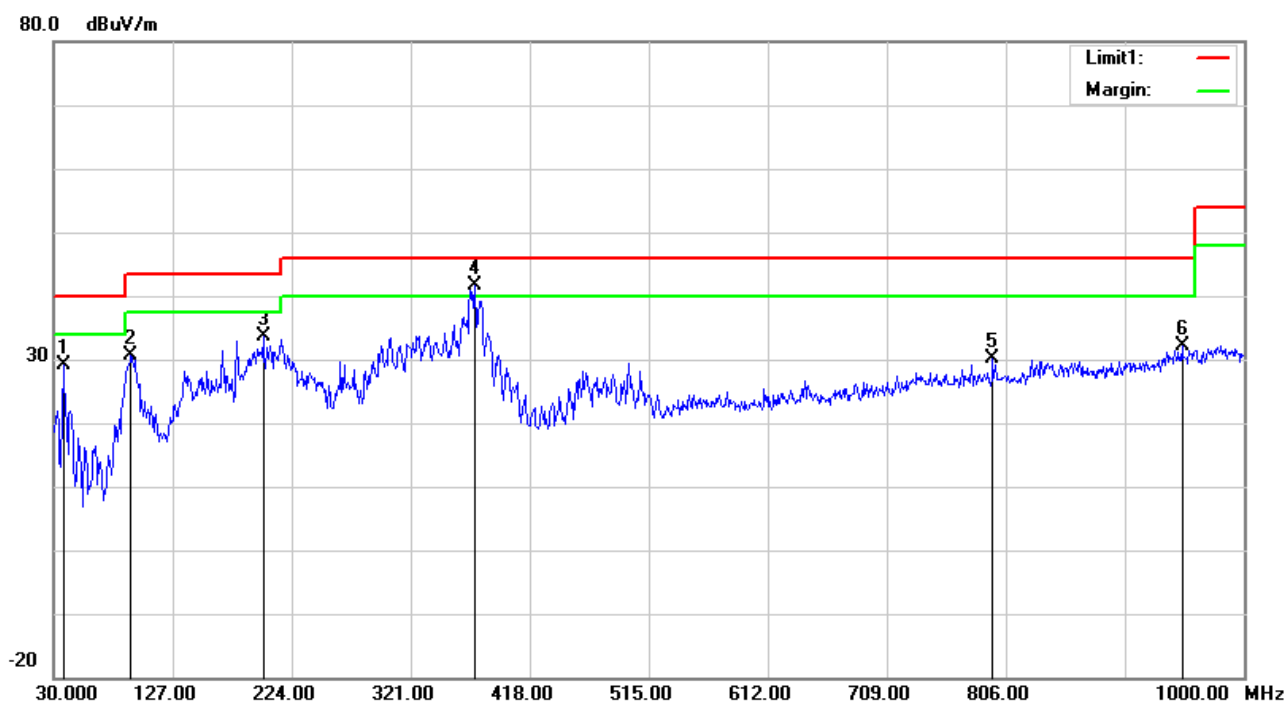


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	37.7600	46.03	-16.85	29.18	40.00	-10.82	QP
2	93.0500	51.60	-21.04	30.56	43.50	-12.94	QP
3	200.7200	54.70	-21.06	33.64	43.50	-9.86	QP
4	373.3800	54.12	-12.42	41.70	46.00	-4.30	QP
5	795.3300	32.03	-2.01	30.02	46.00	-15.98	QP
6	949.5600	30.63	1.58	32.21	46.00	-13.79	QP



Temperature:	23.5(C)	Relative Humidity:	60%RH
Test Voltage:	AC 120V/60Hz	Phase:	Vertical
Test Mode:	TX Mode of ANT 2(PP32Z)		

80.0 dBuV/m

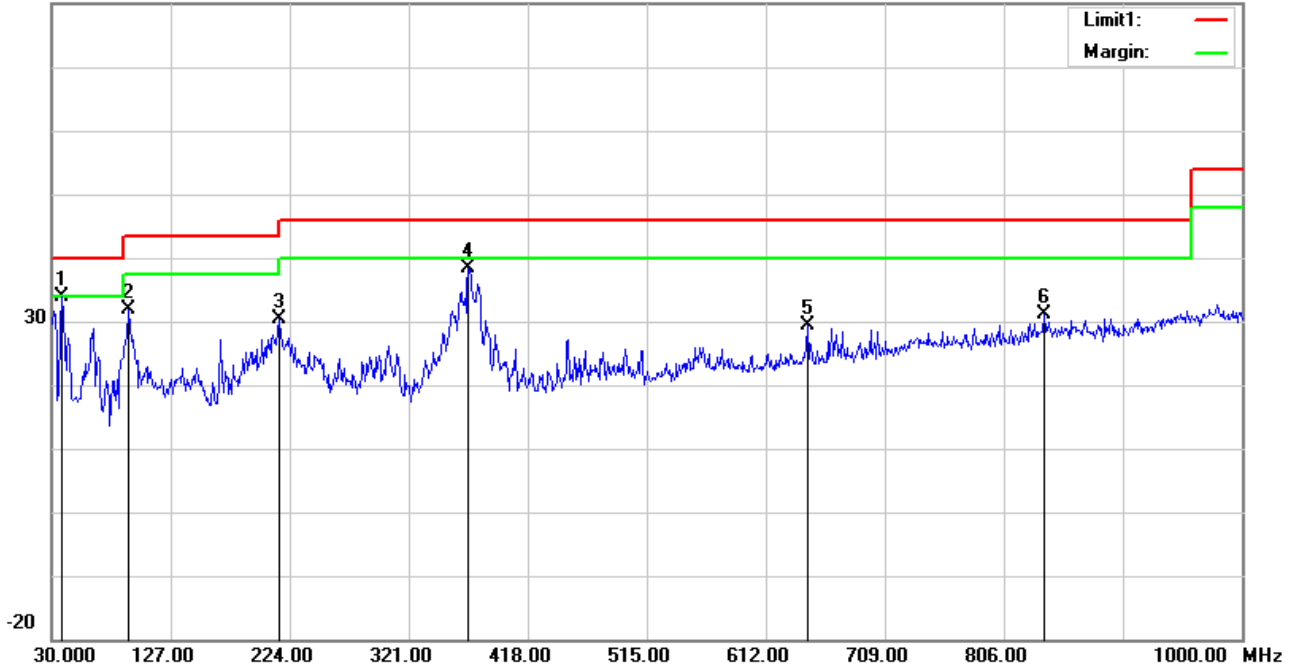


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	37.7600	50.74	-16.85	33.89	40.00	-6.11	QP
2	93.0500	52.89	-21.04	31.85	43.50	-11.65	QP
3	215.2700	50.43	-20.17	30.26	43.50	-13.24	QP
4	369.5000	50.89	-12.51	38.38	46.00	-7.62	QP
5	645.9500	34.19	-4.87	29.32	46.00	-16.68	QP
6	838.9800	31.62	-0.39	31.23	46.00	-14.77	QP



Temperature:	23.5(C)	Relative Humidity:	60%RH
Test Voltage:	AC 120V/60Hz	Phase:	Horizontal
Test Mode:	TX Mode of ANT 1(PP64Z)		

80.0 dBuV/m

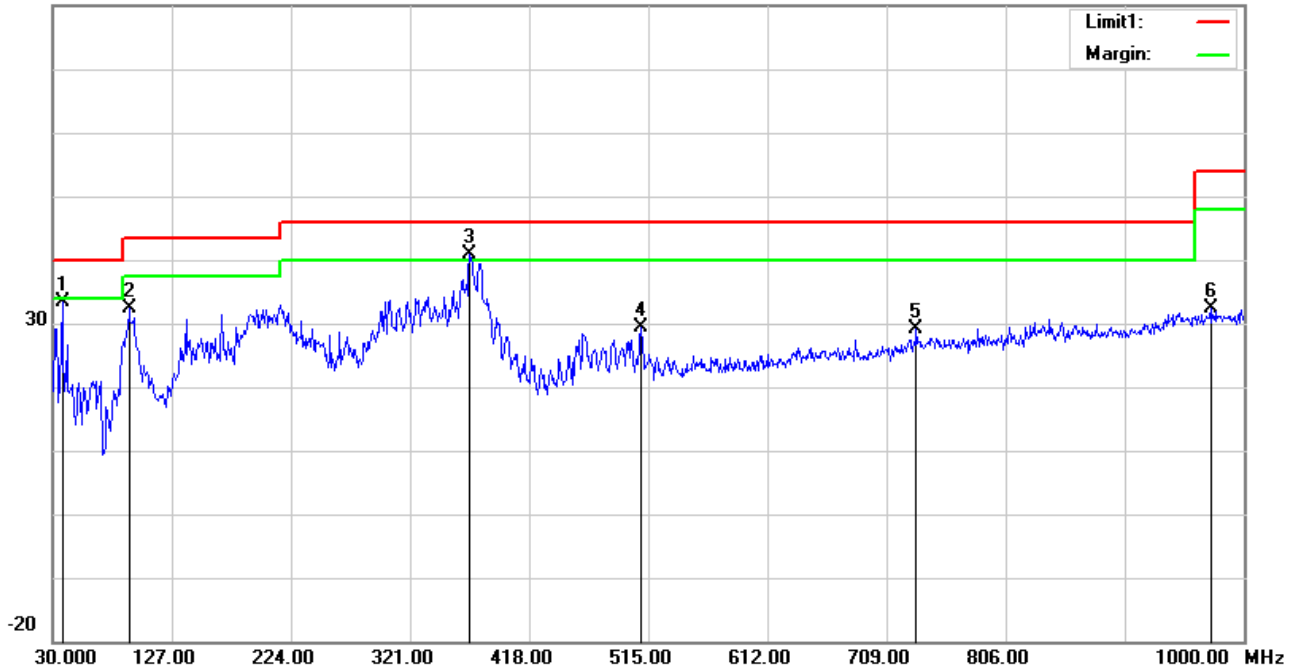


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	37.7600	50.30	-16.85	33.45	40.00	-6.55	QP
2	92.0800	53.55	-21.20	32.35	43.50	-11.15	QP
3	369.5000	53.42	-12.51	40.91	46.00	-5.09	QP
4	509.1800	37.24	-7.95	29.29	46.00	-16.71	QP
5	733.2500	31.48	-2.35	29.13	46.00	-16.87	QP
6	972.8400	30.27	2.19	32.46	54.00	-21.54	QP



Temperature:	23.5(C)	Relative Humidity:	60%RH
Test Voltage:	AC 120V/60Hz	Phase:	Vertical
Test Mode:	TX Mode of ANT 1(PP64Z)		

80.0 dBuV/m

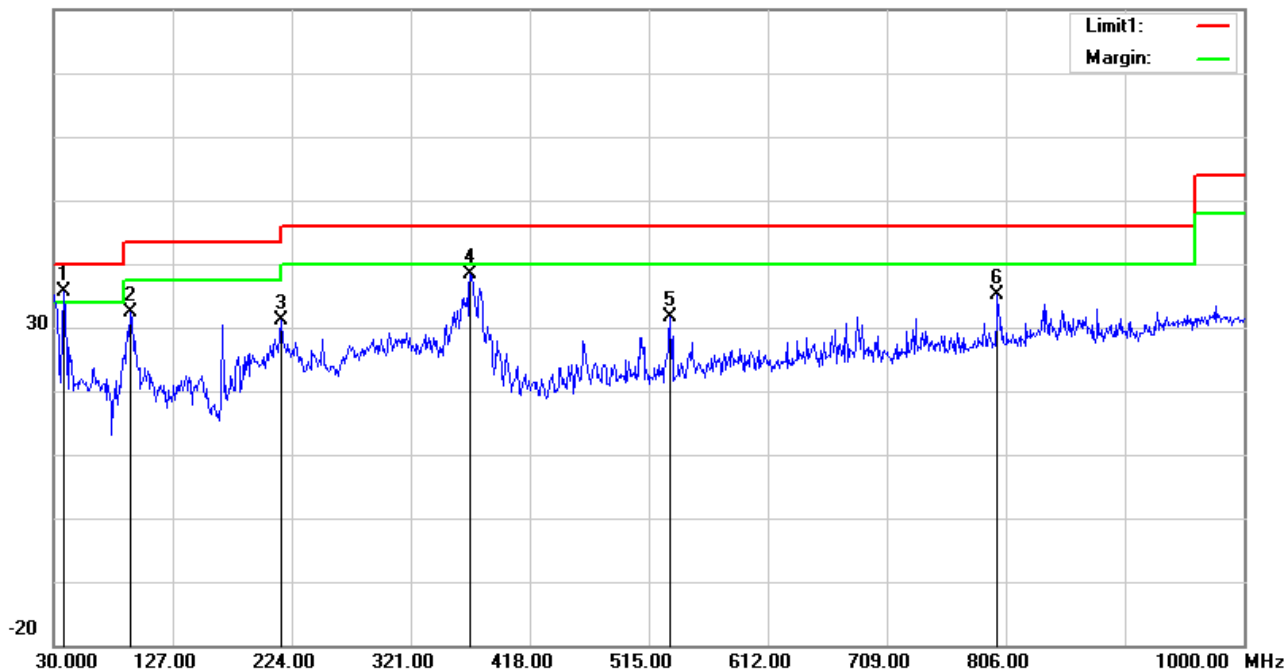


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	37.7600	52.42	-16.85	35.57	40.00	-4.43	QP
2	92.0800	53.50	-21.20	32.30	43.50	-11.20	QP
3	215.2700	51.22	-20.17	31.05	43.50	-12.45	QP
4	369.5000	50.77	-12.51	38.26	46.00	-7.74	QP
5	532.4600	38.88	-7.31	31.57	46.00	-14.43	QP
6	799.2100	37.19	-2.04	35.15	46.00	-10.85	QP



Temperature:	23.5(C)	Relative Humidity:	60%RH
Test Voltage:	AC 120V/60Hz	Phase:	Horizontal
Test Mode:	TX Mode of ANT 2(PP64Z)		

80.0 dBuV/m

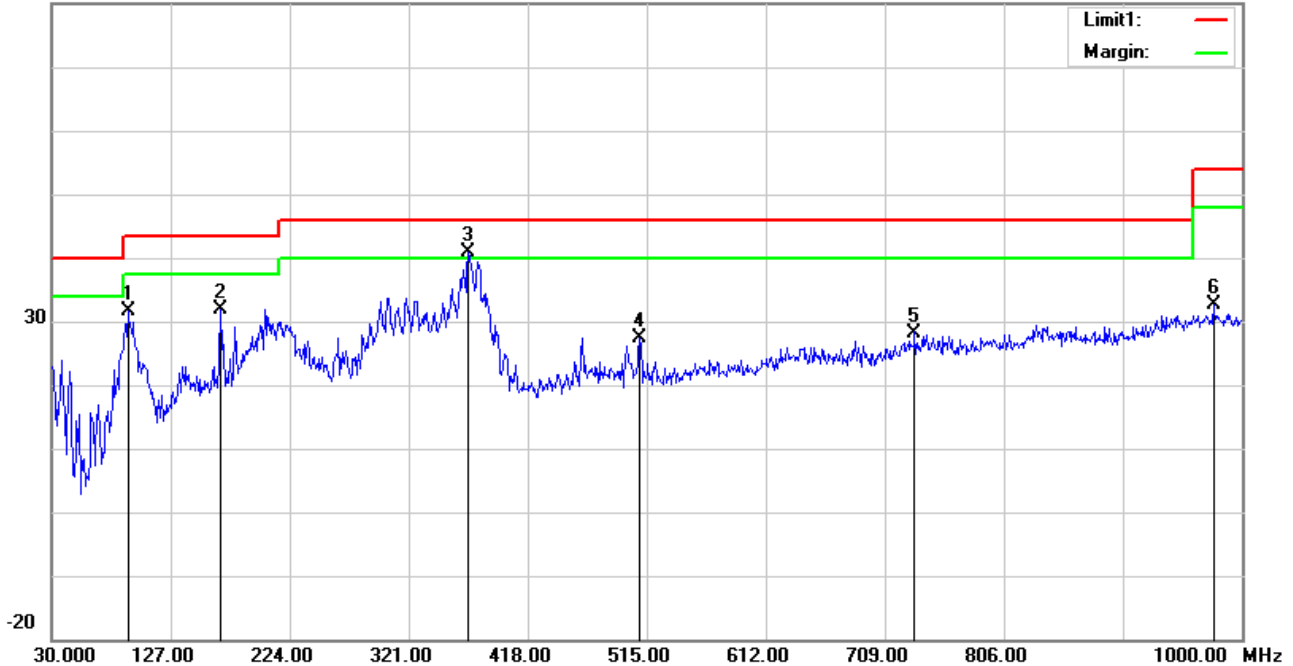


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	92.0800	52.79	-21.20	31.59	43.50	-11.91	QP
2	167.7400	51.57	-19.58	31.99	43.50	-11.51	QP
3	369.5000	53.50	-12.51	40.99	46.00	-5.01	QP
4	509.1800	35.34	-7.95	27.39	46.00	-18.61	QP
5	733.2500	30.60	-2.35	28.25	46.00	-17.75	QP
6	976.7200	30.27	2.45	32.72	54.00	-21.28	QP



Temperature:	23.5(C)	Relative Humidity:	60%RH
Test Voltage:	AC 120V/60Hz	Phase:	Vertical
Test Mode:	TX Mode of ANT 2(PP64Z)		

80.0 dBuV/m

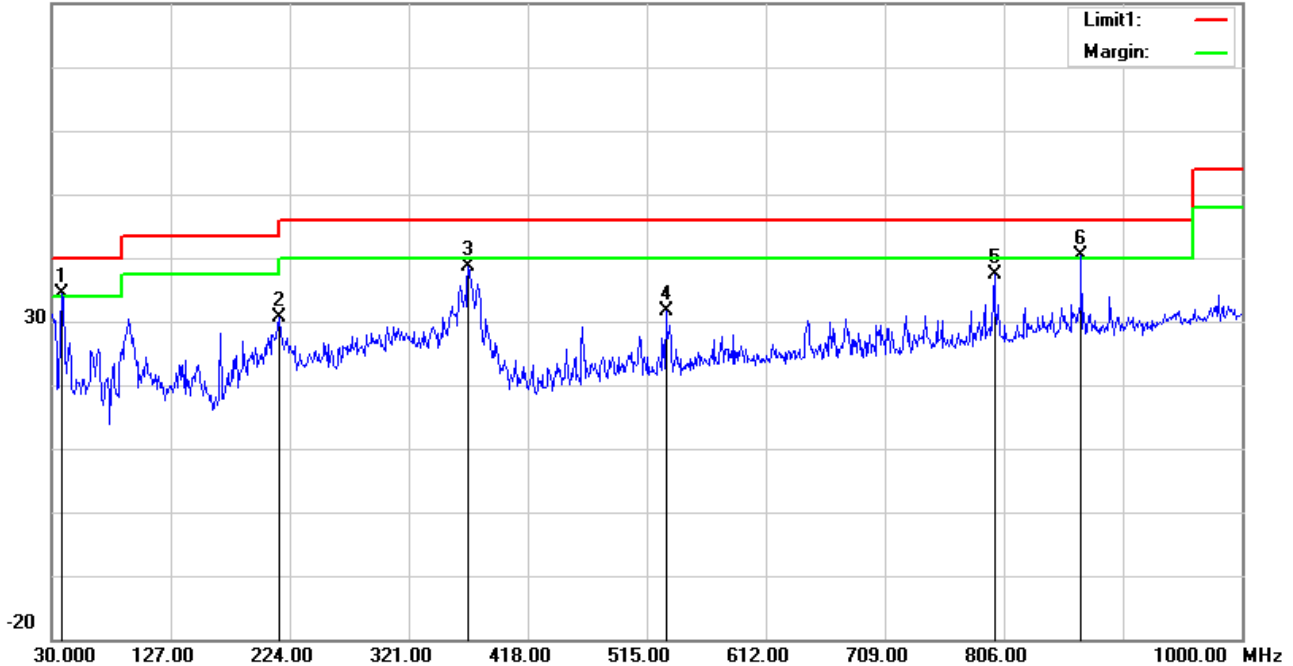

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	37.7600	51.24	-16.85	34.39	40.00	-5.61	QP
2	215.2700	50.91	-20.17	30.74	43.50	-12.76	QP
3	369.5000	51.02	-12.51	38.51	46.00	-7.49	QP
4	530.5200	39.15	-7.43	31.72	46.00	-14.28	QP
5	798.2400	39.34	-2.03	37.31	46.00	-8.69	QP
6	869.0500	40.93	-0.52	40.41	46.00	-5.59	QP



TEST RESULTS(Above 1GHz)

PP32Z

GFSK-Low-ANT 1

Horizontal

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1860	47.16	37.36	0.79	47.95	38.15	74.00	54.00	-15.85	Horizontal
3843	67.36	61.28	-10.95	56.41	50.33	74.00	54.00	-3.67	Horizontal
5766	57.84	54.39	-3.93	53.91	50.46	74.00	54.00	-3.54	Horizontal
8738	50.21	40.21	5.04	55.25	45.25	74.00	54.00	-8.75	Horizontal
10929.75	50.69	39.38	9.68	60.37	49.06	74.00	54.00	-4.94	Horizontal
14400.25	49.29	39.38	11.42	60.71	50.80	74.00	54.00	-3.20	Horizontal

Vertical

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1882.5	47.64	36.44	0.82	48.46	37.26	74.00	54.00	-16.74	Vertical
3842	66.60	58.16	-10.95	55.65	47.21	74.00	54.00	-6.79	Vertical
5765	53.97	48.12	-3.93	50.04	44.19	74.00	54.00	-9.81	Vertical
8749	50.94	40.25	5.01	55.95	45.26	74.00	54.00	-8.74	Vertical
10982	49.90	39.76	10.08	59.98	49.84	74.00	54.00	-4.16	Vertical
15170.25	49.55	38.86	10.82	60.37	49.68	74.00	54.00	-4.32	Vertical

**GFSK-Mid-ANT 1****Horizontal**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1883.5	49.96	41.29	0.82	50.78	42.11	74.00	54.00	-11.89	Horizontal
3591	54.44	48.30	-11.96	42.48	36.34	74.00	54.00	-17.66	Horizontal
5776	59.26	53.37	-3.91	55.35	49.46	74.00	54.00	-4.54	Horizontal
8809.5	51.00	40.39	4.79	55.79	45.18	74.00	54.00	-8.82	Horizontal
11056.25	50.56	40.08	9.92	60.48	50.00	74.00	54.00	-4.00	Horizontal
15384.75	50.34	39.11	10.81	61.15	49.92	74.00	54.00	-4.08	Horizontal

Vertical

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1883.5	48.99	42.77	0.82	49.81	43.59	74.00	54.00	-10.41	Vertical
3587	54.76	50.07	-11.93	42.83	38.14	74.00	54.00	-15.86	Vertical
5774	56.94	52.69	-3.91	53.03	48.78	74.00	54.00	-5.22	Vertical
8746.25	50.50	40.76	5.02	55.52	45.78	74.00	54.00	-8.22	Vertical
11413.75	51.06	40.26	9.77	60.83	50.03	74.00	54.00	-3.97	Vertical
15032.75	50.47	39.52	10.37	60.84	49.89	74.00	54.00	-4.11	Vertical

**GFSK-High-ANT 1****Horizontal**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1886	47.29	38.11	0.82	48.11	38.93	74.00	54.00	-15.07	Horizontal
3590	54.11	48.93	-11.95	42.16	36.98	74.00	54.00	-17.02	Horizontal
5786	56.21	49.27	-3.89	52.32	45.38	74.00	54.00	-8.62	Horizontal
8212.75	50.58	40.31	4.21	54.79	44.52	74.00	54.00	-9.48	Horizontal
11345	50.66	40.10	9.63	60.29	49.73	74.00	54.00	-4.27	Horizontal
14416.75	49.53	39.95	11.23	60.76	51.18	74.00	54.00	-2.82	Horizontal

Vertical

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1886.5	47.95	41.30	0.82	48.77	42.12	74.00	54.00	-11.88	Vertical
3598	54.88	48.08	-12	42.88	36.08	74.00	54.00	-17.92	Vertical
5785	57.65	52.58	-3.9	53.75	48.68	74.00	54.00	-5.32	Vertical
8762.75	50.96	40.37	4.97	55.93	45.34	74.00	54.00	-8.66	Vertical
10899.5	50.59	39.88	9.44	60.03	49.32	74.00	54.00	-4.68	Vertical
14403	49.58	39.29	11.39	60.97	50.68	74.00	54.00	-3.32	Vertical

**GFSK-Low-ANT 2****Horizontal**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1880.5	45.04	36.03	0.82	45.86	36.85	74.00	54.00	-17.15	Horizontal
3842	67.41	59.56	-10.95	56.46	48.61	74.00	54.00	-5.39	Horizontal
5763	56.13	49.58	-3.93	52.20	45.65	74.00	54.00	-8.35	Horizontal
8270.5	50.73	40.58	4.23	54.96	44.81	74.00	54.00	-9.19	Horizontal
11012.25	51.00	39.08	10.15	61.15	49.23	74.00	54.00	-4.77	Horizontal
15401.25	49.81	38.98	10.96	60.77	49.94	74.00	54.00	-4.06	Horizontal

Vertical

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1883.5	43.87	34.90	0.82	44.69	35.72	74.00	54.00	-18.28	Vertical
3842	67.58	59.78	-10.95	56.63	48.83	74.00	54.00	-5.17	Vertical
5764	54.94	51.85	-3.93	51.01	47.92	74.00	54.00	-6.08	Vertical
8259.5	50.89	40.35	4.22	55.11	44.57	74.00	54.00	-9.43	Vertical
11389	50.88	40.03	9.72	60.60	49.75	74.00	54.00	-4.25	Vertical
14416.75	49.58	39.56	11.23	60.81	50.79	74.00	54.00	-3.21	Vertical

**GFSK-Mid-ANT 2****Horizontal**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1882.5	44.60	34.50	0.82	45.42	35.32	74.00	54.00	-18.68	Horizontal
3849	68.21	58.67	-10.92	57.29	47.75	74.00	54.00	-6.25	Horizontal
5776	58.02	50.33	-3.91	54.11	46.42	74.00	54.00	-7.58	Horizontal
8512.5	50.67	39.19	4.57	55.24	43.76	74.00	54.00	-10.24	Horizontal
11917	51.95	40.77	8.7	60.65	49.47	74.00	54.00	-4.53	Horizontal
15426	49.56	39.23	10.88	60.44	50.11	74.00	54.00	-3.89	Horizontal

Vertical

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1876	47.01	34.87	0.81	47.82	35.68	74.00	54.00	-18.32	Vertical
3849	66.49	58.35	-10.92	55.57	47.43	74.00	54.00	-6.57	Vertical
5386	53.78	49.19	-4.79	48.99	44.40	74.00	54.00	-9.60	Vertical
8718.75	49.84	40.24	5.1	54.94	45.34	74.00	54.00	-8.66	Vertical
10990.25	50.82	39.76	10.14	60.96	49.90	74.00	54.00	-4.10	Vertical
14405.75	49.92	39.61	11.36	61.28	50.97	74.00	54.00	-3.03	Vertical

**GFSK-High-ANT 2****Horizontal**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1887	47.60	41.18	0.82	48.42	42.00	74.00	54.00	-12.00	Horizontal
3858	60.59	52.89	-10.89	49.70	42.00	74.00	54.00	-12.00	Horizontal
5786	56.94	53.10	-3.89	53.05	49.21	74.00	54.00	-4.79	Horizontal
8760.001	50.79	39.86	4.97	55.76	44.83	74.00	54.00	-9.17	Horizontal
11455	50.81	39.56	9.86	60.67	49.42	74.00	54.00	-4.58	Horizontal
14229.75	49.50	38.05	11.37	60.87	49.42	74.00	54.00	-4.58	Horizontal

Vertical

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1866.5	45.28	34.81	0.8	46.08	35.61	74.00	54.00	-18.39	Vertical
3856	65.18	61.34	-10.9	54.28	50.44	74.00	54.00	-3.56	Vertical
5785	58.27	51.38	-3.9	54.37	47.48	74.00	54.00	-6.52	Vertical
8771	50.46	40.55	4.94	55.40	45.49	74.00	54.00	-8.51	Vertical
10883	50.82	40.19	9.25	60.07	49.44	74.00	54.00	-4.56	Vertical
14419.5	50.03	39.65	11.19	61.22	50.84	74.00	54.00	-3.16	Vertical



PP64Z
GFSK-Low-ANT 1
Horizontal

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1879.5	48.96	41.67	0.82	49.78	42.49	74.00	54.00	-11.51	Horizontal
3843	68.15	61.62	-10.95	57.20	50.67	74.00	54.00	-3.33	Horizontal
5765	57.16	52.53	-3.93	53.23	48.60	74.00	54.00	-5.40	Horizontal
8721.5	50.73	40.03	5.09	55.82	45.12	74.00	54.00	-8.88	Horizontal
11039.75	50.11	39.72	10.01	60.12	49.73	74.00	54.00	-4.27	Horizontal
14414	49.38	40.16	11.26	60.64	51.42	74.00	54.00	-2.58	Horizontal

Vertical

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1880	48.76	41.52	0.82	49.58	42.34	74.00	54.00	-11.66	Vertical
3843	68.86	61.85	-10.95	57.91	50.90	74.00	54.00	-3.10	Vertical
5764	55.16	51.99	-3.93	51.23	48.06	74.00	54.00	-5.94	Vertical
8149.5	50.49	40.00	4.18	54.67	44.18	74.00	54.00	-9.82	Vertical
11064.5	51.03	40.43	9.87	60.90	50.30	74.00	54.00	-3.70	Vertical
14405.75	49.29	39.37	11.36	60.65	50.73	74.00	54.00	-3.27	Vertical

**GFSK-Mid-ANT 1****Horizontal**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1886	49.86	38.49	0.82	50.68	39.31	74.00	54.00	-14.69	Horizontal
3850	68.28	60.83	-10.92	57.36	49.91	74.00	54.00	-4.09	Horizontal
5775	57.79	52.15	-3.91	53.88	48.24	74.00	54.00	-5.76	Horizontal
8738	50.40	39.93	5.04	55.44	44.97	74.00	54.00	-9.03	Horizontal
11034.25	50.41	39.82	10.04	60.45	49.86	74.00	54.00	-4.14	Horizontal
15184	49.71	39.02	10.92	60.63	49.94	74.00	54.00	-4.06	Horizontal

Vertical

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1862.5	48.69	39.11	0.79	49.48	39.90	74.00	54.00	-14.10	Vertical
3849	69.95	61.45	-10.92	59.03	50.53	74.00	54.00	-3.47	Vertical
5776	56.51	52.36	-3.91	52.60	48.45	74.00	54.00	-5.55	Vertical
8746.25	51.13	40.62	5.02	56.15	45.64	74.00	54.00	-8.36	Vertical
11070	50.54	40.13	9.84	60.38	49.97	74.00	54.00	-4.03	Vertical
14430.5	50.10	39.19	11.06	61.16	50.25	74.00	54.00	-3.75	Vertical

**GFSK-High-ANT 1****Horizontal**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1886.5	48.28	41.42	0.82	49.10	42.24	74.00	54.00	-11.76	Horizontal
3856	68.95	62.01	-10.9	58.05	51.11	74.00	54.00	-2.89	Horizontal
5785	56.79	51.33	-3.9	52.89	47.43	74.00	54.00	-6.57	Horizontal
8130.25	50.74	40.00	4.18	54.92	44.18	74.00	54.00	-9.82	Horizontal
11383.5	51.14	40.54	9.71	60.85	50.25	74.00	54.00	-3.75	Horizontal
15173	49.47	39.05	10.84	60.31	49.89	74.00	54.00	-4.11	Horizontal

Vertical

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1887.5	49.34	41.92	0.83	50.17	42.75	74.00	54.00	-11.25	Vertical
2398	42.34	29.67	3.98	46.32	33.65	74.00	54.00	-20.35	Vertical
3857	61.98	59.75	-10.89	51.09	48.86	74.00	54.00	-5.14	Vertical
5786	56.67	52.17	-3.89	52.78	48.28	74.00	54.00	-5.72	Vertical
11105.75	51.55	40.63	9.68	61.23	50.31	74.00	54.00	-3.69	Vertical
14400.25	49.37	39.73	11.42	60.79	51.15	74.00	54.00	-2.85	Vertical

**GFSK-Low-ANT 2****Horizontal**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1901	47.00	40.58	0.84	47.84	41.42	74.00	54.00	-12.58	Horizontal
3842	66.44	61.15	-10.95	55.49	50.20	74.00	54.00	-3.80	Horizontal
5764	56.53	53.26	-3.93	52.60	49.33	74.00	54.00	-4.67	Horizontal
8223.75	51.08	41.02	4.21	55.29	45.23	74.00	54.00	-8.77	Horizontal
11408.25	50.98	40.07	9.76	60.74	49.83	74.00	54.00	-4.17	Horizontal
14414	50.20	39.92	11.26	61.46	51.18	74.00	54.00	-2.82	Horizontal

Vertical

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1878	45.12	36.92	0.81	45.93	37.73	74.00	54.00	-16.27	Vertical
2633.5	47.41	42.19	4.34	51.75	46.53	74.00	54.00	-7.47	Vertical
3844	64.61	60.10	-10.94	53.67	49.16	74.00	54.00	-4.84	Vertical
5764	56.60	51.80	-3.93	52.67	47.87	74.00	54.00	-6.13	Vertical
11094.75	51.03	40.79	9.71	60.74	50.50	74.00	54.00	-3.50	Vertical
15151	49.90	38.98	10.68	60.58	49.66	74.00	54.00	-4.34	Vertical

**GFSK-Mid-ANT 2****Horizontal**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1883	47.89	39.88	0.82	48.71	40.70	74.00	54.00	-13.30	Horizontal
3849	67.96	61.07	-10.92	57.04	50.15	74.00	54.00	-3.85	Horizontal
5776	55.09	51.79	-3.91	51.18	47.88	74.00	54.00	-6.12	Horizontal
8179.75	51.22	40.82	4.19	55.41	45.01	74.00	54.00	-8.99	Horizontal
11100.25	51.20	40.49	9.68	60.88	50.17	74.00	54.00	-3.83	Horizontal
14400.25	50.54	39.46	11.42	61.96	50.88	74.00	54.00	-3.12	Horizontal

Vertical

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1886	45.94	35.87	0.82	46.76	36.69	74.00	54.00	-17.31	Vertical
3849	66.35	59.52	-10.92	55.43	48.60	74.00	54.00	-5.40	Vertical
5774	60.37	53.61	-3.91	56.46	49.70	74.00	54.00	-4.30	Vertical
8163.25	50.77	40.02	4.19	54.96	44.21	74.00	54.00	-9.79	Vertical
11625.5	51.60	39.41	9.84	61.44	49.25	74.00	54.00	-4.75	Vertical
14425	50.29	39.24	11.13	61.42	50.37	74.00	54.00	-3.63	Vertical

**GFSK-High-ANT 2****Horizontal**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1863	47.20	37.07	0.8	48.00	37.87	74.00	54.00	-16.13	Horizontal
3856	67.86	59.51	-10.9	56.96	48.61	74.00	54.00	-5.39	Horizontal
5785	60.44	51.76	-3.9	56.54	47.86	74.00	54.00	-6.14	Horizontal
7712.25	51.05	42.45	4.1	55.15	46.55	74.00	54.00	-7.45	Horizontal
11034.25	50.52	40.25	10.04	60.56	50.29	74.00	54.00	-3.71	Horizontal
14144.5	50.54	39.27	10.67	61.21	49.94	74.00	54.00	-4.06	Horizontal

Vertical

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1887	45.56	39.58	0.82	46.38	40.40	74.00	54.00	-13.60	Vertical
3856	68.17	61.37	-10.9	57.27	50.47	74.00	54.00	-3.53	Vertical
5786	58.65	53.20	-3.89	54.76	49.31	74.00	54.00	-4.69	Vertical
8801.25	50.14	40.48	4.84	54.98	45.32	74.00	54.00	-8.68	Vertical
11518.25	50.48	39.17	9.97	60.45	49.14	74.00	54.00	-4.86	Vertical
14823.75	51.06	38.79	10.05	61.11	48.84	74.00	54.00	-5.16	Vertical



APENDIX B PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

※※※※※ END OF THE REPORT ※※※※※

