

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : E149R-061

AGR No : A148A-146

Applicant : TiVo Inc.
Address : 2160 Gold Street, Alviso CA 95002-2160. USA

Manufacturer : TiVo Inc.
Address : 2160 Gold Street, Alviso CA 95002-2160. USA

Type of Equipment : IR&RF Remote

FCC ID. : TGN-RC30

Model Name : S5-S MSO

Multiple Model Name : S5-S Retail

Serial number : None

Total page of Report : 22 pages (including this page)

Date of Incoming : September 04, 2014

Date of issue : September 18, 2014


SUMMARY

The equipment complies with the regulation; **FCC Part 15 Subpart C Section 15.249.**

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Prepared by:



Ki-Hong, Nam / Senior Engineer
ONETECH Corp.

Approved by:



Gea-Won, Lee / Managing Director
ONETECH Corp.

CONTENTS

PAGE

1. VERIFICATION OF COMPLIANCE	5
2. TEST SUMMARY	6
2.1 TEST ITEMS AND RESULTS	6
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	6
2.3 RELATED SUBMITTAL(S) / GRANT(S)	6
2.4 PURPOSE OF THE TEST	6
2.5 TEST METHODOLOGY.....	6
2.6 TEST FACILITY.....	7
3. GENERAL INFORMATION	8
3.1 PRODUCT DESCRIPTION.....	8
3.2 MODEL DIFFERENCES.....	8
4. EUT MODIFICATIONS	8
5. SYSTEM TEST CONFIGURATION	9
5.1 JUSTIFICATION.....	9
5.2 PERIPHERAL EQUIPMENT	9
5.3 MODE OF OPERATION DURING THE TEST	9
5.4 CONFIGURATION OF TEST SYSTEM.....	9
5.5 ANTENNA REQUIREMENT	9
6. PRELIMINARY TEST	10
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	10
6.2 GENERAL RADIATED EMISSIONS TESTS	10
7. RADIATED EMISSION TEST	11
7.1 TEST SET-UP	11
7.2 MEASUREMENT UNCERTAINTY	11
7.3 TEST EQUIPMENT USED.....	11
7.4 FINAL RESULT OF MEASUREMENT	12
7.4.1 <i>Field Strength of the Fundamental Frequency</i>	12
7.4.2 <i>Emissions Radiated Outside of the Specified Frequency Bands</i>	13
8. 20 DB BANDWIDTH	20
8.1 OPERATING ENVIRONMENT	20

8.2 TEST SET-UP 20

8.3 TEST EQUIPMENT USED 20

8.4 TEST DATA FOR BANDWIDTH..... 20

Revision History

Issue Report No.	Issued Date	Revisions	Effect Section
E149R-061	September 18, 2014	Initial Release	All

1. VERIFICATION OF COMPLIANCE

APPLICANT : TiVo Inc.
 ADDRESS : 2160 Gold Street, Alviso CA 95002-2160. USA
 CONTACT PERSON : Roger Hsu / Senior Consumer Design Engineer
 TELEPHONE NO : +408-519-9667
 FCC ID : TGN-RC30
 MODEL NAME : S5-S MSO
 BRAND NAME : TiVo
 SERIAL NUMBER : N/A
 DATE : September 18, 2014

EQUIPMENT CLASS	DXX – Low Power Communications Transmitter
KIND OF EQUIPMENT	IR&RF Remote
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2009
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.249
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.249 (a)	Field Strength of Emission	Met the Limit / PASS
15.249 (c)	Measurement distance	Met the Requirement / PASS
15.249 (d)	Emissions Radiated Outside of the Specified Frequency Band	Met the Limit / PASS
15.249 (e)	Radiated Emissions above 1 000 MHz	Met the Limit / PASS
15.209	Radiated Emission Limits, General Requirement	Met the Limit / PASS
15.207	Conducted Limits	N/A (See Note)
15.203	Antenna Requirement	Met the Requirement / PASS

Note: This test is not performed because the EUT is operated by DC battery.

Note 1: This report is reproduced on the basis of report No.(E134R-024), it is have already been Certified (FCC ID : TGN-RC30), The change point are internal schematic.

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in section 2.1.

2.5 Test Methodology

Radiated testing was performed according to the procedures in ANSI C63.10: 2009 at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 301-14, Daessangnyeong-ri, Chowol-eup, Gwangju-si, Gyeonggi-do, 464-862 Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-4617/ G-666/ T-1842 IC (Industry Canada) – Registration No. Site# 3736-3

-. Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation No. 85

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The TiVo Inc., Model: S5-S MSO (referred to as the EUT in this report) is an IR&RF Remote. Product specification information described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	Portable Device
OPERATING FREQUENCY	2 425 MHz ~ 2 475 MHz
RATED RF OUTPUT POWER	0 dBm
ANTENNA TYPE	Inserted into the main board(Pattern Antenna)
MODULATION	O-QPSK
Tx DATA SPEED	250 kbps
USED RF CHIP	Maker: Texas Instruments Incorporated, Model Name:CC2533
LIST OF EACH OSC. OR CRY. FREQ.(FREQ. >= 1 MHz)	32 MHz
RATED SUPPLY VOLTAGE	1.5 V Alkaline Battery(AA) * 2

3.2 Model Differences

-. The following lists consist of the added model and their differences.

Model Name	Differences	Tested
S5-S MSO	Basic Model	☒
S5-S Retail	This model is simple button on the S5-S MSO models deleted. No circuit changes.	☐

Note: 1. Applicant consigns only basic model to test. Therefore this test report just guarantees the units, which have been tested.

2. The Applicant/manufacturer is responsible for the compliance of all variants.

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	TiVo Inc.	RC30 / 1BC-0374A	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested: None

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at Low Channel (2 425 MHz), Middle Channel (2 450 MHz), and High Channel (2 475 MHz). To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis.

5.4 Configuration of Test System

Line Conducted Test : It is not need to test this requirement, because the EUT shall be operated by DC battery.

Radiated Emission Test : Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2009 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 m open area test site.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

According to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is a pattern antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
It is not need to test this requirement, because the power of the EUT is supplied by battery.	

6.2 General Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
TX Mode	X

7. RADIATED EMISSION TEST

7.1 Test set-up

The radiated emissions measurements were on the 3 m, semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from up to 25 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

Test set-up photos are included in appendix I.

7.2 Measurement uncertainty

Radiated emission electric field intensity, 0.15 MHz ~ 30 MHz : ± 2.61 dB

Radiated emission electric field intensity, 30 MHz ~ 300 MHz : ± 4.43 dB

Radiated emission electric field intensity, 300 MHz ~ 1 000 MHz : ± 3.80 dB

Radiated emission electric field intensity, 1 000 MHz ~ 3 000 MHz : ± 4.40 dB

Measurement uncertainty is calculated in accordance with CISPR 16-4-2. The measurement uncertainty is given with a confidence of 95 % with the coverage factor, $k = 2$.

7.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
□ - ESCI	Rohde & Schwarz	EMI Test Receiver	101012	Nov. 18, 2013(1Y)
■ - ESU	Rohde & Schwarz	EMI Test Receiver	100261	Apr. 29, 2014(1Y)
□ - 8564E	HP	Spectrum Analyzer	3650A00756	Apr. 28, 2014(1Y)
□ - FSP	Rohde & Schwarz	Spectrum Analyzer	100017	Nov. 05, 2013(1Y)
■ - 310N	Sonoma Instrument	AMPLIFIER	312544	Apr. 28, 2014(1Y)
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101372	Apr. 28, 2014(1Y)
■ - SCU-18	Rohde & Schwarz	PRE-AMPLIFIER	10041	Jan. 20, 2014(1Y)
■ - MA240	HD GmbH	Antenna Master	N/A	N/A
■ - HD100	HD GmbH	Position Controller	N/A	N/A
■ - DS420S	HD GmbH	Turn Table	N/A	N/A
■ - HFH2-Z2	Rohde & Schwarz	Loop Antenna	879285/26	Dec. 11, 2012(2Y)
■ - VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-255	May 02, 2014(2Y)
■ - BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	Sep. 05, 2013(2Y)
■ - BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	N/A

All test equipment used is calibrated on a regular basis.

7.4 Final Result of Measurement

7.4.1 Field Strength of the Fundamental Frequency

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Humidity Level : 42 % R.H.

Temperature: 21 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.249(a)

Result : PASSED

EUT : IR&RF Remote

Date: September 11, 2014

Operating Condition : TX mode

Distance : 3 m

Channel	Radiated Emissions			Ant Pol.	Correction Factors			Total	FCC Limit	
	Carrier Freq. (MHz)	Reading (dBμV)	Detector Mode		Antenna (dB/m)	Cable (dB)	Pre-Amp (dB)	Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Low	2 425.00	89.23	Peak	H	27.15	5.02	43.10	78.30	113.98	35.68
		85.21	Average	H				74.28	93.98	19.70
		90.64	Peak	V				79.71	113.98	34.27
		87.06	Average	V				76.13	93.98	17.85
Middle	2 450.00	89.76	Peak	H	27.22	5.04	43.10	78.92	113.98	35.06
		86.05	Average	H				75.21	93.98	18.77
		90.03	Peak	V				79.19	113.98	34.79
		86.36	Average	V				75.52	93.98	18.46
High	2 475.00	89.95	Peak	H	27.28	5.06	43.10	79.19	113.98	34.79
		86.21	Average	H				75.45	93.98	18.53
		90.51	Peak	V				79.75	113.98	34.23
		86.35	Average	V				75.59	93.98	18.39

*Remark: To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes, but the worst plane data were recorded in the report.

Margin (dB) = Limit (dBuV/m) – Total (dBuV/m)

Total = Reading + Antenna Factor + Cable Loss – Pre-amplifier gain.



Tested by: Tae-Ho, Kim / Project Engineer

7.4.2 Emissions Radiated Outside of the Specified Frequency Bands

7.4.2.1 Test Data for Harmonic

Humidity Level : 42 % R.H.

Temperature: 21 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.249(a)

Result : PASSED

EUT : IR&RF Remote

Date: September 11, 2014

Operating Condition : TX mode

Distance : 3 m

Channel	Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Pre-Amp (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Low	4 850.00*	49.83	Peak	H	31.14	6.90	42.80	45.07	73.98	28.91
		47.71	Average	H				42.95	53.98	11.03
		51.26	Peak	V				46.50	73.98	27.48
		48.11	Average	V				43.35	53.98	10.63
	Other frequencies were not found up to 25 GHz.									
Middle	4 900.00*	49.85	Peak	H	31.22	6.93	42.80	45.20	73.98	28.78
		47.86	Average	H				43.21	53.98	10.77
		49.50	Peak	V				44.85	73.98	29.13
		46.09	Average	V				41.44	53.98	12.54
	Other frequencies were not found up to 25 GHz.									
High	4 950.00*	49.56	Peak	H	31.30	6.97	42.80	45.03	73.98	28.95
		47.33	Average	H				42.80	53.98	11.18
		49.72	Peak	V				45.19	73.98	28.79
		46.51	Average	V				41.98	53.98	12.00
	Other frequencies were not found up to 25 GHz.									

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band

Margin (dB) = Limit (dBuV/m) – Total (dBuV/m)

Total = Reading + Antenna Factor + Cable Loss – Pre-amplifier gain.



Tested by: Tae-Ho, Kim / Project Engineer

7.4.2.2 Test Data for Frequency range: 30 MHz ~ 1 000 MHz

Humidity Level : 42 % R.H.

Temperature: 21 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.249 (d)


Result : PASSED

EUT : IR&RF Remote

Date: September 11, 2014


Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

Operating condition : Low Channel

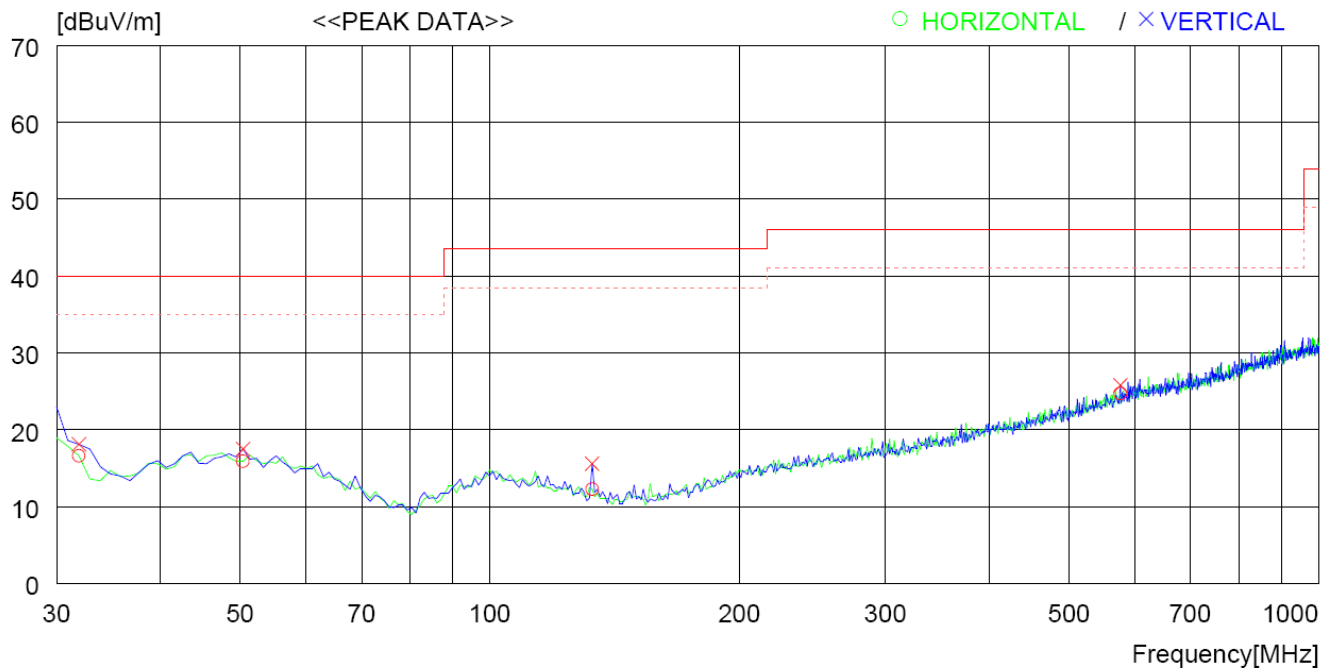


No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	31.940	32.0	11.0	6.6	33.0	16.6	40.0	23.4	300	359
2	50.370	27.9	14.2	6.8	33.0	15.9	40.0	24.1	400	313
3	132.820	28.9	8.7	7.7	33.0	12.3	43.5	31.2	300	251
4	576.109	28.8	18.5	10.7	33.3	24.7	46.0	21.3	100	67
----- Vertical -----										
5	31.940	33.5	11.0	6.6	33.0	18.1	40.0	21.9	100	257
6	50.370	29.5	14.2	6.8	33.0	17.5	40.0	22.5	400	359
7	132.820	32.2	8.7	7.7	33.0	15.6	43.5	27.9	200	314
8	576.109	29.9	18.5	10.7	33.3	25.8	46.0	20.2	300	39

Operating condition : Middle Channel

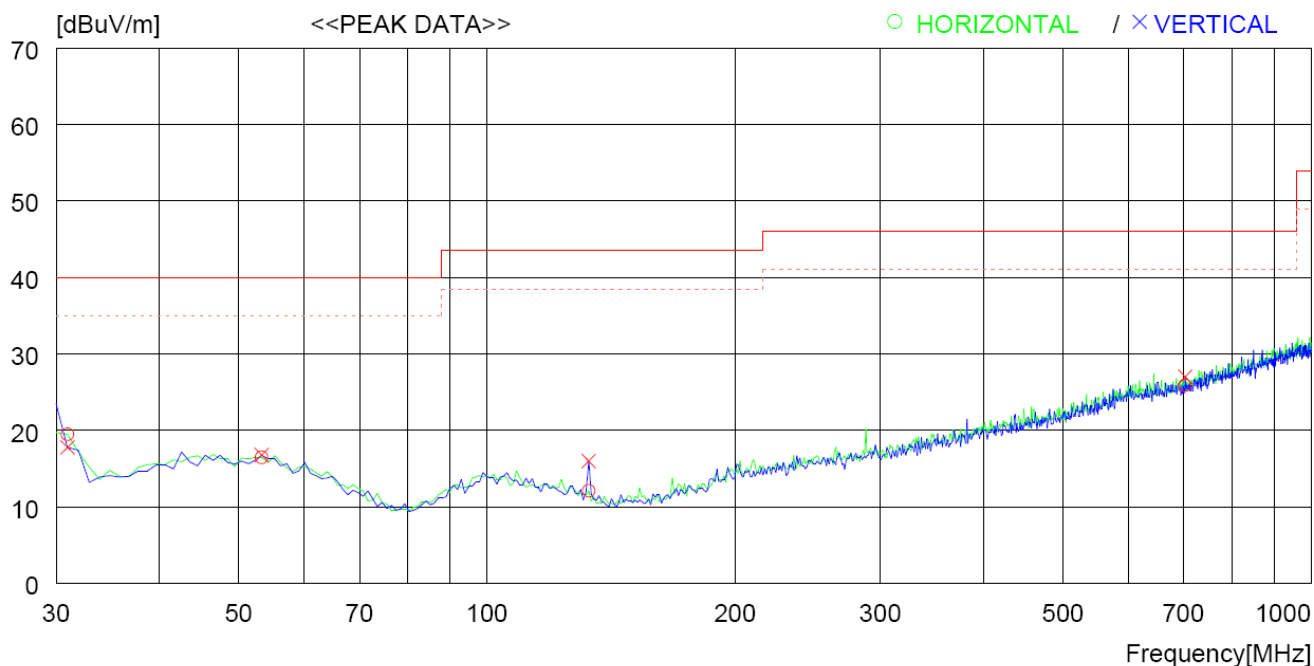

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	30.970	35.2	10.7	6.6	33.0	19.5	40.0	20.5	300	359
2	53.280	28.9	13.8	6.8	33.0	16.5	40.0	23.5	200	214
3	132.820	28.7	8.7	7.7	33.0	12.1	43.5	31.4	400	277
4	703.175	28.4	19.5	11.3	33.3	25.9	46.0	20.1	200	0
----- Vertical -----										
5	30.970	33.5	10.7	6.6	33.0	17.8	40.0	22.2	400	359
6	53.280	29.2	13.8	6.8	33.0	16.8	40.0	23.2	234	0
7	132.820	32.6	8.7	7.7	33.0	16.0	43.5	27.5	300	46
8	703.175	29.5	19.5	11.3	33.3	27.0	46.0	19	400	359

Operating condition : High Channel

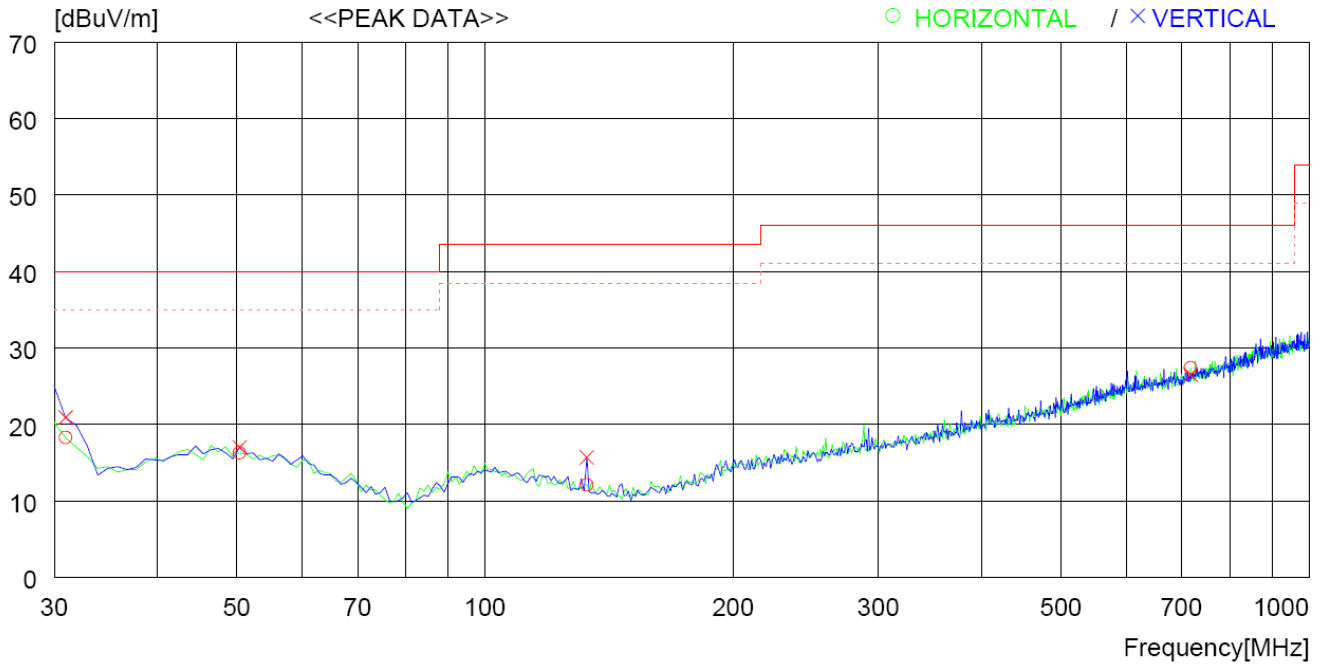

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	30.970	34.0	10.7	6.6	33.0	18.3	40.0	21.7	400	0
2	50.370	28.3	14.2	6.8	33.0	16.3	40.0	23.7	100	159
3	132.820	28.7	8.7	7.7	33.0	12.1	43.5	31.4	400	358
4	717.724	29.6	19.6	11.4	33.2	27.4	46.0	18.6	100	237
----- Vertical -----										
5	30.970	36.6	10.7	6.6	33.0	20.9	40.0	19.1	100	88
6	50.370	29.0	14.2	6.8	33.0	17.0	40.0	23	200	352
7	132.820	32.3	8.7	7.7	33.0	15.7	43.5	27.8	200	359
8	717.724	28.7	19.6	11.4	33.2	26.5	46.0	19.5	200	68

Tested by: Tae-Ho, Kim / Project Engineer

7.4.2.3 Test Data for Below 30 MHz

Humidity Level : 42 % R.H. Temperature: 21 °C
 Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
 Frequency range : 9 kHz ~ 30 MHz
 Measurement distance : 3 m
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.249 (d)
 Result : PASSED

EUT : IR&RF Remote Date: September 11, 2014
 Detector : CISPR Quasi-Peak (Resolution Bandwidth: 9 kHz)

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.									



Tested by: Tae-Ho, Kim / Project Engineer

7.4.2.4 Test Data above 1 GHz except for harmonic

- Test Date : September 11, 2014
- Humidity Level : 42 % R.H.
- Temperature : 21 °C
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Frequency range : 1 GHz ~ 25 GHz
- Measurement distance : 3 m
- Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.249 (d)
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.									



Tested by: Tae-Ho, Kim / Project Engineer

7.4.2.5 Band Edge

- . Test Date : September 11, 2014
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- . Measurement distance : 3 m
- . Operating Condition : Low / High Channel
- . Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.249 (d)
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Pre-Amp (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 367.38	36.85	Peak	H	27.05	3.14	43.10	23.94	74.00	50.06
	27.54	Average	H				14.63	54.00	39.37
2 362.18	38.02	Peak	V				25.11	74.00	48.89
	28.35	Average	V				15.44	54.00	38.56
Test Data for High Channel									
2 483.59	36.21	Peak	H	27.31	3.17	43.10	23.59	74.00	50.41
	27.55	Average	H				14.93	54.00	39.07
2 484.28	37.47	Peak	V				24.85	74.00	49.15
	28.54	Average	V				15.92	54.00	38.08

Remark. Margin (dB) = Limit (dBμV/m) – Total (dBμV/m)

Total = Reading + Antenna Factor + Cable Loss – Pre-amplifier gain.



Tested by: Tae-Ho, Kim / Project Engineer


8. 20 dB BANDWIDTH

8.1 Operating environment

Temperature : 21 °C
Relative humidity : 42 % R.H.

8.2 Test set-up

The output signal of EUT was received by the spectrum analyzer. The resolution bandwidth is set to 10 kHz, and peak detection was used. The 20 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 20 dB.

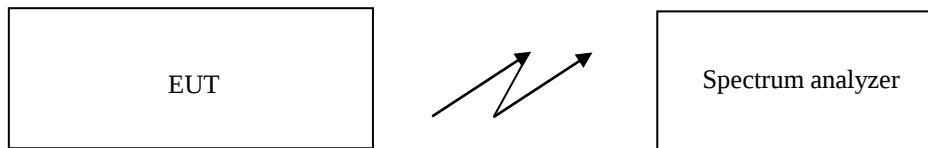

8.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ -	FSV30	R/S	Spectrum Analyzer	101372	Apr. 28, 2014 (1Y)

8.4 Test data for Bandwidth

-. Test Date : September 10, 2014
-. Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.215(c)


Channel	Operating Freq. (MHz)	20 dB Bandwidth (kHz)	Result
Low	2 425	2.822 0	Met the requirement / PASS
Middle	2 450	2.836 5	
High	2 475	2.836 5	

Remark: See next page for 20 dB Bandwidth test data.


The 20 dB bandwidth is within the assigned frequency band from 2 400 MHz to 2 483.5 MHz.



Tested by: Tae-Ho, Kim / Project Engineer

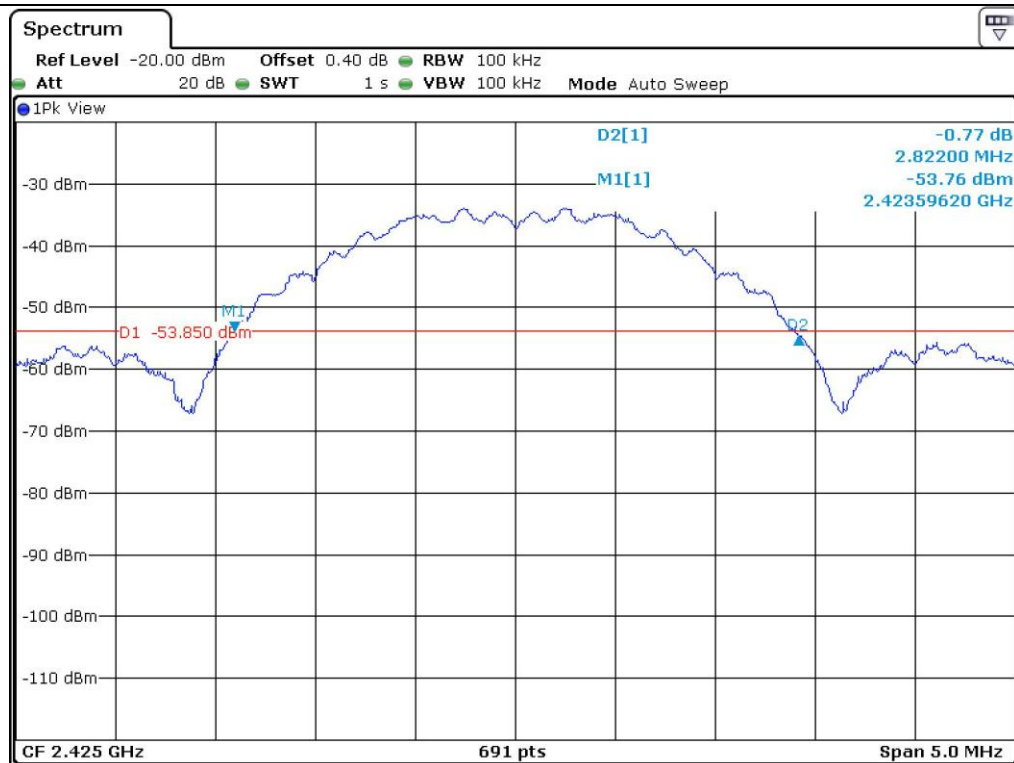

Low Channel

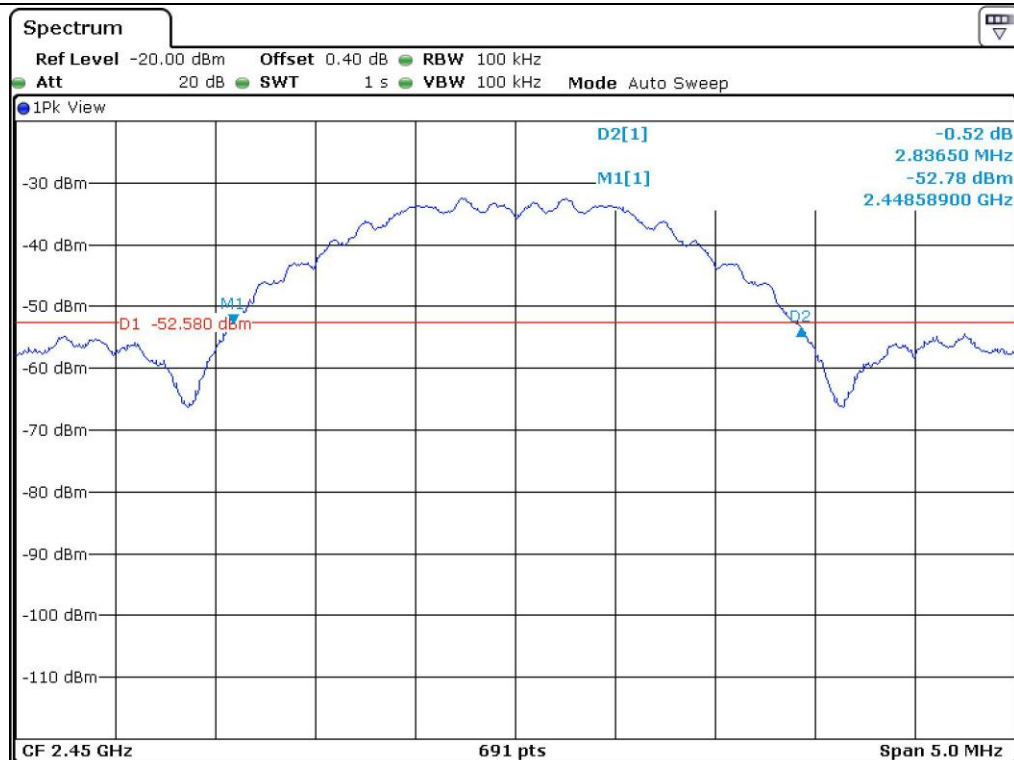

Middle Channel

