
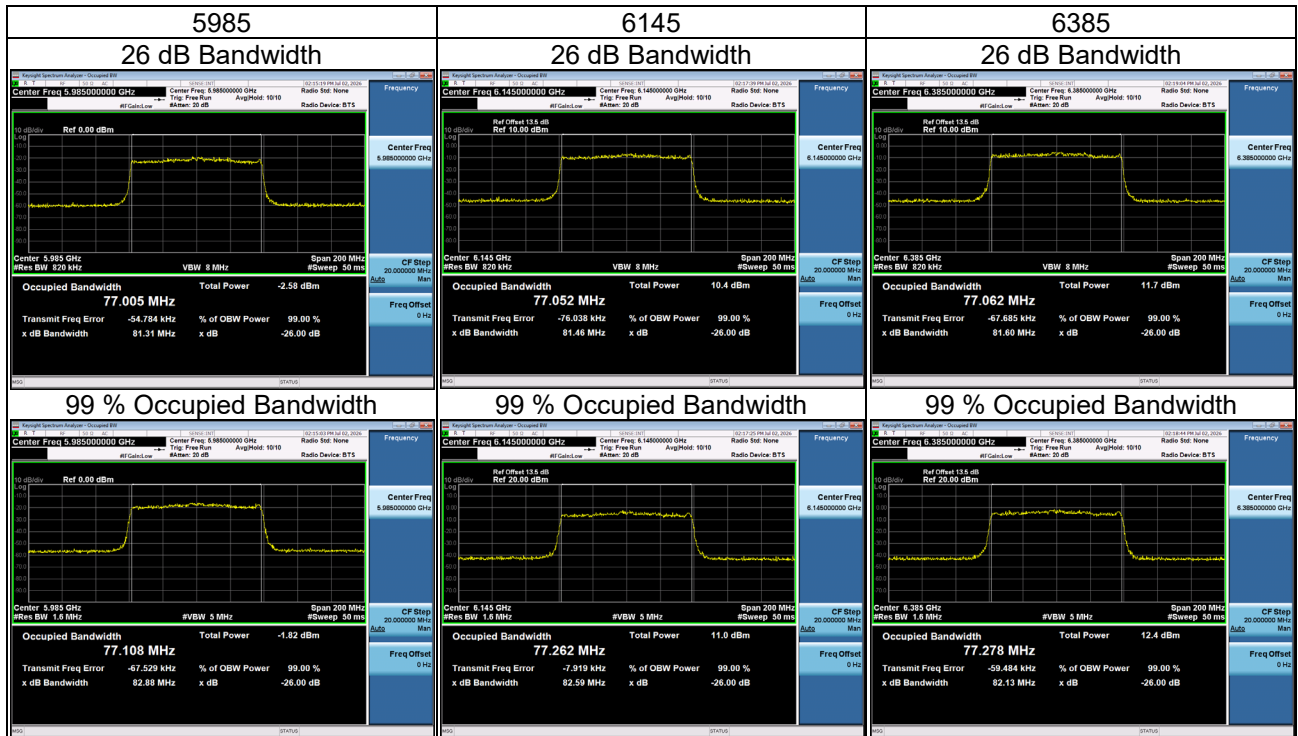
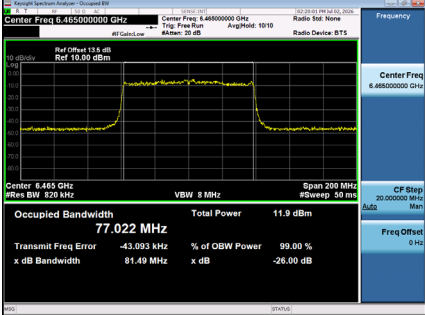


Test Mode	IEEE 802.11ax(HE80)_Ant_1
-----------	---------------------------


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit (MHz)	Result
5985	81.31	77.11	320	Pass
6145	81.46	77.26	320	Pass
6385	81.60	77.28	320	Pass

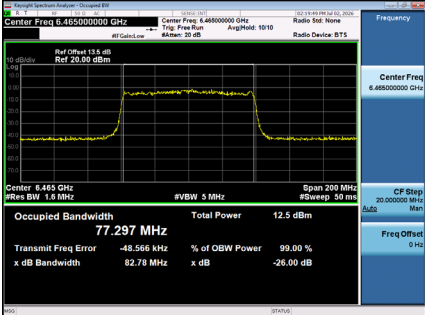


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit (MHz)	Result
6465	81.49	77.30	320	Pass

6465 26 dB Bandwidth  Occupied Bandwidth: 77.022 MHz Total Power: 11.9 dBm Transmit Freq Error: -43.092 kHz % of OBW Power: 99.00 % x dB Bandwidth: 81.49 MHz x dB: -26.00 dB	-	-
99 % Occupied Bandwidth  Occupied Bandwidth: 77.297 MHz Total Power: 12.5 dBm Transmit Freq Error: -48.566 kHz % of OBW Power: 99.00 % x dB Bandwidth: 82.78 MHz x dB: -26.00 dB	-	-

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit (MHz)	Result
6545	80.98	77.26	320	Pass
6705	81.15	77.26	320	Pass
6865	81.03	77.17	320	Pass

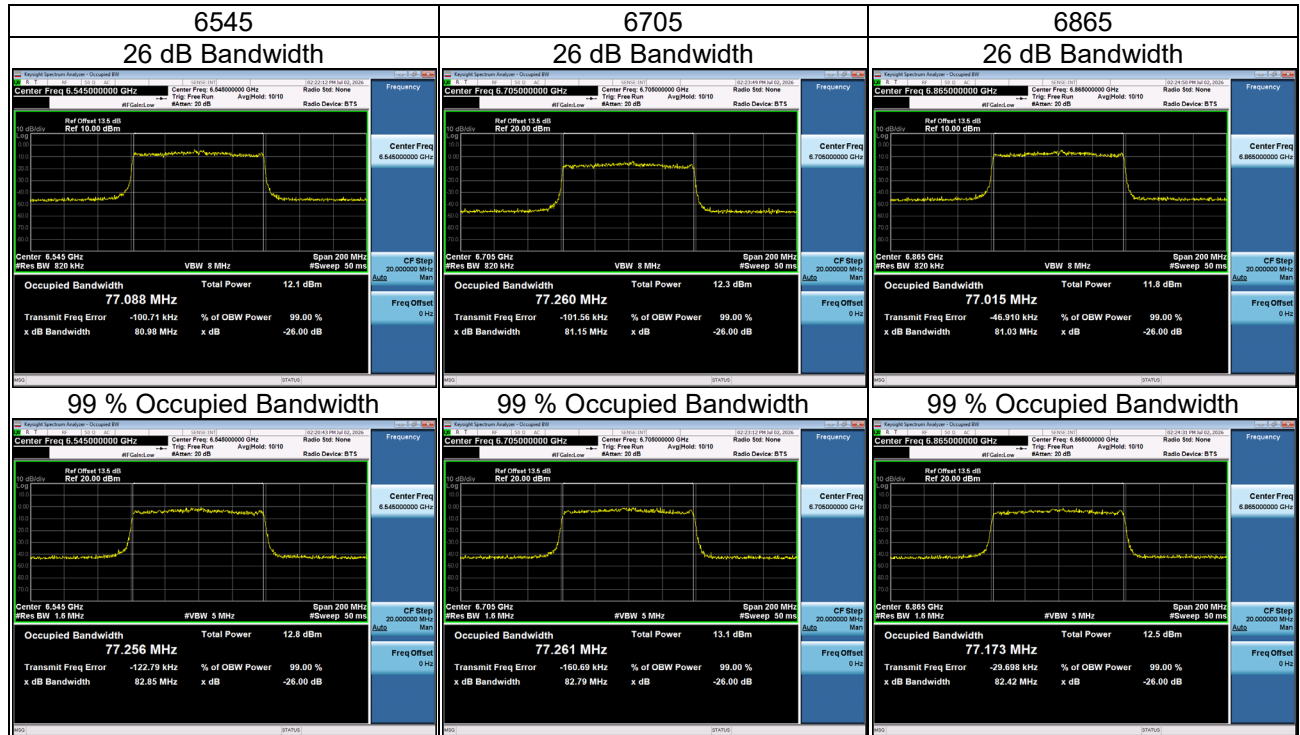


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit (MHz)	Result
6945	81.11	77.22	320	Pass
7025	80.95	77.11	320	Pass


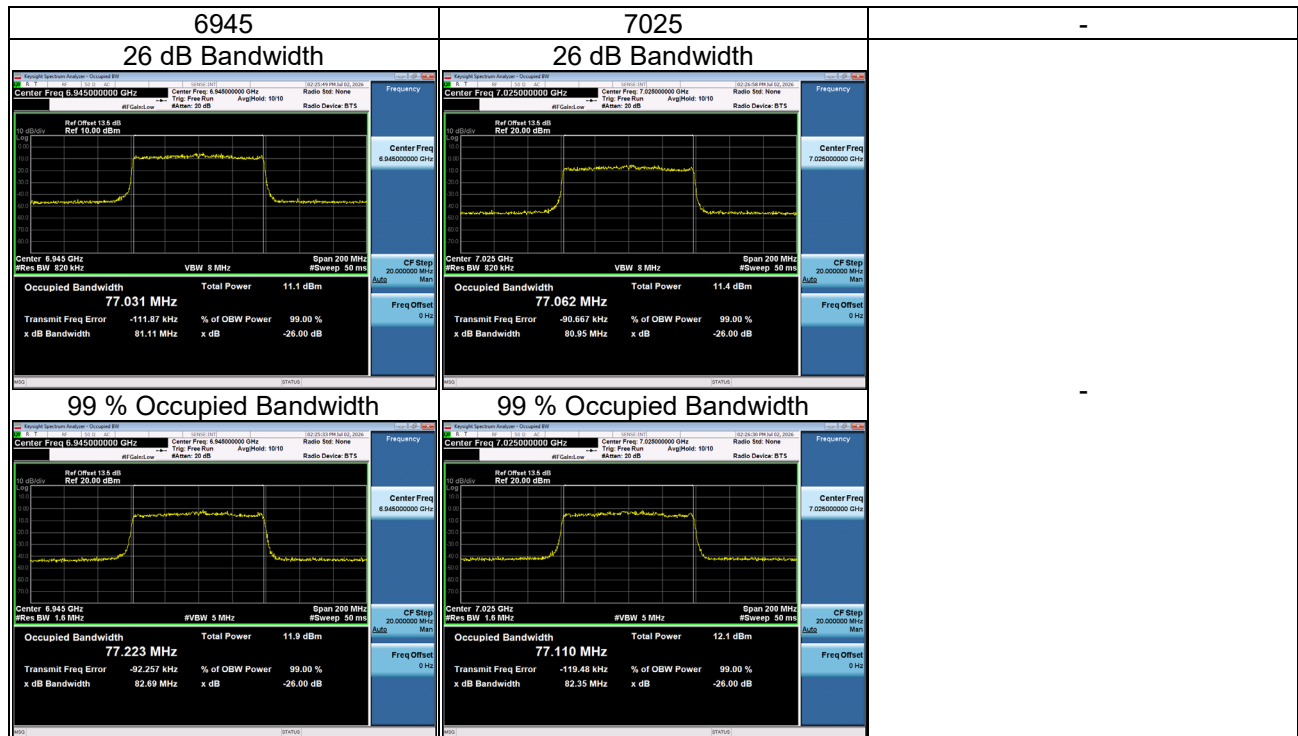


Test Mode	IEEE 802.11ax(HE80)_Ant_2
-----------	---------------------------


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit (MHz)	Result
5985	81.48	77.18	320	Pass
6145	81.06	77.42	320	Pass
6385	81.31	77.20	320	Pass

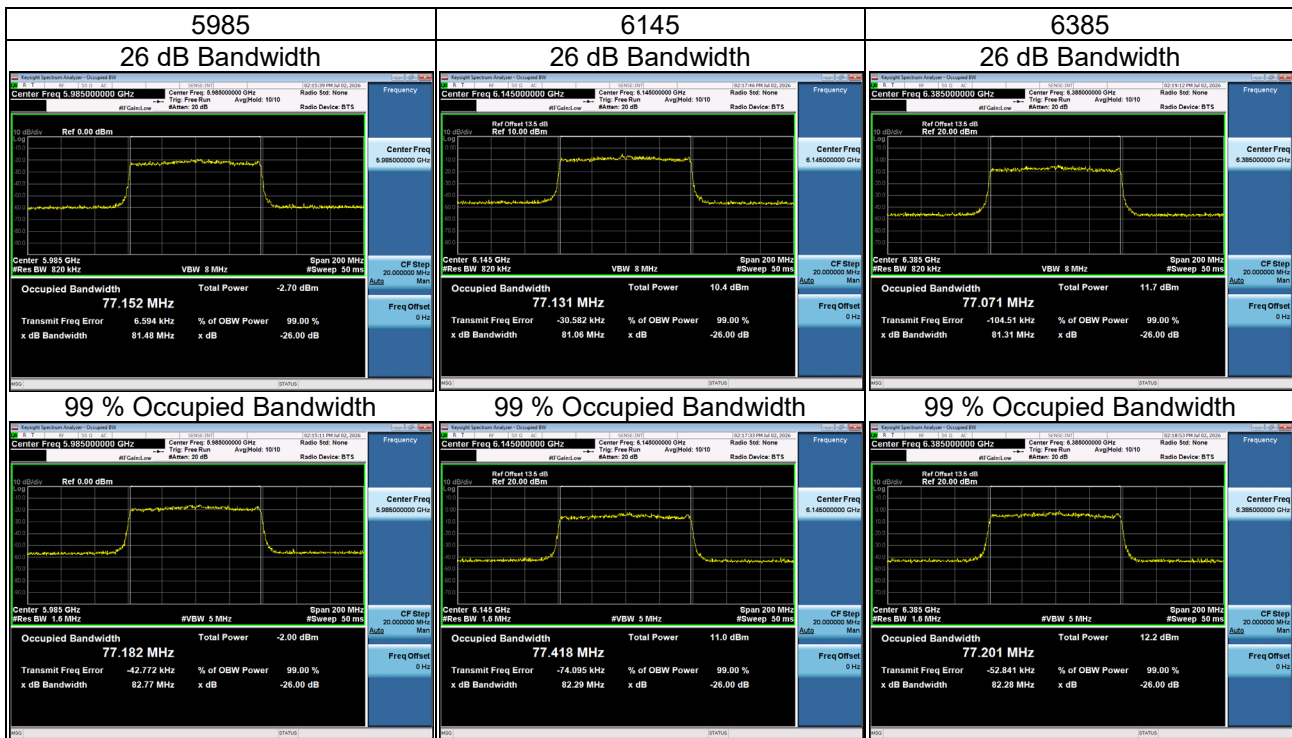


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit (MHz)	Result
6465	81.08	77.29	320	Pass

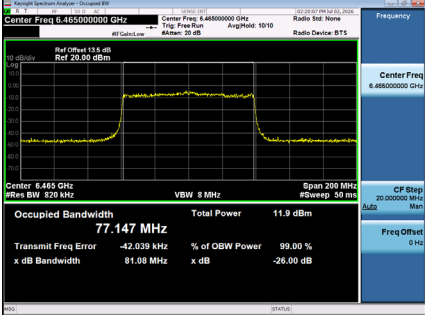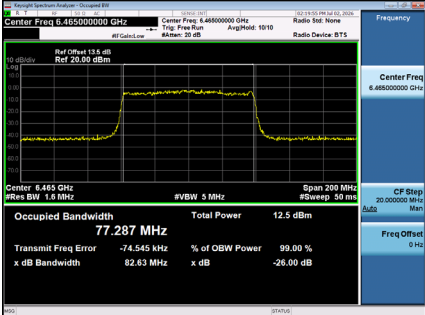6465 26 dB Bandwidth  Occupied Bandwidth 77.147 MHz Total Power 11.9 dBm Transmit Freq Error -42.838 kHz % of OBW Power 99.00 % x dB Bandwidth 81.08 MHz x dB -26.00 dB	-	-
99 % Occupied Bandwidth  Occupied Bandwidth 77.287 MHz Total Power 12.5 dBm Transmit Freq Error -74.545 kHz % of OBW Power 99.00 % x dB Bandwidth 82.63 MHz x dB -26.00 dB	-	-

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit (MHz)	Result
6545	81.24	77.24	320	Pass
6705	81.18	77.26	320	Pass
6865	81.19	77.30	320	Pass

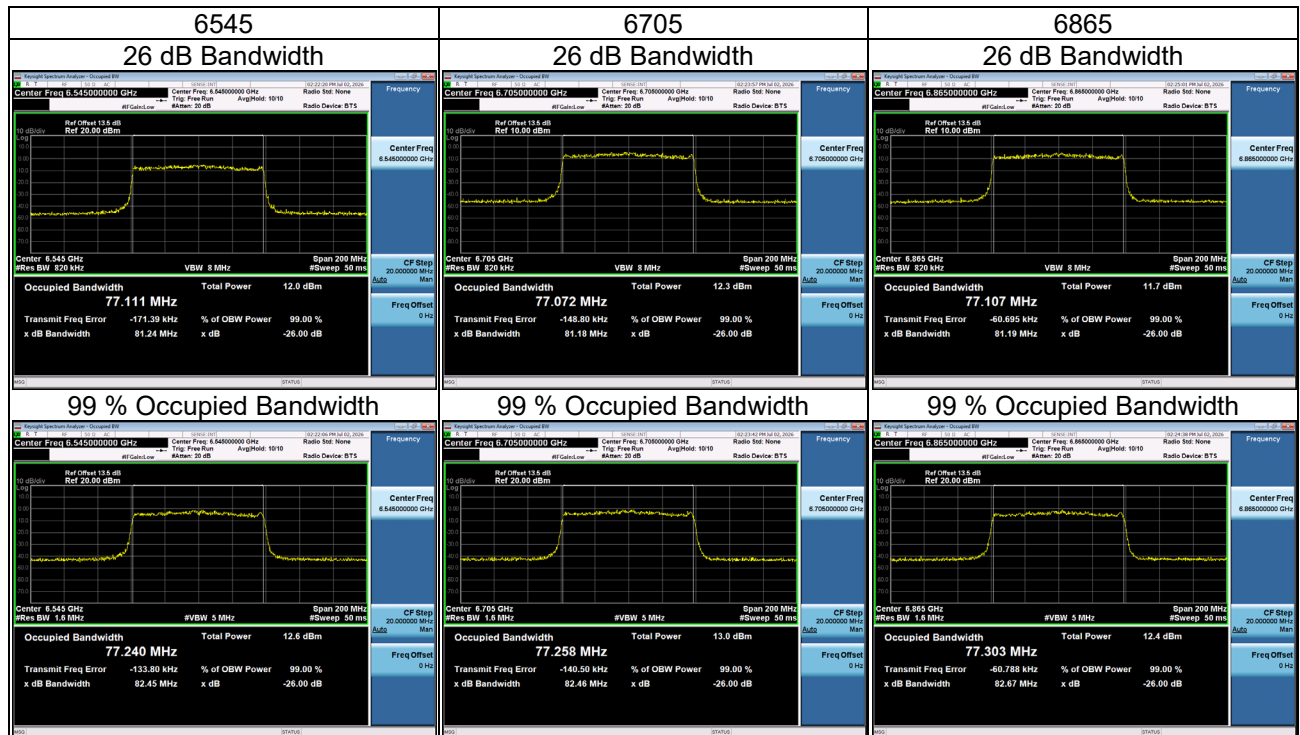

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit (MHz)	Result
6945	81.16	77.27	320	Pass
7025	81.05	77.26	320	Pass

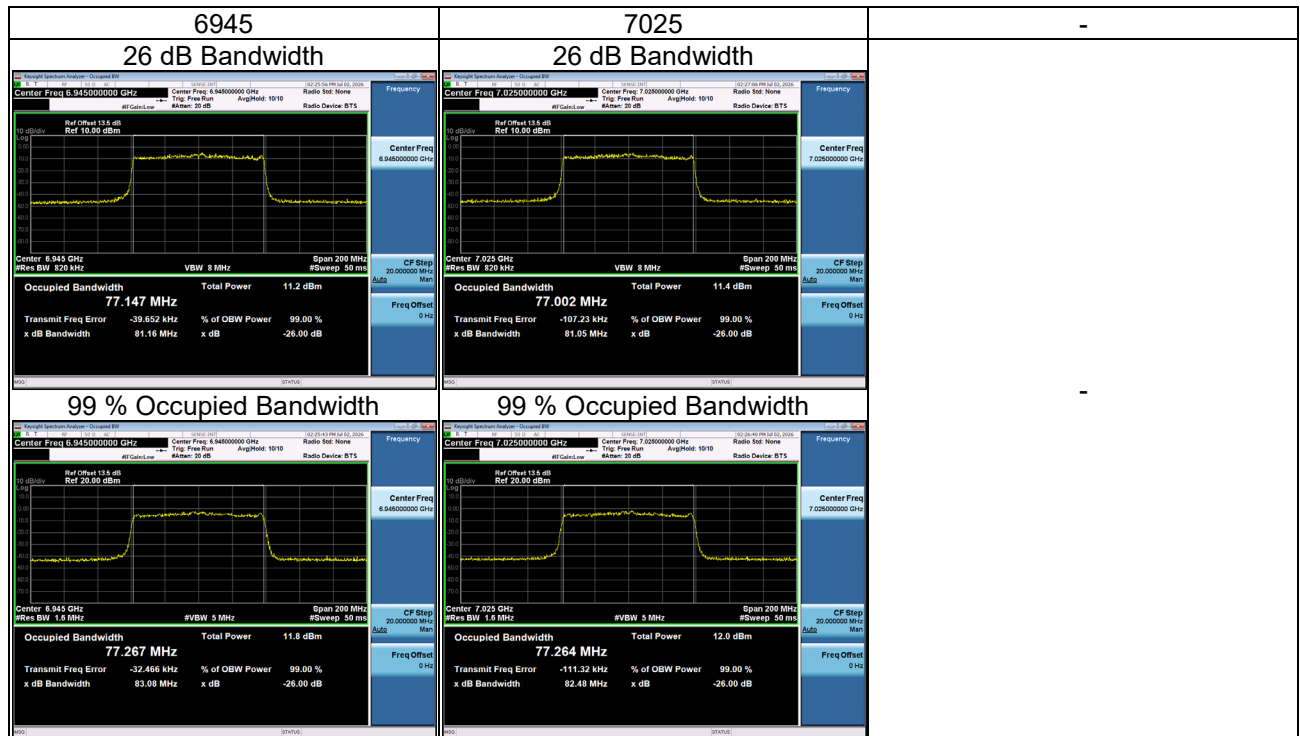

APPENDIX F - MAXIMUM E.I.R.P.

Test Mode	IEEE 802.11ax(HE20)_Ant.1
-----------	---------------------------

Test Frequency (MHz)	Conducted Power (dBm)	e.i.r.p. (dBm)	e.i.r.p. (W)	e.i.r.p. Limit (dBm)	e.i.r.p. Limit (W)	Result
5955	-2.07	2.93	0.0020	24.00	0.2512	Pass
6175	-1.73	3.27	0.0021	24.00	0.2512	Pass
6415	-1.48	3.52	0.0022	24.00	0.2512	Pass
6435	-1.03	3.97	0.0025	24.00	0.2512	Pass
6475	-1.02	3.98	0.0025	24.00	0.2512	Pass
6515	-1.07	3.93	0.0025	24.00	0.2512	Pass
6535	-0.86	4.14	0.0026	24.00	0.2512	Pass
6695	-1.68	3.32	0.0021	24.00	0.2512	Pass
6855	-2.57	2.43	0.0017	24.00	0.2512	Pass
6875	-2.57	2.43	0.0017	24.00	0.2512	Pass
6995	-2.20	2.80	0.0019	24.00	0.2512	Pass
7115	-2.77	2.23	0.0017	24.00	0.2512	Pass

Test Mode	IEEE 802.11ax(HE20)_Ant.2
-----------	---------------------------

Test Frequency (MHz)	Conducted Power (dBm)	e.i.r.p. (dBm)	e.i.r.p. (W)	e.i.r.p. Limit (dBm)	e.i.r.p. Limit (W)	Result
5955	-2.11	2.89	0.0019	24.00	0.2512	Pass
6175	-1.54	3.46	0.0022	24.00	0.2512	Pass
6415	-1.42	3.58	0.0023	24.00	0.2512	Pass
6435	-1.17	3.83	0.0024	24.00	0.2512	Pass
6475	-0.99	4.01	0.0025	24.00	0.2512	Pass
6515	-1.14	3.86	0.0024	24.00	0.2512	Pass
6535	-0.92	4.08	0.0026	24.00	0.2512	Pass
6695	-1.72	3.28	0.0021	24.00	0.2512	Pass
6855	-2.59	2.41	0.0017	24.00	0.2512	Pass
6875	-2.72	2.28	0.0017	24.00	0.2512	Pass
6995	-2.26	2.74	0.0019	24.00	0.2512	Pass
7115	-2.88	2.12	0.0016	24.00	0.2512	Pass

Test Mode	IEEE 802.11ax(HE20)_Total
-----------	---------------------------

Test Frequency (MHz)	Conducted Power (dBm)	e.i.r.p. (dBm)	e.i.r.p. (W)	e.i.r.p. Limit (dBm)	e.i.r.p. Limit (W)	Result
5955	0.92	5.92	0.0039	24.00	0.2512	Pass
6175	1.38	6.38	0.0043	24.00	0.2512	Pass
6415	1.56	6.56	0.0045	24.00	0.2512	Pass
6435	1.91	6.91	0.0049	24.00	0.2512	Pass
6475	2.01	7.01	0.0050	24.00	0.2512	Pass
6515	1.91	6.91	0.0049	24.00	0.2512	Pass
6535	2.12	7.12	0.0052	24.00	0.2512	Pass
6695	1.31	6.31	0.0043	24.00	0.2512	Pass
6855	0.43	5.43	0.0035	24.00	0.2512	Pass
6875	0.37	5.37	0.0034	24.00	0.2512	Pass
6995	0.78	5.78	0.0038	24.00	0.2512	Pass
7115	0.19	5.19	0.0033	24.00	0.2512	Pass

Test Mode	IEEE 802.11ax(HE40)_Ant.1
-----------	---------------------------

Test Frequency (MHz)	Conducted Power (dBm)	e.i.r.p. (dBm)	e.i.r.p. (W)	e.i.r.p. Limit (dBm)	e.i.r.p. Limit (W)	Result
5965	-0.27	4.73	0.0030	24.00	0.2512	Pass
6165	0.01	5.01	0.0032	24.00	0.2512	Pass
6405	0.43	5.43	0.0035	24.00	0.2512	Pass
6445	1.52	6.52	0.0045	24.00	0.2512	Pass
6485	1.28	6.28	0.0042	24.00	0.2512	Pass
6525	1.25	6.25	0.0042	24.00	0.2512	Pass
6565	1.64	6.64	0.0046	24.00	0.2512	Pass
6725	-0.17	4.83	0.0030	24.00	0.2512	Pass
6845	-0.38	4.62	0.0029	24.00	0.2512	Pass
6885	-0.11	4.89	0.0031	24.00	0.2512	Pass
7005	1.10	6.10	0.0041	24.00	0.2512	Pass
7085	1.53	6.53	0.0045	24.00	0.2512	Pass

Test Mode	IEEE 802.11ax(HE40)_Ant.2
-----------	---------------------------

Test Frequency (MHz)	Conducted Power (dBm)	e.i.r.p. (dBm)	e.i.r.p. (W)	e.i.r.p. Limit (dBm)	e.i.r.p. Limit (W)	Result
5965	-0.31	4.69	0.0029	24.00	0.2512	Pass
6165	0.04	5.04	0.0032	24.00	0.2512	Pass
6405	0.37	5.37	0.0034	24.00	0.2512	Pass
6445	1.43	6.43	0.0044	24.00	0.2512	Pass
6485	1.21	6.21	0.0042	24.00	0.2512	Pass
6525	1.24	6.24	0.0042	24.00	0.2512	Pass
6565	1.60	6.60	0.0046	24.00	0.2512	Pass
6725	-0.28	4.72	0.0030	24.00	0.2512	Pass
6845	-0.41	4.59	0.0029	24.00	0.2512	Pass
6885	-0.18	4.82	0.0030	24.00	0.2512	Pass
7005	0.93	5.93	0.0039	24.00	0.2512	Pass
7085	1.67	6.67	0.0046	24.00	0.2512	Pass

Test Mode	IEEE 802.11ax(HE40)_Total
-----------	---------------------------

Test Frequency (MHz)	Conducted Power (dBm)	e.i.r.p. (dBm)	e.i.r.p. (W)	e.i.r.p. Limit (dBm)	e.i.r.p. Limit (W)	Result
5965	2.72	7.72	0.0059	24.00	0.2512	Pass
6165	3.04	8.04	0.0064	24.00	0.2512	Pass
6405	3.41	8.41	0.0069	24.00	0.2512	Pass
6445	4.49	9.49	0.0089	24.00	0.2512	Pass
6485	4.26	9.26	0.0084	24.00	0.2512	Pass
6525	4.26	9.26	0.0084	24.00	0.2512	Pass
6565	4.63	9.63	0.0092	24.00	0.2512	Pass
6725	2.79	7.79	0.0060	24.00	0.2512	Pass
6845	2.62	7.62	0.0058	24.00	0.2512	Pass
6885	2.87	7.87	0.0061	24.00	0.2512	Pass
7005	4.03	9.03	0.0080	24.00	0.2512	Pass
7085	4.61	9.61	0.0091	24.00	0.2512	Pass

Test Mode	IEEE 802.11ax(HE80)_Ant.1
-----------	---------------------------

Test Frequency (MHz)	Conducted Power (dBm)	e.i.r.p. (dBm)	e.i.r.p. (W)	e.i.r.p. Limit (dBm)	e.i.r.p. Limit (W)	Result
5985	4.14	9.14	0.0082	24.00	0.2512	Pass
6145	5.21	10.21	0.0105	24.00	0.2512	Pass
6385	5.10	10.10	0.0102	24.00	0.2512	Pass
6465	4.31	9.31	0.0085	24.00	0.2512	Pass
6545	3.71	8.71	0.0074	24.00	0.2512	Pass
6705	3.60	8.60	0.0072	24.00	0.2512	Pass
6865	3.74	8.74	0.0075	24.00	0.2512	Pass
6945	3.62	8.62	0.0073	24.00	0.2512	Pass
7025	3.27	8.27	0.0067	24.00	0.2512	Pass

Test Mode	IEEE 802.11ax(HE80)_Ant.2
-----------	---------------------------

Test Frequency (MHz)	Conducted Power (dBm)	e.i.r.p. (dBm)	e.i.r.p. (W)	e.i.r.p. Limit (dBm)	e.i.r.p. Limit (W)	Result
5985	4.18	9.18	0.0083	24.00	0.2512	Pass
6145	5.36	10.36	0.0109	24.00	0.2512	Pass
6385	5.13	10.13	0.0103	24.00	0.2512	Pass
6465	4.28	9.28	0.0085	24.00	0.2512	Pass
6545	3.61	8.61	0.0073	24.00	0.2512	Pass
6705	3.54	8.54	0.0071	24.00	0.2512	Pass
6865	3.78	8.78	0.0076	24.00	0.2512	Pass
6945	3.70	8.70	0.0074	24.00	0.2512	Pass
7025	3.23	8.23	0.0067	24.00	0.2512	Pass

Test Mode	IEEE 802.11ax(HE80)_Total
-----------	---------------------------


Test Frequency (MHz)	Conducted Power (dBm)	e.i.r.p. (dBm)	e.i.r.p. (W)	e.i.r.p. Limit (dBm)	e.i.r.p. Limit (W)	Result
5985	7.17	12.17	0.0165	24.00	0.2512	Pass
6145	8.30	13.30	0.0214	24.00	0.2512	Pass
6385	8.13	13.13	0.0206	24.00	0.2512	Pass
6465	7.31	12.31	0.0170	24.00	0.2512	Pass
6545	6.67	11.67	0.0147	24.00	0.2512	Pass
6705	6.58	11.58	0.0144	24.00	0.2512	Pass
6865	6.77	11.77	0.0150	24.00	0.2512	Pass
6945	6.67	11.67	0.0147	24.00	0.2512	Pass
7025	6.26	11.26	0.0134	24.00	0.2512	Pass

Note: Conducted power = Measure result + Cable loss + Duty factor

APPENDIX G - MAXIMUM POWER SPECTRAL DENSITY (E.I.R.P.)

Test Mode IEEE 802.11ax(HE20)_Ant.1

Test Frequency (MHz)	Conducted Power Spectral Density (dBm/MHz)	Duty Factor (dB)	e.i.r.p. Spectral Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5955	-14.25	1.20	-8.05	-1.00	Pass
6175	-13.05	1.20	-6.85	-1.00	Pass
6415	-13.81	1.20	-7.61	-1.00	Pass

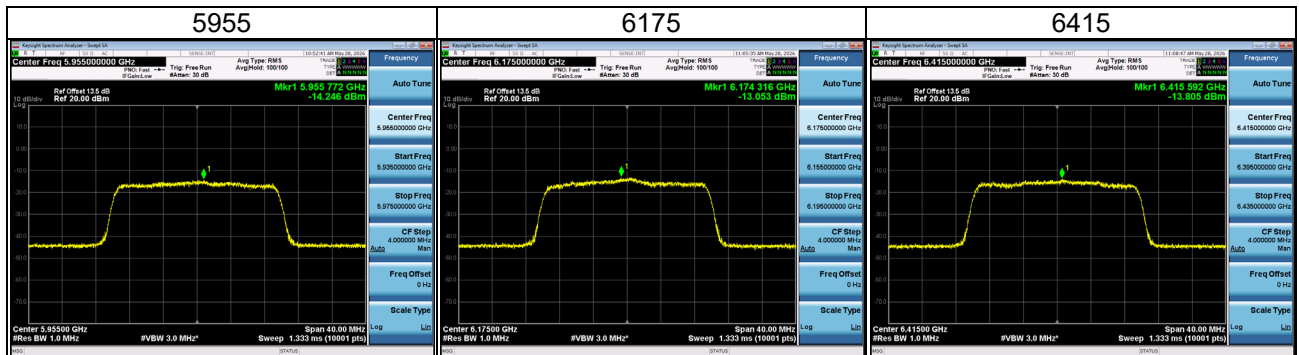

Test Frequency (MHz)	Conducted Power Spectral Density (dBm/MHz)	Duty Factor (dB)	e.i.r.p. Spectral Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
6435	-15.09	1.20	-8.89	-1.00	Pass
6475	-13.51	1.20	-7.31	-1.00	Pass
6515	-14.41	1.20	-8.21	-1.00	Pass

