

TEST REPORT

SCOPE OF WORK

FCC TESTING—MODEL: DGUN-2960, ADDITIONAL MODEL: DGUN-2964

REPORT NUMBER

SZHH01201001-002

ISSUE DATE

November 27, 2017

[REVISED DATE]

[-----]

PAGES

42

DOCUMENT CONTROL NUMBER

FCC ID 249_C

© 2017 INTERTEK



DREAMGEAR, LLC

Application
For
Certification

FCC ID: TW8D18018B**SUPER GAMEPAD FOR SNES CLASSIC****Additional Name: Super Gamepad for Super Famicom Classic****Model: DGUN-2960****Additional Model: DGUN-2964****2.4GHz Transceiver****Report No.: SZHH01201001-002**

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-1-16]

Prepared and Checked by:

Approved by:

Sign on file

Abel Zhou
Senior Engineer

Kidd Yang
Senior Project Engineer
Date: November 27, 2017

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

LIST OF EXHIBITS

INTRODUCTION

<i>EXHIBIT 1:</i>	General Description
<i>EXHIBIT 2:</i>	System Test Configuration
<i>EXHIBIT 3:</i>	Emission Results
<i>EXHIBIT 4:</i>	Equipment Photographs
<i>EXHIBIT 5:</i>	Product Labelling
<i>EXHIBIT 6:</i>	Technical Specifications
<i>EXHIBIT 7:</i>	Instruction Manual
<i>EXHIBIT 8:</i>	Miscellaneous Information
<i>EXHIBIT 9:</i>	Confidentiality Request
<i>EXHIBIT 10:</i>	Test Equipment List

MEASUREMENT/TECHNICAL REPORT

MODEL: DGUN-2960

FCC ID: TW8D18018B

This report concerns (check one) Original Grant X Class II Change _____

Equipment Type: DXX - Part 15 Low Power Communication Device Transmitter

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes _____ No X

If yes, defer until: _____
date

Company Name agrees to notify the Commission by: _____
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes _____ No X

If no, assumed Part 15, Subpart C for intentional radiator – the new 47 CFR [10-1-16 Edition] provision.

Report prepared by:

Abel Zhou
Intertek Testing Services Shenzhen Ltd. Longhua Branch
1F/2F, Building B, QiaoAn Scientific Technology Park,
Shangkeng Community, Guanhu Subdistrict, Longhua District,
Shenzhen, P.R. China China

Phone: (86 755) 8614 0687

Fax: (86 755) 8601 6751

Table of Contents

1.0 General Description	7
1.1 Product Description	7
1.2 Related Submittal(s) Grants	7
1.3 Test Methodology	7
1.4 Test Facility	7
2.0 System Test Configuration.....	9
2.1 Justification.....	9
2.2 EUT Exercising Software.....	9
2.3 Special Accessories	9
2.4 Equipment Modification.....	9
2.5 Measurement Uncertainty.....	10
2.6 Support Equipment List and Description	10
3.0 Emission Results	12
3.1 Radiated Test Results.....	13
3.1.1 Field Strength Calculation.....	13
3.1.2 Radiated Emission Configuration Photograph.....	14
3.1.3 Radiated Emissions	14
3.1.4 Transmitter Spurious Emissions	16
3.2 Conducted Emission at Mains Termina	20
3.2.1 Conducted Emissions Configuration Photograph.....	20
3.2.2 Conducted Emissions	20
4.0 Equipment Photographs.....	24
5.0 Product Labelling	26
6.0 Technical Specifications.....	28
7.0 Instruction Manual	30
8.0 Miscellaneous Information.....	32
8.1 Bandedge Plot	33
8.2 Discussion of Pulse Desensitization	35
8.3 Calculation of Average Factor	36
8.4 Emissions Test Procedures.....	37
9.0 Confidentiality Request	40
10.0 Technical Specifications	42

List of attached file

Exhibit type	File Description	Filename
Test Report	Test Report	report.pdf
Test Setup Photo	Conducted Emission	conducted photos.pdf
Test Setup Photo	Radiated Emission	radiated photos.pdf
Test Report	Bandedge Plot	bandedge.pdf
Test Report	20dB BW Plot	bw.pdf
External Photo	External Photo	external photos.pdf
Internal Photo	Internal Photo	internal photos.pdf
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
Operation Description	Technical Description	descri.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Cover Letter	Confidentiality Letter	request.pdf
Cover Letter	Letter of Agency	agency.pdf

EXHIBIT 1

GENERAL DESCRIPTION

1.0 General Description

1.1 Product Description

The equipment under test (EUT) is a wireless adapter for the SUPER GAMEPAD FOR SNES CLASSIC model: DGUN-2960 operating at 2.4GHz band. It is powered by DC 3.3V (Uii port) via NES Classic Edition Host Unit which can be powered by adapter with AC 120V/60Hz input. For more detail information pls. refer to the user manual.

The Model: DGUN-2964 is the same as the Model: DGUN-2960 in hardware and electrical aspect. The difference in appearance and model number serves as marketing strategy.

Antenna Type: Integral antenna

Modulation Type: GFSK

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

1.2 Related Submittal(s) Grants

This is an application for certification of a dongle unit for the SUPER GAMEPAD FOR SNES CLASSIC and the corresponding controller unit is subjected to the FCC ID: TW8DI8018A.

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in Semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

1.4 Test Facility

The Semi-anechoic chamber and shielding room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Longhua Branch** and located at 1F/2F, Building B, QiaoAn Scientific Technology Park, Shangkeng Community, Guanhu Subdistrict, Longhua District, Shenzhen, P.R. China. This test facility and site measurement data have been fully placed on file with FCC (Registration Number: CN1188).

EXHIBIT 2

SYSTEM TEST CONFIGURATION

2.0 System Test Configuration

2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The EuT was powered by DC 3.3V (Uii port) via NES Classic Edition Host Unit which was powered by adapter with AC 120V/60Hz input during the test. Only the worst case data was reported.

For maximizing emissions below 30 MHz, the EUT was rotated through 360°, the centre of the loop antenna was placed 1 meter above the ground, and the antenna polarization was changed. For maximizing emission at and above 30 MHz, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data report in Exhibit 3.0.

The rear of unit was flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the styrene turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

2.2 EUT Exercising Software

There was no special software to exercise the device.

2.3 Special Accessories

No special accessories used.

2.4 Equipment Modification

Any modifications installed previous to testing by DREAMGEAR, LLC will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd Longhua Branch.

2.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

2.6 Support Equipment List and Description

Description	Manufacturer	Model No.
NES Classic Edition (Provided by Applicant)	Nintendo	CLV-001
Adapter (Provided by Applicant)	Nintendo	CLV-001(USZ)
Wii Remote (Provided by Applicant)	Nintendo	RVL-003
TV (Provided by Intertek)	SONY	KDL-24EX520
Displayer (Provided by Intertek)	LG	27UD68
HDMI Cable (Provided by Intertek)	N/A	Unshielded, 150cm

EXHIBIT 3

EMISSION RESULTS

3.0 Emission Results

Data is included worst-case configuration (the configuration which resulted in the highest emission levels).

3.1 Radiated Test Results

A sample calculation, configuration photographs and data tables of the emissions are included.

3.1.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG$$

Where FS = Field Strength in dB μ V/m
 RA = Receiver Amplitude (including preamplifier) in dB μ V
 CF = Cable Attenuation Factor in dB
 AF = Antenna Factor in dB
 AG = Amplifier Gain in dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG$$

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The net field strength for comparison to the appropriate emission limit is 42 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

RA = 62.0 dB μ V
AF = 7.4 dB
CF = 1.6 dB
AG = 29.0 dB

$$FS = 62 + 7.4 + 1.6 - 29 + 0 = 42 \text{ dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm} [(42 \text{ dB}\mu\text{V/m})/20] = 125.9 \mu\text{V/m}$$

3.1.2 Radiated Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

3.1.3 Radiated Emissions

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Worst Case Radiated Emission
at
74.135 MHz

Judgement: Passed by 6.0 dB

TEST PERSONNEL:

Sign on file

Abel Zhou Senior Engineer
Typed/Printed Name

October 25, 2017
Date

Applicant: DREAMGEAR, LLC

Date of Test: October 25, 2017

Model: DGUN-2960

Worst Case Operating Mode:

Normal Link

Table 1

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	222.545	45.3	20.0	8.1	33.4	46.0	-12.6
Horizontal	312.270	42.7	20.0	14.8	37.5	46.0	-8.5
Horizontal	668.260	43.0	20.0	15.3	38.3	46.0	-7.7
Vertical	74.135	45.9	20.0	8.1	34.0	40.0	-6.0
Vertical	312.270	48.8	20.0	10.9	39.7	46.0	-6.3
Vertical	597.450	34.0	20.0	25.2	39.2	46.0	-6.8

- NOTES:
1. Quasi-Peak detector is used except for others stated.
 2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. All emissions are below the QP limit.

3.1.4 Transmitter Spurious Emissions (Radiated)

Worst Case Radiated Emission
at
7425.000 MHz

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 10.8 dB

TEST PERSONNEL:

Sign on file

Abel Zhou Senior Engineer
Typed/Printed Name

October 25, 2017
Date

Applicant: DREAMGEAR, LLC

Date of Test: October 25, 2017

Model: DGUN-2960

Worst Case Operating Mode:

Transmitting

Table 2

Radiated Emissions

(2405MHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	2405.000	91.2	36.7	29.1	83.6	114.0	-30.4
Vertical	4810.000	55.8	36.7	33.5	52.6	74.0	-21.4
Vertical	7215.000	63.1	36.1	35.7	62.7	74.0	-11.3

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	2405.000	91.2	36.7	29.1	27.5	56.1	94.0	-37.9
Vertical	4810.000	55.8	36.7	33.5	27.5	25.1	54.0	-28.9
Vertical	7215.000	63.1	36.1	35.7	27.5	35.2	54.0	-18.8

Notes: 1. Peak detector Data unless otherwise stated.

2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Abel Zhou

Applicant: DREAMGEAR, LLC

Date of Test: October 25, 2017

Model: DGUN-2960

Worst Case Operating Mode:

Transmitting

Table 3

Radiated Emissions

(2440MHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	2440.000	90.6	36.7	29.2	83.1	114.0	-30.9
Vertical	4880.000	56.4	36.7	33.4	53.1	74.0	-20.9
Vertical	7320.000	63.2	36.1	35.8	62.9	74.0	-11.1

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	2440.000	90.6	36.7	29.2	27.5	55.6	94.0	-38.4
Vertical	4880.000	56.4	36.7	33.4	27.5	25.6	54.0	-28.4
Vertical	7320.000	63.2	36.1	35.8	27.5	35.4	54.0	-18.6

Notes: 1. Peak detector Data unless otherwise stated.

2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Abel Zhou

Applicant: DREAMGEAR, LLC

Date of Test: October 25, 2017

Model: DGUN-2960

Worst Case Operating Mode:

Transmitting

Table 4

Radiated Emissions

(2475MHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	2475.000	87.6	36.7	29.3	80.2	114.0	-33.8
Vertical	4950.000	57.7	36.7	33.3	54.3	74.0	-19.7
Vertical	7425.000	63.2	36.1	36.1	63.2	74.0	-10.8

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	2475.000	87.6	36.7	29.3	27.5	52.7	94.0	-41.3
Vertical	4950.000	57.7	36.7	33.3	27.5	26.8	54.0	-27.2
Vertical	7425.000	63.2	36.1	36.1	27.5	35.7	54.0	-18.3

Notes: 1. Peak detector Data unless otherwise stated.

2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Abel Zhou

3.2 Conducted Emission at Mains Terminal

3.2.1 Conducted Emissions Configuration Photograph

For electronic filing, the worst case conducted emission configuration photograph is saved with filename: conducted photos.pdf.

3.2.2 Conducted Emissions

Worst Case Neutral-Conducted Configuration
At

0.514000 MHz

Judgement: Passed by 11.1 dB margin

TEST PERSONNEL:

Sign on file

Abel Zhou Senior Engineer
Typed/Printed Name

October 25, 2017
Date

Test Report

Intertek Report No.: SZHH01201001-002

Applicant: DREAMGEAR, LLC

Date of Test: October 25, 2017


Model: DGUN-2960

Sample: 1/1

Worst Case Operating Mode: Transmit

Phase: Live

Conducted Emission Test – FCC

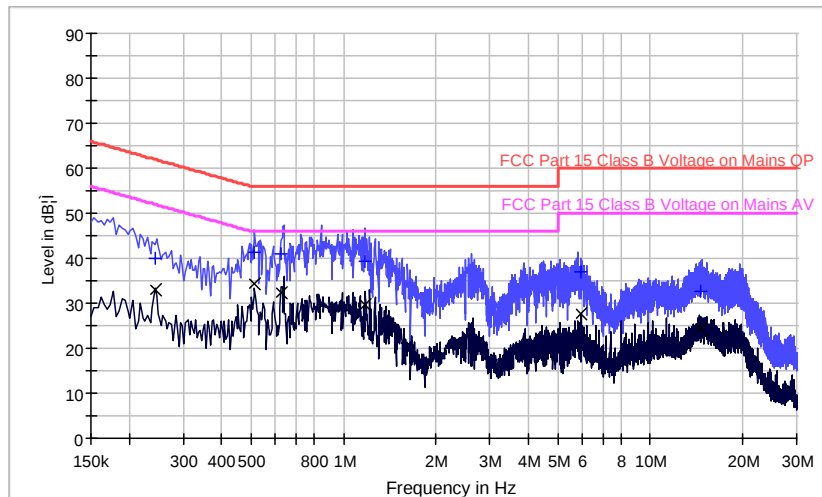

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBμV)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.242000	40.0	L1	9.7	22.0	62.0
0.514000	41.4	L1	9.7	14.6	56.0
0.626000	41.1	L1	9.7	14.9	56.0
1.178000	39.2	L1	9.7	16.8	56.0
5.934000	37.0	L1	9.8	23.0	60.0
14.550000	32.7	L1	10.0	27.3	60.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.242000	33.0	L1	9.7	19.0	52.0
0.514000	34.3	L1	9.7	11.7	46.0
0.626000	32.4	L1	9.7	13.6	46.0
1.178000	29.6	L1	9.7	16.4	46.0
5.934000	27.6	L1	9.8	22.4	50.0
14.550000	24.3	L1	10.0	25.7	50.0

Test Report

Intertek Report No.: SZHH01201001-002

Applicant: DREAMGEAR, LLC

Date of Test: October 25, 2017


Model: DGUN-2960

Sample: 1/1

Worst Case Operating Mode: Transmit

Phase: Neutral

Conducted Emission Test – FCC

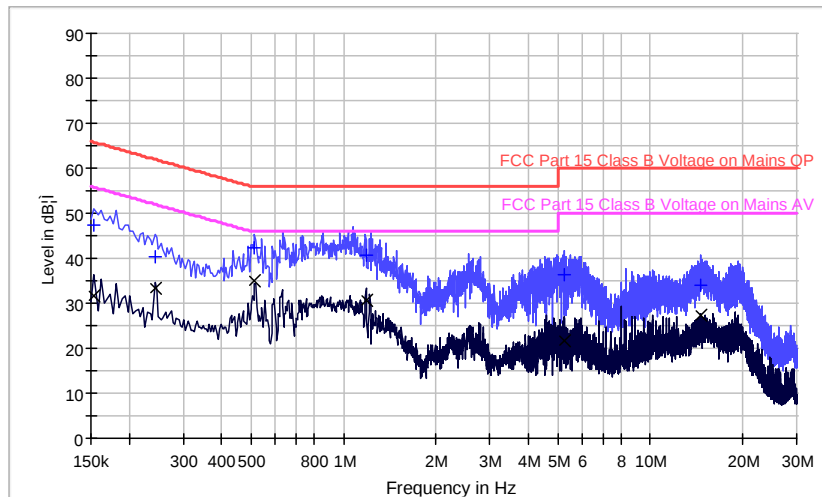

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBμV)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.154000	47.2	N	9.6	18.6	65.8
0.242000	40.5	N	9.7	21.5	62.0
0.514000	42.4	N	9.7	13.6	56.0
1.182000	40.5	N	9.7	15.5	56.0
5.242000	36.4	N	9.8	23.6	60.0
14.530000	34.0	N	10.0	26.0	60.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.154000	31.6	N	9.6	24.2	55.8
0.242000	33.2	N	9.7	18.8	52.0
0.514000	34.9	N	9.7	11.1	46.0
1.182000	30.7	N	9.7	15.3	46.0
5.242000	21.7	N	9.8	28.3	50.0
14.530000	27.5	N	10.0	22.5	50.0

EXHIBIT 4

EQUIPMENT PHOTOGRAPHS

4.0 Equipment Photographs

For electronic filing, the photographs of the tested EUT are saved with filename: external photos.pdf & internal photos.pdf.

EXHIBIT 5

PRODUCT LABELLING

5.0 Product Labelling

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

EXHIBIT 6

TECHNICAL SPECIFICATIONS

6.0 Technical Specifications

For electronic filing, the block diagram and schematics of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

EXHIBIT 7

INSTRUCTION MANUAL

7.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

EXHIBIT 8

MISCELLANEOUS INFORMATION

8.0 Miscellaneous Information

This miscellaneous information includes details of the measured bandedge, the test procedure and calculation of factor such as pulse desensitization.

8.1 Bandedge Plot

For electronic filing, the plot shows the fundamental emission when modulated is saved with filename: bandedge.pdf. From the plot, the field strength of any emissions outside of the specified frequency band are attenuated to the general radiated emission limits in section 15.209. It fulfils the requirement of 15.249(d).

Peak and Average Measurement

Bandedge compliance is determined by applying radiated measurements method, i.e (Bandedge Plot).

(i) Lower channel 2405.000MHz:

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Vertical	2400.000	50.5	36.7	28.5	42.3	74.0	-31.7

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Vertical	2400.000	42.7	36.7	28.5	34.5	54.0	-19.5

(ii) Upper channel 2475.000MHz:

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Vertical	2483.500	44.4	36.7	29.0	36.7	74.0	-37.3

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Vertical	2483.500	38.2	36.7	29.0	30.5	54.0	-23.5

The resultant field strength meets the general radiated emission limit in section 15.209, which does not exceed 74dBμV/m (Peak Limit) and 54dBμV/m (Average Limit).

8.1 Bandedge Plot (cont'd)

Pursuant to FCC part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered.

Figure 8.1 Bandwidth

8.2 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. The effective period (T_{eff}) is approximately 174.638 μ s for a digital "1" bit, as shown in the plots of Exhibit 8.3. With a resolution bandwidth (3 dB) of 100 kHz, the pulse desensitivity factor was 0 dB.

8.3 Transmitter Duty Cycle Calculation, FCC Rule 15.35(b, c)

Averaging factor in dB = $20 \log (\text{duty cycle})$

The specification for output field strengths in accordance with the FCC rules specify measurements with an average detector. During testing, a spectrum analyzer incorporating a peak detector was used. Therefore, a reduction factor can be applied to the resultant peak signal level and compared to the limit for measurement instrumentation incorporating an average detector.

The time period over which the duty cycle is measured is 100 milliseconds, or the repetition cycle, whichever is a shorter time frame. The worst case (highest percentage on) duty cycle is used for the calculation. The duty cycle is measured by placing the spectrum analyzer in zero scan (receiver mode) and linear mode at maximum bandwidth (3 MHz at 3 dB down) and viewing the resulting time domain signal output from the analyzer on a Tektronix oscilloscope. The oscilloscope is used because of its superior time base and triggering facilities.

A plot of the worst-case duty cycle as detected in this manner are saved with filename: af.pdf

The duty cycle is simply the on-time divided by the period:

The duration of one cycle = 4.1449ms

Effective period of the cycle = $174.638\mu\text{s} = 0.174638\text{ms}$

$\text{DC} = 0.174638\text{ms} / 4.1449\text{ms} = 0.04213$ or 4.213%

Therefore, the averaging factor is found by $20 \log_{10} (0.04213) = -27.5\text{dB}$

8.4 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.10 – 2013.

The transmitting equipment under test (EUT) is placed on a styrene turntable which is four feet in diameter and approximately 0.8 meter up to 1GHz and 1.5 meter above 1GHz in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axes to obtain maximum emission levels. The antenna height and polarization are varied during the testing to search for maximum signal levels.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

Detector function for conducted emissions is in QP & AV mode and IFBW setting is 9 kHz from the frequency band 150 kHz to 30MHz.

8.4 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements are made as described in ANSI C63.10 - 2013.

The IF bandwidth used for measurement of radiated signal strength was 10 kHz for emission below 30 MHz and 120 kHz for emission from 30 MHz to 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. Above 1000 MHz, a resolution bandwidth of 1 MHz (RBW 3MHz for fundamental emission) is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the restricted bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, but those measurements taken at a closer distance are so marked.

EXHIBIT 9

CONFIDENTIALITY REQUEST

9.0 Confidentiality Request

For electronic filing, the confidentiality request of the tested EUT is saved with filename: request.pdf.

EXHIBIT10

TEST EQUIPMENT LIST

10.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ061-04	BiConiLog Antenna	ETS	3142C	00066460	17-Oct-2017	17-Oct-2018
SZ185-01	EMI Receiver	R&S	ESCI	100547	9-Feb-2017	9-Feb-2018
SZ061-09	Horn Antenna	ETS	3115	00092346	17-Oct-2017	17-Oct-2018
SZ061-07	Pyramidal Horn Antenna	ETS	3160-09	00083067	16-Mar-2017	16-Mar-2018
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	26-May-2017	26-May-2018
SZ056-06	Spectrum Analyzer	R&S	FSV40	101101	7-Jul-2017	7-Jul-2018
SZ181-04	Preamplifier	Agilent	8449B	3008A02474	9-Feb-2017	9-Feb-2018
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	16-Jan-2017	16-Jan-2019
SZ062-02	RF Cable	RADIAL	RG 213U	--	8-Jul-2017	8-Jan-2018
SZ062-05	RF Cable	RADIAL	0.04-26.5GHz	--	11-Sep-2017	11-Mar-2018
SZ062-12	RF Cable	RADIAL	0.04-26.5GHz	--	11-Sep-2017	11-Mar-2018
SZ067-04	Notch Filter	Micro-Tronics	BRM50702-02	--	14-Jun-2017	14-Jun-2018
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	30-Nov-2016	30-Nov-2017
SZ187-01	Two-Line V-Network	R&S	ENV216	100072	30-Nov-2016	30-Nov-2017
SZ187-02	Two-Line V-Network	R&S	ENV216	100073	12-Jun-2017	12-Jun-2018
SZ188-03	Shielding Room	ETS	RFD-100	4100	17-Aug-2016	17-Aug-2018