

FCC Test Report

Report No.: RFBHQC-WTW-P20110629

FCC ID: UID-G36

Test Model: G36

Series Model: G34

Received Date: Nov. 19, 2020

Test Date: Dec. 10 to 13, 2020

Issued Date: Jan. 13, 2021

Applicant: ARRIS

Address: 3871 Lakefield Drive Suite 300 SUWANEE, GA 30024

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability and Tested Channel Detail	11
3.3 Duty Cycle of Test Signal	13
3.4 Description of Support Units	14
3.4.1 Configuration of System under Test	15
3.5 General Description of Applied Standards and References	16
4 Test Types and Results	17
4.1 Radiated Emission and Bandedge Measurement.....	17
4.1.1 Limits of Radiated Emission and Bandedge Measurement	17
4.1.2 Test Instruments	18
4.1.3 Test Procedures.....	20
4.1.4 Deviation from Test Standard	21
4.1.5 Test Setup.....	21
4.1.6 EUT Operating Conditions.....	22
4.1.7 Test Results	23
4.2 Conducted Emission Measurement	37
4.2.1 Limits of Conducted Emission Measurement	37
4.2.2 Test Instruments	37
4.2.3 Test Procedures.....	38
4.2.4 Deviation from Test Standard	38
4.2.5 Test Setup.....	38
4.2.6 EUT Operating Conditions.....	38
4.2.7 Test Results	39
4.3 6dB Bandwidth Measurement	41
4.3.1 Limits of 6dB Bandwidth Measurement	41
4.3.2 Test Setup.....	41
4.3.3 Test Instruments	41
4.3.4 Test Procedure	41
4.3.5 Deviation from Test Standard	41
4.3.6 EUT Operating Conditions.....	41
4.3.7 Test Result.....	42
4.4 Conducted Output Power Measurement.....	44
4.4.1 Limits of Conducted Output Power Measurement	44
4.4.2 Test Setup.....	44
4.4.3 Test Instruments	44
4.4.4 Test Procedures.....	44
4.4.5 Deviation from Test Standard	44
4.4.6 EUT Operating Conditions.....	44
4.4.7 Test Results	45
4.5 Power Spectral Density Measurement.....	48
4.5.1 Limits of Power Spectral Density Measurement	48
4.5.2 Test Setup.....	48
4.5.3 Test Instruments	48
4.5.4 Test Procedure	48
4.5.5 Deviation from Test Standard	48
4.5.6 EUT Operating Condition	48

4.5.7 Test Results	49
4.6 Conducted Out of Band Emission Measurement	51
4.6.1 Limits of Conducted Out of Band Emission Measurement.....	51
4.6.2 Test Setup.....	51
4.6.3 Test Instruments	51
4.6.4 Test Procedure	51
4.6.5 Deviation from Test Standard	51
4.6.6 EUT Operating Condition	51
4.6.7 Test Results	51
5 Pictures of Test Arrangements.....	58
Annex A - Band-Edge Measurement.....	59
Appendix – Information of the Testing Laboratories	63

Release Control Record

Issue No.	Description	Date Issued
RFBHQC-WTW-P20110629	Original release.	Jan. 13, 2021

1 Certificate of Conformity

Product: DOCSIS 3.1 Wireless Cable Modem

Brand: ARRIS

Test Model: G36

Series Model: G34

Sample Status: Engineering sample

Applicant: ARRIS

Test Date: Dec. 10 to 13, 2020

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :  , **Date:** Jan. 13, 2021
Joyce Kuo / Specialist

Approved by :  , **Date:** Jan. 13, 2021
Clark Lin / Technical Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -12.91dB at 0.57653MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 2390.00MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex(MHF) not a standard connector.

Note:

- For 2.4GHz band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.9 dB
Conducted emissions	-	2.5 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.1 dB
	30MHz ~ 1GHz	5.4 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.0 dB
	18GHz ~ 40GHz	5.3 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	DOCSIS 3.1 Wireless Cable Modem
Brand	ARRIS
Test Model	G36
Series Model	G34
Status of EUT	Engineering sample
Power Supply Rating	12Vdc from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT (20/40) mode in 2.4GHz 1024QAM for OFDMA in 11ax HE mode
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	802.11b: up to 11 Mbps 802.11a/g: up to 54 Mbps 802.11n: up to 300 Mbps 802.11ac: up to 1733.3 Mbps 802.11ax: up to 2401.9 Mbps
Operating Frequency	2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.18 ~ 5.32GHz, 5.50 ~ 5.72GHz, 5.745 ~ 5.825GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20): 11 802.11n (HT40), VHT40, 802.11ax (HE40): 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20): 25 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40): 12 802.11ac (VHT80), 802.11ax (HE80): 6 802.11ac (VHT160), 802.11ax (HE160): 2
Output Power	CDD Mode: 2.412 ~ 2.462 GHz: 893.433 mW 5.18 ~ 5.25 GHz: 737.061 mW 5.25 ~ 5.32GHz: 246.604 mW 5.50 ~ 5.72GHz: 233.538 mW 5.745 ~ 5.825 GHz: 952.044 mW Beamforming Mode: 2.412 ~ 2.462 GHz: 893.433 mW 5.18 ~ 5.25 GHz: 737.061 mW 5.25 ~ 5.32GHz: 187.849 mW 5.50 ~ 5.72GHz: 176.12 mW 5.745 ~ 5.825 GHz: 697.341 mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x 1
Data Cable Supplied	NA

Note:

1. The EUT has two model names, which are identical to each other in all aspects except for the following information:

Brand	Product name	Model	Difference
ARRIS	DOCSIS 3.1 Wireless Cable Modem	G36	-
		G34	The different is without 2.5 GHz

From the above models, model: G36 was selected as representative model for the test and its data are recorded in this report.

2. Simultaneously transmission condition.

Condition	Technology	
1	WLAN (2.4GHz)	WLAN (5GHz)

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

1. The EUT power needs to be supplied from one power adapter, the information is as below table:

No.	Brand	Model No.	Spec.
1	HONOTO	ADS-40FSI-12 12030EPCU-L	Input: 120Vac, 1A Max, 60Hz Output: 12Vdc, 2.5A DC output cable: Unshielded, 1.8m
2	Ktec	KSAS0361200250HU	Input: 120Vac, 1A Max, 60Hz Output: 12Vdc, 2.5A DC output cable: Unshielded, 1.8m

Note:

1. From the above models, the worst Radiated Emissions test was found in Adapter 1 and Conducted Emissions test was found in Adapter 2. Therefore only the test data of the modes were recorded in this report.

3. The antennas provided to the EUT, please refer to the following table:

Antenna NO.	RF Chain NO	Brand	Antenna Net Gain(dBi)	Frequency range	Antenna Type	Connector Type	Cable Length
ANT1	Chain0	2G	2.82	2.4~2.4835GHz	Dipole	i-pex(MHF)	40mm
		5G	3.88	5.15~5.25GHz			
			3.88	5.25~5.35GHz			
			4.3	5.47~5.725GHz			
			4.42	5.725~5.85GHz			
ANT2	Chain1	2G	2.84	2.4~2.4835GHz	Dipole	i-pex(MHF)	130mm
		5G	3.85	5.15~5.25GHz			
			4.33	5.25~5.35GHz			
			4.3	5.47~5.725GHz			
			4.38	5.725~5.85GHz			

4. The EUT incorporates a MISO function:

2.4GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11b	1Tx Fixed Chain 0	1Rx
802.11g	1Tx Diversity	1Rx
802.11n (HT20)	2Tx	1Rx
802.11n (HT40)	2Tx	1Rx
VHT20	2Tx	1Rx
VHT40	2Tx	1Rx
802.11ax (HE20)	2Tx	1Rx
802.11ax (HE40)	2Tx	1Rx
5GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11a	1Tx Diversity	1Rx
802.11n (HT20)	2Tx	1Rx
802.11n (HT40)	2Tx	1Rx
802.11ac (VHT20)	2Tx	1Rx
802.11ac (VHT40)	2Tx	1Rx
802.11ac (VHT80)	2Tx	1Rx
802.11ac (VHT160)	2Tx	1Rx
802.11ax (HE20)	2Tx	1Rx
802.11ax (HE40)	2Tx	1Rx
802.11ax (HE80)	2Tx	1Rx
802.11ax (HE160)	2Tx	1Rx

Note:

1. All of modulation mode support beamforming function 802.11b, 802.11g and 802.11a modulation mode.
2. The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
3. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz), VHT mode for 20MHz (40MHz) and 802.11ax mode for 20MHz (40MHz), therefore the manufacturer will control the power for 802.11n/VH mode is the same as the 802.11ax mode or more lower than it and investigated worst case to representative mode in test report.

5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.
6. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20), VHT20 and 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40), VHT40 and 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz & Bandedge Measurement
RE<1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1Mb/s
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6Mb/s
802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11ax (HE20)	1 to 11	6	OFDMA	BPSK	MCS0

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11ax (HE20)	1 to 11	6	OFDMA	BPSK	MCS0

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1Mb/s
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6Mb/s
VHT20 (Output power only)	1 to 11	1, 6, 11	OFDM	BPSK	MCS0
VHT40 (Output power only)	3 to 9	3, 6, 9	OFDM	BPSK	MCS0
802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE $\geq$ 1G	25deg. C, 65%RH	120Vac, 60Hz	Tom Yang
RE<1G	25deg. C, 65%RH	120Vac, 60Hz	Tom Yang
PLC	25deg. C, 75%RH	120Vac, 60Hz	Tom Yang
APCM	25deg. C, 60%RH	120Vac, 60Hz	Eric Peng

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.


802.11b: Duty cycle = 8.41 ms / 8.465 ms = 0.994

802.11g: Duty cycle = 5.389 ms / 5.444 ms = 0.99


802.11ax (HE20): Duty cycle = 3.787 ms / 3.826 ms = 0.99

802.11ax (HE40): Duty cycle = 1.917 ms / 1.945 ms = 0.986


802.11b

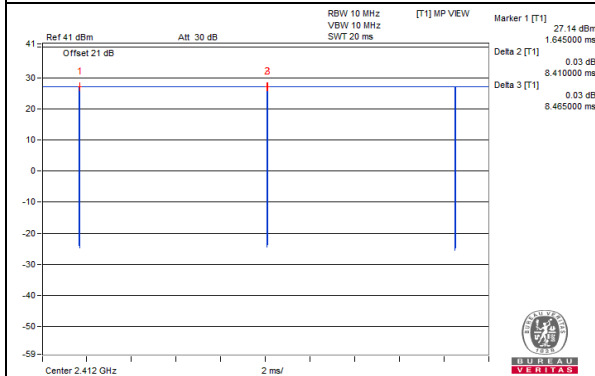


802.11g

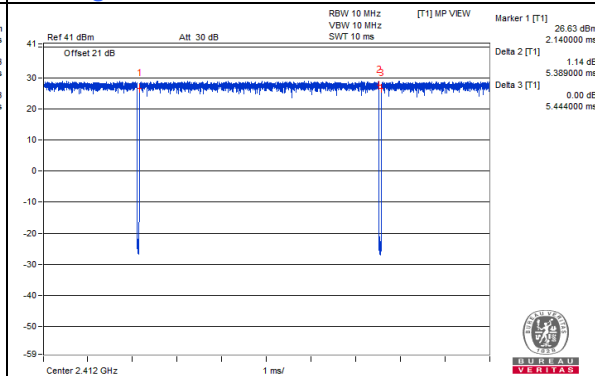

802.11ax (HE20)

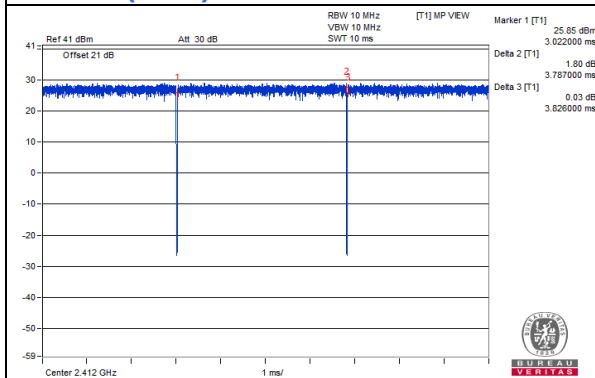

802.11ax (HE40)

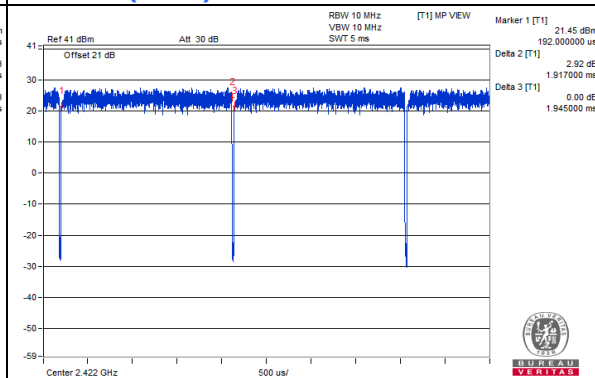

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E5430	4YV4VY1	FCC DoC	Provided by Lab
B.	Laptop	DELL	E5430	HYV4VY1	FCC DoC	Provided by Lab
C.	Switch	D-Link	DGS-1005D	DR8WC92000523	NA	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ-45 Cable	1	10	No	0	Provided by Lab
2.	RJ-45 Cable	1	10	No	0	Provided by Lab
3.	RJ-45 Cable	3	10	No	0	Provided by Lab
4.	DC Cable	1	1.8	No	0	Supplied by client
5.	Coaxial Cable	1	10	No	0	Provided by Lab

3.4.1 Configuration of System under Test

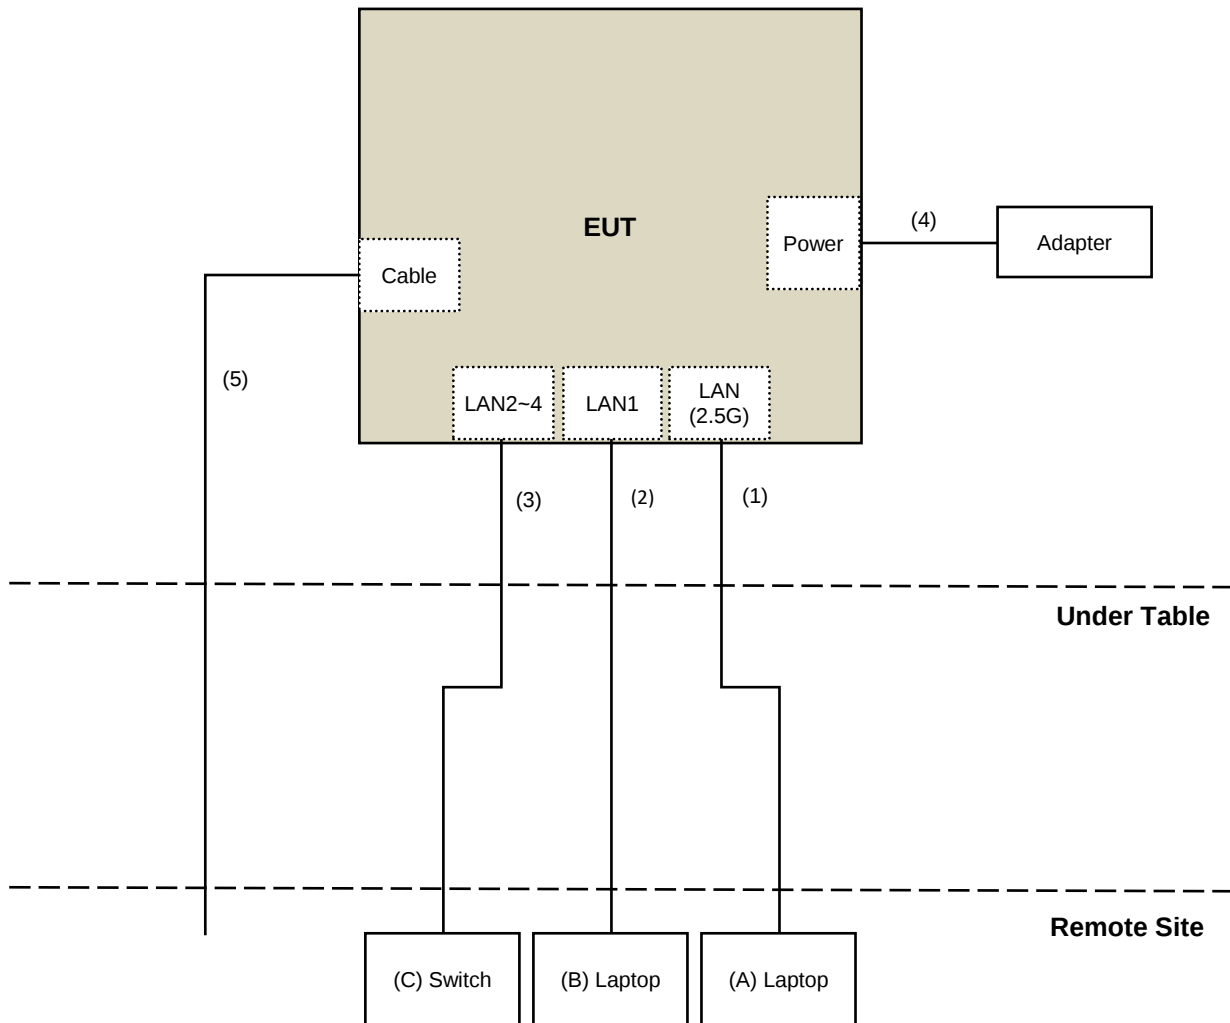

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

For Radiated emission & Bandedge test

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 06, 2020	July 05, 2021
Pre-Amplifier EMCI	EMC001340	980142	May 25, 2020	May 24, 2021
Loop Antenna Electro-Metrics	EM-6879	264	Feb. 18, 2020	Feb. 17, 2021
RF Cable	NA	LOOPCAB-001	Jan. 08, 2020	Jan. 07, 2021
RF Cable	NA	LOOPCAB-002	Jan. 08, 2020	Jan. 07, 2021
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-05	Apr. 28, 2020	Apr. 27, 2021
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Nov. 05, 2020	Nov. 04, 2021
RF Cable	8D	966-3-1	Mar. 17, 2020	Mar. 16, 2021
RF Cable	8D	966-3-2	Mar. 17, 2020	Mar. 16, 2021
RF Cable	8D	966-3-3	Mar. 17, 2020	Mar. 16, 2021
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-3-01	Sep. 24, 2020	Sep. 23, 2021
Horn_Antenna SCHWARZBECK	BBHA9120-D	9120D-406	Nov. 22, 2020	Nov. 21, 2021
Pre-Amplifier EMCI	EMC12630SE	980384	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-1500	180504	Apr. 29, 2020	Apr. 28, 2021
RF Cable	EMC104-SM-SM-2000	180601	June 09, 2020	June 08, 2021
RF Cable	EMC104-SM-SM-6000	180602	June 09, 2020	June 08, 2021
Spectrum Analyzer Keysight	N9030A	MY54490679	July 13, 2020	July 12, 2021
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 15, 2020	Jan. 14, 2021
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 22, 2020	Nov. 21, 2021
RF Cable	EMC102-KM-KM-1200	160924	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC-KM-KM-4000	200214	Mar. 11, 2020	Mar. 10, 2021
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 3.
3. Tested Date: Dec. 12 to 13, 2020

For other test items:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	100964	May 29, 2020	May 28, 2021
Power meter Anritsu	ML2495A	1529002	July 22, 2020	July 21, 2021
Power sensor Anritsu	MA2411B	1339443	July 22, 2020	July 21, 2021
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 14, 2020	Apr. 13, 2021
Software	ADT_RF Test Software V6.6.5.4	NA	NA	NA

- NOTE:**
1. The test was performed in Oven room 2.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: Dec. 10, 2020

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

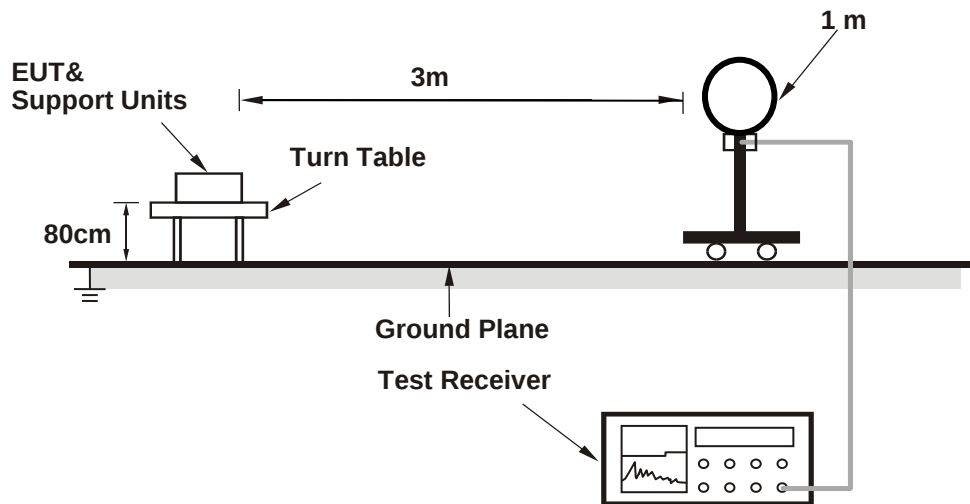

For Radiated emission 30MHz to 1GHz

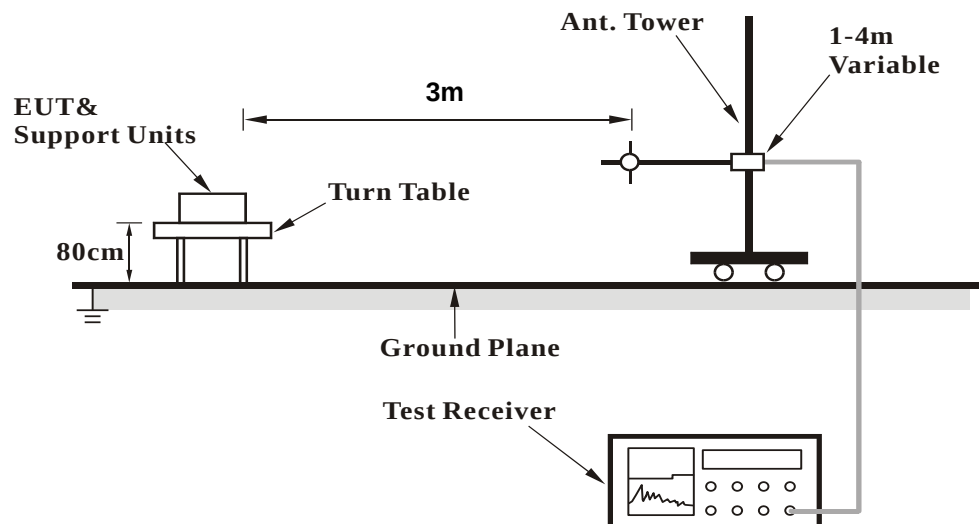

For Radiated emission above 1GHz

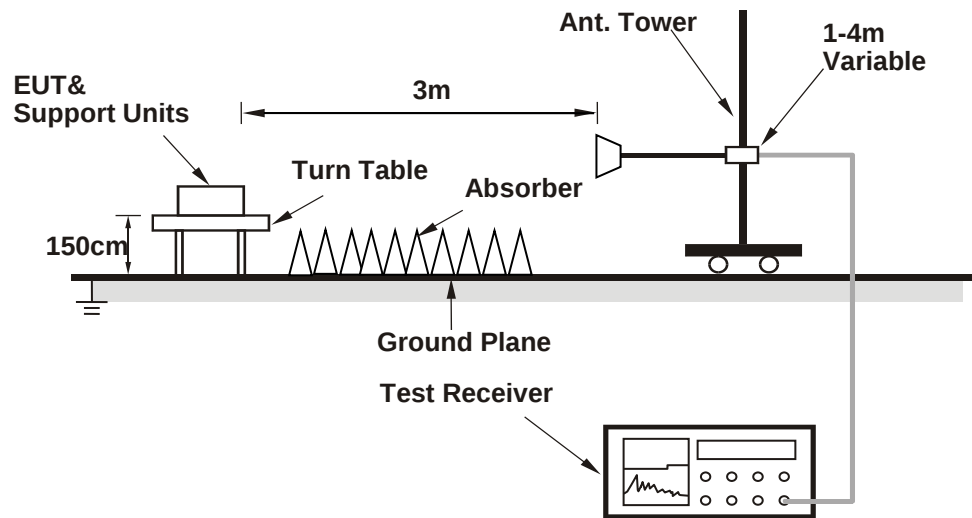

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Connected the EUT with the Laptop which is placed on remote site.
- Controlling software (DUT_setup.610.32) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz Data :

RF Mode	TX 802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.3 PK	74.0	-19.7	1.03 H	88	55.7	-1.4
2	2390.00	42.3 AV	54.0	-11.7	1.03 H	88	43.7	-1.4
3	*2412.00	114.3 PK			1.03 H	88	115.7	-1.4
4	*2412.00	107.4 AV			1.03 H	88	108.8	-1.4
5	4824.00	44.7 PK	74.0	-29.3	1.69 H	140	41.2	3.5
6	4824.00	39.5 AV	54.0	-14.5	1.69 H	140	36.0	3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.2 PK	74.0	-18.8	1.62 V	345	56.6	-1.4
2	2390.00	42.5 AV	54.0	-11.5	1.62 V	345	43.9	-1.4
3	*2412.00	115.4 PK			1.62 V	345	116.8	-1.4
4	*2412.00	108.0 AV			1.62 V	345	109.4	-1.4
5	4824.00	42.1 PK	74.0	-31.9	1.50 V	101	38.6	3.5
6	4824.00	35.9 AV	54.0	-18.1	1.50 V	101	32.4	3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.1 PK	74.0	-19.9	1.20 H	70	55.5	-1.4
2	2390.00	40.4 AV	54.0	-13.6	1.20 H	70	41.8	-1.4
3	*2437.00	111.8 PK			1.20 H	70	113.3	-1.5
4	*2437.00	107.2 AV			1.20 H	70	108.7	-1.5
5	2483.50	53.6 PK	74.0	-20.4	1.20 H	70	55.0	-1.4
6	2483.50	40.2 AV	54.0	-13.8	1.20 H	70	41.6	-1.4
7	4874.00	44.6 PK	74.0	-29.4	1.67 H	139	40.9	3.7
8	4874.00	39.3 AV	54.0	-14.7	1.67 H	139	35.6	3.7
9	7311.00	44.3 PK	74.0	-29.7	1.43 H	47	34.5	9.8
10	7311.00	32.1 AV	54.0	-21.9	1.43 H	47	22.3	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.7 PK	74.0	-20.3	1.57 V	346	55.1	-1.4
2	2390.00	40.2 AV	54.0	-13.8	1.57 V	346	41.6	-1.4
3	*2437.00	111.1 PK			1.57 V	346	112.6	-1.5
4	*2437.00	108.8 AV			1.57 V	346	110.3	-1.5
5	2483.50	53.3 PK	74.0	-20.7	1.57 V	346	54.7	-1.4
6	2483.50	39.9 AV	54.0	-14.1	1.57 V	346	41.3	-1.4
7	4874.00	41.8 PK	74.0	-32.2	1.47 V	106	38.1	3.7
8	4874.00	35.6 AV	54.0	-18.4	1.47 V	106	31.9	3.7
9	7311.00	44.4 PK	74.0	-29.6	1.83 V	261	34.6	9.8
10	7311.00	31.6 AV	54.0	-22.4	1.83 V	261	21.8	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.3 PK			1.14 H	83	111.7	-1.4
2	*2462.00	107.6 AV			1.14 H	83	109.0	-1.4
3	2483.50	53.9 PK	74.0	-20.1	1.14 H	83	55.3	-1.4
4	2483.50	41.8 AV	54.0	-12.2	1.14 H	83	43.2	-1.4
5	4924.00	44.9 PK	74.0	-29.1	1.65 H	147	41.2	3.7
6	4924.00	39.5 AV	54.0	-14.5	1.65 H	147	35.8	3.7
7	7386.00	44.8 PK	74.0	-29.2	1.47 H	63	35.0	9.8
8	7386.00	32.5 AV	54.0	-21.5	1.47 H	63	22.7	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.1 PK			1.60 V	350	112.5	-1.4
2	*2462.00	108.6 AV			1.60 V	350	110.0	-1.4
3	2483.50	54.7 PK	74.0	-19.3	1.60 V	350	56.1	-1.4
4	2483.50	42.2 AV	54.0	-11.8	1.60 V	350	43.6	-1.4
5	4924.00	41.8 PK	74.0	-32.2	1.52 V	104	38.1	3.7
6	4924.00	35.6 AV	54.0	-18.4	1.52 V	104	31.9	3.7
7	7386.00	44.8 PK	74.0	-29.2	1.88 V	264	35.0	9.8
8	7386.00	31.9 AV	54.0	-22.1	1.88 V	264	22.1	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	73.7 PK	74.0	-0.3	1.85 H	25	75.1	-1.4
2	2390.00	53.9 AV	54.0	-0.1	1.85 H	25	55.3	-1.4
3	*2412.00	117.9 PK			1.85 H	25	119.3	-1.4
4	*2412.00	107.5 AV			1.85 H	25	108.9	-1.4
5	4824.00	38.5 PK	74.0	-35.5	1.05 H	269	35.0	3.5
6	4824.00	30.7 AV	54.0	-23.3	1.05 H	269	27.2	3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.5 PK	74.0	-9.5	3.99 V	76	65.9	-1.4
2	2390.00	48.8 AV	54.0	-5.2	3.99 V	76	50.2	-1.4
3	*2412.00	110.8 PK			3.99 V	76	112.2	-1.4
4	*2412.00	101.2 AV			3.99 V	76	102.6	-1.4
5	4824.00	38.2 PK	74.0	-35.8	2.07 V	250	34.7	3.5
6	4824.00	30.4 AV	54.0	-23.6	2.07 V	250	26.9	3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.4 PK	74.0	-11.6	1.83 H	20	63.8	-1.4
2	2390.00	46.7 AV	54.0	-7.3	1.83 H	20	48.1	-1.4
3	*2437.00	117.6 PK			1.83 H	20	119.1	-1.5
4	*2437.00	107.9 AV			1.83 H	20	109.4	-1.5
5	2483.50	61.7 PK	74.0	-12.3	1.83 H	20	63.1	-1.4
6	2483.50	44.3 AV	54.0	-9.7	1.83 H	20	45.7	-1.4
7	4874.00	37.9 PK	74.0	-36.1	1.00 H	283	34.2	3.7
8	4874.00	30.1 AV	54.0	-23.9	1.00 H	283	26.4	3.7
9	7311.00	43.7 PK	74.0	-30.3	2.37 H	56	33.9	9.8
10	7311.00	31.9 AV	54.0	-22.1	2.37 H	56	22.1	9.8

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.1 PK	74.0	-17.9	3.89 V	89	57.5	-1.4
2	2390.00	42.5 AV	54.0	-11.5	3.89 V	89	43.9	-1.4
3	*2437.00	109.1 PK			3.89 V	89	110.6	-1.5
4	*2437.00	100.5 AV			3.89 V	89	102.0	-1.5
5	2483.50	52.7 PK	74.0	-21.3	3.89 V	89	54.1	-1.4
6	2483.50	39.7 AV	54.0	-14.3	3.89 V	89	41.1	-1.4
7	4874.00	38.6 PK	74.0	-35.4	2.08 V	243	34.9	3.7
8	4874.00	30.6 AV	54.0	-23.4	2.08 V	243	26.9	3.7
9	7311.00	44.2 PK	74.0	-29.8	1.63 V	134	34.4	9.8
10	7311.00	32.2 AV	54.0	-21.8	1.63 V	134	22.4	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	116.3 PK			1.93 H	28	117.7	-1.4
2	*2462.00	106.8 AV			1.93 H	28	108.2	-1.4
3	2483.50	63.9 PK	74.0	-10.1	1.93 H	28	65.3	-1.4
4	2483.50	46.4 AV	54.0	-7.6	1.93 H	28	47.8	-1.4
5	4924.00	38.0 PK	74.0	-36.0	1.07 H	282	34.3	3.7
6	4924.00	30.3 AV	54.0	-23.7	1.07 H	282	26.6	3.7
7	7386.00	43.7 PK	74.0	-30.3	2.31 H	50	33.9	9.8
8	7386.00	32.1 AV	54.0	-21.9	2.31 H	50	22.3	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.7 PK			1.06 V	7	110.1	-1.4
2	*2462.00	99.1 AV			1.06 V	7	100.5	-1.4
3	2483.50	56.5 PK	74.0	-17.5	1.06 V	7	57.9	-1.4
4	2483.50	42.6 AV	54.0	-11.4	1.06 V	7	44.0	-1.4
5	4924.00	38.3 PK	74.0	-35.7	2.08 V	237	34.6	3.7
6	4924.00	30.6 AV	54.0	-23.4	2.08 V	237	26.9	3.7
7	7386.00	44.5 PK	74.0	-29.5	1.67 V	133	34.7	9.8
8	7386.00	32.3 AV	54.0	-21.7	1.67 V	133	22.5	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.8 PK	74.0	-11.2	1.48 H	22	64.2	-1.4
2	2390.00	51.0 AV	54.0	-3.0	1.48 H	22	52.4	-1.4
3	*2412.00	117.9 PK			1.48 H	22	119.3	-1.4
4	*2412.00	106.3 AV			1.48 H	22	107.7	-1.4
5	4824.00	39.5 PK	74.0	-34.5	1.46 H	151	36.0	3.5
6	4824.00	29.8 AV	54.0	-24.2	1.46 H	151	26.3	3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.3 PK	74.0	-7.7	1.50 V	1	67.7	-1.4
2	2390.00	52.8 AV	54.0	-1.2	1.50 V	1	54.2	-1.4
3	*2412.00	117.2 PK			1.50 V	1	118.6	-1.4
4	*2412.00	104.8 AV			1.50 V	1	106.2	-1.4
5	4824.00	38.6 PK	74.0	-35.4	1.94 V	260	35.1	3.5
6	4824.00	30.7 AV	54.0	-23.3	1.94 V	260	27.2	3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.2 PK	74.0	-19.8	1.78 H	32	55.6	-1.4
2	2390.00	42.1 AV	54.0	-11.9	1.78 H	32	43.5	-1.4
3	*2437.00	118.4 PK			1.78 H	32	119.9	-1.5
4	*2437.00	106.4 AV			1.78 H	32	107.9	-1.5
5	2483.50	54.5 PK	74.0	-19.5	1.78 H	32	55.9	-1.4
6	2483.50	41.6 AV	54.0	-12.4	1.78 H	32	43.0	-1.4
7	4874.00	39.3 PK	74.0	-34.7	1.50 H	147	35.6	3.7
8	4874.00	29.6 AV	54.0	-24.4	1.50 H	147	25.9	3.7
9	7311.00	43.5 PK	74.0	-30.5	1.74 H	93	33.7	9.8
10	7311.00	32.2 AV	54.0	-21.8	1.74 H	93	22.4	9.8

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.4 PK	74.0	-18.6	1.56 V	11	56.8	-1.4
2	2390.00	43.2 AV	54.0	-10.8	1.56 V	11	44.6	-1.4
3	*2437.00	117.4 PK			1.56 V	11	118.9	-1.5
4	*2437.00	104.9 AV			1.56 V	11	106.4	-1.5
5	2483.50	55.9 PK	74.0	-18.1	1.56 V	11	57.3	-1.4
6	2483.50	42.7 AV	54.0	-11.3	1.56 V	11	44.1	-1.4
7	4874.00	38.5 PK	74.0	-35.5	1.87 V	252	34.8	3.7
8	4874.00	30.4 AV	54.0	-23.6	1.87 V	252	26.7	3.7
9	7311.00	45.0 PK	74.0	-29.0	1.38 V	247	35.2	9.8
10	7311.00	32.8 AV	54.0	-21.2	1.38 V	247	23.0	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	116.5 PK			1.46 H	36	117.9	-1.4
2	*2462.00	104.6 AV			1.46 H	36	106.0	-1.4
3	2483.50	59.5 PK	74.0	-14.5	1.46 H	36	60.9	-1.4
4	2483.50	46.6 AV	54.0	-7.4	1.46 H	36	48.0	-1.4
5	4924.00	39.1 PK	74.0	-34.9	1.46 H	148	35.4	3.7
6	4924.00	29.4 AV	54.0	-24.6	1.46 H	148	25.7	3.7
7	7386.00	43.0 PK	74.0	-31.0	1.77 H	97	33.2	9.8
8	7386.00	31.8 AV	54.0	-22.2	1.77 H	97	22.0	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	116.8 PK			1.05 V	339	118.2	-1.4
2	*2462.00	104.4 AV			1.05 V	339	105.8	-1.4
3	2483.50	62.4 PK	74.0	-11.6	1.05 V	339	63.8	-1.4
4	2483.50	47.7 AV	54.0	-6.3	1.05 V	339	49.1	-1.4
5	4924.00	38.1 PK	74.0	-35.9	1.84 V	250	34.4	3.7
6	4924.00	30.0 AV	54.0	-24.0	1.84 V	250	26.3	3.7
7	7386.00	45.6 PK	74.0	-28.4	1.38 V	240	35.8	9.8
8	7386.00	33.2 AV	54.0	-20.8	1.38 V	240	23.4	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 3 : 2422 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.1 PK	74.0	-9.9	1.46 H	24	65.5	-1.4
2	2390.00	51.5 AV	54.0	-2.5	1.46 H	24	52.9	-1.4
3	*2422.00	115.8 PK			1.46 H	24	117.2	-1.4
4	*2422.00	103.0 AV			1.46 H	24	104.4	-1.4
5	4844.00	39.4 PK	74.0	-34.6	1.45 H	134	35.8	3.6
6	4844.00	28.6 AV	54.0	-25.4	1.45 H	134	25.0	3.6
7	7266.00	43.3 PK	74.0	-30.7	1.73 H	85	33.6	9.7
8	7266.00	32.5 AV	54.0	-21.5	1.73 H	85	22.8	9.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.7 PK	74.0	-8.3	1.25 V	335	67.1	-1.4
2	2390.00	51.7 AV	54.0	-2.3	1.25 V	335	53.1	-1.4
3	*2422.00	113.8 PK			1.25 V	335	115.2	-1.4
4	*2422.00	101.5 AV			1.25 V	335	102.9	-1.4
5	4844.00	39.1 PK	74.0	-34.9	1.83 V	241	35.5	3.6
6	4844.00	30.9 AV	54.0	-23.1	1.83 V	241	27.3	3.6
7	7266.00	44.7 PK	74.0	-29.3	1.48 V	261	35.0	9.7
8	7266.00	32.4 AV	54.0	-21.6	1.48 V	261	22.7	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.8 PK	74.0	-20.2	1.42 H	39	55.2	-1.4
2	2390.00	45.4 AV	54.0	-8.6	1.42 H	39	46.8	-1.4
3	*2437.00	115.5 PK			1.42 H	39	117.0	-1.5
4	*2437.00	103.4 AV			1.42 H	39	104.9	-1.5
5	2483.50	61.3 PK	74.0	-12.7	1.42 H	39	62.7	-1.4
6	2483.50	44.3 AV	54.0	-9.7	1.42 H	39	45.7	-1.4
7	4874.00	39.1 PK	74.0	-34.9	1.42 H	133	35.4	3.7
8	4874.00	28.2 AV	54.0	-25.8	1.42 H	133	24.5	3.7
9	7311.00	43.4 PK	74.0	-30.6	1.74 H	92	33.6	9.8
10	7311.00	32.3 AV	54.0	-21.7	1.74 H	92	22.5	9.8

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.3 PK	74.0	-18.7	1.15 V	347	56.7	-1.4
2	2390.00	46.0 AV	54.0	-8.0	1.15 V	347	47.4	-1.4
3	*2437.00	114.1 PK			1.15 V	347	115.6	-1.5
4	*2437.00	102.0 AV			1.15 V	347	103.5	-1.5
5	2483.50	60.9 PK	74.0	-13.1	1.15 V	347	62.3	-1.4
6	2483.50	44.4 AV	54.0	-9.6	1.15 V	347	45.8	-1.4
7	4874.00	38.3 PK	74.0	-35.7	1.85 V	254	34.6	3.7
8	4874.00	30.2 AV	54.0	-23.8	1.85 V	254	26.5	3.7
9	7311.00	44.3 PK	74.0	-29.7	1.44 V	247	34.5	9.8
10	7311.00	32.1 AV	54.0	-21.9	1.44 V	247	22.3	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 9 : 2452 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	115.1 PK			1.45 H	33	116.5	-1.4
2	*2452.00	102.5 AV			1.45 H	33	103.9	-1.4
3	2486.50	62.0 PK	74.0	-12.0	1.45 H	33	63.4	-1.4
4	2486.50	49.0 AV	54.0	-5.0	1.45 H	33	50.4	-1.4
5	4904.00	39.2 PK	74.0	-34.8	1.45 H	136	35.5	3.7
6	4904.00	28.3 AV	54.0	-25.7	1.45 H	136	24.6	3.7
7	7356.00	43.3 PK	74.0	-30.7	1.74 H	100	33.4	9.9
8	7356.00	32.5 AV	54.0	-21.5	1.74 H	100	22.6	9.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	113.9 PK			1.00 V	352	115.3	-1.4
2	*2452.00	101.9 AV			1.00 V	352	103.3	-1.4
3	2483.50	63.5 PK	74.0	-10.5	1.00 V	352	64.9	-1.4
4	2483.50	50.1 AV	54.0	-3.9	1.00 V	352	51.5	-1.4
5	4904.00	38.5 PK	74.0	-35.5	1.89 V	246	34.8	3.7
6	4904.00	30.5 AV	54.0	-23.5	1.89 V	246	26.8	3.7
7	7356.00	44.6 PK	74.0	-29.4	1.40 V	247	34.7	9.9
8	7356.00	32.5 AV	54.0	-21.5	1.40 V	247	22.6	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.


Below 1GHz Data:

RF Mode	TX 802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.90	32.0 QP	40.0	-8.0	1.00 H	360	40.2	-8.2
2	62.28	31.0 QP	40.0	-9.0	1.00 H	259	39.5	-8.5
3	118.95	28.6 QP	43.5	-14.9	2.00 H	274	37.8	-9.2
4	164.20	31.4 QP	43.5	-12.1	2.00 H	79	38.7	-7.3
5	322.43	29.0 QP	46.0	-17.0	1.00 H	236	34.0	-5.0
6	874.99	39.1 QP	46.0	-6.9	2.00 H	360	32.1	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

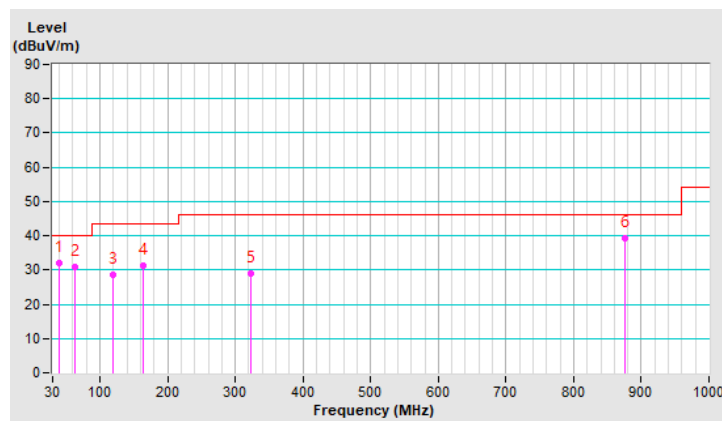


RF Mode	TX 802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.95	33.2 QP	40.0	-6.8	1.50 V	202	41.3	-8.1
2	59.42	28.8 QP	40.0	-11.2	1.50 V	55	36.9	-8.1
3	160.08	28.7 QP	43.5	-14.8	2.00 V	315	35.8	-7.1
4	270.95	27.3 QP	46.0	-18.7	1.50 V	251	34.3	-7.0
5	374.98	30.1 QP	46.0	-15.9	1.50 V	246	33.8	-3.7
6	875.00	43.0 QP	46.0	-3.0	1.00 V	286	36.0	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

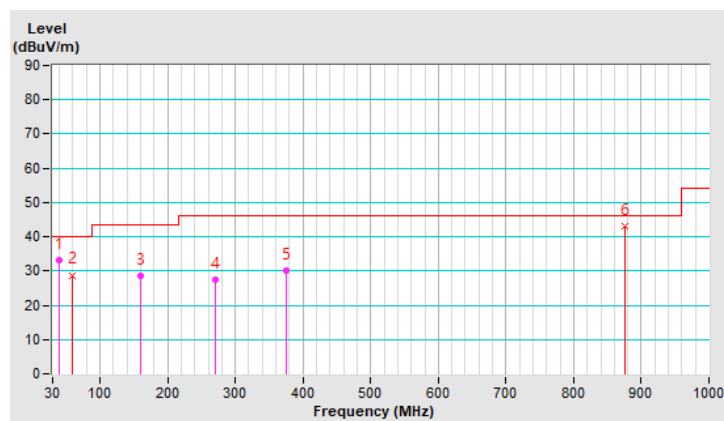

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 20, 2020	Oct. 19, 2021
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 27, 2020	Oct. 26, 2021
Line-Impedance Stabilization Network (for Peripheral) R&S	ESH3-Z5	835239/001	Mar. 19, 2020	Mar. 18, 2021
50 ohms Terminator	50	3	Oct. 26, 2020	Oct. 25, 2021
RF Cable	5D-FB	COCCAB-001	Sep. 26, 2020	Sep. 25, 2021
Fixed attenuator EMCi	STI02-2200-10	005	Aug. 29, 2020	Aug. 28, 2021
Software BVADT	BVADT_Cond_V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
- 3 Tested Date: Dec. 13, 2020

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

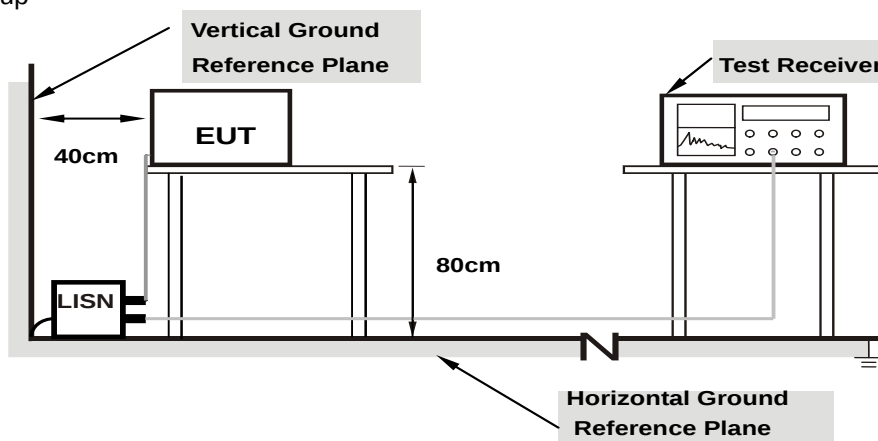

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.96	38.91	27.28	48.87	37.24	65.79	55.79	-16.92	-18.55
2	0.19297	9.99	33.28	22.44	43.27	32.43	63.91	53.91	-20.64	-21.48
3	0.23203	9.99	25.07	16.01	35.06	26.00	62.38	52.38	-27.32	-26.38
4	0.34531	10.01	23.23	17.87	33.24	27.88	59.07	49.07	-25.83	-21.19
5	0.57653	10.03	29.83	23.06	39.86	33.09	56.00	46.00	-16.14	-12.91
6	25.76975	11.63	31.35	15.90	42.98	27.53	60.00	50.00	-17.02	-22.47

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

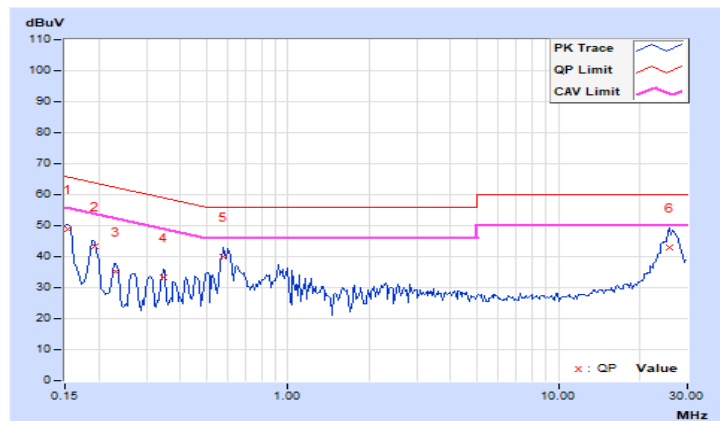


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.94	38.67	27.34	48.61	37.28	65.79	55.79	-17.18	-18.51
2	0.18906	9.97	31.73	19.63	41.70	29.60	64.08	54.08	-22.38	-24.48
3	0.34141	10.00	20.95	11.61	30.95	21.61	59.17	49.17	-28.22	-27.56
4	0.58259	10.03	30.40	20.08	40.43	30.11	56.00	46.00	-15.57	-15.89
5	1.18950	10.08	23.24	7.88	33.32	17.96	56.00	46.00	-22.68	-28.04
6	25.75391	11.28	31.98	17.86	43.26	29.14	60.00	50.00	-16.74	-20.86

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

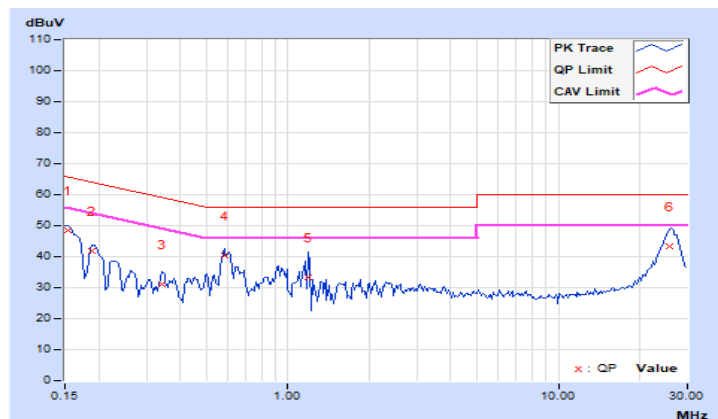


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	8.59	0.5	PASS
6	2437	8.61	0.5	PASS
11	2462	9.04	0.5	PASS

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	16.39	0.5	PASS
6	2437	16.41	0.5	PASS
11	2462	16.43	0.5	PASS

802.11ax (HE20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	19.02	18.98	0.5	PASS
6	2437	19.01	19.09	0.5	PASS
11	2462	18.99	19.02	0.5	PASS

802.11ax (HE40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	37.1	38.02	0.5	PASS
6	2437	38.51	37.76	0.5	PASS
9	2452	37.17	37.52	0.5	PASS

Spectrum Plot of Worst Value


802.11b : CH1

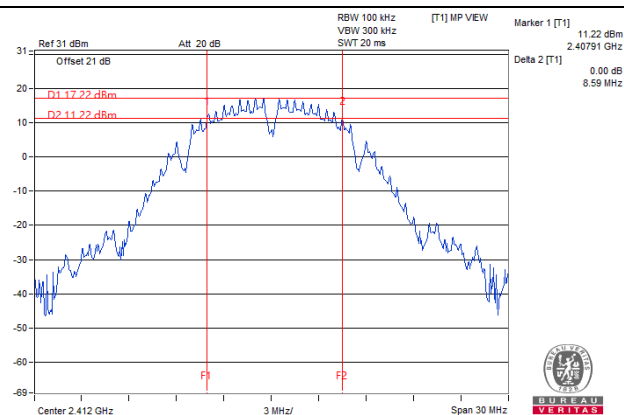


802.11g : CH1

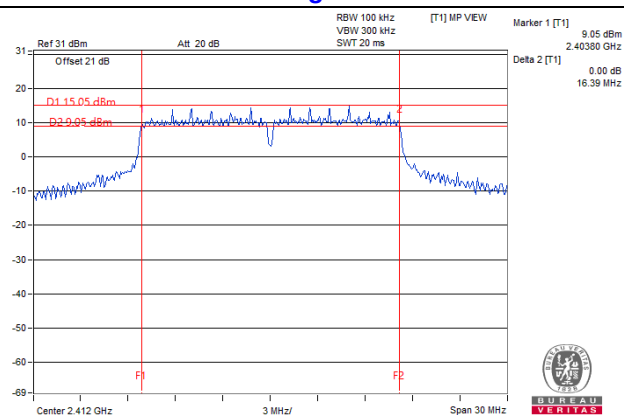

802.11ax (HE20) / Chain 1 : CH1

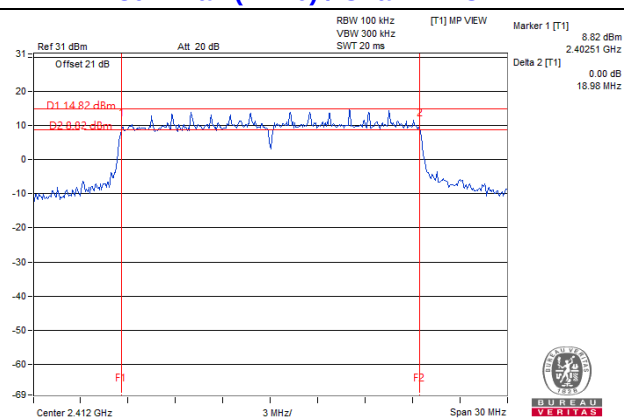

802.11ax (HE40) / Chain 0 : CH3

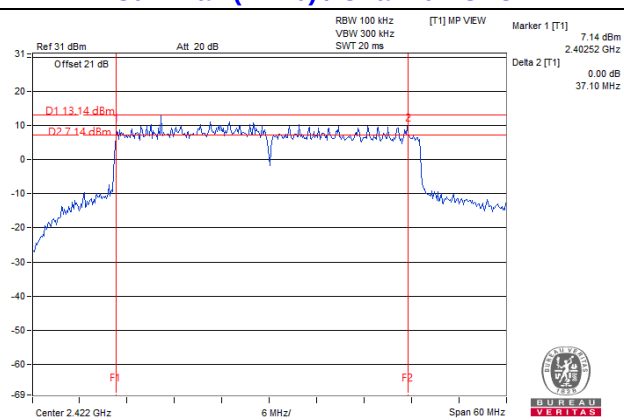

4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

FOR AVERAGE POWER

CDD Mode

802.11b

Chan.	Frequency (MHz)	Avg. Power (dBm)	Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	26.58	454.988	26.58	30	Pass
6	2437	26.65	462.381	26.65	30	Pass
11	2462	25.23	333.426	25.23	30	Pass

802.11g

Chan.	Frequency (MHz)	Avg. Power (dBm)	Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	26.52	448.745	26.52	30	Pass
6	2437	26.53	449.78	26.53	30	Pass
11	2462	24.95	312.608	24.95	30	Pass

VHT20

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	26.21	25.90	806.876	29.07	30	Pass
6	2437	26.44	26.07	845.131	29.27	30	Pass
11	2462	24.86	24.68	599.961	27.78	30	Pass

VHT40

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	25.21	25.06	652.521	28.15	30	Pass
6	2437	25.48	25.27	689.695	28.39	30	Pass
9	2452	24.54	24.73	581.613	27.65	30	Pass

802.11ax (HE20)

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	26.49	26.13	855.86	29.32	30	Pass
6	2437	26.71	26.28	893.433	29.51	30	Pass
11	2462	25.06	24.95	633.235	28.02	30	Pass

802.11ax (HE40)

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	25.42	25.31	687.963	28.38	30	Pass
6	2437	25.76	25.53	733.977	28.66	30	Pass
9	2452	24.83	24.94	615.977	27.90	30	Pass

Beamforming Mode

VHT20

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	26.21	25.90	806.876	29.07	30	Pass
6	2437	26.44	26.07	845.131	29.27	30	Pass
11	2462	24.86	24.68	599.961	27.78	30	Pass

Note: Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 5.84\text{dBi} < 6\text{dBi}$, so the power limit shall not be reduced..

VHT40

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	25.21	25.06	652.521	28.15	30	Pass
6	2437	25.48	25.27	689.695	28.39	30	Pass
9	2452	24.54	24.73	581.613	27.65	30	Pass

Note: Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 5.84\text{dBi} < 6\text{dBi}$, so the power limit shall not be reduced..

802.11ax (HE20)

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	26.49	26.13	855.86	29.32	30	Pass
6	2437	26.71	26.28	893.433	29.51	30	Pass
11	2462	25.06	24.95	633.235	28.02	30	Pass

Note: Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 5.84\text{dBi} < 6\text{dBi}$, so the power limit shall not be reduced..

802.11ax (HE40)

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	25.42	25.31	687.963	28.38	30	Pass
6	2437	25.76	25.53	733.977	28.66	30	Pass
9	2452	24.83	24.94	615.977	27.90	30	Pass


Note: Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 5.84\text{dBi} < 6\text{dBi}$, so the power limit shall not be reduced..

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

802.11b

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)	Total PSD (mW/3kHz)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
1	2412	-6.64	0.2168	-6.64	8.00	PASS
6	2437	-6.75	0.2113	-6.75	8.00	PASS
11	2462	-8.36	0.1459	-8.36	8.00	PASS

Note: 1. Directional gain $= 10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 2.82\text{dBi} > 6\text{dBi}$, so the power density limit shall not be reduced.

802.11g

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)	Total PSD (mW/3kHz)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
1	2412	-9.03	0.125	-9.03	8.00	PASS
6	2437	-9.16	0.1213	-9.16	8.00	PASS
11	2462	-10.11	0.0975	-10.11	8.00	PASS

Note: 1. Directional gain $= 10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 2.82\text{dBi} > 6\text{dBi}$, so the power density limit shall not be reduced.

802.11ax (HE20)


Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (mW/3kHz)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain 0	Chain 1				
1	2412	-10.43	-10.14	0.1874	-7.27	8.00	PASS
6	2437	-10.23	-11.24	0.17	-7.70	8.00	PASS
11	2462	-11.40	-11.54	0.14259	-8.46	8.00	PASS

Note: 1. Directional gain $= 10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 2.82\text{dBi} > 6\text{dBi}$, so the power density limit shall not be reduced.

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (mW/3kHz)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain 0	Chain 1				
3	2422	-12.68	-12.11	0.11547	-9.38	8.00	PASS
6	2437	-11.99	-12.38	0.12105	-9.17	8.00	PASS
9	2452	-13.21	-12.47	0.10438	-9.81	8.00	PASS

Note: 1. Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 2.82\text{dBi} > 6\text{dBi}$, so the power density limit shall not be reduced.

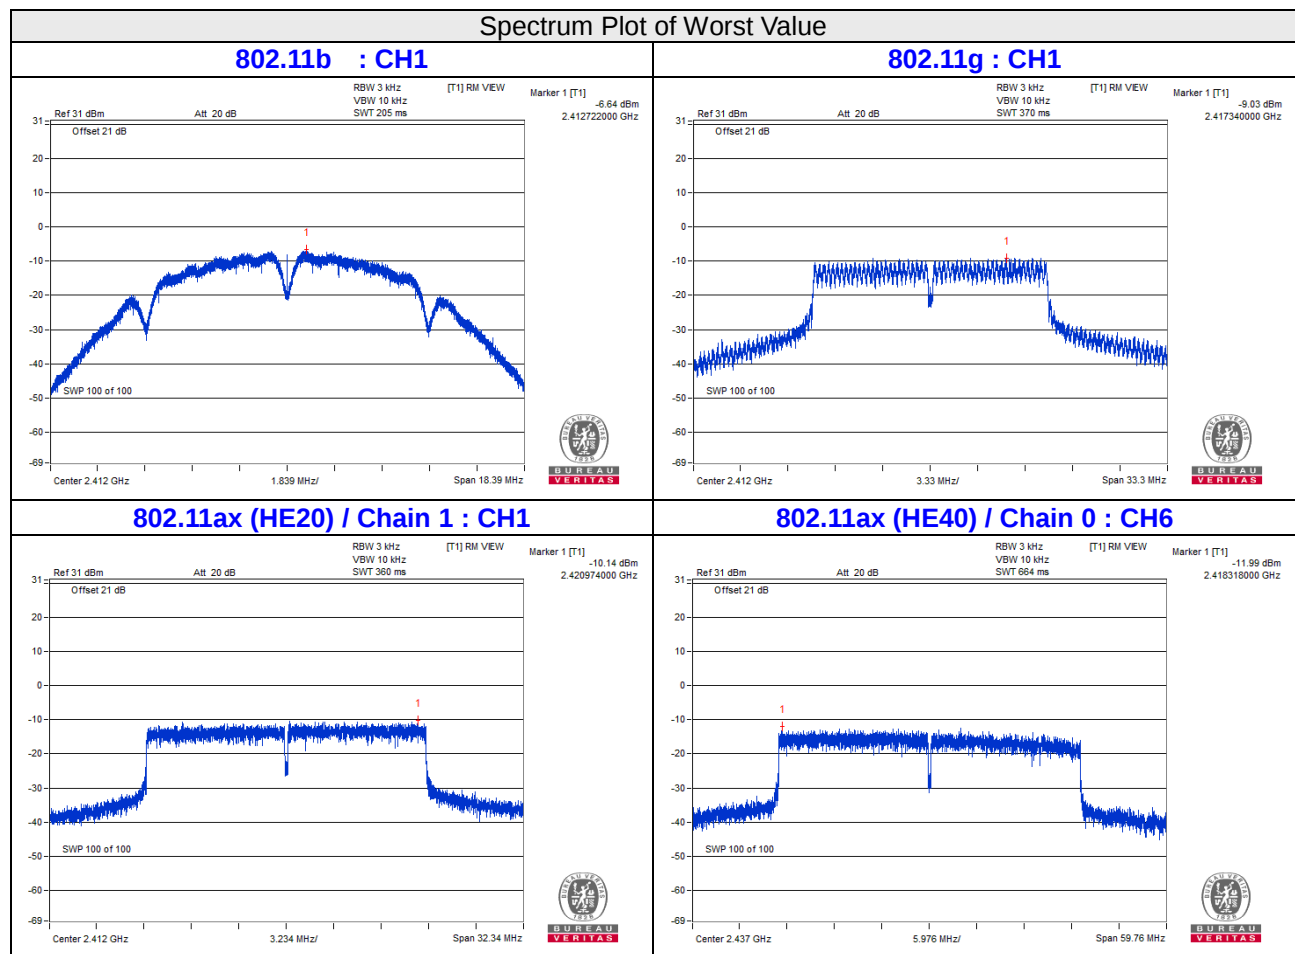


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.


4.6.6 EUT Operating Condition

Same as Item 4.3.6


4.6.7 Test Results

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.


802.11b

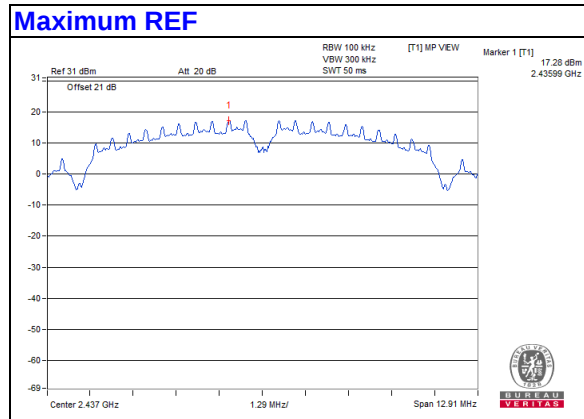


CH 1

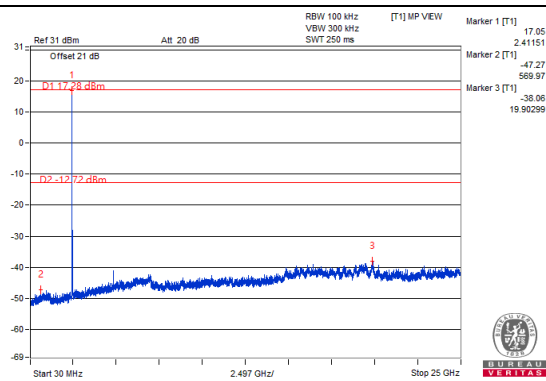

CH 6

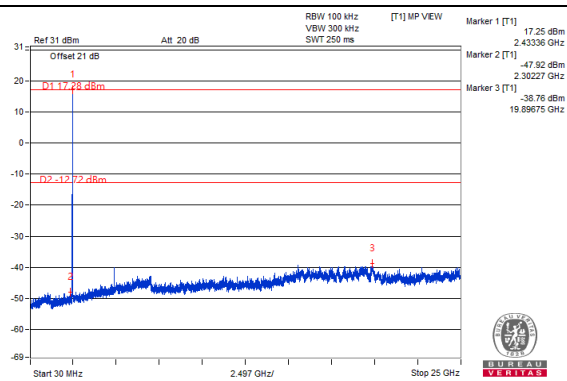


CH 11

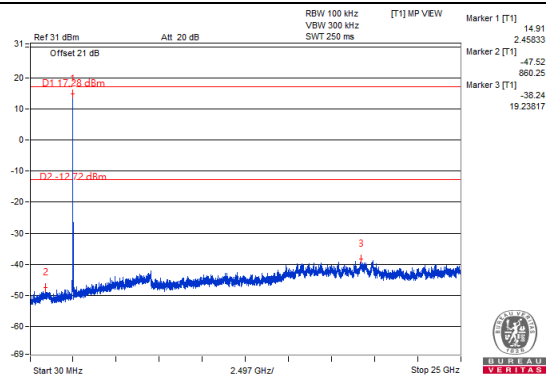


CH 11 Band edge




CH 1 Band edge

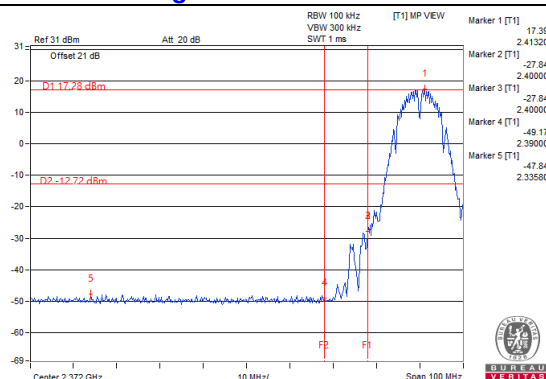


CH 11 Band edge

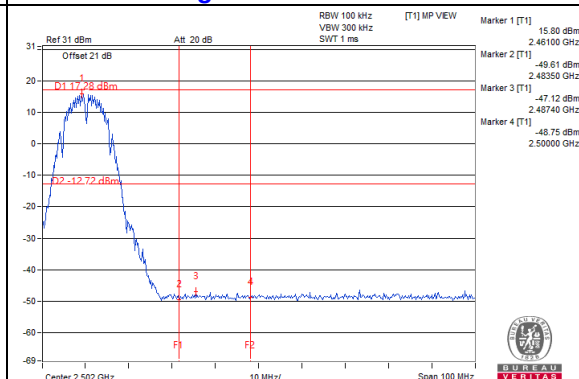


802.11g

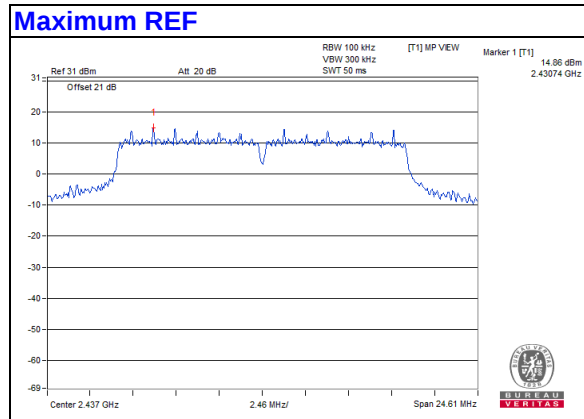


CH 1

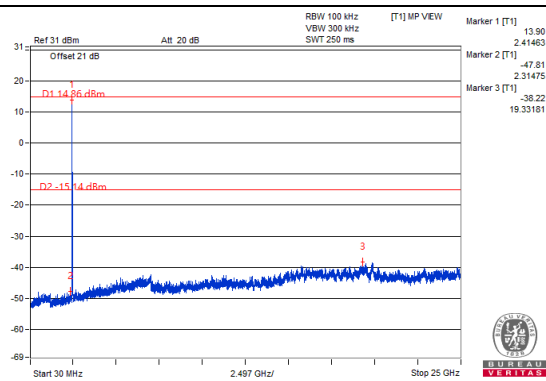

CH 6

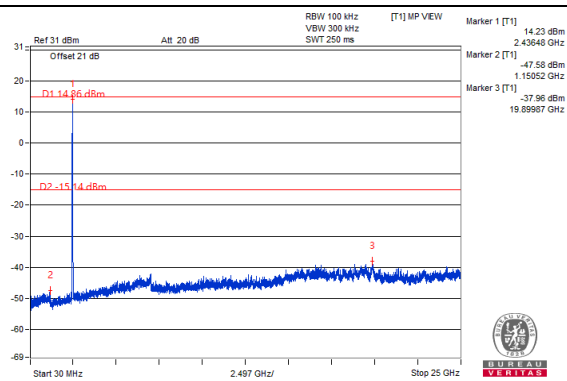


CH 11

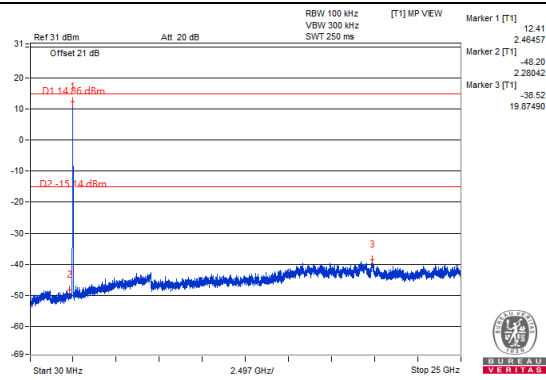


CH 11 Band edge



CH 1 Band edge

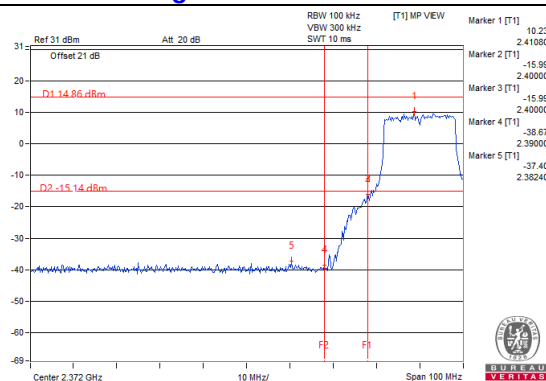


CH 11 Band edge

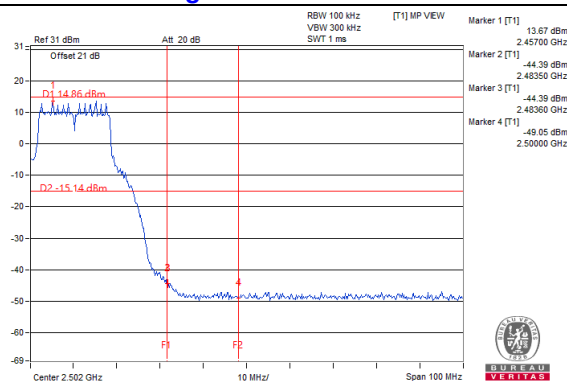


802.11ax (HE20)

Maximum REF

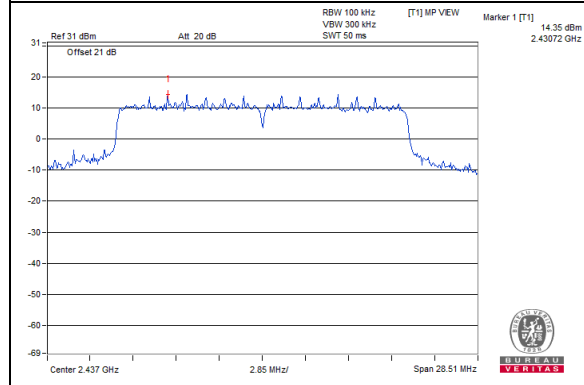


Chain 0


CH 1

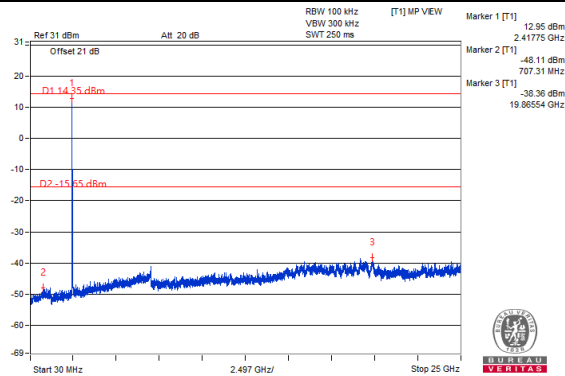


CH 6

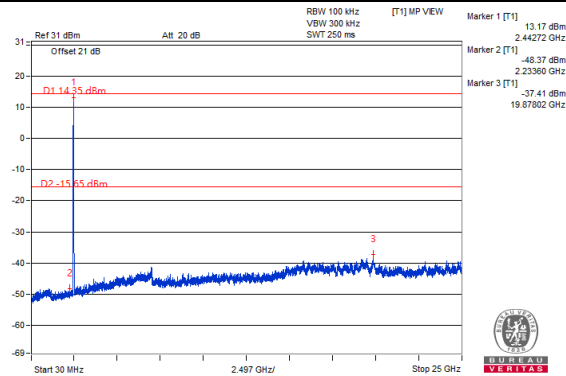


CH 11

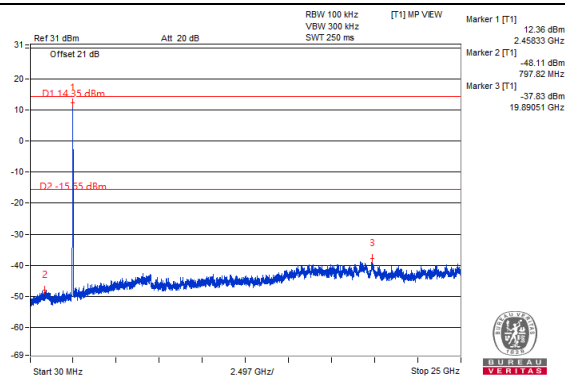


CH 11 Band edge



CH 1 Band edge

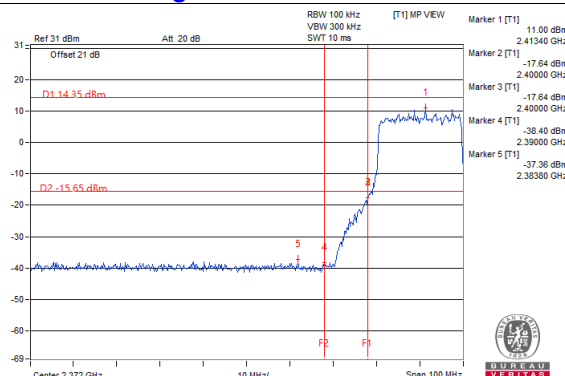


CH 11 Band edge

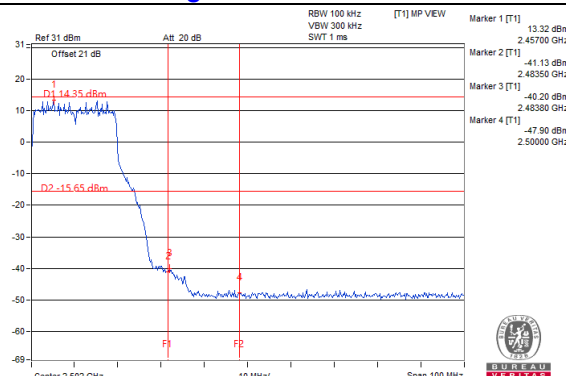


Chain 1


CH 1

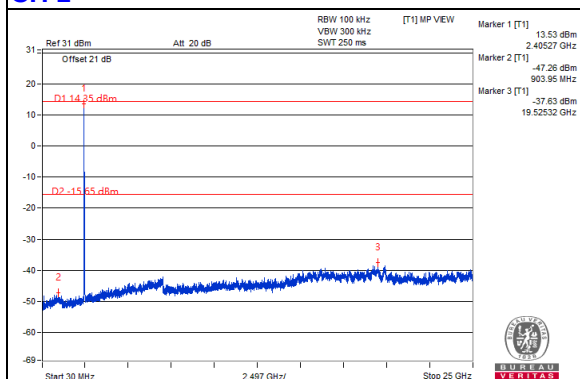


CH 6

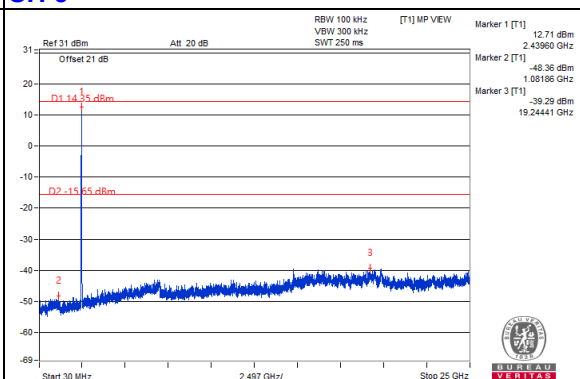


CH 11

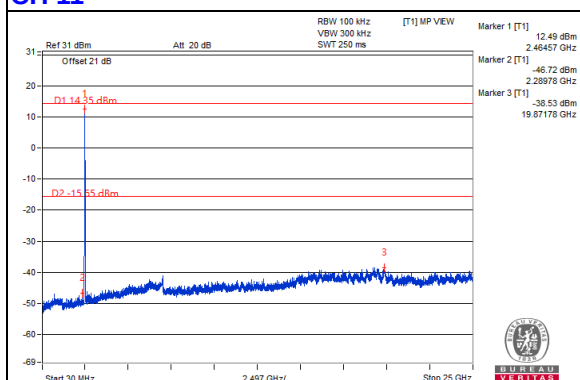

CH 11 Band edge

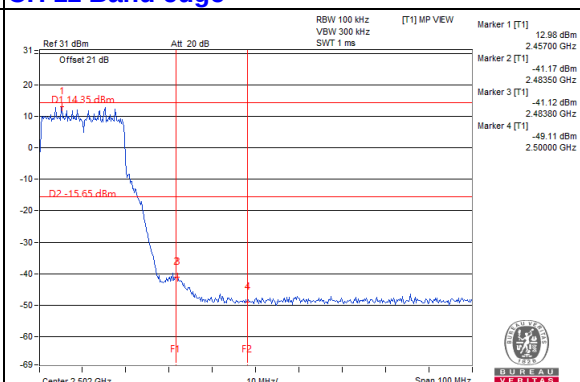


CH 1 Band edge

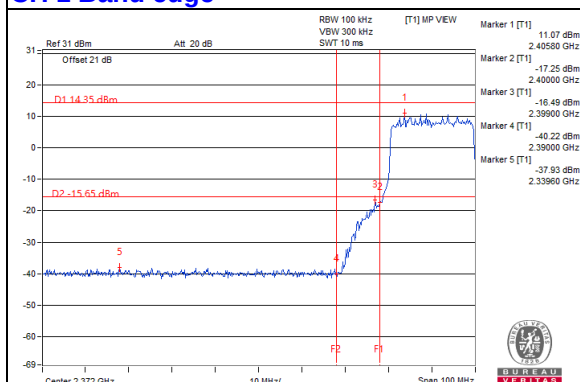


802.11ax (HE40)

Maximum REF

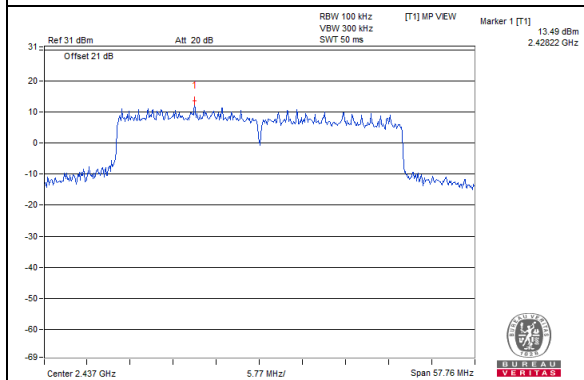


Chain 0


CH 3

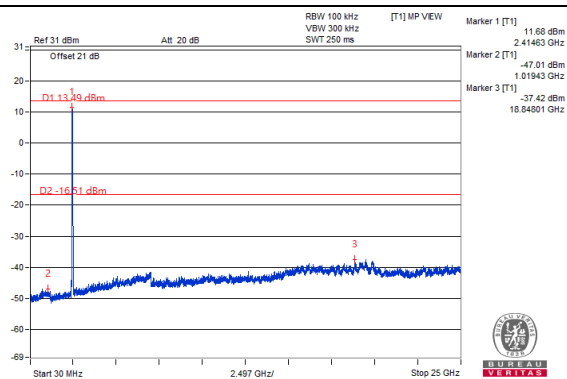


CH 6

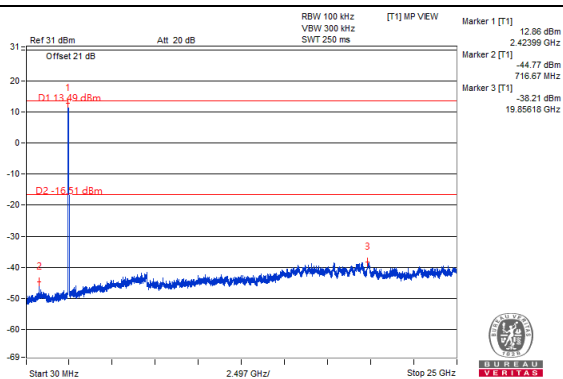


CH 9

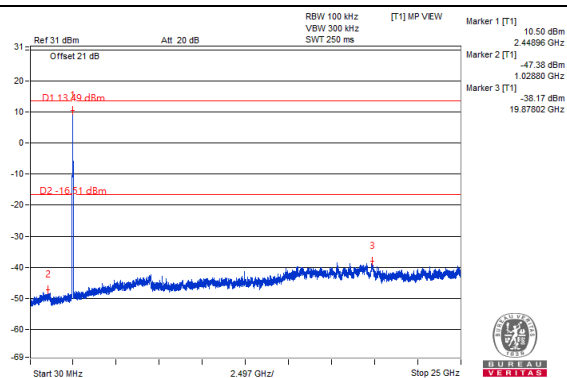


CH 9



CH 3 Band edge

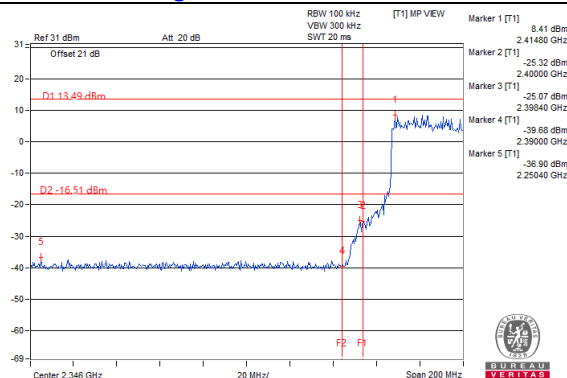


CH 9 Band edge

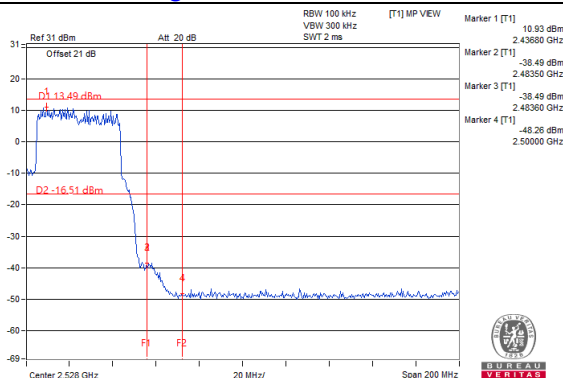


Chain 1


CH 3

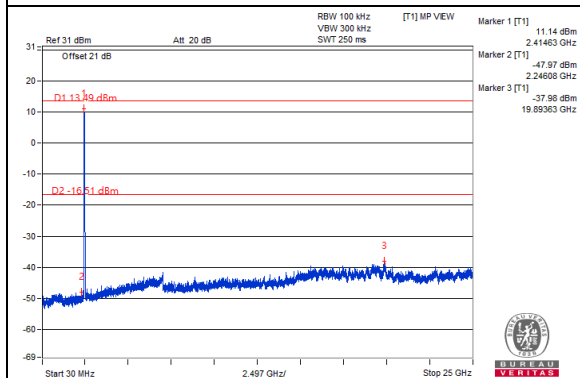


CH 6

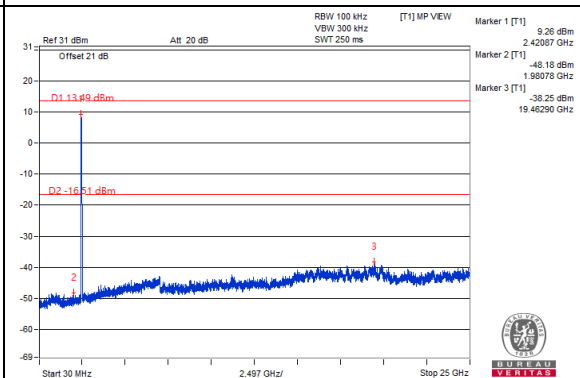


CH 9

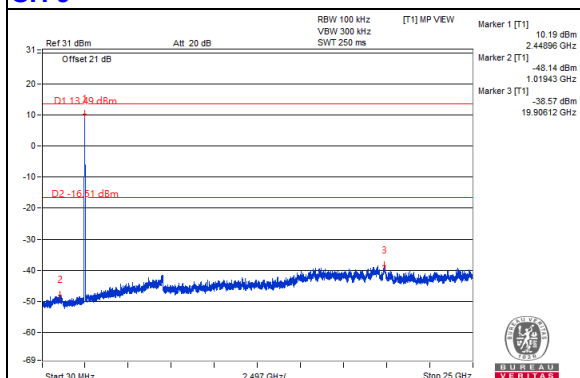


CH 9 Band edge



CH 3 Band edge

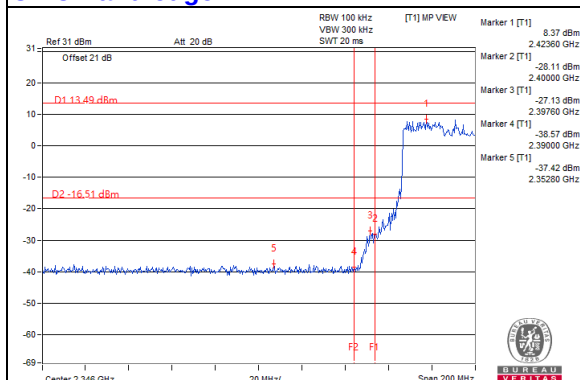


CH 9 Band edge

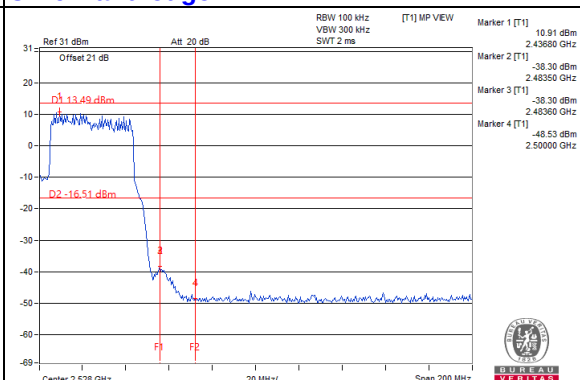



5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).

Annex A - Band-Edge Measurement

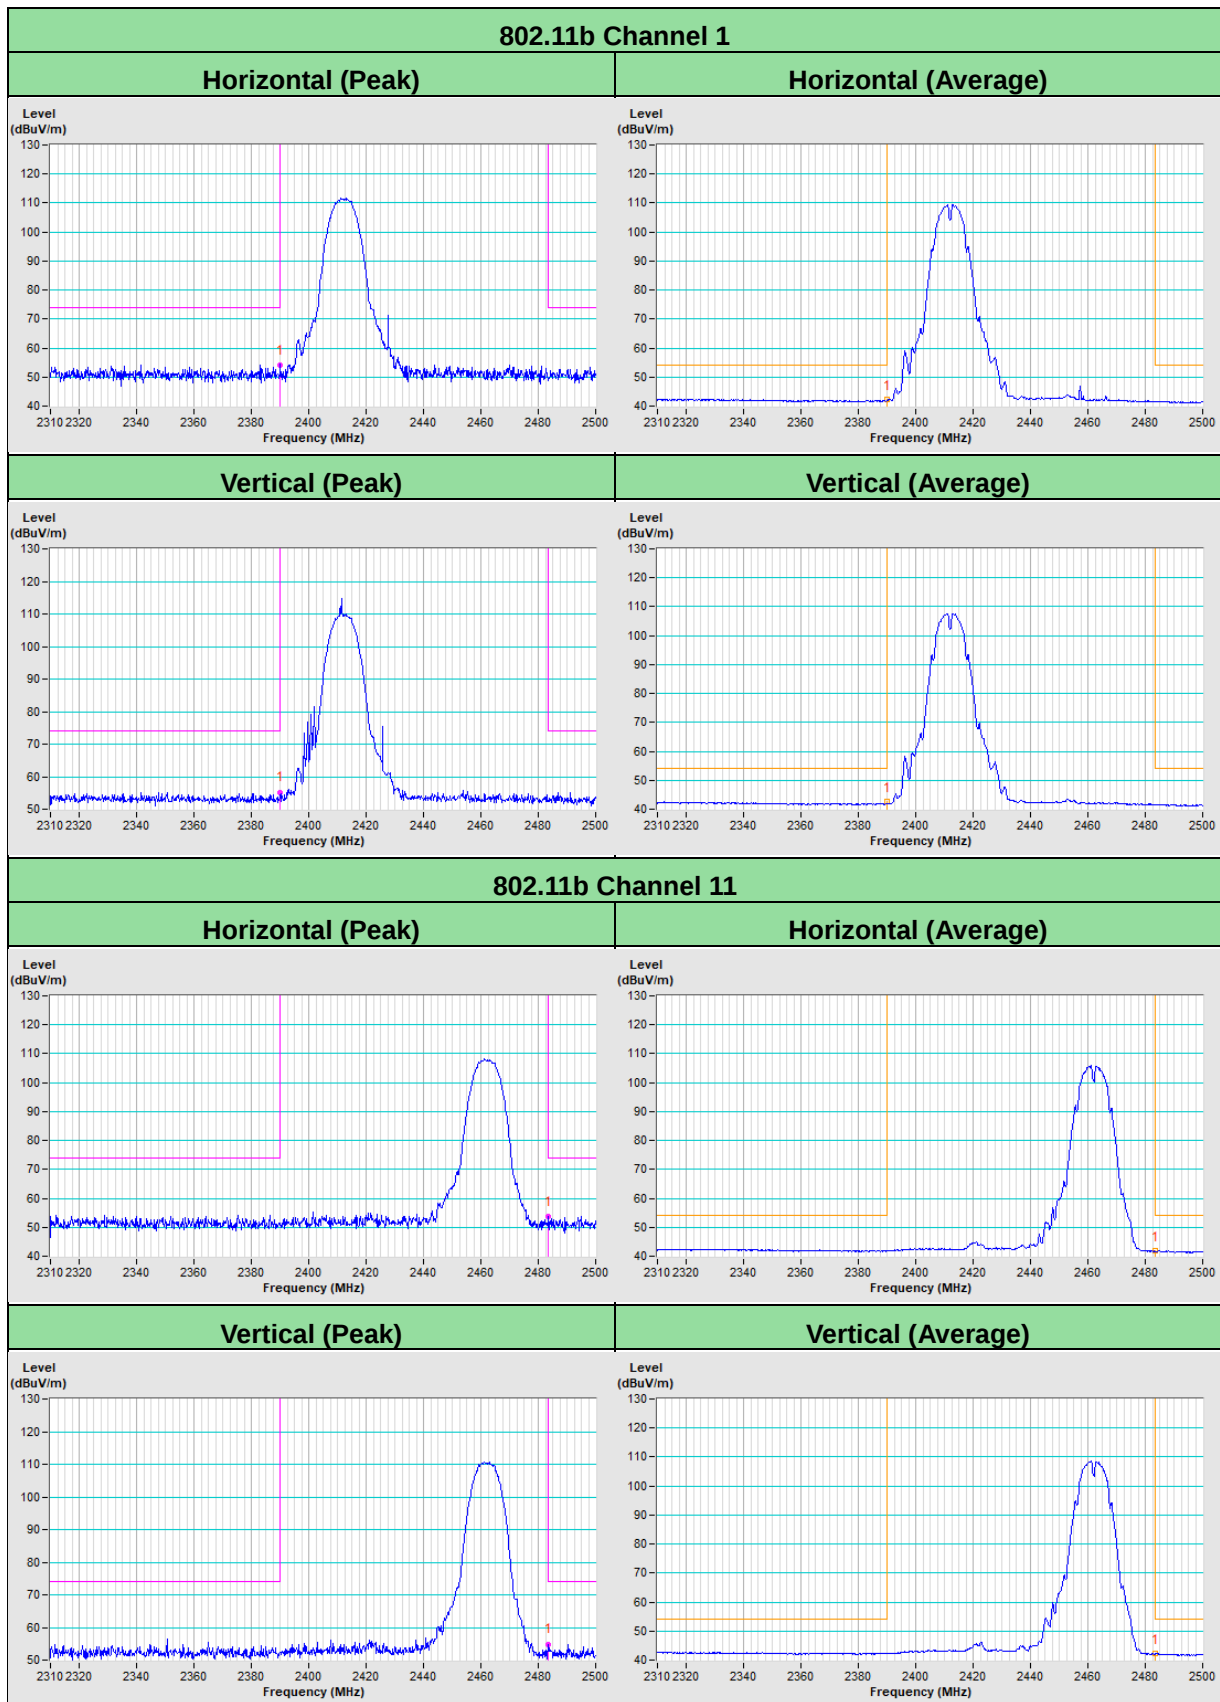

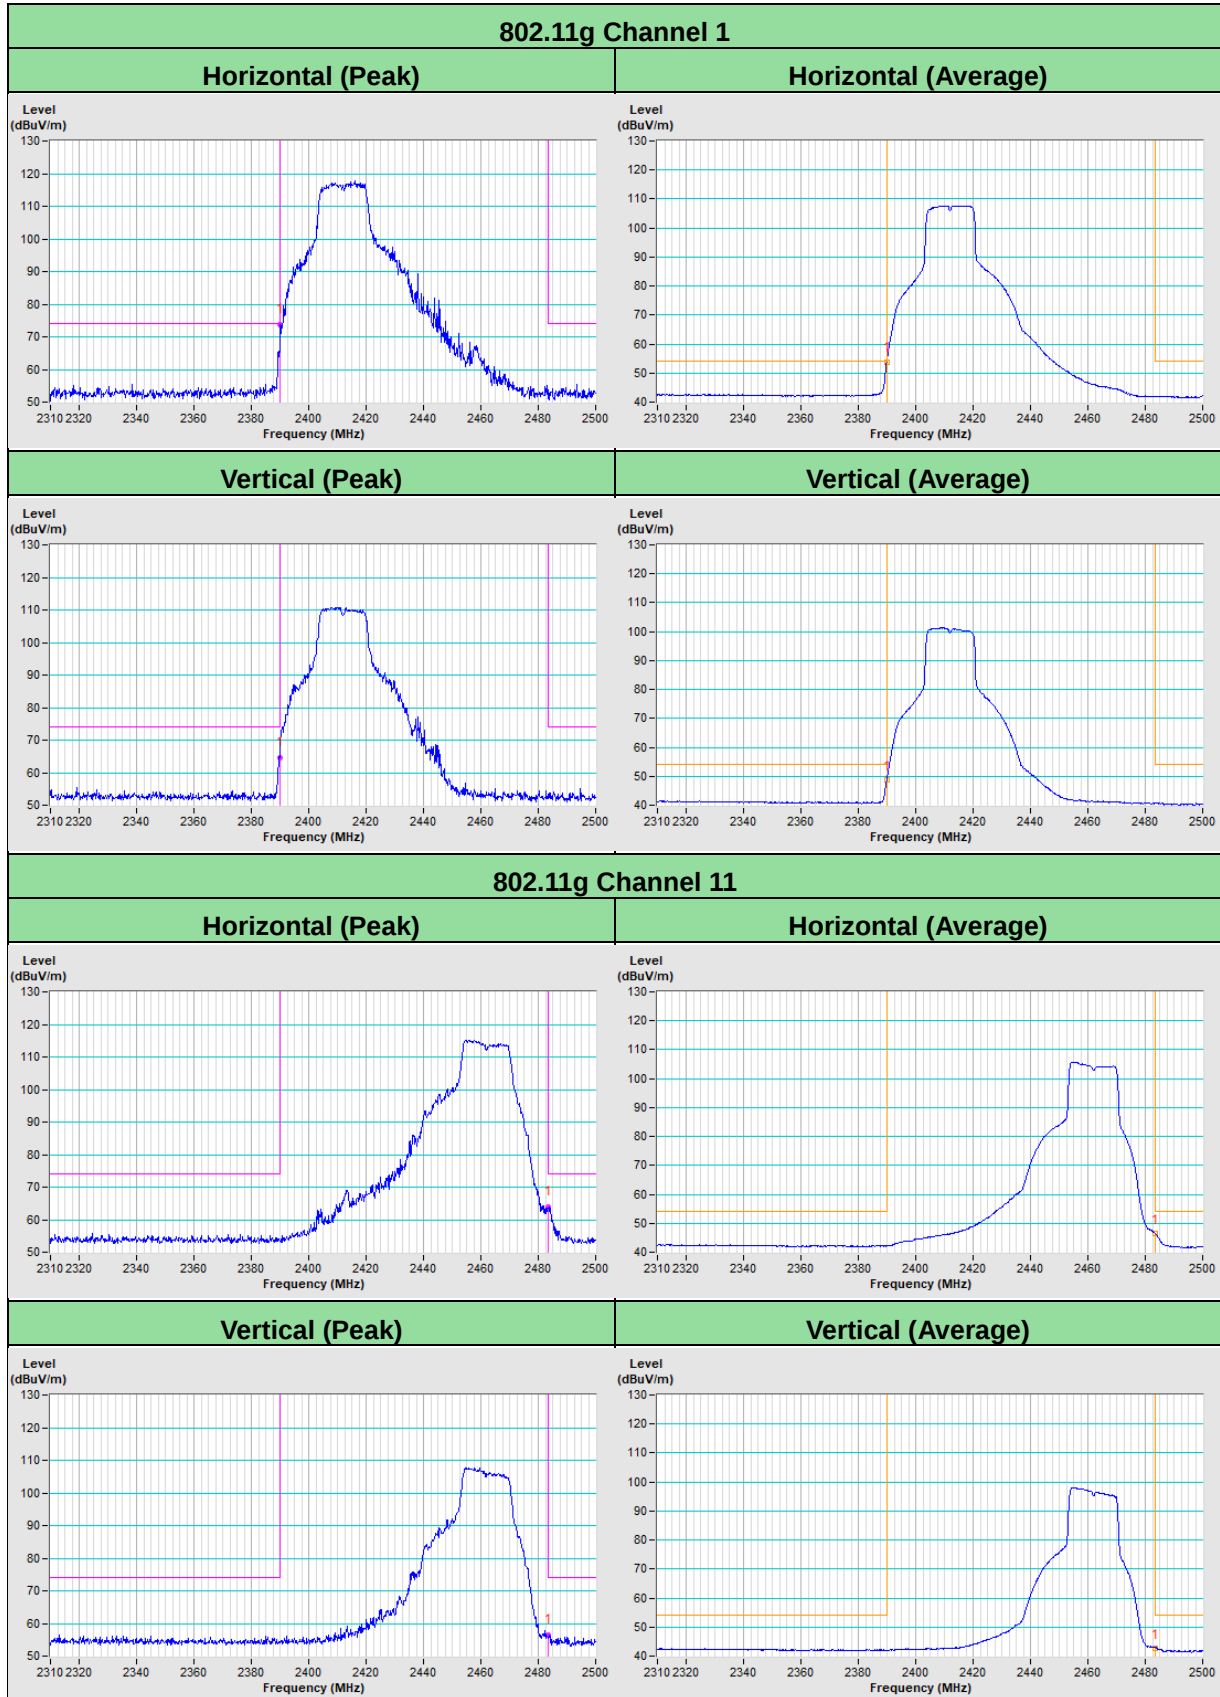

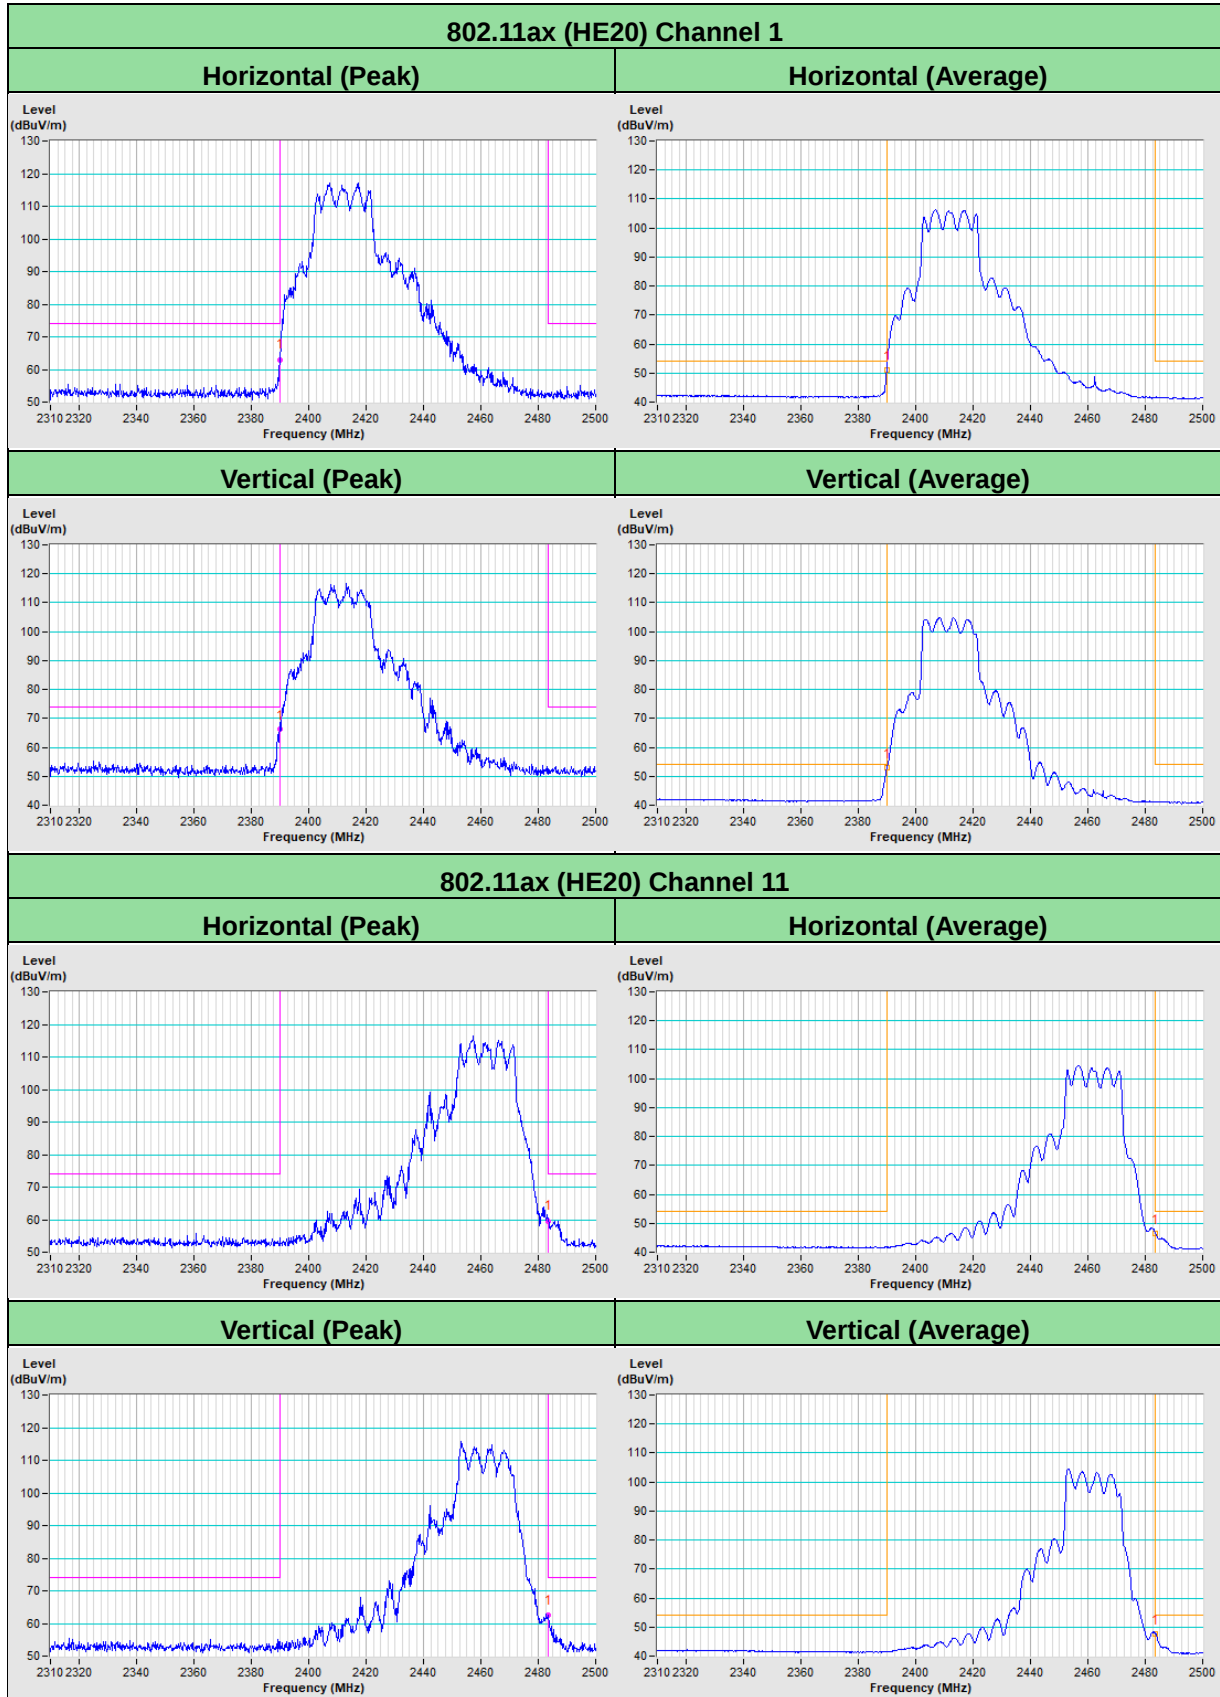

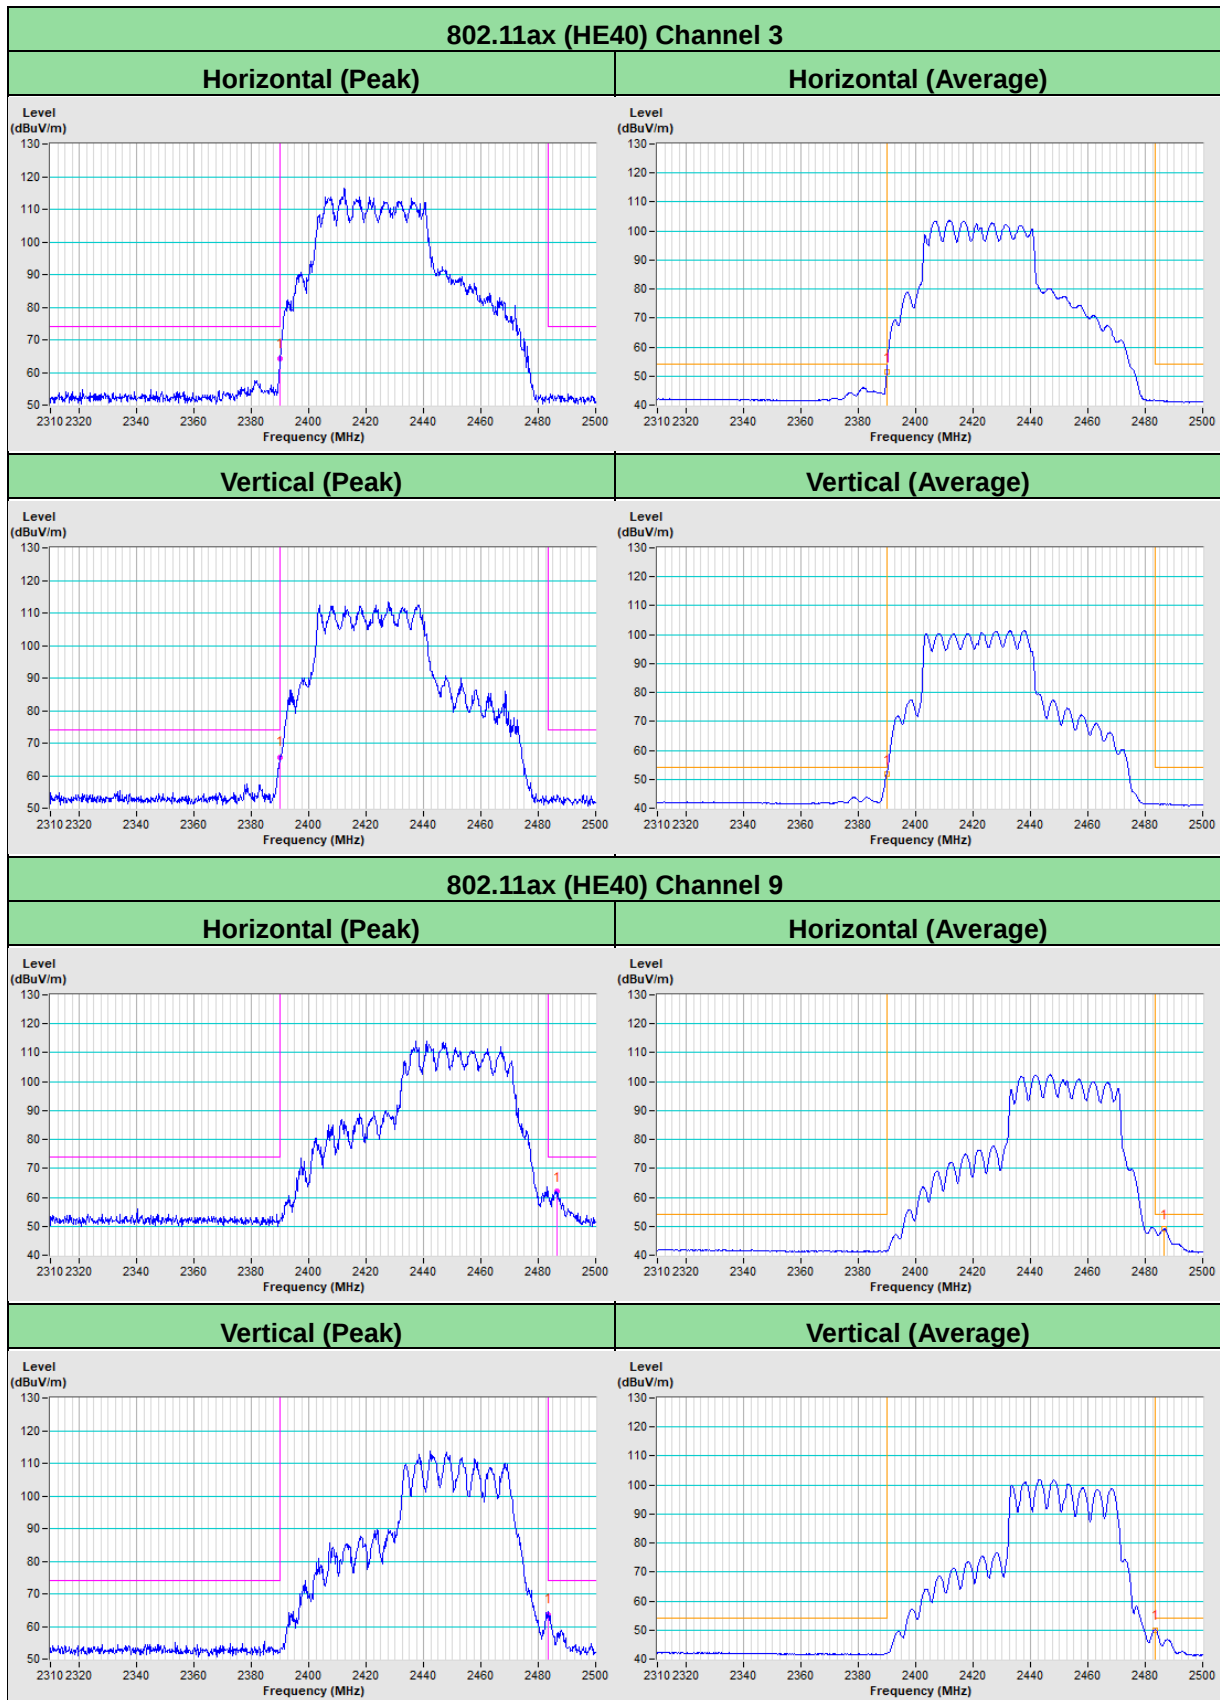

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---