



FCC RF Test Report

FCC ID : UZ7ET4015B
EQUIPMENT : Enterprise Tablet
BRAND NAME : Zebra
MODEL NAME : ET4015B
APPLICANT : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
MANUFACTURER : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter
TEST DATE(S) : Jan. 08, 2026 ~ Jan. 15, 2026

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	6
1.3 Modification of EUT	6
1.4 Testing Location	6
1.5 Test Software.....	6
1.6 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	8
2.1 Carrier Frequency Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 TEST RESULT	12
3.1 Number of Channel Measurement	12
3.2 Hopping Channel Separation Measurement	14
3.3 Dwell Time Measurement.....	17
3.4 20dB and 99% Bandwidth Measurement	19
3.5 Output Power Measurement.....	24
3.6 Conducted Band Edges Measurement.....	25
3.7 Conducted Spurious Emission Measurement	28
3.8 Radiated Band Edges and Spurious Emission Measurement	32
3.9 AC Conducted Emission Measurement.....	36
3.10 Antenna Requirements.....	38
4 LIST OF MEASURING EQUIPMENT.....	39
5 UNCERTAINTY OF EVALUATION.....	40
APPENDIX A. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX B. RADIATED SPURIOUS EMISSION	
APPENDIX C. DUTY CYCLE PLOTS	
APPENDIX D. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR550911-07E	Rev. 01	Initial issue of report	Mar. 02, 2026

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)(i)	Number of Channels	$\geq 50\text{Chs}$	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	$\geq 25\text{KHz}$ or 20dB BW	Pass	-
3.3	15.247(a)(1)(i)	Dwell Time of Each Channel	$\leq 0.4\text{sec}$ in 20sec period	Pass	-
3.4	15.247(a)(1)(i)	20dB Bandwidth	500 KHz	Pass	-
3.4	2.1049	99% Bandwidth	-	Report only	-
3.5	15.247(b)(2)	Peak Output Power	$\leq 1\text{W}$	Pass	-
3.6	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 28.87 dB at 927.25 MHz
3.9	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 6.27 dB at 2.594 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Enterprise Tablet
Brand Name	Zebra
Model Name	ET4015B
FCC ID	UZ7ET4015B
SN	Conducted: 253305247D0048 Radiation: 253295247D0050 Conduction: 253295247D0064
HW Version	DV3
SW Version	qssi_64-userdebug 15 15-14-02.00-VG-U00-PRD-ERS-04 275 release-keys
MFD	25NOV25
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Specification of Accessory				
Battery	Brand Name	Zebra	Model	BT-000528

Supported Unit used in test configuration and system				
AC Adapter 1 (TYPE C Wall Charger 1)	Brand Name	Zebra	Part Number	PWR-WUA5V45W1US
Earphone 1 (Wired headset USB-C)	Brand Name	Zebra	Part Number	HDST-USBC-PTT 1-01
Earphone 2 (Rugged Bluetooth Headset)	Brand Name	Zebra	Part Number	HS3100-0TH
Earphone 3 (3.5mm PTT Headset)	Brand Name	Zebra	Part Number	HDST-35MM-PTT 1-02
Earphone 4 (Rugged Headset)	Brand Name	Zebra	Part Number	HS2100-0TH
Type C-Audio Cable (Type C to 3.5mm)	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
3.5mm to 3.5mm audio connector	Brand Name	Zebra	Part Number	CBL-HS2100-3MS1-01
USB Cable 1 (USB-C to C Cable)	Brand Name	Zebra	Part Number	CBL-EC5X-USBC3A-01
USB Cable 3 (USB-C to C Cable)	Brand Name	Zebra	Part Number	CBL-TN28-USBC2C-01



1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	902.75 MHz ~ 927.25 MHz
Number of Channels	50
Channel Spacing	0.5 MHz
Maximum Output Power to Antenna	27.73 dBm (0.5929 W)
99% Occupied Bandwidth	0.116 MHz
Antenna Type / Gain	Loop Antenna type with gain -0.27 dBi
Type of Modulation	ASK

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS TH01-KS	CN1257	314309

1.5 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	SPORTON	FCC 15C-15E Test Tools Ver10.0_210607	10.0
2.	03CH06-KS	AUDIX	E3	210616
3.	CO01-KS	AUDIX	E3	6.2009-8-24



1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2020+Cor.1-2023

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
902.75-927.25 MHz	1	902.75	26	915.25
	2	903.25	27	915.75
	3	903.75	28	916.25
	4	904.25	29	916.75
	5	904.75	30	917.25
	6	905.25	31	917.75
	7	905.75	32	918.25
	8	906.25	33	918.75
	9	906.75	34	919.25
	10	907.25	35	919.75
	11	907.75	36	920.25
	12	908.25	37	920.75
	13	908.75	38	921.25
	14	909.25	39	921.75
	15	909.75	40	922.25
	16	910.25	41	922.75
	17	910.75	42	923.25
	18	911.25	43	923.75
	19	911.75	44	924.25
	20	912.25	45	924.75
	21	912.75	46	925.25
	22	913.25	47	925.75
	23	913.75	48	926.25
	24	914.25	49	926.75
	25	914.75	50	927.25

2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report, and the worst mode of radiated spurious emissions is recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	UHF RFID
Conducted Test Cases	Mode 1: RFID Tx 902.75 MHz Mode 2: RFID Tx 914.75 MHz Mode 3: RFID Tx 927.25 MHz
	UHF RFID
Radiated Test Cases	Mode 1: RFID Tx 902.75 MHz Mode 2: RFID Tx 914.75 MHz Mode 3: RFID Tx 927.25 MHz
AC Conducted Emission	Mode 1 : RFID read + BT Link + USB Cable 1(CBL-EC5X-USBC3A-01) + Charging from AC Adapter 1(PWR-WUA5V45W1US) + Battery (BT-000528)
Remark: For Radiated Test Cases, The tests were performed with Adapter 1 and USB Cable 1.	

2.3 Connection Diagram of Test System

For Conducted Emission

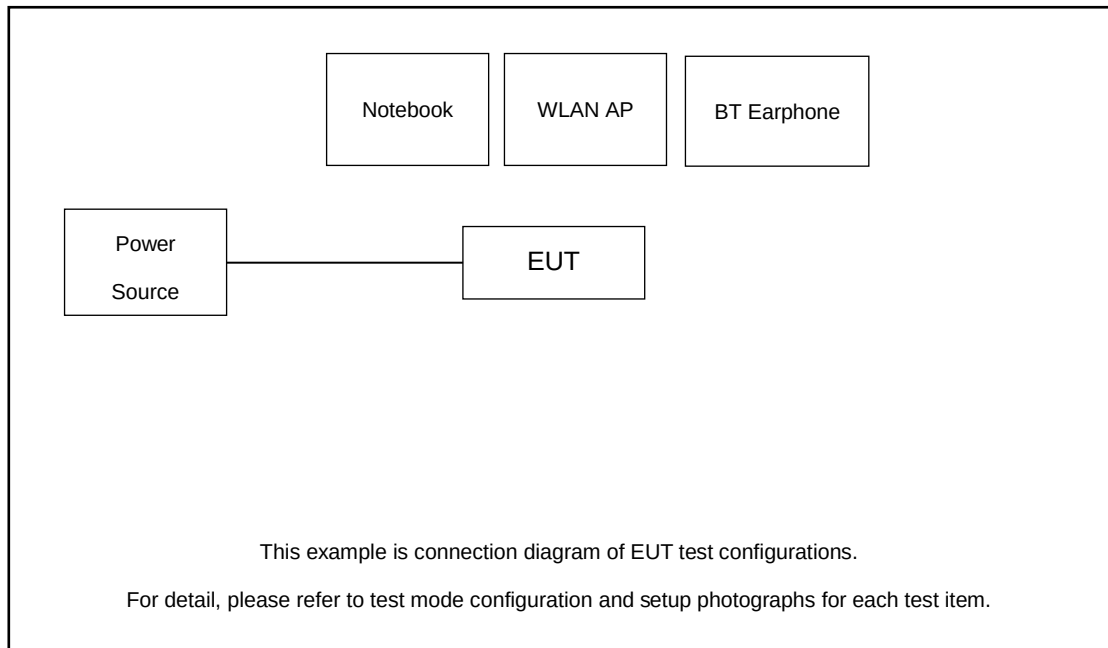

For Radiated Emission

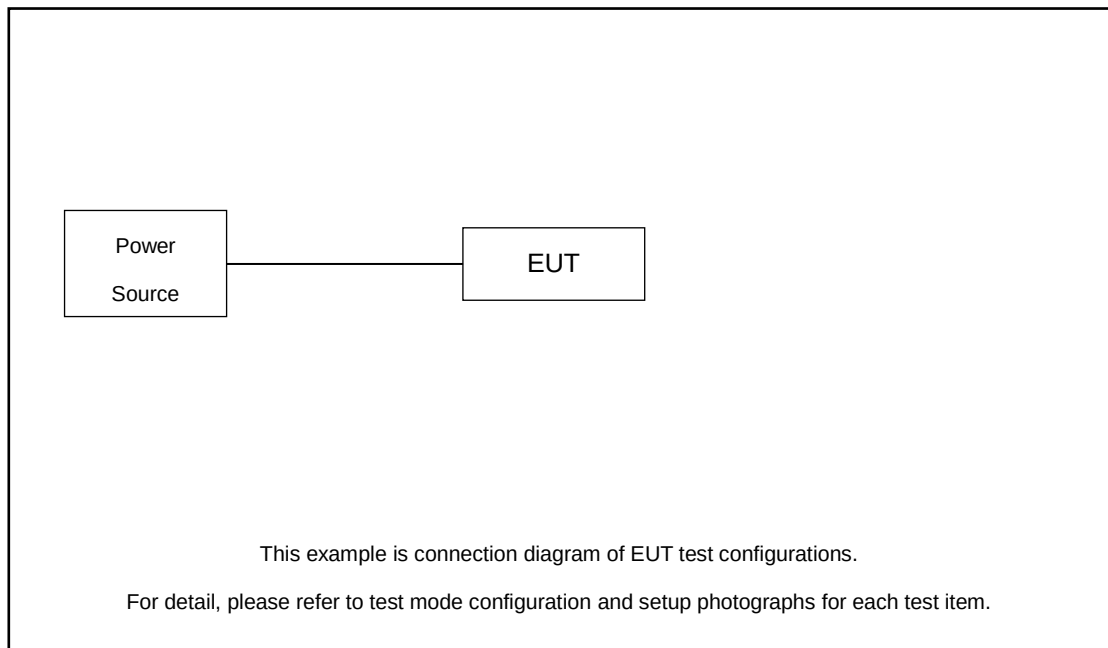

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
2.	SD Card	Kingston	8GB	N/A	N/A	N/A
3.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m

2.5 EUT Operation Test Setup

The RF test items, RFID Read software was installed in order to make the EUT get into the engineering modes to provide channel selection, power level for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 0.50 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 0.50 + 10 = 10.50 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2020 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation;
Set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.


3.1.4 Test Setup

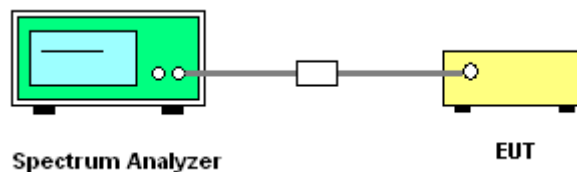

3.1.5 Test Result of Number of Hopping Frequency

TestMode	Result[Num]	Limit[Num]	Verdict
RFID	50	≥50	PASS

Number of Hopping Channel Plot

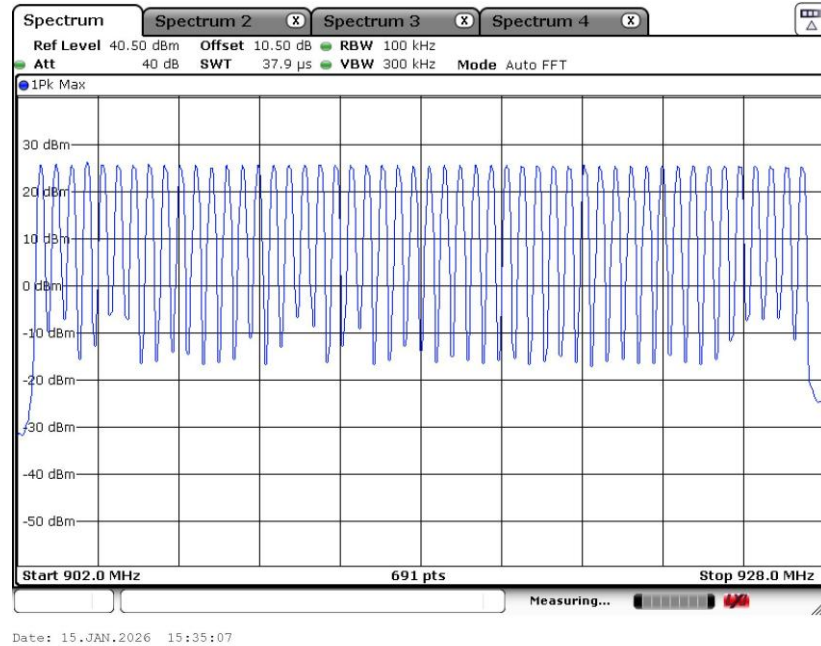

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2020 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels;
RBW Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup

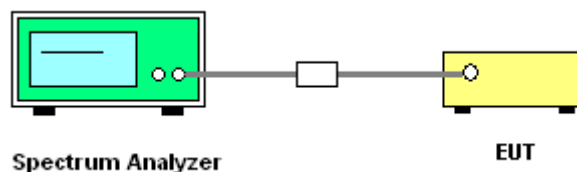




3.2.5 Test Result of Hopping Channel Separation


TestMode	NTX	Freq(MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
RFID	1	902.75	0.501	0.125	PASS
RFID	1	914.75	0.501	0.125	PASS
RFID	1	927.25	0.501	0.125	PASS

Channel Separation Plot on 902.75 MHz

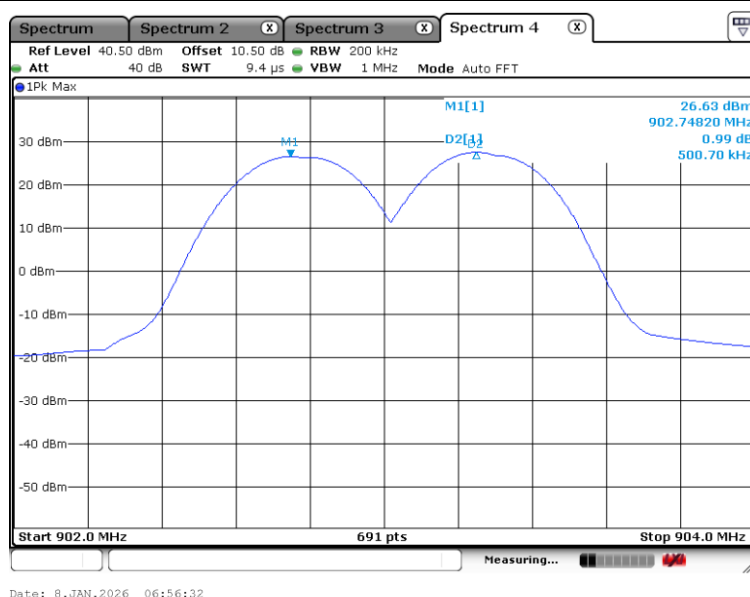




Channel Separation Plot on 914.75 MHz

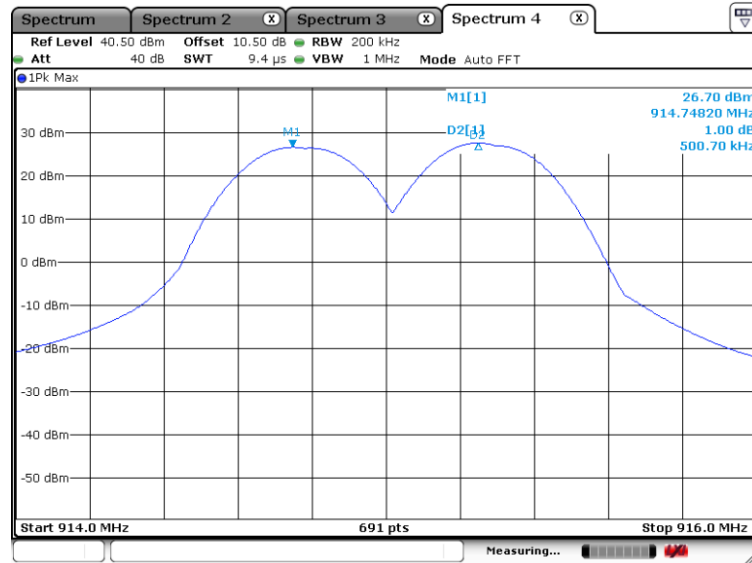

Channel Separation Plot on 927.25 MHz

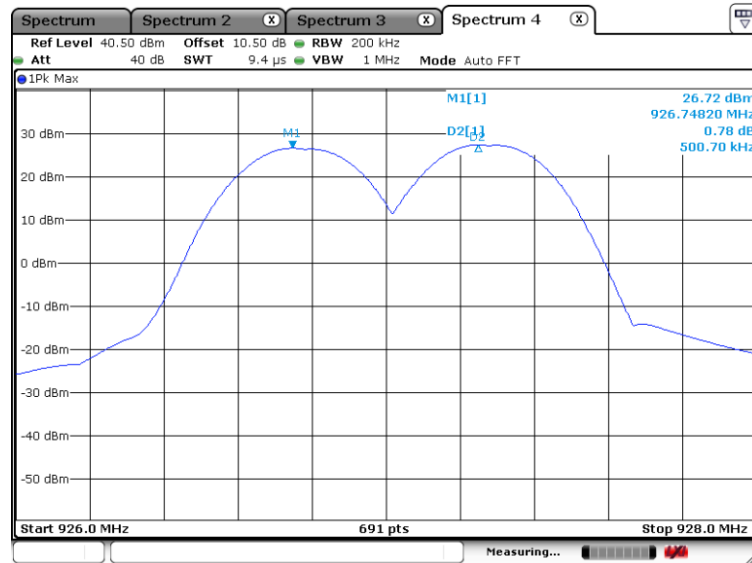

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 20 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


1. The testing follows ANSI C63.10-2020 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1/T$; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup

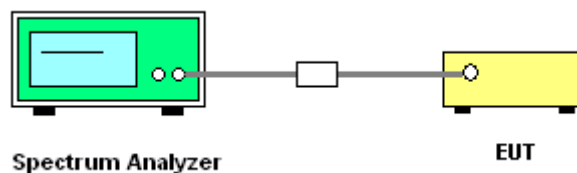

3.3.5 Test Result of Dwell Time

Mod.	DT On-time per hop (ms)	Total hops over 20sec	Dwell Time (sec)	Limits (sec)	Pass/Fail
RFID	376.8	1	0.377	0.4	Pass

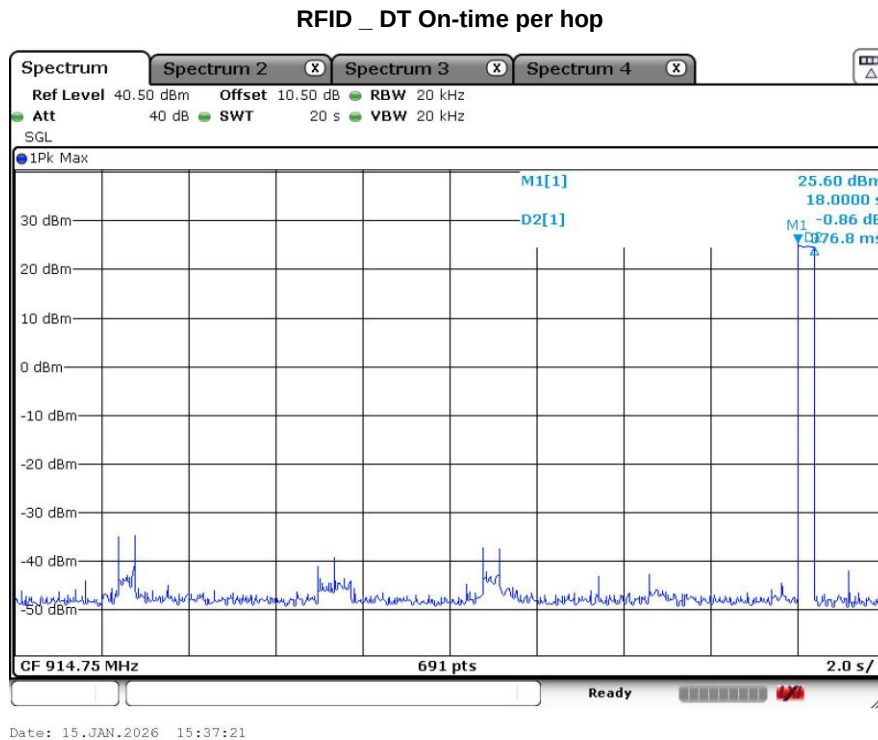

Remark: Dwell Time(s) = DT On-time per hop * Hops Over Occupancy Time (hops)

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

For frequency hopping systems operating in the 902-928 MHz band, the maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2020 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
The RBW is set to 1% to 5% of the 99% OBW, the VBW is set to 3 times the RBW;
Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
The RBW is set to 1% to 5% of the 99% OBW, the VBW is set to 3 times the RBW;
Sweep = auto; Detector function = peak;
Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup

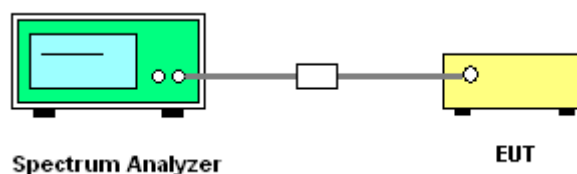




3.4.5 Test Result of 20dB Bandwidth


Mod.	NTX	Freq. (MHz)	20dB BW (MHz)	20dB BW Limit (MHz)	Pass/Fail
RFID	1	902.75	0.125	0.5	Pass
RFID	1	914.75	0.125	0.5	Pass
RFID	1	927.25	0.125	0.5	Pass

20 dB Bandwidth Plot on 902.75 MHz

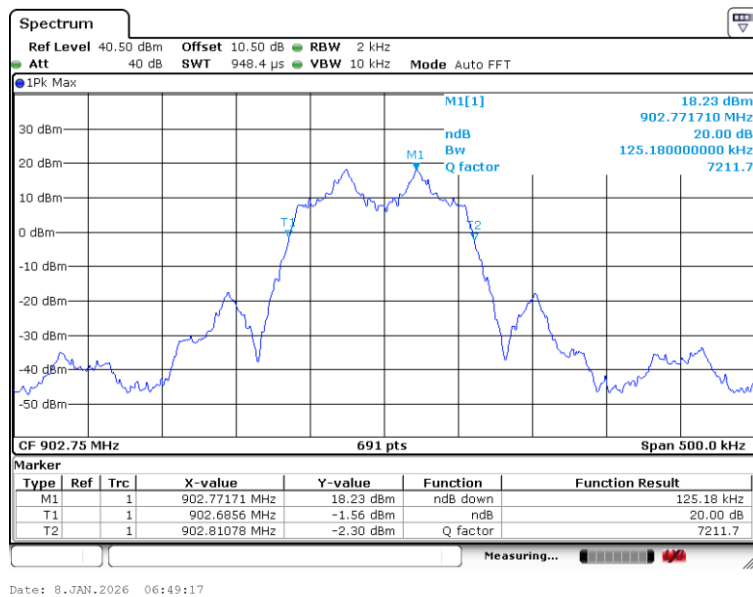




20 dB Bandwidth Plot on 914.75 MHz

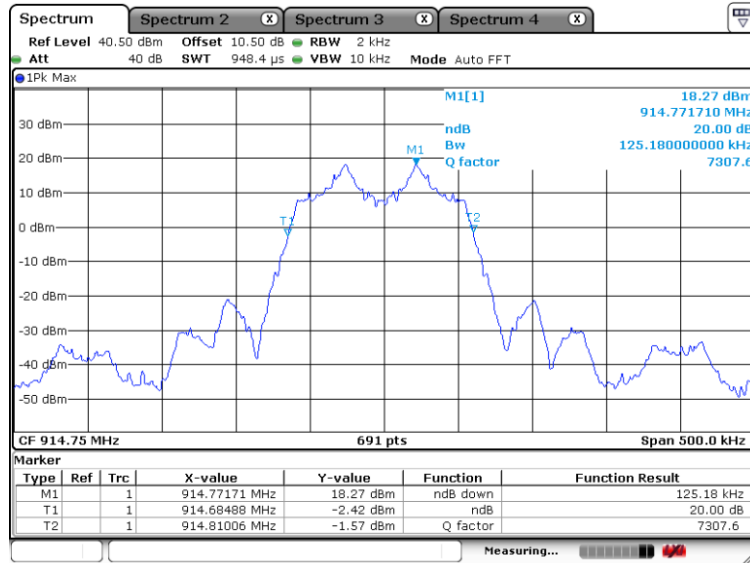

Date: 8.JAN.2026 06:57:52

20 dB Bandwidth Plot on 927.25 MHz

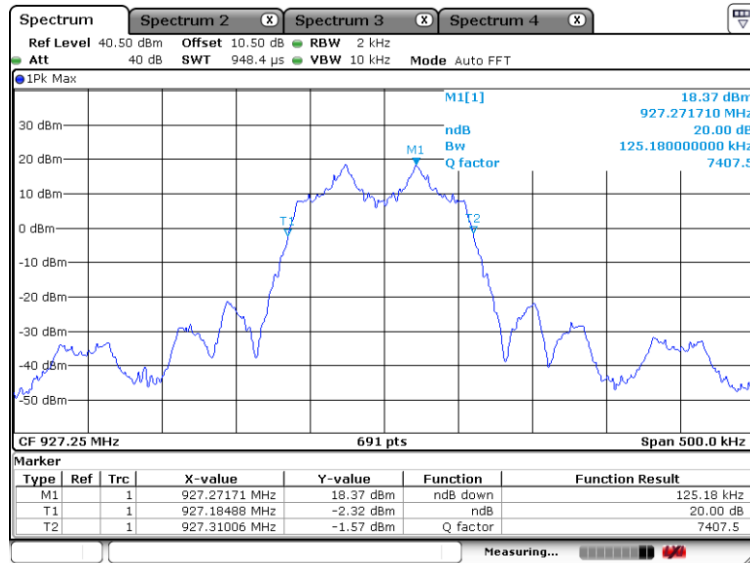


Date: 8.JAN.2026 07:02:51




3.4.6 Test Result of 99% Occupied Bandwidth

Mod.	NTX	Freq. (MHz)	99% Bandwidth (MHz)	Pass/Fail
RFID	1	902.75	0.116	Pass
RFID	1	914.75	0.116	Pass
RFID	1	927.25	0.116	Pass

99% Occupied Bandwidth Plot on 902.75 MHz

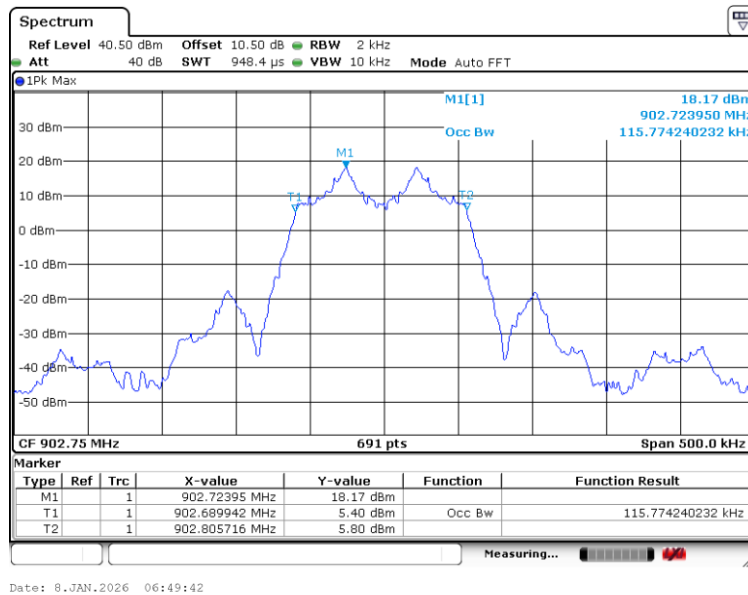


99% Occupied Bandwidth Plot on 914.75 MHz

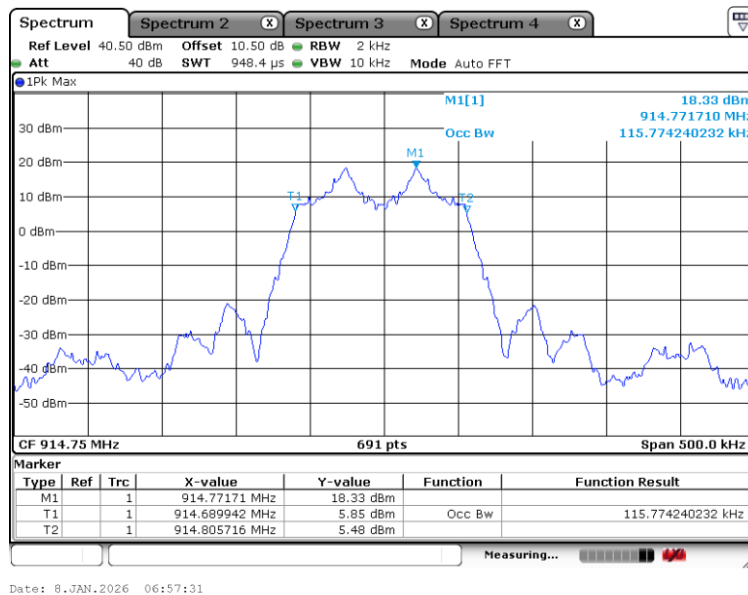



99% Occupied Bandwidth Plot on 927.25MHz

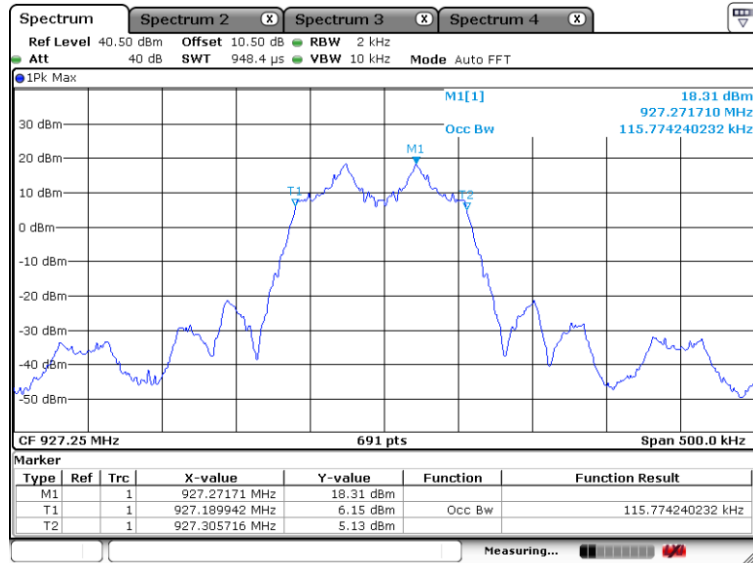

Date: 8.JAN.2026 07:03:21

3.5 Output Power Measurement

3.5.1 Limit of Output Power

15.247(b)(2): For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2020 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

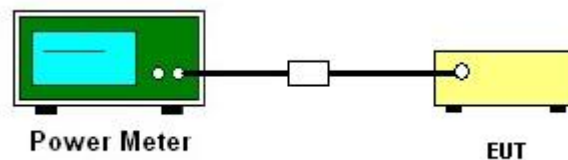

3.5.5 Test Result of Peak Output Power

DH	Freq. (MHz)	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
RFID	902.75	1	27.62	30.00	Pass
	914.75	1	27.73	30.00	Pass
	927.25	1	27.68	30.00	Pass

3.5.6 Test Result of Average Output Power (Reporting Only)

DH	Freq. (MHz)	NTX	Average Power (dBm)	Power Setting
RFID	902.75	1	25.65	30
	914.75	1	25.75	30
	927.25	1	25.69	30

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2020 clause 7.8.7.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.


3.6.4 Test Setup

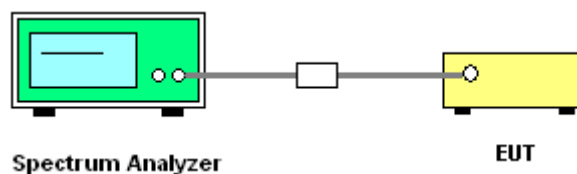


3.6.5 Test Result of Conducted Band Edges

<RFID>

Low Band Edge Plot on 902.75 MHz

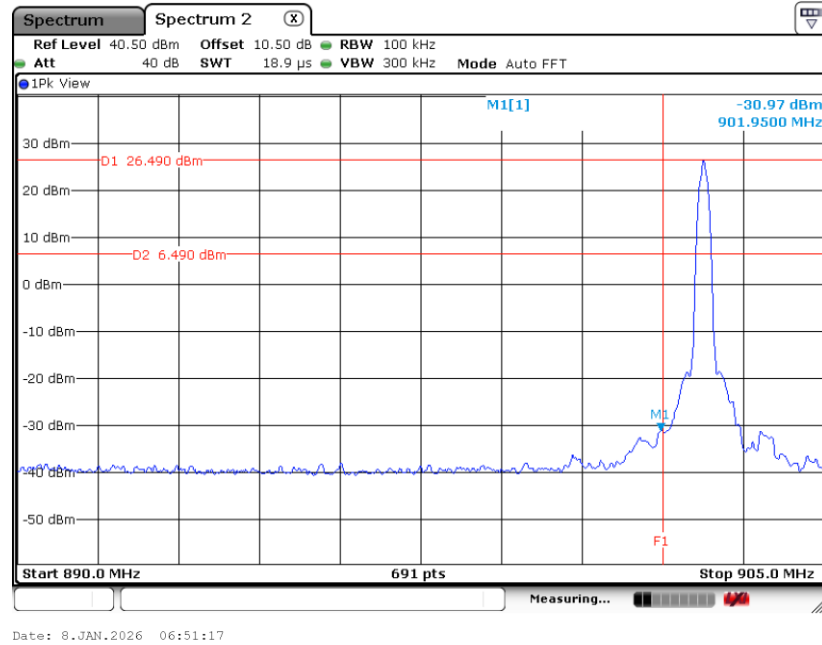


High Band Edge Plot on 927.25 MHz

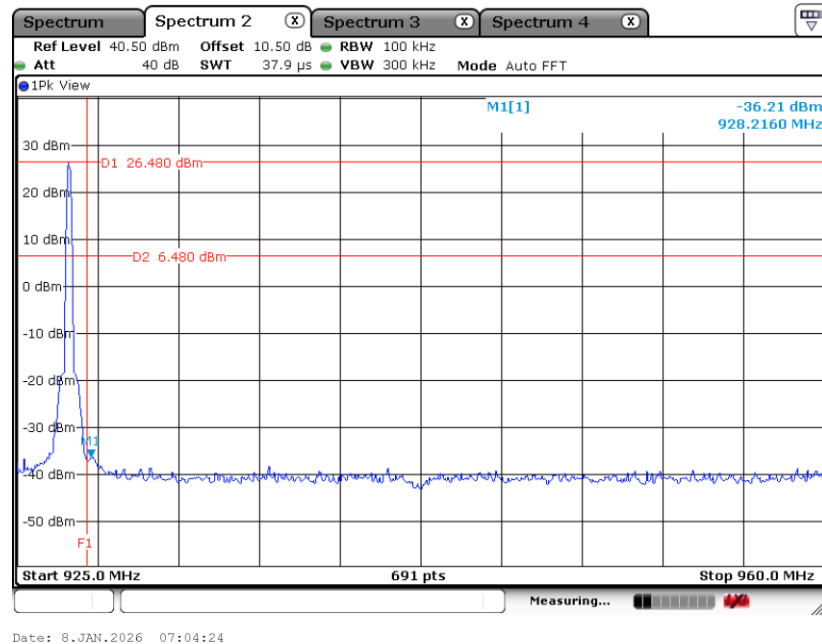


3.6.6 Test Result of Conducted Hopping Mode Band Edges

<RFID>

Hopping Mode Low Band Edge Plot on 902.75 MHz

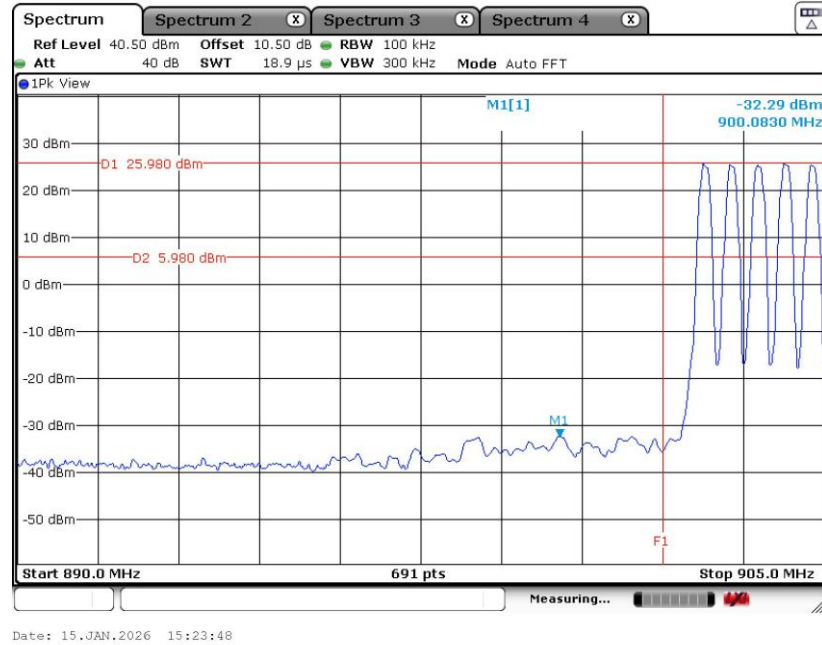

Hopping Mode High Band Edge Plot on 927.25 MHz

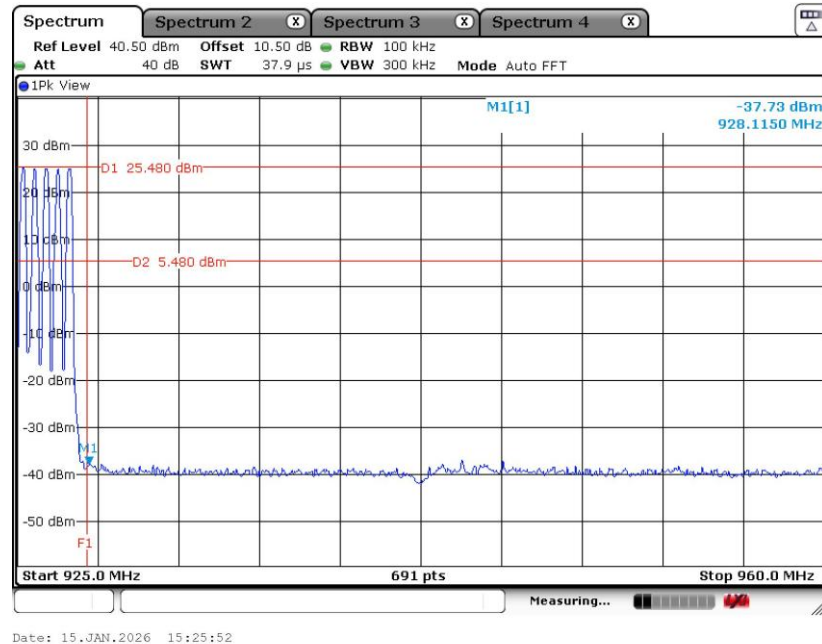

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2020 clause 7.8.7.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.4 Test Setup

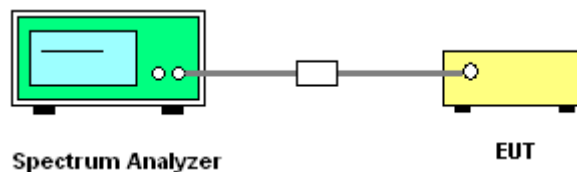




3.7.5 Test Result of Conducted Spurious Emission


<RFID>

CSE Plot on Ch 902.75 MHz

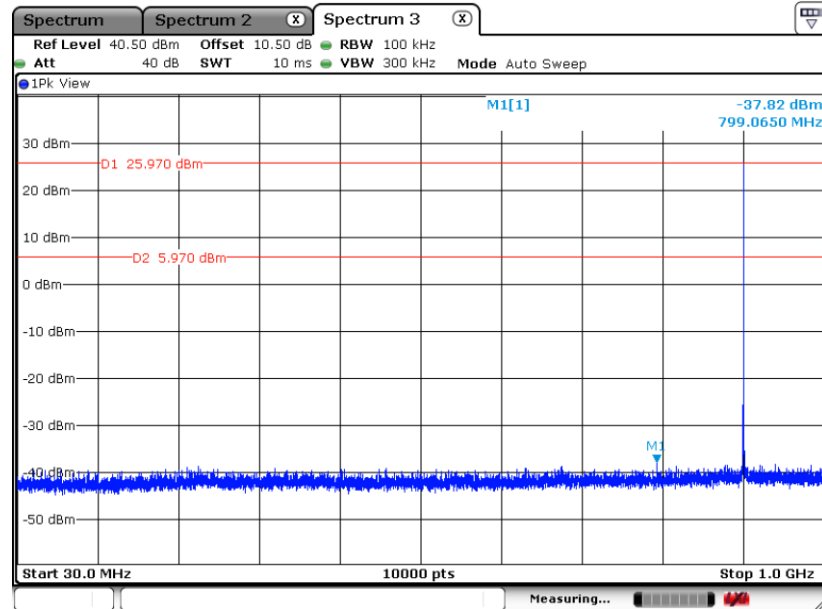

Date: 8.JAN.2026 06:53:12


CSE Plot on Ch 902.75 MHz

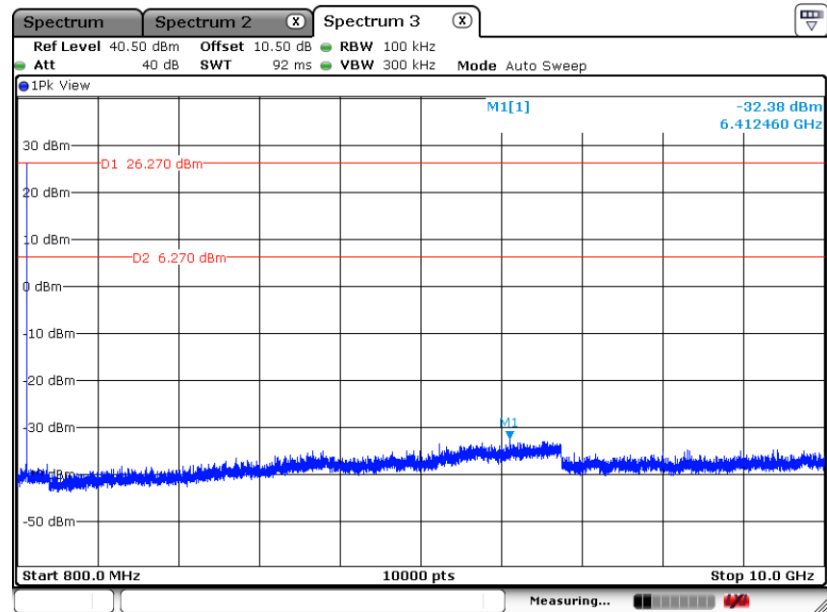

Date: 8.JAN.2026 06:54:17




CSE Plot on Ch 914.75 MHz

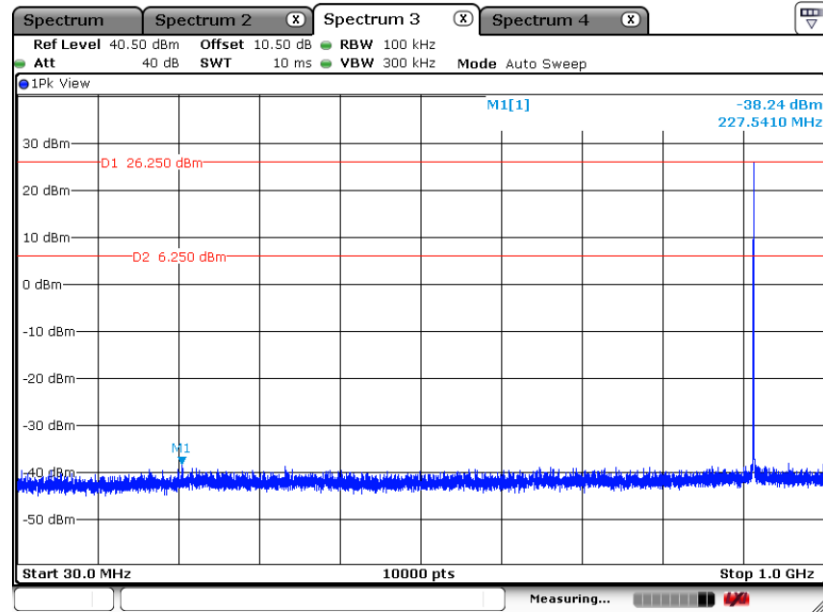

Date: 8.JAN.2026 06:58:59


CSE Plot on Ch 914.75 MHz

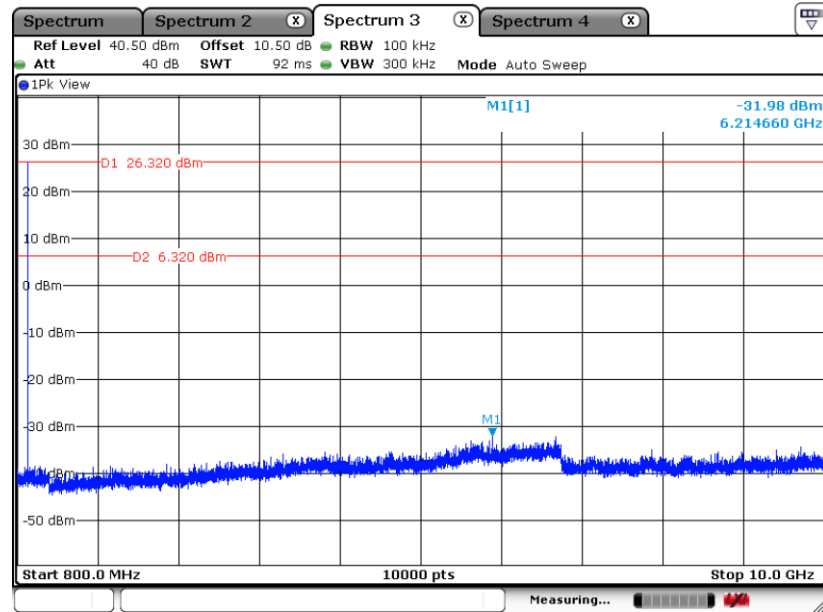

Date: 8.JAN.2026 07:00:04




CSE Plot on Ch 927.25 MHz

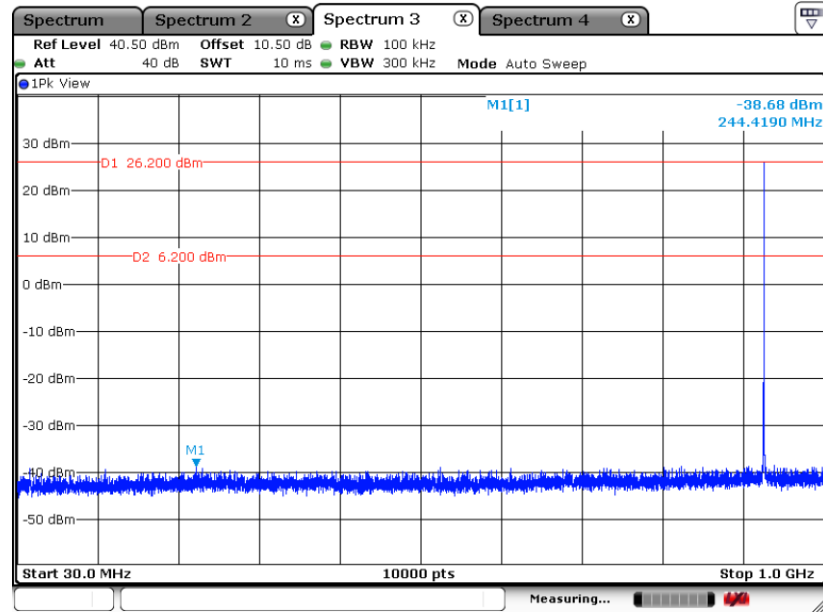

Date: 8.JAN.2026 07:05:13

CSE Plot on Ch 927.25 MHz

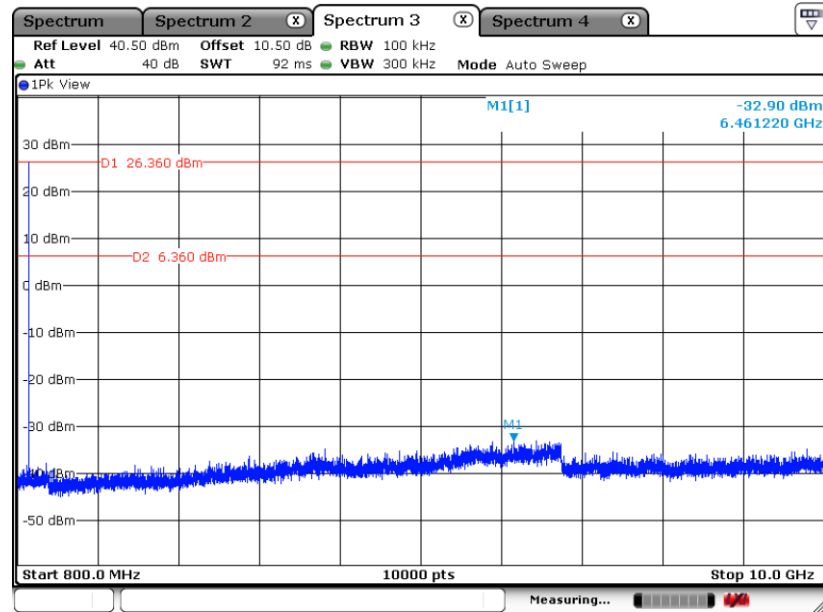

Date: 8.JAN.2026 07:06:08

3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.8.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
$$\text{On time} = N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$$


Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.8.4 Test Setup


For radiated emissions below 30MHz

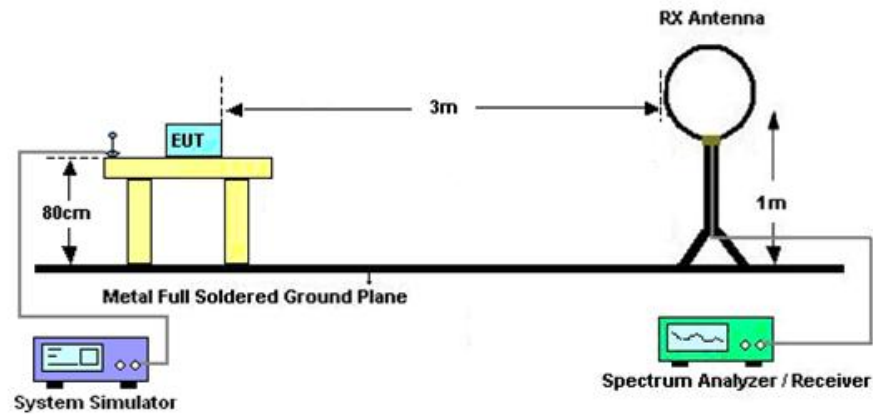

For radiated emissions from 30MHz to 1GHz

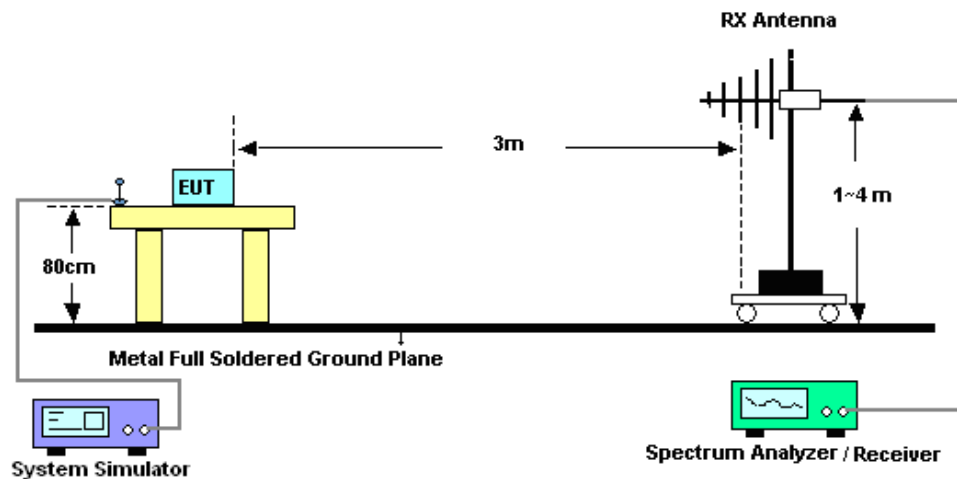

For radiated emissions above 1GHz

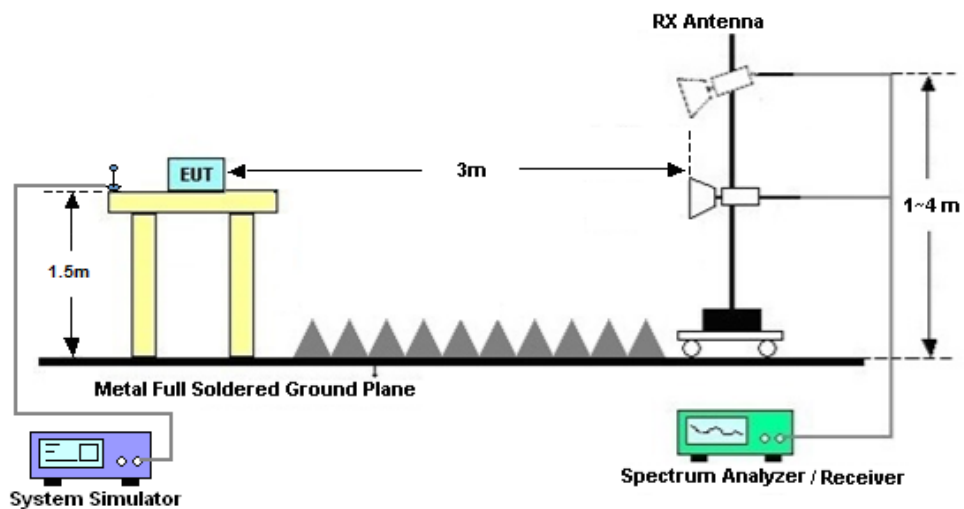



3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.8.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix B.

3.8.8 Duty cycle correction factor for average measurement

Please refer to Appendix C.

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup

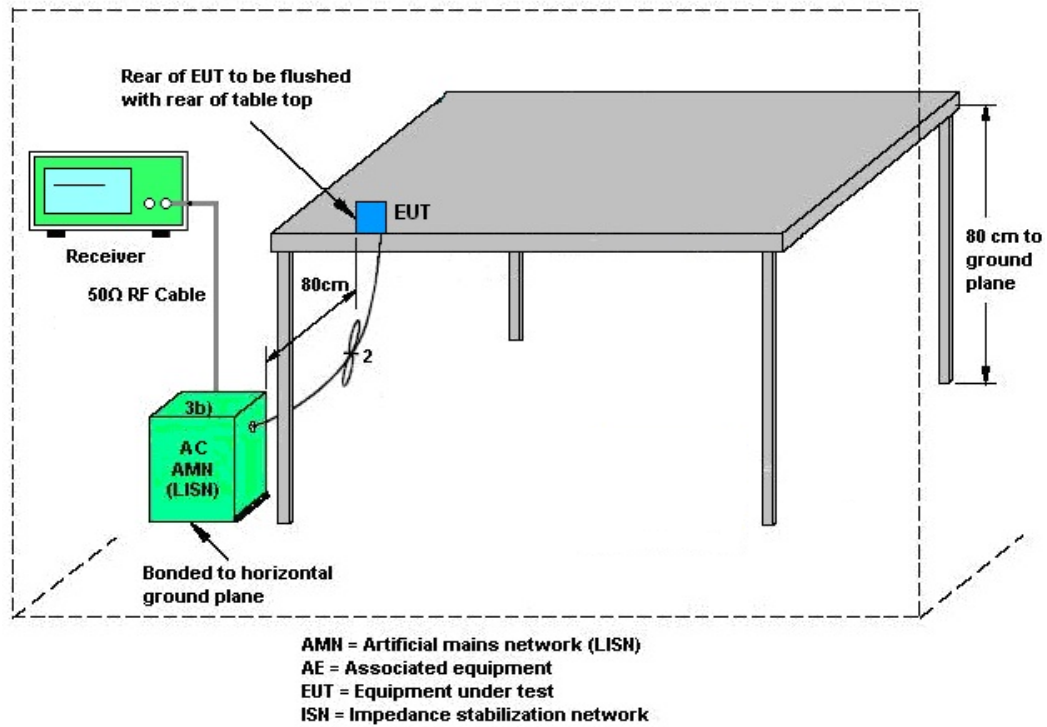

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix A.



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY57290157	3Hz~8.5GHz;Max 30dBm	Feb. 22, 2025	Jan. 12, 2026	Feb. 21, 2026	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471084	10Hz~44GHz	Jul. 03, 2025	Jan. 12, 2026	Jul. 02, 2026	Radiation (03CH06-KS)
Active loop antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Aug. 10, 2025	Jan. 12, 2026	Aug. 09, 2026	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	Mar. 24, 2025	Jan. 12, 2026	Mar. 23, 2026	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 14, 2025	Jan. 12, 2026	Apr. 13, 2026	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101116	18GHz~40GHz	Oct. 18, 2025	Jan. 12, 2026	Oct. 17, 2026	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	380827	9KHz ~1GHZ	Jul. 03, 2025	Jan. 12, 2026	Jul. 02, 2026	Radiation (03CH06-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Dec. 26, 2025	Jan. 12, 2026	Dec. 25, 2026	Radiation (03CH06-KS)
high gain Amplifier	EM	EM01G18GA	060845	1Ghz~18Ghz	Dec. 25, 2025	Jan. 12, 2026	Dec. 24, 2026	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY57280119	500MHz~26.5GHz	Oct. 10, 2025	Jan. 12, 2026	Oct. 09, 2026	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jan. 12, 2026	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jan. 12, 2026	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jan. 12, 2026	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 16, 2025	Jan. 11, 2026	Apr. 15, 2026	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Jul. 03, 2025	Jan. 11, 2026	Jul. 02, 2026	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Dec. 23, 2025	Jan. 11, 2026	Dec. 22, 2026	Conduction (CO01-KS)
AC Power Source	Ouhan	APW-130NYT	202201040060	AC 0V~300V,45Hz~1000Hz	Apr. 16, 2025	Jan. 11, 2026	Apr. 15, 2026	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Jul. 07, 2025	Jan. 08, 2026~Jan. 15, 2026	Jul. 06, 2026	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Dec. 25, 2025	Jan. 08, 2026~Jan. 15, 2026	Dec. 24, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Dec. 25, 2025	Jan. 08, 2026~Jan. 15, 2026	Dec. 24, 2026	Conducted (TH01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	± 2.00 dB
Occupied Channel Bandwidth	$\pm 0.384\%$
Conducted Power	± 0.90 dB
Conducted Power Spectral Density	± 0.90 dB
Frequency	± 0.4 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.84 dB
---	---------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.18 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.88 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)


Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.36 dB
---	---------

----- THE END -----



Appendix A. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

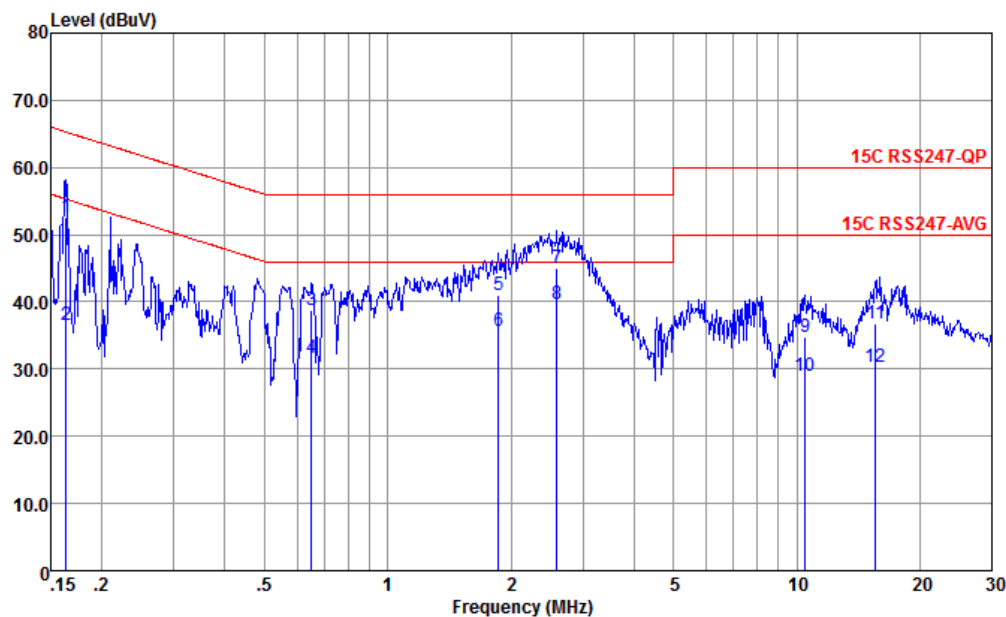


Site : CO01-KS
Condition : 15C RSS247-QP LISN-100334-L 2025 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.163	52.50	-12.80	65.30	32.50	9.55	10.45	QP
2	0.163	36.60	-18.70	55.30	16.60	9.55	10.45	Average
3	0.651	38.74	-17.26	56.00	18.81	9.58	10.35	QP
4	0.651	31.64	-14.36	46.00	11.71	9.58	10.35	Average
5	1.868	41.04	-14.96	56.00	21.20	9.60	10.24	QP
6	1.868	35.64	-10.36	46.00	15.80	9.60	10.24	Average
7	2.594	45.03	-10.97	56.00	25.20	9.60	10.23	QP
8 *	2.594	39.73	-6.27	46.00	19.90	9.60	10.23	Average
9	10.508	34.69	-25.31	60.00	14.60	9.85	10.24	QP
10	10.508	28.89	-21.11	50.00	8.80	9.85	10.24	Average
11	15.552	36.75	-23.25	60.00	16.61	9.86	10.28	QP
12	15.552	30.35	-19.65	50.00	10.21	9.86	10.28	Average



Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

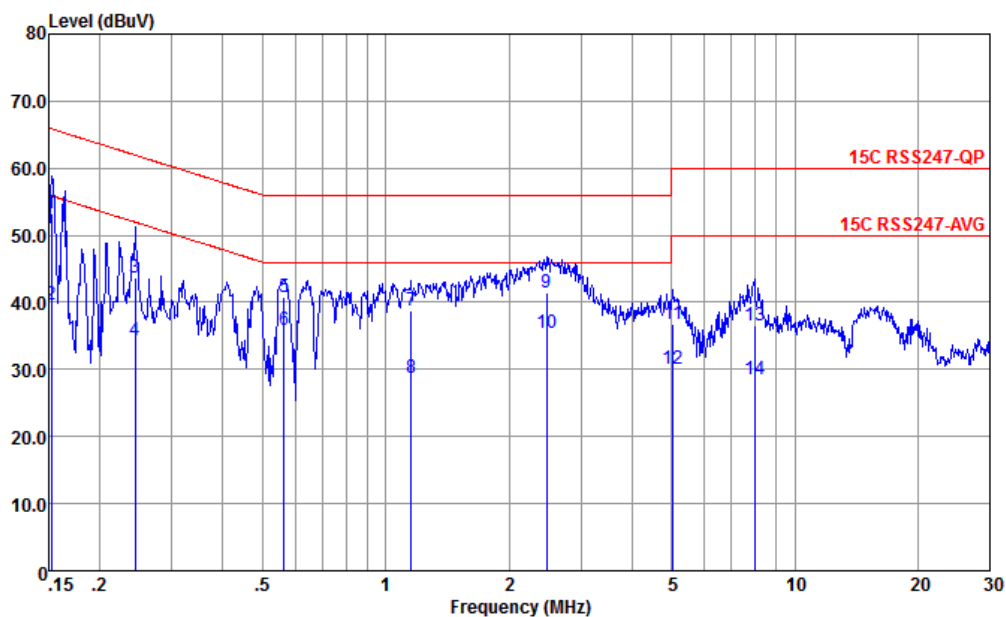

Site : CO01-KS
Condition : 15C RSS247-QP LISN-100334-N 2025 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.152	53.31	-12.56	65.87	33.30	9.56	10.45	QP
2	0.152	39.61	-16.26	55.87	19.60	9.56	10.45	Average
3	0.244	43.72	-18.23	61.95	23.60	9.65	10.47	QP
4	0.244	34.42	-17.53	51.95	14.30	9.65	10.47	Average
5	0.564	40.85	-15.15	56.00	20.70	9.77	10.38	QP
6 *	0.564	35.85	-10.15	46.00	15.70	9.77	10.38	Average
7	1.153	38.70	-17.30	56.00	18.50	9.94	10.26	QP
8	1.153	28.70	-17.30	46.00	8.50	9.94	10.26	Average
9	2.474	41.49	-14.51	56.00	21.50	9.76	10.23	QP
10	2.474	35.49	-10.51	46.00	15.50	9.76	10.23	Average
11	5.031	36.73	-23.27	60.00	16.90	9.63	10.20	QP
12	5.031	30.13	-19.87	50.00	10.30	9.63	10.20	Average
13	7.977	36.47	-23.53	60.00	16.60	9.66	10.21	QP
14	7.977	28.47	-21.53	50.00	8.60	9.66	10.21	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix B. Radiated Spurious Emission Test Data

Test Engineer :	Jerry Xu	Relative Humidity :	41 ~ 42 %
		Temperature :	22 ~ 23 °C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	-	-	RFID	1	902.75	-	-	-
Mode 2	-	-	RFID	25	914.75	-	-	-
Mode 3	-	-	RFID	50	927.25	-	-	-



Summary of each worse mode

Mode	Modulation	Frequency.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	RFID	902.75	2708.50	43.79	74.00	-30.21	V	PEAK	Pass	Harmonic
2	RFID	914.75	2744.20	44.95	74.00	-29.05	V	PEAK	Pass	Harmonic
3	RFID	927.25	1066.30	45.13	74.00	-28.87	H	PEAK	Pass	Harmonic





Mode	1																																																																																																									
	Band Edge																																																																																																									
	RFID_ 902.75MHz																																																																																																									
ANT																																																																																																										
Pol.	Horizontal						Vertical																																																																																																			
Peak	Level (dBuV/m) Frequency (MHz) Part 15C						Level (dBuV/m) Frequency (MHz) Part 15C																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>902.76</td><td>127.25</td><td>-----</td><td>-----</td><td>115.13</td><td>29.74</td><td>4.13</td><td>31.75</td><td>10.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	902.76	127.25	-----	-----	115.13	29.74	4.13	31.75	10.00	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>902.76</td><td>119.68</td><td>-----</td><td>-----</td><td>107.56</td><td>29.74</td><td>4.13</td><td>31.75</td><td>10.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	902.76	119.68	-----	-----	107.56	29.74	4.13	31.75	10.00	---	---	Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																															
1	902.76	127.25	-----	-----	115.13	29.74	4.13	31.75	10.00	---	---	Peak																																																																																														
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																															
1	902.76	119.68	-----	-----	107.56	29.74	4.13	31.75	10.00	---	---	Peak																																																																																														

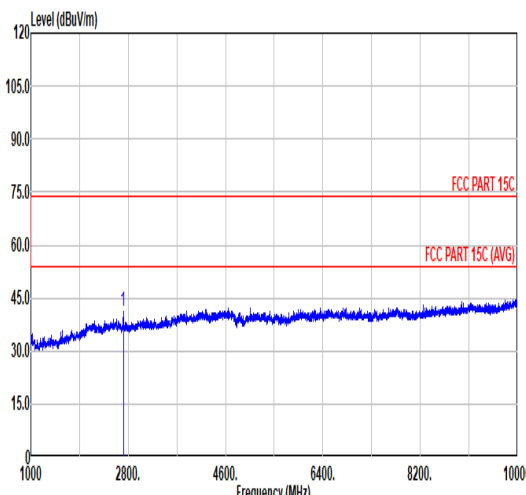
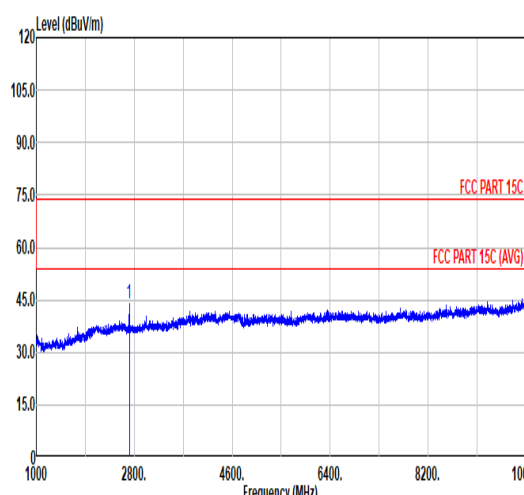


Mode	1																																																																																																								
	Harmonic																																																																																																								
	RFID_ 902.75MHz																																																																																																								
ANT																																																																																																									
Pol.	Horizontal											Vertical																																																																																													
Peak Avg																																																																																																									
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2708.50</td><td>41.03</td><td>74.00</td><td>-32.97</td><td>67.71</td><td>31.92</td><td>7.13</td><td>65.73</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2708.50	41.03	74.00	-32.97	67.71	31.92	7.13	65.73	0.00	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2708.50</td><td>43.79</td><td>74.00</td><td>-30.21</td><td>70.47</td><td>31.92</td><td>7.13</td><td>65.73</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>			Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2708.50	43.79	74.00	-30.21	70.47	31.92	7.13	65.73	0.00	---	---	Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	2708.50	41.03	74.00	-32.97	67.71	31.92	7.13	65.73	0.00	---	---	Peak																																																																																													
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	2708.50	43.79	74.00	-30.21	70.47	31.92	7.13	65.73	0.00	---	---	Peak																																																																																													

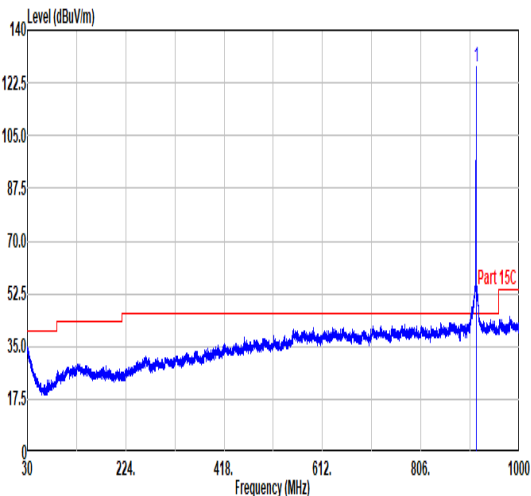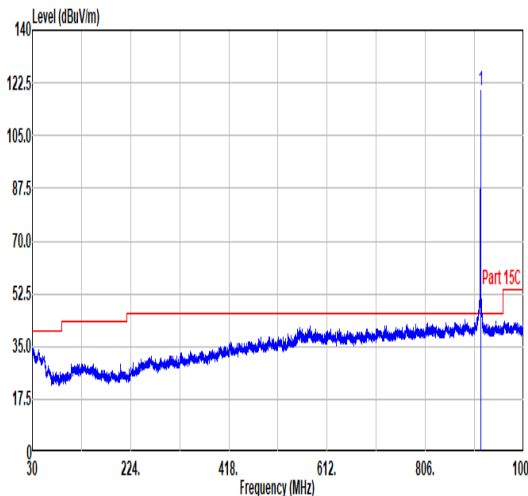



Mode	2																																																																																																							
	Band Edge																																																																																																							
	RFID_ 914.75MHz																																																																																																							
ANT																																																																																																								
Pol.	Horizontal						Vertical																																																																																																	
Peak	 <table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>914.76</td><td>127.66</td><td>-----</td><td>-----</td><td>115.18</td><td>29.94</td><td>4.15</td><td>31.61</td><td>10.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	914.76	127.66	-----	-----	115.18	29.94	4.15	31.61	10.00	---	---	Peak	 <table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>914.76</td><td>119.82</td><td>-----</td><td>-----</td><td>107.34</td><td>29.94</td><td>4.15</td><td>31.61</td><td>10.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	914.76	119.82	-----	-----	107.34	29.94	4.15	31.61	10.00	---	---	Peak
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	914.76	127.66	-----	-----	115.18	29.94	4.15	31.61	10.00	---	---	Peak																																																																																												
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	914.76	119.82	-----	-----	107.34	29.94	4.15	31.61	10.00	---	---	Peak																																																																																												

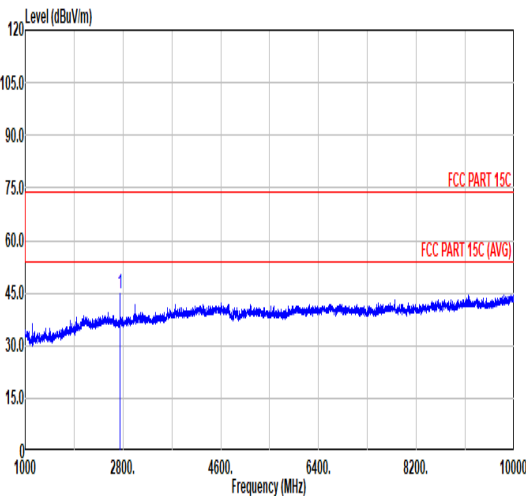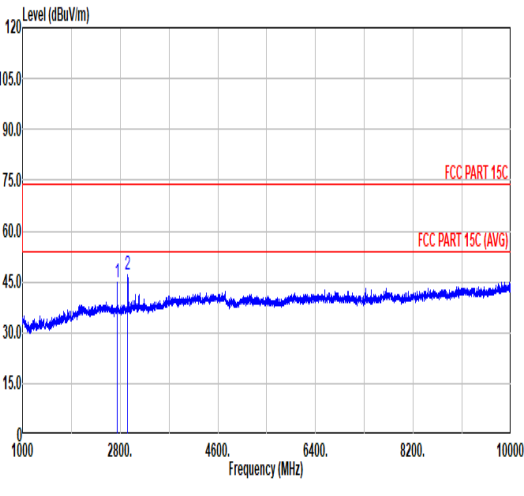



Mode	2																																																																																																																
	Harmonic																																																																																																																
	RFID_ 914.75MHz																																																																																																																
ANT																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																										
Peak Avg																																																																																																																	
	<table><tr><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2744.20</td><td>44.82</td><td>74.00</td><td>-29.18</td><td>71.39</td><td>31.99</td><td>7.18</td><td>65.74</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2744.20	44.82	74.00	-29.18	71.39	31.99	7.18	65.74	0.00	---	---	Peak	<table><tr><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2744.20</td><td>44.95</td><td>74.00</td><td>-29.05</td><td>71.52</td><td>31.99</td><td>7.18</td><td>65.74</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>2939.70</td><td>47.29</td><td>99.82</td><td>-52.53</td><td>73.00</td><td>32.64</td><td>7.45</td><td>65.80</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2744.20	44.95	74.00	-29.05	71.52	31.99	7.18	65.74	0.00	---	---	Peak	2	2939.70	47.29	99.82	-52.53	73.00	32.64	7.45	65.80	0.00	---	---	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																							
1	2744.20	44.82	74.00	-29.18	71.39	31.99	7.18	65.74	0.00	---	---	Peak																																																																																																					
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																							
1	2744.20	44.95	74.00	-29.05	71.52	31.99	7.18	65.74	0.00	---	---	Peak																																																																																																					
2	2939.70	47.29	99.82	-52.53	73.00	32.64	7.45	65.80	0.00	---	---	PEAK																																																																																																					

Note: The non-restricted frequency which limit is 100kHz-PSD down 20dB

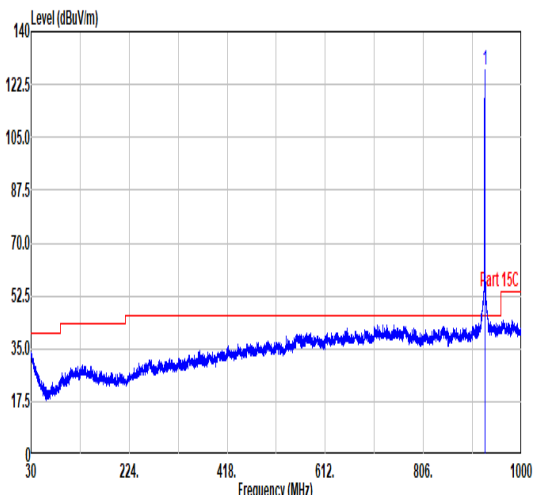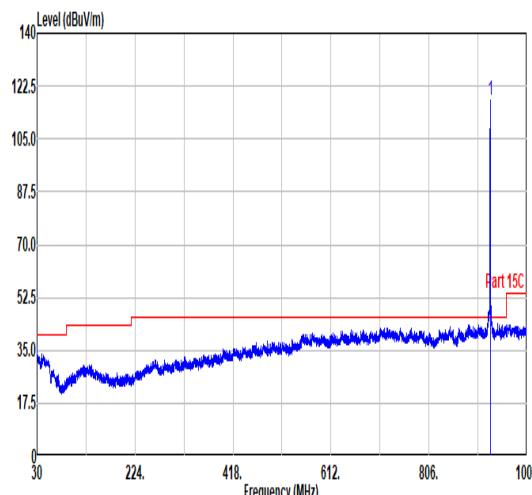


Mode	3																																																																																																									
	Band Edge																																																																																																									
	RFID_ 927.25MHz																																																																																																									
ANT																																																																																																										
Pol.	Horizontal						Vertical																																																																																																			
Peak	 <table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>927.25</td><td>127.08</td><td>-----</td><td>-----</td><td>114.06</td><td>30.32</td><td>4.17</td><td>31.47</td><td>10.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	927.25	127.08	-----	-----	114.06	30.32	4.17	31.47	10.00	---	---	Peak	 <table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>927.25</td><td>117.64</td><td>-----</td><td>-----</td><td>104.62</td><td>30.32</td><td>4.17</td><td>31.47</td><td>10.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	927.25	117.64	-----	-----	104.62	30.32	4.17	31.47	10.00	---	---	Peak
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																															
1	927.25	127.08	-----	-----	114.06	30.32	4.17	31.47	10.00	---	---	Peak																																																																																														
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																															
1	927.25	117.64	-----	-----	104.62	30.32	4.17	31.47	10.00	---	---	Peak																																																																																														

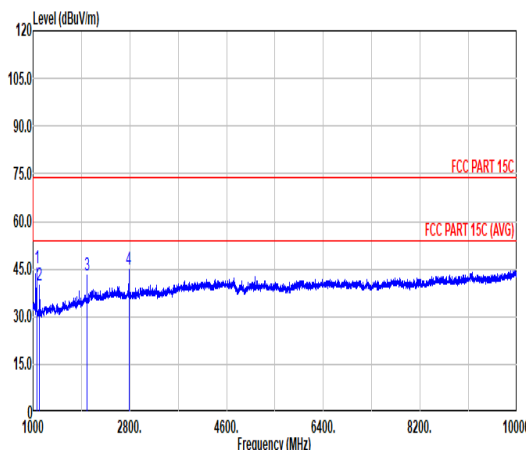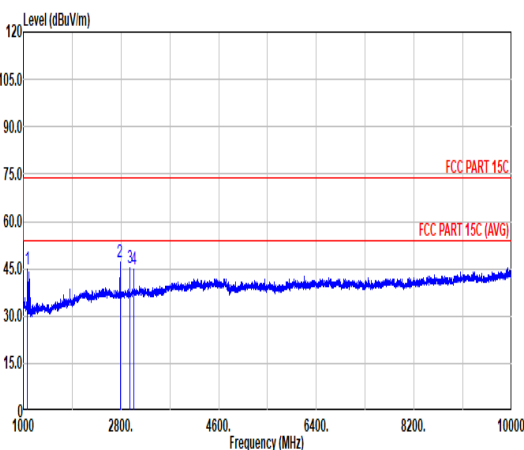

		3																																																																																																
Mode		Harmonic																																																																																																
		RFID_ 927.25MHz																																																																																																
ANT																																																																																																		
Pol.		Horizontal																																																																																																
		Vertical																																																																																																
Peak Avg																																																																																																		
		<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1066.30</td><td>45.13</td><td>74.00</td><td>-28.87</td><td>78.04</td><td>27.81</td><td>4.47</td><td>65.19</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>1122.40</td><td>40.06</td><td>74.00</td><td>-33.94</td><td>73.60</td><td>27.04</td><td>4.58</td><td>65.16</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>2001.30</td><td>43.01</td><td>107.08</td><td>-64.07</td><td>71.10</td><td>31.21</td><td>6.12</td><td>65.42</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>4</td><td>2781.60</td><td>44.82</td><td>74.00</td><td>-29.18</td><td>71.15</td><td>32.19</td><td>7.23</td><td>65.75</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	1066.30	45.13	74.00	-28.87	78.04	27.81	4.47	65.19	0.00	---	---	PEAK	2	1122.40	40.06	74.00	-33.94	73.60	27.04	4.58	65.16	0.00	---	---	PEAK	3	2001.30	43.01	107.08	-64.07	71.10	31.21	6.12	65.42	0.00	---	---	PEAK	4	2781.60	44.82	74.00	-29.18	71.15	32.19	7.23	65.75	0.00	---	---	Peak
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																							
1	1066.30	45.13	74.00	-28.87	78.04	27.81	4.47	65.19	0.00	---	---	PEAK																																																																																						
2	1122.40	40.06	74.00	-33.94	73.60	27.04	4.58	65.16	0.00	---	---	PEAK																																																																																						
3	2001.30	43.01	107.08	-64.07	71.10	31.21	6.12	65.42	0.00	---	---	PEAK																																																																																						
4	2781.60	44.82	74.00	-29.18	71.15	32.19	7.23	65.75	0.00	---	---	Peak																																																																																						
																																																																																																		
		<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1079.90</td><td>44.79</td><td>74.00</td><td>-29.21</td><td>78.02</td><td>27.48</td><td>4.49</td><td>65.20</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>2781.60</td><td>47.31</td><td>74.00</td><td>-26.69</td><td>73.64</td><td>32.19</td><td>7.23</td><td>65.75</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>2958.40</td><td>45.42</td><td>97.64</td><td>-52.22</td><td>70.98</td><td>32.75</td><td>7.48</td><td>65.79</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>4</td><td>3040.00</td><td>44.78</td><td>97.64</td><td>-52.86</td><td>69.95</td><td>33.00</td><td>7.59</td><td>65.76</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	1079.90	44.79	74.00	-29.21	78.02	27.48	4.49	65.20	0.00	---	---	PEAK	2	2781.60	47.31	74.00	-26.69	73.64	32.19	7.23	65.75	0.00	---	---	Peak	3	2958.40	45.42	97.64	-52.22	70.98	32.75	7.48	65.79	0.00	---	---	PEAK	4	3040.00	44.78	97.64	-52.86	69.95	33.00	7.59	65.76	0.00	---	---	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																							
1	1079.90	44.79	74.00	-29.21	78.02	27.48	4.49	65.20	0.00	---	---	PEAK																																																																																						
2	2781.60	47.31	74.00	-26.69	73.64	32.19	7.23	65.75	0.00	---	---	Peak																																																																																						
3	2958.40	45.42	97.64	-52.22	70.98	32.75	7.48	65.79	0.00	---	---	PEAK																																																																																						
4	3040.00	44.78	97.64	-52.86	69.95	33.00	7.59	65.76	0.00	---	---	PEAK																																																																																						

Appendix C. Duty Cycle Plots

RFID on time Plot

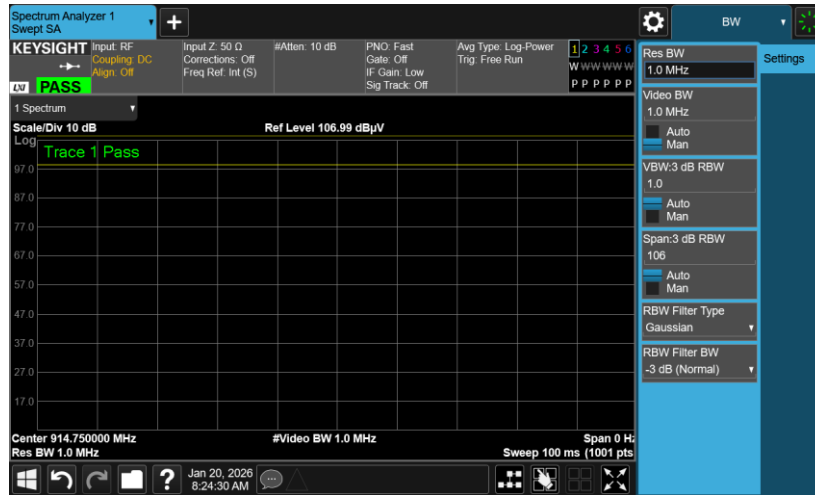

Note:

1. Worst case Duty cycle = 100 %
2. Worst case Duty cycle correction factor = $20 \cdot \log(\text{Duty cycle}) = 0 \text{ dB}$