Mode	46	
	Band Edge - L	
	U-NII-2C_5.15-5.25_802.11BE EHT160_CH114_RU996/67_5570MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	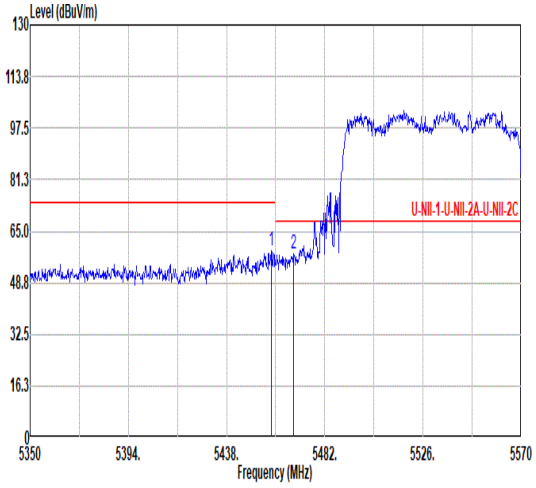 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.02 58.63 74.00 -15.37 48.30 34.67 12.10 36.44 0.00 295 360 PEAK 2 5468.14 57.79 68.20 -10.41 47.50 34.63 12.11 36.45 0.00 295 360 PEAK	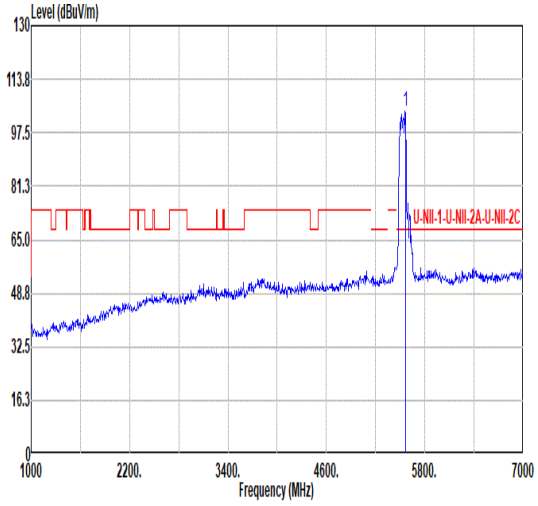 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5570.00 103.78 ------ ------ 93.45 34.42 12.25 36.34 0.00 295 360 PEAK
Avg	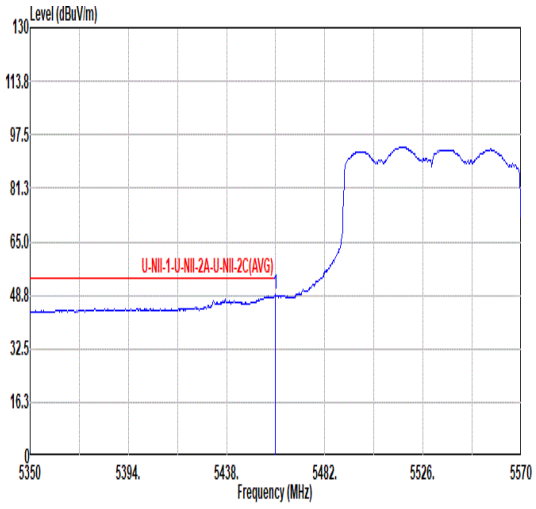 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5460.00 48.93 54.00 -5.07 38.61 34.66 12.10 36.44 0.00 295 360 AVERAGE	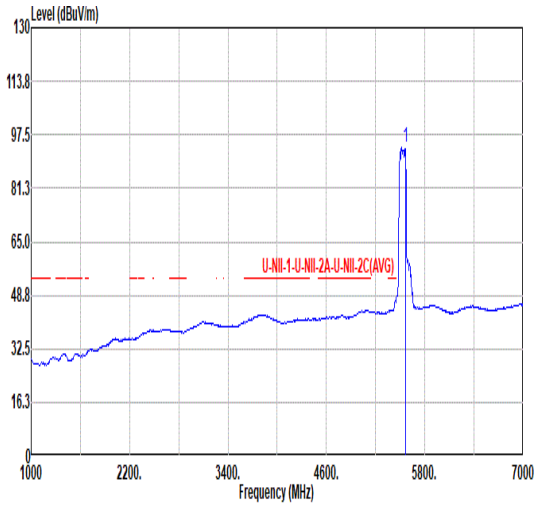 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5570.00 93.69 ------ ------ 83.47 34.46 12.19 36.43 0.00 295 360 AVERAGE

Mode	46	
	Band Edge - R	
	U-NII-2C_5.15-5.25_802.11BE EHT160_CH114_RU996/67_5570MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	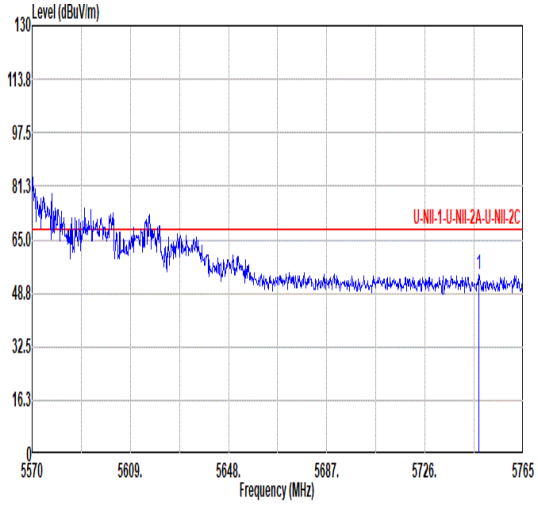 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5747.26 54.63 68.20 -13.57 43.94 34.69 12.44 36.44 0.00 295 360 PEAK	Blank

Mode	47	
	Harmonic	
	U-NII-2C_5.47-5.85_802.11a_CH144_5720MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Vertical
Peak Avg	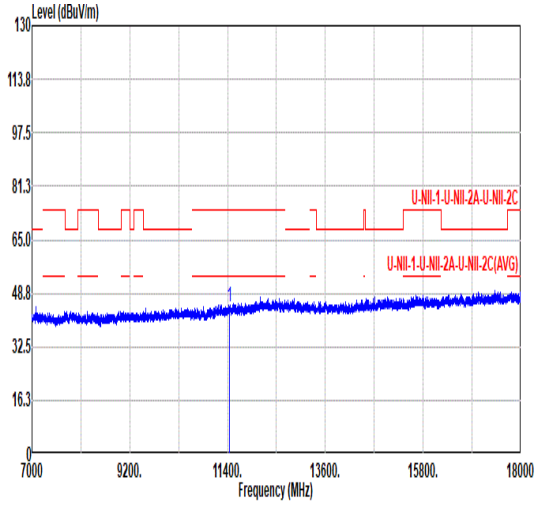 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11440.00 44.50 74.00 -29.50 55.22 38.04 17.83 66.59 0.00 --- --- PEAK	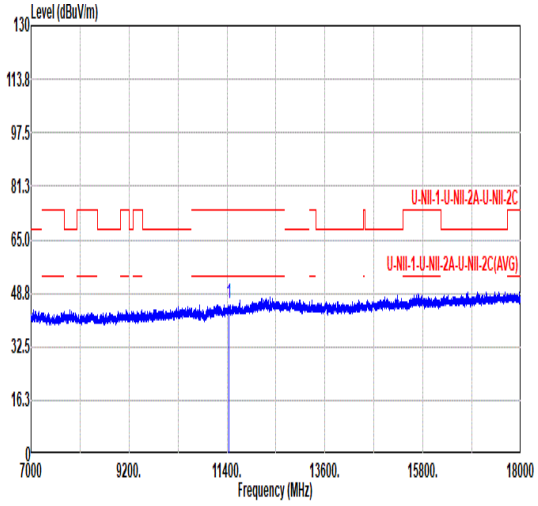 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11440.00 45.62 74.00 -28.38 56.34 38.04 17.83 66.59 0.00 --- --- PEAK

Mode	48	
	Harmonic	
	U-NII-2C_5.47-5.85_802.11BE EHT20_CH144_5720MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Vertical
Peak Avg	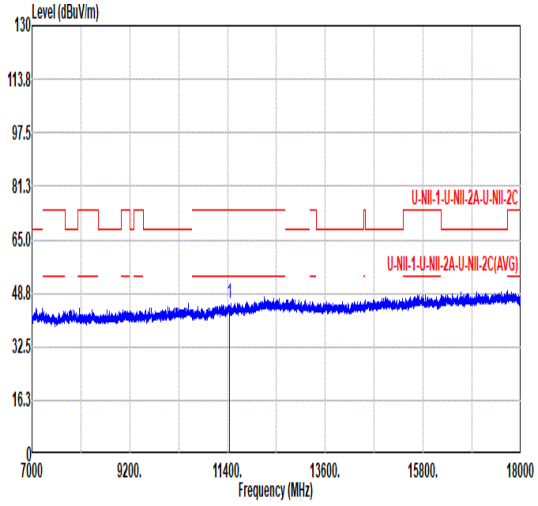 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11440.00 45.39 74.00 -28.61 56.11 38.04 17.83 66.59 0.00 --- --- PEAK	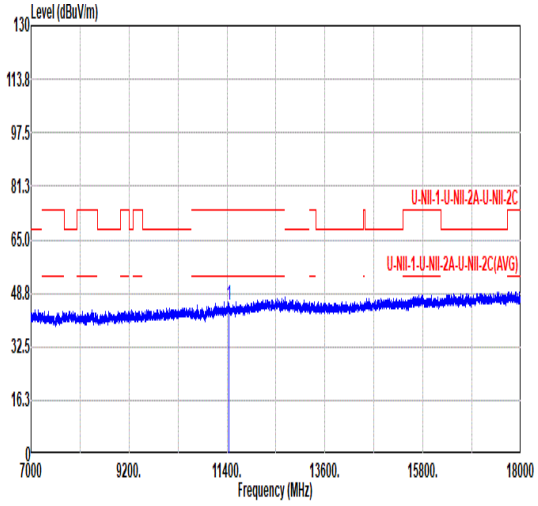 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11440.00 45.31 74.00 -28.69 56.03 38.04 17.83 66.59 0.00 --- --- PEAK

Mode	49	
	Harmonic	
	U-NII-2C_5.47-5.85_802.11BE EHT40_CH142_5710MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Vertical
Peak Avg	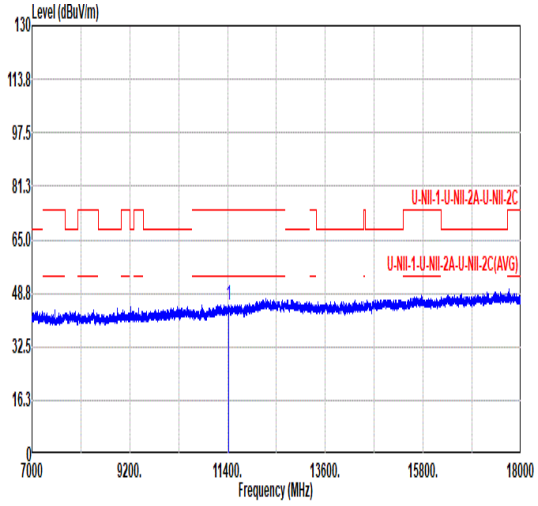 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11420.00 45.18 74.00 -28.82 55.94 38.02 17.81 66.59 0.00 --- --- PEAK	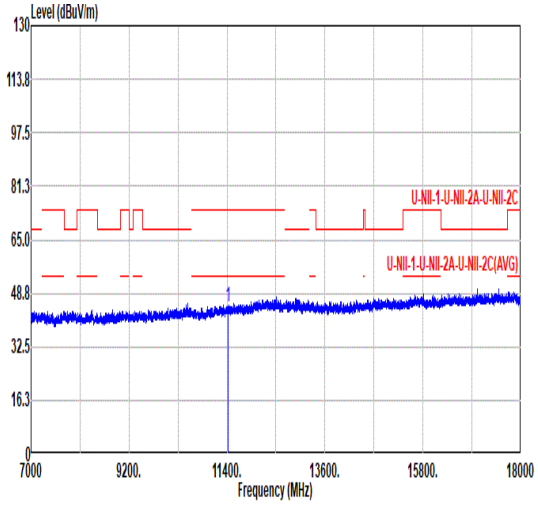 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11420.00 44.64 74.00 -29.36 55.40 38.02 17.81 66.59 0.00 --- --- PEAK

Mode	50	
	Harmonic	
	U-NII-2C_5.47-5.85_802.11BE EHT80_CH138_5690MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Vertical
Peak Avg	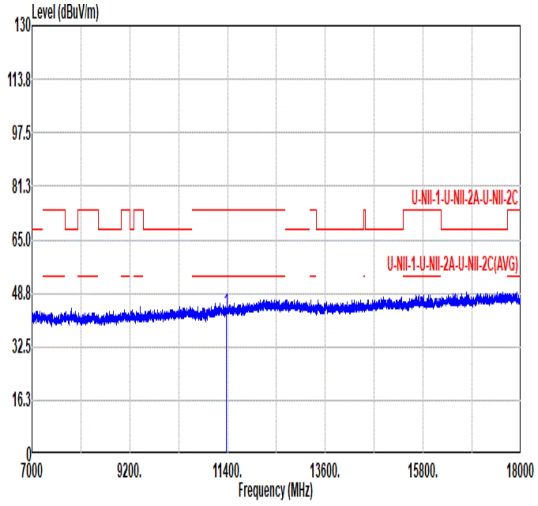 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11380.00 42.65 74.00 -31.35 53.47 37.98 17.79 66.59 0.00 --- --- PEAK	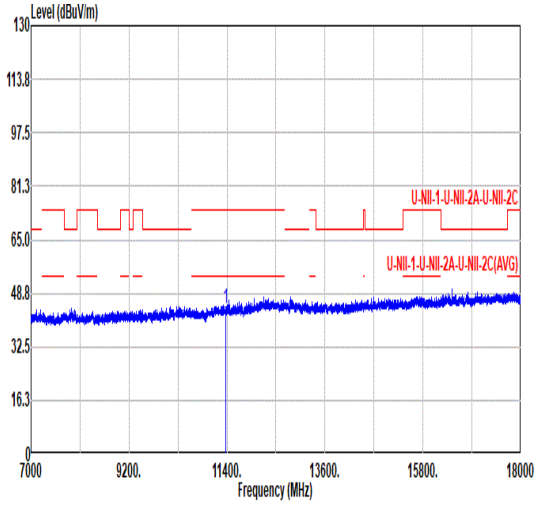 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11380.00 44.07 74.00 -29.93 54.89 37.98 17.79 66.59 0.00 --- --- PEAK

Mode	51	
	Band Edge	
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	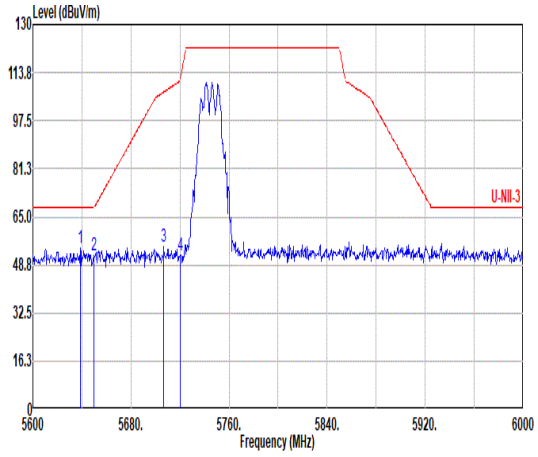 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5638.80 54.58 68.20 -13.62 44.03 34.50 12.34 36.29 0.00 127 185 PEAK 2 5650.00 52.05 68.20 -16.15 41.51 34.50 12.35 36.31 0.00 127 185 PEAK 3 5706.80 54.81 107.21 -52.40 44.15 34.61 12.41 36.36 0.00 127 185 PEAK 4 5720.00 52.15 110.90 -58.75 41.48 34.64 12.42 36.39 0.00 127 185 PEAK	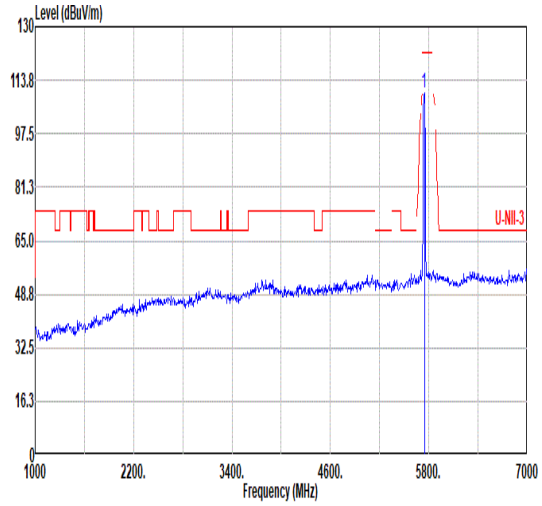 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 109.70 ------ ------ 99.00 34.69 12.44 36.43 0.00 127 185 PEAK
Avg	Blank	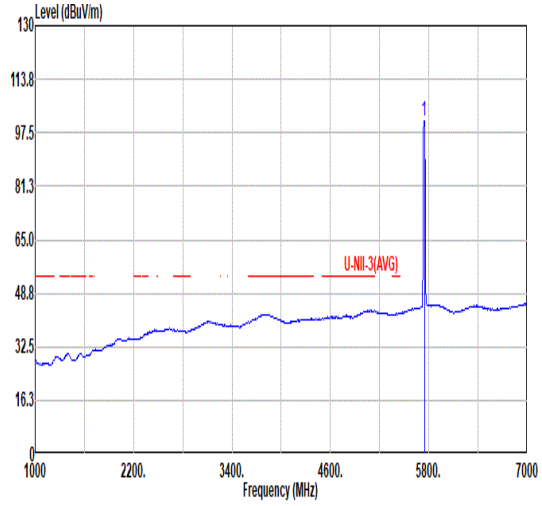 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 101.17 ------ ------ 90.47 34.68 12.44 36.42 0.00 127 185 AVERAGE

Mode	51	
	Band Edge	
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	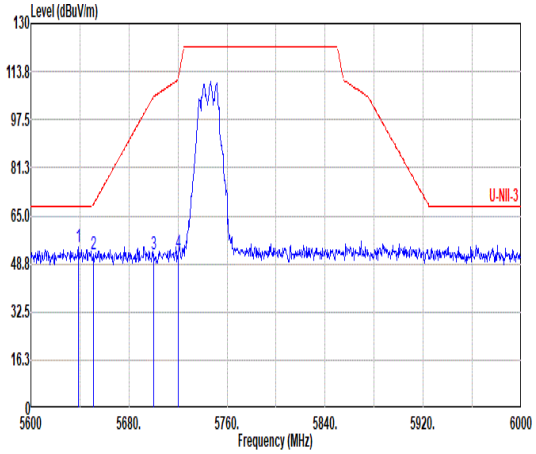 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5638.80 54.30 68.20 -13.90 43.75 34.50 12.34 36.29 0.00 267 207 PEAK 2 5650.80 51.98 68.80 -16.82 41.43 34.50 12.36 36.31 0.00 267 207 PEAK 3 5700.00 51.99 105.30 -53.31 41.34 34.60 12.40 36.35 0.00 267 207 PEAK 4 5720.00 52.37 110.90 -58.53 41.70 34.64 12.42 36.39 0.00 267 207 PEAK	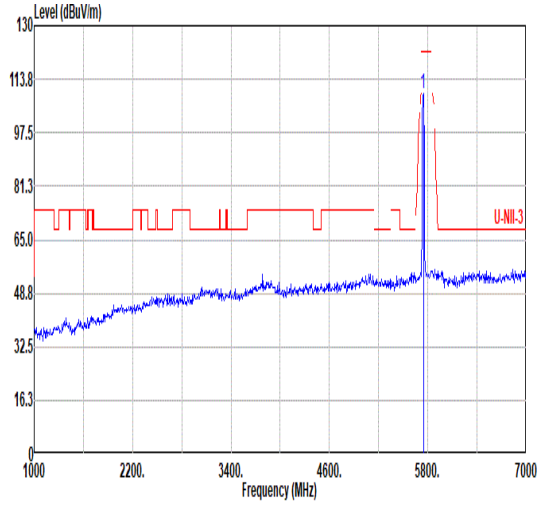 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 109.35 ------ ------ 98.65 34.69 12.44 36.43 0.00 267 207 PEAK
Avg	Blank	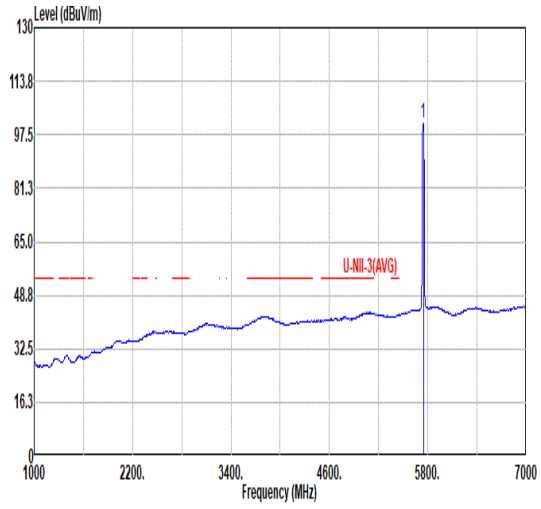 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 100.82 ------ ------ 90.12 34.69 12.44 36.43 0.00 267 207 AVERAGE

Mode	51	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Vertical
Peak Avg	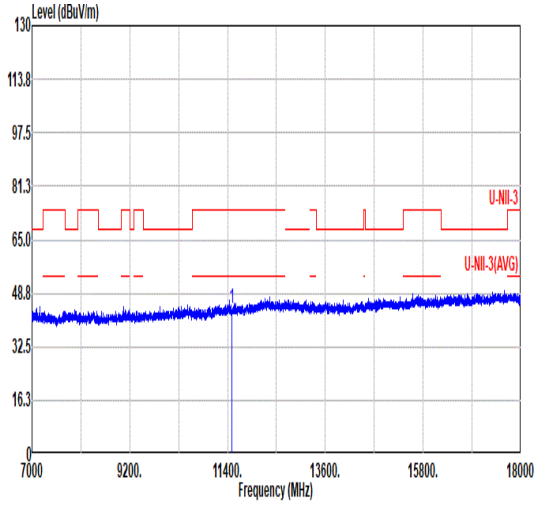 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 44.20 74.00 -29.80 54.83 38.09 17.86 66.58 0.00 --- --- PEAK	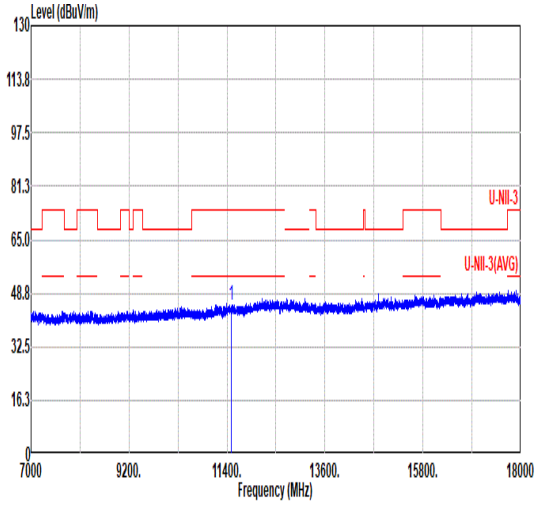 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 44.93 74.00 -29.07 55.56 38.09 17.86 66.58 0.00 --- --- PEAK

Mode	52	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Vertical
Peak Avg	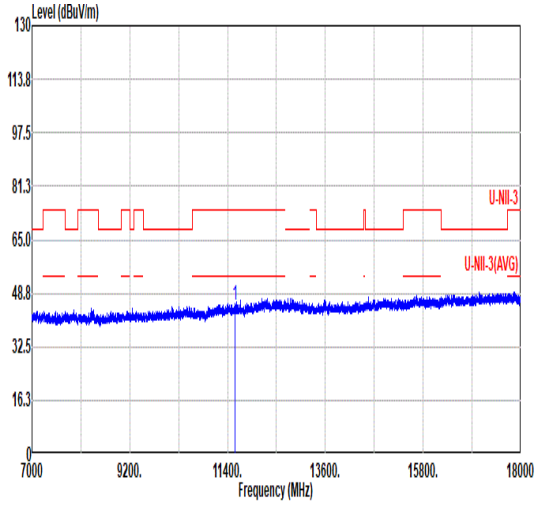 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11570.00 45.04 74.00 -28.96 55.48 38.17 17.92 66.53 0.00 --- --- PEAK	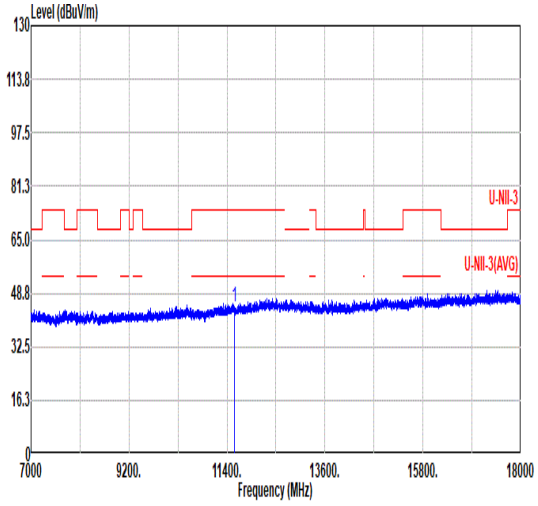 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11570.00 44.79 74.00 -29.21 55.23 38.17 17.92 66.53 0.00 --- --- PEAK

Mode	53	
	Band Edge	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	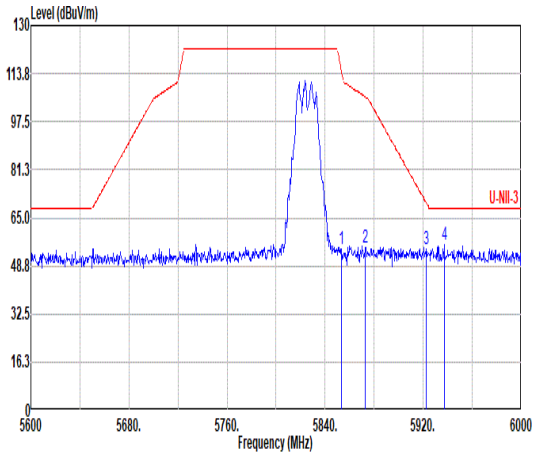 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5853.60 54.42 114.09 -59.67 43.38 35.11 12.56 36.63 0.00 127 195 PEAK 2 5872.80 55.12 105.92 -50.80 44.00 35.19 12.59 36.66 0.00 127 195 PEAK 3 5922.40 54.67 70.12 -15.45 43.52 35.30 12.66 36.81 0.00 127 195 PEAK 4 5937.20 55.96 68.20 -12.24 44.86 35.30 12.68 36.88 0.00 127 195 PEAK	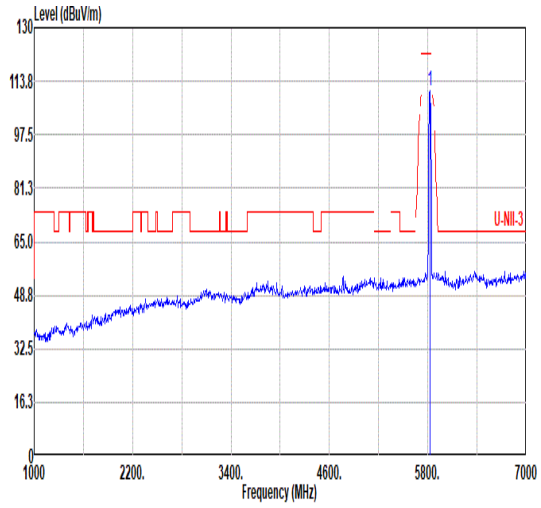 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 110.71 ------ ------ 99.71 35.05 12.52 36.57 0.00 127 195 PEAK
Avg	Blank	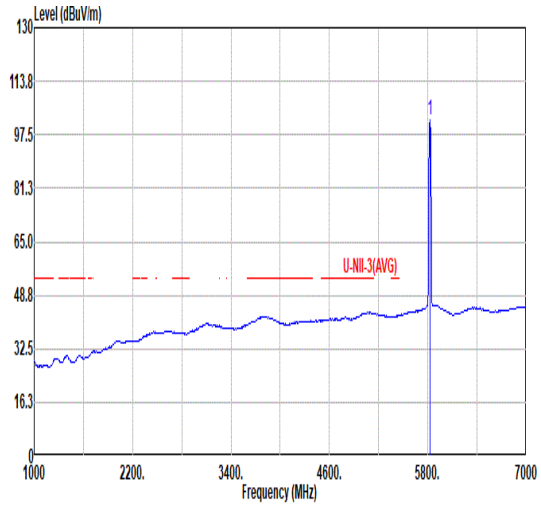 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 101.96 ------ ------ 90.95 35.06 12.53 36.58 0.00 127 195 AVERAGE

Mode	53	
	Band Edge	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	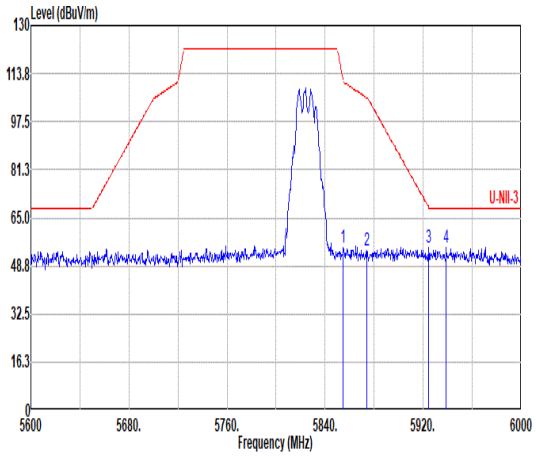 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 54.83 111.36 -56.53 43.78 35.12 12.56 36.63 0.00 303 192 PEAK 2 5874.00 53.94 105.58 -51.64 42.81 35.20 12.59 36.66 0.00 303 192 PEAK 3 5924.40 54.88 68.64 -13.76 43.74 35.30 12.66 36.82 0.00 303 192 PEAK 4 5938.80 55.11 68.20 -13.09 44.01 35.30 12.68 36.88 0.00 303 192 PEAK	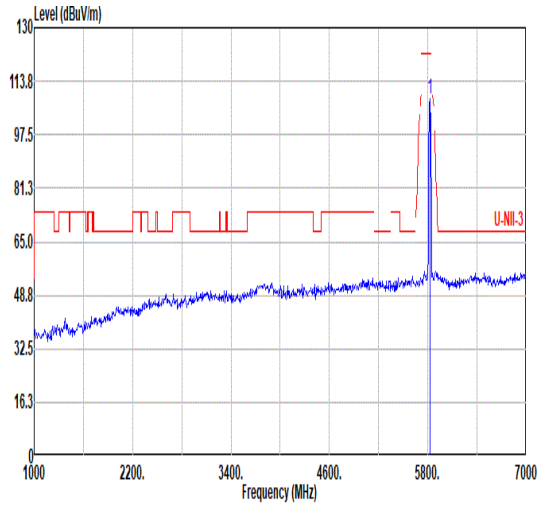 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 108.33 ------ ------ 97.33 35.05 12.52 36.57 0.00 303 192 PEAK
Avg	Blank	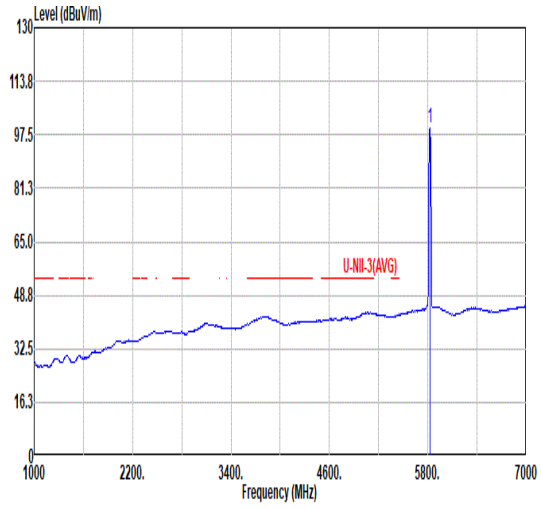 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 99.80 ------ ------ 88.80 35.05 12.52 36.57 0.00 303 192 AVERAGE

Mode	53	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Vertical
Peak Avg	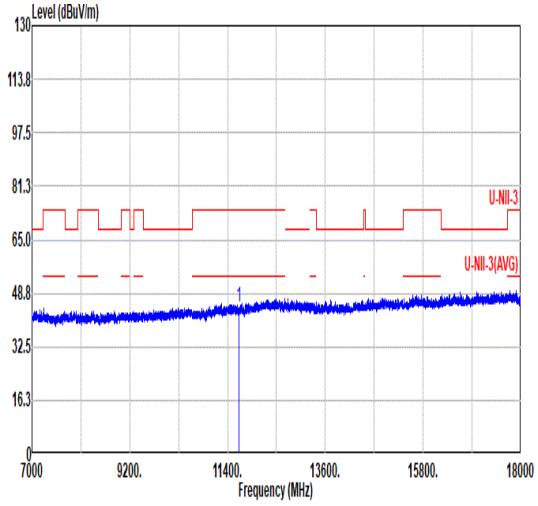 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11650.00 44.57 74.00 -29.43 54.76 38.30 17.98 66.47 0.00 --- --- PEAK	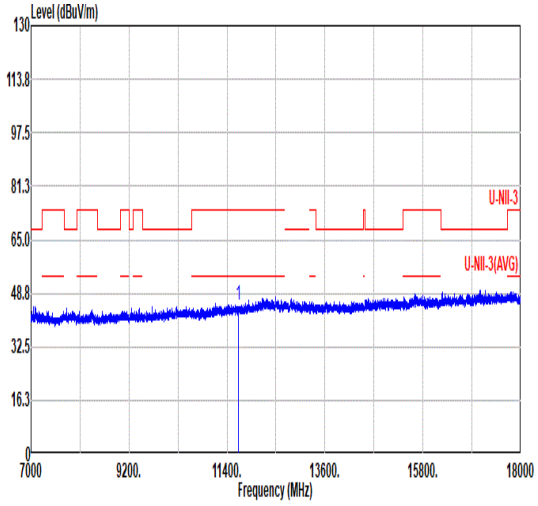 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11650.00 44.97 74.00 -29.03 55.16 38.30 17.98 66.47 0.00 --- --- PEAK

Mode	54	
	Band Edge	
	U-NII-3_5.725-5.85_802.11BE EHT20_CH149_Full_5745MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	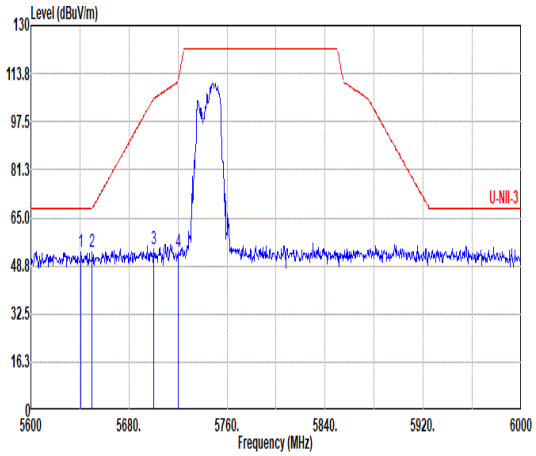 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5640.80 53.55 68.20 -14.65 43.00 34.50 12.35 36.30 0.00 157 184 PEAK 2 5650.00 53.41 68.20 -14.79 42.87 34.50 12.35 36.31 0.00 157 184 PEAK 3 5700.00 54.21 105.30 -51.09 43.56 34.60 12.40 36.35 0.00 157 184 PEAK 4 5720.00 53.41 110.90 -57.49 42.74 34.64 12.42 36.39 0.00 157 184 PEAK	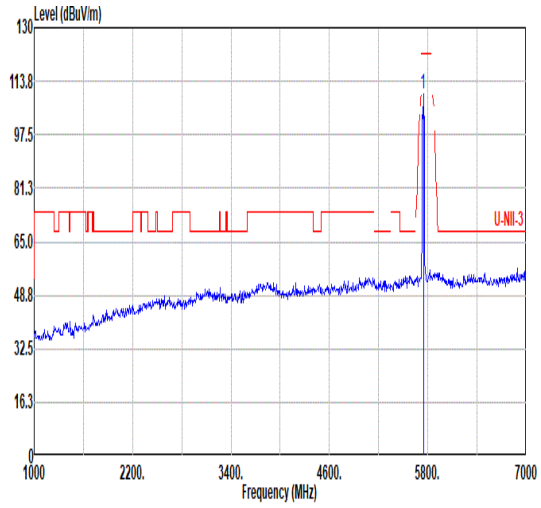 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 109.82 ------ ------ 99.10 34.71 12.45 36.44 0.00 157 184 PEAK
Avg	Blank	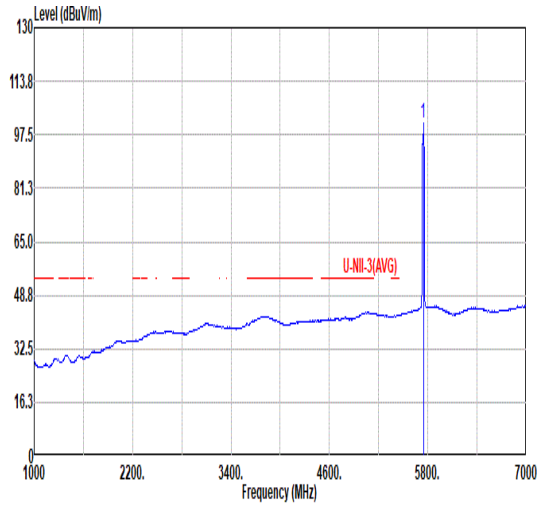 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 101.09 ------ ------ 90.37 34.71 12.45 36.44 0.00 157 184 AVERAGE

Mode	54	
	Band Edge	
	U-NII-3_5.725-5.85_802.11BE EHT20_CH149_Full_5745MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	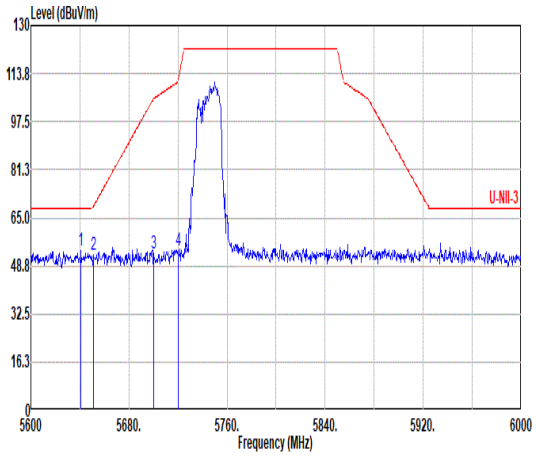 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5640.80 53.75 68.20 -14.45 43.20 34.50 12.35 36.30 0.00 267 207 PEAK 2 5651.20 52.51 69.09 -16.58 41.96 34.50 12.36 36.31 0.00 267 207 PEAK 3 5700.00 53.01 105.30 -52.29 42.36 34.60 12.40 36.35 0.00 267 207 PEAK 4 5720.00 53.90 110.90 -57.00 43.23 34.64 12.42 36.39 0.00 267 207 PEAK	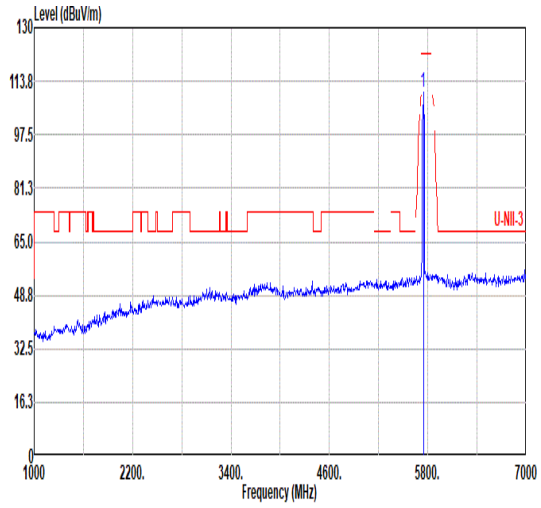 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 110.17 ------ ------ 99.45 34.71 12.45 36.44 0.00 267 207 PEAK
Avg	Blank	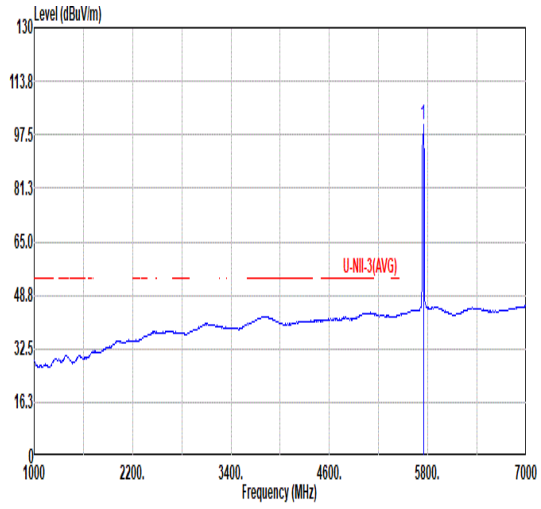 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 100.38 ------ ------ 89.66 34.71 12.45 36.44 0.00 267 207 AVERAGE

Mode	54	
	Harmonic	
	U-NII-3_5.725-5.85_802.11BE EHT20_CH149_Full_5745MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Vertical
Peak Avg	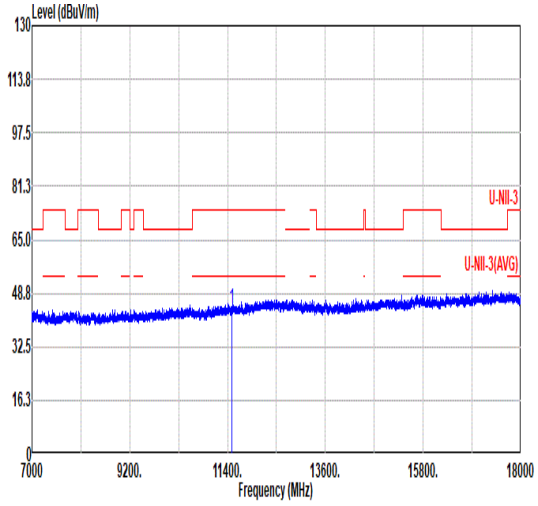 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 44.26 74.00 -29.74 54.89 38.09 17.86 66.58 0.00 --- --- PEAK	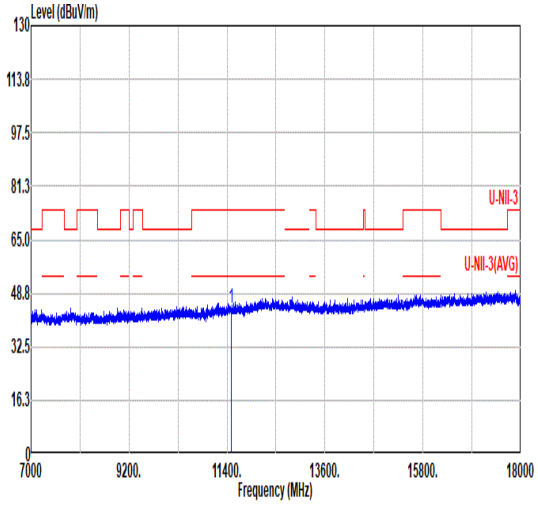 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 43.95 74.00 -30.05 54.58 38.09 17.86 66.58 0.00 --- --- PEAK

Mode	55	
	Band Edge	
	U-NII-3_5.725-5.85_802.11BE EHT20_CH149_RU106/53_5745MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	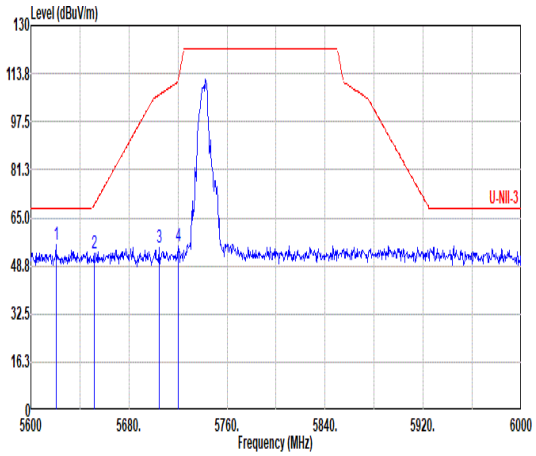 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5620.40 55.70 68.20 -12.50 45.15 34.50 12.33 36.28 0.00 115 360 PEAK 2 5651.60 52.76 69.39 -16.63 42.21 34.50 12.36 36.31 0.00 115 360 PEAK 3 5704.40 54.99 106.53 -51.54 44.34 34.61 12.40 36.36 0.00 115 360 PEAK 4 5720.00 55.47 110.90 -55.43 44.80 34.64 12.42 36.39 0.00 115 360 PEAK	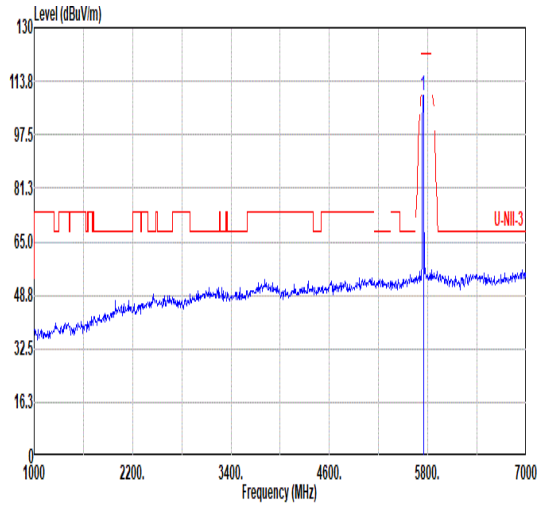 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 109.59 ------ ------ 98.89 34.68 12.44 36.42 0.00 115 360 PEAK
Avg	Blank	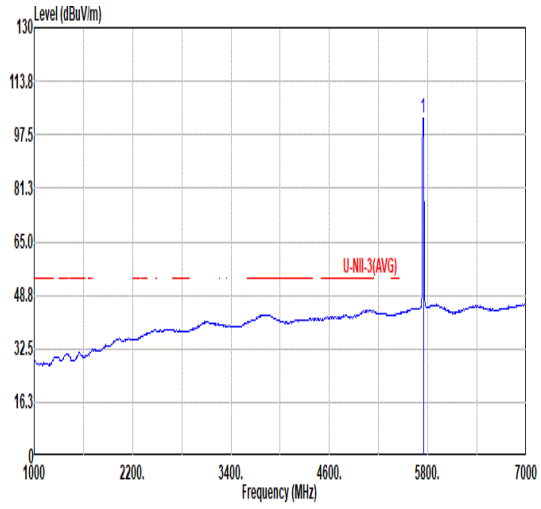 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 102.37 ------ ------ 91.67 34.69 12.44 36.43 0.00 115 360 AVERAGE

Mode	55	
	Band Edge	
	U-NII-3_5.725-5.85_802.11BE EHT20_CH149_RU106/53_5745MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	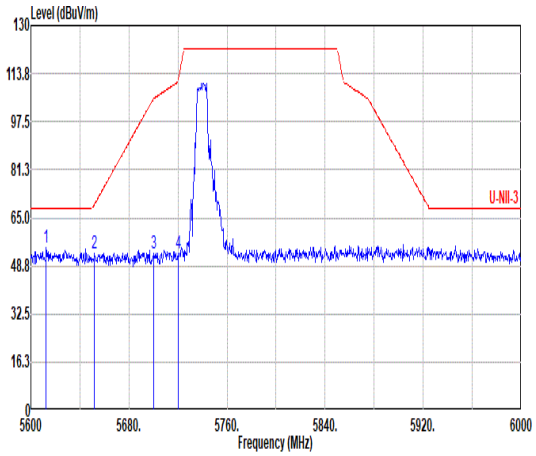 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5612.40 54.74 68.20 -13.46 44.19 34.50 12.32 36.27 0.00 383 342 PEAK 2 5652.00 52.78 69.69 -16.91 42.23 34.50 12.36 36.31 0.00 383 342 PEAK 3 5700.40 53.08 105.41 -52.33 42.43 34.60 12.40 36.35 0.00 383 342 PEAK 4 5720.00 52.80 110.90 -58.10 42.13 34.64 12.42 36.39 0.00 383 342 PEAK	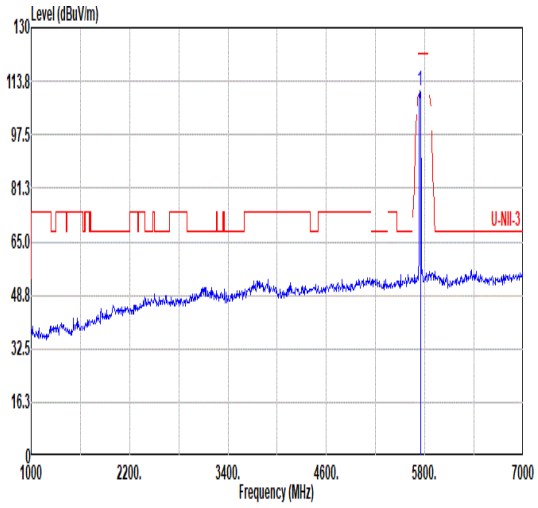 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 110.79 ------ ------ 100.09 34.68 12.44 36.42 0.00 383 342 PEAK
Avg	Blank	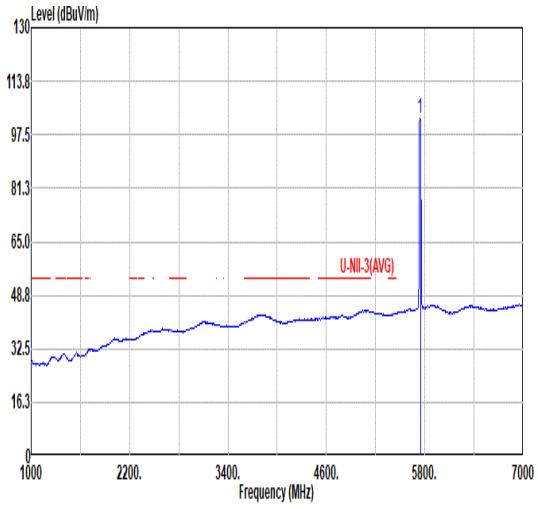 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 102.34 ------ ------ 91.64 34.68 12.44 36.42 0.00 383 342 AVERAGE

Mode	56	
	Harmonic	
	U-NII-3_5.725-5.85_802.11BE EHT20_CH157_Full_5785MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Vertical
Peak Avg	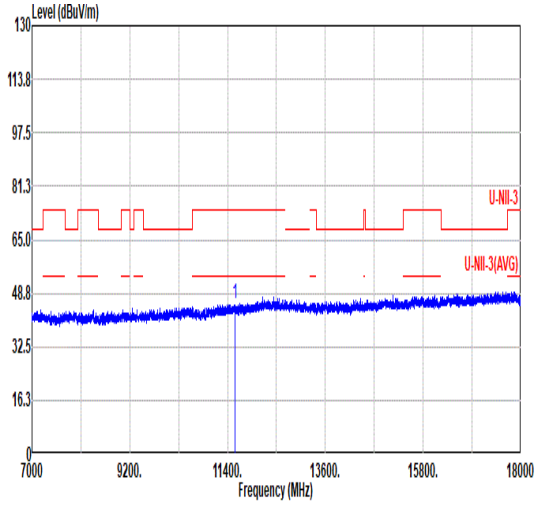 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11570.00 45.51 74.00 -28.49 55.95 38.17 17.92 66.53 0.00 --- --- PEAK	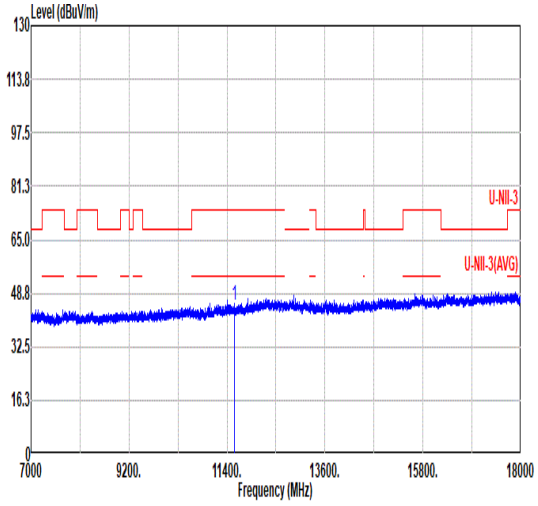 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11570.00 45.10 74.00 -28.90 55.54 38.17 17.92 66.53 0.00 --- --- PEAK

Mode	57	
	Band Edge	
	U-NII-3_5.725-5.85_802.11BE EHT20_CH165_Full_5825MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	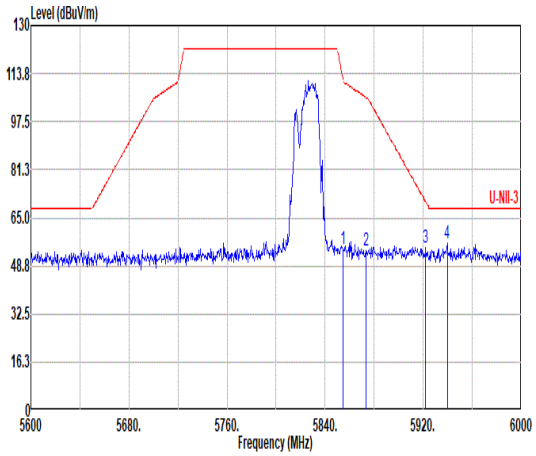 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.40 54.53 112.27 -57.74 43.48 35.12 12.56 36.63 0.00 124 184 PEAK 2 5873.20 53.90 105.80 -51.90 42.78 35.19 12.59 36.66 0.00 124 184 PEAK 3 5922.00 54.83 70.42 -15.59 43.69 35.30 12.65 36.81 0.00 124 184 PEAK 4 5939.60 56.18 68.20 -12.02 45.09 35.30 12.68 36.89 0.00 124 184 PEAK	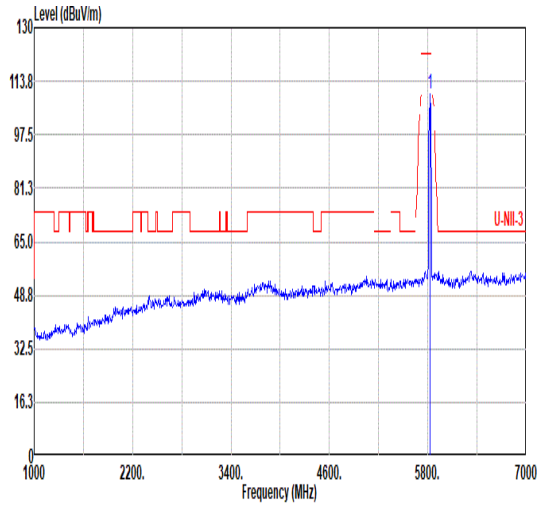 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 109.69 ------ ------ 98.69 35.05 12.52 36.57 0.00 124 184 PEAK
Avg	Blank	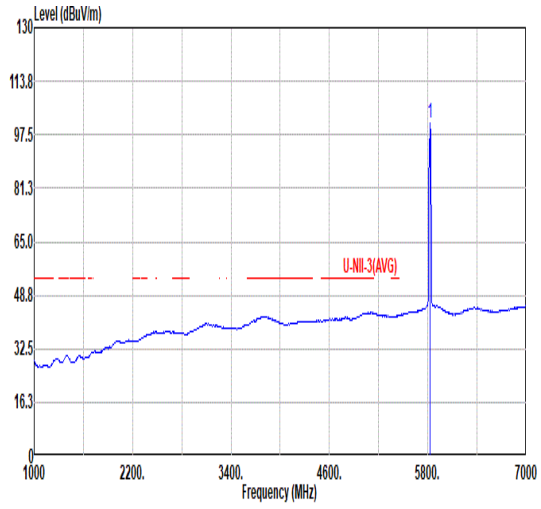 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 100.83 ------ ------ 89.82 35.06 12.53 36.58 0.00 124 184 AVERAGE

Mode	57	
	Band Edge	
	U-NII-3_5.725-5.85_802.11BE EHT20_CH165_Full_5825MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	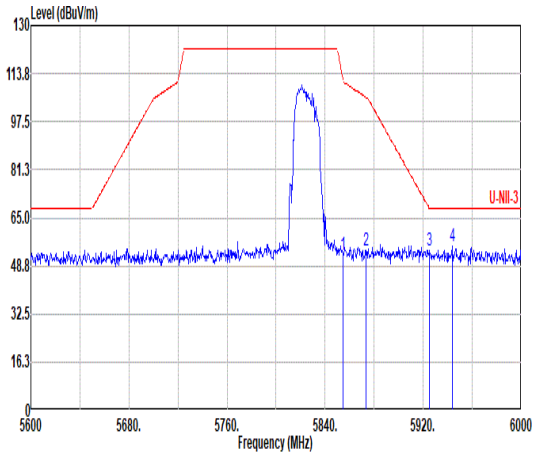 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 52.35 111.36 -59.01 41.30 35.12 12.56 36.63 0.00 260 196 PEAK 2 5873.20 53.99 105.80 -51.81 42.87 35.19 12.59 36.66 0.00 260 196 PEAK 3 5924.80 53.87 68.35 -14.48 42.73 35.30 12.66 36.82 0.00 260 196 PEAK 4 5944.00 55.33 68.20 -12.87 44.26 35.30 12.68 36.91 0.00 260 196 PEAK	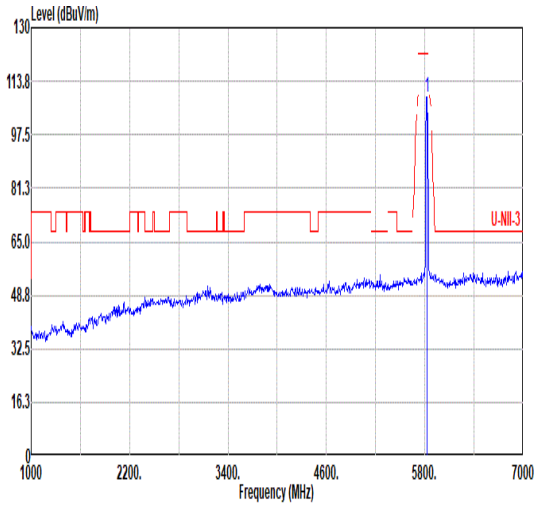 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 109.12 ------ ------ 98.12 35.05 12.52 36.57 0.00 260 196 PEAK
Avg	Blank	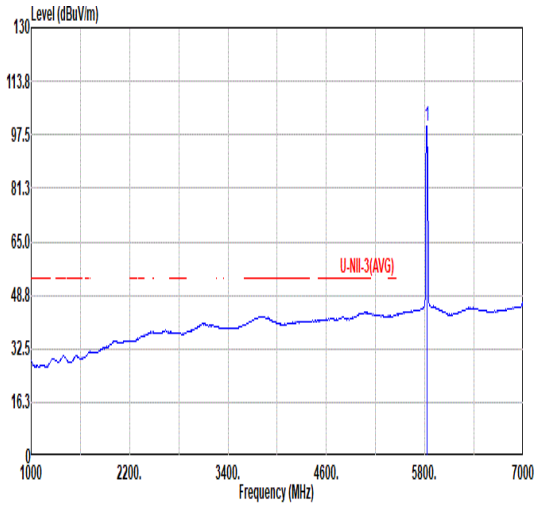 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 100.19 ------ ------ 89.20 35.04 12.51 36.56 0.00 260 196 AVERAGE

Mode	57	
	Harmonic	
	U-NII-3_5.725-5.85_802.11BE EHT20_CH165_Full_5825MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Vertical
Peak Avg	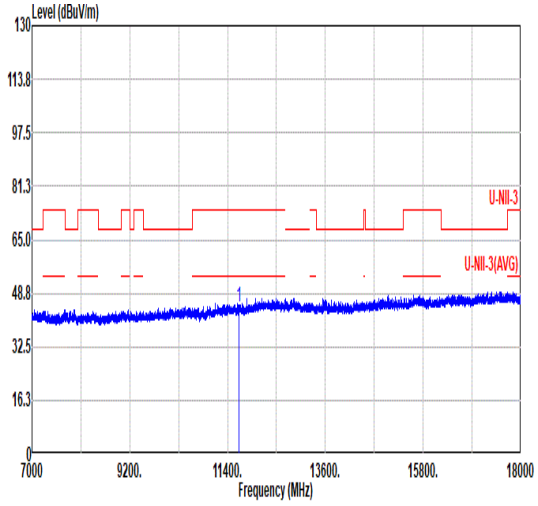 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11650.00 44.72 74.00 -29.28 54.91 38.30 17.98 66.47 0.00 --- --- PEAK	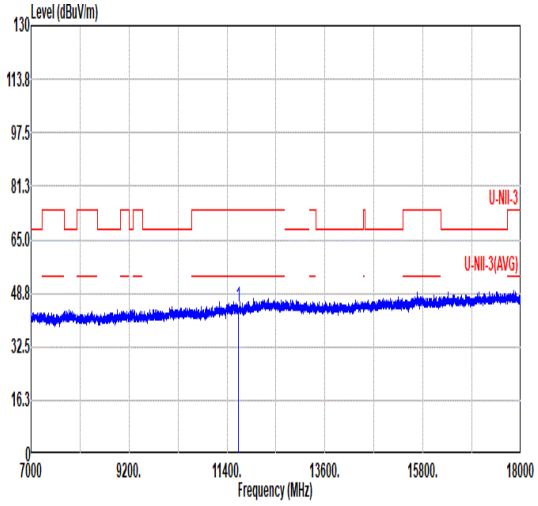 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11650.00 44.60 74.00 -29.40 54.79 38.30 17.98 66.47 0.00 --- --- PEAK

Mode	58	
	Band Edge	
	U-NII-3_5.725-5.85_802.11BE EHT20_CH165_RU106/54_5825MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	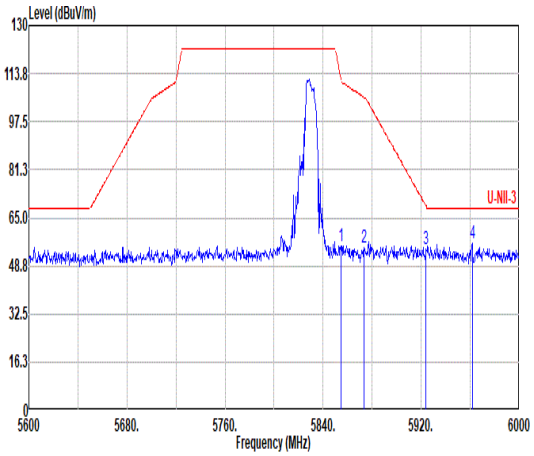 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.40 55.23 112.27 -57.04 44.18 35.12 12.56 36.63 0.00 164 0 PEAK 2 5873.60 54.92 105.69 -50.77 43.80 35.19 12.59 36.66 0.00 164 0 PEAK 3 5924.00 54.32 68.94 -14.62 43.18 35.30 12.66 36.82 0.00 164 0 PEAK 4 5961.60 56.26 68.20 -11.94 45.24 35.30 12.71 36.99 0.00 164 0 PEAK	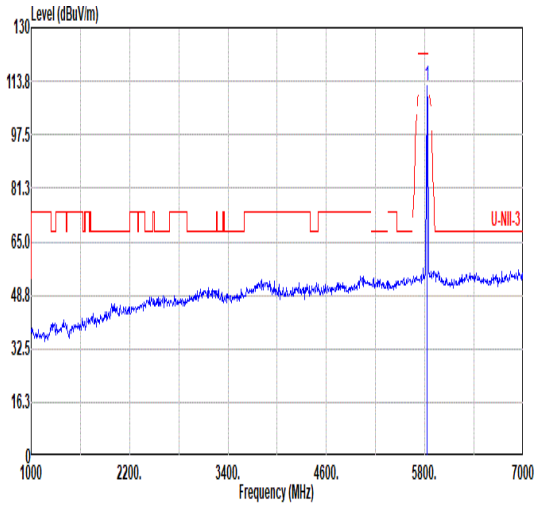 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 112.47 ------ ------ 101.46 35.06 12.53 36.58 0.00 164 0 PEAK
Avg	Blank	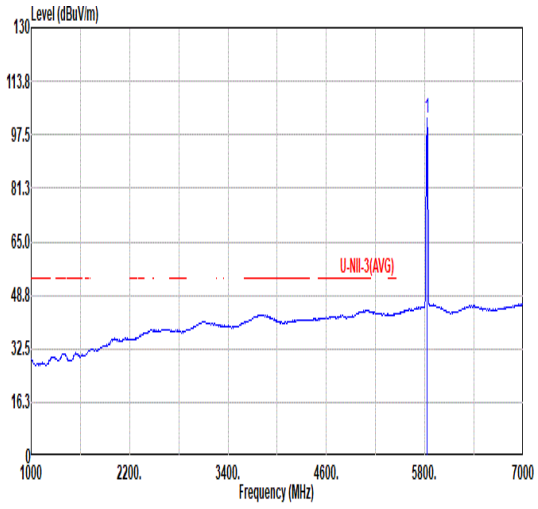 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 102.76 ------ ------ 91.76 35.05 12.52 36.57 0.00 164 0 AVERAGE

Mode	58	
	Band Edge	
	U-NII-3_5.725-5.85_802.11BE EHT20_CH165_RU106/54_5825MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	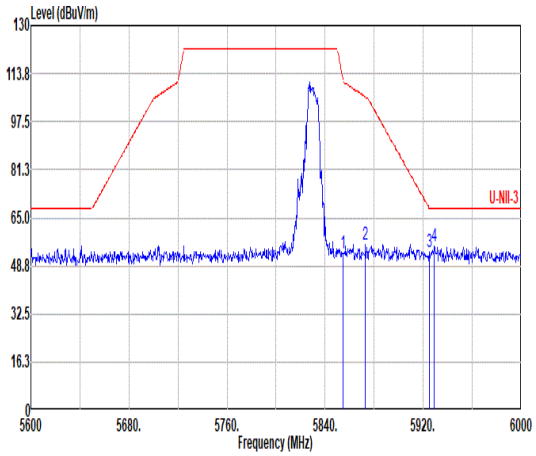 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 53.23 111.36 -58.13 42.18 35.12 12.56 36.63 0.00 300 22 PEAK 2 5872.80 55.68 105.92 -50.24 44.56 35.19 12.59 36.66 0.00 300 22 PEAK 3 5924.80 53.53 68.35 -14.82 42.39 35.30 12.66 36.82 0.00 300 22 PEAK 4 5929.20 55.21 68.20 -12.99 44.09 35.30 12.66 36.84 0.00 300 22 PEAK	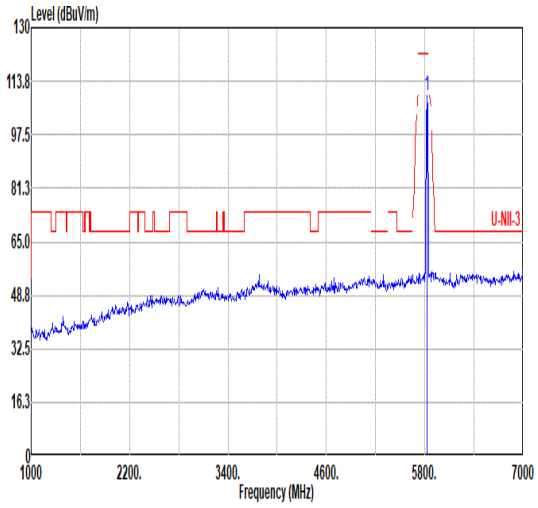 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 109.44 ------ ------ 98.43 35.06 12.53 36.58 0.00 300 22 PEAK
Avg	Blank	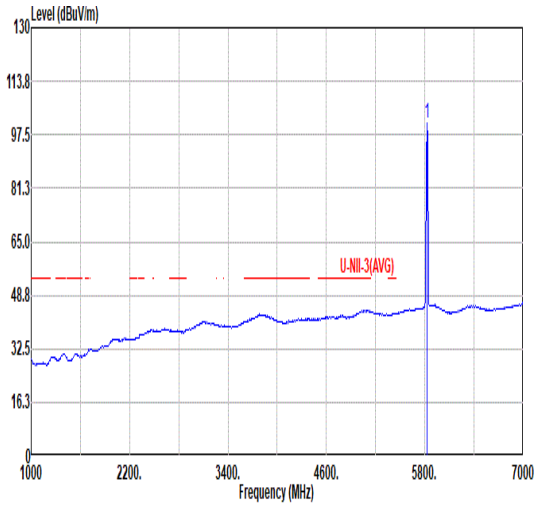 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 101.12 ------ ------ 90.11 35.06 12.53 36.58 0.00 300 22 AVERAGE

Mode	59	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11BE EHT40_CH151_RU242/61_5755MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	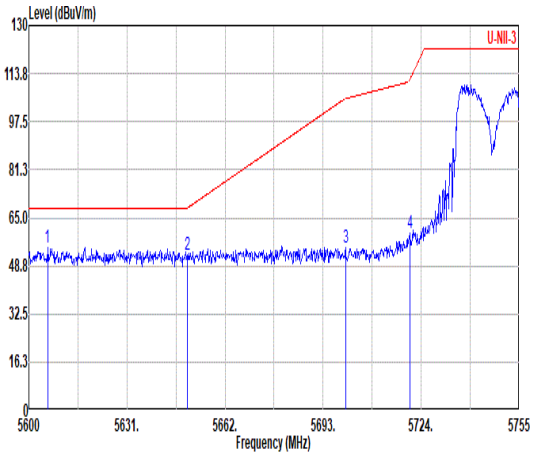 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5605.89 54.88 68.20 -13.32 44.33 34.50 12.32 36.27 0.00 173 360 PEAK 2 5650.07 52.61 68.25 -15.64 42.06 34.50 12.36 36.31 0.00 173 360 PEAK 3 5700.13 55.11 105.34 -50.23 44.46 34.60 12.40 36.35 0.00 173 360 PEAK 4 5720.44 59.81 111.89 -52.08 49.14 34.64 12.42 36.39 0.00 173 360 PEAK	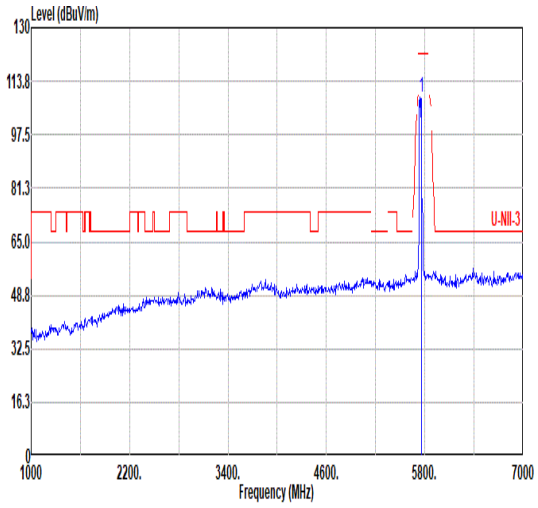 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 108.84 ------ ------ 98.14 34.68 12.44 36.42 0.00 173 360 PEAK
Avg	Blank	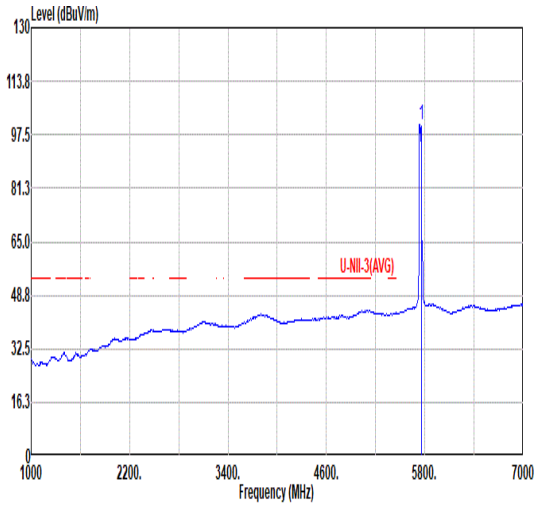 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 100.45 ------ ------ 89.76 34.67 12.43 36.41 0.00 173 360 AVERAGE

Mode	59	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11BE EHT40_CH151_RU242/61_5755MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	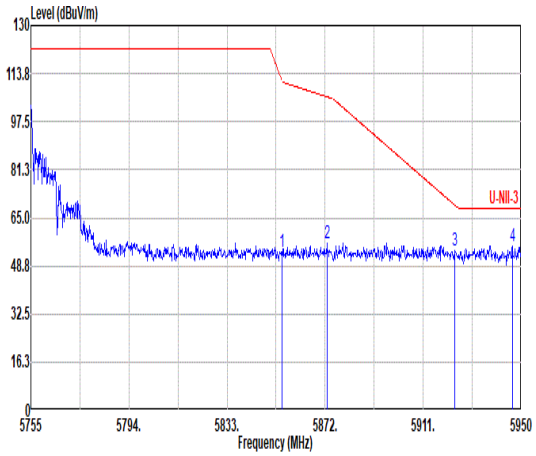 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.84 53.70 111.26 -57.56 42.65 35.12 12.56 36.63 0.00 173 360 PEAK 2 5872.78 56.22 105.92 -49.70 45.10 35.19 12.59 36.66 0.00 173 360 PEAK 3 5923.68 54.20 69.18 -14.98 43.06 35.30 12.66 36.82 0.00 173 360 PEAK 4 5946.49 55.53 68.20 -12.67 44.46 35.30 12.69 36.92 0.00 173 360 PEAK	Blank

Mode	59	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11BE EHT40_CH151_RU242/61_5755MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	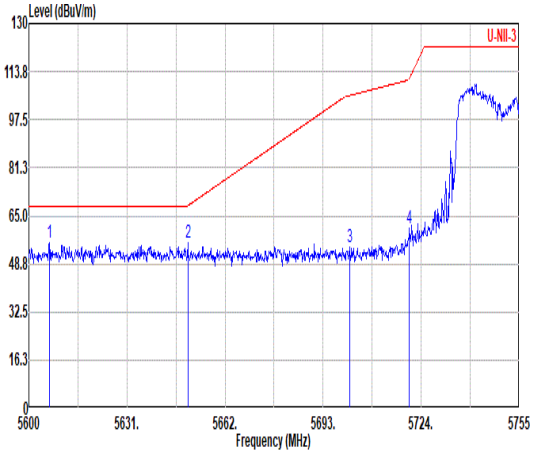 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5606.51 55.78 68.20 -12.42 45.23 34.50 12.32 36.27 0.00 316 0 PEAK 2 5650.22 55.71 68.36 -12.65 45.16 34.50 12.36 36.31 0.00 316 0 PEAK 3 5701.37 54.59 105.68 -51.09 43.94 34.60 12.40 36.35 0.00 316 0 PEAK 4 5720.28 60.67 111.54 -50.87 50.00 34.64 12.42 36.39 0.00 316 0 PEAK	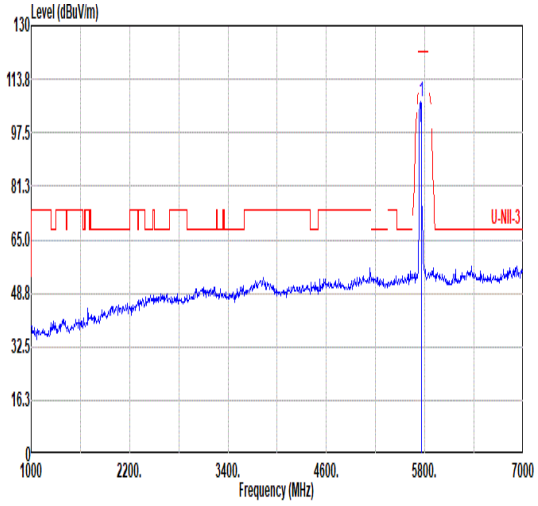 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 107.00 ------ ------ 96.30 34.69 12.44 36.43 0.00 316 0 PEAK
Avg	Blank	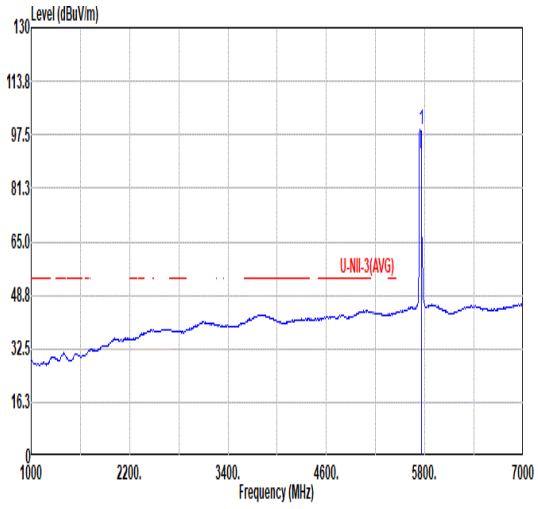 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 99.24 ------ ------ 88.54 34.68 12.44 36.42 0.00 316 0 AVERAGE

Mode	59	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11BE EHT40_CH151_RU242/61_5755MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	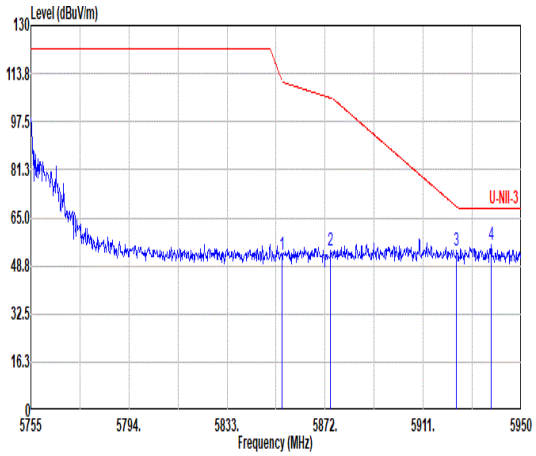 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.84 52.34 111.26 -58.92 41.29 35.12 12.56 36.63 0.00 316 0 PEAK 2 5874.15 54.18 105.54 -51.36 43.05 35.20 12.59 36.66 0.00 316 0 PEAK 3 5924.26 53.95 68.75 -14.80 42.81 35.30 12.66 36.82 0.00 316 0 PEAK 4 5938.11 55.93 68.20 -12.27 44.83 35.30 12.68 36.88 0.00 316 0 PEAK	Blank

Mode	60	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11BE EHT40_CH151_Full_5755MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	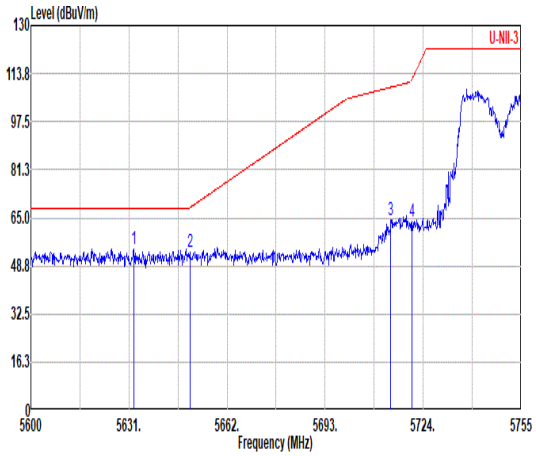 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5632.55 54.43 68.20 -13.77 43.88 34.50 12.34 36.29 0.00 109 0 PEAK 2 5650.22 53.57 68.36 -14.79 43.02 34.50 12.36 36.31 0.00 109 0 PEAK 3 5713.77 64.48 109.16 -44.68 53.81 34.63 12.41 36.37 0.00 109 0 PEAK 4 5720.44 63.59 111.89 -48.30 52.92 34.64 12.42 36.39 0.00 109 0 PEAK	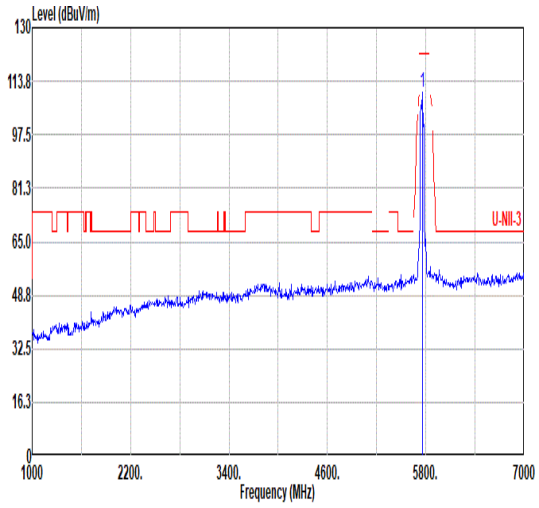 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 110.51 ------ ------ 99.76 34.75 12.45 36.45 0.00 109 0 PEAK
Avg	Blank	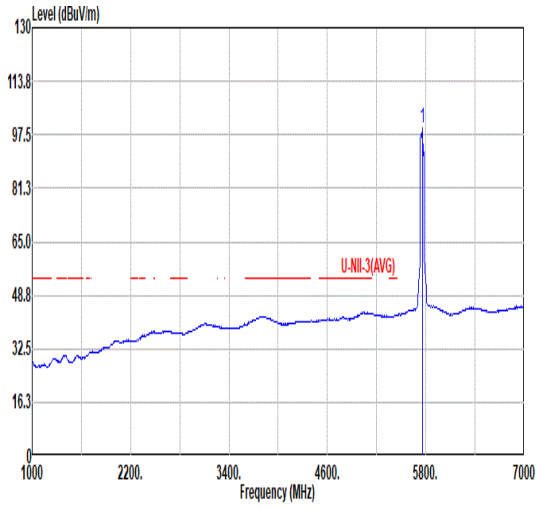 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 99.71 ------ ------ 88.96 34.75 12.45 36.45 0.00 109 0 AVERAGE

Mode	60	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11BE EHT40_CH151_Full_5755MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	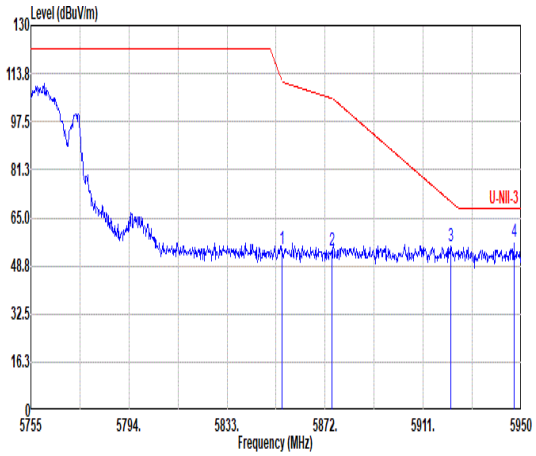 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.84 54.70 111.26 -56.56 43.65 35.12 12.56 36.63 0.00 109 0 PEAK 2 5874.73 53.72 105.38 -51.66 42.59 35.20 12.59 36.66 0.00 109 0 PEAK 3 5922.12 55.23 70.33 -15.10 44.09 35.30 12.65 36.81 0.00 109 0 PEAK 4 5947.08 57.04 68.20 -11.16 45.97 35.30 12.69 36.92 0.00 109 0 PEAK	Blank

Mode	60	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11BE EHT40_CH151_Full_5755MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	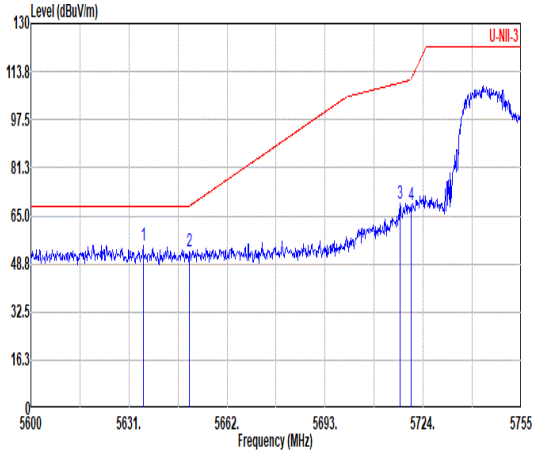 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5635.50 54.91 68.20 -13.29 44.36 34.50 12.34 36.29 0.00 291 360 PEAK 2 5650.07 52.74 68.25 -15.51 42.19 34.50 12.36 36.31 0.00 291 360 PEAK 3 5716.72 69.28 109.98 -40.70 58.61 34.63 12.42 36.38 0.00 291 360 PEAK 4 5720.13 68.46 111.19 -42.73 57.79 34.64 12.42 36.39 0.00 291 360 PEAK	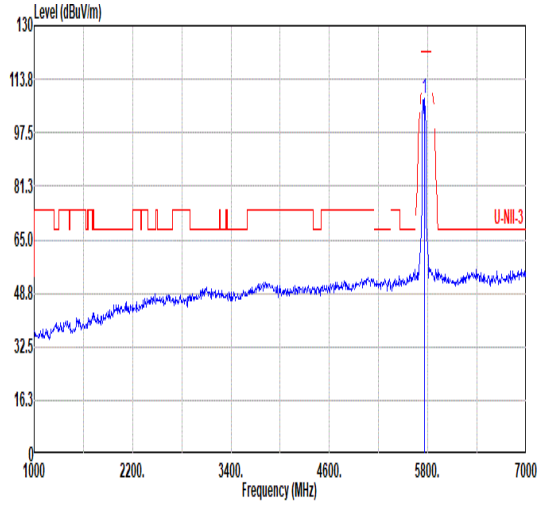 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 107.69 ------ ------ 96.92 34.78 12.46 36.47 0.00 291 360 PEAK
Avg	Blank	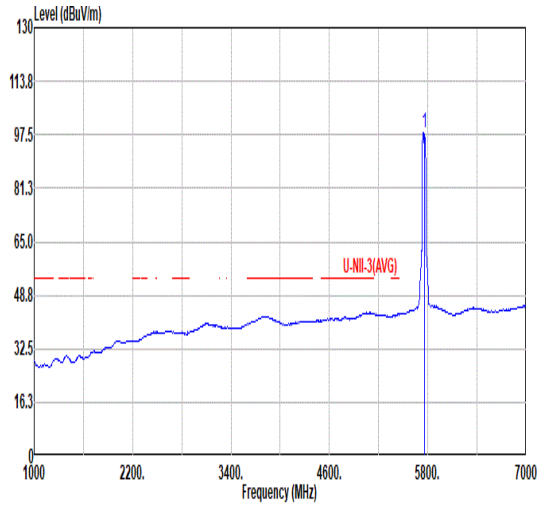 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 98.27 ------ ------ 87.57 34.68 12.44 36.42 0.00 291 360 AVERAGE

Mode	60	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11BE EHT40_CH151_Full_5755MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	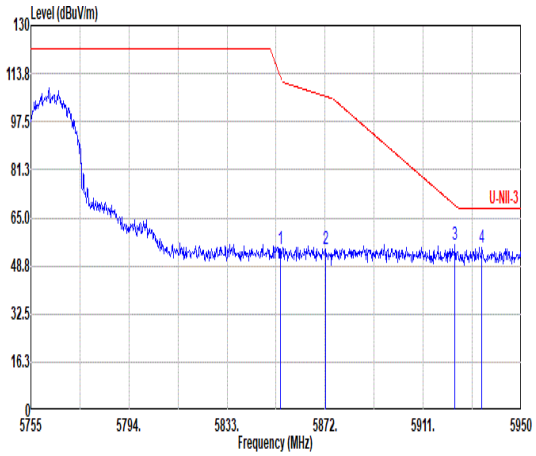 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.26 54.45 112.60 -58.15 43.40 35.12 12.56 36.63 0.00 291 360 PEAK 2 5872.20 54.62 106.08 -51.46 43.50 35.19 12.59 36.66 0.00 291 360 PEAK 3 5923.68 55.86 69.18 -13.32 44.72 35.30 12.66 36.82 0.00 291 360 PEAK 4 5934.40 55.02 68.20 -13.18 43.91 35.30 12.67 36.86 0.00 291 360 PEAK	Blank

Mode	60	
	Harmonic	
	U-NII-3_5.725-5.85_802.11BE EHT40_CH151_Full_5755MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Vertical
Peak Avg	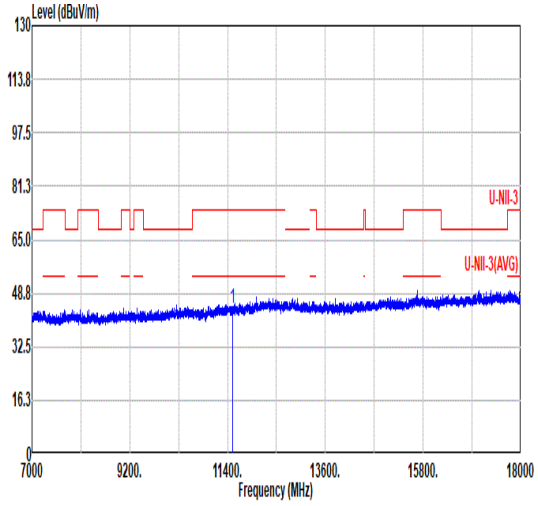 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11510.00 44.34 74.00 -29.66 54.92 38.11 17.88 66.57 0.00 --- --- PEAK	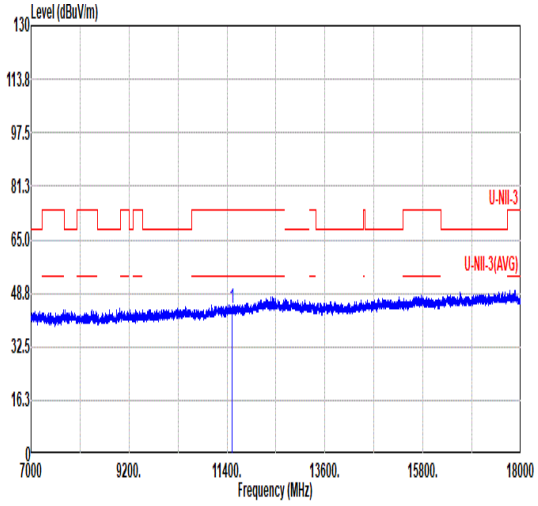 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11510.00 43.95 74.00 -30.05 54.53 38.11 17.88 66.57 0.00 --- --- PEAK

Mode	60	
	18G-40G	
	U-NII-3_5.725-5.85_802.11BE EHT40_CH151_Full_5755MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Vertical
Peak Avg	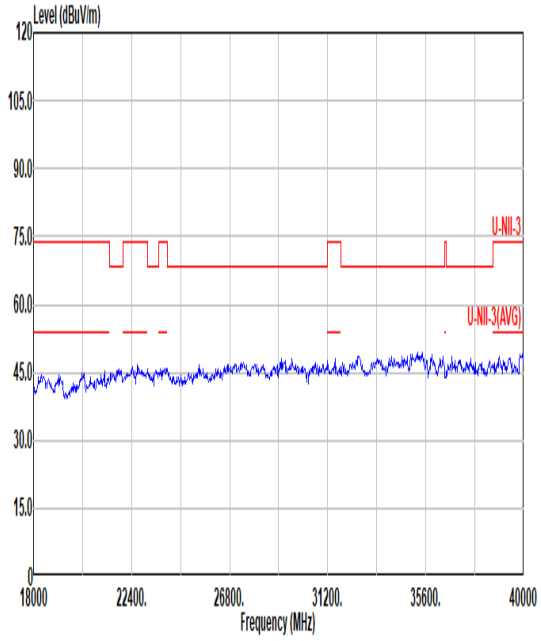	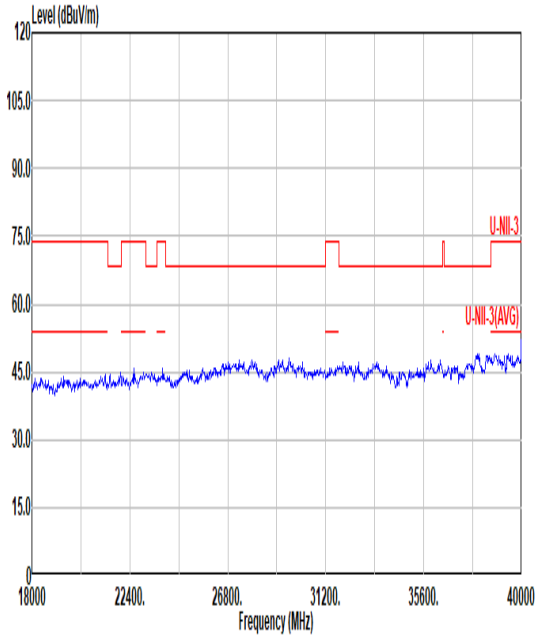

Mode	60
	30-1G
	U-NII-3_5.725-5.85_802.11BE EHT40_CH151_Full_5755MHz
ANT	CDD 6+7

Pol. — Horizontal

Peak

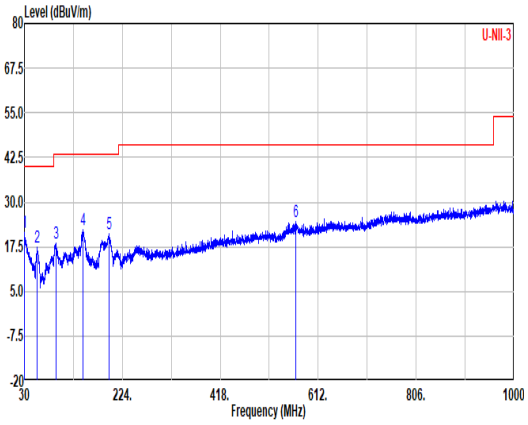

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	30.49	21.46	40.00	-18.54	29.08	24.93	0.36	32.91	0.00	---	---	Peak
2	54.98	17.24	40.00	-22.76	36.69	12.82	0.61	32.88	0.00	---	---	Peak
3	92.08	18.54	43.50	-24.96	35.27	15.20	1.00	32.93	0.00	---	---	Peak
4	146.64	22.38	43.50	-21.12	36.38	17.51	1.31	32.82	0.00	---	---	Peak
5	197.08	21.06	43.50	-22.44	37.12	15.11	1.56	32.73	0.00	---	---	Peak
6	567.87	24.65	46.00	-21.35	29.02	26.52	2.60	33.49	0.00	---	---	Peak

Pol. — Vertical

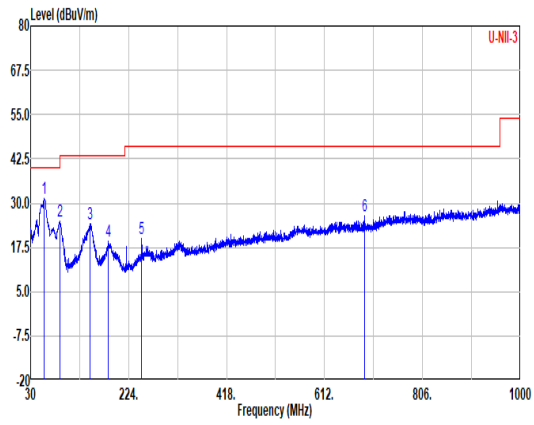

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	56.92	31.18	40.00	-8.82	51.00	12.42	0.63	32.87	0.00	---	---	Peak
2	87.72	24.85	40.00	-15.15	42.18	14.65	0.96	32.94	0.00	---	---	Peak
3	147.86	24.15	43.50	-19.35	38.18	17.47	1.32	32.82	0.00	---	---	Peak
4	184.23	19.07	43.50	-24.43	35.30	15.04	1.49	32.76	0.00	---	---	Peak
5	249.95	19.94	46.00	-26.06	32.33	18.80	1.74	32.93	0.00	---	---	Peak
6	691.30	26.27	46.00	-19.73	30.24	26.75	2.85	33.57	0.00	---	---	Peak

Mode	61	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11BE EHT40_CH159_Full_5795MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	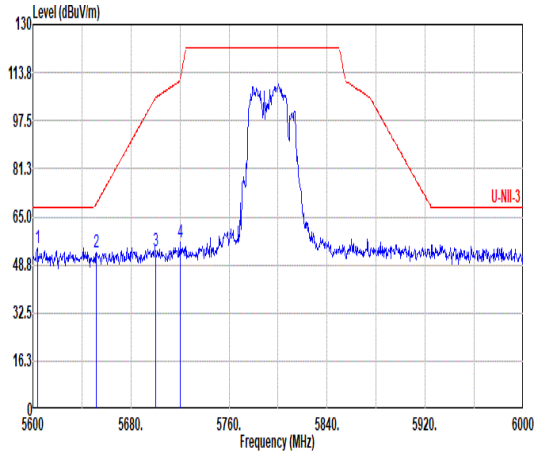 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5603.60 54.27 68.20 -13.93 43.72 34.50 12.31 36.26 0.00 121 0 PEAK 2 5651.60 53.18 69.39 -16.21 42.63 34.50 12.36 36.31 0.00 121 0 PEAK 3 5700.00 53.25 105.30 -52.05 42.60 34.60 12.40 36.35 0.00 121 0 PEAK 4 5720.40 56.31 111.81 -55.50 45.64 34.64 12.42 36.39 0.00 121 0 PEAK	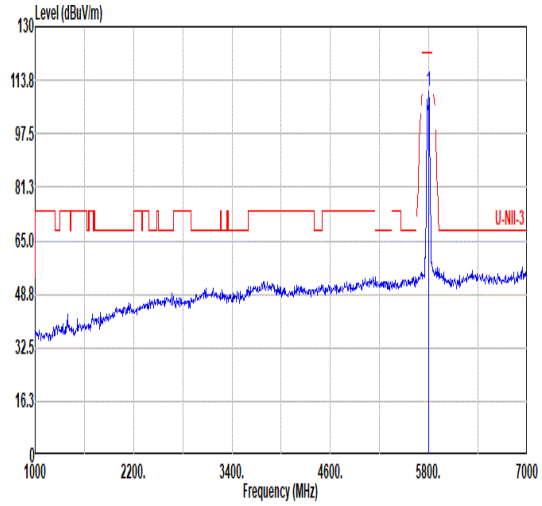 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 110.15 ------ ------ 99.19 35.00 12.49 36.53 0.00 121 0 PEAK
Avg	Blank	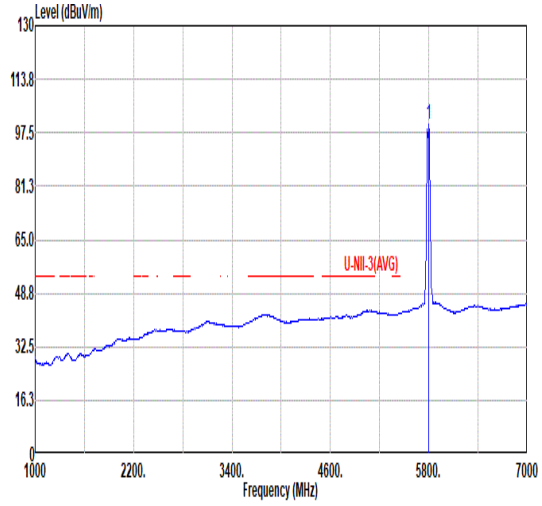 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 99.90 ------ ------ 88.94 35.00 12.49 36.53 0.00 121 0 AVERAGE

Mode	61	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11BE EHT40_CH159_Full_5795MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	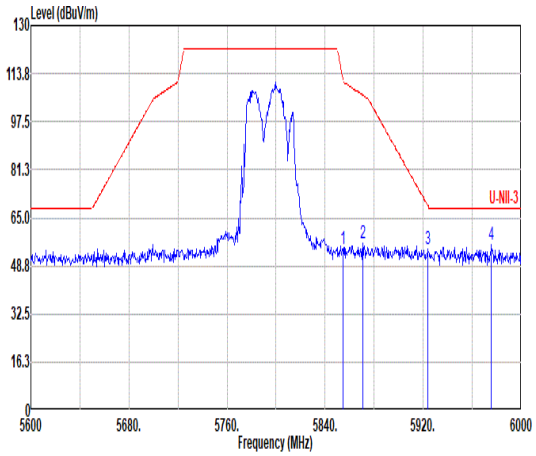 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.40 54.21 112.27 -58.06 43.16 35.12 12.56 36.63 0.00 121 0 PEAK 2 5870.80 56.43 106.47 -50.04 45.32 35.18 12.59 36.66 0.00 121 0 PEAK 3 5924.00 54.40 68.94 -14.54 43.26 35.30 12.66 36.82 0.00 121 0 PEAK 4 5975.60 55.82 68.20 -12.38 44.84 35.30 12.73 37.05 0.00 121 0 PEAK	Blank

Mode	61	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11BE EHT40_CH159_Full_5795MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	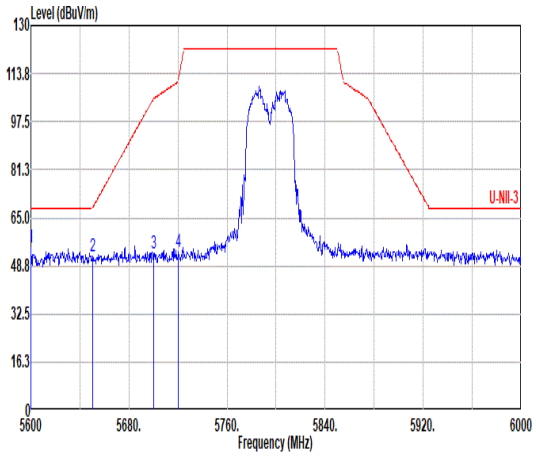 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5600.00 55.02 68.20 -13.18 44.47 34.50 12.31 36.26 0.00 247 5 PEAK 2 5650.40 52.16 68.50 -16.34 41.61 34.50 12.36 36.31 0.00 247 5 PEAK 3 5700.00 52.77 105.30 -52.53 42.12 34.60 12.40 36.35 0.00 247 5 PEAK 4 5720.40 53.63 111.81 -58.18 42.96 34.64 12.42 36.39 0.00 247 5 PEAK	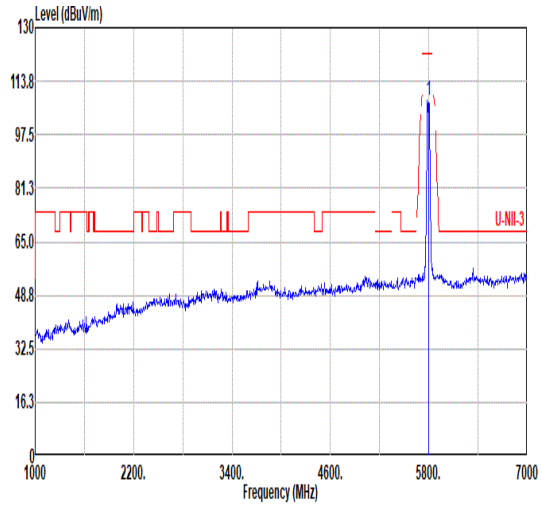 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 107.82 ------ ------ 96.96 34.89 12.47 36.50 0.00 247 5 PEAK
Avg	Blank	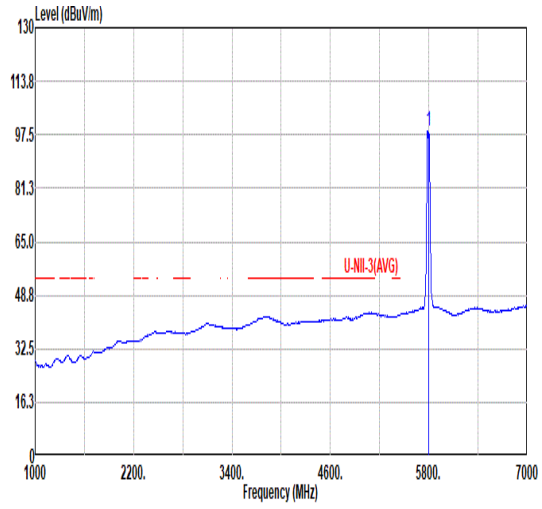 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 98.38 ------ ------ 87.52 34.89 12.47 36.50 0.00 247 5 AVERAGE

Mode	61	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11BE EHT40_CH159_Full_5795MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	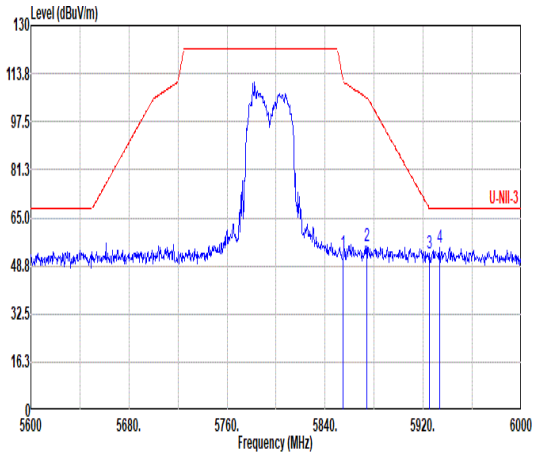 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 52.77 111.36 -58.59 41.72 35.12 12.56 36.63 0.00 247 5 PEAK 2 5874.00 55.43 105.58 -50.15 44.30 35.20 12.59 36.66 0.00 247 5 PEAK 3 5924.80 52.75 68.35 -15.60 41.61 35.30 12.66 36.82 0.00 247 5 PEAK 4 5933.20 54.91 68.20 -13.29 43.80 35.30 12.67 36.86 0.00 247 5 PEAK	Blank

Mode	61	
	Harmonic	
	U-NII-3_5.725-5.85_802.11BE EHT40_CH159_Full_5795MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Vertical
Peak Avg	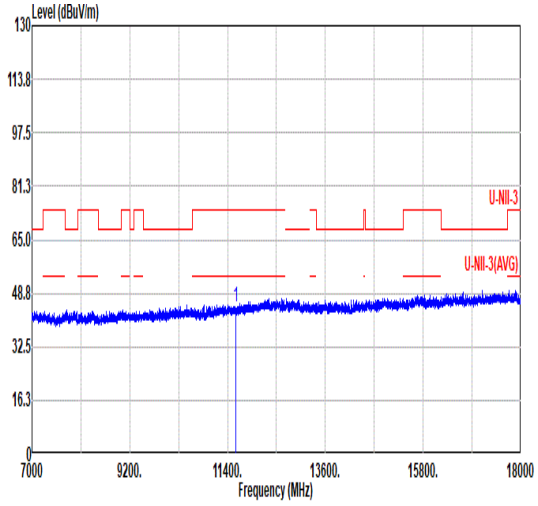 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11590.00 44.52 74.00 -29.48 54.92 38.19 17.93 66.52 0.00 --- --- PEAK	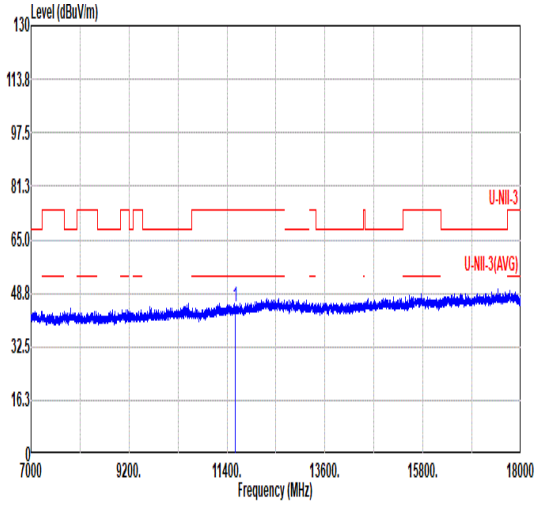 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11590.00 44.51 74.00 -29.49 54.91 38.19 17.93 66.52 0.00 --- --- PEAK

Mode	62	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11BE EHT40_CH159_RU242/62_5795MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	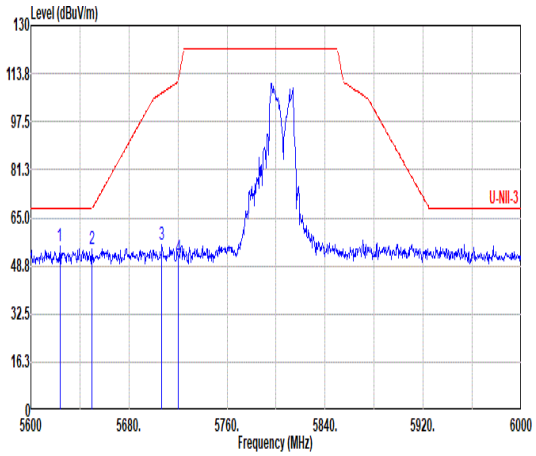 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5623.60 55.57 68.20 -12.63 45.02 34.50 12.33 36.28 0.00 167 360 PEAK 2 5650.00 54.48 68.20 -13.72 43.94 34.50 12.35 36.31 0.00 167 360 PEAK 3 5706.80 55.83 107.21 -51.38 45.17 34.61 12.41 36.36 0.00 167 360 PEAK 4 5720.00 51.35 110.90 -59.55 40.68 34.64 12.42 36.39 0.00 167 360 PEAK	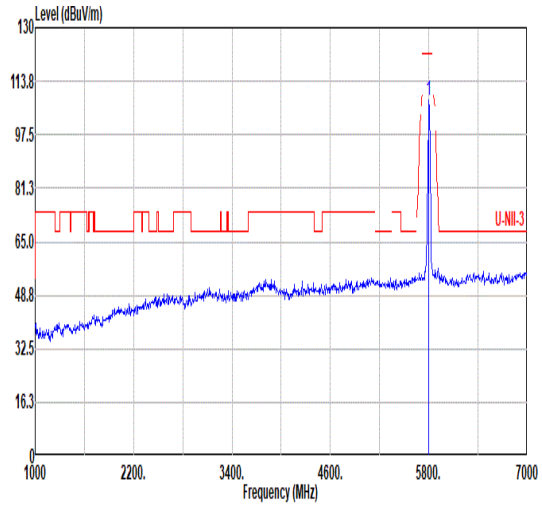 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 108.03 ------ ------ 97.11 34.96 12.48 36.52 0.00 167 360 PEAK
Avg	Blank	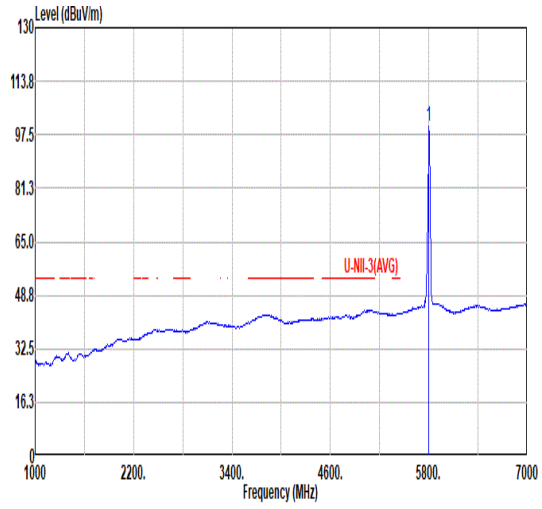 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 99.98 ------ ------ 89.06 34.96 12.48 36.52 0.00 167 360 AVERAGE

Mode	62	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11BE EHT40_CH159_RU242/62_5795MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	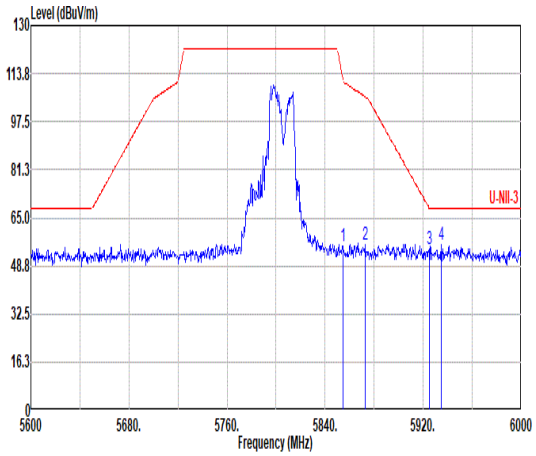 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.40 55.61 112.27 -56.66 44.56 35.12 12.56 36.63 0.00 167 360 PEAK 2 5872.80 55.94 105.92 -49.98 44.82 35.19 12.59 36.66 0.00 167 360 PEAK 3 5924.80 54.49 68.35 -13.86 43.35 35.30 12.66 36.82 0.00 167 360 PEAK 4 5934.80 55.85 68.20 -12.35 44.75 35.30 12.67 36.87 0.00 167 360 PEAK	Blank

Mode	62	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11BE EHT40_CH159_RU242/62_5795MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	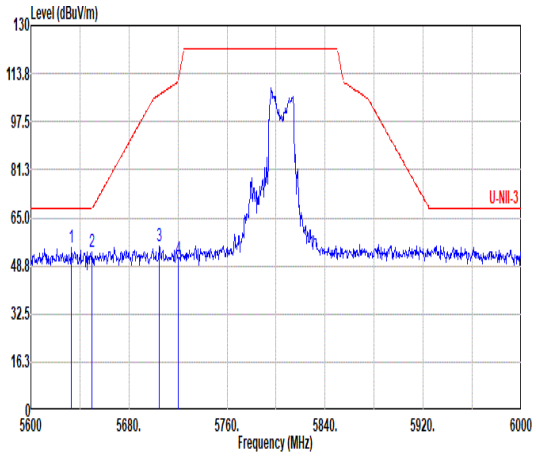 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5633.20 55.01 68.20 -13.19 44.46 34.50 12.34 36.29 0.00 317 18 PEAK 2 5650.00 53.33 68.20 -14.87 42.79 34.50 12.35 36.31 0.00 317 18 PEAK 3 5704.40 55.36 106.53 -51.17 44.71 34.61 12.40 36.36 0.00 317 18 PEAK 4 5720.00 50.98 110.90 -59.92 40.31 34.64 12.42 36.39 0.00 317 18 PEAK	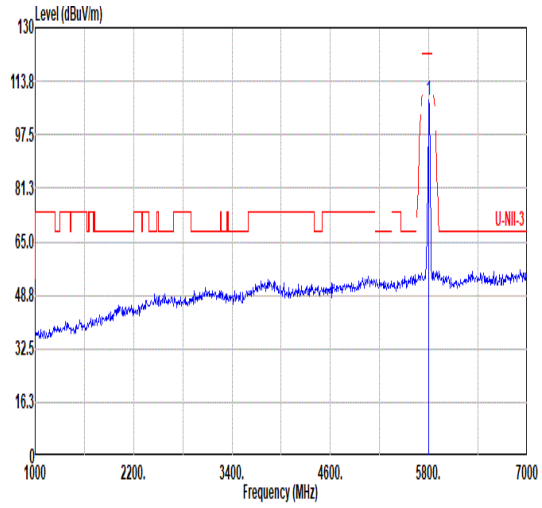 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 108.09 ------ ------ 97.13 35.00 12.49 36.53 0.00 317 18 PEAK
Avg	Blank	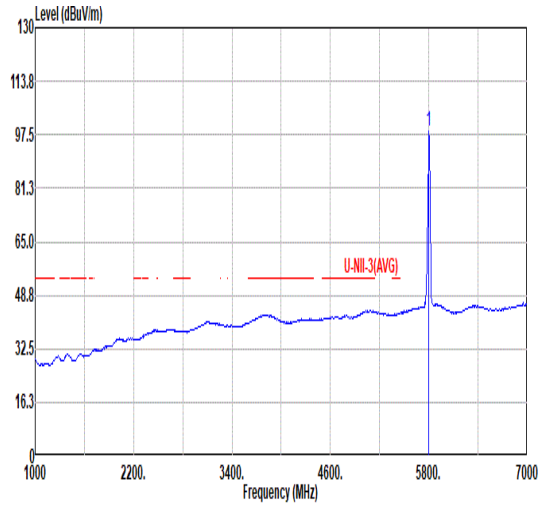 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 98.52 ------ ------ 87.60 34.96 12.48 36.52 0.00 317 18 AVERAGE

Mode	62	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11BE EHT40_CH159_RU242/62_5795MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	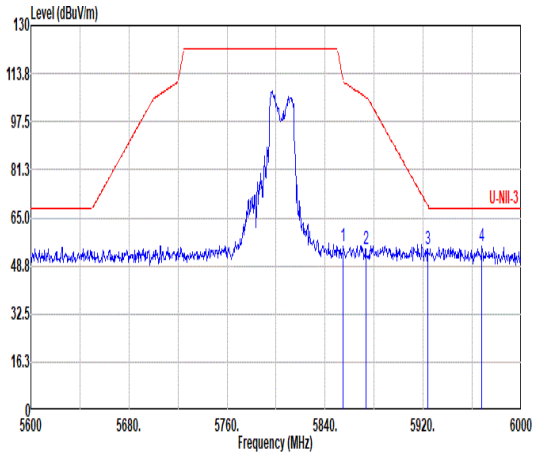 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 55.67 111.36 -55.69 44.62 35.12 12.56 36.63 0.00 317 18 PEAK 2 5873.20 54.49 105.80 -51.31 43.37 35.19 12.59 36.66 0.00 317 18 PEAK 3 5923.60 54.31 69.23 -14.92 43.17 35.30 12.66 36.82 0.00 317 18 PEAK 4 5968.00 55.38 68.20 -12.82 44.38 35.30 12.72 37.02 0.00 317 18 PEAK	Blank

Mode	63
	Band Edge - L
	U-NII-3_5.725-5.85_802.11BE EHT80_CH155_Full_5775MHz
ANT	CDD 6+7

Pol.	Horizontal	Fundamental
Peak	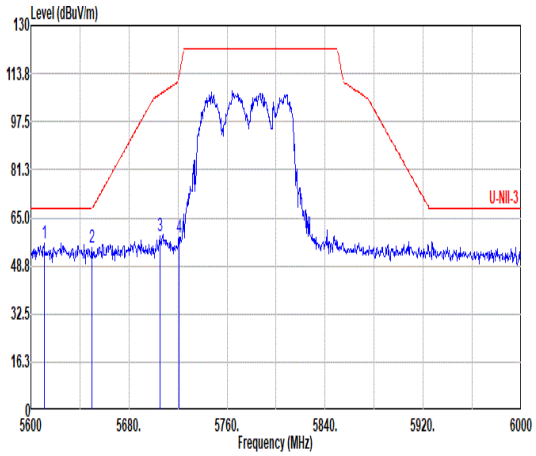 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.80 56.42 68.20 -11.78 45.87 34.50 12.32 36.27 0.00 100 188 PEAK 2 5650.00 54.82 68.20 -13.38 44.28 34.50 12.35 36.31 0.00 100 188 PEAK 3 5705.20 58.88 106.76 -47.88 48.23 34.61 12.40 36.36 0.00 100 188 PEAK 4 5720.80 58.33 112.72 -54.39 47.66 34.64 12.42 36.39 0.00 100 188 PEAK	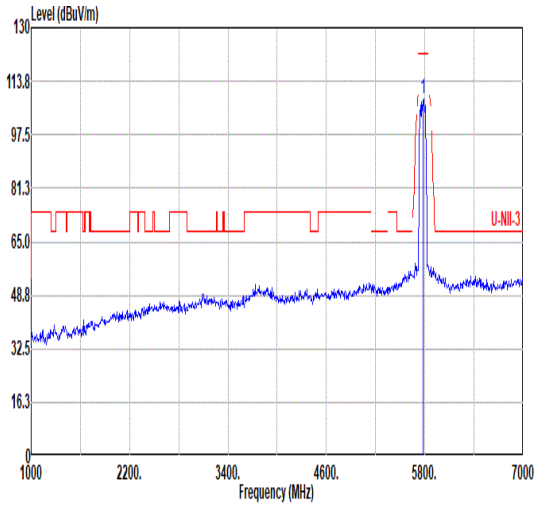 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 108.29 ------ ------ 97.39 34.93 12.48 36.51 0.00 100 188 PEAK
Avg	Blank	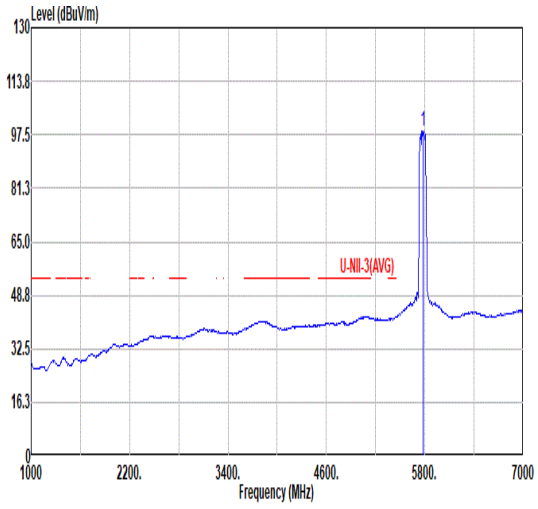 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 98.85 ------ ------ 88.05 34.82 12.46 36.48 0.00 100 188 AVERAGE

Mode	63	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11BE EHT80_CH155_Full_5775MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	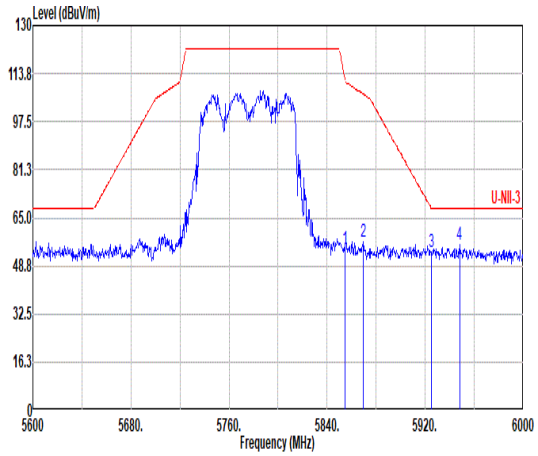 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 54.32 111.36 -57.04 43.27 35.12 12.56 36.63 0.00 100 188 PEAK 2 5869.60 57.00 106.81 -49.81 45.90 35.18 12.58 36.66 0.00 100 188 PEAK 3 5924.80 53.67 68.35 -14.68 42.53 35.30 12.66 36.82 0.00 100 188 PEAK 4 5948.00 55.73 68.20 -12.47 44.67 35.30 12.69 36.93 0.00 100 188 PEAK	Blank

Mode	63	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11BE EHT80_CH155_Full_5775MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	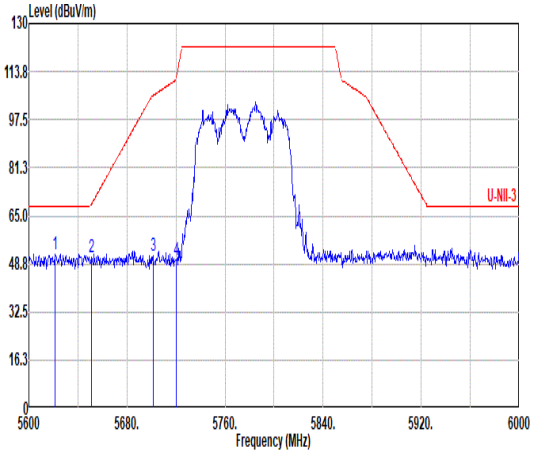 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5621.60 52.24 68.20 -15.96 41.69 34.50 12.33 36.28 0.00 364 266 PEAK 2 5650.80 51.18 68.80 -17.62 40.63 34.50 12.36 36.31 0.00 364 266 PEAK 3 5701.20 51.75 105.64 -53.89 41.10 34.60 12.40 36.35 0.00 364 266 PEAK 4 5720.00 50.19 110.90 -60.71 39.52 34.64 12.42 36.39 0.00 364 266 PEAK	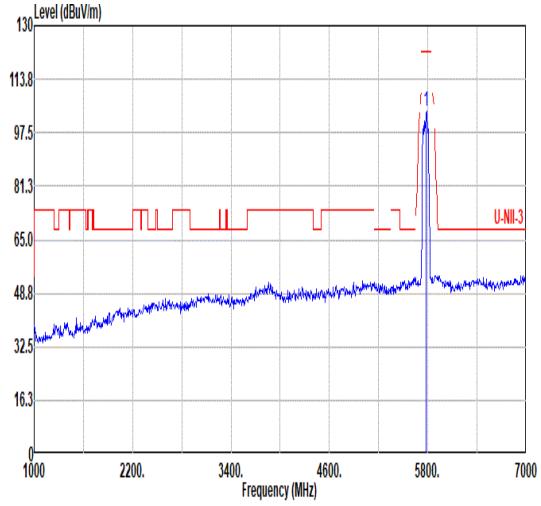 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 104.20 ------ ------ 93.30 34.93 12.48 36.51 0.00 364 266 PEAK
Avg	Blank	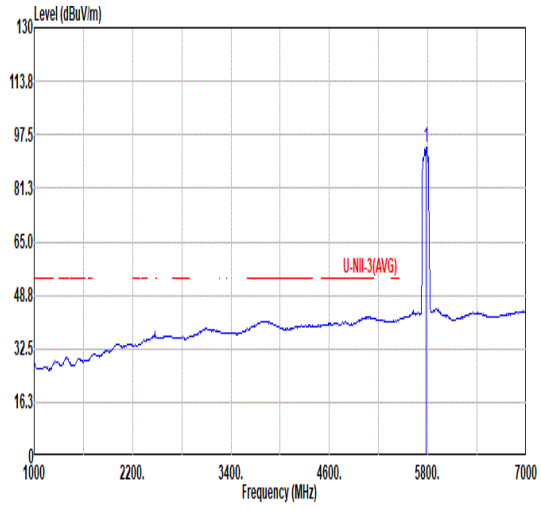 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 93.86 ------ ------ 83.00 34.89 12.47 36.50 0.00 364 266 AVERAGE

Mode	63	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11BE EHT80_CH155_Full_5775MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	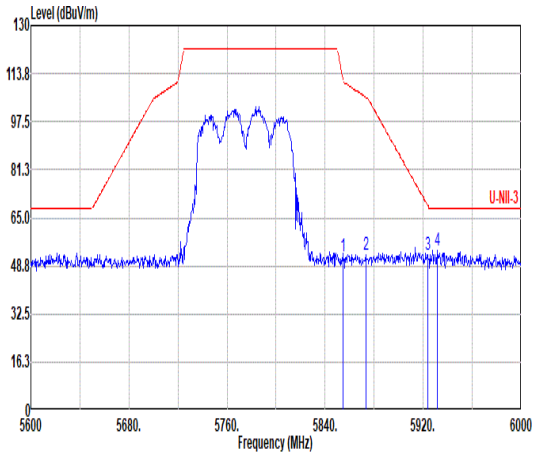 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 52.17 111.36 -59.19 41.12 35.12 12.56 36.63 0.00 364 266 PEAK 2 5873.20 52.67 105.80 -53.13 41.55 35.19 12.59 36.66 0.00 364 266 PEAK 3 5923.60 52.42 69.23 -16.81 41.28 35.30 12.66 36.82 0.00 364 266 PEAK 4 5931.60 53.92 68.20 -14.28 42.80 35.30 12.67 36.85 0.00 364 266 PEAK	Blank

Mode	63	
	Harmonic	
	U-NII-3_5.725-5.85_802.11BE EHT80_CH155_Full_5775MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Vertical
Peak Avg	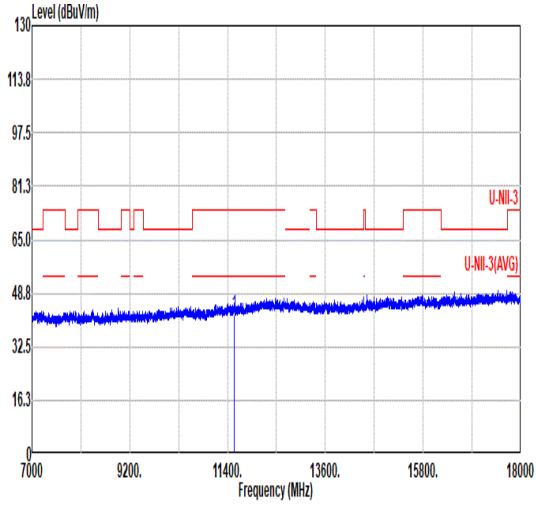 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11550.00 42.29 74.00 -31.71 52.77 38.15 17.91 66.54 0.00 --- --- PEAK	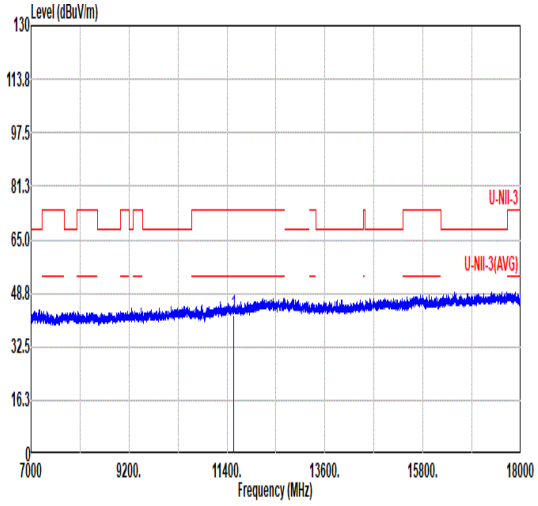 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11550.00 42.36 74.00 -31.64 52.84 38.15 17.91 66.54 0.00 --- --- PEAK

Mode	64	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11BE EHT80_CH155_RU484/65_5775MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	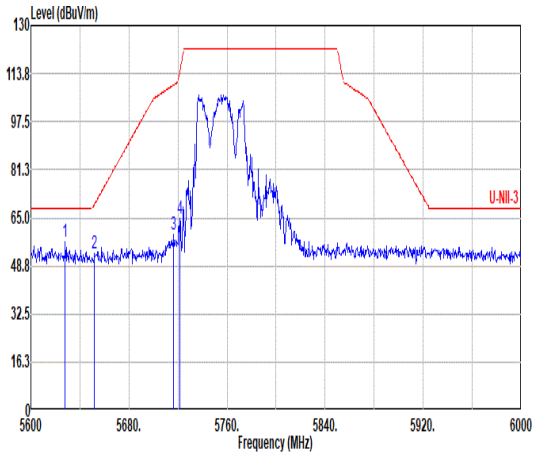 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5628.00 56.83 68.20 -11.37 46.28 34.50 12.34 36.29 0.00 171 360 PEAK 2 5652.00 53.17 69.69 -16.52 42.62 34.50 12.36 36.31 0.00 171 360 PEAK 3 5716.40 59.40 109.89 -50.49 48.74 34.63 12.41 36.38 0.00 171 360 PEAK 4 5721.20 64.63 113.64 -49.01 53.96 34.64 12.42 36.39 0.00 171 360 PEAK	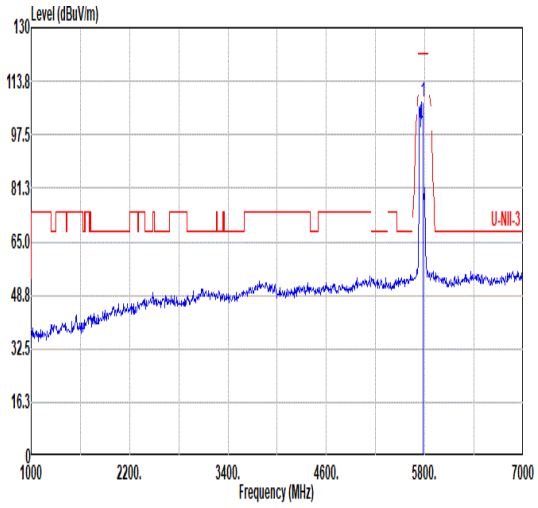 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 107.58 ------ ------ 96.83 34.75 12.45 36.45 0.00 171 360 PEAK
Avg	Blank	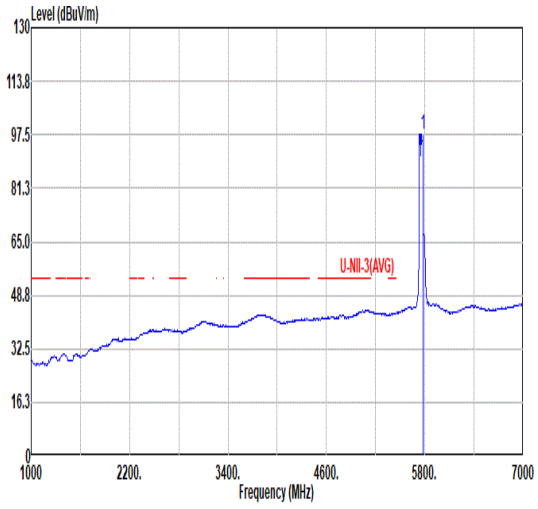 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 97.63 ------ ------ 86.94 34.67 12.43 36.41 0.00 171 360 AVERAGE

Mode	64	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11BE EHT80_CH155_RU484/65_5775MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	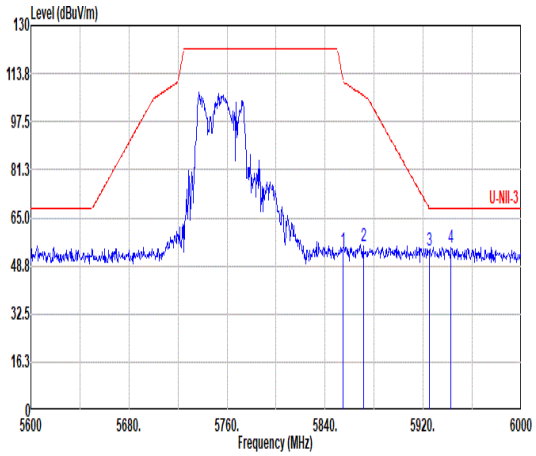 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 54.13 111.36 -57.23 43.08 35.12 12.56 36.63 0.00 171 360 PEAK 2 5871.20 55.20 106.36 -51.16 44.09 35.18 12.59 36.66 0.00 171 360 PEAK 3 5924.80 54.11 68.35 -14.24 42.97 35.30 12.66 36.82 0.00 171 360 PEAK 4 5942.80 55.18 68.20 -13.02 44.10 35.30 12.68 36.90 0.00 171 360 PEAK	Blank

Mode	64	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11BE EHT80_CH155_RU484/65_5775MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	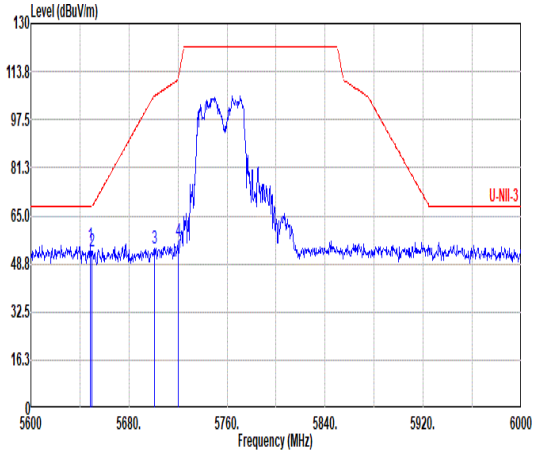 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5648.40 54.85 68.20 -13.35 44.30 34.50 12.35 36.30 0.00 384 10 PEAK 2 5650.00 53.17 68.20 -15.03 42.63 34.50 12.35 36.31 0.00 384 10 PEAK 3 5700.80 53.75 105.52 -51.77 43.10 34.60 12.40 36.35 0.00 384 10 PEAK 4 5720.00 56.52 110.90 -54.38 45.85 34.64 12.42 36.39 0.00 384 10 PEAK	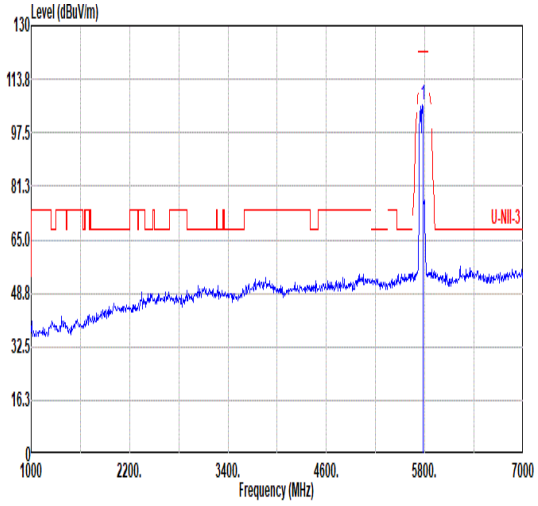 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 106.10 ------ ------ 95.30 34.82 12.46 36.48 0.00 384 10 PEAK
Avg	Blank	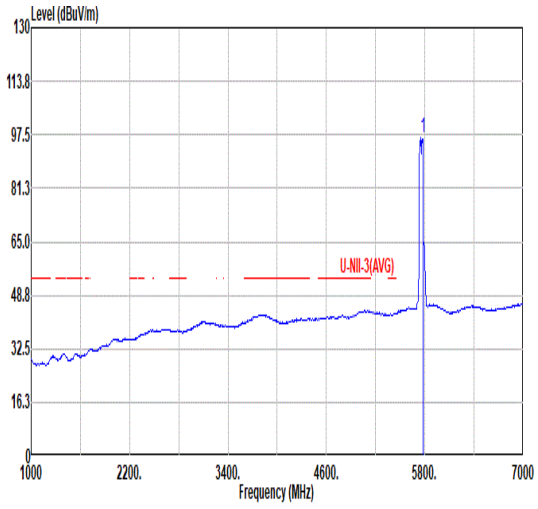 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 96.62 ------ ------ 85.92 34.69 12.44 36.43 0.00 384 10 AVERAGE

Mode	64	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11BE EHT80_CH155_RU484/65_5775MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	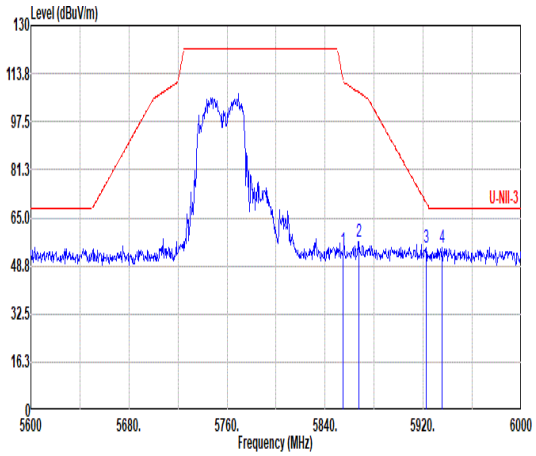 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.40 53.82 112.27 -58.45 42.77 35.12 12.56 36.63 0.00 384 10 PEAK 2 5867.60 56.94 107.37 -50.43 45.84 35.17 12.58 36.65 0.00 384 10 PEAK 3 5922.40 54.71 70.12 -15.41 43.56 35.30 12.66 36.81 0.00 384 10 PEAK 4 5935.20 54.79 68.20 -13.41 43.69 35.30 12.67 36.87 0.00 384 10 PEAK	Blank

Mode	65	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11BE EHT80_CH155_RU484/66_5775MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	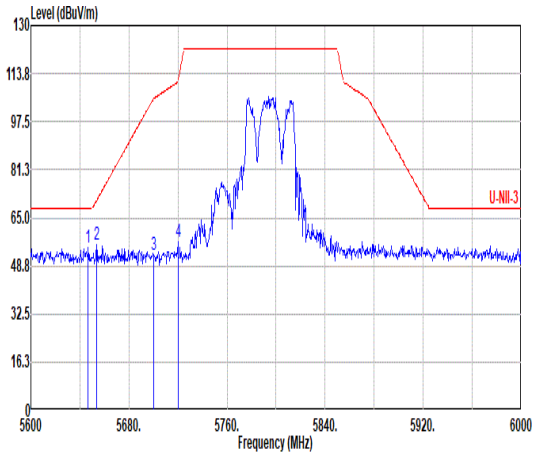 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5646.80 54.97 68.20 -13.23 44.42 34.50 12.35 36.30 0.00 119 360 PEAK 2 5653.60 55.88 70.88 -15.00 45.32 34.51 12.36 36.31 0.00 119 360 PEAK 3 5700.00 52.46 105.30 -52.84 41.81 34.60 12.40 36.35 0.00 119 360 PEAK 4 5720.00 56.86 110.90 -54.04 46.19 34.64 12.42 36.39 0.00 119 360 PEAK	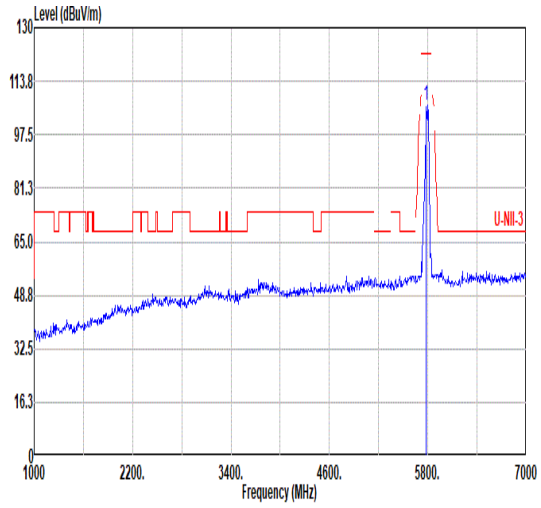 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 106.64 ------ ------ 95.72 34.96 12.48 36.52 0.00 119 360 PEAK
Avg	Blank	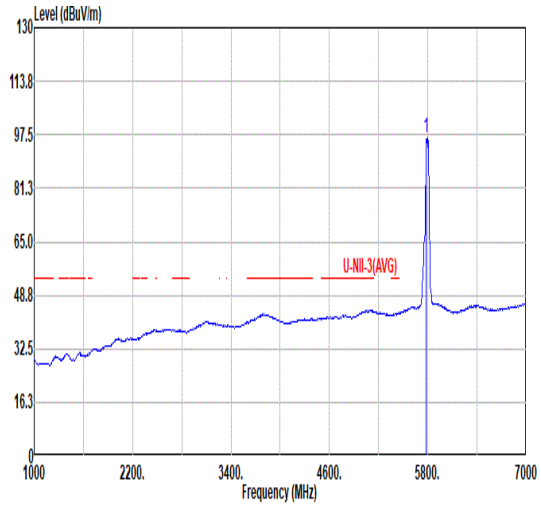 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 96.55 ------ ------ 85.63 34.96 12.48 36.52 0.00 119 360 AVERAGE

Mode	65	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11BE EHT80_CH155_RU484/66_5775MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	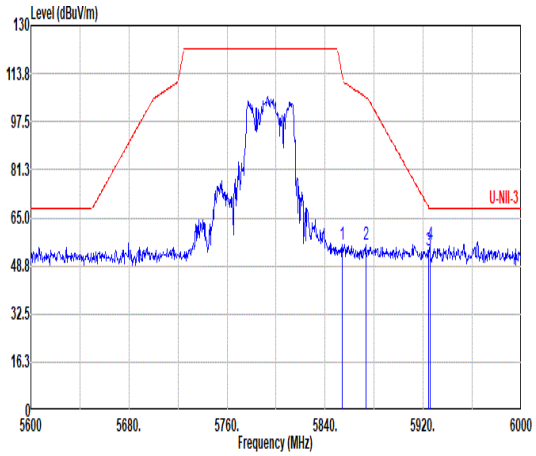 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.00 56.11 113.18 -57.07 45.06 35.12 12.56 36.63 0.00 119 360 PEAK 2 5873.20 56.11 105.80 -49.69 44.99 35.19 12.59 36.66 0.00 119 360 PEAK 3 5924.40 53.96 68.64 -14.68 42.82 35.30 12.66 36.82 0.00 119 360 PEAK 4 5925.60 55.90 68.20 -12.30 44.77 35.30 12.66 36.83 0.00 119 360 PEAK	Blank

Mode	65	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11BE EHT80_CH155_RU484/66_5775MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	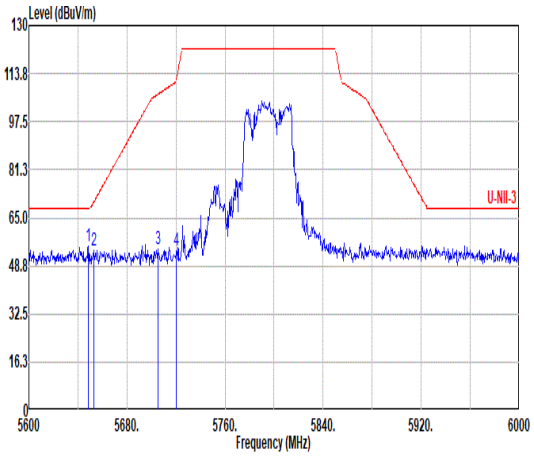 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5648.40 55.42 68.20 -12.78 44.87 34.50 12.35 36.30 0.00 301 17 PEAK 2 5652.80 53.82 70.29 -16.47 43.26 34.51 12.36 36.31 0.00 301 17 PEAK 3 5705.20 54.38 106.76 -52.38 43.73 34.61 12.40 36.36 0.00 301 17 PEAK 4 5720.40 53.90 111.81 -57.91 43.23 34.64 12.42 36.39 0.00 301 17 PEAK	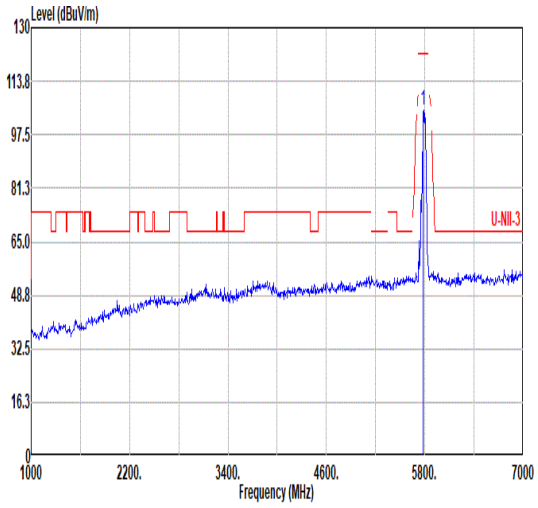 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 104.84 ------ ------ 93.94 34.93 12.48 36.51 0.00 301 17 PEAK
Avg	Blank	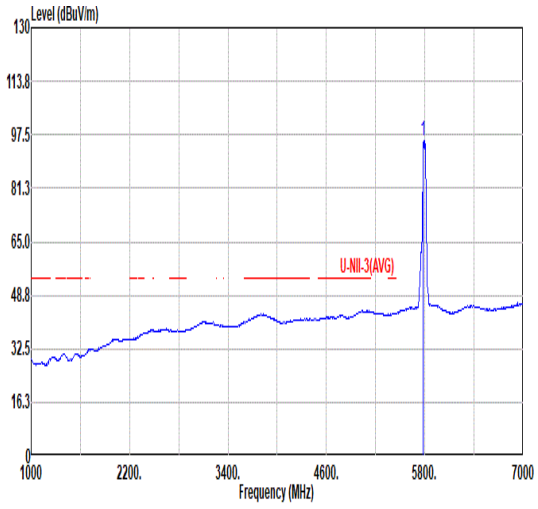 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 95.82 ------ ------ 84.90 34.96 12.48 36.52 0.00 301 17 AVERAGE

Mode	65	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11BE EHT80_CH155_RU484/66_5775MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	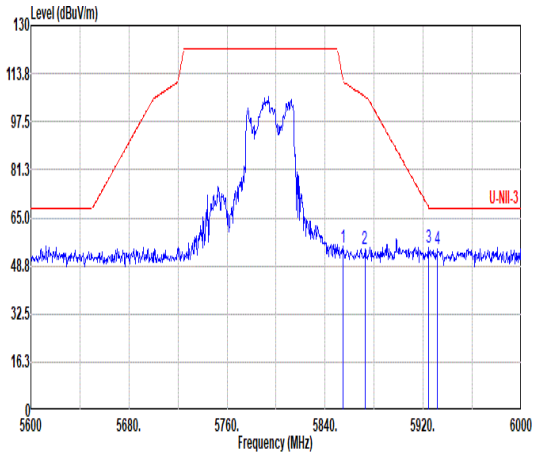 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 54.75 111.36 -56.61 43.70 35.12 12.56 36.63 0.00 301 17 PEAK 2 5872.40 54.42 106.03 -51.61 43.30 35.19 12.59 36.66 0.00 301 17 PEAK 3 5924.40 54.87 68.64 -13.77 43.73 35.30 12.66 36.82 0.00 301 17 PEAK 4 5931.60 54.69 68.20 -13.51 43.57 35.30 12.67 36.85 0.00 301 17 PEAK	Blank

Mode	66	
	Band Edge	
	U-NII-1_5.15-5.25_802.11BE EHT20_CH36_Small RU Index 38+1_5180MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	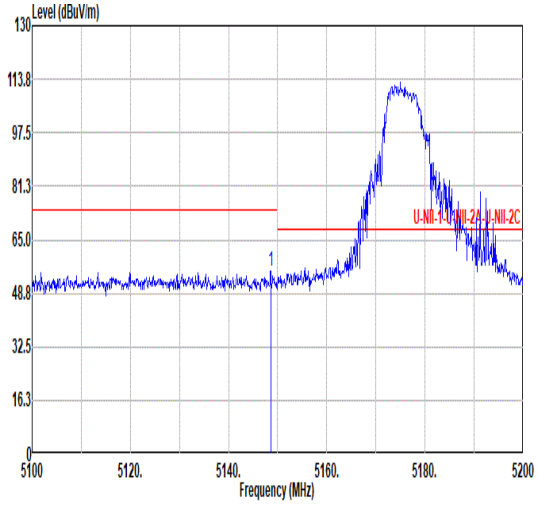 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5148.60 55.48 74.00 -18.52 46.61 34.10 11.80 37.03 0.00 267 360 PEAK	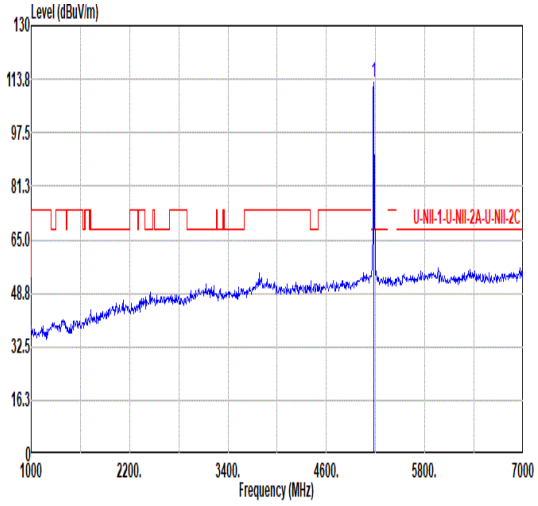 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 112.74 ------ ------ 103.81 34.20 11.83 37.10 0.00 267 360 PEAK
Avg	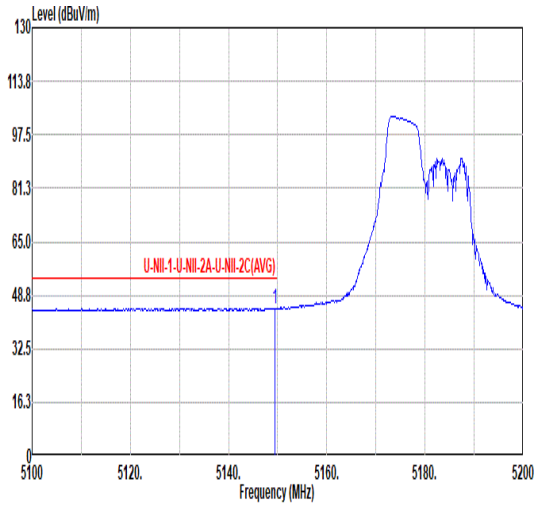 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.50 44.84 54.00 -9.16 35.97 34.10 11.80 37.03 0.00 267 360 AVERAGE	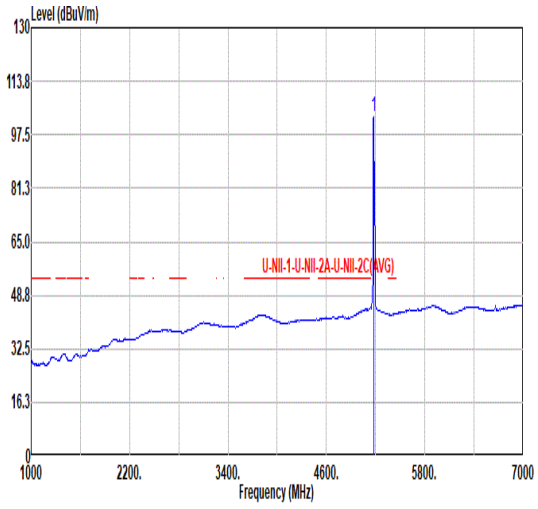 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 103.12 ------ ------ 94.19 34.20 11.83 37.10 0.00 267 360 AVERAGE

Mode	66	
	Band Edge	
	U-NII-1_5.15-5.25_802.11BE EHT20_CH36_Small RU Index 38+1_5180MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	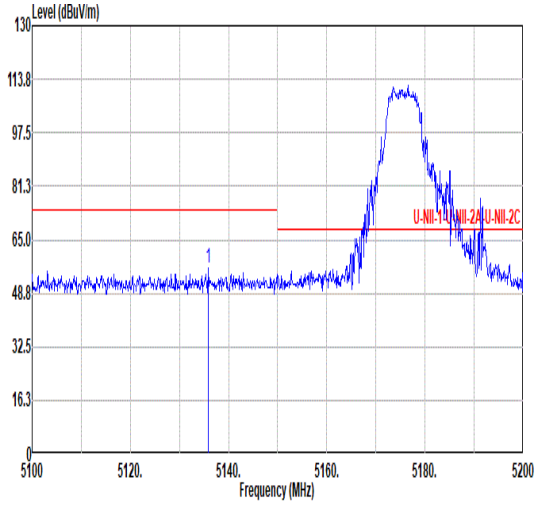 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5135.80 56.54 74.00 -17.46 47.67 34.07 11.79 36.99 0.00 300 343 PEAK	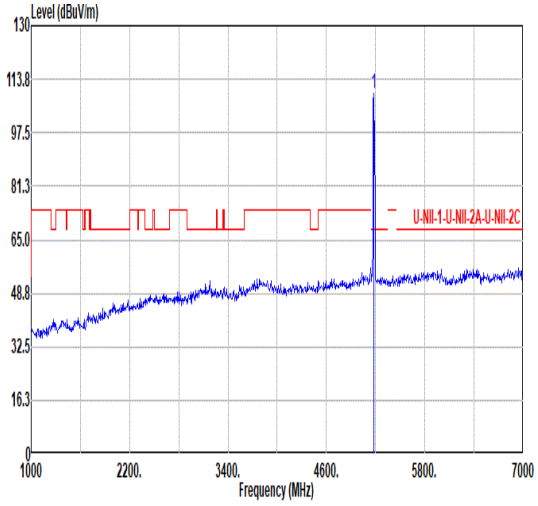 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 109.38 ------ ------ 100.45 34.20 11.83 37.10 0.00 300 343 PEAK
Avg	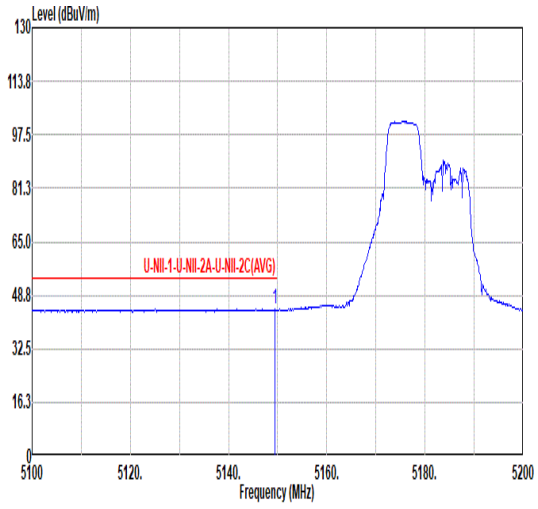 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.50 44.59 54.00 -9.41 35.72 34.10 11.80 37.03 0.00 300 343 AVERAGE	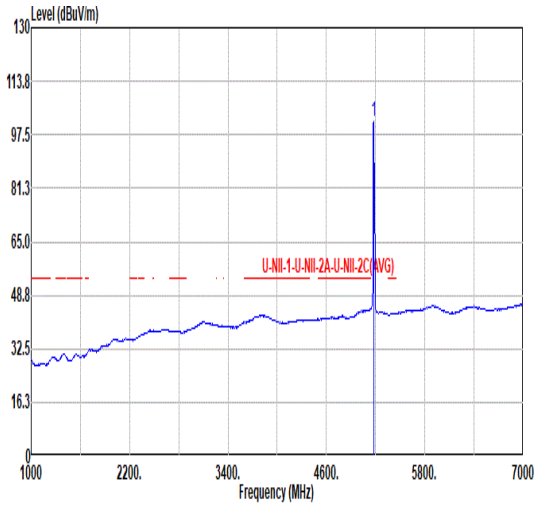 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 101.51 ------ ------ 92.58 34.20 11.83 37.10 0.00 300 343 AVERAGE

Mode	67	
	Band Edge	
	U-NII-1_5.15-5.25_802.11BE EHT20_CH36_Small RU Index 53+4_5180MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	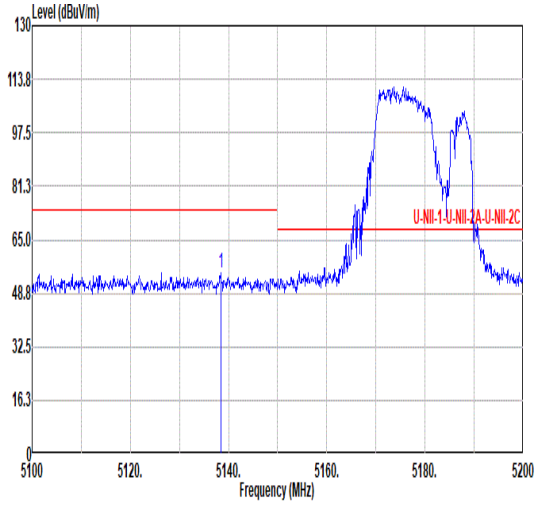 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5138.40 55.10 74.00 -18.90 46.23 34.08 11.79 37.00 0.00 268 0 PEAK	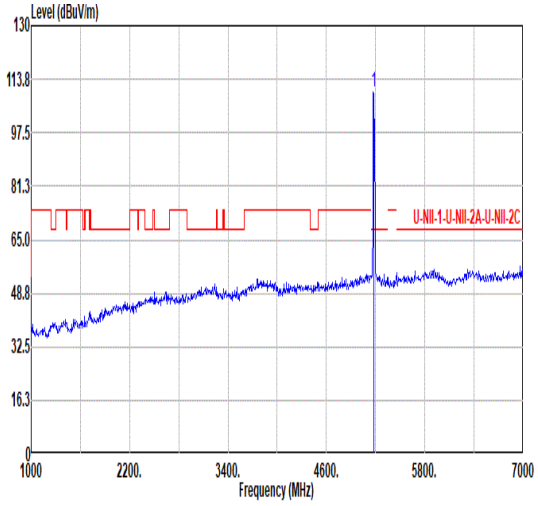 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 109.93 ------ ------ 101.01 34.18 11.82 37.08 0.00 268 0 PEAK
Avg	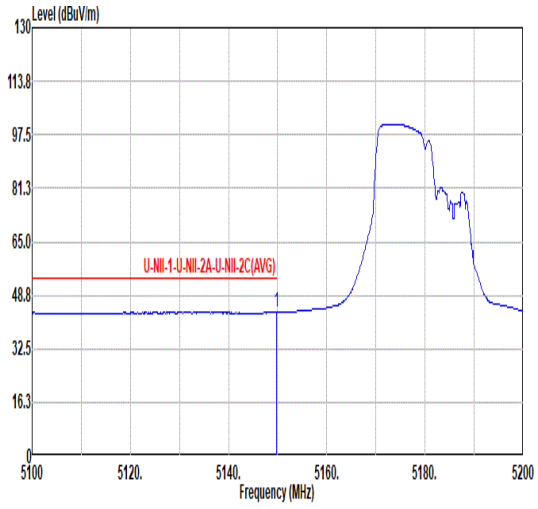 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.80 43.52 54.00 -10.48 34.65 34.10 11.80 37.03 0.00 268 0 AVERAGE	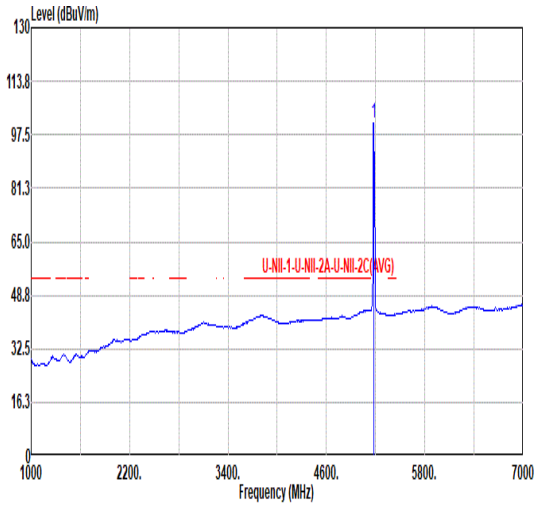 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 101.03 ------ ------ 92.10 34.20 11.83 37.10 0.00 268 0 AVERAGE

Mode	67	
	Band Edge	
	U-NII-1_5.15-5.25_802.11BE EHT20_CH36_Small RU Index 53+4_5180MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	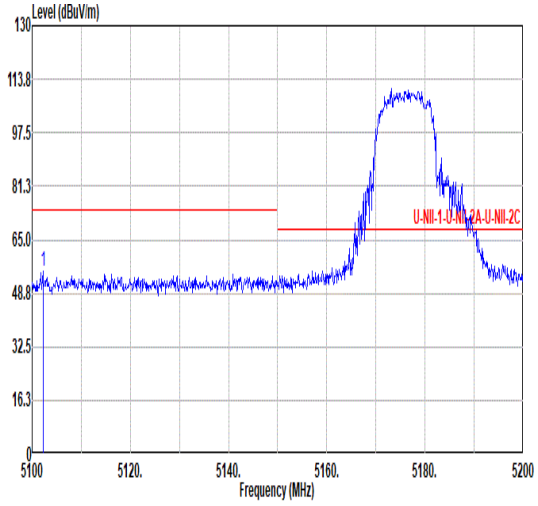 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5102.20 55.28 74.00 -18.72 46.44 34.00 11.75 36.91 0.00 281 347 PEAK	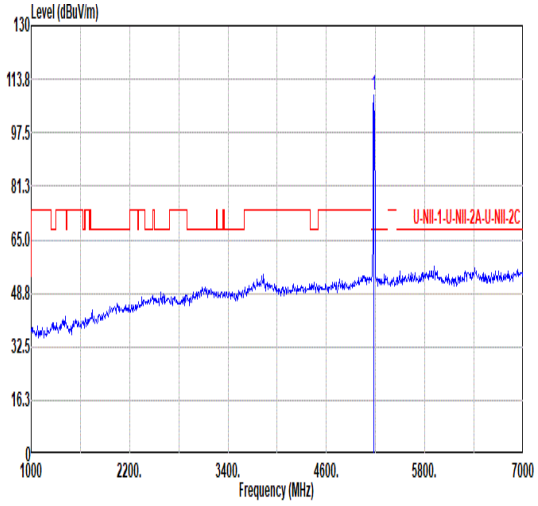 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 108.99 ------ ------ 100.06 34.20 11.83 37.10 0.00 281 347 PEAK
Avg	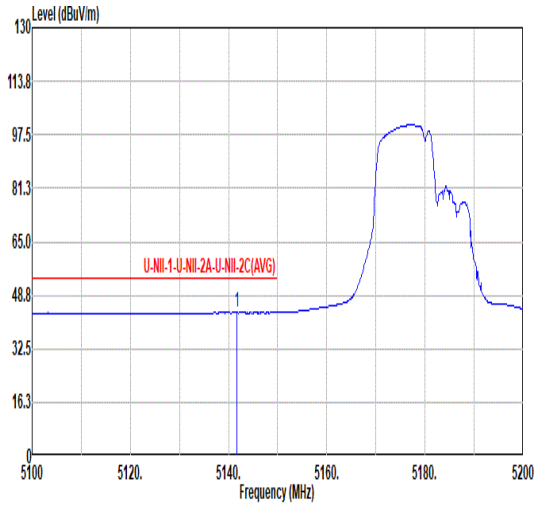 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5141.70 43.49 54.00 -10.51 34.63 34.08 11.79 37.01 0.00 281 347 AVERAGE	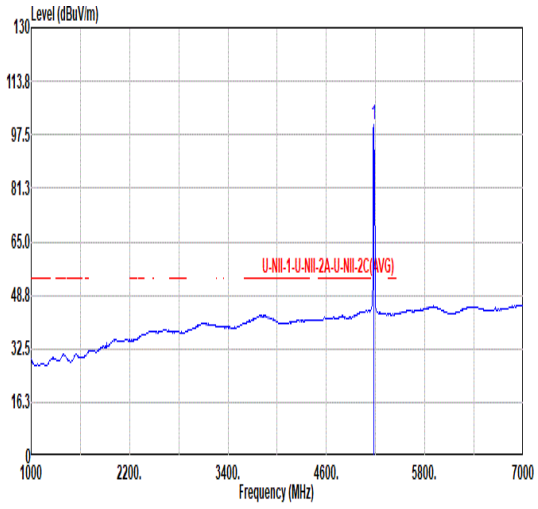 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 100.76 ------ ------ 91.83 34.20 11.83 37.10 0.00 281 347 AVERAGE

Mode	68	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11BE EHT20_CH64_Small RU Index 39+7_5320MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	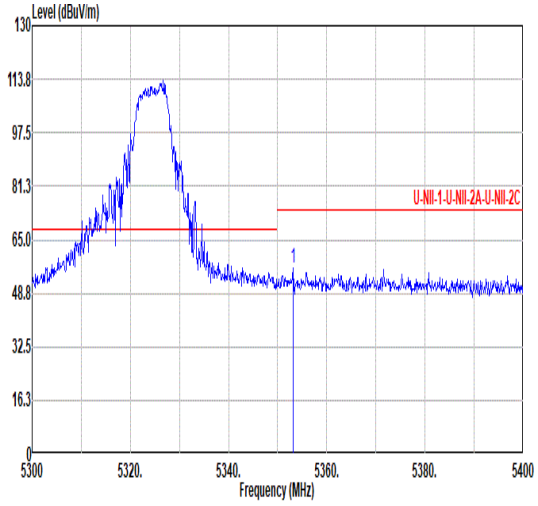 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5353.20 56.40 74.00 -17.60 46.34 34.60 11.97 36.51 0.00 192 0 PEAK	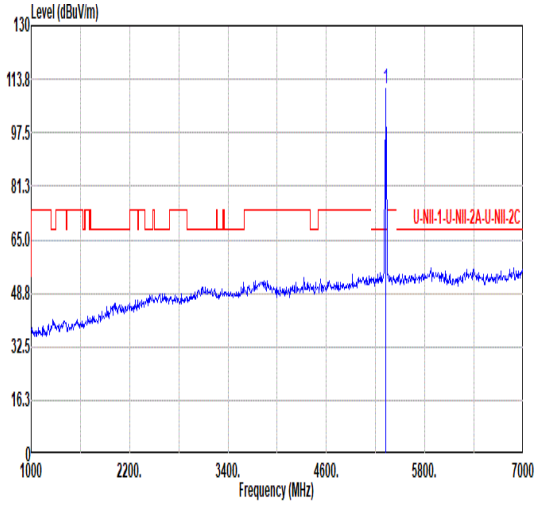 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 111.11 ------ ------ 101.14 34.60 11.95 36.58 0.00 192 0 PEAK
Avg	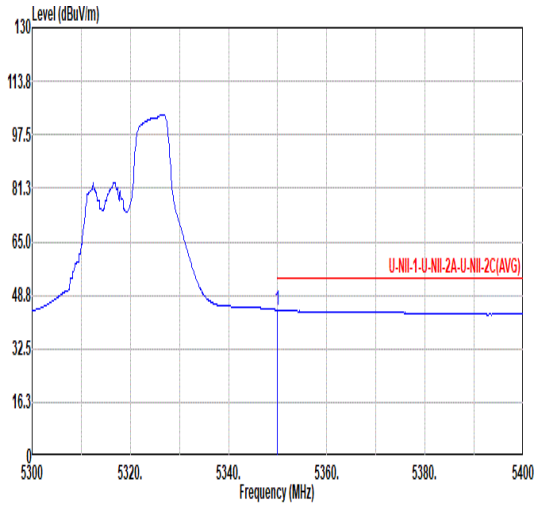 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.00 44.30 54.00 -9.70 34.25 34.60 11.97 36.52 0.00 192 0 AVERAGE	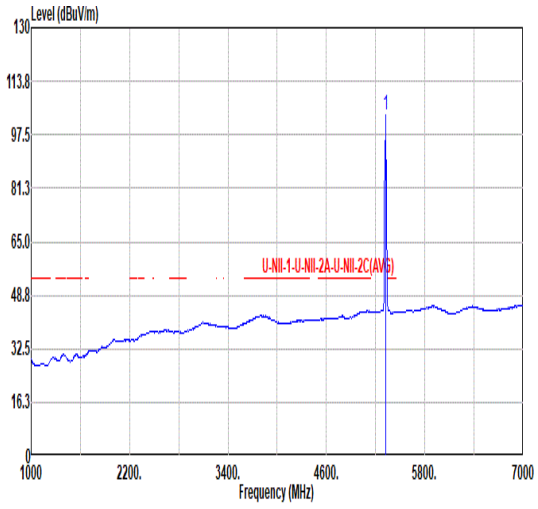 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 103.62 ------ ------ 93.65 34.60 11.95 36.58 0.00 192 0 AVERAGE

Mode	68	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11BE EHT20_CH64_Small RU Index 39+7_5320MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	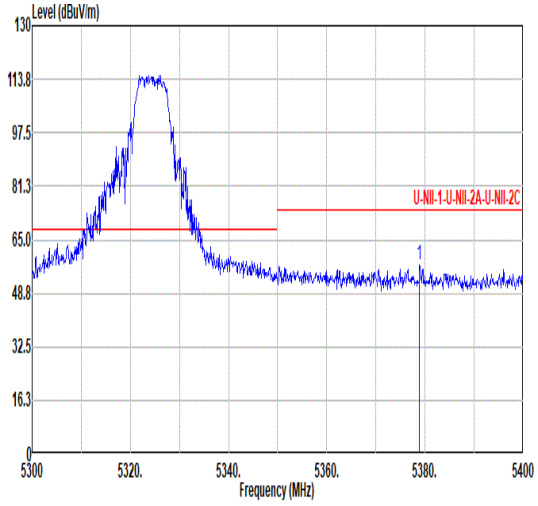 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5378.90 57.52 74.00 -16.48 47.38 34.60 11.99 36.45 0.00 256 360 PEAK	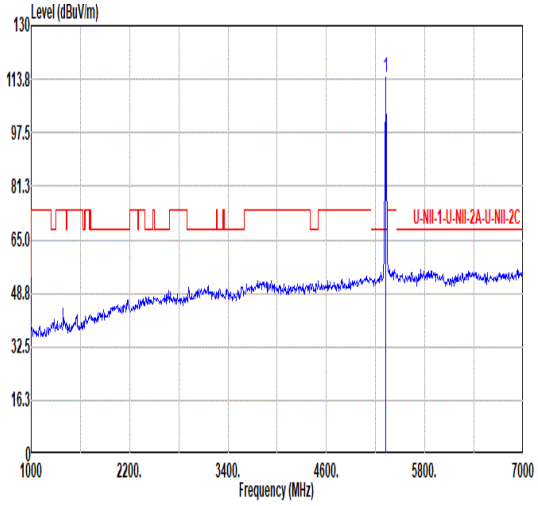 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 114.26 ------ ------ 104.29 34.60 11.95 36.58 0.00 256 360 PEAK
Avg	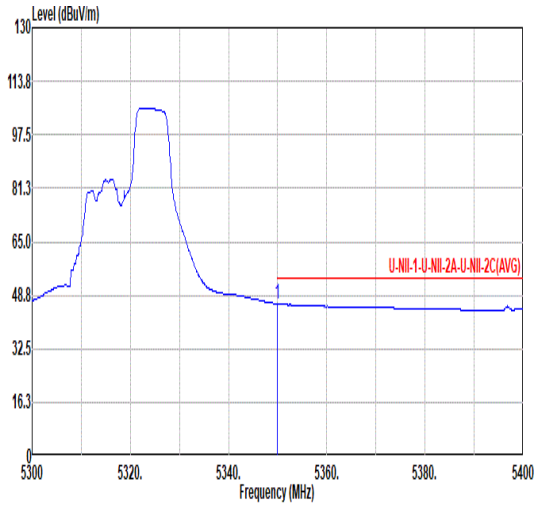 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.00 46.19 54.00 -7.81 36.14 34.60 11.97 36.52 0.00 256 360 AVERAGE	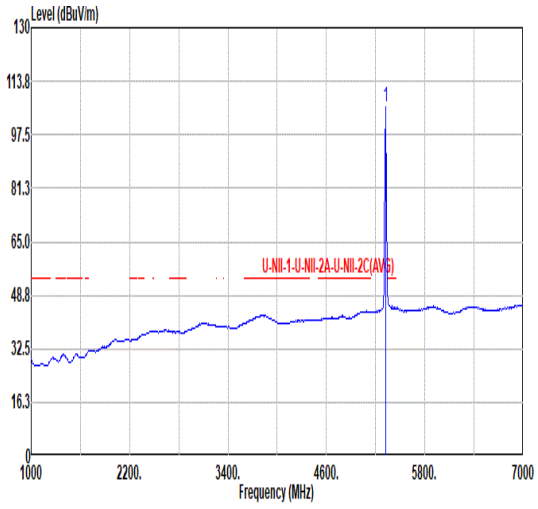 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 105.93 ------ ------ 95.97 34.60 11.95 36.59 0.00 256 360 AVERAGE

Mode	69	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11BE EHT20_CH64_Small RU Index 54+4_5320MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	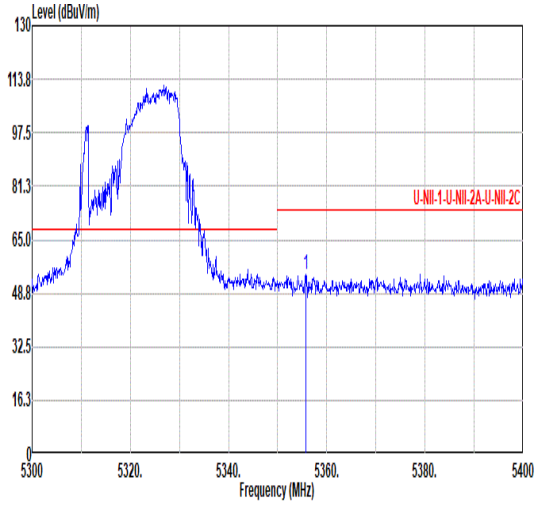 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5355.80 54.36 74.00 -19.64 44.30 34.60 11.97 36.51 0.00 193 0 PEAK	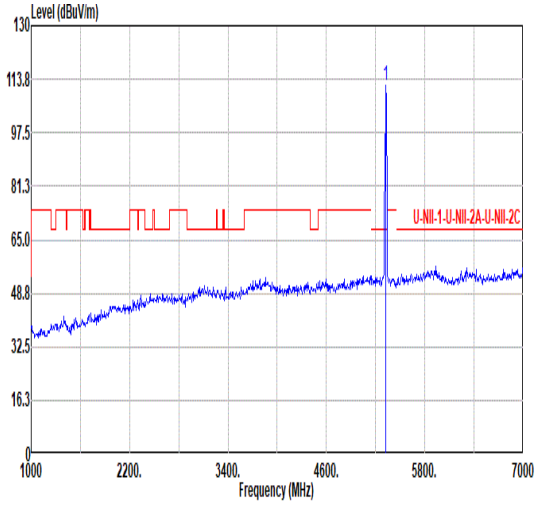 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 111.96 ------ ------ 101.99 34.60 11.95 36.58 0.00 193 0 PEAK
Avg	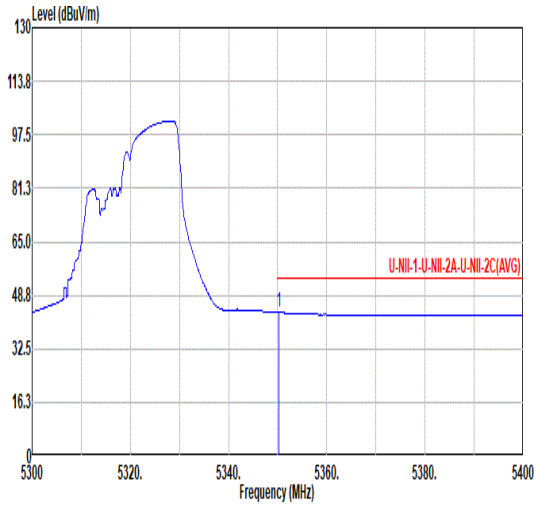 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.20 43.54 54.00 -10.46 33.49 34.60 11.97 36.52 0.00 193 0 AVERAGE	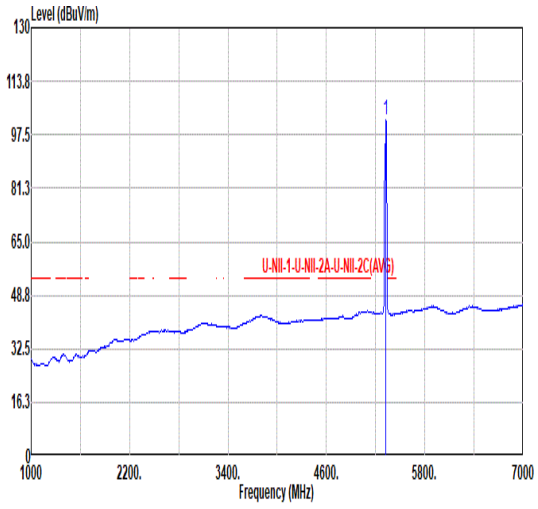 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 101.80 ------ ------ 91.83 34.60 11.95 36.58 0.00 193 0 AVERAGE

Mode	69	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11BE EHT20_CH64_Small RU Index 54+4_5320MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	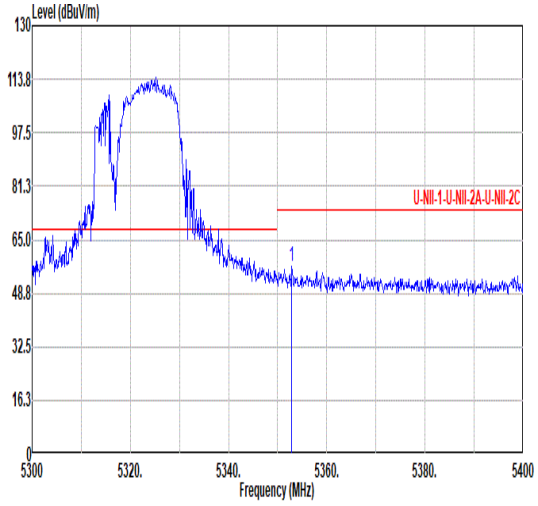 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5352.90 56.95 74.00 -17.05 46.89 34.60 11.97 36.51 0.00 257 360 PEAK	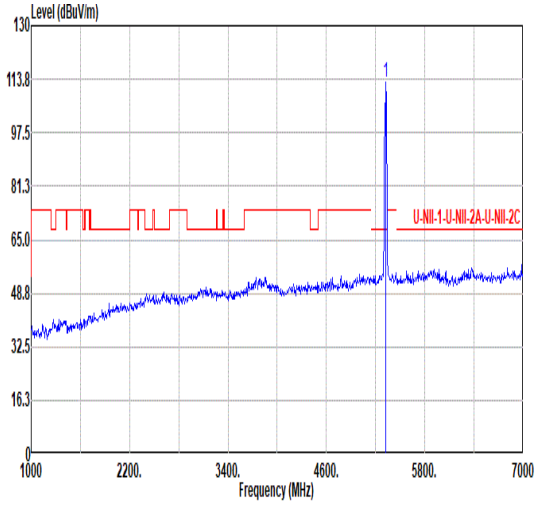 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 112.70 ------ ------ 102.74 34.60 11.95 36.59 0.00 257 360 PEAK
Avg	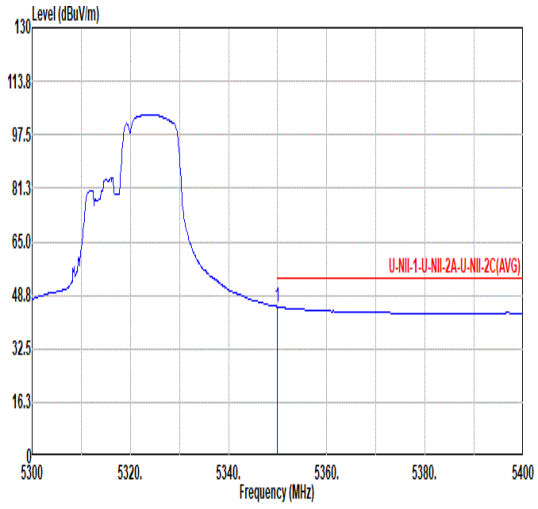 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.00 45.28 54.00 -8.72 35.23 34.60 11.97 36.52 0.00 257 360 AVERAGE	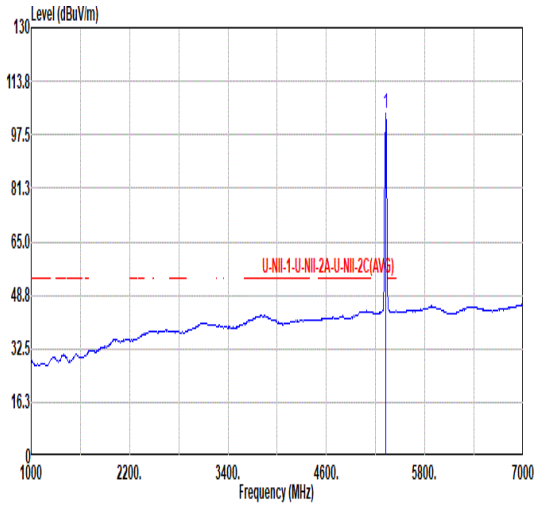 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 103.81 ------ ------ 93.84 34.60 11.95 36.58 0.00 257 360 AVERAGE

Mode	70	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11BE EHT20_CH100_Small RU Index 38+1_5500MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	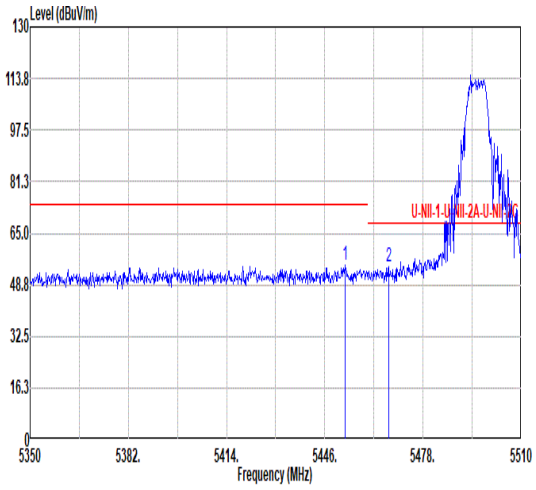 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5452.56 55.04 74.00 -18.96 44.70 34.69 12.09 36.44 0.00 388 23 PEAK 2 5466.80 54.50 68.20 -13.70 44.21 34.63 12.11 36.45 0.00 388 23 PEAK	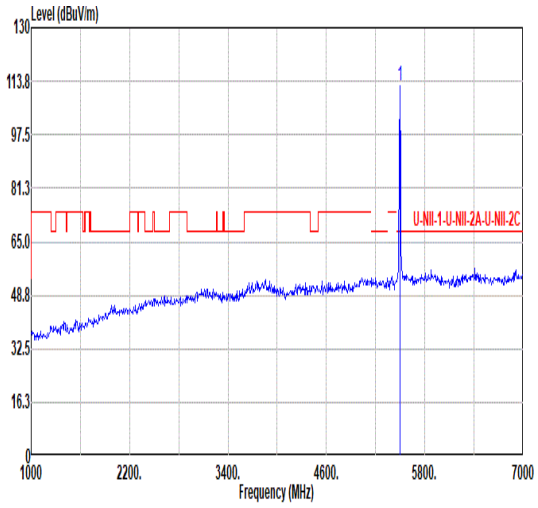 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 112.42 ------ ------ 102.22 34.52 12.15 36.47 0.00 388 23 PEAK
Avg	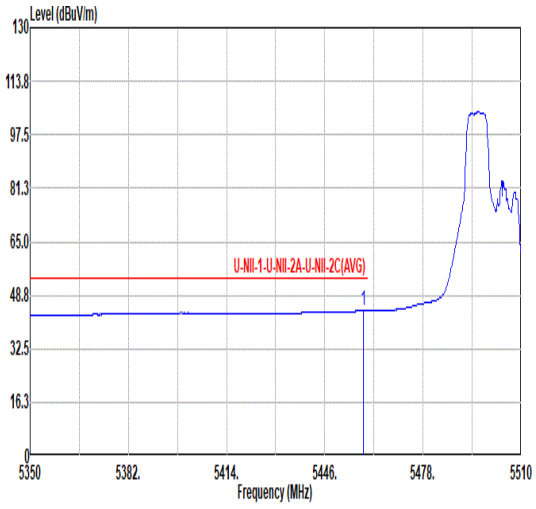 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.64 44.01 54.00 -9.99 33.68 34.67 12.10 36.44 0.00 388 23 AVERAGE	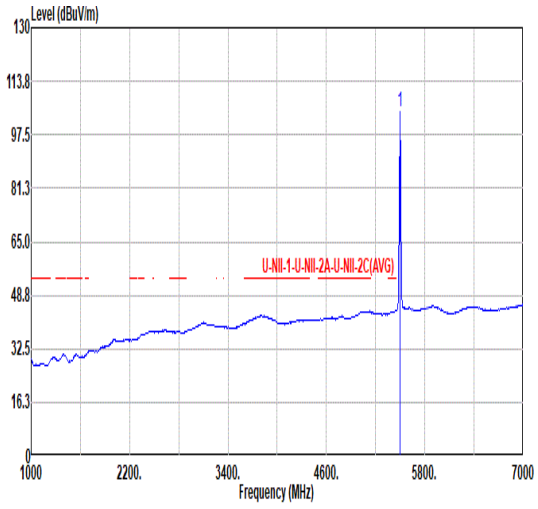 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 104.37 ------ ------ 94.17 34.52 12.15 36.47 0.00 388 23 AVERAGE

Mode	70	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11BE EHT20_CH100_Small RU Index 38+1_5500MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	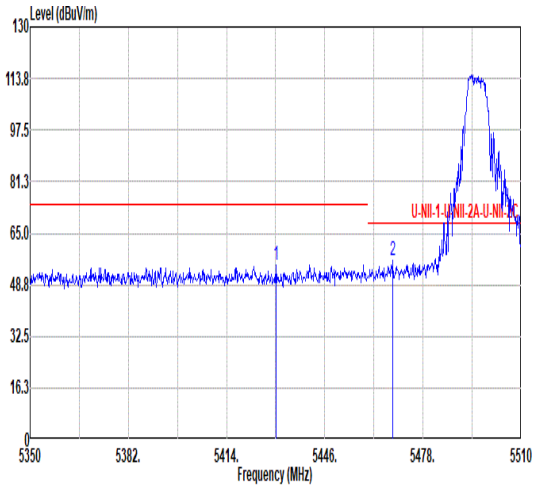 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5430.16 54.92 74.00 -19.08 44.62 34.66 12.06 36.42 0.00 300 12 PEAK 2 5468.08 56.45 68.20 -11.75 46.16 34.63 12.11 36.45 0.00 300 12 PEAK	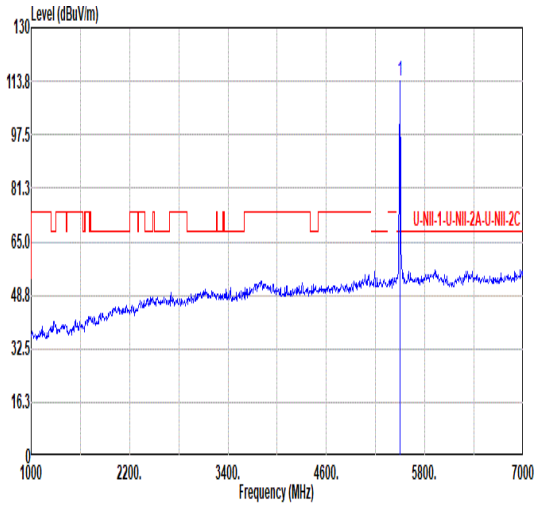 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 113.95 ------ ------ 103.75 34.52 12.15 36.47 0.00 300 12 PEAK
Avg	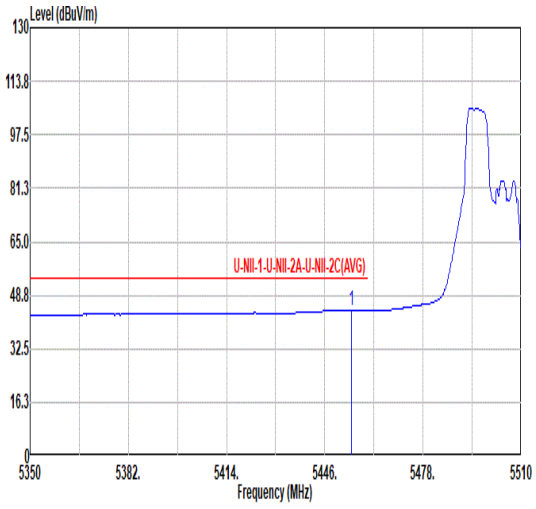 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5454.80 44.30 54.00 -9.70 33.97 34.68 12.09 36.44 0.00 300 12 AVERAGE	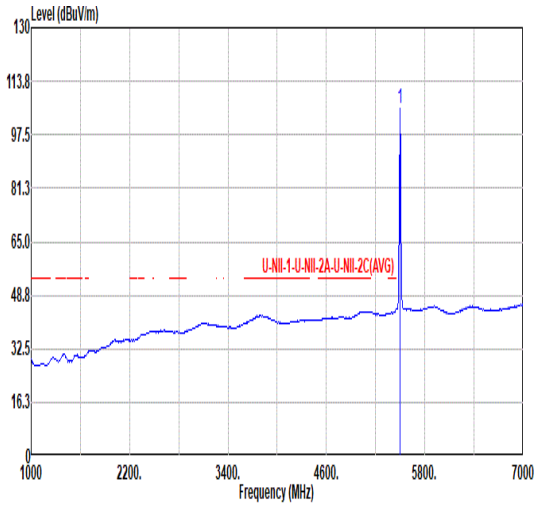 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 105.67 ------ ------ 95.47 34.52 12.15 36.47 0.00 300 12 AVERAGE

Mode	71	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11BE EHT20_CH100_Small RU Index 53+4_5500MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	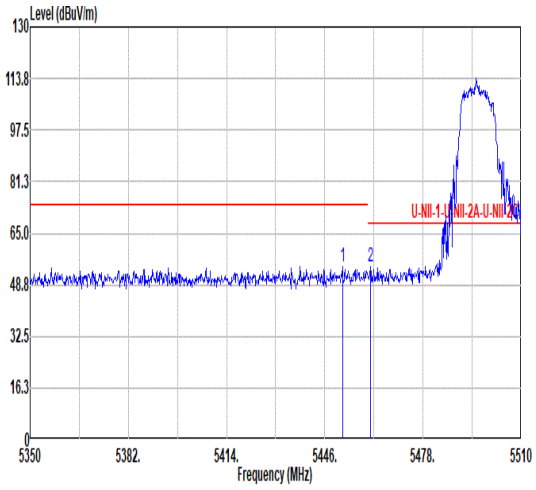 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5451.76 54.62 74.00 -19.38 44.28 34.69 12.09 36.44 0.00 333 24 PEAK 2 5460.88 54.43 68.20 -13.77 44.11 34.66 12.10 36.44 0.00 333 24 PEAK	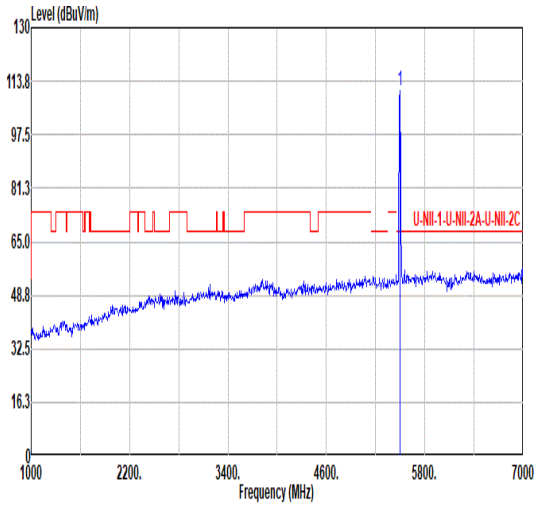 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 110.72 ------ ------ 100.52 34.52 12.15 36.47 0.00 333 24 PEAK
Avg	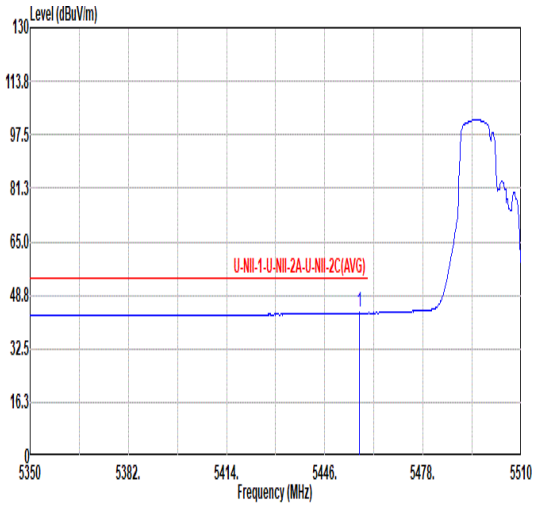 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5457.20 43.42 54.00 -10.58 33.09 34.67 12.10 36.44 0.00 333 24 AVERAGE	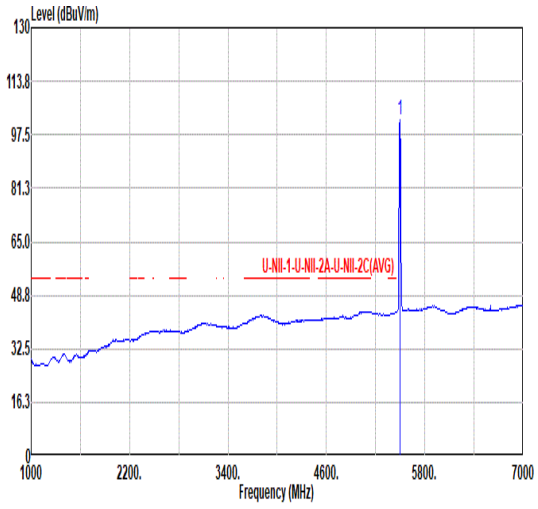 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 102.24 ------ ------ 92.04 34.52 12.15 36.47 0.00 333 24 AVERAGE

Mode	71	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11BE EHT20_CH100_Small RU Index 53+4_5500MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	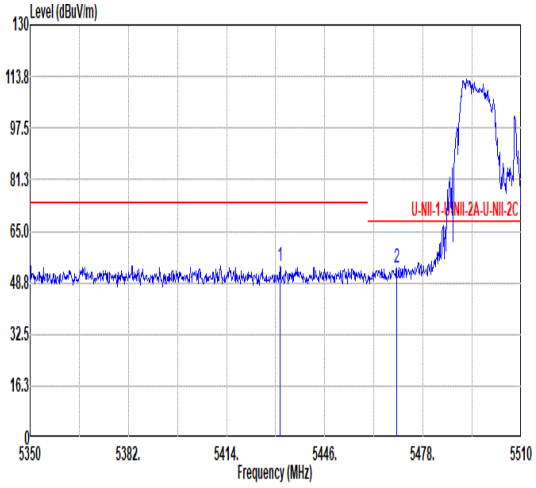 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5431.44 54.12 74.00 -19.88 43.82 34.66 12.06 36.42 0.00 298 9 PEAK 2 5469.36 53.23 68.20 -14.97 42.95 34.62 12.11 36.45 0.00 298 9 PEAK	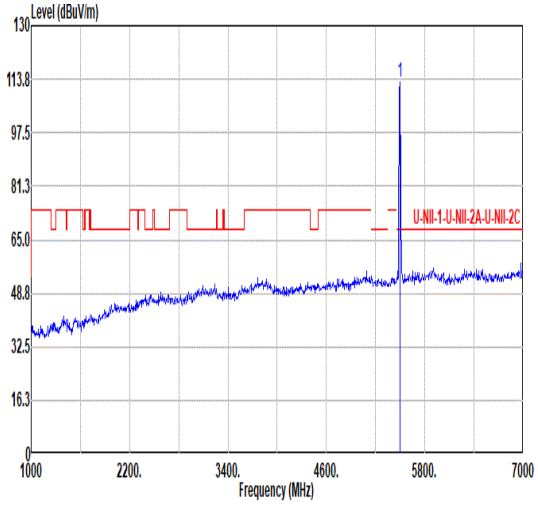 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 112.94 ------ ------ 102.74 34.52 12.15 36.47 0.00 298 9 PEAK
Avg	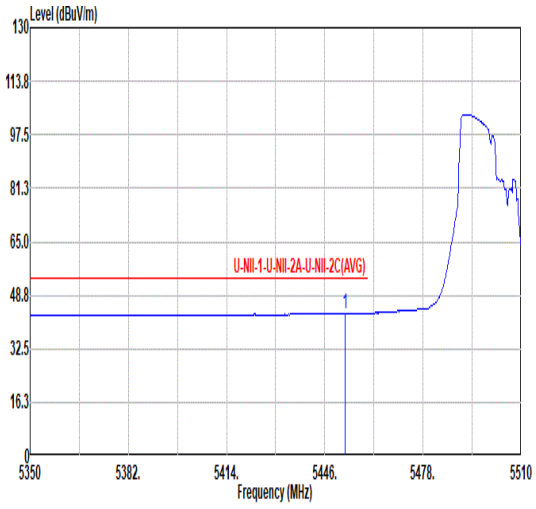 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5452.72 43.37 54.00 -10.63 33.03 34.69 12.09 36.44 0.00 298 9 AVERAGE	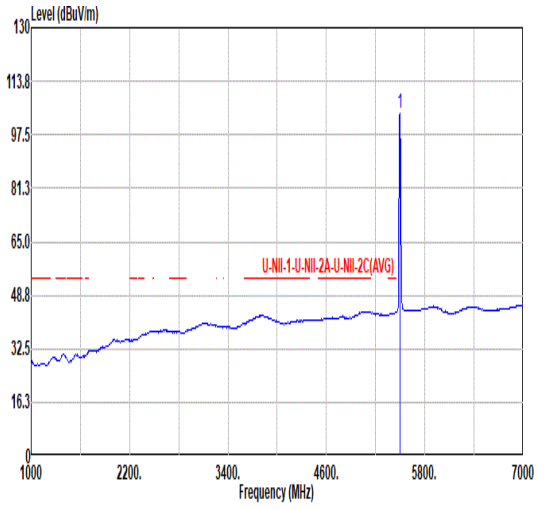 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 103.80 ------ ------ 93.60 34.52 12.15 36.47 0.00 298 9 AVERAGE

Mode	72	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11BE EHT20_CH140_Small RU Index 39+7_5700MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	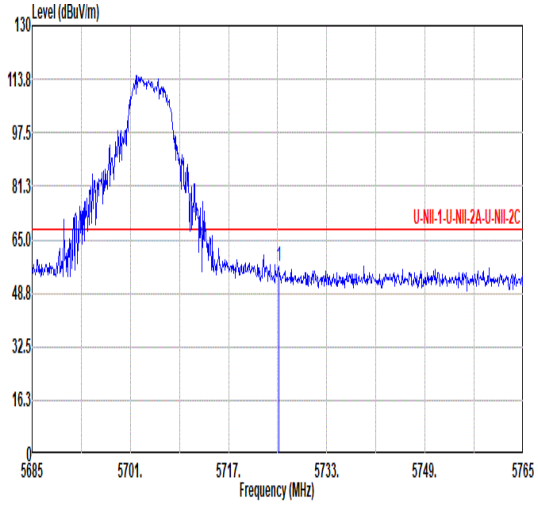 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5725.16 56.79 68.20 -11.41 46.12 34.65 12.42 36.40 0.00 166 360 PEAK	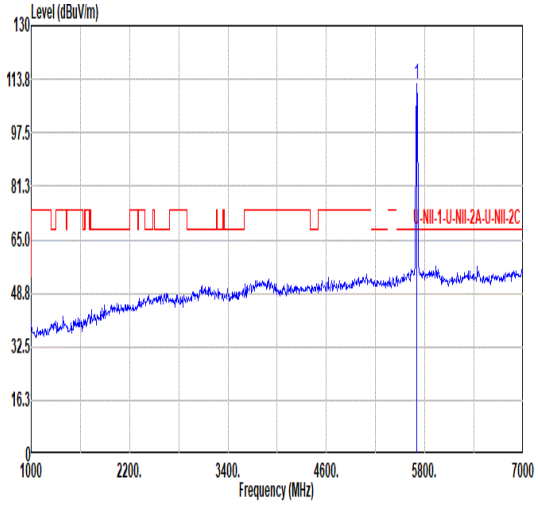 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 112.21 ------ ------ 101.56 34.61 12.40 36.36 0.00 166 360 PEAK
Avg	Blank	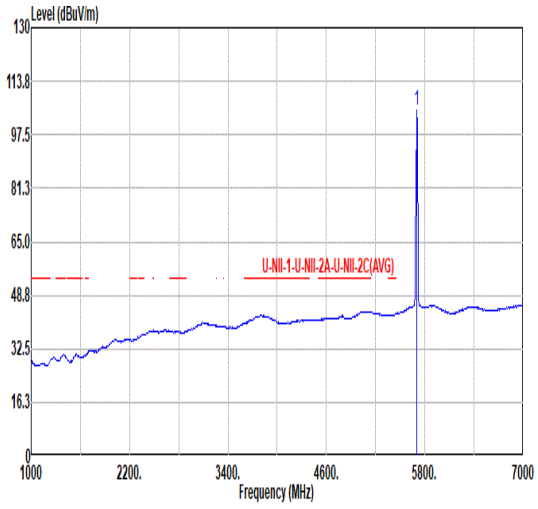 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 104.79 ------ ------ 94.14 34.61 12.40 36.36 0.00 166 360 AVERAGE

Mode	72	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11BE EHT20_CH140_Small RU Index 39+7_5700MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	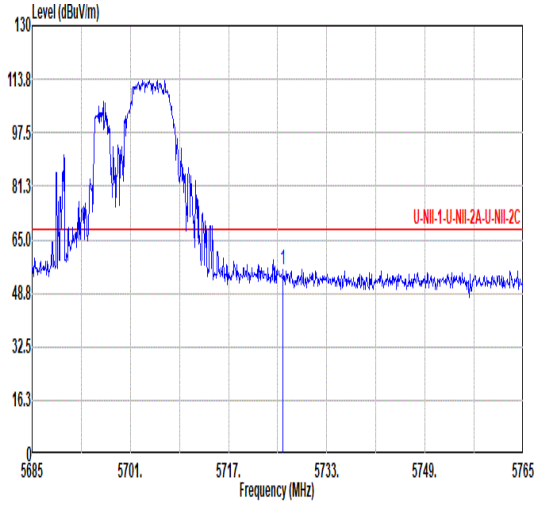 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5725.88 56.10 68.20 -12.10 45.43 34.65 12.42 36.40 0.00 296 25 PEAK	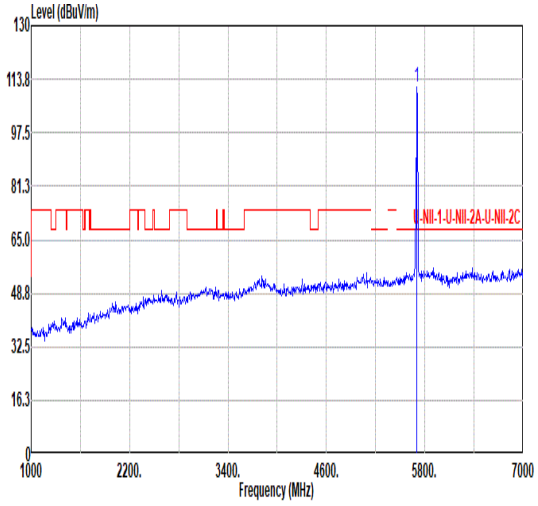 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 111.57 ------ ------ 100.92 34.61 12.40 36.36 0.00 296 25 PEAK
Avg	Blank	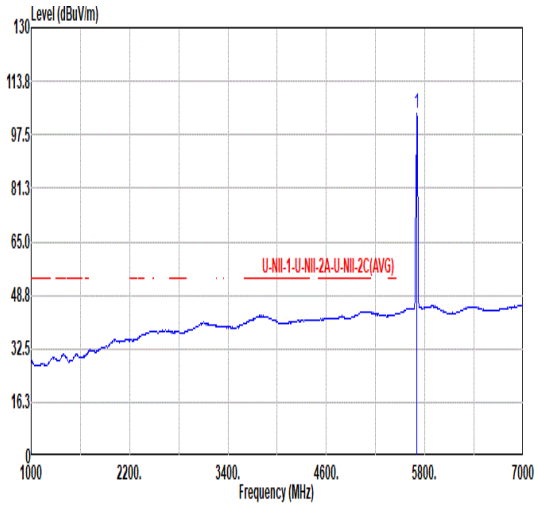 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 103.91 ------ ------ 93.26 34.61 12.40 36.36 0.00 296 25 AVERAGE

Mode	73	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11BE EHT20_CH140_Small RU Index 54+4_5700MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	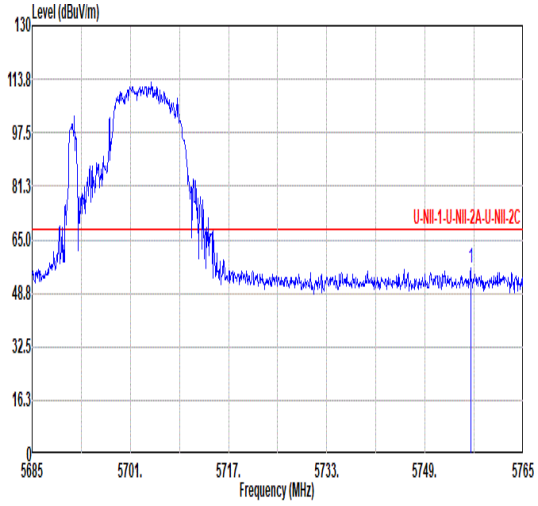 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5756.44 56.56 68.20 -11.64 45.82 34.74 12.45 36.45 0.00 166 360 PEAK	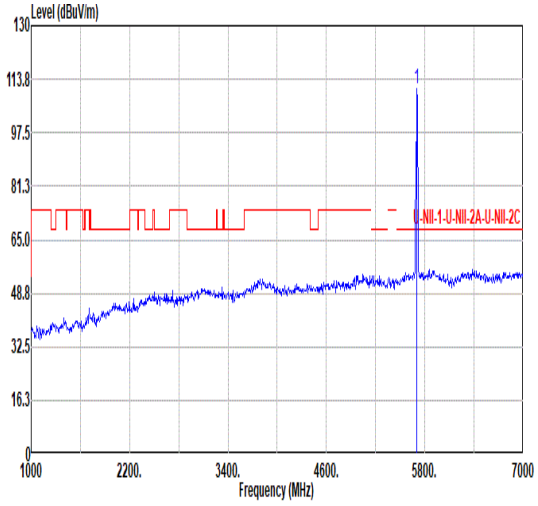 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 110.79 ------ ------ 100.14 34.61 12.40 36.36 0.00 166 360 PEAK
Avg	Blank	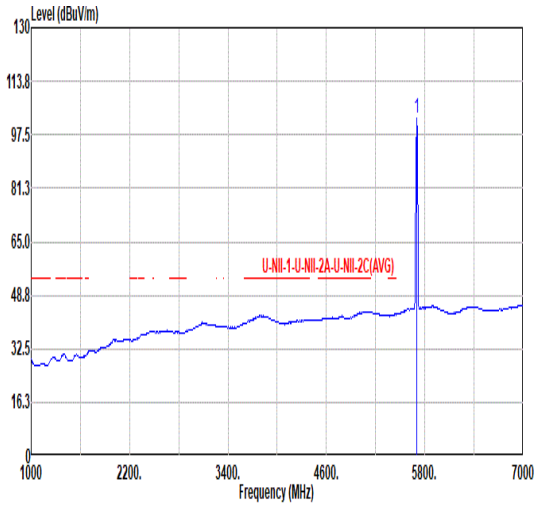 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 102.51 ------ ------ 91.86 34.61 12.40 36.36 0.00 166 360 AVERAGE

Mode	73	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11BE EHT20_CH140_Small RU Index 54+4_5700MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	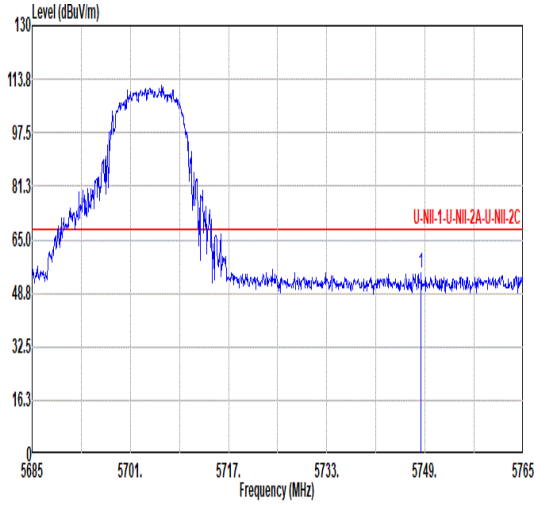 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5748.36 55.14 68.20 -13.06 44.44 34.70 12.44 36.44 0.00 297 25 PEAK	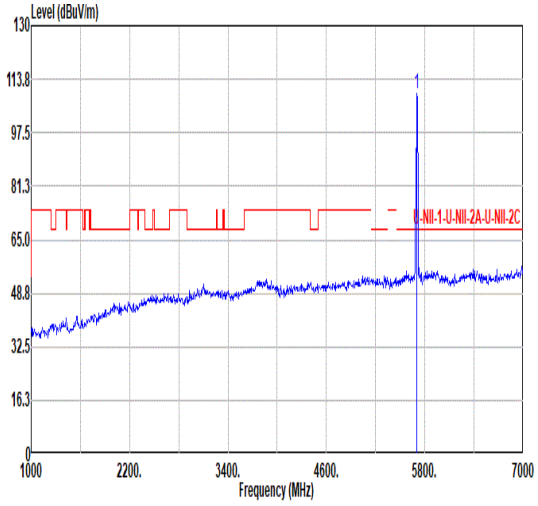 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 109.21 ------ ------ 98.56 34.61 12.40 36.36 0.00 297 25 PEAK
Avg	Blank	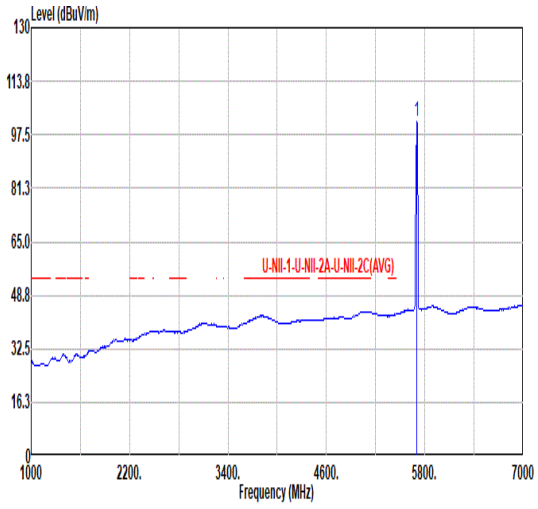 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 101.52 ------ ------ 90.87 34.61 12.40 36.36 0.00 297 25 AVERAGE

Mode	74	
	Band Edge	
	U-NII-3_5.725-5.85_802.11BE EHT20_CH149_Small RU Index 38+1_5745MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	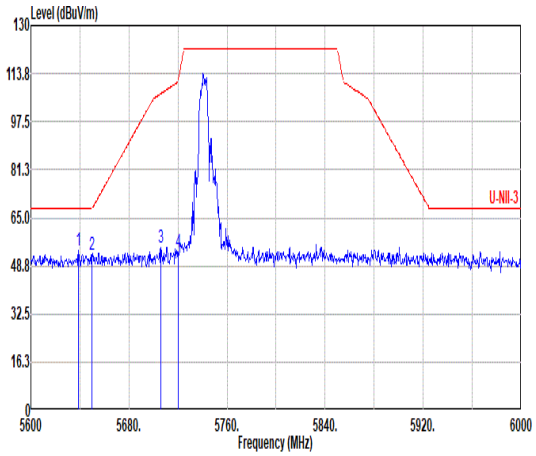 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5638.80 53.83 68.20 -14.37 43.28 34.50 12.34 36.29 0.00 110 360 PEAK 2 5650.00 52.63 68.20 -15.57 42.09 34.50 12.35 36.31 0.00 110 360 PEAK 3 5706.00 54.74 106.98 -52.24 44.08 34.61 12.41 36.36 0.00 110 360 PEAK 4 5720.40 53.54 111.81 -58.27 42.87 34.64 12.42 36.39 0.00 110 360 PEAK	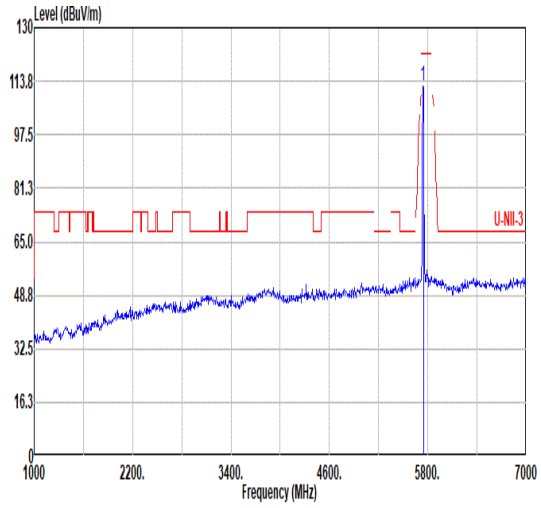 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 112.18 ------ ------ 101.48 34.68 12.44 36.42 0.00 110 360 PEAK
Avg	Blank	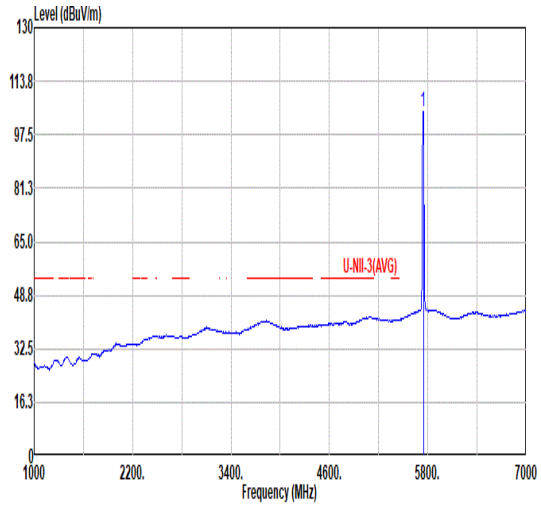 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 104.30 ------ ------ 93.60 34.68 12.44 36.42 0.00 110 360 AVERAGE

Mode	74	
	Band Edge	
	U-NII-3_5.725-5.85_802.11BE EHT20_CH149_Small RU Index 38+1_5745MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	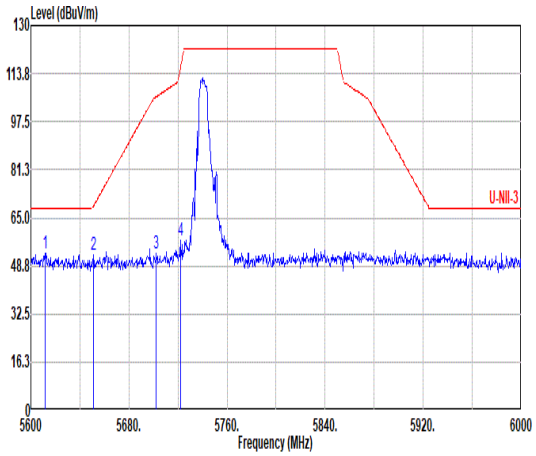 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5611.60 53.03 68.20 -15.17 42.48 34.50 12.32 36.27 0.00 366 346 PEAK 2 5650.80 52.51 68.80 -16.29 41.96 34.50 12.36 36.31 0.00 366 346 PEAK 3 5702.40 52.79 105.97 -53.18 42.14 34.60 12.40 36.35 0.00 366 346 PEAK 4 5722.00 57.52 115.46 -57.94 46.85 34.64 12.42 36.39 0.00 366 346 PEAK	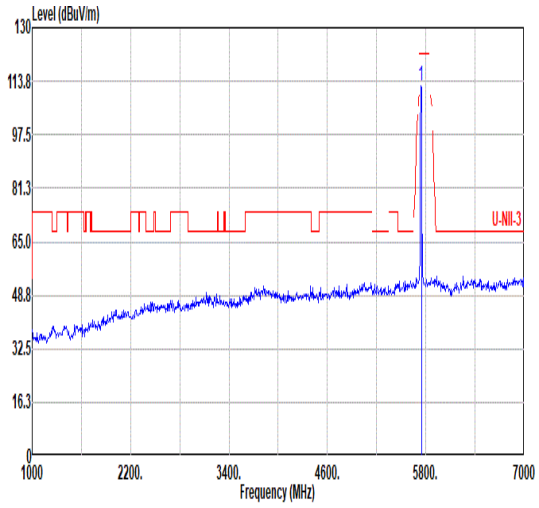 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 112.21 ------ ------ 101.51 34.68 12.44 36.42 0.00 366 346 PEAK
Avg	Blank	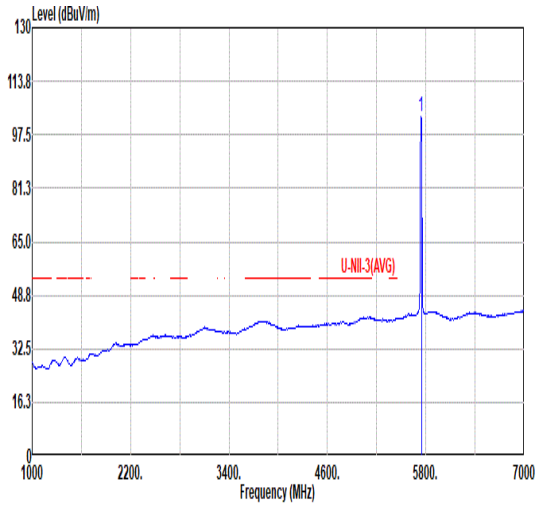 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 102.89 ------ ------ 92.19 34.68 12.44 36.42 0.00 366 346 AVERAGE

Mode	75	
	Band Edge	
	U-NII-3_5.725-5.85_802.11BE EHT20_CH149_Small RU Index 53+4_5745MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	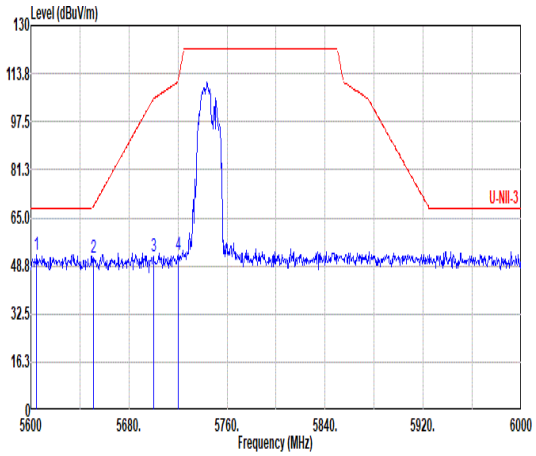 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5604.80 52.66 68.20 -15.54 42.11 34.50 12.31 36.26 0.00 108 0 PEAK 2 5650.80 51.40 68.80 -17.40 40.85 34.50 12.36 36.31 0.00 108 0 PEAK 3 5700.00 52.21 105.30 -53.09 41.56 34.60 12.40 36.35 0.00 108 0 PEAK 4 5720.00 52.73 110.90 -58.17 42.06 34.64 12.42 36.39 0.00 108 0 PEAK	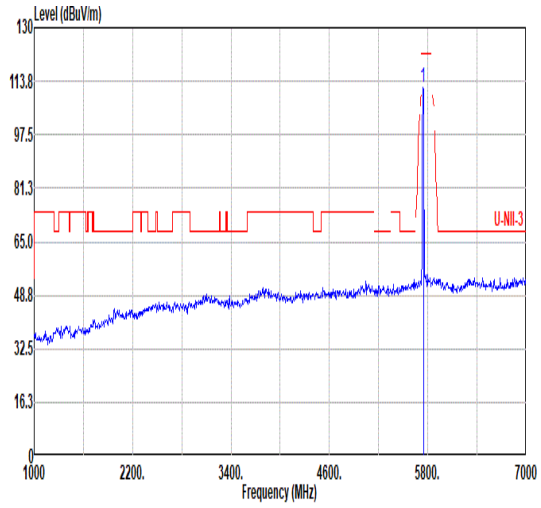 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 111.75 ------ ------ 101.05 34.68 12.44 36.42 0.00 108 0 PEAK
Avg	Blank	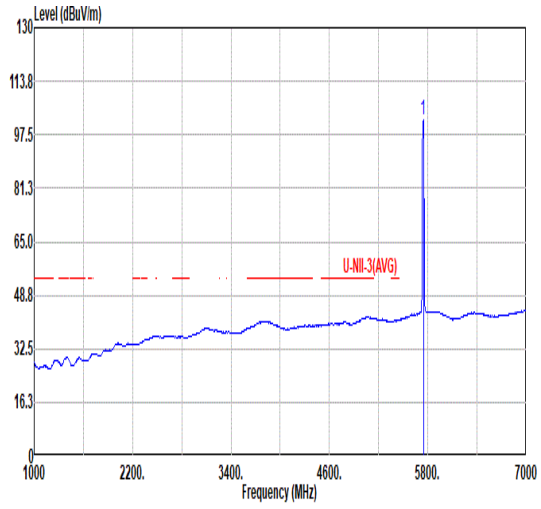 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 102.15 ------ ------ 91.45 34.69 12.44 36.43 0.00 108 0 AVERAGE

Mode	75	
	Band Edge	
	U-NII-3_5.725-5.85_802.11BE EHT20_CH149_Small RU Index 53+4_5745MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	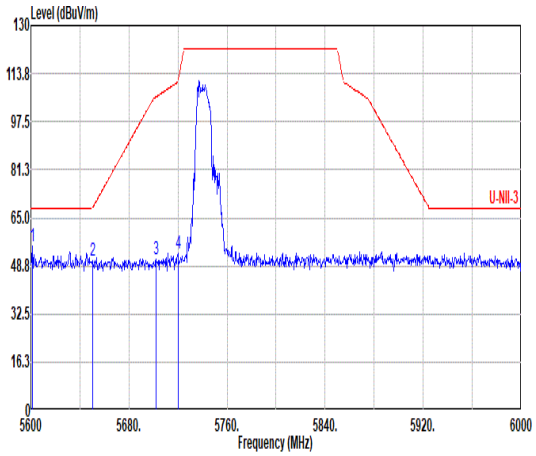 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5601.20 55.30 68.20 -12.90 44.75 34.50 12.31 36.26 0.00 381 343 PEAK 2 5650.40 50.33 68.50 -18.17 39.78 34.50 12.36 36.31 0.00 381 343 PEAK 3 5702.00 50.95 105.86 -54.91 40.30 34.60 12.40 36.35 0.00 381 343 PEAK 4 5720.00 52.76 110.90 -58.14 42.09 34.64 12.42 36.39 0.00 381 343 PEAK	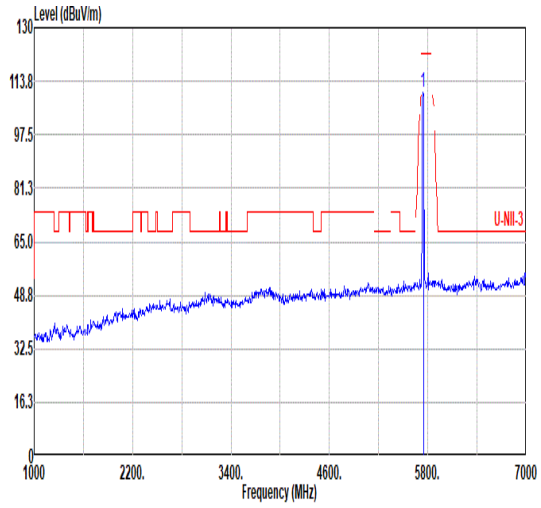 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 110.29 ------ ------ 99.59 34.68 12.44 36.42 0.00 381 343 PEAK
Avg	Blank	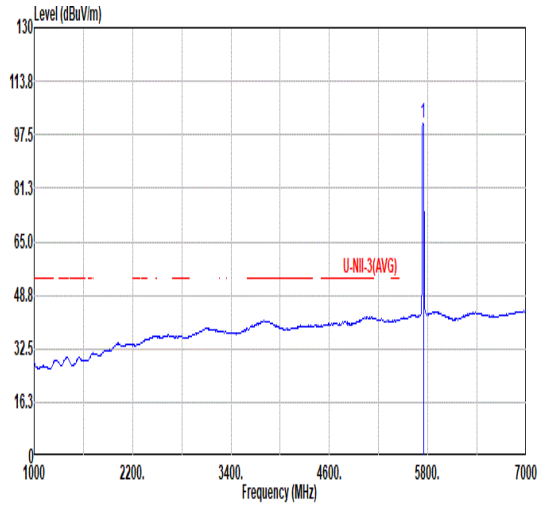 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 100.83 ------ ------ 90.13 34.68 12.44 36.42 0.00 381 343 AVERAGE

Mode	76	
	Band Edge	
	U-NII-3_5.725-5.85_802.11BE EHT20_CH165_Small RU Index 39+7_5825MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	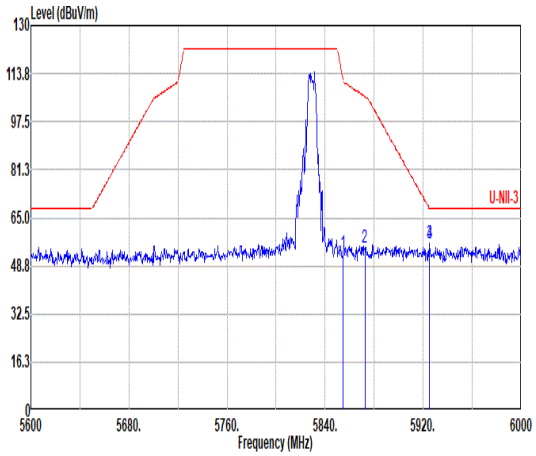 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 53.15 111.36 -58.21 42.10 35.12 12.56 36.63 0.00 143 360 PEAK 2 5872.40 55.15 106.03 -50.88 44.03 35.19 12.59 36.66 0.00 143 360 PEAK 3 5924.80 56.55 68.35 -11.80 45.41 35.30 12.66 36.82 0.00 143 360 PEAK 4 5925.20 56.48 68.20 -11.72 45.34 35.30 12.66 36.82 0.00 143 360 PEAK	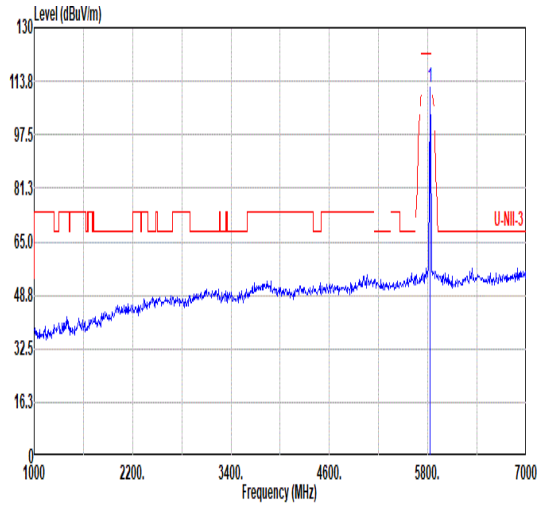 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 111.79 ------ ------ 100.78 35.06 12.53 36.58 0.00 143 360 PEAK
Avg	Blank	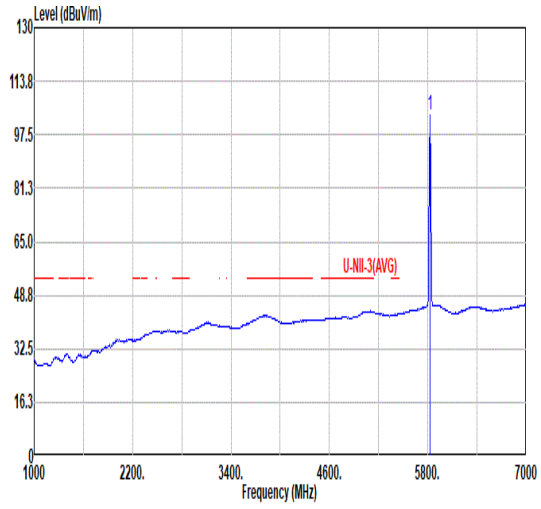 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 103.49 ------ ------ 92.48 35.06 12.53 36.58 0.00 143 360 AVERAGE

Mode	76	
	Band Edge	
	U-NII-3_5.725-5.85_802.11BE EHT20_CH165_Small RU Index 39+7_5825MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	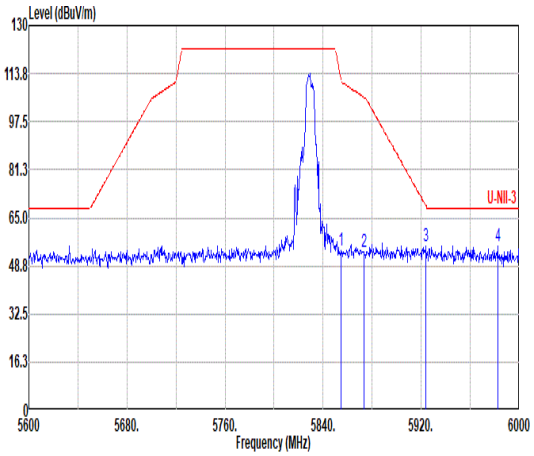 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.40 54.16 112.27 -58.11 43.11 35.12 12.56 36.63 0.00 297 24 PEAK 2 5873.20 53.55 105.80 -52.25 42.43 35.19 12.59 36.66 0.00 297 24 PEAK 3 5924.00 55.23 68.94 -13.71 44.09 35.30 12.66 36.82 0.00 297 24 PEAK 4 5982.40 55.26 68.20 -12.94 44.30 35.30 12.74 37.08 0.00 297 24 PEAK	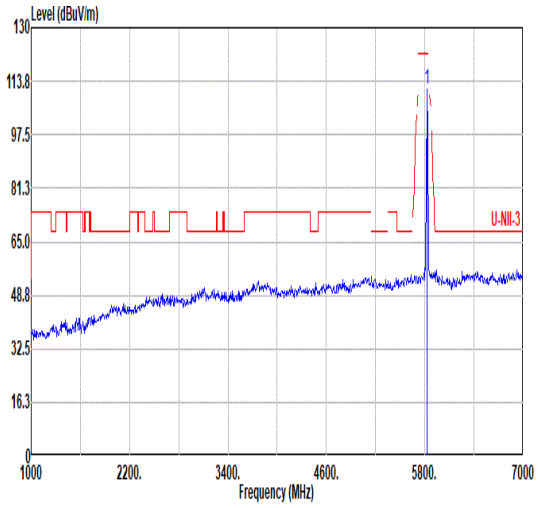 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 111.58 ------ ------ 100.57 35.06 12.53 36.58 0.00 297 24 PEAK
Avg	Blank	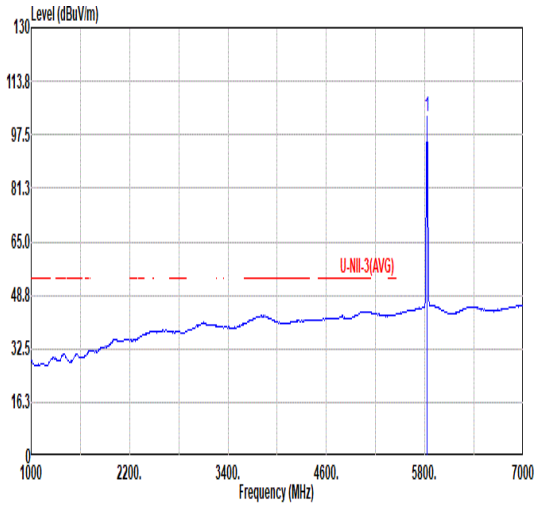 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 103.05 ------ ------ 92.04 35.06 12.53 36.58 0.00 297 24 AVERAGE

Mode	77	
	Band Edge	
	U-NII-3_5.725-5.85_802.11BE EHT20_CH165_Small RU Index 54+4_5825MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	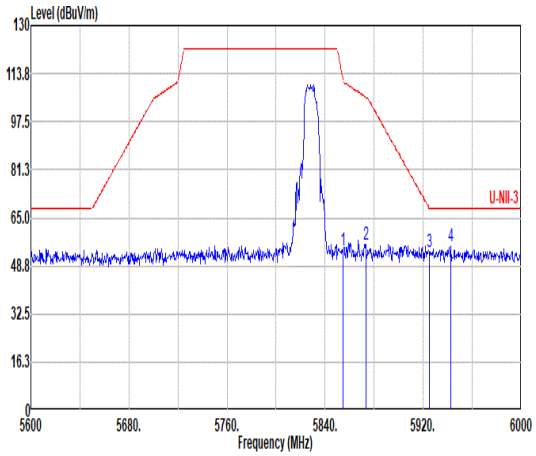 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 53.82 111.36 -57.54 42.77 35.12 12.56 36.63 0.00 142 360 PEAK 2 5873.20 55.74 105.80 -50.06 44.62 35.19 12.59 36.66 0.00 142 360 PEAK 3 5924.80 53.66 68.35 -14.69 42.52 35.30 12.66 36.82 0.00 142 360 PEAK 4 5942.40 55.29 68.20 -12.91 44.21 35.30 12.68 36.90 0.00 142 360 PEAK	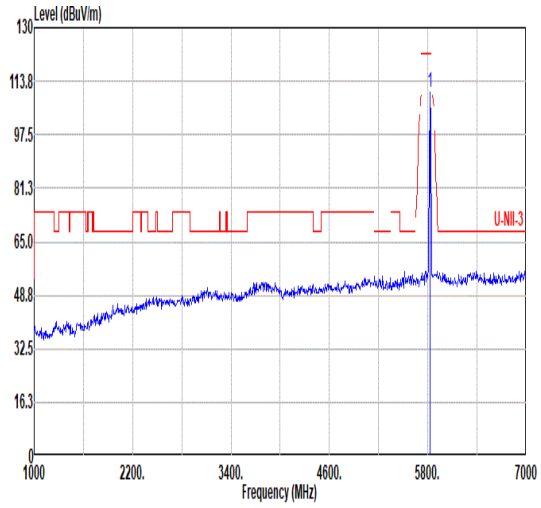 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 110.51 ------ ------ 99.50 35.06 12.53 36.58 0.00 142 360 PEAK
Avg	Blank	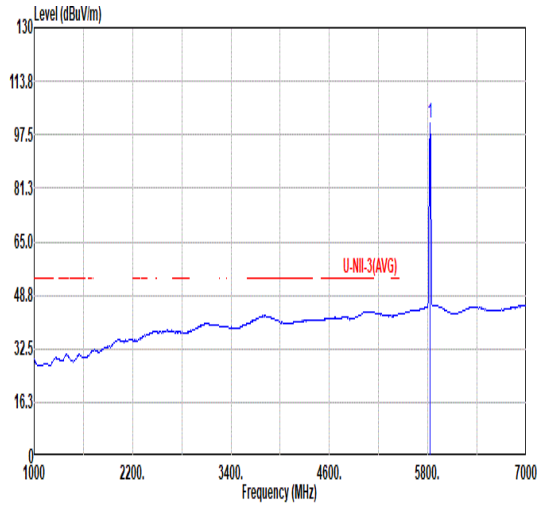 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 101.22 ------ ------ 90.22 35.05 12.52 36.57 0.00 142 360 AVERAGE

Mode	77	
	Band Edge	
	U-NII-3_5.725-5.85_802.11BE EHT20_CH165_Small RU Index 54+4_5825MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	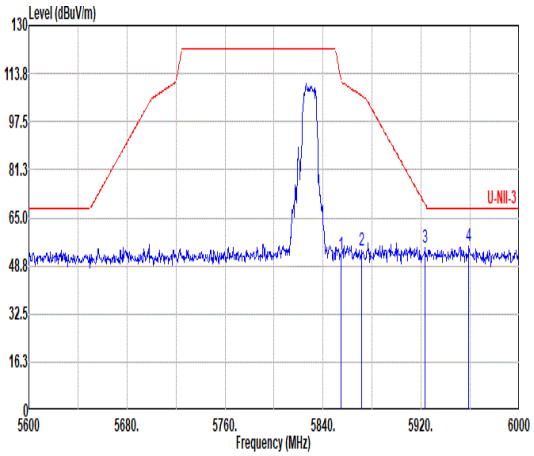 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 52.69 111.36 -58.67 41.64 35.12 12.56 36.63 0.00 297 25 PEAK 2 5871.20 53.79 106.36 -52.57 42.68 35.18 12.59 36.66 0.00 297 25 PEAK 3 5923.20 54.87 69.53 -14.66 43.72 35.30 12.66 36.81 0.00 297 25 PEAK 4 5958.80 55.45 68.20 -12.75 44.42 35.30 12.70 36.97 0.00 297 25 PEAK	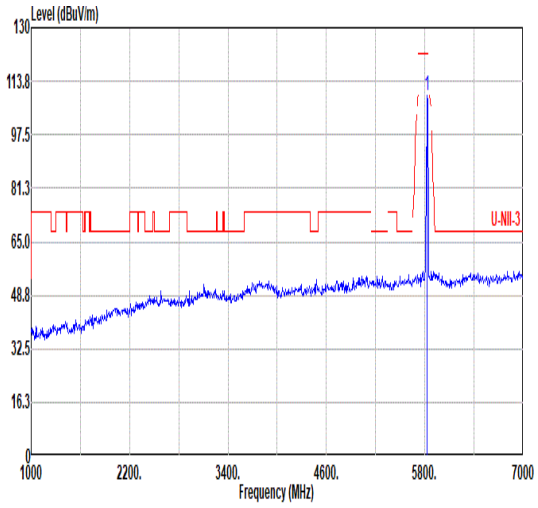 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 109.28 ------ ------ 98.27 35.06 12.53 36.58 0.00 297 25 PEAK
Avg	Blank	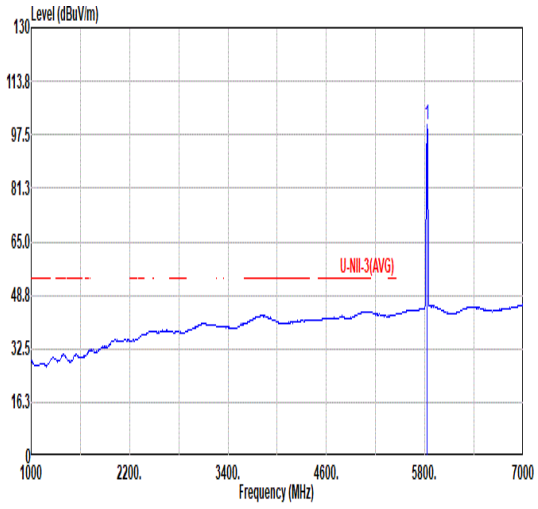 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 100.49 ------ ------ 89.48 35.06 12.53 36.58 0.00 297 25 AVERAGE

Mode	78	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11BE EHT80_CH42_Puncturing 20M ❹_5210MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	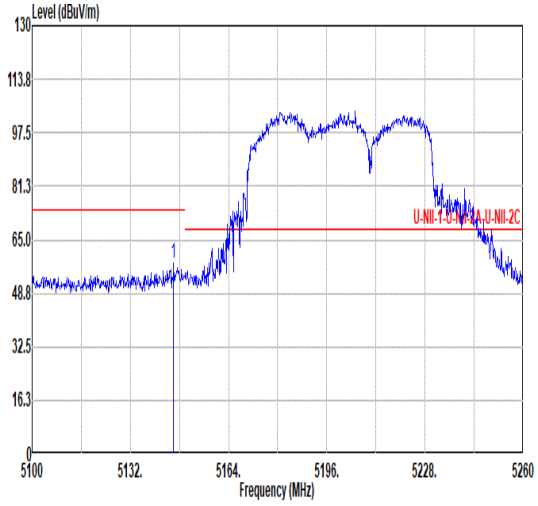 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5146.08 57.70 74.00 -16.30 48.83 34.09 11.80 37.02 0.00 227 360 PEAK	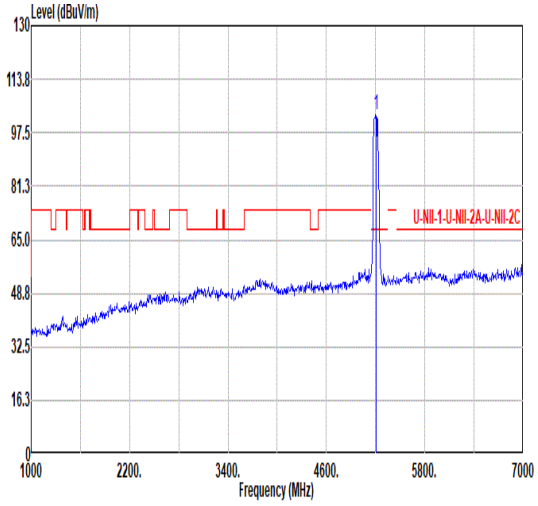 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5210.00 102.99 ------ ------ 94.00 34.30 11.85 37.16 0.00 227 360 PEAK
Avg	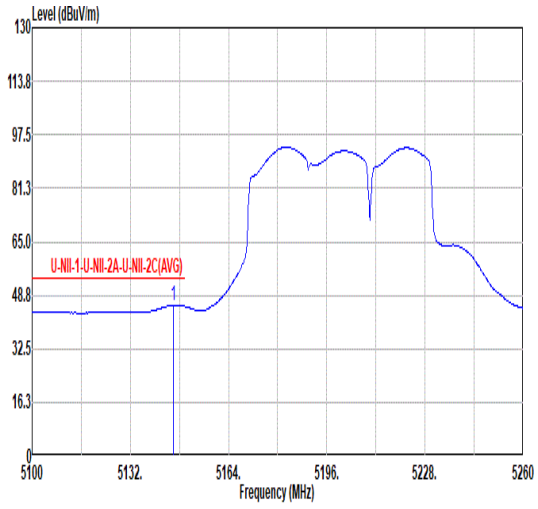 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5146.08 45.71 54.00 -8.29 36.84 34.09 11.80 37.02 0.00 227 360 AVERAGE	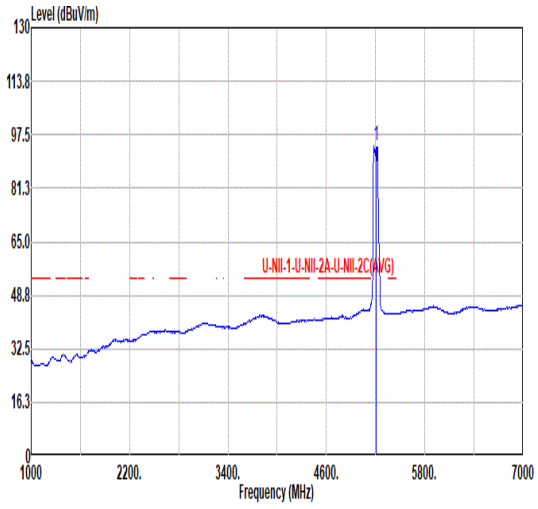 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5210.00 94.04 ------ ------ 85.09 34.23 11.83 37.11 0.00 227 360 AVERAGE

Mode	78	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11BE EHT80_CH42_Puncturing 20M ❹_5210MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	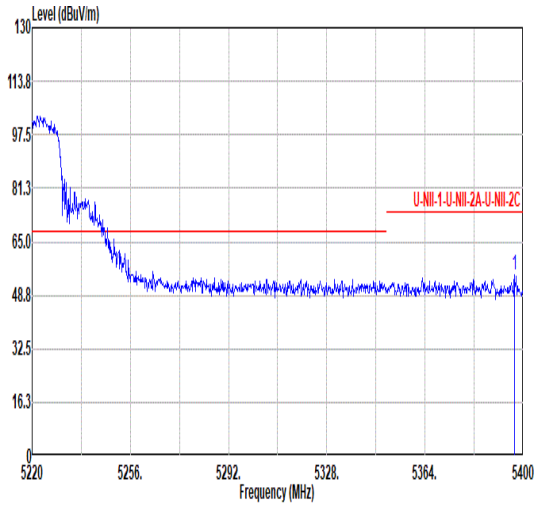 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5396.76 54.93 74.00 -19.07 44.73 34.60 12.01 36.41 0.00 227 360 PEAK	Blank
Avg	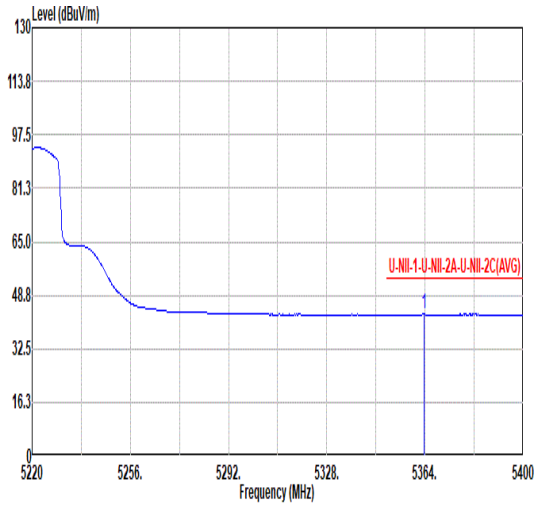 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5363.64 43.24 54.00 -10.76 33.15 34.60 11.98 36.49 0.00 227 360 AVERAGE	Blank

Mode	78	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11BE EHT80_CH42_Puncturing 20M ❹_5210MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	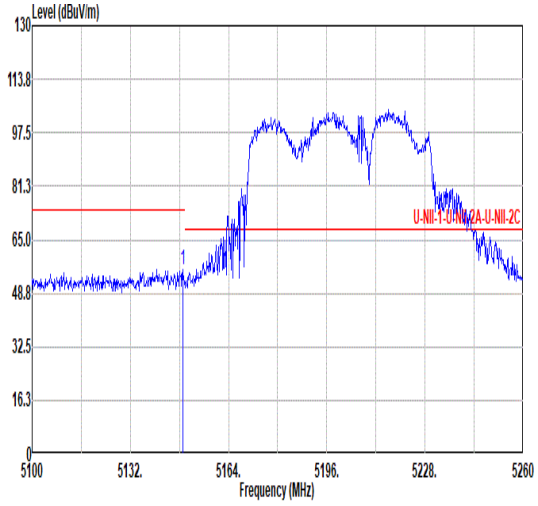 Limit Over Read Ant Cable Preamp Aux APos TPos Freq Level Line Limit Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.12 56.03 74.00 -17.97 47.16 34.10 11.80 37.03 0.00 266 0 PEAK	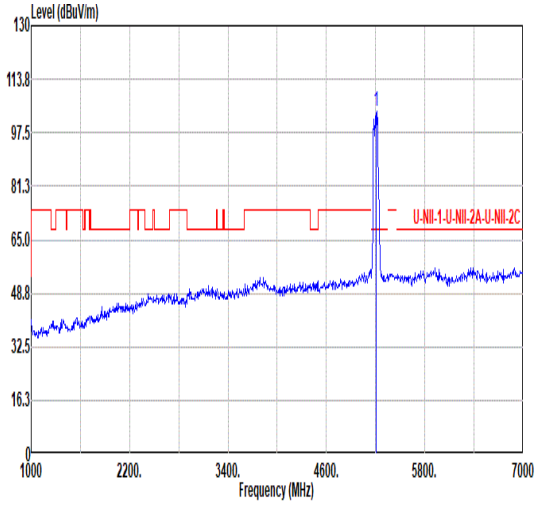 Limit Over Read Ant Cable Preamp Aux APos TPos Freq Level Line Limit Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5210.00 103.86 ------ ------ 94.70 34.37 11.86 37.07 0.00 266 0 PEAK
Avg	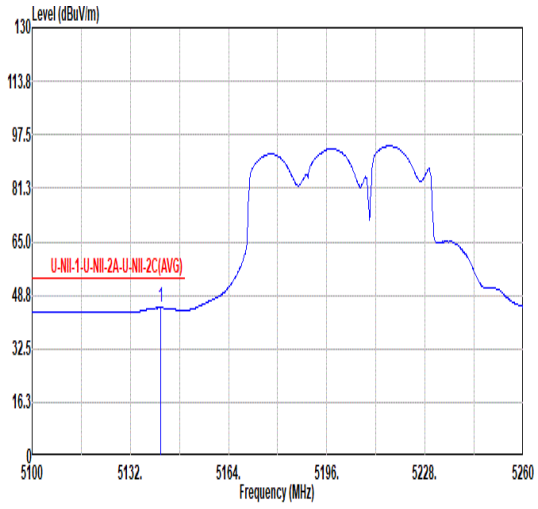 Limit Over Read Ant Cable Preamp Aux APos TPos Freq Level Line Limit Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5141.92 44.97 54.00 -9.03 36.11 34.08 11.79 37.01 0.00 266 0 AVERAGE	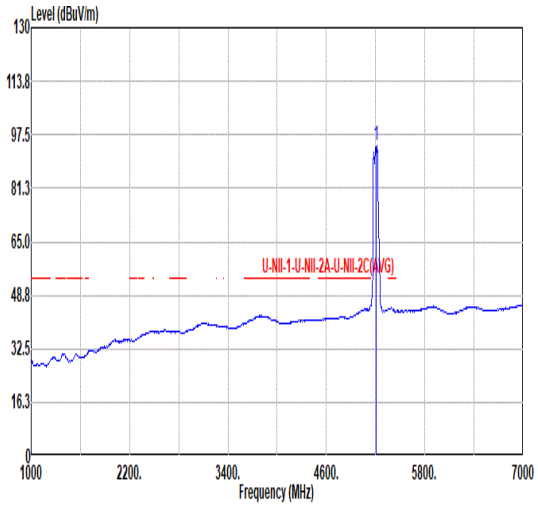 Limit Over Read Ant Cable Preamp Aux APos TPos Freq Level Line Limit Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5210.00 94.31 ------ ------ 85.15 34.37 11.86 37.07 0.00 266 0 AVERAGE

Mode	78	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11BE EHT80_CH42_Puncturing 20M ❹_5210MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	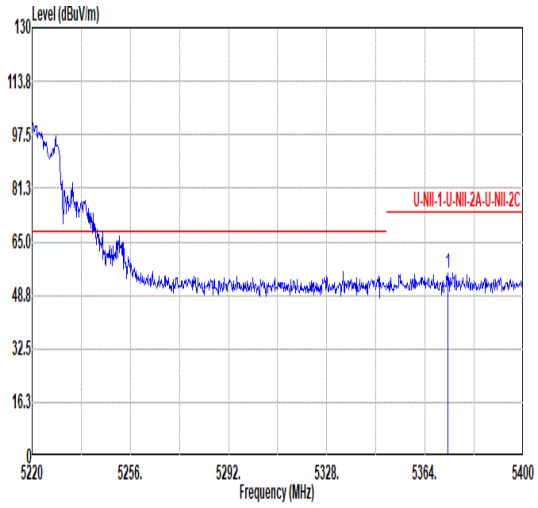 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5372.46 55.30 74.00 -18.70 45.18 34.60 11.99 36.47 0.00 266 0 PEAK	Blank
Avg	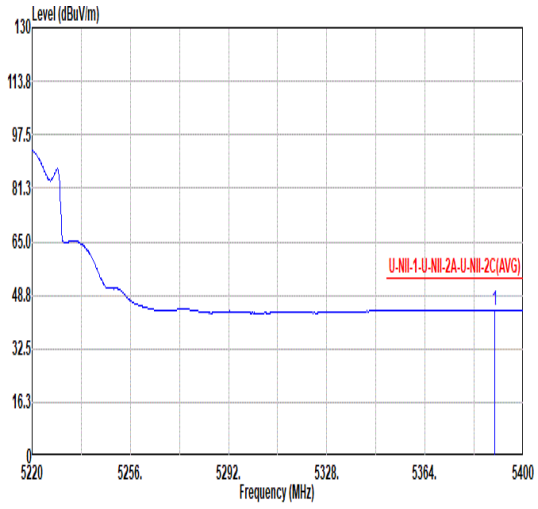 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5389.56 44.36 54.00 -9.64 34.19 34.60 12.00 36.43 0.00 266 0 AVERAGE	Blank

Mode	79	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11BE EHT80_CH58_Puncturing 20M ❶_5290MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	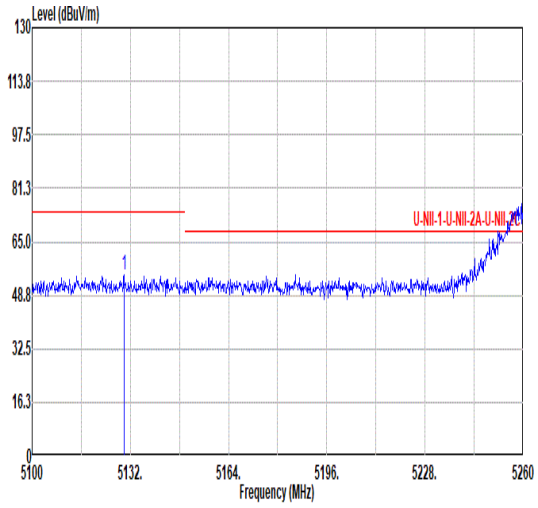 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5129.92 54.75 74.00 -19.25 45.89 34.06 11.78 36.98 0.00 271 360 PEAK	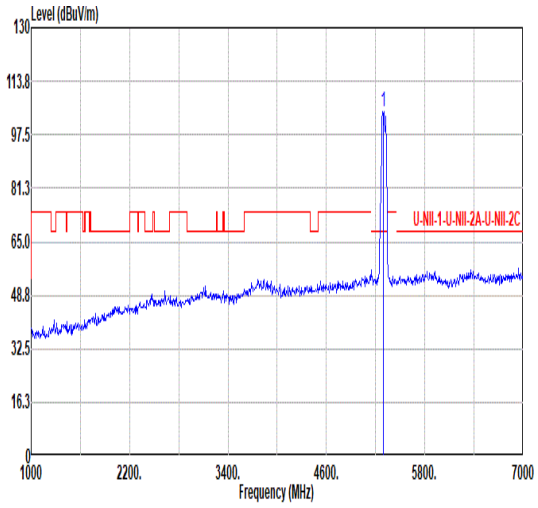 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5290.00 104.42 ------ ------ 94.53 34.60 11.93 36.64 0.00 271 360 PEAK
Avg	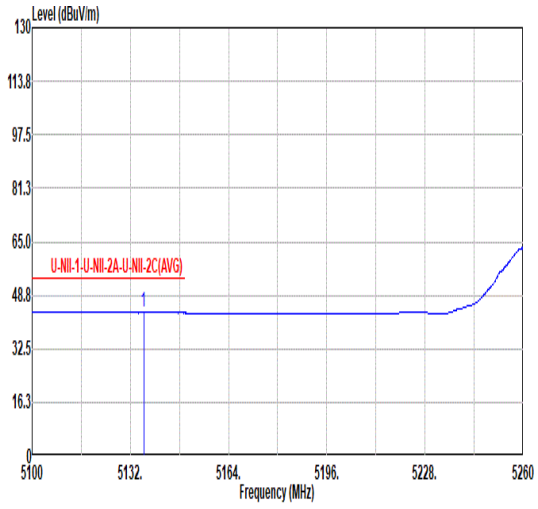 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5136.32 43.82 54.00 -10.18 34.95 34.07 11.79 36.99 0.00 271 360 AVERAGE	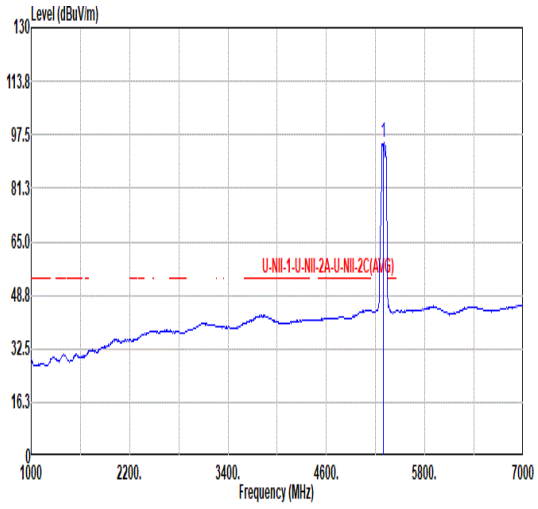 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5290.00 95.40 ------ ------ 85.51 34.60 11.93 36.64 0.00 271 360 AVERAGE

Mode	79	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11BE EHT80_CH58_Puncturing 20M ❶_5290MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	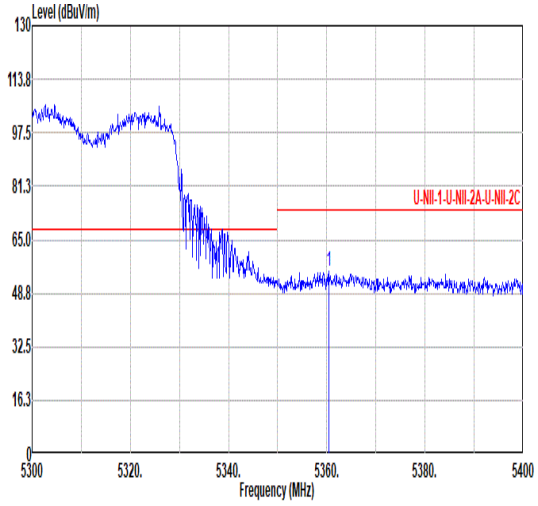 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5360.50 55.29 74.00 -18.71 45.20 34.60 11.98 36.49 0.00 271 360 PEAK	Blank
Avg	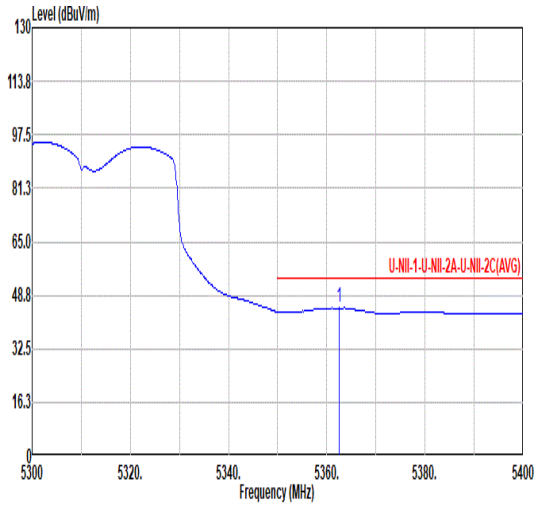 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5362.60 44.91 54.00 -9.09 34.82 34.60 11.98 36.49 0.00 271 360 AVERAGE	Blank

Mode	79	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11BE EHT80_CH58_Puncturing 20M ❶_5290MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	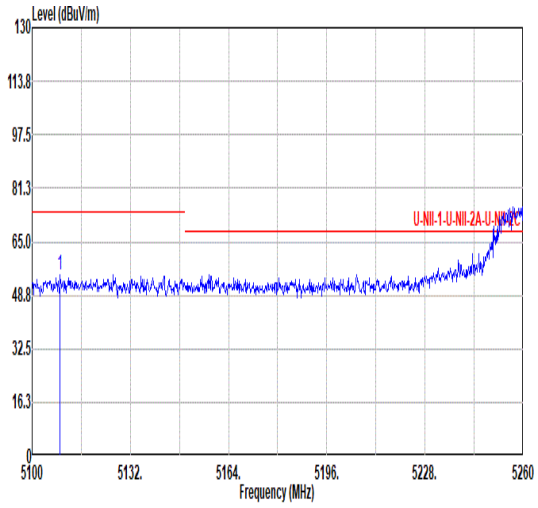 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5109.12 55.12 74.00 -18.88 46.26 34.02 11.76 36.92 0.00 259 0 PEAK	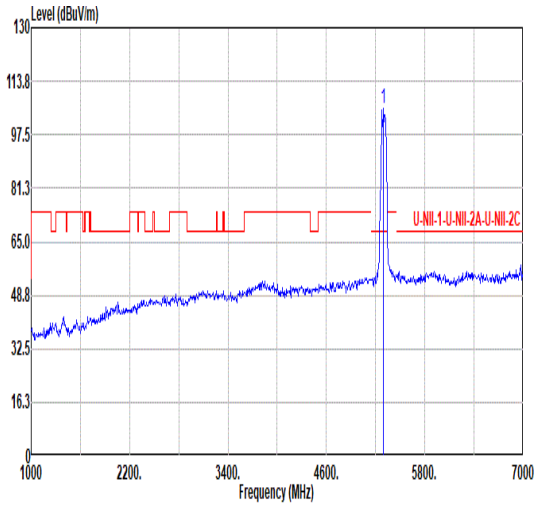 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5290.00 105.49 ------ ------ 95.63 34.59 11.93 36.66 0.00 259 0 PEAK
Avg	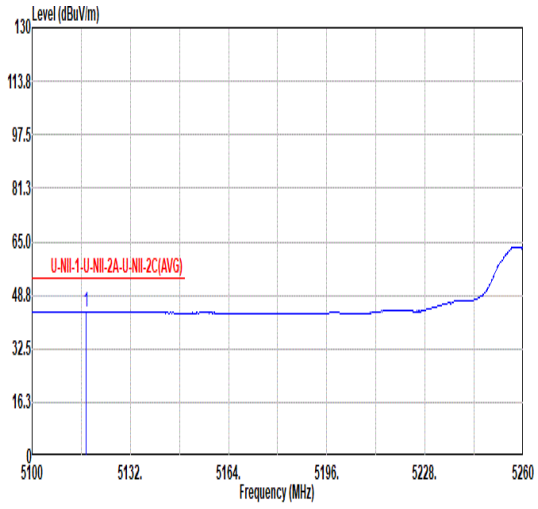 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5117.60 43.60 54.00 -10.40 34.74 34.04 11.77 36.95 0.00 259 0 AVERAGE	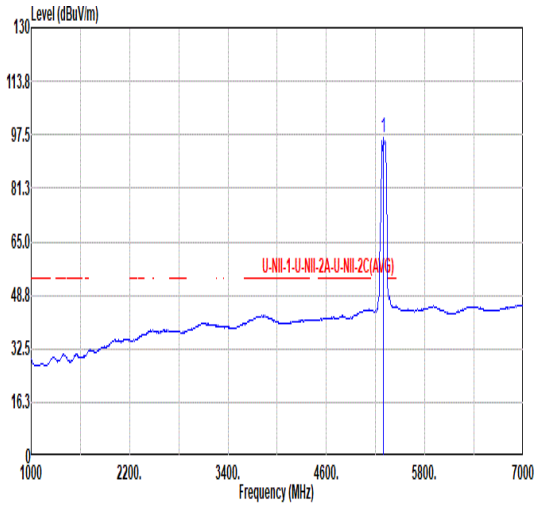 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5290.00 96.70 ------ ------ 86.84 34.59 11.93 36.66 0.00 259 0 AVERAGE

Mode	79	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11BE EHT80_CH58_Puncturing 20M ❶_5290MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	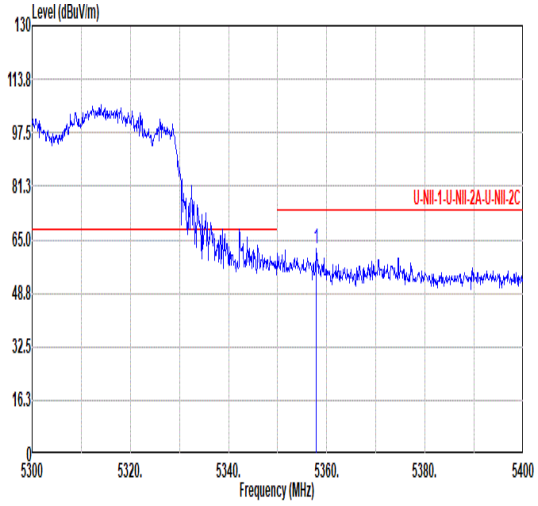 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5357.90 62.51 74.00 -11.49 52.43 34.60 11.98 36.50 0.00 259 0 PEAK	Blank
Avg	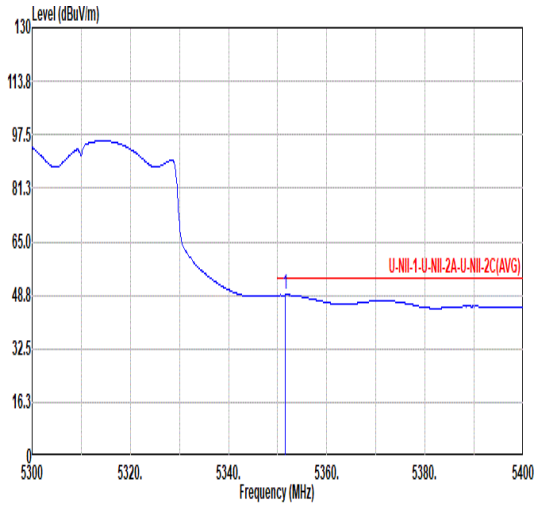 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.60 48.87 54.00 -5.13 38.82 34.60 11.97 36.52 0.00 259 0 AVERAGE	Blank

Mode	80	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11BE EHT80_CH106_Puncturing 20M ⓫_5530MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	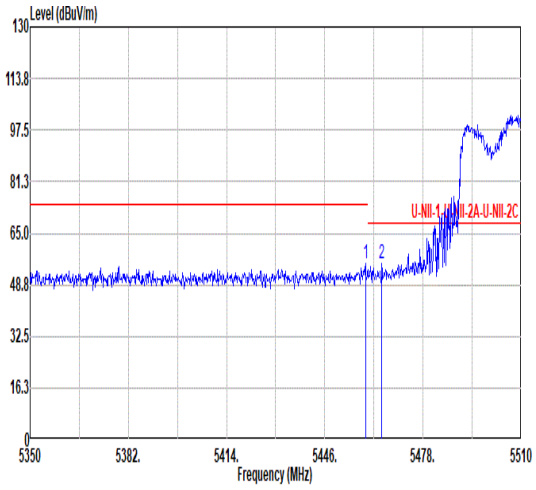 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.28 55.65 74.00 -18.35 45.33 34.66 12.10 36.44 0.00 125 360 PEAK 2 5464.56 55.24 68.20 -12.96 44.94 34.64 12.11 36.45 0.00 125 360 PEAK	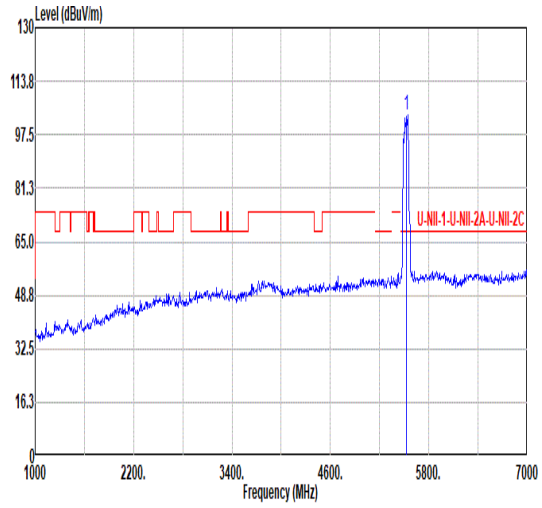 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 103.68 ------ ------ 93.42 34.40 12.23 36.37 0.00 125 360 PEAK
Avg	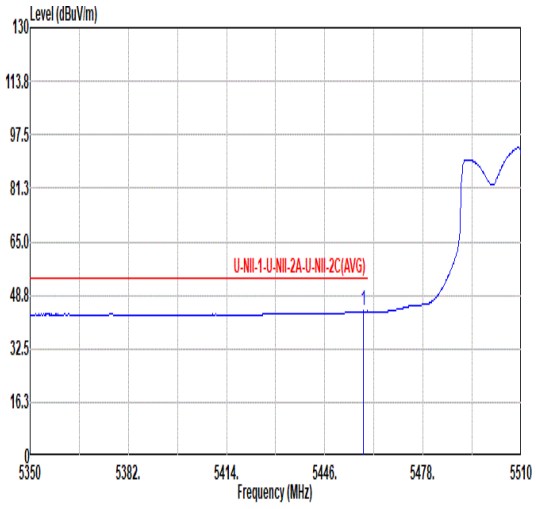 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.48 43.91 54.00 -10.09 33.58 34.67 12.10 36.44 0.00 125 360 AVERAGE	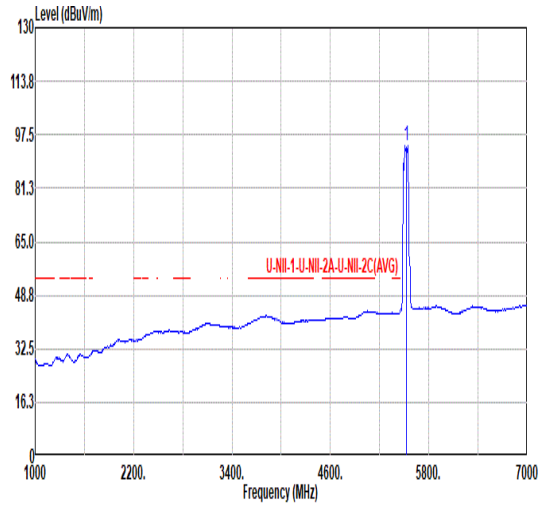 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 94.25 ------ ------ 83.99 34.40 12.23 36.37 0.00 125 360 AVERAGE

Mode	80	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11BE EHT80_CH106_Puncturing 20M ⓘ_5530MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	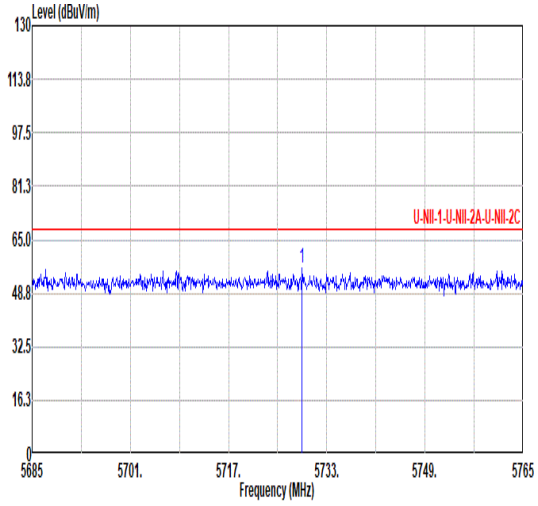 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5729.00 56.34 68.20 -11.86 45.65 34.66 12.43 36.40 0.00 125 360 PEAK	Blank

Mode	80	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11BE EHT80_CH106_Puncturing 20M ⓛ_5530MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	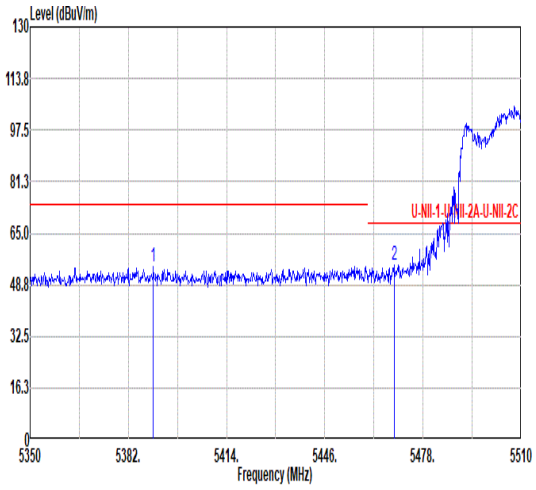 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5390.16 54.67 74.00 -19.33 44.49 34.60 12.00 36.42 0.00 296 15 PEAK 2 5468.56 55.08 68.20 -13.12 44.79 34.63 12.11 36.45 0.00 296 15 PEAK	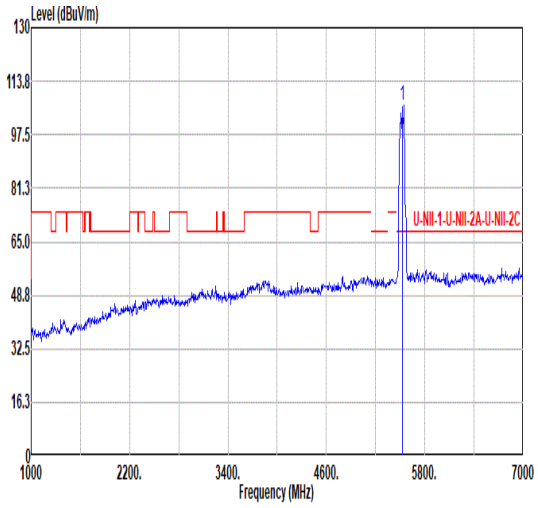 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 106.40 ------ ------ 96.14 34.40 12.23 36.37 0.00 296 15 PEAK
Avg	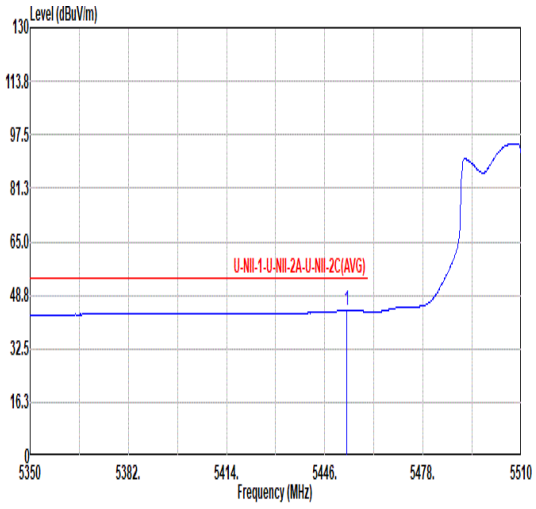 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5453.20 44.19 54.00 -9.81 33.85 34.69 12.09 36.44 0.00 296 15 AVERAGE	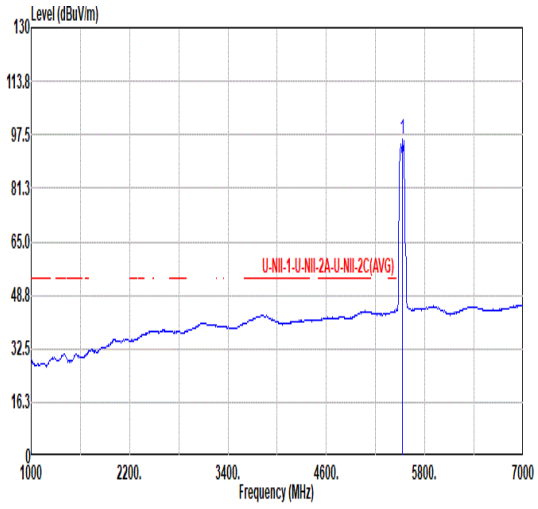 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 95.97 ------ ------ 85.74 34.44 12.20 36.41 0.00 296 15 AVERAGE

Mode	80	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11BE EHT80_CH106_Puncturing 20M ⓫_5530MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	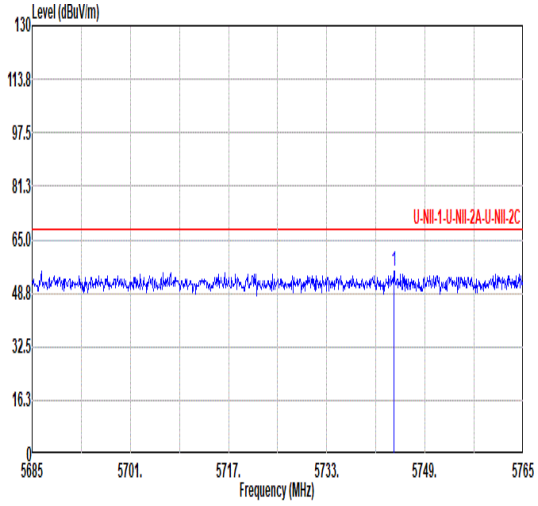 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5743.88 55.61 68.20 -12.59 44.91 34.69 12.44 36.43 0.00 296 15 PEAK	Blank

Mode	81	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11BE EHT80_CH122_Puncturing 20M ❶_5610MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	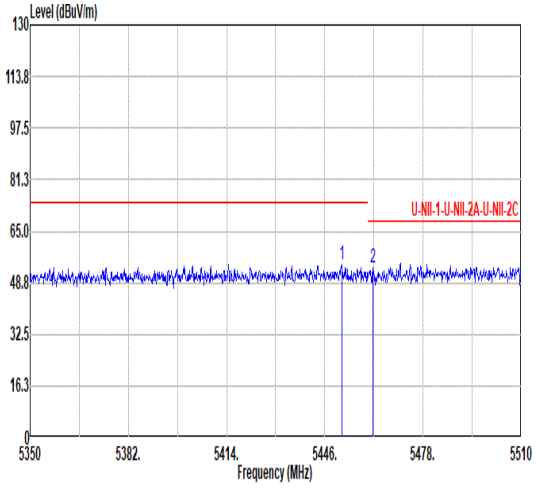 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5451.60 54.33 74.00 -19.67 43.99 34.69 12.09 36.44 0.00 167 0 PEAK 2 5461.68 53.65 68.20 -14.55 43.34 34.65 12.10 36.44 0.00 167 0 PEAK	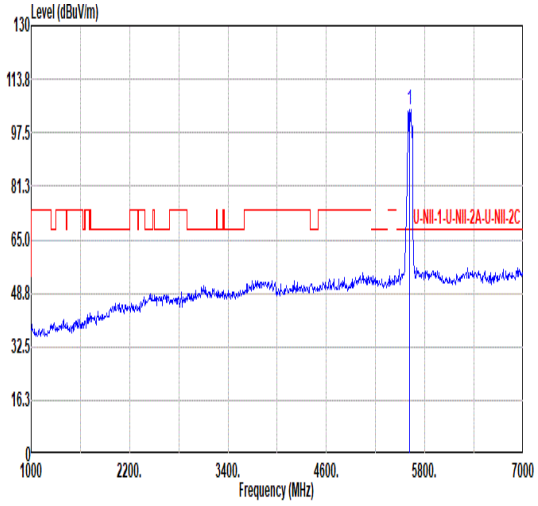 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 104.61 ------ ------ 94.06 34.50 12.34 36.29 0.00 167 0 PEAK
Avg	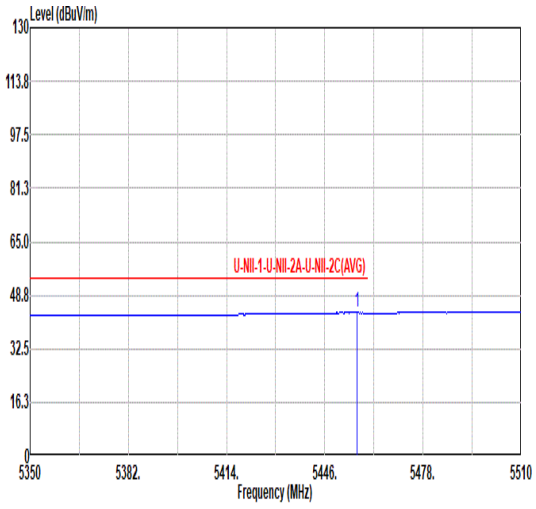 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5456.40 43.87 54.00 -10.13 33.55 34.67 12.09 36.44 0.00 167 0 AVERAGE	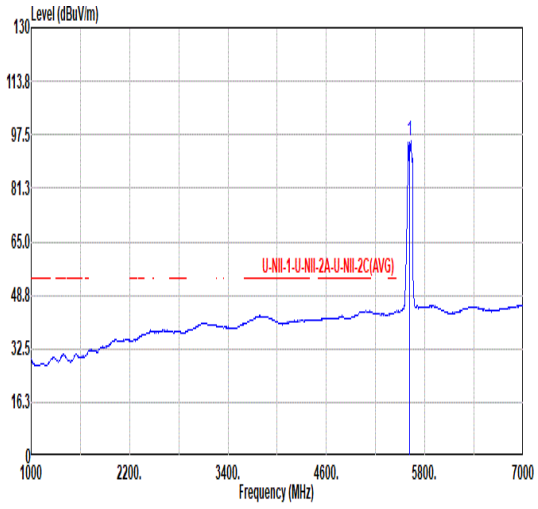 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 95.63 ------ ------ 85.08 34.50 12.34 36.29 0.00 167 0 AVERAGE

Mode	81	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11BE EHT80_CH122_Puncturing 20M ❶_5610MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	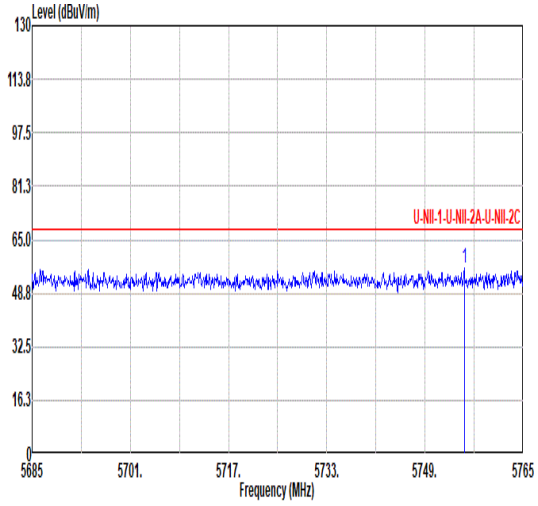 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.40 56.18 68.20 -12.02 45.45 34.73 12.45 36.45 0.00 167 0 PEAK	Blank

Mode	81	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11BE EHT80_CH122_Puncturing 20M ❶_5610MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	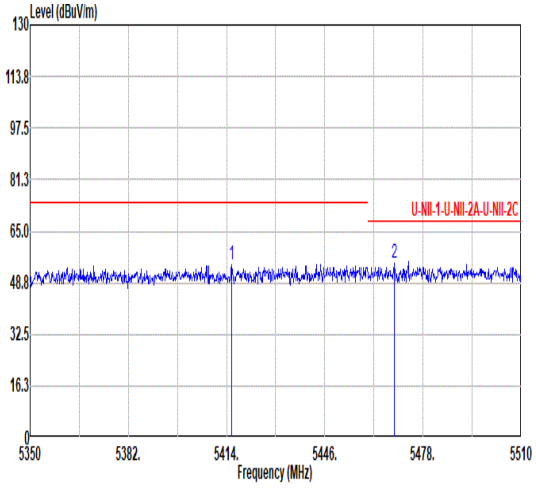 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5415.60 54.57 74.00 -19.43 44.32 34.63 12.03 36.41 0.00 300 360 PEAK 2 5468.56 54.95 68.20 -13.25 44.66 34.63 12.11 36.45 0.00 300 360 PEAK	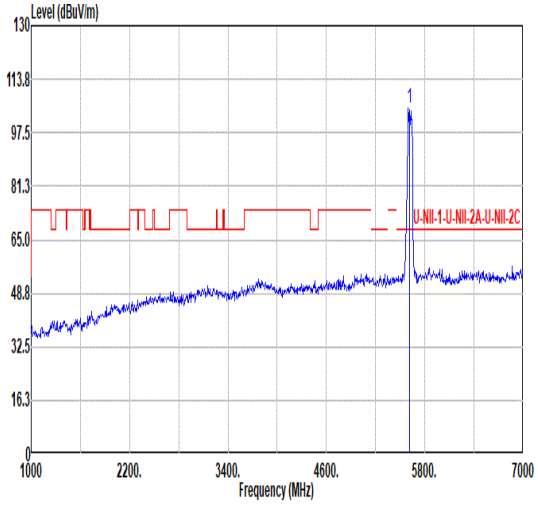 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 104.89 ------ ------ 94.37 34.49 12.30 36.27 0.00 300 360 PEAK
Avg	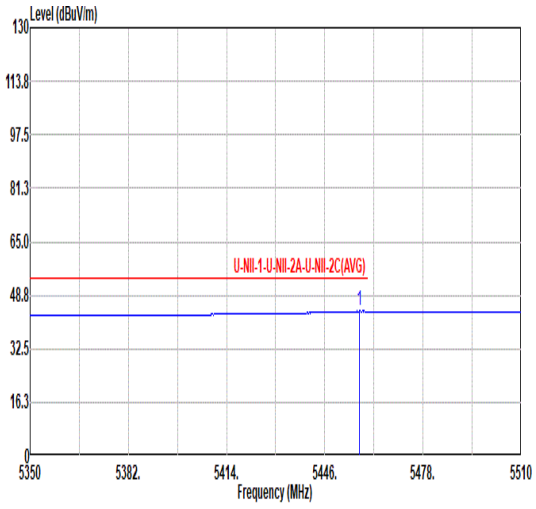 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5457.36 43.93 54.00 -10.07 33.60 34.67 12.10 36.44 0.00 300 360 AVERAGE	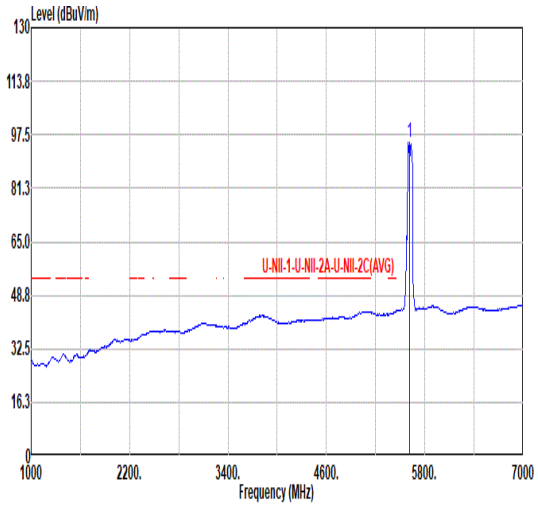 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 95.14 ------ ------ 84.62 34.49 12.30 36.27 0.00 300 360 AVERAGE

Mode	81	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11BE EHT80_CH122_Puncturing 20M ❶_5610MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	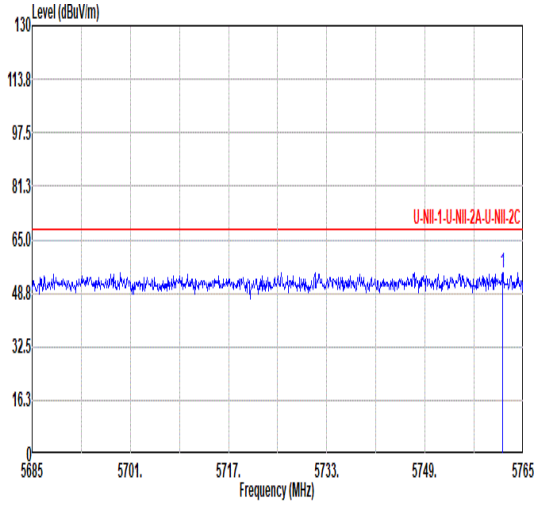 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5761.64 54.95 68.20 -13.25 44.18 34.77 12.46 36.46 0.00 300 360 PEAK	Blank

Mode	82	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11BE EHT160_CH50_Puncturing 40M ④ 5250MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	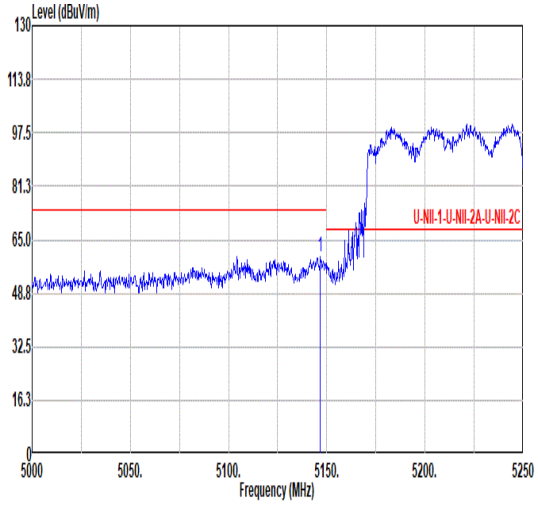 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5146.75 59.96 74.00 -14.04 51.09 34.09 11.80 37.02 0.00 262 0 PEAK	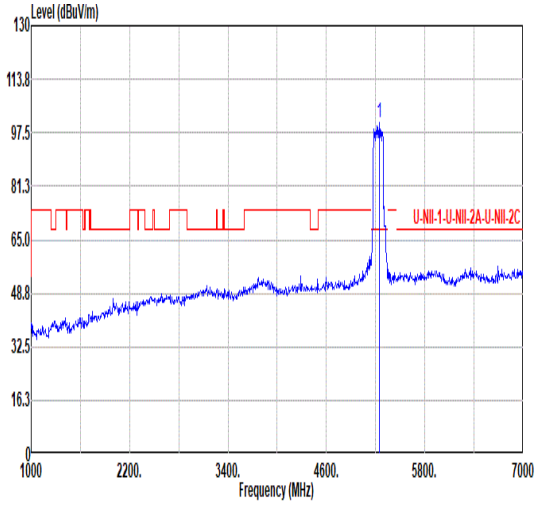 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5250.00 100.49 ------ ------ 91.08 34.47 11.88 36.94 0.00 262 0 PEAK
Avg	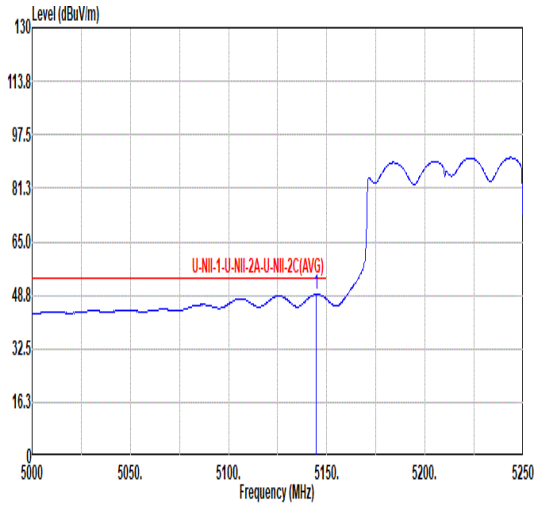 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5144.50 49.02 54.00 -4.98 40.16 34.09 11.79 37.02 0.00 262 0 AVERAGE	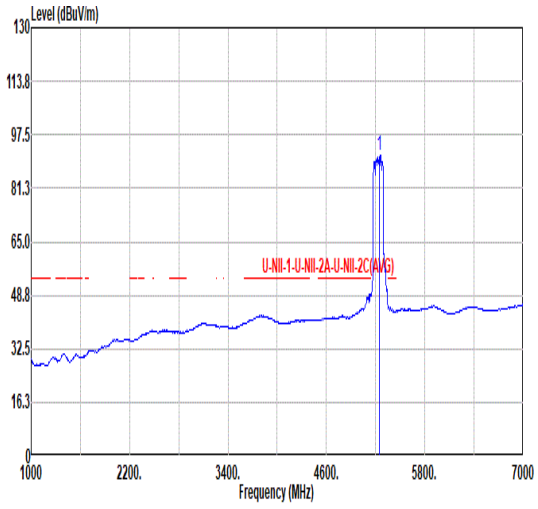 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5250.00 91.11 ------ ------ 81.54 34.52 11.90 36.85 0.00 262 0 AVERAGE

Mode	82	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11BE EHT160_CH50_Puncturing 40M ❹_5250MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	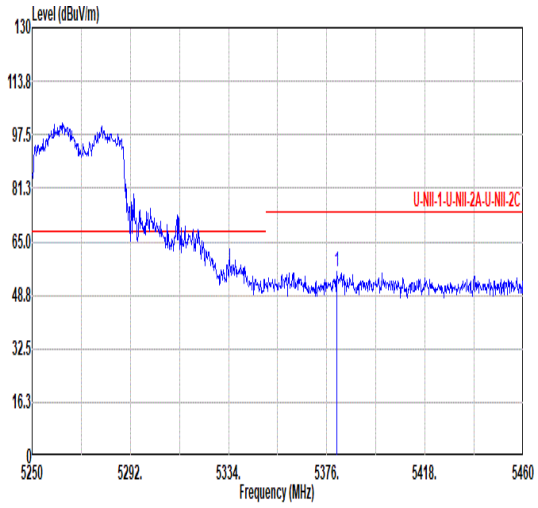 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5380.41 56.14 74.00 -17.86 46.00 34.60 11.99 36.45 0.00 262 0 PEAK	Blank
Avg	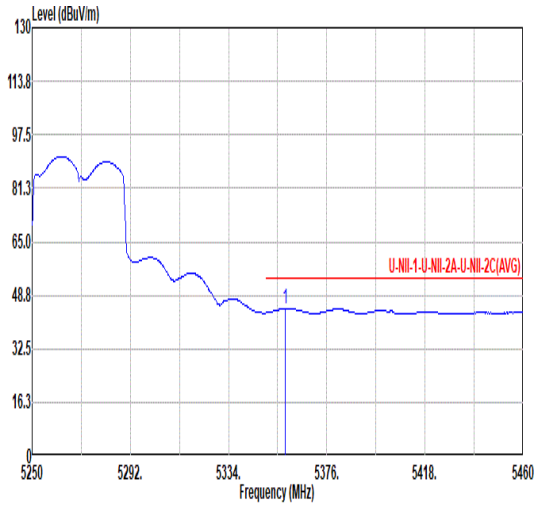 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5358.15 44.77 54.00 -9.23 34.69 34.60 11.98 36.50 0.00 262 0 AVERAGE	Blank

Mode	82	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11BE EHT160_CH50_Puncturing 40M ④ 5250MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	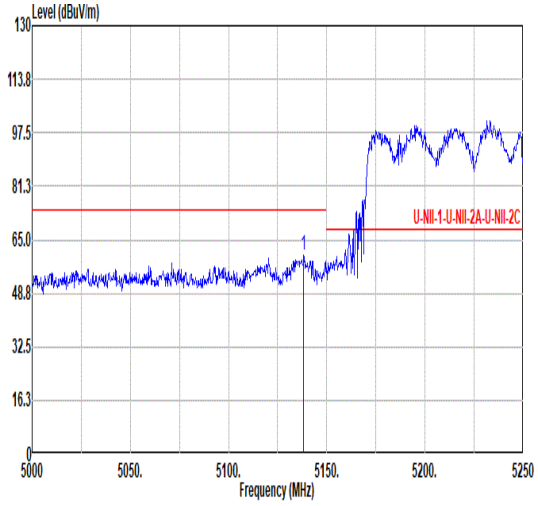 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5138.25 60.27 74.00 -13.73 51.40 34.08 11.79 37.00 0.00 198 360 PEAK	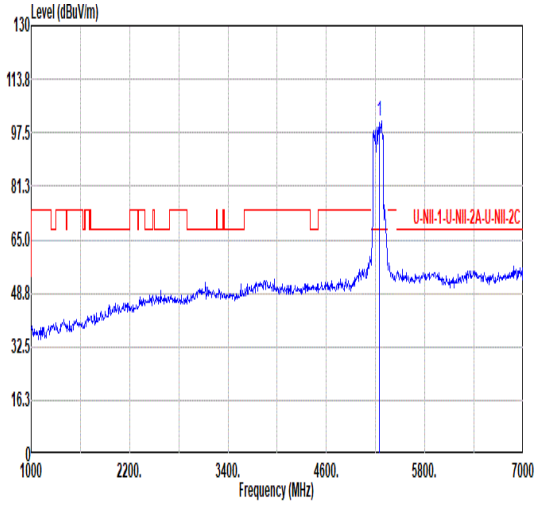 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5250.00 101.22 ------ ------ 91.56 34.54 11.91 36.79 0.00 198 360 PEAK
Avg	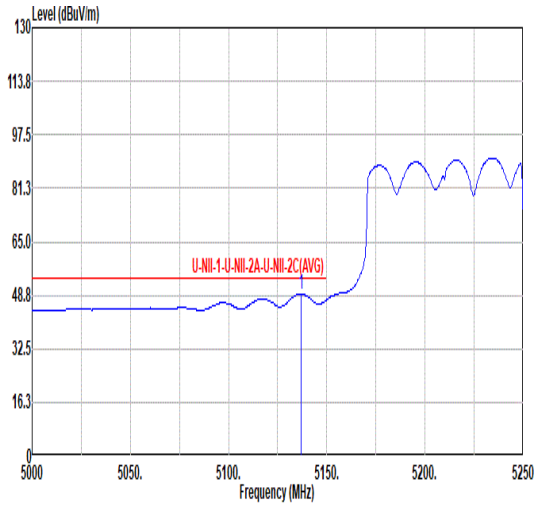 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5136.75 49.19 54.00 -4.81 40.33 34.07 11.79 37.00 0.00 198 360 AVERAGE	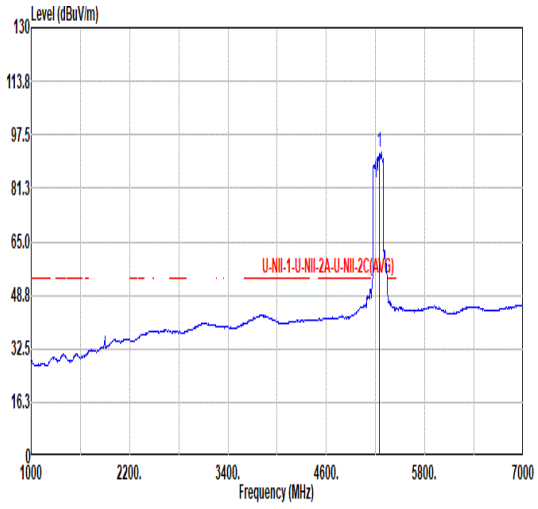 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5250.00 92.18 ------ ------ 82.52 34.54 11.91 36.79 0.00 198 360 AVERAGE

Mode	82	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11BE EHT160_CH50_Puncturing 40M ❹_5250MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	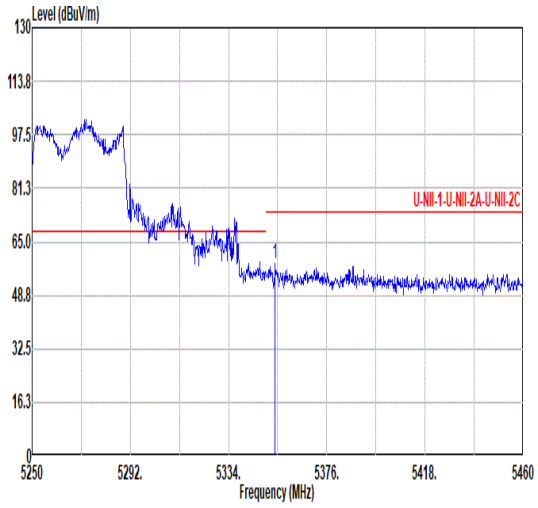 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5353.95 58.54 74.00 -15.46 48.48 34.60 11.97 36.51 0.00 198 360 PEAK	Blank
Avg	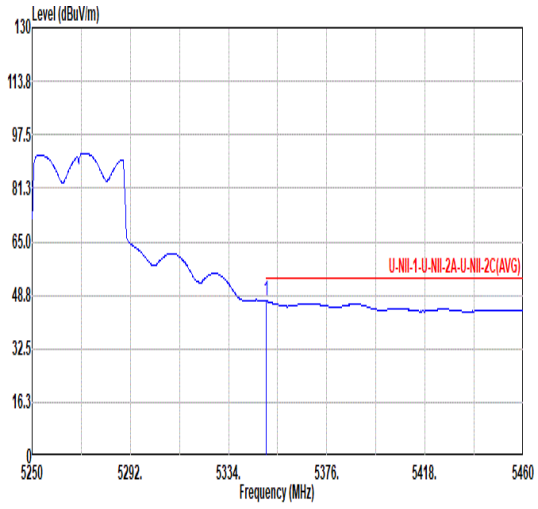 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.17 46.94 54.00 -7.06 36.89 34.60 11.97 36.52 0.00 198 360 AVERAGE	Blank

Mode	83	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11BE EHT160_CH50_Puncturing 40M ❶ 5250MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	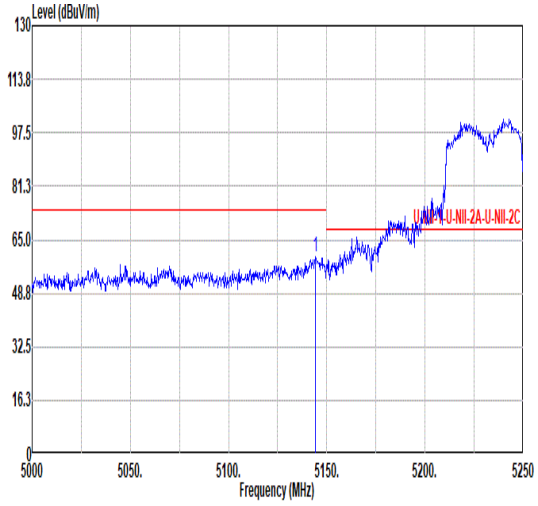 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5144.25 59.97 74.00 -14.03 51.11 34.09 11.79 37.02 0.00 260 360 PEAK	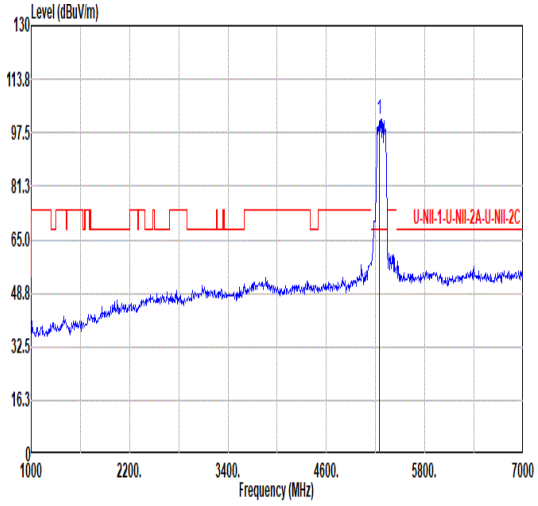 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5250.00 101.44 ------ ------ 91.83 34.53 11.90 36.82 0.00 260 360 PEAK
Avg	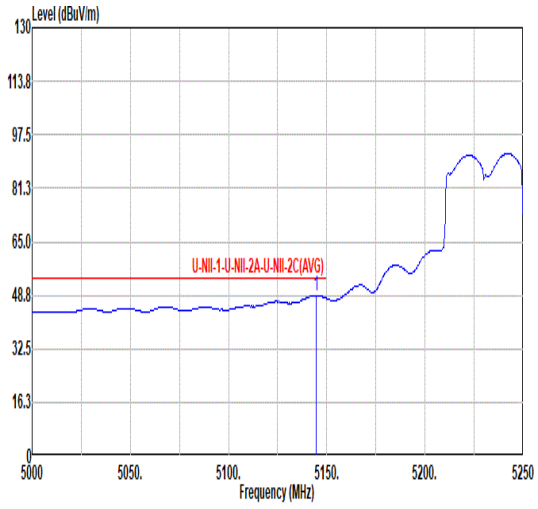 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5144.75 48.71 54.00 -5.29 39.85 34.09 11.79 37.02 0.00 260 360 AVERAGE	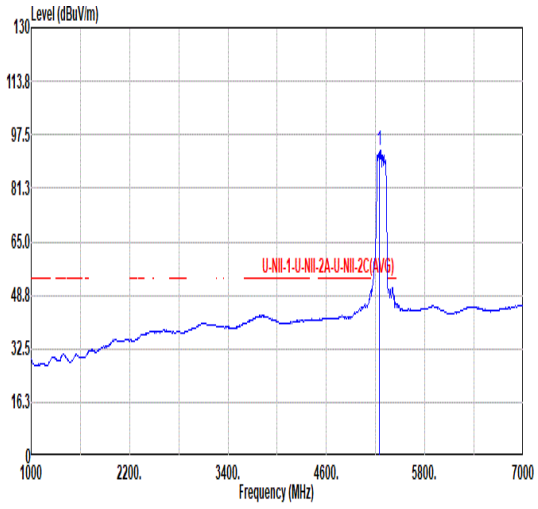 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5250.00 92.92 ------ ------ 83.35 34.52 11.90 36.85 0.00 260 360 AVERAGE

Mode	83	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11BE EHT160_CH50_Puncturing 40M ❶_5250MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	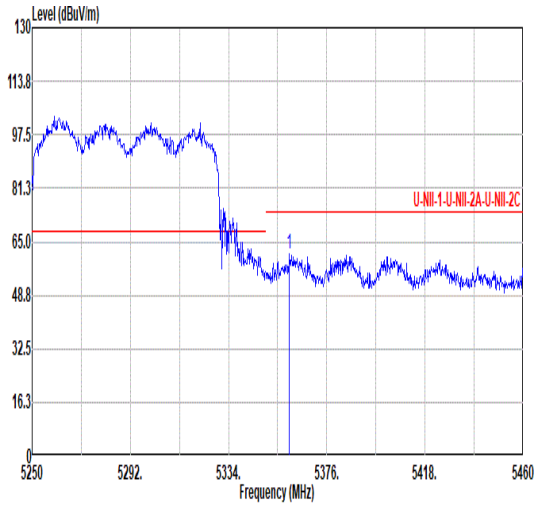 Limit Over Read Ant Cable Preamp Aux APos TPos Freq Level Line Limit Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5360.04 61.42 74.00 -12.58 51.34 34.60 11.98 36.50 0.00 260 360 PEAK	Blank
Avg	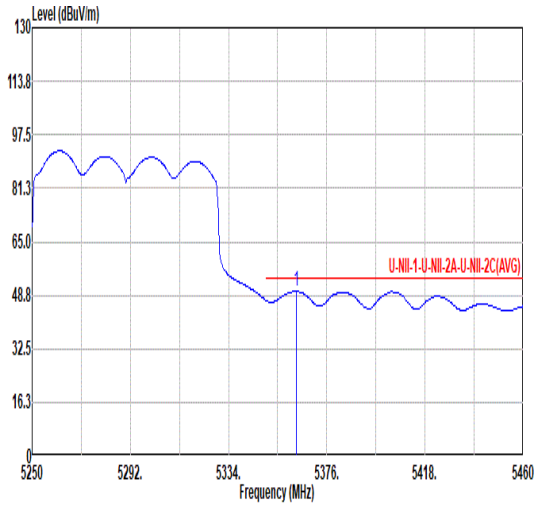 Limit Over Read Ant Cable Preamp Aux APos TPos Freq Level Line Limit Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5362.98 49.94 54.00 -4.06 39.85 34.60 11.98 36.49 0.00 260 360 AVERAGE	Blank

Mode	83	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11BE EHT160_CH50_Puncturing 40M ❶ 5250MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	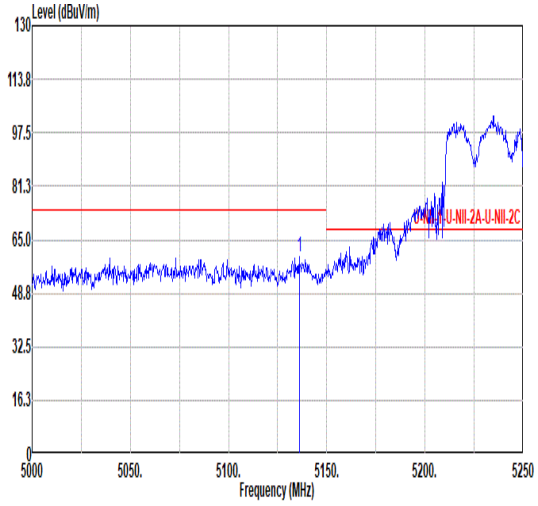 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5136.00 60.04 74.00 -13.96 51.17 34.07 11.79 36.99 0.00 198 0 PEAK	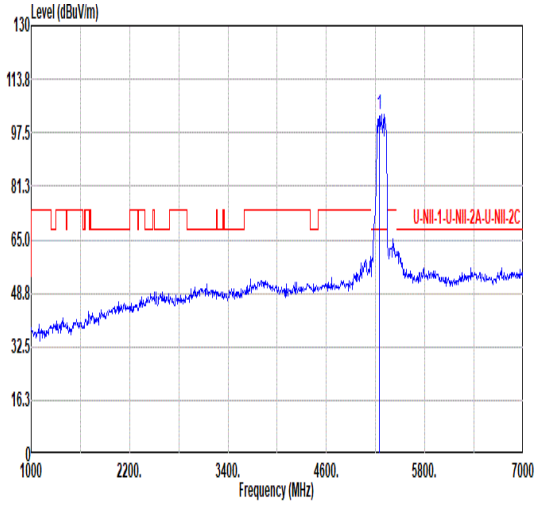 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5250.00 102.97 ------ ------ 93.31 34.54 11.91 36.79 0.00 198 0 PEAK
Avg	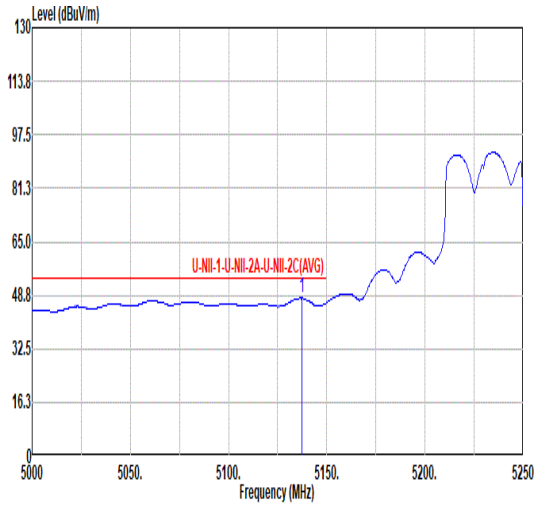 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5137.50 47.91 54.00 -6.09 39.04 34.08 11.79 37.00 0.00 198 0 AVERAGE	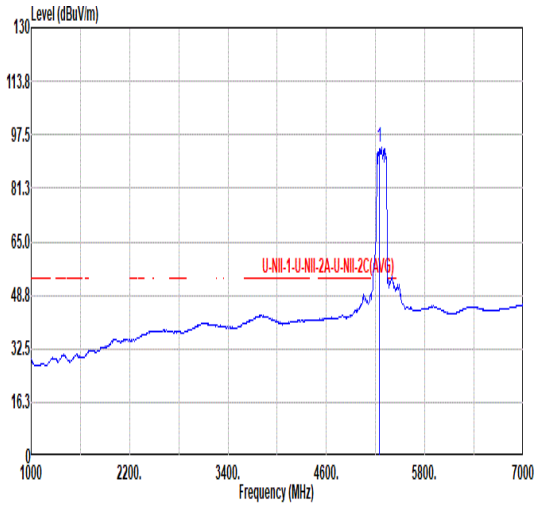 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5250.00 93.78 ------ ------ 84.12 34.54 11.91 36.79 0.00 198 0 AVERAGE

Mode	83	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11BE EHT160_CH50_Puncturing 40M ❶_5250MHz	
ANT	CDD 6+7	
Pol.	Vertical	Fundamental
Peak	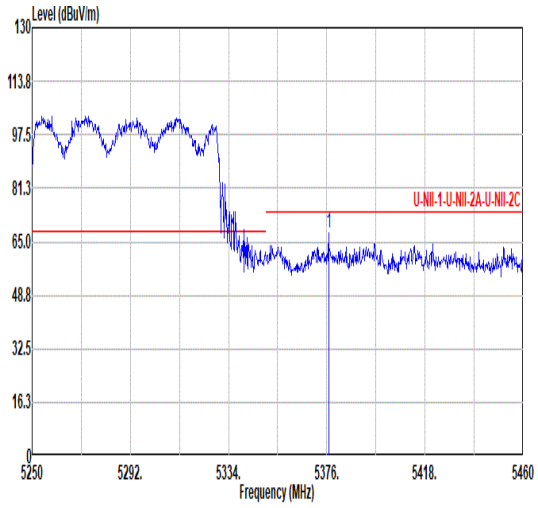 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5376.84 67.51 74.00 -6.49 57.38 34.60 11.99 36.46 0.00 198 0 PEAK	Blank
Avg	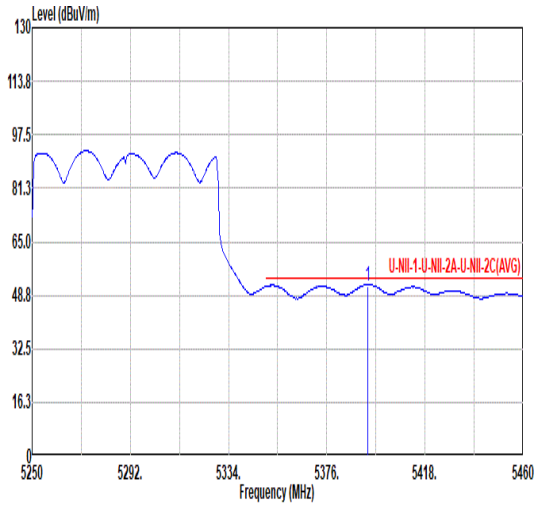 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5393.64 51.69 54.00 -2.31 41.51 34.60 12.00 36.42 0.00 198 0 AVERAGE	Blank

Mode	84
	Band Edge - L
	U-NII-1_5.15-5.25_802.11BE EHT160_CH114_Puncturing 40M ❹_5570MHz
ANT	CDD 6+7

Pol.	Horizontal	Fundamental
Peak	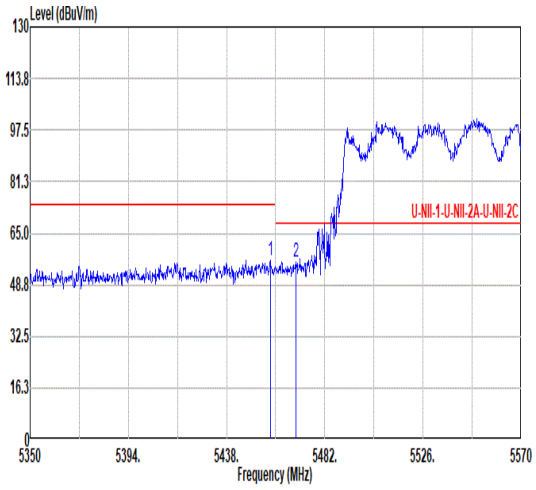 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5457.58 56.26 74.00 -17.74 45.93 34.67 12.10 36.44 0.00 117 360 PEAK 2 5469.02 56.02 68.20 -12.18 45.74 34.62 12.11 36.45 0.00 117 360 PEAK	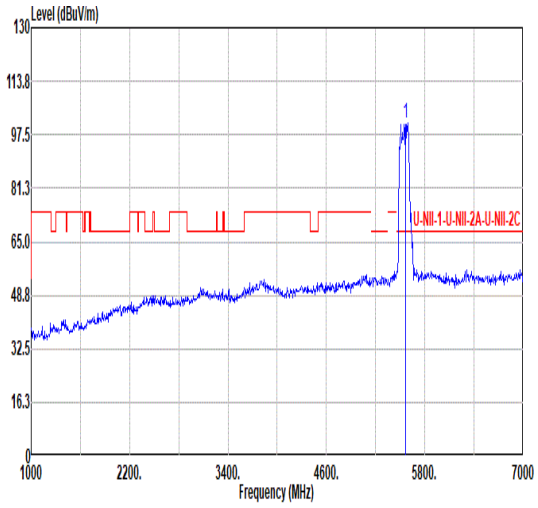 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5570.00 101.19 ------ ------ 90.67 34.49 12.30 36.27 0.00 117 360 PEAK
Avg	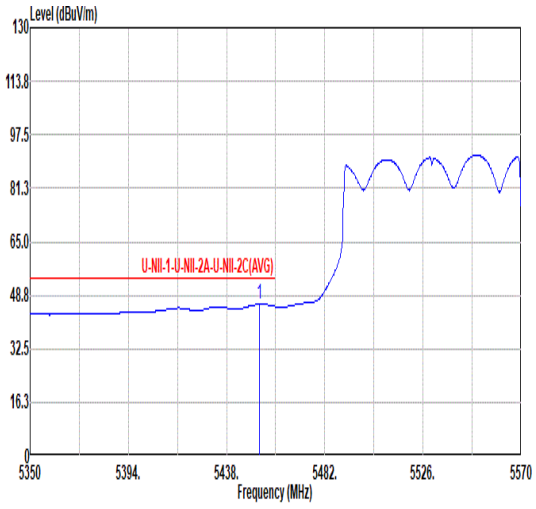 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5452.74 46.12 54.00 -7.88 35.78 34.69 12.09 36.44 0.00 117 360 AVERAGE	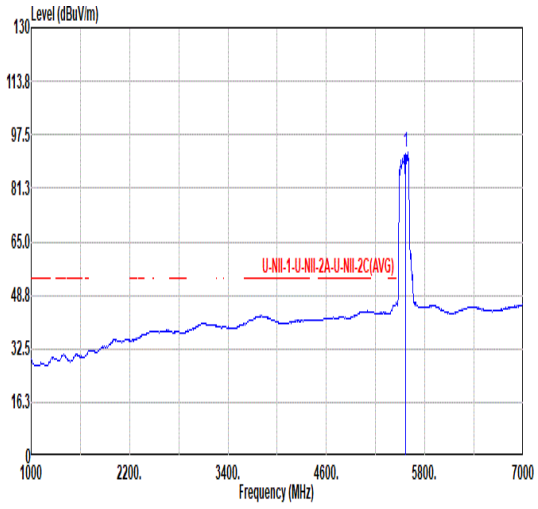 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5570.00 92.05 ------ ------ 81.55 34.48 12.30 36.28 0.00 117 360 AVERAGE

Mode	84	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11BE EHT160_CH114_Puncturing 40M ❹_5570MHz	
ANT	CDD 6+7	
Pol.	Horizontal	Fundamental
Peak	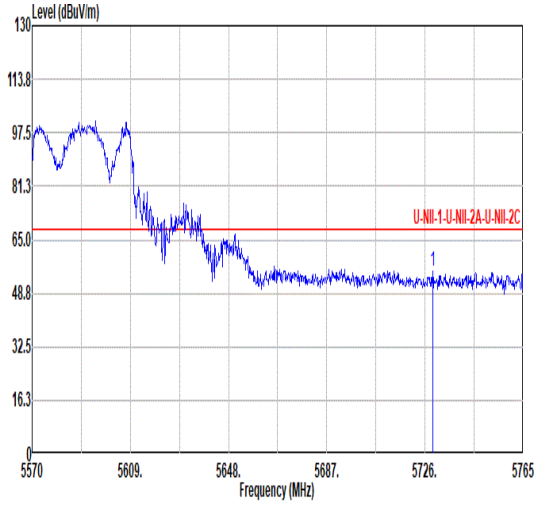 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5729.12 55.34 68.20 -12.86 44.65 34.66 12.43 36.40 0.00 117 360 PEAK	Blank