




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	23~26°C
		Relative Humidity :	45~55%

EUT Information

Report NO : 5N2836
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

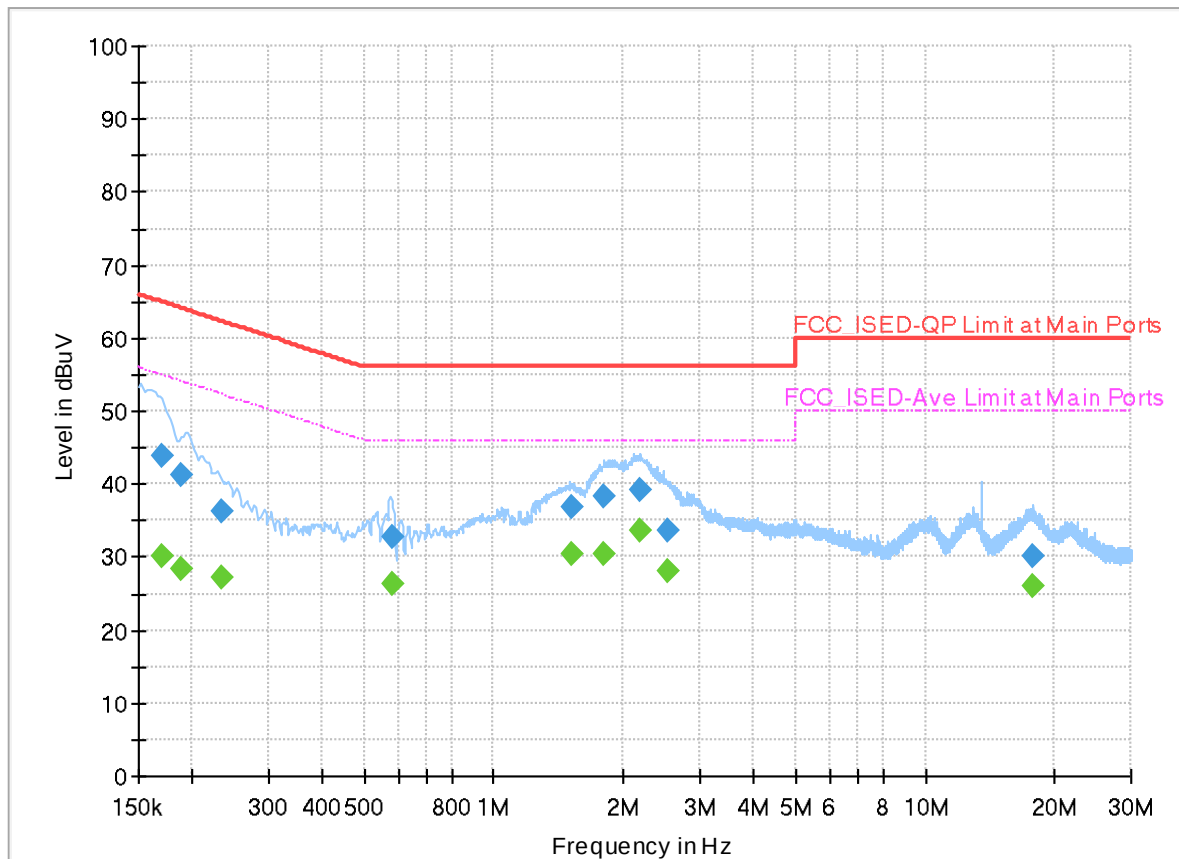


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.170700	---	30.13	54.93	24.80	L1	ON	20.1
0.170700	43.94	---	64.93	20.99	L1	ON	20.1
0.188250	---	28.36	54.11	25.75	L1	ON	20.1
0.188250	41.21	---	64.11	22.90	L1	ON	20.1
0.233250	---	27.10	52.33	25.23	L1	ON	20.1
0.233250	36.35	---	62.33	25.98	L1	ON	20.1
0.579750	---	26.30	46.00	19.70	L1	ON	20.0
0.579750	32.77	---	56.00	23.23	L1	ON	20.0
1.517460	---	30.45	46.00	15.55	L1	ON	20.0
1.517460	36.90	---	56.00	19.10	L1	ON	20.0
1.800105	---	30.54	46.00	15.46	L1	ON	20.0
1.800105	38.21	---	56.00	17.79	L1	ON	20.0
2.177250	---	33.60	46.00	12.40	L1	ON	20.0
2.177250	39.20	---	56.00	16.80	L1	ON	20.0
2.545530	---	28.18	46.00	17.82	L1	ON	20.1
2.545530	33.63	---	56.00	22.37	L1	ON	20.1
17.710215	---	26.07	50.00	23.93	L1	ON	20.7
17.710215	30.03	---	60.00	29.97	L1	ON	20.7

EUT Information

Report NO : 5N2836
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

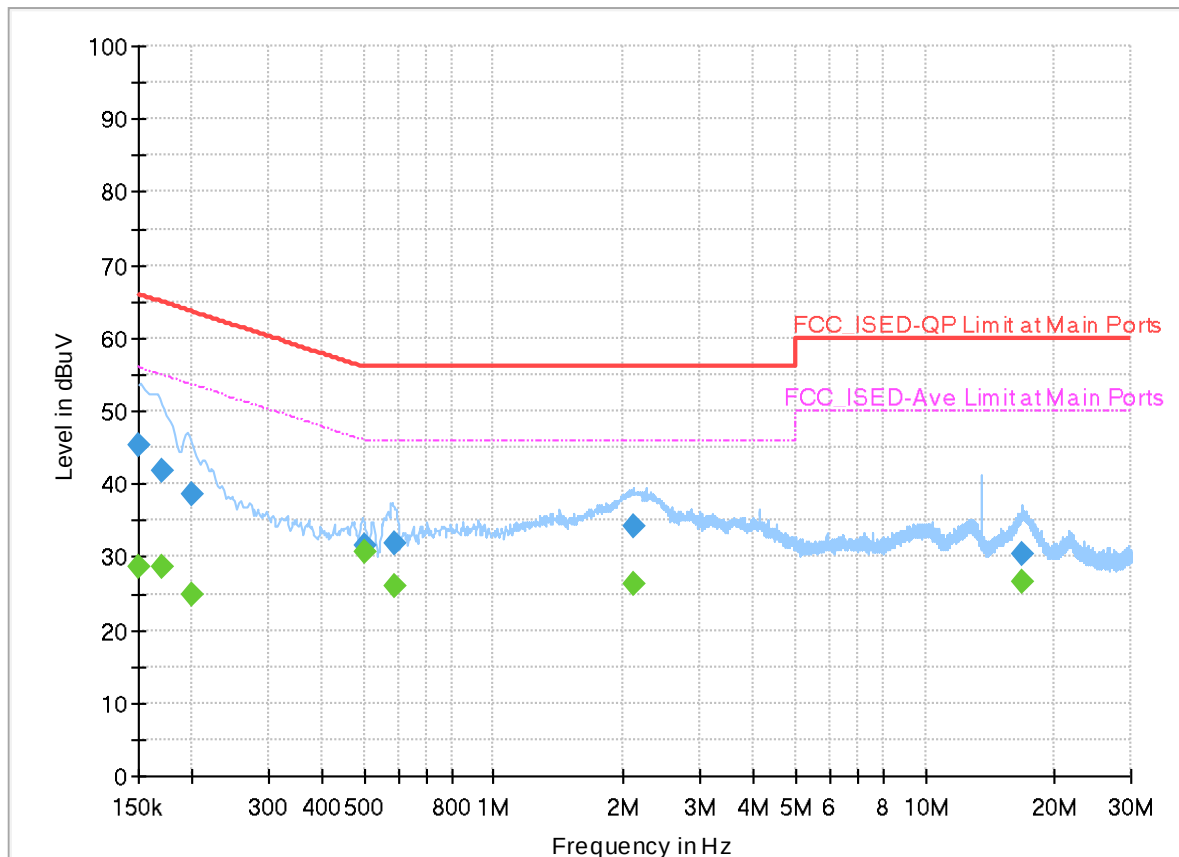

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150180	---	28.61	55.99	27.38	N	ON	20.1
0.150180	45.46	---	65.99	20.53	N	ON	20.1
0.170250	---	28.68	54.95	26.27	N	ON	20.1
0.170250	41.82	---	64.95	23.13	N	ON	20.1
0.198915	---	24.90	53.66	28.76	N	ON	20.1
0.198915	38.46	---	63.66	25.20	N	ON	20.1
0.499515	---	30.66	46.01	15.35	N	ON	20.0
0.499515	31.61	---	56.01	24.40	N	ON	20.0
0.589560	---	26.00	46.00	20.00	N	ON	20.0
0.589560	31.78	---	56.00	24.22	N	ON	20.0
2.109345	---	26.43	46.00	19.57	N	ON	20.0
2.109345	34.17	---	56.00	21.83	N	ON	20.0
16.735425	---	26.53	50.00	23.47	N	ON	20.7
16.735425	30.28	---	60.00	29.72	N	ON	20.7



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Leo Li , Karl Hou	Temperature :	19~23°C
		Relative Humidity :	60~64.5%

Note symbol

-L	Low channel location
-R	High channel location

C1.Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 66	U-NII-5	5.925-6.425	0+1	802.11a	1	5955	6Mbps	-	-
Mode 67	U-NII-5	5.925-6.425	0+1	802.11a	49	6195	6Mbps	-	-
Mode 68	U-NII-5	5.925-6.425	0+1	802.11a	93	6415	6Mbps	-	-
Mode 69	U-NII-5	5.925-6.425	0+1	802.11ax HE20	1	5955	MCS0	Full RU	-
Mode 70	U-NII-5	5.925-6.425	0+1	802.11ax HE20	1	5955	MCS0	Partial RU 106/53	-
Mode 71	U-NII-5	5.925-6.425	0+1	802.11ax HE20	49	6195	MCS0	Full RU	-
Mode 72	U-NII-5	5.925-6.425	0+1	802.11ax HE20	93	6415	MCS0	Full RU	-
Mode 73	U-NII-5	5.925-6.425	0+1	802.11ax HE40	3	5965	MCS0	Full RU	-
Mode 74	U-NII-5	5.925-6.425	0+1	802.11ax HE40	3	5965	MCS0	Partial RU 242/61	-
Mode 75	U-NII-5	5.925-6.425	0+1	802.11ax HE40	51	6205	MCS0	Full RU	-
Mode 76	U-NII-5	5.925-6.425	0+1	802.11ax HE40	91	6405	MCS0	Full RU	-

**FCC RADIO TEST REPORT**

Report No. : FR5N2836G

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 77	U-NII-5	5.925-6.425	0+1	802.11ax HE80	7	5985	MCS0	Full RU	-
Mode 78	U-NII-5	5.925-6.425	0+1	802.11ax HE80	7	5985	MCS0	Partial RU 484/65	-
Mode 79	U-NII-5	5.925-6.425	0+1	802.11ax HE80	55	6225	MCS0	Full RU	-
Mode 80	U-NII-5	5.925-6.425	0+1	802.11ax HE80	87	6385	MCS0	Full RU	-
Mode 81	U-NII-5	5.925-6.425	0+1	802.11ax HE160	15	6025	MCS0	Full RU	-
Mode 82	U-NII-5	5.925-6.425	0+1	802.11ax HE160	15	6025	MCS0	Partial RU 996/67	-
Mode 83	U-NII-5	5.925-6.425	0+1	802.11ax HE160	47	6185	MCS0	Full RU	-
Mode 84	U-NII-5	5.925-6.425	0+1	802.11ax HE160	79	6345	MCS0	Full RU	-
Mode 96	U-NII-7	6.525-6.875	0+1	802.11a	117	6535	6Mbps	-	-
Mode 97	U-NII-7	6.525-6.875	0+1	802.11a	149	6695	6Mbps	-	-
Mode 98	U-NII-7	6.525-6.875	0+1	802.11a	185	6875	6Mbps	-	-

**FCC RADIO TEST REPORT**

Report No. : FR5N2836G

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 99	U-NII-7	6.525-6.875	0+1	802.11ax HE20	117	6535	MCS0	Full RU	-
Mode 100	U-NII-7	6.525-6.875	0+1	802.11ax HE20	149	6695	MCS0	Full RU	-
Mode 101	U-NII-7	6.525-6.875	0+1	802.11ax HE20	185	6875	MCS0	Full RU	-
Mode 102	U-NII-7	6.525-6.875	0+1	802.11ax HE40	123	6565	MCS0	Full RU	-
Mode 103	U-NII-7	6.525-6.875	0+1	802.11ax HE40	147	6685	MCS0	Full RU	-
Mode 104	U-NII-7	6.525-6.875	0+1	802.11ax HE40	187	6885	MCS0	Full RU	-
Mode 105	U-NII-7	6.525-6.875	0+1	802.11ax HE80	135	6625	MCS0	Full RU	-
Mode 106	U-NII-7	6.525-6.875	0+1	802.11ax HE80	151	6705	MCS0	Full RU	-
Mode 107	U-NII-7	6.525-6.875	0+1	802.11ax HE80	183	6865	MCS0	Full RU	-
Mode 108	U-NII-7	6.525-6.875	0+1	802.11ax HE160	143	6665	MCS0	Full RU	-
Mode 109	U-NII-7	6.525-6.875	0+1	802.11ax HE160	175	6825	MCS0	Full RU	-



FCC RADIO TEST REPORT

Report No. : FR5N2836G

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 126	U-NII-5	5.925-6.425	0+1	802.11ax HE80	7	5985	MCS0	Full RU	LF

C2.Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
66	802.11a	1	5924.97	65.22	68.20	-2.98	V	Avg.	Pass	-	Band Edge
	802.11a	1	17865.00	42.81	54.00	-11.19	V	Avg.	Pass	-	Harmonic
67	802.11a	49	-	-	-	-	-	-	-	-	Band Edge
	802.11a	49	12390.00	41.74	54.00	-12.26	H	Avg.	Pass	-	Harmonic
68	802.11a	93	-	-	-	-	-	-	-	-	Band Edge
	802.11a	93	19245.00	38.51	74.00	-35.49	V	Peak	Pass	-	Harmonic
69	802.11ax HE20	1	5924.97	66.08	68.20	-2.12	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	1	17865.00	42.81	54.00	-11.19	H	Avg.	Pass	Full RU	Harmonic
70	802.11ax HE20	1	5922.63	86.50	88.20	-1.70	H	Peak	Pass	Partial RU 106/53	Band Edge
	802.11ax HE20	1	-	-	-	-	-	-	-	Partial RU 106/53	Harmonic
71	802.11ax HE20	49	-	-	-	-	-	-	-	Full RU	Band Edge

**FCC RADIO TEST REPORT**

Report No. : FR5N2836G

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
71	802.11ax HE20	49	12390.00	41.46	54.00	-12.54	V	Avg.	Pass	Full RU	Harmonic
72	802.11ax HE20	93	-	-	-	-	-	-	-	Full RU	Band Edge
	802.11ax HE20	93	19245.00	38.78	74.00	-35.22	V	Peak	Pass	Full RU	Harmonic
73	802.11ax HE40	3	5922.72	65.78	68.20	-2.42	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE40	3	17895.00	44.37	54.00	-9.63	H	Avg.	Pass	Full RU	Harmonic
74	802.11ax HE40	3	5922.72	86.00	88.20	-2.20	H	Peak	Pass	Partial RU 242/61	Band Edge
	802.11ax HE40	3	-	-	-	-	-	-	-	Partial RU 242/61	Harmonic
75	802.11ax HE40	51	-	-	-	-	-	-	-	Full RU	Band Edge
	802.11ax HE40	51	12410.00	41.99	54.00	-12.01	V	Avg.	Pass	Full RU	Harmonic
76	802.11ax HE40	91	-	-	-	-	-	-	-	Full RU	Band Edge
	802.11ax HE40	91	19215.00	39.51	74.00	-34.49	H	Peak	Pass	Full RU	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
77	802.11ax HE80	7	5922.60	66.72	68.20	-1.48	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE80	7	17955.00	43.53	54.00	-10.47	H	Avg.	Pass	Full RU	Harmonic
78	802.11ax HE80	7	5923.56	65.25	68.20	-2.95	H	Avg.	Pass	Partial RU 484/65	Band Edge
	802.11ax HE80	7	-	-	-	-	-	-	-	Partial RU 484/65	Harmonic
79	802.11ax HE80	55	-	-	-	-	-	-	-	Full RU	Band Edge
	802.11ax HE80	55	12450.00	41.74	54.00	-12.26	H	Avg.	Pass	Full RU	Harmonic
80	802.11ax HE80	87	-	-	-	-	-	-	-	Full RU	Band Edge
	802.11ax HE80	87	19155.00	40.02	74.00	-33.98	H	Peak	Pass	Full RU	Harmonic
81	802.11ax HE160	15	5912.80	65.51	68.20	-2.69	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE160	15	12050.00	41.15	54.00	-12.85	H	Avg.	Pass	Full RU	Harmonic
82	802.11ax HE160	15	5898.60	63.55	68.20	-4.65	H	Avg.	Pass	Partial RU 996/67	Band Edge

**FCC RADIO TEST REPORT**

Report No. : FR5N2836G

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
82	802.11ax HE160	15	-	-	-	-	-	-	-	Partial RU 996/67	Harmonic
83	802.11ax HE160	47	-	-	-	-	-	-	-	Full RU	Band Edge
	802.11ax HE160	47	12370.00	42.36	54.00	-11.64	H	Avg.	Pass	Full RU	Harmonic
84	802.11ax HE160	79	-	-	-	-	-	-	-	Full RU	Band Edge
	802.11ax HE160	79	12690.00	43.61	54.00	-10.39	H	Avg.	Pass	Full RU	Harmonic
96	802.11a	117	-	-	-	-	-	-	-	-	Band Edge
	802.11a	117	19605.00	39.75	74.00	-34.25	H	Peak	Pass	-	Harmonic
97	802.11a	149	-	-	-	-	-	-	-	-	Band Edge
	802.11a	149	13390.00	43.58	54.00	-10.42	V	Avg.	Pass	-	Harmonic
98	802.11a	185	-	-	-	-	-	-	-	-	Band Edge
	802.11a	185	13750.00	55.14	88.20	-33.06	H	Peak	Pass	-	Harmonic

**FCC RADIO TEST REPORT**

Report No. : FR5N2836G

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
99	802.11ax HE20	117	-	-	-	-	-	-	-	Full RU	Band Edge
	802.11ax HE20	117	13070.00	53.64	88.20	-34.56	V	Peak	Pass	Full RU	Harmonic
100	802.11ax HE20	149	-	-	-	-	-	-	-	Full RU	Band Edge
	802.11ax HE20	149	13390.00	43.45	54.00	-10.55	V	Avg.	Pass	Full RU	Harmonic
101	802.11ax HE20	185	-	-	-	-	-	-	-	Full RU	Band Edge
	802.11ax HE20	185	13750.00	54.74	88.20	-33.46	H	Peak	Pass	Full RU	Harmonic
102	802.11ax HE40	123	-	-	-	-	-	-	-	Full RU	Band Edge
	802.11ax HE40	123	13130.00	55.29	88.20	-32.91	H	Peak	Pass	Full RU	Harmonic
103	802.11ax HE40	147	-	-	-	-	-	-	-	Full RU	Band Edge
	802.11ax HE40	147	13370.00	43.84	54.00	-10.16	H	Avg.	Pass	Full RU	Harmonic
104	802.11ax HE40	187	-	-	-	-	-	-	-	Full RU	Band Edge

**FCC RADIO TEST REPORT**

Report No. : FR5N2836G

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
104	802.11ax HE40	187	13770.00	54.89	88.20	-33.31	H	Peak	Pass	Full RU	Harmonic
105	802.11ax HE80	135	-	-	-	-	-	-	-	Full RU	Band Edge
	802.11ax HE80	135	13250.00	43.98	54.00	-10.02	H	Avg.	Pass	Full RU	Harmonic
106	802.11ax HE80	151	-	-	-	-	-	-	-	Full RU	Band Edge
	802.11ax HE80	151	13410.00	55.02	88.20	-33.18	V	Peak	Pass	Full RU	Harmonic
107	802.11ax HE80	183	-	-	-	-	-	-	-	Full RU	Band Edge
	802.11ax HE80	183	13730.00	54.87	88.20	-33.33	V	Peak	Pass	Full RU	Harmonic
108	802.11ax HE160	143	-	-	-	-	-	-	-	Full RU	Band Edge
	802.11ax HE160	143	13330.00	44.01	54.00	-9.99	V	Avg.	Pass	Full RU	Harmonic
109	802.11ax HE160	175	-	-	-	-	-	-	-	Full RU	Band Edge
	802.11ax HE160	175	13650.00	56.14	88.20	-32.06	H	Peak	Pass	Full RU	Harmonic



FCC RADIO TEST REPORT

Report No. : FR5N2836G

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
126	LF	7	741.98	37.26	46.00	-8.74	H	Peak	Pass	-	LF



Mode	66																																																																																																			
	Band Edge																																																																																																			
	U-NII-5_5.925-6.425_802.11a_CH1_5955MHz																																																																																																			
ANT	0+1																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5923.28</td><td>74.34</td><td>88.20</td><td>-13.86</td><td>59.39</td><td>34.00</td><td>11.58</td><td>34.20</td><td>3.57</td><td>100</td><td>302</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5923.28	74.34	88.20	-13.86	59.39	34.00	11.58	34.20	3.57	100	302	Peak	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>114.43</td><td>-----</td><td>-----</td><td>99.46</td><td>34.00</td><td>11.65</td><td>34.24</td><td>3.56</td><td>100</td><td>302</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	114.43	-----	-----	99.46	34.00	11.65	34.24	3.56	100	302	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5923.28	74.34	88.20	-13.86	59.39	34.00	11.58	34.20	3.57	100	302	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5955.00	114.43	-----	-----	99.46	34.00	11.65	34.24	3.56	100	302	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.32</td><td>64.55</td><td>68.20</td><td>-3.65</td><td>49.59</td><td>34.00</td><td>11.59</td><td>34.20</td><td>3.57</td><td>100</td><td>302</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.32	64.55	68.20	-3.65	49.59	34.00	11.59	34.20	3.57	100	302	Average	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>108.01</td><td>-----</td><td>-----</td><td>93.04</td><td>34.00</td><td>11.65</td><td>34.24</td><td>3.56</td><td>100</td><td>302</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	108.01	-----	-----	93.04	34.00	11.65	34.24	3.56	100	302	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5924.32	64.55	68.20	-3.65	49.59	34.00	11.59	34.20	3.57	100	302	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5955.00	108.01	-----	-----	93.04	34.00	11.65	34.24	3.56	100	302	Average																																																																																								



Mode	66																																																																																																			
	Band Edge																																																																																																			
	U-NII-5_5.925-6.425_802.11a_CH1_5955MHz																																																																																																			
ANT	0+1																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.97</td><td>73.45</td><td>88.20</td><td>-14.75</td><td>58.49</td><td>34.00</td><td>11.59</td><td>34.20</td><td>3.57</td><td>100</td><td>293</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.97	73.45	88.20	-14.75	58.49	34.00	11.59	34.20	3.57	100	293	Peak	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>115.62</td><td>-----</td><td>-----</td><td>100.66</td><td>34.00</td><td>11.66</td><td>34.25</td><td>3.55</td><td>100</td><td>293</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	115.62	-----	-----	100.66	34.00	11.66	34.25	3.55	100	293	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5924.97	73.45	88.20	-14.75	58.49	34.00	11.59	34.20	3.57	100	293	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5955.00	115.62	-----	-----	100.66	34.00	11.66	34.25	3.55	100	293	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.97</td><td>65.22</td><td>68.20</td><td>-2.98</td><td>58.26</td><td>34.00</td><td>11.59</td><td>34.20</td><td>3.57</td><td>100</td><td>293</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.97	65.22	68.20	-2.98	58.26	34.00	11.59	34.20	3.57	100	293	Average	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>108.22</td><td>-----</td><td>-----</td><td>93.26</td><td>34.00</td><td>11.63</td><td>34.23</td><td>3.56</td><td>100</td><td>293</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	108.22	-----	-----	93.26	34.00	11.63	34.23	3.56	100	293	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5924.97	65.22	68.20	-2.98	58.26	34.00	11.59	34.20	3.57	100	293	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5955.00	108.22	-----	-----	93.26	34.00	11.63	34.23	3.56	100	293	Average																																																																																								



Mode	66																																																																																																																																																																									
	Harmonic																																																																																																																																																																									
	U-NII-5_5.925-6.425_802.11a_CH1_5955MHz																																																																																																																																																																									
ANT	0+1																																																																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2026-01-17 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11910.00</td><td>51.33</td><td>74.00</td><td>-22.67</td><td>36.13</td><td>38.68</td><td>16.36</td><td>40.34</td><td>0.50</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>11910.00</td><td>40.77</td><td>54.00</td><td>-13.23</td><td>25.57</td><td>38.68</td><td>16.36</td><td>40.34</td><td>0.50</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17865.00</td><td>53.22</td><td>74.00</td><td>-20.78</td><td>38.87</td><td>40.36</td><td>20.04</td><td>46.76</td><td>0.71</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>17865.00</td><td>42.66</td><td>54.00</td><td>-11.34</td><td>28.31</td><td>40.36</td><td>20.04</td><td>46.76</td><td>0.71</td><td>--</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11910.00	51.33	74.00	-22.67	36.13	38.68	16.36	40.34	0.50	--	Peak	2	11910.00	40.77	54.00	-13.23	25.57	38.68	16.36	40.34	0.50	--	Average	3	17865.00	53.22	74.00	-20.78	38.87	40.36	20.04	46.76	0.71	--	Peak	4	17865.00	42.66	54.00	-11.34	28.31	40.36	20.04	46.76	0.71	--	Average	Level (dBuV/m) Date: 2026-01-17 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11910.00</td><td>50.21</td><td>74.00</td><td>-23.79</td><td>35.01</td><td>38.68</td><td>16.36</td><td>40.34</td><td>0.50</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>11910.00</td><td>39.65</td><td>54.00</td><td>-14.35</td><td>24.45</td><td>38.68</td><td>16.36</td><td>40.34</td><td>0.50</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17865.00</td><td>53.37</td><td>74.00</td><td>-20.63</td><td>39.02</td><td>40.36</td><td>20.04</td><td>46.76</td><td>0.71</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>17865.00</td><td>42.81</td><td>54.00</td><td>-11.19</td><td>28.46</td><td>40.36</td><td>20.04</td><td>46.76</td><td>0.71</td><td>--</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11910.00	50.21	74.00	-23.79	35.01	38.68	16.36	40.34	0.50	--	Peak	2	11910.00	39.65	54.00	-14.35	24.45	38.68	16.36	40.34	0.50	--	Average	3	17865.00	53.37	74.00	-20.63	39.02	40.36	20.04	46.76	0.71	--	Peak	4	17865.00	42.81	54.00	-11.19	28.46	40.36	20.04	46.76	0.71	--	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																
1	11910.00	51.33	74.00	-22.67	36.13	38.68	16.36	40.34	0.50	--	Peak																																																																																																																																																															
2	11910.00	40.77	54.00	-13.23	25.57	38.68	16.36	40.34	0.50	--	Average																																																																																																																																																															
3	17865.00	53.22	74.00	-20.78	38.87	40.36	20.04	46.76	0.71	--	Peak																																																																																																																																																															
4	17865.00	42.66	54.00	-11.34	28.31	40.36	20.04	46.76	0.71	--	Average																																																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																
1	11910.00	50.21	74.00	-23.79	35.01	38.68	16.36	40.34	0.50	--	Peak																																																																																																																																																															
2	11910.00	39.65	54.00	-14.35	24.45	38.68	16.36	40.34	0.50	--	Average																																																																																																																																																															
3	17865.00	53.37	74.00	-20.63	39.02	40.36	20.04	46.76	0.71	--	Peak																																																																																																																																																															
4	17865.00	42.81	54.00	-11.19	28.46	40.36	20.04	46.76	0.71	--	Average																																																																																																																																																															



Mode	66	
	Harmonic	
	U-NII-5_5.925-6.425_802.11a_CH1_5955MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-01-17 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 10600 12080 13560 15040 16520 18000 Frequency (MHz) Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2026-01-17 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 10600 12080 13560 15040 16520 18000 Frequency (MHz) Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL



Mode	67																																																																																																																																							
	Harmonic																																																																																																																																							
	U-NII-5_5.925-6.425_802.11a_CH49_6195MHz																																																																																																																																							
ANT	0+1																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	Level (dBuV/m) Date: 2026-01-17 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12390.00</td><td>52.30</td><td>74.00</td><td>-21.70</td><td>36.14</td><td>39.18</td><td>16.74</td><td>40.23</td><td>0.47</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>12390.00</td><td>41.74</td><td>54.00</td><td>-12.26</td><td>25.58</td><td>39.18</td><td>16.74</td><td>40.23</td><td>0.47</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>18585.00</td><td>38.67</td><td>74.00</td><td>-35.33</td><td>55.95</td><td>38.34</td><td>18.62</td><td>64.70</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	12390.00	52.30	74.00	-21.70	36.14	39.18	16.74	40.23	0.47	--	Peak	2	12390.00	41.74	54.00	-12.26	25.58	39.18	16.74	40.23	0.47	--	Average	3	18585.00	38.67	74.00	-35.33	55.95	38.34	18.62	64.70	-9.54	--	Peak	Level (dBuV/m) Date: 2026-01-17 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12390.00</td><td>51.71</td><td>74.00</td><td>-22.29</td><td>35.55</td><td>39.18</td><td>16.74</td><td>40.23</td><td>0.47</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>12390.00</td><td>41.15</td><td>54.00</td><td>-12.85</td><td>24.99</td><td>39.18</td><td>16.74</td><td>40.23</td><td>0.47</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>18585.00</td><td>38.87</td><td>74.00</td><td>-35.13</td><td>56.15</td><td>38.34</td><td>18.62</td><td>64.70</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	12390.00	51.71	74.00	-22.29	35.55	39.18	16.74	40.23	0.47	--	Peak	2	12390.00	41.15	54.00	-12.85	24.99	39.18	16.74	40.23	0.47	--	Average	3	18585.00	38.87	74.00	-35.13	56.15	38.34	18.62	64.70	-9.54	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																														
1	12390.00	52.30	74.00	-21.70	36.14	39.18	16.74	40.23	0.47	--	Peak																																																																																																																													
2	12390.00	41.74	54.00	-12.26	25.58	39.18	16.74	40.23	0.47	--	Average																																																																																																																													
3	18585.00	38.67	74.00	-35.33	55.95	38.34	18.62	64.70	-9.54	--	Peak																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																														
1	12390.00	51.71	74.00	-22.29	35.55	39.18	16.74	40.23	0.47	--	Peak																																																																																																																													
2	12390.00	41.15	54.00	-12.85	24.99	39.18	16.74	40.23	0.47	--	Average																																																																																																																													
3	18585.00	38.87	74.00	-35.13	56.15	38.34	18.62	64.70	-9.54	--	Peak																																																																																																																													





Mode	67	
	Harmonic	
	U-NII-5_5.925-6.425_802.11a_CH49_6195MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-01-17 Frequency (MHz) Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2026-01-17 Frequency (MHz) Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL



Mode	68																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-5_5.925-6.425_802.11a_CH93_6415MHz																																																																																																																									
ANT	0+1																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2026-01-17 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12830.00</td><td>51.51</td><td>88.20</td><td>-36.69</td><td>34.62</td><td>39.90</td><td>17.09</td><td>40.54</td><td>0.44</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>19245.00</td><td>38.27</td><td>74.00</td><td>-35.73</td><td>54.90</td><td>38.20</td><td>18.96</td><td>64.25</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	12830.00	51.51	88.20	-36.69	34.62	39.90	17.09	40.54	0.44	--	Peak	2	19245.00	38.27	74.00	-35.73	54.90	38.20	18.96	64.25	-9.54	--	Peak	Level (dBuV/m) Date: 2026-01-17 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12830.00</td><td>51.02</td><td>88.20</td><td>-37.18</td><td>34.13</td><td>39.90</td><td>17.09</td><td>40.54</td><td>0.44</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>19245.00</td><td>38.51</td><td>74.00</td><td>-35.49</td><td>55.14</td><td>38.20</td><td>18.96</td><td>64.25</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	12830.00	51.02	88.20	-37.18	34.13	39.90	17.09	40.54	0.44	--	Peak	2	19245.00	38.51	74.00	-35.49	55.14	38.20	18.96	64.25	-9.54	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	12830.00	51.51	88.20	-36.69	34.62	39.90	17.09	40.54	0.44	--	Peak																																																																																																															
2	19245.00	38.27	74.00	-35.73	54.90	38.20	18.96	64.25	-9.54	--	Peak																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	12830.00	51.02	88.20	-37.18	34.13	39.90	17.09	40.54	0.44	--	Peak																																																																																																															
2	19245.00	38.51	74.00	-35.49	55.14	38.20	18.96	64.25	-9.54	--	Peak																																																																																																															

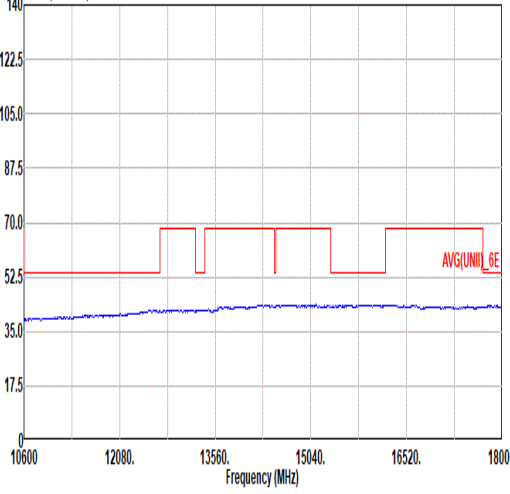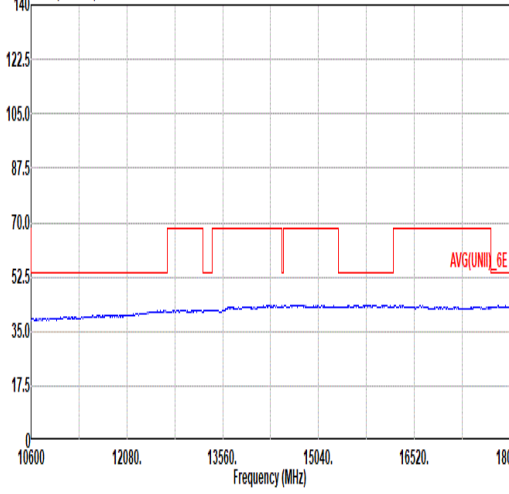

Mode	68	
	Harmonic	
	U-NII-5_5.925-6.425_802.11a_CH93_6415MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-01-17  AVG(UNII)_6E Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2026-01-17  AVG(UNII)_6E Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL





Mode	69																																																																																									
	Band Edge																																																																																									
	U-NII-5_5.925-6.425_802.11ax HE20_CH1_Full RU_5955MHz																																																																																									
ANT	0+1																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 5923.15</td><td>77.89</td><td>88.20 -10.31</td><td>62.94</td><td>34.00</td><td>11.58</td><td>34.20</td><td>3.57</td><td>100</td><td>302 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5923.15	77.89	88.20 -10.31	62.94	34.00	11.58	34.20	3.57	100	302 Peak	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 5955.00</td><td>115.86</td><td>-----</td><td>100.89</td><td>34.00</td><td>11.65</td><td>34.24</td><td>3.56</td><td>100</td><td>302 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5955.00	115.86	-----	100.89	34.00	11.65	34.24	3.56	100	302 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																	
1 5923.15	77.89	88.20 -10.31	62.94	34.00	11.58	34.20	3.57	100	302 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																	
1 5955.00	115.86	-----	100.89	34.00	11.65	34.24	3.56	100	302 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 5923.15</td><td>64.68</td><td>68.20 -3.52</td><td>49.73</td><td>34.00</td><td>11.58</td><td>34.20</td><td>3.57</td><td>100</td><td>302 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5923.15	64.68	68.20 -3.52	49.73	34.00	11.58	34.20	3.57	100	302 Average	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 5955.00</td><td>107.57</td><td>-----</td><td>92.61</td><td>34.00</td><td>11.63</td><td>34.23</td><td>3.56</td><td>100</td><td>302 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5955.00	107.57	-----	92.61	34.00	11.63	34.23	3.56	100	302 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																	
1 5923.15	64.68	68.20 -3.52	49.73	34.00	11.58	34.20	3.57	100	302 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																	
1 5955.00	107.57	-----	92.61	34.00	11.63	34.23	3.56	100	302 Average																																																																																	



Mode	69																																																																																									
	Band Edge																																																																																									
	U-NII-5_5.925-6.425_802.11ax HE20_CH1_Full RU_5955MHz																																																																																									
ANT	0+1																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5924.32</td><td>79.96</td><td>88.20</td><td>-8.24</td><td>65.00</td><td>34.00</td><td>11.59</td><td>34.20</td><td>3.57</td><td>100 302 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5924.32	79.96	88.20	-8.24	65.00	34.00	11.59	34.20	3.57	100 302 Peak	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5955.00</td><td>115.66</td><td>-----</td><td>-----</td><td>100.69</td><td>34.00</td><td>11.65</td><td>34.24</td><td>3.56</td><td>100 302 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5955.00	115.66	-----	-----	100.69	34.00	11.65	34.24	3.56	100 302 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 5924.32	79.96	88.20	-8.24	65.00	34.00	11.59	34.20	3.57	100 302 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 5955.00	115.66	-----	-----	100.69	34.00	11.65	34.24	3.56	100 302 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5924.97</td><td>66.08</td><td>68.20</td><td>-2.12</td><td>51.12</td><td>34.00</td><td>11.59</td><td>34.20</td><td>3.57</td><td>100 302 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5924.97	66.08	68.20	-2.12	51.12	34.00	11.59	34.20	3.57	100 302 Average	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5955.00</td><td>107.21</td><td>-----</td><td>-----</td><td>92.24</td><td>34.00</td><td>11.65</td><td>34.24</td><td>3.56</td><td>100 302 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5955.00	107.21	-----	-----	92.24	34.00	11.65	34.24	3.56	100 302 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 5924.97	66.08	68.20	-2.12	51.12	34.00	11.59	34.20	3.57	100 302 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 5955.00	107.21	-----	-----	92.24	34.00	11.65	34.24	3.56	100 302 Average																																																																																	



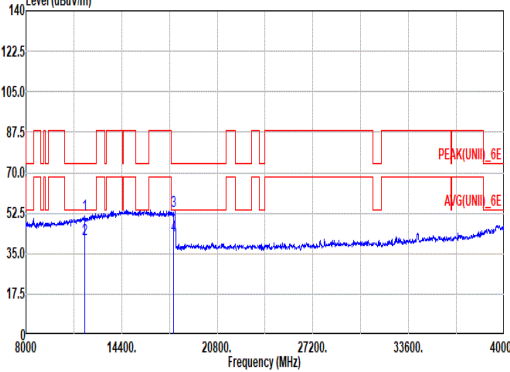
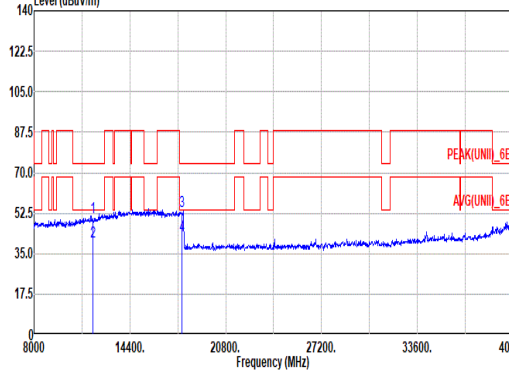


Mode	69																																																																																																																																																																									
	Harmonic																																																																																																																																																																									
	U-NII-5_5.925-6.425_802.11ax HE20_CH1_Full RU_5955MHz																																																																																																																																																																									
ANT	0+1																																																																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2026-01-17  Site : 03CH23-HY Condition: PEAK(U-NII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11910.00</td><td>51.52</td><td>74.00</td><td>-22.48</td><td>36.32</td><td>38.68</td><td>16.36</td><td>40.34</td><td>0.50</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>11910.00</td><td>40.96</td><td>54.00</td><td>-13.04</td><td>25.76</td><td>38.68</td><td>16.36</td><td>40.34</td><td>0.50</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17865.00</td><td>53.37</td><td>74.00</td><td>-20.63</td><td>39.02</td><td>40.36</td><td>20.04</td><td>46.76</td><td>0.71</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>17865.00</td><td>42.81</td><td>54.00</td><td>-11.19</td><td>28.46</td><td>40.36</td><td>20.04</td><td>46.76</td><td>0.71</td><td>--</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11910.00	51.52	74.00	-22.48	36.32	38.68	16.36	40.34	0.50	--	Peak	2	11910.00	40.96	54.00	-13.04	25.76	38.68	16.36	40.34	0.50	--	Average	3	17865.00	53.37	74.00	-20.63	39.02	40.36	20.04	46.76	0.71	--	Peak	4	17865.00	42.81	54.00	-11.19	28.46	40.36	20.04	46.76	0.71	--	Average	Level (dBuV/m) Date: 2026-01-17  Site : 03CH23-HY Condition: PEAK(U-NII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11910.00</td><td>50.66</td><td>74.00</td><td>-23.34</td><td>35.46</td><td>38.68</td><td>16.36</td><td>40.34</td><td>0.50</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>11910.00</td><td>40.10</td><td>54.00</td><td>-13.90</td><td>24.90</td><td>38.68</td><td>16.36</td><td>40.34</td><td>0.50</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17865.00</td><td>53.34</td><td>74.00</td><td>-20.66</td><td>38.99</td><td>40.36</td><td>20.04</td><td>46.76</td><td>0.71</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>17865.00</td><td>42.78</td><td>54.00</td><td>-11.22</td><td>28.43</td><td>40.36</td><td>20.04</td><td>46.76</td><td>0.71</td><td>--</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11910.00	50.66	74.00	-23.34	35.46	38.68	16.36	40.34	0.50	--	Peak	2	11910.00	40.10	54.00	-13.90	24.90	38.68	16.36	40.34	0.50	--	Average	3	17865.00	53.34	74.00	-20.66	38.99	40.36	20.04	46.76	0.71	--	Peak	4	17865.00	42.78	54.00	-11.22	28.43	40.36	20.04	46.76	0.71	--	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																
1	11910.00	51.52	74.00	-22.48	36.32	38.68	16.36	40.34	0.50	--	Peak																																																																																																																																																															
2	11910.00	40.96	54.00	-13.04	25.76	38.68	16.36	40.34	0.50	--	Average																																																																																																																																																															
3	17865.00	53.37	74.00	-20.63	39.02	40.36	20.04	46.76	0.71	--	Peak																																																																																																																																																															
4	17865.00	42.81	54.00	-11.19	28.46	40.36	20.04	46.76	0.71	--	Average																																																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																
1	11910.00	50.66	74.00	-23.34	35.46	38.68	16.36	40.34	0.50	--	Peak																																																																																																																																																															
2	11910.00	40.10	54.00	-13.90	24.90	38.68	16.36	40.34	0.50	--	Average																																																																																																																																																															
3	17865.00	53.34	74.00	-20.66	38.99	40.36	20.04	46.76	0.71	--	Peak																																																																																																																																																															
4	17865.00	42.78	54.00	-11.22	28.43	40.36	20.04	46.76	0.71	--	Average																																																																																																																																																															



Mode	69	
	Harmonic	
	U-NII-5_5.925-6.425_802.11ax HE20_CH1_Full RU_5955MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-01-17 AVG(UNII)_6E Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2026-01-17 AVG(UNII)_6E Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL

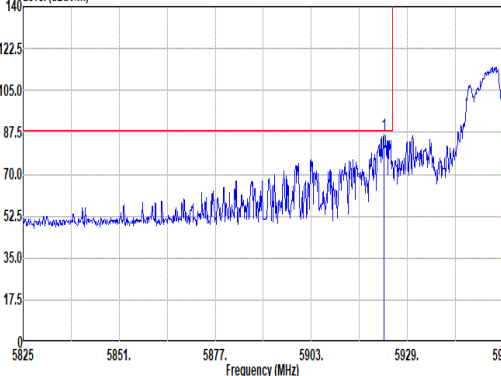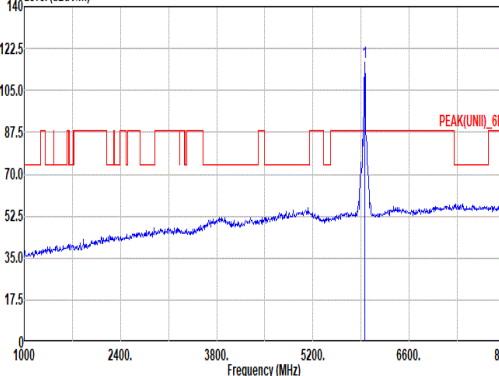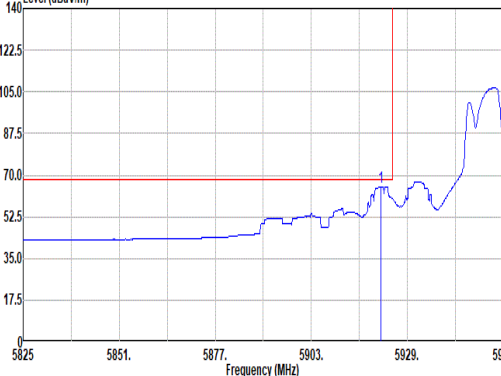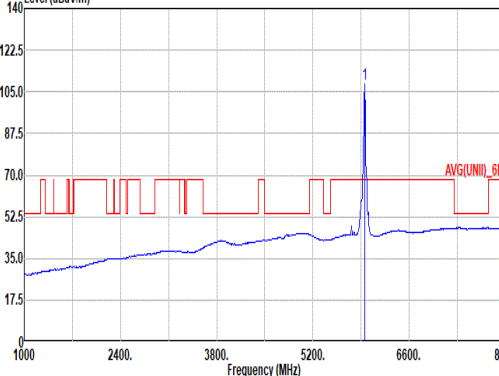

		70																																																																																																										
Mode		Band Edge																																																																																																										
		U-NII-5_5.925-6.425_802.11ax HE20_CH1_Partial RU 106/53_5955MHz																																																																																																										
ANT		0+1																																																																																																										
Pol.	Horizontal										Fundamental																																																																																																	
Peak	Level (dBuV/m) Date: 2026-01-16  Site : 03CH23-HY Condition: PEAK_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5922.63</td><td>86.50</td><td>88.20</td><td>-1.70</td><td>71.55</td><td>34.00</td><td>11.58</td><td>34.20</td><td>3.57</td><td>100</td><td>306</td><td>Peak</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5922.63	86.50	88.20	-1.70	71.55	34.00	11.58	34.20	3.57	100	306	Peak	Level (dBuV/m) Date: 2026-01-16  Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>116.68</td><td>-----</td><td>-----</td><td>101.71</td><td>34.00</td><td>11.65</td><td>34.24</td><td>3.56</td><td>100</td><td>306</td><td>Peak</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	116.68	-----	-----	101.71	34.00	11.65	34.24	3.56	100	306	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	5922.63	86.50	88.20	-1.70	71.55	34.00	11.58	34.20	3.57	100	306	Peak																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	5955.00	116.68	-----	-----	101.71	34.00	11.65	34.24	3.56	100	306	Peak																																																																																																
Avg	Level (dBuV/m) Date: 2026-01-16  Site : 03CH23-HY Condition: AVG_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5921.85</td><td>64.90</td><td>68.20</td><td>-3.30</td><td>49.95</td><td>34.00</td><td>11.58</td><td>34.20</td><td>3.57</td><td>100</td><td>306</td><td>Average</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5921.85	64.90	68.20	-3.30	49.95	34.00	11.58	34.20	3.57	100	306	Average	Level (dBuV/m) Date: 2026-01-16  Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>108.47</td><td>-----</td><td>-----</td><td>93.51</td><td>34.00</td><td>11.63</td><td>34.23</td><td>3.56</td><td>100</td><td>306</td><td>Average</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	108.47	-----	-----	93.51	34.00	11.63	34.23	3.56	100	306	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	5921.85	64.90	68.20	-3.30	49.95	34.00	11.58	34.20	3.57	100	306	Average																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	5955.00	108.47	-----	-----	93.51	34.00	11.63	34.23	3.56	100	306	Average																																																																																																



Mode	70																																																																																																	
	Band Edge																																																																																																	
	U-NII-5_5.925-6.425_802.11ax HE20_CH1_Partial RU 106/53_5955MHz																																																																																																	
ANT	0+1																																																																																																	
Pol.	Vertical						Fundamental																																																																																											
Peak	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.71</td><td>83.97</td><td>88.20</td><td>-4.23</td><td>69.01</td><td>34.00</td><td>11.59</td><td>34.20</td><td>3.57</td><td>100</td><td>297 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.71	83.97	88.20	-4.23	69.01	34.00	11.59	34.20	3.57	100	297 Peak	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>114.16</td><td>-----</td><td>-----</td><td>99.20</td><td>34.00</td><td>11.63</td><td>34.23</td><td>3.56</td><td>100</td><td>297 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	114.16	-----	-----	99.20	34.00	11.63	34.23	3.56	100	297 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5924.71	83.97	88.20	-4.23	69.01	34.00	11.59	34.20	3.57	100	297 Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5955.00	114.16	-----	-----	99.20	34.00	11.63	34.23	3.56	100	297 Peak																																																																																							
Avg	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.58</td><td>64.68</td><td>68.20</td><td>-3.52</td><td>49.72</td><td>34.00</td><td>11.59</td><td>34.20</td><td>3.57</td><td>100</td><td>297 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.58	64.68	68.20	-3.52	49.72	34.00	11.59	34.20	3.57	100	297 Average	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>106.86</td><td>-----</td><td>-----</td><td>91.90</td><td>34.00</td><td>11.63</td><td>34.23</td><td>3.56</td><td>100</td><td>297 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	106.86	-----	-----	91.90	34.00	11.63	34.23	3.56	100	297 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5924.58	64.68	68.20	-3.52	49.72	34.00	11.59	34.20	3.57	100	297 Average																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5955.00	106.86	-----	-----	91.90	34.00	11.63	34.23	3.56	100	297 Average																																																																																							



Mode	71																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-5_5.925-6.425_802.11ax HE20_CH49_Full RU_6195MHz																																																																																																																									
ANT	0+1																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	Level (dBuV/m) Date: 2026-01-17 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 12390.00</td><td>51.69</td><td>74.00</td><td>-22.31</td><td>35.53</td><td>39.18</td><td>16.74</td><td>40.23</td><td>0.47</td><td>-- -- Peak</td></tr><tr><td>2 12390.00</td><td>41.13</td><td>54.00</td><td>-12.87</td><td>24.97</td><td>39.18</td><td>16.74</td><td>40.23</td><td>0.47</td><td>-- -- Average</td></tr><tr><td>3 18585.00</td><td>38.32</td><td>74.00</td><td>-35.68</td><td>55.60</td><td>38.34</td><td>18.62</td><td>64.70</td><td>-9.54</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 12390.00	51.69	74.00	-22.31	35.53	39.18	16.74	40.23	0.47	-- -- Peak	2 12390.00	41.13	54.00	-12.87	24.97	39.18	16.74	40.23	0.47	-- -- Average	3 18585.00	38.32	74.00	-35.68	55.60	38.34	18.62	64.70	-9.54	-- -- Peak	Level (dBuV/m) Date: 2026-01-17 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 12390.00</td><td>52.02</td><td>74.00</td><td>-21.98</td><td>35.86</td><td>39.18</td><td>16.74</td><td>40.23</td><td>0.47</td><td>-- -- Peak</td></tr><tr><td>2 12390.00</td><td>41.46</td><td>54.00</td><td>-12.54</td><td>25.30</td><td>39.18</td><td>16.74</td><td>40.23</td><td>0.47</td><td>-- -- Average</td></tr><tr><td>3 18585.00</td><td>37.93</td><td>74.00</td><td>-36.07</td><td>55.21</td><td>38.34</td><td>18.62</td><td>64.70</td><td>-9.54</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 12390.00	52.02	74.00	-21.98	35.86	39.18	16.74	40.23	0.47	-- -- Peak	2 12390.00	41.46	54.00	-12.54	25.30	39.18	16.74	40.23	0.47	-- -- Average	3 18585.00	37.93	74.00	-36.07	55.21	38.34	18.62	64.70	-9.54	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 12390.00	51.69	74.00	-22.31	35.53	39.18	16.74	40.23	0.47	-- -- Peak																																																																																																																	
2 12390.00	41.13	54.00	-12.87	24.97	39.18	16.74	40.23	0.47	-- -- Average																																																																																																																	
3 18585.00	38.32	74.00	-35.68	55.60	38.34	18.62	64.70	-9.54	-- -- Peak																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 12390.00	52.02	74.00	-21.98	35.86	39.18	16.74	40.23	0.47	-- -- Peak																																																																																																																	
2 12390.00	41.46	54.00	-12.54	25.30	39.18	16.74	40.23	0.47	-- -- Average																																																																																																																	
3 18585.00	37.93	74.00	-36.07	55.21	38.34	18.62	64.70	-9.54	-- -- Peak																																																																																																																	



Mode	71	
	Harmonic	
	U-NII-5_5.925-6.425_802.11ax HE20_CH49_Full RU_6195MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-01-17 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 10600 12080 13560 15040 16520 18000 Frequency (MHz) Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2026-01-17 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 10600 12080 13560 15040 16520 18000 Frequency (MHz) Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL



Mode	72																																																																																																															
	Harmonic																																																																																																															
	U-NII-5_5.925-6.425_802.11ax HE20_CH93_Full RU_6415MHz																																																																																																															
ANT	0+1																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	Level (dBuV/m) Date: 2026-01-17 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12830.00</td><td>51.90</td><td>88.20</td><td>-36.30</td><td>35.01</td><td>39.90</td><td>17.09</td><td>40.54</td><td>0.44</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>19245.00</td><td>38.76</td><td>74.00</td><td>-35.24</td><td>55.39</td><td>38.20</td><td>18.96</td><td>64.25</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	12830.00	51.90	88.20	-36.30	35.01	39.90	17.09	40.54	0.44	--	Peak	2	19245.00	38.76	74.00	-35.24	55.39	38.20	18.96	64.25	-9.54	--	Peak	Level (dBuV/m) Date: 2026-01-17 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12830.00</td><td>51.16</td><td>88.20</td><td>-37.04</td><td>34.27</td><td>39.90</td><td>17.09</td><td>40.54</td><td>0.44</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>19245.00</td><td>38.78</td><td>74.00</td><td>-35.22</td><td>55.41</td><td>38.20</td><td>18.96</td><td>64.25</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	12830.00	51.16	88.20	-37.04	34.27	39.90	17.09	40.54	0.44	--	Peak	2	19245.00	38.78	74.00	-35.22	55.41	38.20	18.96	64.25	-9.54	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	12830.00	51.90	88.20	-36.30	35.01	39.90	17.09	40.54	0.44	--	Peak																																																																																																					
2	19245.00	38.76	74.00	-35.24	55.39	38.20	18.96	64.25	-9.54	--	Peak																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	12830.00	51.16	88.20	-37.04	34.27	39.90	17.09	40.54	0.44	--	Peak																																																																																																					
2	19245.00	38.78	74.00	-35.22	55.41	38.20	18.96	64.25	-9.54	--	Peak																																																																																																					



Mode	72	
	Harmonic	
	U-NII-5_5.925-6.425_802.11ax HE20_CH93_Full RU_6415MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-01-17 AVG(UNII)_6E Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2026-01-17 AVG(UNII)_6E Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL





Mode	73																																																																									
	Band Edge																																																																									
	U-NII-5_5.925-6.425_802.11ax HE40_CH3_Full RU_5965MHz																																																																									
ANT	0+1																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 5921.88 79.95 88.20 -8.25 65.00 34.00 11.58 34.20 3.57 100 307 Peak</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg									1 5921.88 79.95 88.20 -8.25 65.00 34.00 11.58 34.20 3.57 100 307 Peak									Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 5965.00 114.38 ----- 99.42 34.00 11.67 34.26 3.55 100 307 Peak</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg									1 5965.00 114.38 ----- 99.42 34.00 11.67 34.26 3.55 100 307 Peak								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																	
Freq Level Line Margin Level Factor Loss Factor Factor																																																																										
MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg																																																																										
1 5921.88 79.95 88.20 -8.25 65.00 34.00 11.58 34.20 3.57 100 307 Peak																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin Level Factor Loss Factor Factor																																																																										
MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg																																																																										
1 5965.00 114.38 ----- 99.42 34.00 11.67 34.26 3.55 100 307 Peak																																																																										
Avg	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 5922.72 65.78 68.20 -2.42 50.83 34.00 11.58 34.20 3.57 100 307 Average</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg									1 5922.72 65.78 68.20 -2.42 50.83 34.00 11.58 34.20 3.57 100 307 Average									Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 5965.00 105.10 ----- 90.14 34.00 11.66 34.25 3.55 100 307 Average</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg									1 5965.00 105.10 ----- 90.14 34.00 11.66 34.25 3.55 100 307 Average								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin Level Factor Loss Factor Factor																																																																										
MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg																																																																										
1 5922.72 65.78 68.20 -2.42 50.83 34.00 11.58 34.20 3.57 100 307 Average																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin Level Factor Loss Factor Factor																																																																										
MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg																																																																										
1 5965.00 105.10 ----- 90.14 34.00 11.66 34.25 3.55 100 307 Average																																																																										



Mode	73																																																																																																			
	Band Edge																																																																																																			
	U-NII-5_5.925-6.425_802.11ax HE40_CH3_Full RU_5965MHz																																																																																																			
ANT	0+1																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5913.90</td><td>77.27</td><td>88.20</td><td>-10.93</td><td>62.32</td><td>34.00</td><td>11.57</td><td>34.19</td><td>3.57</td><td>100</td><td>297</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5913.90	77.27	88.20	-10.93	62.32	34.00	11.57	34.19	3.57	100	297	Peak	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5965.00</td><td>112.11</td><td>-----</td><td>-----</td><td>97.15</td><td>34.00</td><td>11.67</td><td>34.26</td><td>3.55</td><td>100</td><td>297</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5965.00	112.11	-----	-----	97.15	34.00	11.67	34.26	3.55	100	297	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5913.90	77.27	88.20	-10.93	62.32	34.00	11.57	34.19	3.57	100	297	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5965.00	112.11	-----	-----	97.15	34.00	11.67	34.26	3.55	100	297	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.96</td><td>65.19</td><td>68.20</td><td>-3.01</td><td>50.23</td><td>34.00</td><td>11.59</td><td>34.20</td><td>3.57</td><td>100</td><td>297</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.96	65.19	68.20	-3.01	50.23	34.00	11.59	34.20	3.57	100	297	Average	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5965.00</td><td>104.45</td><td>-----</td><td>-----</td><td>89.48</td><td>34.00</td><td>11.65</td><td>34.24</td><td>3.56</td><td>100</td><td>297</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5965.00	104.45	-----	-----	89.48	34.00	11.65	34.24	3.56	100	297	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5924.96	65.19	68.20	-3.01	50.23	34.00	11.59	34.20	3.57	100	297	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5965.00	104.45	-----	-----	89.48	34.00	11.65	34.24	3.56	100	297	Average																																																																																								

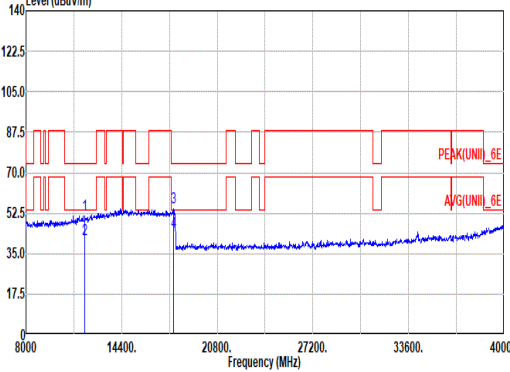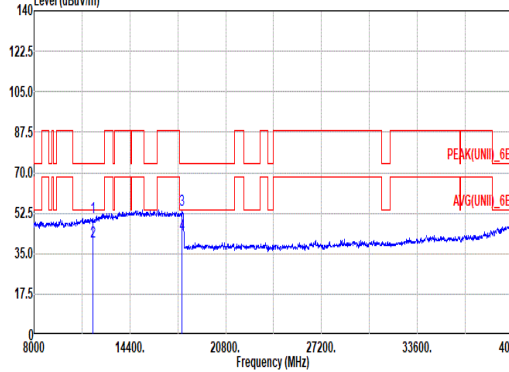

Mode	73																																																																																																																																																																								
	Harmonic																																																																																																																																																																								
	U-NII-5_5.925-6.425_802.11ax HE40_CH3_Full RU_5965MHz																																																																																																																																																																								
ANT	0+1																																																																																																																																																																								
Pol.	Horizontal						Vertical																																																																																																																																																																		
Peak Avg	Level (dBuV/m) Date: 2026-01-17  Site : 03CH23-HY Condition: PEAK(U11)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11930.00</td><td>51.91</td><td>74.00</td><td>-22.09</td><td>36.76</td><td>38.64</td><td>16.37</td><td>40.36</td><td>0.50</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>11930.00</td><td>41.35</td><td>54.00</td><td>-12.65</td><td>26.20</td><td>38.64</td><td>16.37</td><td>40.36</td><td>0.50</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17895.00</td><td>54.93</td><td>74.00</td><td>-19.07</td><td>40.44</td><td>40.48</td><td>20.06</td><td>46.76</td><td>0.71</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>17895.00</td><td>44.37</td><td>54.00</td><td>-9.63</td><td>29.88</td><td>40.48</td><td>20.06</td><td>46.76</td><td>0.71</td><td>--</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11930.00	51.91	74.00	-22.09	36.76	38.64	16.37	40.36	0.50	--	Peak	2	11930.00	41.35	54.00	-12.65	26.20	38.64	16.37	40.36	0.50	--	Average	3	17895.00	54.93	74.00	-19.07	40.44	40.48	20.06	46.76	0.71	--	Peak	4	17895.00	44.37	54.00	-9.63	29.88	40.48	20.06	46.76	0.71	--	Average	Level (dBuV/m) Date: 2026-01-17  Site : 03CH23-HY Condition: PEAK(U11)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11930.00</td><td>50.53</td><td>74.00</td><td>-23.47</td><td>35.38</td><td>38.64</td><td>16.37</td><td>40.36</td><td>0.50</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>11930.00</td><td>39.97</td><td>54.00</td><td>-14.03</td><td>24.82</td><td>38.64</td><td>16.37</td><td>40.36</td><td>0.50</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17895.00</td><td>53.88</td><td>74.00</td><td>-20.12</td><td>39.39</td><td>40.48</td><td>20.06</td><td>46.76</td><td>0.71</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>17895.00</td><td>43.32</td><td>54.00</td><td>-10.68</td><td>28.83</td><td>40.48</td><td>20.06</td><td>46.76</td><td>0.71</td><td>--</td><td>Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11930.00	50.53	74.00	-23.47	35.38	38.64	16.37	40.36	0.50	--	Peak	2	11930.00	39.97	54.00	-14.03	24.82	38.64	16.37	40.36	0.50	--	Average	3	17895.00	53.88	74.00	-20.12	39.39	40.48	20.06	46.76	0.71	--	Peak	4	17895.00	43.32	54.00	-10.68	28.83	40.48	20.06	46.76	0.71	--	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																															
1	11930.00	51.91	74.00	-22.09	36.76	38.64	16.37	40.36	0.50	--	Peak																																																																																																																																																														
2	11930.00	41.35	54.00	-12.65	26.20	38.64	16.37	40.36	0.50	--	Average																																																																																																																																																														
3	17895.00	54.93	74.00	-19.07	40.44	40.48	20.06	46.76	0.71	--	Peak																																																																																																																																																														
4	17895.00	44.37	54.00	-9.63	29.88	40.48	20.06	46.76	0.71	--	Average																																																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																															
1	11930.00	50.53	74.00	-23.47	35.38	38.64	16.37	40.36	0.50	--	Peak																																																																																																																																																														
2	11930.00	39.97	54.00	-14.03	24.82	38.64	16.37	40.36	0.50	--	Average																																																																																																																																																														
3	17895.00	53.88	74.00	-20.12	39.39	40.48	20.06	46.76	0.71	--	Peak																																																																																																																																																														
4	17895.00	43.32	54.00	-10.68	28.83	40.48	20.06	46.76	0.71	--	Average																																																																																																																																																														



Mode	73	
	Harmonic	
	U-NII-5_5.925-6.425_802.11ax HE40_CH3_Full RU_5965MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-01-17 AVG(UNII)_6E Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2026-01-17 AVG(UNII)_6E Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL



FCC RADIO TEST REPORT

Report No. : FR5N2836G

Mode	74																																																																									
	Band Edge																																																																									
	U-NII-5_5.925-6.425_802.11ax HE40_CH3_Partial RU 242/61_5965MHz																																																																									
ANT	0+1																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 5922.72 86.00 88.20 -2.20 71.05 34.00 11.58 34.20 3.57 100 304 Peak</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg									1 5922.72 86.00 88.20 -2.20 71.05 34.00 11.58 34.20 3.57 100 304 Peak									Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 5965.00 115.83 ----- 100.87 34.00 11.63 34.23 3.56 100 304 Peak</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg									1 5965.00 115.83 ----- 100.87 34.00 11.63 34.23 3.56 100 304 Peak								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																	
Freq Level Line Margin Level Factor Loss Factor Factor																																																																										
MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg																																																																										
1 5922.72 86.00 88.20 -2.20 71.05 34.00 11.58 34.20 3.57 100 304 Peak																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin Level Factor Loss Factor Factor																																																																										
MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg																																																																										
1 5965.00 115.83 ----- 100.87 34.00 11.63 34.23 3.56 100 304 Peak																																																																										
Avg	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 5913.48 65.03 68.20 -3.17 50.08 34.00 11.57 34.19 3.57 100 304 Average</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg									1 5913.48 65.03 68.20 -3.17 50.08 34.00 11.57 34.19 3.57 100 304 Average									Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 5965.00 106.21 ----- 91.25 34.00 11.63 34.23 3.56 100 304 Average</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg									1 5965.00 106.21 ----- 91.25 34.00 11.63 34.23 3.56 100 304 Average								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																	
Freq Level Line Margin Level Factor Loss Factor Factor																																																																										
MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg																																																																										
1 5913.48 65.03 68.20 -3.17 50.08 34.00 11.57 34.19 3.57 100 304 Average																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin Level Factor Loss Factor Factor																																																																										
MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg																																																																										
1 5965.00 106.21 ----- 91.25 34.00 11.63 34.23 3.56 100 304 Average																																																																										



		74																																																																																																																																																																																				
Mode		Band Edge																																																																																																																																																																																				
		U-NII-5_5.925-6.425_802.11ax HE40_CH3_Partial RU 242/61_5965MHz																																																																																																																																																																																				
ANT		0+1																																																																																																																																																																																				
Pol.		Vertical					Fundamental																																																																																																																																																																															
Peak		Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5896.12</td><td>83.62</td><td>88.20</td><td>-4.58</td><td>68.66</td><td>34.01</td><td>11.53</td><td>34.16</td><td>3.58</td><td>100 342 Peak</td></tr></tbody></table> Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5965.00</td><td>112.37</td><td>-----</td><td>-----</td><td>97.40</td><td>34.00</td><td>11.65</td><td>34.24</td><td>3.56</td><td>100 342 Peak</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5896.12	83.62	88.20	-4.58	68.66	34.01	11.53	34.16	3.58	100 342 Peak		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5965.00	112.37	-----	-----	97.40	34.00	11.65	34.24	3.56	100 342 Peak	Avg	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5920.48</td><td>63.48</td><td>68.20</td><td>-4.72</td><td>48.53</td><td>34.00</td><td>11.58</td><td>34.20</td><td>3.57</td><td>100 342 Average</td></tr></tbody></table> Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5965.00</td><td>104.23</td><td>-----</td><td>-----</td><td>89.26</td><td>34.00</td><td>11.65</td><td>34.24</td><td>3.56</td><td>100 342 Average</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5920.48	63.48	68.20	-4.72	48.53	34.00	11.58	34.20	3.57	100 342 Average		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5965.00	104.23	-----	-----	89.26	34.00	11.65	34.24	3.56	100 342 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																													
1 5896.12	83.62	88.20	-4.58	68.66	34.01	11.53	34.16	3.58	100 342 Peak																																																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																													
1 5965.00	112.37	-----	-----	97.40	34.00	11.65	34.24	3.56	100 342 Peak																																																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																													
1 5920.48	63.48	68.20	-4.72	48.53	34.00	11.58	34.20	3.57	100 342 Average																																																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																													
1 5965.00	104.23	-----	-----	89.26	34.00	11.65	34.24	3.56	100 342 Average																																																																																																																																																																													



Mode	75																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-5_5.925-6.425_802.11ax HE40_CH51_Full RU_6205MHz																																																																																																																									
ANT	0+1																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	Level (dBuV/m) Date: 2026-01-17 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 12410.00</td><td>52.07</td><td>74.00</td><td>-21.93</td><td>35.83</td><td>39.24</td><td>16.75</td><td>40.22</td><td>0.47</td><td>-- -- Peak</td></tr><tr><td>2 12410.00</td><td>41.51</td><td>54.00</td><td>-12.49</td><td>25.27</td><td>39.24</td><td>16.75</td><td>40.22</td><td>0.47</td><td>-- -- Average</td></tr><tr><td>3 18615.00</td><td>38.37</td><td>74.00</td><td>-35.63</td><td>55.57</td><td>38.37</td><td>18.63</td><td>64.66</td><td>-9.54</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 12410.00	52.07	74.00	-21.93	35.83	39.24	16.75	40.22	0.47	-- -- Peak	2 12410.00	41.51	54.00	-12.49	25.27	39.24	16.75	40.22	0.47	-- -- Average	3 18615.00	38.37	74.00	-35.63	55.57	38.37	18.63	64.66	-9.54	-- -- Peak	Level (dBuV/m) Date: 2026-01-17 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 12410.00</td><td>52.55</td><td>74.00</td><td>-21.45</td><td>36.31</td><td>39.24</td><td>16.75</td><td>40.22</td><td>0.47</td><td>-- -- Peak</td></tr><tr><td>2 12410.00</td><td>41.99</td><td>54.00</td><td>-12.01</td><td>25.75</td><td>39.24</td><td>16.75</td><td>40.22</td><td>0.47</td><td>-- -- Average</td></tr><tr><td>3 18615.00</td><td>38.12</td><td>74.00</td><td>-35.88</td><td>55.32</td><td>38.37</td><td>18.63</td><td>64.66</td><td>-9.54</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 12410.00	52.55	74.00	-21.45	36.31	39.24	16.75	40.22	0.47	-- -- Peak	2 12410.00	41.99	54.00	-12.01	25.75	39.24	16.75	40.22	0.47	-- -- Average	3 18615.00	38.12	74.00	-35.88	55.32	38.37	18.63	64.66	-9.54	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 12410.00	52.07	74.00	-21.93	35.83	39.24	16.75	40.22	0.47	-- -- Peak																																																																																																																	
2 12410.00	41.51	54.00	-12.49	25.27	39.24	16.75	40.22	0.47	-- -- Average																																																																																																																	
3 18615.00	38.37	74.00	-35.63	55.57	38.37	18.63	64.66	-9.54	-- -- Peak																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 12410.00	52.55	74.00	-21.45	36.31	39.24	16.75	40.22	0.47	-- -- Peak																																																																																																																	
2 12410.00	41.99	54.00	-12.01	25.75	39.24	16.75	40.22	0.47	-- -- Average																																																																																																																	
3 18615.00	38.12	74.00	-35.88	55.32	38.37	18.63	64.66	-9.54	-- -- Peak																																																																																																																	



Mode	75	
	Harmonic	
	U-NII-5_5.925-6.425_802.11ax HE40_CH51_Full RU_6205MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-01-17 AVG(UNII)_6E Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2026-01-17 AVG(UNII)_6E Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL



Mode	76																																																																																																															
	Harmonic																																																																																																															
	U-NII-5_5.925-6.425_802.11ax HE40_CH91_Full RU_6405MHz																																																																																																															
ANT	0+1																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	Level (dBuV/m) Date: 2026-01-17 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12810.00</td><td>52.19</td><td>88.20</td><td>-36.01</td><td>35.29</td><td>39.90</td><td>17.07</td><td>40.51</td><td>0.44</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>19215.00</td><td>39.51</td><td>74.00</td><td>-34.49</td><td>56.14</td><td>38.20</td><td>18.95</td><td>64.24</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	12810.00	52.19	88.20	-36.01	35.29	39.90	17.07	40.51	0.44	--	Peak	2	19215.00	39.51	74.00	-34.49	56.14	38.20	18.95	64.24	-9.54	--	Peak	Level (dBuV/m) Date: 2026-01-17 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12810.00</td><td>51.33</td><td>88.20</td><td>-36.87</td><td>34.43</td><td>39.90</td><td>17.07</td><td>40.51</td><td>0.44</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>19215.00</td><td>38.86</td><td>74.00</td><td>-35.14</td><td>55.49</td><td>38.20</td><td>18.95</td><td>64.24</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	12810.00	51.33	88.20	-36.87	34.43	39.90	17.07	40.51	0.44	--	Peak	2	19215.00	38.86	74.00	-35.14	55.49	38.20	18.95	64.24	-9.54	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	12810.00	52.19	88.20	-36.01	35.29	39.90	17.07	40.51	0.44	--	Peak																																																																																																					
2	19215.00	39.51	74.00	-34.49	56.14	38.20	18.95	64.24	-9.54	--	Peak																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	12810.00	51.33	88.20	-36.87	34.43	39.90	17.07	40.51	0.44	--	Peak																																																																																																					
2	19215.00	38.86	74.00	-35.14	55.49	38.20	18.95	64.24	-9.54	--	Peak																																																																																																					



Mode	76	
	Harmonic	
	U-NII-5_5.925-6.425_802.11ax HE40_CH91_Full RU_6405MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-01-17 AVG(UNII)_6E Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2026-01-17 AVG(UNII)_6E Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL





Mode	77																																																																									
	Band Edge																																																																									
	U-NII-5_5.925-6.425_802.11ax HE80_CH7_Full RU_5985MHz																																																																									
ANT	0+1																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 5913.96 78.60 88.20 -9.60 63.65 34.00 11.57 34.19 3.57 100 304 Peak</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg									1 5913.96 78.60 88.20 -9.60 63.65 34.00 11.57 34.19 3.57 100 304 Peak									Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 5985.00 109.70 ----- 94.74 34.00 11.67 34.26 3.55 100 304 Peak</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg									1 5985.00 109.70 ----- 94.74 34.00 11.67 34.26 3.55 100 304 Peak								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																	
Freq Level Line Margin Level Factor Loss Factor Factor																																																																										
MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg																																																																										
1 5913.96 78.60 88.20 -9.60 63.65 34.00 11.57 34.19 3.57 100 304 Peak																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin Level Factor Loss Factor Factor																																																																										
MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg																																																																										
1 5985.00 109.70 ----- 94.74 34.00 11.67 34.26 3.55 100 304 Peak																																																																										
Avg	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 5922.60 66.72 68.20 -1.48 51.77 34.00 11.58 34.20 3.57 100 304 Average</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg									1 5922.60 66.72 68.20 -1.48 51.77 34.00 11.58 34.20 3.57 100 304 Average									Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 5985.00 101.39 ----- 86.43 34.00 11.67 34.26 3.55 100 304 Average</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg									1 5985.00 101.39 ----- 86.43 34.00 11.67 34.26 3.55 100 304 Average								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin Level Factor Loss Factor Factor																																																																										
MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg																																																																										
1 5922.60 66.72 68.20 -1.48 51.77 34.00 11.58 34.20 3.57 100 304 Average																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin Level Factor Loss Factor Factor																																																																										
MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg																																																																										
1 5985.00 101.39 ----- 86.43 34.00 11.67 34.26 3.55 100 304 Average																																																																										



		77																																																																																								
Mode	Band Edge																																																																																									
	U-NII-5_5.925-6.425_802.11ax HE80_CH7_Full RU_5985MHz																																																																																									
ANT	0+1																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5923.24</td><td>78.34</td><td>88.20</td><td>-9.86</td><td>63.39</td><td>34.00</td><td>11.58</td><td>34.20</td><td>3.57</td><td>100 301 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5923.24	78.34	88.20	-9.86	63.39	34.00	11.58	34.20	3.57	100 301 Peak	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5985.00</td><td>109.07</td><td>-----</td><td>94.09</td><td>34.02</td><td>11.73</td><td>34.31</td><td>3.54</td><td>100 301 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5985.00	109.07	-----	94.09	34.02	11.73	34.31	3.54	100 301 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 5923.24	78.34	88.20	-9.86	63.39	34.00	11.58	34.20	3.57	100 301 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 5985.00	109.07	-----	94.09	34.02	11.73	34.31	3.54	100 301 Peak																																																																																		
Avg	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5925.00</td><td>66.33</td><td>68.20</td><td>-1.87</td><td>51.37</td><td>34.00</td><td>11.59</td><td>34.20</td><td>3.57</td><td>100 301 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5925.00	66.33	68.20	-1.87	51.37	34.00	11.59	34.20	3.57	100 301 Average	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5985.00</td><td>100.80</td><td>-----</td><td>85.83</td><td>34.00</td><td>11.69</td><td>34.27</td><td>3.55</td><td>100 301 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5985.00	100.80	-----	85.83	34.00	11.69	34.27	3.55	100 301 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 5925.00	66.33	68.20	-1.87	51.37	34.00	11.59	34.20	3.57	100 301 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 5985.00	100.80	-----	85.83	34.00	11.69	34.27	3.55	100 301 Average																																																																																		



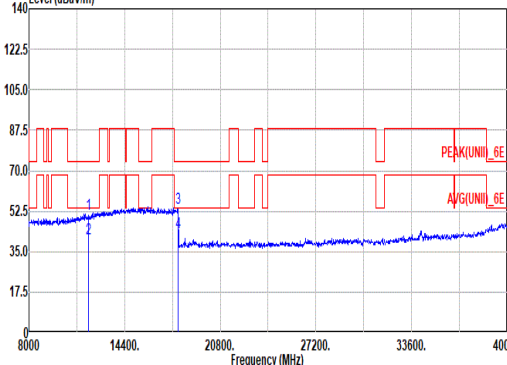
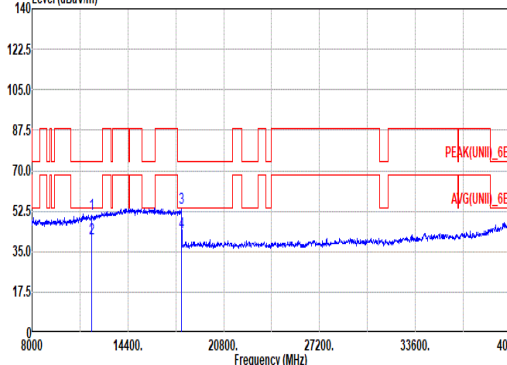


	77																																																																																																																																																																									
Mode	Harmonic																																																																																																																																																																									
	U-NII-5_5.925-6.425_802.11ax HE80_CH7_Full RU_5985MHz																																																																																																																																																																									
ANT	0+1																																																																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2026-01-17  Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11970.00</td><td>51.29</td><td>74.00</td><td>-22.71</td><td>36.14</td><td>38.64</td><td>16.41</td><td>40.39</td><td>0.49</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>11970.00</td><td>40.73</td><td>54.00</td><td>-13.27</td><td>25.58</td><td>38.64</td><td>16.41</td><td>40.39</td><td>0.49</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17955.00</td><td>54.09</td><td>74.00</td><td>-19.91</td><td>39.56</td><td>40.50</td><td>20.09</td><td>46.77</td><td>0.71</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>17955.00</td><td>43.53</td><td>54.00</td><td>-10.47</td><td>29.00</td><td>40.50</td><td>20.09</td><td>46.77</td><td>0.71</td><td>--</td><td>Average</td></tr></tbody></table> Level (dBuV/m) Date: 2026-01-17  Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11970.00</td><td>51.50</td><td>74.00</td><td>-22.50</td><td>36.35</td><td>38.64</td><td>16.41</td><td>40.39</td><td>0.49</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>11970.00</td><td>40.94</td><td>54.00</td><td>-13.06</td><td>25.79</td><td>38.64</td><td>16.41</td><td>40.39</td><td>0.49</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17955.00</td><td>54.00</td><td>74.00</td><td>-20.00</td><td>39.47</td><td>40.50</td><td>20.09</td><td>46.77</td><td>0.71</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>17955.00</td><td>43.44</td><td>54.00</td><td>-10.56</td><td>28.91</td><td>40.50</td><td>20.09</td><td>46.77</td><td>0.71</td><td>--</td><td>Average</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11970.00	51.29	74.00	-22.71	36.14	38.64	16.41	40.39	0.49	--	Peak	2	11970.00	40.73	54.00	-13.27	25.58	38.64	16.41	40.39	0.49	--	Average	3	17955.00	54.09	74.00	-19.91	39.56	40.50	20.09	46.77	0.71	--	Peak	4	17955.00	43.53	54.00	-10.47	29.00	40.50	20.09	46.77	0.71	--	Average		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11970.00	51.50	74.00	-22.50	36.35	38.64	16.41	40.39	0.49	--	Peak	2	11970.00	40.94	54.00	-13.06	25.79	38.64	16.41	40.39	0.49	--	Average	3	17955.00	54.00	74.00	-20.00	39.47	40.50	20.09	46.77	0.71	--	Peak	4	17955.00	43.44	54.00	-10.56	28.91	40.50	20.09	46.77	0.71	--	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																
1	11970.00	51.29	74.00	-22.71	36.14	38.64	16.41	40.39	0.49	--	Peak																																																																																																																																																															
2	11970.00	40.73	54.00	-13.27	25.58	38.64	16.41	40.39	0.49	--	Average																																																																																																																																																															
3	17955.00	54.09	74.00	-19.91	39.56	40.50	20.09	46.77	0.71	--	Peak																																																																																																																																																															
4	17955.00	43.53	54.00	-10.47	29.00	40.50	20.09	46.77	0.71	--	Average																																																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																
1	11970.00	51.50	74.00	-22.50	36.35	38.64	16.41	40.39	0.49	--	Peak																																																																																																																																																															
2	11970.00	40.94	54.00	-13.06	25.79	38.64	16.41	40.39	0.49	--	Average																																																																																																																																																															
3	17955.00	54.00	74.00	-20.00	39.47	40.50	20.09	46.77	0.71	--	Peak																																																																																																																																																															
4	17955.00	43.44	54.00	-10.56	28.91	40.50	20.09	46.77	0.71	--	Average																																																																																																																																																															



Mode	77	
	Harmonic	
	U-NII-5_5.925-6.425_802.11ax HE80_CH7_Full RU_5985MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-01-17 AVG(UNII)_6E Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2026-01-17 AVG(UNII)_6E Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL

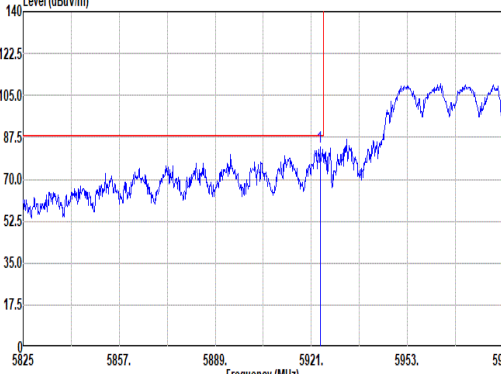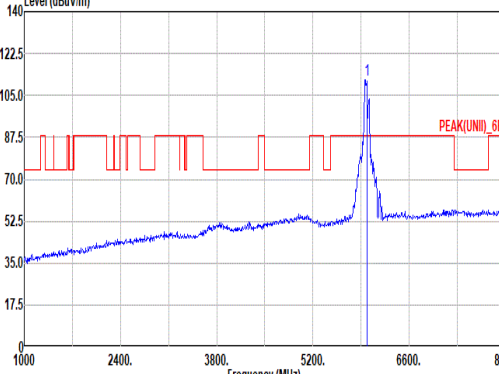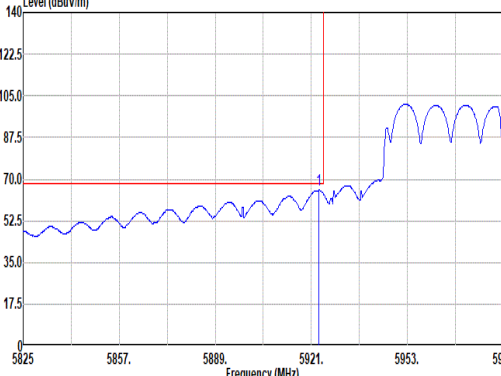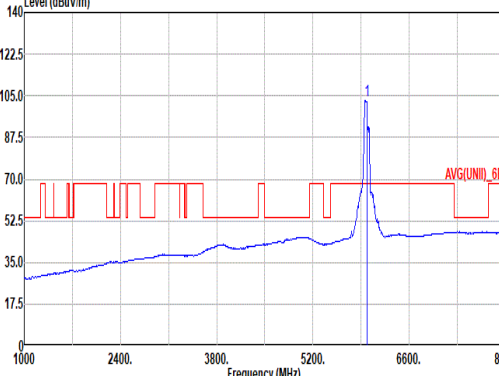

Mode	78																																																																																									
	Band Edge																																																																																									
	U-NII-5_5.925-6.425_802.11ax HE80_CH7_Partial RU 484/65_5985MHz																																																																																									
ANT	0+1																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2026-01-16  Site : 03CH23-HY Condition: PEAK_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1</td><td>5923.08</td><td>83.56</td><td>88.20</td><td>-4.64</td><td>68.60</td><td>34.00</td><td>11.59</td><td>34.20</td><td>3.57</td><td>100</td><td>304</td><td>Peak</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg									1	5923.08	83.56	88.20	-4.64	68.60	34.00	11.59	34.20	3.57	100	304	Peak	Level (dBuV/m) Date: 2026-01-16  Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1</td><td>5985.00</td><td>111.50</td><td>-----</td><td>-----</td><td>96.54</td><td>34.00</td><td>11.63</td><td>34.23</td><td>3.56</td><td>100</td><td>304</td><td>Peak</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg									1	5985.00	111.50	-----	-----	96.54	34.00	11.63	34.23	3.56	100	304	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq Level Line Margin Level Factor Loss Factor Factor																																																																																										
MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg																																																																																										
1	5923.08	83.56	88.20	-4.64	68.60	34.00	11.59	34.20	3.57	100	304	Peak																																																																														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq Level Line Margin Level Factor Loss Factor Factor																																																																																										
MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg																																																																																										
1	5985.00	111.50	-----	-----	96.54	34.00	11.63	34.23	3.56	100	304	Peak																																																																														
Avg	Level (dBuV/m) Date: 2026-01-16  Site : 03CH23-HY Condition: AVG_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1</td><td>5923.56</td><td>65.25</td><td>68.20</td><td>-2.95</td><td>50.30</td><td>34.00</td><td>11.58</td><td>34.20</td><td>3.57</td><td>100</td><td>304</td><td>Average</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg									1	5923.56	65.25	68.20	-2.95	50.30	34.00	11.58	34.20	3.57	100	304	Average	Level (dBuV/m) Date: 2026-01-16  Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1</td><td>5985.00</td><td>103.19</td><td>-----</td><td>-----</td><td>88.23</td><td>34.00</td><td>11.63</td><td>34.23</td><td>3.56</td><td>100</td><td>304</td><td>Average</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg									1	5985.00	103.19	-----	-----	88.23	34.00	11.63	34.23	3.56	100	304	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq Level Line Margin Level Factor Loss Factor Factor																																																																																										
MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg																																																																																										
1	5923.56	65.25	68.20	-2.95	50.30	34.00	11.58	34.20	3.57	100	304	Average																																																																														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq Level Line Margin Level Factor Loss Factor Factor																																																																																										
MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg																																																																																										
1	5985.00	103.19	-----	-----	88.23	34.00	11.63	34.23	3.56	100	304	Average																																																																														



Mode	78																																																																																	
	Band Edge																																																																																	
	U-NII-5_5.925-6.425_802.11ax HE80_CH7_Partial RU 484/65_5985MHz																																																																																	
ANT	0+1																																																																																	
Pol.	Vertical					Fundamental																																																																												
Peak	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 5917.00 81.04 88.20 -7.16 66.09 34.00 11.57 34.19 3.57 100 300</td><td>Peak</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg									1 5917.00 81.04 88.20 -7.16 66.09 34.00 11.57 34.19 3.57 100 300	Peak								Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 5985.00 110.04 ----- 95.07 34.00 11.69 34.27 3.55 100 300</td><td>Peak</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg									1 5985.00 110.04 ----- 95.07 34.00 11.69 34.27 3.55 100 300	Peak							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq Level Line Margin Level Factor Loss Factor Factor																																																																																		
MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg																																																																																		
1 5917.00 81.04 88.20 -7.16 66.09 34.00 11.57 34.19 3.57 100 300	Peak																																																																																	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq Level Line Margin Level Factor Loss Factor Factor																																																																																		
MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg																																																																																		
1 5985.00 110.04 ----- 95.07 34.00 11.69 34.27 3.55 100 300	Peak																																																																																	
Avg	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 5924.84 64.14 68.20 -4.06 49.18 34.00 11.59 34.20 3.57 100 300</td><td>Average</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg									1 5924.84 64.14 68.20 -4.06 49.18 34.00 11.59 34.20 3.57 100 300	Average								Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 5985.00 101.82 ----- 86.85 34.00 11.65 34.24 3.56 100 300</td><td>Average</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg									1 5985.00 101.82 ----- 86.85 34.00 11.65 34.24 3.56 100 300	Average							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq Level Line Margin Level Factor Loss Factor Factor																																																																																		
MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg																																																																																		
1 5924.84 64.14 68.20 -4.06 49.18 34.00 11.59 34.20 3.57 100 300	Average																																																																																	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq Level Line Margin Level Factor Loss Factor Factor																																																																																		
MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg																																																																																		
1 5985.00 101.82 ----- 86.85 34.00 11.65 34.24 3.56 100 300	Average																																																																																	



Mode	79																																																																																																																																													
	Harmonic																																																																																																																																													
	U-NII-5_5.925-6.425_802.11ax HE80_CH55_Full RU_6225MHz																																																																																																																																													
ANT	0+1																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	Level (dBuV/m) Date: 2026-01-17 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12450.00</td><td>52.30</td><td>74.00</td><td>-21.70</td><td>35.85</td><td>39.40</td><td>16.79</td><td>40.20</td><td>0.46</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>12450.00</td><td>41.74</td><td>54.00</td><td>-12.26</td><td>25.29</td><td>39.40</td><td>16.79</td><td>40.20</td><td>0.46</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>18675.00</td><td>38.97</td><td>74.00</td><td>-35.03</td><td>56.09</td><td>38.35</td><td>18.66</td><td>64.59</td><td>-9.54</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	12450.00	52.30	74.00	-21.70	35.85	39.40	16.79	40.20	0.46	--	--	Peak	2	12450.00	41.74	54.00	-12.26	25.29	39.40	16.79	40.20	0.46	--	--	Average	3	18675.00	38.97	74.00	-35.03	56.09	38.35	18.66	64.59	-9.54	--	--	Peak	Level (dBuV/m) Date: 2026-01-17 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12450.00</td><td>52.27</td><td>74.00</td><td>-21.73</td><td>35.82</td><td>39.40</td><td>16.79</td><td>40.20</td><td>0.46</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>12450.00</td><td>41.71</td><td>54.00</td><td>-12.29</td><td>25.26</td><td>39.40</td><td>16.79</td><td>40.20</td><td>0.46</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>18675.00</td><td>38.45</td><td>74.00</td><td>-35.55</td><td>55.57</td><td>38.35</td><td>18.66</td><td>64.59</td><td>-9.54</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	12450.00	52.27	74.00	-21.73	35.82	39.40	16.79	40.20	0.46	--	--	Peak	2	12450.00	41.71	54.00	-12.29	25.26	39.40	16.79	40.20	0.46	--	--	Average	3	18675.00	38.45	74.00	-35.55	55.57	38.35	18.66	64.59	-9.54	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	12450.00	52.30	74.00	-21.70	35.85	39.40	16.79	40.20	0.46	--	--	Peak																																																																																																																																		
2	12450.00	41.74	54.00	-12.26	25.29	39.40	16.79	40.20	0.46	--	--	Average																																																																																																																																		
3	18675.00	38.97	74.00	-35.03	56.09	38.35	18.66	64.59	-9.54	--	--	Peak																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	12450.00	52.27	74.00	-21.73	35.82	39.40	16.79	40.20	0.46	--	--	Peak																																																																																																																																		
2	12450.00	41.71	54.00	-12.29	25.26	39.40	16.79	40.20	0.46	--	--	Average																																																																																																																																		
3	18675.00	38.45	74.00	-35.55	55.57	38.35	18.66	64.59	-9.54	--	--	Peak																																																																																																																																		





Mode	79	
	Harmonic	
	U-NII-5_5.925-6.425_802.11ax HE80_CH55_Full RU_6225MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-01-17 AVG(UNII_6E) Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2026-01-17 AVG(UNII_6E) Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL



Mode	80																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-5_5.925-6.425_802.11ax HE80_CH87_Full RU_6385MHz																																																																																																																									
ANT	0+1																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2026-01-17 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12770.00</td><td>52.26</td><td>88.20</td><td>-35.94</td><td>35.41</td><td>39.84</td><td>17.04</td><td>40.47</td><td>0.44</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>19155.00</td><td>40.02</td><td>74.00</td><td>-33.98</td><td>56.58</td><td>38.29</td><td>18.92</td><td>64.23</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	12770.00	52.26	88.20	-35.94	35.41	39.84	17.04	40.47	0.44	--	Peak	2	19155.00	40.02	74.00	-33.98	56.58	38.29	18.92	64.23	-9.54	--	Peak	Level (dBuV/m) Date: 2026-01-17 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12770.00</td><td>51.89</td><td>88.20</td><td>-36.31</td><td>35.04</td><td>39.84</td><td>17.04</td><td>40.47</td><td>0.44</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>19155.00</td><td>39.31</td><td>74.00</td><td>-34.69</td><td>55.87</td><td>38.29</td><td>18.92</td><td>64.23</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	12770.00	51.89	88.20	-36.31	35.04	39.84	17.04	40.47	0.44	--	Peak	2	19155.00	39.31	74.00	-34.69	55.87	38.29	18.92	64.23	-9.54	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	12770.00	52.26	88.20	-35.94	35.41	39.84	17.04	40.47	0.44	--	Peak																																																																																																															
2	19155.00	40.02	74.00	-33.98	56.58	38.29	18.92	64.23	-9.54	--	Peak																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	12770.00	51.89	88.20	-36.31	35.04	39.84	17.04	40.47	0.44	--	Peak																																																																																																															
2	19155.00	39.31	74.00	-34.69	55.87	38.29	18.92	64.23	-9.54	--	Peak																																																																																																															

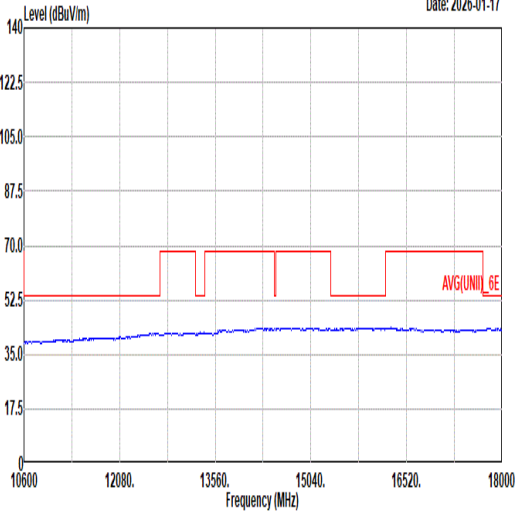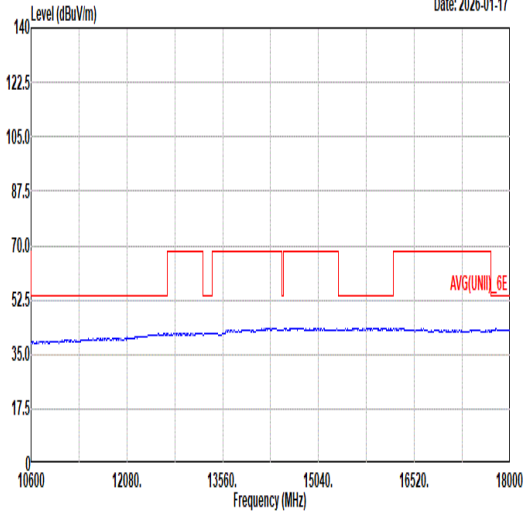

Mode	80	
	Harmonic	
	U-NII-5_5.925-6.425_802.11ax HE80_CH87_Full RU_6385MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-01-17  AVG(UNII_6E) Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2026-01-17  AVG(UNII_6E) Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL



Mode	81																																																																																									
	Band Edge																																																																																									
	U-NII-5_5.925-6.425_802.11ax HE160_CH15_Full RU_6025MHz																																																																																									
ANT	0+1																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5898.00</td><td>75.84</td><td>88.20 -12.36</td><td>60.89</td><td>34.00</td><td>11.54</td><td>34.17</td><td>3.58</td><td>100</td><td>302 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5898.00	75.84	88.20 -12.36	60.89	34.00	11.54	34.17	3.58	100	302 Peak	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 6025.00</td><td>106.26</td><td>-----</td><td>91.18</td><td>34.13</td><td>11.74</td><td>34.34</td><td>3.55</td><td>100</td><td>302 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 6025.00	106.26	-----	91.18	34.13	11.74	34.34	3.55	100	302 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 5898.00	75.84	88.20 -12.36	60.89	34.00	11.54	34.17	3.58	100	302 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 6025.00	106.26	-----	91.18	34.13	11.74	34.34	3.55	100	302 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5912.00</td><td>65.51</td><td>68.20 -2.69</td><td>50.57</td><td>34.00</td><td>11.56</td><td>34.19</td><td>3.57</td><td>100</td><td>302 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5912.00	65.51	68.20 -2.69	50.57	34.00	11.56	34.19	3.57	100	302 Average	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 6025.00</td><td>96.94</td><td>-----</td><td>81.98</td><td>34.00</td><td>11.67</td><td>34.26</td><td>3.55</td><td>100</td><td>302 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 6025.00	96.94	-----	81.98	34.00	11.67	34.26	3.55	100	302 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 5912.00	65.51	68.20 -2.69	50.57	34.00	11.56	34.19	3.57	100	302 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 6025.00	96.94	-----	81.98	34.00	11.67	34.26	3.55	100	302 Average																																																																																	



Mode	81																																																																																																	
	Band Edge																																																																																																	
	U-NII-5_5.925-6.425_802.11ax HE160_CH15_Full RU_6025MHz																																																																																																	
ANT	0+1																																																																																																	
Pol.	Vertical						Fundamental																																																																																											
Peak	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5905.00</td><td>72.97</td><td>88.20</td><td>-15.23</td><td>58.03</td><td>34.00</td><td>11.55</td><td>34.18</td><td>3.57</td><td>100</td><td>300</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5905.00	72.97	88.20	-15.23	58.03	34.00	11.55	34.18	3.57	100	300	Peak	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6025.00</td><td>105.02</td><td>-----</td><td>-----</td><td>89.09</td><td>34.19</td><td>11.74</td><td>34.35</td><td>3.55</td><td>100</td><td>300</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	6025.00	105.02	-----	-----	89.09	34.19	11.74	34.35	3.55	100	300	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	5905.00	72.97	88.20	-15.23	58.03	34.00	11.55	34.18	3.57	100	300	Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	6025.00	105.02	-----	-----	89.09	34.19	11.74	34.35	3.55	100	300	Peak																																																																																						
Avg	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5915.00</td><td>64.16</td><td>68.20</td><td>-4.04</td><td>49.21</td><td>34.00</td><td>11.57</td><td>34.19</td><td>3.57</td><td>100</td><td>300</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5915.00	64.16	68.20	-4.04	49.21	34.00	11.57	34.19	3.57	100	300	Average	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6025.00</td><td>96.32</td><td>-----</td><td>-----</td><td>81.24</td><td>34.13</td><td>11.74</td><td>34.34</td><td>3.55</td><td>100</td><td>300</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	6025.00	96.32	-----	-----	81.24	34.13	11.74	34.34	3.55	100	300	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	5915.00	64.16	68.20	-4.04	49.21	34.00	11.57	34.19	3.57	100	300	Average																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	6025.00	96.32	-----	-----	81.24	34.13	11.74	34.34	3.55	100	300	Average																																																																																						



Mode	81																																																																																																																																																							
	Harmonic																																																																																																																																																							
	U-NII-5_5.925-6.425_802.11ax HE160_CH15_Full RU_6025MHz																																																																																																																																																							
ANT	0+1																																																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																																																	
Peak Avg	Level (dBuV/m) Date: 2026-01-17 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12050.00</td><td>51.71</td><td>74.00</td><td>-22.29</td><td>36.35</td><td>38.80</td><td>16.47</td><td>40.40</td><td>0.49</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>12050.00</td><td>41.15</td><td>54.00</td><td>-12.85</td><td>25.79</td><td>38.80</td><td>16.47</td><td>40.40</td><td>0.49</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>18075.00</td><td>38.84</td><td>74.00</td><td>-35.16</td><td>56.33</td><td>38.80</td><td>18.34</td><td>64.29</td><td>-9.54</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	12050.00	51.71	74.00	-22.29	36.35	38.80	16.47	40.40	0.49	--	--	Peak	2	12050.00	41.15	54.00	-12.85	25.79	38.80	16.47	40.40	0.49	--	--	Average	3	18075.00	38.84	74.00	-35.16	56.33	38.80	18.34	64.29	-9.54	--	--	Peak	Level (dBuV/m) Date: 2026-01-17 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12050.00</td><td>51.12</td><td>74.00</td><td>-22.88</td><td>35.76</td><td>38.80</td><td>16.47</td><td>40.40</td><td>0.49</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>12050.00</td><td>40.56</td><td>54.00</td><td>-13.44</td><td>25.20</td><td>38.80</td><td>16.47</td><td>40.40</td><td>0.49</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>18075.00</td><td>39.28</td><td>74.00</td><td>-34.72</td><td>56.77</td><td>38.80</td><td>18.34</td><td>64.29</td><td>-9.54</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	12050.00	51.12	74.00	-22.88	35.76	38.80	16.47	40.40	0.49	--	--	Peak	2	12050.00	40.56	54.00	-13.44	25.20	38.80	16.47	40.40	0.49	--	--	Average	3	18075.00	39.28	74.00	-34.72	56.77	38.80	18.34	64.29	-9.54	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																														
1	12050.00	51.71	74.00	-22.29	36.35	38.80	16.47	40.40	0.49	--	--	Peak																																																																																																																																												
2	12050.00	41.15	54.00	-12.85	25.79	38.80	16.47	40.40	0.49	--	--	Average																																																																																																																																												
3	18075.00	38.84	74.00	-35.16	56.33	38.80	18.34	64.29	-9.54	--	--	Peak																																																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																														
1	12050.00	51.12	74.00	-22.88	35.76	38.80	16.47	40.40	0.49	--	--	Peak																																																																																																																																												
2	12050.00	40.56	54.00	-13.44	25.20	38.80	16.47	40.40	0.49	--	--	Average																																																																																																																																												
3	18075.00	39.28	74.00	-34.72	56.77	38.80	18.34	64.29	-9.54	--	--	Peak																																																																																																																																												



Mode	81	
	Harmonic	
	U-NII-5_5.925-6.425_802.11ax HE160_CH15_Full RU_6025MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-01-17 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 10600 12080 13560 15040 16520 18000 Frequency (MHz) Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2026-01-17 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 10600 12080 13560 15040 16520 18000 Frequency (MHz) Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL



Mode	82																																																																																																	
	Band Edge																																																																																																	
	U-NII-5_5.925-6.425_802.11ax HE160_CH15_Partial RU 996/67_6025MHz																																																																																																	
ANT	0+1																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5903.40</td><td>77.27</td><td>88.20</td><td>-10.93</td><td>62.32</td><td>34.00</td><td>11.55</td><td>34.17</td><td>3.57</td><td>100</td><td>302</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5903.40	77.27	88.20	-10.93	62.32	34.00	11.55	34.17	3.57	100	302	Peak	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6025.00</td><td>106.13</td><td>-----</td><td>-----</td><td>91.17</td><td>34.00</td><td>11.66</td><td>34.25</td><td>3.55</td><td>100</td><td>302</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	6025.00	106.13	-----	-----	91.17	34.00	11.66	34.25	3.55	100	302	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	5903.40	77.27	88.20	-10.93	62.32	34.00	11.55	34.17	3.57	100	302	Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	6025.00	106.13	-----	-----	91.17	34.00	11.66	34.25	3.55	100	302	Peak																																																																																						
Avg	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5898.60</td><td>63.55</td><td>68.20</td><td>-4.65</td><td>48.60</td><td>34.00</td><td>11.54</td><td>34.17</td><td>3.58</td><td>100</td><td>302</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5898.60	63.55	68.20	-4.65	48.60	34.00	11.54	34.17	3.58	100	302	Average	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6025.00</td><td>97.68</td><td>-----</td><td>-----</td><td>82.72</td><td>34.00</td><td>11.63</td><td>34.23</td><td>3.56</td><td>100</td><td>302</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	6025.00	97.68	-----	-----	82.72	34.00	11.63	34.23	3.56	100	302	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	5898.60	63.55	68.20	-4.65	48.60	34.00	11.54	34.17	3.58	100	302	Average																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	6025.00	97.68	-----	-----	82.72	34.00	11.63	34.23	3.56	100	302	Average																																																																																						



Mode	82																																																																																																			
	Band Edge																																																																																																			
	U-NII-5_5.925-6.425_802.11ax HE160_CH15_Partial RU 996/67_6025MHz																																																																																																			
ANT	0+1																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5900.40</td><td>74.63</td><td>88.20</td><td>-13.57</td><td>59.69</td><td>34.00</td><td>11.54</td><td>34.17</td><td>3.57</td><td>100</td><td>301</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5900.40	74.63	88.20	-13.57	59.69	34.00	11.54	34.17	3.57	100	301	Peak	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6025.00</td><td>105.51</td><td>-----</td><td>-----</td><td>90.54</td><td>34.00</td><td>11.65</td><td>34.24</td><td>3.56</td><td>100</td><td>301</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	6025.00	105.51	-----	-----	90.54	34.00	11.65	34.24	3.56	100	301	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																										
1	5900.40	74.63	88.20	-13.57	59.69	34.00	11.54	34.17	3.57	100	301	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																										
1	6025.00	105.51	-----	-----	90.54	34.00	11.65	34.24	3.56	100	301	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5900.40</td><td>62.59</td><td>68.20</td><td>-5.61</td><td>47.65</td><td>34.00</td><td>11.54</td><td>34.17</td><td>3.57</td><td>100</td><td>301</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5900.40	62.59	68.20	-5.61	47.65	34.00	11.54	34.17	3.57	100	301	Average	Level (dBuV/m) Date: 2026-01-16 Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6025.00</td><td>96.92</td><td>-----</td><td>-----</td><td>81.96</td><td>34.00</td><td>11.66</td><td>34.25</td><td>3.55</td><td>100</td><td>301</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	6025.00	96.92	-----	-----	81.96	34.00	11.66	34.25	3.55	100	301	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																										
1	5900.40	62.59	68.20	-5.61	47.65	34.00	11.54	34.17	3.57	100	301	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																										
1	6025.00	96.92	-----	-----	81.96	34.00	11.66	34.25	3.55	100	301	Average																																																																																								



Mode	83																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-5_5.925-6.425_802.11ax HE160_CH47_Full RU_6185MHz																																																																																																																									
ANT	0+1																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	Level (dBuV/m) Date: 2026-01-17 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 12370.00</td><td>52.92</td><td>74.00 -21.08</td><td>36.83</td><td>39.14</td><td>16.72</td><td>40.24</td><td>0.47</td><td>--</td><td>-- Peak</td></tr><tr><td>2 12370.00</td><td>42.36</td><td>54.00 -11.64</td><td>26.27</td><td>39.14</td><td>16.72</td><td>40.24</td><td>0.47</td><td>--</td><td>-- Average</td></tr><tr><td>3 18555.00</td><td>39.09</td><td>74.00 -34.91</td><td>56.54</td><td>38.22</td><td>18.60</td><td>64.73</td><td>-9.54</td><td>--</td><td>-- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 12370.00	52.92	74.00 -21.08	36.83	39.14	16.72	40.24	0.47	--	-- Peak	2 12370.00	42.36	54.00 -11.64	26.27	39.14	16.72	40.24	0.47	--	-- Average	3 18555.00	39.09	74.00 -34.91	56.54	38.22	18.60	64.73	-9.54	--	-- Peak	Level (dBuV/m) Date: 2026-01-17 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 12370.00</td><td>52.45</td><td>74.00 -21.55</td><td>36.36</td><td>39.14</td><td>16.72</td><td>40.24</td><td>0.47</td><td>--</td><td>-- Peak</td></tr><tr><td>2 12370.00</td><td>41.89</td><td>54.00 -12.11</td><td>25.80</td><td>39.14</td><td>16.72</td><td>40.24</td><td>0.47</td><td>--</td><td>-- Average</td></tr><tr><td>3 18555.00</td><td>38.74</td><td>74.00 -35.26</td><td>56.19</td><td>38.22</td><td>18.60</td><td>64.73</td><td>-9.54</td><td>--</td><td>-- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 12370.00	52.45	74.00 -21.55	36.36	39.14	16.72	40.24	0.47	--	-- Peak	2 12370.00	41.89	54.00 -12.11	25.80	39.14	16.72	40.24	0.47	--	-- Average	3 18555.00	38.74	74.00 -35.26	56.19	38.22	18.60	64.73	-9.54	--	-- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																	
1 12370.00	52.92	74.00 -21.08	36.83	39.14	16.72	40.24	0.47	--	-- Peak																																																																																																																	
2 12370.00	42.36	54.00 -11.64	26.27	39.14	16.72	40.24	0.47	--	-- Average																																																																																																																	
3 18555.00	39.09	74.00 -34.91	56.54	38.22	18.60	64.73	-9.54	--	-- Peak																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																	
1 12370.00	52.45	74.00 -21.55	36.36	39.14	16.72	40.24	0.47	--	-- Peak																																																																																																																	
2 12370.00	41.89	54.00 -12.11	25.80	39.14	16.72	40.24	0.47	--	-- Average																																																																																																																	
3 18555.00	38.74	74.00 -35.26	56.19	38.22	18.60	64.73	-9.54	--	-- Peak																																																																																																																	



Mode	83	
	Harmonic	
	U-NII-5_5.925-6.425_802.11ax HE160_CH47_Full RU_6185MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-01-17 Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2026-01-17 Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL



Mode	84																																																																																																																																													
	Harmonic																																																																																																																																													
	U-NII-5_5.925-6.425_802.11ax HE160_CH79_Full RU_6345MHz																																																																																																																																													
ANT	0+1																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	Level (dBuV/m) Date: 2026-01-17 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12690.00</td><td>54.17</td><td>74.00</td><td>-19.83</td><td>37.33</td><td>39.80</td><td>16.98</td><td>40.39</td><td>0.45</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>12690.00</td><td>43.61</td><td>54.00</td><td>-10.39</td><td>26.77</td><td>39.80</td><td>16.98</td><td>40.39</td><td>0.45</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>19035.00</td><td>38.82</td><td>74.00</td><td>-35.18</td><td>55.38</td><td>38.33</td><td>18.86</td><td>64.21</td><td>-9.54</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	12690.00	54.17	74.00	-19.83	37.33	39.80	16.98	40.39	0.45	--	--	Peak	2	12690.00	43.61	54.00	-10.39	26.77	39.80	16.98	40.39	0.45	--	--	Average	3	19035.00	38.82	74.00	-35.18	55.38	38.33	18.86	64.21	-9.54	--	--	Peak	Level (dBuV/m) Date: 2026-01-17 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12690.00</td><td>52.59</td><td>74.00</td><td>-21.41</td><td>35.75</td><td>39.80</td><td>16.98</td><td>40.39</td><td>0.45</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>12690.00</td><td>42.03</td><td>54.00</td><td>-11.97</td><td>25.19</td><td>39.80</td><td>16.98</td><td>40.39</td><td>0.45</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>19035.00</td><td>38.63</td><td>74.00</td><td>-35.37</td><td>55.19</td><td>38.33</td><td>18.86</td><td>64.21</td><td>-9.54</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	12690.00	52.59	74.00	-21.41	35.75	39.80	16.98	40.39	0.45	--	--	Peak	2	12690.00	42.03	54.00	-11.97	25.19	39.80	16.98	40.39	0.45	--	--	Average	3	19035.00	38.63	74.00	-35.37	55.19	38.33	18.86	64.21	-9.54	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	12690.00	54.17	74.00	-19.83	37.33	39.80	16.98	40.39	0.45	--	--	Peak																																																																																																																																		
2	12690.00	43.61	54.00	-10.39	26.77	39.80	16.98	40.39	0.45	--	--	Average																																																																																																																																		
3	19035.00	38.82	74.00	-35.18	55.38	38.33	18.86	64.21	-9.54	--	--	Peak																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	12690.00	52.59	74.00	-21.41	35.75	39.80	16.98	40.39	0.45	--	--	Peak																																																																																																																																		
2	12690.00	42.03	54.00	-11.97	25.19	39.80	16.98	40.39	0.45	--	--	Average																																																																																																																																		
3	19035.00	38.63	74.00	-35.37	55.19	38.33	18.86	64.21	-9.54	--	--	Peak																																																																																																																																		



Mode	84	
	Harmonic	
	U-NII-5_5.925-6.425_802.11ax HE160_CH79_Full RU_6345MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-01-17 Frequency (MHz) Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2026-01-17 Frequency (MHz) Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL



Mode	96																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-7_6.525-6.875_802.11a_CH117_6535MHz																																																																																																																									
ANT	0+1																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2026-01-17 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13070.00</td><td>53.72</td><td>88.20</td><td>-34.48</td><td>34.78</td><td>39.00</td><td>17.26</td><td>40.87</td><td>0.43</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>19605.00</td><td>39.75</td><td>74.00</td><td>-34.25</td><td>56.27</td><td>38.10</td><td>19.14</td><td>64.22</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13070.00	53.72	88.20	-34.48	34.78	39.00	17.26	40.87	0.43	--	Peak	2	19605.00	39.75	74.00	-34.25	56.27	38.10	19.14	64.22	-9.54	--	Peak	Level (dBuV/m) Date: 2026-01-17 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13070.00</td><td>53.00</td><td>88.20</td><td>-35.12</td><td>34.14</td><td>39.00</td><td>17.26</td><td>40.87</td><td>0.43</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>19605.00</td><td>38.16</td><td>74.00</td><td>-35.84</td><td>54.68</td><td>38.10</td><td>19.14</td><td>64.22</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13070.00	53.00	88.20	-35.12	34.14	39.00	17.26	40.87	0.43	--	Peak	2	19605.00	38.16	74.00	-35.84	54.68	38.10	19.14	64.22	-9.54	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	13070.00	53.72	88.20	-34.48	34.78	39.00	17.26	40.87	0.43	--	Peak																																																																																																															
2	19605.00	39.75	74.00	-34.25	56.27	38.10	19.14	64.22	-9.54	--	Peak																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	13070.00	53.00	88.20	-35.12	34.14	39.00	17.26	40.87	0.43	--	Peak																																																																																																															
2	19605.00	38.16	74.00	-35.84	54.68	38.10	19.14	64.22	-9.54	--	Peak																																																																																																															



Mode	96	
	Harmonic	
	U-NII-7_6.525-6.875_802.11a_CH117_6535MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-01-17 AVG(UNII)_6E Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2026-01-17 AVG(UNII)_6E Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL



Mode	97																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-7_6.525-6.875_802.11a_CH149_6695MHz																																																																																																																																	
ANT	0+1																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																
Peak Avg	Level (dBuV/m) Date: 2026-01-17 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 13390.00</td><td>53.74</td><td>74.00</td><td>-20.26</td><td>35.04</td><td>40.10</td><td>17.46</td><td>41.58</td><td>0.41</td><td>--</td><td>-- Peak</td></tr><tr><td>2 13390.00</td><td>43.32</td><td>54.00</td><td>-10.68</td><td>24.62</td><td>40.10</td><td>17.46</td><td>41.58</td><td>0.41</td><td>--</td><td>-- Average</td></tr><tr><td>3 20805.00</td><td>38.82</td><td>74.00</td><td>-35.18</td><td>54.05</td><td>38.00</td><td>19.39</td><td>63.88</td><td>-9.54</td><td>--</td><td>-- Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13390.00	53.74	74.00	-20.26	35.04	40.10	17.46	41.58	0.41	--	-- Peak	2 13390.00	43.32	54.00	-10.68	24.62	40.10	17.46	41.58	0.41	--	-- Average	3 20805.00	38.82	74.00	-35.18	54.05	38.00	19.39	63.88	-9.54	--	-- Peak	Level (dBuV/m) Date: 2026-01-17 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 13390.00</td><td>54.23</td><td>74.00</td><td>-19.77</td><td>35.53</td><td>40.10</td><td>17.46</td><td>41.58</td><td>0.41</td><td>--</td><td>-- Peak</td></tr><tr><td>2 13390.00</td><td>43.50</td><td>54.00</td><td>-10.42</td><td>24.80</td><td>40.10</td><td>17.46</td><td>41.58</td><td>0.41</td><td>--</td><td>-- Average</td></tr><tr><td>3 20805.00</td><td>38.04</td><td>74.00</td><td>-35.96</td><td>54.07</td><td>38.00</td><td>19.39</td><td>63.88</td><td>-9.54</td><td>--</td><td>-- Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13390.00	54.23	74.00	-19.77	35.53	40.10	17.46	41.58	0.41	--	-- Peak	2 13390.00	43.50	54.00	-10.42	24.80	40.10	17.46	41.58	0.41	--	-- Average	3 20805.00	38.04	74.00	-35.96	54.07	38.00	19.39	63.88	-9.54	--	-- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																								
1 13390.00	53.74	74.00	-20.26	35.04	40.10	17.46	41.58	0.41	--	-- Peak																																																																																																																								
2 13390.00	43.32	54.00	-10.68	24.62	40.10	17.46	41.58	0.41	--	-- Average																																																																																																																								
3 20805.00	38.82	74.00	-35.18	54.05	38.00	19.39	63.88	-9.54	--	-- Peak																																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																								
1 13390.00	54.23	74.00	-19.77	35.53	40.10	17.46	41.58	0.41	--	-- Peak																																																																																																																								
2 13390.00	43.50	54.00	-10.42	24.80	40.10	17.46	41.58	0.41	--	-- Average																																																																																																																								
3 20805.00	38.04	74.00	-35.96	54.07	38.00	19.39	63.88	-9.54	--	-- Peak																																																																																																																								



Mode	97	
	Harmonic	
	U-NII-7_6.525-6.875_802.11a_CH149_6695MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-01-17 AVG(UNII)_6E Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2026-01-17 AVG(UNII)_6E Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL



Mode	98																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-7_6.525-6.875_802.11a_CH185_6875MHz																																																																																																																									
ANT	0+1																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2026-01-18 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13750.00</td><td>55.14</td><td>88.20</td><td>-33.06</td><td>36.78</td><td>40.30</td><td>17.68</td><td>42.30</td><td>0.38</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>20625.00</td><td>39.72</td><td>74.00</td><td>-34.28</td><td>55.08</td><td>38.10</td><td>19.75</td><td>63.67</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13750.00	55.14	88.20	-33.06	36.78	40.30	17.68	42.30	0.38	--	Peak	2	20625.00	39.72	74.00	-34.28	55.08	38.10	19.75	63.67	-9.54	--	Peak	Level (dBuV/m) Date: 2026-01-18 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13750.00</td><td>55.02</td><td>88.20</td><td>-33.18</td><td>36.66</td><td>40.30</td><td>17.68</td><td>42.30</td><td>0.38</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>20625.00</td><td>38.22</td><td>74.00</td><td>-35.78</td><td>53.58</td><td>38.10</td><td>19.75</td><td>63.67</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13750.00	55.02	88.20	-33.18	36.66	40.30	17.68	42.30	0.38	--	Peak	2	20625.00	38.22	74.00	-35.78	53.58	38.10	19.75	63.67	-9.54	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	13750.00	55.14	88.20	-33.06	36.78	40.30	17.68	42.30	0.38	--	Peak																																																																																																															
2	20625.00	39.72	74.00	-34.28	55.08	38.10	19.75	63.67	-9.54	--	Peak																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	13750.00	55.02	88.20	-33.18	36.66	40.30	17.68	42.30	0.38	--	Peak																																																																																																															
2	20625.00	38.22	74.00	-35.78	53.58	38.10	19.75	63.67	-9.54	--	Peak																																																																																																															



Mode	98	
	Harmonic	
	U-NII-7_6.525-6.875_802.11a_CH185_6875MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-01-18 AVG(UNII)_6E Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2026-01-18 AVG(UNII)_6E Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL



Mode	99																																																																																																															
	Harmonic																																																																																																															
	U-NII-7_6.525-6.875_802.11ax HE20_CH117_Full RU_6535MHz																																																																																																															
ANT	0+1																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	Level (dBuV/m) Date: 2026-01-18 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13070.00</td><td>53.63</td><td>88.20</td><td>-34.57</td><td>34.69</td><td>39.80</td><td>17.26</td><td>40.87</td><td>0.43</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>19605.00</td><td>38.94</td><td>74.00</td><td>-35.06</td><td>55.46</td><td>38.10</td><td>19.14</td><td>64.22</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13070.00	53.63	88.20	-34.57	34.69	39.80	17.26	40.87	0.43	--	Peak	2	19605.00	38.94	74.00	-35.06	55.46	38.10	19.14	64.22	-9.54	--	Peak	Level (dBuV/m) Date: 2026-01-18 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13070.00</td><td>53.64</td><td>88.20</td><td>-34.56</td><td>34.70</td><td>39.80</td><td>17.26</td><td>40.87</td><td>0.43</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>19605.00</td><td>39.07</td><td>74.00</td><td>-34.93</td><td>55.59</td><td>38.10</td><td>19.14</td><td>64.22</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13070.00	53.64	88.20	-34.56	34.70	39.80	17.26	40.87	0.43	--	Peak	2	19605.00	39.07	74.00	-34.93	55.59	38.10	19.14	64.22	-9.54	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	13070.00	53.63	88.20	-34.57	34.69	39.80	17.26	40.87	0.43	--	Peak																																																																																																					
2	19605.00	38.94	74.00	-35.06	55.46	38.10	19.14	64.22	-9.54	--	Peak																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	13070.00	53.64	88.20	-34.56	34.70	39.80	17.26	40.87	0.43	--	Peak																																																																																																					
2	19605.00	39.07	74.00	-34.93	55.59	38.10	19.14	64.22	-9.54	--	Peak																																																																																																					



Mode	99	
	Harmonic	
	U-NII-7_6.525-6.875_802.11ax HE20_CH117_Full RU_6535MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-01-18 Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2026-01-18 Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL



Mode	100																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-7_6.525-6.875_802.11ax HE20_CH149_Full RU_6695MHz																																																																																																																									
ANT	0+1																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	Level (dBuV/m) Date: 2026-01-18 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 13390.00</td><td>53.99</td><td>74.00</td><td>-20.01</td><td>35.29</td><td>40.10</td><td>17.46</td><td>41.58</td><td>0.41</td><td>-- -- Peak</td></tr><tr><td>2 13390.00</td><td>43.41</td><td>54.00</td><td>-10.59</td><td>24.71</td><td>40.10</td><td>17.46</td><td>41.58</td><td>0.41</td><td>-- -- Average</td></tr><tr><td>3 20085.00</td><td>38.88</td><td>74.00</td><td>-35.12</td><td>54.91</td><td>38.00</td><td>19.39</td><td>63.88</td><td>-9.54</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 13390.00	53.99	74.00	-20.01	35.29	40.10	17.46	41.58	0.41	-- -- Peak	2 13390.00	43.41	54.00	-10.59	24.71	40.10	17.46	41.58	0.41	-- -- Average	3 20085.00	38.88	74.00	-35.12	54.91	38.00	19.39	63.88	-9.54	-- -- Peak	Level (dBuV/m) Date: 2026-01-18 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 13390.00</td><td>54.53</td><td>74.00</td><td>-19.47</td><td>35.83</td><td>40.10</td><td>17.46</td><td>41.58</td><td>0.41</td><td>-- -- Peak</td></tr><tr><td>2 13390.00</td><td>43.45</td><td>54.00</td><td>-10.55</td><td>24.75</td><td>40.10</td><td>17.46</td><td>41.58</td><td>0.41</td><td>-- -- Average</td></tr><tr><td>3 20085.00</td><td>38.04</td><td>74.00</td><td>-35.96</td><td>54.07</td><td>38.00</td><td>19.39</td><td>63.88</td><td>-9.54</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 13390.00	54.53	74.00	-19.47	35.83	40.10	17.46	41.58	0.41	-- -- Peak	2 13390.00	43.45	54.00	-10.55	24.75	40.10	17.46	41.58	0.41	-- -- Average	3 20085.00	38.04	74.00	-35.96	54.07	38.00	19.39	63.88	-9.54	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 13390.00	53.99	74.00	-20.01	35.29	40.10	17.46	41.58	0.41	-- -- Peak																																																																																																																	
2 13390.00	43.41	54.00	-10.59	24.71	40.10	17.46	41.58	0.41	-- -- Average																																																																																																																	
3 20085.00	38.88	74.00	-35.12	54.91	38.00	19.39	63.88	-9.54	-- -- Peak																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 13390.00	54.53	74.00	-19.47	35.83	40.10	17.46	41.58	0.41	-- -- Peak																																																																																																																	
2 13390.00	43.45	54.00	-10.55	24.75	40.10	17.46	41.58	0.41	-- -- Average																																																																																																																	
3 20085.00	38.04	74.00	-35.96	54.07	38.00	19.39	63.88	-9.54	-- -- Peak																																																																																																																	



Mode	100	
	Harmonic	
	U-NII-7_6.525-6.875_802.11ax HE20_CH149_Full RU_6695MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-01-18 Frequency (MHz) Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2026-01-18 Frequency (MHz) Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL



Mode	101																																																																																																															
	Harmonic																																																																																																															
	U-NII-7_6.525-6.875_802.11ax HE20_CH185_Full RU_6875MHz																																																																																																															
ANT	0+1																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	Level (dBuV/m) Date: 2026-01-18 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13750.00</td><td>54.74</td><td>88.20</td><td>-33.46</td><td>36.38</td><td>40.30</td><td>17.68</td><td>42.30</td><td>0.38</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>20625.00</td><td>39.28</td><td>74.00</td><td>-34.72</td><td>54.64</td><td>38.10</td><td>19.75</td><td>63.67</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13750.00	54.74	88.20	-33.46	36.38	40.30	17.68	42.30	0.38	--	Peak	2	20625.00	39.28	74.00	-34.72	54.64	38.10	19.75	63.67	-9.54	--	Peak	Level (dBuV/m) Date: 2026-01-18 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13750.00</td><td>54.72</td><td>88.20</td><td>-33.48</td><td>36.36</td><td>40.30</td><td>17.68</td><td>42.30</td><td>0.38</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>20625.00</td><td>38.46</td><td>74.00</td><td>-35.54</td><td>53.82</td><td>38.10</td><td>19.75</td><td>63.67</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13750.00	54.72	88.20	-33.48	36.36	40.30	17.68	42.30	0.38	--	Peak	2	20625.00	38.46	74.00	-35.54	53.82	38.10	19.75	63.67	-9.54	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	13750.00	54.74	88.20	-33.46	36.38	40.30	17.68	42.30	0.38	--	Peak																																																																																																					
2	20625.00	39.28	74.00	-34.72	54.64	38.10	19.75	63.67	-9.54	--	Peak																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	13750.00	54.72	88.20	-33.48	36.36	40.30	17.68	42.30	0.38	--	Peak																																																																																																					
2	20625.00	38.46	74.00	-35.54	53.82	38.10	19.75	63.67	-9.54	--	Peak																																																																																																					



Mode	101	
	Harmonic	
	U-NII-7_6.525-6.875_802.11ax HE20_CH185_Full RU_6875MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-01-18 AVG(UNII)_6E Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2026-01-18 AVG(UNII)_6E Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL



Mode	102																																																																																																															
	Harmonic																																																																																																															
	U-NII-7_6.525-6.875_802.11ax HE40_CH123_Full RU_6565MHz																																																																																																															
ANT	0+1																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	Level (dBuV/m) Date: 2026-01-18 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13130.00</td><td>55.29</td><td>88.20</td><td>-32.91</td><td>36.40</td><td>39.06</td><td>17.30</td><td>41.01</td><td>0.42</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>19695.00</td><td>38.71</td><td>74.00</td><td>-35.29</td><td>55.11</td><td>38.10</td><td>19.18</td><td>64.14</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13130.00	55.29	88.20	-32.91	36.40	39.06	17.30	41.01	0.42	--	Peak	2	19695.00	38.71	74.00	-35.29	55.11	38.10	19.18	64.14	-9.54	--	Peak	Level (dBuV/m) Date: 2026-01-18 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13130.00</td><td>54.38</td><td>88.20</td><td>-33.82</td><td>35.49</td><td>39.06</td><td>17.30</td><td>41.01</td><td>0.42</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>19695.00</td><td>38.27</td><td>74.00</td><td>-35.73</td><td>54.67</td><td>38.10</td><td>19.18</td><td>64.14</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13130.00	54.38	88.20	-33.82	35.49	39.06	17.30	41.01	0.42	--	Peak	2	19695.00	38.27	74.00	-35.73	54.67	38.10	19.18	64.14	-9.54	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	13130.00	55.29	88.20	-32.91	36.40	39.06	17.30	41.01	0.42	--	Peak																																																																																																					
2	19695.00	38.71	74.00	-35.29	55.11	38.10	19.18	64.14	-9.54	--	Peak																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	13130.00	54.38	88.20	-33.82	35.49	39.06	17.30	41.01	0.42	--	Peak																																																																																																					
2	19695.00	38.27	74.00	-35.73	54.67	38.10	19.18	64.14	-9.54	--	Peak																																																																																																					



Mode	102	
	Harmonic	
	U-NII-7_6.525-6.875_802.11ax HE40_CH123_Full RU_6565MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-01-18 Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2026-01-18 Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL



Mode	103																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-7_6.525-6.875_802.11ax HE40_CH147_Full RU_6685MHz																																																																																																																																	
ANT	0+1																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																
Peak Avg	Level (dBuV/m) Date: 2026-01-18 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 13370.00</td><td>54.38</td><td>74.00 -19.62</td><td>35.64</td><td>40.10</td><td>17.45</td><td>41.53</td><td>0.41</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2 13370.00</td><td>43.84</td><td>54.00 -10.16</td><td>25.10</td><td>40.10</td><td>17.45</td><td>41.53</td><td>0.41</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3 20055.00</td><td>38.99</td><td>74.00 -35.01</td><td>55.05</td><td>38.00</td><td>19.37</td><td>63.89</td><td>-9.54</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13370.00	54.38	74.00 -19.62	35.64	40.10	17.45	41.53	0.41	--	--	Peak	2 13370.00	43.84	54.00 -10.16	25.10	40.10	17.45	41.53	0.41	--	--	Average	3 20055.00	38.99	74.00 -35.01	55.05	38.00	19.37	63.89	-9.54	--	--	Peak	Level (dBuV/m) Date: 2026-01-18 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 13370.00</td><td>53.99</td><td>74.00 -20.01</td><td>35.25</td><td>40.10</td><td>17.45</td><td>41.53</td><td>0.41</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2 13370.00</td><td>43.60</td><td>54.00 -10.40</td><td>24.86</td><td>40.10</td><td>17.45</td><td>41.53</td><td>0.41</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3 20055.00</td><td>38.51</td><td>74.00 -35.49</td><td>54.57</td><td>38.00</td><td>19.37</td><td>63.89</td><td>-9.54</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13370.00	53.99	74.00 -20.01	35.25	40.10	17.45	41.53	0.41	--	--	Peak	2 13370.00	43.60	54.00 -10.40	24.86	40.10	17.45	41.53	0.41	--	--	Average	3 20055.00	38.51	74.00 -35.49	54.57	38.00	19.37	63.89	-9.54	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																								
1 13370.00	54.38	74.00 -19.62	35.64	40.10	17.45	41.53	0.41	--	--	Peak																																																																																																																								
2 13370.00	43.84	54.00 -10.16	25.10	40.10	17.45	41.53	0.41	--	--	Average																																																																																																																								
3 20055.00	38.99	74.00 -35.01	55.05	38.00	19.37	63.89	-9.54	--	--	Peak																																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																								
1 13370.00	53.99	74.00 -20.01	35.25	40.10	17.45	41.53	0.41	--	--	Peak																																																																																																																								
2 13370.00	43.60	54.00 -10.40	24.86	40.10	17.45	41.53	0.41	--	--	Average																																																																																																																								
3 20055.00	38.51	74.00 -35.49	54.57	38.00	19.37	63.89	-9.54	--	--	Peak																																																																																																																								



Mode	103	
	Harmonic	
	U-NII-7_6.525-6.875_802.11ax HE40_CH147_Full RU_6685MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-01-18 AVG(UNII)_6E Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2026-01-18 AVG(UNII)_6E Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL



Mode	104																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-7_6.525-6.875_802.11ax HE40_CH187_Full RU_6885MHz																																																																																																																									
ANT	0+1																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2026-01-18 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13770.00</td><td>54.89</td><td>88.20</td><td>-33.31</td><td>36.52</td><td>40.34</td><td>17.69</td><td>42.34</td><td>0.38</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>20655.00</td><td>38.62</td><td>74.00</td><td>-35.38</td><td>53.94</td><td>38.10</td><td>19.77</td><td>63.65</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13770.00	54.89	88.20	-33.31	36.52	40.34	17.69	42.34	0.38	--	Peak	2	20655.00	38.62	74.00	-35.38	53.94	38.10	19.77	63.65	-9.54	--	Peak	Level (dBuV/m) Date: 2026-01-18 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13770.00</td><td>54.63</td><td>88.20</td><td>-33.57</td><td>36.26</td><td>40.34</td><td>17.69</td><td>42.34</td><td>0.38</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>20655.00</td><td>38.23</td><td>74.00</td><td>-35.77</td><td>53.55</td><td>38.10</td><td>19.77</td><td>63.65</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13770.00	54.63	88.20	-33.57	36.26	40.34	17.69	42.34	0.38	--	Peak	2	20655.00	38.23	74.00	-35.77	53.55	38.10	19.77	63.65	-9.54	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	13770.00	54.89	88.20	-33.31	36.52	40.34	17.69	42.34	0.38	--	Peak																																																																																																															
2	20655.00	38.62	74.00	-35.38	53.94	38.10	19.77	63.65	-9.54	--	Peak																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	13770.00	54.63	88.20	-33.57	36.26	40.34	17.69	42.34	0.38	--	Peak																																																																																																															
2	20655.00	38.23	74.00	-35.77	53.55	38.10	19.77	63.65	-9.54	--	Peak																																																																																																															



Mode	104	
	Harmonic	
	U-NII-7_6.525-6.875_802.11ax HE40_CH187_Full RU_6885MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-01-18 AVG(UNII_6E) Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2026-01-18 AVG(UNII_6E) Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL



		105																																																																																																																																																																		
Mode		Harmonic																																																																																																																																																																		
		U-NII-7_6.525-6.875_802.11ax HE80_CH135_Full RU_6625MHz																																																																																																																																																																		
ANT		0+1																																																																																																																																																																		
Pol.		Horizontal																																																																																																																																																																		
Peak Avg	Level (dBuV/m) Date: 2026-01-18 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>13250.00</td><td>55.42</td><td>74.00</td><td>-18.58</td><td>36.58</td><td>40.00</td><td>17.37</td><td>41.27</td><td>0.42</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>13250.00</td><td>43.98</td><td>54.00</td><td>-10.02</td><td>25.14</td><td>40.00</td><td>17.37</td><td>41.27</td><td>0.42</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>19875.00</td><td>39.37</td><td>74.00</td><td>-34.63</td><td>55.54</td><td>38.10</td><td>19.27</td><td>64.00</td><td>-9.54</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13250.00	55.42	74.00	-18.58	36.58	40.00	17.37	41.27	0.42	--	--	Peak	2	13250.00	43.98	54.00	-10.02	25.14	40.00	17.37	41.27	0.42	--	--	Average	3	19875.00	39.37	74.00	-34.63	55.54	38.10	19.27	64.00	-9.54	--	--	Peak	Level (dBuV/m) Date: 2026-01-18 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>13250.00</td><td>53.71</td><td>74.00</td><td>-20.29</td><td>34.87</td><td>40.00</td><td>17.37</td><td>41.27</td><td>0.42</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>13250.00</td><td>43.94</td><td>54.00</td><td>-10.06</td><td>25.10</td><td>40.00</td><td>17.37</td><td>41.27</td><td>0.42</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>19875.00</td><td>38.32</td><td>74.00</td><td>-35.68</td><td>54.49</td><td>38.10</td><td>19.27</td><td>64.00</td><td>-9.54</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13250.00	53.71	74.00	-20.29	34.87	40.00	17.37	41.27	0.42	--	--	Peak	2	13250.00	43.94	54.00	-10.06	25.10	40.00	17.37	41.27	0.42	--	--	Average	3	19875.00	38.32	74.00	-35.68	54.49	38.10	19.27	64.00	-9.54	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																										
1	13250.00	55.42	74.00	-18.58	36.58	40.00	17.37	41.27	0.42	--	--	Peak																																																																																																																																																								
2	13250.00	43.98	54.00	-10.02	25.14	40.00	17.37	41.27	0.42	--	--	Average																																																																																																																																																								
3	19875.00	39.37	74.00	-34.63	55.54	38.10	19.27	64.00	-9.54	--	--	Peak																																																																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																										
1	13250.00	53.71	74.00	-20.29	34.87	40.00	17.37	41.27	0.42	--	--	Peak																																																																																																																																																								
2	13250.00	43.94	54.00	-10.06	25.10	40.00	17.37	41.27	0.42	--	--	Average																																																																																																																																																								
3	19875.00	38.32	74.00	-35.68	54.49	38.10	19.27	64.00	-9.54	--	--	Peak																																																																																																																																																								



Mode	105	
	Harmonic	
	U-NII-7_6.525-6.875_802.11ax HE80_CH135_Full RU_6625MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-01-18 AVG(UNII_6E) Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2026-01-18 AVG(UNII_6E) Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL



Mode	106																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-7_6.525-6.875_802.11ax HE80_CH151_Full RU_6705MHz																																																																																																																									
ANT	0+1																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2026-01-18 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13410.00</td><td>54.60</td><td>88.20</td><td>-33.60</td><td>35.95</td><td>40.00</td><td>17.47</td><td>41.62</td><td>0.41</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>20115.00</td><td>39.09</td><td>74.00</td><td>-34.91</td><td>55.10</td><td>30.00</td><td>19.41</td><td>63.88</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13410.00	54.60	88.20	-33.60	35.95	40.00	17.47	41.62	0.41	--	Peak	2	20115.00	39.09	74.00	-34.91	55.10	30.00	19.41	63.88	-9.54	--	Peak	Level (dBuV/m) Date: 2026-01-18 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13410.00</td><td>55.02</td><td>88.20</td><td>-33.18</td><td>36.37</td><td>40.00</td><td>17.47</td><td>41.62</td><td>0.41</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>20115.00</td><td>38.72</td><td>74.00</td><td>-35.28</td><td>54.73</td><td>30.00</td><td>19.41</td><td>63.88</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13410.00	55.02	88.20	-33.18	36.37	40.00	17.47	41.62	0.41	--	Peak	2	20115.00	38.72	74.00	-35.28	54.73	30.00	19.41	63.88	-9.54	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	13410.00	54.60	88.20	-33.60	35.95	40.00	17.47	41.62	0.41	--	Peak																																																																																																															
2	20115.00	39.09	74.00	-34.91	55.10	30.00	19.41	63.88	-9.54	--	Peak																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	13410.00	55.02	88.20	-33.18	36.37	40.00	17.47	41.62	0.41	--	Peak																																																																																																															
2	20115.00	38.72	74.00	-35.28	54.73	30.00	19.41	63.88	-9.54	--	Peak																																																																																																															



Mode	106	
	Harmonic	
	U-NII-7_6.525-6.875_802.11ax HE80_CH151_Full RU_6705MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-01-18 AVG(UNII)_6E Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2026-01-18 AVG(UNII)_6E Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL



Mode	107																																																																																																															
	Harmonic																																																																																																															
	U-NII-7_6.525-6.875_802.11ax HE80_CH183_Full RU_6865MHz																																																																																																															
ANT	0+1																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	Level (dBuV/m) Date: 2026-01-18 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13730.00</td><td>54.78</td><td>88.20</td><td>-33.42</td><td>36.41</td><td>40.26</td><td>17.67</td><td>42.26</td><td>0.39</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>20595.00</td><td>39.28</td><td>74.00</td><td>-34.72</td><td>54.69</td><td>30.10</td><td>19.73</td><td>63.70</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13730.00	54.78	88.20	-33.42	36.41	40.26	17.67	42.26	0.39	--	Peak	2	20595.00	39.28	74.00	-34.72	54.69	30.10	19.73	63.70	-9.54	--	Peak	Level (dBuV/m) Date: 2026-01-18 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13730.00</td><td>54.87</td><td>88.20</td><td>-33.33</td><td>36.50</td><td>40.26</td><td>17.67</td><td>42.26</td><td>0.39</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>20595.00</td><td>39.65</td><td>74.00</td><td>-34.35</td><td>55.06</td><td>30.10</td><td>19.73</td><td>63.70</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13730.00	54.87	88.20	-33.33	36.50	40.26	17.67	42.26	0.39	--	Peak	2	20595.00	39.65	74.00	-34.35	55.06	30.10	19.73	63.70	-9.54	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	13730.00	54.78	88.20	-33.42	36.41	40.26	17.67	42.26	0.39	--	Peak																																																																																																					
2	20595.00	39.28	74.00	-34.72	54.69	30.10	19.73	63.70	-9.54	--	Peak																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	13730.00	54.87	88.20	-33.33	36.50	40.26	17.67	42.26	0.39	--	Peak																																																																																																					
2	20595.00	39.65	74.00	-34.35	55.06	30.10	19.73	63.70	-9.54	--	Peak																																																																																																					



Mode	107	
	Harmonic	
	U-NII-7_6.525-6.875_802.11ax HE80_CH183_Full RU_6865MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-01-18 AVG(UNII_6E) Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2026-01-18 AVG(UNII_6E) Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL



Mode	108																																																																																																																																																							
	Harmonic																																																																																																																																																							
	U-NII-7_6.525-6.875_802.11ax HE160_CH143_Full RU_6665MHz																																																																																																																																																							
ANT	0+1																																																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																																																	
Peak Avg	Level (dBuV/m) Date: 2026-01-18 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13330.00</td><td>54.41</td><td>74.00</td><td>-19.59</td><td>35.62</td><td>40.10</td><td>17.42</td><td>41.45</td><td>0.41</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>13330.00</td><td>43.97</td><td>54.00</td><td>-10.03</td><td>25.18</td><td>40.10</td><td>17.42</td><td>41.45</td><td>0.41</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>19995.00</td><td>38.74</td><td>74.00</td><td>-35.26</td><td>54.05</td><td>38.00</td><td>19.33</td><td>63.90</td><td>-9.54</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13330.00	54.41	74.00	-19.59	35.62	40.10	17.42	41.45	0.41	--	--	Peak	2	13330.00	43.97	54.00	-10.03	25.18	40.10	17.42	41.45	0.41	--	--	Average	3	19995.00	38.74	74.00	-35.26	54.05	38.00	19.33	63.90	-9.54	--	--	Peak	Level (dBuV/m) Date: 2026-01-18 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13330.00</td><td>54.32</td><td>74.00</td><td>-19.68</td><td>35.53</td><td>40.10</td><td>17.42</td><td>41.45</td><td>0.41</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>13330.00</td><td>44.01</td><td>54.00</td><td>-9.99</td><td>25.22</td><td>40.10</td><td>17.42</td><td>41.45</td><td>0.41</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>19995.00</td><td>38.47</td><td>74.00</td><td>-35.53</td><td>54.58</td><td>38.00</td><td>19.33</td><td>63.90</td><td>-9.54</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13330.00	54.32	74.00	-19.68	35.53	40.10	17.42	41.45	0.41	--	--	Peak	2	13330.00	44.01	54.00	-9.99	25.22	40.10	17.42	41.45	0.41	--	--	Average	3	19995.00	38.47	74.00	-35.53	54.58	38.00	19.33	63.90	-9.54	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																														
1	13330.00	54.41	74.00	-19.59	35.62	40.10	17.42	41.45	0.41	--	--	Peak																																																																																																																																												
2	13330.00	43.97	54.00	-10.03	25.18	40.10	17.42	41.45	0.41	--	--	Average																																																																																																																																												
3	19995.00	38.74	74.00	-35.26	54.05	38.00	19.33	63.90	-9.54	--	--	Peak																																																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																														
1	13330.00	54.32	74.00	-19.68	35.53	40.10	17.42	41.45	0.41	--	--	Peak																																																																																																																																												
2	13330.00	44.01	54.00	-9.99	25.22	40.10	17.42	41.45	0.41	--	--	Average																																																																																																																																												
3	19995.00	38.47	74.00	-35.53	54.58	38.00	19.33	63.90	-9.54	--	--	Peak																																																																																																																																												



Mode	108	
	Harmonic	
	U-NII-7_6.525-6.875_802.11ax HE160_CH143_Full RU_6665MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-01-18 Frequency (MHz) Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2026-01-18 Frequency (MHz) Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL





Mode	109																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-7_6.525-6.875_802.11ax HE160_CH175_Full RU_6825MHz																																																																																																																									
ANT	0+1																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2026-01-18 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13650.00</td><td>56.14</td><td>88.20</td><td>-32.06</td><td>37.83</td><td>40.10</td><td>17.62</td><td>42.11</td><td>0.39</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>20475.00</td><td>39.32</td><td>74.00</td><td>-34.68</td><td>54.92</td><td>38.10</td><td>19.65</td><td>63.81</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13650.00	56.14	88.20	-32.06	37.83	40.10	17.62	42.11	0.39	--	Peak	2	20475.00	39.32	74.00	-34.68	54.92	38.10	19.65	63.81	-9.54	--	Peak	Level (dBuV/m) Date: 2026-01-18 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13650.00</td><td>54.84</td><td>88.20</td><td>-33.36</td><td>36.53</td><td>40.10</td><td>17.62</td><td>42.11</td><td>0.39</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>20475.00</td><td>39.46</td><td>74.00</td><td>-34.54</td><td>55.06</td><td>38.10</td><td>19.65</td><td>63.81</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13650.00	54.84	88.20	-33.36	36.53	40.10	17.62	42.11	0.39	--	Peak	2	20475.00	39.46	74.00	-34.54	55.06	38.10	19.65	63.81	-9.54	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	13650.00	56.14	88.20	-32.06	37.83	40.10	17.62	42.11	0.39	--	Peak																																																																																																															
2	20475.00	39.32	74.00	-34.68	54.92	38.10	19.65	63.81	-9.54	--	Peak																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	13650.00	54.84	88.20	-33.36	36.53	40.10	17.62	42.11	0.39	--	Peak																																																																																																															
2	20475.00	39.46	74.00	-34.54	55.06	38.10	19.65	63.81	-9.54	--	Peak																																																																																																															



Mode	109	
	Harmonic	
	U-NII-7_6.525-6.875_802.11ax HE160_CH175_Full RU_6825MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-01-18 AVG(UNII)_6E Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2026-01-18 AVG(UNII)_6E Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL

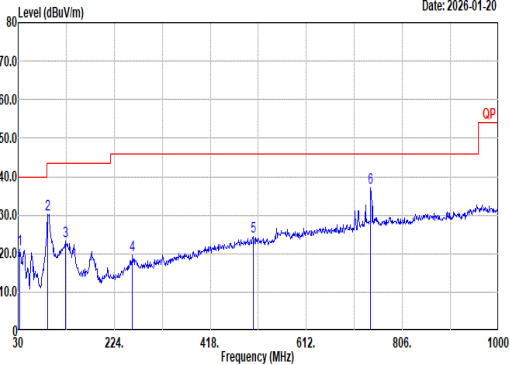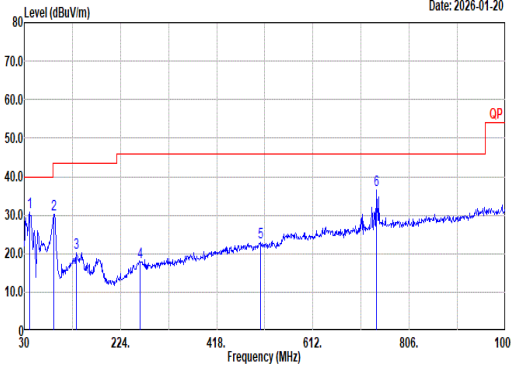



Mode	126																																																																																																																																																																																												
	LF																																																																																																																																																																																												
	U-NII-5_5.925-6.425_802.11ax HE80_CH7_Full RU_5985MHz																																																																																																																																																																																												
ANT	0+1																																																																																																																																																																																												
Pol.	Horizontal					Vertical																																																																																																																																																																																							
QPI Peak																																																																																																																																																																																													
	Site : 03CH23-HY Condition: QP 3m CBL6111D_62028 & 003_251126 HORIZONTAL					Site : 03CH23-HY Condition: QP 3m CBL6111D_62028 & 003_251126 VERTICAL																																																																																																																																																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>32.91</td><td>21.05</td><td>40.00</td><td>-18.95</td><td>30.31</td><td>22.73</td><td>0.49</td><td>32.56</td><td>0.08 -- -- Peak</td></tr><tr><td>2</td><td>90.14</td><td>30.21</td><td>43.50</td><td>-13.29</td><td>46.30</td><td>15.22</td><td>1.04</td><td>32.51</td><td>0.08 -- -- Peak</td></tr><tr><td>3</td><td>125.06</td><td>23.17</td><td>43.50</td><td>-20.33</td><td>36.63</td><td>17.61</td><td>1.25</td><td>32.48</td><td>0.16 -- -- Peak</td></tr><tr><td>4</td><td>260.86</td><td>19.51</td><td>46.00</td><td>-26.49</td><td>29.09</td><td>20.06</td><td>1.96</td><td>32.52</td><td>0.12 -- -- Peak</td></tr><tr><td>5</td><td>504.33</td><td>24.40</td><td>46.00</td><td>-21.60</td><td>30.02</td><td>24.12</td><td>2.85</td><td>32.68</td><td>0.09 -- -- Peak</td></tr><tr><td>6</td><td>741.98</td><td>37.26</td><td>46.00</td><td>-8.74</td><td>38.02</td><td>28.09</td><td>3.51</td><td>32.56</td><td>0.20 -- -- Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	32.91	21.05	40.00	-18.95	30.31	22.73	0.49	32.56	0.08 -- -- Peak	2	90.14	30.21	43.50	-13.29	46.30	15.22	1.04	32.51	0.08 -- -- Peak	3	125.06	23.17	43.50	-20.33	36.63	17.61	1.25	32.48	0.16 -- -- Peak	4	260.86	19.51	46.00	-26.49	29.09	20.06	1.96	32.52	0.12 -- -- Peak	5	504.33	24.40	46.00	-21.60	30.02	24.12	2.85	32.68	0.09 -- -- Peak	6	741.98	37.26	46.00	-8.74	38.02	28.09	3.51	32.56	0.20 -- -- Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>40.67</td><td>30.92</td><td>40.00</td><td>-9.08</td><td>43.36</td><td>19.41</td><td>0.62</td><td>32.55</td><td>0.08 -- -- Peak</td></tr><tr><td>2</td><td>89.17</td><td>30.32</td><td>43.50</td><td>-13.18</td><td>46.63</td><td>15.09</td><td>1.03</td><td>32.51</td><td>0.08 -- -- Peak</td></tr><tr><td>3</td><td>134.76</td><td>20.34</td><td>43.50</td><td>-23.16</td><td>33.71</td><td>17.66</td><td>1.32</td><td>32.47</td><td>0.12 -- -- Peak</td></tr><tr><td>4</td><td>262.80</td><td>17.96</td><td>46.00</td><td>-28.04</td><td>28.23</td><td>20.16</td><td>1.97</td><td>32.52</td><td>0.12 -- -- Peak</td></tr><tr><td>5</td><td>506.27</td><td>22.92</td><td>46.00</td><td>-23.08</td><td>28.50</td><td>24.15</td><td>2.86</td><td>32.68</td><td>0.09 -- -- Peak</td></tr><tr><td>6</td><td>740.04</td><td>36.56</td><td>46.00</td><td>-9.44</td><td>37.52</td><td>27.90</td><td>3.51</td><td>32.57</td><td>0.20 -- -- Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	40.67	30.92	40.00	-9.08	43.36	19.41	0.62	32.55	0.08 -- -- Peak	2	89.17	30.32	43.50	-13.18	46.63	15.09	1.03	32.51	0.08 -- -- Peak	3	134.76	20.34	43.50	-23.16	33.71	17.66	1.32	32.47	0.12 -- -- Peak	4	262.80	17.96	46.00	-28.04	28.23	20.16	1.97	32.52	0.12 -- -- Peak	5	506.27	22.92	46.00	-23.08	28.50	24.15	2.86	32.68	0.09 -- -- Peak	6	740.04	36.56	46.00	-9.44	37.52	27.90	3.51	32.57
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																																				
1	32.91	21.05	40.00	-18.95	30.31	22.73	0.49	32.56	0.08 -- -- Peak																																																																																																																																																																																				
2	90.14	30.21	43.50	-13.29	46.30	15.22	1.04	32.51	0.08 -- -- Peak																																																																																																																																																																																				
3	125.06	23.17	43.50	-20.33	36.63	17.61	1.25	32.48	0.16 -- -- Peak																																																																																																																																																																																				
4	260.86	19.51	46.00	-26.49	29.09	20.06	1.96	32.52	0.12 -- -- Peak																																																																																																																																																																																				
5	504.33	24.40	46.00	-21.60	30.02	24.12	2.85	32.68	0.09 -- -- Peak																																																																																																																																																																																				
6	741.98	37.26	46.00	-8.74	38.02	28.09	3.51	32.56	0.20 -- -- Peak																																																																																																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																																				
1	40.67	30.92	40.00	-9.08	43.36	19.41	0.62	32.55	0.08 -- -- Peak																																																																																																																																																																																				
2	89.17	30.32	43.50	-13.18	46.63	15.09	1.03	32.51	0.08 -- -- Peak																																																																																																																																																																																				
3	134.76	20.34	43.50	-23.16	33.71	17.66	1.32	32.47	0.12 -- -- Peak																																																																																																																																																																																				
4	262.80	17.96	46.00	-28.04	28.23	20.16	1.97	32.52	0.12 -- -- Peak																																																																																																																																																																																				
5	506.27	22.92	46.00	-23.08	28.50	24.15	2.86	32.68	0.09 -- -- Peak																																																																																																																																																																																				
6	740.04	36.56	46.00	-9.44	37.52	27.90	3.51	32.57	0.20 -- -- Peak																																																																																																																																																																																				



Appendix D. Duty Cycle Plots


Antenna	Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting
6+7	6GHz 802.11a	99.05	2095	0.48	10Hz
6+7	6GHz 802.11ax HE20 Full RU	100.00	3000	0.33	10Hz
6+7	6GHz 802.11ax HE20 106 RU	100.00	3330	0.30	10Hz
6+7	6GHz 802.11ax HE40 Full RU	100.00	3000	0.33	10Hz
6+7	6GHz 802.11ax HE40 242 RU	99.46	4392	0.23	10Hz
6+7	6GHz 802.11ax HE80 Full RU	99.33	2218	0.45	10Hz
6+7	6GHz 802.11ax HE80 484 RU	99.29	2232	0.45	10Hz
6+7	6GHz 802.11ax HE160 Full RU	99.31	2155	0.46	10Hz
6+7	6GHz 802.11ax HE160 996 RU	97.53	711	1.41	1.5kHz

MIMO <Ant. 6+7>

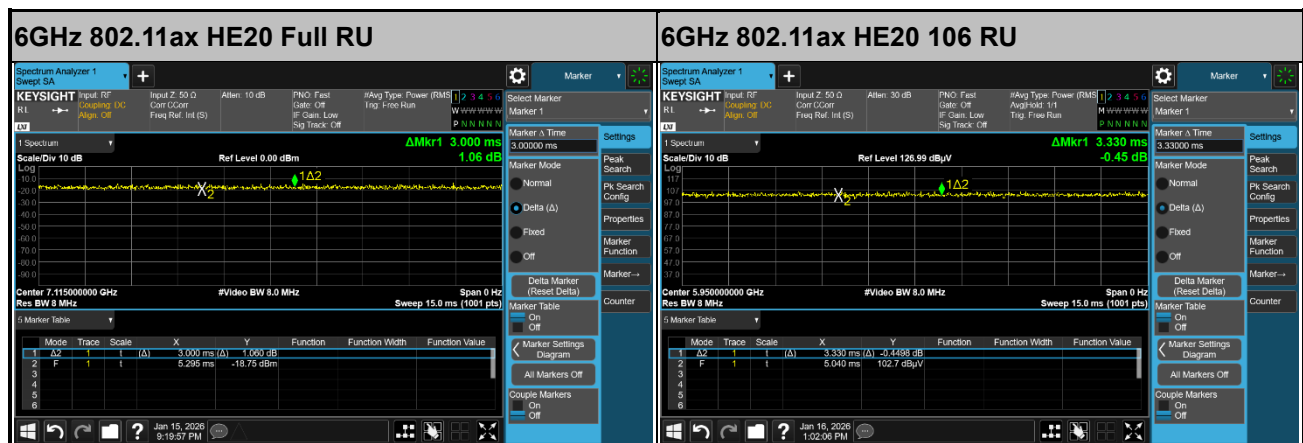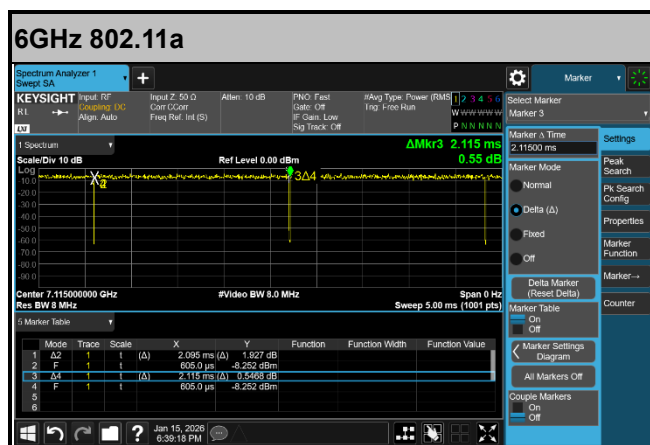





6GHz 802.11ax HE40 Full RU

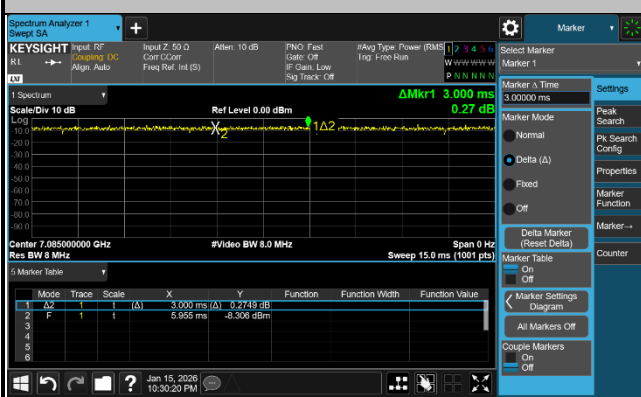


6GHz 802.11ax HE40 242 RU

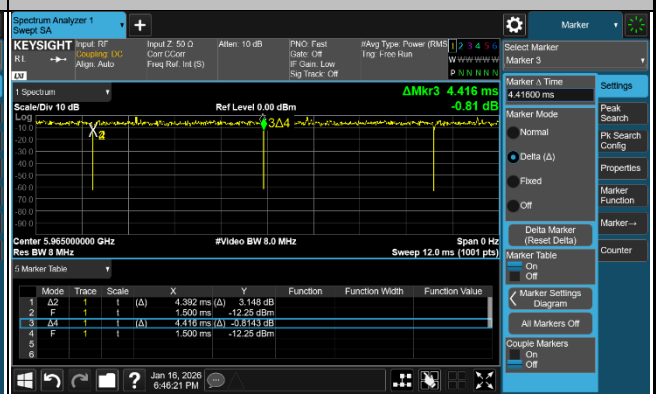


6GHz 802.11ax HE80 Full RU

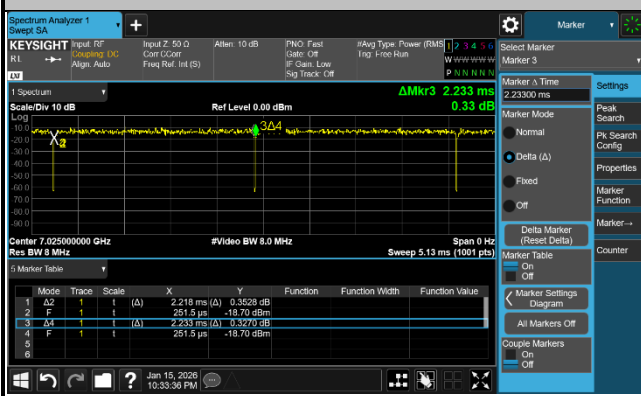

6GHz 802.11ax HE80 484 RU

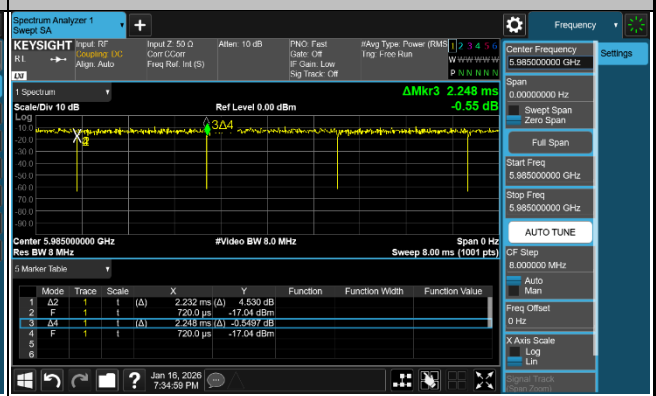

6GHz 802.11ax HE160 Full RU

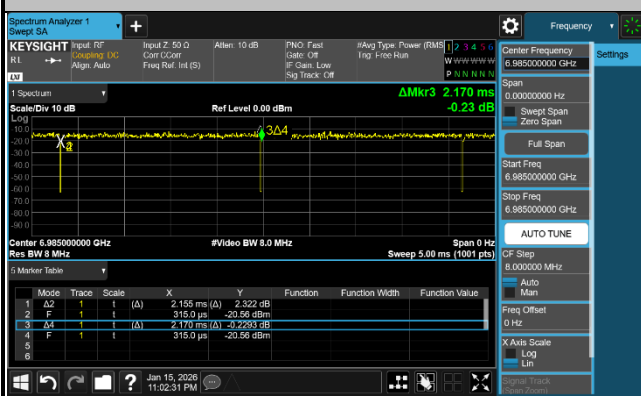

6GHz 802.11ax HE160 996 RU

