



# **RADIO TEST REPORT**

**Test Report No. : 10662332H-E-R1**

**Applicant** : **Murata Manufacturing Company, Ltd.**  
**Type of Equipment** : **Communication Module**  
**Model No.** : **LBEE5ZZ1CK**  
**FCC ID** : **VPYLB1CK**  
**Test regulation** : **FCC Part 15 Subpart E: 2015**  
**(DFS test only)**  
**Test Result** : **Complied**

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
6. This test report covers Radio technical requirements. It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
7. This report is a revised version of 10662332H-E. 10662332H-E is replaced with this report.

**Date of test:** February 10, 2015

**Representative test engineer:**

T. Shimada

Takumi Shimada

Engineer

Consumer Technology Division

**Approved by:**

Takayuki Shimada

Takayuki Shimada

Engineer

Consumer Technology Division



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.  
\*As for the range of Accreditation in NVLAP, you may refer to the WEB address,  
[http://japan.ul.com/resources/emc\\_accredited/](http://japan.ul.com/resources/emc_accredited/)

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

13-EM-F0429



| <b><u>CONTENTS</u></b>                                                       | <b><u>PAGE</u></b> |
|------------------------------------------------------------------------------|--------------------|
| <b>SECTION 1: Customer information.....</b>                                  | <b>4</b>           |
| <b>SECTION 2: Equipment under test (E.U.T.).....</b>                         | <b>4</b>           |
| <b>SECTION 3: Scope of Report.....</b>                                       | <b>6</b>           |
| <b>SECTION 4: Test specification, procedures &amp; results.....</b>          | <b>6</b>           |
| <b>SECTION 5: Operation of E.U.T. during testing .....</b>                   | <b>11</b>          |
| <b>SECTION 6: Channel Move Time, Channel Closing Transmission Time .....</b> | <b>18</b>          |
| <b>SECTION 7: Non-Occupancy Period .....</b>                                 | <b>20</b>          |
| <b>APPENDIX 1: Test instruments .....</b>                                    | <b>22</b>          |
| <b>APPENDIX 2: Photographs of test setup .....</b>                           | <b>23</b>          |

## **SECTION 1: Customer information**

Company Name : Murata Manufacturing Company, Ltd.  
Address : 10-1, Higashikotari 1-chome, Nagaokakyo-shi, Kyoto 617-8555 Japan  
Telephone Number : +81-75-955-6736  
Facsimile Number : +81-75-955-6634  
Contact Person : Motoo Hayashi

## **SECTION 2: Equipment under test (E.U.T.)**

### **2.1 Identification of E.U.T.**

Type of Equipment : Communication Module  
Model No. : LBEE5ZZ1CK  
Serial No. : Refer to Section 4, Clause 4.2  
Rating : VBAT: Typ. 3.6V, Min. 3.2V, Max. 4.4V  
VIO: Typ. 1.8V, Min. 1.71V, Max. 1.89V  
(This doesn't influence the RF Characteristic.)  
Receipt Date of Sample : December 26, 2014  
Country of Mass-production : China, Japan  
Condition of EUT : Production prototype  
(Not for Sale: This sample is equivalent to mass-produced items.)  
Modification of EUT : No Modification by the test lab

### **2.2 Product Description**

#### **General Specification**

Clock frequency(ies) in the system : 37.4MHz  
Operating temperature : -20deg. C to +80deg. C

---

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

### **Radio Specification**

Radio Type : Transceiver  
Power Supply (inner) : DC 1.35 V / DC 3.3 V

### **Specification of Wireless LAN (IEEE802.11b/g/a/n-20/n-40/ac-20/ac-40/ac-80)**

| Type of radio          | IEEE802.11b                    | IEEE802.11g/n                          | IEEE802.11a/n/ac<br>(20 M band)                                      | IEEE802.11n/ac<br>(40 M band)                                        | IEEE802.11ac<br>(80 M band)                           |
|------------------------|--------------------------------|----------------------------------------|----------------------------------------------------------------------|----------------------------------------------------------------------|-------------------------------------------------------|
| Frequency of operation | 2412-2462MHz                   | 2412-2462MHz                           | 5180-5240MHz<br>5260-5320MHz *1)<br>5500-5700MHz *1)<br>5745-5825MHz | 5190-5230MHz<br>5270-5310MHz *1)<br>5510-5670MHz *1)<br>5755-5795MHz | 5210MHz<br>5290MHz *1)<br>5530-5610MHz *1)<br>5775MHz |
| Type of modulation     | DSSS<br>(CCK, DQPSK, DBPSK)    | OFDM-CCK<br>(64QAM, 16QAM, QPSK, BPSK) | OFDM<br>(64QAM, 16QAM, QPSK, BPSK, 256QAM(IEEE802.11ac only))        |                                                                      |                                                       |
| Channel spacing        | 5MHz                           |                                        | 20MHz                                                                | 40MHz                                                                | 80MHz                                                 |
| Antenna type           | Pattern Antenna                |                                        |                                                                      |                                                                      |                                                       |
| Antenna Gain           | 2.4GHz: 0.0dBi<br>5GHz: 0.7dBi |                                        |                                                                      |                                                                      |                                                       |

\*1) 5GHz Band (5260-5320MHz, 5500-5700MHz, 5270-5310MHz, 5510-5670MHz, 5290MHz and 5530-5610MHz) is applied for this test report.

---

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

### **SECTION 3: Scope of Report**

This report only covers DFS requirement, as specified by the following referenced procedures.

### **SECTION 4: Test specification, procedures & results**

#### **4.1 Test Specification**

|                    |   |                                                                                                                                                                                                       |
|--------------------|---|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Specification | : | FCC Part 15 Subpart E: 2015, final revised on June 12, 2015 and effective July 13, 2015<br>* The revision on June 12, 2015 does not affect the test specification applied to the EUT.                 |
| Title              | : | FCC 47CFR Part15 Radio Frequency Device<br>Subpart E Unlicensed National Information Infrastructure Devices<br>Section 15.407 General technical requirements                                          |
| Test Specification | : | KDB905462 D02 UNII DFS Compliance Procedures New Rules v01r02                                                                                                                                         |
| Title              | : | COMPLIANCE MEASUREMENT PROCEDURES FOR UNLICENSED-<br>NATIONAL INFORMATION INFRASTRUCTURE DEVICES<br>OPERATING IN THE 5250-5350MHz AND 5470-5725MHz BANDS<br>INCORPORATING DYNAMIC FREQUENCY SELECTION |
| Test Specification | : | KDB905462 D03 Client Without DFS New Rules v01r01                                                                                                                                                     |
| Title              | : | U-NII CLIENT DEVICES WITHOUT RADAR DETECTION CAPABILITY                                                                                                                                               |
| Test Specification | : | KDB905462 D04 Operational Modes for DFS Testing New Rules v01                                                                                                                                         |
| Title              | : | OPERATIONAL MODES SUGGESTED FOR DFS TESTING                                                                                                                                                           |

#### **FCC Part 15.31 (e)**

The RF Module has own regulator.

The RF Module is constantly provided voltage (DC 1.35 V / DC 3.3 V) through own regulator regardless of input voltage.

Therefore, this EUT complies with the requirement.

#### **FCC Part 15.203/212 Antenna requirement**

The antenna is not removable from the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203/212.

---

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## 4.2 Procedures and results

**Table 1: Applicability of DFS Requirements**

| Requirement                                                                    | Operating Mode                 | Test Procedures & Limits                                      | Deviation | Results  |
|--------------------------------------------------------------------------------|--------------------------------|---------------------------------------------------------------|-----------|----------|
|                                                                                | Client without Radar Detection |                                                               |           |          |
| U-NII Detection Bandwidth                                                      | Not required                   | KDB905462 D02 UNII DFS Compliance Procedures New Rules v01r02 | N/A       | N/A      |
| Initial Channel Availability Check Time                                        | Not required                   | FCC15.407 (h)                                                 | N/A       | N/A      |
|                                                                                |                                | KDB905462 D02 UNII DFS Compliance Procedures New Rules v01r02 |           |          |
|                                                                                |                                | RSS-247 6.3                                                   |           |          |
| Radar Burst at the Beginning of the Channel Availability Check Time            | Not required                   | FCC15.407 (h)                                                 | N/A       | N/A      |
|                                                                                |                                | KDB905462 D02 UNII DFS Compliance Procedures New Rules v01r02 |           |          |
|                                                                                |                                | RSS-247 6.3                                                   |           |          |
| Radar Burst at the End of the Channel Availability Check Time                  | Not required                   | FCC15.407 (h)                                                 | N/A       | N/A      |
|                                                                                |                                | KDB905462 D02 UNII DFS Compliance Procedures New Rules v01r02 |           |          |
|                                                                                |                                | RSS-247 6.3                                                   |           |          |
| In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time | Yes                            | FCC15.407 (h)                                                 | N/A       | Complied |
|                                                                                |                                | KDB905462 D02 UNII DFS Compliance Procedures New Rules v01r02 |           |          |
|                                                                                |                                | RSS-247 6.3                                                   |           |          |
| In-Service Monitoring for Non-Occupancy period                                 | Yes *                          | FCC15.407 (h)                                                 | N/A       | Complied |
|                                                                                |                                | KDB905462 D02 UNII DFS Compliance Procedures New Rules v01r02 |           |          |
|                                                                                |                                | RSS-247 6.3                                                   |           |          |
| Statistical Performance Check                                                  | Not required                   | FCC15.407 (h)                                                 | N/A       | N/A      |
|                                                                                |                                | KDB905462 D02 UNII DFS Compliance Procedures New Rules v01r02 |           |          |

\*Although this test was not required in FCC, KDB 905462 D02, it was performed as additional test.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

**Table 2 DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection**

| Maximum Transmit Power                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Value (See Notes 1,2, and 3) |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|
| ≥ 200 milliwatt                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | -64 dBm                      |
| < 200 milliwatt and power spectral density < 10dBm/MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | -62 dBm                      |
| < 200 milliwatt that do not meet the power spectral density requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                 | -64 dBm                      |
| <p>Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.</p> <p>Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.</p> <p>Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.</p> |                              |

**Table 3 DFS Response Requirement Values**

| Parameter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Value                                                                                                    |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|
| Non-occupancy period                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Minimum 30 minutes                                                                                       |
| Channel Availability Check Time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 60 seconds                                                                                               |
| Channel Move Time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 10 seconds<br>See Note 1                                                                                 |
| Channel Closing Transmission Time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period.<br>See Notes 1 and 2 |
| U-NII Detection Bandwidth                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Minimum 100% of the U-NII 99% transmission power bandwidth<br>See Note 3                                 |
| <p><b>Note 1:</b> Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.</p> <p><b>Note 2:</b> The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signal will not count quiet periods in between transmissions.</p> <p><b>Note 3:</b> During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.</p> |                                                                                                          |

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124



**Table 4 Short Pulse Radar Test Waveform**

| Radar Type                                                                                                                           | Pulse Width (μsec) | PRI (μsec)                                                                                                                                                                                                                                                 | Number of Pulses                                               | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|--------------------------------------------------------------------------------------------------------------------------------------|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|--------------------------------------------|--------------------------|
| 0                                                                                                                                    | 1                  | 1428                                                                                                                                                                                                                                                       | 18                                                             | See Note 1                                 | See Note 1               |
| 1                                                                                                                                    | 1                  | Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a<br>Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A | Roundup $\{(1/360) * (19 * 10^6 / \text{PRI}_{\text{μsec}})\}$ | 60%                                        | 30                       |
| 2                                                                                                                                    | 1-5                | 150-230                                                                                                                                                                                                                                                    | 23-29                                                          | 60%                                        | 30                       |
| 3                                                                                                                                    | 6-10               | 200-500                                                                                                                                                                                                                                                    | 16-18                                                          | 60%                                        | 30                       |
| 4                                                                                                                                    | 11-20              | 200-500                                                                                                                                                                                                                                                    | 12-16                                                          | 60%                                        | 30                       |
| Aggregate (Rader Types 1-4)                                                                                                          |                    |                                                                                                                                                                                                                                                            |                                                                | 80%                                        | 120                      |
| Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests. |                    |                                                                                                                                                                                                                                                            |                                                                |                                            |                          |

**Table 5 Long Pulse Radar Test Waveform**

| Radar Type | Pulse Width (μsec) | Chip Width (MHz) | PRI (μsec) | Number of Pulses per Burst | Number of Burst | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|------------|--------------------|------------------|------------|----------------------------|-----------------|--------------------------------------------|--------------------------|
| 5          | 50-100             | 5-20             | 1000-2000  | 1-3                        | 8-20            | 80%                                        | 30                       |

**Table 6 Frequency Hopping Radar Test Waveform**

| Radar Type | Pulse Width (μsec) | PRI (μsec) | Pulse per Hop (kHz) | Hopping Rate (kHz) | Hopping Sequence Length (msec) | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|------------|--------------------|------------|---------------------|--------------------|--------------------------------|--------------------------------------------|--------------------------|
| 6          | 1                  | 333        | 9                   | 0.333              | 300                            | 70%                                        | 30                       |

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

#### 4.3 Test Location

UL Japan, Inc. Ise EMC Lab. \*NVLAP Lab. code: 200572-0  
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
Telephone : +81 596 24 8999 Facsimile : +81 596 24 8124

|                            | IC Registration Number | Width x Depth x Height (m) | Size of reference ground plane (m) / horizontal conducting plane | Other rooms            |
|----------------------------|------------------------|----------------------------|------------------------------------------------------------------|------------------------|
| No.1 semi-anechoic chamber | 2973C-1                | 19.2 x 11.2 x 7.7m         | 7.0 x 6.0m                                                       | No.1 Power source room |
| No.2 semi-anechoic chamber | 2973C-2                | 7.5 x 5.8 x 5.2m           | 4.0 x 4.0m                                                       | -                      |
| No.3 semi-anechoic chamber | 2973C-3                | 12.0 x 8.5 x 5.9m          | 6.8 x 5.75m                                                      | No.3 Preparation room  |
| No.3 shielded room         | -                      | 4.0 x 6.0 x 2.7m           | N/A                                                              | -                      |
| No.4 semi-anechoic chamber | 2973C-4                | 12.0 x 8.5 x 5.9m          | 6.8 x 5.75m                                                      | No.4 Preparation room  |
| No.4 shielded room         | -                      | 4.0 x 6.0 x 2.7m           | N/A                                                              | -                      |
| No.5 semi-anechoic chamber | -                      | 6.0 x 6.0 x 3.9m           | 6.0 x 6.0m                                                       | -                      |
| No.6 shielded room         | -                      | 4.0 x 4.5 x 2.7m           | 4.0 x 4.5 m                                                      | -                      |
| No.6 measurement room      | -                      | 4.75 x 5.4 x 3.0m          | 4.75 x 4.15 m                                                    | -                      |
| No.7 shielded room         | -                      | 4.7 x 7.5 x 2.7m           | 4.7 x 7.5m                                                       | -                      |
| No.8 measurement room      | -                      | 3.1 x 5.0 x 2.7m           | N/A                                                              | -                      |
| No.9 measurement room      | -                      | 8.0 x 4.6 x 2.8m           | 2.4 x 2.4m                                                       | -                      |
| No.11 measurement room     | -                      | 6.2 x 4.7 x 3.0m           | 4.8 x 4.6m                                                       | -                      |

\* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

#### 4.4 Uncertainty

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.  
Time Measurement uncertainty for this test was: ( $\pm$ ) 0.012%

#### 4.5 Data of DFS test, Test instruments of DFS, Test set up

Refer to APPENDIX.

## **SECTION 5: Operation of E.U.T. during testing**

### **5.1 Operating Modes**

The EUT, which is a Client Device without Radar detection capability, operates over the 5260-5320MHz and 5500-5700MHz.

Power level of the EUT[dBm]

| Band | Output Power (Min) | Output Power(Max) |
|------|--------------------|-------------------|
| W53  | 10.59              | 12.09             |
| W56  | 10.16              | 11.62             |

\*Refer to 10662332H-C-R1, FCC Part 15E (FCC 15.407) report for other parts than DFS.

The channel-loading of approximately 17% or greater was used for testing, and its test data was transferred from the Master Device to the Client Device for all test configurations.

The EUT utilizes the 802.11ac, with 20MHz and 80MHz bandwidth.

The FCC ID for the Master Device used with EUT for DFS testing is LDK102087.

The rated output power of the Master unit is >200mW(23dBm). Therefore the required interference threshold level is -64 dBm. After correction for antenna gain and procedural adjustments, the required conducted threshold at the antenna port is  $-64 + 1 + 0 = -63.0$  dBm (threshold level + additional 1dB + antenna gain ).

It is impossible for users to change DFS control, because the DFS function is written on the firmware and users cannot access it.

The EUT was set by the software as follows:

Software name & version: Ping for Linux armadillo440-0 Version 1.22

---

**UL Japan, Inc.**


**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## 5.2 Configuration and peripherals

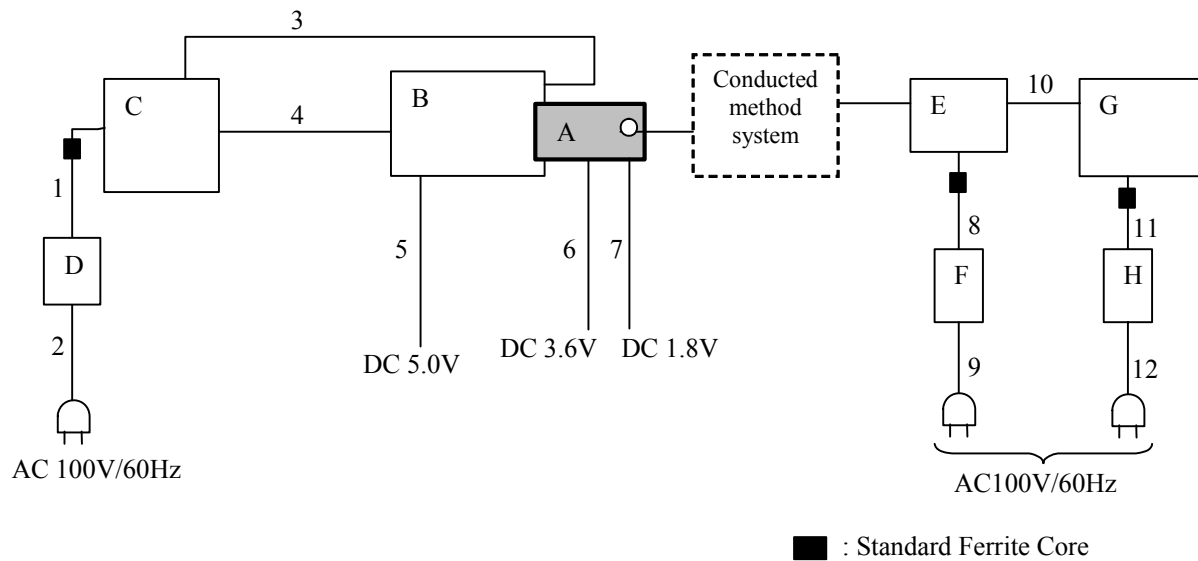

\* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

### Description of EUT and Support equipment

| No. | Item                 | Model number      | Serial number  | Manufacturer                       | Remarks |
|-----|----------------------|-------------------|----------------|------------------------------------|---------|
| A   | Communication Module | LBEE5ZZ1CK        | Conducted No.1 | Murata Manufacturing Company, Ltd. | EUT     |
| B   | Jig                  | -                 | -              | Murata Manufacturing Company, Ltd. | -       |
| C   | Laptop PC            | FMV-C8230         | R7305077       | FUJITSU                            | -       |
| D   | AC Adapter           | FMV-AC312         | CA01007-0930   | FUJITSU                            | -       |
| E   | Access point         | AIR-CAP3702E-A-K9 | FTX18227609    | Cisco                              | -       |
| F   | AC Adapter           | AA25480L          | ALD02510FEW    | Cisco                              | -       |
| G   | Laptop PC            | T410              | R8-D76YV       | Lenovo                             | -       |
| H   | AC Adapter           | 42T4418           | PA-1650-531    | Lenovo                             | -       |

### List of cables used

| No. | Name         | Length (m) | Shield     |            | Remarks |
|-----|--------------|------------|------------|------------|---------|
|     |              |            | Cable      | Connector  |         |
| 1   | DC Cable     | 1.8        | Unshielded | Unshielded | -       |
| 2   | AC Cable     | 2.0        | Unshielded | Unshielded | -       |
| 3   | LAN Cable    | 5.0        | Unshielded | Unshielded | -       |
| 4   | Serial Cable | 1.5        | Shielded   | Shielded   | -       |
| 5   | DC Cable     | 0.6        | Unshielded | Unshielded | -       |
| 6   | DC Cable     | 0.6        | Unshielded | Unshielded | -       |
| 7   | DC Cable     | 0.6        | Unshielded | Unshielded | -       |
| 8   | DC Cable     | 1.8        | Unshielded | Unshielded | -       |
| 9   | AC Cable     | 1.8        | Unshielded | Unshielded | -       |
| 10  | LAN Cable    | 3.0        | Unshielded | Unshielded | -       |
| 11  | DC Cable     | 1.7        | Unshielded | Unshielded | -       |
| 12  | AC Cable     | 1.0        | Unshielded | Unshielded | -       |

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

### 5.3 Test and Measurement System

#### **SYSTEM OVERVIEW**

The measurement system is based on a conducted test method.

The software selects waveform parameters from within the bounds of the signal type on a random basis using uniform distribution. The short pulse types 0, 1, 2, 3, and 4, the long pulse type 5, and the frequency hopping type 6 parameters are randomized at run-time.

The signal monitoring equipment consists of a spectrum analyzer with the capacity to display 8001 bins on the horizontal axis. A time-domain resolution of 2 msec/bin is achievable with a 16 second sweep time, meeting the 10 seconds short pulse reporting criteria. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection. A time-domain resolution of 3 msec/bin is achievable with a 24 second sweep time, meeting the 22 second long pulse reporting criteria and allowing a minimum of 10 seconds after the end of the long pulse waveform.


#### **FREQUENCY HOPPING RADAR WAVEFORM GENERATING SUBSYSTEM**

The first 100 frequencies are selected out of the hopping sequence of the randomized 475 hop frequencies.

Only a *Burst* that has the frequency falling within the receiver bandwidth of the tested U-NII device is selected among those frequencies. (Frequency-domain simulation). The radar waveform generated at the start time of the selected *Burst* (Time-domain simulation) is download to the Signal Generator.

If all of the randomly selected 100 frequencies do not fall within the receiver bandwidth of the U-NII device, the radar waveform is not used for the test.

## CONDUCTED METHODS SYSTEM BLOCK DIAGRAM

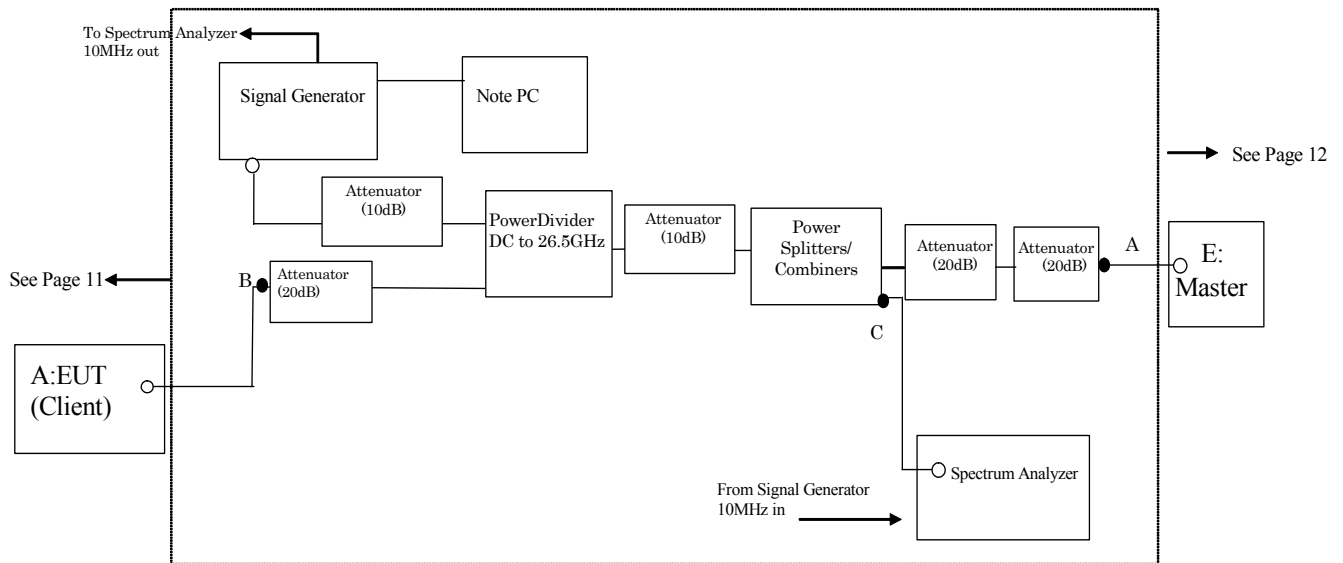

## MEASUREMENT SYSTEM FREQUENCY REFERENCE

Lock the signal generator and the spectrum analyzer to the same reference sources as follows: Connect the 10MHz OUT on the signal generator to the 10MHz IN on the spectrum analyzer and set the spectrum analyzer 10MHz In to On.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## **SYSTEM CALIBRATION**

**Step 1:** Set the system as shown in Figure 3 of KDB905462 7.2.2.

**Step 2:** Adjust each attenuator to fulfill the following three conditions:

- WLAN can be communicated, and
- Rader detection threshold level is bigger than Client Device traffic level on the spectrum analyzer, and
- Master Device traffic level is not displayed on the spectrum analyzer.

**Step 3:** Terminate 50 ohm at B and C points, and connect the spectrum analyzer to the point A. (See the figure on page 14)

At the point A, adjust the signal generator and spectrum analyzer to the center frequency of the channel to be measured.

Download the applicable radar waveforms to the signal generator. Select the radar waveform, trigger a burst manually and measure the amplitude on the spectrum analyzer. Readjust the amplitude of the signal generator as required so that the peak level of the waveform is at a displayed level equal to the required or desired interference detection threshold.

Separate signal generator amplitude settings are determined as required for each radar type.

**Step 4:** Without changing any of the instrument settings, restore the system setting to Step 2 and adjust the Reference Level Offset of the spectrum analyzer to the level at Step 3.

By taking the above steps 1 to 4, the spectrum analyzer displays the level of the signal generator as received at the antenna ports of the Master Device.

See Clause 5.4 for Plots of Noise, Rader Waveforms, and WLAN signals.

5.4 Plots of Noise, Rader Waveforms, and WLAN signals

Test place

Report No.

Date

Temperature/ Humidity

Engineer

Mode

Ise EMC Lab. No.6 Measurement room


10662332H

02/10/2015


23deg. C / 44% RH

Takumi Shimada

11ac-20 Tx / 11ac-80 Tx

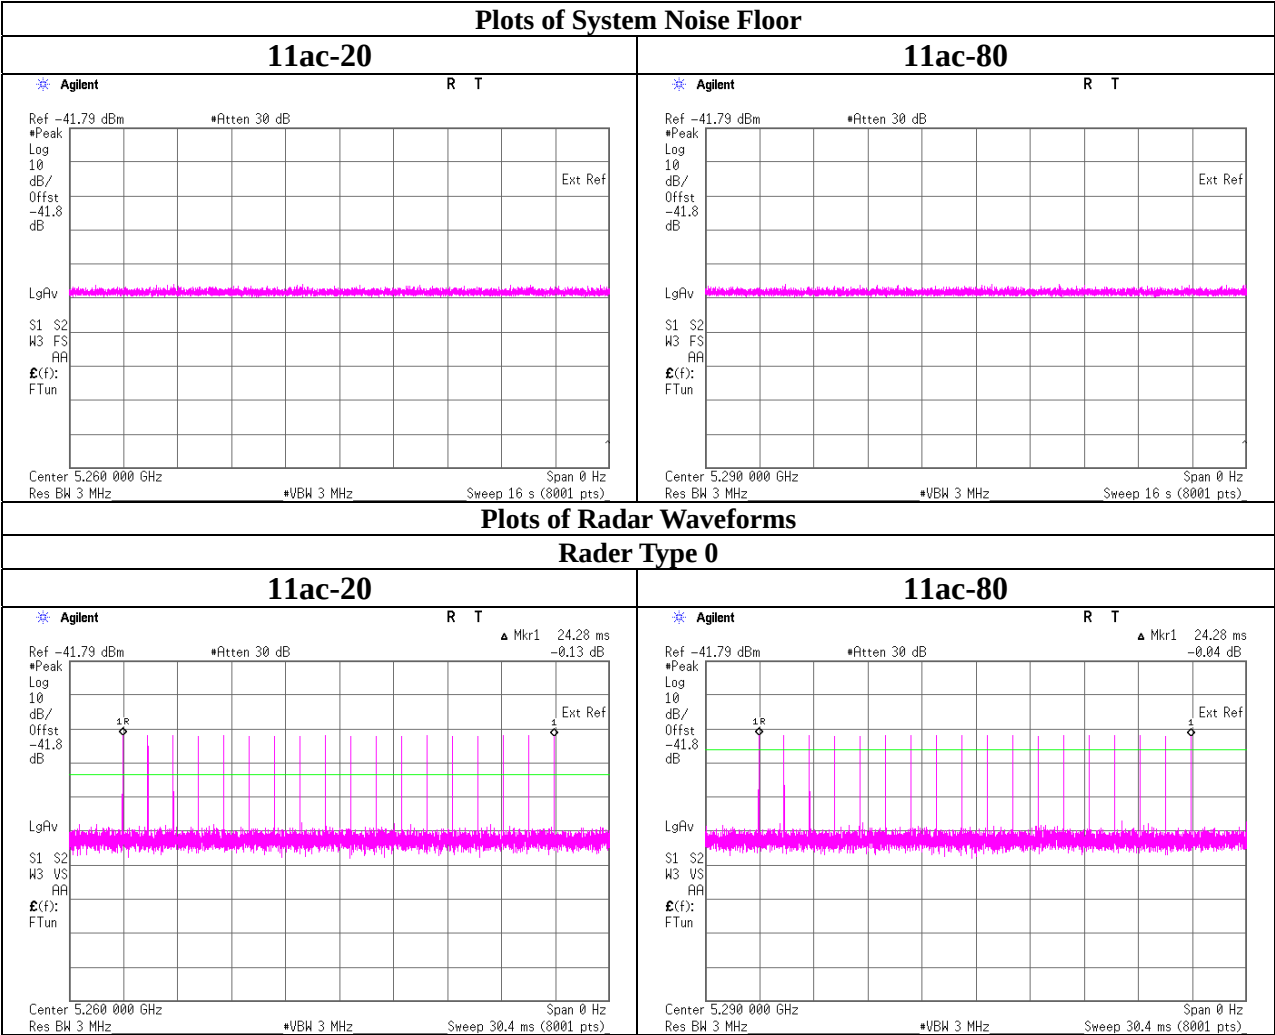



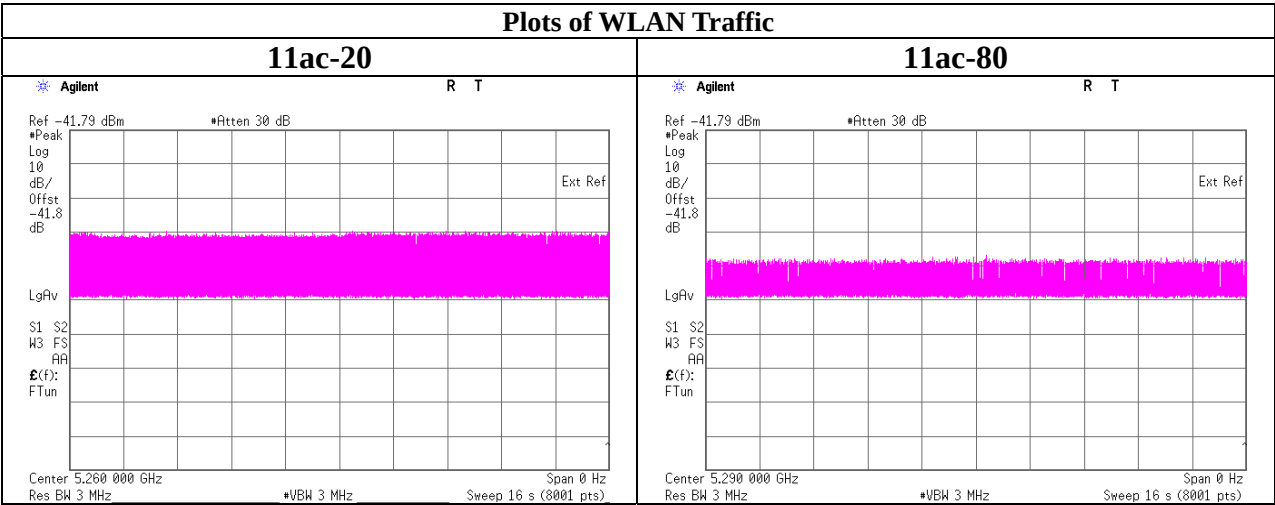

## **SECTION 6: Channel Move Time, Channel Closing Transmission Time**

### **6.1 Test Procedure**

Transmit the data from the Master Device to the Client Device on the test Channel for the entire period of the test. The Radar Waveform generator sends a Burst of pulses for Radar Types 0 at levels defined , on the Operating Channel. An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.

Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds.

### **6.2 Test data**

|                       |                                    |
|-----------------------|------------------------------------|
| Test place            | Ise EMC Lab. No.6 Measurement room |
| Report No.            | 10662332H                          |
| Date                  | 02/10/2015                         |
| Temperature/ Humidity | 23deg. C / 44% RH                  |
| Engineer              | Takumi Shimada                     |
| Mode                  | 11ac-20 Tx / 11ac-80 Tx            |

#### **11ac-20**

| Test Item                             | Unit   | Measurement Time | Limit  | Results |
|---------------------------------------|--------|------------------|--------|---------|
| Channel Move Time *1)                 | [sec]  | 0.084            | 10.000 | Pass    |
| Channel Closing Transmission Time *2) | [msec] | 0                | 60     | Pass    |

\*1) Channel Move Time is calculated as follows:

(Channel Move Time) = (End of Transmission) - (End of Burst) = 3.28-3.196

\*2) Channel Closing Transmission Time is calculated from (End of Burst + 200msec) to (End of Burst + 10sec )

(Channel Closing Transmission Time) = (Number of analyzer bins showing transmission) × (dwell time per bin)  
= 0 × 2[msec]

#### **11ac-80**

| Test Item                             | Unit   | Measurement Time | Limit  | Results |
|---------------------------------------|--------|------------------|--------|---------|
| Channel Move Time *1)                 | [sec]  | 0.022            | 10.000 | Pass    |
| Channel Closing Transmission Time *2) | [msec] | 0                | 60     | Pass    |

\*1) Channel Move Time is calculated as follows:

(Channel Move Time) = (End of Transmission) - (End of Burst) = 3.264-3.242

\*2) Channel Closing Transmission Time is calculated from (End of Burst + 200msec) to (End of Burst + 10sec )

(Channel Closing Transmission Time) = (Number of analyzer bins showing transmission) × (dwell time per bin)  
= 0 × 2[msec]


**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

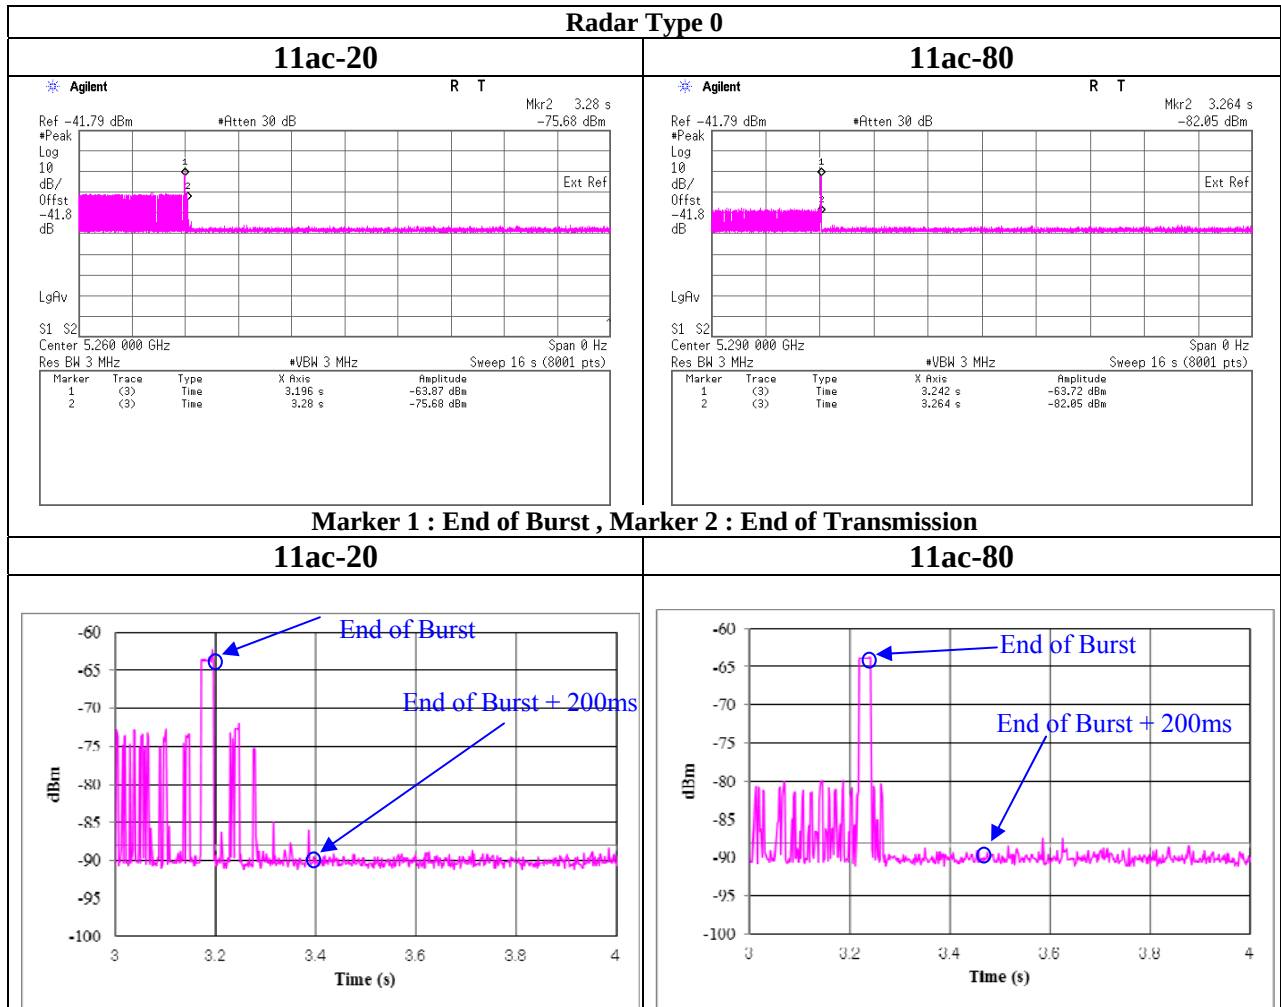

## **SECTION 7: Non-Occupancy Period**

### **7.1 Test Procedure**

The following two tests are performed:

1) Transmit the data from the Master Device to the Client Device on the test Channel for the entire period of the test. The Radar Waveform generator sends a Burst of pulses for Radar Types 0 at levels defined on the Operating Channel. An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.

Observe the transmissions of the EUT after the Channel Move Time on the Operating Channel for duration greater than 30 minutes.

2) Transmit the data from the Master Device to the Client Device on the test Channel for the entire period of the test. Observe the transmissions of the EUT on the Operating Channel for duration greater than 30 minutes after the Master Device is shut off.

---

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

7.2 Test data

Test place  
Report No.  
Date  
Temperature/ Humidity  
Engineer  
Mode

Ise EMC Lab. No.6 Measurement room  
10662332H  
02/10/2015  
23deg. C / 44% RH  
Takumi Shimada  
11ac-20 Tx / 11ac-80 Tx

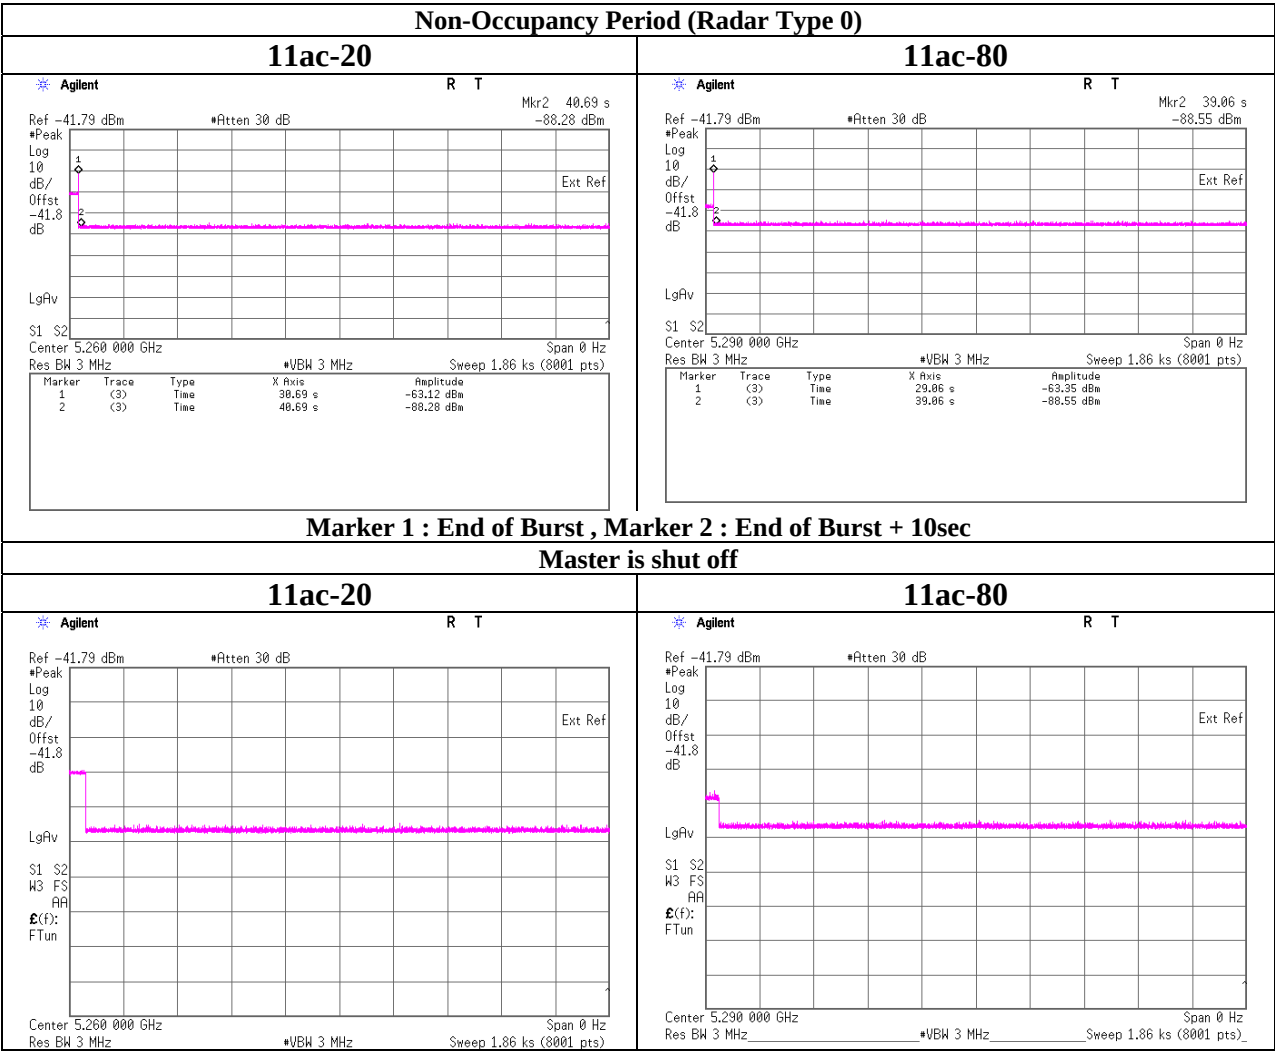

## **APPENDIX 1: Test instruments**

### **EMI Test Equipment**

| Control No.  | Instrument                        | Manufacturer | Model No     | Serial No  | Test Item | Calibration Date *<br>Interval(month) |
|--------------|-----------------------------------|--------------|--------------|------------|-----------|---------------------------------------|
| EST-48 *1)   | Signal Generator                  | Agilent      | E4438C       | MY45090353 | DFS       | 2014/12/19 * 12                       |
| MOS-14       | Thermo-Hygrometer                 | Custom       | CTH-201      | 1401       | DFS       | 2015/01/13 * 12                       |
| COTS-MDFS-01 | Signal Studio Software for DFS    | Agilent      | N7620A-101   | 5010-7739  | DFS       | -                                     |
| COTS-MDFS-02 | Radar Generating Software for DFS | Agilent      | -            | -          | DFS       | -                                     |
| MPD-01       | PowerDivider DC to 26.5GHz        | Agilent      | 11636B       | 52258      | DFS       | 2014/03/24 * 12                       |
| MPSC-04      | Power Splitters/Combiners         | Mini-Circuit | ZFSC-2-10G   | 0326       | DFS       | 2014/09/26 * 12                       |
| MCC-96       | Microwave Cable 1G-40GHz          | Suhner       | SUCOFLEX102  | 30817/2    | DFS       | 2014/05/16 * 12                       |
| MCC-97       | Microwave Cable 1G-40GHz          | Suhner       | SUCOFLEX102  | 30818/2    | DFS       | 2014/05/16 * 12                       |
| MCC-137      | Microwave cable                   | HUBER+SUHNER | SUCOFLEX 102 | 37954/2    | DFS       | 2014/10/02 * 12                       |
| MCC-138      | Microwave cable                   | HUBER+SUHNER | SUCOFLEX 102 | 37953/2    | DFS       | 2014/10/02 * 12                       |
| MAT-56       | Attenuator(10dB)                  | Suhner       | 6810.19.A    | -          | DFS       | 2015/01/08 * 12                       |
| MAT-57       | Attenuator(10dB)                  | Suhner       | 6810.19.A    | -          | DFS       | 2015/01/08 * 12                       |
| MAT-59       | Attenuator(20dB)                  | Suhner       | 6820.19.A    | -          | DFS       | Pre Check                             |
| MAT-60       | Attenuator(20dB)                  | Suhner       | 6820.19.A    | -          | DFS       | Pre Check                             |
| MAT-61       | Attenuator(20dB)                  | Suhner       | 6820.19.A    | -          | DFS       | Pre Check                             |

**\*1) Signal generator is only used to generate radar test signal, and the wave form is confirmed with spectrum analyzer every time before the test.**

**The expiration date of the calibration is the end of the expired month.**

**All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.**

**As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.**

**DFS: Dynamic Frequency Selection**

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124