

FCC Certification Test Report

Report No.: FC150612C01

FCC ID: VQK-F02H

Test Model: F-02H

Received Date: Jun. 12, 2015

Test Date: Jul. 24 ~ Aug. 15, 2015

Issued Date: Aug. 20, 2015

Applicant: FUJITSU LIMITED

Address: 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki 211-8588, Japan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, TAIWAN (R.O.C.)



LAB CODE: 200837-0



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results.....	5
2.1 Measurement Uncertainty	5
2.2 Modification Record	5
3 General Information	6
3.1 Features of EUT	6
3.2 General Description of EUT	6
3.3 Operating Modes of EUT and Determination of Worst Case Operating Mode	7
3.4 Test Program Used and Operation Descriptions.....	8
3.5 Primary Clock Frequencies of Internal SourceG.....	8
3.6 Miscellaneous.....	9
4 Configuration and Connections with EUT	10
4.1 Connection Diagram of EUT and Peripheral Devices	10
4.2 Configuration of Peripheral Devices and Cable Connections	11
5 Conducted Emissions at Mains Ports.....	12
5.1 Limits	12
5.2 Test Instruments	12
5.3 Test Arrangement	13
5.4 Test Results.....	14
6 Radiated Emissions up to 1 GHz	18
6.1 Limits	18
6.2 Test Instruments	19
6.3 Test Arrangement	20
6.4 Test Results.....	21
7 Radiated Emissions above 1 GHz.....	23
7.1 Limits	23
7.2 Test Instruments	24
7.3 Test Arrangement	25
7.4 Test Results.....	26
8 Pictures of Test Arrangements	30
Appendix – Information on the Testing Laboratories	31



A D T

Release Control Record

Issue No.	Description	Date Issued
FC150612C01	Original release	Aug. 20, 2015

1 Certificate of Conformity

Product: Smart Phone

Brand: FUJITSU

Test Model: F-02H

Sample Status: Engineering sample

Applicant: FUJITSU LIMITED

Test Date: Jul. 24 ~ Aug. 15, 2015

Standards: 47 CFR FCC Part 15, Subpart B, Class B
ICES-003:2012 Issue 5, Class B
ANSI C63.4:2009

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Celine Chou , **Date:** Aug. 20, 2015
Celine Chou / Specialist

Approved by : Ken Liu , **Date:** Aug. 20, 2015
Ken Liu / Senior Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart B / ICES-003:2012 Issue 5, Class B

ANSI C63.4:2009

FCC Clause	ICES-003 Clause	Test Item	Result/Remarks	Verdict
15.107	6.1	AC Power Line Conducted Emissions	Minimum passing Class B margin is -10.17 dB at 2.60938 MHz	Pass
15.109	6.2.1	Radiated Emissions up to 1 GHz	Minimum passing Class B margin is -4.52 dB at 323.99 MHz	Pass
	6.2.2	Radiated Emissions above 1 GHz	Minimum passing Class B margin is -21.28 dB at 2227.37 MHz	Pass

Note: There is no deviation to the applied test methods and requirements covered by the scope of this report.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

The listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Frequency	Expended Uncertainty (k=2) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.44 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	4.70 dB
Radiated Emissions above 1 GHz	Above 1GHz	2.29 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 Features of EUT

The tests reported herein were performed according to the method specified by FUJITSU LIMITED, for detailed feature description, please refer to the manufacturer's specifications or user's manual.

3.2 General Description of EUT

Product	Smart Phone
Brand	FUJITSU
Test Model	F-02H
Sample Status	Engineering sample
Operating Software	Android 5.1.1
Power Supply Rating	3.8Vdc (Battery) 5Vdc (Adapter or cradle)
Accessory Device	Refer to Note as below
Data Cable Supplied	N/A

Note:

1. The EUT contains the following accessories.

Product	Brand	Model	Description
Battery	NTT docomo	N/A	3.8Vdc, 3390mAh, 12.8Wh (Built-in battery)
Cradle	NTT docomo	F52	Input: 5.0Vdc, 1.5A Output: 5.0Vdc, 1.5A

2. The following adapter is support unit only.

Product	Brand	Model	Description
Adapter	NTT docomo	AC Adapter 04	Input: 100-240Vac, 50-60Hz, 0.22A Output: 5.0Vdc, 1.8A Power line: 1.05m cable with two cores attached on adapter

3. SW version is R021.1e

4. HW version is v2.1.0.

5. IMEI Code: 351914070004954 and 351914070004970.

6. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.3 Operating Modes of EUT and Determination of Worst Case Operating Mode

The EUT consumes power from adapter or cradle, which is designed with AC power supply of 100-240Vac, 50-60Hz.

For radiated emissions below 1GHz test, EUT has been pre-tested under following test modes, and test mode 5 was the worst case for final test.

Mode	Test Condition
1	GSM 850 Idle + WIFI Idle + BT Idle + GPS RX + MP4 (SD Card) + Earphone + Adapter
2	GSM 1900 Idle + WIFI Idle + BT Idle + GPS RX + MP4 (SD Card) + Adapter
3	WCDMA Band 5 Idle + WIFI Idle + BT Idle + Camera (Front) + Earphone + Adapter
4	GSM 850 Idle + WIFI Idle + BT Idle + ANT plus Idle + Camera (Back) + Earphone + Adapter
5	GSM 1900 Idle + WIFI Idle + BT Idle + MP4 (SD Card) + MHL
6	EUT charging + Earphone + adapter + Cradle
7	WCDMA Band 5 Idle + WIFI Idle + BT Idle + GPS RX + NFC Idle + RFID Idle + Earphone

Test modes are presented in the report as below.

Mode	Test Condition
Conducted emission test	
A	GSM 850 Idle + WIFI Idle + BT Idle + GPS RX + MP4 (SD Card) + Earphone + Adapter
B	EUT charging + Earphone + adapter + Cradle
Radiated emission test	
-	GSM 1900 Idle + WIFI Idle + BT Idle + MP4 (SD Card) + MHL

3.4 Test Program Used and Operation Descriptions

For conducted emission test

Test Mode A

- a. Placed the EUT on the test table and powered by adapter.
- b. The EUT linked with the Bluetooth Earphone, GPS simulator, Universal Radio Communication Tester, Wireless N Dual band Router, which acted as a communication partner, and then set the GSM, WIFI, Bluetooth in idle condition, GPS function in RX condition.
- c. The EUT played MP4 from SD card and displayed them on the screen.
- d. The EUT played audio signals and sent audio signals to the earphone.

Test Mode B

- a. Placed the EUT on the cradle and located it on the test table, the EUT was powered by cradle at charging mode.
- b. The EUT linked with the Bluetooth Earphone which acted as a communication partner, and then set the Bluetooth in idle condition.
- c. The EUT played audio signals and sent audio signals to the earphone.

For radiated emission test

- a. Placed the EUT on the test table.
- b. The EUT linked with the Bluetooth Earphone, Universal Radio Communication Tester, Wireless N Dual band Router, which acted as a communication partner, and then set the GSM, WIFI, Bluetooth in idle condition.
- c. The EUT connected with Monitor via Micro USB to HDMI cable.
- d. The EUT played MP4 from SD card and displayed them on the screen of Monitor.

3.5 Primary Clock Frequencies of Internal SourceG

The highest frequency generated or used within the EUT or on which the EUT operates or tunes is 5GHz, provided by FUJITSU LIMITED, for detailed internal source, please refer to the manufacturer's specifications.

3.6 Miscellaneous

Labelling Requirements for Part 15 Devices:

➤ Verification

The specific labelling requirements for a device subject to the Verification procedure are contained in Section 15.19(a). These labelling requirements are:

If the device is subject only to Verification, include a label bearing a unique identifier (Section 2.954) and one of three compliance statements specified in Section 15.19(a). If the labeling area for the device is so small, and/or it is not practical to place the compliance statement on the device, then the statement can be placed in the user manual or product packaging (Section 15.19(a)(5)). However, the device must still be labelled with the unique identifier (Verification). Generally, devices smaller than the palm of the hand are considered too small for the compliance statement.

➤ Certification

If the device is subject to Certification: (1) Section 2.925 contains information on identification of the equipment; (2) include a label bearing an FCC Identifier (FCC ID) (Section 2.926) and (3) include the appropriate compliance statement in Section 15.19(a). If the device is considered too small and therefore it is impractical (smaller than the palm of the hand) to display the compliance statement, then the statement may be placed in the user manual or product packaging. However, the device must still be labelled with the FCC ID. If the device is unquestionably too small for the FCC ID to be readable (smaller than 4-6 points), the FCC ID may be placed in the user manual. However, it must be determined that the device itself is too small – the label area allocated to the FCC ID may not be reduced because of over crowded identification of other product and regulatory information.

An electronic display of the FCC ID (see 9. Electronic Labelling below) may be used for Certification of Section 15.212 modular transmitters and software defined radios (Section 2.944).

➤ Declaration of Conformity (DoC):

The labelling requirements for a device subject to the DoC procedure are specified in Section 15.19(b). The label should include the FCC logo along with the Trade Name and Model Number, which satisfies the unique identifier requirement of Section 2.1074 if it represents the identical equipment tested for DoC compliance. For personal computers assembled from authorized components, the following additional text must also be included: “Assembled from tested components,” “Complete system not tested.” When the device is so small and/or when it is not practical to place the required additional text on the device, the text may be placed in the user manual or pamphlet supplied to the user. However, the FCC logo, Trade Name, and Model Number must still be displayed on the device (Section 15.19(b)(3)).



Part 15 Declaration of Conformity (DoC) Label Examples

Equipment certified as software defined radio may use a means that readily displays the FCC ID on an electronic display screen, instead of labelling the device (Section 2.925 (e)).

Further information may refer to FCC KDB:784748 D01 Labelling Part 15 &18 Guidelines

Labelling Requirements for ICES-003 Devices:

➤ Industry Canada ICES-003 Compliance Label:

CAN ICES-3 (*)/NMB-3(*)


* Insert either “A” or “B” but not both to identify the applicable Class of ITE.

4 Configuration and Connections with EUT

4.1 Connection Diagram of EUT and Peripheral Devices

For conducted emission test


Test Mode A

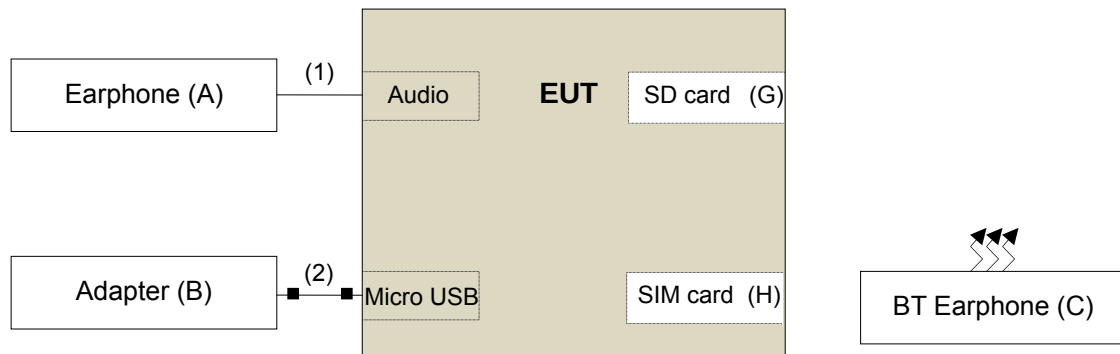


Remote site



Test Mode B

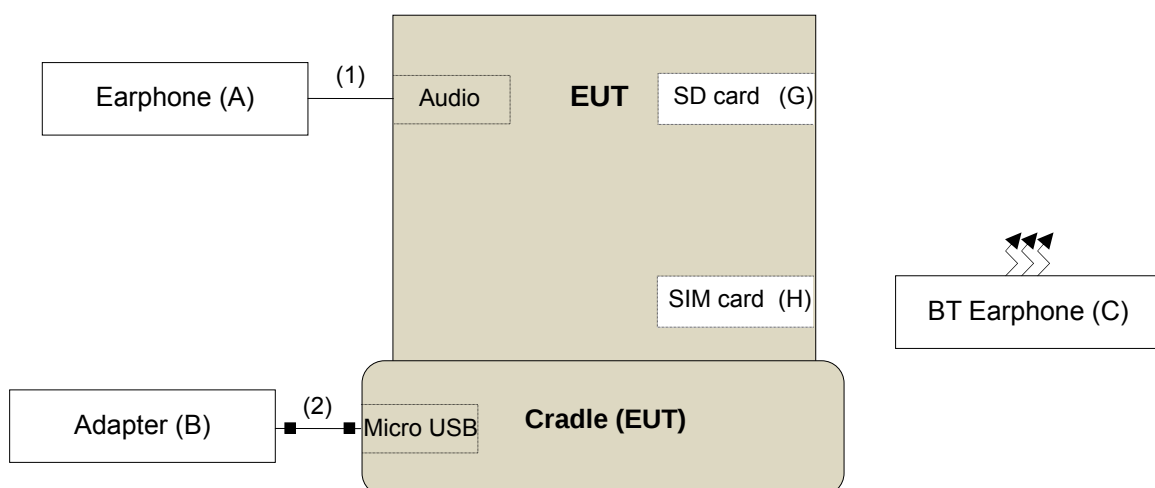

For radiated emission test

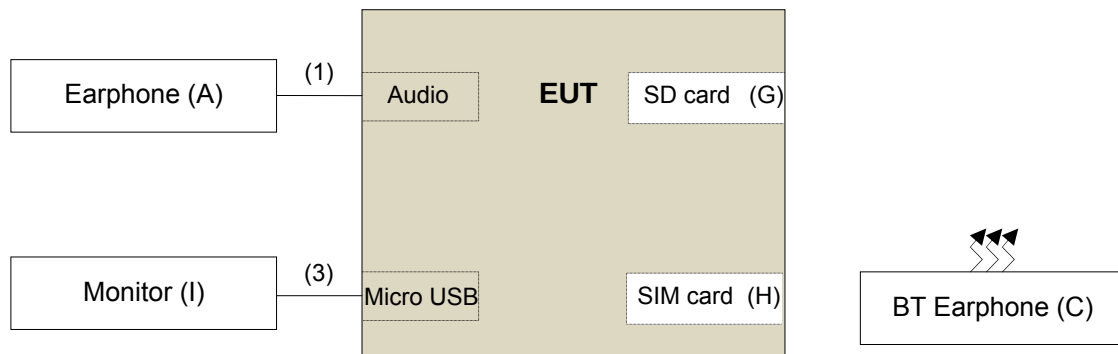

Remote site



4.2 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Earphone	HTC	N/A	N/A	N/A	-
B.	Adapter	NTT docomo	AC Adapter 04	N/A	N/A	Provided by the manufacturer For conducted emission test
C.	Bluetooth Earphone	ELECOM	LBT-MPHS400	N/A	N/A	-
D.	GPS simulator	SPECTRACOM	GSG-54	200055	N/A	For conducted emission test mode A and radiated emission test
E.	Universal Radio Communication Tester	R&S	CMU 200	101095	N/A	
F.	Wireless N Dual band Router	D-LINK	DIR-815	PVK21B5000399	KA21R815A1	
G.	SD Card	Transcend	8GB	N/A	N/A	-
H.	SIM Card	R&S	CMW-Z04	N/A	N/A	-
I.	LCD Monitor	Lenovo	LT3053PWA	N/A	FCC DoC Approved	For radiated emission test

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item C-F acted as a communication partner to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	Earphone cable	1	1.2	Y	0	-
2.	Power cable	1	1.05	Y	2	Provided by the client Attached on adapter
3.	Micro USB to HDMI cable	1	3	Y	0	Provided by the client For radiated emission test

Note: The core(s) is(are) originally attached to the cable(s).

5 Conducted Emissions at Mains Ports

5.1 Limits

Frequency (MHz)	Class A (dBUV)		Class B (dBUV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

Notes: 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases linearly with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.2 Test Instruments


Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Apr. 27, 2015	Apr. 26, 2016
RF signal cable Woken	5D-FB	Cable-HYCO2-01	Dec. 26, 2014	Dec. 25, 2015
LISN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Dec. 30, 2014	Dec. 29, 2015
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Jul. 21, 2015	Jul. 20, 2016
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

Notes: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 2.
3. The VCCI Site Registration No. is C-2047.

5.3 Test Arrangement

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The test results of conducted emissions at mains ports are recorded of six worst margins for quasi-peak (mandatory) [and average (if necessary)] values against the limits at frequencies of interest unless the margin is 20 dB or greater.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

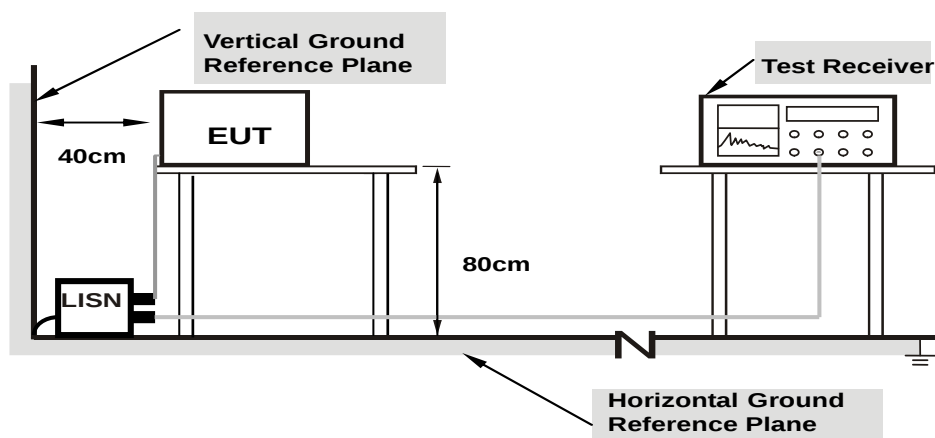

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes


5.4 Test Results

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	23°C, 65%RH
Tested by	Felix Chen	Test Date	2015/7/25
Test Mode	A		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.20469	0.20	37.73	30.49	37.93	30.69	63.42	53.42	-25.49	-22.73
2	0.24766	0.20	42.30	37.47	42.50	37.67	61.84	51.84	-19.34	-14.17
3	0.44297	0.21	31.75	22.63	31.96	22.84	57.01	47.01	-25.05	-24.17
4	0.72031	0.25	34.08	26.42	34.33	26.67	56.00	46.00	-21.67	-19.33
5	2.45313	0.38	35.40	26.80	35.78	27.18	56.00	46.00	-20.22	-18.82
6	3.65625	0.42	35.51	24.53	35.93	24.95	56.00	46.00	-20.07	-21.05

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

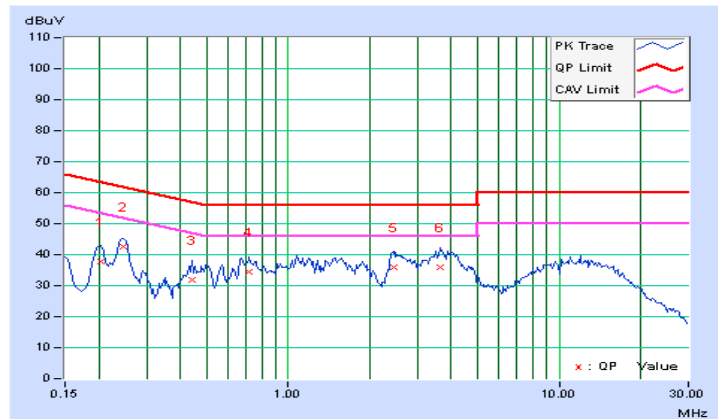


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	23°C, 65%RH
Tested by	Felix Chen	Test Date	2015/7/25
Test Mode	A		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.24375	0.23	38.08	30.82	38.31	31.05	61.97	51.97	-23.66	-20.92
2	0.45078	0.26	37.53	32.39	37.79	32.65	56.86	46.86	-19.08	-14.22
3	0.57188	0.27	33.02	26.37	33.29	26.64	56.00	46.00	-22.71	-19.36
4	2.62891	0.42	29.03	20.46	29.45	20.88	56.00	46.00	-26.55	-25.12
5	3.65625	0.45	33.13	23.19	33.58	23.64	56.00	46.00	-22.42	-22.36
6	8.81641	0.55	33.77	28.43	34.32	28.98	60.00	50.00	-25.68	-21.02

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

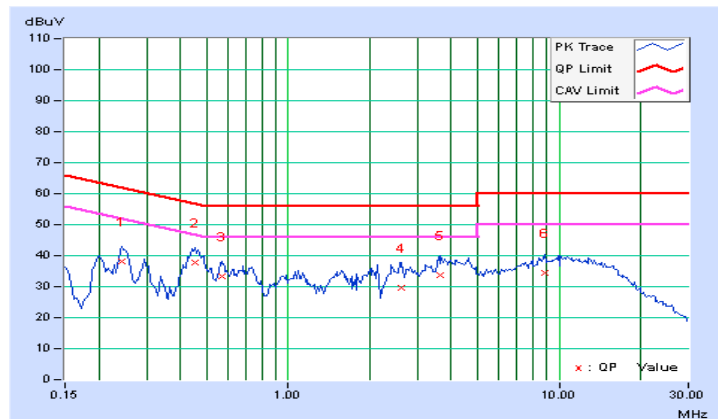


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	23°C, 65%RH
Tested by	Felix Chen	Test Date	2015/7/25
Test Mode	B		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.90000	0.28	38.22	28.87	38.50	29.15	56.00	46.00	-17.50	-16.85
2	1.18750	0.31	41.73	32.16	42.04	32.47	56.00	46.00	-13.96	-13.53
3	1.51953	0.33	42.18	34.10	42.51	34.43	56.00	46.00	-13.49	-11.57
4	1.78125	0.35	43.07	34.78	43.42	35.13	56.00	46.00	-12.58	-10.87
5	1.96094	0.36	43.30	34.49	43.66	34.85	56.00	46.00	-12.34	-11.15
6	2.15625	0.37	42.62	33.77	42.99	34.14	56.00	46.00	-13.01	-11.86
7	2.60938	0.38	44.95	35.45	45.33	35.83	56.00	46.00	-10.67	-10.17
8	3.19922	0.40	42.80	32.89	43.20	33.29	56.00	46.00	-12.80	-12.71
9	3.95313	0.43	42.54	29.26	42.97	29.69	56.00	46.00	-13.03	-16.31
10	4.27344	0.43	42.19	28.75	42.62	29.18	56.00	46.00	-13.38	-16.82

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

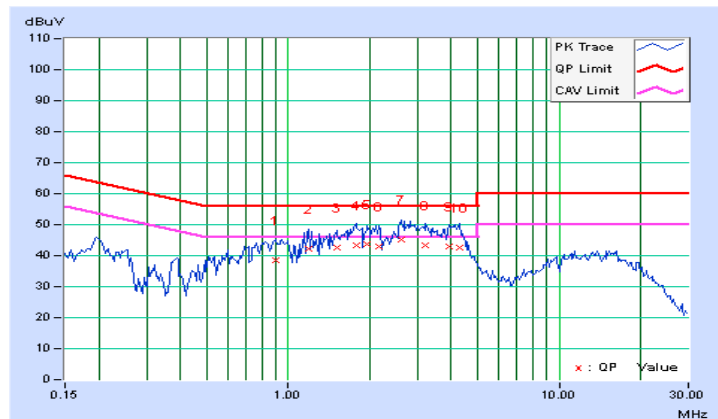


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	23°C, 65%RH
Tested by	Felix Chen	Test Date	2015/7/25
Test Mode	B		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	1.81641	0.38	36.44	28.47	36.82	28.85	56.00	46.00	-19.18	-17.15
2	2.05469	0.40	37.47	29.79	37.87	30.19	56.00	46.00	-18.13	-15.81
3	2.36328	0.41	37.77	31.72	38.18	32.13	56.00	46.00	-17.82	-13.87
4	2.83594	0.43	39.26	30.04	39.69	30.47	56.00	46.00	-16.31	-15.53
5	3.56250	0.45	37.49	26.83	37.94	27.28	56.00	46.00	-18.06	-18.72
6	4.23047	0.46	40.74	26.93	41.20	27.39	56.00	46.00	-14.80	-18.61

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

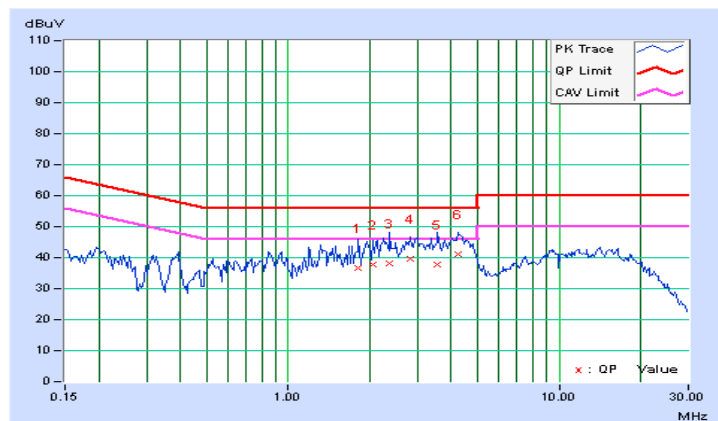

6 Radiated Emissions up to 1 GHz

6.1 Limits

Emissions radiated outside of the specified bands, shall be according to the general radiated limits as following:

Radiated Emissions Limits at 10 meters (dBμV/m)				
Frequencies (MHz)	FCC 15B / ICES-003, Class A	FCC 15B / ICES-003, Class B	CISPR 22, Class A	CISPR 22, Class B
30-88	39	29.5	40	30
88-216	43.5	33.1		
216-230	46.4	35.6		
230-960			47	37
960-1000	49.5	43.5		

Radiated Emissions Limits at 3 meters (dBμV/m)				
Frequencies (MHz)	FCC 15B / ICES-003, Class A	FCC 15B / ICES-003, Class B	CISPR 22, Class A	CISPR 22, Class B
30-88	49.5	40	50.5	40.5
88-216	54	43.5		
216-230	56.9	46		
230-960				
960-1000	60	54	57.5	47.5

- Notes: 1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB μ V/m) = 20 log Emission level (uV/m).
3. QP detector shall be applied if not specified.

6.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ (V)	ESR-7	101240	Sep. 29, 2014	Sep. 28, 2015
Test Receiver ROHDE & SCHWARZ (H)	ESR-7	101264	Dec. 04, 2014	Dec. 03, 2015
BILOG Antenna SCHWARZBECK (V)	VULB9168	9168-149	Feb. 03, 2015	Feb. 02, 2016
BILOG Antenna SCHWARZBECK (H)	VULB9168	9168-154	Feb. 03, 2015	Feb. 02, 2016
Preamplifier Agilent (V)	8447D	2944A10636	Oct. 18, 2014	Oct. 17, 2015
Preamplifier Agilent (H)	8447D	2944A10637	Oct. 18, 2014	Oct. 17, 2015
Preamplifier Agilent	8449B	3008A01959	Oct. 18, 2014	Oct. 17, 2015
RF signal cable Woken (V)	8D-FB	Cable-CH(V)-01	Oct. 25, 2014	Oct. 24, 2015
RF signal cable Woken (H)	8D-FB	Cable-CH(H)-01	Oct. 25, 2014	Oct. 24, 2015
Software BV ADT	BV ADT_Radiated_ V 8.7.07	NA	NA	NA
Antenna Tower (V)	MFA-440	9707	NA	NA
Antenna Tower (H)	MFA-440	970705	NA	NA
Turn Table	DS430	50303	NA	NA
Controller (V)	MF7802	074	NA	NA
Controller (H)	MF7802	08093	NA	NA


Notes: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 1.
3. The FCC Site Registration No. is 477732.
4. The IC Site Registration No. is IC 7450F-1.
5. The VCCI Site Registration No. is R-1893.

6.3 Test Arrangement

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited test facility. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for quasi-peak detection (QP) at frequency below 1GHz.

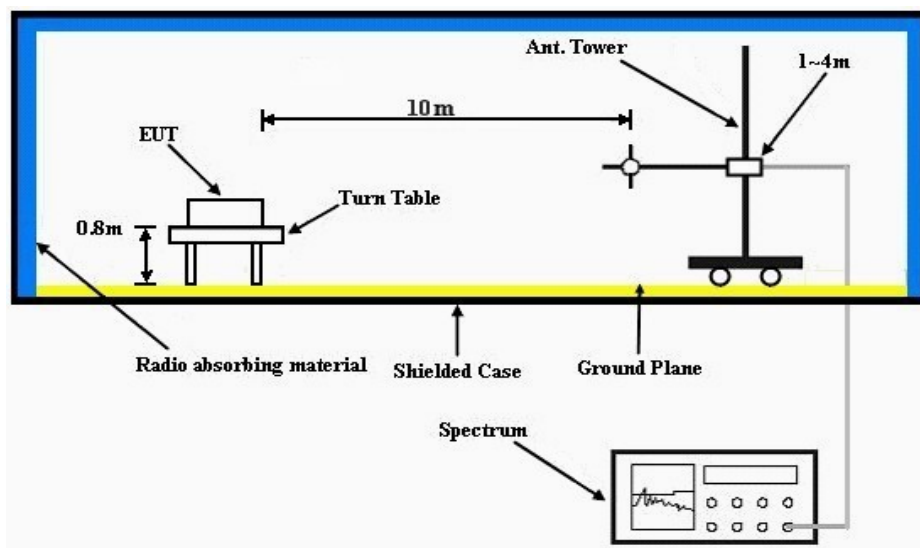


6.4 Test Results

Frequency Range	30MHz ~ 1GHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP), 120kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 65%RH
Tested by	James Chang	Test Date	2015/8/15

Antenna Polarity & Test Distance : Horizontal at 10 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	123.46	24.89 QP	30.00	-5.11	2.50 H	34	40.62	-15.73
2	273.87	28.08 QP	37.00	-8.92	2.50 H	158	40.53	-12.45
3	540.00	28.41 QP	37.00	-8.59	2.00 H	325	35.02	-6.61
4	755.98	28.07 QP	37.00	-8.93	2.00 H	309	29.83	-1.76
5	864.00	28.13 QP	37.00	-8.87	1.50 H	35	28.21	-0.08
6	972.01	30.17 QP	37.00	-6.83	1.00 H	15	28.24	1.93

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

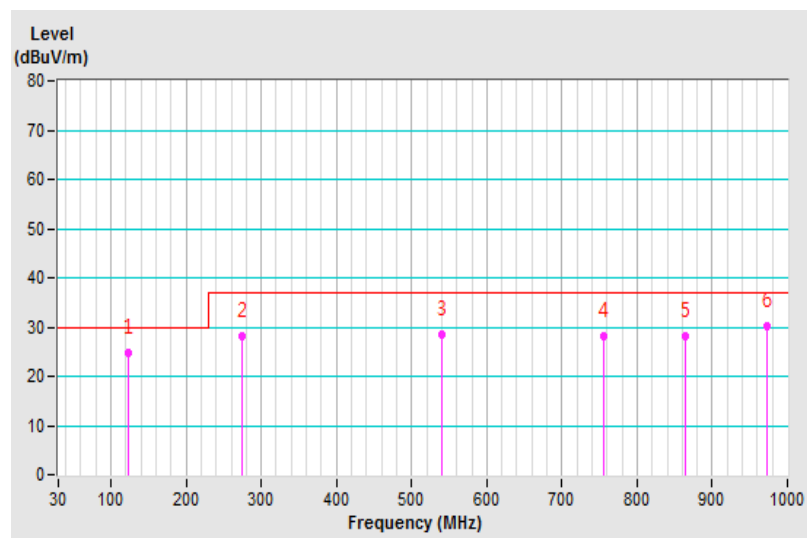


Frequency Range	30MHz ~ 1GHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP), 120kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 65%RH
Tested by	James Chang	Test Date	2015/8/15

Antenna Polarity & Test Distance : Vertical at 10 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.81	22.03 QP	30.00	-7.97	1.00 V	333	37.58	-15.55
2	52.01	24.29 QP	30.00	-5.71	1.00 V	197	38.37	-14.08
3	136.72	24.92 QP	30.00	-5.08	1.98 V	304	38.94	-14.02
4	201.84	25.16 QP	30.00	-4.84	1.50 V	112	40.83	-15.67
5	323.99	32.48 QP	37.00	-4.52	1.00 V	165	42.76	-10.28
6	467.88	31.06 QP	37.00	-5.94	3.50 V	150	38.37	-7.31
7	802.35	30.32 QP	37.00	-6.68	1.50 V	144	30.21	0.11
8	972.01	30.39 QP	37.00	-6.61	3.00 V	183	27.51	2.88

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

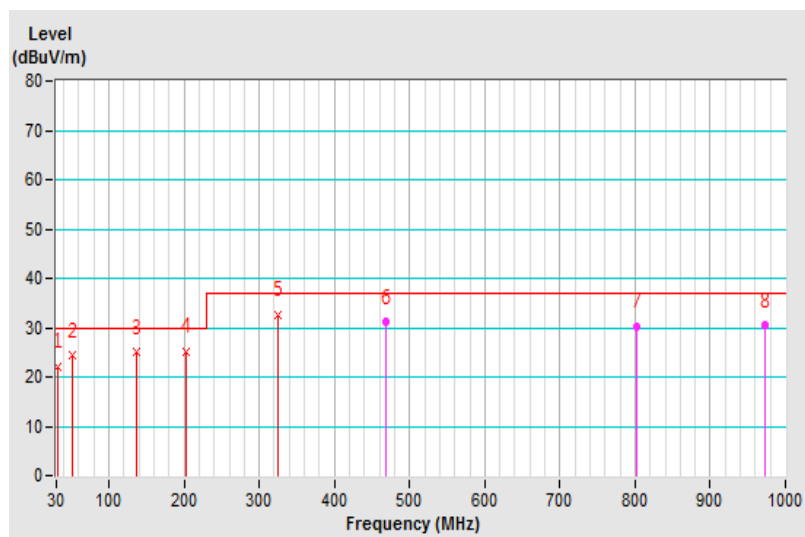

7 Radiated Emissions above 1 GHz

7.1 Limits

Emissions radiated outside of the specified bands, shall be according to the general radiated limits as following:

Radiated Emissions Limits at 10 meters (dBμV/m)				
Frequencies (MHz)	FCC 15B / ICES-003, Class A	FCC 15B / ICES-003, Class B	CISPR 22, Class A	CISPR 22, Class B
1000-3000	Avg: 49.5	Avg: 43.5	Not defined	Not defined
Above 3000	Peak: 69.5	Peak: 63.5	Not defined	Not defined

Radiated Emissions Limits at 3 meters (dBμV/m)				
Frequencies (MHz)	FCC 15B / ICES-003, Class A	FCC 15B / ICES-003, Class B	CISPR 22, Class A	CISPR 22, Class B
1000-3000	Avg: 60	Avg: 54	Avg: 56 Peak: 76	Avg: 50 Peak: 70
Above 3000	Peak: 80	Peak: 74	Avg: 60 Peak: 80	Avg: 54 Peak: 74

- Notes:
1. The lower limit shall apply at the transition frequencies.
 2. Emission level (dBμV/m) = 20 log Emission level (uV/m).
 3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Radiated Emissions Limits at 1.5 meters (dBμV/m)		
Frequencies (MHz)	FCC 15B / ICES-003, Class A	FCC 15B / ICES-003, Class B
18000-40000	Avg: 66 Peak: 86	Avg: 60 Peak: 80

Note: Limit@1.5m = Limit@3m + 20log(3/1.5)

Frequency Range (For unintentional radiators)

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5th harmonic of the highest frequency or 40GHz, whichever is lower

7.2 Test Instruments


Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESR7	101471	Feb. 09, 2015	Feb. 08, 2016
Spectrum Analyzer Agilent	E4446A	MY43360128	Mar. 13, 2015	Mar. 12, 2016
BILOG Antenna SCHWARZBECK	VULB9168	9168-157	Feb. 03, 2015	Feb. 02, 2016
RF signal cable Woken	8D-FB	NA	Mar. 22, 2015	Mar. 21, 2016
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-405	Feb. 06, 2015	Feb. 05, 2016
Preamplifier Agilent (Above 1GHz)	8449B	3008A01961	Oct. 18, 2014	Oct. 17, 2015
RF signal cable HUBER+SUHNER	SUCOFLEX 104	MWX322+MWX2211308 S0295	Nov. 06, 2014	Nov. 05, 2015
Software BV ADT	BV ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower BV ADT	AT100	AT93021702	NA	NA
Turn Table BV ADT	TT100	TT93021702	NA	NA
Controller BV ADT	SC100	SC93021702	NA	NA
HORN Antenna SCHWARZBECK	BBHA 9170	148	Feb. 09, 2015	Feb. 08, 2016
RF signal cable HUBER+SUHNER	SUCOFLEX 102	38218/2+37433/2	Oct. 25, 2014	Oct. 24, 2015
Fix tool for Boresight antenna tower	BAF-01	2	NA	NA
18GHz ~ 40GHz Amplifier	EMC184045B	980175	Nov. 07, 2014	Nov. 06, 2015

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 2.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 686814.
5. The IC Site Registration No. is IC 7450F-2.
6. The VCCI Site Registration No. is G-18.

7.3 Test Arrangement

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- For frequency range 1 ~ 18GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- For frequency range 18 ~ 40GHz, the EUT was set 1.5 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna can be varied from one meter to four meters, the height of adjustment depends on the EUT height and the antenna 3dB beamwidth both, to detect the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The spectrum analyzer system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.

Note: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection (PK) at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.

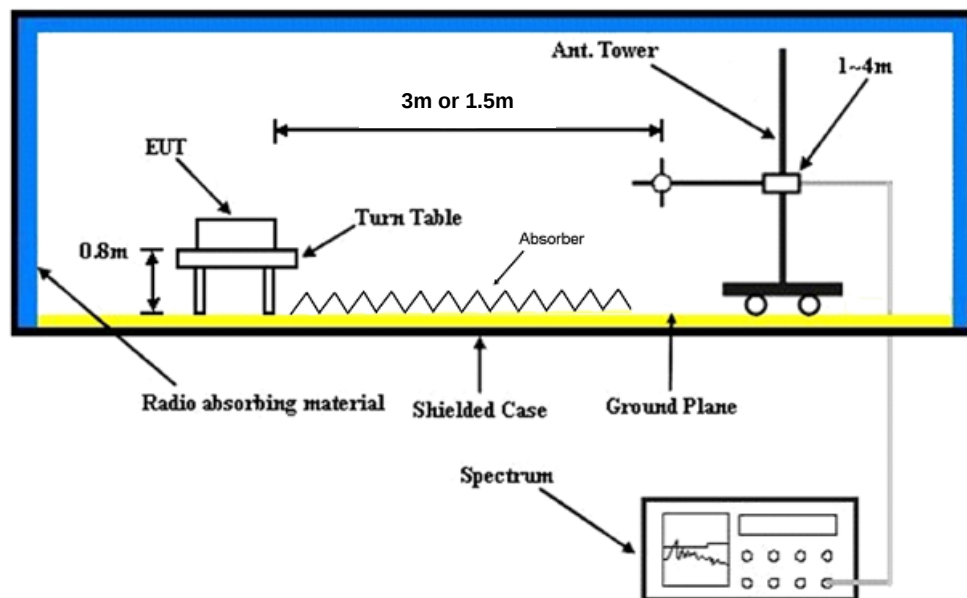


7.4 Test Results

Frequency Range	1GHz ~ 18GHz	Detector Function & Resolution Bandwidth	Peak (PK) / Average (AV), 1MHz
Input Power	120Vac, 60Hz	Environmental Conditions	20°C, 60%RH
Tested by	Pon Tsai	Test Date	2015/7/24

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1039.44	42.51 PK	74.00	-31.49	1.74 H	189	53.61	-11.10
2	1039.44	27.18 AV	54.00	-26.82	1.74 H	189	38.28	-11.10
3	1485.13	42.12 PK	74.00	-31.88	2.49 H	207	49.57	-7.45
4	1485.13	28.76 AV	54.00	-25.24	2.49 H	207	36.21	-7.45
5	2227.37	44.46 PK	74.00	-29.54	2.00 H	201	50.25	-5.79
6	2227.37	32.72 AV	54.00	-21.28	2.00 H	201	38.51	-5.79

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

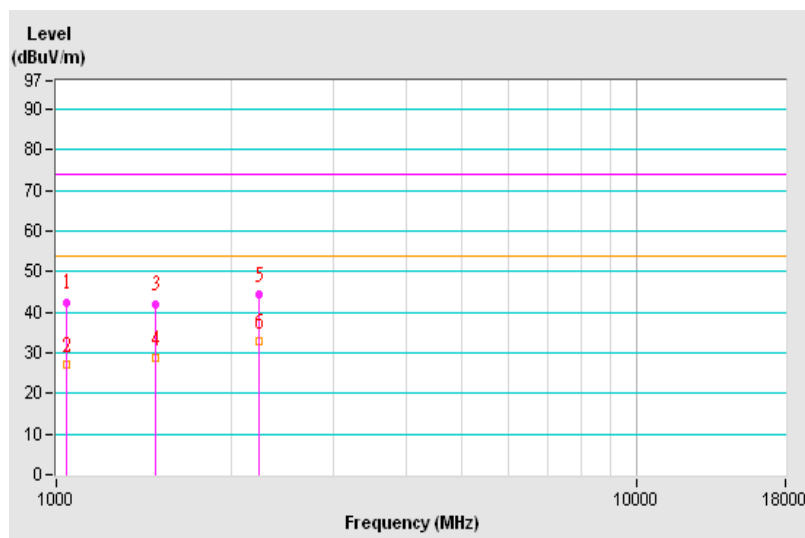


Frequency Range	1GHz ~ 18GHz	Detector Function & Resolution Bandwidth	Peak (PK) / Average (AV), 1MHz
Input Power	120Vac, 60Hz	Environmental Conditions	20°C, 60%RH
Tested by	Pon Tsai	Test Date	2015/7/24

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1168.12	40.52 PK	74.00	-33.48	1.00 V	173	50.43	-9.91
2	1168.12	21.93 AV	54.00	-32.07	1.00 V	173	31.84	-9.91
3	1799.83	41.39 PK	74.00	-32.61	1.50 V	129	48.34	-6.95
4	1799.83	30.98 AV	54.00	-23.02	1.50 V	129	37.93	-6.95
5	2721.17	46.81 PK	74.00	-27.19	2.24 V	195	50.81	-4.00
6	2721.17	26.07 AV	54.00	-27.93	2.24 V	195	30.07	-4.00

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

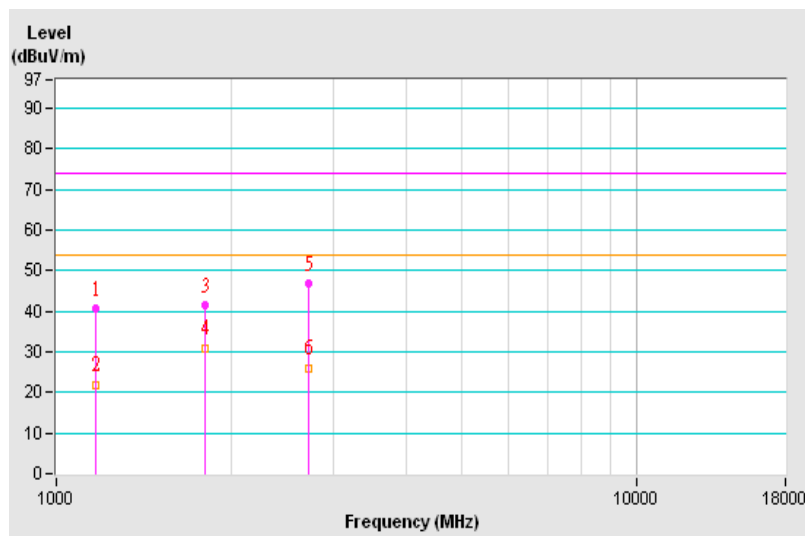


Frequency Range	18GHz ~ 40GHz	Detector Function & Resolution Bandwidth	Peak (PK) / Average (AV), 1MHz
Input Power	120Vac, 60Hz	Environmental Conditions	20°C, 60%RH
Tested by	Pon Tsai	Test Date	2015/7/24

Antenna Polarity & Test Distance : Horizontal at 1.5 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	20255.32	48.65 PK	80.00	-31.35	1.00 H	62	54.62	-5.97
2	20255.32	38.60 AV	60.00	-21.40	1.00 H	62	44.57	-5.97

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

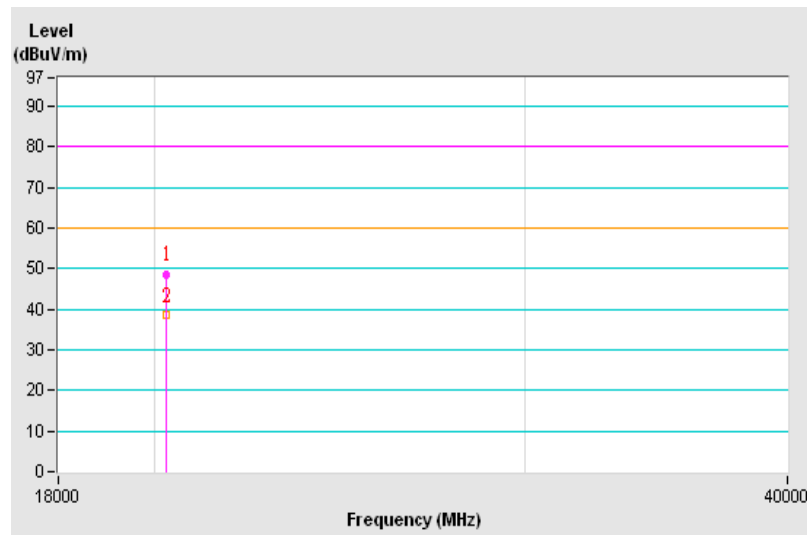


Frequency Range	18GHz ~ 40GHz	Detector Function & Resolution Bandwidth	Peak (PK) / Average (AV), 1MHz
Input Power	120Vac, 60Hz	Environmental Conditions	20°C, 60%RH
Tested by	Pon Tsai	Test Date	2015/7/24

Antenna Polarity & Test Distance : Vertical at 1.5 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	21051.50	49.50 PK	80.00	-30.50	1.00 V	122	54.59	-5.09
2	21051.50	37.88 AV	60.00	-22.12	1.00 V	122	42.97	-5.09

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

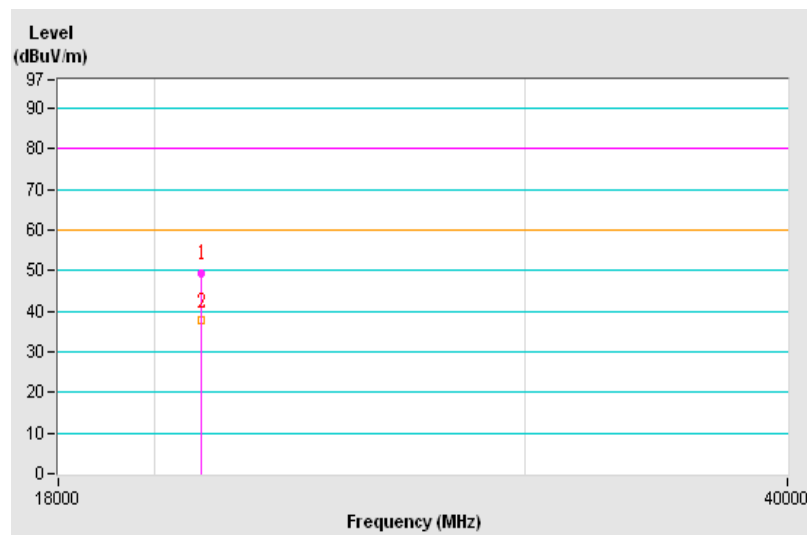

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---