


FCC Test Report

FCC ID : VQK-F05F
Equipment : Mobile Phone
Model No. : F-05F
Brand Name : FUJITSU
Applicant : FUJITSU LIMITED
Address : 1-1, Kamikodanaka 4-chome, Nakahara-ku,
Kawasaki 211-8588, Japan
Standard : 47 CFR FCC Part 22 Subpart H
Received Date : Dec. 25, 2013
Tested Date : Feb. 26 ~ Mar. 05, 2014

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:



Gary Chang / Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	6
1.3	Test Setup Chart	6
1.4	The Equipment List	7
1.5	Test Standards	8
1.6	Measurement Uncertainty	8
2	TEST CONFIGURATION	9
2.1	Testing Condition and Location Information.....	9
2.2	The Worst Test Modes and Channel Details	9
3	TEST RESULTS.....	10
3.1	Effective Radiated Power	10
3.2	Radiated Emissions.....	14
3.3	Conducted Emissions.....	20
3.4	Band Edge.....	23
3.5	Occupied Bandwidth	25
3.6	Peak to Average Ratio	28
3.7	Frequency Stability.....	30
4	TEST LABORATORY INFORMATION	32

Release Record

Report No.	Version	Description	Issued Date
FG3D2502P22	Rev. 01	Initial issue	Mar. 20, 2014

Summary of Test Results

FCC Rules	Test Items	Measured	Result
2.1046 / 22.913(a)(2)	Effective Radiated Power	Power[dBm]: GSM: 28.49 WCDMA: 20.17	Pass
2.1053 / 22.917(a)	Radiated Emissions	Meet the requirement of limit	Pass
2.1051 / 22.917(a)	Conducted Emissions	Meet the requirement of limit	Pass
2.1051 / 22.917(a)	Band Edge	Meet the requirement of limit	Pass
2.1049 / 22.917(a)	Occupied Bandwidth	Meet the requirement of limit	Pass
-	Peak to average ratio	Meet the requirement of limit	Pass
2.1055 / 22.355	Frequency Stability	Meet the requirement of limit	Pass

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

Operating band(MHz)	GSM: 824.2-848.8 WCDMA: 826.4-846.6
Modulation	GSM / GPRS: GMSK WCDMA / HSDPA / HSUPA: QPSK
Multislot class	33
3GPP release version	6
IMEI Code	359401050023008 & 359401050023099
H/W Version	V2.1.0
S/W Version	R18Ae

1.1.2 Maximum ERP, Frequency Tolerance and Emission Designator

System	Modulation	Maximum ERP(W)	Frequency Tolerance (ppm)	Emission Designator
GSM 850	GMSK	0.706	0.026	247KGXW
WCDMA850	QPSK	0.104	0.026	4M17F9W

1.1.3 Antenna Details

Type	Gain (dBi)	Connector	Remark
$\lambda/4$ Monopole	-0.6	---	For GSM 850
$\lambda/4$ Monopole	-1.2	---	For WCDMA 850

1.1.4 EUT Operational Condition

Power Supply Type	Battery: 3.75Vdc / 3200mAh Adapter: DC5.0V 1.8A, DC9.0V 1.8A
-------------------	---

1.1.5 Accessories

Accessories		
No.	Equipment	Description
1	Battery (Built-in battery)	Brand Name: Panasonic Model Name: CA54310-0052 Power Rating: O/P: 3.75Vdc, 3200mA

1.1.6 Operating Channel List

GSM & GPRS		
	Channel	Frequency (MHz)
Low	128	824.2
Middle	190	836.6
High	251	848.8


WCDMA		
	Channel	Frequency (MHz)
Low	4132	826.4
Middle	4182	836.4
High	4233	846.6

1.2 Local Support Equipment List

Support Equipment List						
No.	Equipment	Brand	Model	S/N	FCC ID	Signal cable / Length (m)
1	Adapter	NTT docomo	AC Adaptor 05	---	---	1.2m non-shielded with 2 cores
2	Earphone	Apple	MD827FE/A	---	---	1.2m non-shielded w/o core

Note: Item 1 was provided by applicant.

1.3 Test Setup Chart

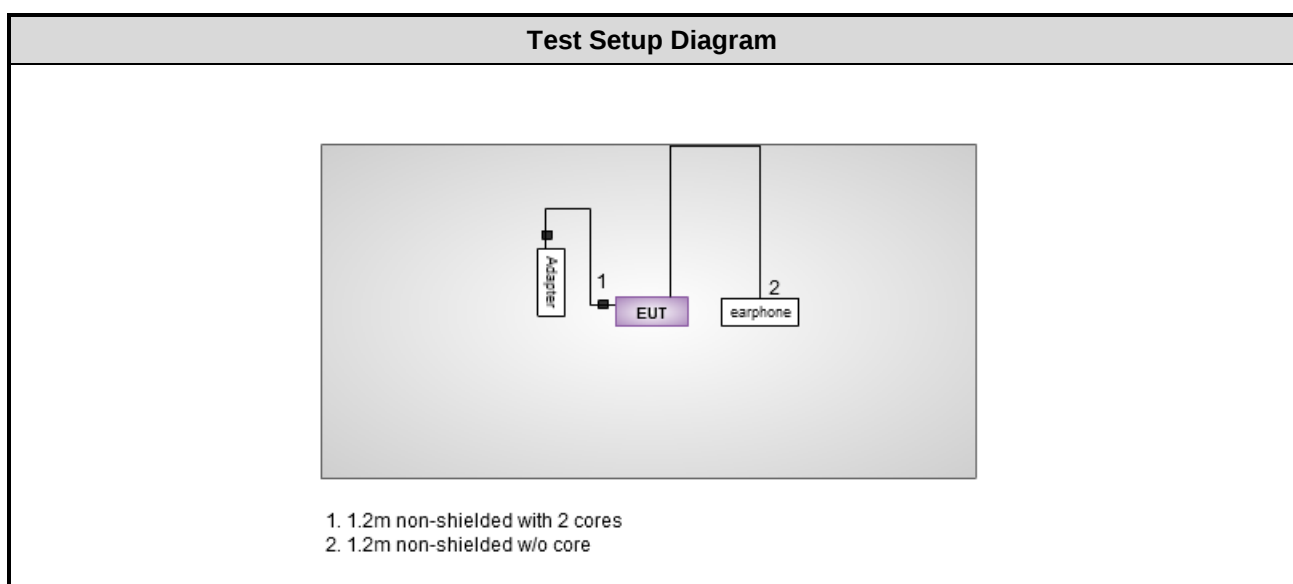

1.4 The Equipment List

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Jan. 25, 2014	Jan. 24, 2015
Receiver	R&S	ESR3	101658	Jan. 10, 2014	Jan. 09, 2015
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jan. 02, 2014	Jan. 01, 2015
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Feb. 13, 2014	Feb. 12, 2015
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Dec. 27, 2013	Dec. 26, 2014
Preamplifier	Burgeon	BPA-530	SN:100219	Nov. 22, 2013	Nov. 21, 2014
Preamplifier	Agilent	83017A	MY39501308	Dec. 16, 2013	Dec. 15, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 16, 2013	Dec. 15, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 16, 2013	Dec. 15, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 16, 2013	Dec. 15, 2014
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Dec. 16, 2013	Dec. 15, 2014
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Dec. 16, 2013	Dec. 15, 2014
Note: Calibration Interval of instruments listed above is one year.					

Loop Antenna	R&S	HFH2-Z2	100330	Nov. 15, 2012	Nov. 14, 2014
Preamplifier	EM	EM18G40G	060572	Jun. 20, 2013	Jun. 19, 2014
Note: Calibration Interval of instruments listed above is two year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Feb. 17, 2014	Feb. 16, 2015
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Dec. 11, 2013	Dec. 10, 2014
Power Meter	Anritsu	ML2495A	1241002	Oct. 24, 2013	Oct. 23, 2014
Power Sensor	Anritsu	MA2411B	1207366	Oct. 24, 2013	Oct. 23, 2014
Radio Communication Analyzer	Anritsu	MT8820C	6201240341	Mar. 13, 2013	Mar. 12, 2014
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards.

47 CFR FCC Part 22 Subpart H

ANSI C63.4-2003

ANSI / TIA / EIA-603-C -2004

Note: The EUT has been tested and complied with FCC part 15B requirement. FCC Part 15B test results are issued to another report.

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 35.286 Hz
Conducted power	± 0.536 dB
Frequency error	± 35.286 Hz
Temperature	± 0.3 °C
Conducted emission	± 2.946 dB
AC conducted emission	± 2.43 dB
Radiated emission	± 2.49 dB

2 Test Configuration

2.1 Testing Condition and Location Information

Test Item	Test Site	Ambient Condition	Tested By
RF conducted	TH01-WS	22°C / 64%	Felix Sung
Radiated Emissions	03CH01-WS	22°C / 62%	Haru Yang

➤ FCC site registration No.: 657002

➤ IC site registration No.: 10807A-1

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Channel	Test Configuration
Effective Radiated Power	GSM WCDMA	128, 190, 251 4132, 4182, 4233	---
Radiated Emissions ≤ 1GHz	GSM WCDMA	251 4182	---
Radiated Emissions > 1GHz	GSM WCDMA	128, 190, 251 4132, 4182, 4233	---
Conducted Emissions	GSM WCDMA	128, 190, 251 4132, 4182, 4233	---
Band Edge	GSM WCDMA	128, 251 4132, 4233	---
Occupied Bandwidth	GSM WCDMA	128, 190, 251 4132, 4182, 4233	---
Peak to average ratio	GSM WCDMA	128, 190, 251 4132, 4182, 4233	---
Frequency Stability	GSM WCDMA	190 4182	---

NOTE:

- The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **X-plane** results were found as the worst case and were shown in this report.

3 Test Results

3.1 Effective Radiated Power

3.1.1 Limit of Effective Radiated Power

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

3.1.2 Test Procedures

For E.R.P measurement


1. The EUT links up with simulator and is set to maximum output power level at low / middel / high channel. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.
4. After finding the max radiated emission, substitution method will be used for getting effective radiated power. EUT will be removed and substitution antenna will be placed at same position. Signal generator will output CW signal to substitution antenna through a RF cable. Rotate turntable and move antenna to find maximum radiated emission. Adjust output power of signal generator to let the maximum radiated emission is same as step 3. Record the output power level.
5. E.I.R.P = output power of step 4 + gain of substitution antenna – cable loss of RF cable. ERP can be calculated by below formula:
$$E.R.P = E.I.R.P - 2.15dB$$

For Conducted power measurement


1. The EUT links up with simulator and is set to maximum output power level at low / middel / high channel.
2. Measure the output power of low / middle / high channel of the EUT

3.1.3 Test Setup

Effective Radiated Power Measurement

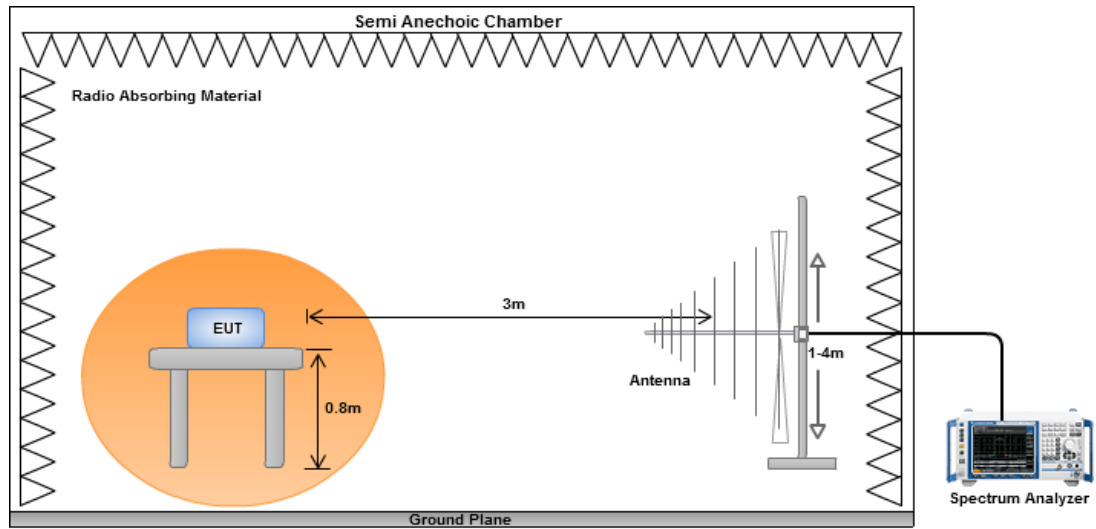

Conducted Power Measurement



3.1.4 Test Result of Conducted Output Power (dBm)

Band	GSM850		
Channel	128	189	251
Frequency (MHz)	824.2	836.4	848.8
GSM	32.02	31.85	31.71
GPRS 8 (GMSK, 1 slot)	32.06	31.87	31.75
GPRS 10 (GMSK, 2 slots)	29.89	29.75	29.66
GPRS 11 (GMSK, 3 slots)	28.25	28.20	28.10
GPRS 12 (GMSK, 4 slots)	26.91	26.77	26.67

Band	WCDMA V		
Channel	4132	4182	4233
Frequency (MHz)	826.4	836.4	846.6
AMR	23.64	23.70	23.67
RMC 12.2K	23.65	23.71	23.68
HSDPA Subtest-1	22.63	22.76	22.67
HSDPA Subtest-2	22.61	22.75	22.65
HSDPA Subtest-3	22.25	22.34	22.29
HSDPA Subtest-4	22.23	22.30	22.26
HSUPA Subtest-1	22.21	22.62	22.47
HSUPA Subtest-2	21.50	21.70	21.65
HSUPA Subtest-3	21.37	21.55	21.42
HSUPA Subtest-4	22.09	22.21	22.18
HSUPA Subtest-5	22.59	22.67	22.64

3.1.5 Test Result of Effective Radiated Power (dBm)

Mode	GPRS (GMSK, 1 Tx slot)						
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Vaule (dBm)	Correction Factor (dB)
128	824.2	28.49	38.45	-9.96	-1.05	27.59	3.05
190	836.6	27.91	38.45	-11.54	-1.80	27.06	3.00
251	848.8	26.26	38.45	-14.19	-3.61	25.46	2.95

Mode	WCDMA RMC 12.2Kbps						
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Vaule (dBm)	Correction Factor (dB)
4132	826.4	20.17	38.45	-18.28	-12.90	19.28	3.04
4182	836.4	20.11	38.45	-19.34	-13.10	19.26	3.00
4233	846.6	18.36	38.45	-22.09	-14.98	17.56	2.95

NOTE: ERP = S.G power value + correction factor - 2.15

3.2 Radiated Emissions

3.2.1 Limit of Radiated Emissions


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB equal to -13dBm.

3.2.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.
4. After finding the max radiated emission, substitution method will be used for getting effective radiated power. EUT will be removed and substitution antenna will be placed at same position. Signal generator will output CW signal to substitution antenna through a RF cable. Rotate turntable and move antenna to find maximum radiated emission. Adjust output power of signal generator to let the maximum radiated emission is same as step 3. Record the output power level.
5. E.I.R.P = output power of step 4 + gain of substitution antenna – cable loss of RF cable. ERP can be calculated by below formula:
$$E.R.P = E.I.R.P - 2.15dB$$

3.2.3 Test Setup

Radiated Emissions below 1 GHz

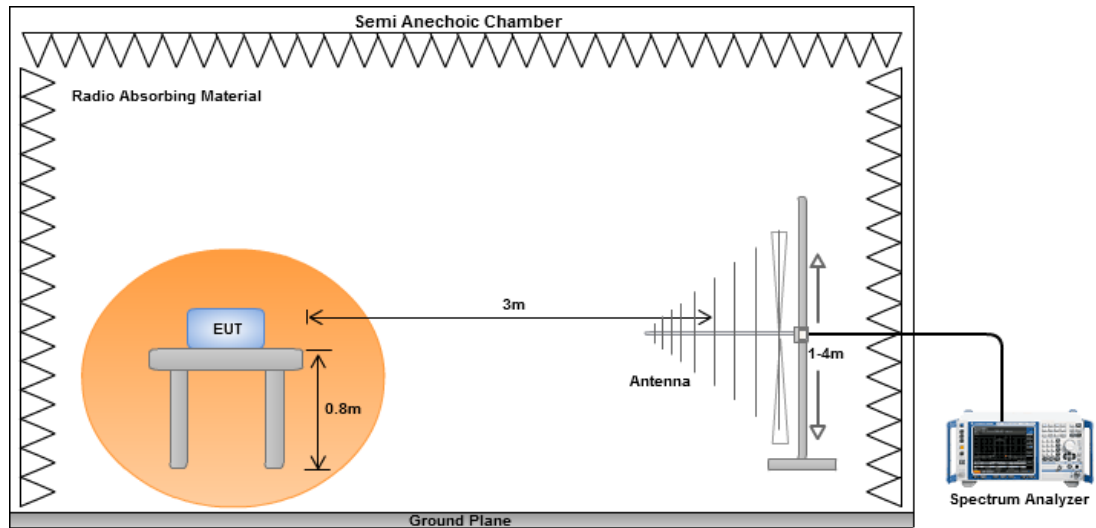

Radiated Emissions above 1 GHz

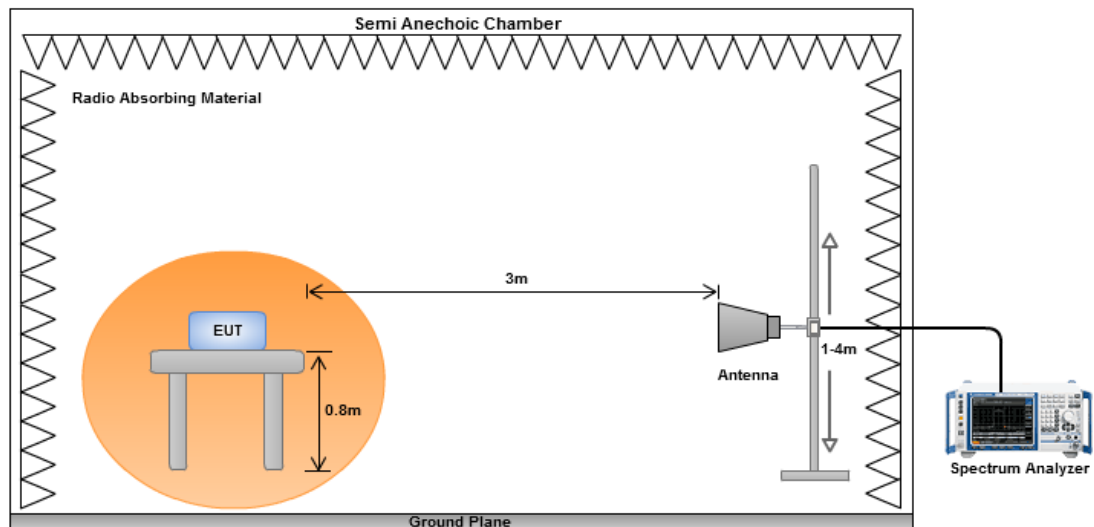

3.2.4 Test Result of Radiated Emissions below 1GHz

Mode	GPRS (GMSK, 1 Tx slot), Channel : 251						
Frequency (MHz)	Antenna Polarity	E.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Vaule (dBm)	Correction Factor (dB)
42.61	H	-50.21	-13.00	-37.21	-44.46	-36.14	-11.92
129.91	H	-47.90	-13.00	-34.90	-35.90	-44.72	-1.03
226.91	H	-58.20	-13.00	-45.20	-45.80	-60.43	4.38
305.48	H	-60.46	-13.00	-47.46	-50.92	-62.53	4.22
350.10	H	-61.45	-13.00	-48.45	-52.18	-63.72	4.42
556.71	H	-63.56	-13.00	-50.56	-58.49	-65.50	4.09
58.13	V	-41.08	-13.00	-28.08	-31.60	-29.76	-9.17
176.47	V	-43.11	-13.00	-30.11	-36.93	-42.55	1.59
260.86	V	-47.74	-13.00	-34.74	-38.19	-49.92	4.33
450.01	V	-46.88	-13.00	-33.88	-42.62	-48.82	4.09
608.12	V	-56.61	-13.00	-43.61	-54.05	-58.27	3.81
697.36	V	-56.50	-13.00	-43.50	-54.77	-58.14	3.79

NOTE: ERP = S.G power value + correction factor - 2.15

Mode	WCDMA RMC 12.2Kbps, Channel : 4182						
Frequency (MHz)	Antenna Polarity	E.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Vaule (dBm)	Correction Factor (dB)
42.61	H	-50.47	-13.00	-37.47	-44.72	-36.40	-11.92
129.91	H	-44.87	-13.00	-31.87	-32.87	-41.69	-1.03
177.44	H	-56.31	-13.00	-43.31	-45.21	-55.90	1.74
232.73	H	-58.04	-13.00	-45.04	-45.91	-60.27	4.38
561.56	H	-55.01	-13.00	-42.01	-49.97	-56.92	4.06
649.83	H	-52.88	-13.00	-39.88	-48.79	-55.04	4.31
48.43	V	-40.77	-13.00	-27.77	-31.83	-27.50	-11.12
142.52	V	-45.78	-13.00	-32.78	-40.10	-42.34	-1.29
171.62	V	-49.73	-13.00	-36.73	-44.16	-48.45	0.87
257.95	V	-49.22	-13.00	-36.22	-39.59	-51.41	4.34
401.51	V	-53.70	-13.00	-40.70	-47.73	-55.83	4.28
699.30	V	-57.03	-13.00	-44.03	-55.32	-58.66	3.78

NOTE: ERP = S.G power value + correction factor - 2.15

3.2.5 Test Result of Radiated Emissions above 1GHz

Mode	GPRS (GMSK, 1 Tx slot) , Channel : 128						
Frequency (MHz)	Antenna Polarity	E.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Vaule (dBm)	Correction Factor (dB)
1648.40	H	-45.53	-13.00	-32.53	-46.08	-48.41	5.03
2472.60	H	-47.62	-13.00	-34.62	-52.55	-51.55	6.08
3296.80	H	-51.33	-13.00	-38.33	-60.03	-55.58	6.40
1648.40	V	-48.96	-13.00	-35.96	-48.79	-51.84	5.03
2472.60	V	-48.38	-13.00	-35.38	-54.81	-52.31	6.08
3296.80	V	-50.48	-13.00	-37.48	-59.90	-54.73	6.40

Mode	GPRS (GMSK, 1 Tx slot) , Channel : 190						
Frequency (MHz)	Antenna Polarity	E.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Vaule (dBm)	Correction Factor (dB)
1673.20	H	-47.47	-13.00	-34.47	-48.29	-50.43	5.11
2509.80	H	-48.20	-13.00	-35.20	-53.52	-52.11	6.06
3346.40	H	-52.19	-13.00	-39.19	-60.89	-56.50	6.46
1673.20	V	-53.98	-13.00	-40.98	-54.15	-56.94	5.11
2509.80	V	-48.62	-13.00	-35.62	-55.35	-52.53	6.06
3346.40	V	-50.17	-13.00	-37.17	-59.82	-54.48	6.46

Mode	GPRS (GMSK, 1 Tx slot) , Channel : 251						
Frequency (MHz)	Antenna Polarity.	E.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Vaule (dBm)	Correction Factor (dB)
1697.60	H	-47.38	-13.00	-34.38	-48.46	-50.41	5.18
2546.40	H	-48.50	-13.00	-35.50	-54.19	-52.39	6.04
3395.20	H	-51.73	-13.00	-38.73	-60.43	-56.11	6.53
1697.60	V	-50.44	-13.00	-37.44	-50.94	-53.47	5.18
2546.40	V	-49.61	-13.00	-36.61	-56.63	-53.50	6.04
3395.20	V	-51.42	-13.00	-38.42	-61.31	-55.80	6.53

NOTE: ERP = S.G power value + correction factor - 2.15

Mode	WCDMA RMC 12.2Kbps, Channel : 4132						
Frequency (MHz)	Antenna Polarity	E.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Vaule (dBm)	Correction Factor (dB)
1652.80	H	-59.93	-13.00	-46.93	-60.53	-62.82	5.04
2479.20	H	-56.25	-13.00	-43.25	-61.26	-60.17	6.07
3305.60	H	-52.69	-13.00	-39.69	-61.39	-56.95	6.41
1652.80	V	-60.17	-13.00	-47.17	-60.06	-63.06	5.04
2479.20	V	-54.89	-13.00	-41.89	-61.38	-58.81	6.07
3305.60	V	-52.10	-13.00	-39.10	-61.55	-56.36	6.41

Mode	WCDMA RMC 12.2Kbps, Channel : 4182						
Frequency (MHz)	Antenna Polarity	E.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Vaule (dBm)	Correction Factor (dB)
1672.80	H	-59.33	-13.00	-46.33	-60.15	-62.29	5.11
2509.20	H	-55.14	-13.00	-42.14	-60.45	-59.05	6.06
3345.60	H	-52.64	-13.00	-39.64	-61.34	-56.95	6.46
1672.80	V	-61.06	-13.00	-48.06	-61.23	-64.02	5.11
2509.20	V	-53.83	-13.00	-40.83	-60.55	-57.74	6.06
3345.60	V	-51.59	-13.00	-38.59	-61.24	-55.90	6.46

Mode	WCDMA RMC 12.2Kbps, Channel : 4233						
Frequency (MHz)	Antenna Polarity.	E.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Vaule (dBm)	Correction Factor (dB)
1693.20	H	-59.23	-13.00	-46.23	-60.27	-62.25	5.17
2539.80	H	-55.62	-13.00	-42.62	-61.25	-59.52	6.05
3386.40	H	-53.44	-13.00	-40.44	-62.14	-57.81	6.52
1693.20	V	-59.58	-13.00	-46.58	-60.03	-62.60	5.17
2539.80	V	-54.29	-13.00	-41.29	-61.26	-58.19	6.05
3386.40	V	-52.02	-13.00	-39.02	-61.86	-56.39	6.52

NOTE: ERP = S.G power value + correction factor - 2.15

3.3 Conducted Emissions


3.3.1 Limit of Conducted Emissions

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB equal to -13dBm.


3.3.2 Test Procedures

1. Lowest, middle and highest operating channels are tested for this item.
2. Scan frequency range is from 30MHz~9GHz.
3. Set RBW = 1MHz, VBW = 3MHz, detector = RMS, sweep time = auto.
4. Record the max trace value and capture the test plot of each sub frequency band.

3.3.3 Test Setup

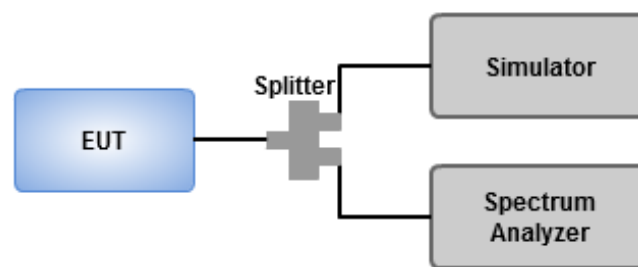

3.3.4 Test Result of Conducted Emissions

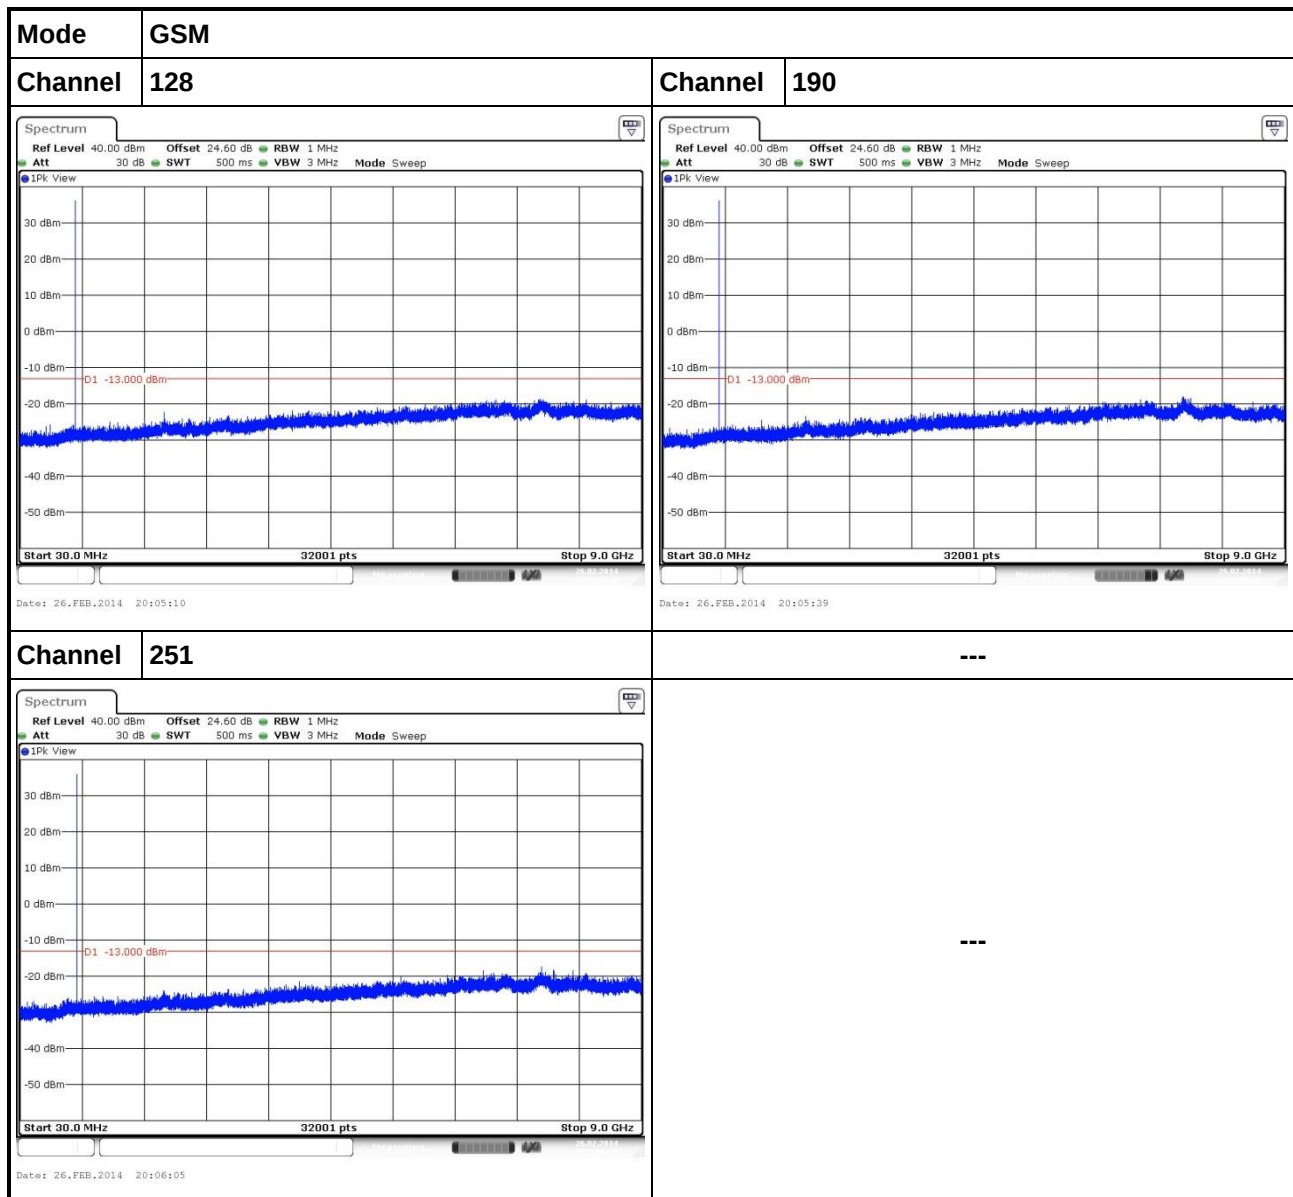

3.4 Band Edge


3.4.1 Limit of Band Edge

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB equal to -13dBm.



3.4.2 Test Procedures

1. Lowest and highest operating channels are tested for this item.
2. The center frequency of spectrum analyzer will be set to 824 and 849 MHz.
3. Set RBW = VBW=3kHz, span = 1 MHz, detector = RMS, sweep time = auto for GSM
Set RBW = VBW = 100kHz, span = 5 MHz, detector = RMS, sweep time = auto for WCDMA
4. Record the max trace value and capture the test plot.

3.4.3 Test Setup

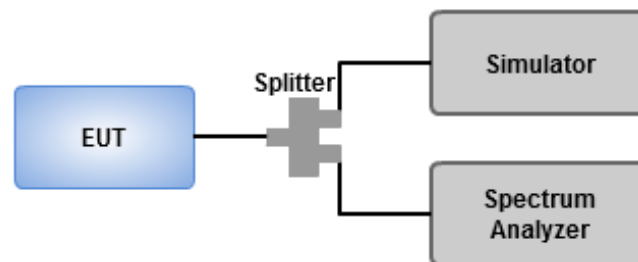

3.4.4 Test Result of Band Edge

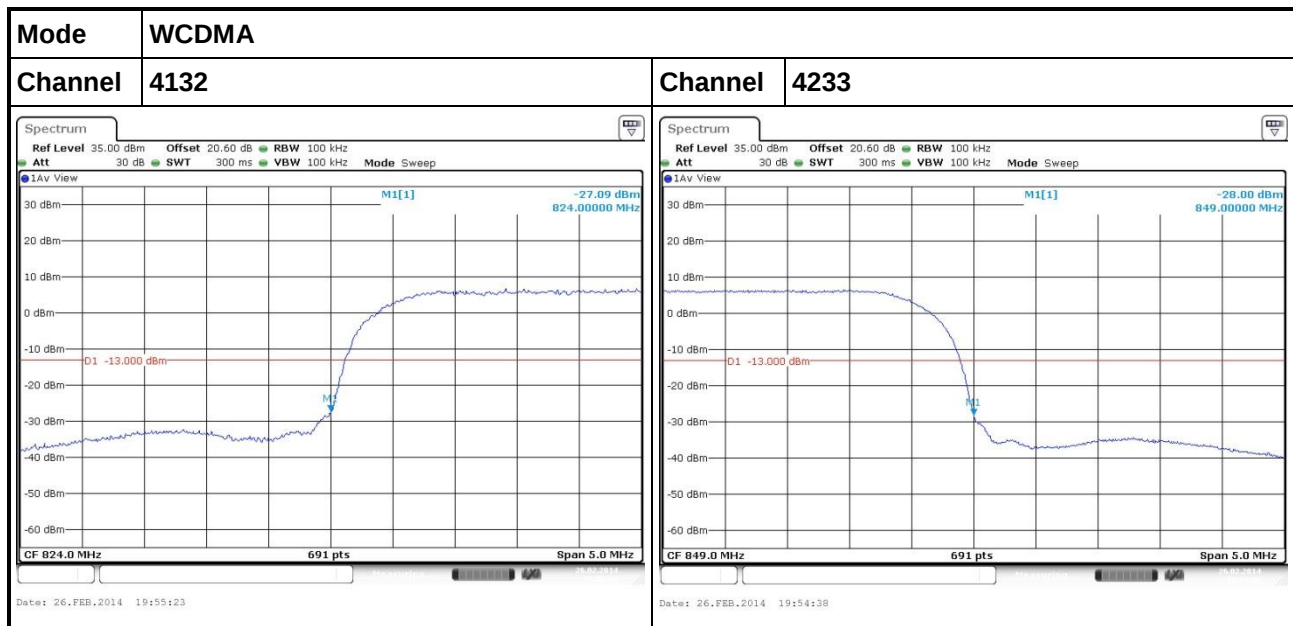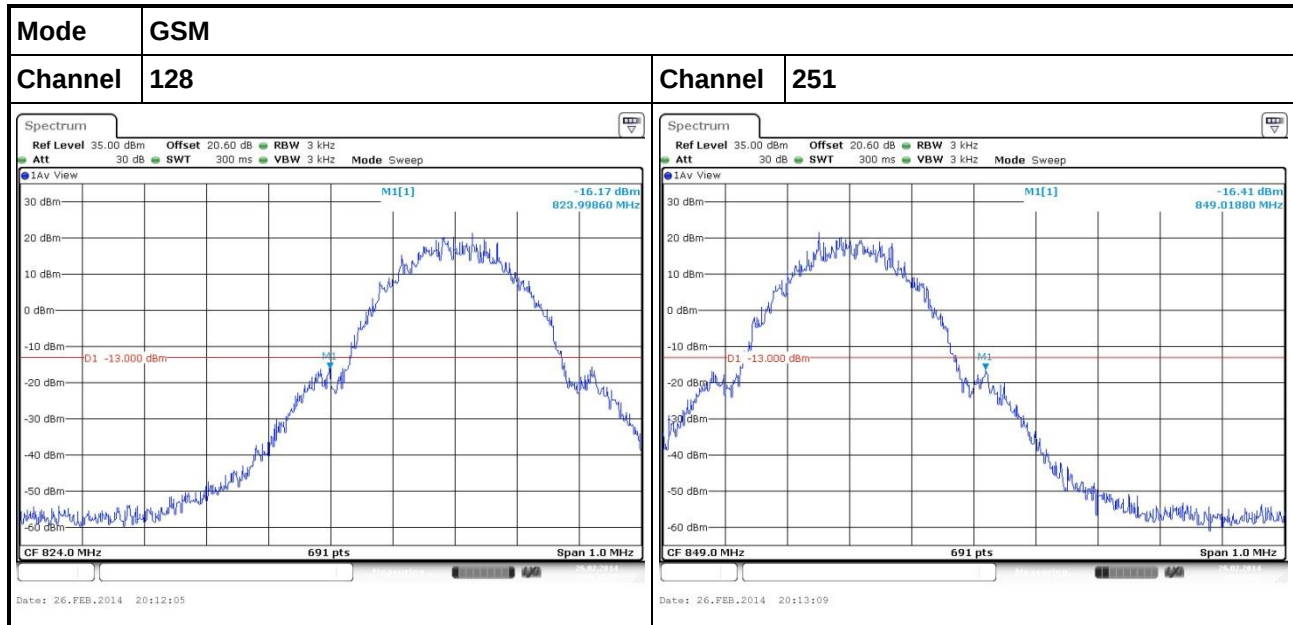

3.5 Occupied Bandwidth


3.5.1 Limit of Band Edge

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB equal to -13dBm.

3.5.2 Test Procedures


1. Set resolution bandwidth (RBW) = 10 kHz, Video bandwidth = 30 kHz for GSM mode.
Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz for WCDMA mode.
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Using occupied bandwidth measurement function of spectrum analyzer to measure occupied bandwidth

3.5.3 Test Setup

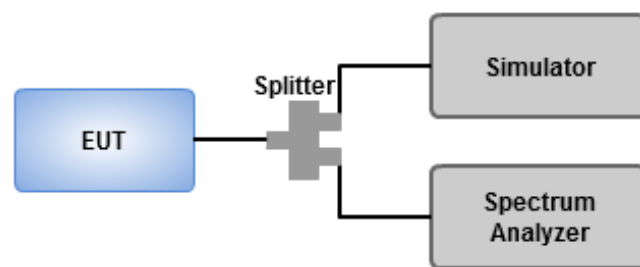


3.5.4 Test Result of Occupied Bandwidth

MODE	Channel	Frequency (MHz)	OBW (kHz)	26dB bandwidth(kHz)
GSM	128	824.2	238.78	311.59
GSM	190	836.6	244.57	311.59
GSM	251	848.8	247.47	321.74

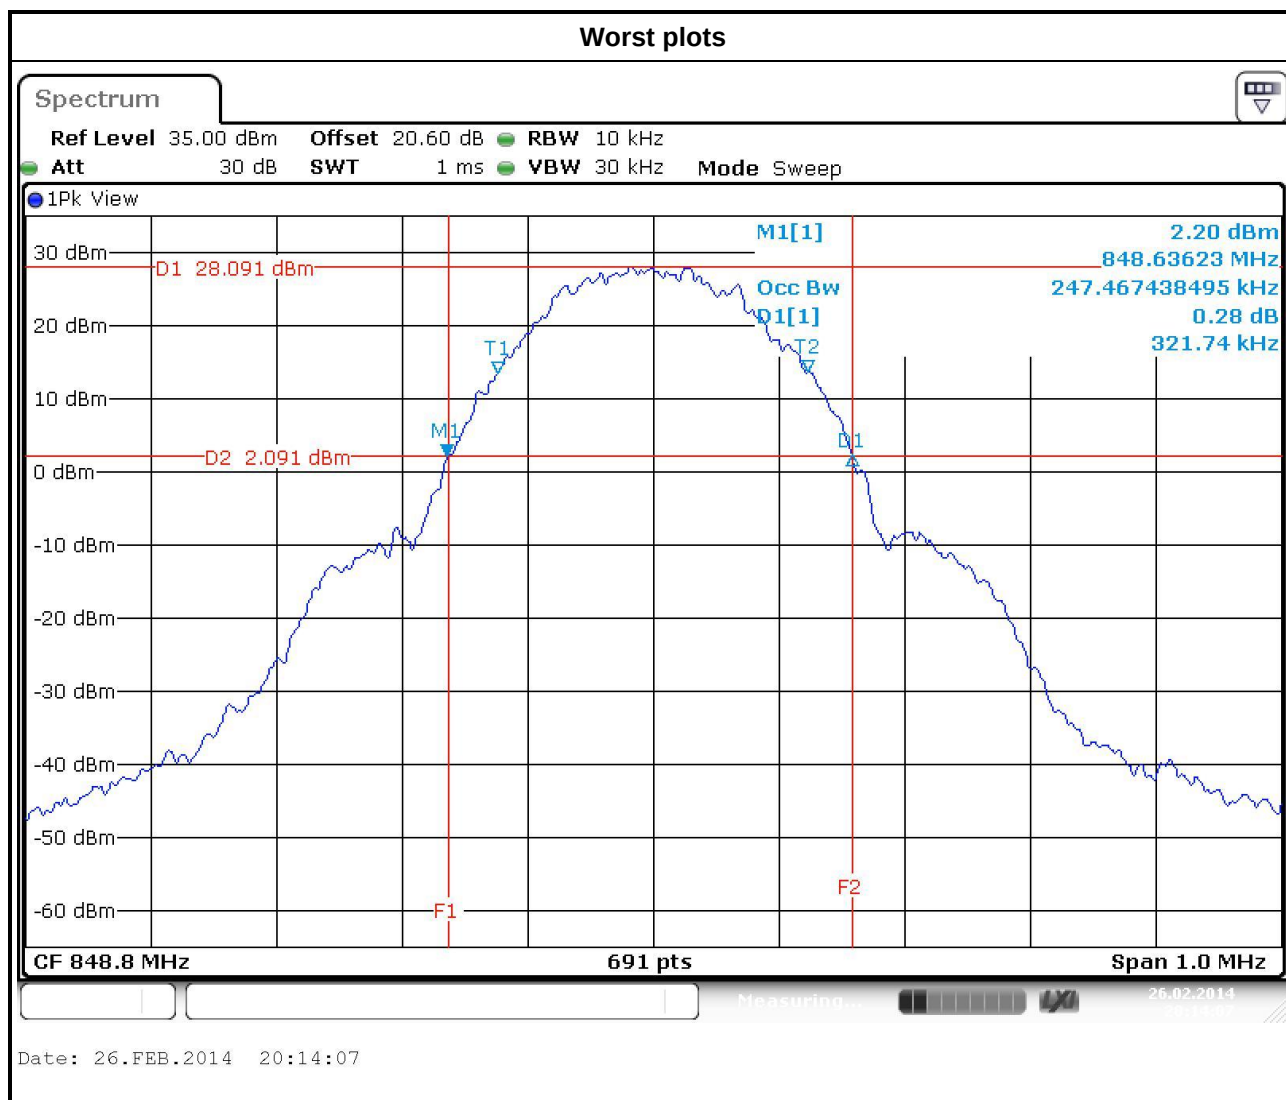

MODE	Channel	Frequency (MHz)	OBW (MHz)	26dB bandwidth(MHz)
WCDMA	4132	826.4	4.153	4.638
WCDMA	4182	836.4	4.168	4.667
WCDMA	4133	846.6	4.139	4.667

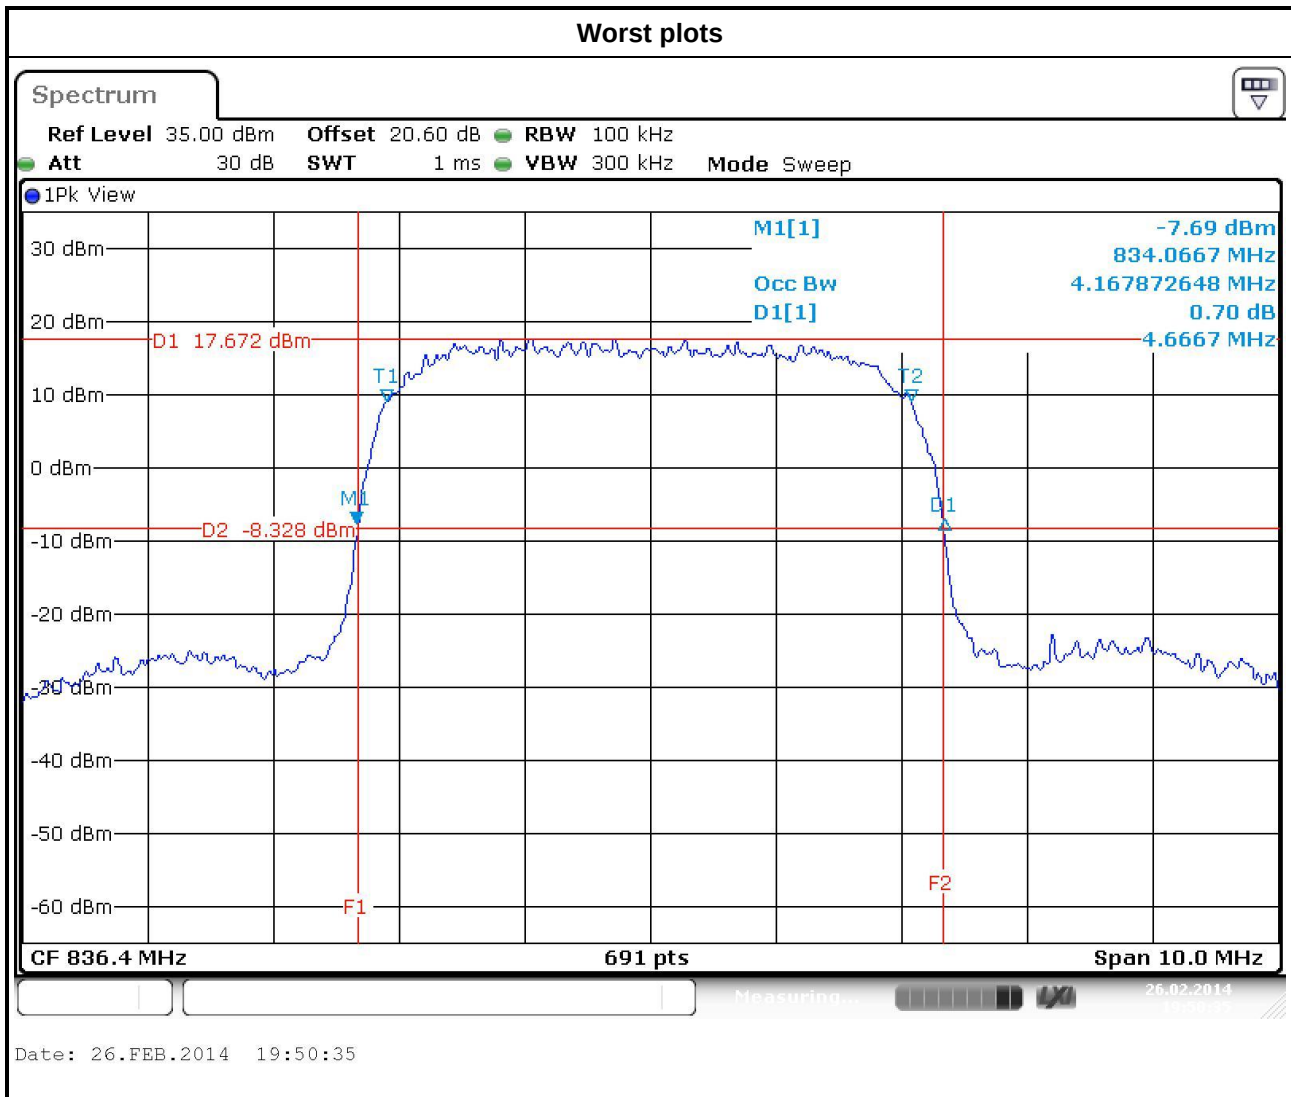

3.6 Peak to Average Ratio

3.6.1 Limit of Peak to Average Ratio

Peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

3.6.2 Test Procedures


For GSM mode

1. Set RBW=1MHz, RBW=3MHz, Peak detector in Trace 1
2. Set RBW=1MHz, RBW=3MHz, RMS detector in Trace 2
3. Trigger function is enabled for measuring signal at burst on time. Measure the difference between trace1 and trace 2.

For WCDMA mode


1. Enable CCDF function of spectrum analyzer and set RBW=10MHz
2. Set the number of counts to a value that stabilizes the measured CCDF curve
3. Record the maximum PAPR level associated with a probability of 0.1%.

3.6.3 Test Setup

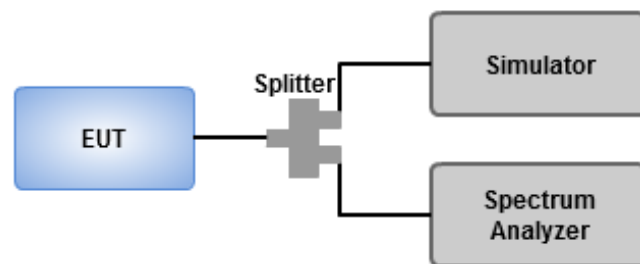

3.6.4 Test Result of Peak to Average Ratio

MODE	Channel	Frequency (MHz)	Peak to Average ratio (dB)
GSM	128	824.2	0.01
GSM	190	836.6	0.03
GSM	251	848.8	0.01
WCDMA	4132	826.4	3.25
WCDMA	4182	836.4	3.13
WCDMA	4133	846.6	3.16

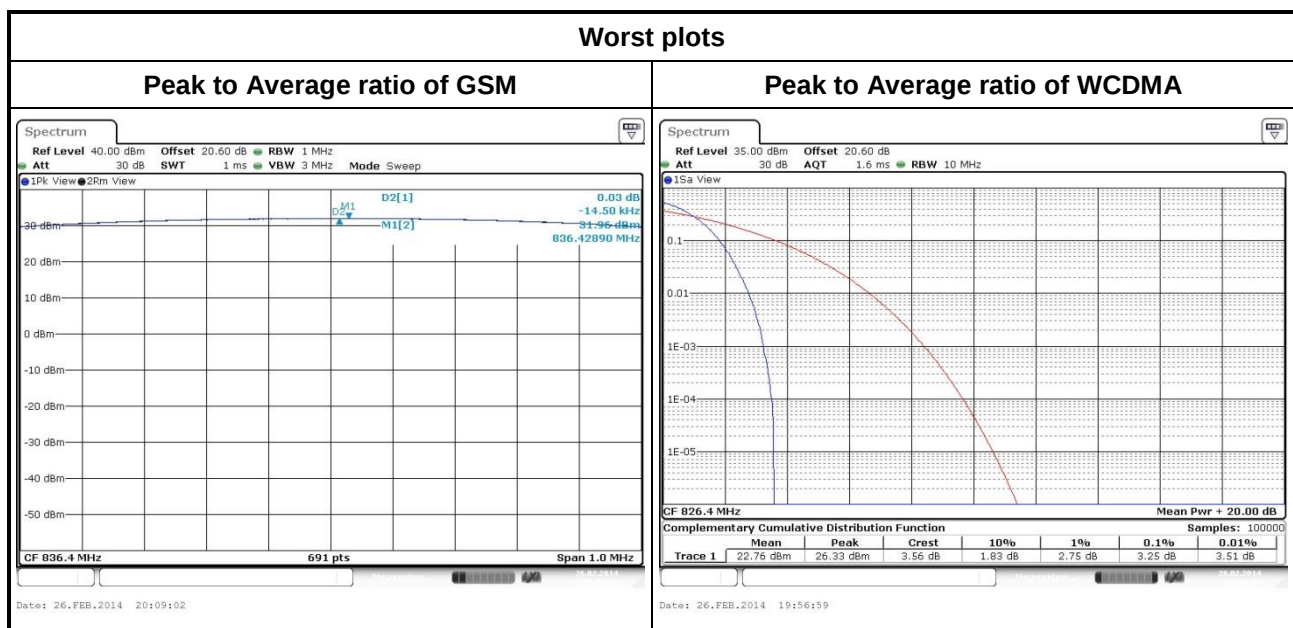

3.7 Frequency Stability


3.7.1 Limit of Frequency Stability

The frequency stability shall be less +/- 2.5ppm.

3.7.2 Test Procedures

1. EUT was placed at temperature chamber and connected to an external power supply.
2. Temperature and voltage condition shall be tested to confirm frequency stability.
3. Temperature range is from -30~50°C and voltage range is from lowest to highest working voltage.
4. Link up EUT and simulator. Confirm frequency drift value of simulator and record it.

3.7.3 Test Setup

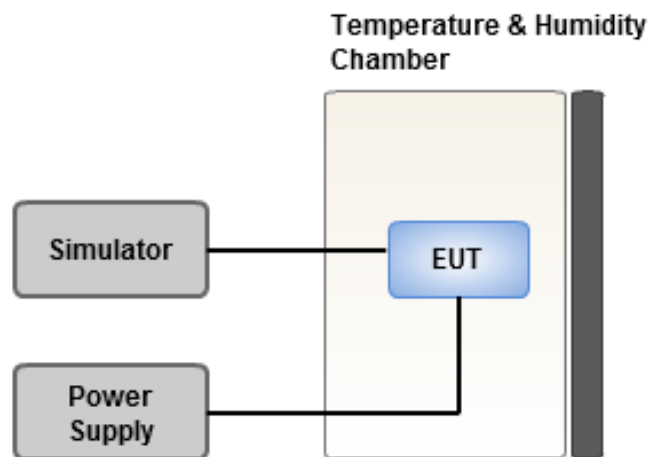

3.7.4 Test Result of Frequency Stability

Temperature (°C)	Voltage (dc)	Frequency Drift (ppm)		Limit (ppm)
		GSM	WCDMA	
55	3.9	0.023	0.025	2.5
50	3.9	0.026	0.024	2.5
40	3.9	0.024	0.020	2.5
30	3.9	0.022	0.023	2.5
20	3.9	0.018	0.026	2.5
10	3.9	0.019	0.024	2.5
0	3.9	0.022	0.022	2.5
-10	3.9	0.018	0.018	2.5
-20	3.9	0.019	0.016	2.5
-30	3.9	0.023	0.019	2.5
20	4.29	0.014	0.020	2.5
20	3.51	0.010	0.017	2.5

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==