



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	6,816.000	97.17			15.06	V	323.1	1.00
2	7,209.500	64.44	88.20	23.76	16.04	V	323.1	1.00

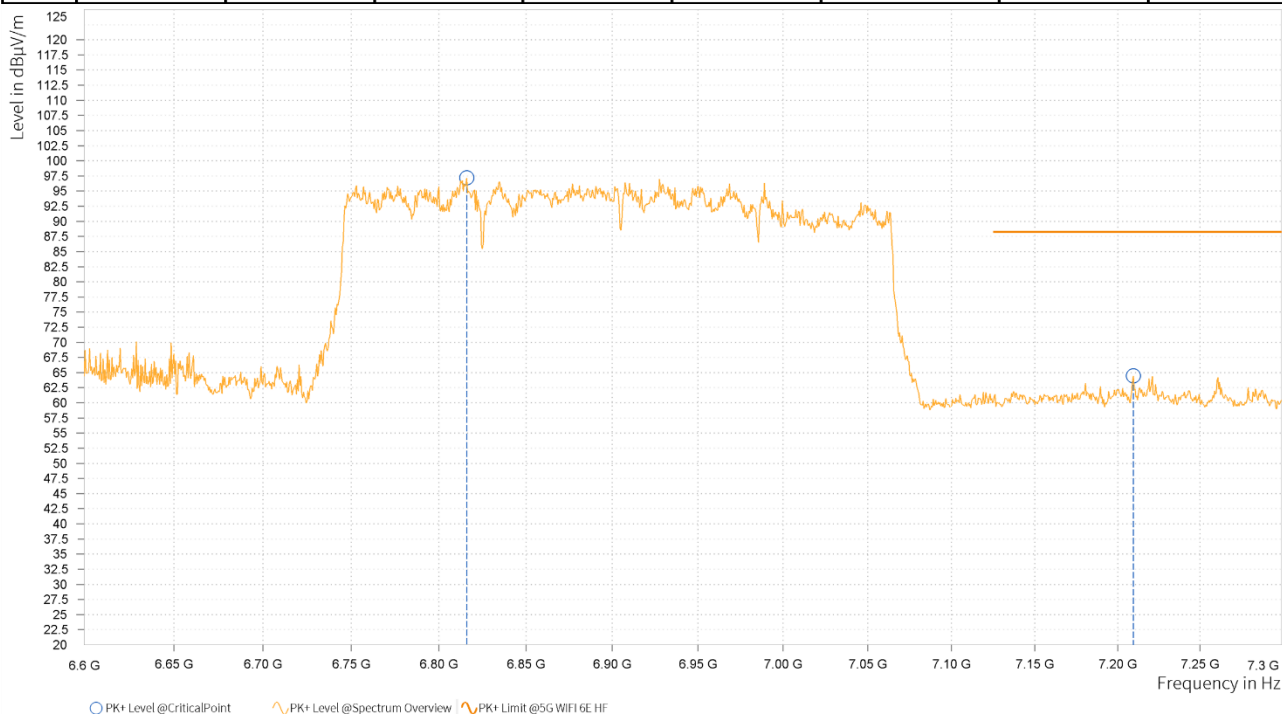

Test Report No.: RF260714B018

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	6,854.500	84.20			15.08	V	317.2	1.00
2	7,180.000	48.89	68.20	19.31	15.91	V	359	2.00

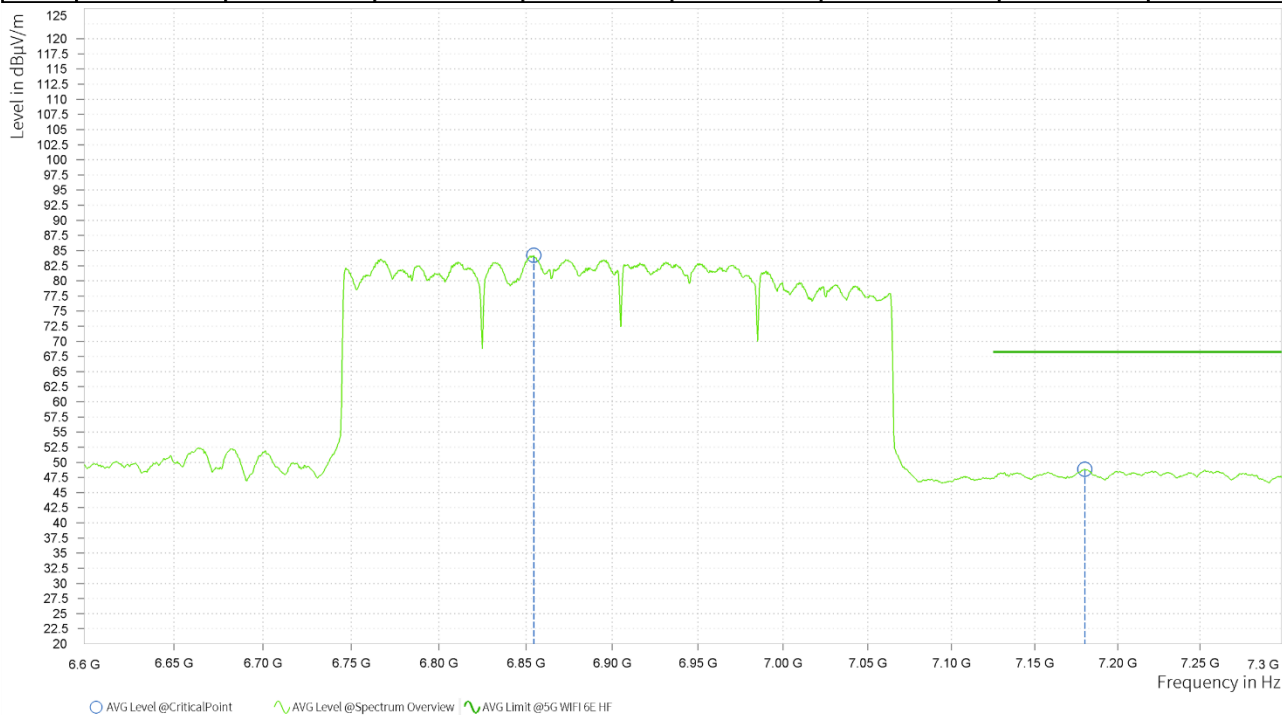

REMARKS:


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 6985MHz: Fundamental frequency.



Test Report No.: RF260714B018
802.11be (20MHz) RU53

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,893.297	53.47	88.20	34.73	14.09	H	359.1	1.00
1	5,950.453	97.90			13.73	H	348	1.00

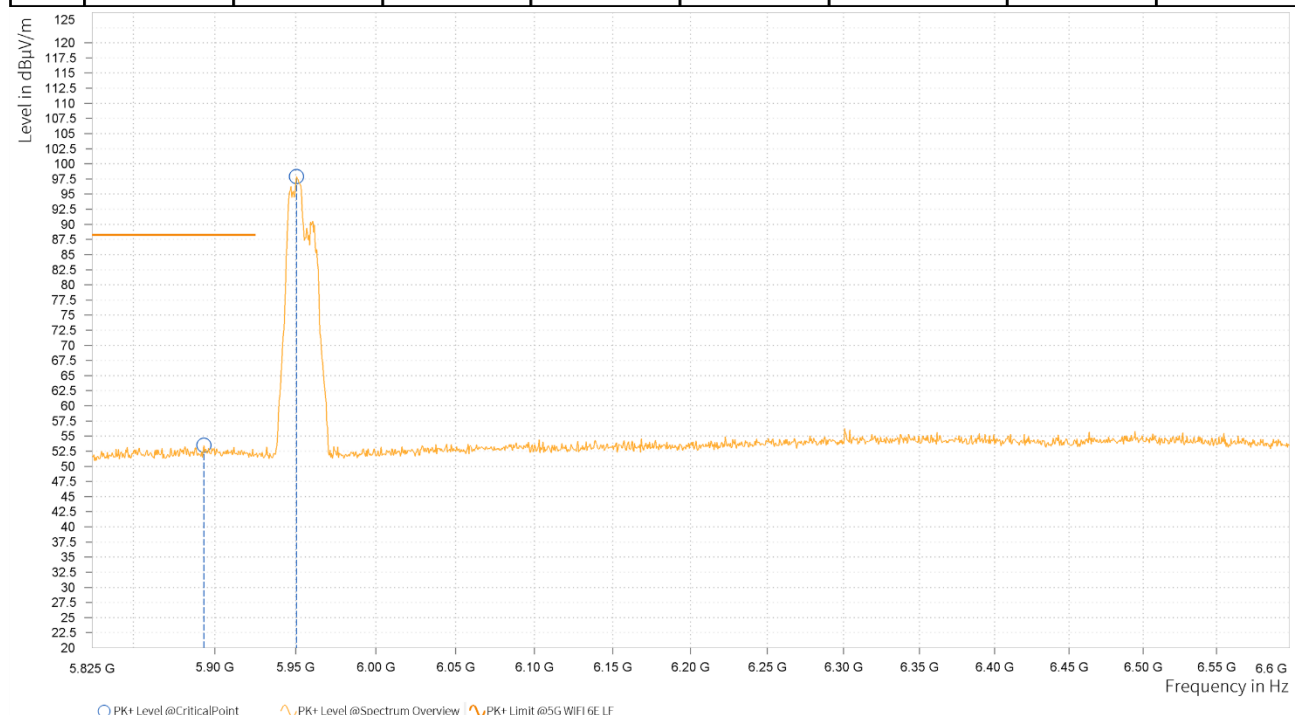


Test Report No.: RF260714B018

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,897.172	39.19	68.20	29.01	14.09	H	356.6	1.00
1	5,946.094	85.76			13.75	H	262.2	1.00




Test Report No.: RF260714B018

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,901.531	53.58	88.20	34.62	14.09	V	53.5	2.00
1	5,950.938	97.57			13.73	V	359	1.00

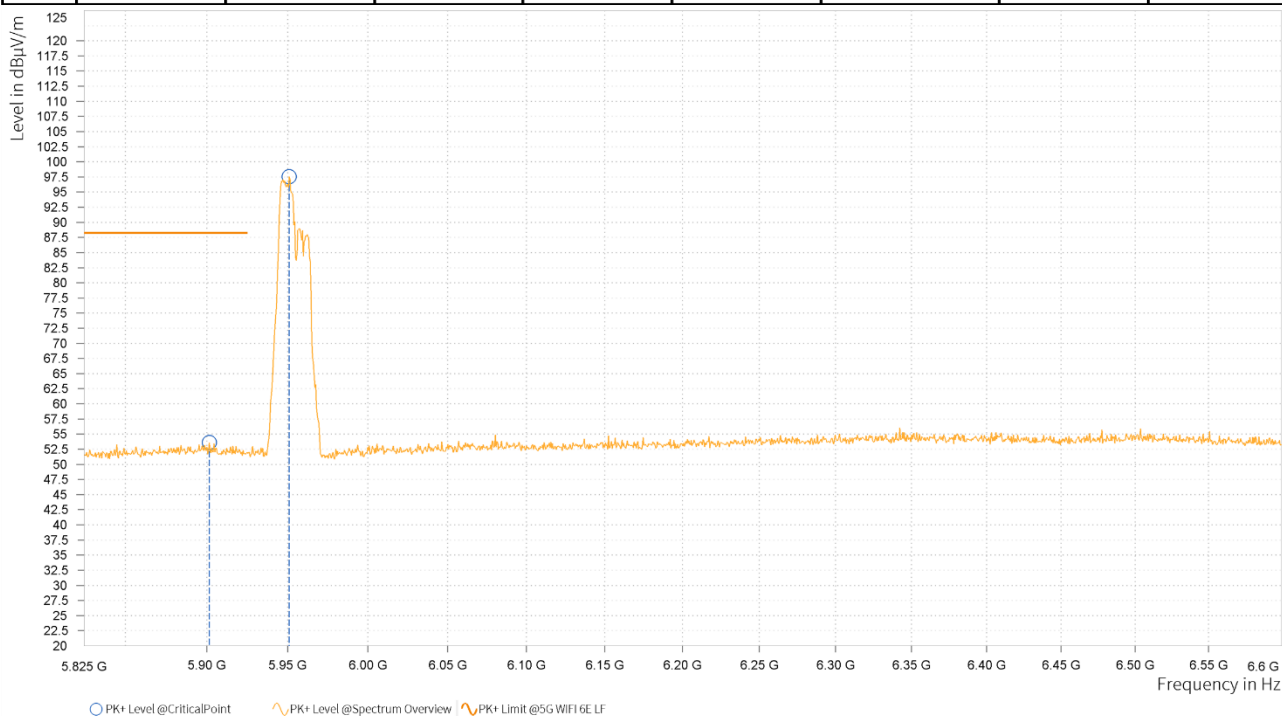

Test Report No.: RF260714B018

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,899.109	39.20	68.20	29.00	14.10	V	99.6	1.00
1	5,946.094	84.66			13.75	V	258.6	1.00

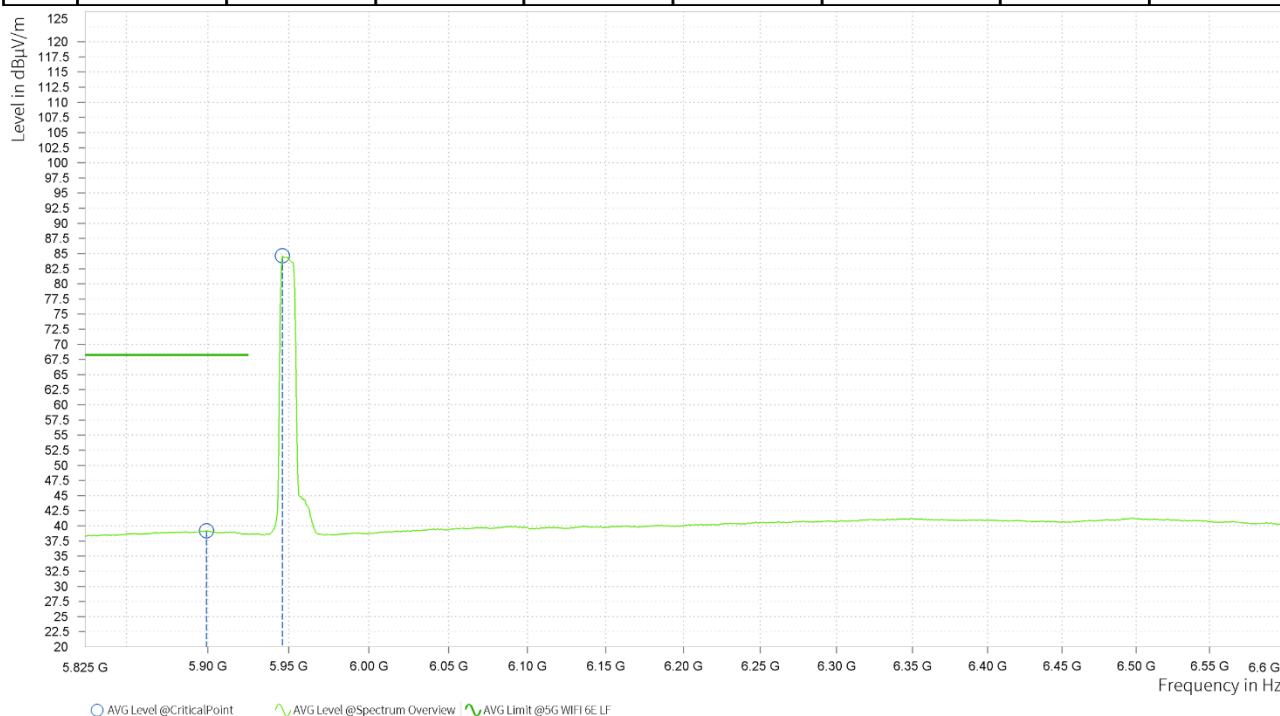


REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5955MHz: Fundamental frequency.

Test Report No.: RF260714B018


CHANNEL	TX Channel 233	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	7,107.000	91.52			15.40	H	196.5	1.00
2	7,255.500	60.51	88.20	27.69	15.89	H	129.4	1.00

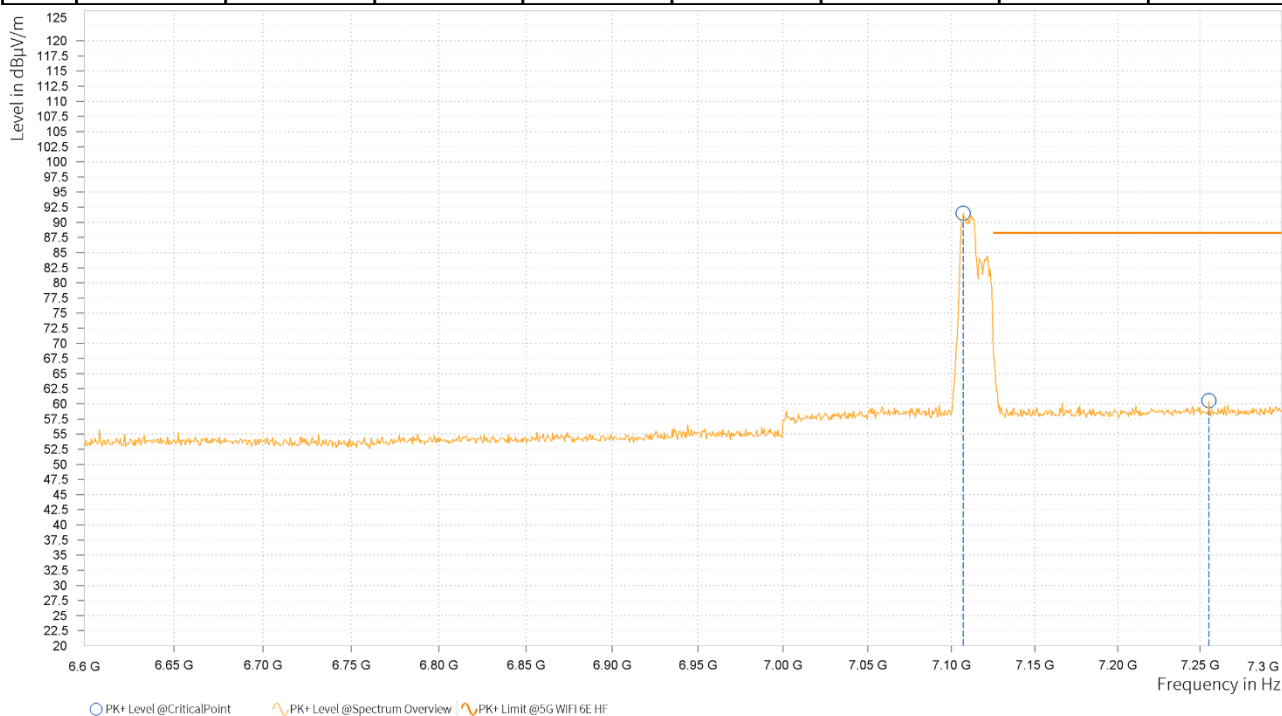


Test Report No.: RF260714B018

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	7,106.500	79.12			15.39	H	355.8	2.00
2	7,216.500	45.29	68.20	22.91	16.01	H	359.1	1.00

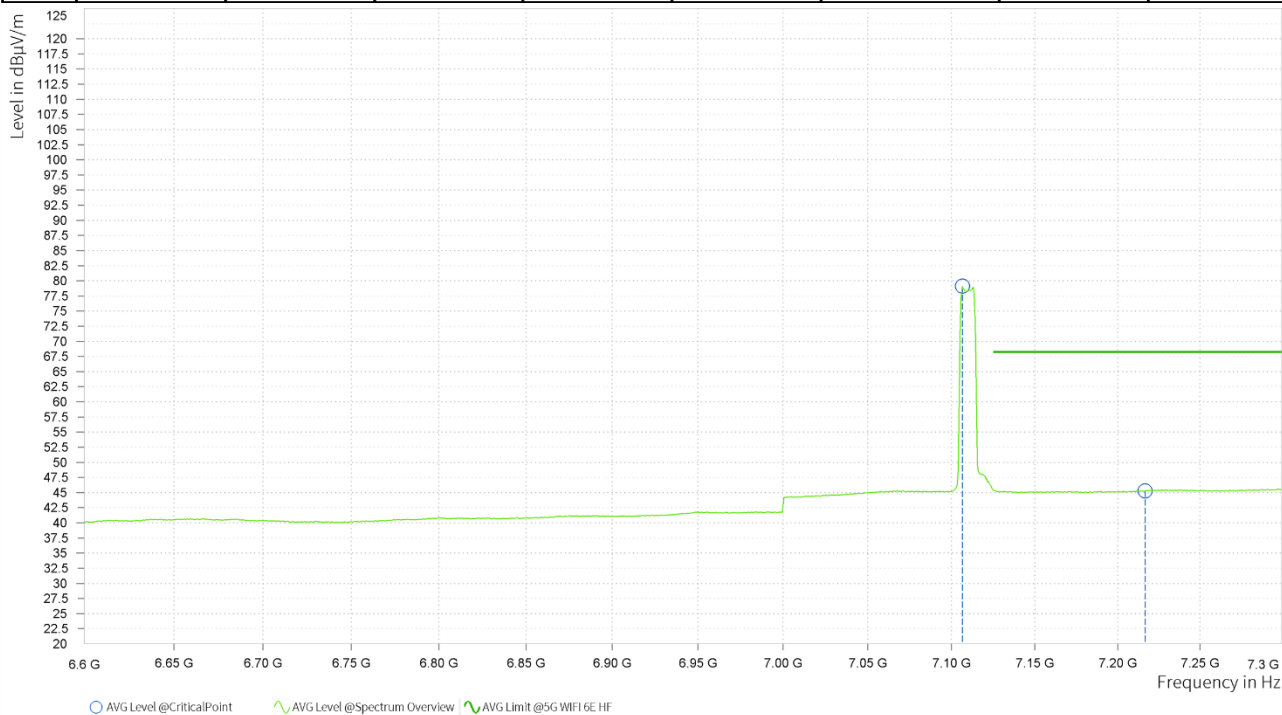


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	7,107.000	96.32			15.40	V	91.8	2.00
2	7,279.000	60.27	88.20	27.93	15.93	V	65	1.00

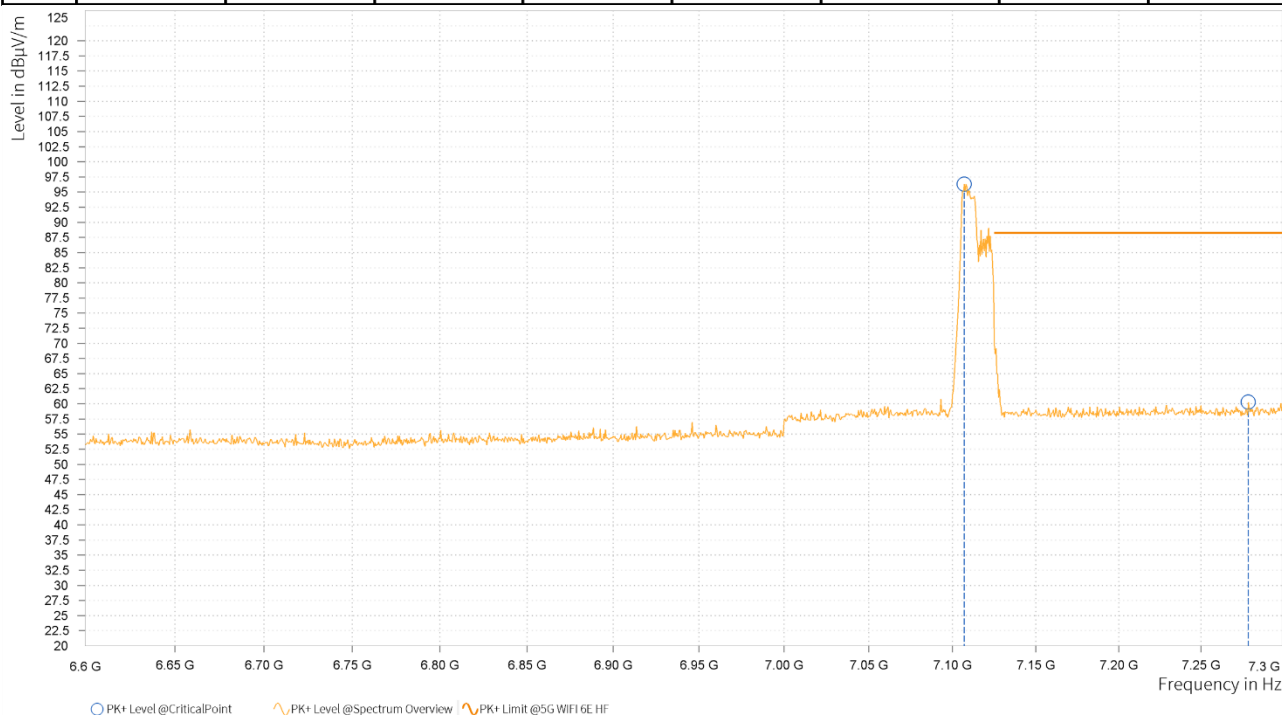

Test Report No.: RF260714B018

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	7,112.000	82.46			15.44	V	96.6	2.00
2	7,219.000	45.34	68.20	22.86	16.00	V	32	2.00

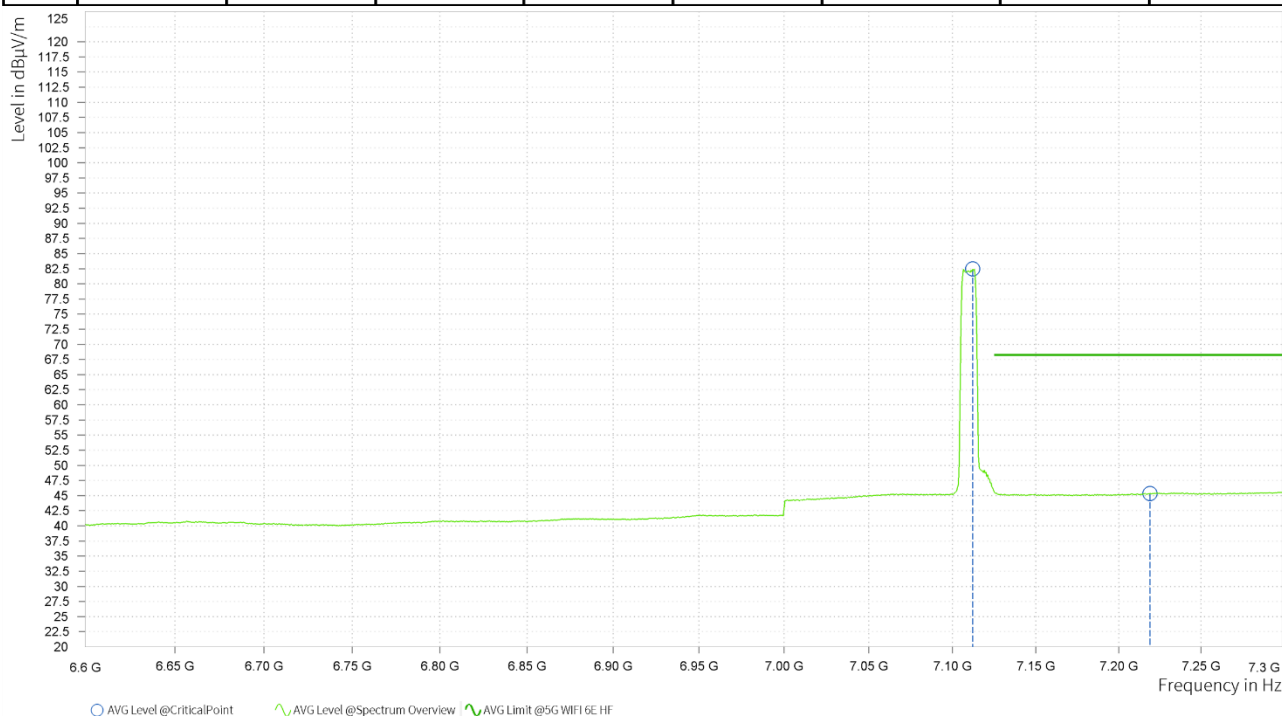

REMARKS:


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 7115MHz: Fundamental frequency.



Test Report No.: RF260714B018
802.11be (40MHz)_RU61


CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,875.375	53.64	88.20	34.56	14.00	H	359	1.00
1	5,957.230	101.89			13.74	H	270.6	1.00

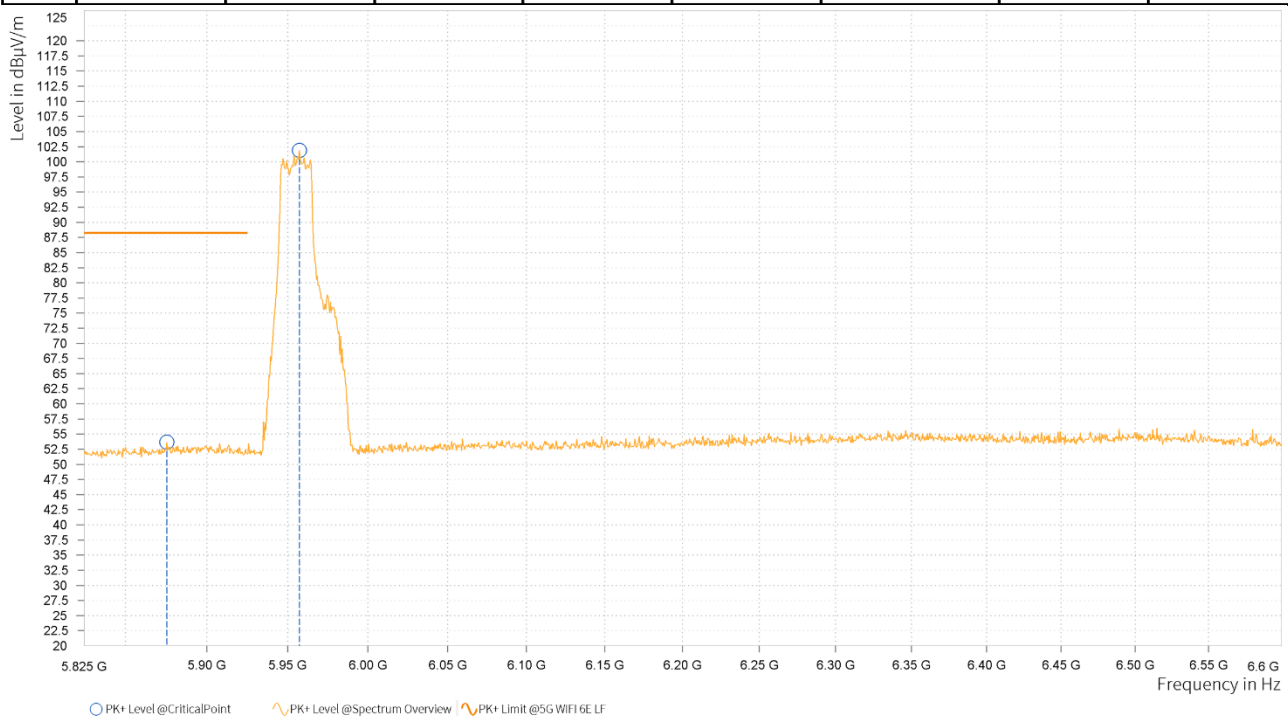


Test Report No.: RF260714B018

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,888.453	39.19	68.20	29.01	14.07	H	281.4	1.00
1	5,955.297	88.58			13.74	H	281.4	1.00

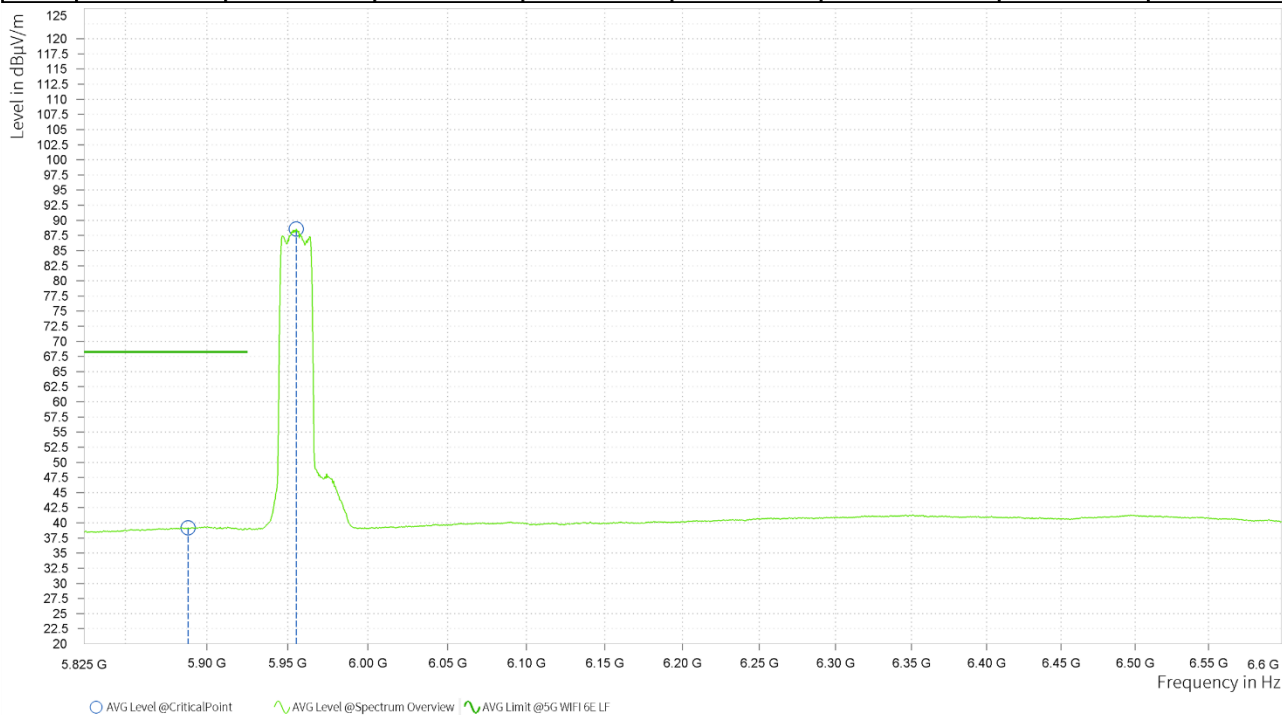


Test Report No.: RF260714B018

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,912.672	53.72	88.20	34.48	14.01	V	215.7	1.00
1	5,946.578	99.74			13.75	V	270.6	1.00

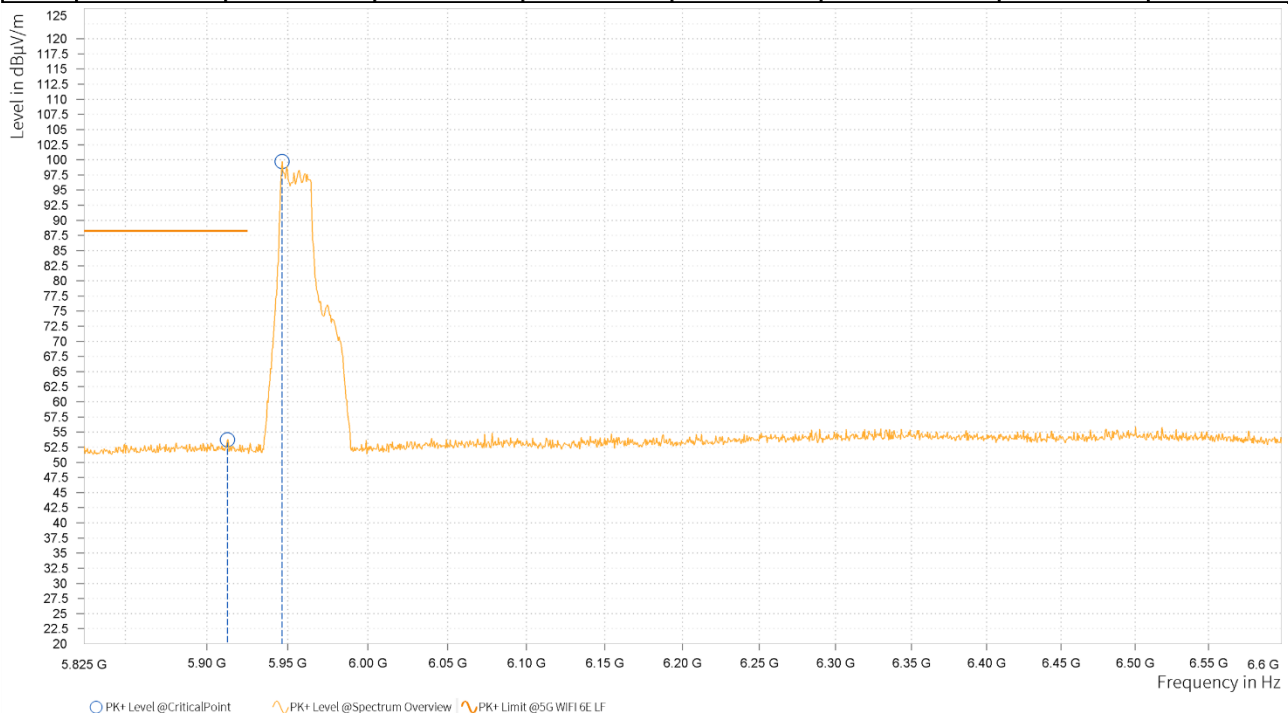

Test Report No.: RF260714B018

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,894.750	39.26	68.20	28.94	14.09	V	359.1	1.00
1	5,963.047	84.97			13.76	V	6.2	1.00

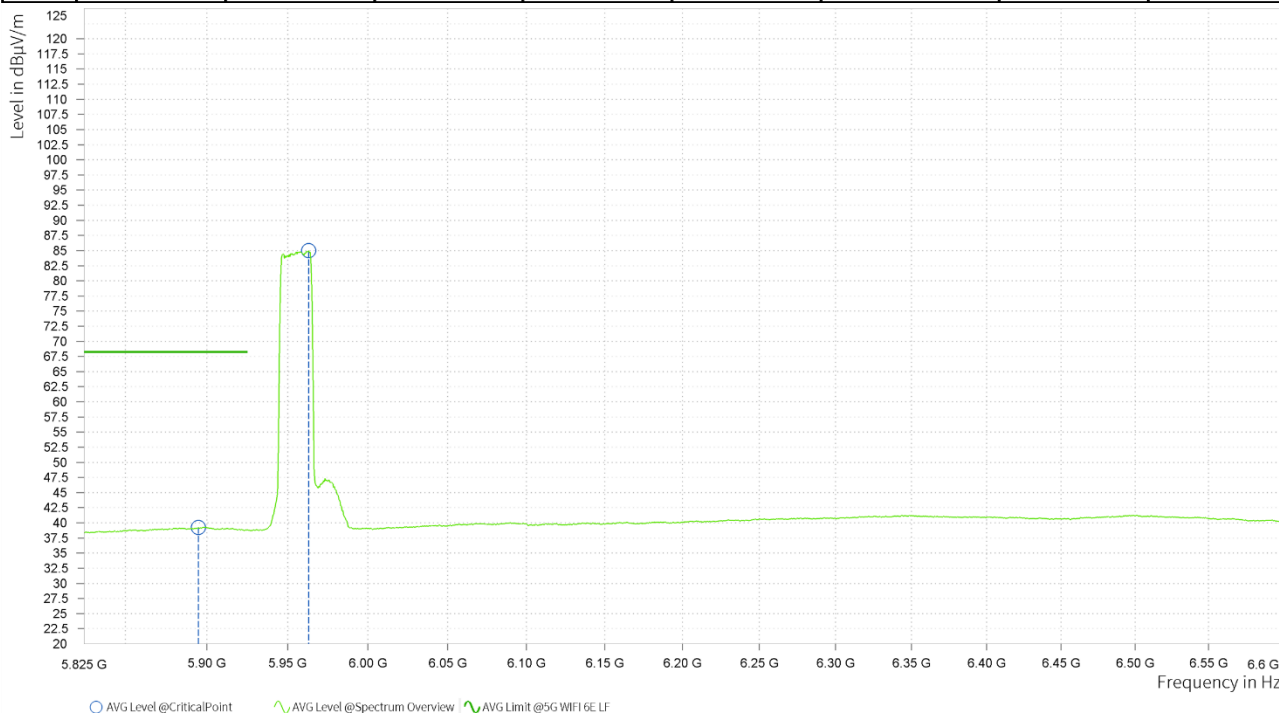

REMARKS:


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5965MHz: Fundamental frequency.

Test Report No.: RF260714B018

CHANNEL	TX Channel 227	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	7,069.000	97.91			15.22	H	355.1	2.00
2	7,254.500	60.12	88.20	28.08	15.89	H	359	1.00

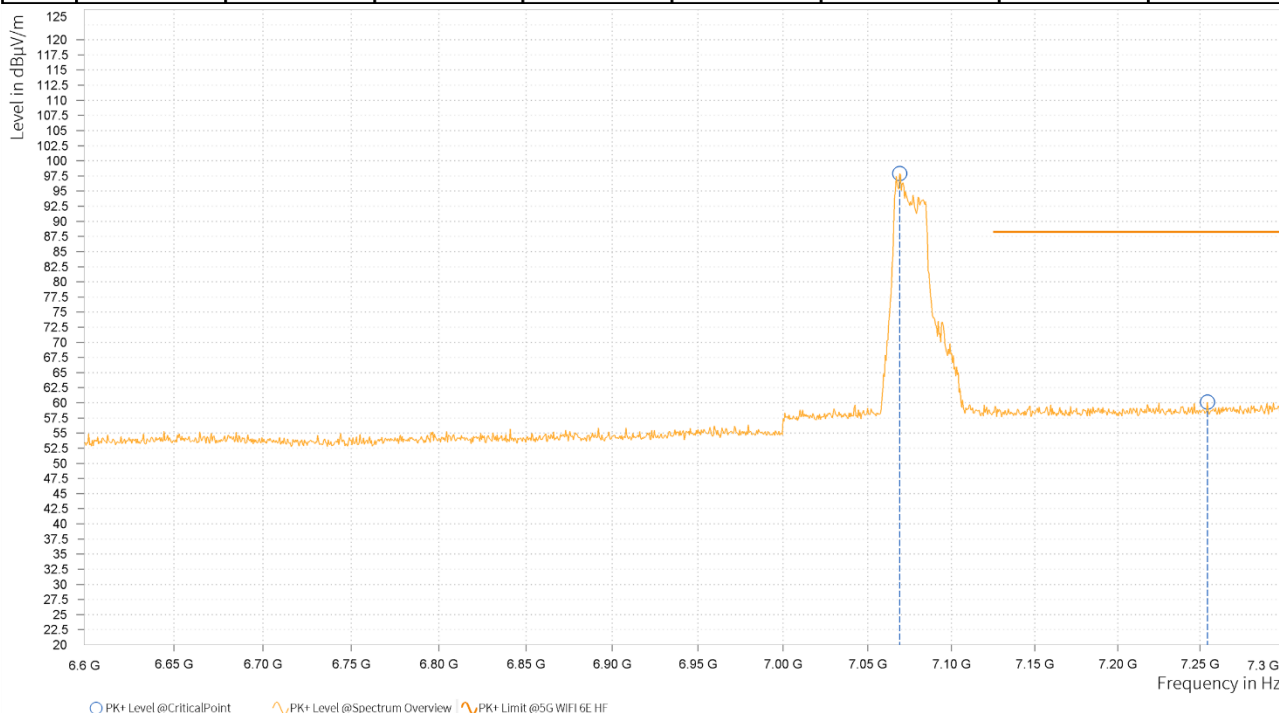


Test Report No.: RF260714B018

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	7,068.000	84.00			15.22	H	355.1	2.00
2	7,233.000	45.46	68.20	22.74	15.95	H	62.6	1.00

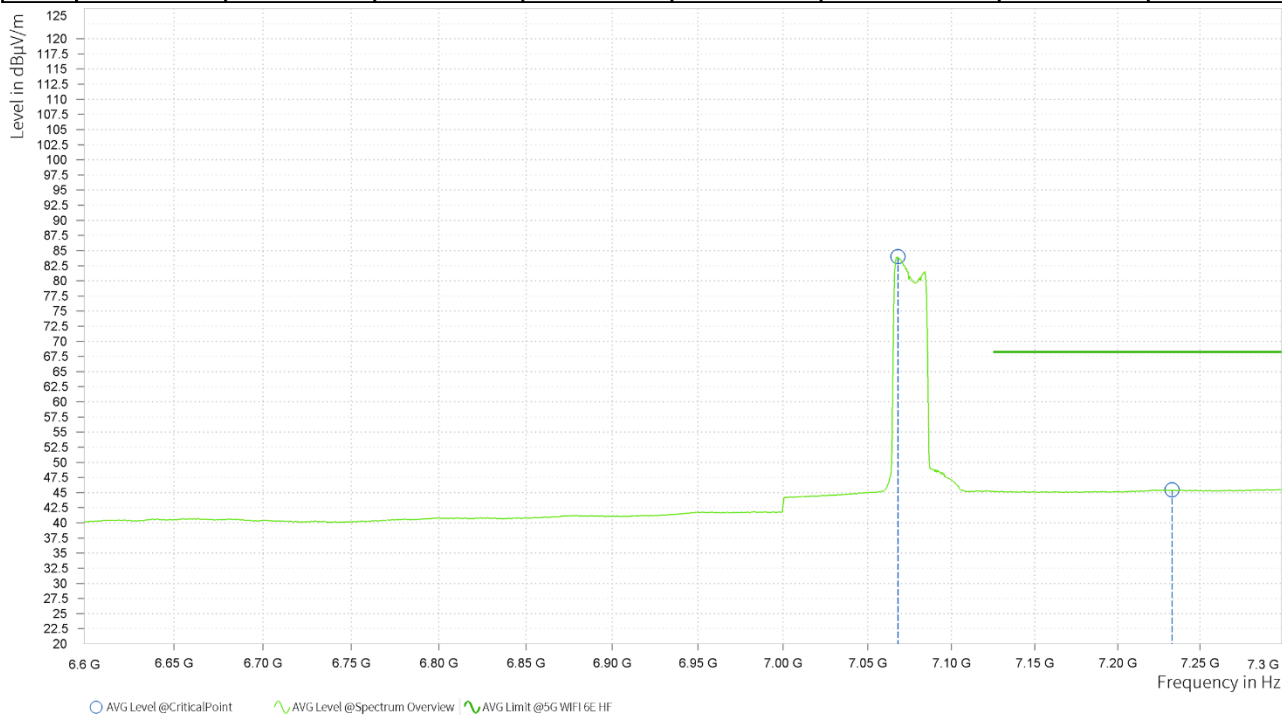


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	7,067.000	98.47			15.21	V	100.2	2.00
2	7,236.500	60.35	88.20	27.85	15.93	V	354.5	2.00

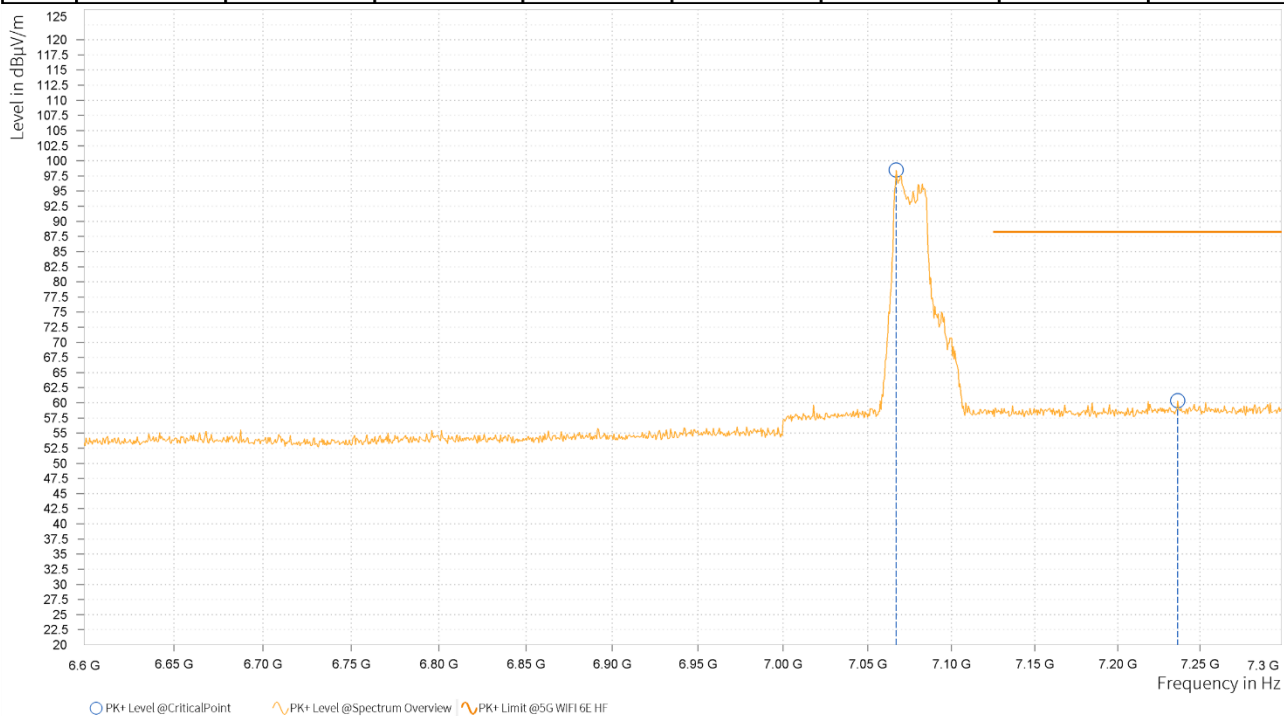

Test Report No.: RF260714B018

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	7,078.500	85.02			15.26	V	258.6	1.00
2	7,220.500	45.50	68.20	22.70	15.99	V	231.6	2.00

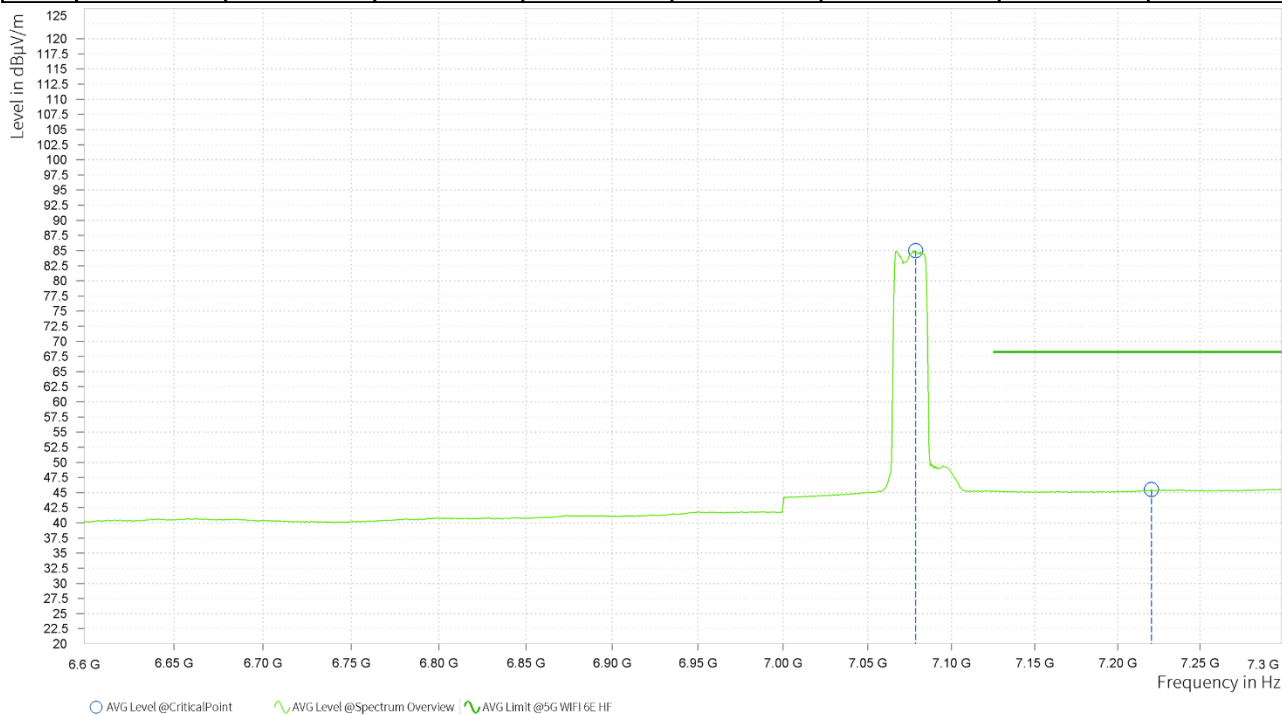

REMARKS:


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 7085MHz: Fundamental frequency.



Test Report No.: RF260714B018
802.11be (80MHz)_RU65


CHANNEL	TX Channel 7	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,867.141	53.44	88.20	34.76	13.94	H	251.9	2.00
1	5,966.920	100.20			13.77	H	357.8	1.00

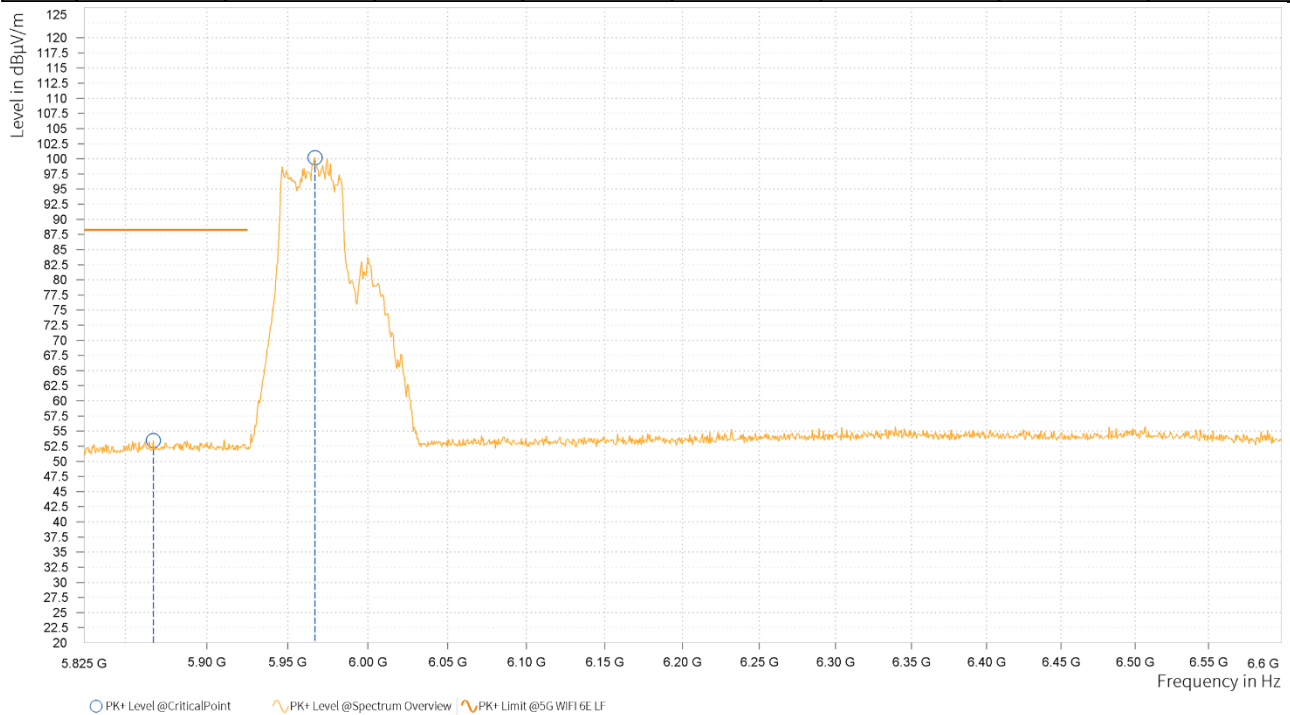


Test Report No.: RF260714B018

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,898.141	40.67	68.20	27.53	14.10	H	4.9	1.00
1	5,965.953	88.23			13.77	H	359	1.00

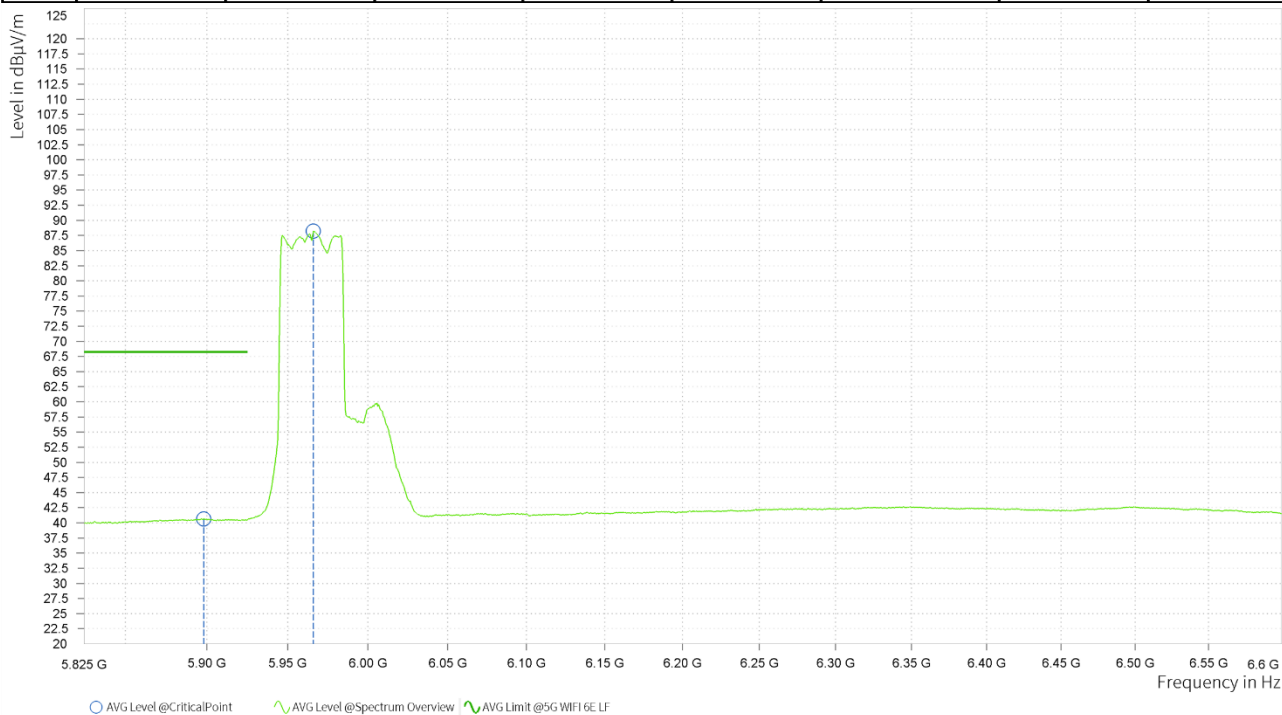

Test Report No.: RF260714B018

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,890.391	53.50	88.20	34.70	14.08	V	51.8	1.00
1	5,976.609	99.41			13.79	V	359	2.00

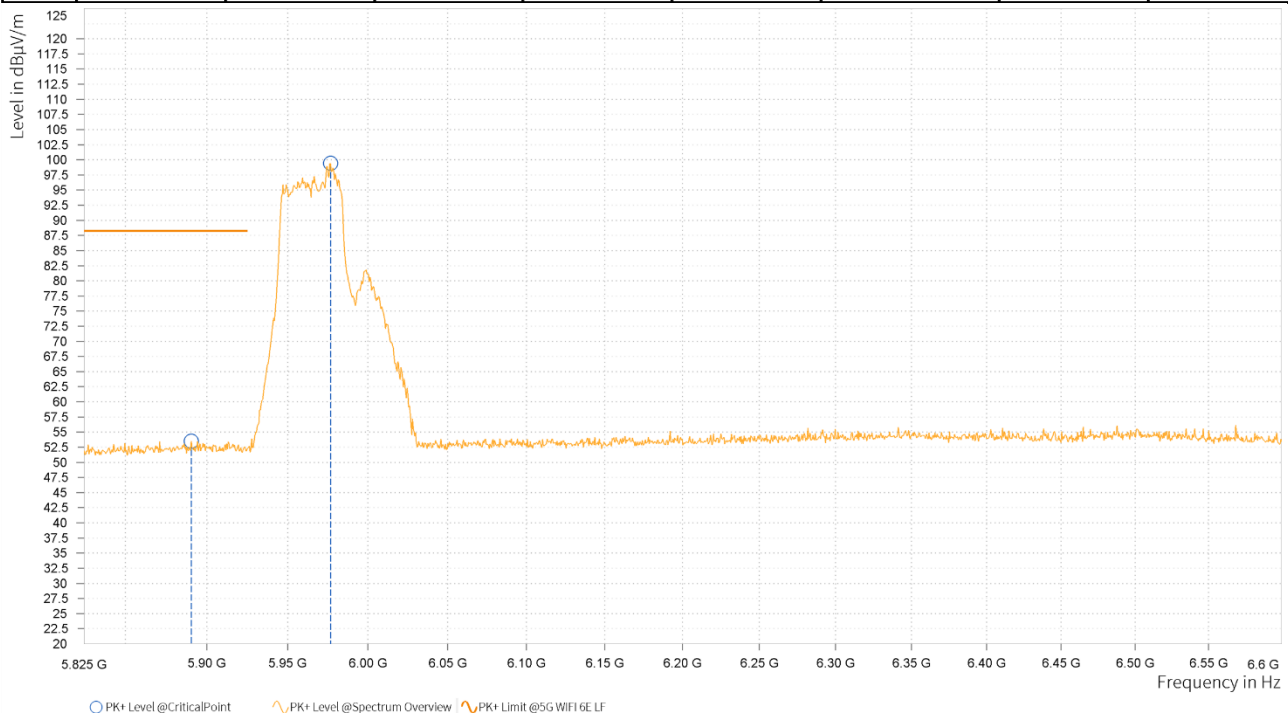

Test Report No.: RF260714B018

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,900.563	40.63	68.20	27.57	14.10	V	6.2	1.00
1	5,966.922	89.30			13.77	V	247.8	1.00



REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5985MHz: Fundamental frequency.




Test Report No.: RF260714B018

CHANNEL	TX Channel 215	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	6,999.500	96.59			14.75	H	310	1.00
2	7,288.000	60.84	88.20	27.36	15.94	H	174.2	2.00

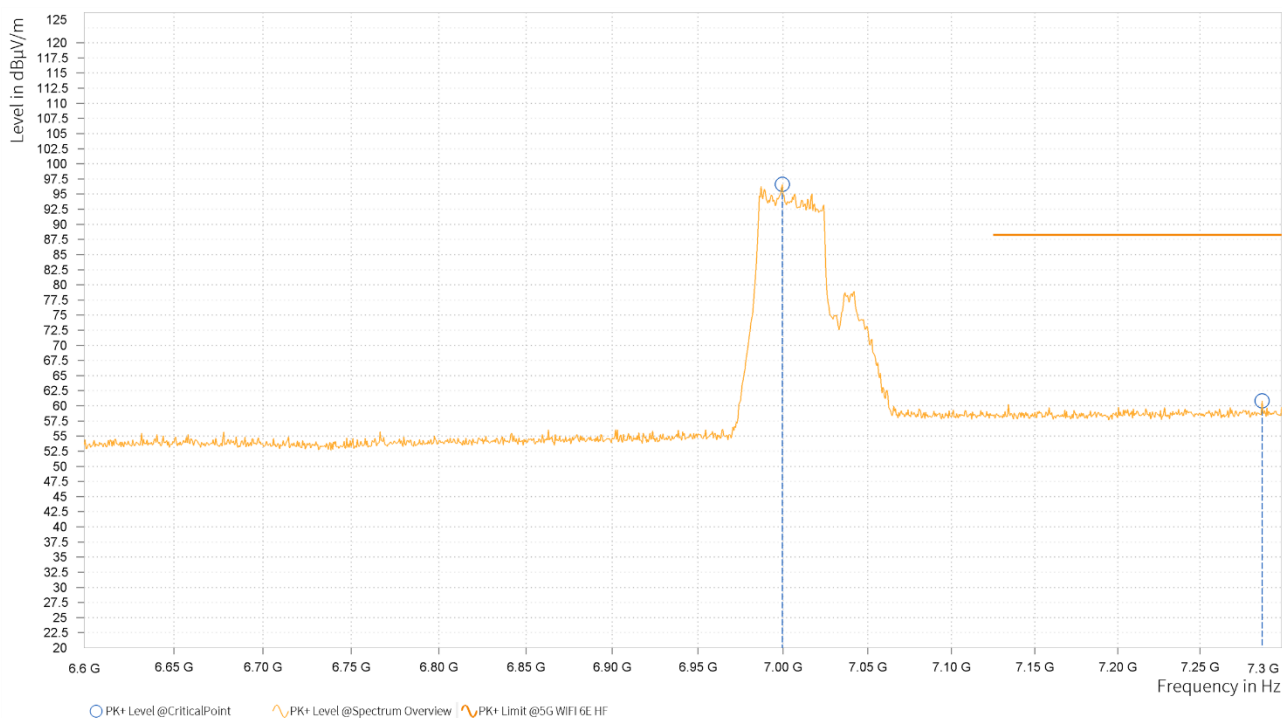

Test Report No.: RF260714B018

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	6,999.500	83.62			14.75	H	308.9	1.00
2	7,226.500	45.44	68.20	22.76	15.97	H	246.6	1.00



Test Report No.: RF260714B018

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	6,989.000	97.51			14.73	V	93	2.00
2	7,210.500	59.88	88.20	28.32	16.03	V	60.2	1.00

