



# FCC RADIO TEST REPORT

Applicant : Green Packet Berhad, Taiwan

---

Address : 6F, No. 21, Lane 583, Rueiguang Rd. Neihu  
District, Taipei City 11492, Taiwan

---

Equipment : Bluetooth Low Energy TPMS

---

Model No. : PT-240, KT-240

---

Trade Name : Roadmio / Greenpacket

---

FCC ID. : W9VPT240

---

## I HEREBY CERTIFY THAT :

The sample was received on Mar. 01, 2018 and the testing was carried out on Mar. 10, 2018 at Cerpass Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of Cerpass Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Assistant Manager

Tested by:

Spree Yei / Engineer

Laboratory Accreditation:

Cerpass Technology Corporation Test Laboratory





## Contents

|                                                               |           |
|---------------------------------------------------------------|-----------|
| <b>1. Summary of Test Procedure and Test Results.....</b>     | <b>5</b>  |
| 1.1 Applicable Standards .....                                | 5         |
| <b>2. Test Configuration of Equipment under Test.....</b>     | <b>6</b>  |
| 2.1 Feature of Equipment under Test.....                      | 6         |
| 2.2 Carrier Frequency of Channels.....                        | 6         |
| 2.3 Test Mode and Test Software .....                         | 7         |
| 2.4 Description of Test System.....                           | 7         |
| 2.5 General Information of Test.....                          | 8         |
| <b>3. Test Equipment and Ancillaries Used for Tests .....</b> | <b>9</b>  |
| <b>4. Antenna Requirements.....</b>                           | <b>10</b> |
| 4.1 Standard Applicable .....                                 | 10        |
| 4.2 Antenna Construction and Directional Gain.....            | 10        |
| <b>5. Test of AC Power Line Conducted Emission .....</b>      | <b>11</b> |
| <b>6. Test of Spurious Emission (Radiated) .....</b>          | <b>12</b> |
| 6.1 Test Limit .....                                          | 12        |
| 6.2 Test Procedures .....                                     | 12        |
| 6.3 Typical Test Setup .....                                  | 13        |
| 6.4 Test Result and Data (9kHz ~ 30MHz).....                  | 14        |
| 6.5 Test Result and Data (30MHz ~ 1GHz).....                  | 14        |
| 6.6 Test Result and Data (1GHz ~ 25GHz).....                  | 16        |
| 6.7 Restricted Bands of Operation .....                       | 22        |
| 6.8 Test Photographs (30MHz ~ 1GHz) .....                     | 23        |
| 6.9 Test Photographs (1GHz ~ 25GHz) .....                     | 24        |
| <b>7. Test of Spurious Emission (Conducted).....</b>          | <b>25</b> |
| 7.1 Test Limit .....                                          | 25        |
| 7.2 Test Procedure .....                                      | 25        |
| 7.3 Test Setup Layout .....                                   | 25        |
| 7.4 Test Result and Data .....                                | 25        |
| <b>8. 6dB Bandwidth Measurement Data.....</b>                 | <b>28</b> |
| 8.1 Test Limit .....                                          | 28        |
| 8.2 Test Procedures .....                                     | 28        |
| 8.3 Test Setup Layout .....                                   | 28        |
| 8.4 Test Result and Data .....                                | 28        |
| <b>9. Maximum Peak and Average Output Power.....</b>          | <b>30</b> |
| 9.1 Test Limit .....                                          | 30        |
| 9.2 Test Procedures .....                                     | 30        |
| 9.3 Test Setup Layout .....                                   | 30        |
| 9.4 Test Result and Data .....                                | 30        |
| <b>10. Power Spectral Density .....</b>                       | <b>31</b> |
| 10.1 Test Limit .....                                         | 31        |
| 10.2 Test Procedures .....                                    | 31        |
| 10.3 Test Setup Layout .....                                  | 31        |
| 10.4 Test Result and Data .....                               | 31        |



|                                           |           |
|-------------------------------------------|-----------|
| <b>11. Radio Frequency Exposure .....</b> | <b>33</b> |
| 11.1 Applicable Standards .....           | 33        |
| 11.2 EUT Specification .....              | 33        |
| 11.1 Test Results .....                   | 34        |
| 11.2 Calculation .....                    | 34        |
| 11.3 Maximum Permissible Exposure .....   | 34        |

[illegible]



## 1. Summary of Test Procedure and Test Results

### 1.1 Applicable Standards

**ANSI C63.4:2014**

**ANSI C63.10:2013**

**FCC Rules and Regulations Part 15 Subpart C §15.247**

| FCC Rule         | Description of Test                | Result |
|------------------|------------------------------------|--------|
| 15.203           | . Antenna Requirement              | Pass   |
| 15.207           | . AC Power Line Conducted Emission | Pass   |
| 15.209<br>15.205 | . Radiated Spurious Emission       | Pass   |
| 15.247(d)        | . Conducted Spurious Emission      | Pass   |
| 15.247(a)(2)     | . 6dB Bandwidth                    | Pass   |
| 15.247(b)        | . Maximum Peak Output Power        | Pass   |
| 15.247(e)        | . Power Spectral Density           | Pass   |

This EUT has been also tested and compiled with the requirement of FCC Part 15, Subpart B, recorded in a separate test report.



## 2. Test Configuration of Equipment under Test

### 2.1 Feature of Equipment under Test

|                      |                             |
|----------------------|-----------------------------|
| Frequency Range      | 2402-2480 MHz               |
| Type of Modulation   | GFSK (Bluetooth low energy) |
| Channel of Bandwidth | 2MHz                        |
| Channel numbers      | 40 channels                 |
| Type of Antenna      | Iron Wire Antenna           |
| Antenna Gain         | -0.42 dBi                   |
| Rating Input         | DC 3V from battery          |

Note: Model number difference of this application is for marketing purpose, the circuit design and layout are the same.

### 2.2 Carrier Frequency of Channels

| Channel    | Frequency (MHz) | Channel    | Frequency (MHz) | Channel    | Frequency (MHz) |
|------------|-----------------|------------|-----------------|------------|-----------------|
| <b>*00</b> | <b>2402</b>     | 14         | 2430            | 28         | 2458            |
| 01         | 2404            | 15         | 2432            | 29         | 2460            |
| 02         | 2406            | 16         | 2434            | 30         | 2462            |
| 03         | 2408            | 17         | 2436            | 31         | 2464            |
| 04         | 2410            | 18         | 2438            | 32         | 2466            |
| 05         | 2412            | <b>*19</b> | <b>2440</b>     | 33         | 2468            |
| 06         | 2414            | 20         | 2442            | 34         | 2470            |
| 07         | 2416            | 21         | 2444            | 35         | 2472            |
| 08         | 2418            | 22         | 2446            | 36         | 2474            |
| 09         | 2420            | 23         | 2448            | 37         | 2476            |
| 10         | 2422            | 24         | 2450            | 38         | 2478            |
| 11         | 2424            | 25         | 2452            | <b>*39</b> | <b>2480</b>     |
| 12         | 2426            | 26         | 2454            | --         | --              |
| 13         | 2428            | 27         | 2456            | --         | --              |

Note: Channels remarked \* are selected to perform test.



### 2.3 Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.4
- b. The complete test system included EUT for RF test.
- c. An executive program, "QBlue Evaluation Tool \_v1.06" under WIN 8 was executed to transmit and receive data via Bluetooth.
- d. The test mode of RF test as follow:  
Mode 1: GFSK (1Mbps, CH 00: 2402MHz, CH 19: 2440MHz, CH 39: 2480MHz)

### 2.4 Description of Test System

The EUT was tested alone. No support devices are needed for testing.



## 2.5 General Information of Test

|                               |                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                              |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Site                     | <b>Cerpass Technology Corporation Test Laboratory</b><br>Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.)<br>Tel:+886-3-3226-888<br>Fax:+886-3-3226-881<br>Address: No.68-1, Shihbachongsi, Shihding Township, New Taipei City 223, Taiwan, R.O.C.<br>Tel: +886-2-2663-8582 |                                                                                                                                                                              |
|                               | FCC                                                                                                                                                                                                                                                                                                            | TW1079, TW1061, TW1439                                                                                                                                                       |
|                               | IC                                                                                                                                                                                                                                                                                                             | 4934E-1, 4934E-2                                                                                                                                                             |
|                               | VCCI                                                                                                                                                                                                                                                                                                           | T-2205 for Telecommunication Test<br>C-4663 for Conducted emission test<br>R-4218, R-4399 for Radiated emission test<br>G-10812, G-10813 for radiated disturbance above 1GHz |
| Frequency Range Investigated: | Conducted: from 150kHz to 30 MHz<br>Radiation: from 30 MHz to 25,000MHz                                                                                                                                                                                                                                        |                                                                                                                                                                              |
| Test Distance:                | The test distance of radiated emission from antenna to EUT is 3 M.                                                                                                                                                                                                                                             |                                                                                                                                                                              |



### 3. Test Equipment and Ancillaries Used for Tests

| Instrument                     | Manufacturer    | Model No.                | Serial No.  | Calibration Date | Valid Date |
|--------------------------------|-----------------|--------------------------|-------------|------------------|------------|
| EMI Receiver                   | R&S             | ESCI3                    | 100821      | 2017/09/08       | 2018/09/07 |
| Bilog Antenna                  | Schwarzbeck     | VULB9168                 | 369         | 2017/03/15       | 2018/03/14 |
| Active Loop Antenna            | EMCO            | 6507                     | 40855       | 2017/05/15       | 2018/05/14 |
| Horn Antenna                   | EMCO            | 3115                     | 31589       | 2017/03/16       | 2018/03/15 |
| Horn Antenna                   | EMCO            | 3116                     | 31970       | 2017/03/29       | 2018/03/28 |
| EXA Signal Analyzer            | KEYSIGHT        | N9010A                   | MY54200207  | 2017/03/17       | 2018/03/16 |
| Preamplifier                   | EM              | EM330                    | 60658       | 2017/09/08       | 2018/09/07 |
| Preamplifier                   | EMC INSTRUMENTS | EMC051845SE              | 980333      | 2017/09/20       | 2018/09/19 |
| Preamplifier                   | EMC INSTRUMENTS | EMC184045                | 980065      | 2017/11/10       | 2018/11/09 |
| MXG MW Analog Signal Generator | KEYSIGHT        | N5183A                   | MY50142931  | 2017/03/17       | 2018/03/16 |
| Spectrum Analyzer              | R&S             | FSP40                    | 100219      | 2017/07/01       | 2018/06/30 |
| Attenuator                     | KEYSIGHT        | 8491B                    | MY39250705  | 2017/09/04       | 2018/09/03 |
| Rotary Attenuator              | Agilent         | 8495B                    | MY42146680  | 2017/03/13       | 2018/03/12 |
| Temp & Humi chamber            | T-MACHINE       | TMJ-9712                 | T-12-040111 | 2017/09/04       | 2018/09/03 |
| Series Power Meter             | Anritsu         | ML2495A                  | 1224005     | 2018/03/01       | 2019/02/28 |
| Power Sensor                   | Anritsu         | MA2411B                  | 1207295     | 2018/03/01       | 2019/02/28 |
| Cable                          | EMC INSTRUMENTS | EMC104-SM-S M-500        | 160318W     | 2018/02/09       | 2019/02/08 |
| Cable                          | EMC INSTRUMENTS | EMC104-SM-S M-3000       | 160317W     | 2018/02/09       | 2019/02/08 |
| Software                       | Farad           | Ez-EMC                   | ver.ct3a1   | N/A              | N/A        |
| Software                       | AUDIX           | E3                       | V8.2014-8-6 | N/A              | N/A        |
| Software                       | Keysight        | N7607B Signal Studio     | V3.0.0.0    | N/A              | N/A        |
| Software                       | Keysight        | Inservice MonitorUtility | N/A         | N/A              | N/A        |



## 4. Antenna Requirements

### 4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 4.2 Antenna Construction and Directional Gain

| Antenna Type | Antenna Gain |
|--------------|--------------|
| Wire Antenna | -0.42 dBi    |



## 5. Test of AC Power Line Conducted Emission

Not required test for DC power source.



## 6. Test of Spurious Emission (Radiated)

### 6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

| Frequency (MHz) | Field Strength (microvolt/meter) | Measurement Distance (meters) |
|-----------------|----------------------------------|-------------------------------|
| 0.009 ~ 0.490   | 2400/F(kHz)                      | 300                           |
| 0.490 ~ 1.705   | 24000/F(kHz)                     | 30                            |
| 1.705 ~ 30.0    | 30                               | 30                            |
| 30 ~ 88         | 100                              | 3                             |
| 88 ~ 216        | 150                              | 3                             |
| 216 ~ 960       | 200                              | 3                             |
| Above 960       | 500                              | 3                             |


### 6.2 Test Procedures

- The EUT was placed on a rotatable table top 0.8 meter above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.




### 6.3 Typical Test Setup


Below 30MHz test setup

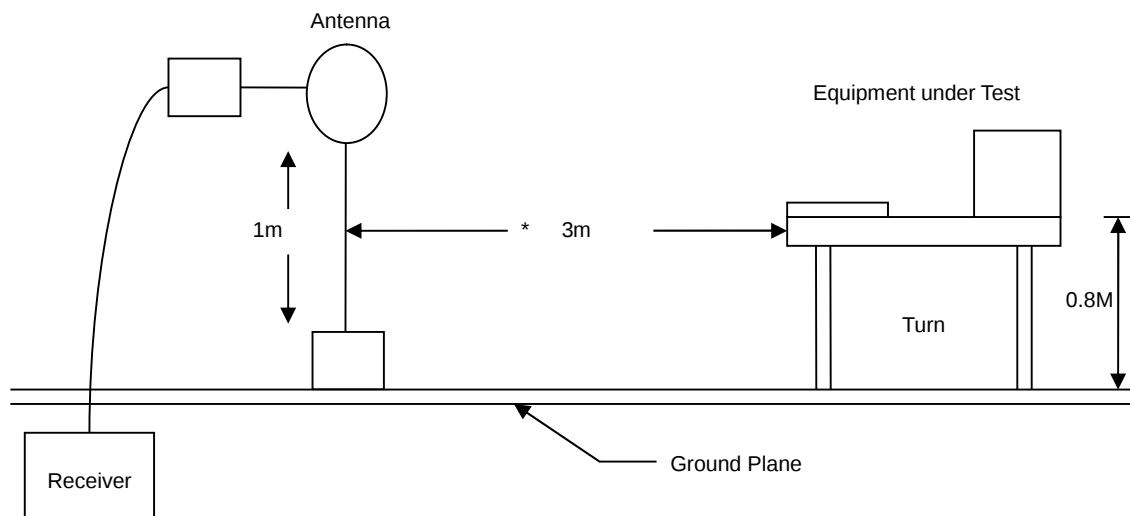

30MHz- 1GHz Test Setup

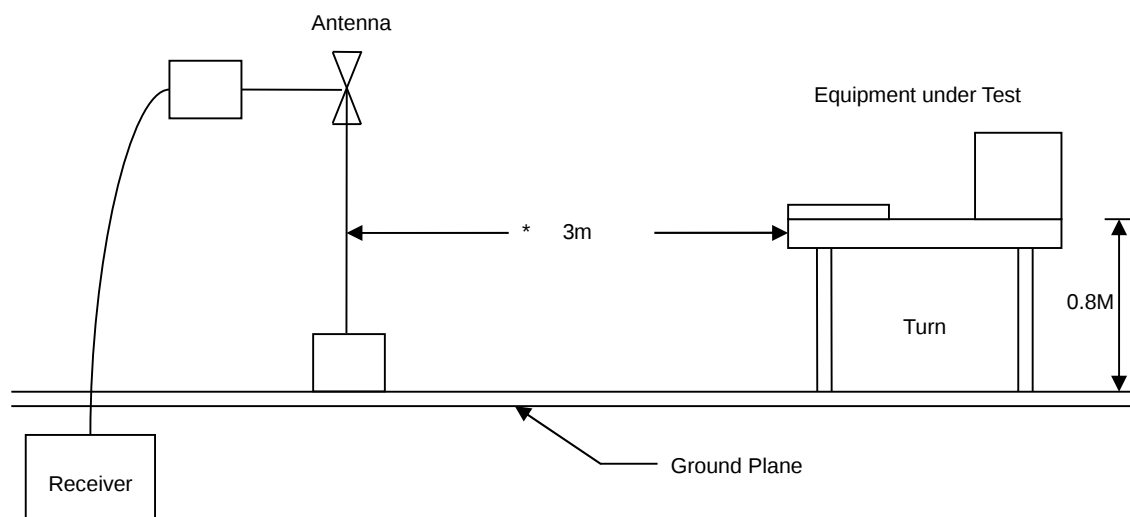

Above 1GHz Test Setup

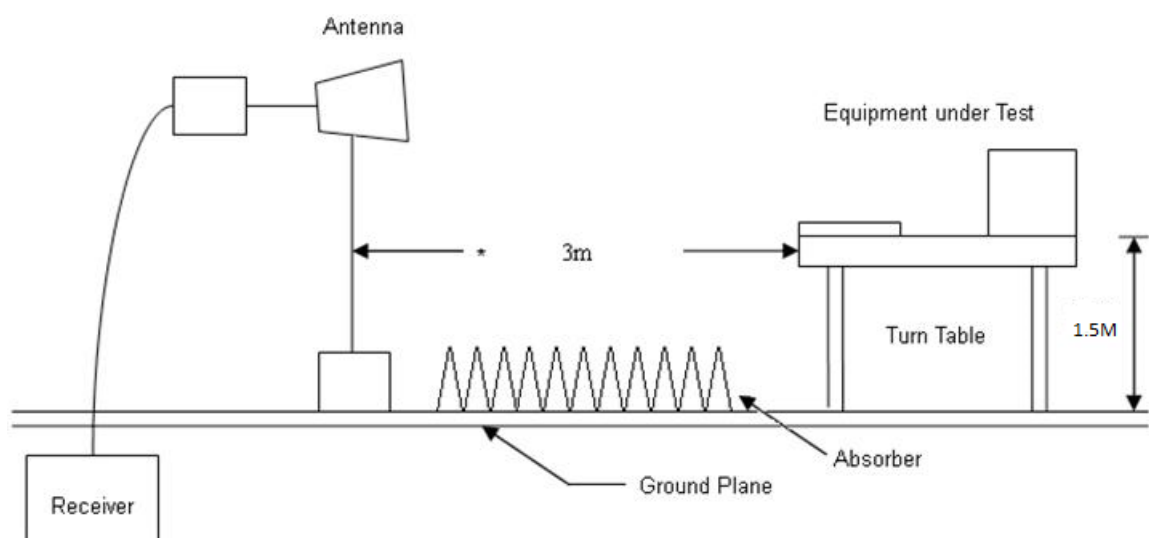




#### 6.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

#### 6.5 Test Result and Data (30MHz ~ 1GHz)

|           |                 |             |            |
|-----------|-----------------|-------------|------------|
| Power     | : DC 12V        | Pol/Phase   | : VERTICAL |
| Test Mode | : Mode 1        | Temperature | : 21 °C    |
| Test Date | : Mar. 07, 2018 | Humidity    | : 60 %     |

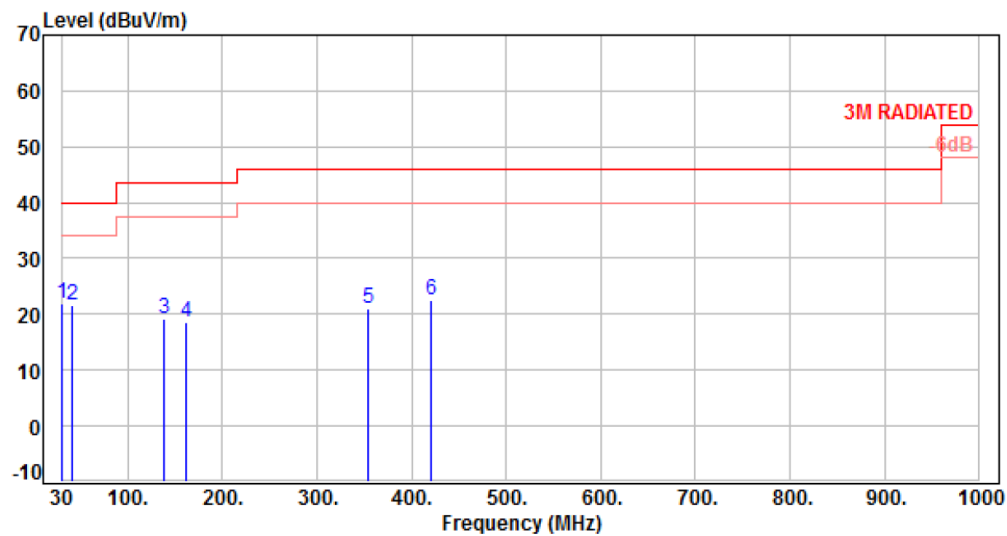

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|--------------|--------------|-------------|----------|-------------|---------------|-----|
| 1   | 30.00           | -10.92      | 32.94          | 22.02        | 40.00        | -17.98      | Peak     | 400         | 0             | P   |
| 2   | 40.67           | -10.30      | 32.04          | 21.74        | 40.00        | -18.26      | Peak     | 400         | 0             | P   |
| 3   | 137.67          | -10.59      | 29.72          | 19.13        | 43.50        | -24.37      | Peak     | 400         | 0             | P   |
| 4   | 160.95          | -9.86       | 28.54          | 18.68        | 43.50        | -24.82      | Peak     | 400         | 0             | P   |
| 5   | 353.98          | -7.37       | 28.47          | 21.10        | 46.00        | -24.90      | Peak     | 400         | 0             | P   |
| 6   | 419.94          | -5.50       | 27.97          | 22.47        | 46.00        | -23.53      | Peak     | 400         | 0             | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |                 |             |              |
|-----------|-----------------|-------------|--------------|
| Power     | : DC 12V        | Pol/Phase   | : HORIZONTAL |
| Test Mode | : Mode 1        | Temperature | : 21 °C      |
| Test Date | : Mar. 07, 2018 | Humidity    | : 60 %       |

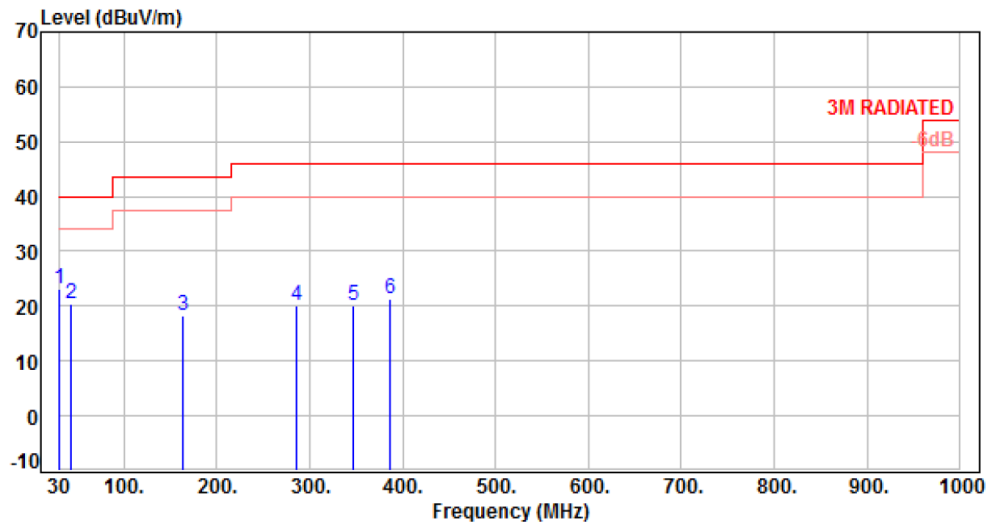

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|--------------|--------------|-------------|----------|-------------|---------------|-----|
| 1   | 30.00           | -10.92      | 33.99          | 23.07        | 40.00        | -16.93      | Peak     | 100         | 0             | P   |
| 2   | 42.61           | -10.12      | 30.67          | 20.55        | 40.00        | -19.45      | Peak     | 100         | 0             | P   |
| 3   | 163.86          | -9.93       | 28.19          | 18.26        | 43.50        | -25.24      | Peak     | 100         | 0             | P   |
| 4   | 286.08          | -9.24       | 29.40          | 20.16        | 46.00        | -25.84      | Peak     | 100         | 0             | P   |
| 5   | 347.19          | -7.56       | 27.55          | 19.99        | 46.00        | -26.01      | Peak     | 100         | 0             | P   |
| 6   | 385.99          | -6.40       | 27.88          | 21.48        | 46.00        | -24.52      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



## 6.6 Test Result and Data (1GHz ~ 25GHz)

|           |                 |             |            |
|-----------|-----------------|-------------|------------|
| Power     | : DC 12V        | Pol/Phase   | : VERTICAL |
| Test Mode | : Mode 1, CH00  | Temperature | : 21 °C    |
| Test Date | : Mar. 01, 2018 | Humidity    | : 60 %     |

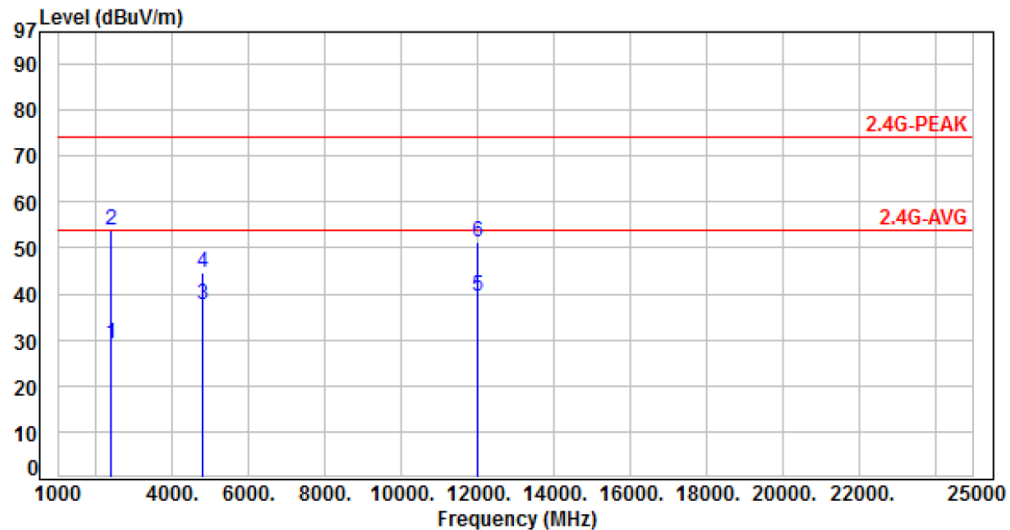

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|--------------|--------------|-------------|----------|-------------|---------------|-----|
| 1   | 2390.00         | -14.45      | 43.50          | 29.05        | 54.00        | -24.95      | Average  | 126         | 237           | P   |
| 2   | 2390.00         | -14.45      | 68.30          | 53.85        | 74.00        | -20.15      | Peak     | 126         | 237           | P   |
| 3   | 4804.00         | -6.66       | 44.20          | 37.54        | 54.00        | -16.46      | Average  | 294         | 240           | P   |
| 4   | 4804.00         | -6.66       | 51.20          | 44.54        | 74.00        | -29.46      | Peak     | 294         | 240           | P   |
| 5   | 12010.00        | 4.94        | 34.50          | 39.44        | 54.00        | -14.56      | Average  | 155         | 174           | P   |
| 6   | 12010.00        | 4.94        | 46.30          | 51.24        | 74.00        | -22.76      | Peak     | 155         | 174           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |                 |             |              |
|-----------|-----------------|-------------|--------------|
| Power     | : DC 12V        | Pol/Phase   | : HORIZONTAL |
| Test Mode | : Mode 1, CH00  | Temperature | : 21 °C      |
| Test Date | : Mar. 01, 2018 | Humidity    | : 60 %       |

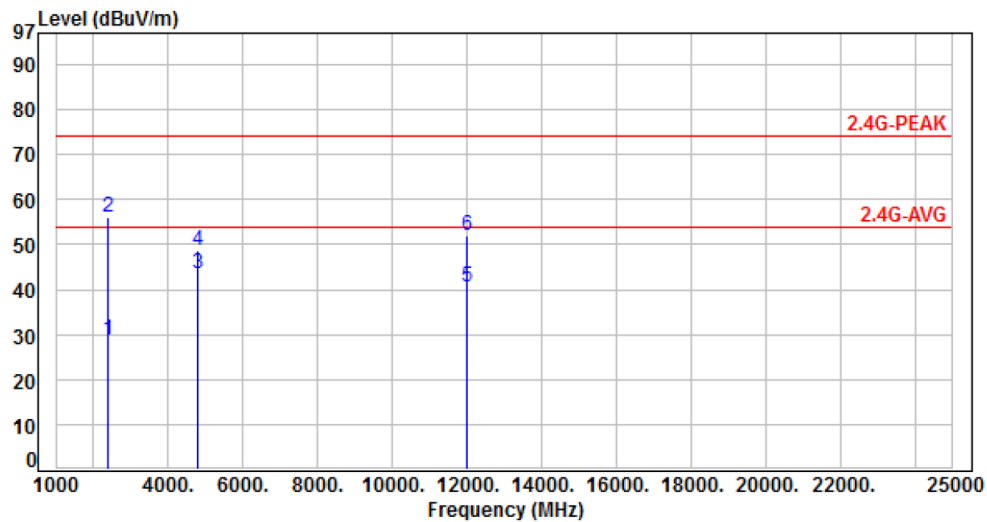

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|--------------|--------------|-------------|----------|-------------|---------------|-----|
| 1   | 2390.00         | -14.45      | 43.20          | 28.75        | 54.00        | -25.25      | Average  | 180         | 300           | P   |
| 2   | 2390.00         | -14.45      | 70.40          | 55.95        | 74.00        | -18.05      | Peak     | 180         | 300           | P   |
| 3   | 4804.00         | -6.66       | 50.20          | 43.54        | 54.00        | -10.46      | Average  | 100         | 160           | P   |
| 4   | 4804.00         | -6.66       | 55.50          | 48.84        | 74.00        | -25.16      | Peak     | 100         | 160           | P   |
| 5   | 12010.00        | 4.94        | 35.60          | 40.54        | 54.00        | -13.46      | Average  | 100         | 55            | P   |
| 6   | 12010.00        | 4.94        | 47.10          | 52.04        | 74.00        | -21.96      | Peak     | 100         | 55            | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |                 |             |            |
|-----------|-----------------|-------------|------------|
| Power     | : DC 12V        | Pol/Phase   | : VERTICAL |
| Test Mode | : Mode 1, CH19  | Temperature | : 21 °C    |
| Test Date | : Mar. 01, 2018 | Humidity    | : 60 %     |

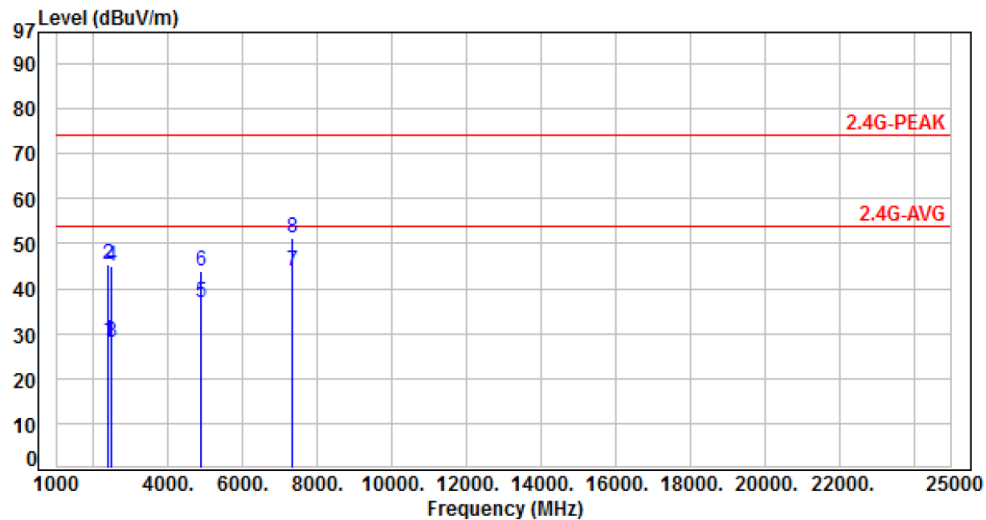

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|--------------|--------------|-------------|----------|-------------|---------------|-----|
| 1   | 2390.00         | -14.45      | 42.67          | 28.22        | 54.00        | -25.78      | Average  | 100         | 250           | P   |
| 2   | 2390.00         | -14.45      | 59.90          | 45.45        | 74.00        | -28.55      | Peak     | 100         | 250           | P   |
| 3   | 2483.50         | -14.10      | 42.12          | 28.02        | 54.00        | -25.98      | Average  | 100         | 250           | P   |
| 4   | 2483.50         | -14.10      | 59.10          | 45.00        | 74.00        | -29.00      | Peak     | 100         | 250           | P   |
| 5   | 4880.00         | -6.40       | 43.20          | 36.80        | 54.00        | -17.20      | Average  | 102         | 130           | P   |
| 6   | 4880.00         | -6.40       | 50.20          | 43.80        | 74.00        | -30.20      | Peak     | 102         | 130           | P   |
| 7   | 7320.00         | -1.88       | 45.91          | 44.03        | 54.00        | -9.97       | Average  | 254         | 144           | P   |
| 8   | 7320.00         | -1.88       | 53.10          | 51.22        | 74.00        | -22.78      | Peak     | 254         | 144           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |                 |             |              |
|-----------|-----------------|-------------|--------------|
| Power     | : DC 12V        | Pol/Phase   | : HORIZONTAL |
| Test Mode | : Mode 1, CH19  | Temperature | : 21 °C      |
| Test Date | : Mar. 01, 2018 | Humidity    | : 60 %       |

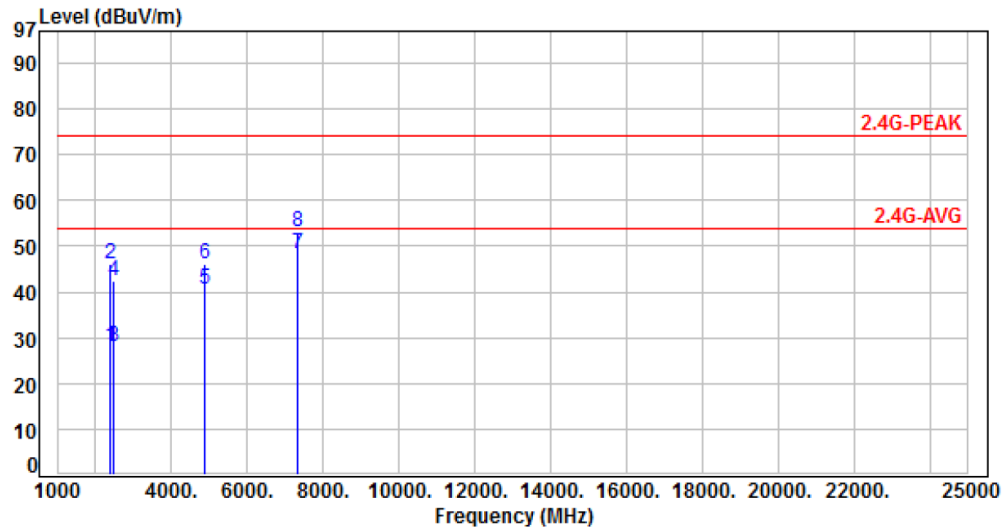

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|--------------|--------------|-------------|----------|-------------|---------------|-----|
| 1   | 2390.00         | -14.45      | 42.40          | 27.95        | 54.00        | -26.05      | Average  | 376         | 82            | P   |
| 2   | 2390.00         | -14.45      | 60.50          | 46.05        | 74.00        | -27.95      | Peak     | 376         | 82            | P   |
| 3   | 2483.50         | -14.10      | 42.00          | 27.90        | 54.00        | -26.10      | Average  | 376         | 82            | P   |
| 4   | 2483.50         | -14.10      | 56.50          | 42.40        | 74.00        | -31.60      | Peak     | 376         | 82            | P   |
| 5   | 4880.00         | -6.40       | 46.80          | 40.40        | 54.00        | -13.60      | Average  | 100         | 126           | P   |
| 6   | 4880.00         | -6.40       | 52.60          | 46.20        | 74.00        | -27.80      | Peak     | 100         | 126           | P   |
| 7   | 7320.00         | -1.88       | 50.20          | 48.32        | 54.00        | -5.68       | Average  | 331         | 285           | P   |
| 8   | 7320.00         | -1.88       | 55.10          | 53.22        | 74.00        | -20.78      | Peak     | 331         | 285           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |                 |             |            |
|-----------|-----------------|-------------|------------|
| Power     | : DC 12V        | Pol/Phase   | : VERTICAL |
| Test Mode | : Mode 1, CH39  | Temperature | : 21 °C    |
| Test Date | : Mar. 01, 2018 | Humidity    | : 60 %     |

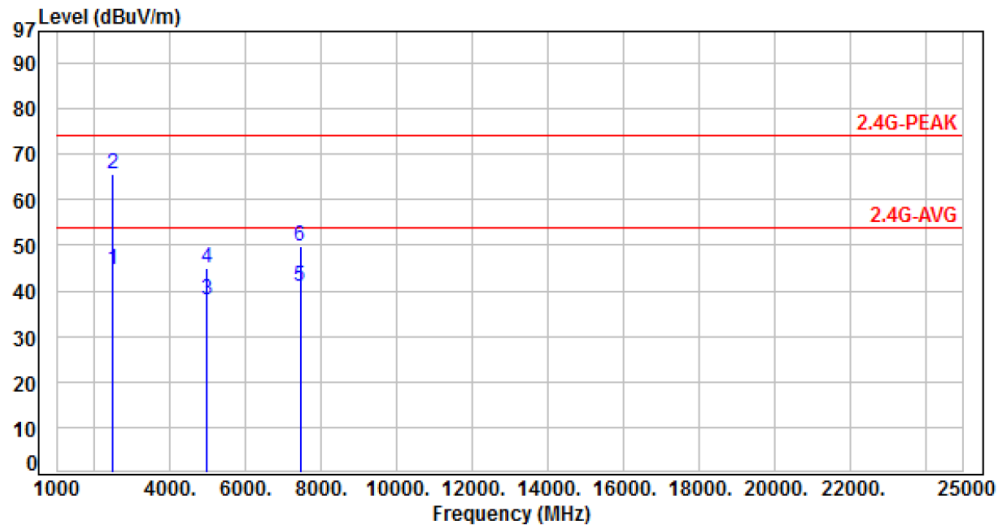

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|--------------|--------------|-------------|----------|-------------|---------------|-----|
| 1   | 2483.50         | -14.10      | 58.80          | 44.70        | 54.00        | -9.30       | Average  | 100         | 248           | P   |
| 2   | 2483.50         | -14.10      | 79.80          | 65.70        | 74.00        | -8.30       | Peak     | 100         | 248           | P   |
| 3   | 4960.00         | -6.13       | 44.30          | 38.17        | 54.00        | -15.83      | Average  | 300         | 291           | P   |
| 4   | 4960.00         | -6.13       | 51.20          | 45.07        | 74.00        | -28.93      | Peak     | 300         | 291           | P   |
| 5   | 7440.00         | -1.51       | 42.50          | 40.99        | 54.00        | -13.01      | Average  | 134         | 149           | P   |
| 6   | 7440.00         | -1.51       | 51.20          | 49.69        | 74.00        | -24.31      | Peak     | 134         | 149           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



|           |                 |             |              |
|-----------|-----------------|-------------|--------------|
| Power     | : DC 12V        | Pol/Phase   | : HORIZONTAL |
| Test Mode | : Mode 1, CH39  | Temperature | : 21 °C      |
| Test Date | : Mar. 01, 2018 | Humidity    | : 60 %       |

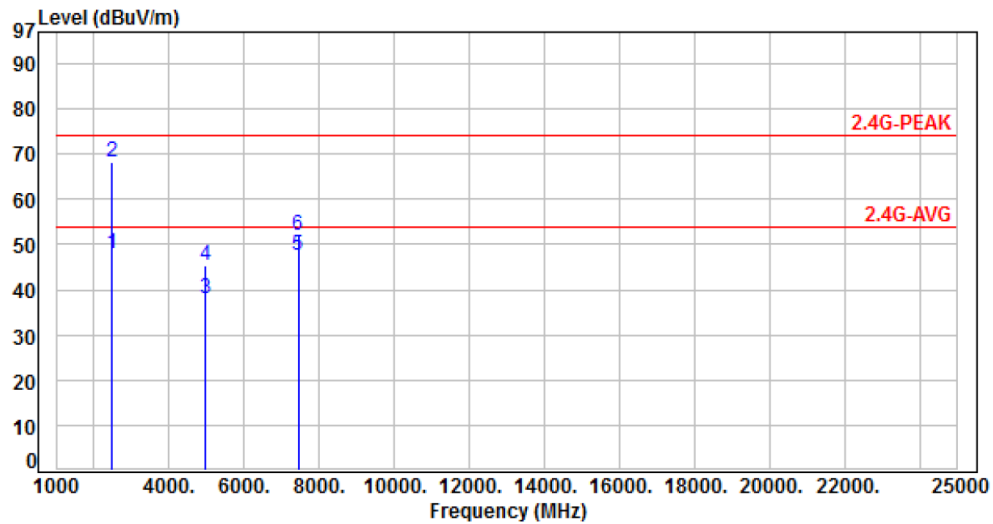

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|--------------|--------------|-------------|----------|-------------|---------------|-----|
| 1   | 2483.50         | -14.10      | 61.90          | 47.80        | 54.00        | -6.20       | Average  | 393         | 288           | P   |
| 2   | 2483.50         | -14.10      | 82.30          | 68.20        | 74.00        | -5.80       | Peak     | 393         | 288           | P   |
| 3   | 4960.00         | -6.13       | 44.30          | 38.17        | 54.00        | -15.83      | Average  | 100         | 130           | P   |
| 4   | 4960.00         | -6.13       | 51.60          | 45.47        | 74.00        | -28.53      | Peak     | 100         | 130           | P   |
| 5   | 7440.00         | -1.51       | 49.10          | 47.59        | 54.00        | -6.41       | Average  | 310         | 295           | P   |
| 6   | 7440.00         | -1.51       | 53.50          | 51.99        | 74.00        | -22.01      | Peak     | 310         | 295           | P   |

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



## 6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

| MHz                 | MHz                   | MHz             | GHz             |
|---------------------|-----------------------|-----------------|-----------------|
| 0.09000 – 0.11000   | 16.42000 – 16.42300   | 399.9 – 410.0   | 4.500 – 5.250   |
| 0.49500 – 0.505**   | 16.69475 – 16.69525   | 608.0 – 614.0   | 5.350 – 5.460   |
| 2.17350 – 2.19050   | 16.80425 – 16.80475   | 960.0 – 1240.0  | 7.250 – 7.750   |
| 4.12500 – 4.12800   | 25.50000 – 25.67000   | 1300.0 – 1427.0 | 8.025 – 8.500   |
| 4.17725 – 4.17775   | 37.50000 – 38.25000   | 1435.0 – 1626.5 | 9.000 – 9.200   |
| 4.20725 – 4.20775   | 73.00000 – 74.60000   | 1645.5 – 1646.5 | 9.300 – 9.500   |
| 6.21500 – 6.21800   | 74.80000 – 75.20000   | 1660.0 – 1710.0 | 10.600 – 12.700 |
| 6.26775 – 6.26825   | 108.00000 – 121.94000 | 1718.8 – 1722.2 | 13.250 – 13.400 |
| 6.31175 – 6.31225   | 123.00000 – 138.00000 | 2200.0 – 2300.0 | 14.470 – 14.500 |
| 8.29100 – 8.29400   | 149.90000 – 150.05000 | 2310.0 – 2390.0 | 15.350 – 16.200 |
| 8.36200 – 8.36600   | 156.52475 – 156.52525 | 2483.5 – 2500.0 | 17.700 – 21.400 |
| 8.37625 – 8.38675   | 156.70000 – 156.90000 | 2655.0 – 2900.0 | 22.010 – 23.120 |
| 8.41425 – 8.41475   | 162.01250 – 167.17000 | 3260.0 – 3267.0 | 23.600 – 24.000 |
| 12.29000 – 12.29300 | 167.72000 – 173.20000 | 3332.0 – 3339.0 | 31.200 – 31.800 |
| 12.51975 – 12.52025 | 240.00000 – 285.00000 | 3345.8 – 3358.0 | 36.430 – 36.500 |
| 12.57675 – 12.57725 | 322.00000 – 335.40000 | 3600.0 – 4400.0 | Above 38.6      |
| 13.36000 – 13.41000 |                       |                 |                 |

\*\* : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



## 7. Test of Spurious Emission (Conducted)


### 7.1 Test Limit

Below -20dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

### 7.2 Test Procedure

- The transmitter output was connected to the spectrum analyzer via a low lose cable.
- Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20dB relative to the maximum measured in-band peak PSD level.
- The band edges was measured and recorded.

### 7.3 Test Setup Layout



### 7.4 Test Result and Data

Test Result : PASS

Temperature : 23°C


Test Date : Mar. 10, 2018

Humidity : 61%




Note: Test plots refer to the following pages.



Modulation Type: GFSK  
CH00


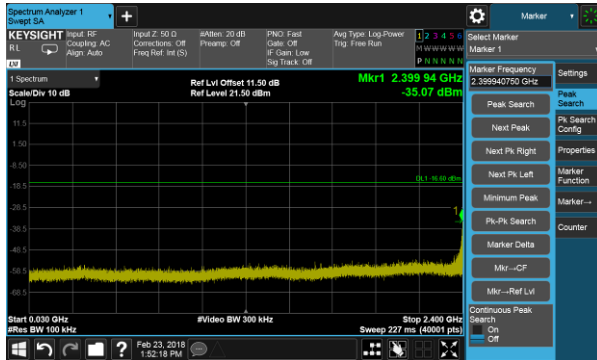


Modulation Type: GFSK  
CH19

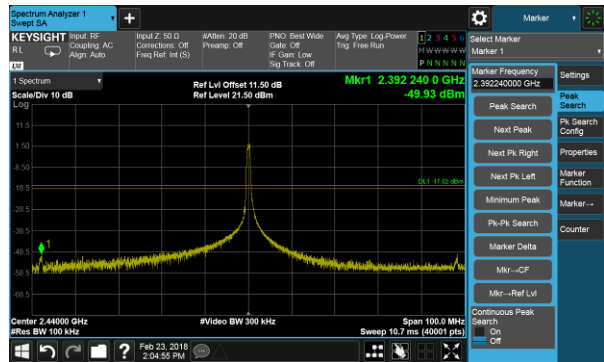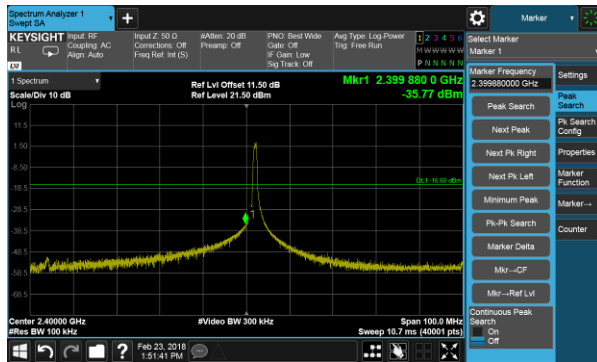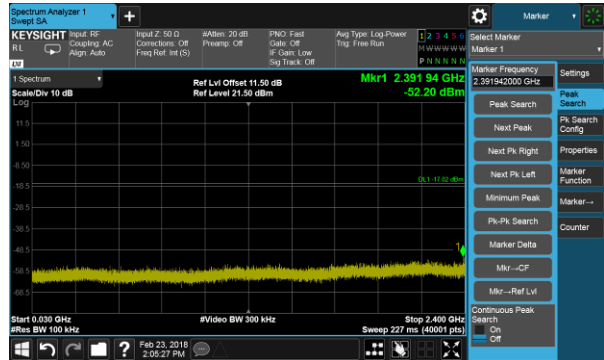



Modulation Type: GFSK  
CH39

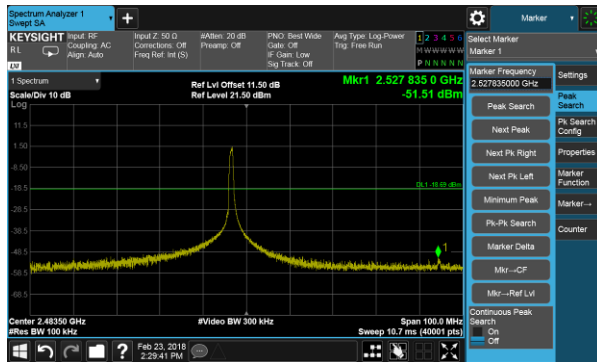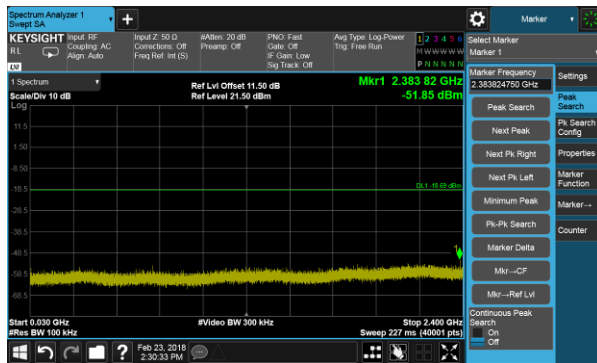



## 8. 6dB Bandwidth Measurement Data


### 8.1 Test Limit

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

### 8.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 1~5% of the emission bandwidth and VBW  $\geq 3 \times$  RBW.
- The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- The 6dB Bandwidth was measured and recorded.

### 8.3 Test Setup Layout




### 8.4 Test Result and Data

Test Result : PASS                      Temperature : 23°C  
Test Date : Mar. 10, 2018              Humidity : 61%


| Modulation Type | Channel | Frequency (MHz) | 6dB Bandwidth (KHz) | Limit (KHz) |
|-----------------|---------|-----------------|---------------------|-------------|
| GFSK            | 0       | 2402            | 618.00              | 1083.00     |
|                 | 19      | 2440            | 693.00              | 1088.00     |
|                 | 39      | 2480            | 678.00              | 1101.00     |



Modulation Type: GFSK  
CH00

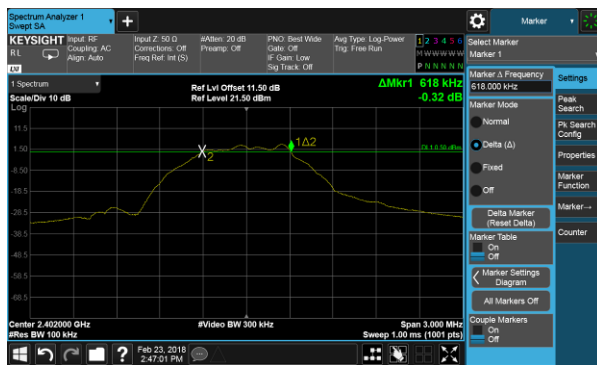

CH19

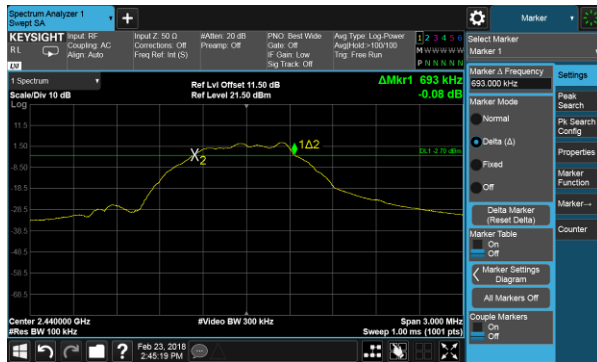

CH39





## 9. Maximum Peak and Average Output Power


### 9.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.

### 9.2 Test Procedures

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

### 9.3 Test Setup Layout



### 9.4 Test Result and Data

Test Result : PASS

Temperature : 23°C

Test Date : Mar. 10, 2018

Humidity : 61%

| Modulation Standard | Channel | Frequency (MHz) | Power Output (dBm) |         | Peak Power Output (mW) |         |
|---------------------|---------|-----------------|--------------------|---------|------------------------|---------|
|                     |         |                 | Peak               | Average | Peak                   | Average |
| GFSK                | 00      | 2402            | 3.46               | 3.28    | 2.218                  | 2.128   |
|                     | 19      | 2440            | 2.9                | 2.74    | 1.950                  | 1.879   |
|                     | 39      | 2480            | 2.27               | 2.08    | 1.687                  | 1.614   |



## 10. Power Spectral Density


### 10.1 Test Limit

The Maximum of Power Spectral Density Measurement is 8dBm.

### 10.2 Test Procedures

- The transmitter output was connected to spectrum analyzer.
- The spectrum analyzer's resolution bandwidth were set at 3KHz RBW and 30KHz VBW as that of the fundamental frequency. Set the sweep time=auto couple.
- The power spectral density was measured and recorded.

### 10.3 Test Setup Layout



### 10.4 Test Result and Data

Test Result : PASS

Temperature : 23°C

Test Date : Mar. 10, 2018

Humidity : 61%

| Modulation Standard | Channel | Frequency (MHz) | Maximum Power Density of 3 kHz Bandwidth (dBm) | Limit |
|---------------------|---------|-----------------|------------------------------------------------|-------|
| GFSK                | 0       | 2402            | -10.54                                         | 8.00  |
|                     | 19      | 2440            | -10.99                                         | 8.00  |
|                     | 39      | 2480            | -11.83                                         | 8.00  |



Modulation Type: GFSK  
CH00



CH19



CH39

