


RF TEST REPORT



Report No.: 17070248-FCC-R1

Supersede Report No.: N/A

Applicant	Verykool USA Inc	
Product Name	Mobile Phone	
Model No.	s4009	
Serial No.	N/A	
Test Standard	FCC Part 22(H):2016 ;FCC Part 24(E):2016; ANSI/TIA-603-D: 2010	
Test Date	April 01 to 20, 2017	
Issue Date	April 21, 2017	
Test Result	☒ Pass ☐ Fail	
Equipment complied with the specification ☒		
Equipment did not comply with the specification ☐		
		
Leen Yang Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION.....	6
5. TEST SUMMARY	9
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS.....	10
6.1 RF EXPOSURE (SAR).....	10
6.2 RF OUTPUT POWER	11
6.3 PEAK-AVERAGE RATIO	23
6.4 OCCUPIED BANDWIDTH	27
6.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	38
6.6 SPURIOUS RADIATED EMISSIONS	51
6.7 BAND EDGE	57
6.8 FREQUENCY STABILITY.....	67
ANNEX A. TEST INSTRUMENT	71
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS	73
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	84
ANNEX C.II. EUT OPERATING CONKITIONS.....	86
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	87
ANNEX E. DECLARATION OF SIMILARITY	88

1. Report Revision History

Report No.	Report Version	Description	Issue Date
17070248-FCC-R1	NONE	Original	April 21, 2017

2. Customer information

Applicant Name	Verykool USA Inc
Applicant Add	3636 Nobel Drive, Suite 325, San Diego, California 92122 United States
Manufacturer	TEM MOBILE LIMITED
Manufacturer Add	No 1708, Cangsong Building, Tairan 6 Road, Futian ShenZhen, China

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen(ICP-03A1)

4. Equipment under Test (EUT) Information

Description of EUT:	Mobile Phone
Main Model:	s4009
Serial Model:	N/A
Date EUT received:	March 31, 2017
Test Date(s):	April 01 to 20, 2017
Equipment Category :	PCE
Antenna Gain:	GSM850:1.5dBi PCS1900:1.55dBi UMTS-FDD Band V: 1.58dBi UMTS-FDD Band II: 1.56dBi WIFI: 1.35dBi Bluetooth/BLE: 1.35dBi GPS: 1.8dBi
Antenna Type:	PIFA antenna
Type of Modulation:	GSM / GPRS: GMSK EGPRS: GMSK,8PSK UMTS-FDD: QPSK 802.11b/g/n: DSSS, OFDM Bluetooth: GFSK, π /4DQPSK, 8DPSK BLE: GFSK GPS:BPSK

RF Operating Frequency (ies):

GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz
 PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz
 UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz
 UMTS-FDD Band II TX: 1852.4 ~ 1907.6 MHz;
 RX: 1932.4 ~ 1987.6 MHz
 WIFI: 802.11b/g/n(20M): 2412-2462 MHz
 WIFI: 802.11n(40M): 2422-2452 MHz
 Bluetooth& BLE: 2402-2480 MHz
 GPS: 1575.42 MHz

Maximum Conducted AV Power to Antenna:

GSM Voice: GSM850: 31.20 dBm
 PCS1900: 29.69 dBm
 GPRS: GSM850: 32.19 dBm
 PCS1900: 29.71 dBm
 EGPRS(MCS5): GSM850: 27.61 dBm
 PCS1900: 25.61 dBm
 RMC: UMTS-FDD Band V: 22.87 dBm
 UMTS-FDD Band II: 22.53 dBm
 HSUPA: UMTS-FDD Band V: 21.50 dBm
 UMTS-FDD Band II: 21.36 dBm
 HSDPA: UMTS-FDD Band V: 21.46 dBm
 UMTS-FDD Band II: 21.32 dBm

ERP/EIRP:

GSM Voice: GSM850: 30.50 dBm / ERP
 PCS1900: 31.17 dBm / EIRP
 GPRS: GSM850: 31.49 dBm / ERP
 PCS1900: 31.36 dBm / EIRP
 EGPRS(MCS5): GSM850: 26.91 dBm / ERP
 PCS1900: 27.16 dBm / EIRP
 RMC: UMTS-FDD Band V: 22.37 dBm / ERP
 UMTS-FDD Band II: 24.13 dBm / EIRP
 HSDPA: UMTS-FDD Band V: 21.00 dBm / ERP
 UMTS-FDD Band II: 22.95 dBm / EIRP
 HSUPA: UMTS-FDD Band V: 20.99 dBm / ERP
 UMTS-FDD Band II: 22.81 dBm / EIRP

Number of Channels:	GSM 850: 124CH
	PCS1900: 299CH
	UMTS-FDD Band V : 102CH
	UMTS-FDD Band II : 277CH
	WIFI :802.11b/g/n(20M): 11CH
	WIFI :802.11n(40M): 7CH
	Bluetooth: 79CH
	BLE: 40CH
Port:	GPS:1CH
	USB Port, Earphone Port
Input Power:	Adapter:
	Model: s4009
	Input: AC100-240V~50/60Hz,0.2A
	Output: DC 5.0V,550mA
	Battery :
	Model: s4009
Trade Name :	Spec: 3.7V,1200mAh(4.44Wh)
	Limited charger voltage: 4.2V
GPRS/ EGPRS Multi-slot class	Verykool
FCC ID:	8/10/12
	WA6S4009

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§ 1.1307; § 2.1093	RF Exposure (SAR)	Compliance
§2.1046; § 22.913(a); § 24.232(c); § 27.50(c.10) ;	RF Output Power	Compliance
§ 24.232 (d) ;	Peak-Average Ratio	Compliance
§ 2.1049; § 22.905; § 22.917; § 24.238;	99% & -26 dB Occupied Bandwidth	Compliance
§ 2.1051; § 22.917(a); § 24.238(a);	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917(a); § 24.238(a);	Field Strength of Spurious Radiation	Compliance
§ 22.917(a); § 24.238(a);	Out of band emission, Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235;	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

Note: Testing was performed by configuring EUT to maximum output power status, the declared output power class for different

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS

6.1 RF Exposure (SAR)

Test Result: Pass

The EUT is a portable device, thus requires SAR evaluation;


Please refer to RF Exposure Evaluation Report: 17070248-FCC-H.

6.2 RF Output Power

Temperature	24°C
Relative Humidity	55%
Atmospheric Pressure	1010mbar
Test date :	April 17, 2017
Tested By :	Leen Yang

Requirement(s):

Spec	Item	Requirement	Applicable
§22.913 (a)	a)	ERP:38.45dBm	☒
§24.232 (c)	b)	EIRP:33dBm	☒

Test Setup	 Base Station EUT
------------	--

Test Procedure	For Conducted Power: - The transmitter output port was connected to base station. - Set EUT at maximum power through base station. - Select lowest, middle, and highest channels for each band and different test mode. For ERP/EIRP: According with KDB 971168 v02r02 - The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable. - The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis. - The frequency range up to tenth harmonic of the fundamental frequency was investigated.
----------------	---

	- Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution. - Spurious emissions in dB = $10 \log (\text{TX power in Watts}/0.001)$ – the absolute level - Spurious attenuation limit in dB = $43 + 10 \log_{10} (\text{power out in Watts})$.
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A
 Test Plot ☐ Yes (See below) ☒ N/A

Conducted Power

GSM Mode:

Burst Average Power (dBm);								
Band	GSM850				PCS1900			
Channel	128	190	251	Tune up Power tolerant	512	661	810	Tune up Power tolerant
Frequency (MHz)	824.2	836.6	848.8	/	1850.2	1880	1909.8	/
GSM Voice (1 uplink),GMSK	31.20	31.13	31.05	31±1	29.35	29.49	29.69	29±1
GPRS Multi-Slot Class 8 (1 uplink),GMSK	32.19	31.12	31.03	32±1	29.28	29.50	29.71	29±1
GPRS Multi-Slot Class 10 (2 uplink) GMSK	30.75	30.68	30.59	30±1	28.70	25.63	28.52	28±1
GPRS Multi-Slot Class 12 (4 uplink) GMSK	28.15	28.18	28.12	28±1	25.62	25.63	25.65	25±1
EGPRS Multi-Slot Class 8 (1 uplink) GMSK MCS1	31.16	31.09	31.02	31±1	29.30	29.63	29.70	29±1
EGPRS Multi-Slot Class 10 (2 uplink) GMSK MCS1	30.71	30.65	30.58	30±1	28.65	28.83	28.68	28±1
EGPRS Multi-Slot Class 12 (4 uplink) GMSK MCS1	28.19	28.2	28.19	28±1	26.26	26.56	26.85	26±1
EGPRS Multi-Slot Class 8 (1 uplink) 8PSK MCS5	27.61	27.57	27.59	27±1	25.52	25.30	25.61	25±1
EGPRS Multi-Slot Class 10 (2 uplink) 8PSK MCS5	25.49	25.61	25.62	25±1	24.45	24.51	24.39	24±1
EGPRS Multi-Slot Class 12 (4 uplink) 8PSK MCS5	22.44	22.57	22.48	22±1	22.01	22.21	22.36	22±1

Test Report	17070248-FCC-R1
Page	14 of 88

Remark :

GPRS, CS1 coding scheme.

EGPRS, MCS1 coding scheme.

EGPRS, MCS5 coding scheme.

Multi-Slot Class 8 , Support Max 4 downlink, 1 uplink , 5 working link

Multi-Slot Class 10 , Support Max 4 downlink, 2 uplink , 5 working link

Multi-Slot Class 12 , Support Max 4 downlink, 4 uplink , 5 working link

UMTS Mode:

UMTS-FDD Band V

Band/ Time Slot configuration	Channel	Frequency	Average power (dBm)	Tune up Power tolerant
RMC 12.2kbps	4132	826.4	22.67	22±1
	4175	835	22.87	22±1
	4233	846.6	22.48	22±1
HSDPA Subtest1	4132	826.4	21.45	21.3±1
	4175	835	21.49	21.3±1
	4233	846.6	21.46	21.3±1
HSDPA Subtest2	4132	826.4	21.43	21.3±1
	4175	835	21.40	21.3±1
	4233	846.6	21.47	21.3±1
HSDPA Subtest3	4132	826.4	21.48	21.3±1
	4175	835	21.50	21.3±1
	4233	846.6	21.42	21.3±1
HSDPA Subtest4	4132	826.4	21.43	21.3±1
	4175	835	21.41	21.3±1
	4233	846.6	21.40	21.3±1
HSUPA Subtest1	4132	826.4	21.46	21.3±1
	4175	835	21.46	21.3±1
	4233	846.6	21.46	21.3±1
HSUPA Subtest2	4132	826.4	21.41	21.3±1
	4175	835	21.42	21.3±1
	4233	846.6	21.46	21.3±1
HSUPA Subtest3	4132	826.4	21.43	21.3±1
	4175	835	21.41	21.3±1
	4233	846.6	21.43	21.3±1
HSUPA Subtest4	4132	826.4	21.49	21.3±1
	4175	835	21.44	21.3±1
	4233	846.6	21.46	21.3±1
HSUPA Subtest5	4132	826.4	21.40	21.3±1
	4175	835	21.42	21.3±1
	4233	846.6	21.43	21.3±1

UMTS-FDD Band II

Band/ Time Slot configuration	Channel	Frequency	Average power (dBm)	Tune up Power tolerant
RMC 12.2kbps	9262	1852.4	22.18	22±1
	9400	1880	22.51	22±1
	9538	1907.6	22.53	22±1
HSDPA Subtest1	9262	1852.4	21.23	21.3±1
	9400	1880	21.26	21.3±1
	9538	1907.6	21.33	21.3±1
HSDPA Subtest2	9262	1852.4	21.33	21.3±1
	9400	1880	21.34	21.3±1
	9538	1907.6	21.36	21.3±1
HSDPA Subtest3	9262	1852.4	21.35	21.3±1
	9400	1880	21.34	21.3±1
	9538	1907.6	21.25	21.3±1
HSDPA Subtest4	9262	1852.4	21.22	21.3±1
	9400	1880	21.26	21.3±1
	9538	1907.6	21.25	21.3±1
HSUPA Subtest1	9262	1852.4	21.25	21.3±1
	9400	1880	21.24	21.3±1
	9538	1907.6	21.22	21.3±1
HSUPA Subtest2	9262	1852.4	21.24	21.3±1
	9400	1880	21.25	21.3±1
	9538	1907.6	21.26	21.3±1
HSUPA Subtest3	9262	1852.4	21.28	21.3±1
	9400	1880	21.26	21.3±1
	9538	1907.6	21.25	21.3±1
HSUPA Subtest4	9262	1852.4	21.28	21.3±1
	9400	1880	21.26	21.3±1
	9538	1907.6	21.32	21.3±1
HSUPA Subtest5	9262	1852.4	21.29	21.3±1
	9400	1880	21.25	21.3±1
	9538	1907.6	21.31	21.3±1

ERP & EIRP

GSM Voice

ERP for Cellular Band (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	24.23	V	6.8	0.53	30.50	38.45
824.2	22.49	H	6.8	0.53	28.76	38.45
836.6	24.2	V	6.8	0.53	30.47	38.45
836.6	22.46	H	6.8	0.53	28.73	38.45
848.8	23.98	V	6.9	0.53	30.35	38.45
848.8	22.17	H	6.9	0.53	28.54	38.45

EIRP for PCS Band (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	23.87	V	7.88	0.85	30.90	33
1850.2	22.31	H	7.88	0.85	29.34	33
1880	24.01	V	7.88	0.85	31.04	33
1880	22.45	H	7.88	0.85	29.48	33
1909.8	24.16	V	7.86	0.85	31.17	33
1909.8	22.62	H	7.86	0.85	29.63	33

GPRS:

ERP for Cellular Band (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	25.22	V	6.8	0.53	31.49	38.45
824.2	23.59	H	6.8	0.53	29.86	38.45
836.6	24.15	V	6.8	0.53	30.42	38.45
836.6	22.48	H	6.8	0.53	28.75	38.45
848.8	23.96	V	6.9	0.53	30.33	38.45
848.8	22.24	H	6.9	0.53	28.61	38.45

EIRP for PCS Band (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	23.8	V	7.88	0.85	30.83	33
1850.2	22.24	H	7.88	0.85	29.27	33
1880	24.02	V	7.88	0.85	31.05	33
1880	22.43	H	7.88	0.85	29.46	33
1909.8	24.35	V	7.86	0.85	31.36	33
1909.8	22.73	H	7.86	0.85	29.74	33

EGPRS (MCS5):

ERP for Cellular Band (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	20.64	V	6.8	0.53	26.91	38.45
824.2	18.96	H	6.8	0.53	25.23	38.45
836.6	20.56	V	6.8	0.53	26.83	38.45
836.6	18.91	H	6.8	0.53	25.18	38.45
848.8	20.52	V	6.9	0.53	26.89	38.45
848.8	18.8	H	6.9	0.53	25.17	38.45

EIRP for PCS Band (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	20.13	V	7.88	0.85	27.16	33
1850.2	18.46	H	7.88	0.85	25.49	33
1880	19.82	V	7.88	0.85	26.85	33
1880	18.28	H	7.88	0.85	25.31	33
1909.8	20.06	V	7.86	0.85	27.07	33
1909.8	18.28	H	7.86	0.85	25.29	33

RMC

ERP for UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
826.4	15.9	V	6.8	0.53	22.17	38.45
826.4	14.96	H	6.8	0.53	21.23	38.45
835	16.1	V	6.8	0.53	22.37	38.45
835	15.18	H	6.8	0.53	21.45	38.45
846.6	15.61	V	6.9	0.53	21.98	38.45
846.6	14.69	H	6.9	0.53	21.06	38.45

EIRP for UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1852.4	16.75	V	7.88	0.85	23.78	33
1852.4	15.81	H	7.88	0.85	22.84	33
1880	17.08	V	7.88	0.85	24.11	33
1880	16.13	H	7.88	0.85	23.16	33
1907.6	17.12	V	7.86	0.85	24.13	33
1907.6	16.2	H	7.86	0.85	23.21	33

HSDPA

ERP for UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
826.4	14.71	V	6.8	0.53	20.98	38.45
826.4	13.81	H	6.8	0.53	20.08	38.45
835	14.73	V	6.8	0.53	21.00	38.45
835	13.87	H	6.8	0.53	20.14	38.45
846.6	14.6	V	6.9	0.53	20.97	38.45
846.6	13.66	H	6.9	0.53	20.03	38.45

EIRP for UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1852.4	15.92	V	7.88	0.85	22.95	33
1852.4	15	H	7.88	0.85	22.03	33
1880	15.81	V	7.88	0.85	22.84	33
1880	14.91	H	7.88	0.85	21.94	33
1907.6	15.85	V	7.86	0.85	22.86	33
1907.6	14.96	H	7.86	0.85	21.97	33

HSUPA

ERP for UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
826.4	14.72	V	6.8	0.53	20.99	38.45
826.4	13.78	H	6.8	0.53	20.05	38.45
835	14.69	V	6.8	0.53	20.96	38.45
835	13.74	H	6.8	0.53	20.01	38.45
846.6	14.57	V	6.9	0.53	20.94	38.45
846.6	13.61	H	6.9	0.53	19.98	38.45

EIRP for UMTS-FDD Band II (Part 24E)


Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1852.4	15.76	V	7.88	0.85	22.79	33
1852.4	14.83	H	7.88	0.85	21.86	33
1880	15.78	V	7.88	0.85	22.81	33
1880	14.93	H	7.88	0.85	21.96	33
1907.6	15.74	V	7.86	0.85	22.75	33
1907.6	14.84	H	7.86	0.85	21.85	33

6.3 Peak-Average Ratio

Temperature	24°C
Relative Humidity	55%
Atmospheric Pressure	1010mbar
Test date :	April 17, 2017
Tested By :	Leen Yang

Requirement(s):

Spec	Item	Requirement	Applicable
§24.232(d)	a)	The peak-to-average ratio (PAR) of the transmission may not exceed 13dB.	☒

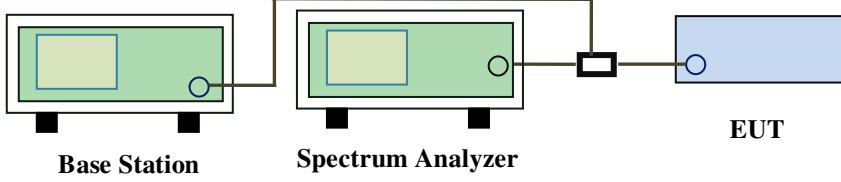Test Setup	 Base Station Spectrum Analyzer EUT
------------	---

Test Procedure	According with KDB 971168 v02r02 5.7.2 Alternate procedure for PAPR 5.1.2 Peak power measurements with a peak power meter The total peak output power may be measured using a broadband peak RF power meter. The power meter must have a video bandwidth that is greater than or equal to the emission bandwidth and utilize a fast-responding diode detector. 5.2.3 Average power measurement with average power meter As an alternative to the use of a spectrum/signal analyzer or EMI receiver to perform a measurement of the total in-band average output power, a wideband RF average power meter with a thermocouple detector or equivalent can be used under certain conditions If the EUT can be configured to transmit continuously (i.e., the burst duty cycle $\geq 98\%$) and at all times the EUT is transmitting at its maximum output
----------------	--

	power level, then a conventional wide-band RF power meter can be used. If the EUT cannot be configured to transmit continuously (i.e., the burst duty cycle < 98%), then there are two options for the use of an average power meter. First, a gated average power meter can be used to perform the measurement if the gating parameters can be adjusted such that the power is measured only over active transmission bursts at maximum output power levels. A conventional average power meter can also be used if the measured burst duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent) by performing the measurement over the on/off burst cycles and then correcting (increasing) the measured level by a factor equal to $10\log(1/\text{duty cycle})$
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A
Test Plot ☐ Yes (See below) ☒ N/A

GSM : GSM 1900 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1850.2	30.39	29.35	1.04
1880	30.41	29.49	0.92
1909.8	30.63	29.69	0.94

GPRS 1900 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1850.2	30.25	29.28	0.97
1880	30.59	29.50	1.09
1909.8	30.74	29.71	1.03

EGPRS (MSC5) 1900 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1850.2	26.66	25.61	1.05
1880	26.42	25.30	1.12
1909.8	26.63	25.52	1.11

RMC : UMTS-FDD Band 2 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1852.4	25.66	22.98	2.68
1880	25.61	22.68	2.93
1907.6	25.69	22.53	3.16

HSDPA : UMTS-FDD Band 2 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1852.4	23.36	21.25	2.11
1880	23.33	21.24	2.09
1907.6	23.39	21.22	2.17


HSUPA : UMTS-FDD Band 2 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1852.4	23.35	21.23	2.12
1880	23.31	21.26	2.05
1907.6	23.38	21.33	2.05

6.4 Occupied Bandwidth

Temperature	22°C
Relative Humidity	55%
Atmospheric Pressure	1015mbar
Test date :	April 18, 2017
Tested By :	Leen Yang

Requirement(s):

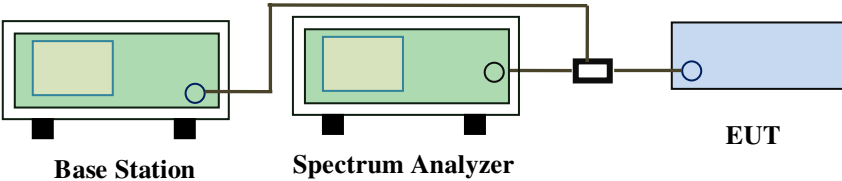Spec	Item	Requirement	Applicable
§2.1049, §22.917, §22.905 §24.238	a)	99% Occupied Bandwidth(kHz)	☒
	b)	26 dB Bandwidth(kHz)	☒
Test Setup			
Test Procedure	- The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers.		
Remark			
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

GSM Voice:

Cellular Band (Part 22H) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	242.4488	319.182
190	836.6	243.5640	318.668
251	848.8	247.0206	320.230

PCS Band (Part 24E) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850	243.5680	318.041
661	1880	244.2307	317.660
810	1910	242.1123	319.783

GPRS:

Cellular Band (Part 22H) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	250.6824	318.220
190	836.6	243.7862	316.788
251	848.8	252.6224	319.311

PCS Band (Part 24E) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850	247.7191	316.478
661	1880	246.8020	319.685
810	1910	246.4638	318.868

EGPRS (MCS 5):

Cellular Band (Part 22H) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	247.1156	319.922
190	836.6	245.2354	318.902
251	848.8	248.8799	319.208

PCS Band (Part 24E) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850	250.1170	319.417
661	1880	244.9056	320.250
810	1910	244.1826	320.332

RMC:

UMTS-FDD Band V (Part 22H)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
4132	826.6	4.1478	4.715
4175	835.0	4.1526	4.727
4233	846.4	4.1527	4.694

UMTS-FDD Band II (Part 24E)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
9262	1853	4.1573	4.728
9400	1880	4.1641	4.743
9538	1907	4.1513	4.729

HSDPA:

UMTS-FDD Band V (Part 22H)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
4132	826.6	4.1578	4.719
4175	835.0	4.1519	4.693
4233	846.4	4.1427	4.703

UMTS-FDD Band II (Part 24E)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
9262	1853	4.1500	4.698
9400	1880	4.1647	4.721
9538	1907	4.1478	4.731

HSUPA:

UMTS-FDD Band V (Part 22H)


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
4132	826.6	4.1543	4.692
4175	835.0	4.1473	4.712
4233	846.4	4.1480	4.709

UMTS-FDD Band II (Part 24E)


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
9262	1853	4.1688	4.726
9400	1880	4.1648	4.727
9538	1907	4.1475	4.731

Test Plots


GSM Voice:

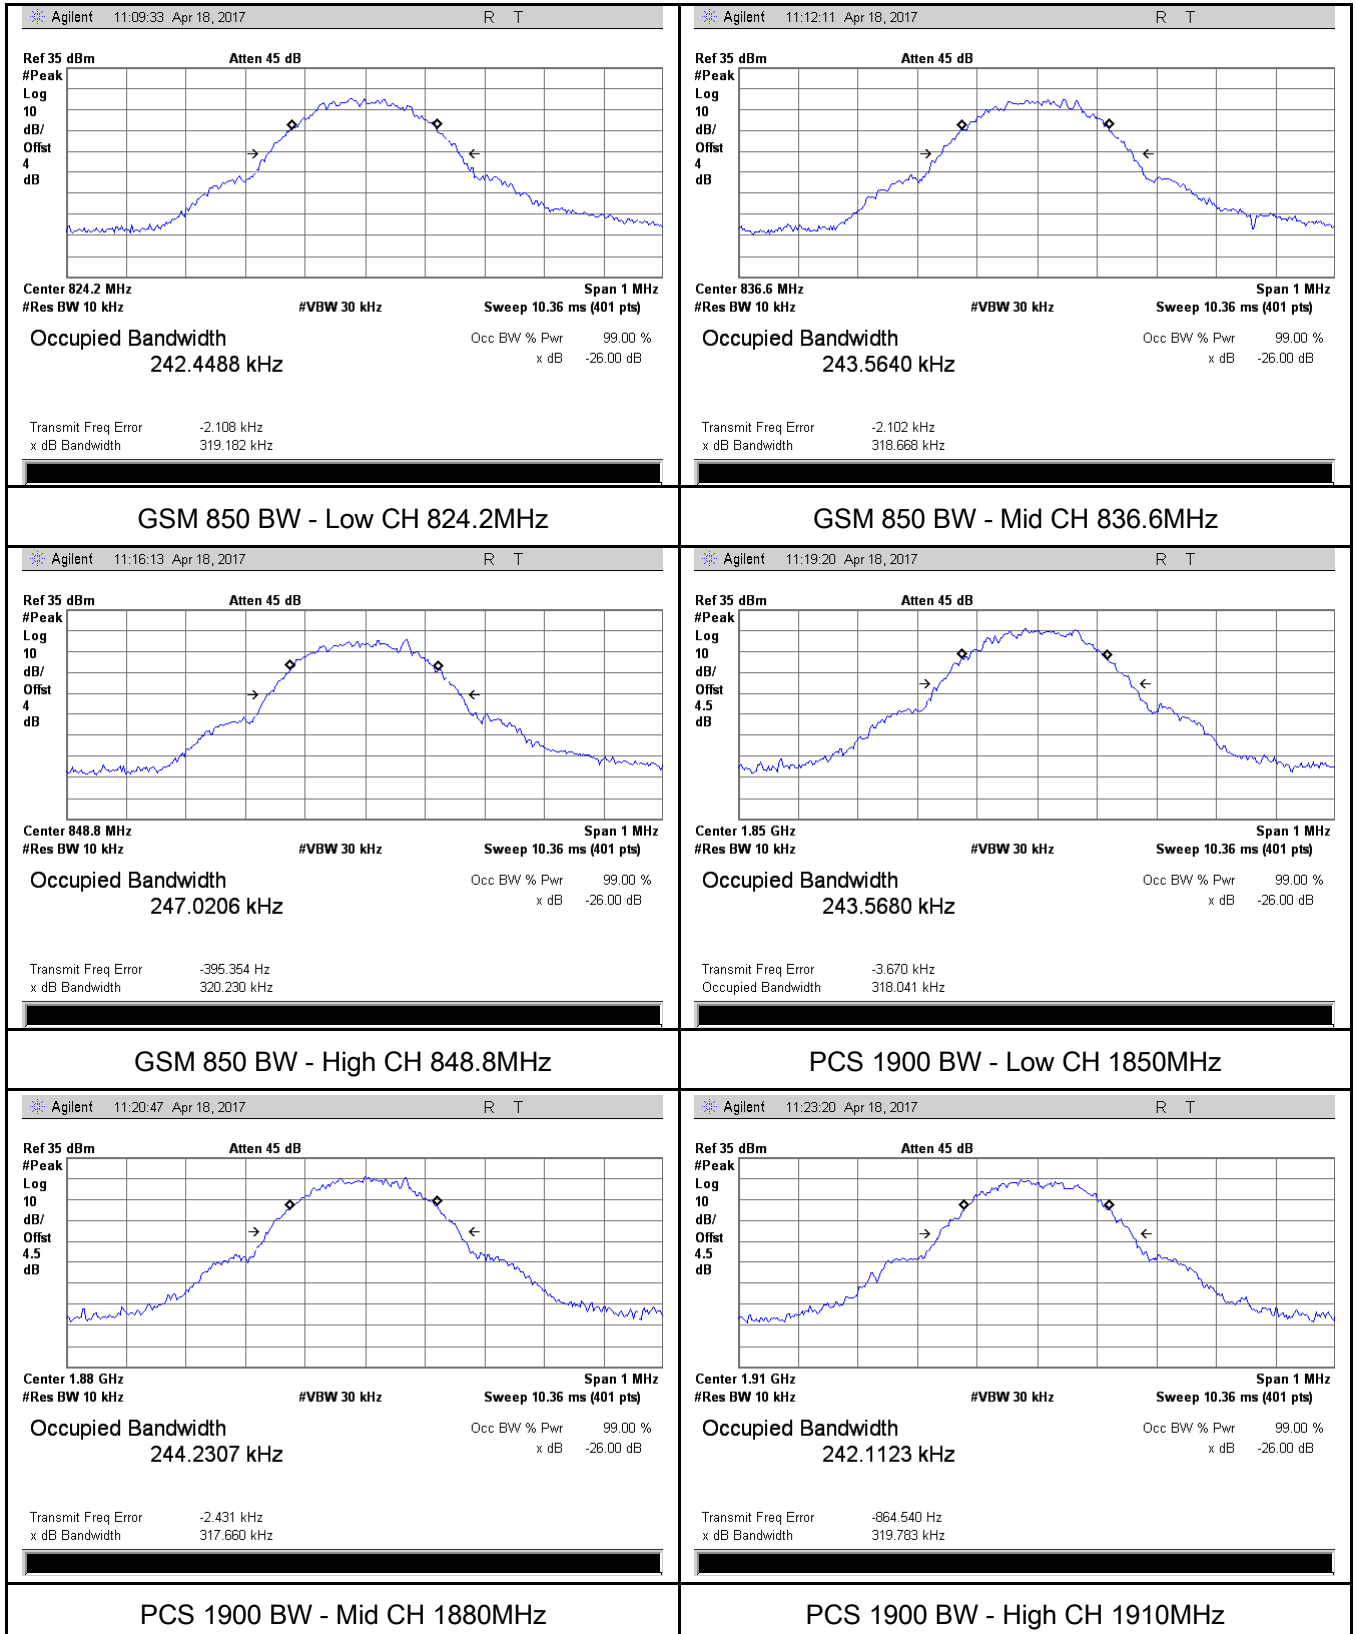


GPRS:

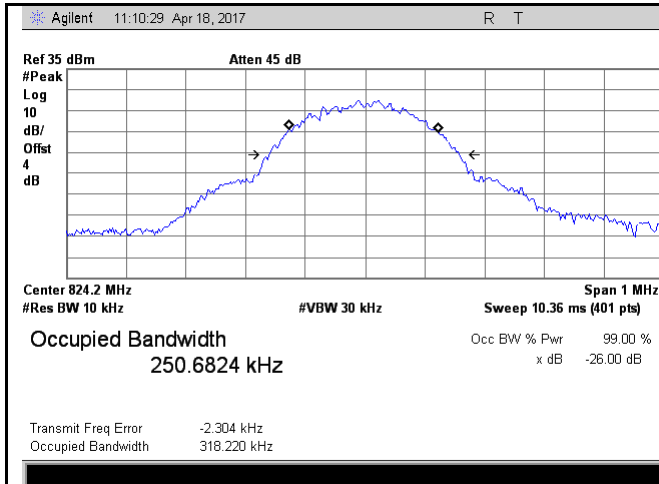


GSM 850 BW - Low CH 824.2MHz

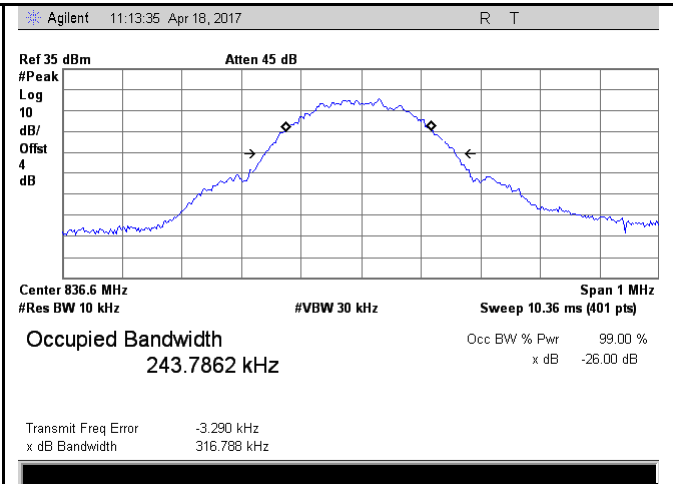


GSM 850 BW - Mid CH 836.6MHz

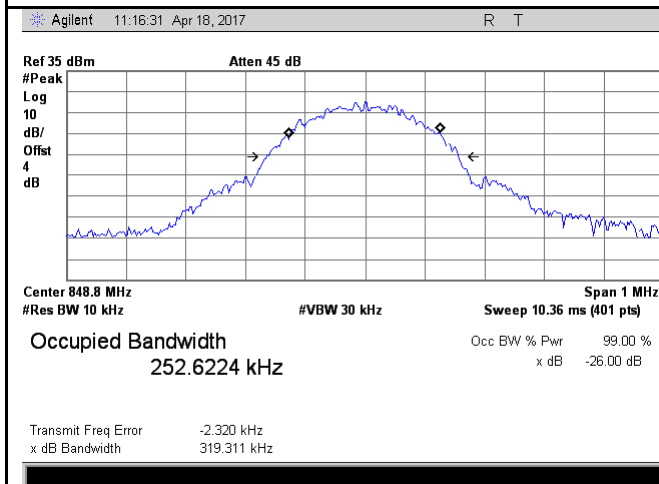


GSM 850 BW - High CH 848.8MHz

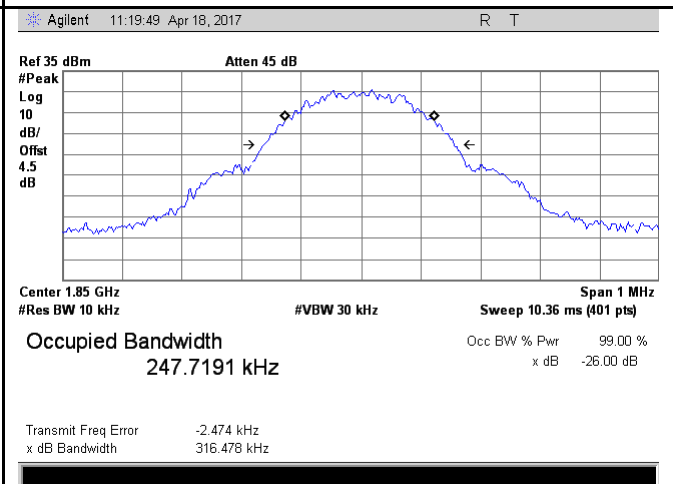

PCS 1900 BW - Low CH 1850MHz

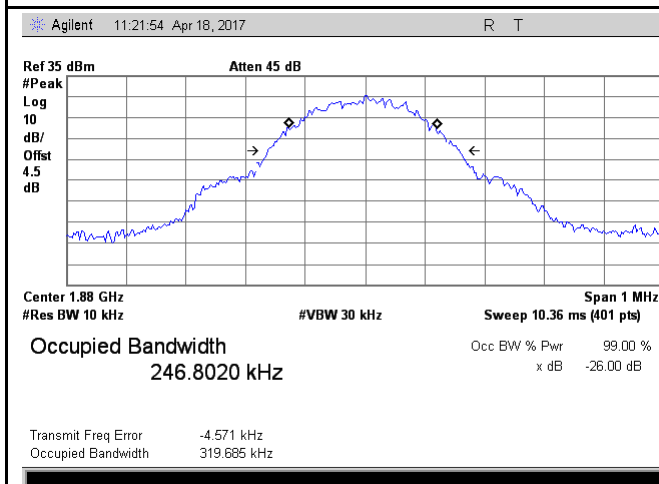


PCS 1900 BW - Mid CH 1880MHz


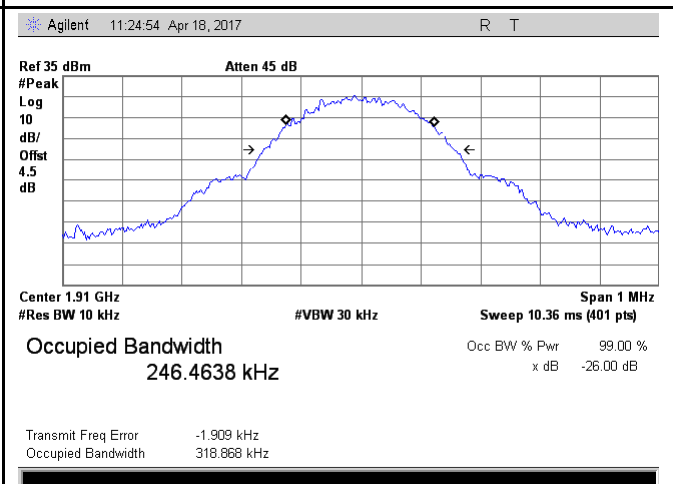


PCS 1900 BW - High CH 1910MHz



EGPRS (MCS5):

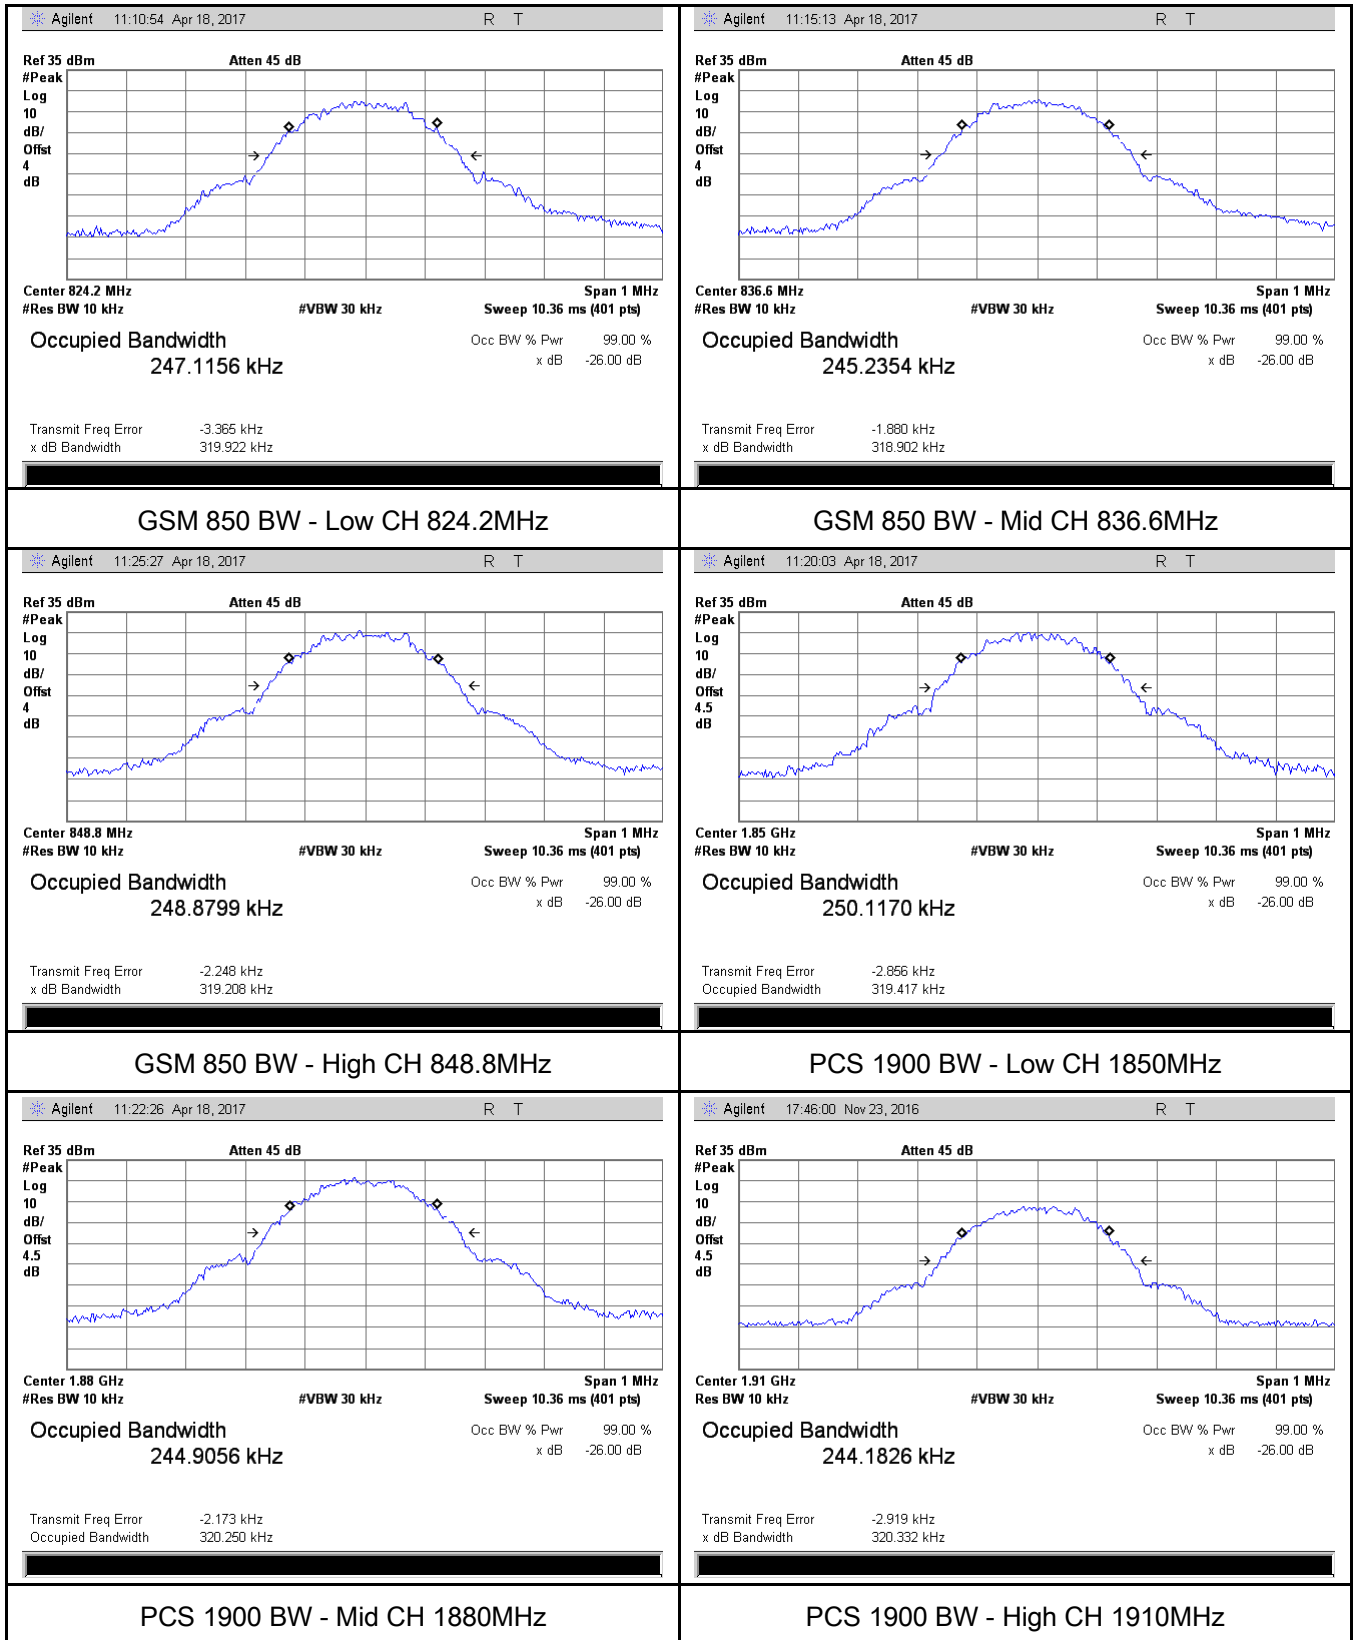



RMC:

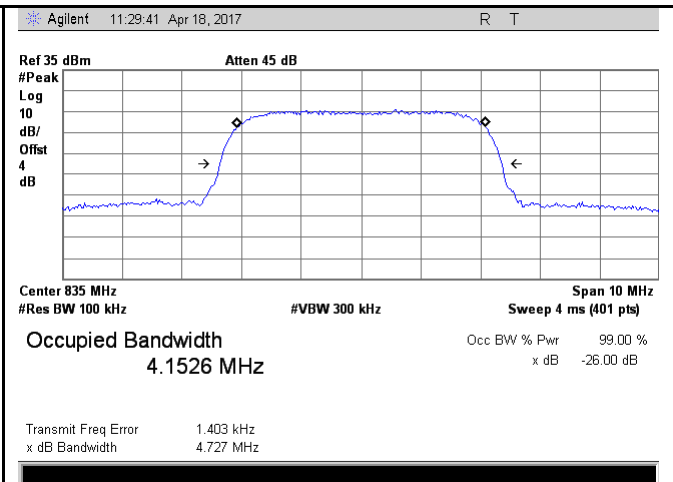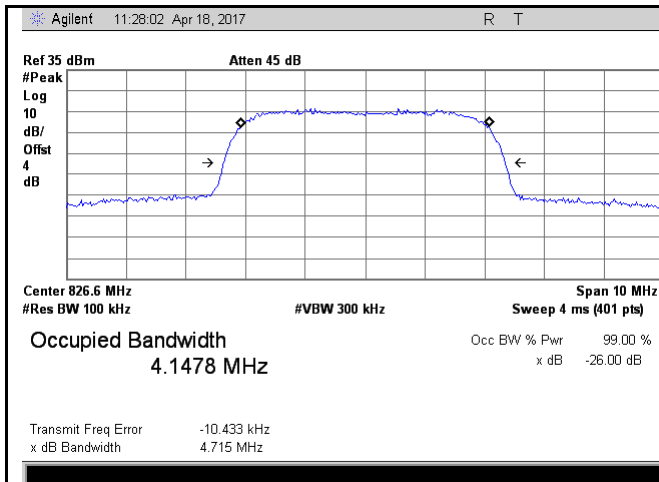

Band V BW - Low CH 826.6 MHz

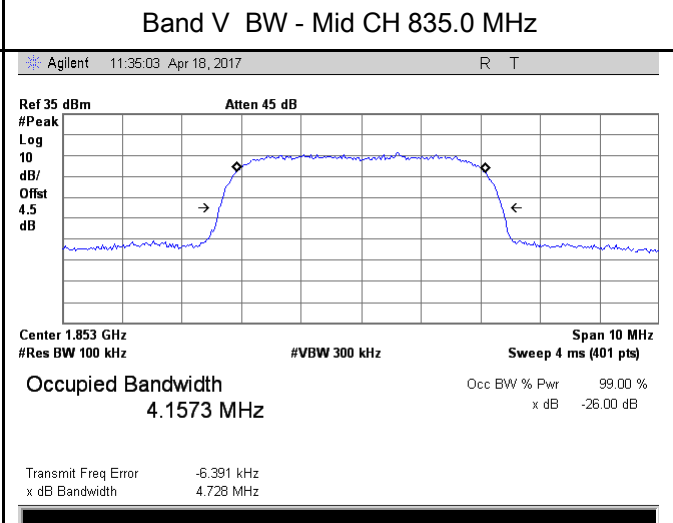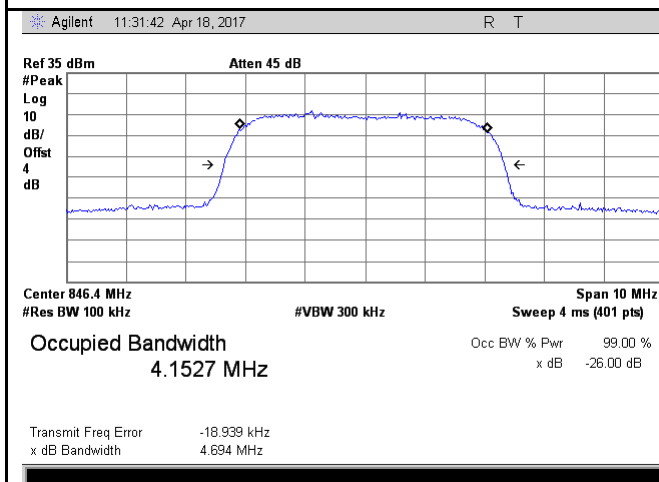



Band V BW - High CH 846.4 MHz

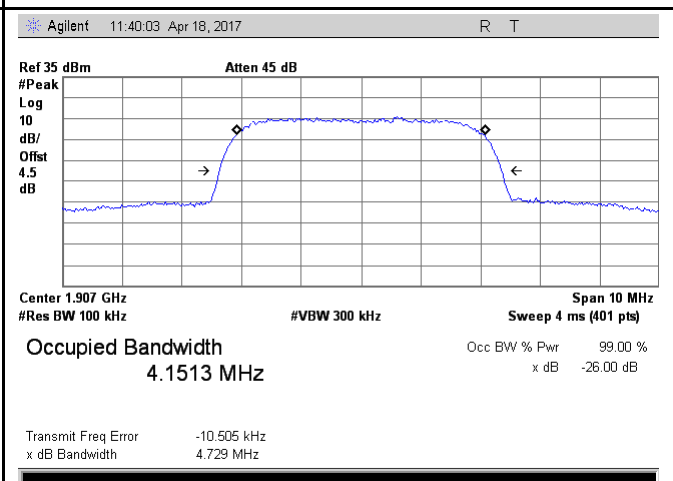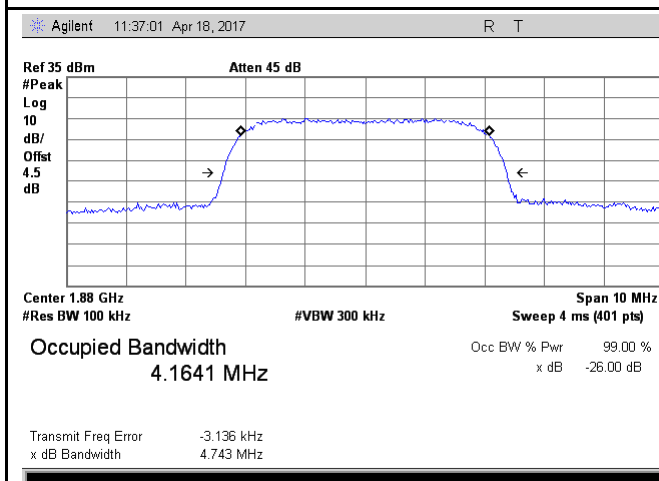


Band II BW - Mid CH 1880MHz

Band II BW - High CH 1907MHz


HSDPA:

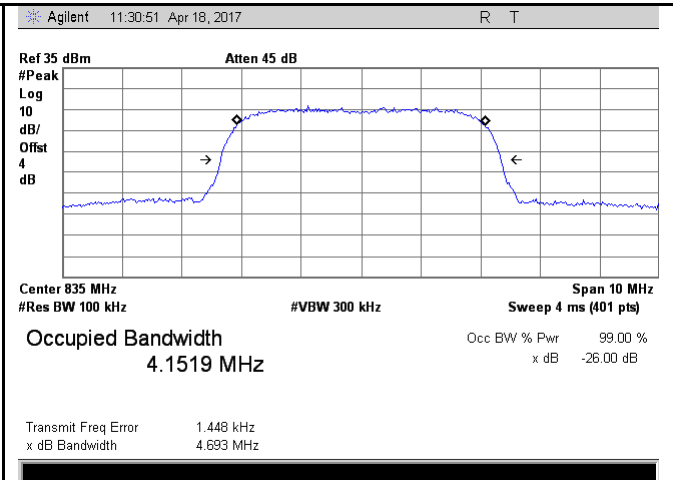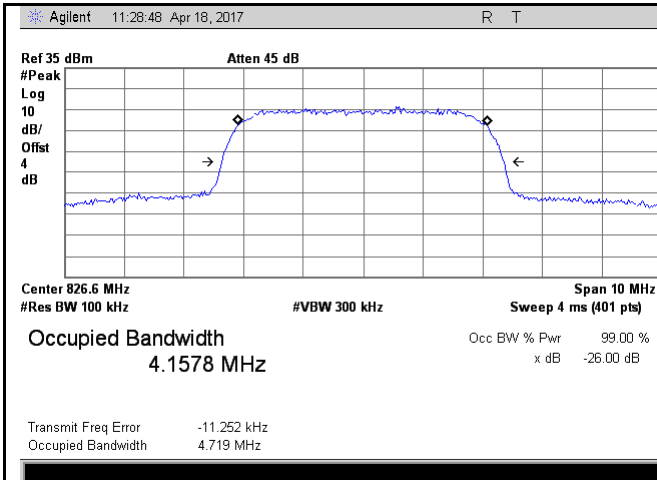


Band V BW - Low CH 826.6 MHz

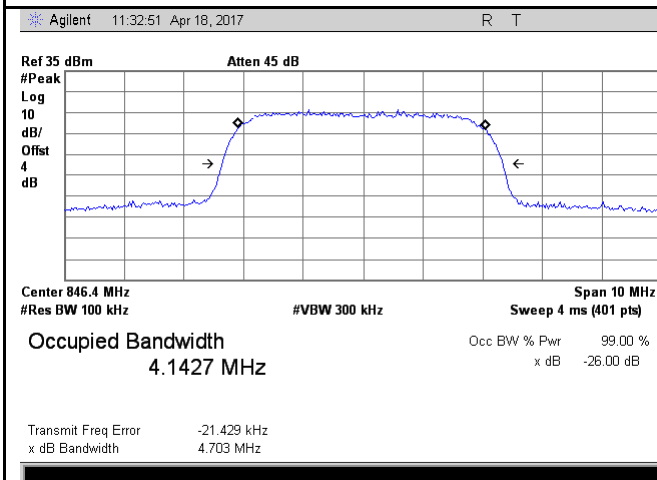


Band V BW - Mid CH 835.0 MHz

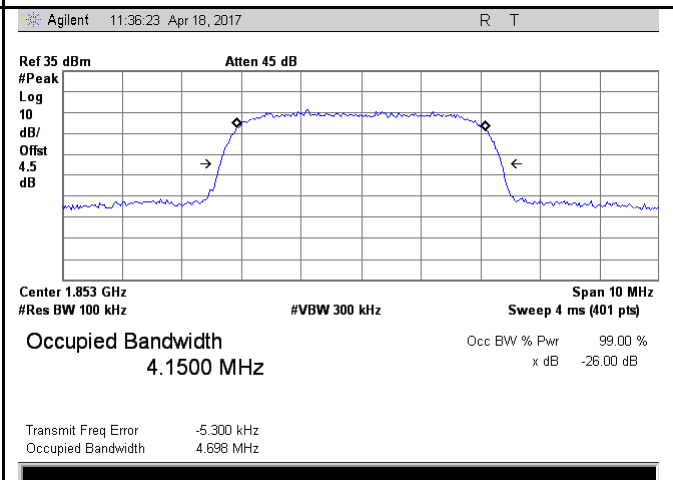

Band V BW - High CH 846.4 MHz

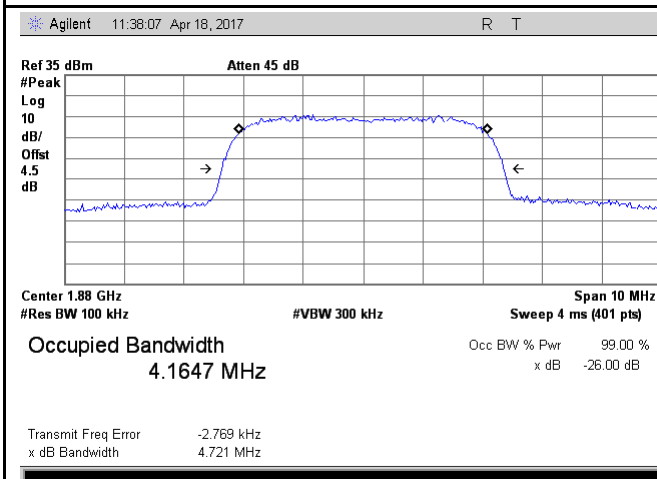



Band II BW - Low CH 1853MHz

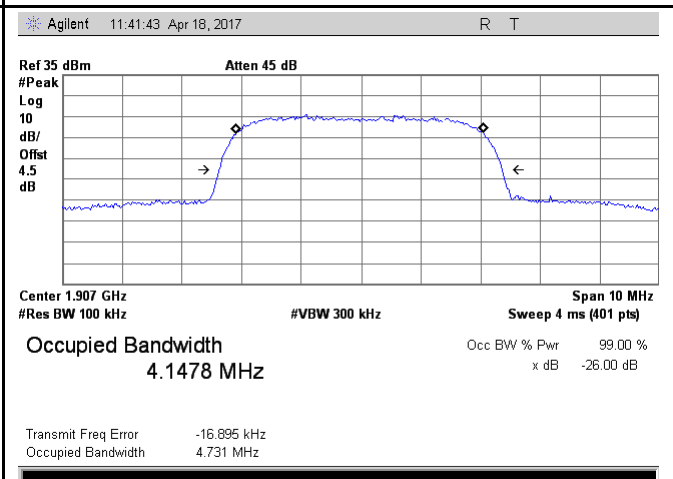


Band II BW - Mid CH 1880MHz

Band II BW - High CH 1907MHz


HSUPA:

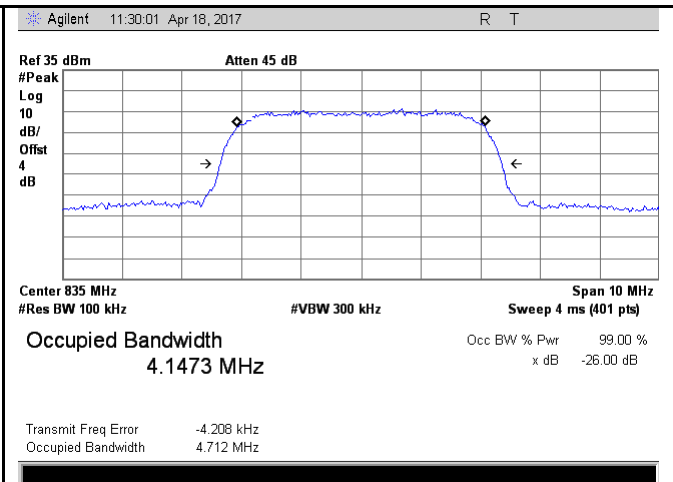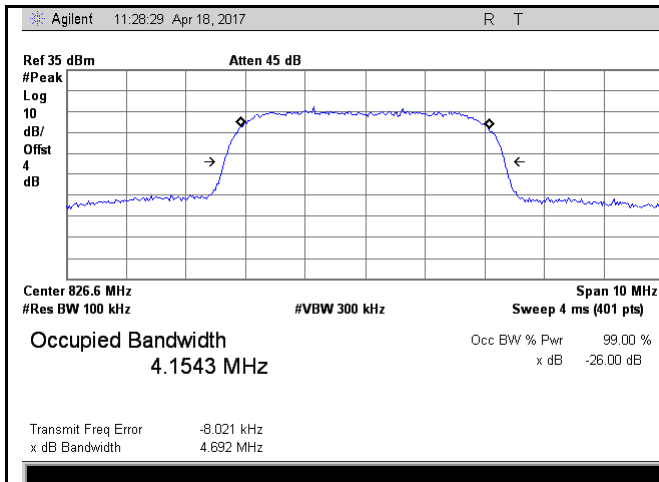


Band V BW - Low CH 826.6 MHz

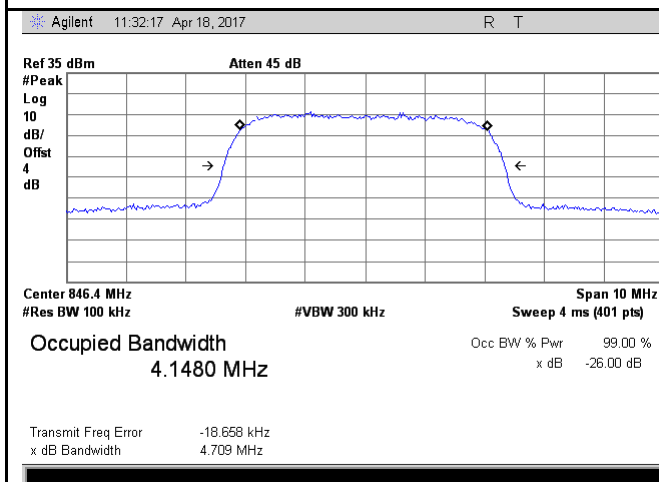


Band V BW - Mid CH 835.0 MHz

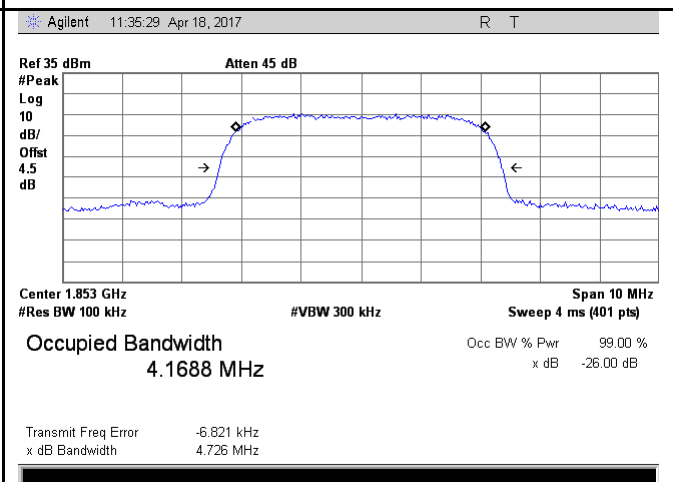

Band V BW - High CH 846.4 MHz

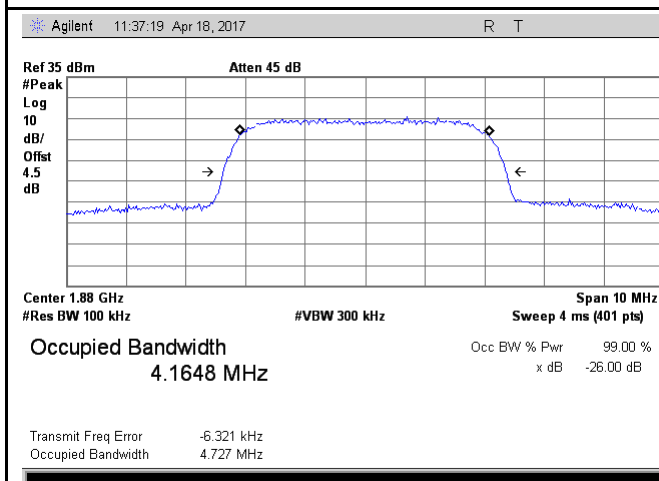

Band II BW - Low CH 1852.4MHz

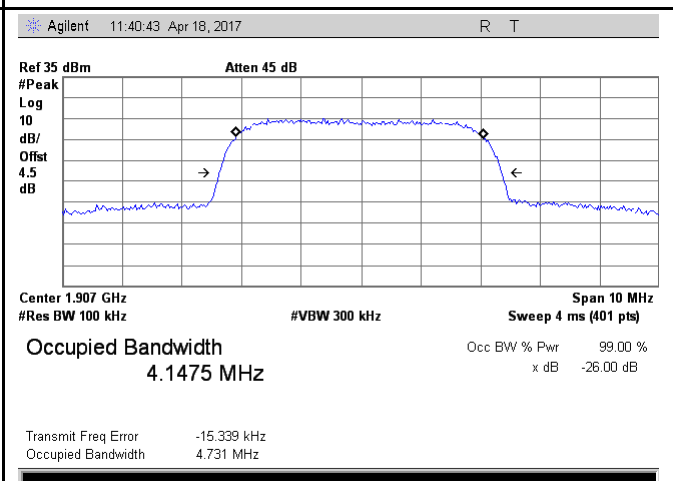


Band II BW - Mid CH 1880MHz

Band II BW - High CH 1907MHz

6.5 Spurious Emissions at Antenna Terminals

Temperature	22°C
Relative Humidity	55%
Atmospheric Pressure	1015mbar
Test date :	April 18, 2017
Tested By :	Leen Yang

Requirement(s):

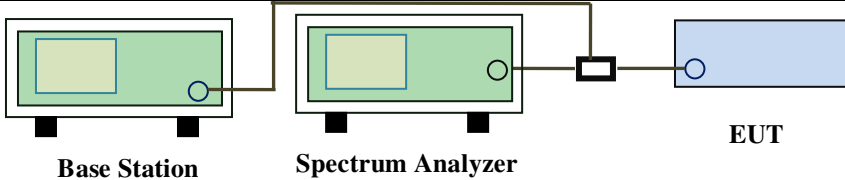
Spec	Item	Requirement	Applicable
§2.1051, §22.917(a)& §24.238(a)	a)	The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB	☒
Test Setup			
Test Procedure	- The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The Band Edges of low and high channels for the highest RF powers were measured. - Setting RBW as roughly BW/100.		
Remark			
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A
 Test Plot ☒ Yes (See below) ☐ N/A


Test Plots

GSM Voice:


Cellular Band (Part 22H) result

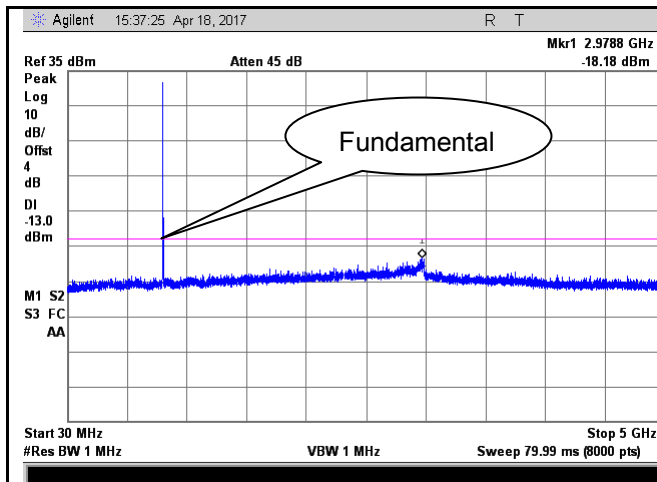


GSM 850 - Low Channel-1

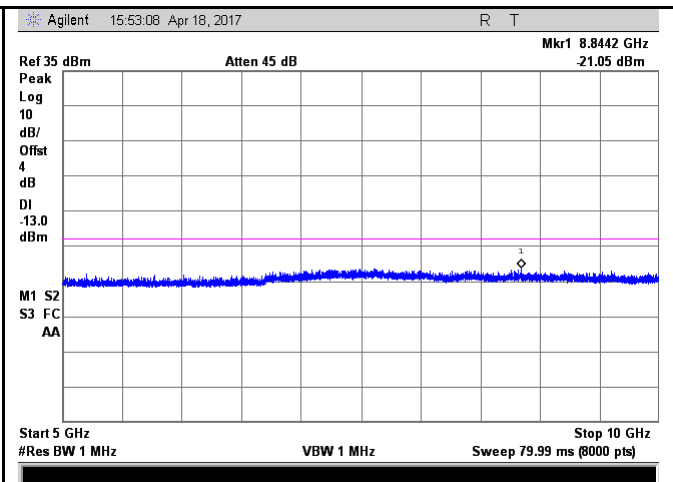


GSM 850 - Low Channel-2

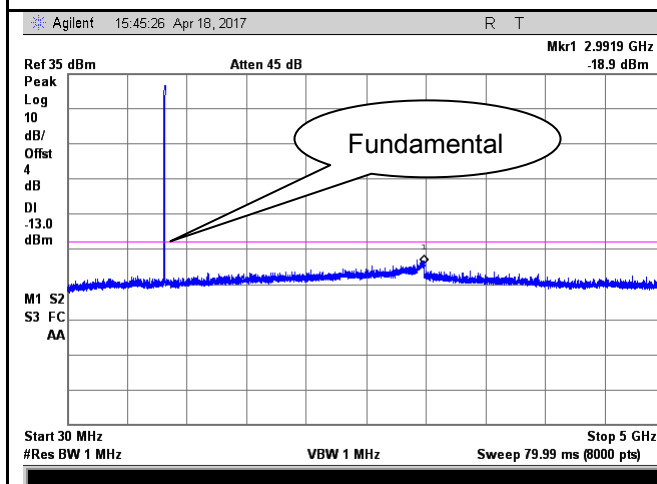


GSM 850 Middle Channel-1

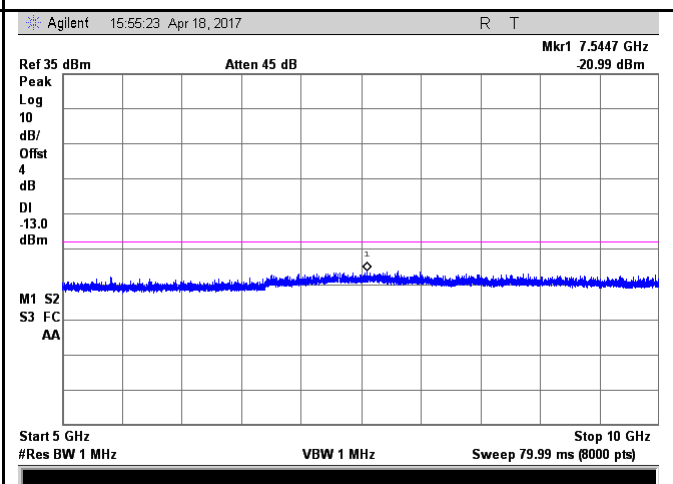

GSM 850 Middle Channel-2

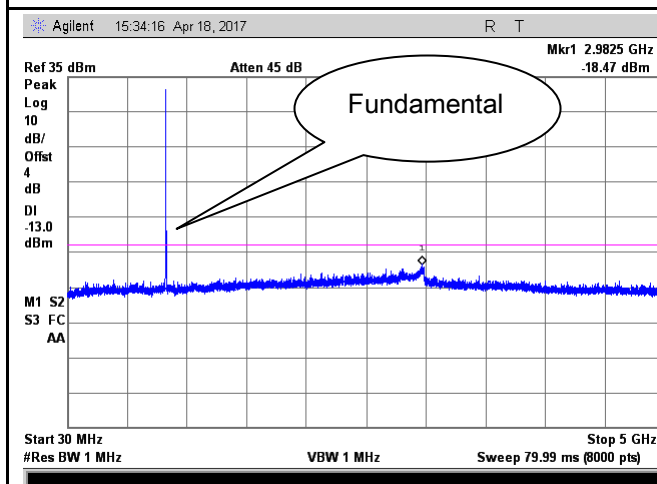


GSM 850 - High Channel-1

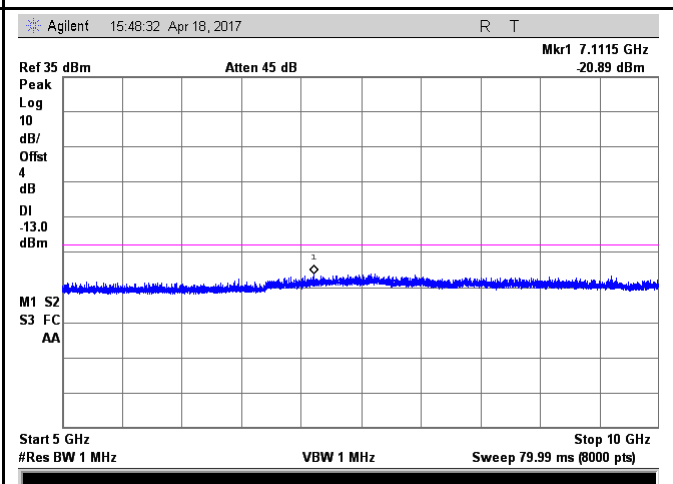



GSM 850 - High Channel-2

PCS Band (Part24E) result


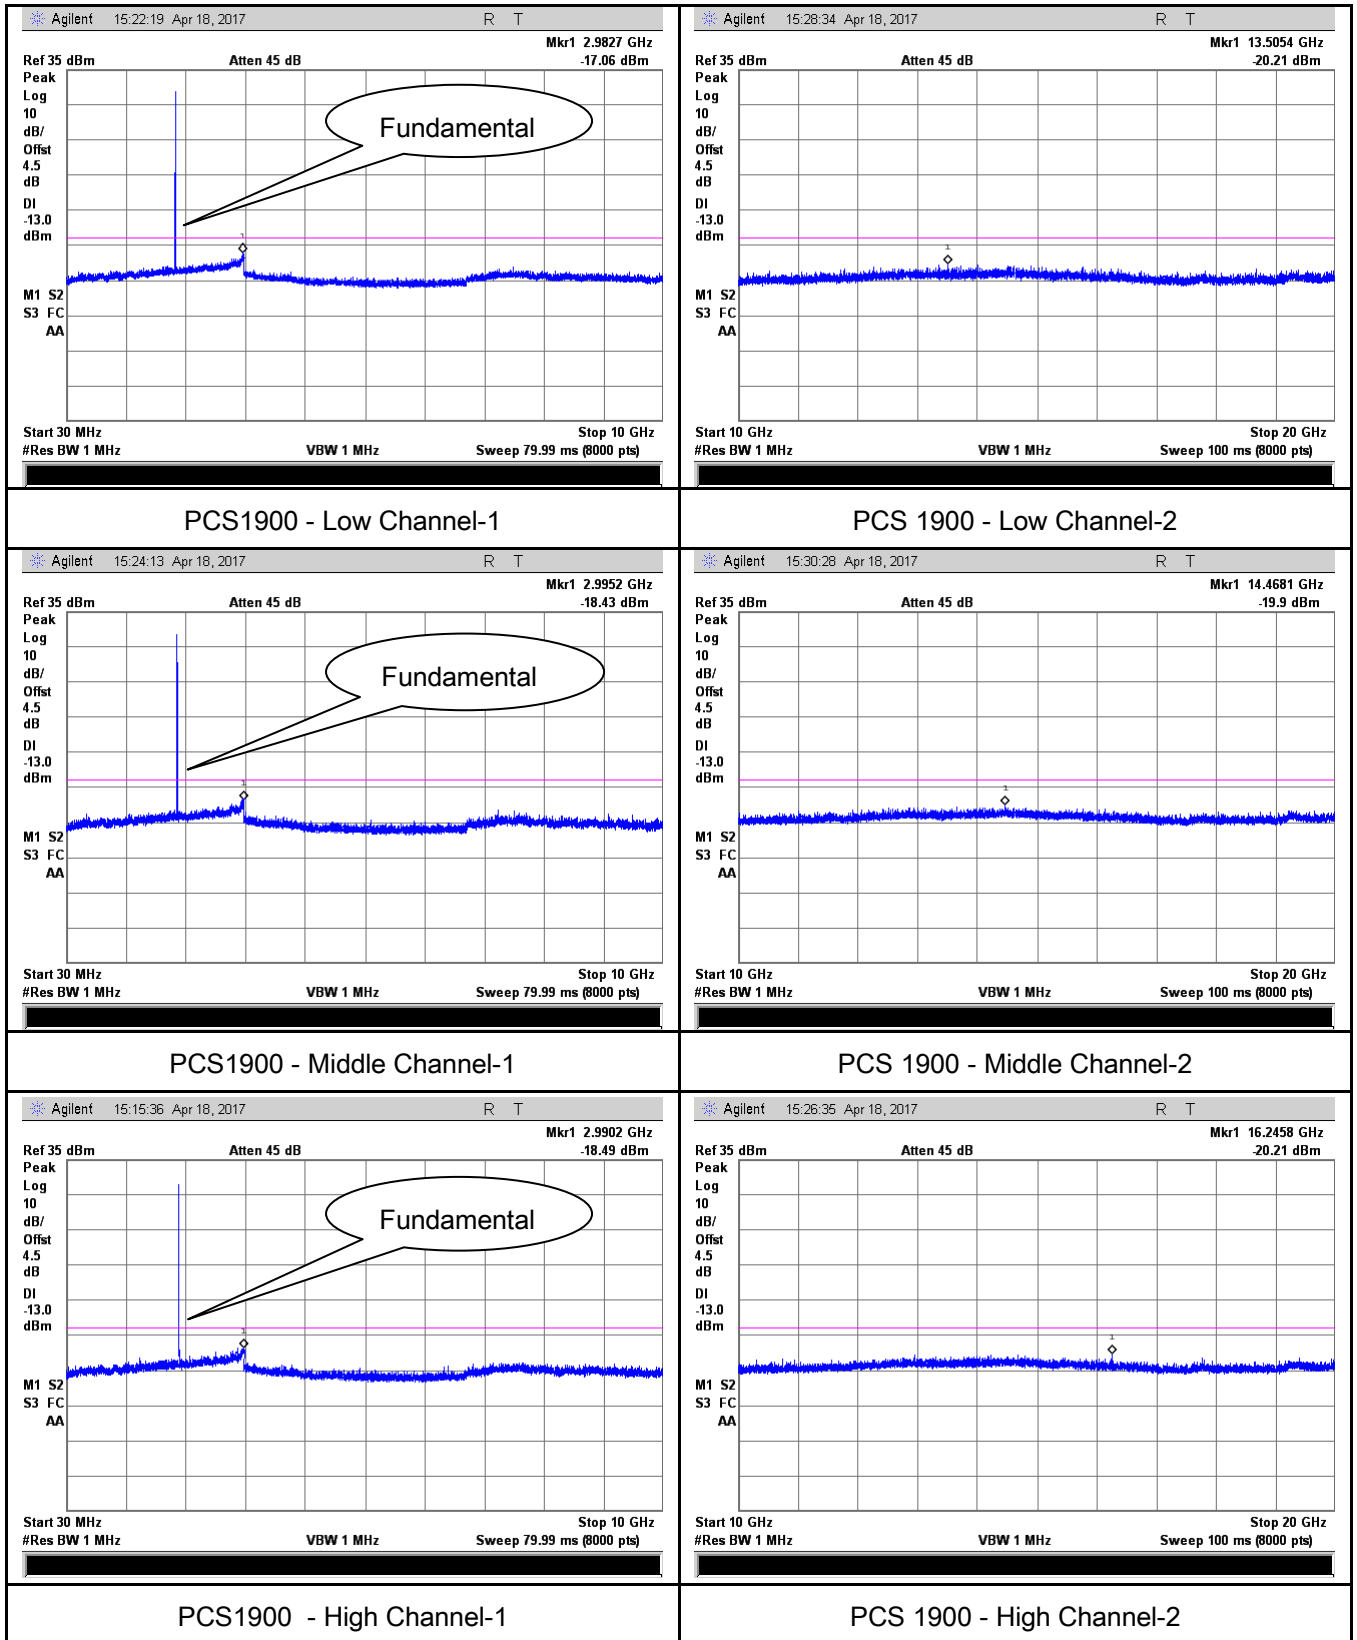


GPRS:



Cellular Band (Part 22H) result

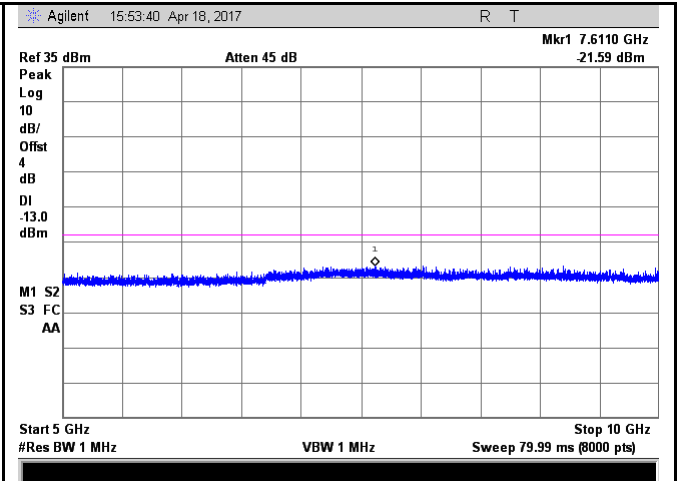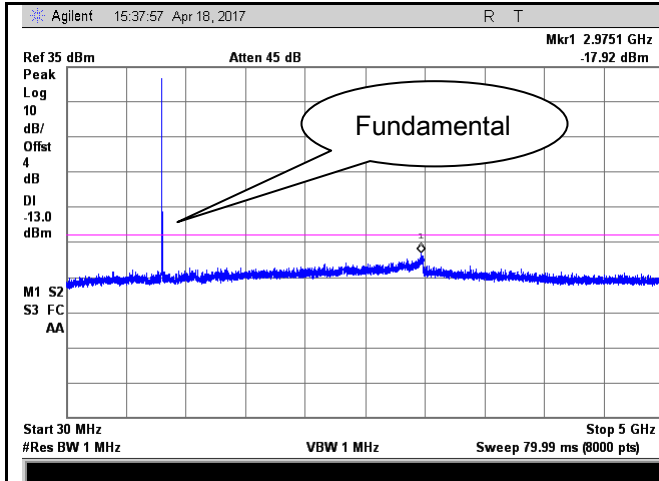

GSM 850 - Low Channel-1

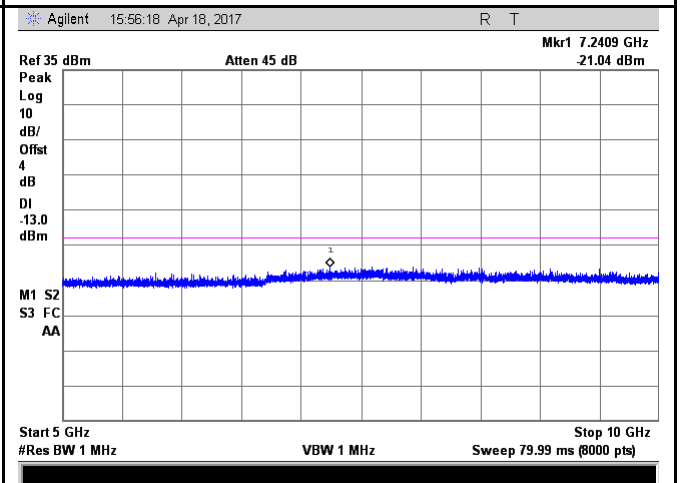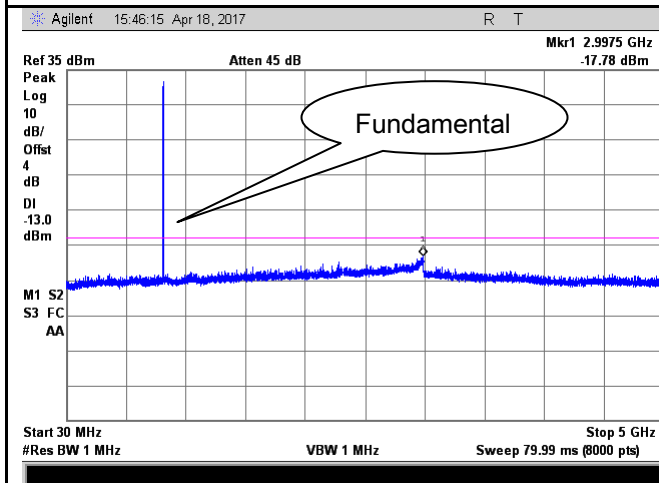


GSM 850 Middle Channel-1

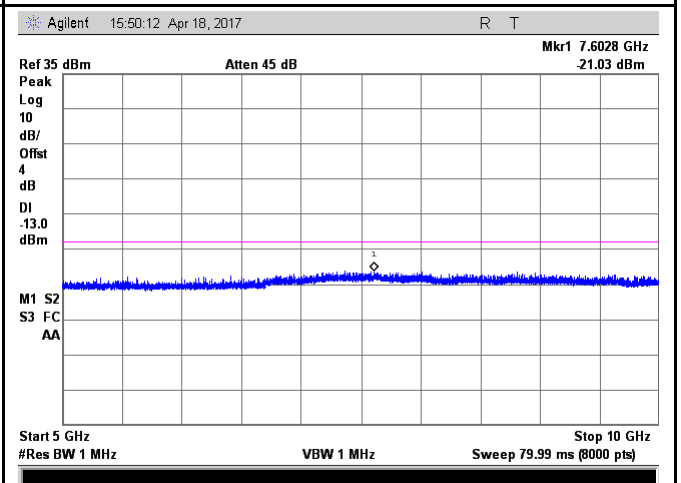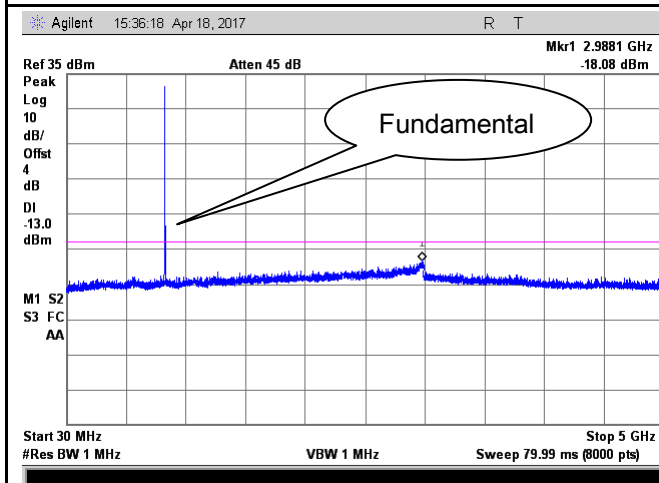

GSM 850 - High Channel-1


GSM 850 - High Channel-2

PCS Band (Part24E) result

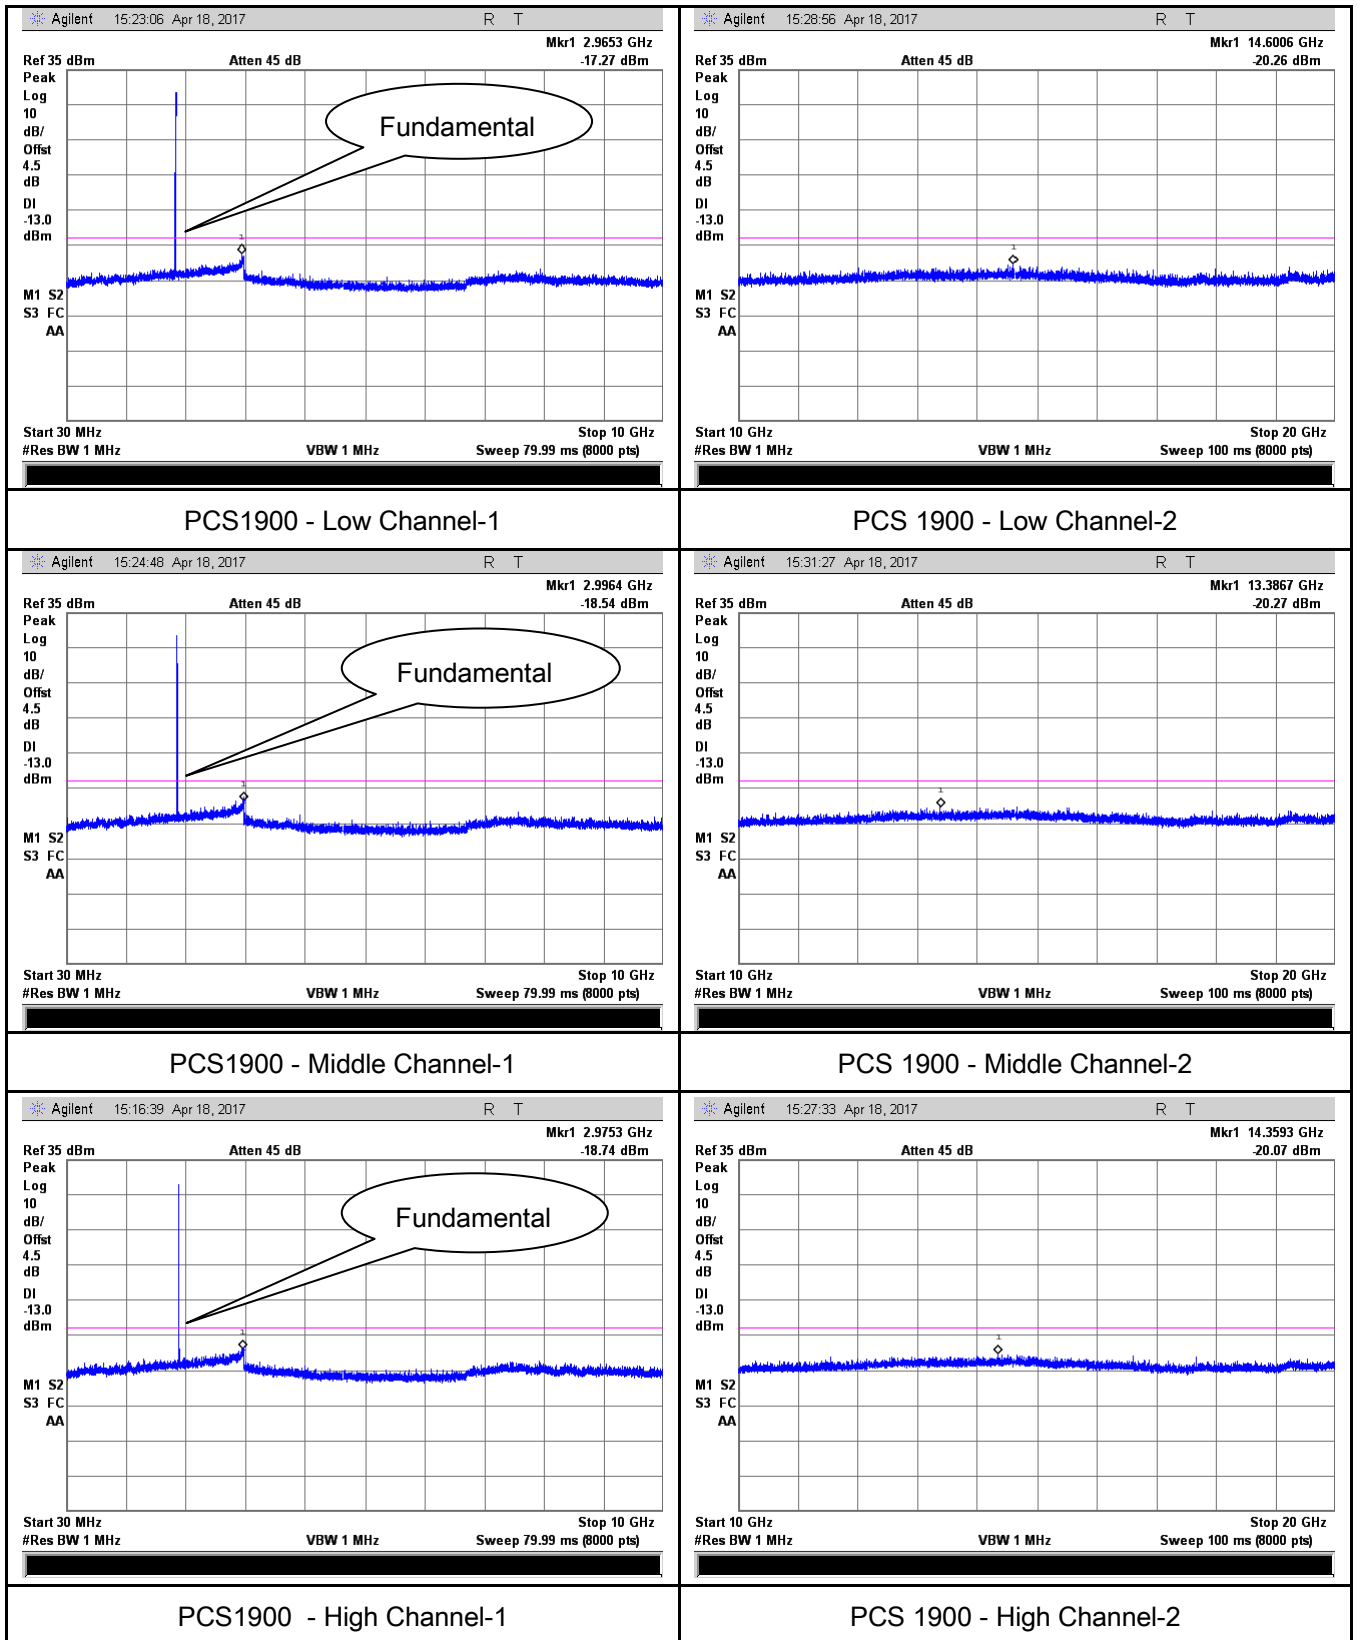


EGPRS (MCS 5):

Cellular Band (Part 22H) result

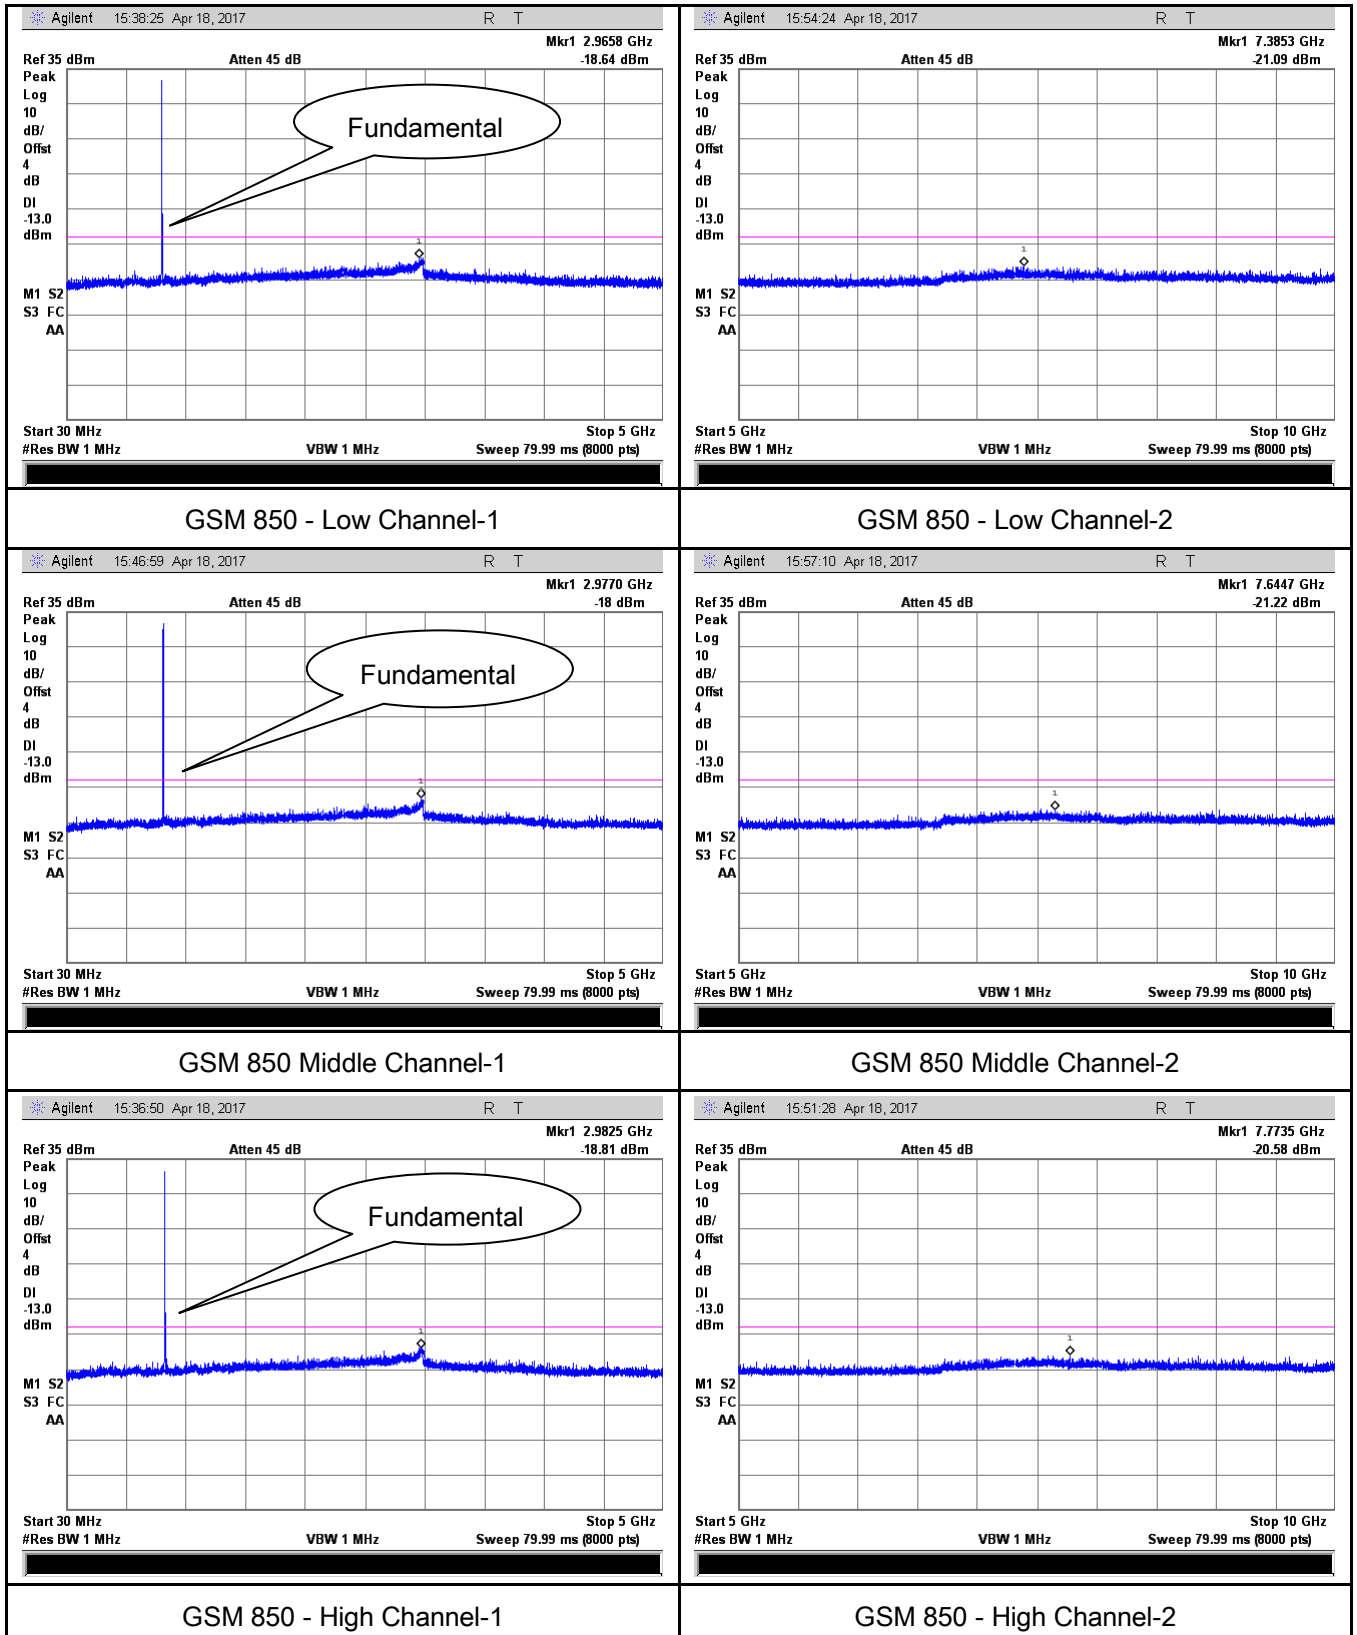


PCS Band (Part24E) result

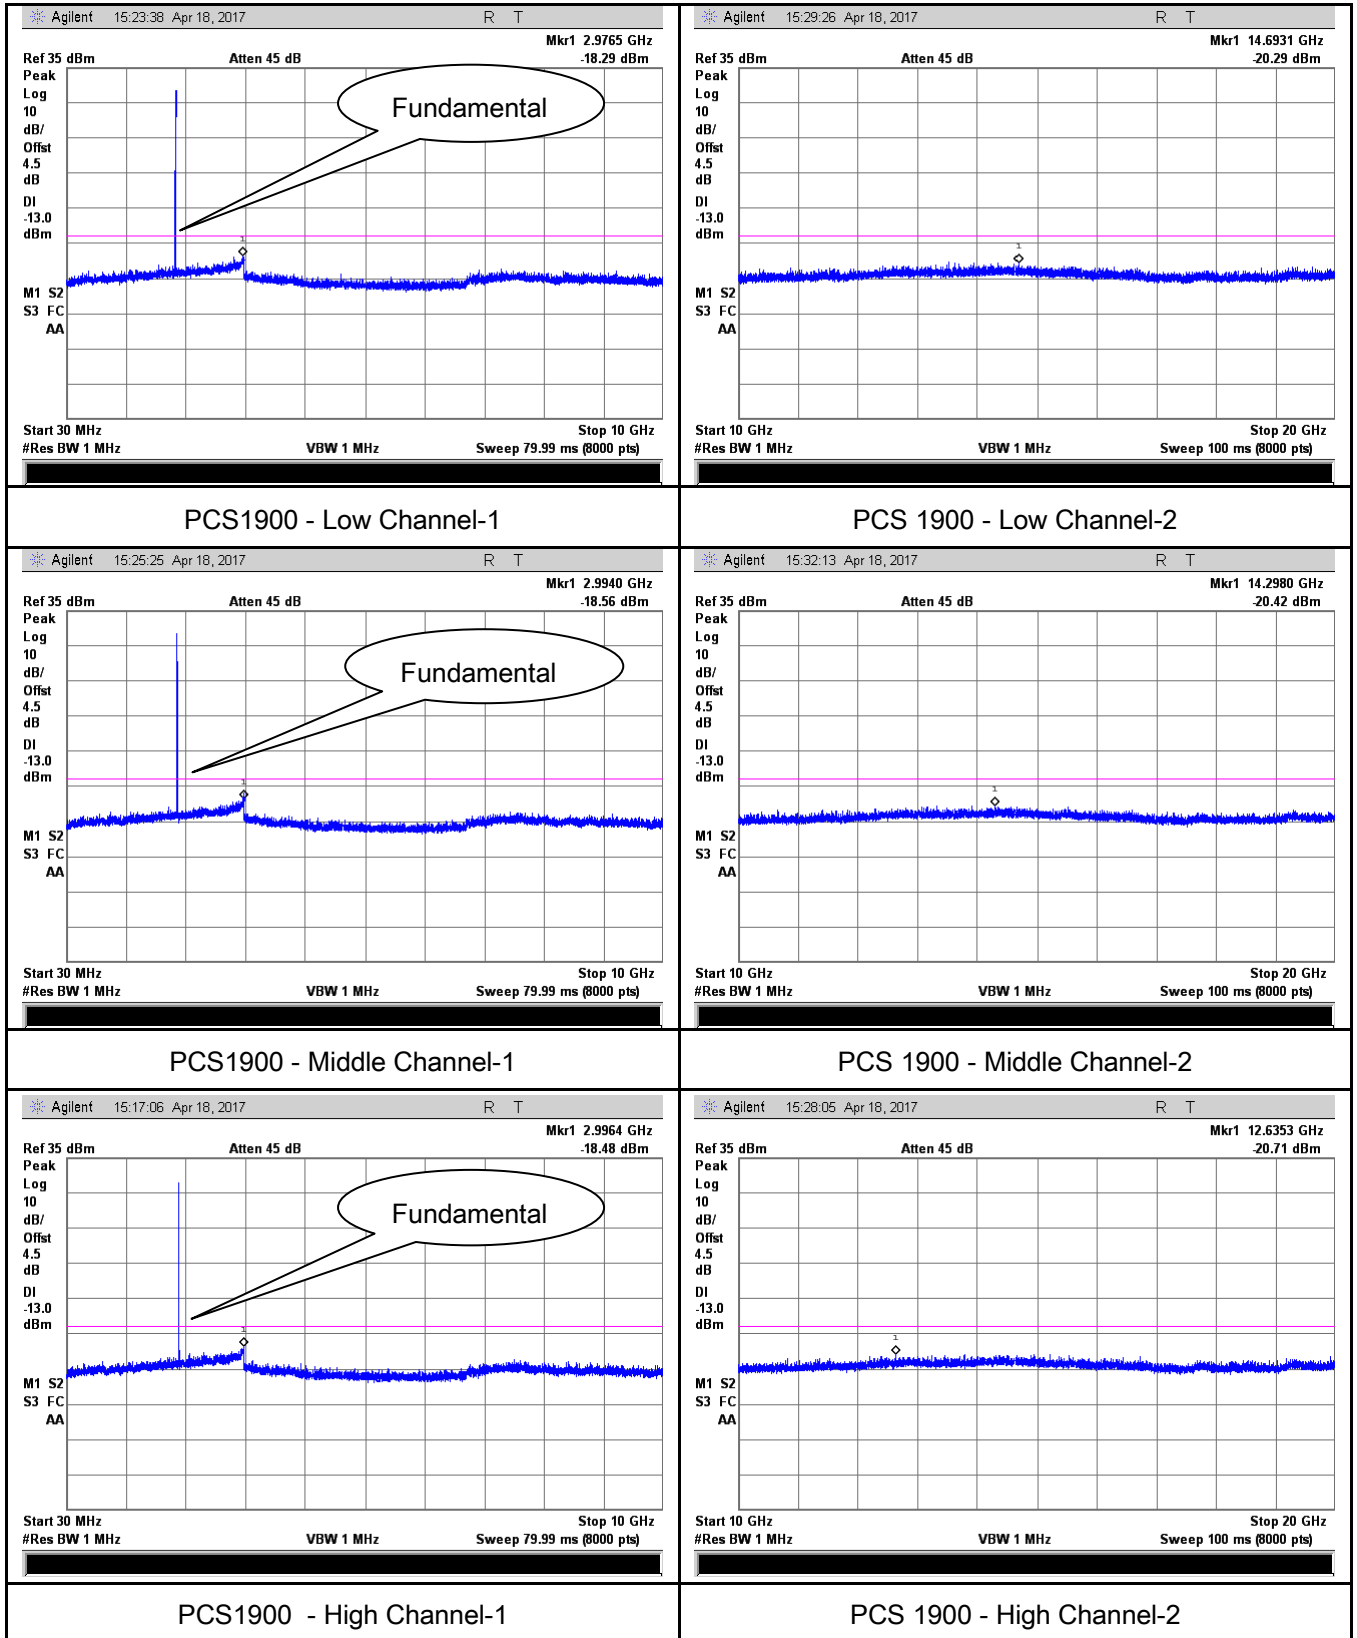


RMC


UMTS-FDD Band V (Part 22H)

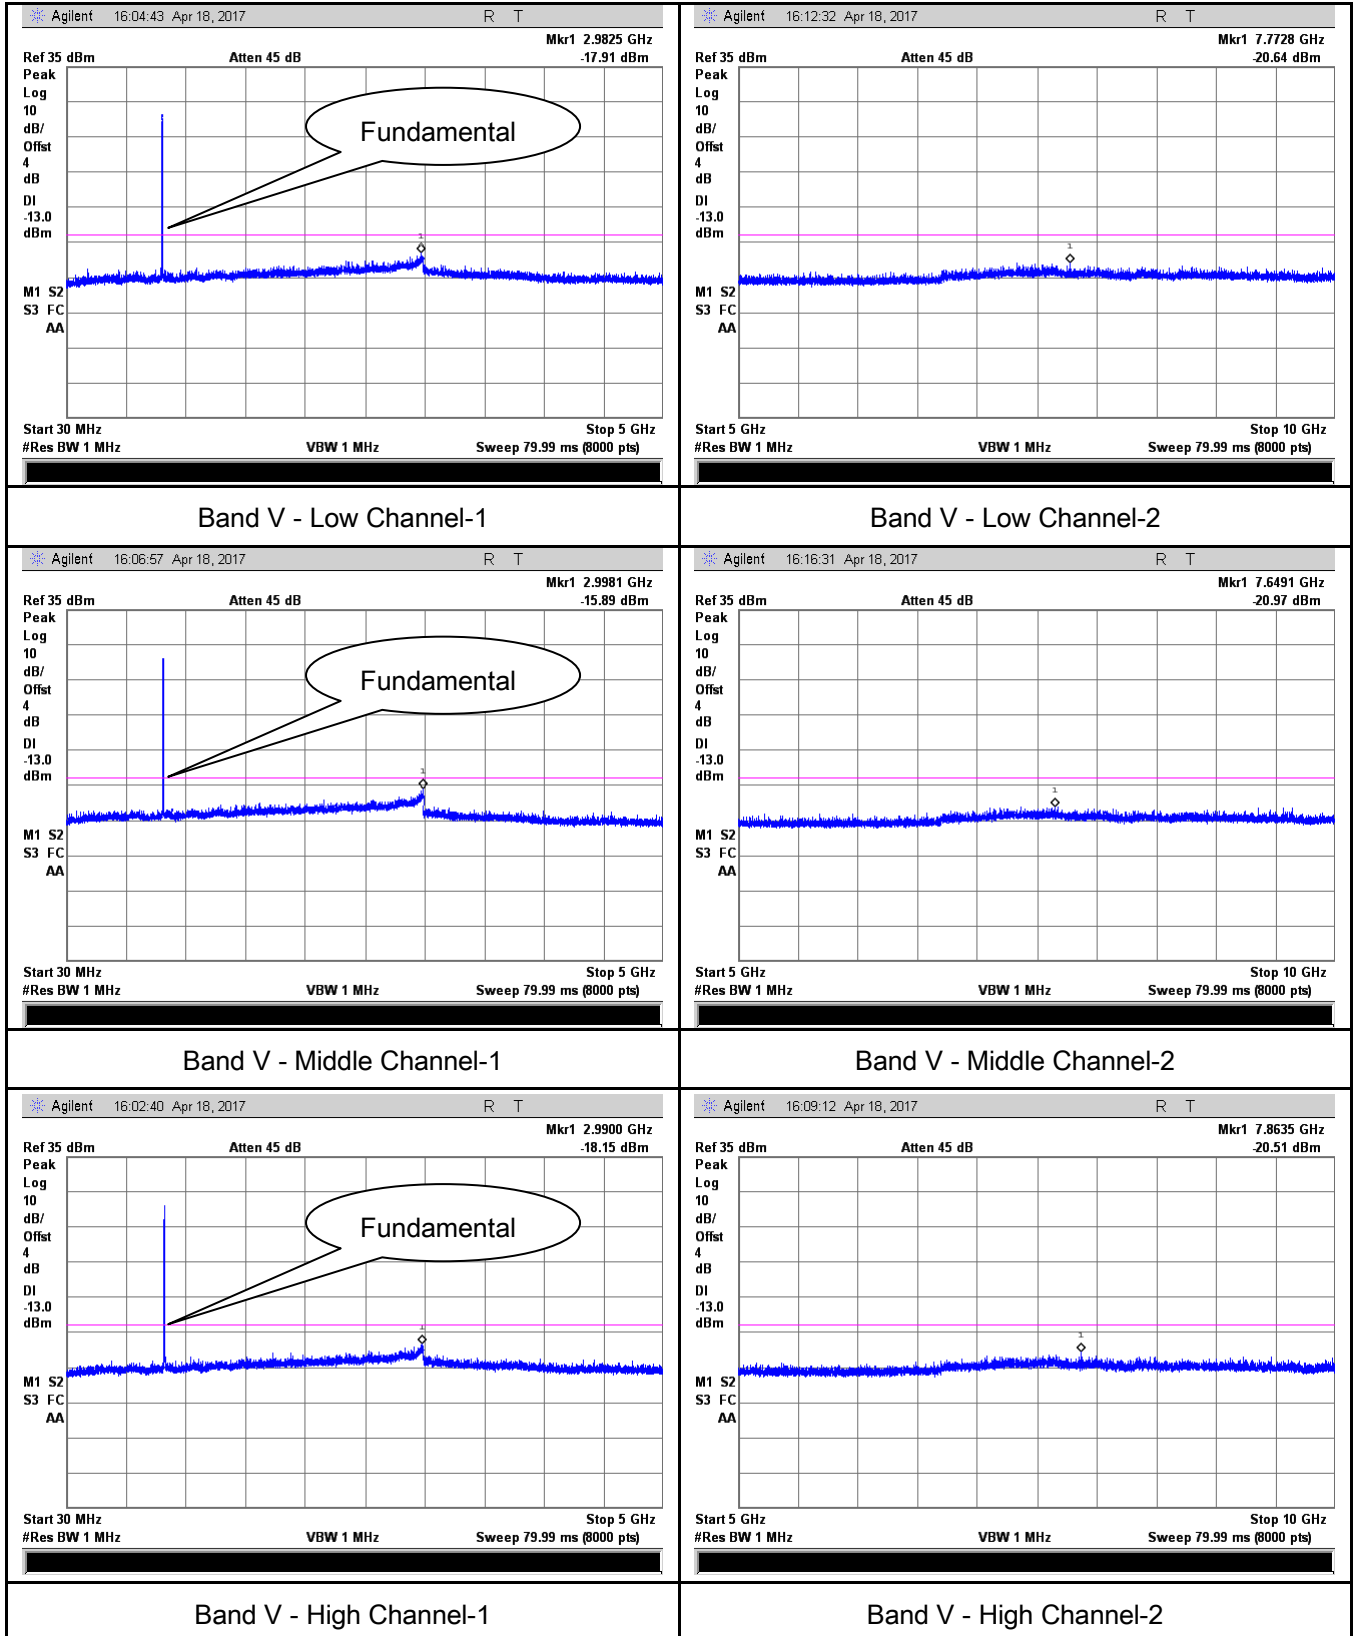


UMTS-FDD Band II (Part 24E)

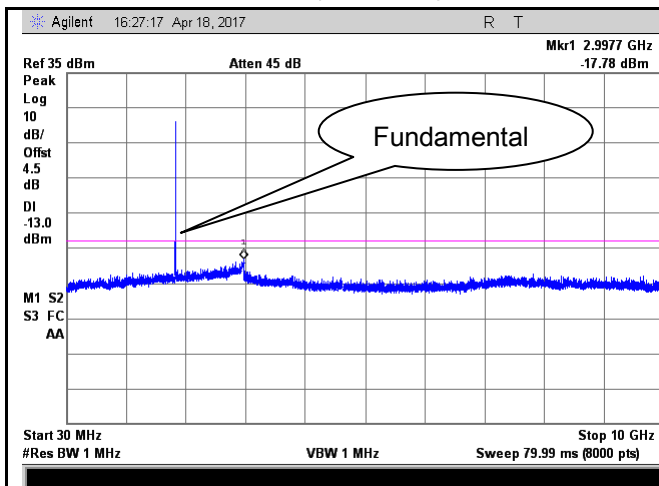


Band II - Low Channel-1

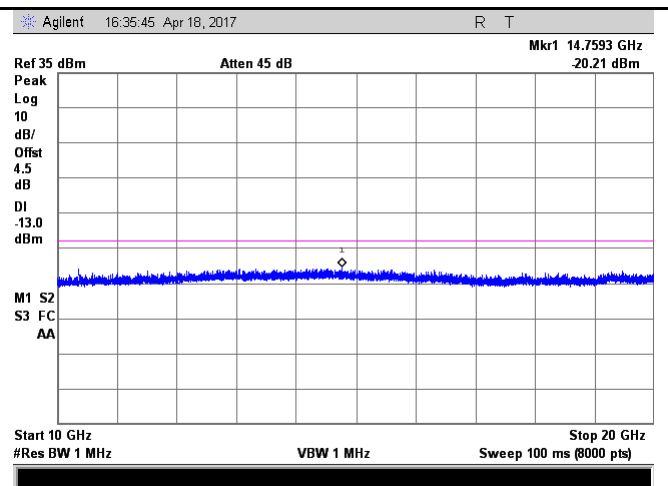


Band II - Low Channel-2

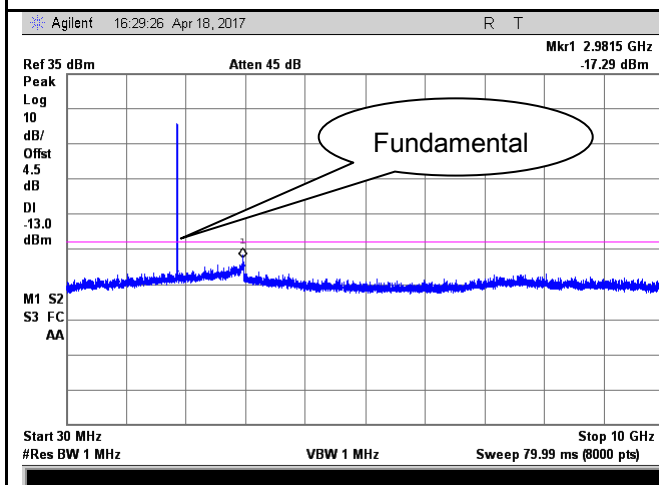


Band II - Middle Channel-1

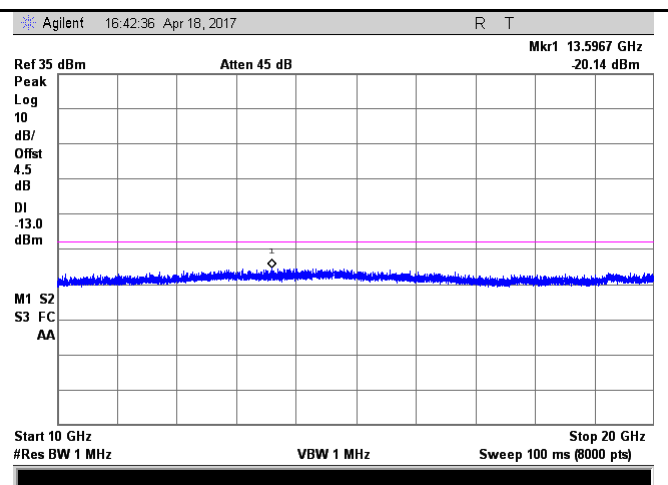

Band II - Middle Channel-2

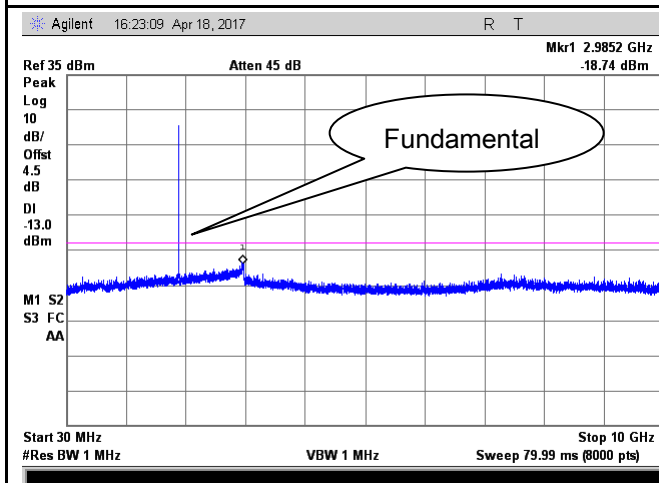


Band II - High Channel-1

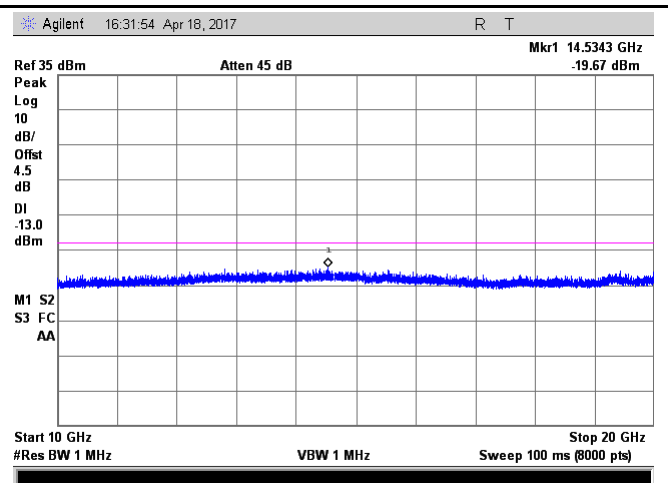


Band II - High Channel-2

HSDPA:


UMTS-FDD Band V (Part 22H)

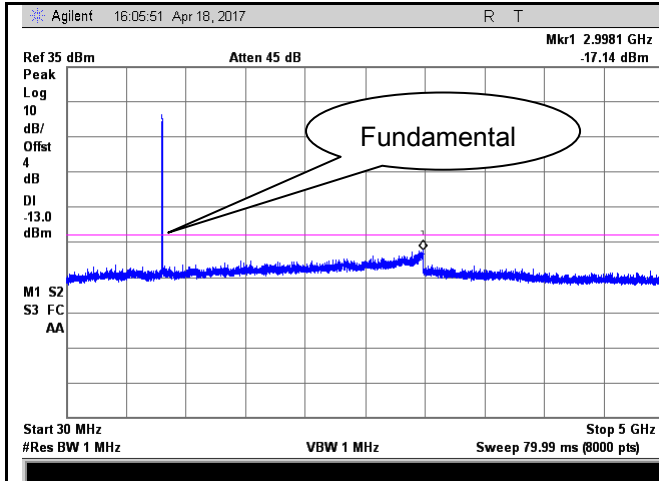


Band V - Low Channel-1

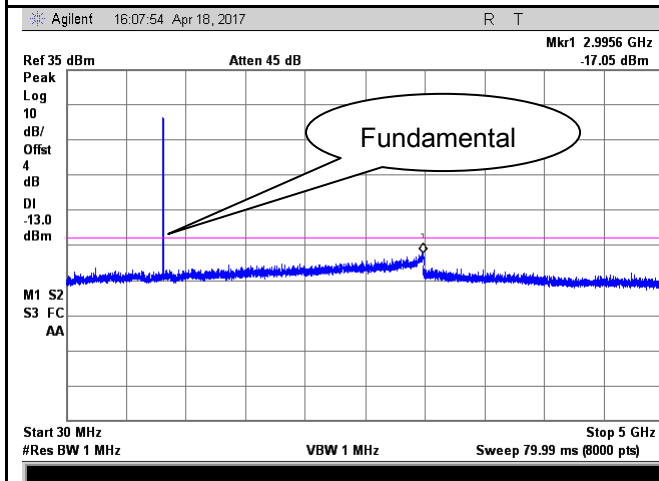


Band V - Middle Channel-1

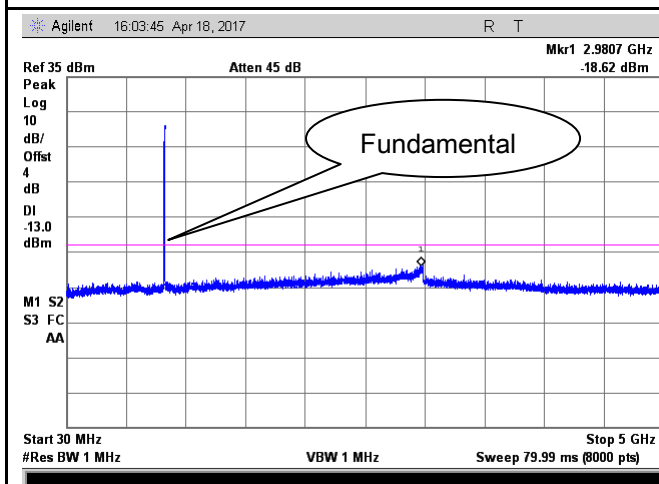


Band V - High Channel-1

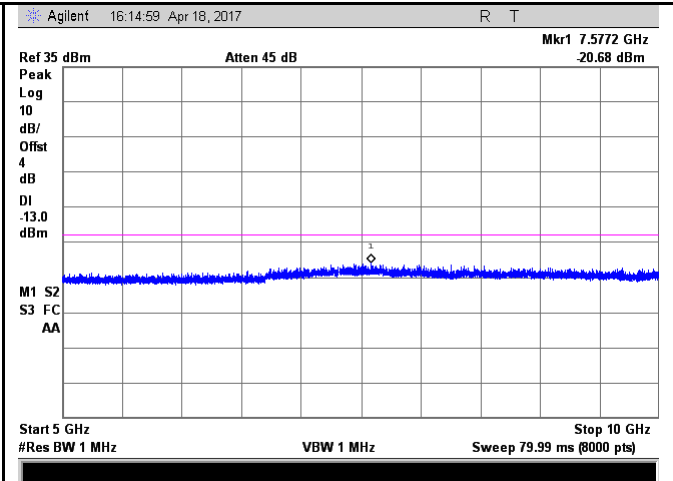

Band V - Low Channel-2

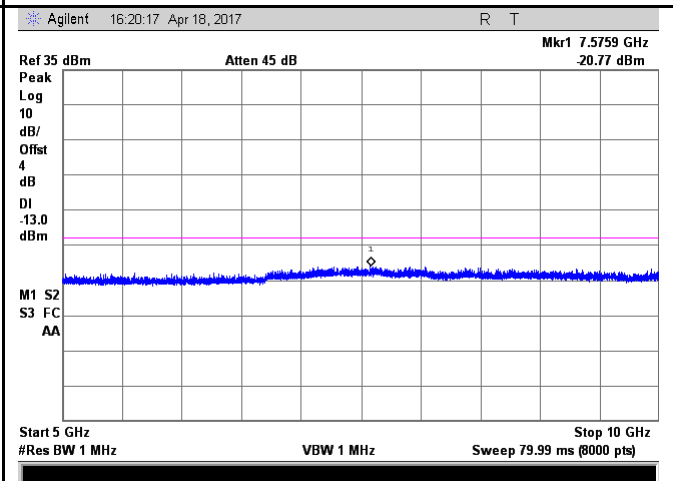


Band V - Middle Channel-2

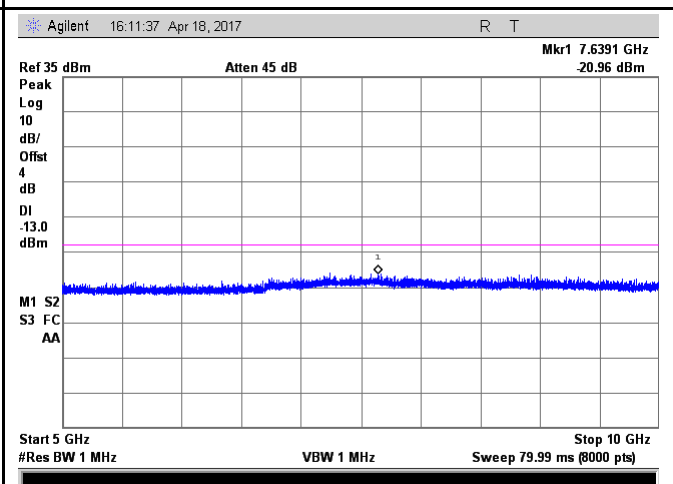



Band V - High Channel-2

UMTS-FDD Band II (Part 24E)


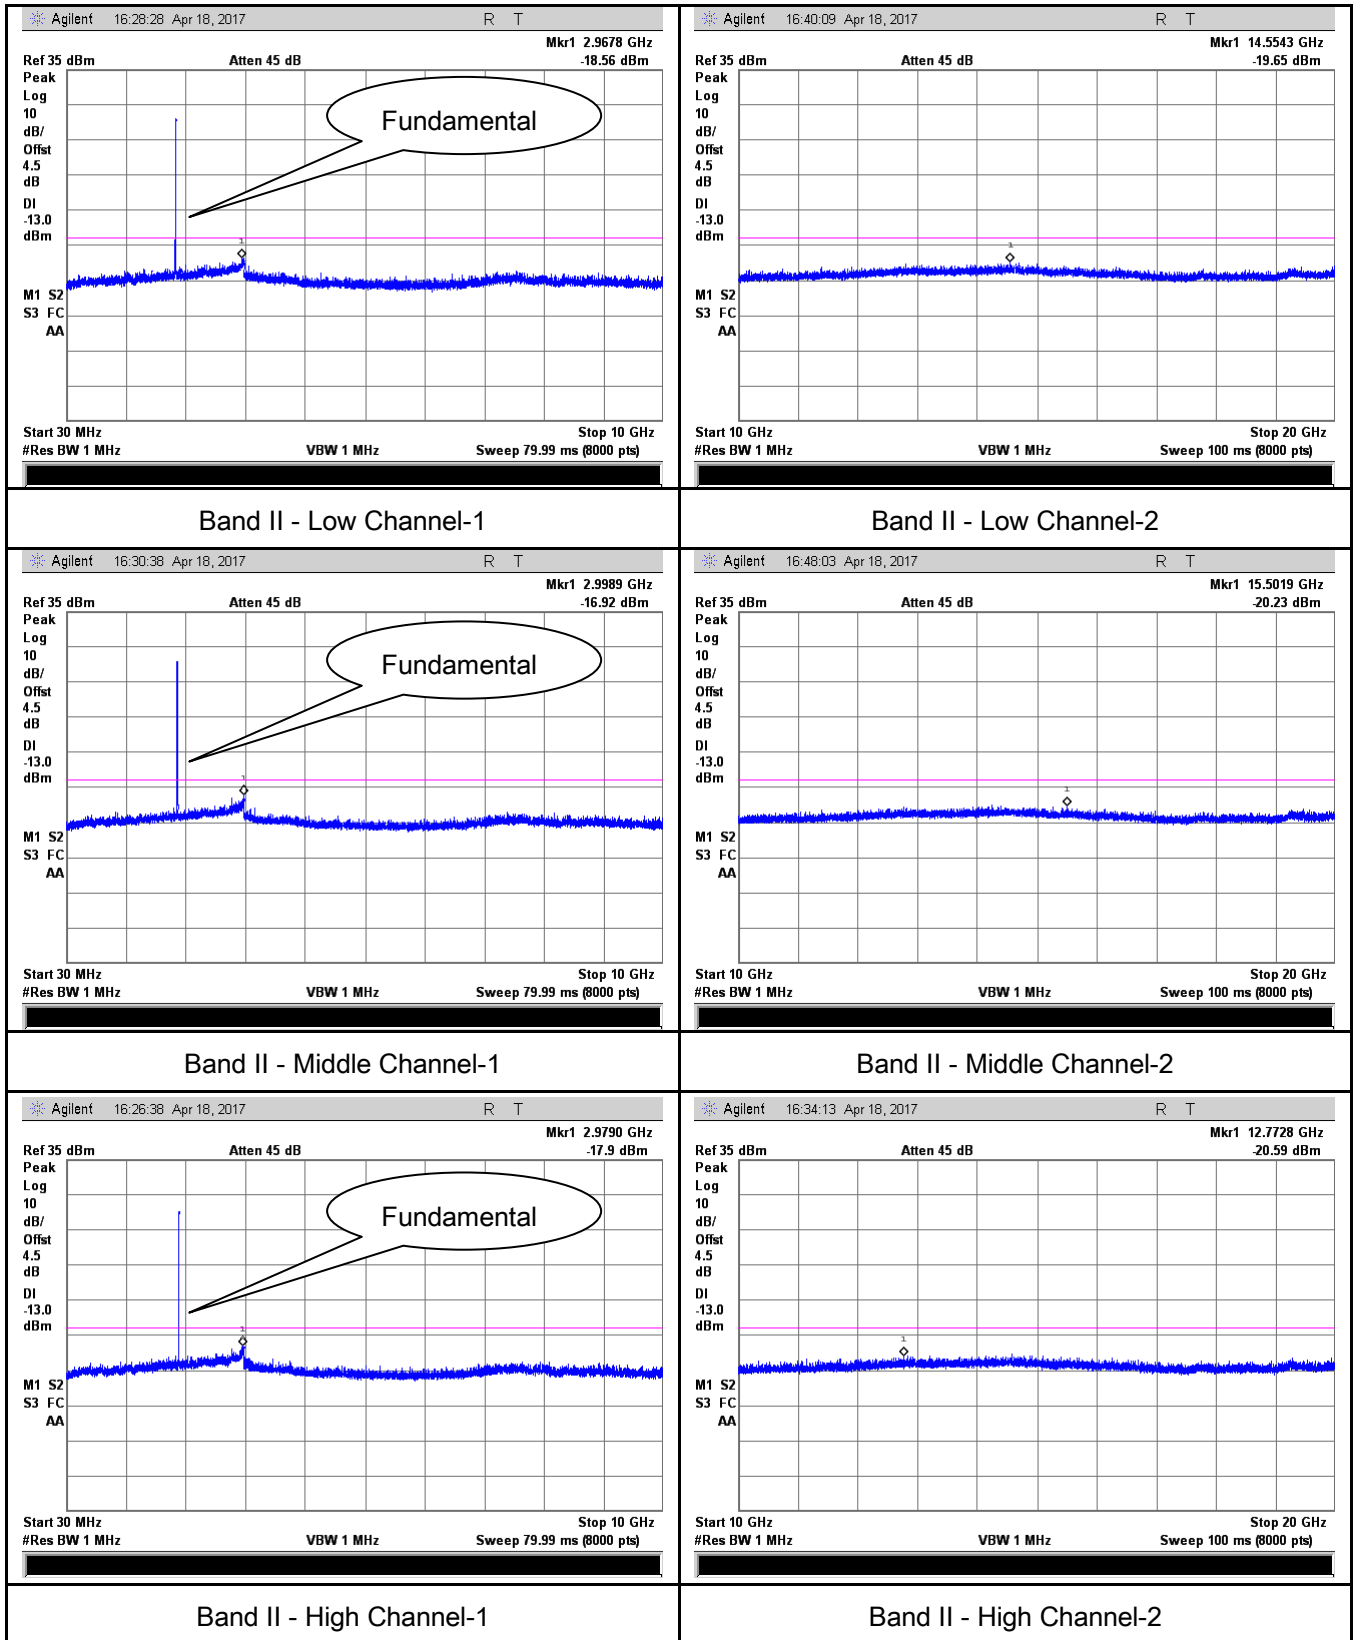


HSUPA:



UMTS-FDD Band V (Part 22H)

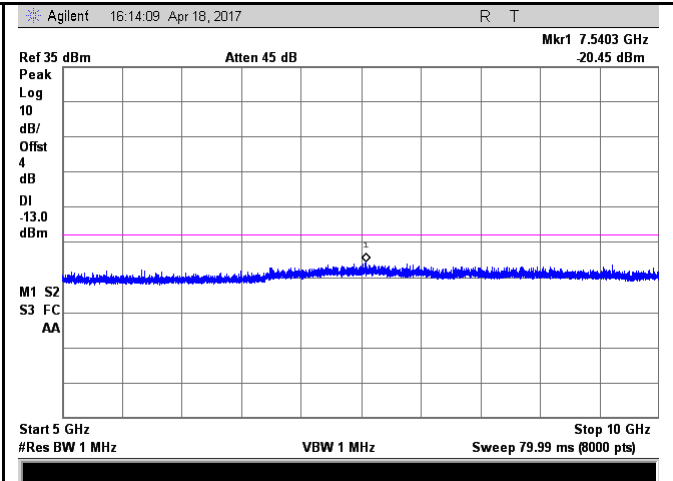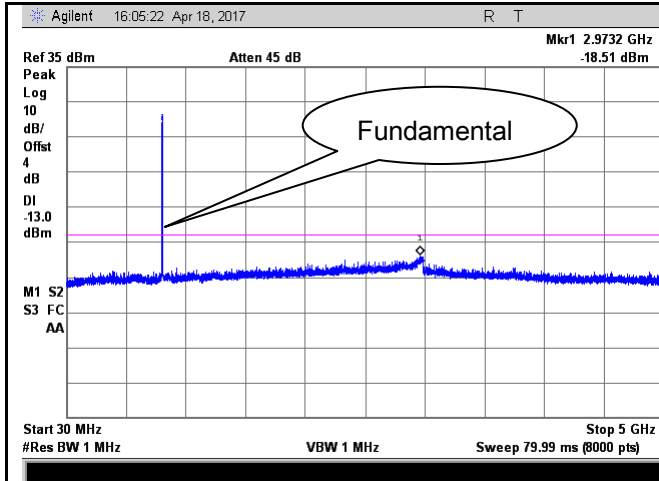

Band V - Low Channel-1

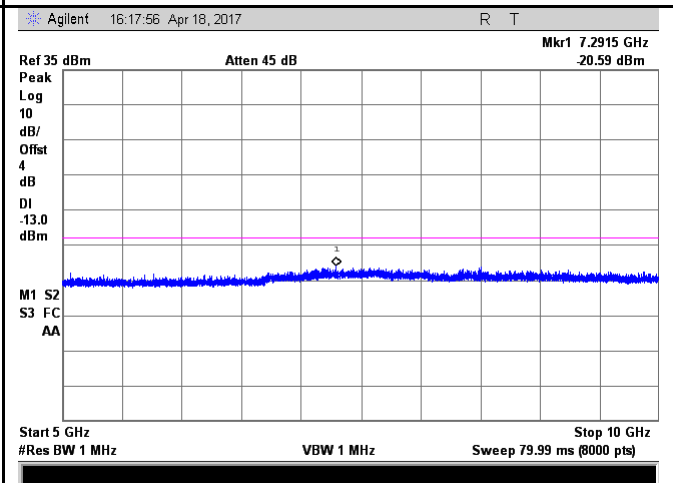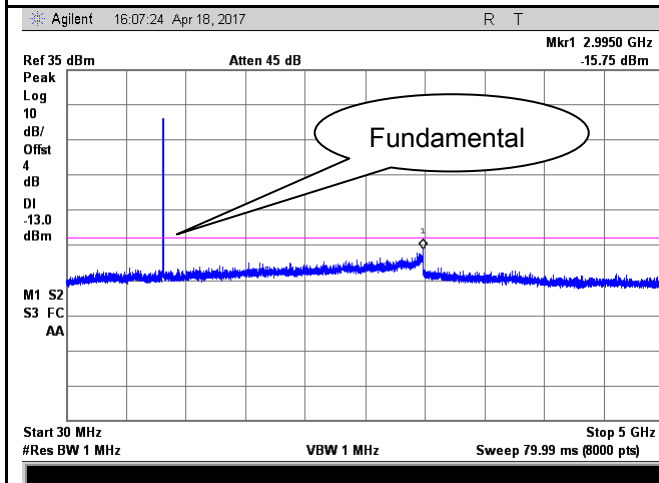


Band V - Middle Channel-1

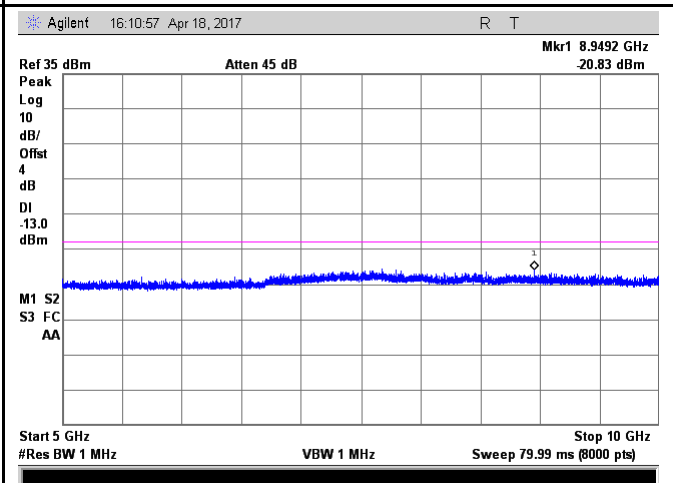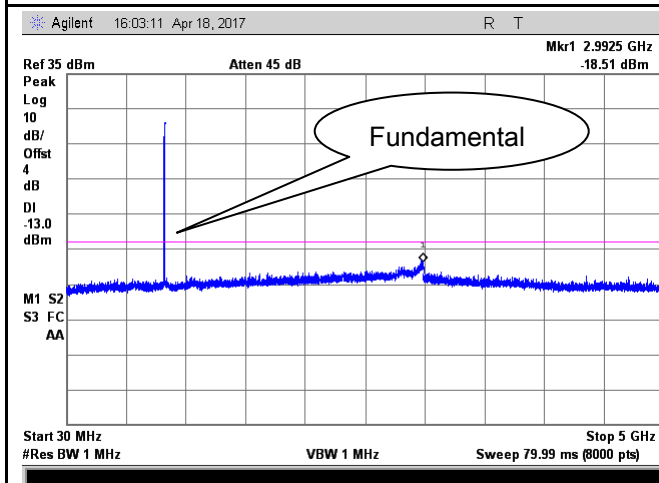

Band V - High Channel-1

Band V - High Channel-2

UMTS-FDD Band II (Part 24E)

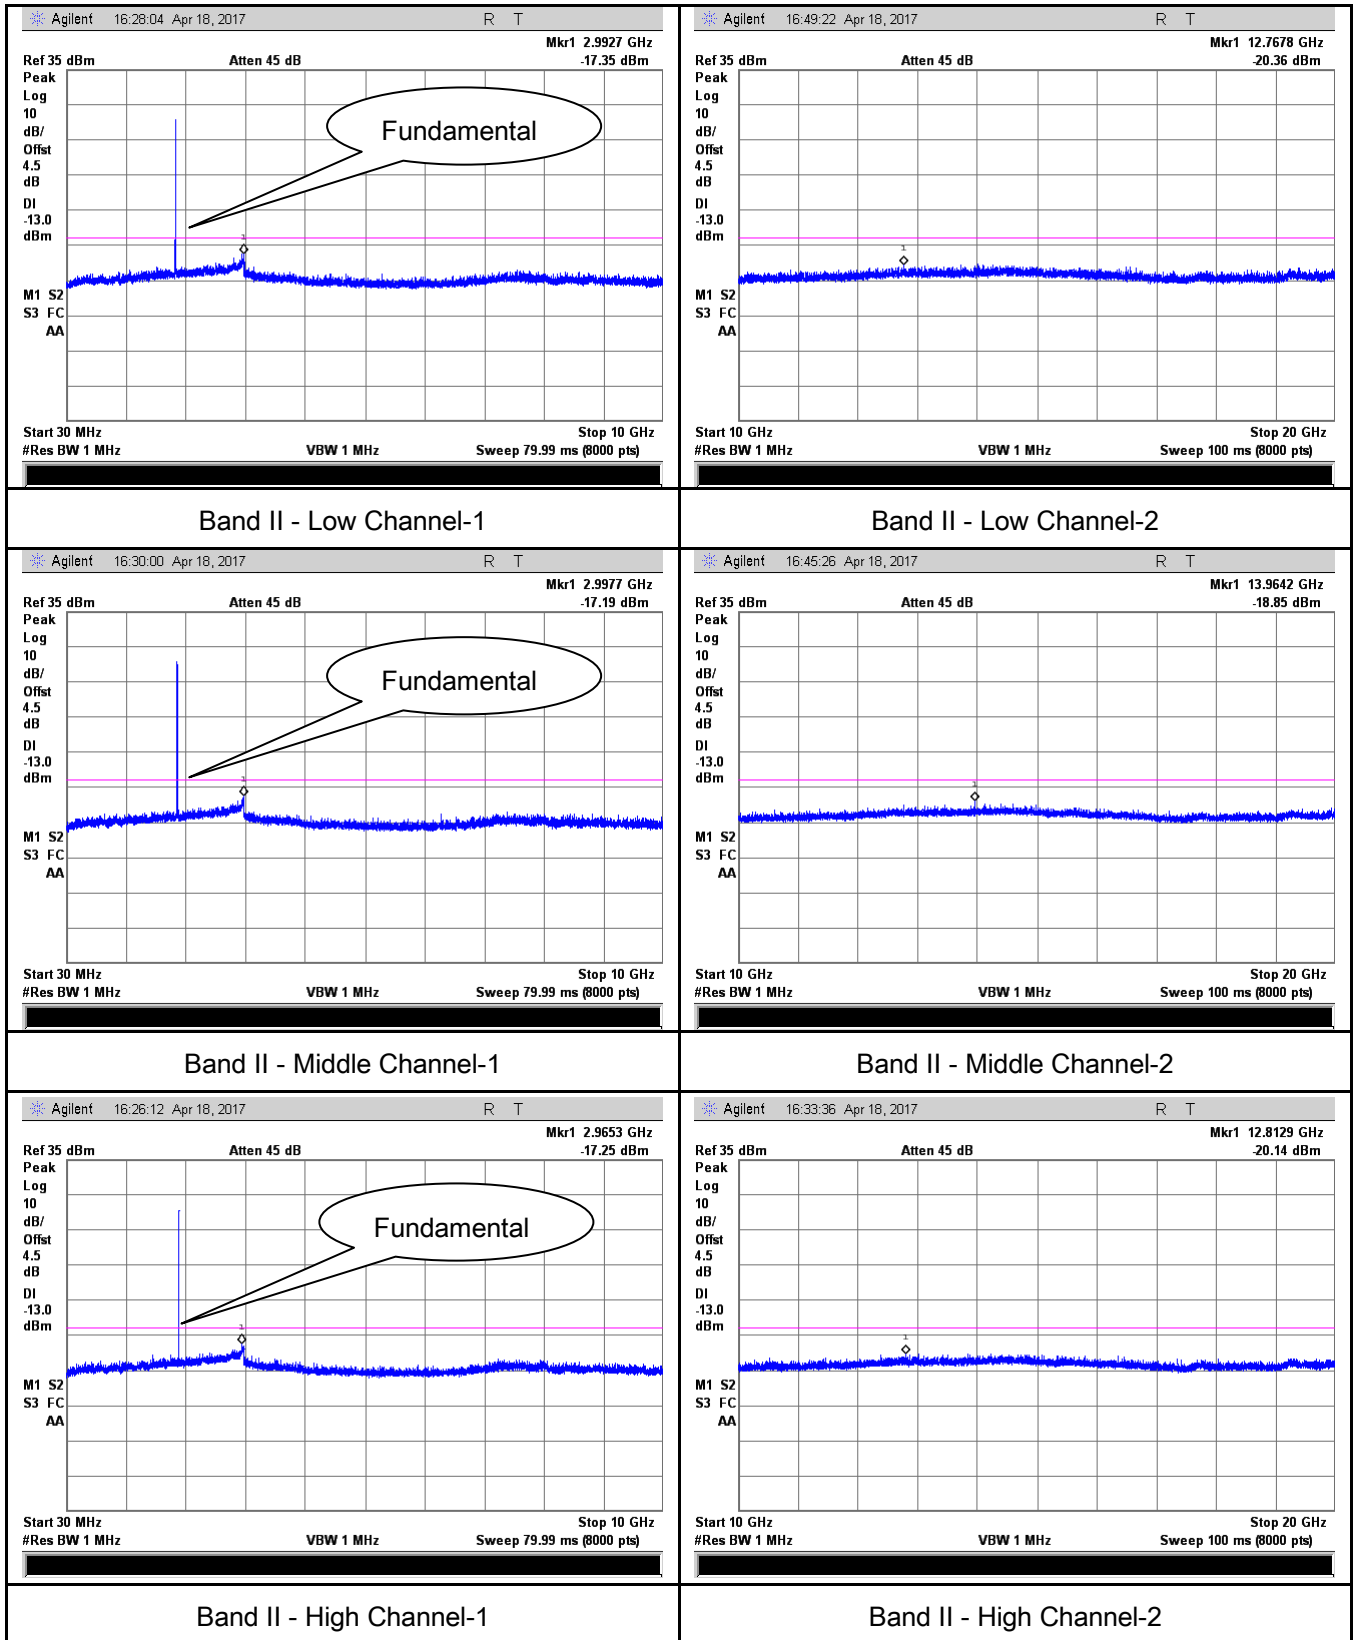


6.6 Spurious Radiated Emissions

Temperature	24°C
Relative Humidity	55%
Atmospheric Pressure	1010mbar
Test date :	April 17, 2017
Tested By :	Leen Yang

Requirement(s):

Spec	Item	Requirement	Applicable
§2.1053, §22.917 & §24.238	a)	The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.	☒

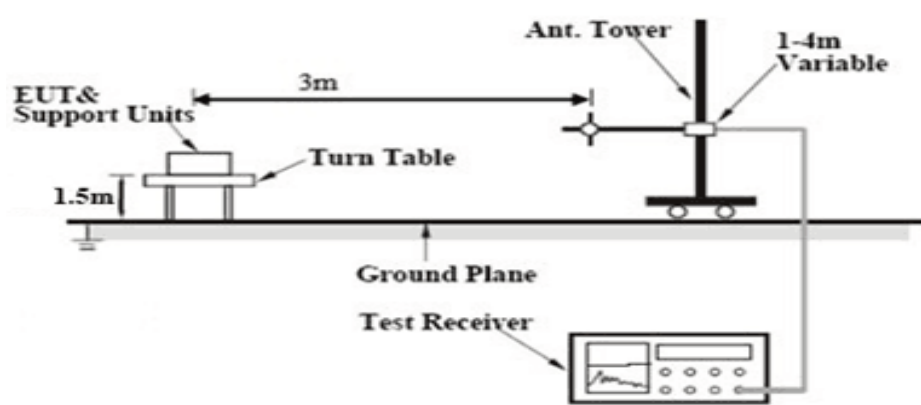Test setup	
------------	--

Test Procedure	- The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable. - The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis. - Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution. Sample Calculation: EUT Field Strength = Raw Amplitude (dBμV/m) – Amplifier Gain (dB) + Antenna Factor (dB) + Cable Loss (dB) + Filter Attenuation (dB, if used)
----------------	---

Test Report	17070248-FCC-R1
Page	52 of 88

Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

Cellular Band (Part 22H) result

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1648.4	-43.65	V	7.95	0.78	-36.48	-13	-23.48
1648.4	-44.28	H	7.95	0.78	-37.11	-13	-24.11
325.4	-52.79	V	6.4	0.26	-46.65	-13	-33.65
609.7	-53.12	H	6.8	0.37	-46.69	-13	-33.69

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1673.2	-43.16	V	7.95	0.78	-35.99	-13	-22.99
1673.2	-43.87	H	7.95	0.78	-36.7	-13	-23.7
324.1	-52.46	V	6.4	0.26	-46.32	-13	-33.32
605.3	-52.89	H	6.8	0.37	-46.46	-13	-33.46

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1697.6	-43.69	V	7.95	0.78	-36.52	-13	-23.52
1697.6	-44.21	H	7.95	0.78	-37.04	-13	-24.04
326.9	-53.76	V	6.4	0.26	-47.62	-13	-34.62
606.7	-51.89	H	6.8	0.37	-45.46	-13	-32.46

Note:

1, The testing has been conformed to $10 \times 848.8 \text{ MHz} = 8,488 \text{ MHz}$

2, All other emissions more than 30 dB below the limit

3, GSM voice, GPRS and EGPRS mode were investigated. The results above show only the worse cases

4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

PCS Band (Part24E) result

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3700.4	-49.57	V	10.25	2.73	-42.05	-13	-29.05
3700.4	-49.03	H	10.25	2.73	-41.51	-13	-28.51
327.4	-53.16	V	6.4	0.26	-47.02	-13	-34.02
601.5	-52.87	H	6.8	0.37	-46.44	-13	-33.44

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3760	-48.75	V	10.25	2.73	-41.23	-13	-28.23
3760	-49.51	H	10.25	2.73	-41.99	-13	-28.99
326.5	-53.64	V	6.4	0.26	-47.5	-13	-34.5
609.2	-53.97	H	6.8	0.37	-47.54	-13	-34.54

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3819.6	-49.11	V	10.36	2.73	-41.48	-13	-28.48
3819.6	-49.44	H	10.36	2.73	-41.81	-13	-28.81
322.5	-53.67	V	6.4	0.26	-47.53	-13	-34.53
601.8	-52.48	H	6.8	0.37	-46.05	-13	-33.05

Note:

- 1, The testing has been conformed to $10 \times 1909.8 \text{ MHz} = 19,098 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, GSM voice, GPRS and EGPRS mode were investigated. The results above show only the worse cases
- 4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

UMTS-FDD Band V (Part 22H)

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1652.8	-47.13	V	7.95	0.78	-39.96	-13	-26.96
1652.8	-46.85	H	7.95	0.78	-39.68	-13	-26.68
329.7	-53.29	V	6.4	0.26	-47.15	-13	-34.15
603.2	-53.78	H	6.8	0.37	-47.35	-13	-34.35

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1670	-48.79	V	7.95	0.78	-41.62	-13	-28.62
1670	-46.21	H	7.95	0.78	-39.04	-13	-26.04
324.7	-53.49	V	6.4	0.26	-47.35	-13	-34.35
605.2	-53.28	H	6.8	0.37	-46.85	-13	-33.85

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1693.2	-46.77	V	7.95	0.78	-39.6	-13	-26.60
1693.2	-45.31	H	7.95	0.78	-38.14	-13	-25.14
326.8	-52.98	V	6.4	0.26	-46.84	-13	-33.84
600.2	-53.24	H	6.8	0.37	-46.81	-13	-33.81

Note:

1, The testing has been conformed to $10 \times 846.6 \text{ MHz} = 8,466 \text{ MHz}$

2, All other emissions more than 30 dB below the limit

3, RMC, HSUPA and HSDPA mode were investigated. The results above show only the worse cases

4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

UMTS-FDD Band II (Part 24E)

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3704.8	-49.78	V	10.25	2.73	-42.26	-13	-29.26
3704.8	-50.32	H	10.25	2.73	-42.8	-13	-29.80
324.7	-53.64	V	6.4	0.26	-47.5	-13	-34.50
605.3	-53.98	H	6.8	0.37	-47.55	-13	-34.55

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3760	-49.56	V	10.25	2.73	-42.04	-13	-29.04
3760	-49.78	H	10.25	2.73	-42.26	-13	-29.26
324.1	-53.64	V	6.4	0.26	-47.5	-13	-34.50
609.5	-54.13	H	6.8	0.37	-47.7	-13	-34.70

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3815.2	-50.26	V	10.36	2.73	-42.63	-13	-29.63
3815.2	-49.87	H	10.36	2.73	-42.24	-13	-29.24
325.8	-54.31	V	6.4	0.26	-48.17	-13	-35.17
608.3	-53.96	H	6.8	0.37	-47.53	-13	-34.53

Note:

1, The testing has been conformed to $10 \times 1907.6 \text{ MHz} = 19,076 \text{ MHz}$

2, All other emissions more than 30 dB below the limit


3, RMC, HSUPA and HSDPA mode were investigated. The results above show only the worse cases

4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case

6.7 Band Edge

Temperature	22°C
Relative Humidity	55%
Atmospheric Pressure	1015mbar
Test date :	April 18, 2017
Tested By :	Leen Yang

Requirement(s):

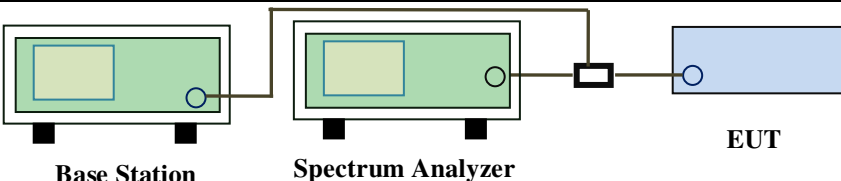Spec	Item	Requirement	Applicable
§22.917(a) §24.238(a)	a)	The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.	☒
Test setup	 The diagram shows a Base Station (green box) and a Spectrum Analyzer (green box) connected to an EUT (blue box) via a power divider (black box). The Base Station and Spectrum Analyzer are connected to the power divider, which then splits the signal to the EUT.		
Procedure	- The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The Band Edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.		
Remark			
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

GSM Voice:

Cellular Band (Part 22H) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.9975	-14.88	-13
849.0225	-16.47	-13

PCS Band (Part24E) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.9975	-14.07	-13
1910.0025	-13.96	-13

GPRS:

Cellular Band (Part 22H) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.9975	-15.40	-13
849.0200	-14.84	-13

PCS Band (Part24E) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.9975	-14.56	-13
1910.0175	-14.29	-13

EGPRS (MCS5):

Cellular Band (Part 22H) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.9975	-16.39	-13
849.0025	-16.05	-13

PCS Band (Part24E) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.9975	-14.79	-13
1910.0200	-15.48	-13

RMC:

UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.800	-22.60	-13
849.025	-28.49	-13

UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.900	-28.90	-13
1910.075	-22.92	-13

HSDPA:

UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.975	-22.69	-13
849.025	-28.12	-13

UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.925	-29.41	-13
1910.025	-24.22	-13

HSUPA:

UMTS-FDD Band V (Part 22H)


Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.950	-21.85	-13
849.125	-28.82	-13

UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.900	-27.68	-13
1910.050	-23.33	-13


GSM Voice:

Test Plots

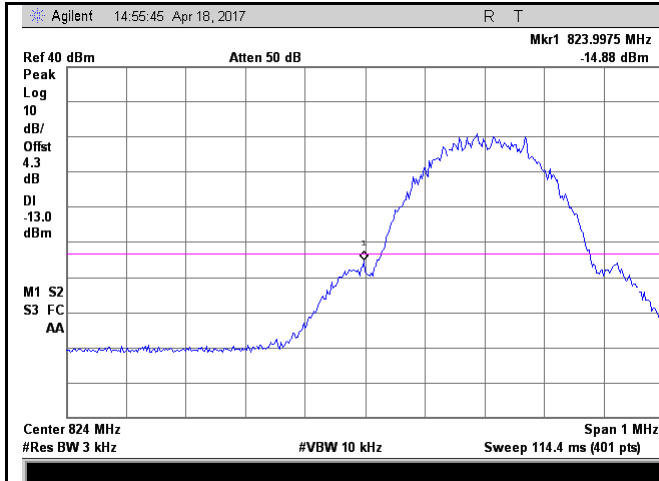


Cellular Band - Low Channel

Note: Offset=Cable loss (4.0) + 10log
(3.19/3)=4.0+0.3=4.3dB

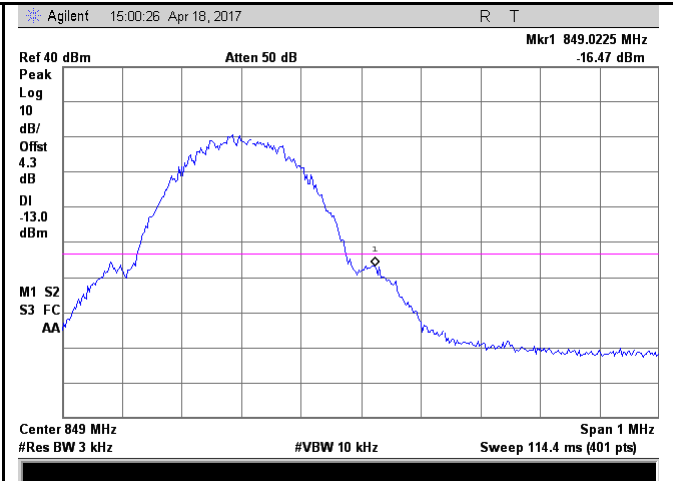


Cellular Band - High Channel

Note: Offset=Cable loss (4.0) + 10log
(3.20/3)=4.0+0.3=4.3dB

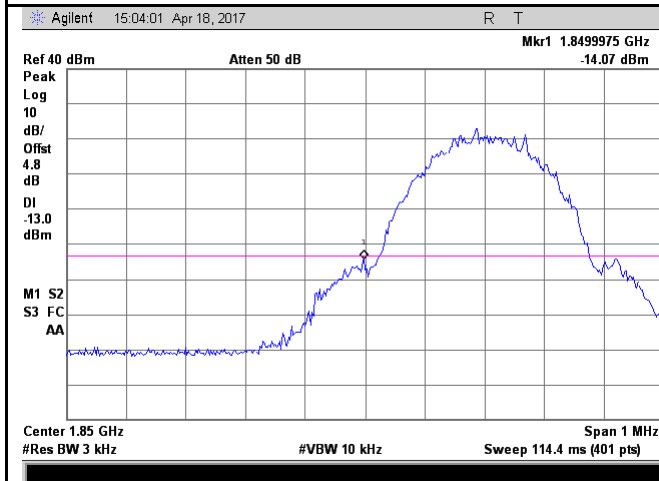

PCS Band - Low Channel

Note: Offset=Cable loss (4.0) + 10log
(3.18/3)=4.5+0.3=4.8dB

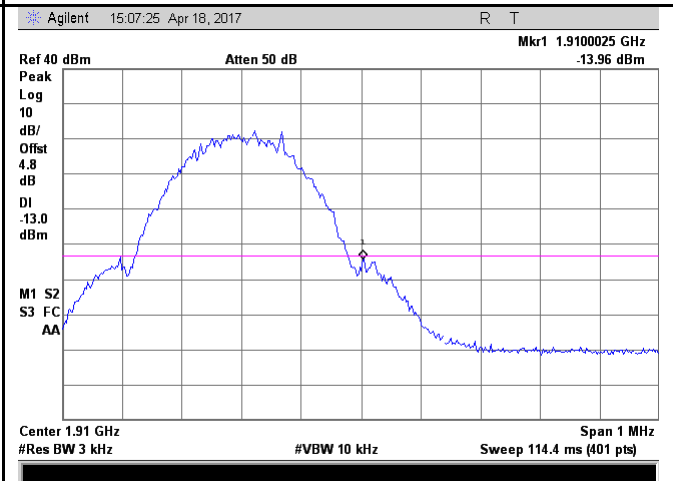


PCS Band - High Channel

Note: Offset=Cable loss (4.0) + 10log
(3.19/3)=4.5+0.3=4.8dB


GPRS:

Test Plots

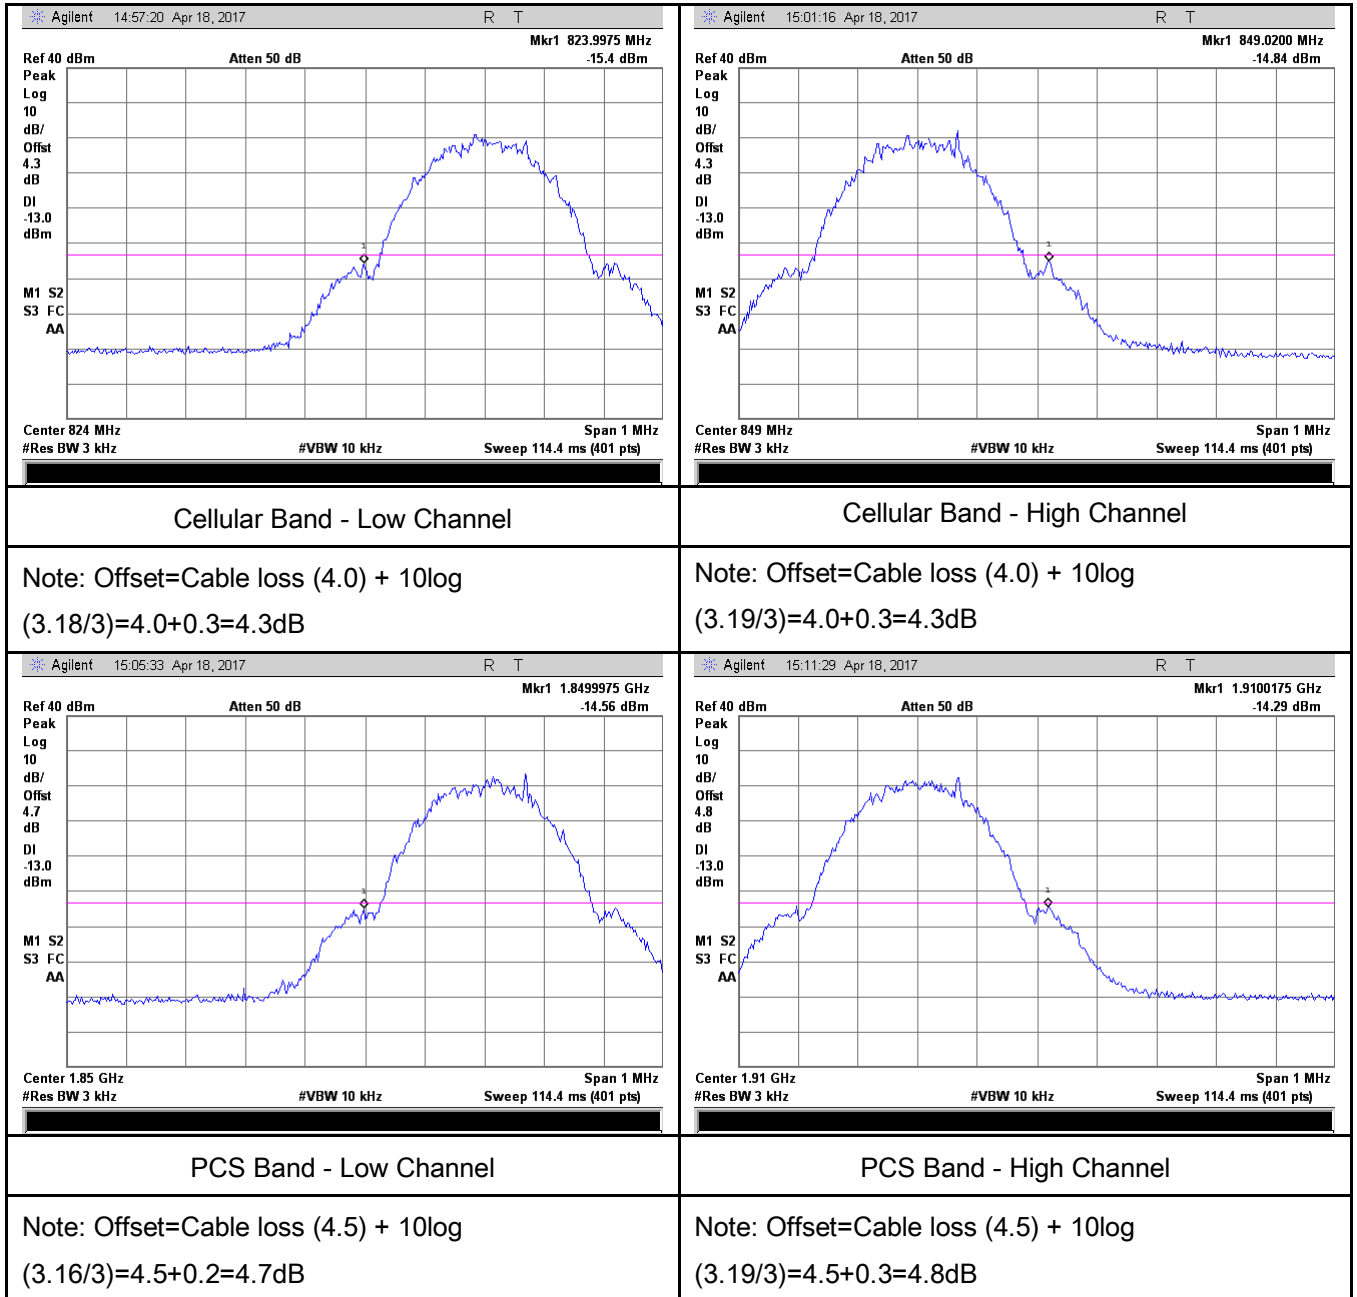


EGPRS (MCS5):

Test Plots

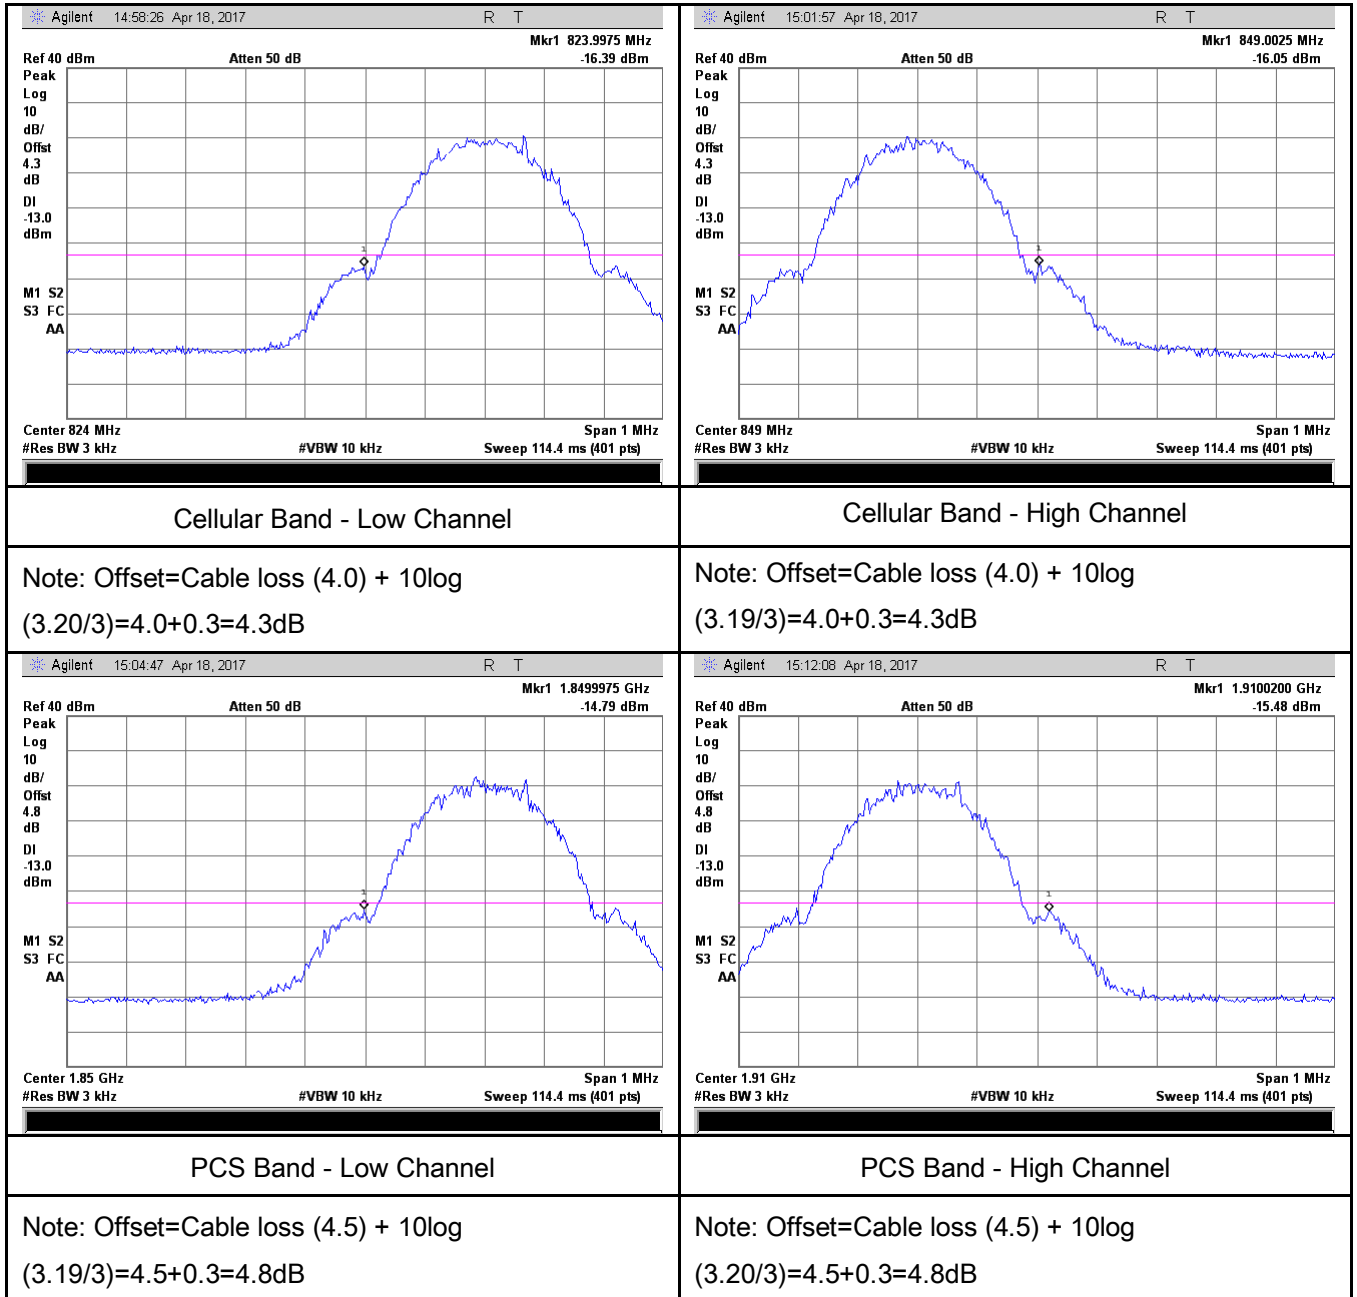


RMC:

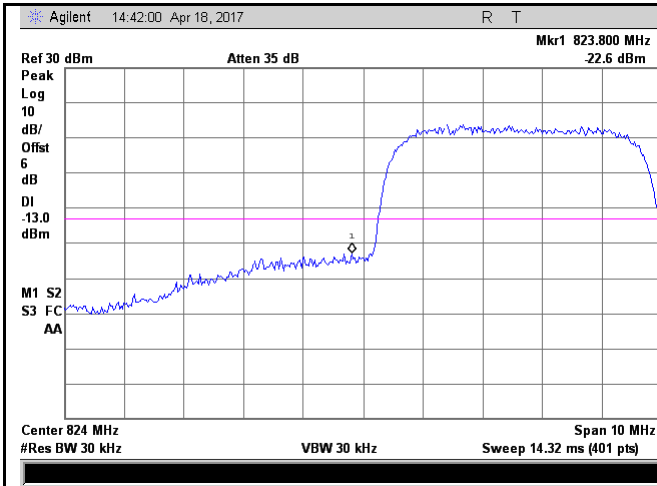


UMTS-FDD Band V - Low Channel

Note: Offset=Cable loss (4.0) + 10log
(47.15/30)=4.0+2.0=6.0 dB

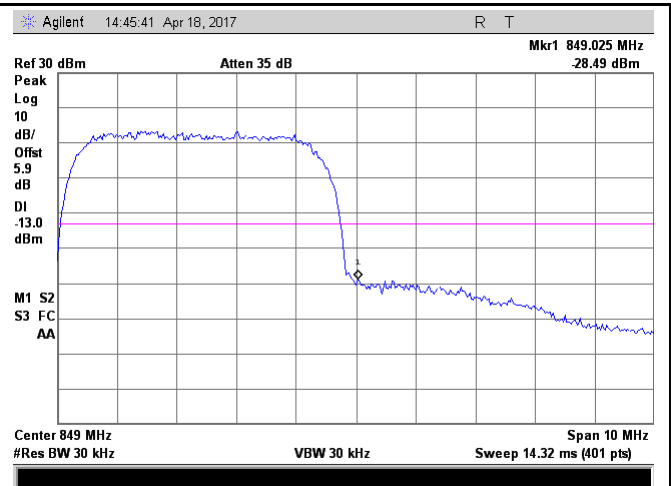


UMTS-FDD Band V - High Channel

Note: Offset=Cable loss (4.0) + 10log
(46.94/30)=4.0+1.9=5.9dB

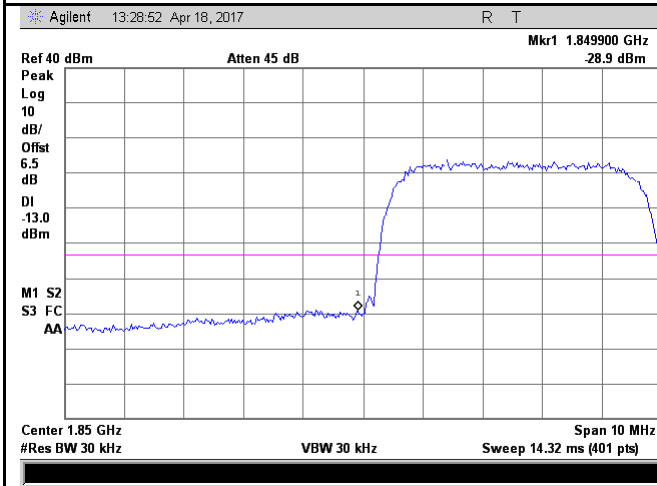

UMTS-FDD Band II - Low Channel


Note: Offset=Cable loss (4.5) + 10log
(47.28/30)=4.5+2.0=6.5 dB

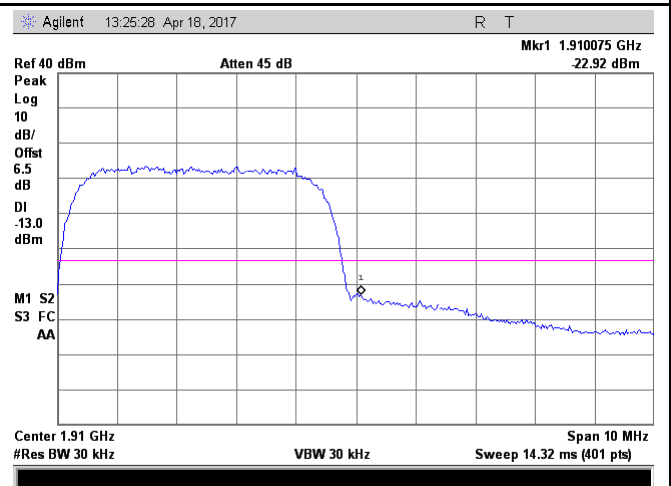

UMTS-FDD Band II - High Channel


Note: Offset=Cable loss (4.5) + 10log
(47.29/30)=4.5+2.0=6.5 dB

HSDPA:

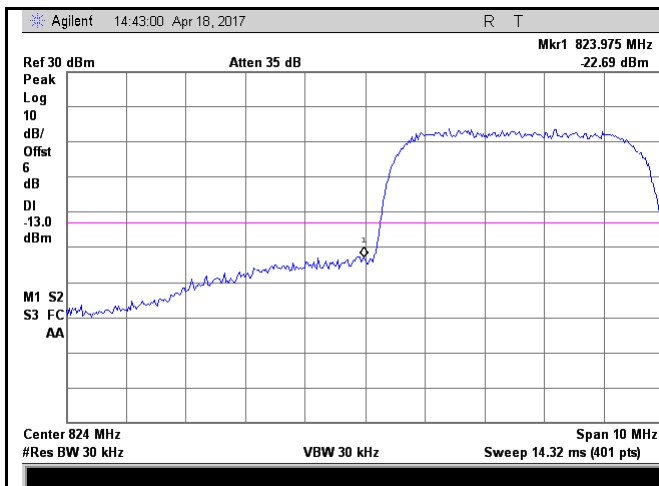


UMTS-FDD Band V - Low Channel

Note: Offset=Cable loss (4.0) + 10log
(47.19/30)=4.0+2.0=6.0 dB

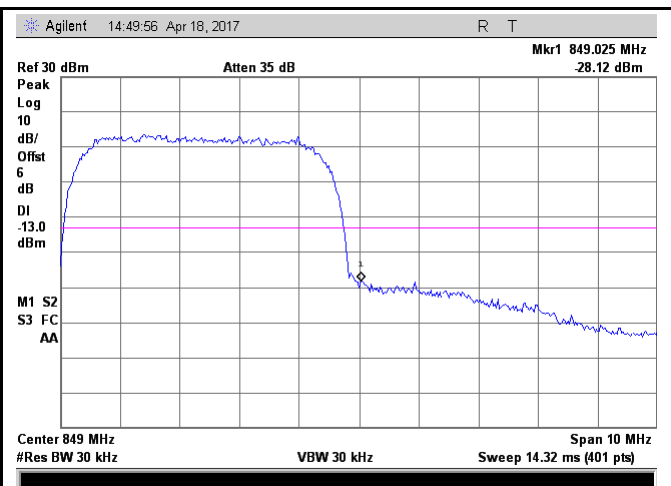


UMTS-FDD Band V - High Channel

Note: Offset=Cable loss (4.0) + 10log
(47.03/30)=4.0+2.0=6.0 dB

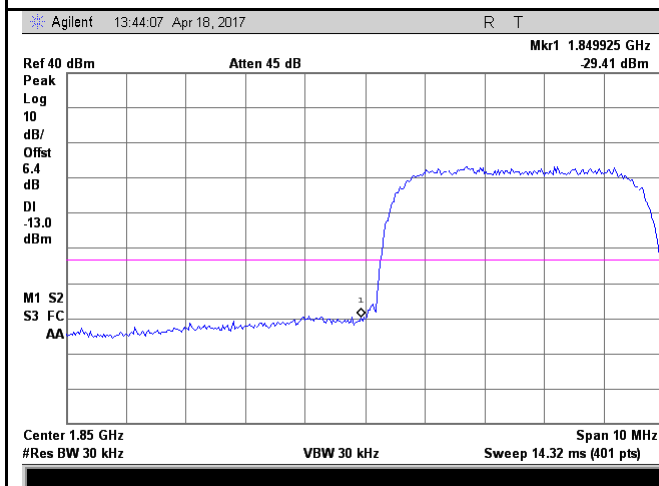

UMTS-FDD Band II - Low Channel


Note: Offset=Cable loss (4.5) + 10log
(46.98/30)=4.5+1.9=6.4dB

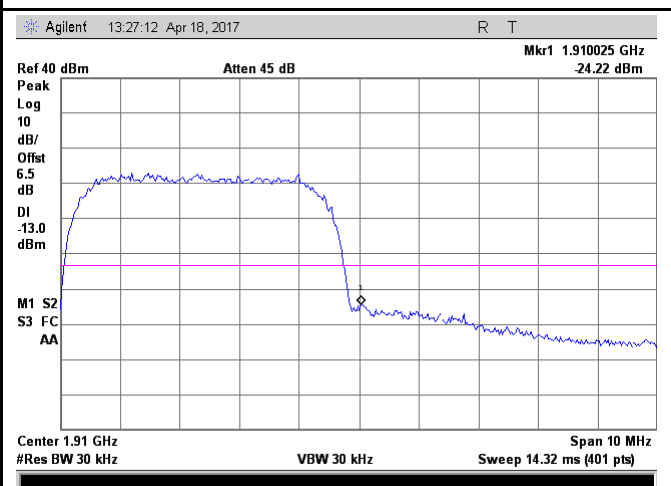

UMTS-FDD Band II - High Channel


Note: Offset=Cable loss (4.5) + 10log
(47.31/30)=4.5+2.0=6.5 dB

HSUPA:

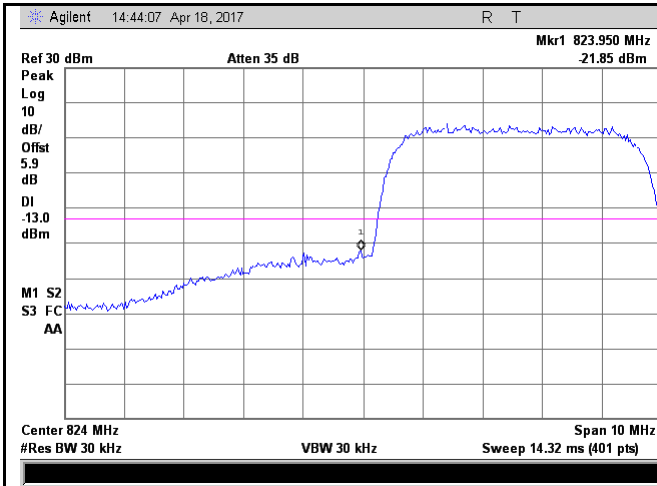


UMTS-FDD Band V - Low Channel

Note: Offset=Cable loss (4.0) + 10log
(46.92/30)=4.0+1.9=5.9 dB

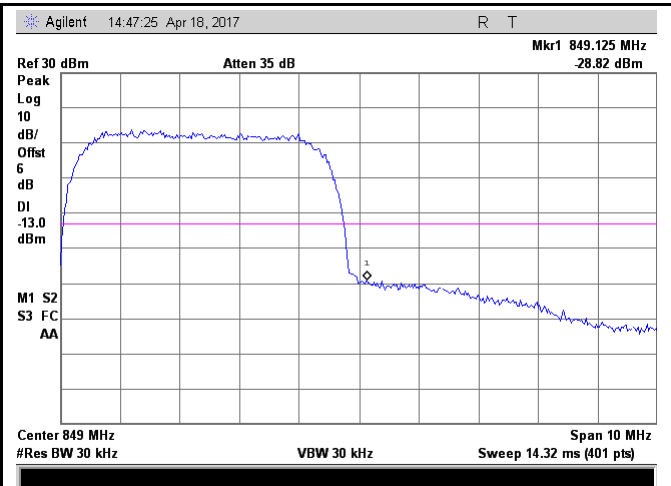


UMTS-FDD Band V - High Channel

Note: Offset=Cable loss (4.0) + 10log
(47.09/30)=4.0+2.0=6.0 dB

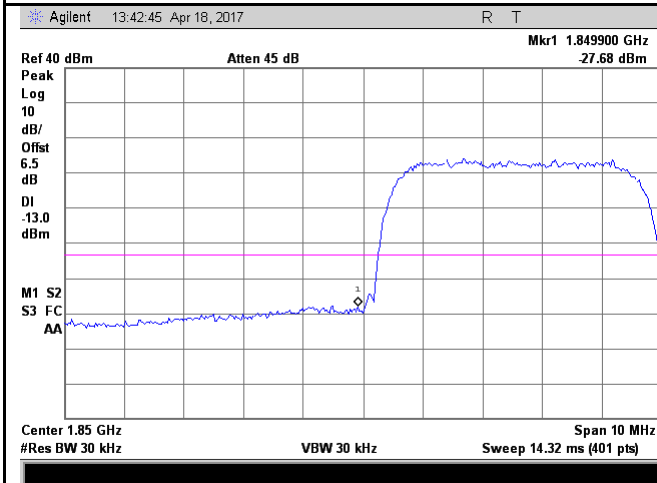

UMTS-FDD Band II - Low Channel

Note: Offset=Cable loss (4.5) + 10log
(47.26/30)=4.5+2.0=6.5dB

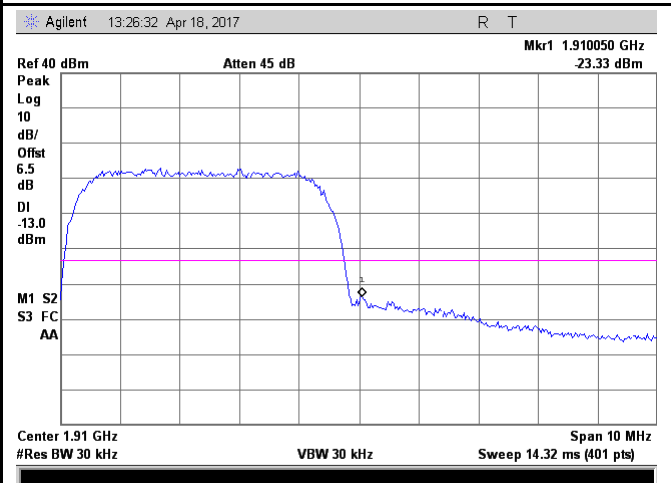


UMTS-FDD Band II - High Channel

Note: Offset=Cable loss (4.5) + 10log
(47.31/30)=4.5+2.0=6.5 dB

6.8 Frequency Stability

Temperature	24°C
Relative Humidity	55%
Atmospheric Pressure	1010mbar
Test date :	April 17, 2017
Tested By :	Leen Yang

Requirement(s):

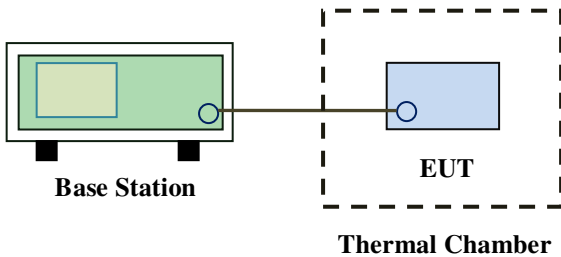Spec	Item	Requirement	Applicable																																
§2.1055, §22.355 & §24.235	a)	According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below: Frequency Tolerance for Transmitters in the Public Mobile Services <table border="1"> <thead> <tr> <th>Frequency Range (MHz)</th><th>Base, fixed (ppm)</th><th>Mobile ≥ 3 watts (ppm)</th><th>Mobile ≤ 3 watts (ppm)</th></tr> </thead> <tbody> <tr> <td>25 to 50</td><td>20.0</td><td>20.0</td><td>50.0</td></tr> <tr> <td>50 to 450</td><td>5.0</td><td>5.0</td><td>50.0</td></tr> <tr> <td>450 to 512</td><td>2.5</td><td>5.0</td><td>5.0</td></tr> <tr> <td>821 to 896</td><td>1.5</td><td>2.5</td><td>2.5</td></tr> <tr> <td>928 to 929</td><td>5.0</td><td>N/A</td><td>N/A</td></tr> <tr> <td>929 to 960</td><td>1.5</td><td>N/A</td><td>N/A</td></tr> <tr> <td>2110 to 2220</td><td>10.0</td><td>N/A</td><td>N/A</td></tr> </tbody> </table> According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized frequency block.	Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≥ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)	25 to 50	20.0	20.0	50.0	50 to 450	5.0	5.0	50.0	450 to 512	2.5	5.0	5.0	821 to 896	1.5	2.5	2.5	928 to 929	5.0	N/A	N/A	929 to 960	1.5	N/A	N/A	2110 to 2220	10.0	N/A	N/A	
Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≥ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)																																
25 to 50	20.0	20.0	50.0																																
50 to 450	5.0	5.0	50.0																																
450 to 512	2.5	5.0	5.0																																
821 to 896	1.5	2.5	2.5																																
928 to 929	5.0	N/A	N/A																																
929 to 960	1.5	N/A	N/A																																
2110 to 2220	10.0	N/A	N/A																																
Test setup	 The diagram shows a Base Station (represented by a green rectangle) connected by a line to an EUT (represented by a blue rectangle) which is enclosed within a dashed-line box labeled 'Thermal Chamber'.																																		

Procedure	A communication link was established between EUT and base station. The frequency error was monitored and measured by base station under variation of ambient temperature and variation of primary supply voltage. Limit: The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

GSM Voice:

Cellular Band (Part 22H) result

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	15	0.0179	2.5
0		16	0.0191	2.5
10		14	0.0167	2.5
20		18	0.0215	2.5
30		19	0.0227	2.5
40		17	0.0203	2.5
50		13	0.0155	2.5
55		15	0.0179	2.5
25	4.2	17	0.0203	2.5
	3.2	13	0.0155	2.5

PCS Band (Part 24E) result

Middle Channel, $f_0 = 1880$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	18	0.0096	2.5
0		16	0.0085	2.5
10		14	0.0074	2.5
20		13	0.0069	2.5
30		19	0.0101	2.5
40		17	0.0090	2.5
50		15	0.0080	2.5
55		16	0.0085	2.5
25	4.2	14	0.0074	2.5
	3.2	12	0.0064	2.5

RMC:

UMTS-FDD Band V (Part 22H)

Middle Channel, $f_o = 835$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	154	0.1844	2.5
0		13	0.0156	2.5
10		14	0.0168	2.5
20		17	0.0204	2.5
30		19	0.0228	2.5
40		15	0.0180	2.5
50		14	0.0168	2.5
55		15	0.0180	2.5
25	4.2	13	0.0156	2.5
	3.2	14	0.0168	2.5

UMTS-FDD Band II (Part 24E)

Middle Channel, $f_o = 1880$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	15	0.0080	2.5
0		12	0.0064	2.5
10		16	0.0085	2.5
20		14	0.0074	2.5
30		15	0.0080	2.5
40		15	0.0080	2.5
50		13	0.0069	2.5
55		14	0.0074	2.5
25	4.2	17	0.0090	2.5
	3.2	14	0.0074	2.5

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
RF Conducted Test					
Agilent ESA-E SERIES SPECTRUM ANALYZER	E4407B	MY45108319	09/15/2016	09/14/2017	☒
Power Splitter	1#	1#	08/31/2016	08/30/2017	☒
Universal Radio Communication Tester	CMU200	121393	09/24/2016	09/23/2017	☒
Temperature/Humidity Chamber	UHL-270	001	10/08/2016	10/07/2017	☒
DC Power Supply	E3640A	MY40004013	09/16/2016	09/15/2017	☒
RF Power Sensor	Dare RPR3006C/P/W	AY554013	09/16/2016	09/15/2017	☒
Radiated Emissions					
EMI test receiver	ESL6	100262	09/16/2016	09/15/2017	☒
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/31/2016	08/30/2017	☒
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/23/2017	03/22/2018	☒
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/20/2016	09/19/2017	☒
Bilog Antenna (30MHz~2GHz)	JB1	A112017	09/20/2016	09/19/2017	☒
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71259	09/23/2016	09/22/2017	☒
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/23/2016	09/22/2017	☒
SYNTHESIZED SIGNAL GENERATOR	8665B	3744A01293	09/16/2016	09/15/2017	☒
Power Amplifier	SMC150D	R1553-0313	03/08/2017	03/07/2018	☒
Power Amplifier	S41-25D	R1553-0314	05/27/2016	05/26/2017	☒
Tunable Notch Filter	3NF-800/1000-S	AA4	08/31/2016	08/30/2017	☒

Test Report	17070248-FCC-R1
Page	72 of 88

Tunable Notch Filter	3NF- 1000/2000-S	AM 4	08/31/2016	08/30/2017	☒
----------------------	---------------------	------	------------	------------	-------------------------------------

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo

Whole Package View




Adapter - Label View



EUT - Front View



EUT - Rear View

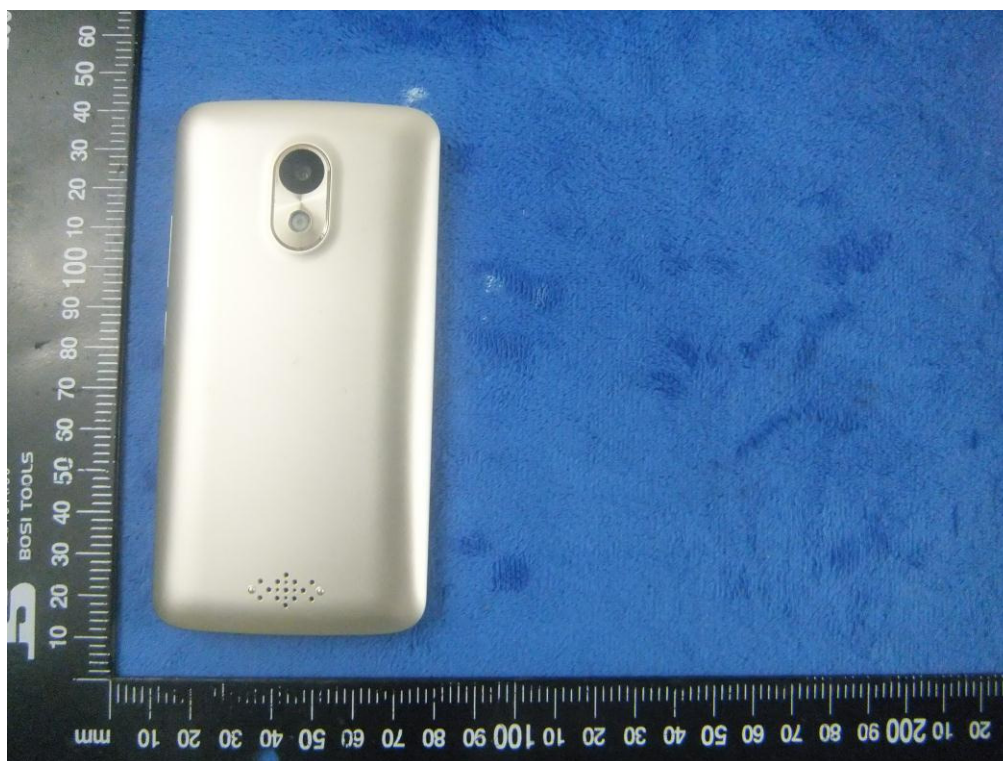


EUT - Top View



EUT - Bottom View



EUT - Left View

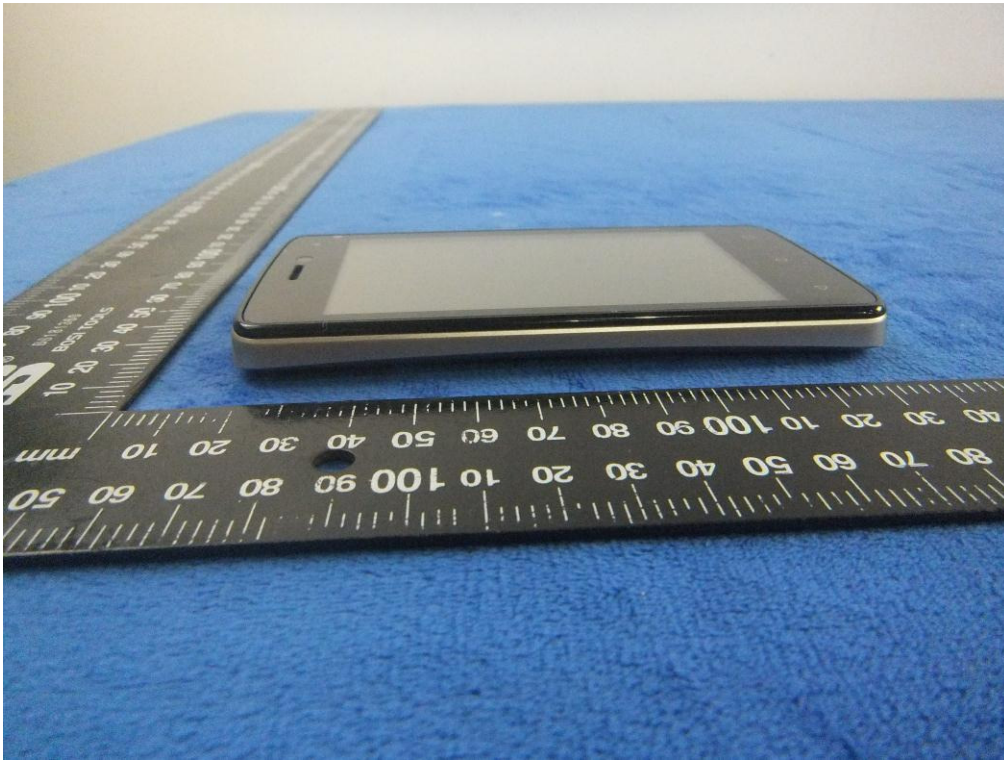

EUT - Right View



Annex B.ii. Photograph: EUT Internal Photo


Cover Off - Top View 1



Cover Off - Top View 2




Battery - Front View

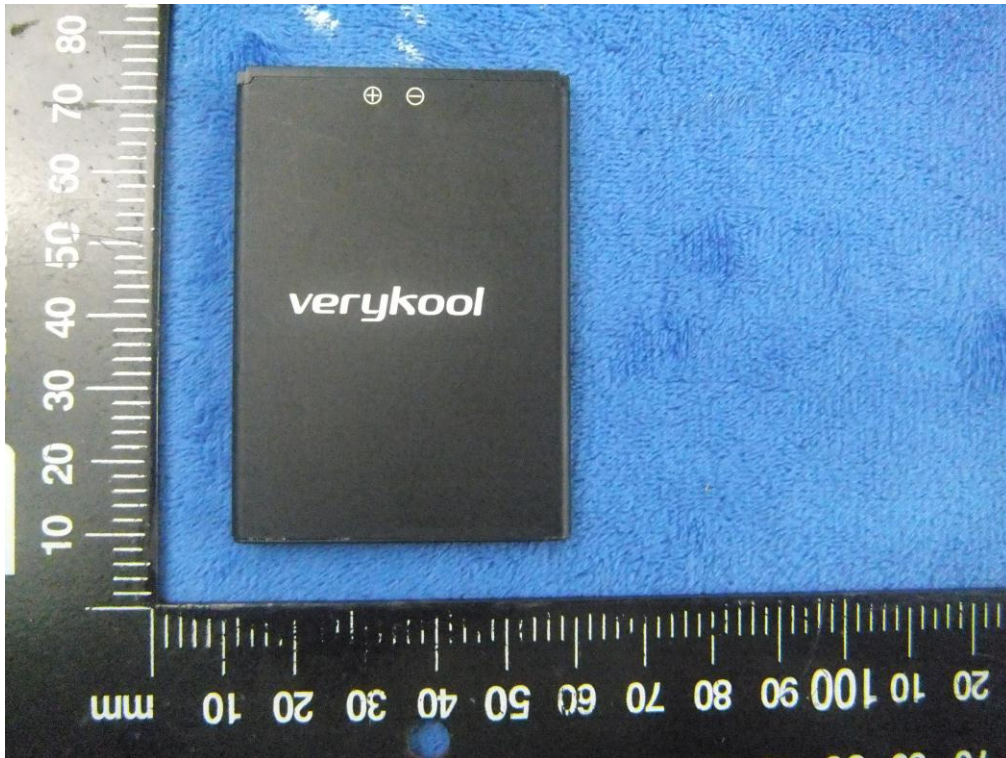


Battery - Rear View(Label)




Mainboard with Shielding - Front View

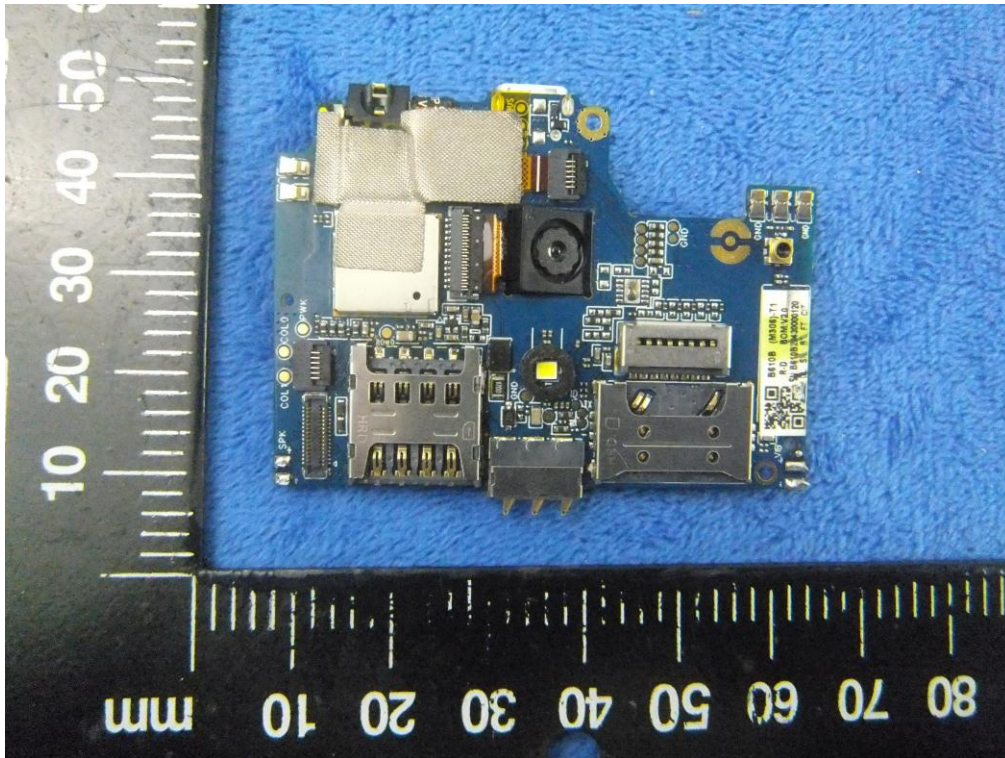


Mainboard without Shielding - Front View

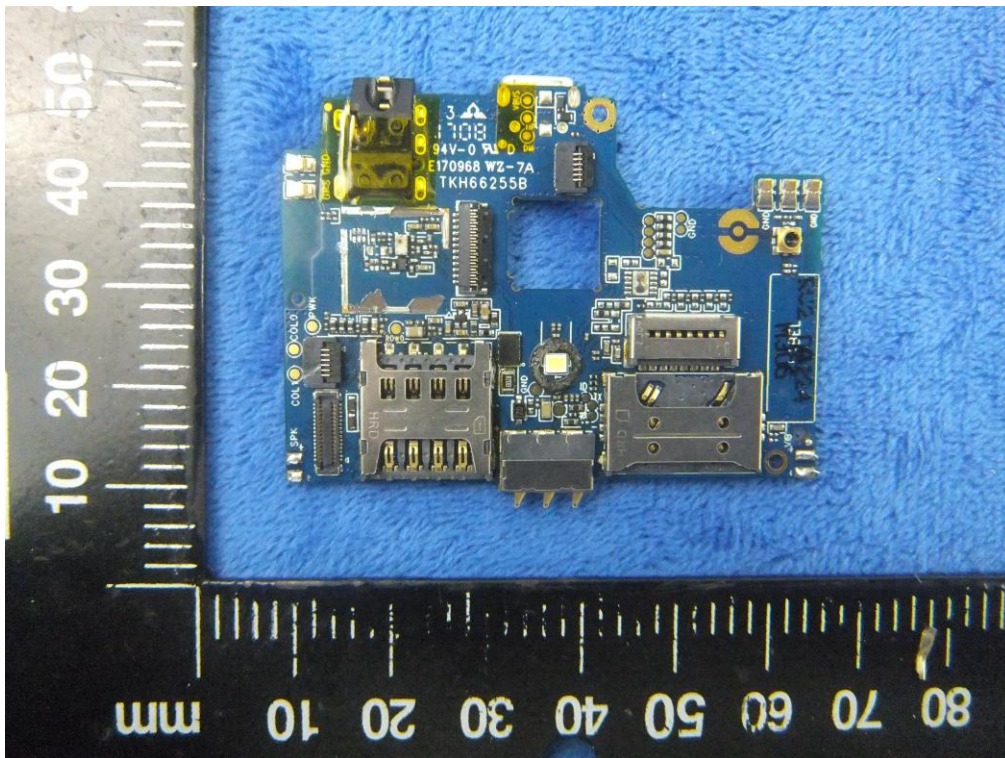

Mainboard with Shielding – Rear View

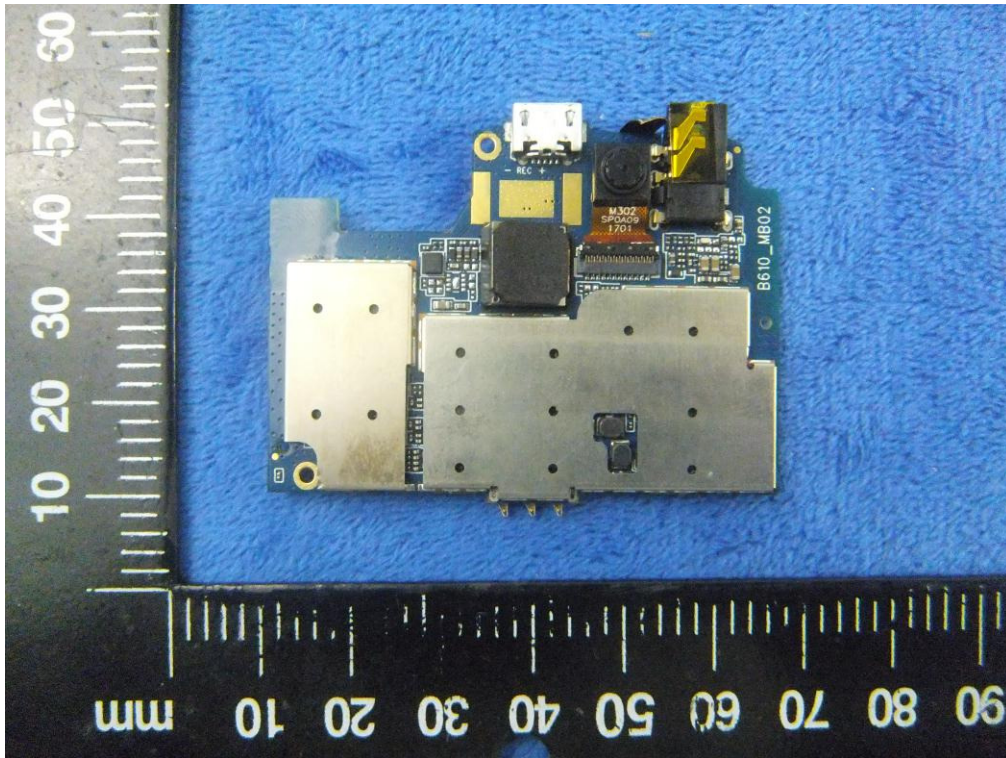

Mainboard without Shielding – Rear View

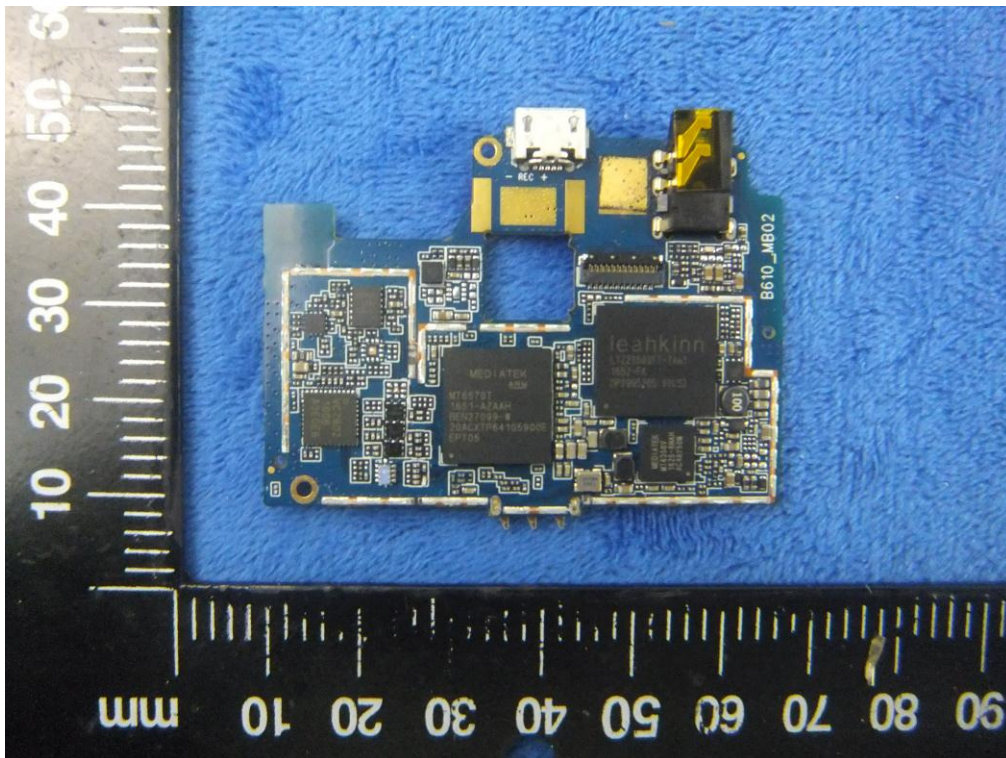

LCD – Front View



LCD – Rear View




GSM/PCS/UMTS-FDD Antenna View




WIFI/BT/BLE/GPS - Antenna View



Annex B.iii. Photograph: Test Setup Photo

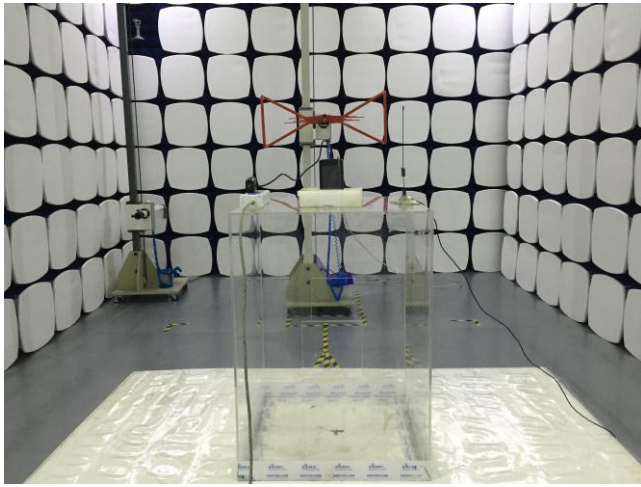

Radiated Spurious Emissions Test Setup Below 1GHz

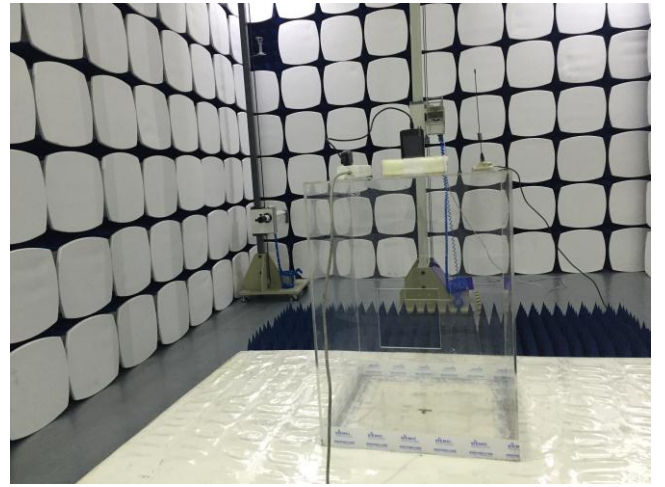


Radiated Spurious Emissions Test Setup Above 1GHz

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for Radiated Emissions

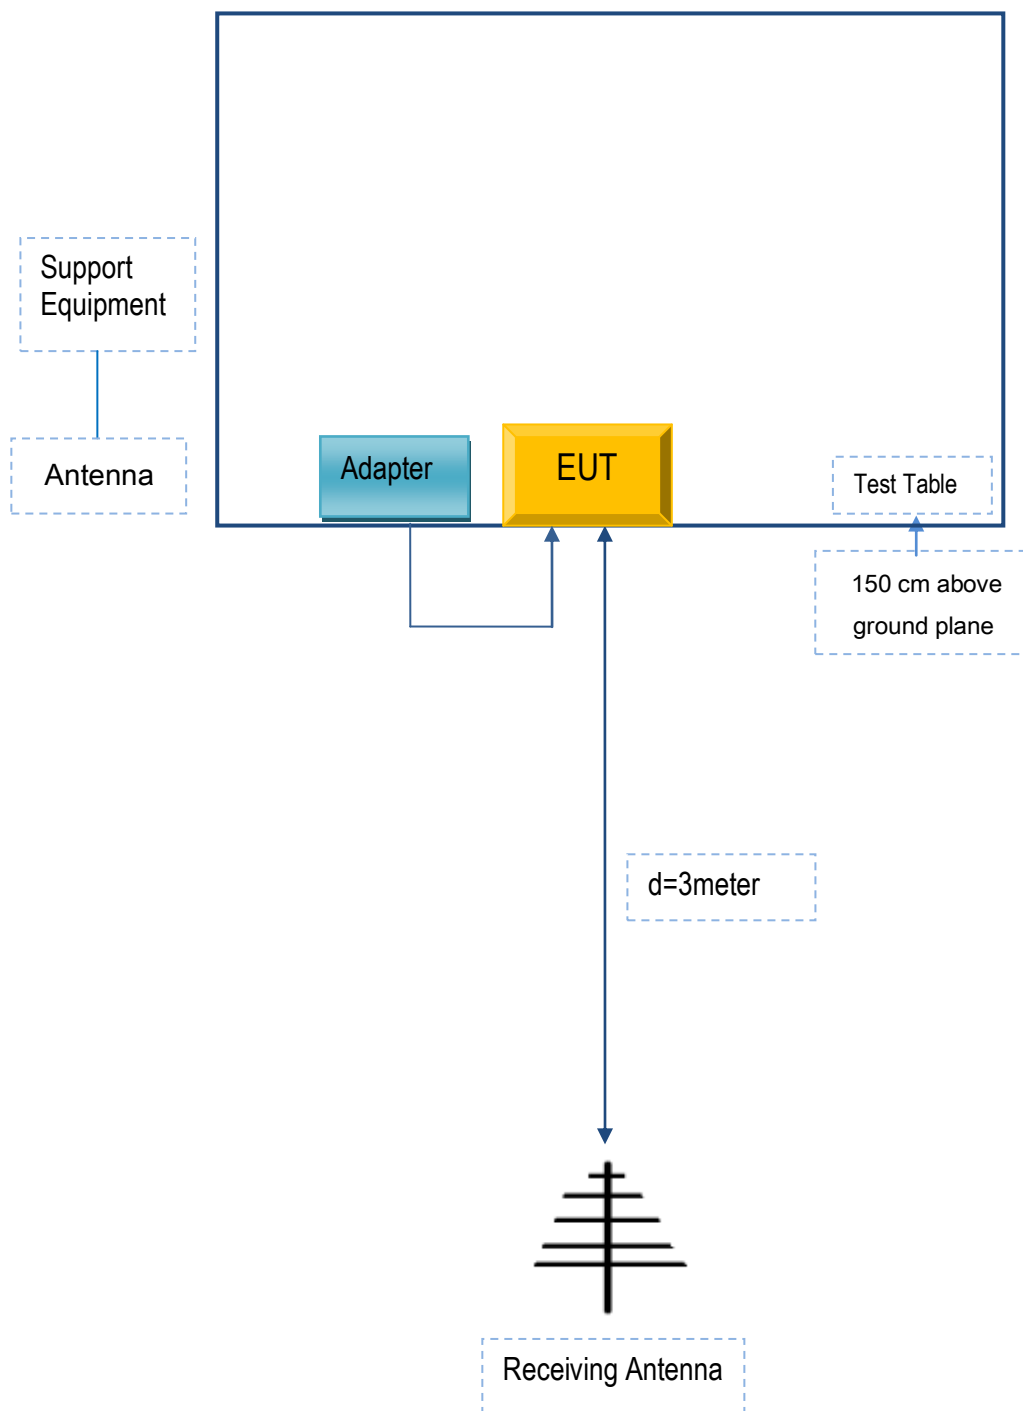

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
Verykool USA Inc	Adapter	s4009	X20170305

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	X20170305

Annex C.ii. EUT OPERATING CONKITIONS

N/A

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see the attachment

Annex E. DECLARATION OF SIMILARITY

N/A