



CASTLES TECHNOLOGY

UPT1000F, UPT1000F-LCNF POS Terminal

Book 2

User Manual

UPT1000F

Version 1.9

Jan. 2022

CRT-U1-02-02-V1.9-FCC-PTCRB

Castles Technology Co., Ltd.

6F, No. 207-5, Sec. 3, Beixin Rd., Xindian District,

New Taipei City 23143, Taiwan R.O.C.

<https://www.castlestechnology.com/>

WARNING

Information in this document is subject to change without prior notice.

No part of this publication may be reproduced, transmitted, stored in a retrieval system, nor translated into any human or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual, or otherwise, without the prior written permission of **Castles Technology Co., Ltd.**

All trademarks mentioned are proprietary of their respective owners.

Revision History

Version	Date	Descriptions	Author
1.0	May 25, 2017	Initial creation.	Jeff
1.1	Dec 27, 2017	Add the battery caution. (7.1)	Jeff
1.2	Apr 12, 2018	Remove the note in “7.1. Cautions”.	Jeff
1.3	Oct 19, 2018	1. Add “2.3. Bluetooth Antenna Installation”. 2. Add “2.4. GSM Antenna Installation”	Jeff
1.4	Jul 17, 2019	1. Add “VCCI Caution”. 2. Modify the pictures of “2.1.Parts of the UPT1000F”.	Jeff
1.5	Jul 28, 2021	1.Add Canada IC Caution	John
1.6	Nov 26, 2021	1.Add UPT1000F-LCNF title	John
1.7	Dec 03, 2021	1.Update the terminal label	John
1.8	Jan 21 2022	1.Update antenna info	John
1.9	Jan 26 2022	1.Update antenna info	John

Contents

1. Introduction.....	6
2. Hardware Setup.....	7
2.1. Parts of the UPT1000F	7
2.2. Communication Support	8
2.3. Bluetooth Antenna Installation	9
2.4. WWAN Antenna Installation.....	10
3. Basic Operation	11
3.1. Program Manager.....	11
3.2. Download AP	14
3.3. System Info.....	15
3.4. Memory Status	16
3.5. System Settings.....	17
3.6. Test Utility.....	20
3.7. Factory Reset	22
3.8. Power Off	23
3.9. FK PWD Change	24
3.10. Share Object Management	25
3.11. Embedded TMS.....	26
3.12. Font Mng	27
3.13. Debug Tools	28
3.14. ULD Key Hash.....	29
3.15. HW Detect	30
3.16. Bluetooth Setup	31
3.17. Plug-in Mng	32
3.18. Key Injection	33
4. Secure File Loading.....	34
4.1. ULD Key System	34
4.1.1. ULD Manufacturer Key.....	34
4.1.2. ULD User Key	36
4.1.3. Key Change	36
4.2. File Signing.....	37
4.2.1. Signing Kernel Module	37
4.2.2. Signing User Files	39

4.3.	File Loading	43
4.3.1.	Download by User Loader	43
4.3.2.	Download by Removable Media.....	46
4.4.	Changing ULD User Key.....	48
5.	Font Management	55
5.1.	Loading New Font.....	55
5.2.	Custom Font	58
5.3.	Using TrueType Font (TTF)	66
6.	Technical Notes	68
6.1.	Serial Cable PIN Assignment.....	68
7.	Appendix	69
7.1.	Industry Canada statement.....	69
7.2.	General Cautions.....	70

1. Introduction

This document provides a guideline on operating and configuring Castles UPT1000F.

The scope of this document includes setting up the UPT1000F, basic operation, application life cycle, and some advance features.

2. Hardware Setup

2.1. Parts of the UPT1000F


Front



UPT1000F

- | | |
|--------------------------------------|----------------------------------|
| 1. LCD Display (Touch Panel) | 5. Contactless Card Landing Zone |
| 2. Smart Card Reader indicator light | 6. MSR indicator light |
| 3. Smart Card Reader | |
| 4. Magnetic Stripe Reader | |

Rear

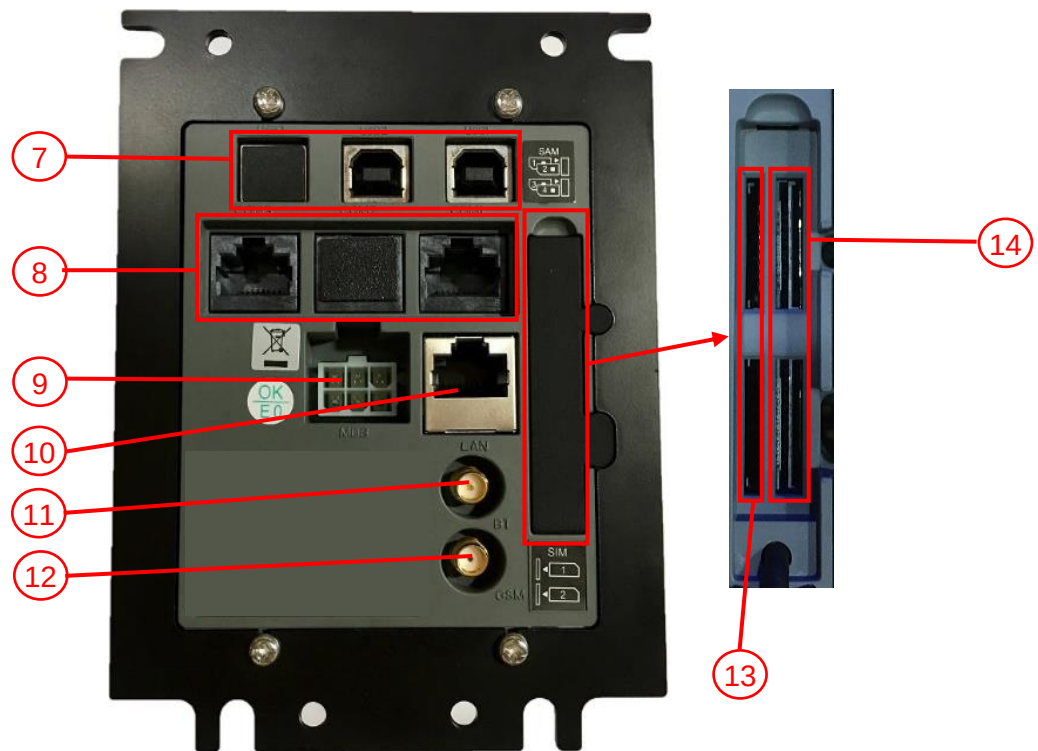

UPT1000F


- 7. USB port 1~3
- 8. RS232 port 1~3
- 9. MDB (power connector)
- 10. LAN port
- 11. BT antenna socket
- 12. GPRS antenna socket
- 13. GSM SIM Card Slots 1~2
- 14. SAM Card Slots 1~4

Note: Both USB3 and COM2 are non-functional and are for maintenance only.

2.2. Communication Support

- 1. Ethernet
- 2. BT
- 3. UMTS 850/1900
- 4. GPRG 850/1900

2.3. Bluetooth Antenna Installation

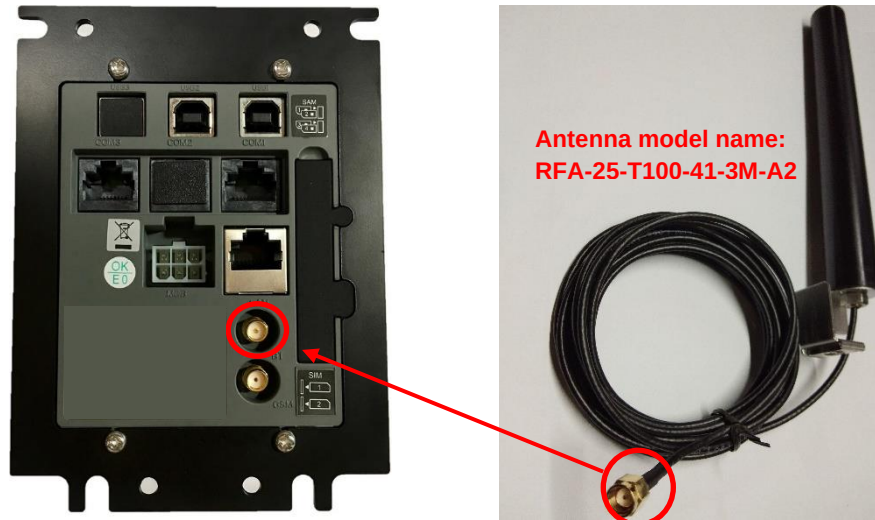

Step 1




Step 2

Step 1: Plug in the antenna connector to the BT socket on UPT1000F.

Step 2: Screw the antenna connector by right direction until the end.

Note: The antenna must use the model RFA-25-T100-41-3M-A2 which pass the compliance test of Castles.

2.4. WWAN Antenna Installation

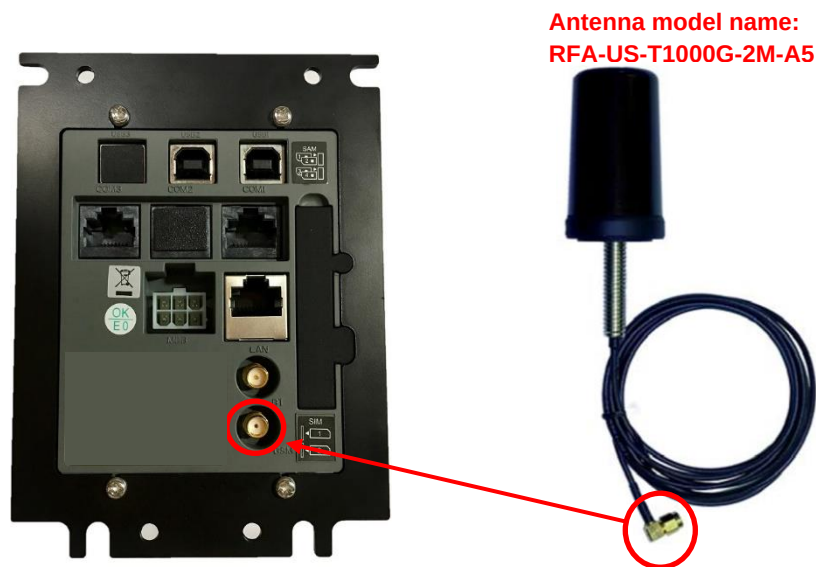

Step 1



Step 2

Step 1: Plug in the antenna connector to the GSM socket on UPT1000F.

Step 2: Screw the antenna connector by right direction until the end.

Note: The antenna must use the model RFA-US-T1000G-2M-A5 which pass the compliance test of Castles.


3. Basic Operation

3.1. Program Manager


Since UPT1000F doesn't have keypad. Therefore, it needs to connect to PC for controlling.

Please follow the following steps to connect PC and UPT1000F.


- Power on UPT1000F and connect COM Port 1 to PC.

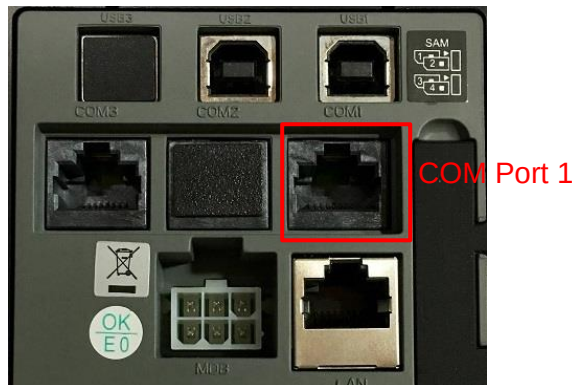

- Run the application program such as “TeraTerm” or “PuTTY” on PC.
- Select “Serial port” to set the com port. The baud rate should be set to “115200”.

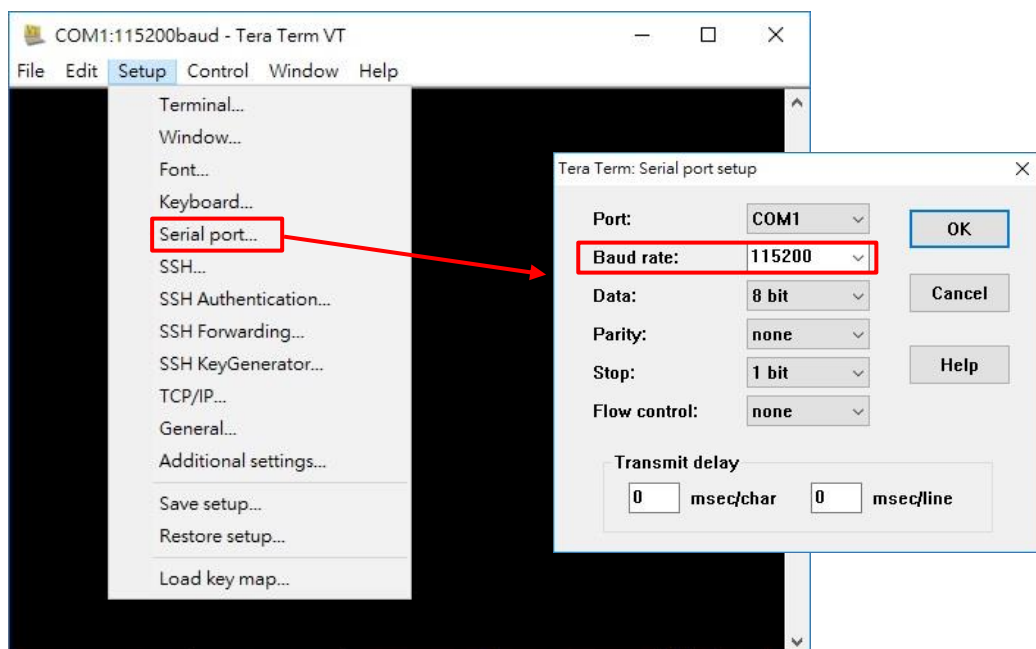


- Press any key on keyboard to refresh screen, if doesn't show "Program Manager" on "Tera Term" or PuTTY".

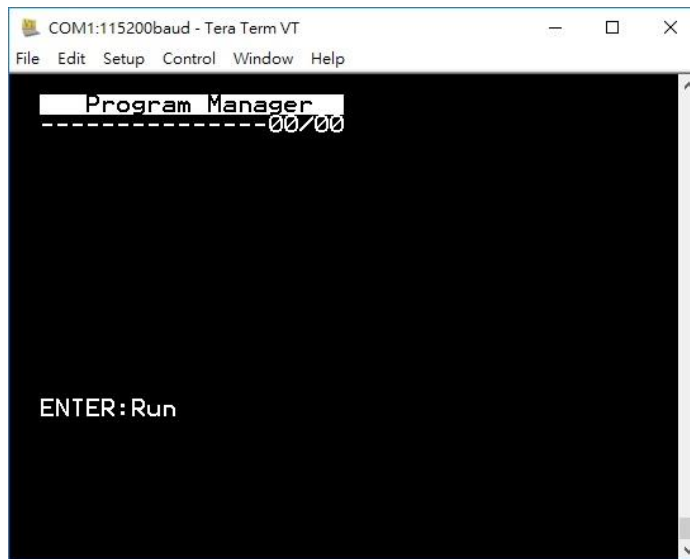

Once the power is on in normal status, UPT1000F will enter Program Manager if no default application selected. All user applications are listed in Program Manager. Users can select an application and run the application, view the application info, delete the application, or set application to the default one to run once the power is on. Users may enter System Menu to configure UPT1000F settings.


Program Manager



- Press [0] button to enter System Menu.
- Press [1] button to toggle default application selection.
- Press [2] button to delete application.
- Press [3] button to view application info.
- Press [OK] button to run application.
- Press [↑] or [↓] as the up and down button to select application.


System Menu

Page 1




- Press [↓] button to page 2.

Page 2



- Press [↑] button to page1.
- Press [↓] button to page3.

Page 3




- Press [↑] button to page2.

3.2. Download AP


Download user application or kernel modules firmware.

System Menu



- Press [1] button to enter Download AP menu.

Download AP Menu



Select download source:

- Press [1] button to select source as RS232 or USB connection and enter ULD download mode.
- Press [2] button to select source as USB disk.
- Press [3] button to select source as SD card. (Not support)

3.3. System Info

View kernel module firmware information.

System Menu

System Menu
1.Download AP
2.System Info
3.Memory Status
4.Sys Settings
5.Test Utility
6.Factory Reset
7.Power Off

- Press [2] button to enter System Info menu.

System Info Menu

Page 1

SYSTEM INFO
---Kernel Ver---
BIOS :VR0024
SULD :VRF010
LINUXKNL:VR0024
ROOTFS :VR0010

Page 2

SYSTEM INFO
--- KOver ---
SECURITY :VR0025
KMS :VR0027
DRV :VR0046
USB :N/A
CIF :VR0025
SAM :VR0034

Page 3

SYSTEM INFO
--- KOver2 ---
CL :VR0018
SC :VR0011

Page 4

SYSTEM INFO
----- SOVer-----
UART :VR0017
USBH :VR0011
MODEM :VR0019
ETHERNET :VR0035
FONT :VR0032
LCD :VR0042

Page 5

SYSTEM INFO
----- SO Ver2 ---
PRT :VR0025
RTC :VR0013
ULDPM :VR0029
PPPMODEM :VR0031
KMS :VR0032
FS :VR0016

Page 6

SYSTEM INFO
--- SO Ver3 ---
GSM :VR0029
BARCODE :VR0013
TLS :VR0014
CLVW :VR0024
CTOSAPI :VR0039

Page 8

SYSTEM INFO
--- HWMVer ---
CRDL/ETHE:ONCHIP
CLM-MP : N/A
--- APVer ---
ULDPM :VR0036

Page 9

SYSTEM INFO
HUSBID:0CA6A050
CUSBID:N/A
--Factory S/N---
FFFFFFFFFFFFFFFF

Page 10

SYSTEM INFO
--EXT SO Ver P.1--
CACLM DL :VR0008
CACLENTY :VR0008
CAMP :VR0007
CAVPW :VR0019
CAAEP :VR0004
CAJCT :VR0007

- Press [↑] button to previous page.
- Press [↓] button to next page.

3.4. Memory Status

View flash memory and RAM information.

System Menu

System Menu
1.Download AP
2.System Info
3.Memory Status
4.Sys Settings
5.Test Utility
6.Factory Reset
7.Power Off

- Press [3] button to enter Memory Status menu.

Memory Status Menu

MEMORY STATUS
--FLASH Memory--
Total: 130688KB
Used : 44644KB
--SDRAM Memory--
Total: 65408KB
Used : 32384KB

3.5. System Settings

View or change system settings.

Setting	Descriptions
Key Sound	Enable (Y) or disable (N) the beep sound when pressing any key.
Exec DFLT AP	Enable (Y) or disable (N) execution of default selected application.
USB CDC Mode	Enable (Y) or disable (N) USB CDC mode.
FunKey PWD	Enable (Y) or disable (N) password protection to access function key "0" in Program Manager.
PMEnter PWD	Enable (Y) or disable (N) password protection to enter Program Manager.
SET USB Host	Enable (Y) or disable (N) USB host mode.
Base USB CDC	Enable (Y) or disable (N) USB CDC mode in base unit. (Not support)
List SHR Lib	Enable (Y) or disable (N) to list all shared libraries in Program Manager.
Key MNG Mode	<TBC>
BATThreshld	Battery charging threshold value. (Not support)
Null Cradle	Enable (Y) if base is Type A cradle. (Not support)
Debug Mode	Enable (Y) or disable (N) console debug mode.
Debug Port	Serial port for console debug.
Mobil AutoON	Enable (Y) or disable (N) to auto turn on GSM module after boot up.
Bklit Auto Off	Enable (Y) or disable (N) Auto Off LCD Backlight
Bklit Off Time	Threshold of Auto Off LCD Backlight
PWR KEY OFF	Power key function, power off (Y) or reboot(N)
GDB Mode	Enable (Y) or disable (N) GDB (GNU Debugger) mode. (Needs to download GDB plugin FW first.)
GDB Timeout	Set GDB connection timeout.
GDB Channel	Set GDB connection channel.
ETHER IP/PORT	GDB Ethernet connection setting.
RTC Time Zone	Set Time Zone of RTC (Real Time Clock).
NTP Enable	Enable (Y) or disable (N) NTP (Network Time Protocol) function.

NTP Update Freq	Frequency of Network Time Protocol updating.
Halt Timeout	Set timeout of AP to get back to Program Manager whenever AP is in halt state.
PWM Auto	Enable (Y) or disable (N) power saving mode.
PWM Mode	Select (STB) standby mode or (SLP) sleep mode for power saving mode.
PWM Time	Set time period to make machine enter power saving mode from idle state.
BAT PROTECT MODE	Set battery protect mode. (Not support)

System Menu

System Menu
1.Download AP
2.System Info
3.Memory Status
4.Sys Settings
5.Test Utility
6.Factory Reset
7.Power Off

- Press [4] button to enter System Settings menu.

System Settings Menu

Page 1

SYS SETTINGS
Key Sound : Y
Exec DFLT AP : Y
-Default AP Name
USB CDC Mode : Y
FunKey PWD : N
PMEnter PWD : N
2: Next Page

Page 2

SYS SETTINGS
SET USB Host : N
Base USB CDC : X
List SHR Lib : N
Key MNG Mode : 0
Bat Threshld : X
Null Cradle : X
1: Prev 2: Next

Page 3

SYS SETTINGS
Debug Mode : N
Debug Port : X
Mobil AutoON : N
Bklit Auto Off : N
BklitOff Time : X
PWR KEY OFF : N
1: Prev 2: Next

Page 4

SYS SETTINGS
GDB Mode : GMT
GDB Timeout : N
GDB Channel : X
ETHER IP/PORT
1: Prev 2: Next

Page 5

SYS SETTINGS	
RTC Time Zone	: GMT
NTP Enable	: N
NTP Update Freq	: X
1: Prev	2: Next

Page 6


SYS SETTINGS	
Halt Timeout	: 0
PWM Auto	: X
PWM Mode	: X
PWM Time	: X
BAT PROTECT MODE	: X
1: Prev Page	

- Press [↑] or [↓] button to select setting.
- Press [OK] button to change the setting value.
- Press [<] button to toggle Y ⇌ N ⇌ Y.
- Press [1] button to previous page.
- Press [2] button to next page.

3.6. Test Utility

Perform hardware components diagnosis.


System Menu



- Press [5] button to enter Test Utility menu.


Test Utility Menu

Page 1

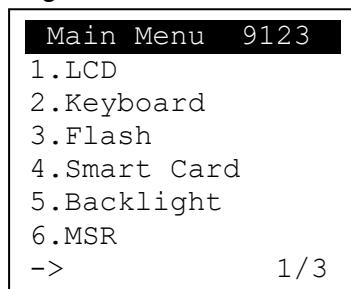


- Press [1] and [OK] to diagnose LCD.
- Press [2] and [OK] to diagnose keyboard.
- Press [3] and [OK] to diagnose flash memory.
- Press [4] and [OK] to diagnose smart card module.
- Press [5] and [OK] to diagnose backlight.
- Press [6] and [OK] to diagnose magnetic stripe card reader.
- Press [↓] button to page 2.

Page 2

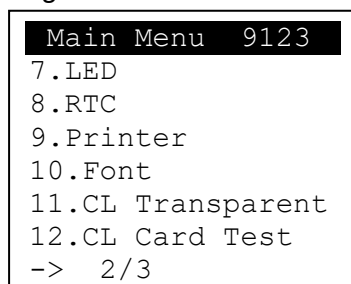

- Press [7] and [OK] to diagnose LED.
- Press [8] and [OK] to diagnose RTC.
- Press [9] and [OK] to check Printer.
- Press [10] and [OK] to check FONT file in UPT1000F.
- Press [11] and [OK] to check CL transparent.
- Press [12] and [OK] to test Contactless Card.
- Press [↑] button to page 1.
- Press [↓] button to page 3.

Page 3




- Press [13] and [OK] to execute SD Card Test. (Not support)
- Press [14] and [OK] to test functionality of WiFi.
- Press [15] and [OK] to test functionality of power saving.
- Press [16] and [OK] to test functionality of multiple communication ways.
- Press [17] and [OK] to test functionality of Bluetooth.
- Press [↑] button to page2.


3.7. Factory Reset

Perform factory reset, all user application, fonts and data will be deleted.


System Menu




- Press [6] button to enter Factory Reset menu.

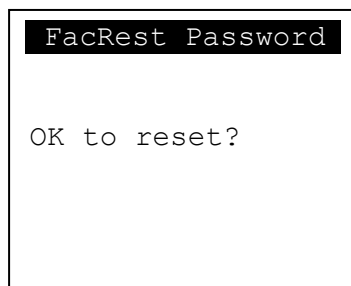

- Press [OK].

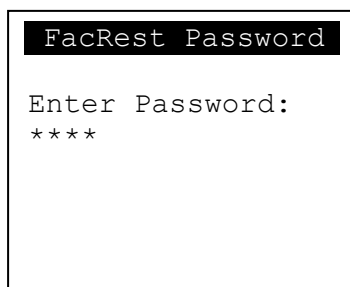

- Enter password and press [OK].
- Enter factory reset password. (**Default password: 8418**)

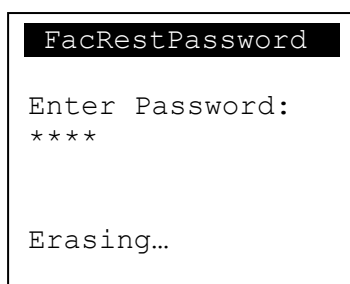

- Start erasing, and then go back to Program Manager.

3.8. Power Off

Power off the machine.

System Menu

System Menu
1.Download AP
2.System Info
3.Memory Status
4.Sys Settings
5.Test Utility
6.Factory Reset
7.Power Off

- Press [7] button to power off the machine.

3.9. FK PWD Change

Change the key-in password.

System Menu (Page 2)

System Menu

1.FK PWD Change
2.Share obj Mng
3.Embedded TMS
4.Font Mng
5.Debug Tools
6.ULD KEY HASH
7.HW Detect

- Press [1] button to enter Password Manager Menu.

FunKey Password

Enter Password:

- Enter current password. (**Default password is "0000"**)

FunKey Password

New Password:

Confirm Password

PWD Changed OK

- Enter new password.
- Enter new password again to confirm.


User must have to change the Default key to user own key at the first time.
The Default Key Value in Password Manager is as below:

Function Key	0000
PMEnter Key	0000
Factory Key	8418

3.10. Share Object Management


View share object in machine.

System Menu (Page 2)



- Press [2] button to enter Share Object Management menu.

Share Object Management Menu




- Press [1] button to view shared libraries.
- Press [2] button to view shared files.

3.11. Embedded TMS


TMS (Terminal Management System) setting menu.

System Menu (Page 2)



- Press [3] button to enter TMS setting menu.

CASTLES TMS




- Press [1] button to connect server.
- Press [2] button to enter system config menu.
- Press [3] button to reset config.
- Press [4] button to set compatible config.

3.12. Font Mng


View Font Management.

System Menu (Page 2)



- Press [4] button to view Font Management.

Font Management




- Press [1] button to view FNT Font list.
- Press [2] button to view TTF Font list.

3.13. Debug Tools


Get core dump or debug log.

System Menu (Page 2)



- Press [5] button to enter Debug Tools menu.

Debug Tools




- Press [1] button to enter core dump menu.
- Press [2] button to enter debug log menu.


3.14. ULD Key Hash

View ULD user key hash value.

System Menu (Page 2)



- Press [6] button to view hash value.

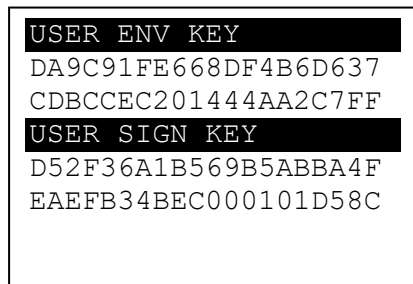

3.15. HW Detect

Run hardware detection.

System Menu (Page 2)

```
System Menu
1.FK PWD Change
2.Share obj Mng
3.Embedded TMS
4.Font Mng
5.Debug Tools
6.ULD KEY HASH
7.HW Detect
```

- Press [7] button to run HW detection.

```
HW TYPE
Original
HW-TYPE : EGCB

New
HW-TYPE : EGCB


Please Any Key.
```

- Press any key to reboot system.

3.16. Bluetooth Setup


Setup Bluetooth config.

System Menu (Page 2)

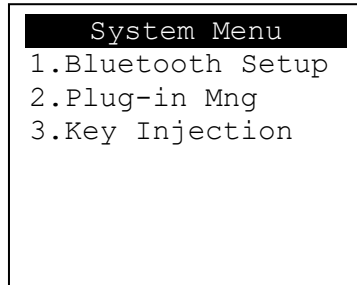

- Press [1] button to enter Bluetooth setting menu.

Bluetooth Setup

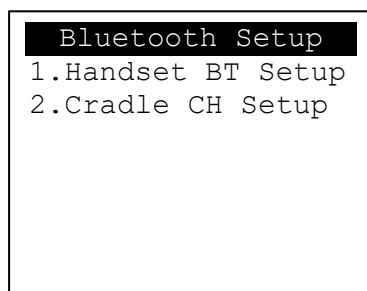


- Press [1] button to enter Handset BT Setup menu.
- Press [2] button to enter Cradle CH Setup menu.


3.17. Plug-in Mng

View Plug-in Management.

System Menu (Page 2)

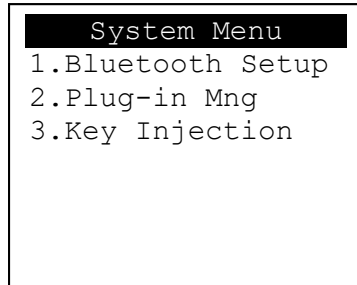

- Press [2] button to view Plug-in Management.

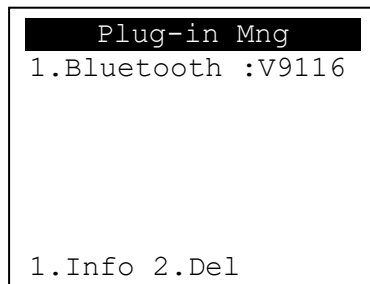


- Press [↑] or [↓] button to select item.
- Press [1] button to get item information.
- Press [2] button to delete item.


3.18. Key Injection

Key Injection function. (Factory use only.)

System Menu (Page 3)

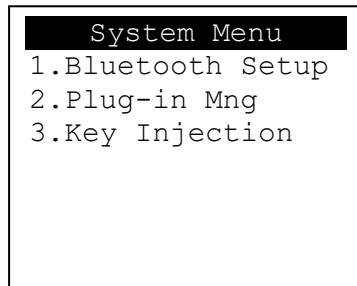

- Press [3] button to view Key Injection.

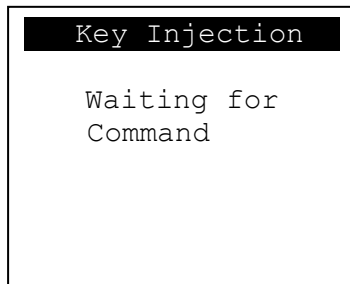

4. Secure File Loading

Castles implemented an interface named User Loader (ULD) to provide secure file loading to system memory. Loading of user application, kernel firmware, font and others must use User Loader.

The loading process is secure by signing the files using ULD Key System.

4.1. ULD Key System

The ULD Key System uses two key sets for securely managing the kernel updating and application downloading. Each key set contains two RSA key pairs. One is used for key encryption and the other is used for signature. These two key sets are specified as below:

ULD Manufacturer Key Set

- ULD Manufacturer Key Encryption Key (RSA)
- ULD Manufacturer Signature Key (RSA)

ULD User Key Set

- ULD User Key Encryption Key (RSA)
- ULD User Signature Key (RSA)

For UPT1000F, the RSA key length is 2048bits.

4.1.1. ULD Manufacturer Key


The system consists of several kernel modules. These kernel modules are provided by the Manufacturer, and released in CAP format file with encryption and signing via ULD Manufacturer Keys.

The ULD Manufacturer keys are managed and maintained by the manufacturer. The manufacturer uses these keys to generate kernel CAP files for updating the system. However, the system is not permitted to be updated with these kernel CAP files directly generated by the manufacturer. This is because only the user can have the privilege to decide whether the system is to be updated. Therefore, before system

updating, the kernel CAP files must be “signed” via ULD User Key to get the user permission. For simple expression, we call the kernel CAP files generated by the manufacturer as “unsigned kernel CAP(s)” and call the kernel CAP files “signed” by the user later as “signed kernel CAP(s)”.

Notes:


1. The kernel modules are encrypted by a random-generated 3DES key, which is retrieved from the Key Encryption Block of the CAP by ULD Manufacturer Key Encryption Key, not directly encrypted by ULD RSA Key.
2. The “sign” action via ULD User Keys actually is done by” the second encryption”. “The second encryption” is done by using the random-generated 3DES key, which is encrypted by ULD User Key Encryption Key, to perform Triple DES encryption again on the cipher data segment of the kernel CAP files. This ensures that the system cannot retrieve the correct data from the kernel CAPs without the user permission.

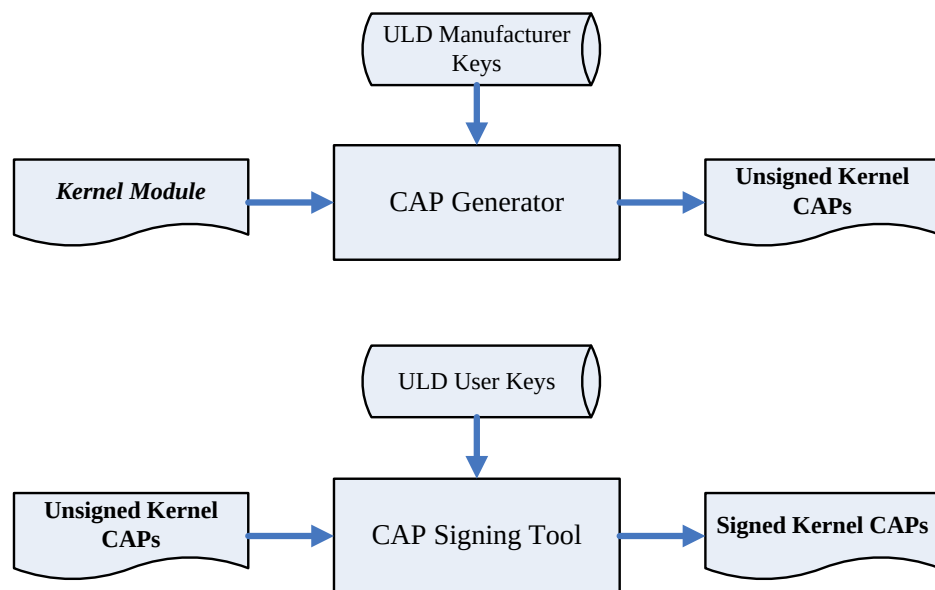

4.1.2. ULD User Key


ULD User Key are used to encrypt and sign the user/shared applications. In addition, they are as goalkeepers to prevent the system updating without user permission. This is done by the kernel CAPs which are encrypted and signed by the manufacturer having to perform the “signed” action via ULD User Keys.

Notes: Applications are encrypted by a random-generated 3DES key, which is retrieved from the Key Encryption Block of the CAP by ULD User Key Encryption Key, not directly encrypted by ULD RSA Key.

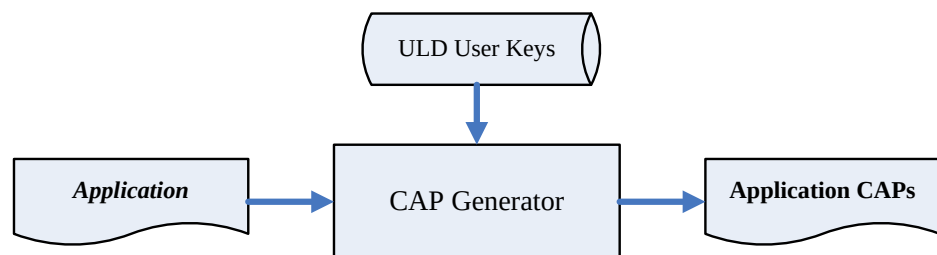

4.1.3. Key Change

The ULD RSA Keys are able to be changed. The system uses a special CAP file, KEY CAP, for the manufacturer and user to change their own keys. The KEY CAP contains a new set of ULD keys (Key Encryption Key and Signature Key). These new keys are encrypted and signed via the original keys. In other words, if the user would like to change the ULD User Keys, they have to use their original ULD User Keys with the new ULD User Keys to generate a KEY CAP.

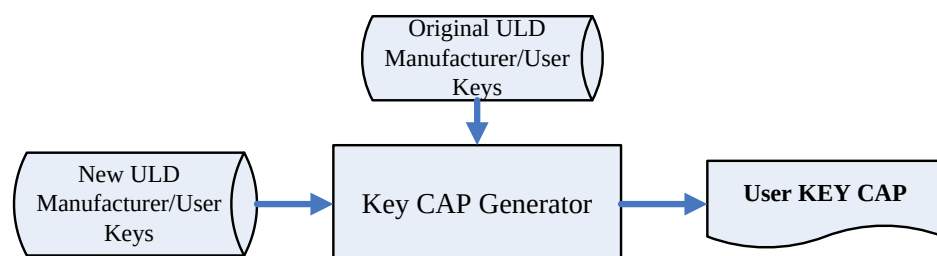

4.2. File Signing

4.2.1. Signing Kernel Module

Castles will release new version of kernel module in “unsigned” form. This files required to sign with ULD User Key before it can load to UPT1000F.

Castles Technology provides a tool named “CAP Signing Tool” to perform this task.


The CAP Signing Tool is located at:

C:\Program Files\Castles\UPT1000\tools\Signing Tool


- Run CAP Signing Tool




- Insert Key Card and select smart card reader

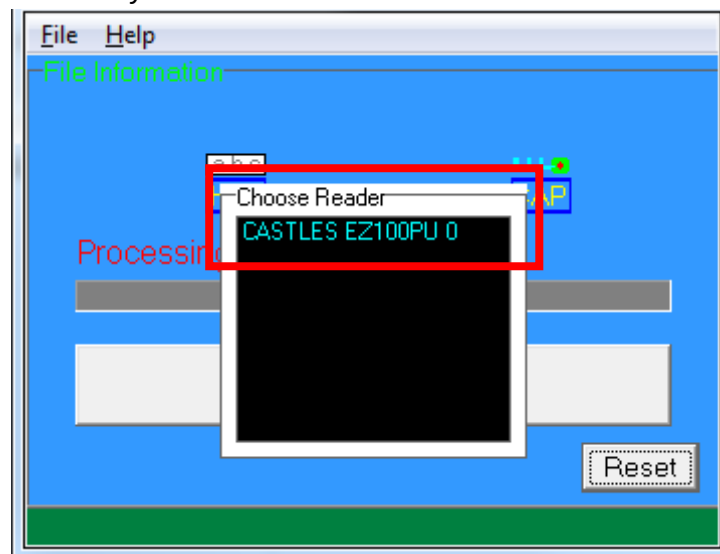

- Enter Key Card PIN

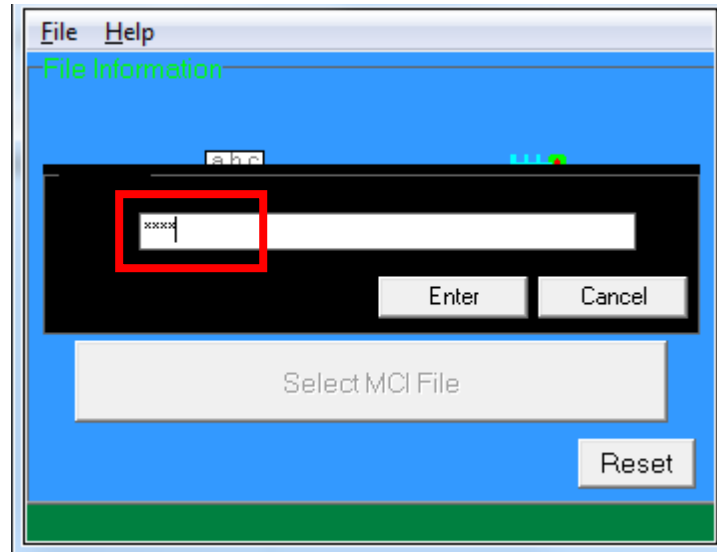

- CAP Signing Tool is ready, press “Select MCI File” button to browse the file.

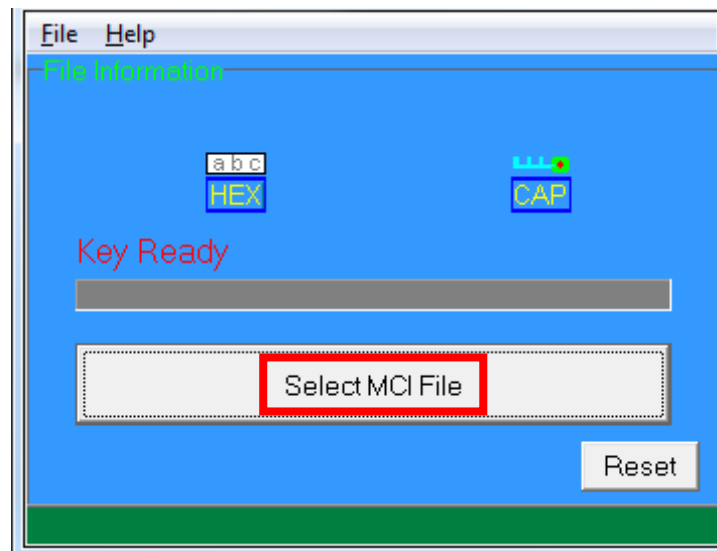

- Output file will be located in “signed” folder.

4.2.2. Signing User Files

Following files are required to sign before load to UPT1000F. This is to ensure the application data and codes confidential and integrity. The output file will be “CAP” file which format is defined by Castles.


- User application
- User application data files
- User application library
- Font file
- Share library
- Share files
- System setting
- Key CAP (Manufacturer ULD Key Set)

Castles Technology provided a tool named “CAP Generator” to perform this task.


The CAP Generator is located at:

C:\Program Files\Castles\UPT1000\tools\CAPG (KeyCard)


- Run CAP Generator



- Insert Key Card and select smart card reader

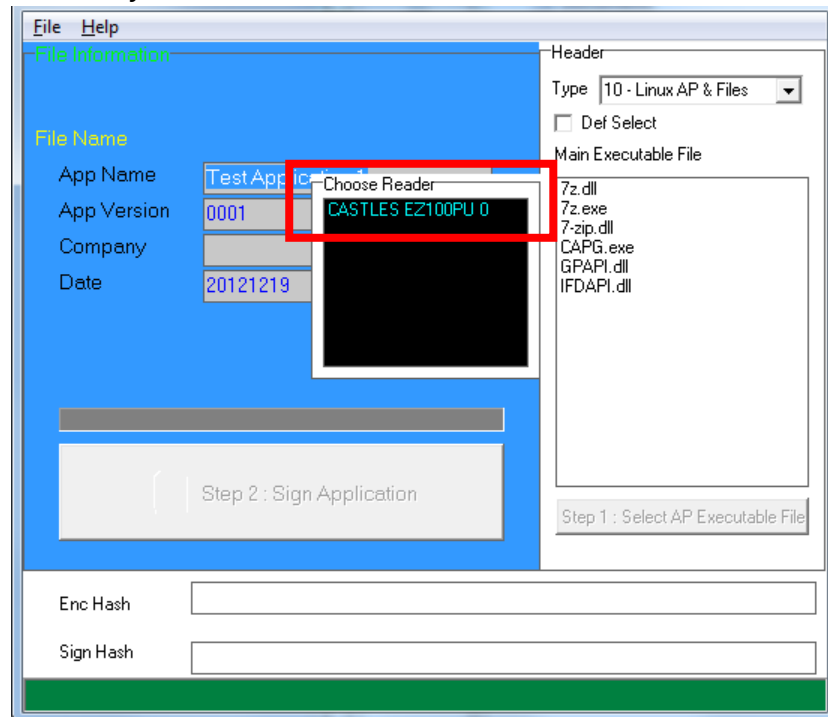

- Enter Key Card PIN

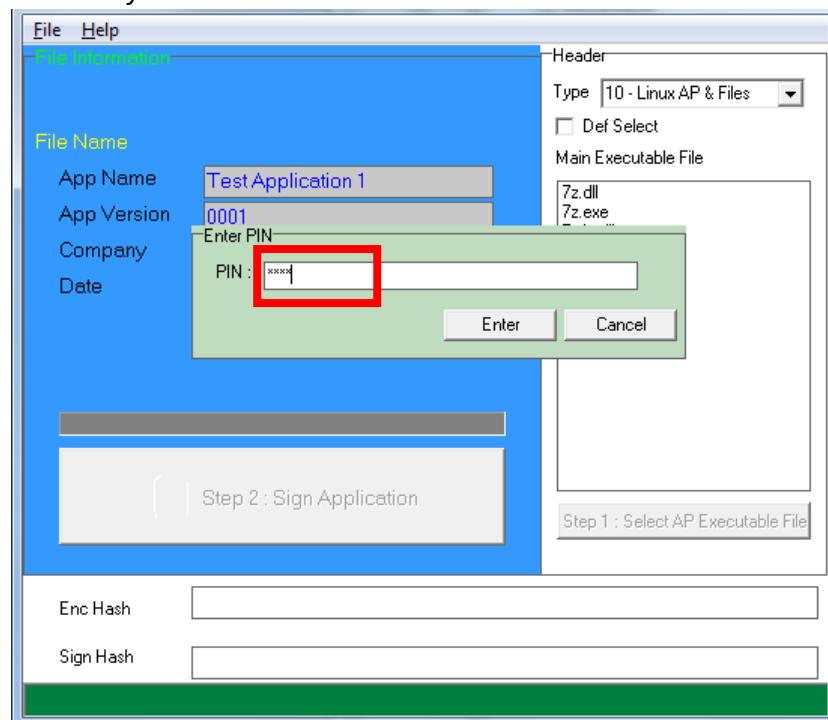

- CAP Generator is ready, select the correct Type from the list.

File Help

File Information

File Name

App Name: Test Application 1

App Version: 0001

Company:

Date: 20121219

Step 2: Sign Application

Enc Hash: 3E278EA92CBF937370A24E5C219DF2172592E79A

Sign Hash: 45B7EC170D7260EB4B28AC9A00C374299991F84D

Header

Type: 10 - Linux AP & Files

10 - Linux AP & Files

11 - Linux Font

20 - Share Library

21 - Share Files

22 - AppData Files

23 - System Setting

24 - App Library

A0 - Linux Key CAP

GF

IFDAPI.dll

Step 1: Select AP Executable File

- Press “Step 1: Select AP Executable File” to select file to sign. This is valid for all the files to sign.

File Help

File Information

File Name

App Name: V5_HelloWorld

App Version: 0001

Company:

Date: 20121219

Finished!

Step 2: Sign Application

Enc Hash: 3E278EA92CBF937370A24E5C219DF2172592E79A

Sign Hash: 45B7EC170D7260EB4B28AC9A00C374299991F84D

Header

Type: 10 - Linux AP & Files


Def Select

Main Executable File

V5_HelloWorld

Step 1: Select AP Executable File

- Enter file details and press “Step 2: Sign Application” to sign the file. This is valid for all the files to sign.

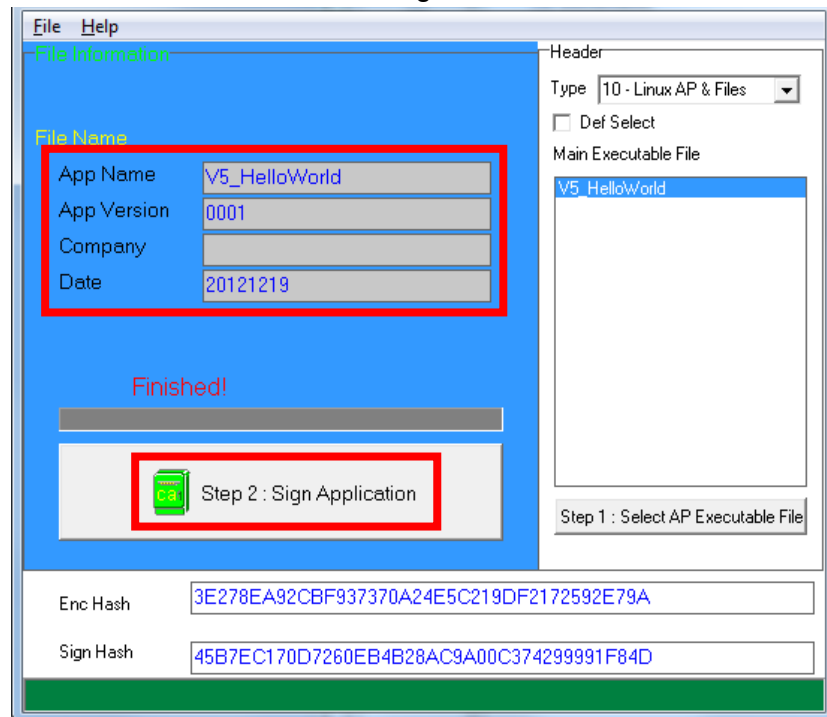

- The output file will be in a set. A “mci” file with one or more “CAP” files. The CAP file contains the signed file binaries, where MCI file contains the list of CAP files.



App.CAP



App.mci

Note: If user would like to load multiple set of signed file, create a new file with extension of “mmci”. Then put the mmci file contents with the list of mci file.



MultiApp.mmci

4.3. File Loading

There are several ways of loading file to UPT1000F.

- Download by User Loader
- Download by removable media
- Download by user application
- Download by Castles TMS

User Loader is a tool provided by Castles Technology. It's the formal way to download file to UPT1000F.

User may implement their own ways of updating application or files using CTOS API provided, **CTOS_UpdateFromMMCI()**.

Castles TMS (CTMS or CASTLES Terminal Management System) is provided by Castles Technology. It uses to perform remote download via Ethernet, GPRS/UMTS or modem.


4.3.1. Download by User Loader

The User Loader works for UPT1000F.


The Loader is located at:

C:\Program Files\Castles\UPT1000\tools\Loader


- Run User Loader



- Select COM port

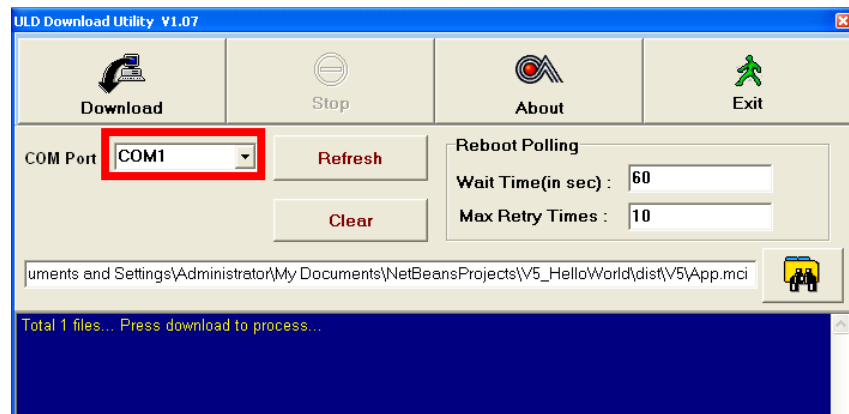


- Browse and select mci file or mmci file

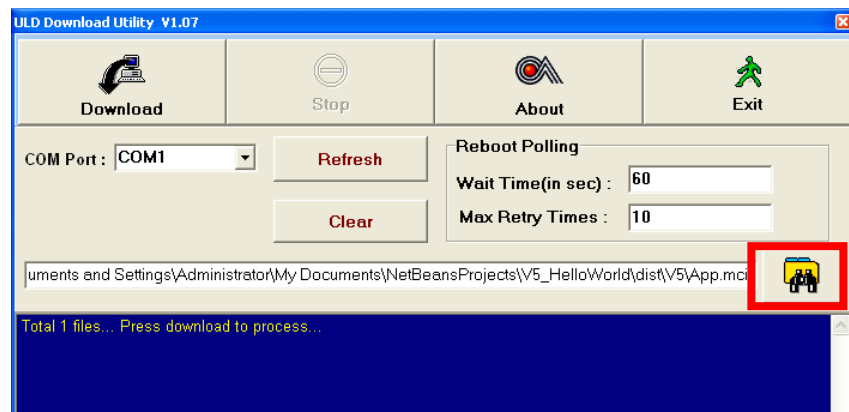


- Setup UPT1000F to enter download mode
 - Press [0] button in Program Manager (PM)
 - Press [1] button to select "1. Download AP"
 - Press [1] button again to select download via RS232 or USB

- Press “Download” button to start.

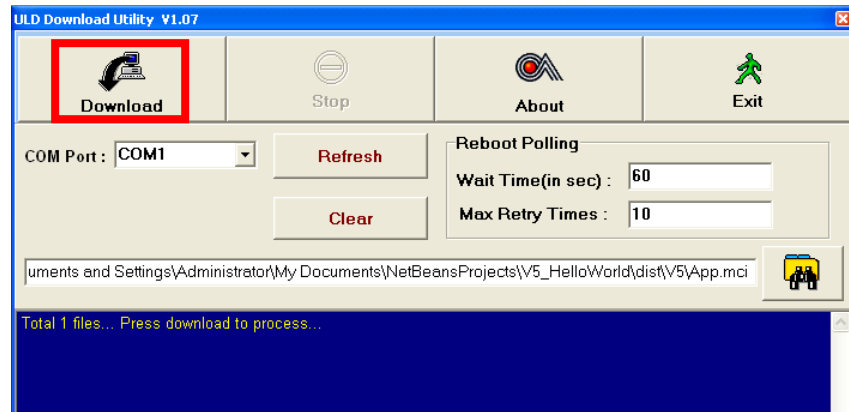


Note: To download using USB cable, UPT1000F must enable CDC mode. Set USB CDC Mode to Y.




4.3.2. Download by Removable Media

The file download process can be achieved without PC by using removable media, USB flash drive. We recommend don't put unwanted file to removable media, as it will increase the time during detection.


- Create a folder name "vxupdate" under root directory.

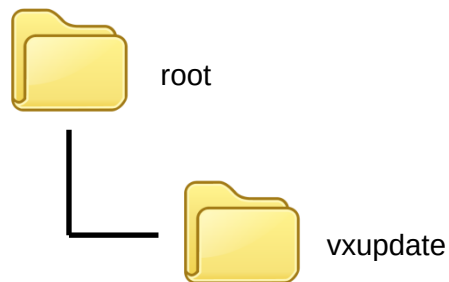

- Place the mci file and cap file to "vxupdate" folder.

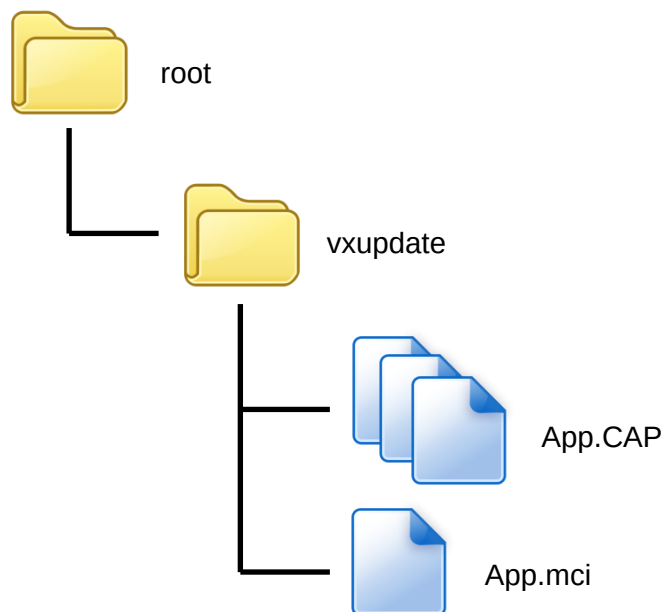


Note: If user would like to load multiple application, create a new file with extension of "mmci". Then put the mmci file contents with the list of mci file.



- Insert removable media to UPT1000F, and select the removable media type in “Download AP” menu.

Download AP Menu




- Press [2] button to select USB flash drive.
 - Press [3] button to select MicroSD card. (Not support)
-
- Finally, UPT1000F will process the file in “vxupdate” folder.


4.4. Changing ULD User Key

User may change their ULD User Key Set stored in Key Card. Castles Technology provided a tool named “Secure Key Generator” to perform this task.


- Run Secure Key Generator




- Insert Key Card and select smart card reader

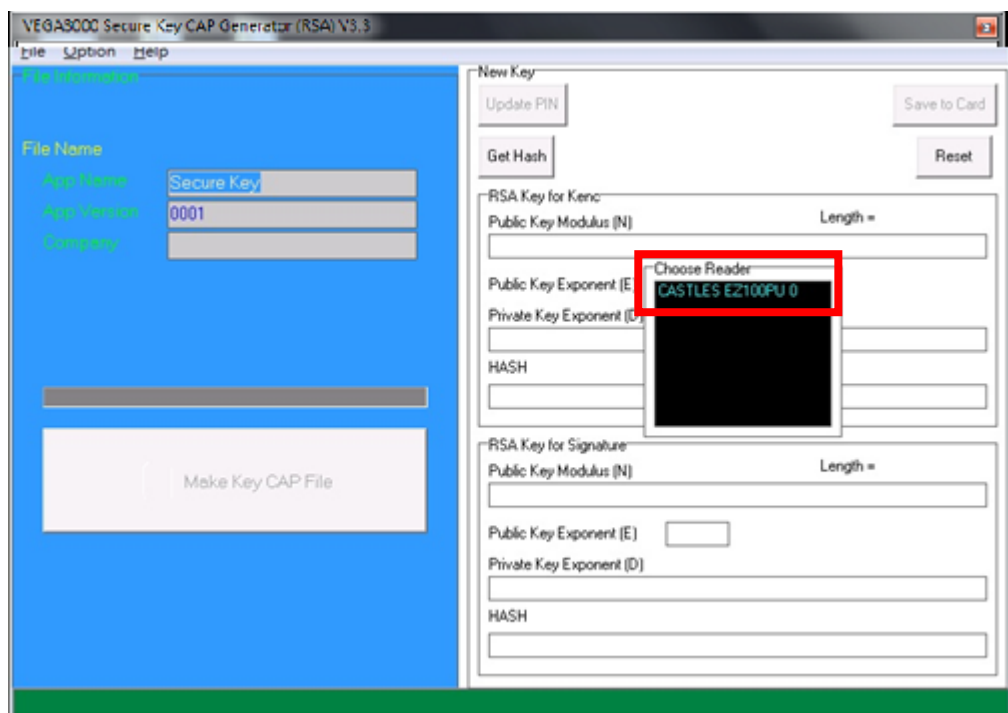


- Enter Key Card PIN, default PIN is “1234”.

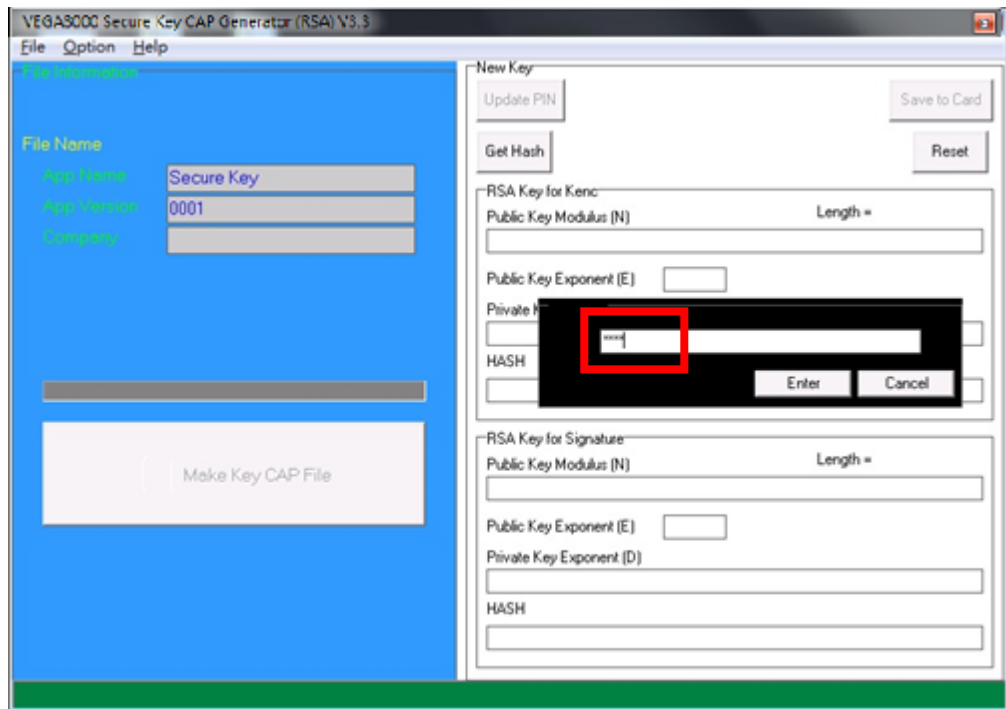

- To change Key Card PIN, press “Update PIN” button. If not, please skip this steps.

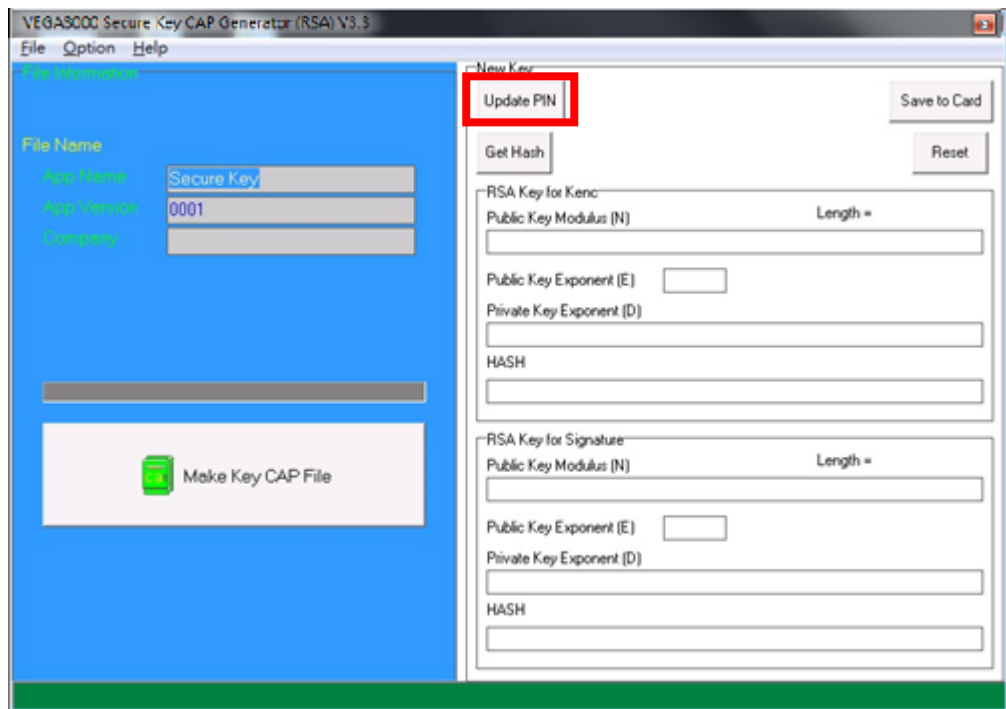

- Enter new PIN, enter new PIN again to confirm, then press [Enter] button to change PIN in Key Card.

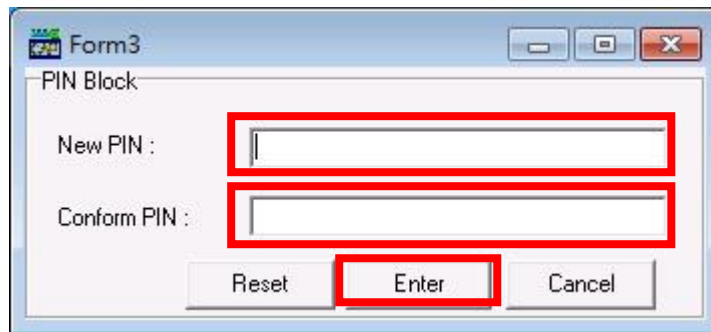

Form3


PIN Block

New PIN :

Conform PIN :

Reset Enter Cancel

- To view current key set hash value, goto “Option” and select key.

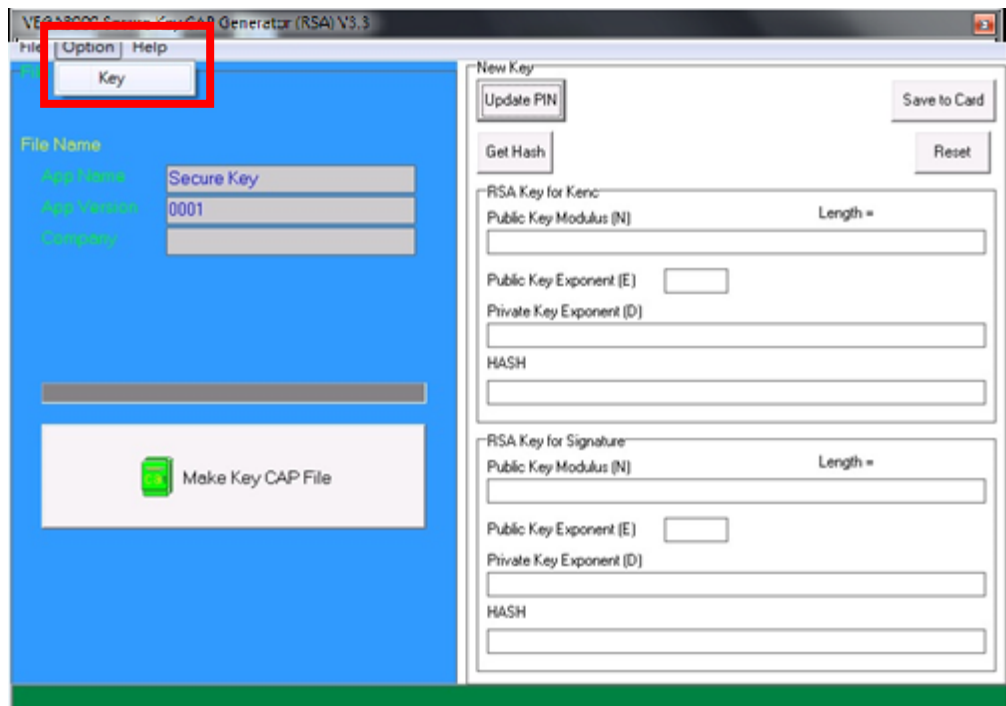

VEP-3000S Secure Key Generator (RSA) V3.3

File Name

App Name: Secure Key

App Version: 0001

Company:

Make Key CAP File

Option Help

Key

New Key

Update PIN Save to Card

Get Hash Reset

RSA Key for Kerio

Public Key Modulus (N) Length =

Public Key Exponent (E)

Private Key Exponent (D)

HASH

RSA Key for Signature

Public Key Modulus (N) Length =

Public Key Exponent (E)

Private Key Exponent (D)

HASH

Current Key Setting

Status
Load Key OK!

RSA Key for Kenc

Public Key Modulus (N) Key Length = 256

Public Key Exponent (E) XXXXXX

Private Key Exponent (D)

HASH
277BF11E6827FF2A263DEDE6DEC84B2BE9B3E576

RSA Key for Signature

Public Key Modulus (N) Key Length = 256


Public Key Exponent (E) XXXXXX

Private Key Exponent (D)


HASH
FE0E7B6606EAE386FC29331E54C413AF8458ACA5

Close


- To generate new user key set
 - Please generate the RSA key by yourself, the length of the RSA key set should be 2048 (bits).
 - Copy RSA key components to RSA Key for Kenc in Secure Key Generator.

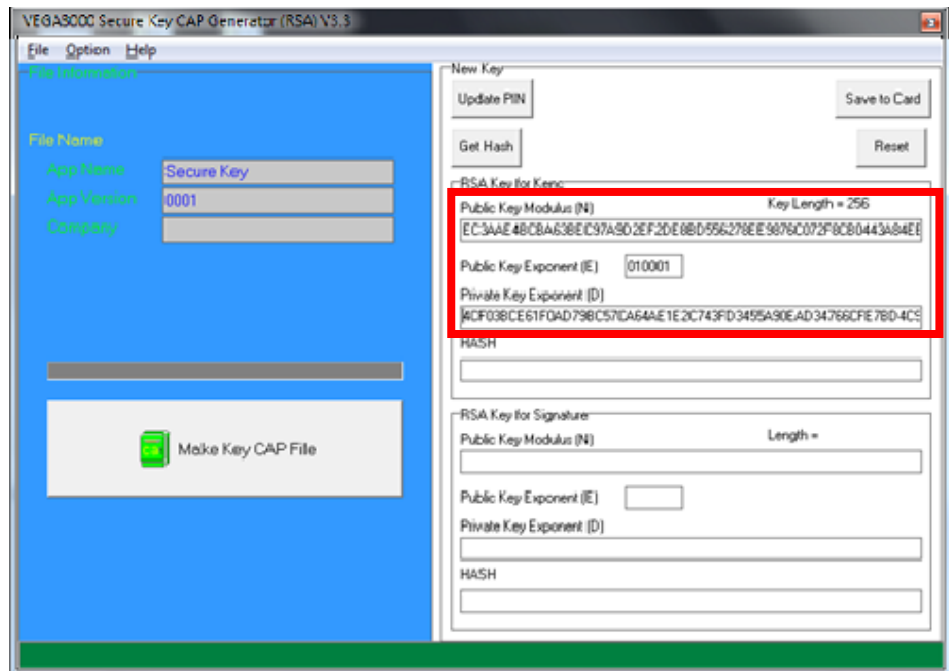


- Generate second RSA key set for Signature.

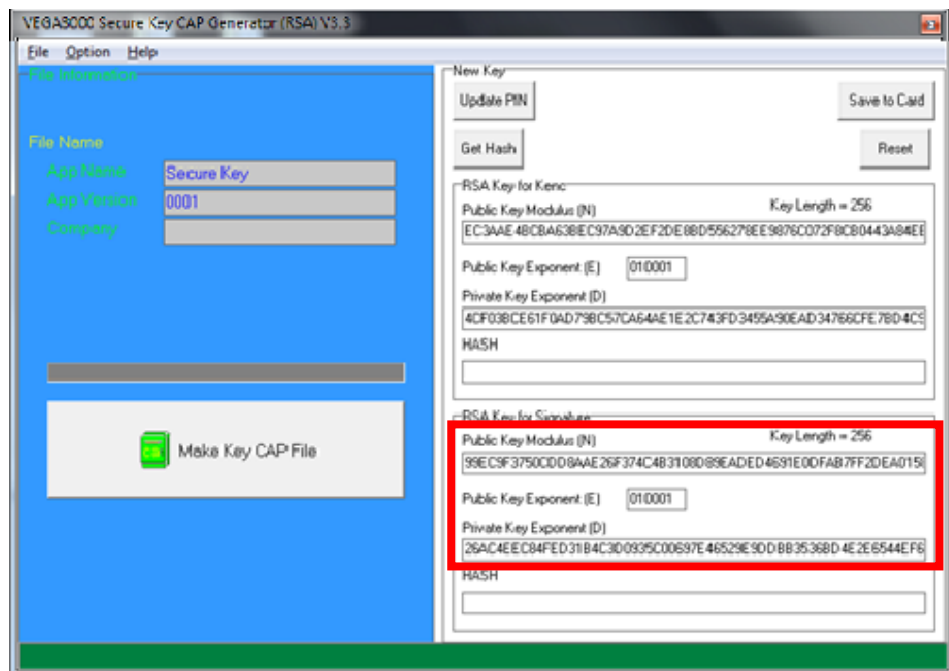


- Click [Get Hash] button to calculate the hash value for key sets.

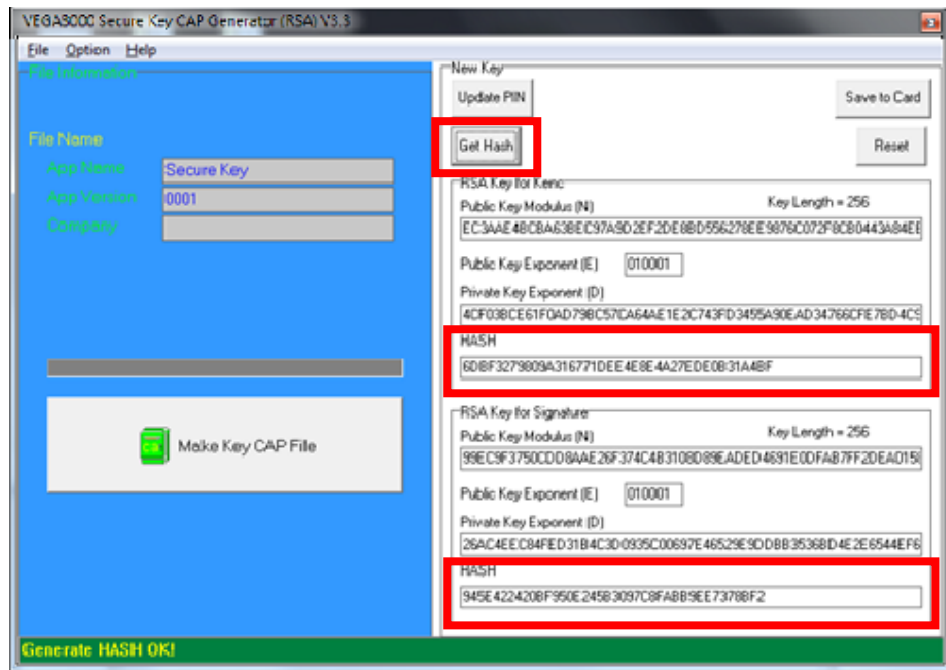


- Please copy down all the values into a text file and keep in a safe place. You will need this if you need to create duplicate Key Card.
- To generate the key CAP for the newly generated user key set, press [Make Key CAP File] button.

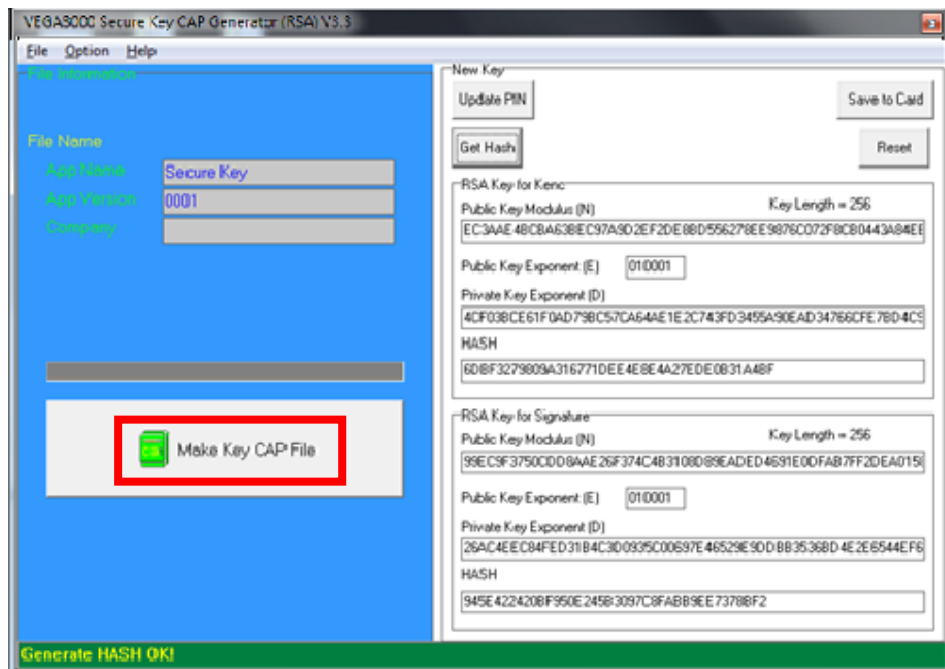

- The output file will be located in the Secure Key Generator folder.

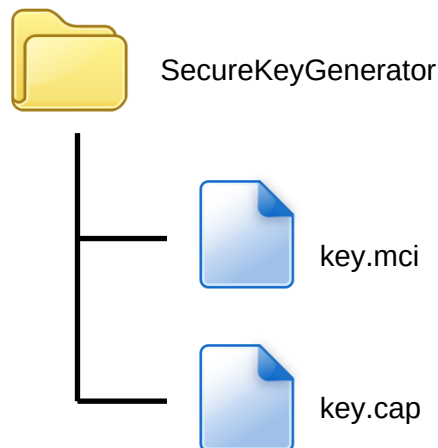


- To update the newly generated key set to Key Card, press [Save to Card] button to write the key set to Key Card.

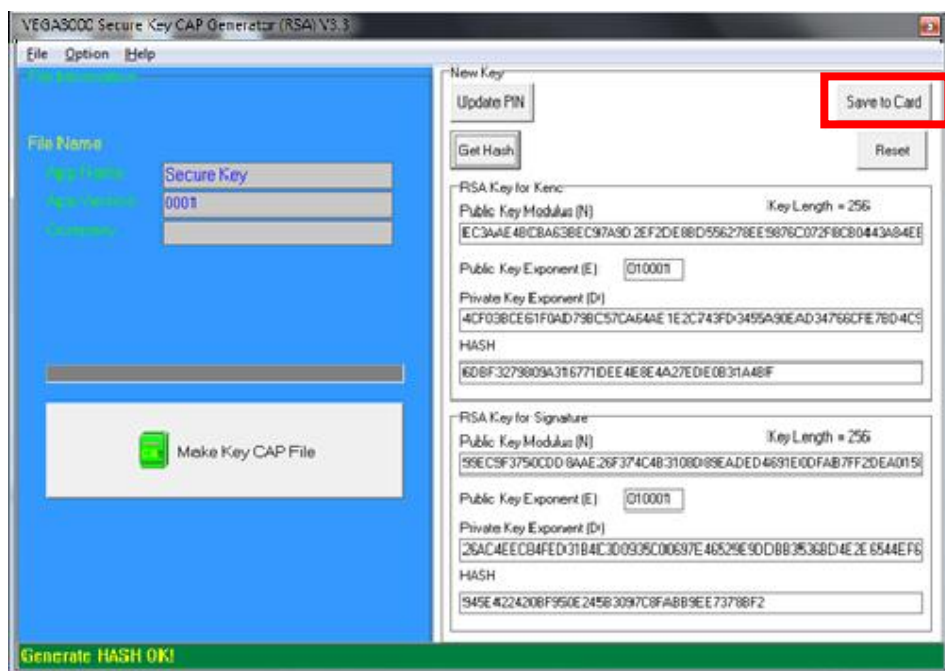

5. Font Management


5.1. Loading New Font

- Run FontManager.exe




Located at C:\Program Files\Castles\Font Manager


- Select font to download

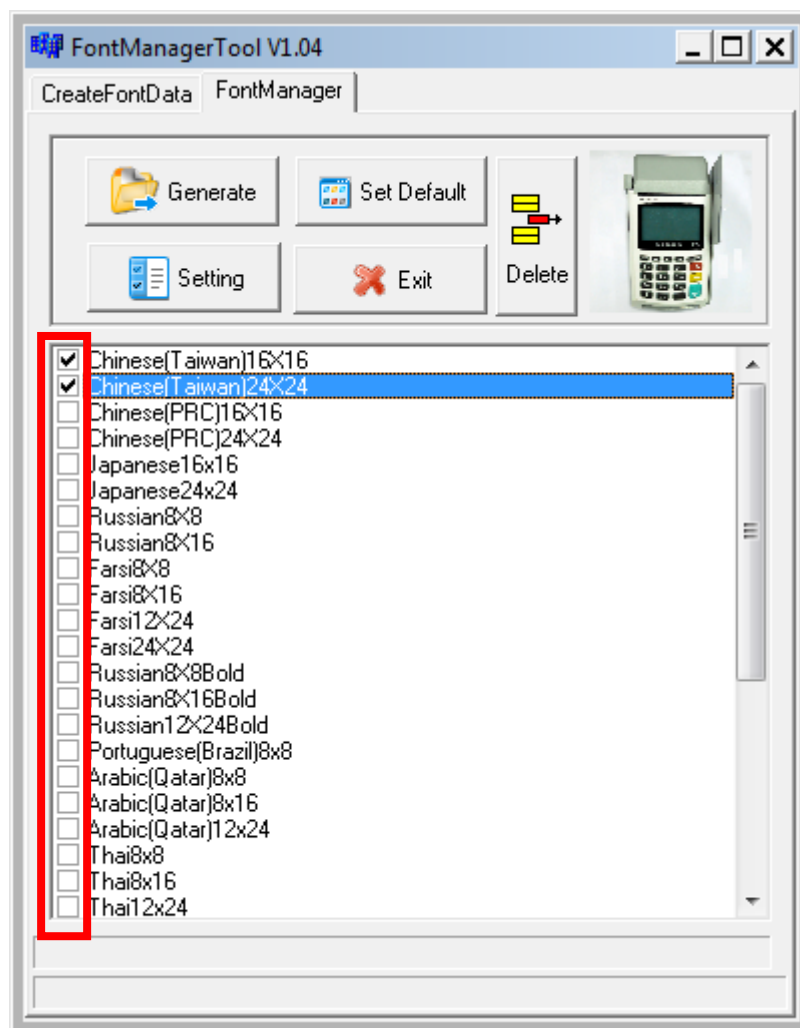


- Press [Setting] button to configure the type.

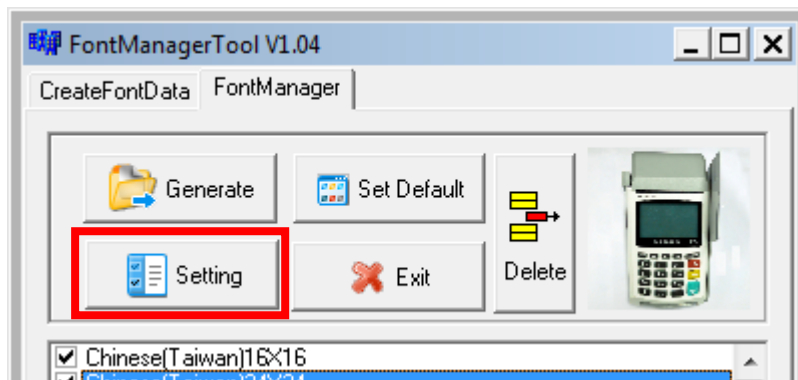


- Select **VEGA5000**, press [Save] button to save and return font manager.

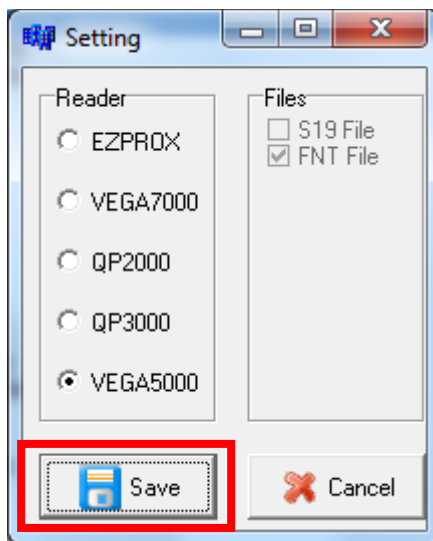


- Press [Generate] to create the font file.

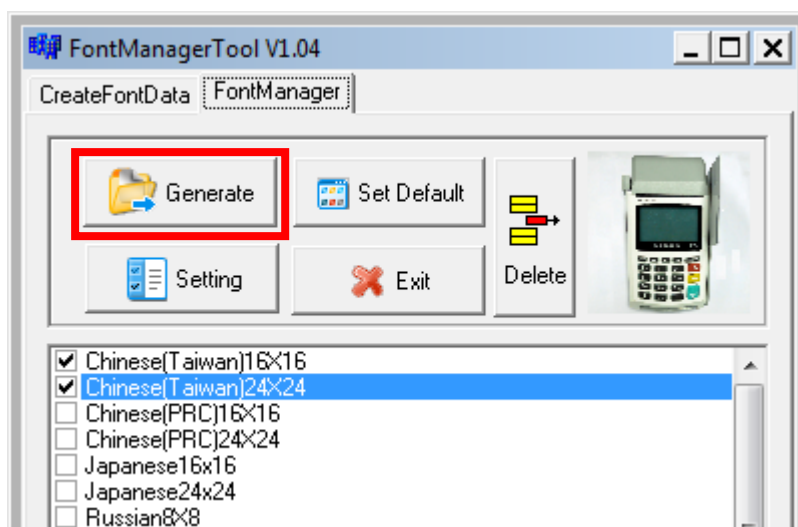

- Output file “Font.FNT” will be located at sub-directory named “Font” in “Font Manager” folder.

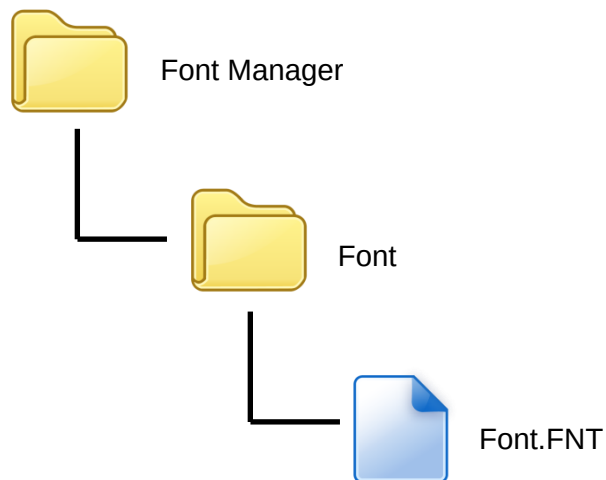

- Sign the file using CAP Generator, the type must set to “11 – Linux Font”.

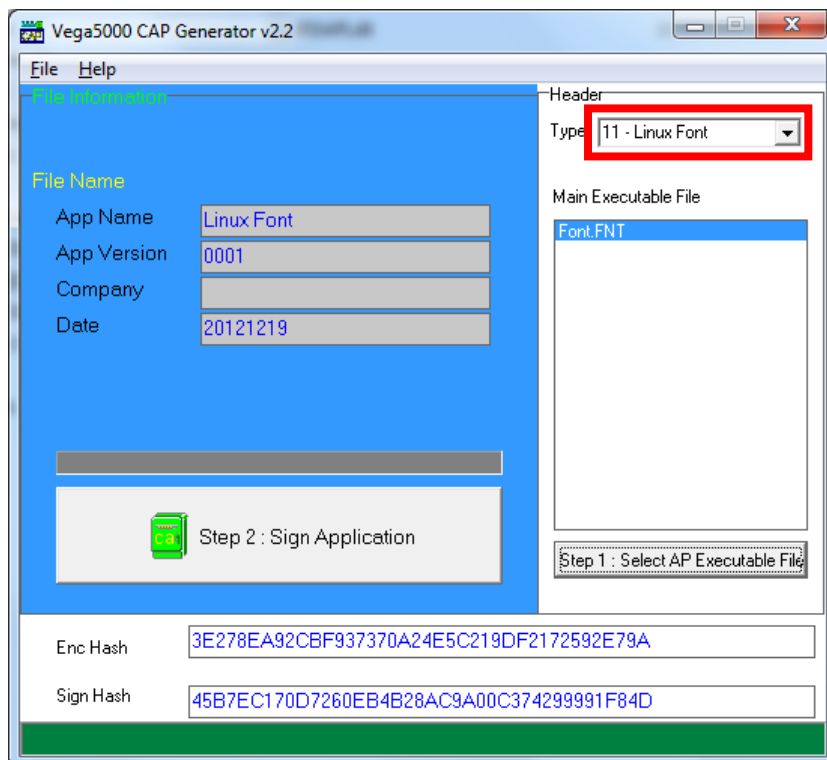

- Lastly, download the signed file (CAP file) to UPT1000F using Loader.

5.2. Custom Font

User may create font they preferred for displaying or printing on UPT1000F.


There are two zone defined:

Zone 0x00 ~ 0x7F – ASCII characters, you may replace with the font type preferred or your own language character set.


Zone 0x80 ~ 0xFF – Free to use, you may use for symbols.

Following steps demonstrate how to create a 12x24 font.


- Run GLCD Font Creator




- Select [File] ⇒ [New Font] ⇒ [Import An Existing System Font]

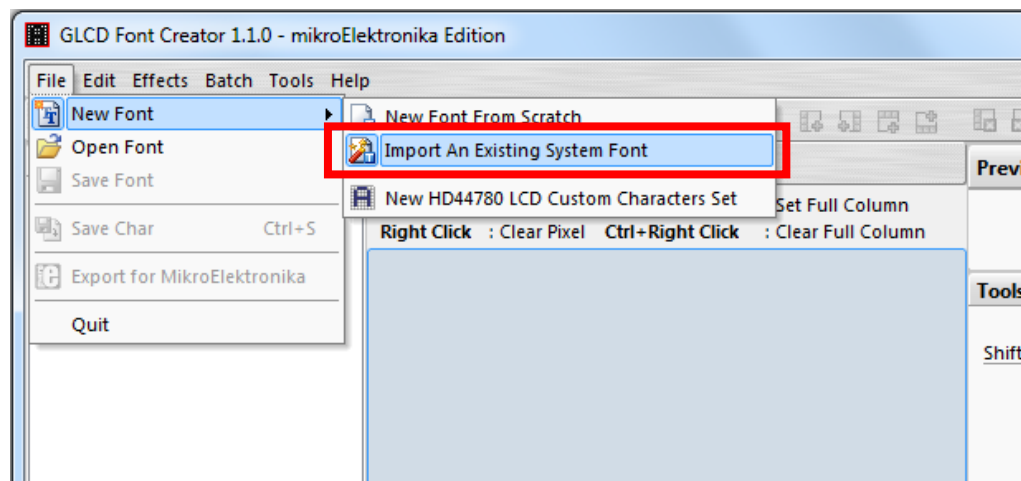


- Select the font needed, simply choose a font size. The final value of font size should be determined by the minimum pixel width. You may need to repeat this steps few times to find the best fit font size.

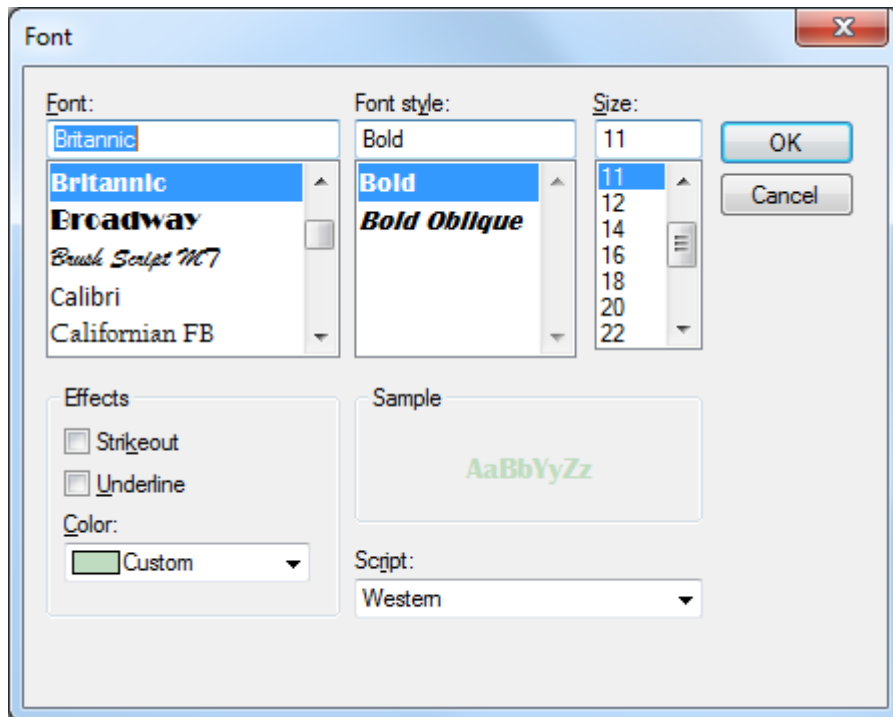


- Set the import range from 0 to 127.

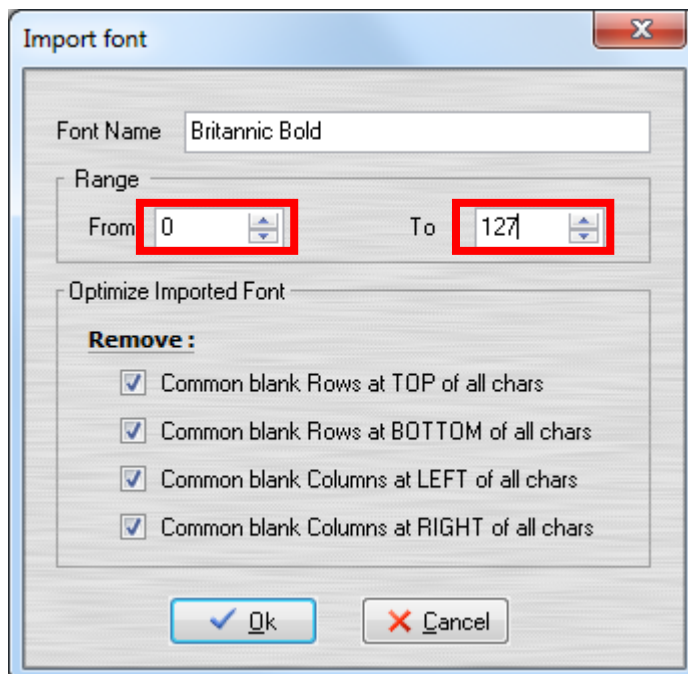


- Check the minimum pixel width and height.

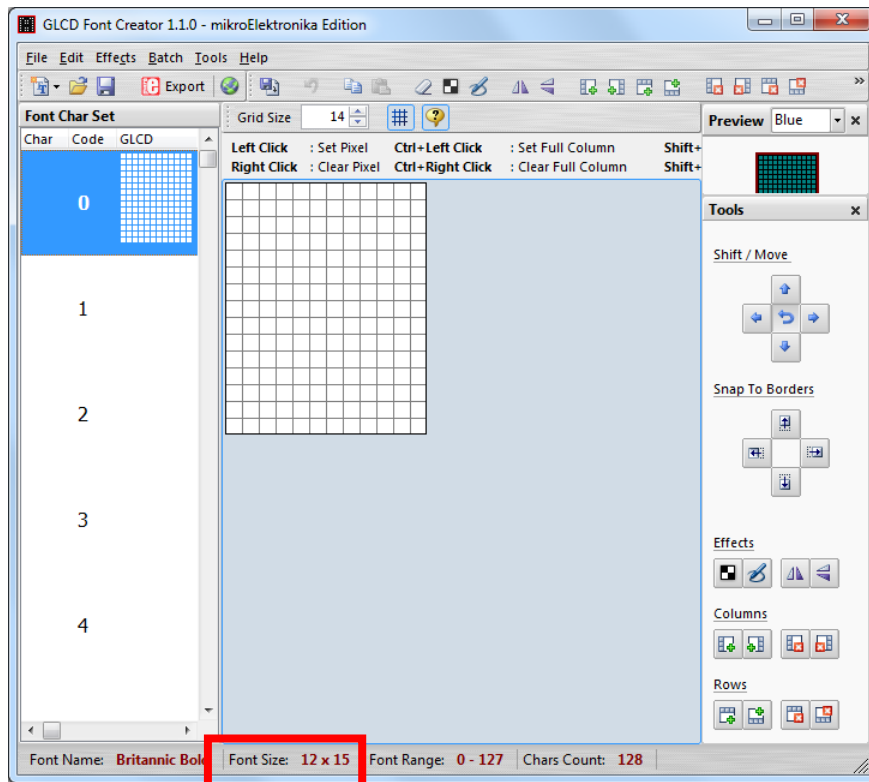

- If the pixel width of the font size is larger than expected, then you have to repeat the previous steps to import font with smaller size.
- Use the following buttons to adjust the font size to match with expected font size.

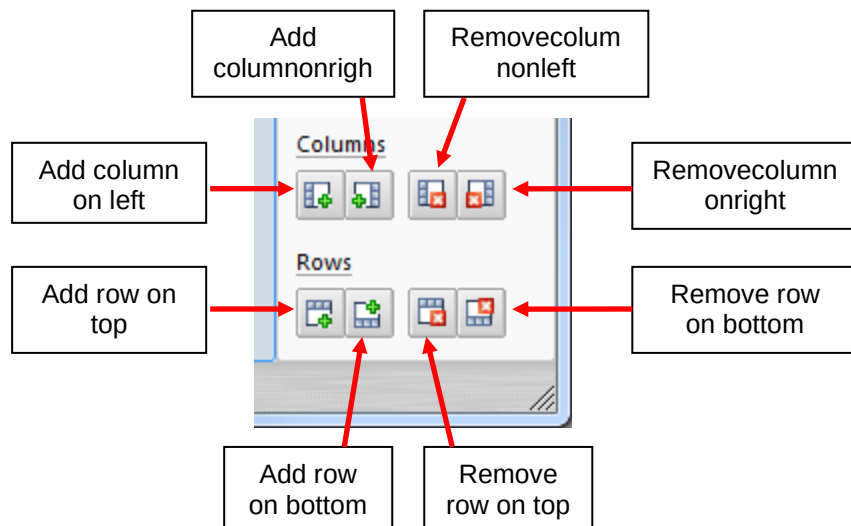

- After adjust font size, select [File] ⇒ [Export for MikroElektronika].

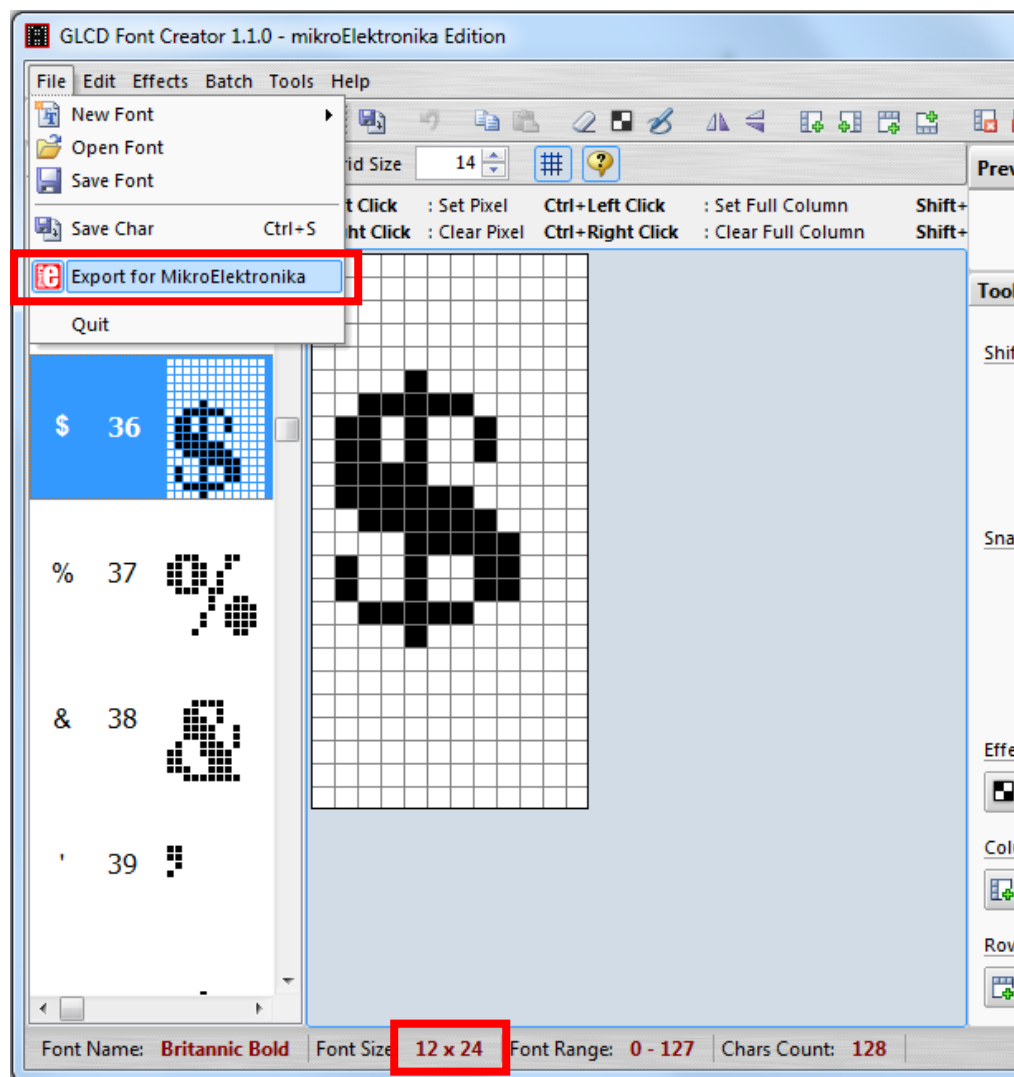

- Select output format as [mikroC].




- [illegible]

- FontManagerTool.exe
30/10/2012 10:14
1.04 MB


-

- Enter the file name, font id, and select the size.

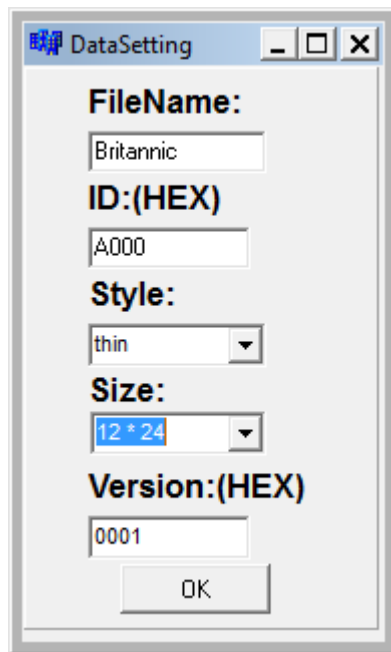


The image shows a dialog box titled "DataSeting". It contains several input fields and a button. The "FileName:" field contains the text "Britannic". The "ID:(HEX)" field contains the text "A000". The "Style:" field is a dropdown menu with "thin" selected. The "Size:" field is a dropdown menu with "12 * 24" selected. The "Version:(HEX)" field contains the text "0001". At the bottom of the dialog is an "OK" button.

- Click [Create] button, and select the C file previously created using GLCD Font Generator.

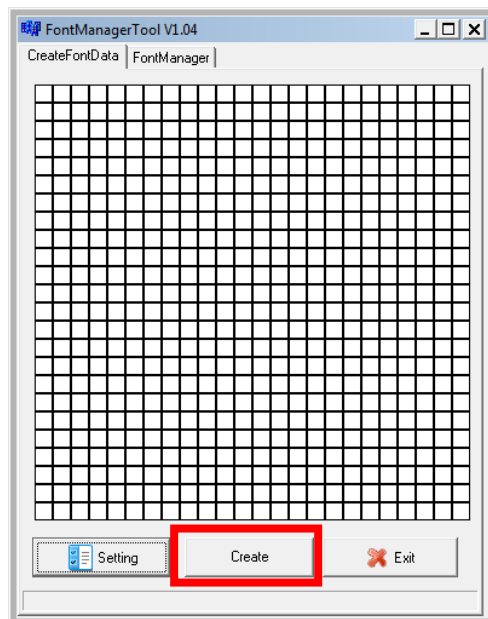


The image shows a window titled "FontManagerTool V1.04". It has two tabs: "CreateFontData" and "FontManager". The "CreateFontData" tab is active, showing a large grid of small squares. At the bottom of the window, there are three buttons: "Setting", "Create", and "Exit". The "Create" button is highlighted with a red rectangle.

- Select [Font Manager] tab and tick the newly created font, and press [Generate] button to export to FNT file.

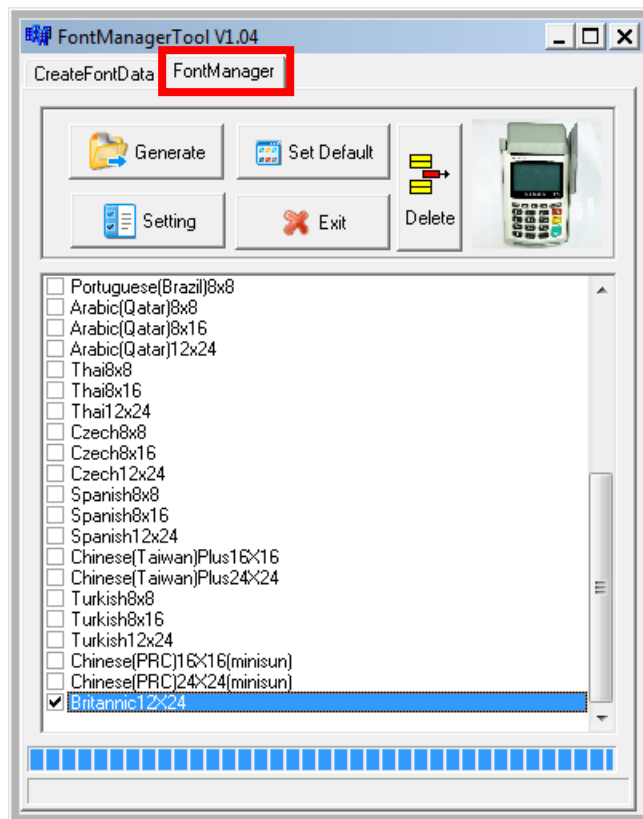

- Use CAP Generator to convert the FNT file to CAP.
Set type to [11 – Linux Font], press [Step 1] button select the FNT file. Then press [Step 2] to generate CAP file.

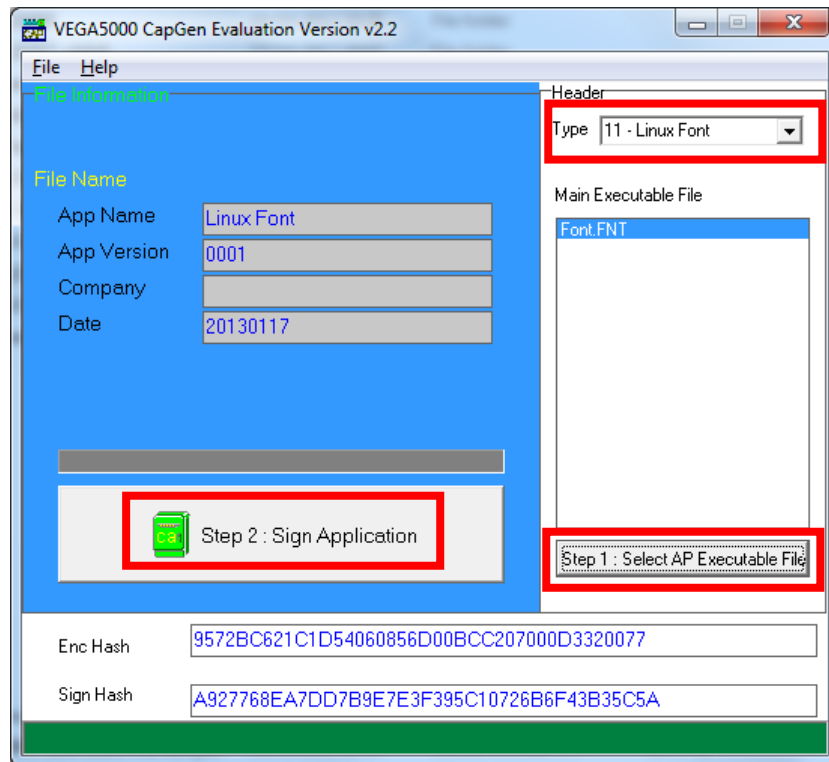

- Download the font CAP file to UPT1000F.
- In the application, add following code to display message using the newly created font.

```
CTOS_LanguageConfig(0xA000,d_FONT_12x24,0,d_FALSE);
CTOS_LanguageLCDSelectASCII(0xA000);
CTOS_LCDTPrintXY(1, 1, "ABCDEFGH");
```

Or print message using the newly created font.


```
CTOS_LanguagePrinterSelectASCII(0xA000);
CTOS_PrinterPutString("ABCDEFGH");
```

5.3. Using TrueType Font (TTF)


TrueType Font (TTF) is supported in UPT1000F. You can download the TrueType font to UPT1000F for displaying or printing.

Following steps demonstrate how to use “Cooper Black” TrueType font.

- Copy the TTF file needed to an empty folder.

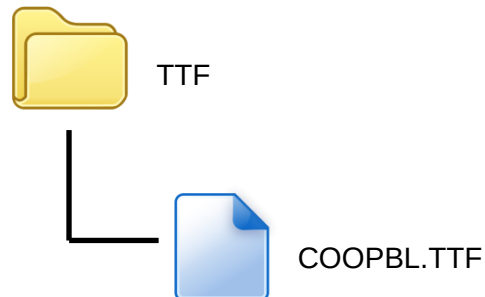

- Use CAP Generator to convert the TTF file to CAP.
Set type to [11 – Linux Font], press [Step 1] button select the TTF file.
Then press [Step 2] to generate CAP file.

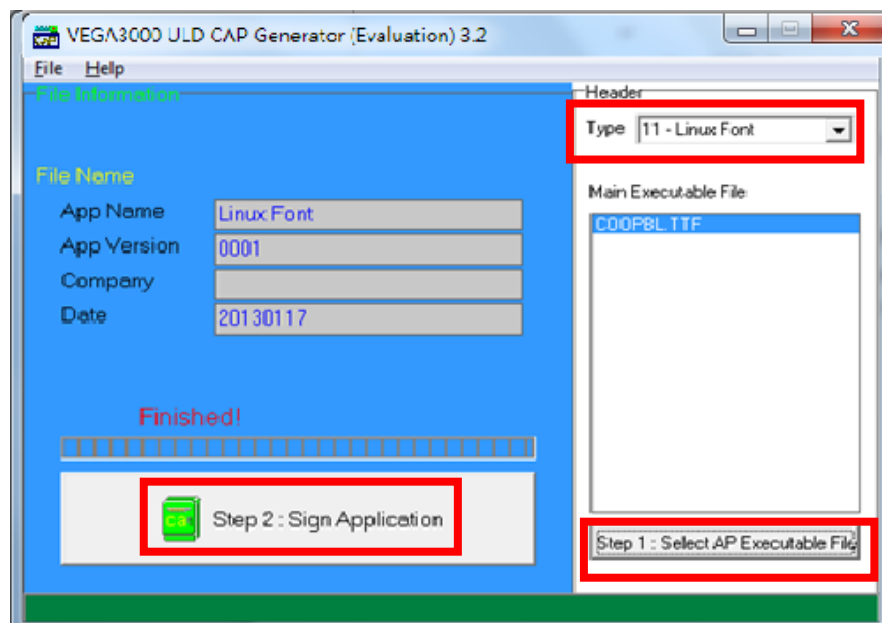

- Download the font CAP file to UPT1000F.

- In the application, add following code to display message using the newly added font.


```
CTOS_LCDTTFSelect("COOPBL.TTF", 0);  
CTOS_LCDFontSelectMode(d_FONT_TTF_MODE);  
CTOS_LCDTSelectFontSize(0x203C); // 32x60  
CTOS_LCDTClearDisplay();  
CTOS_LCDTPrintXY(1, 1, "Hello World");
```

Or print message using the newly added font.

```
CTOS_PrinterTTFSelect("COOPBL.TTF", 0);  
CTOS_PrinterFontSelectMode(d_FONT_TTF_MODE);  
CTOS_LanguagePrinterFontSize(0x203C, 0, 0); // 32x60  
CTOS_PrinterPutString("Hello World");
```

6. Technical Notes

6.1. Serial Cable PIN Assignment

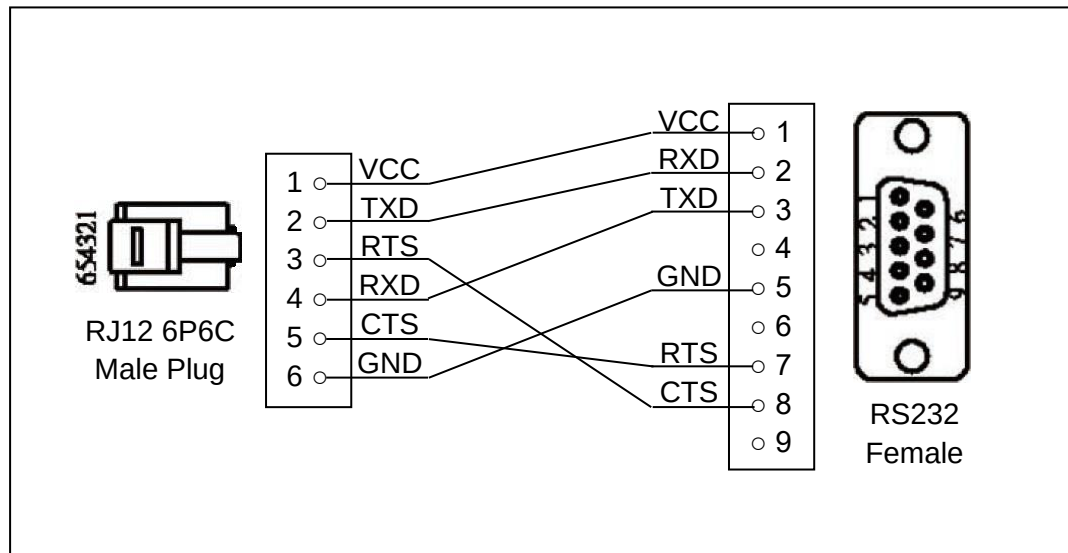

7. Appendix

7.1. Industry Canada statement

Industry Canada statement

This device complies with ISED's licence-exempt RSSs. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Le présent appareil est conforme aux CNR d'ISED applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) le dispositif ne doit pas produire de brouillage préjudiciable, et (2) ce dispositif doit accepter tout brouillage reçu, y compris un brouillage susceptible de provoquer un fonctionnement indésirable.

Radiation Exposure Statement:

This equipment complies with ISED radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with greater than 20cm between the radiator & your body.

Déclaration d'exposition aux radiations:

Cet équipement est conforme aux limites d'exposition aux rayonnements ISED établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé à plus de 20cm entre le radiateur et votre corps.

7.2. General Cautions

Federal Communication Commission Interference Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution:

- Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.
- This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

CAUTION
RISK OF EXPLOSION IF BATTERY IS REPLACED
BY AN INCORRECT TYPE.
DISPOSE OF USED BATTERIES ACCORDING
TO THE INSTRUCTIONS

RFA-US-T1000G-2M-A5

Specifications

Frequency range	704 – 791 MHz	824 – 960 MHz	1710 – 2170 MHz
Peak gain	2 dBi	1 dBi	0.7 dBi

Antenna Type	Dipole	Brand	Aristotle
Antenna Connector	SMA R/A PLUG	Model	RFA-US-T1000G-2M-A5
Antenna Gain (dBi)	WCDMA Band 2	0.7	
	WCDMA Band 4	0.7	
	WCDMA Band 5	1	
	LTE Band 2	0.7	
	LTE Band 4	0.7	
	LTE Band 5	1	
	LTE Band 12	2	
	LTE Band 13	2	
	LTE Band 14	2	
	LTE Band 66	0.7	

RFA-25-T100-41-3M-A2

Specifications

Frequency range	2400 -2500 MHz	5150-5875MHz
Peak gain	-0.1dBi	0.86dBi

VCCI Caution:

この装置は、クラスB機器です。この装置は、住宅環境で使用することを目的としていますが、この装置がラジオやテレビジョン受信機に近接して使用されると、受信障害を引き起こすことがあります。

取扱説明書に従って正しい取り扱いをして下さい。

VCCI-B

~ END ~