

FCC Radio Test Report

FCC ID: WS2-ZB7

This report concerns (check one): ☒ Original Grant ☐ Class II Change

Project No. : 1605250
Equipment : BLE/802.15.4 Module
Model Name : ZB7
Applicant : Jorjin Technologies INC.
Address : 17F, No 239, Datong Road, Sec 1, Xizhi District,
New Taipei City, Taiwan 22161

Date of Receipt : May 27, 2016
Date of Test : May 27, 2016 ~ Jul. 01, 2016
Issued Date : Jul. 04, 2016
Tested by : BTL Inc.

Testing Engineer : Rush Kao
(Rush Kao)

Technical Manager : Jeff Yang
(Jeff Yang)

Authorized Signatory : Andy Chiu
(Andy Chiu)

B T L I N C .

B1, No.37, Lane 365, Yang Guang St.,
Nei-Hu District, Taipei City 114, Taiwan.
TEL:+886-2-2657-3299 FAX: +886-2- 2657-3331

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	10
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	10
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
3.5 DESCRIPTION OF SUPPORT UNITS	11
4 . EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 EUT TEST CONDITIONS	13
4.1.7 TEST RESULTS	13
4.2 RADIATED EMISSION MEASUREMENT	14
4.2.1 RADIATED EMISSION LIMITS	14
4.2.2 TEST PROCEDURE	15
4.2.3 DEVIATION FROM TEST STANDARD	15
4.2.4 TEST SETUP	16
4.2.5 EUT OPERATING CONDITIONS	17
4.2.6 EUT TEST CONDITIONS	17
4.2.7 TEST RESULTS (9KHZ TO 30MHZ)	17
4.2.8 TEST RESULTS (BETWEEN 30MHZ TO 1000 MHZ)	18
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	18
5 . BANDWIDTH TEST	19
5.1 APPLIED PROCEDURES / LIMIT	19
5.1.1 TEST PROCEDURE	19
5.1.2 DEVIATION FROM STANDARD	19
5.1.3 TEST SETUP	19
5.1.4 EUT OPERATION CONDITIONS	19
5.1.5 EUT TEST CONDITIONS	19
5.1.6 TEST RESULTS	19

Table of Contents	Page
6 . MAXIMUM OUTPUT POWER TEST	20
6.1 APPLIED PROCEDURES / LIMIT	20
6.1.1 TEST PROCEDURE	20
6.1.2 DEVIATION FROM STANDARD	20
6.1.3 TEST SETUP	20
6.1.4 EUT OPERATION CONDITIONS	20
6.1.5 EUT TEST CONDITIONS	20
6.1.6 TEST RESULTS	20
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	21
7.1 APPLIED PROCEDURES / LIMIT	21
7.1.1 TEST PROCEDURE	21
7.1.2 DEVIATION FROM STANDARD	21
7.1.3 TEST SETUP	21
7.1.4 EUT OPERATION CONDITIONS	21
7.1.5 EUT OPERATION CONDITIONS	21
7.1.6 TEST RESULTS	21
8 . POWER SPECTRAL DENSITY TEST	22
8.1 APPLIED PROCEDURES / LIMIT	22
8.1.1 TEST PROCEDURE	22
8.1.2 DEVIATION FROM STANDARD	22
8.1.3 TEST SETUP	22
8.1.4 EUT OPERATION CONDITIONS	22
8.1.5 EUT TEST CONDITIONS	22
8.1.6 TEST RESULTS	22
9 . MEASUREMENT INSTRUMENTS LIST	23
10 . EUT TEST PHOTO	25
ATTACHMENT A - CONDUCTED EMISSION	29
ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)	32
ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)	37
ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)	40
ATTACHMENT E - BANDWIDTH	53
ATTACHMENT F - MAXIMUM OUTPUT POWER TEST	56
ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION	57
ATTACHMENT H - POWER SPECTRAL DENSITY TEST	61

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-2-1605250	Original Issue.	Jul. 04, 2016

1. CERTIFICATION

Equipment : BLE/802.15.4 Module
Brand Name : Jorjin
Model Name : ZB7
Applicant : Jorjin Technologies INC.
Manufacturer : Jorjin Technologies INC.
Address : 17F, No 239, Datong Road, Sec 1, Xizhi District, New Taipei City, Taiwan 22161
Date of Test : May 27, 2016 ~ Jul. 01, 2016
Test Sample : Engineering Sample
Standard(s) : FCC Part15, Subpart C (15.247) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-2-1605250) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test results included in this report is only for the BT LE part.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C				
Standard(s)	Section	Test Item	Judgment	Remark
	15.207	Conducted Emission	PASS	
	15.247(d)	Antenna conducted Spurious Emission	PASS	
	15.247(a)(2)	6dB Bandwidth	PASS	
	15.247(b)(3)	Peak Output Power	PASS	
	15.247(e)	Power Spectral Density	PASS	
	15.203	Antenna Requirement	PASS	
	15.209/15.205	Transmitter Radiated Emissions	PASS	

NOTE:

(1) "N/A" denotes test is not applicable to this device.

(2) The test follows FCC KDB Publication No. 558074 D01 DTS Meas Guidance v03r05 (Measurement Guidelines of DTS)

2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

Conducted emission Test:

C05: (VCCI RN: C-4742; FCC RN:949005; FCC DN:TW1082)
No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

Radiated emission Test (Below 1GHz):

CB11: (VCCI RN: R-4260; FCC RN:949005; FCC DN:TW1082; IC Assigned Code:20088)
No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

Radiated emission Test (Above 1GHz):

CB11: (VCCI RN: G-868; FCC RN:949005; FCC DN:TW1082; IC Assigned Code:20088)
No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)
C05	CISPR	150 kHz~30MHz	2.04

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)
CB11 (3m)	CISPR	9kHz ~ 150kHz	4.00
		150kHz ~ 30MHz	4.00

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
CB11 (3m)	CISPR	30 MHz ~ 200 MHz	V	3.06
		30 MHz ~ 200 MHz	H	2.58
		200 MHz ~ 1, 000 MHz	V	3.50
		200 MHz ~ 1, 000 MHz	H	3.10

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
CB11 (3m)	CISPR	1GHz ~ 6GHz	V	4.14
		1GHz ~ 6GHz	H	4.14

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
CB11 (1m)	CISPR	6GHz ~ 18GHz	V	5.34
		6GHz ~ 18GHz	H	5.34

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above. These are our U_{lab} values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called U_{CISPR} , as follows:

Conducted Disturbance (mains port) – 150 kHz – 30 MHz : 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) – 30 MHz – 1000 MHz : 5.2 dB

It can be seen that our U_{lab} values are smaller than U_{CISPR} .

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	BLE/802.15.4 Module		
Brand Name	Jorjin		
Model Name	ZB7		
Model Difference	N/A		
Power Source	Supplied from system.		
Power Rating	EUT I/P: DC 3.3V		
Product Description	Operation Frequency	2402 MHz ~ 2480 MHz	
	Modulation Technology	GFSK(1Mbps)	
	Bit Rate of Transmitter		
	EIRP Power (Max.)	5.38dBm (1Mbps)	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- 2.

Channel List			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

3. Table for Filed Antenna:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	OneWave	7020 M-Ant 2.45 T4(WAN7020L245M04)	Chip	Soldering on board	1.256

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode NOTE (1)
Mode 2	Bluetooth

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 2	Bluetooth

For Radiated Test	
Final Test Mode	Description
Mode 1	TX Mode NOTE (1)

Note:


(1) The measurements are performed at the high, middle, low available channels.

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of BT LE.

Test Software Version	Smart-RF		
Frequency (MHz)	2402	2440	2480
BT LE	5	5	5

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

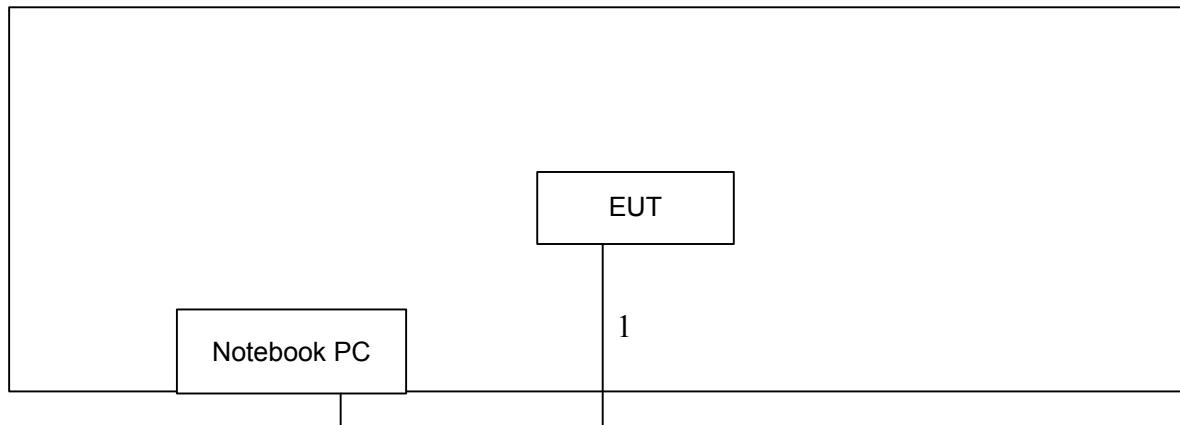

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	Notebook PC	acer	SRP446	DOC	NXVAJTA0015520042C7600

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.5m	USB Cable

Note:

- (1) For detachable type I/O cable should be specified the length in m in 『Length』 column.

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 -0.5	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

Note:

- (1) The limit of " * " decreases with the logarithm of the frequency
- (2) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

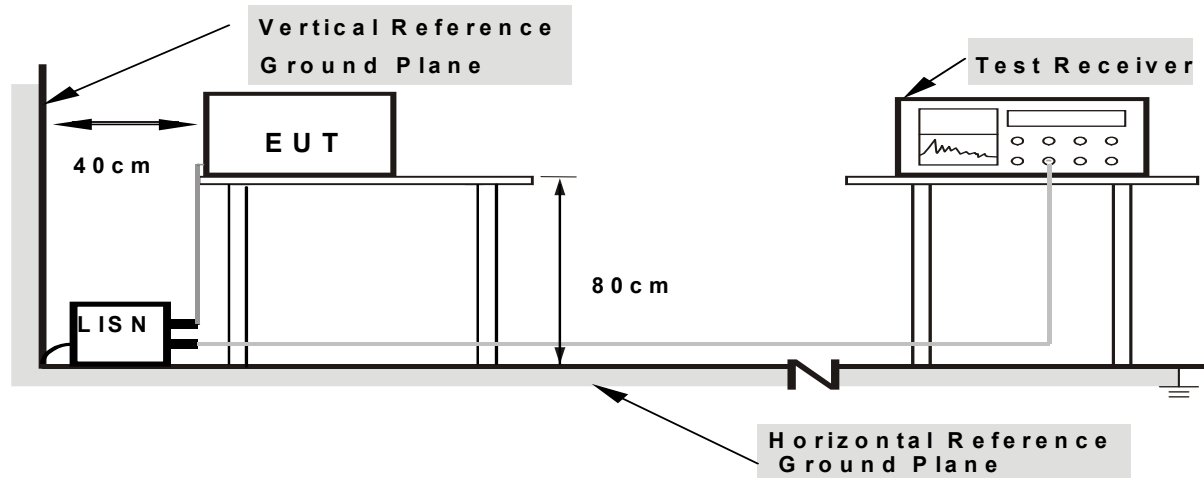

Note: 1.Support units were connected to second LISN .
 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80
 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical function (as a customer would normally use it), EUT was programmed to be in continuously transmitting/receiving data or hopping on mode.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C
 Relative Humidity: 55%
 Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』 . If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform.In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.
- (3) “ N/A ” denotes test is not applicable to this device.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9KHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	RBW 1MHz VBW 3MHz peak detector for Pk value RMS detector for AV value

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

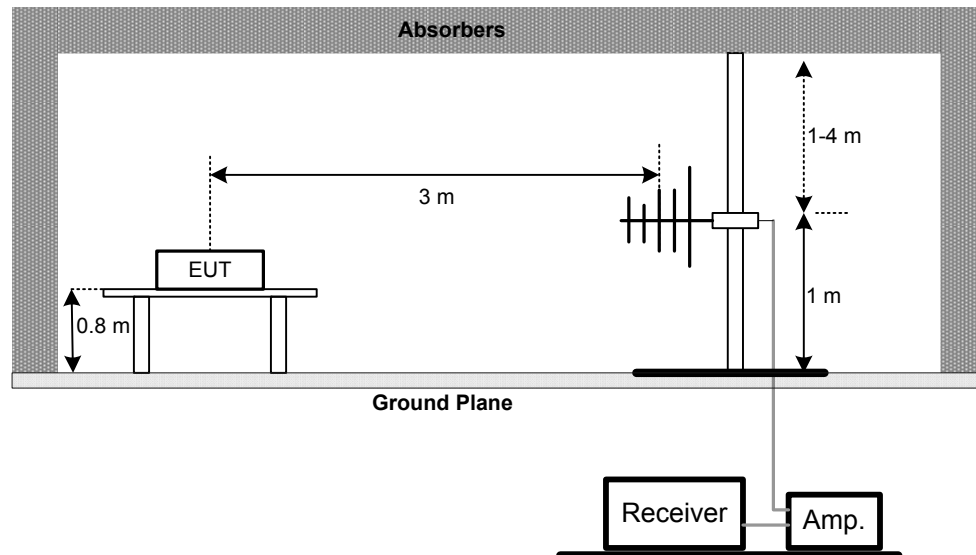

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

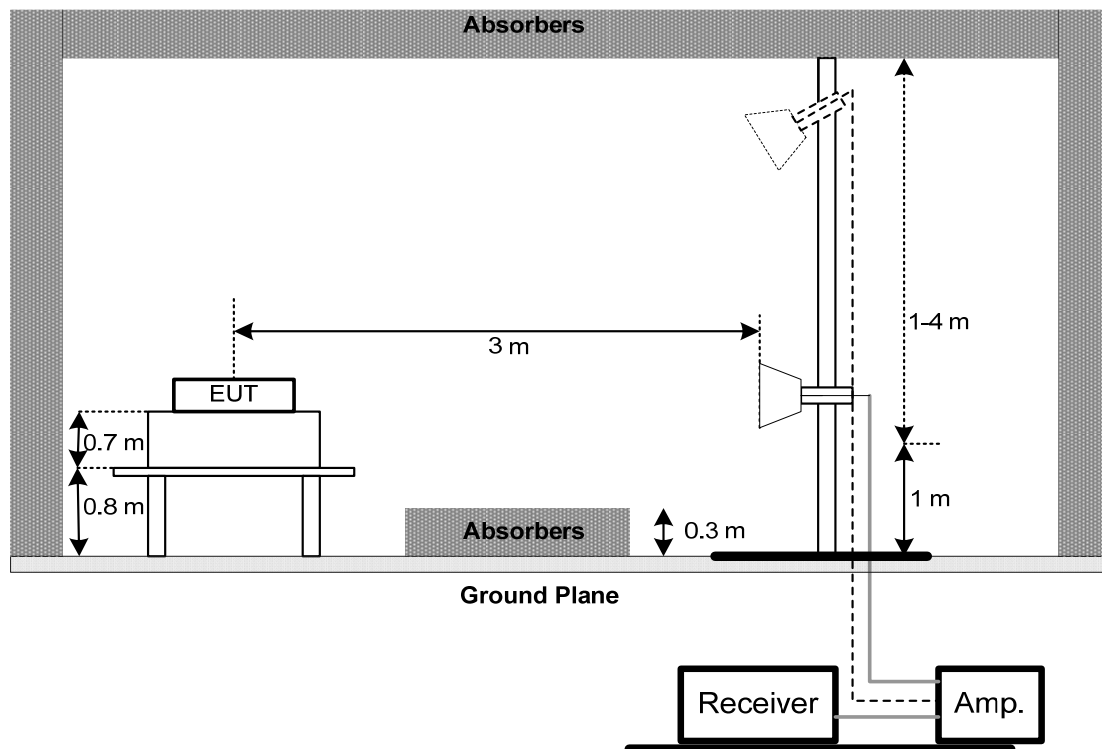

(C) For radiated emissions below 30MHz

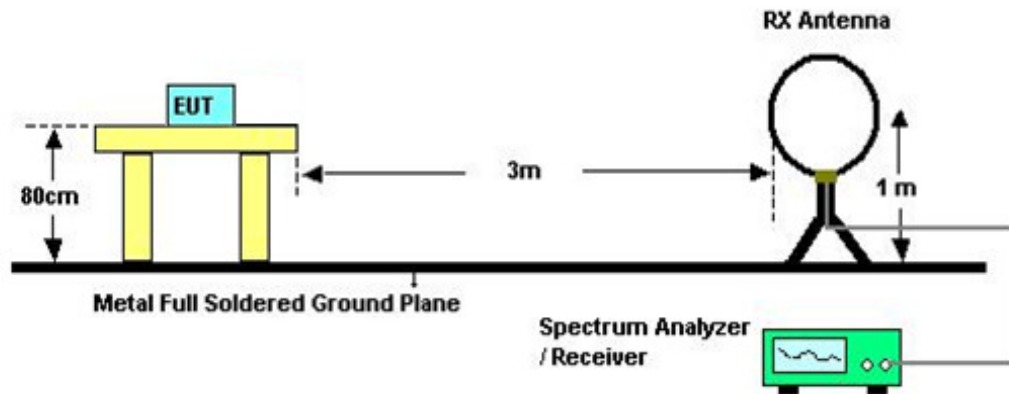

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 45%

Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (BETWEEN 30MHZ TO 1000 MHZ)

Please refer to the Attachment C.

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz.
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

4.2.9 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment D.

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission
- (3) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (4) EUT Orthogonal Axis:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (5) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (6) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS


5.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP

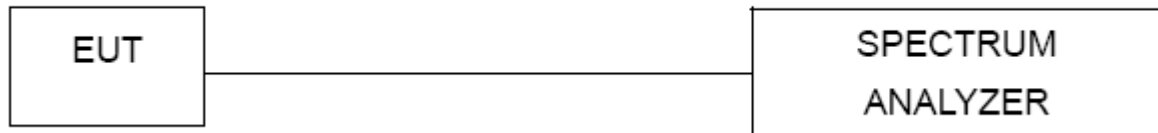

5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 25°C
 Relative Humidity: 60%
 Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Attachment E.

6. MAXIMUM OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- The maximum peak conducted output power was performed in accordance with method 9.1.2 of FCC KDB 558074 D01 DTS Meas Guidance v03r05.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.
 Transmit output power was measured while the host equipment supply voltage was varied from 85 % to 115 % of the nominal rated supply voltage. No change in transmit output power was observed.

6.1.5 EUT TEST CONDITIONS

Temperature: 25°C
 Relative Humidity: 60%
 Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Attachment F.

7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that transmitter demonstrates compliance with the peak conducted power limits.

7.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = 10 ms.
- Offset=antenna gain+ cable loss

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP



7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

7.1.5 EUT OPERATION CONDITIONS

Temperature: 25°C
 Relative Humidity: 60%
 Test Voltage: AC 120V/60Hz

7.1.6 TEST RESULTS

Please refer to the Attachment G.

8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

8.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW=3KHz, VBW=10 KHz, Sweep time = auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP



8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

8.1.5 EUT TEST CONDITIONS

Temperature: 25°C
 Relative Humidity: 60%
 Test Voltage: AC 120V/60Hz

8.1.6 TEST RESULTS

Please refer to the Attachment H.

9. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	101050	Jan. 26, 2017
2	Test Cable	TIMES	CFD300-NL	C02	Jun. 13, 2017
3	EMI Test Receiver	R&S	ESR7	101433	Dec. 09, 2016
4	Power Dividers	HP	11636A	8103	May 03, 2017
5	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	Jul. 30, 2016
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-325	Apr. 19, 2017
3	Horn Antenna	Schwarzbeck	BBHA 9120	9120D-1333	May 19, 2017
4	Pre-Amplifier	Anritsu	MH648A	M92649	Jun. 15, 2017
5	Pre-Amplifier	Agilent	8449B	3008A01714	Apr. 13, 2017
6	Test Cable	LMR	LMR-400	01(10M)	May 11, 2017
7	Test Cable	LMR	LMR-400	01(3M)	May 11, 2017
8	Test Cable	Harbour industries	27478LL142	1M	May 12, 2017
9	Test Cable	Harbour industries	27478LL142	3M	May 12, 2017
10	Test Cable	AISI	S104-SMAP-1	8M	May 12, 2017
11	Spectrum Analyzer	Agilent	N9020A	MY51160196	Aug. 02, 2016
12	EMI Test Receiver	R&S	ESCI	100080	May 12, 2017
13	Measurement Software	Farad	EZ EMC (Version NB-03A)	N/A	N/A

6dB Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY51160196	Jul. 22, 2016

Peak Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2487A	6K00004714	May 18, 2017
2	Power Meter Sensor	Anritsu	MA2491A	034138	May 17, 2017


Antenna Conducted Spurious Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY51160196	Jul. 22, 2016

Power Spectral Density Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Jan. 17, 2017

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.


10. EUT TEST PHOTO

Conducted Measurement Photos

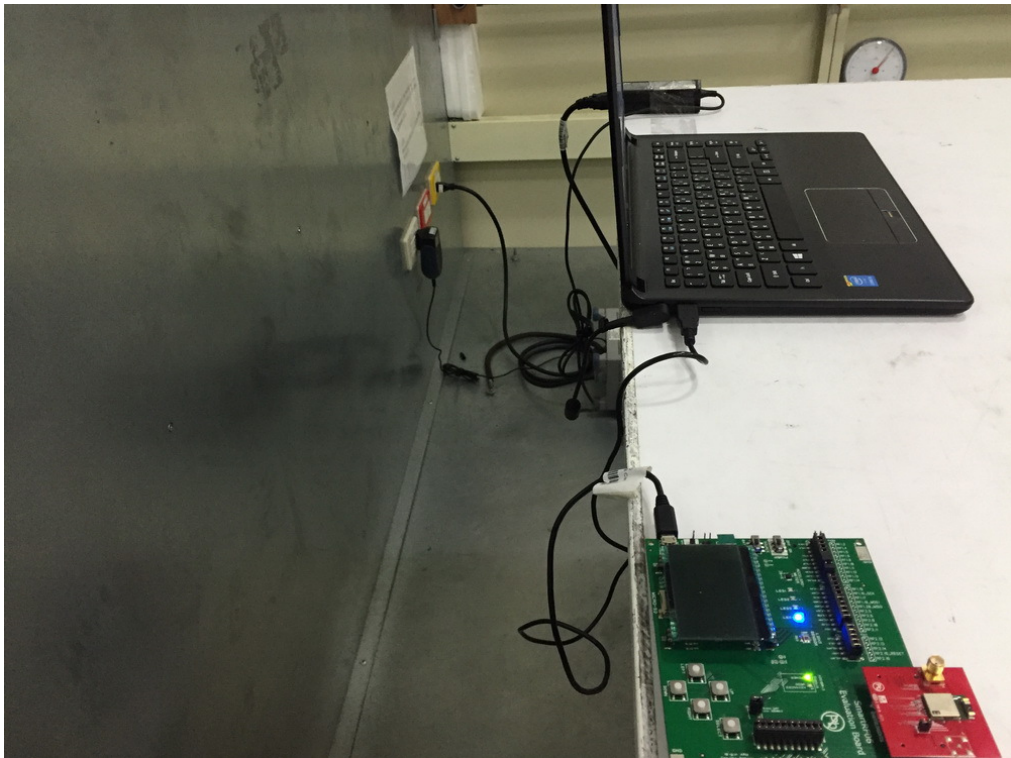


Radiated Measurement Photos

9KHz to 30MHz

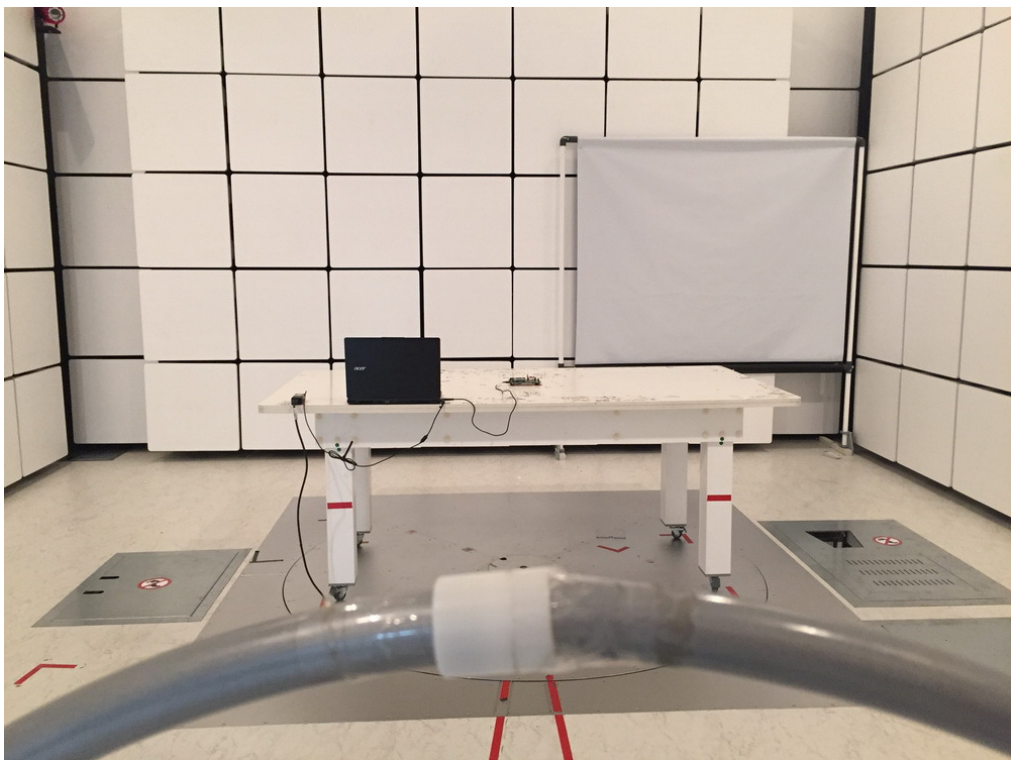

Radiated Measurement Photos

30MHz to 1000MHz

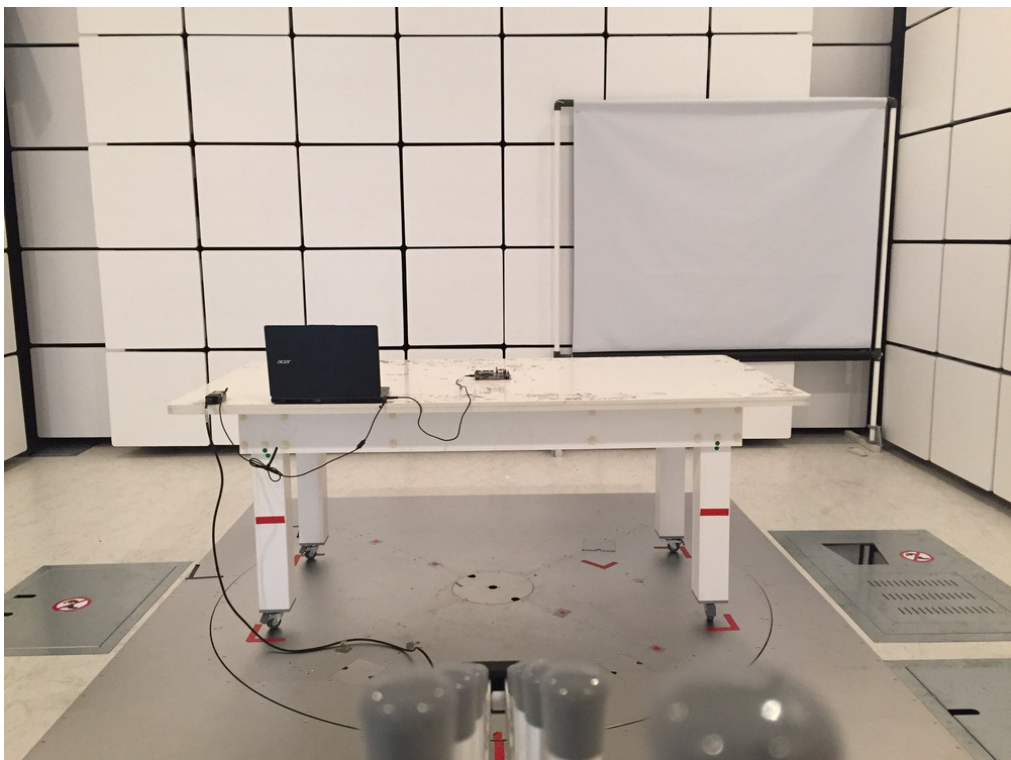

Radiated Measurement Photos


Above 1000MHz



ATTACHMENT A - CONDUCTED EMISSION

Test Mode: Bluetooth

Line

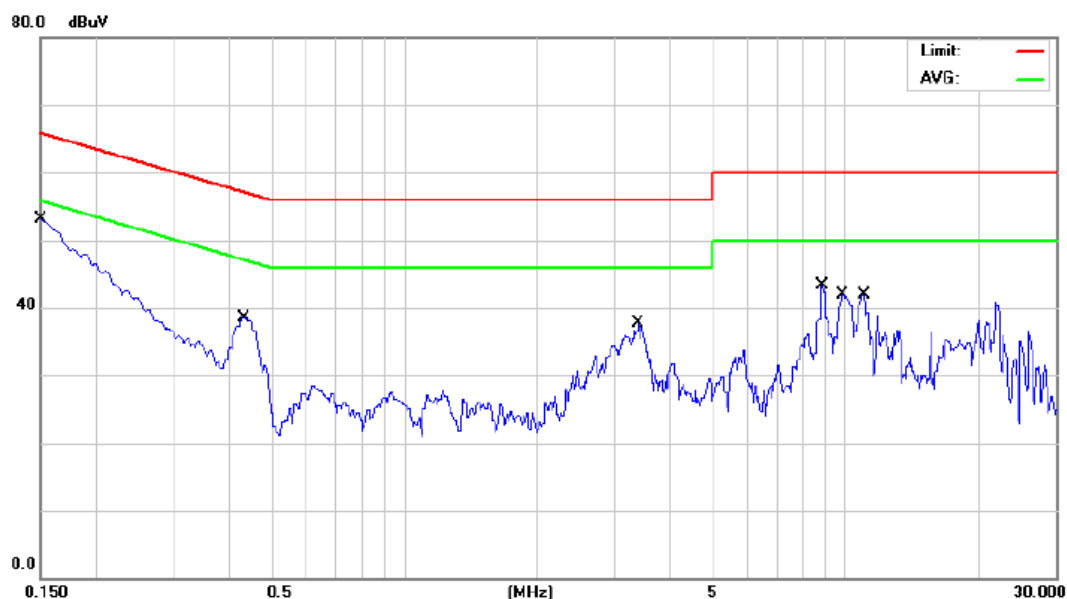

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	35.30	9.64	44.94	65.99	-21.05	QP	
2		0.1500	17.40	9.64	27.04	55.99	-28.95	AVG	
3		0.4314	24.80	9.63	34.43	57.23	-22.80	QP	
4	*	0.4314	19.20	9.63	28.83	47.23	-18.40	AVG	
5		3.3980	22.60	9.65	32.25	56.00	-23.75	QP	
6		3.3980	13.80	9.65	23.45	46.00	-22.55	AVG	
7		8.8500	24.90	9.69	34.59	60.00	-25.41	QP	
8		8.8500	16.80	9.69	26.49	50.00	-23.51	AVG	
9		9.8500	28.20	9.70	37.90	60.00	-22.10	QP	
10		9.8500	20.20	9.70	29.90	50.00	-20.10	AVG	
11		11.0000	26.70	9.71	36.41	60.00	-23.59	QP	
12		11.0000	19.60	9.71	29.31	50.00	-20.69	AVG	

Test Mode: Bluetooth

Neutral




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1584	37.00	9.65	46.65	65.54	-18.89	QP	
2		0.1584	22.30	9.65	31.95	55.54	-23.59	AVG	
3		0.4398	23.20	9.63	32.83	57.06	-24.23	QP	
4		0.4398	15.30	9.63	24.93	47.06	-22.13	AVG	
5		3.2990	21.20	9.66	30.86	56.00	-25.14	QP	
6		3.2990	11.90	9.66	21.56	46.00	-24.44	AVG	
7		9.8000	27.20	9.71	36.91	60.00	-23.09	QP	
8		9.8000	19.60	9.71	29.31	50.00	-20.69	AVG	
9		10.7000	28.00	9.71	37.71	60.00	-22.29	QP	
10		10.7000	20.70	9.71	30.41	50.00	-19.59	AVG	
11		21.8500	24.90	9.74	34.64	60.00	-25.36	QP	
12		21.8500	18.00	9.74	27.74	50.00	-22.26	AVG	

ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode: TX Mode

OPEN

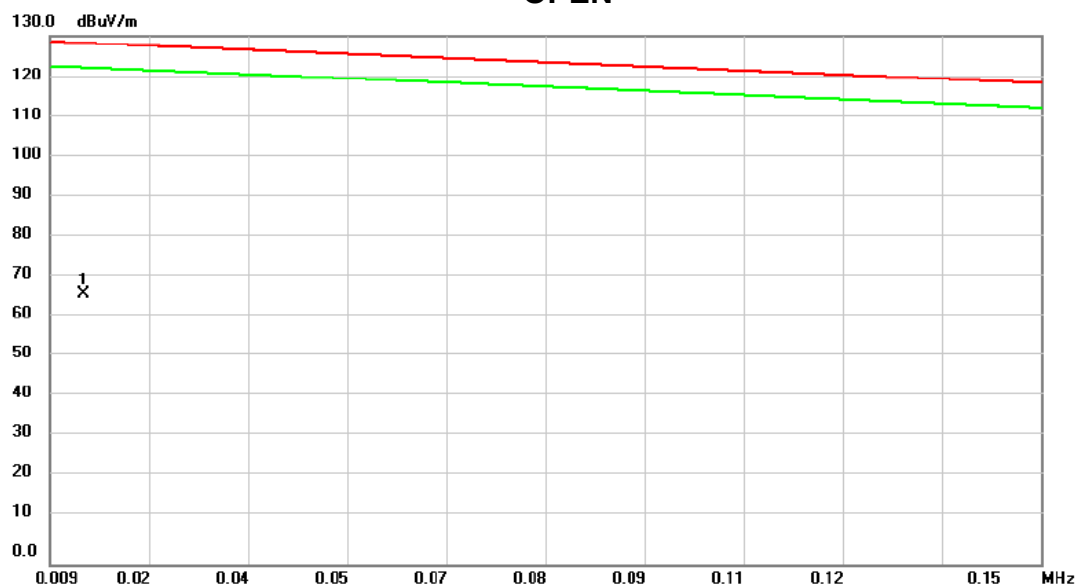

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0137	47.07	19.48	66.55	128.18	-61.63	peak	

Test Mode: TX Mode


OPEN



No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.1500	47.93	12.03	59.96	118.34	-58.38	peak	
2		0.3092	40.72	11.80	52.52	106.85	-54.33	peak	
3		0.4684	36.78	11.80	48.58	95.36	-46.78	peak	
4	*	0.9858	30.00	11.99	41.99	69.38	-27.39	peak	
5		2.4584	20.79	11.34	32.13	69.54	-37.41	peak	
6		5.3638	15.21	11.39	26.60	69.54	-42.94	peak	

Test Mode: TX Mode


CLOSE

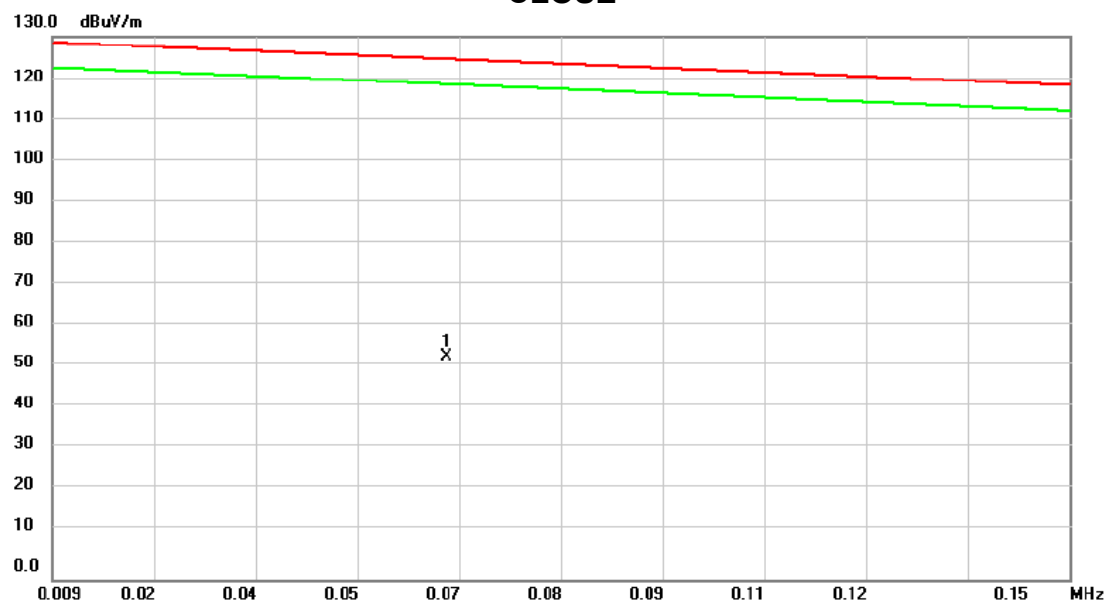

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	0.0637	40.61	12.75	53.36	124.57	-71.21	peak	

Test Mode: TX Mode

CLOSE

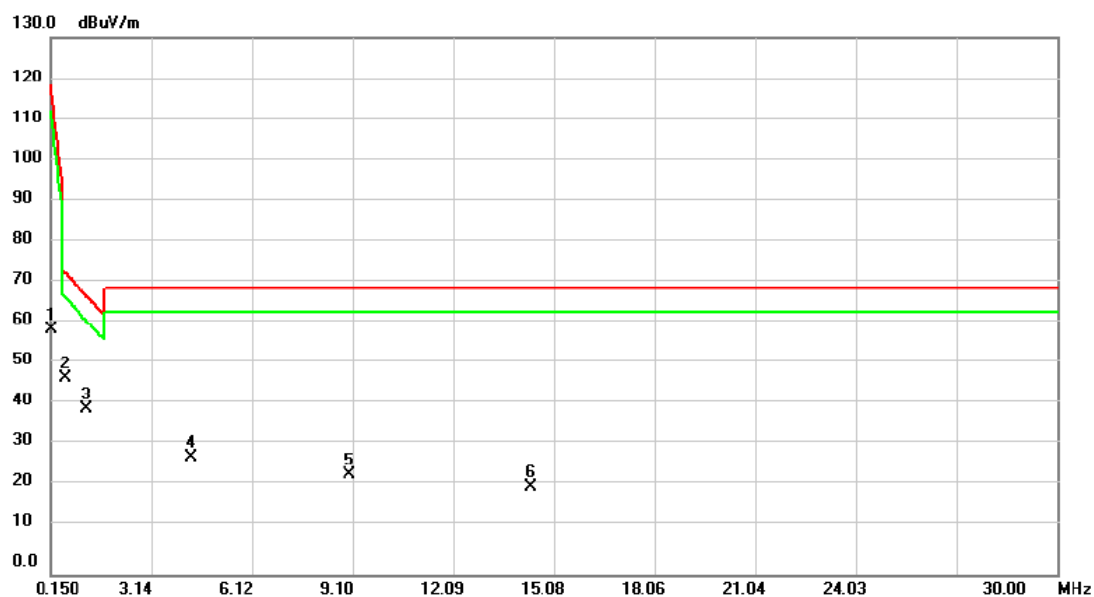


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		0.1500	47.16	12.03	59.19	118.34	-59.15	peak	
2	*	0.5675	35.78	11.83	47.61	73.11	-25.50	peak	
3		1.2241	28.18	11.90	40.08	67.26	-27.18	peak	
4		4.2991	17.28	11.29	28.57	69.54	-40.97	peak	
5		9.0152	12.79	11.32	24.11	69.54	-45.43	peak	
6		14.3885	10.22	11.17	21.39	69.54	-48.15	peak	

ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode: TX Mode


Vertical

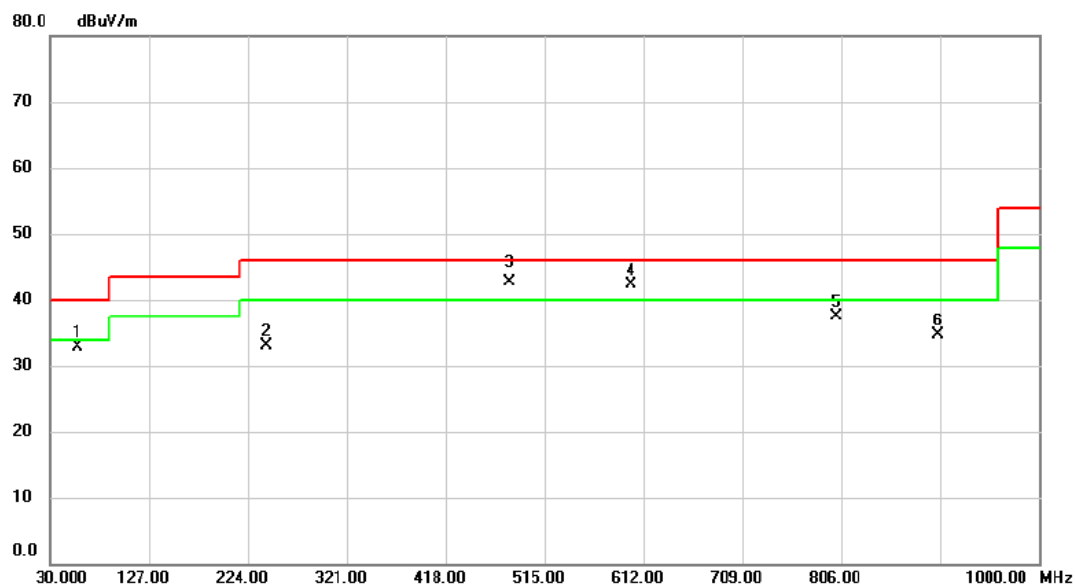

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		56.6750	47.20	-14.31	32.89	40.00	-7.11	peak	
2		240.9750	48.62	-15.56	33.06	46.00	-12.94	peak	
3	*	481.0500	52.41	-9.71	42.70	46.00	-3.30	QP	
4	!	599.8750	49.80	-7.40	42.40	46.00	-3.60	peak	
5		801.1500	41.73	-4.30	37.43	46.00	-8.57	peak	
6		900.5750	37.87	-3.26	34.61	46.00	-11.39	peak	

Test Mode: TX Mode


Horizontal

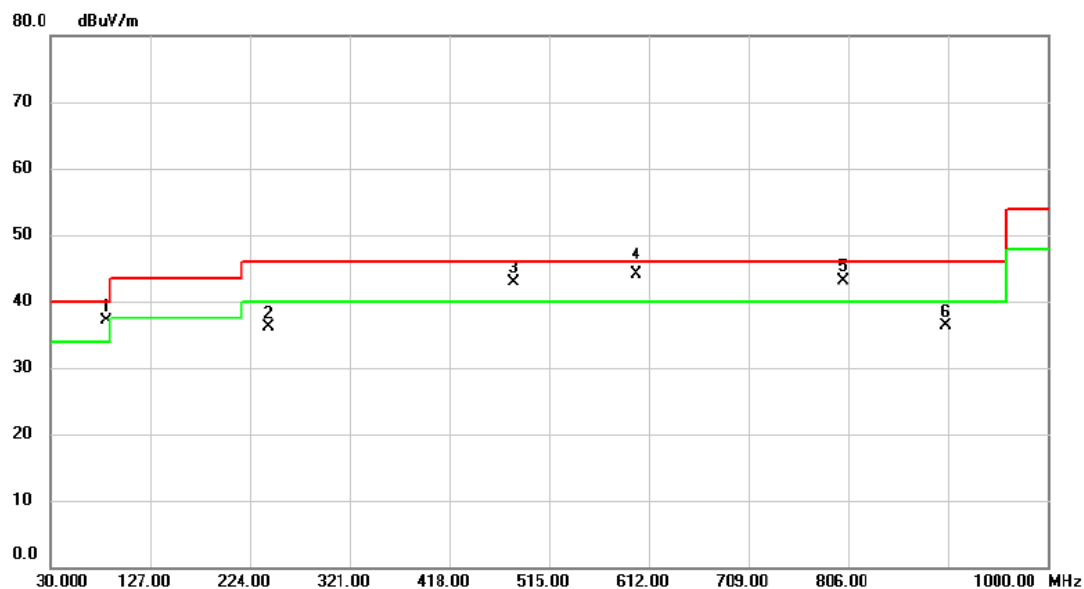

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	!	83.3500	56.41	-19.37	37.04	40.00	-2.96	peak	
2		240.9750	51.70	-15.56	36.14	46.00	-9.86	peak	
3	!	481.0500	52.65	-9.71	42.94	46.00	-3.06	peak	
4	*	599.8750	51.44	-7.40	44.04	46.00	-1.96	QP	
5	!	801.1500	47.35	-4.30	43.05	46.00	-2.95	peak	
6		900.5750	39.52	-3.26	36.26	46.00	-9.74	peak	

ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)


Orthogonal Axis :	X
Test Mode :	TX 2402MHz _CH00_1Mbps

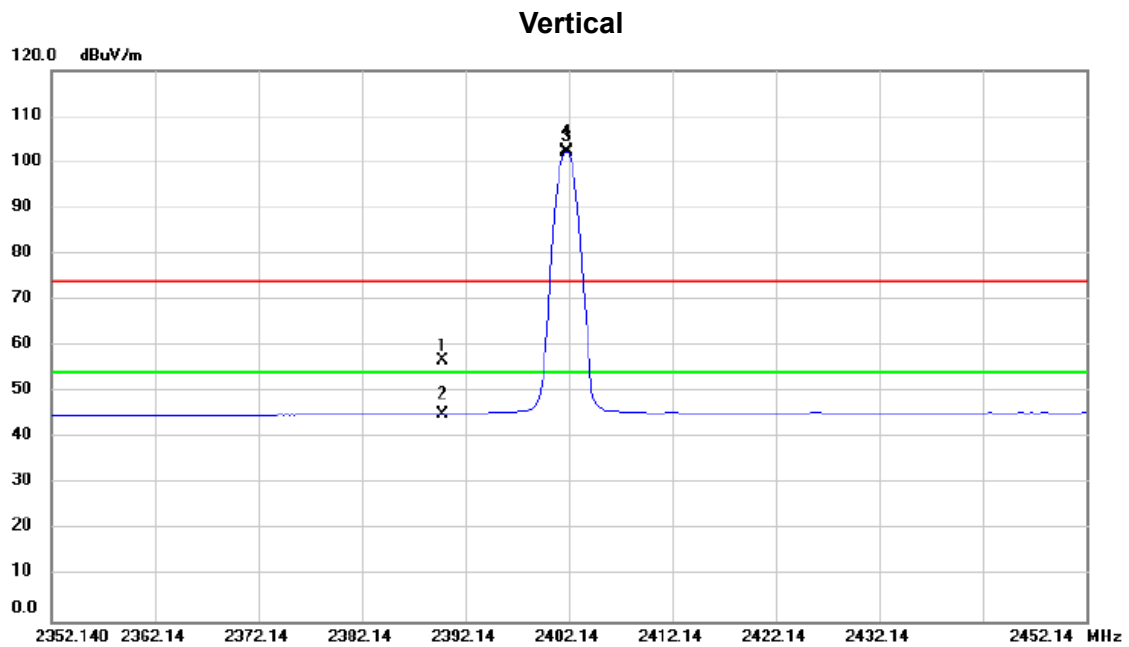

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		2390.000	25.43	31.57	57.00	74.00	-17.00	peak		
2		2390.000	13.63	31.57	45.20	54.00	-8.80	AVG		
3	X	2401.890	70.97	31.61	102.58	74.00	28.58	peak		NO LIMIT
4	*	2401.890	70.41	31.61	102.02	54.00	48.02	AVG		NO LIMIT


Orthogonal Axis :	X
Test Mode :	TX 2402MHz _CH00_1Mbps

Vertical

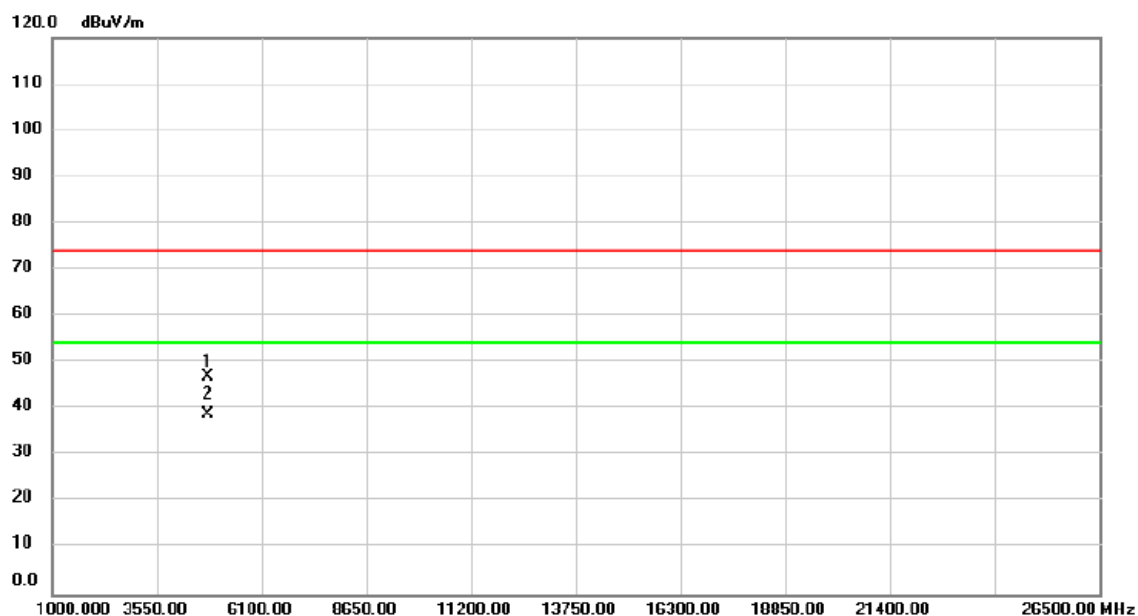

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4804.000	58.20	-11.23	46.97	74.00	-27.03	peak		
2	*	4804.000	50.02	-11.23	38.79	54.00	-15.21	AVG		


Orthogonal Axis :	X
Test Mode :	TX 2402MHz _CH00_1Mbps

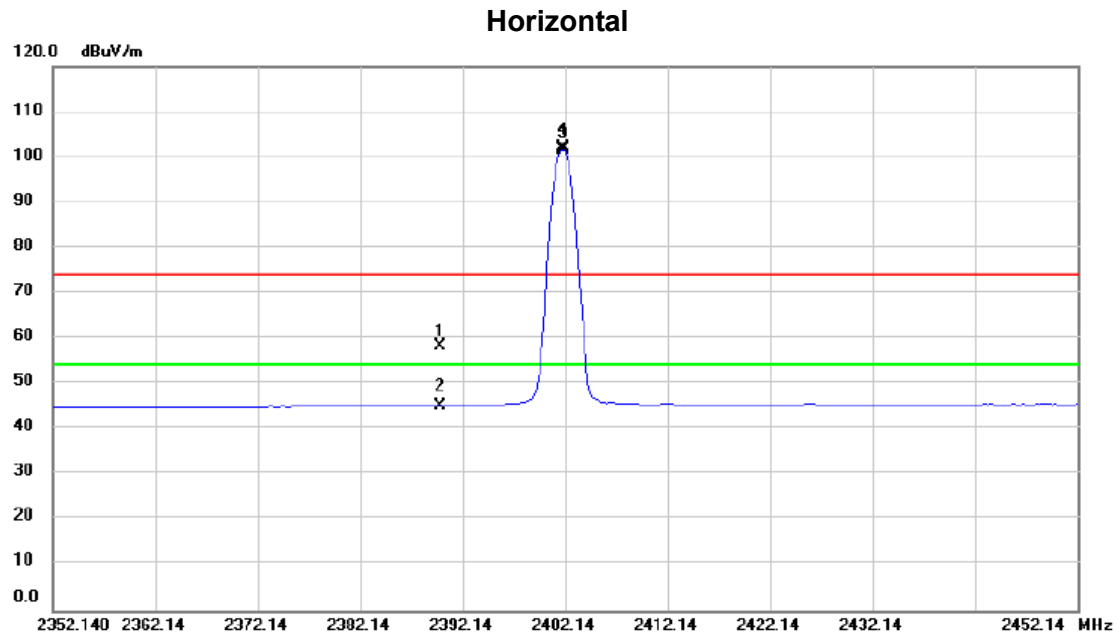

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		2390.000	26.75	31.57	58.32	74.00	-15.68	peak		
2		2390.000	13.60	31.57	45.17	54.00	-8.83	AVG		
3	X	2401.890	70.41	31.61	102.02	74.00	28.02	peak		NO LIMIT
4	*	2401.890	69.82	31.61	101.43	54.00	47.43	AVG		NO LIMIT


Orthogonal Axis :	X
Test Mode :	TX 2402MHz _CH00_1Mbps

Horizontal

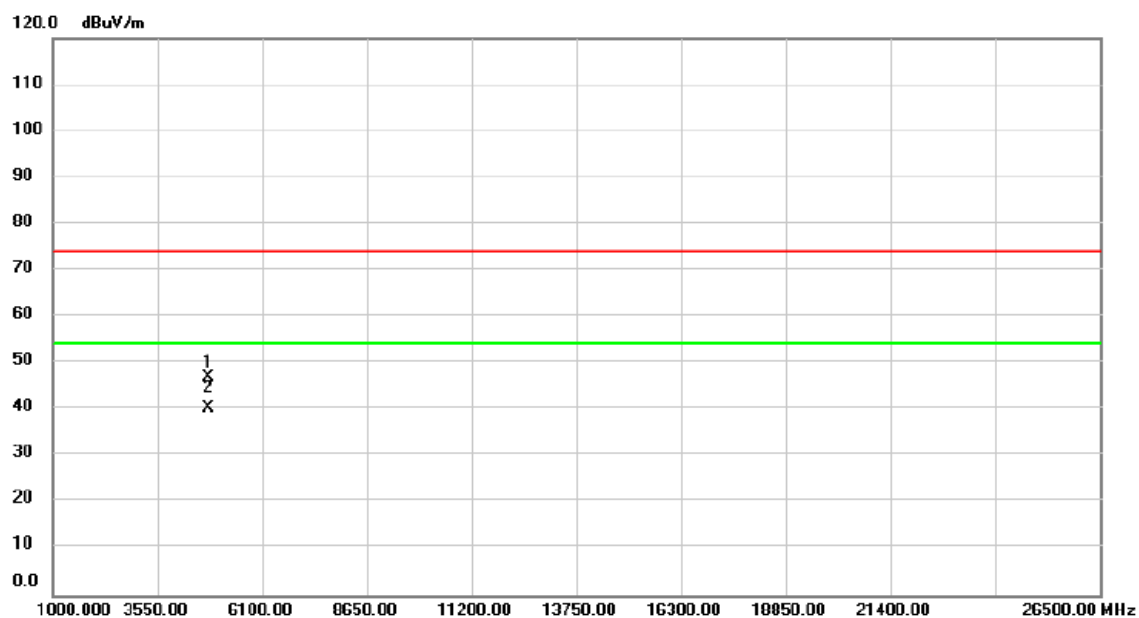

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		4804.000	58.07	-11.23	46.84	74.00	-27.16	peak		
2	*	4804.000	51.49	-11.23	40.26	54.00	-13.74	AVG		


Orthogonal Axis :	X
Test Mode :	TX 2440MHz _CH19_1Mbps

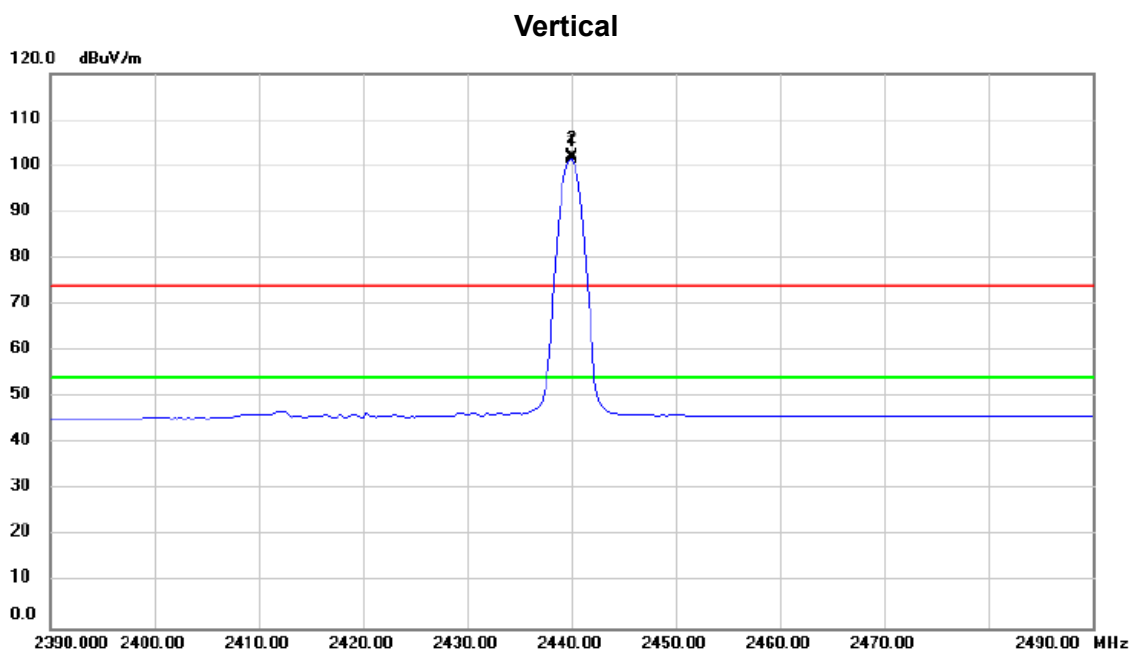

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	X	2440.000	70.26	31.75	102.01	74.00	28.01	peak		NO LIMIT
2	*	2440.000	69.69	31.75	101.44	54.00	47.44	AVG		NO LIMIT

Orthogonal Axis :	X
Test Mode :	TX 2440MHz _CH19_1Mbps


Vertical

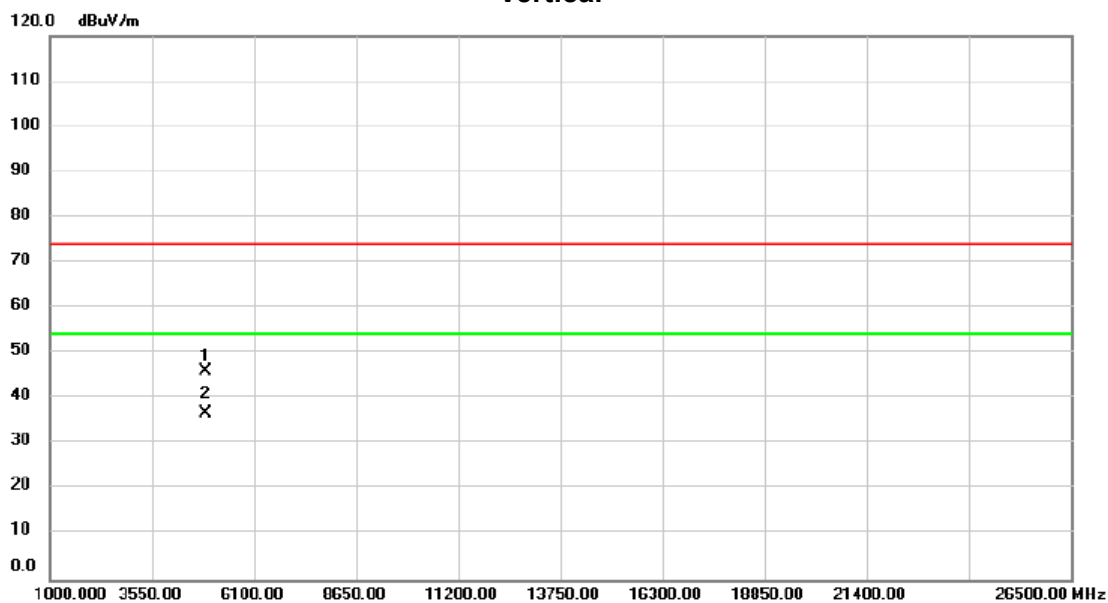

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4880.000	57.25	-11.08	46.17	74.00	-27.83	peak		
2	*	4880.000	47.79	-11.08	36.71	54.00	-17.29	AVG		

Orthogonal Axis :	X
Test Mode :	TX 2440MHz _CH19_1Mbps


Horizontal

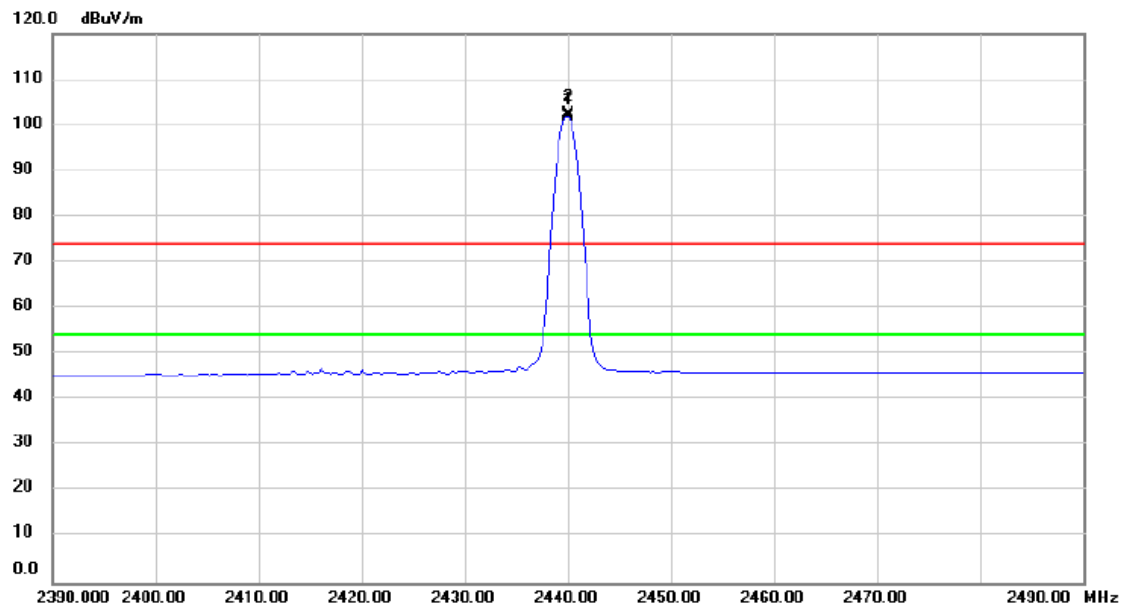

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	X	2440.000	70.77	31.75	102.52	74.00	28.52	peak		NO LIMIT
2	*	2440.000	70.21	31.75	101.96	54.00	47.96	AVG		NO LIMIT

Orthogonal Axis :	X
Test Mode :	TX 2440MHz _CH19_1Mbps


Horizontal

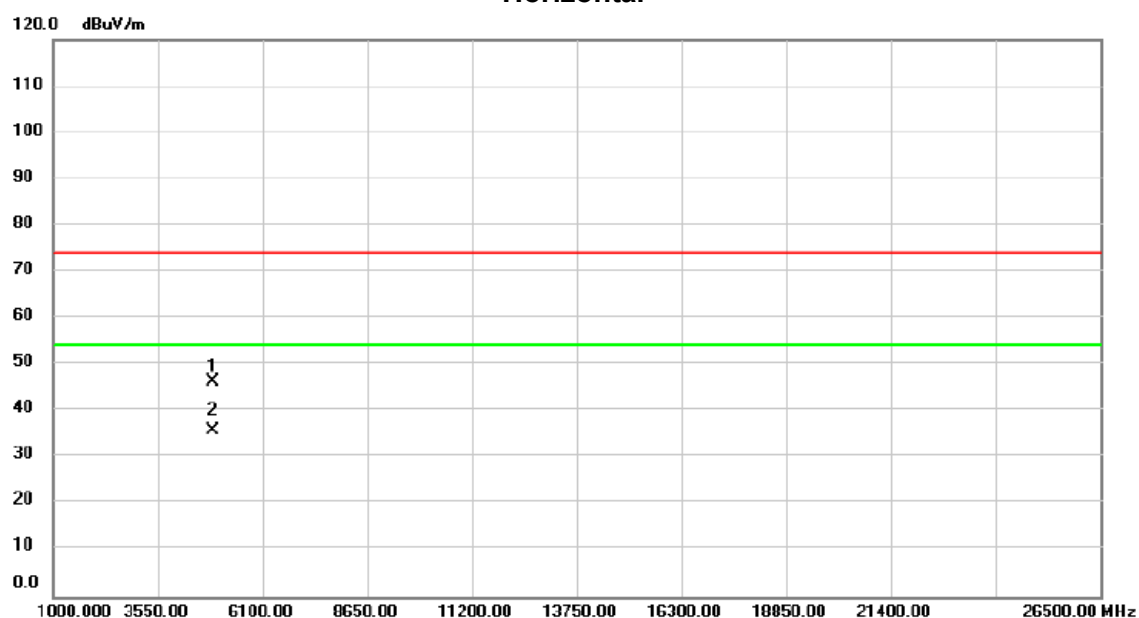

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		4880.000	57.48	-11.08	46.40	74.00	-27.60	peak		
2	*	4880.000	46.85	-11.08	35.77	54.00	-18.23	AVG		

Orthogonal Axis :	X
Test Mode :	TX 2480MHz _CH39_1Mbps


Vertical

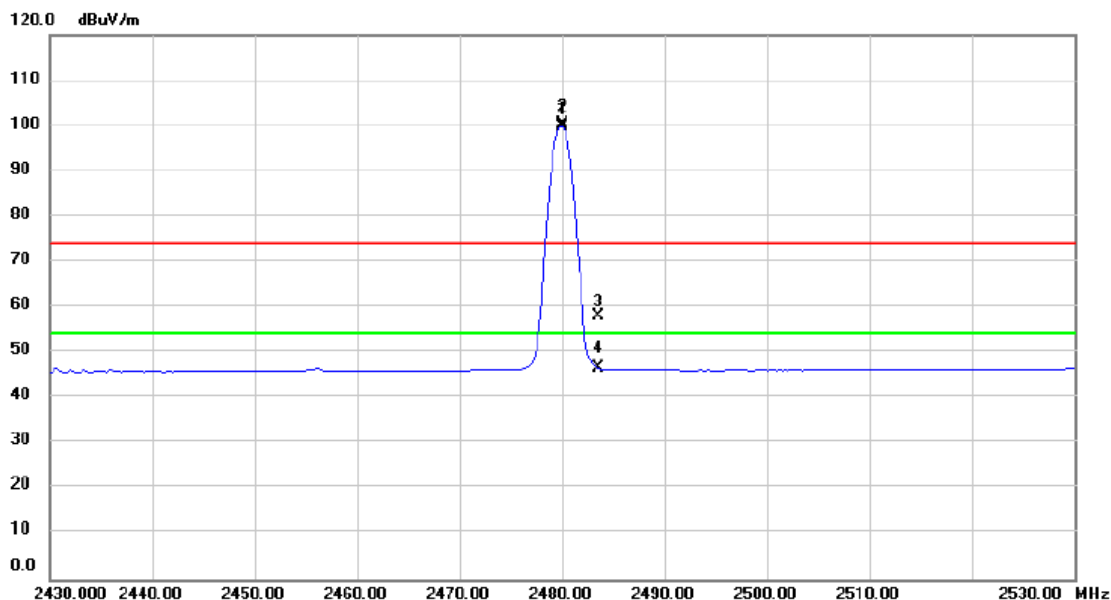

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	X	2480.000	68.48	31.90	100.38	74.00	26.38	peak		NO LIMIT
2	*	2480.000	67.89	31.90	99.79	54.00	45.79	AVG		NO LIMIT
3		2483.500	26.13	31.91	58.04	74.00	-15.96	peak		
4		2483.500	14.71	31.91	46.62	54.00	-7.38	AVG		


Orthogonal Axis :	X
Test Mode :	TX 2480MHz _CH39_1Mbps

Vertical

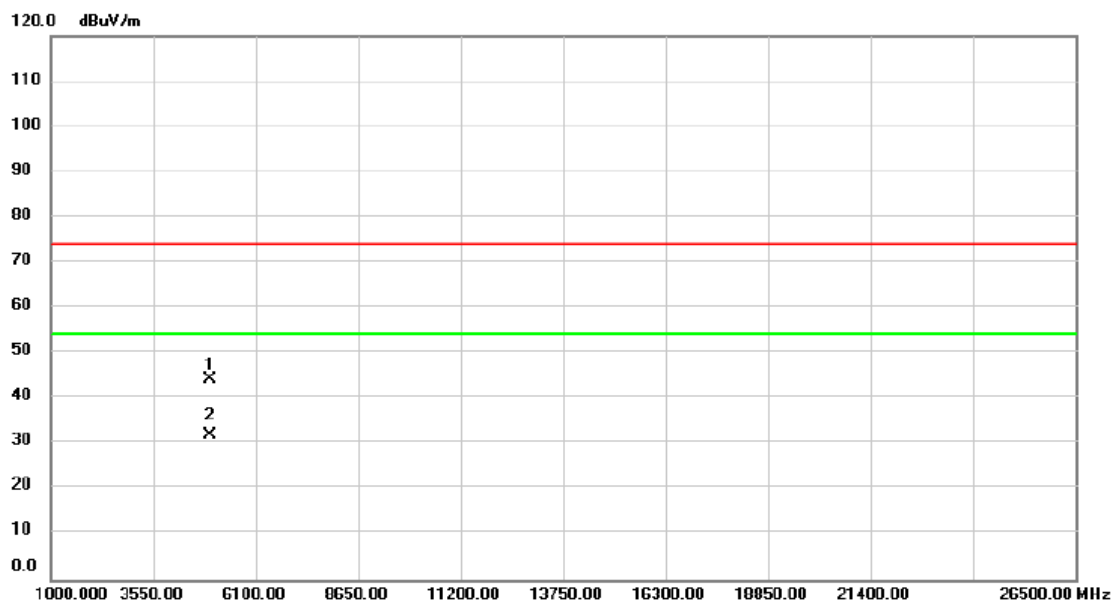


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4960.000	55.08	-10.91	44.17	74.00	-29.83	peak		
2	*	4960.000	42.82	-10.91	31.91	54.00	-22.09	AVG		

Orthogonal Axis :	X
Test Mode :	TX 2480MHz _CH39_1Mbps

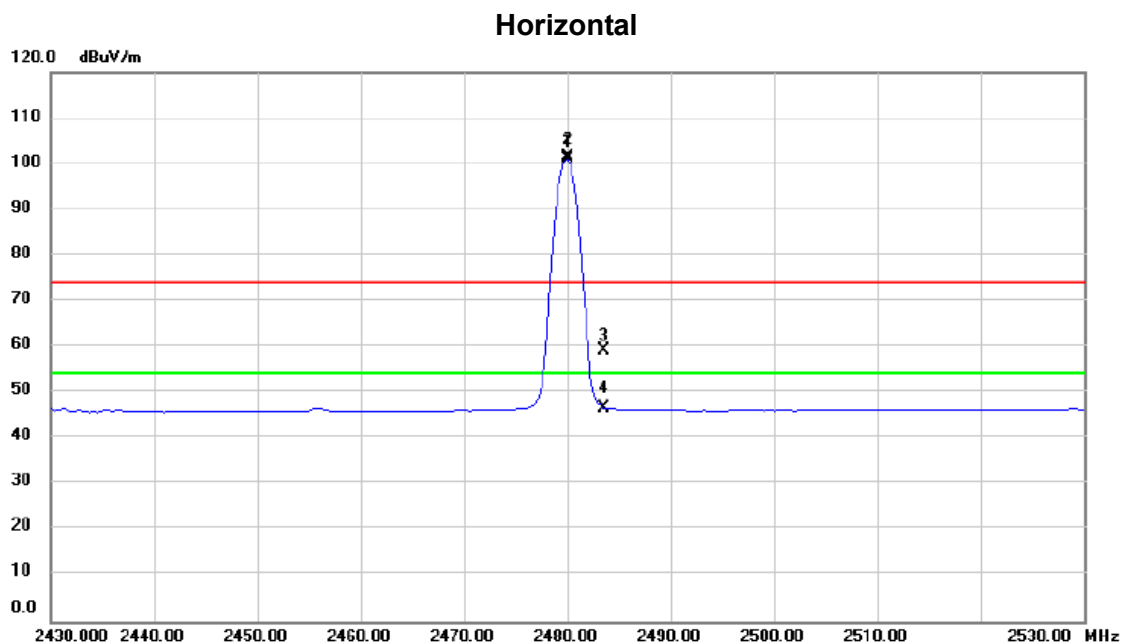

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	X	2480.000	69.50	31.90	101.40	74.00	27.40	peak		NO LIMIT
2	*	2480.000	68.93	31.90	100.83	54.00	46.83	AVG		NO LIMIT
3		2483.500	27.21	31.91	59.12	74.00	-14.88	peak		
4		2483.500	14.87	31.91	46.78	54.00	-7.22	AVG		

Orthogonal Axis :	X
Test Mode :	TX 2480MHz _CH39_1Mbps

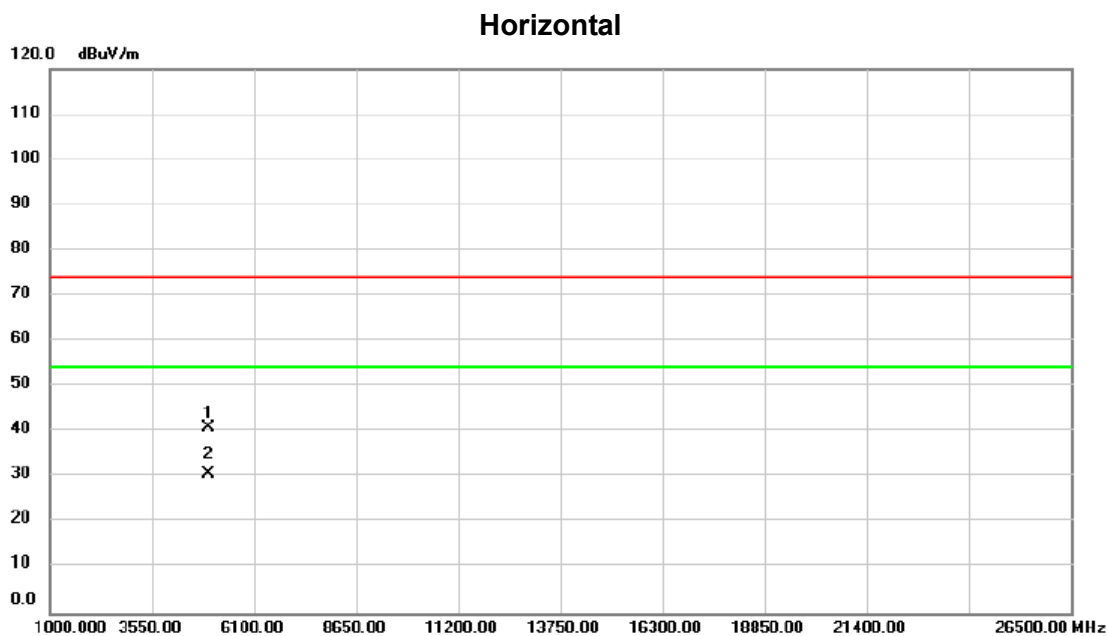


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4960.000	51.80	-10.91	40.89	74.00	-33.11	peak		
2	*	4960.000	41.77	-10.91	30.86	54.00	-23.14	AVG		


ATTACHMENT E - BANDWIDTH

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2402	0.724	1.065	500	Complies
2440	0.708	1.068	500	Complies
2480	0.730	1.069	500	Complies


TX CH00

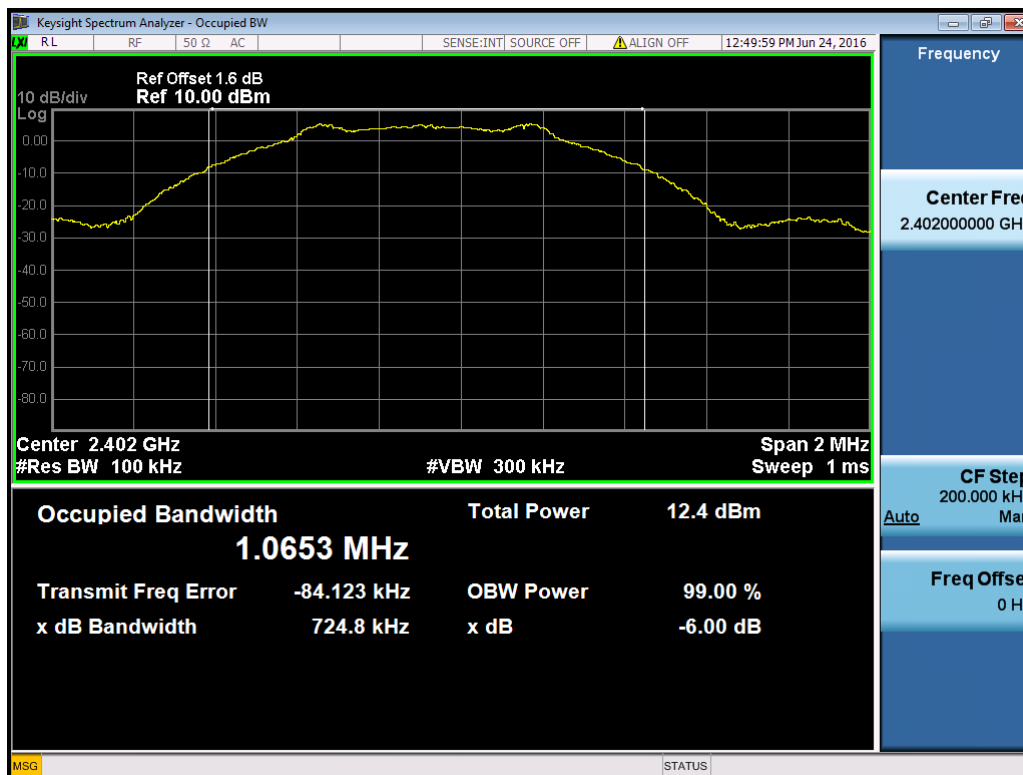

TX CH19

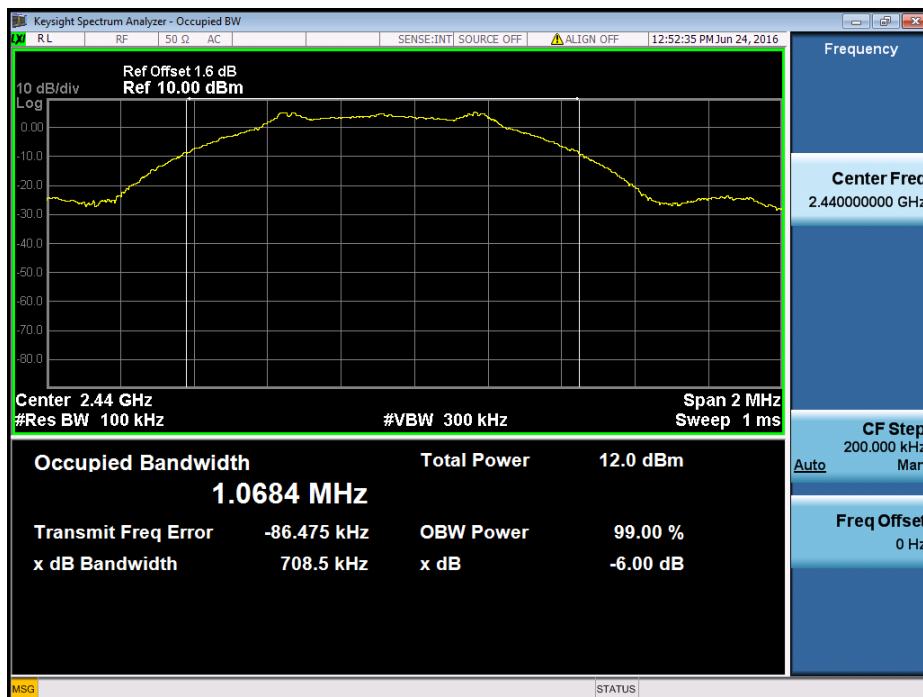

TX CH39

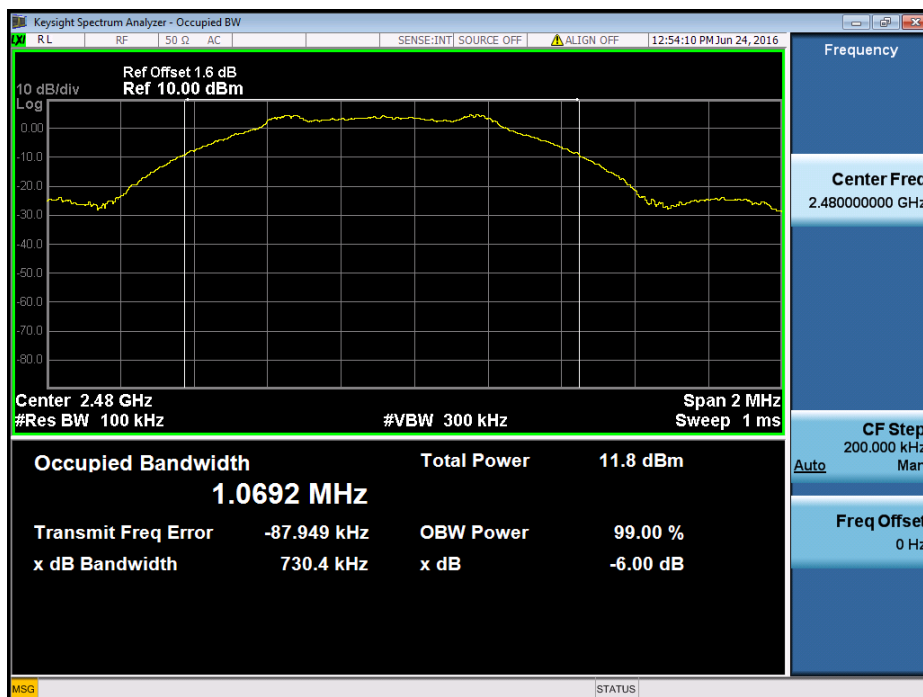


ATTACHMENT F - MAXIMUM OUTPUT POWER TEST

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watt)	Max. Limit (dBm)	Max. Limit (Watt)	Test Result
2402	5.38	0.0035	30.00	1.00	Complies
2440	5.20	0.0033	30.00	1.00	Complies
2480	5.03	0.0032	30.00	1.00	Complies

ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION

Test Mode : CH00, CH19 , CH39 - 1Mbps


CH00 (Lower) - 1Mbps

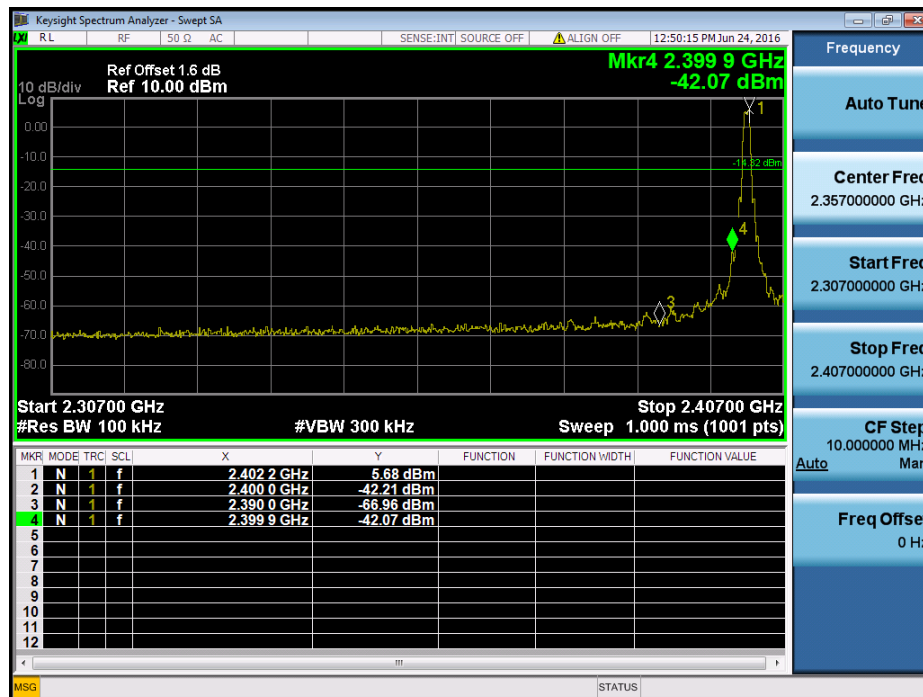

CH39 (upper) - 1Mbps



CH00 (10 Harmonic of the frequency)

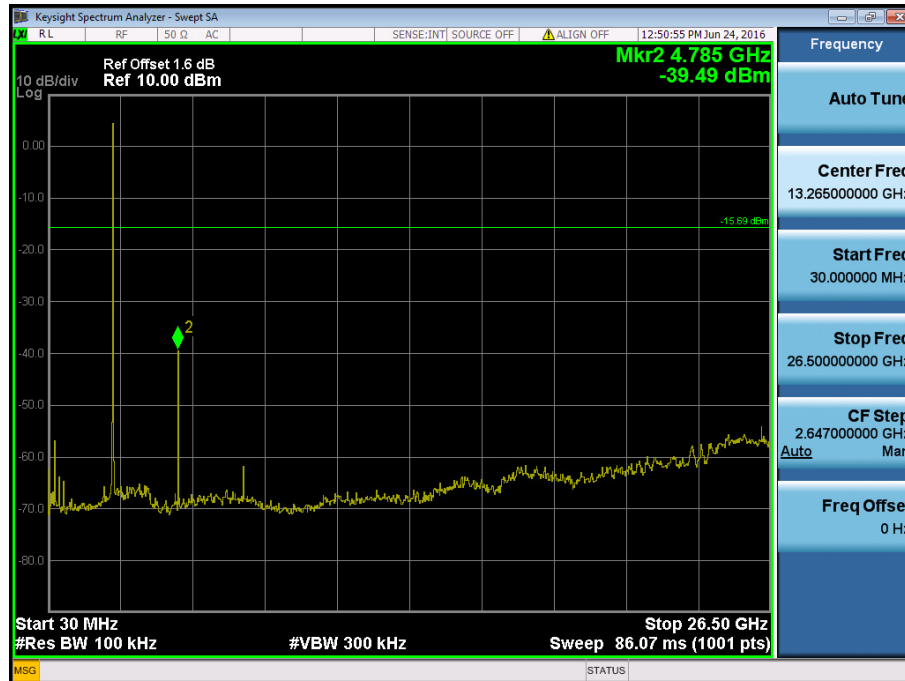

CH19 (10 Harmonic of the frequency)




CH39 (10 Harmonic of the frequency)



ATTACHMENT H - POWER SPECTRAL DENSITY TEST


Frequency (MHz)	Power Density (dBm)	Max. Limit (dBm)	Result
2402	-5.47	8	Complies
2440	-8.91	8	Complies
2480	-8.72	8	Complies

TX CH00

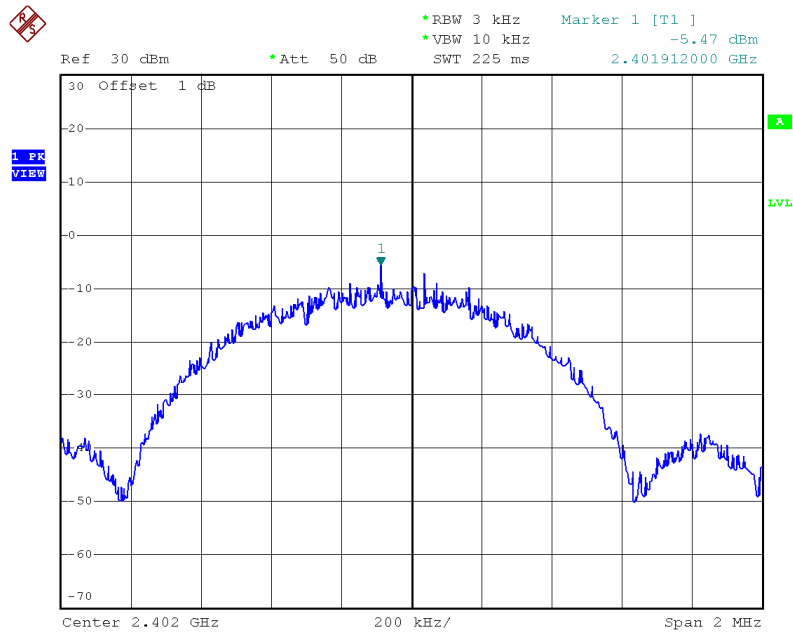


Date: 24.JUN.2016 13:24:28

TX CH19

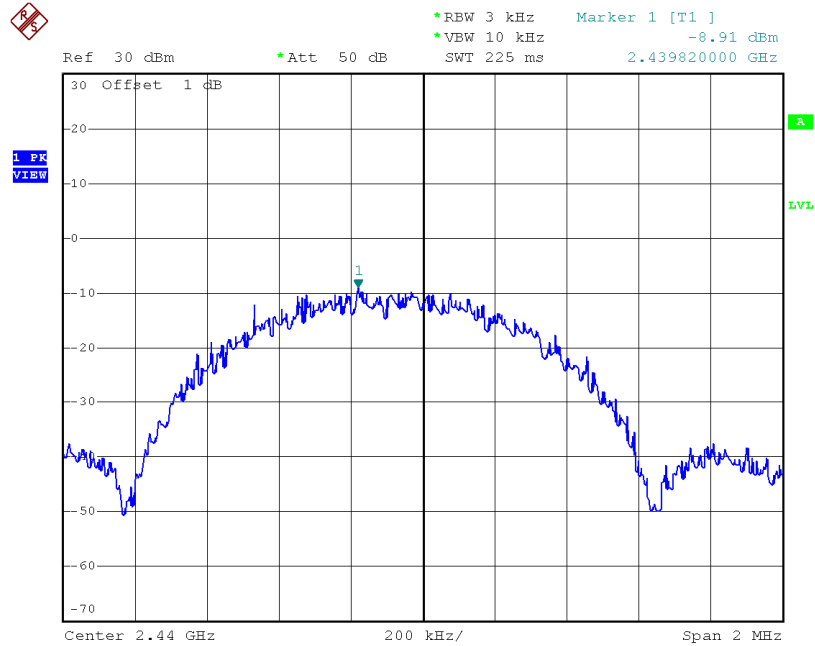

Date: 24.JUN.2016 13:24:43

TX CH39

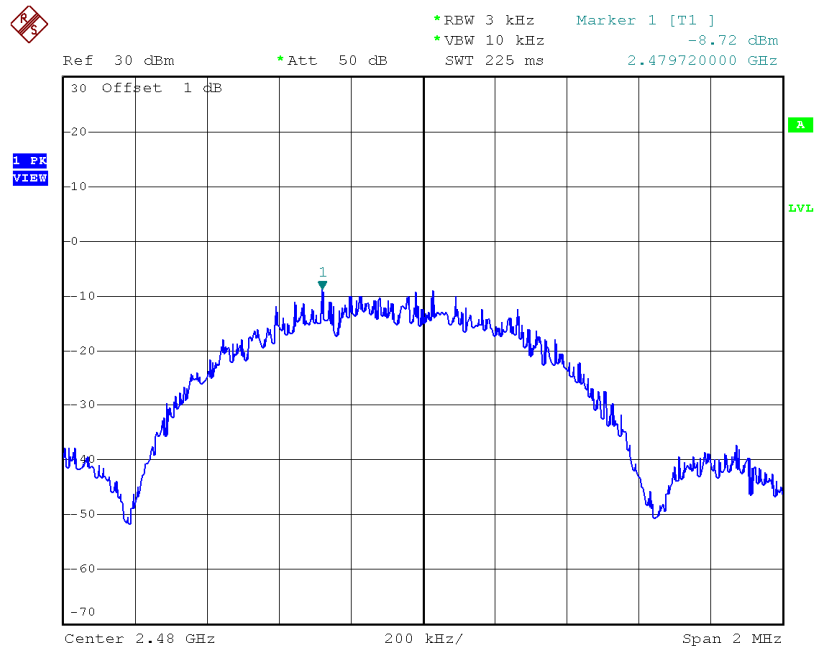

Date: 24.JUN.2016 13:24:55