Mode	3	
	Band Edge	
	2400-2483.5_802.11b_CH11_2462MHz	
ANT	CDD 7+6	
Pol.	Horizontal	Fundamental
Peak	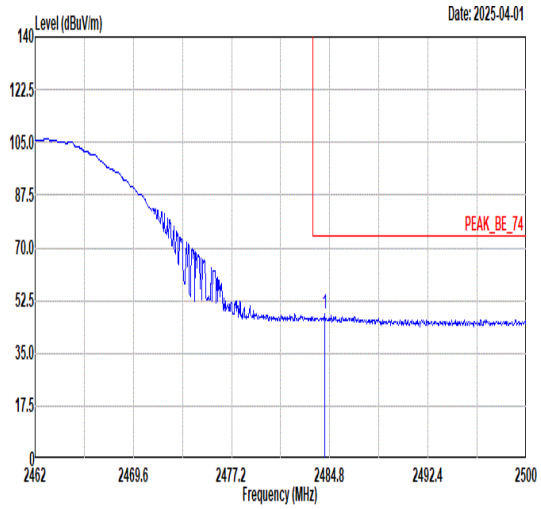	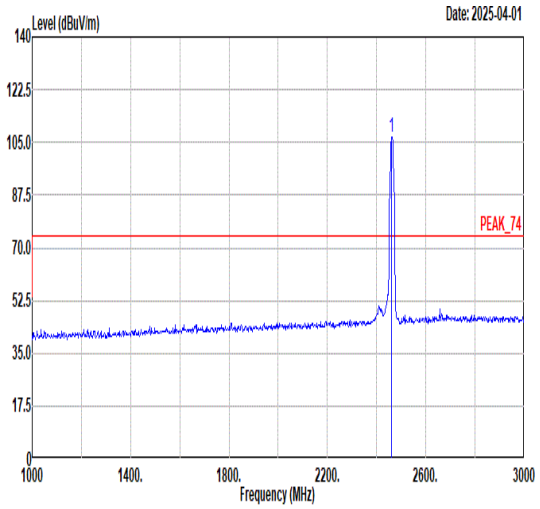
Avg	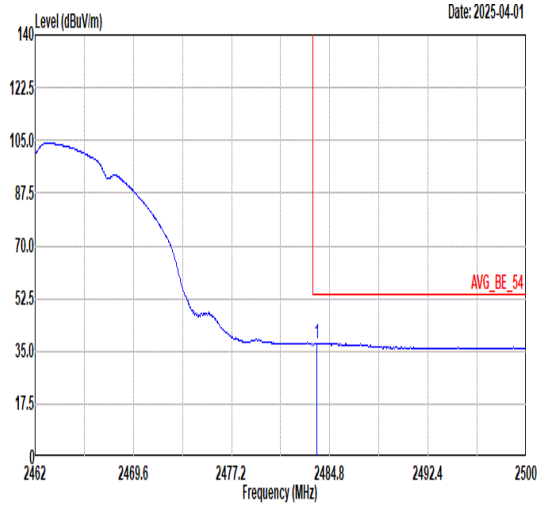	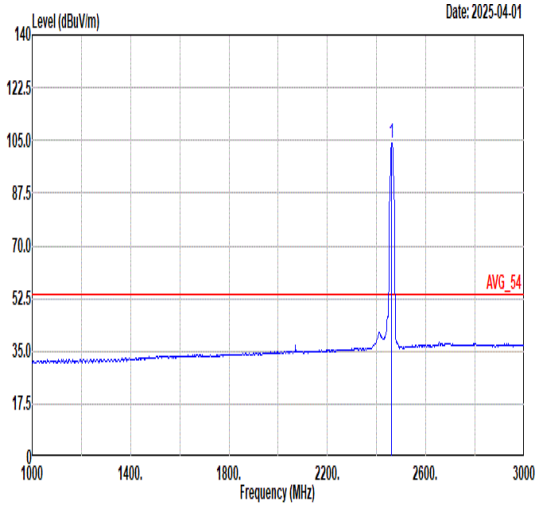

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2484.38	47.85	74.00	-26.15	41.95	30.63	7.88	32.61	368	316	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2462.00	106.84	------	------	100.92	30.68	7.86	32.62	368	316	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2483.81	37.54	54.00	-16.46	31.64	30.63	7.88	32.61	368	316	AVERAGE

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2462.00	104.07	------	------	98.15	30.68	7.86	32.62	368	316	AVERAGE

Mode	3	
	Band Edge	
	2400-2483.5_802.11b_CH11_2462MHz	
ANT	CDD 7+6	
Pol.	Vertical	Fundamental
Peak	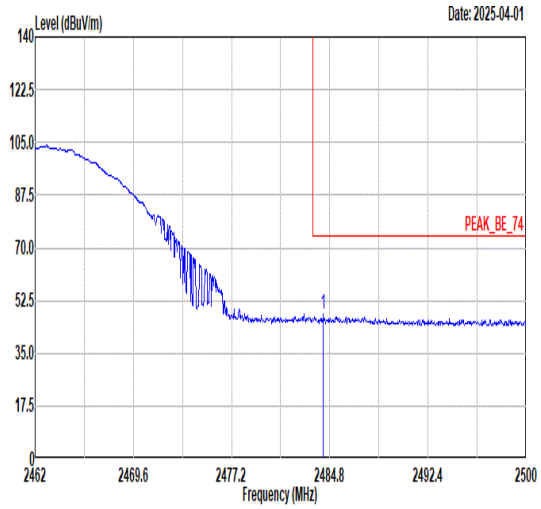	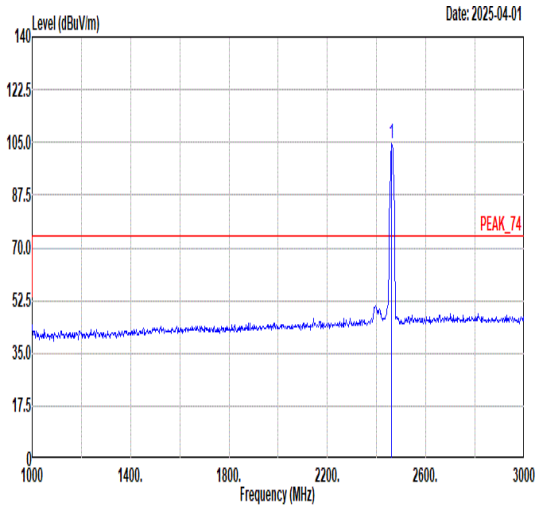
Avg	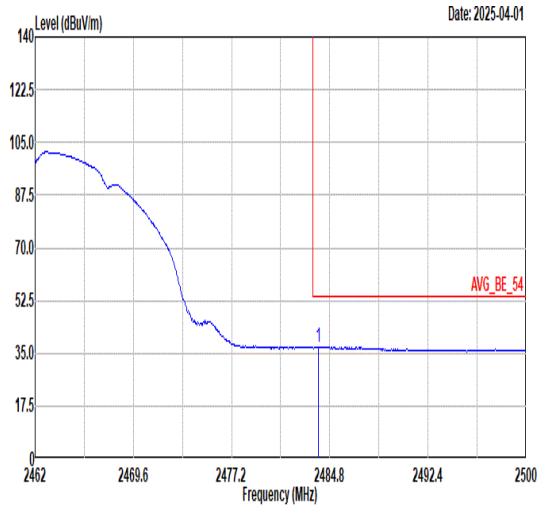	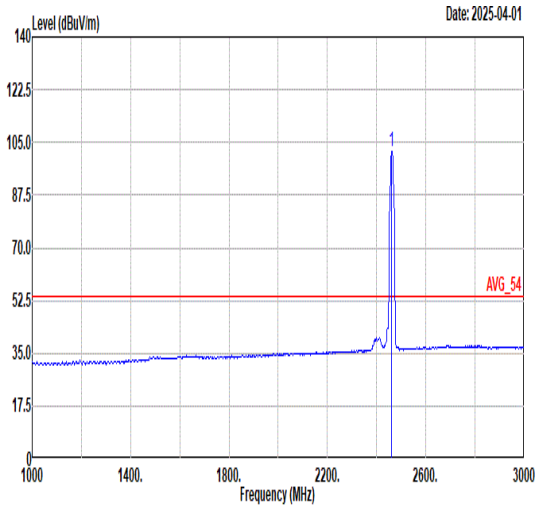

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2484.31	48.04	74.00	-25.96	42.14	30.63	7.88	32.61	334	172	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2462.00	104.38	------	------	98.46	30.68	7.86	32.62	334	172	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2483.93	37.00	54.00	-17.00	31.10	30.63	7.88	32.61	334	172	AVERAGE

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2462.00	101.94	------	------	96.02	30.68	7.86	32.62	334	172	AVERAGE

Mode	3	
	Harmonic	
	2400-2483.5_802.11b_CH11_2462MHz	
ANT	CDD 7+6	
Pol.	Horizontal	Vertical
Peak Avg	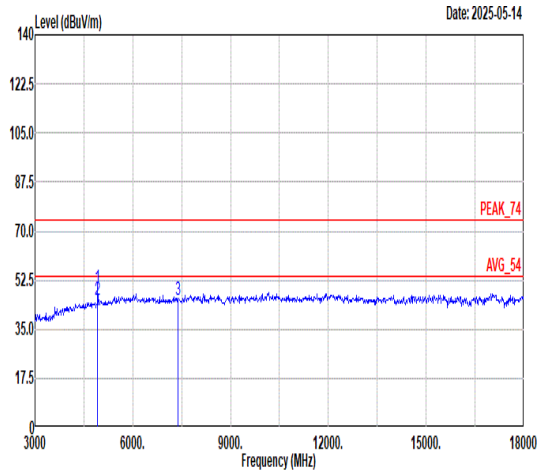	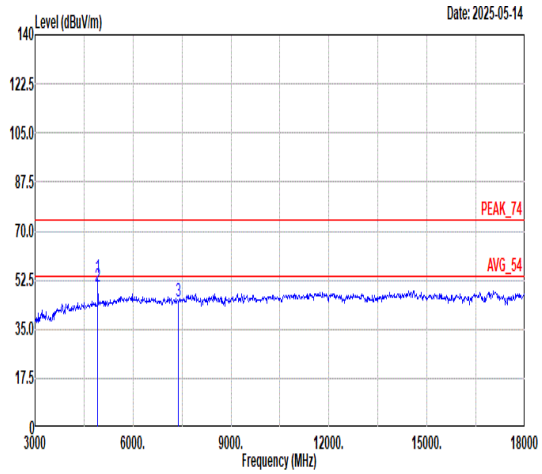

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	4924.00	49.52	74.00	-24.48	56.31	35.54	10.32	52.65	376	238	Peak
2	4924.00	45.41	54.00	-8.59	52.20	35.54	10.32	52.65	376	238	Average
3	7386.00	45.61	74.00	-28.39	49.31	36.57	11.98	52.25	---	---	Peak

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	4924.00	53.13	74.00	-20.87	59.92	35.54	10.32	52.65	355	140	Peak
2	4924.00	50.10	54.00	-3.90	56.89	35.54	10.32	52.65	355	140	Average
3	7386.00	45.04	74.00	-28.96	48.74	36.57	11.98	52.25	---	---	Peak

Mode	4	
	Band Edge	
	2400-2483.5_802.11g_CH01_2412MHz	
ANT	CDD 7+6	
Pol.	Horizontal	Fundamental
Peak	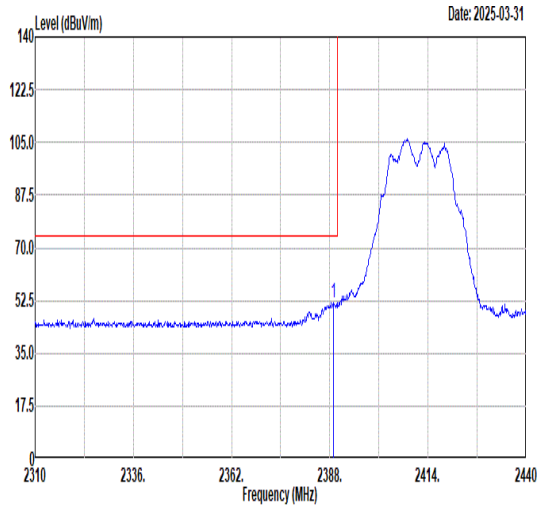	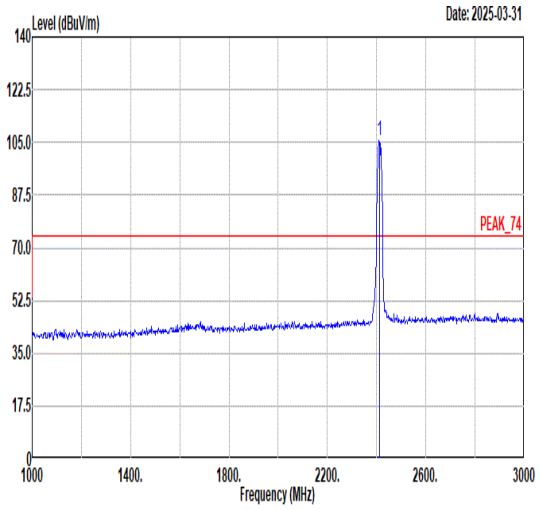
Avg	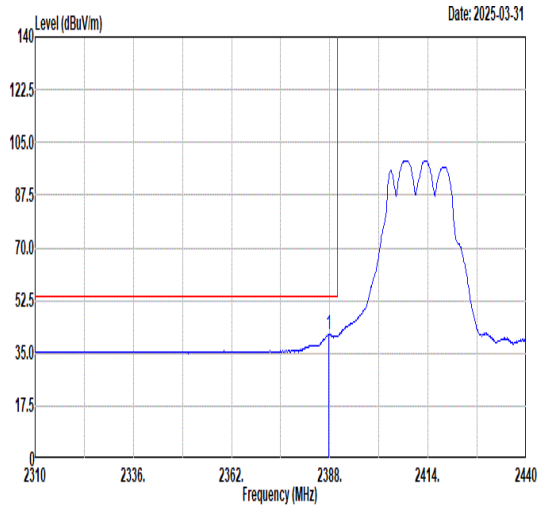	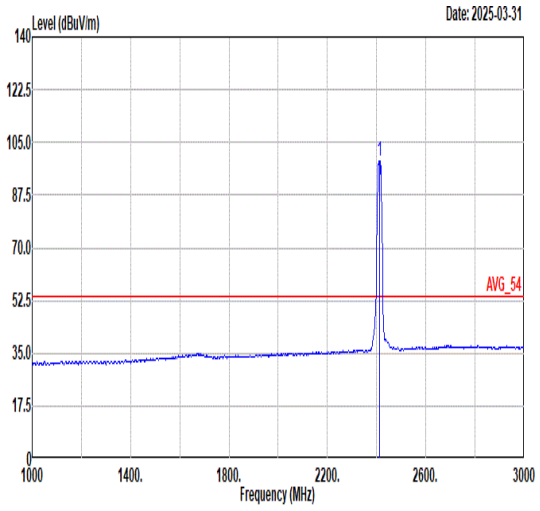

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2388.91	51.63	74.00	-22.37	45.91	30.60	7.76	32.64	338	311	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2412.00	105.83	------	------	100.05	30.62	7.80	32.64	338	311	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2387.74	41.17	54.00	-12.83	35.46	30.60	7.75	32.64	338	311	AVERAGE

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2412.00	98.88	------	------	93.10	30.62	7.80	32.64	338	311	AVERAGE

Mode	4	
	Band Edge	
	2400-2483.5_802.11g_CH01_2412MHz	
ANT	CDD 7+6	
Pol.	Vertical	Fundamental

Peak

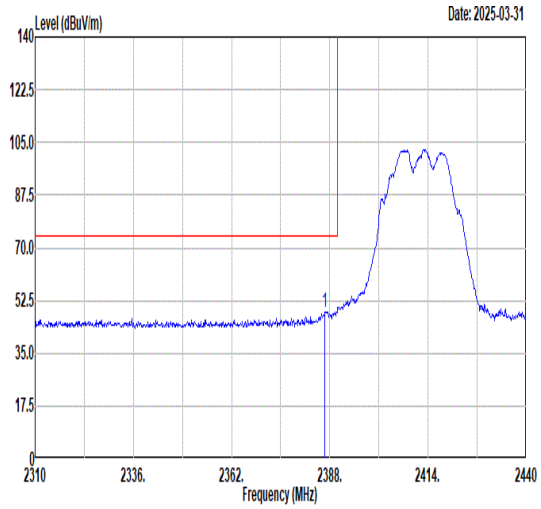

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2386.70	48.73	74.00	-25.27	43.03	30.60	7.75	32.65	338	217	PEAK

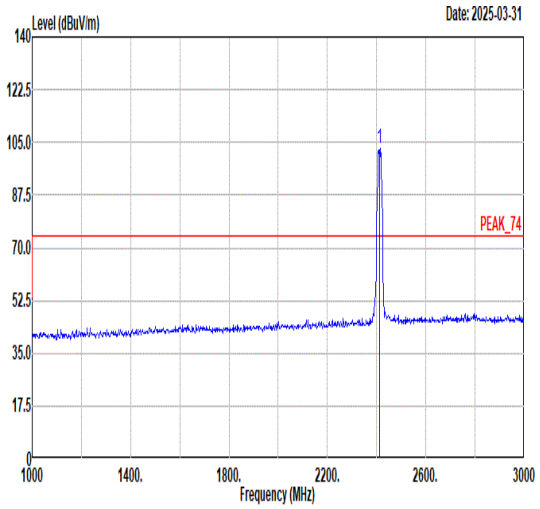

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2412.00	102.83	------	------	97.02	30.63	7.81	32.63	338	217	PEAK

Avg

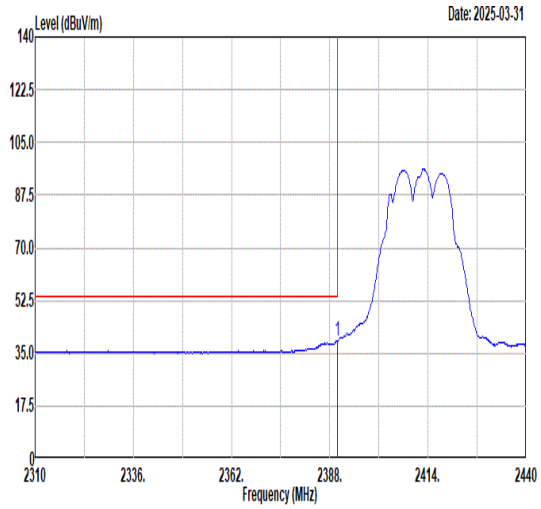

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2389.95	39.03	54.00	-14.97	33.31	30.60	7.76	32.64	338	217	AVERAGE

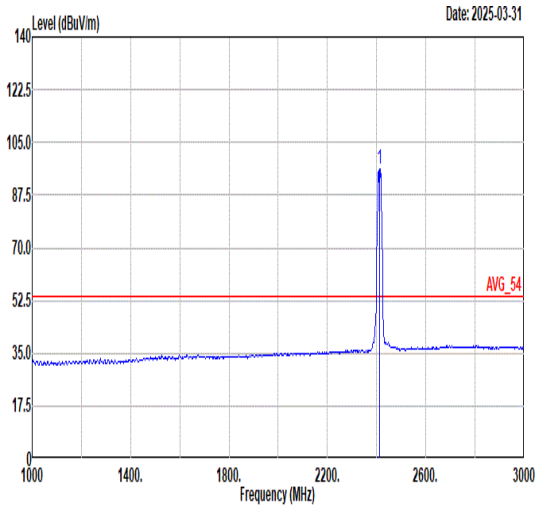

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2412.00	96.01	------	------	90.22	30.62	7.81	32.64	338	217	AVERAGE

Mode	4	
	Harmonic	
	2400-2483.5_802.11g_CH01_2412MHz	
ANT	CDD 7+6	
Pol.	Horizontal	Vertical
Peak Avg	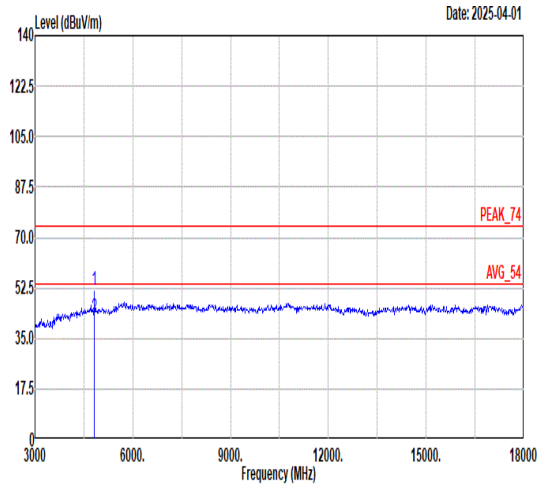	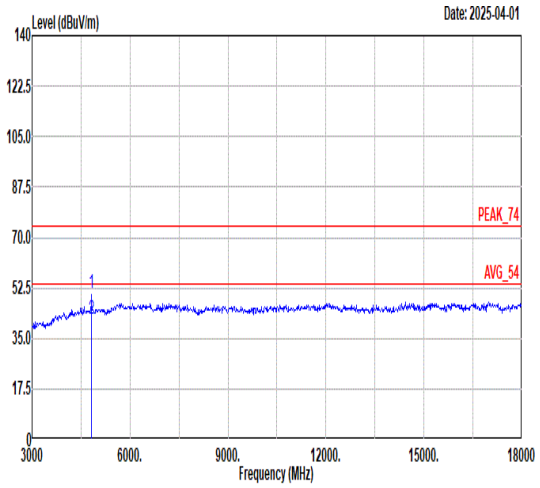

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	4824.00	51.75	74.00	-22.25	57.96	35.30	11.08	52.59	400	185	Peak
2	4824.00	42.02	54.00	-11.98	48.23	35.30	11.08	52.59	400	185	Average

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	4824.00	50.64	74.00	-23.36	56.85	35.30	11.08	52.59	235	141	Peak
2	4824.00	41.64	54.00	-12.36	47.85	35.30	11.08	52.59	235	141	Average

Mode	5	
	Harmonic	
	2400-2483.5_802.11g_CH06_2437MHz	
ANT	CDD 7+6	
Pol.	Horizontal	Vertical
Peak Avg	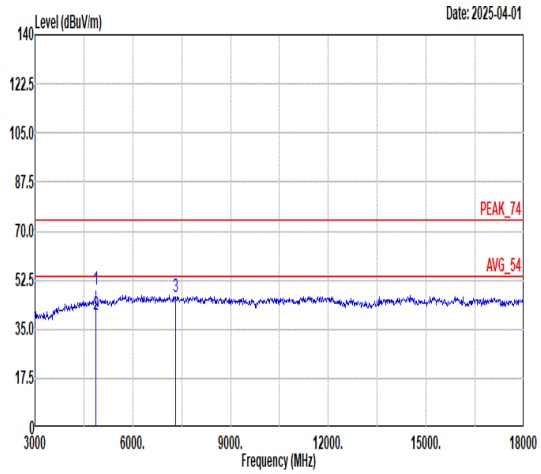	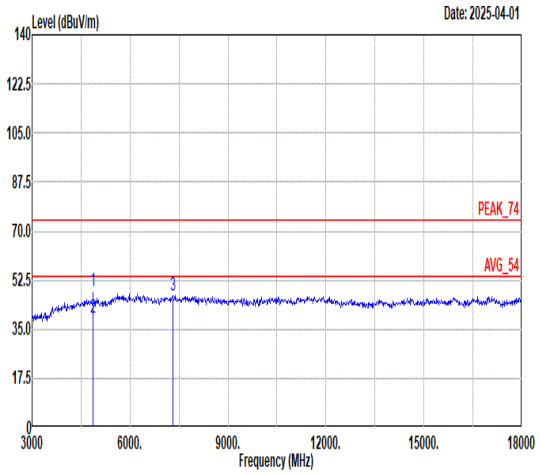

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	4874.00	48.94	74.00	-25.06	55.11	35.35	11.10	52.62	388	188	Peak
2	4874.00	40.05	54.00	-13.95	46.22	35.35	11.10	52.62	388	188	Average
3	7311.00	46.31	74.00	-27.69	48.87	36.58	13.08	52.22	---	---	Peak

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	4874.00	48.35	74.00	-25.65	54.52	35.35	11.10	52.62	235	144	Peak
2	4874.00	38.97	54.00	-15.03	45.14	35.35	11.10	52.62	235	144	Average
3	7311.00	47.08	74.00	-26.92	49.64	36.58	13.08	52.22	---	---	Peak

Mode	6	
	Band Edge	
	2400-2483.5_802.11g_CH11_2462MHz	
ANT	CDD 7+6	
Pol.	Horizontal	Fundamental
Peak	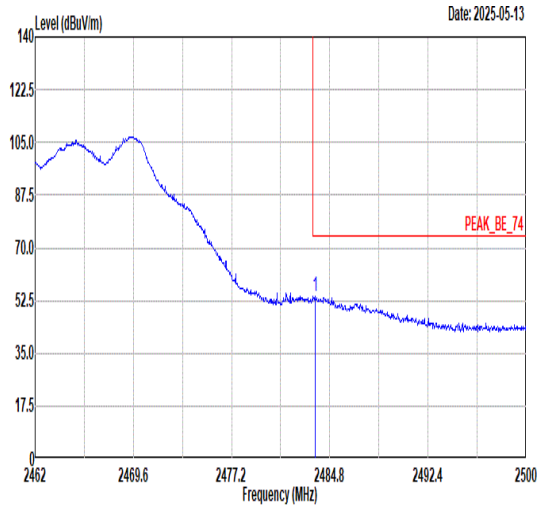	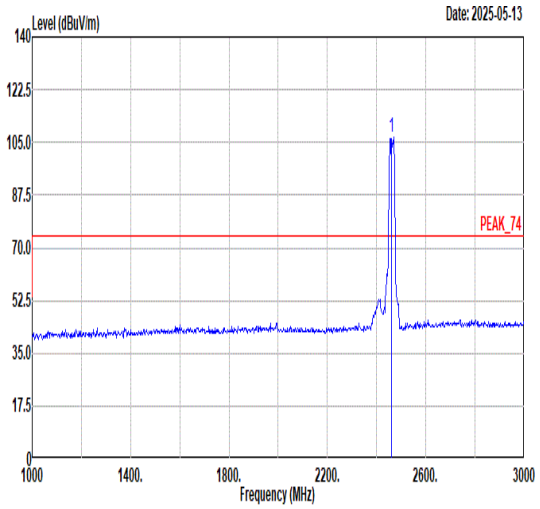
Avg	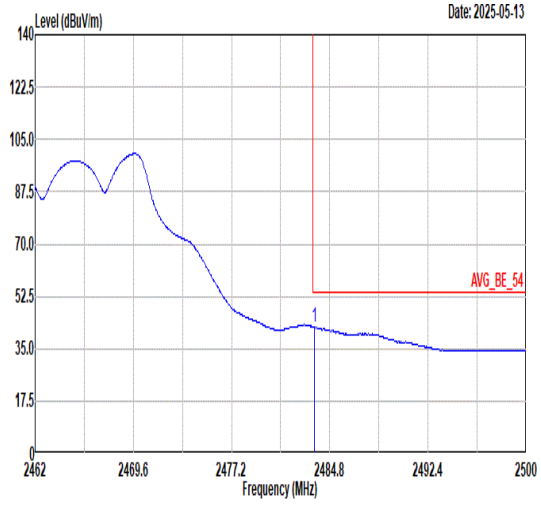	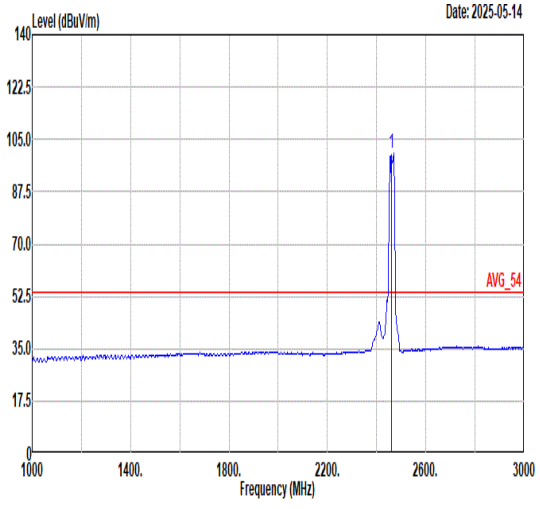

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2483.66	53.97	74.00	-20.03	48.97	30.63	6.98	32.61	147	111	Peak

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2462.00	106.95	------	------	101.94	30.68	6.95	32.62	147	111	Peak

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2483.62	42.35	54.00	-11.65	37.35	30.63	6.98	32.61	147	111	Average

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2462.00	100.16	------	------	95.15	30.68	6.95	32.62	147	111	Average

Mode	6	
	Band Edge	
	2400-2483.5_802.11g_CH11_2462MHz	
ANT	CDD 7+6	
Pol.	Vertical	Fundamental
Peak	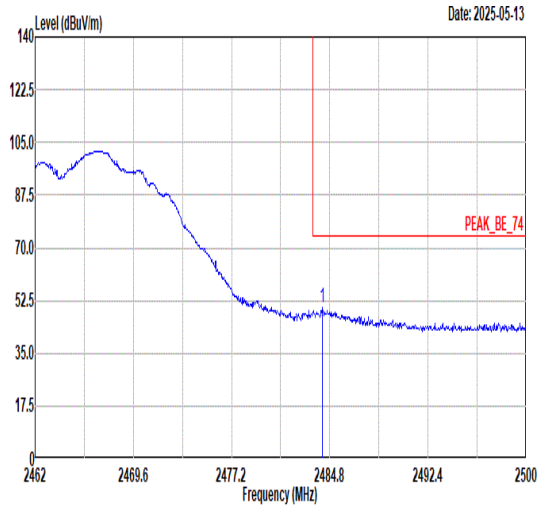	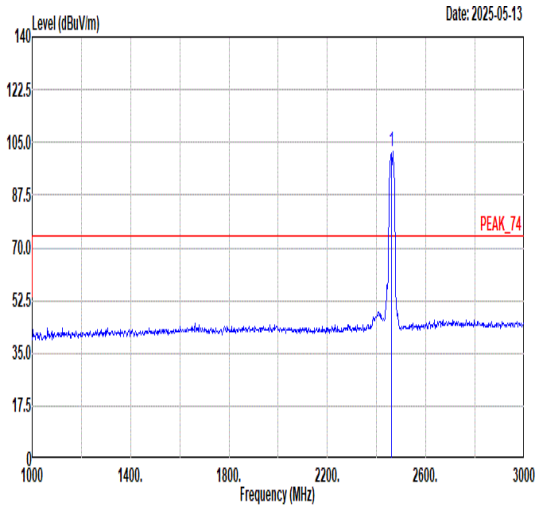
Avg	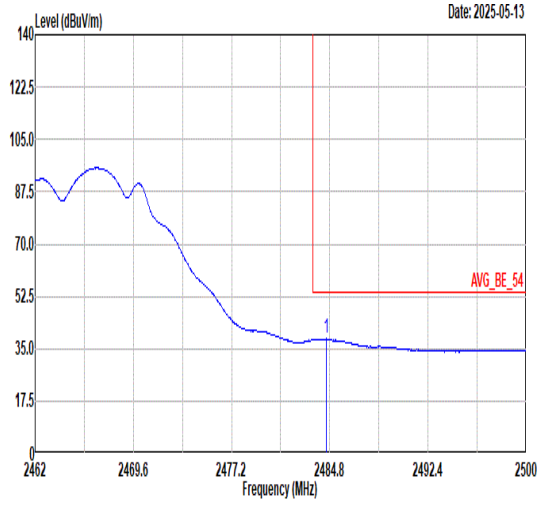	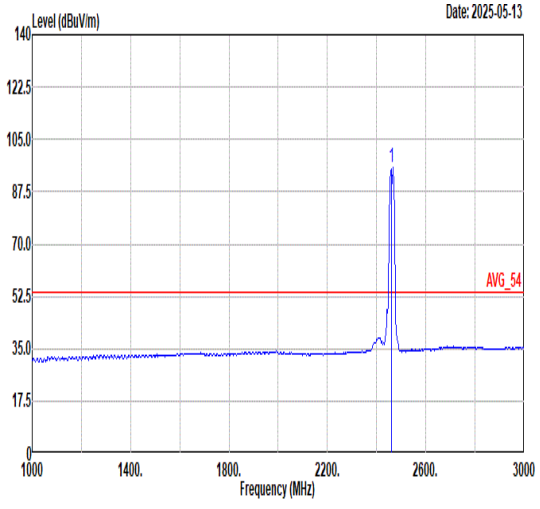

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2484.23	49.97	74.00	-24.03	44.97	30.63	6.98	32.61	264	339	Peak

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2462.00	102.09	------	------	97.08	30.68	6.95	32.62	264	339	Peak

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2484.53	38.39	54.00	-15.61	33.39	30.63	6.98	32.61	264	339	Average

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2462.00	95.37	------	------	90.36	30.68	6.95	32.62	264	339	Average

Mode	6	
	Harmonic	
	2400-2483.5_802.11g_CH11_2462MHz	
ANT	CDD 7+6	
Pol.	Horizontal	Vertical
Peak Avg	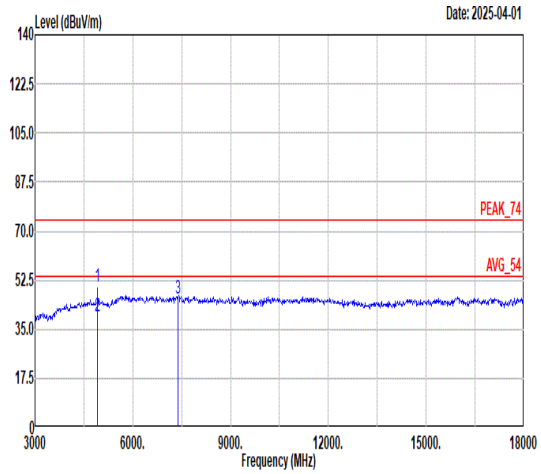	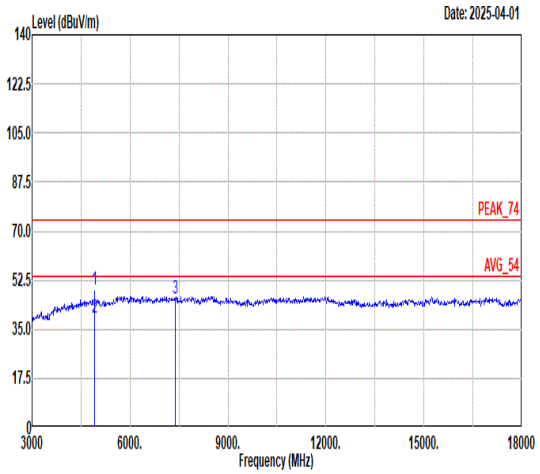

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	4924.00	49.99	74.00	-24.01	55.98	35.54	11.12	52.65	382	182	Peak
2	4924.00	39.67	54.00	-14.33	45.66	35.54	11.12	52.65	382	182	Average
3	7386.00	46.16	74.00	-27.84	48.71	36.57	13.13	52.25	---	---	Peak

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	4924.00	49.14	74.00	-24.86	55.13	35.54	11.12	52.65	240	137	Peak
2	4924.00	38.88	54.00	-15.12	44.87	35.54	11.12	52.65	240	137	Average
3	7386.00	45.99	74.00	-28.01	48.54	36.57	13.13	52.25	---	---	Peak

Mode	7	
	Band Edge	
	2400-2483.5_802.11n HT20_CH01_2412MHz	
ANT	CDD 7+6	
Pol.	Horizontal	Fundamental

Peak

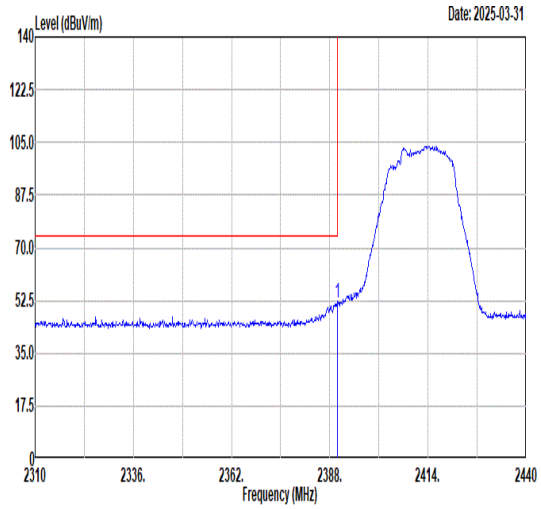

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2389.95	51.73	74.00	-22.27	46.01	30.60	7.76	32.64	339	314	PEAK

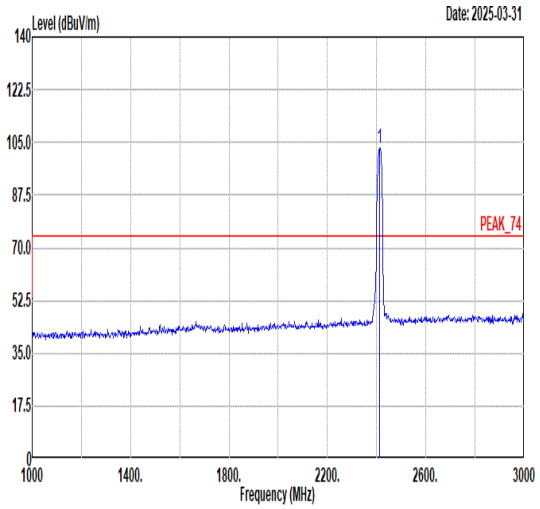

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2412.00	103.16	------	------	97.35	30.63	7.81	32.63	339	314	PEAK

Avg

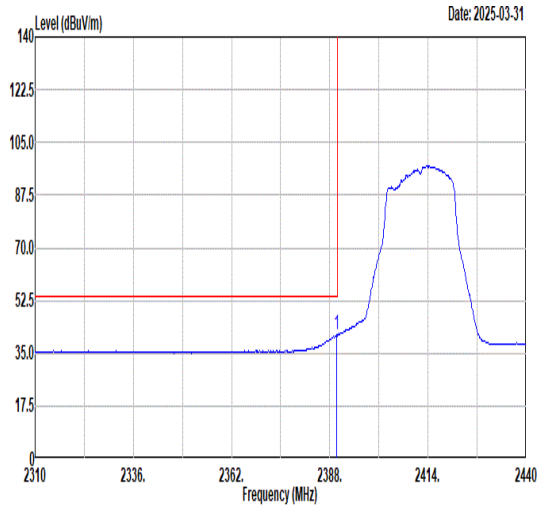

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2389.82	41.00	54.00	-13.00	35.28	30.60	7.76	32.64	339	314	AVERAGE

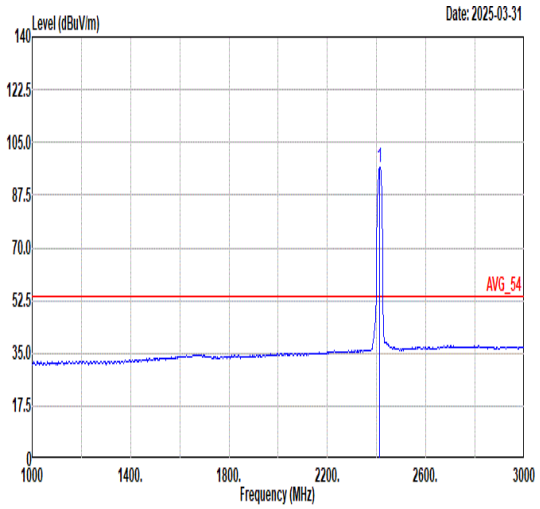

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2412.00	96.87	------	------	91.06	30.63	7.81	32.63	339	314	AVERAGE

Mode	7	
	Band Edge	
	2400-2483.5_802.11n HT20_CH01_2412MHz	
ANT	CDD 7+6	
Pol.	Vertical	Fundamental

Peak

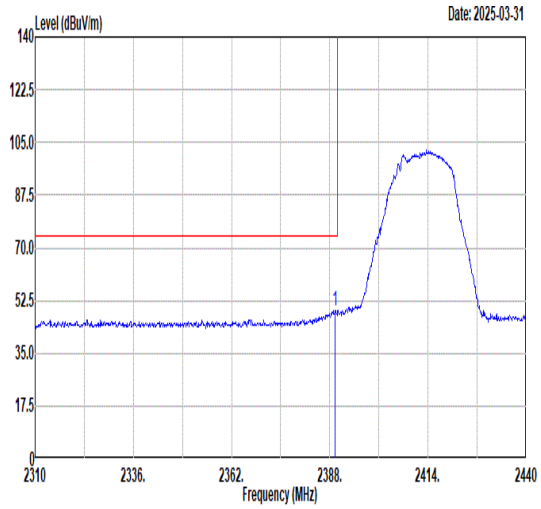

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2389.43	49.28	74.00	-24.72	43.56	30.60	7.76	32.64	338	214	PEAK

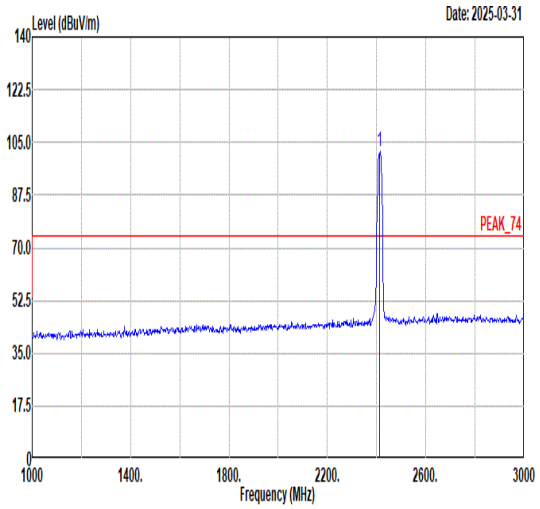

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2412.00	101.93	------	------	96.12	30.63	7.81	32.63	338	214	PEAK

Avg

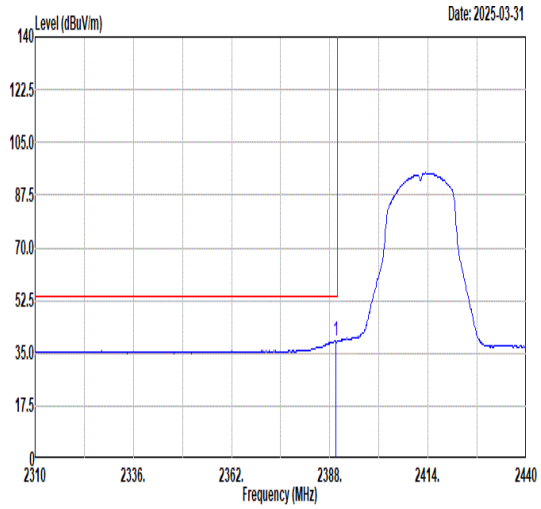

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2389.56	38.89	54.00	-15.11	33.17	30.60	7.76	32.64	338	214	AVERAGE

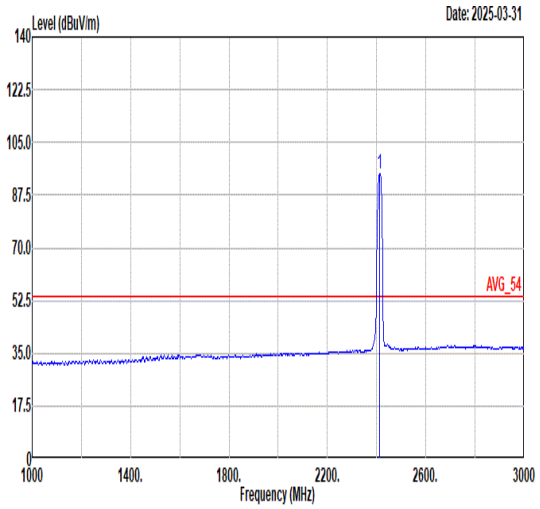

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2412.00	94.69	------	------	88.88	30.63	7.81	32.63	338	214	AVERAGE

Mode	7	
	Harmonic	
	2400-2483.5_802.11n HT20_CH01_2412MHz	
ANT	CDD 7+6	
Pol.	Horizontal	Vertical
Peak Avg	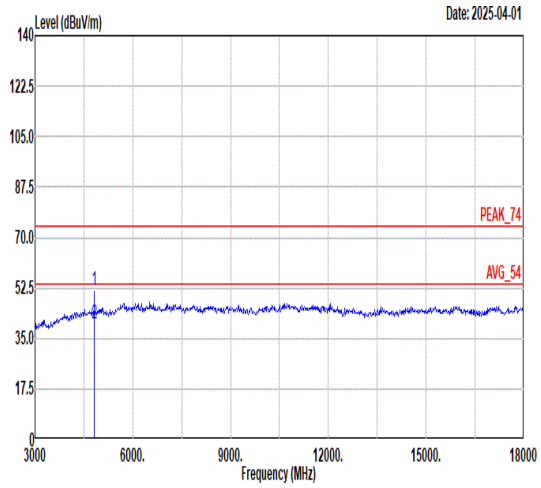	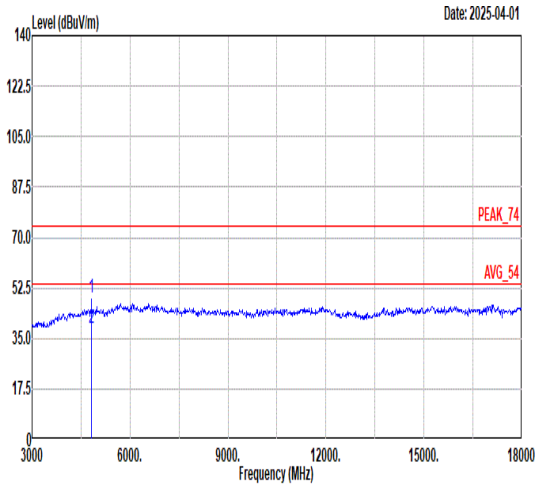

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	4824.00	51.67	74.00	-22.33	57.88	35.30	11.08	52.59	367	128	Peak
2	4824.00	40.01	54.00	-13.99	46.22	35.30	11.08	52.59	367	128	Average

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	4824.00	49.24	74.00	-24.76	55.45	35.30	11.08	52.59	237	141	Peak
2	4824.00	38.77	54.00	-15.23	44.98	35.30	11.08	52.59	237	141	Average

Mode	8	
	Harmonic	
	2400-2483.5_802.11n HT20_CH06_2437MHz	
ANT	CDD 7+6	
Pol.	Horizontal	Vertical
Peak Avg	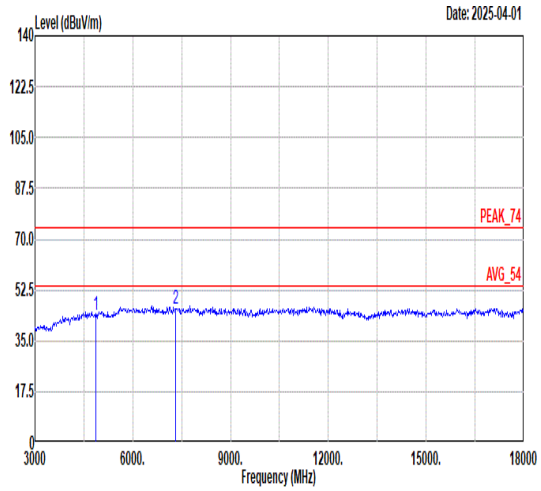	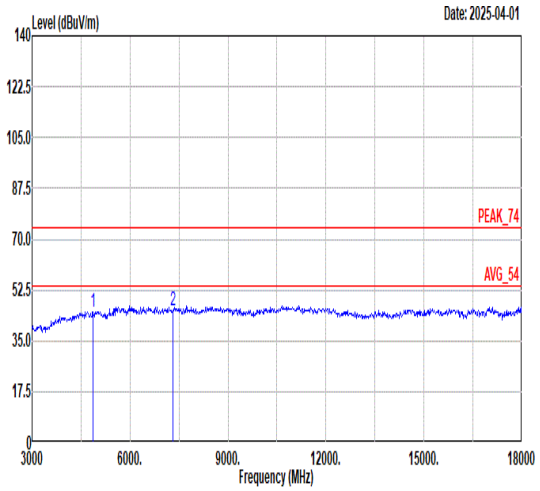

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	4874.00	43.74	74.00	-30.26	49.91	35.35	11.10	52.62	---	---	Peak
2	7311.00	46.19	74.00	-27.81	48.75	36.58	13.08	52.22	---	---	Peak

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	4874.00	44.73	74.00	-29.27	50.90	35.35	11.10	52.62	---	---	Peak
2	7311.00	45.39	74.00	-28.61	47.95	36.58	13.08	52.22	---	---	Peak

Mode	9	
	Band Edge	
	2400-2483.5_802.11n HT20_CH11_2462MHz	
ANT	CDD 7+6	
Pol.	Horizontal	Fundamental

Peak

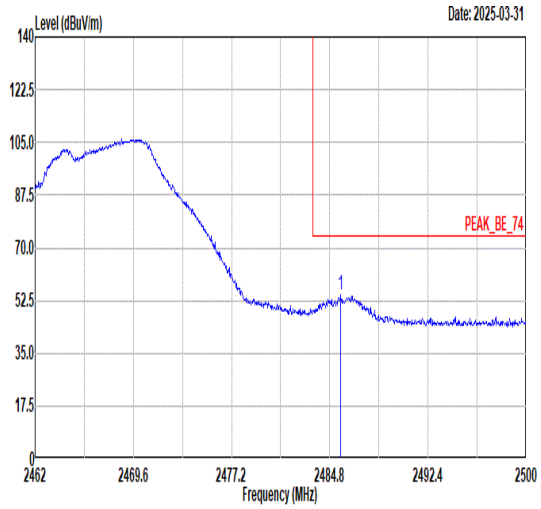

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2485.64	54.23	74.00	-19.77	48.33	30.63	7.88	32.61	354	295	PEAK

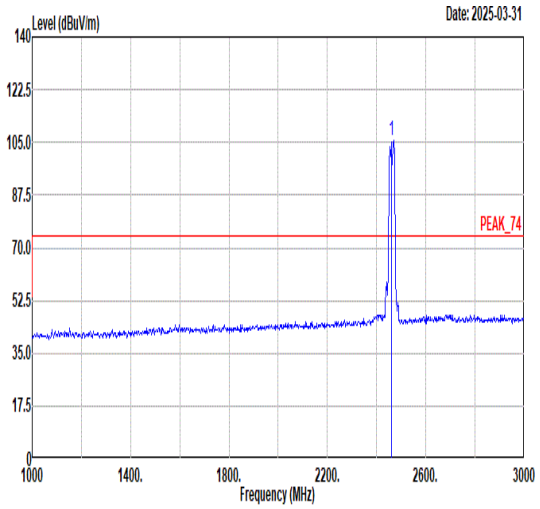

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2462.00	105.51	------	------	99.60	30.66	7.86	32.61	354	295	PEAK

Avg

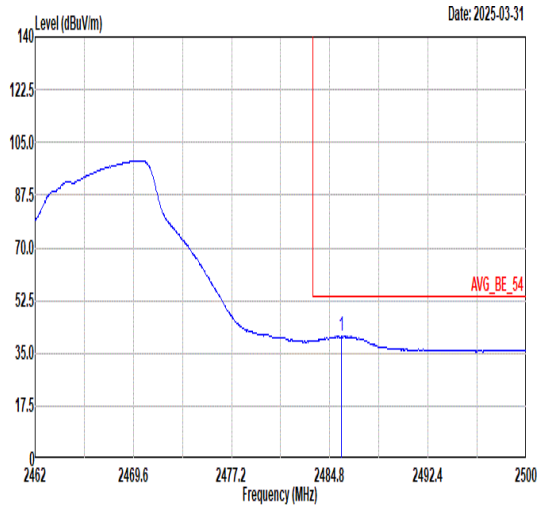

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2485.71	40.78	54.00	-13.22	34.88	30.63	7.88	32.61	354	295	AVERAGE

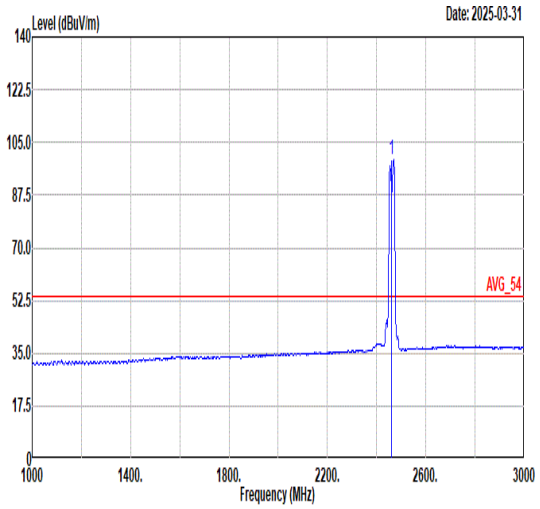

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2462.00	99.16	------	------	93.25	30.66	7.86	32.61	354	295	AVERAGE

Mode	9	
	Band Edge	
	2400-2483.5_802.11n HT20_CH11_2462MHz	
ANT	CDD 7+6	
Pol.	Vertical	Fundamental

Peak

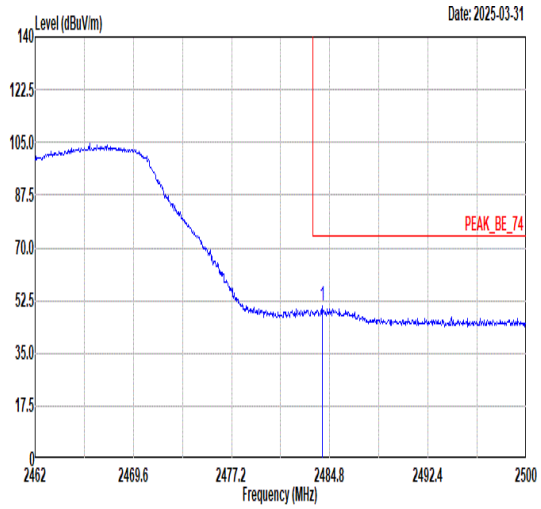

	Freq	Level	Limit Line	Margin (dB)	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	
1	2484.23	50.76	74.00	-23.24	44.86	30.63	7.88	32.61	346	206	PEAK

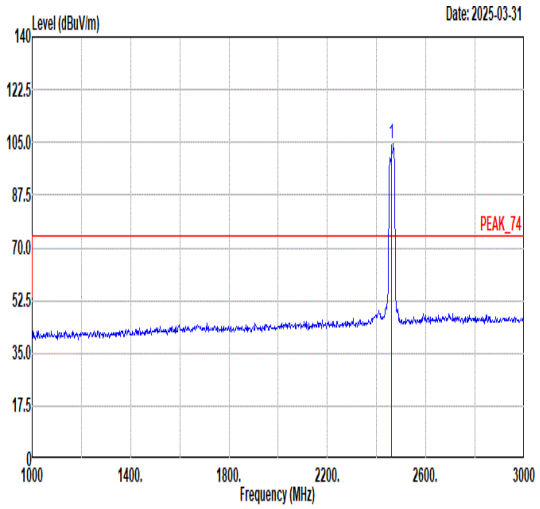

	Freq	Level	Limit Line	Margin (dB)	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	
1	2462.00	104.36	------	------	98.45	30.66	7.86	32.61	346	206	PEAK

Avg

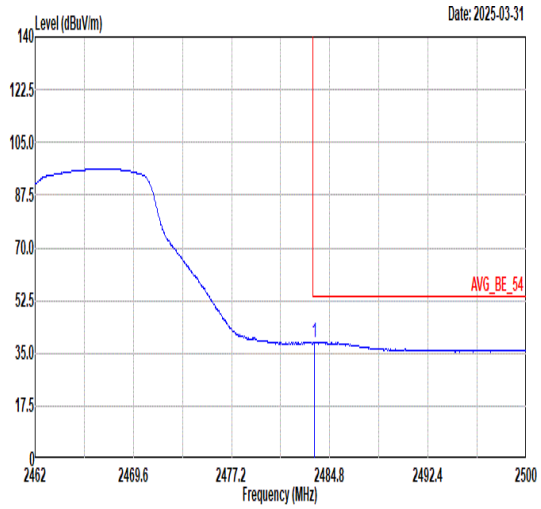

	Freq	Level	Limit Line	Margin (dB)	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	
1	2483.62	38.50	54.00	-15.50	32.60	30.63	7.88	32.61	346	206	AVERAGE

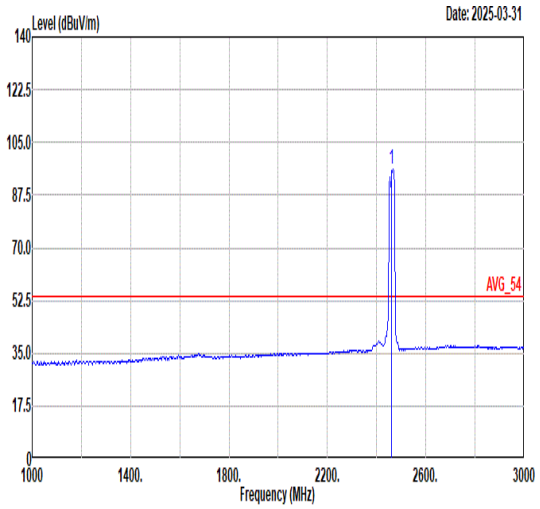

	Freq	Level	Limit Line	Margin (dB)	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	
1	2462.00	96.21	------	------	90.30	30.66	7.86	32.61	346	206	AVERAGE

Mode	9	
	Harmonic	
	2400-2483.5_802.11n HT20_CH11_2462MHz	
ANT	CDD 7+6	
Pol.	Horizontal	Vertical
Peak Avg	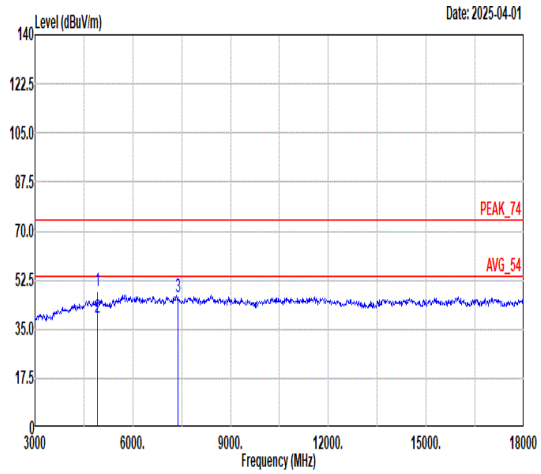	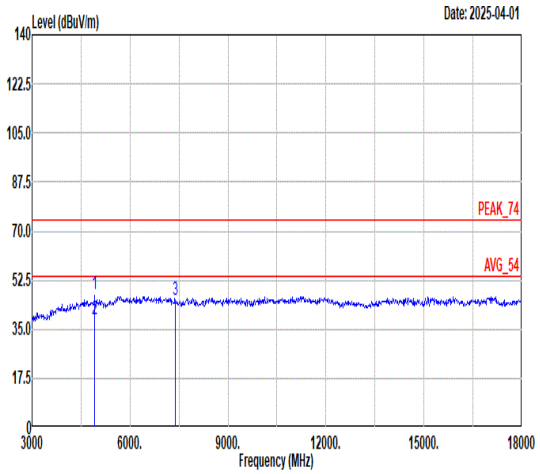

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	4924.00	48.44	74.00	-25.56	54.43	35.54	11.12	52.65	381	185	Peak
2	4924.00	39.14	54.00	-14.86	45.13	35.54	11.12	52.65	381	185	Average
3	7386.00	46.28	74.00	-27.72	48.83	36.57	13.13	52.25	---	---	Peak

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	4924.00	47.77	74.00	-26.23	53.76	35.54	11.12	52.65	242	135	Peak
2	4924.00	38.37	54.00	-15.63	44.36	35.54	11.12	52.65	242	135	Average
3	7386.00	45.40	74.00	-28.60	47.95	36.57	13.13	52.25	---	---	Peak

Mode	10	
	Band Edge - L	
	2400-2483.5_802.11n HT40_CH03_2422MHz	
ANT	CDD 7+6	
Pol.	Horizontal	Fundamental
Peak	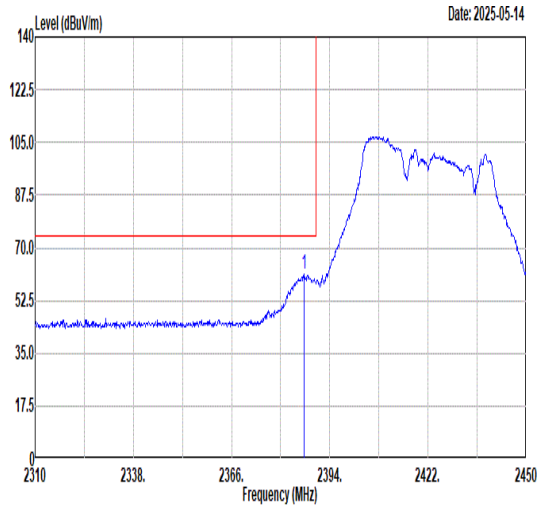	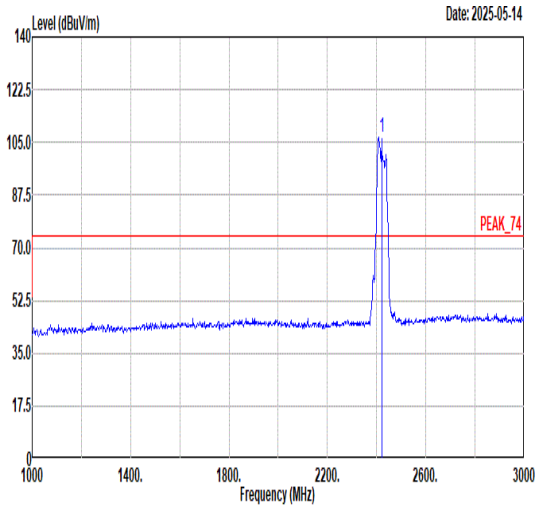
Avg	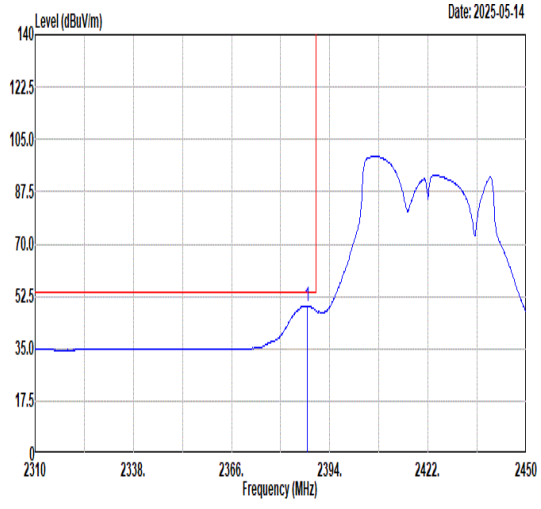	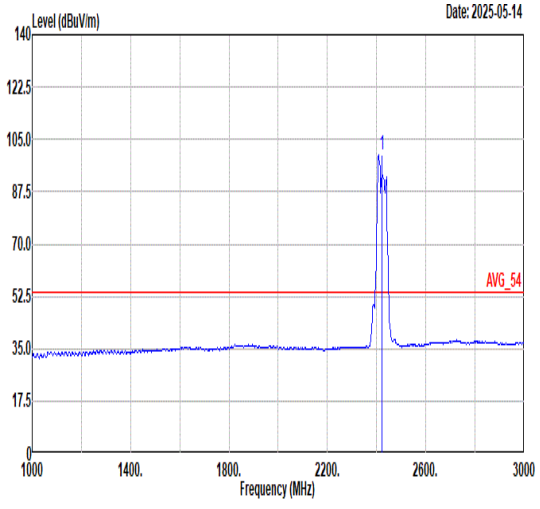

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2386.72	61.04	74.00	-12.96	56.23	30.60	6.86	32.65	340	311	Peak

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2422.00	106.76	------	------	101.85	30.64	6.90	32.63	340	311	Peak

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2387.56	49.23	54.00	-4.77	44.41	30.60	6.86	32.64	340	311	Average

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2422.00	99.68	------	------	94.77	30.64	6.90	32.63	340	311	Average

<table>
<tr><td rowspan="3">Mode</td><td colspan="2">10</td></tr>
<tr><td colspan="2">Band Edge - R</td></tr>
<tr><td colspan="2">2400-2483.5_802.11n HT40_CH03_2422MHz</td></tr>
<tr><td>ANT</td><td colspan="2">CDD 7+6</td></tr>
<tr><td>Pol.</td><td>Horizontal</td><td>Fundamental</td></tr>
<tr><td>Peak</td><td>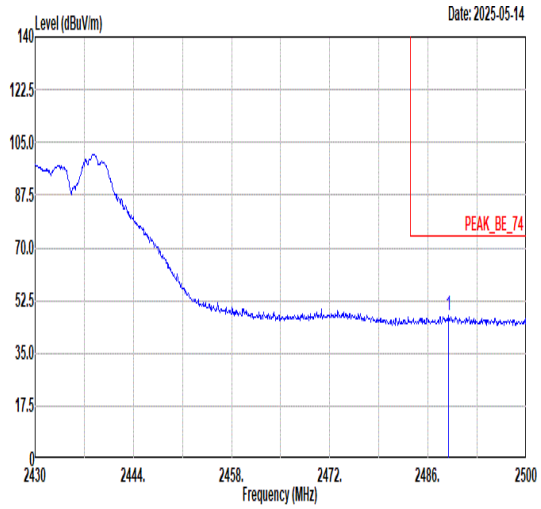

<table>
<tr><th></th><th>Freq</th><th>Level</th><th>Limit Line</th><th>Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr>
<tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td><td></td></tr>
<tr><td>1</td><td>2488.87</td><td>47.45</td><td>74.00</td><td>-26.55</td><td>42.45</td><td>30.62</td><td>6.98</td><td>32.60</td><td>340</td><td>311</td><td>Peak</td></tr>
</table></td><td>Blank</td></tr>
<tr><td>Avg</td><td>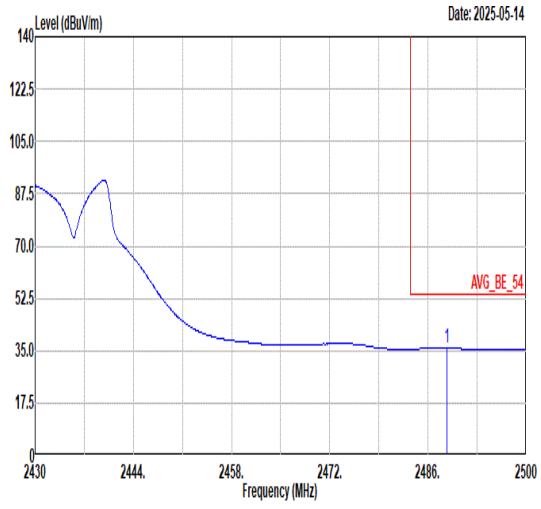

<table>
<tr><th></th><th>Freq</th><th>Level</th><th>Limit Line</th><th>Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr>
<tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td><td></td></tr>
<tr><td>1</td><td>2488.66</td><td>35.97</td><td>54.00</td><td>-18.03</td><td>30.97</td><td>30.62</td><td>6.98</td><td>32.60</td><td>340</td><td>311</td><td>Average</td></tr>
</table></td><td>Blank</td></tr>
</table>

Mode	10	
	Band Edge - L	
	2400-2483.5_802.11n HT40_CH03_2422MHz	
ANT	CDD 7+6	
Pol.	Vertical	Fundamental
Peak	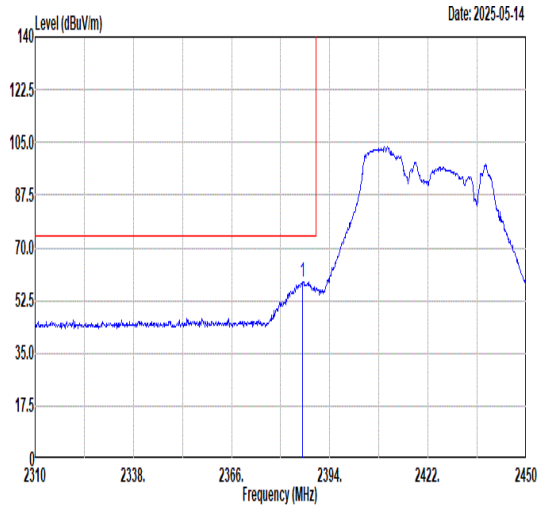	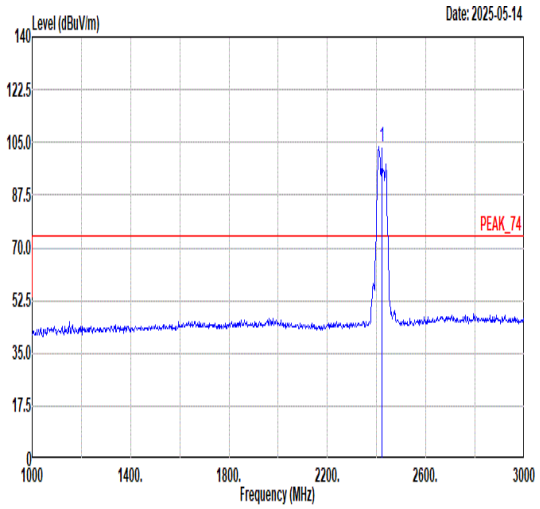
Avg	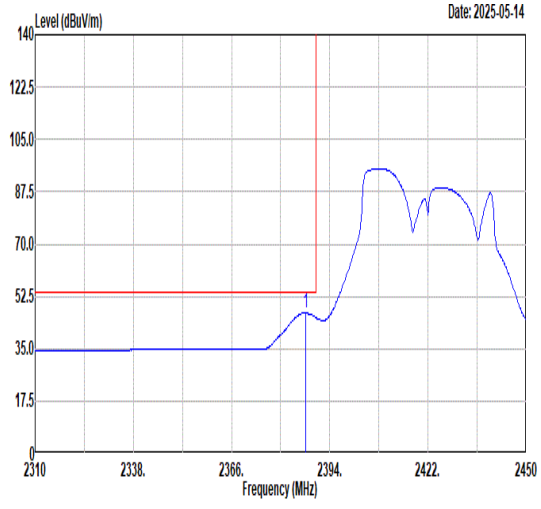	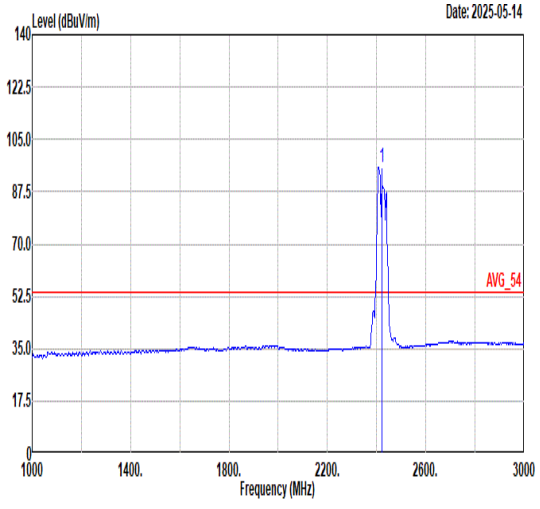

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2386.30	58.81	74.00	-15.19	54.00	30.60	6.86	32.65	352	218	Peak

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2422.00	103.39	------	------	98.48	30.64	6.90	32.63	352	218	Peak

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2387.14	46.86	54.00	-7.14	42.05	30.60	6.86	32.65	352	218	Average

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2422.00	95.64	------	------	90.73	30.64	6.90	32.63	352	218	Average

Mode	10	
	Band Edge - R	
	2400-2483.5_802.11n HT40_CH03_2422MHz	
ANT	CDD 7+6	
Pol.	Vertical	Fundamental
Peak	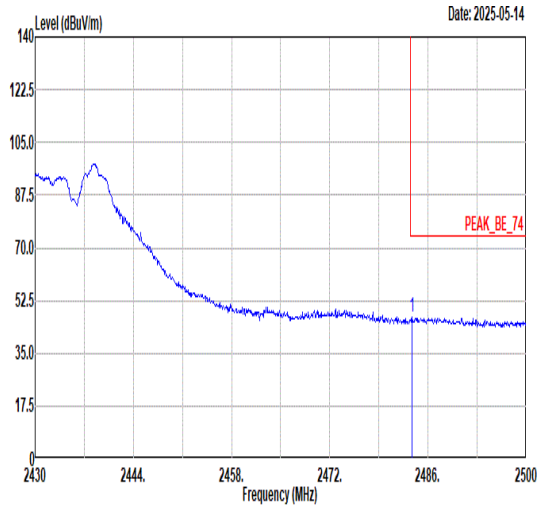 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 2483.76 46.94 74.00 -27.06 41.94 30.63 6.98 32.61 352 218 Peak	Blank
Avg	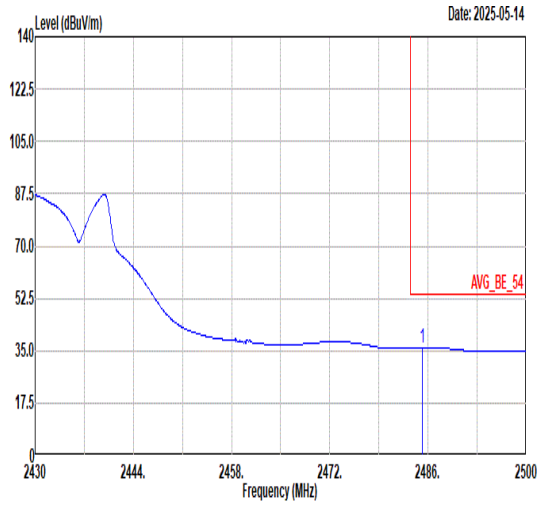 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 2485.16 35.94 54.00 -18.06 30.94 30.63 6.98 32.61 352 218 Average	Blank

Mode	11	
	Band Edge - L	
	2400-2483.5_802.11n HT40_CH09_2452MHz	
ANT	CDD 7+6	
Pol.	Horizontal	Fundamental
Peak	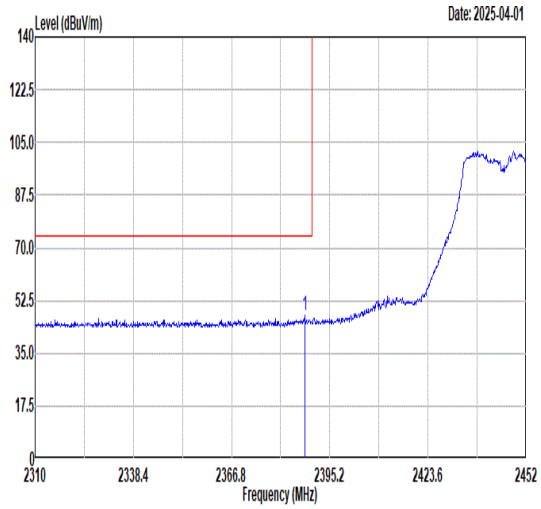	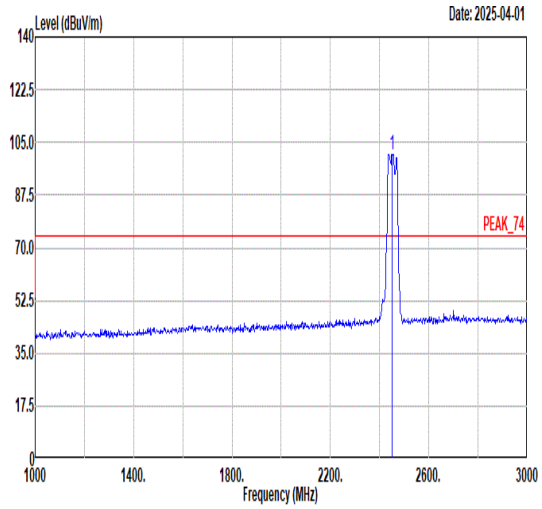
Avg	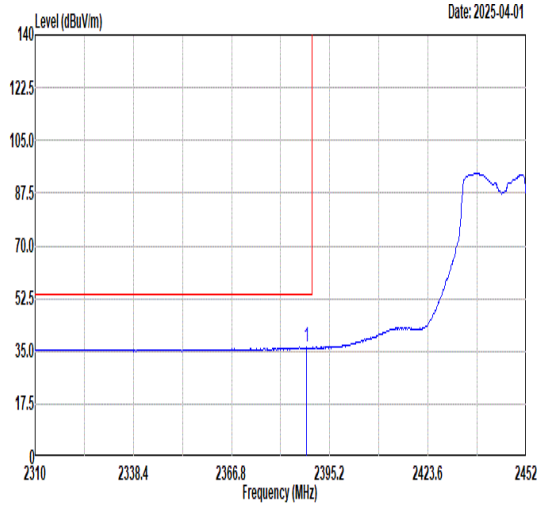	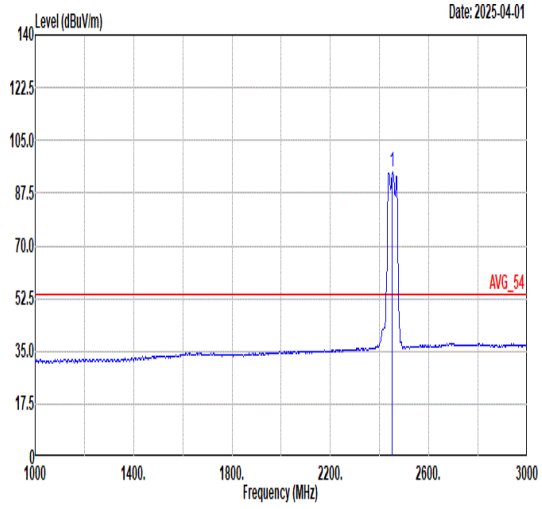

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2387.96	47.31	74.00	-26.69	41.60	30.60	7.75	32.64	363	312	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2452.00	101.16	------	------	95.24	30.69	7.85	32.62	363	312	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2388.53	36.24	54.00	-17.76	30.52	30.60	7.76	32.64	363	312	AVERAGE

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2452.00	94.32	------	------	88.40	30.69	7.85	32.62	363	312	AVERAGE

Mode	11	
	Band Edge - R	
	2400-2483.5_802.11n HT40_CH09_2452MHz	
ANT	CDD 7+6	
Pol.	Horizontal	Fundamental
Peak	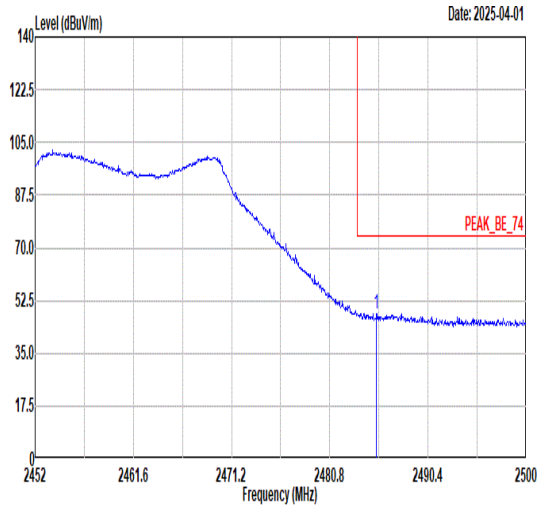 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2485.36 48.11 74.00 -25.89 42.21 30.63 7.88 32.61 363 312 PEAK	Blank
Avg	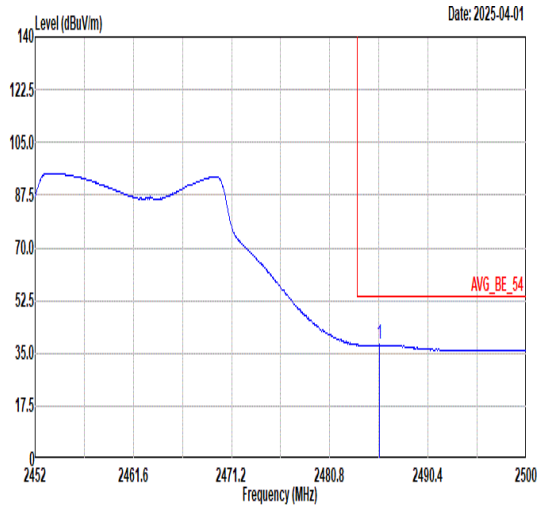 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2485.65 37.94 54.00 -16.06 32.04 30.63 7.88 32.61 363 312 AVERAGE	Blank

Mode	11	
	Band Edge - L	
	2400-2483.5_802.11n HT40_CH09_2452MHz	
ANT	CDD 7+6	
Pol.	Vertical	Fundamental
Peak	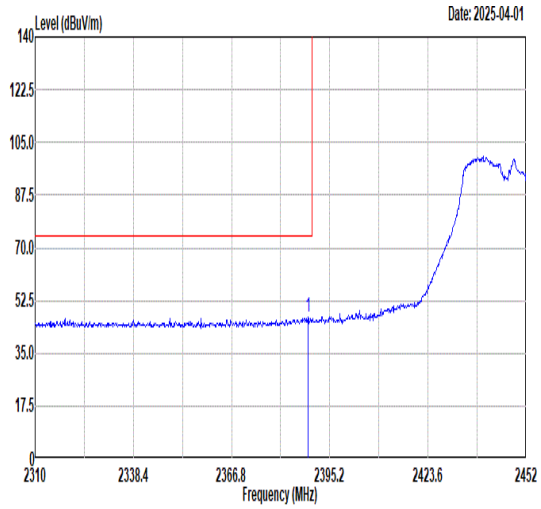	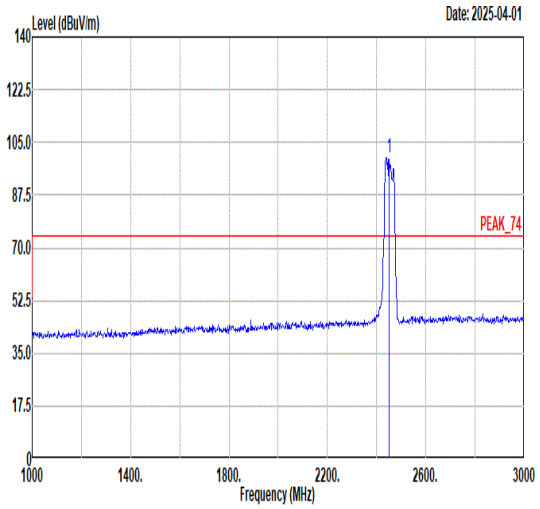
Avg	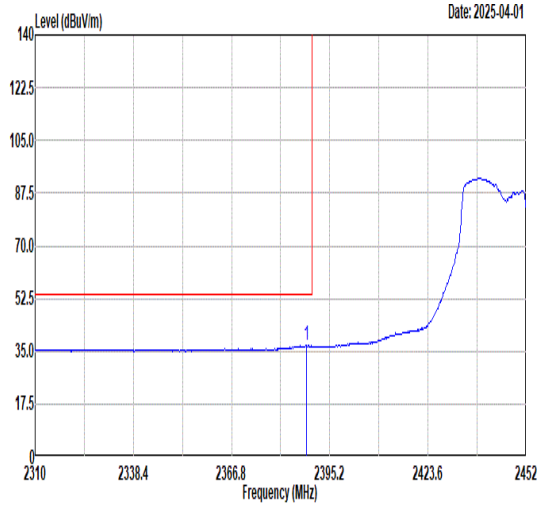	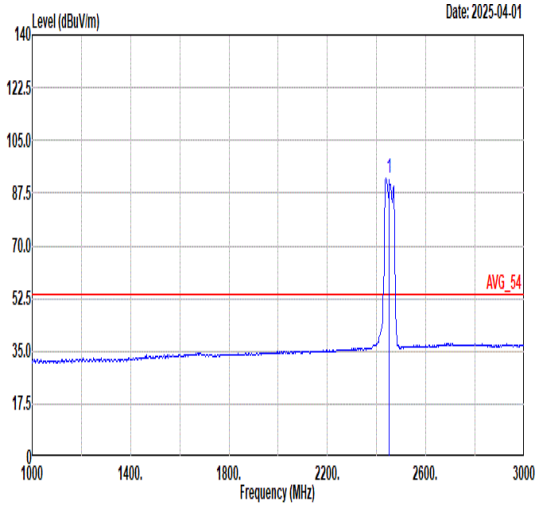

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2388.81	46.81	74.00	-27.19	41.09	30.60	7.76	32.64	347	204	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2452.00	100.09	------	------	94.19	30.68	7.84	32.62	347	204	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2388.38	37.00	54.00	-17.00	31.28	30.60	7.76	32.64	347	204	AVERAGE

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2452.00	92.23	------	------	86.34	30.68	7.83	32.62	347	204	AVERAGE

Mode	11	
	Band Edge - R	
	2400-2483.5_802.11n HT40_CH09_2452MHz	
ANT	CDD 7+6	
Pol.	Vertical	Fundamental
Peak	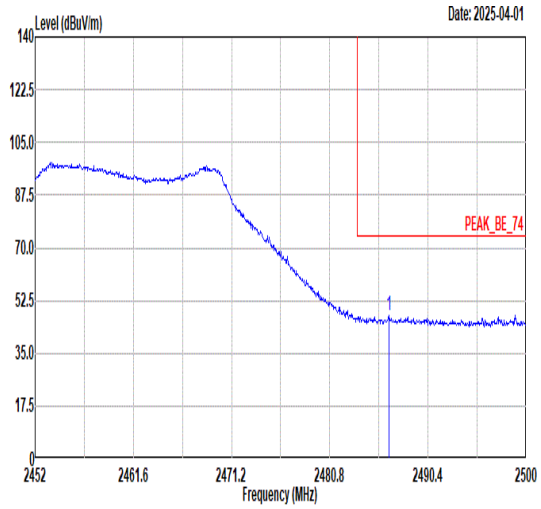	Blank
Avg	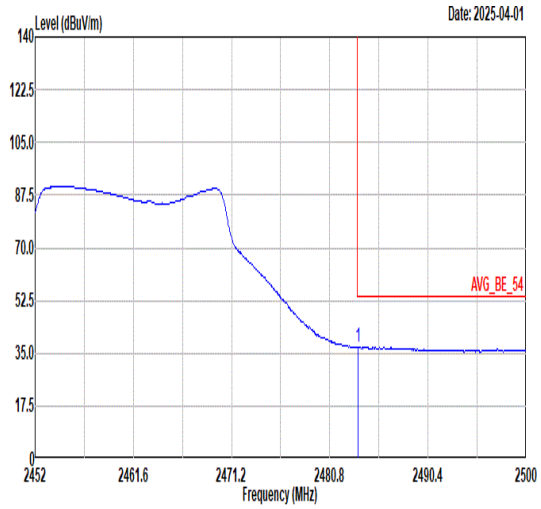	Blank

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2486.61	47.71	74.00	-26.29	41.81	30.63	7.88	32.61	347	204	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2483.58	37.03	54.00	-16.97	31.13	30.63	7.88	32.61	347	204	AVERAGE

Mode	12	
	Band Edge	
	2400-2483.5_802.11be EHT20_CH01_Full RU_2412MHz	
ANT	CDD 7+6	
Pol.	Horizontal	Fundamental
Peak	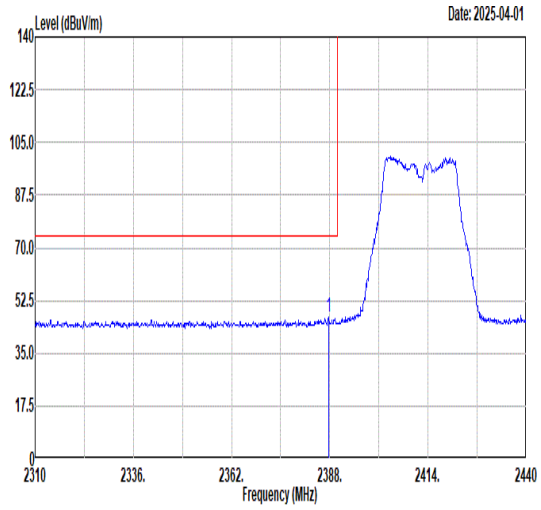	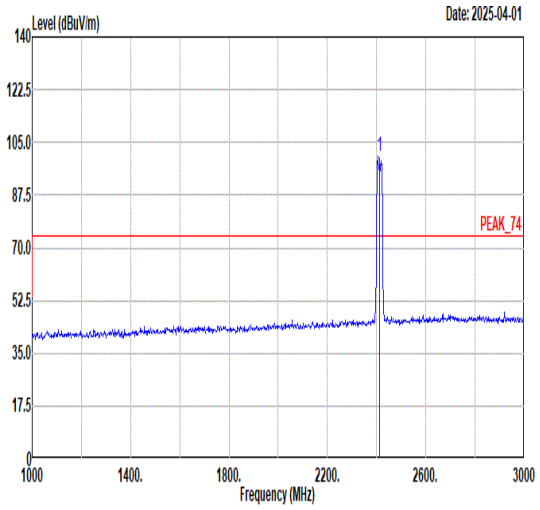
Avg	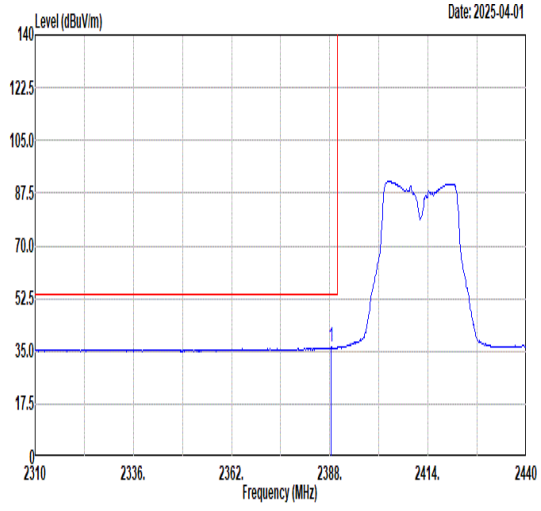	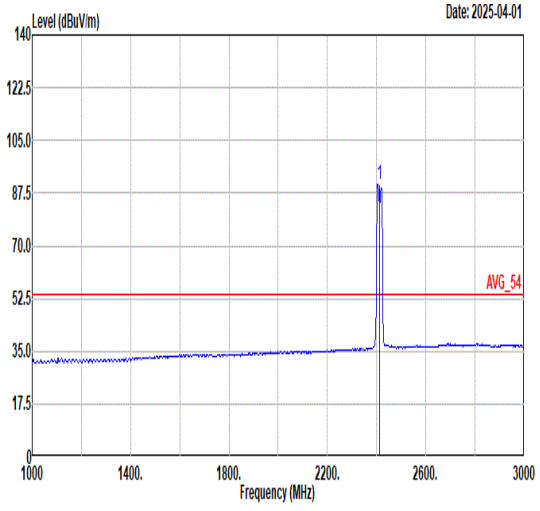

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2387.61	46.86	74.00	-27.14	41.15	30.60	7.75	32.64	377	295	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2412.00	100.17	------	------	94.40	30.61	7.80	32.64	377	295	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2388.39	36.22	54.00	-17.78	30.50	30.60	7.76	32.64	377	295	AVERAGE

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2412.00	90.33	------	------	84.56	30.61	7.80	32.64	377	295	AVERAGE

Mode	12	
	Band Edge	
	2400-2483.5_802.11be EHT20_CH01_Full RU_2412MHz	
ANT	CDD 7+6	
Pol.	Vertical	Fundamental

Peak

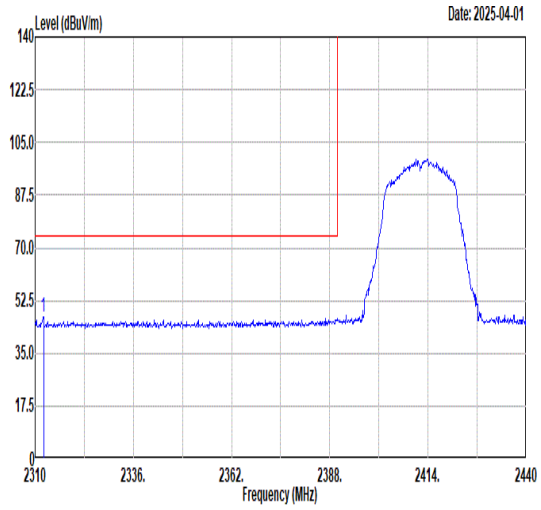

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2312.21	47.09	74.00	-26.91	41.63	30.60	7.54	32.68	331	215	PEAK

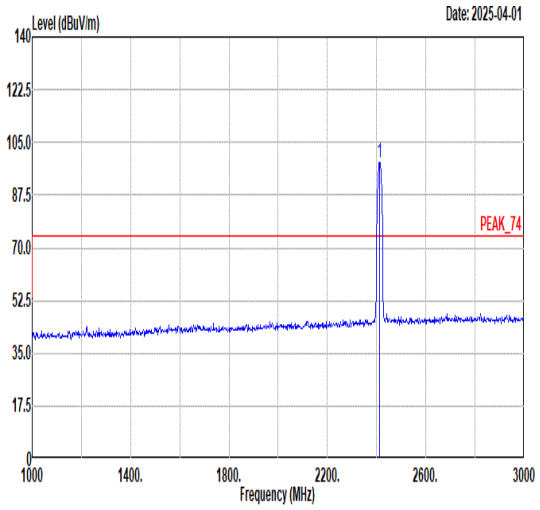

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2412.00	98.30	------	------	92.51	30.62	7.81	32.64	331	215	PEAK

Avg

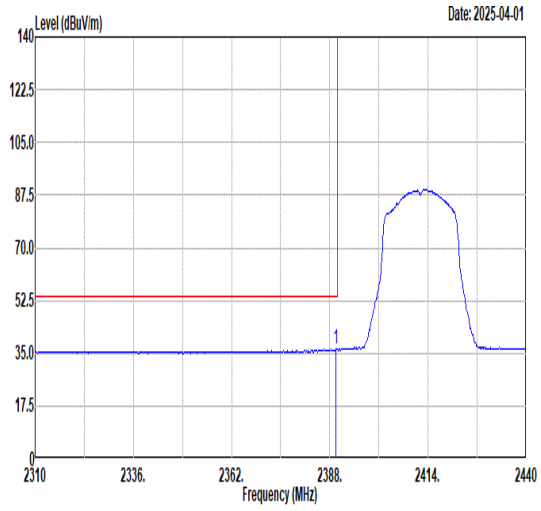

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2389.69	36.36	54.00	-17.64	30.64	30.60	7.76	32.64	331	215	AVERAGE

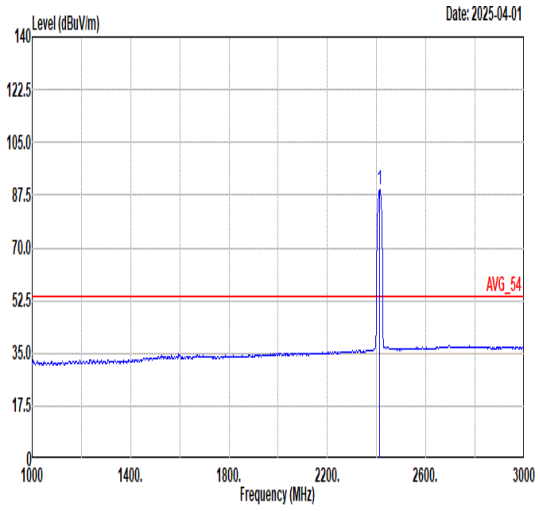

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2412.00	89.20	------	------	83.39	30.63	7.81	32.63	331	215	AVERAGE

Mode	12	
	Harmonic	
	2400-2483.5_802.11be EHT20_CH01_Full RU_2412MHz	
ANT	CDD 7+6	
Pol.	Horizontal	Vertical
Peak Avg	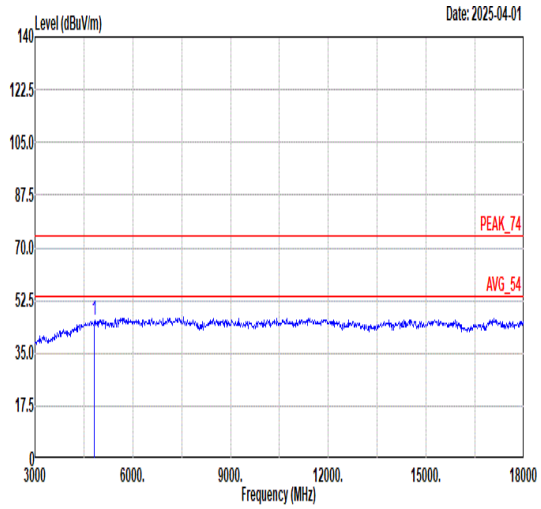 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 4824.00 45.82 74.00 -28.18 52.03 35.30 11.08 52.59 --- --- Peak	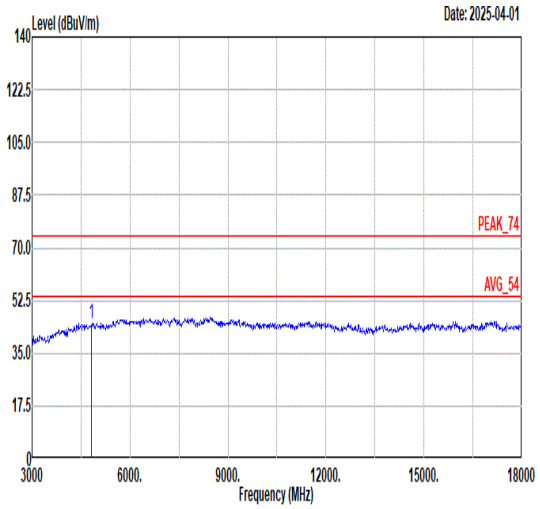 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 4824.00 44.80 74.00 -29.20 51.01 35.30 11.08 52.59 --- --- Peak

Mode	13	
	Harmonic	
	2400-2483.5_802.11be EHT20_CH06_Full RU_2437MHz	
ANT	CDD 7+6	
Pol.	Horizontal	Vertical
Peak Avg	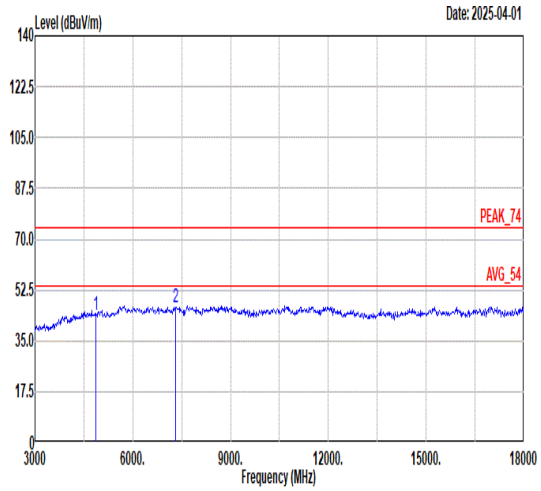 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 4874.00 44.07 74.00 -29.93 50.24 35.35 11.10 52.62 --- --- Peak 2 7311.00 46.50 74.00 -27.50 49.06 36.58 13.08 52.22 --- --- Peak	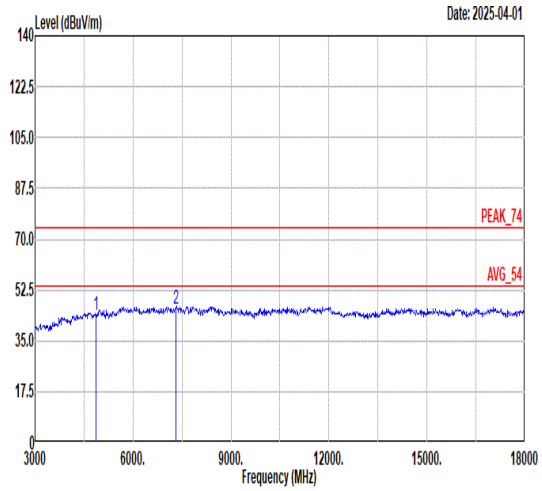 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 4874.00 43.84 74.00 -30.16 50.01 35.35 11.10 52.62 --- --- Peak 2 7311.00 45.84 74.00 -28.16 48.40 36.58 13.08 52.22 --- --- Peak

Mode	14	
	Band Edge	
	2400-2483.5_802.11be EHT20_CH11_Full RU_2462MHz	
ANT	CDD 7+6	
Pol.	Horizontal	Fundamental
Peak	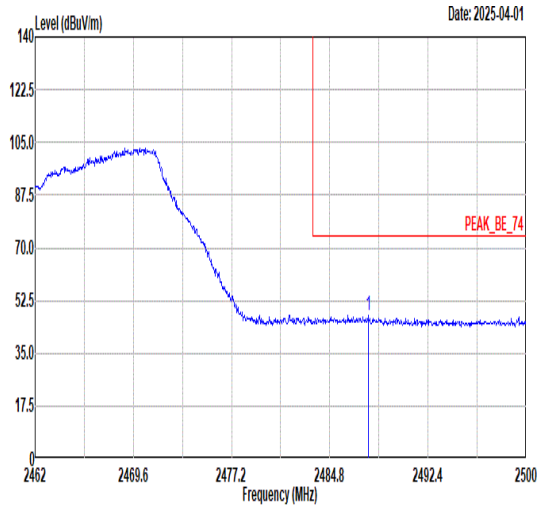	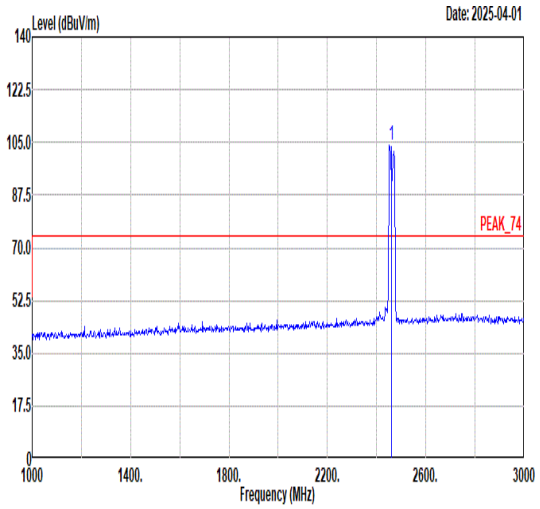
Avg	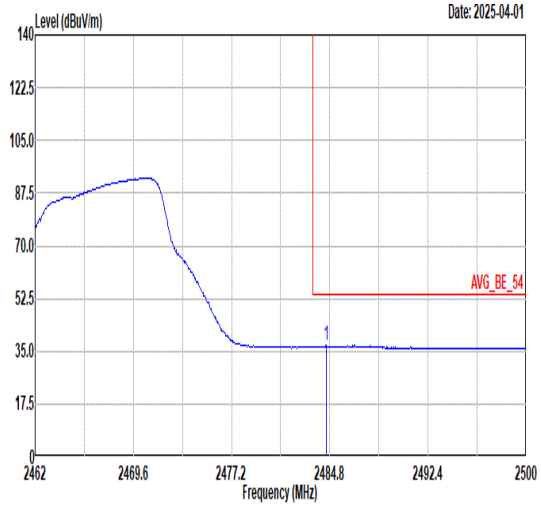	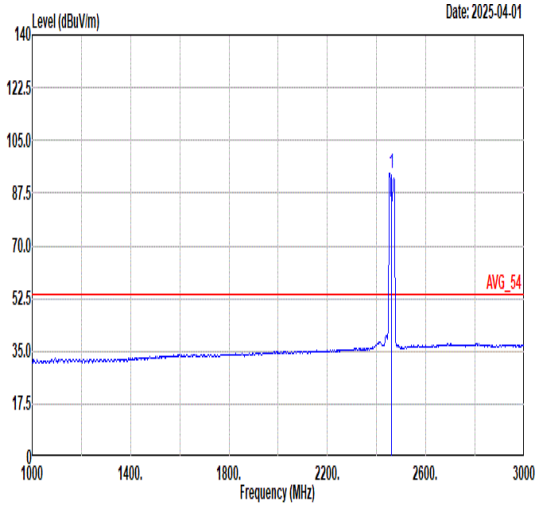

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2487.76	47.74	74.00	-26.26	41.84	30.62	7.88	32.60	365	293	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2462.00	103.89	------	------	97.96	30.70	7.85	32.62	365	293	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2484.53	36.92	54.00	-17.08	31.02	30.63	7.88	32.61	365	293	AVERAGE

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2462.00	94.01	------	------	88.09	30.69	7.85	32.62	365	293	AVERAGE

Mode	14	
	Band Edge	
	2400-2483.5_802.11be EHT20_CH11_Full RU_2462MHz	
ANT	CDD 7+6	
Pol.	Vertical	Fundamental

Peak

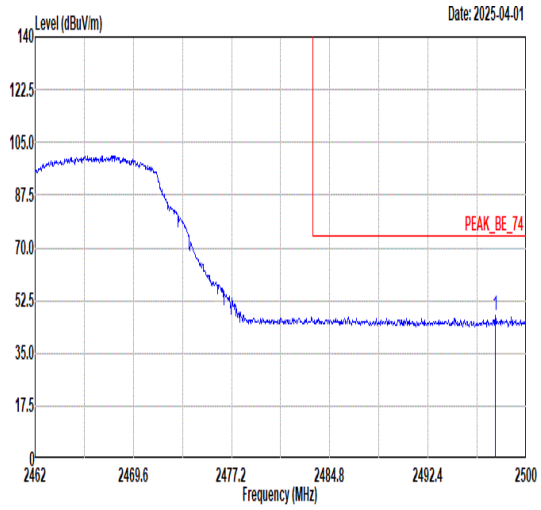

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2497.61	47.60	74.00	-26.40	41.71	30.60	7.89	32.60	345	204	PEAK

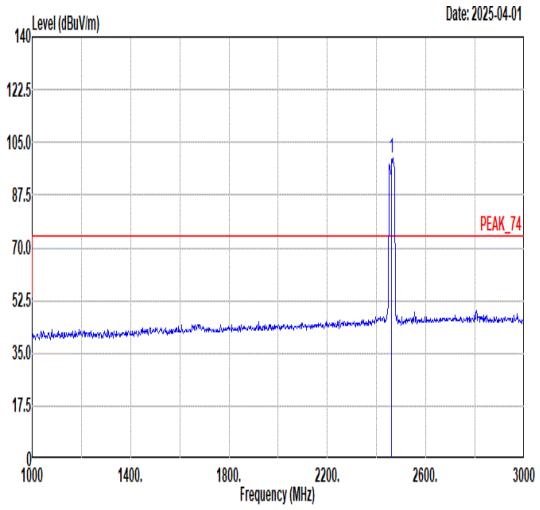

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2462.00	100.05	------	------	94.14	30.66	7.86	32.61	345	204	PEAK

Avg

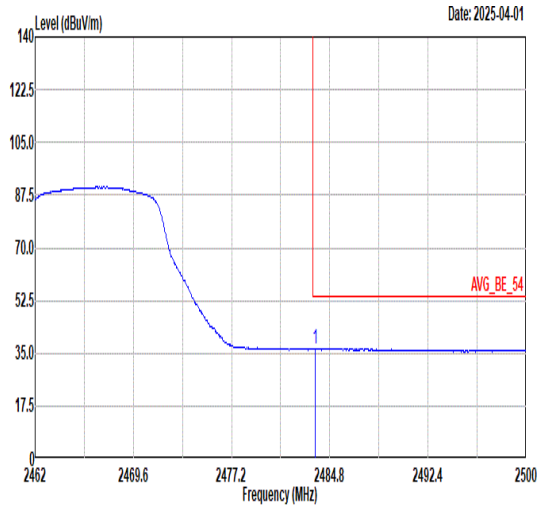

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2483.66	36.57	54.00	-17.43	30.67	30.63	7.88	32.61	345	204	AVERAGE

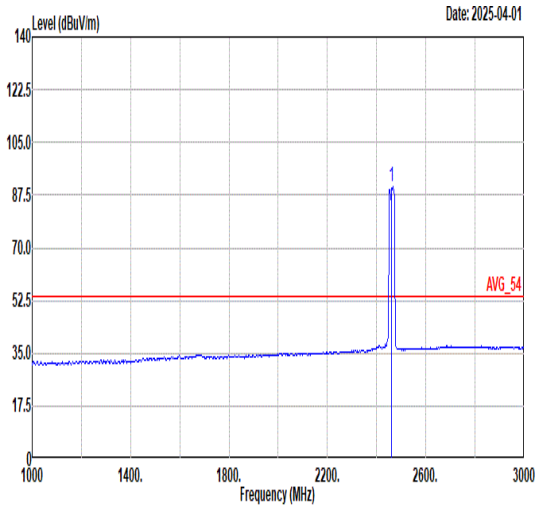

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2462.00	90.11	------	------	84.19	30.67	7.86	32.61	345	204	AVERAGE

Mode	14	
	Harmonic	
	2400-2483.5_802.11be EHT20_CH11_Full RU_2462MHz	
ANT	CDD 7+6	
Pol.	Horizontal	Vertical
Peak Avg	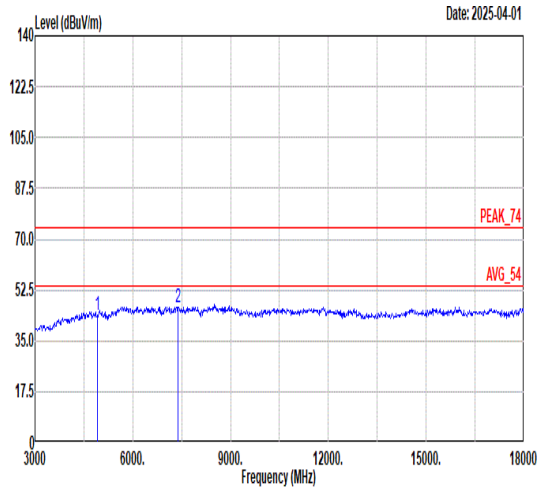	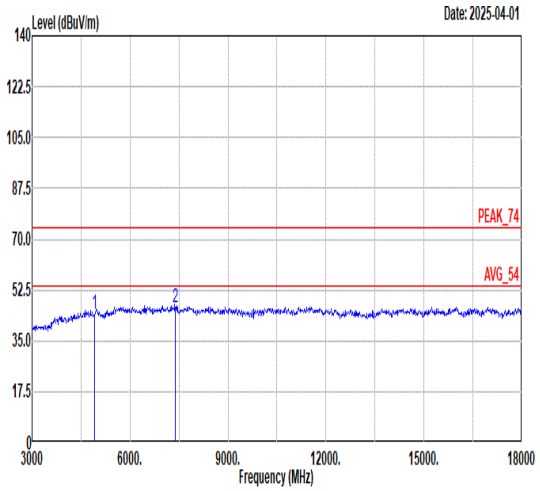

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	4924.00	43.83	74.00	-30.17	49.82	35.54	11.12	52.65	---	---	Peak
2	7386.00	46.38	74.00	-27.62	48.93	36.57	13.13	52.25	---	---	Peak

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	4924.00	44.45	74.00	-29.55	50.44	35.54	11.12	52.65	---	---	Peak
2	7386.00	46.32	74.00	-27.68	48.87	36.57	13.13	52.25	---	---	Peak

Mode	15	
	Band Edge - L	
	2400-2483.5_802.11be EHT40_CH03_Full RU_2422MHz	
ANT	CDD 7+6	
Pol.	Horizontal	Fundamental

Peak

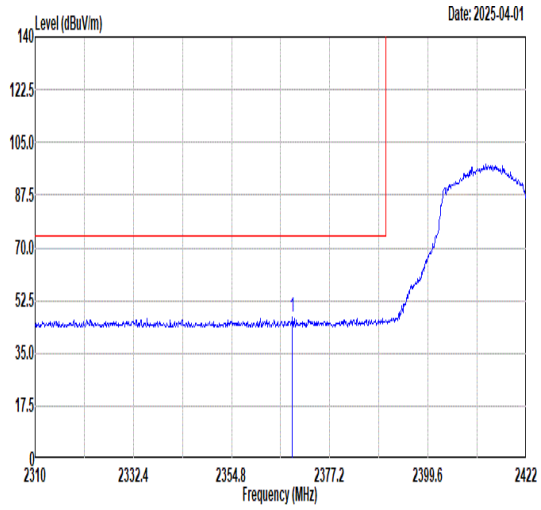

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2368.69	46.82	74.00	-27.18	41.17	30.60	7.70	32.65	210	222	PEAK

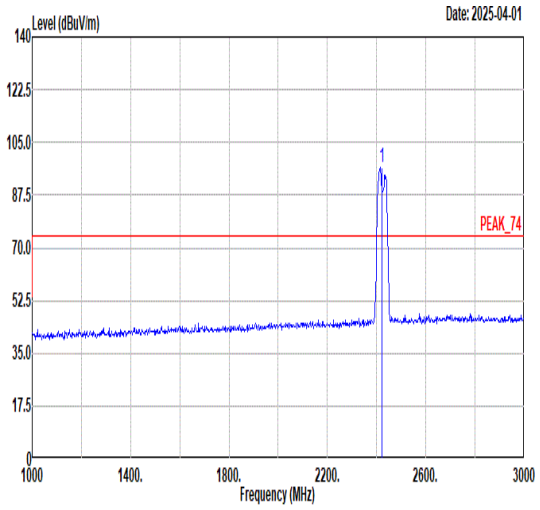

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2422.00	96.48	------	------	90.67	30.63	7.81	32.63	210	222	PEAK

Avg

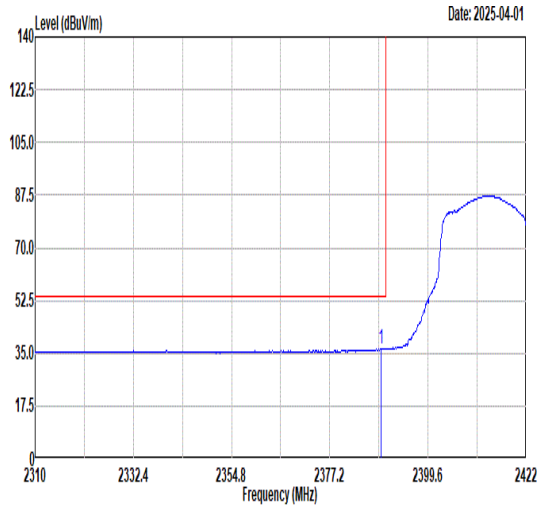

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2388.85	36.49	54.00	-17.51	30.77	30.60	7.76	32.64	210	222	AVERAGE

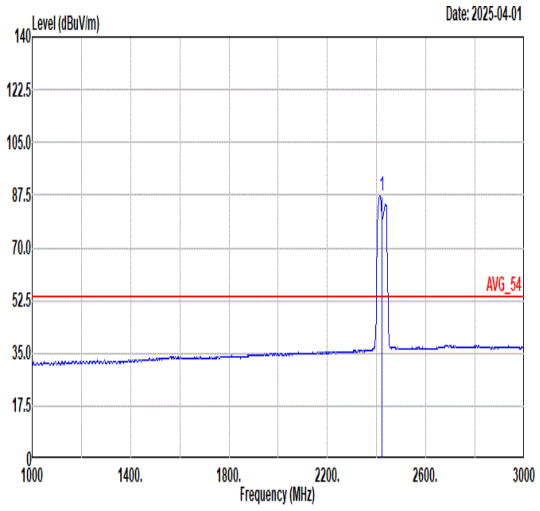

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2422.00	87.03	------	------	81.24	30.62	7.81	32.64	210	222	AVERAGE

Mode	15	
	Band Edge - R	
	2400-2483.5_802.11be EHT40_CH03_Full RU_2422MHz	
ANT	CDD 7+6	
Pol.	Horizontal	Fundamental
Peak	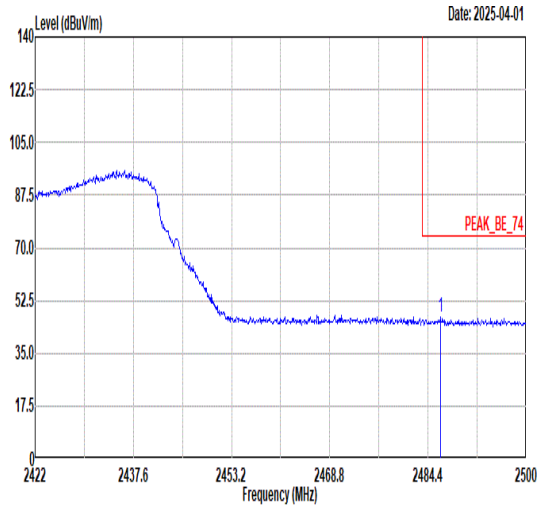	Blank
Avg	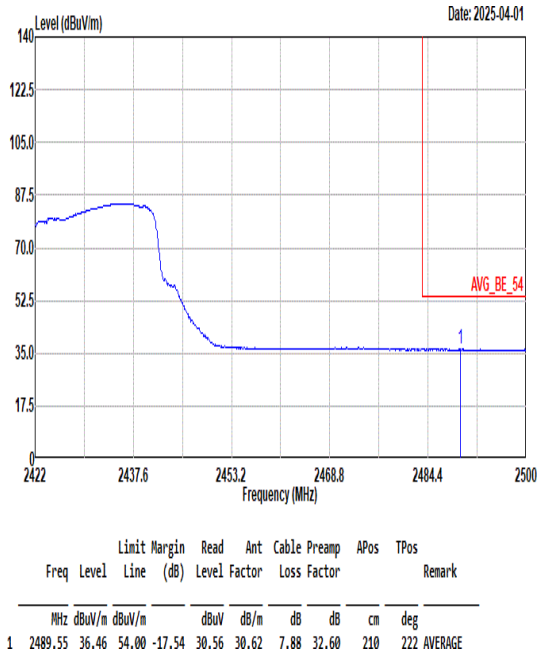	Blank

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2486.35	46.83	74.00	-27.17	40.93	30.63	7.88	32.61	210	222	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2489.55	36.46	54.00	-17.54	30.56	30.62	7.88	32.60	210	222	AVERAGE

Mode	15	
	Band Edge - L	
	2400-2483.5_802.11be EHT40_CH03_Full RU_2422MHz	
ANT	CDD 7+6	
Pol.	Vertical	Fundamental

Peak

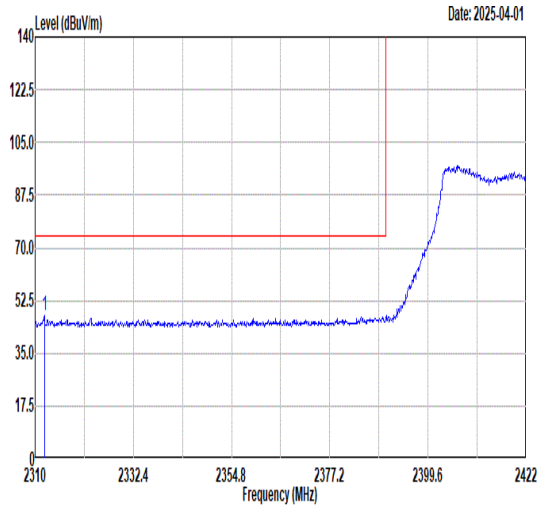

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2312.13	47.46	74.00	-26.54	42.00	30.60	7.54	32.68	368	205	PEAK

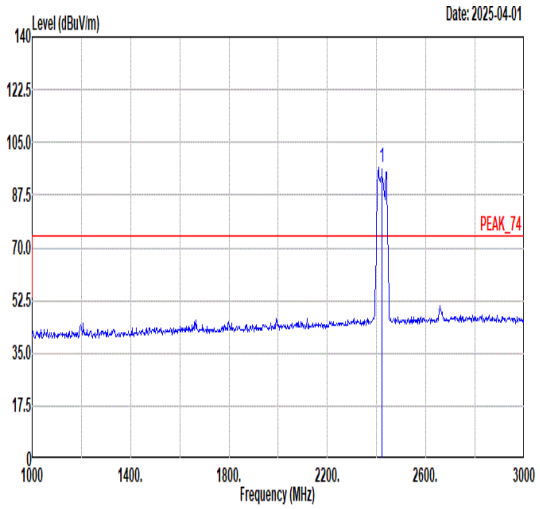

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2422.00	96.81	------	------	91.03	30.62	7.80	32.64	368	205	PEAK

Avg

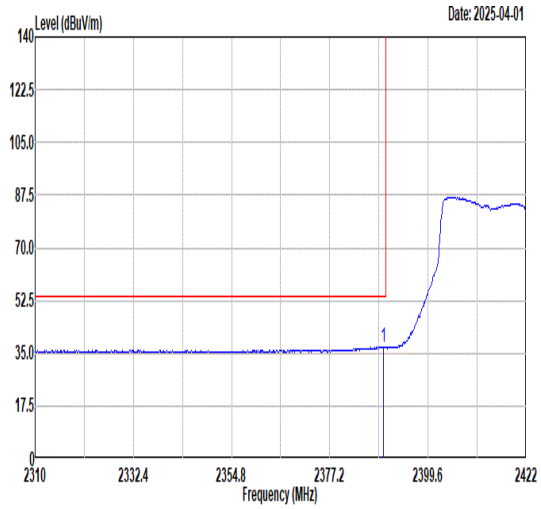

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2389.52	37.16	54.00	-16.84	31.44	30.60	7.76	32.64	368	205	AVERAGE

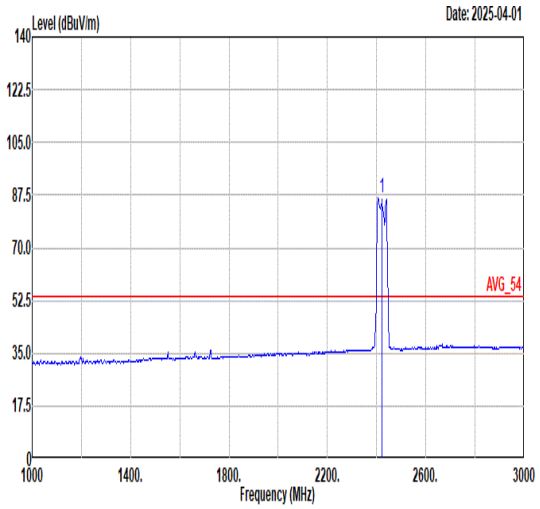

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2422.00	86.43	------	------	80.66	30.61	7.80	32.64	368	205	AVERAGE

Mode	15	
	Band Edge - R	
	2400-2483.5_802.11be EHT40_CH03_Full RU_2422MHz	
ANT	CDD 7+6	
Pol.	Vertical	Fundamental
Peak	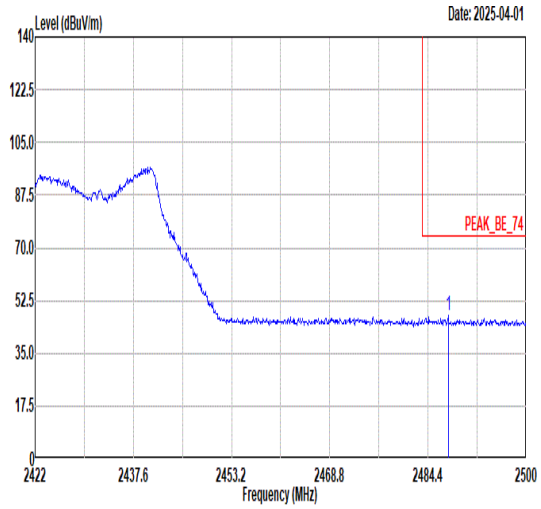	Blank
Avg	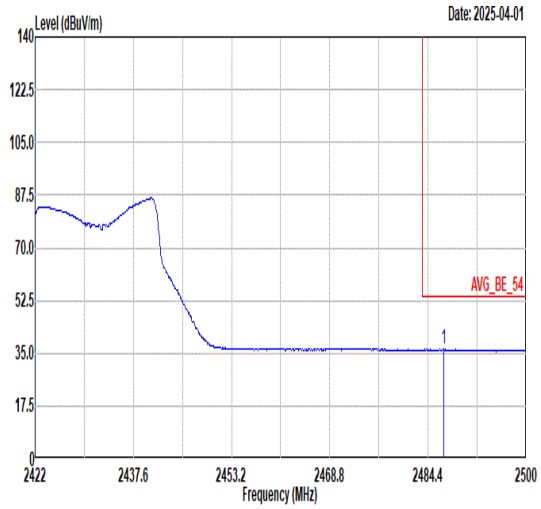	Blank

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2487.60	47.51	74.00	-26.49	41.61	30.62	7.88	32.60	368	205	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2486.90	36.27	54.00	-17.73	30.37	30.63	7.88	32.61	368	205	AVERAGE

Mode	16	
	Band Edge - L	
	2400-2483.5_802.11be EHT40_CH09_Full RU_2452MHz	
ANT	CDD 7+6	
Pol.	Horizontal	Fundamental
Peak	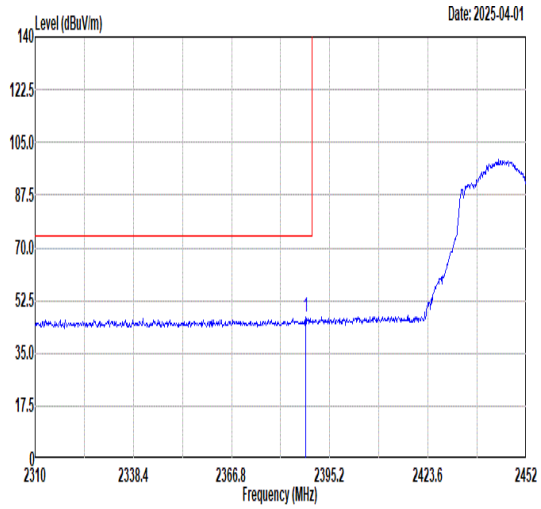	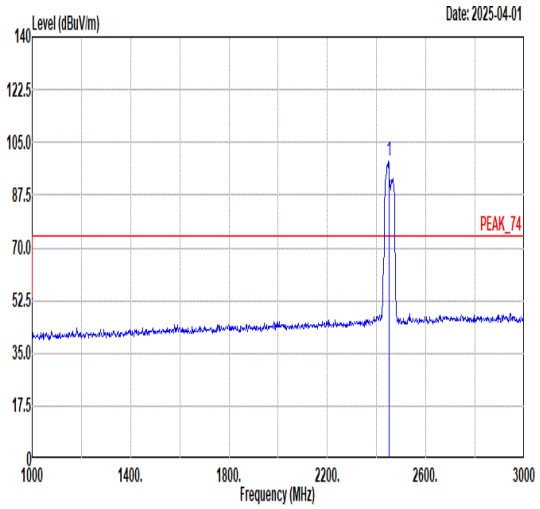
Avg	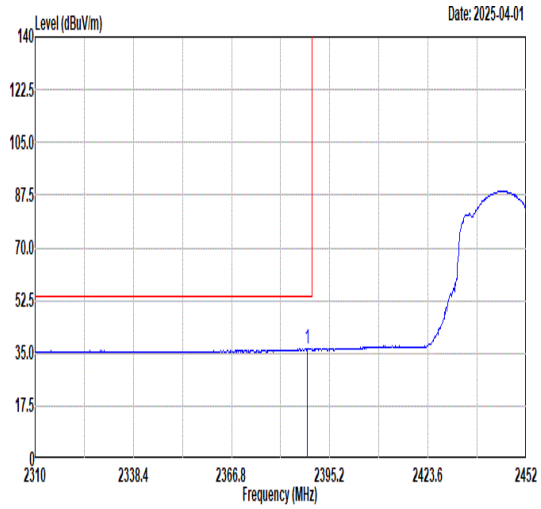	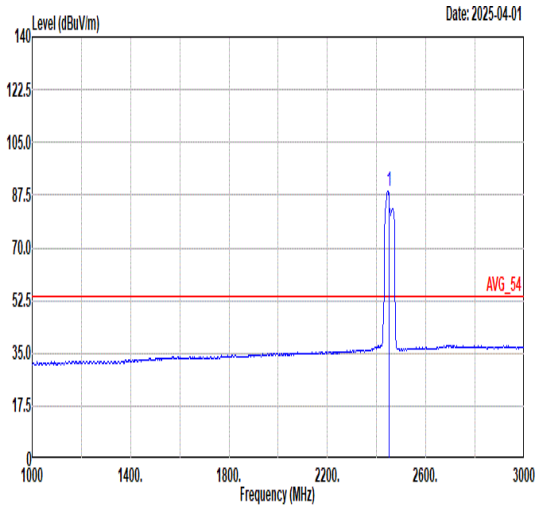

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2388.24	46.81	74.00	-27.19	41.09	30.60	7.76	32.64	205	221	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2452.00	98.82	------	------	92.91	30.69	7.84	32.62	205	221	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2388.67	36.53	54.00	-17.47	30.81	30.60	7.76	32.64	205	221	AVERAGE

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2452.00	88.69	------	------	82.78	30.69	7.84	32.62	205	221	AVERAGE

Mode	16	
	Band Edge - R	
	2400-2483.5_802.11be EHT40_CH09_Full RU_2452MHz	
ANT	CDD 7+6	
Pol.	Horizontal	Fundamental
Peak	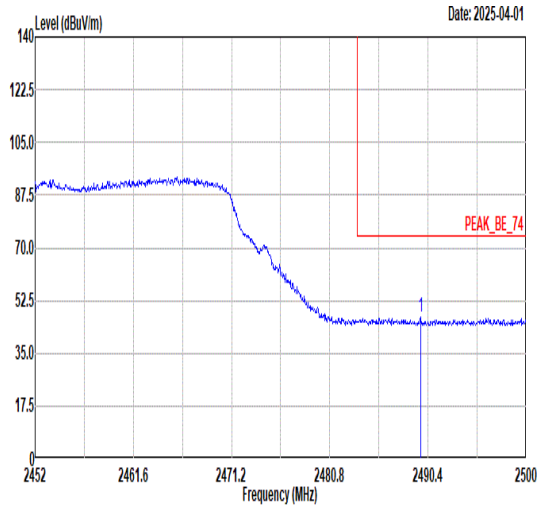	Blank
Avg	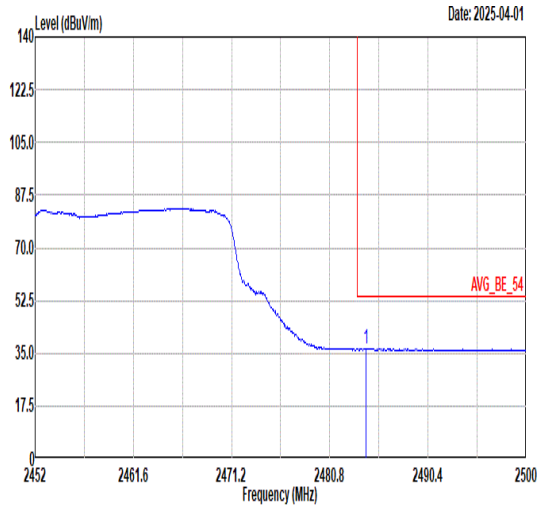	Blank

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2489.68	46.80	74.00	-27.20	40.90	30.62	7.88	32.60	205	221	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2484.35	36.55	54.00	-17.45	30.65	30.63	7.88	32.61	205	221	AVERAGE

Mode	16	
	Band Edge - L	
	2400-2483.5_802.11be EHT40_CH09_Full RU_2452MHz	
ANT	CDD 7+6	
Pol.	Vertical	Fundamental
Peak	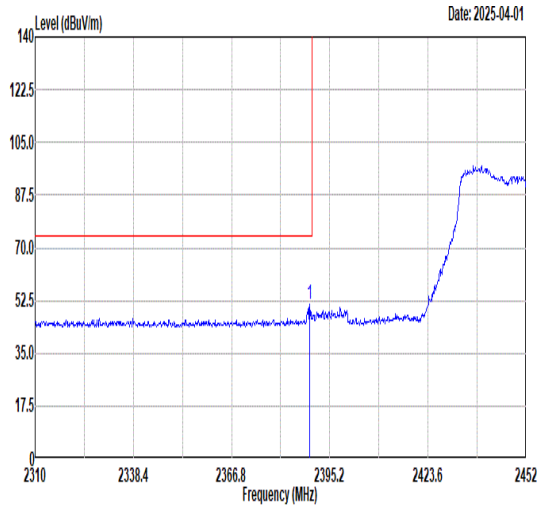	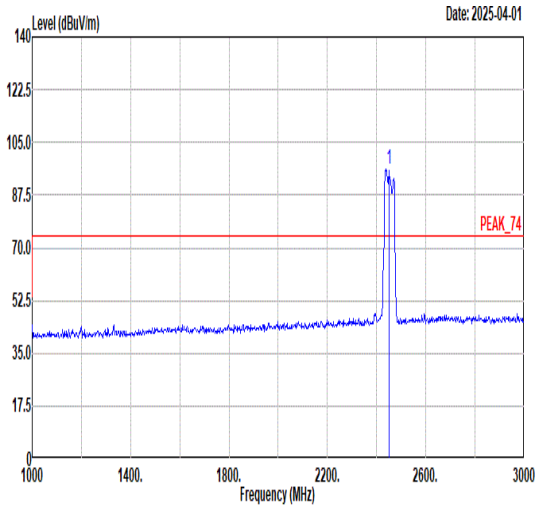
Avg	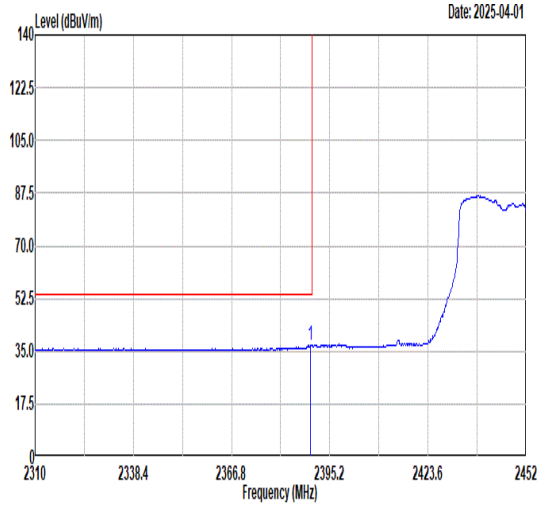	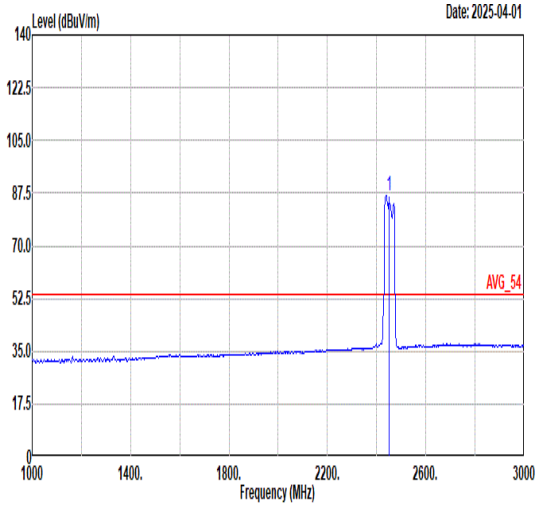

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2389.38	51.02	74.00	-22.98	45.30	30.60	7.76	32.64	350	201	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2452.00	96.15	------	------	90.26	30.68	7.83	32.62	350	201	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2389.66	37.04	54.00	-16.96	31.32	30.60	7.76	32.64	350	201	AVERAGE

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2452.00	86.45	------	------	80.55	30.68	7.84	32.62	350	201	AVERAGE

Mode	16	
	Band Edge - R	
	2400-2483.5_802.11be EHT40_CH09_Full RU_2452MHz	
ANT	CDD 7+6	
Pol.	Vertical	Fundamental
Peak	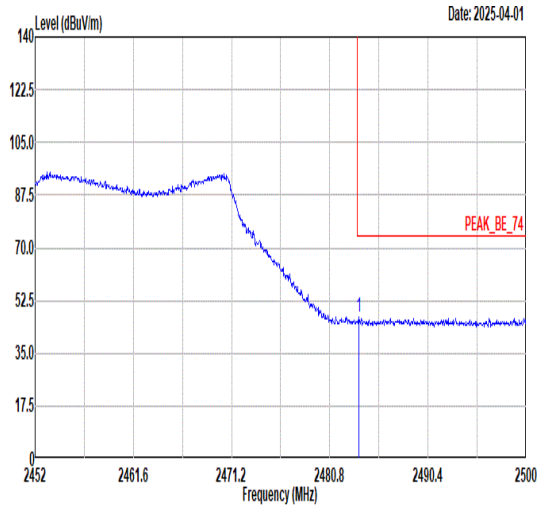	Blank
Avg	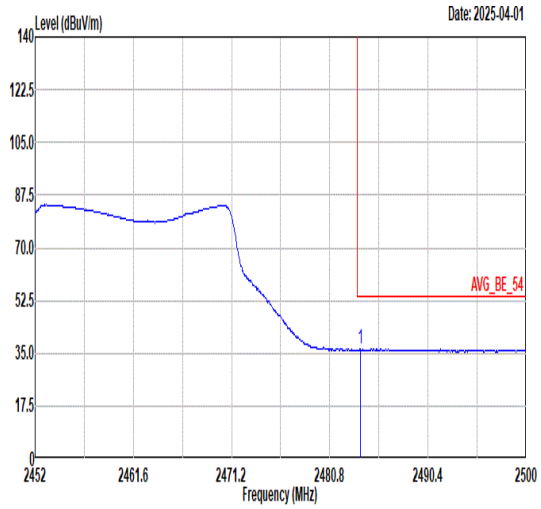	Blank

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2483.63	47.26	74.00	-26.74	41.36	30.63	7.88	32.61	350	201	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2483.78	36.34	54.00	-17.66	30.44	30.63	7.88	32.61	350	201	AVERAGE

Mode	17	
	Band Edge	
	2400-2483.5_802.11be EHT20_CH01_Single RU 106/53 _2412MHz	
ANT	CDD 7+6	
Pol.	Horizontal	Fundamental
Peak	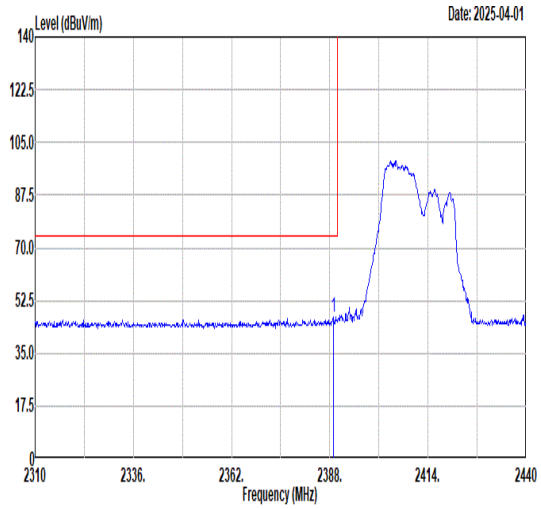	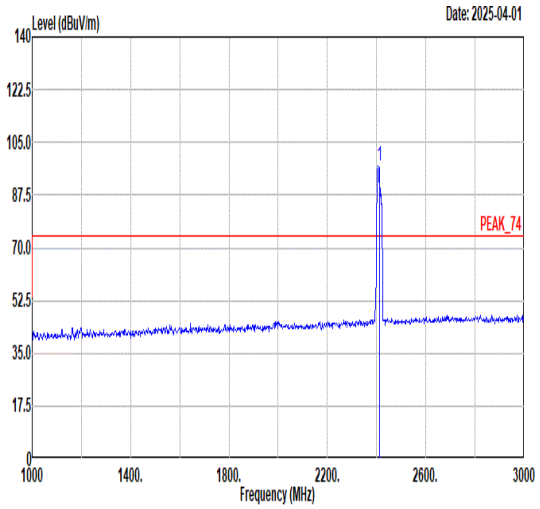
Avg	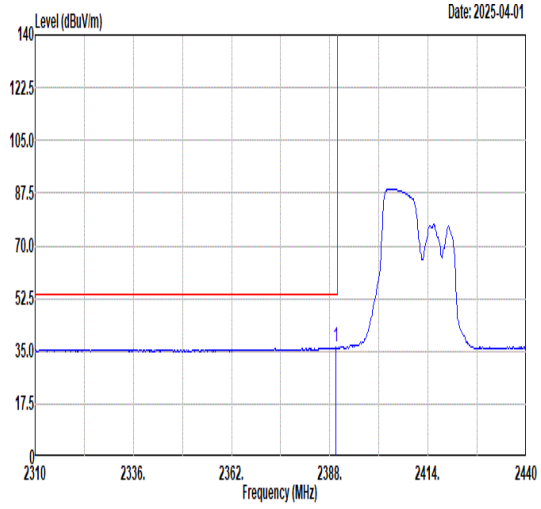	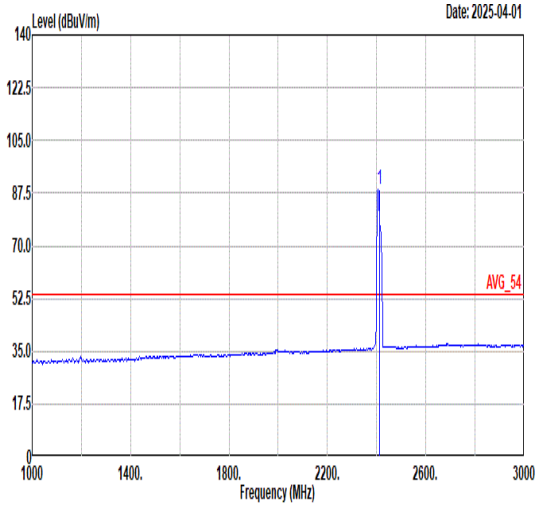

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2389.04	46.85	74.00	-27.15	41.13	30.60	7.76	32.64	387	72	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2412.00	97.33	------	------	91.56	30.61	7.80	32.64	387	72	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2389.69	36.41	54.00	-17.59	30.69	30.60	7.76	32.64	387	72	AVERAGE

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2412.00	88.87	------	------	83.10	30.61	7.80	32.64	387	72	AVERAGE

Mode	17	
	Band Edge	
	2400-2483.5_802.11be EHT20_CH01_Single RU 106/53_2412MHz	
ANT	CDD 7+6	
Pol.	Vertical	Fundamental
Peak	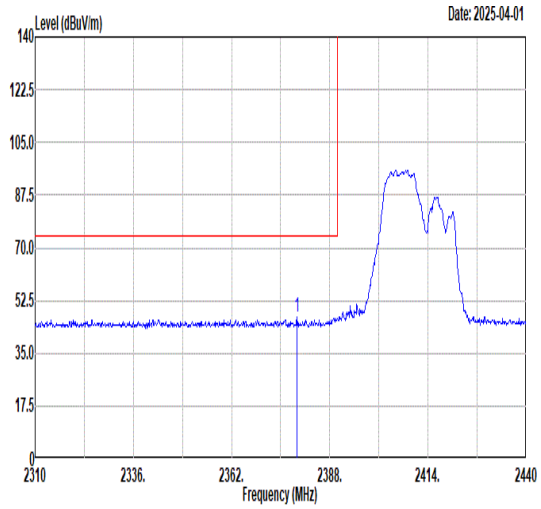	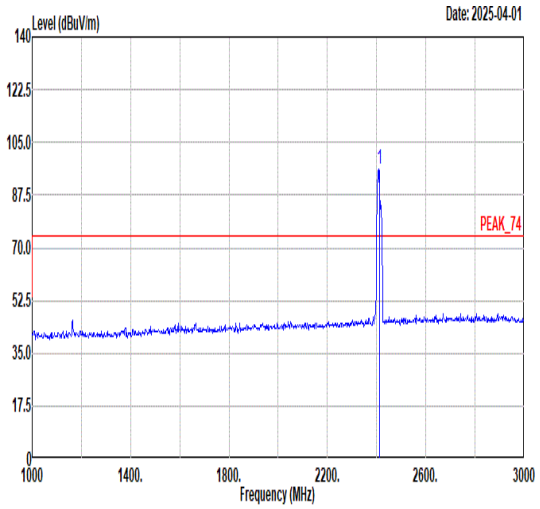
Avg	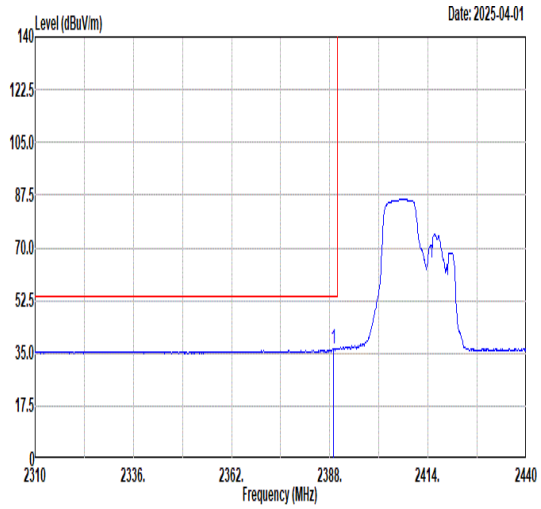	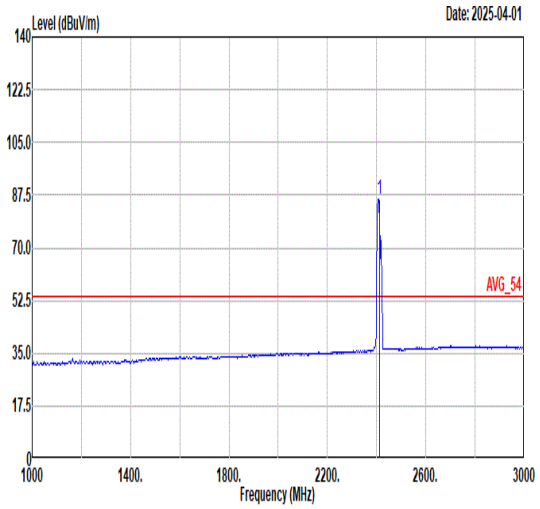

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2379.29	46.87	74.00	-27.13	41.19	30.60	7.73	32.65	390	162	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2412.00	95.92	------	------	90.14	30.62	7.80	32.64	390	162	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2389.04	36.71	54.00	-17.29	30.99	30.60	7.76	32.64	390	162	AVERAGE

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2412.00	86.05	------	------	80.27	30.62	7.80	32.64	390	162	AVERAGE

Mode	18	
	Band Edge	
	2400-2483.5_802.11be EHT20_CH11_Single RU 106/54_2462MHz	
ANT	CDD 7+6	
Pol.	Horizontal	Fundamental

Peak

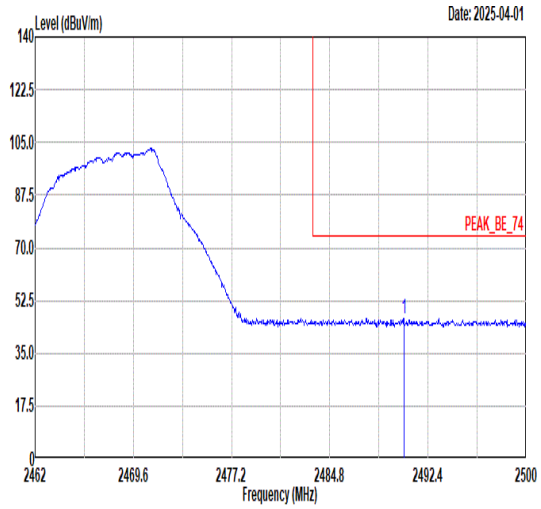

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2490.54	46.42	74.00	-27.58	40.52	30.62	7.88	32.60	361	299	PEAK

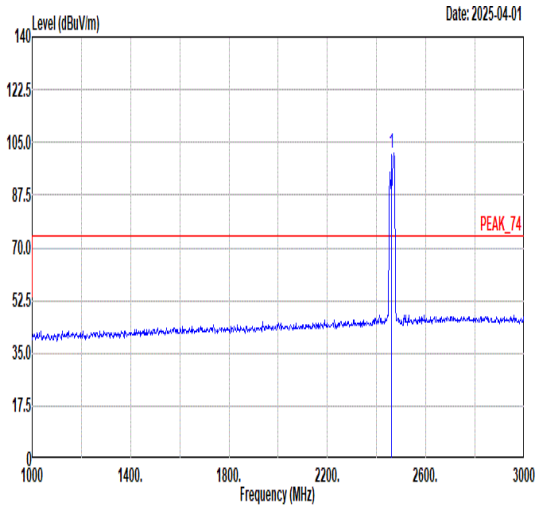

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2462.00	101.45	------	------	95.54	30.66	7.86	32.61	361	299	PEAK

Avg

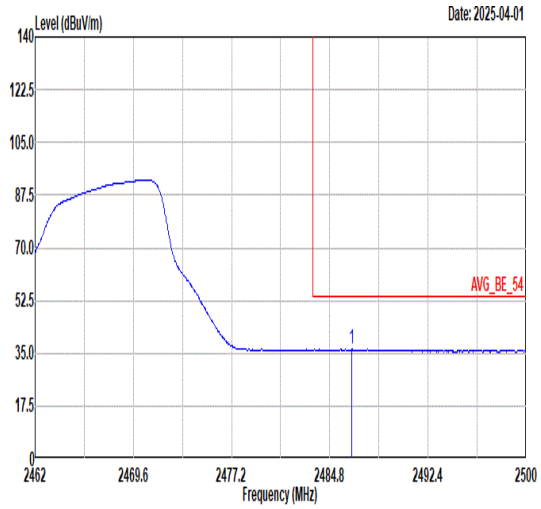

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2486.51	36.44	54.00	-17.56	30.54	30.63	7.88	32.61	361	299	AVERAGE

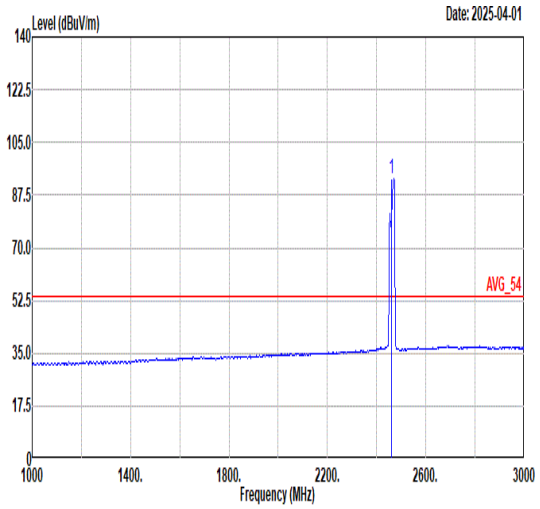

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2462.00	92.79	------	------	86.88	30.66	7.86	32.61	361	299	AVERAGE

Mode	18	
	Band Edge	
	2400-2483.5_802.11be EHT20_CH11_Single RU 106/54_2462MHz	
ANT	CDD 7+6	
Pol.	Vertical	Fundamental
Peak	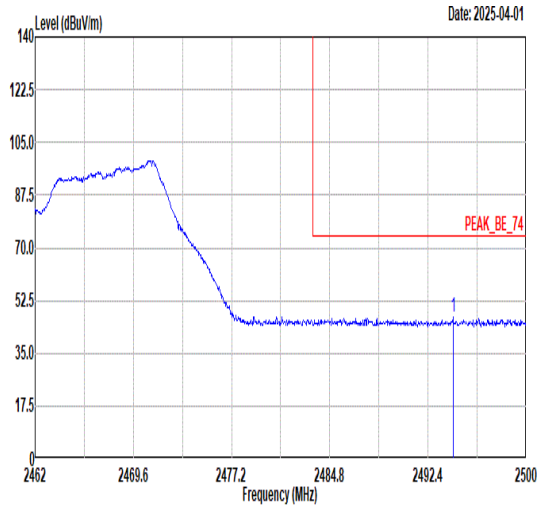	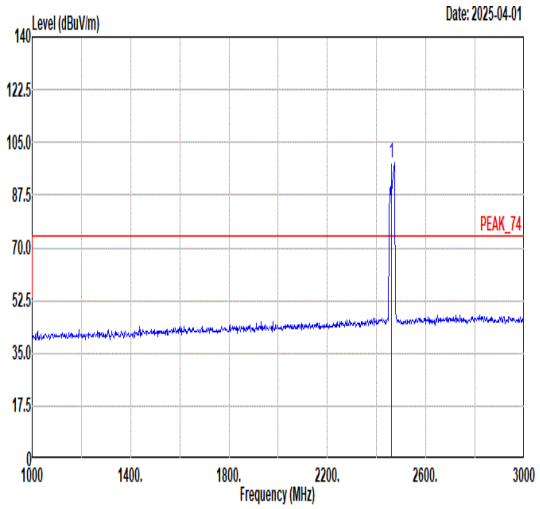
Avg	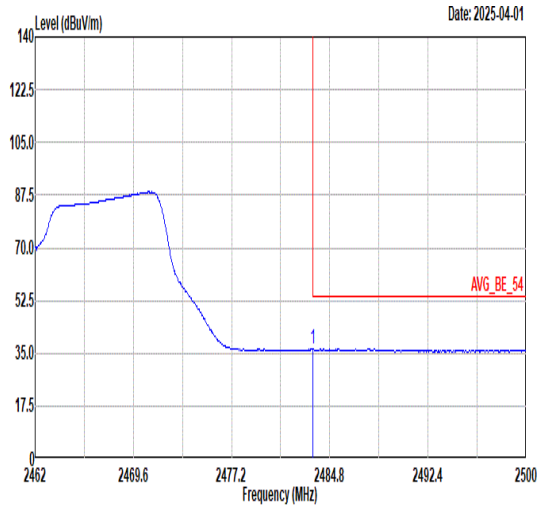	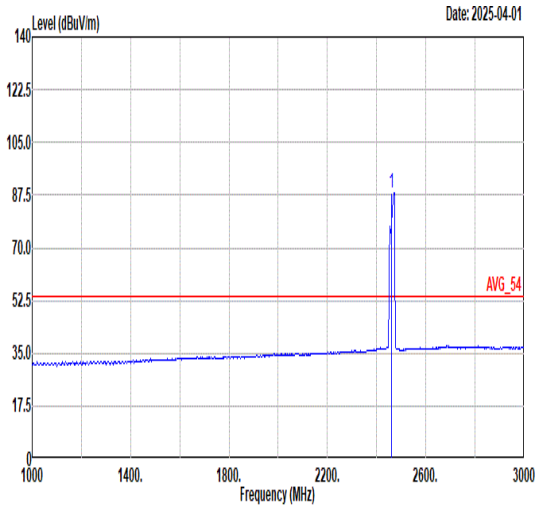

	Freq	Level	Limit Line	Margin (dB)	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	
1	2494.34	46.76	74.00	-27.24	40.86	30.61	7.89	32.60	400	159	PEAK

	Freq	Level	Limit Line	Margin (dB)	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	
1	2462.00	98.15	------	------	92.23	30.66	7.87	32.61	400	159	PEAK

	Freq	Level	Limit Line	Margin (dB)	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	
1	2483.51	36.42	54.00	-17.58	30.52	30.63	7.88	32.61	400	159	AVERAGE

	Freq	Level	Limit Line	Margin (dB)	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	
1	2462.00	88.12	------	------	82.21	30.66	7.86	32.61	400	159	AVERAGE

Mode	19	
	Band Edge	
	2400-2483.5_802.11be EHT20_CH01_Small RU 106+26_2412MHz	
ANT	CDD 7+6	
Pol.	Horizontal	Fundamental

Peak

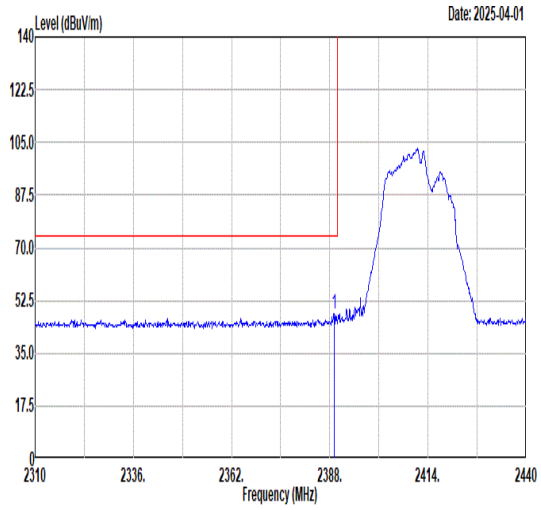

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2389.17	48.05	74.00	-25.95	42.33	30.60	7.76	32.64	385	317	PEAK

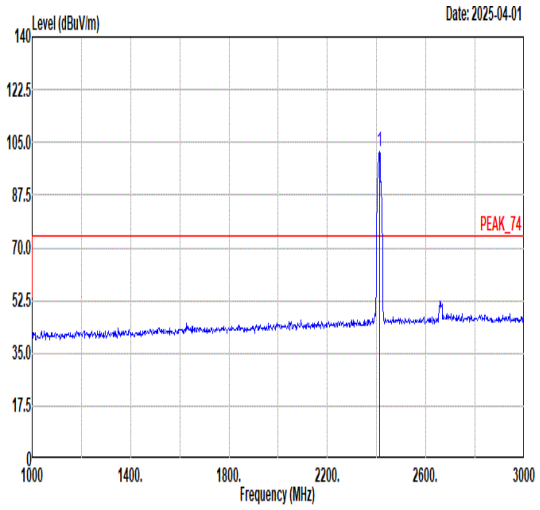

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2412.00	101.76	------	------	95.97	30.62	7.81	32.64	385	317	PEAK

Avg

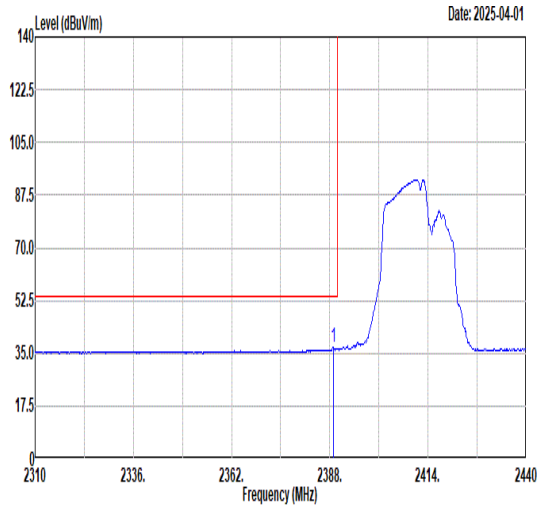

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2388.91	36.89	54.00	-17.11	31.17	30.60	7.76	32.64	385	317	AVERAGE

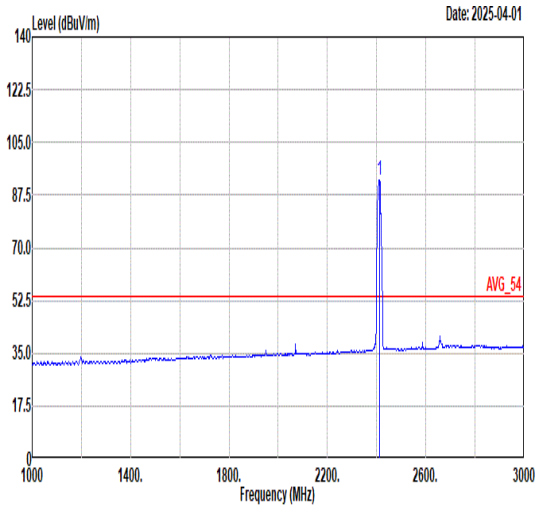

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2412.00	92.36	------	------	86.57	30.62	7.81	32.64	385	317	AVERAGE

Mode	19	
	Band Edge	
	2400-2483.5_802.11be EHT20_CH01_Small RU 106+26_2412MHz	
ANT	CDD 7+6	
Pol.	Vertical	Fundamental
Peak	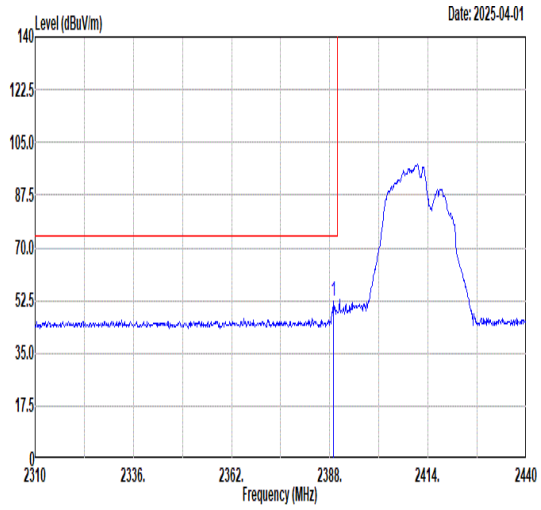	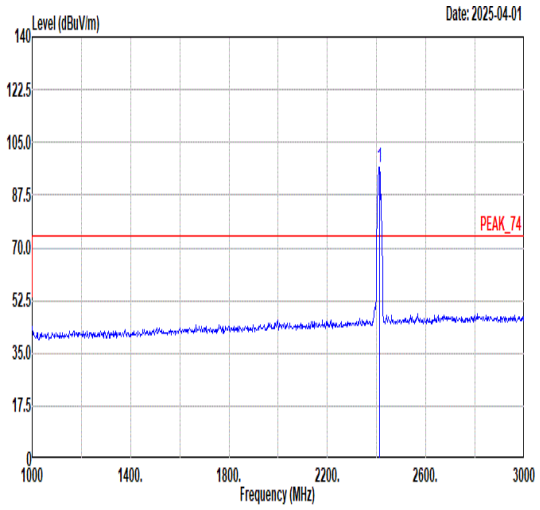
Avg	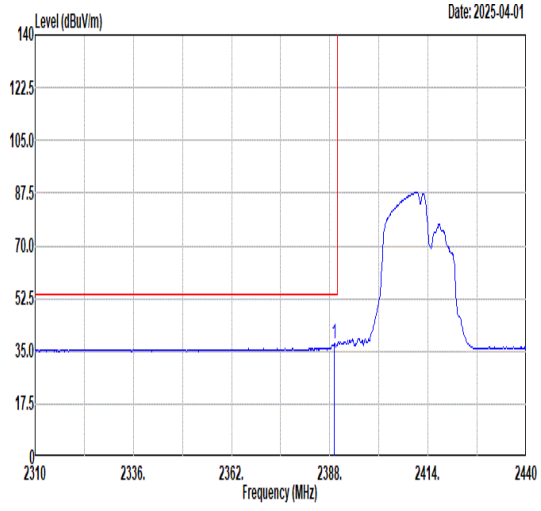	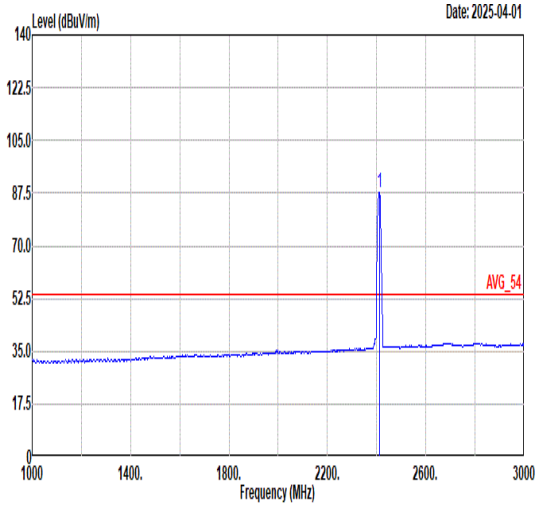

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2389.04	52.56	74.00	-21.44	46.84	30.60	7.76	32.64	355	153	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2412.00	96.74	------	------	90.95	30.62	7.81	32.64	355	153	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2389.17	37.51	54.00	-16.49	31.79	30.60	7.76	32.64	355	153	AVERAGE

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2412.00	87.59	------	------	81.80	30.62	7.81	32.64	355	153	AVERAGE

Mode	20	
	Band Edge	
	2400-2483.5_802.11be EHT20_CH11_Small RU 106+26_2462MHz	
ANT	CDD 7+6	
Pol.	Horizontal	Fundamental
Peak	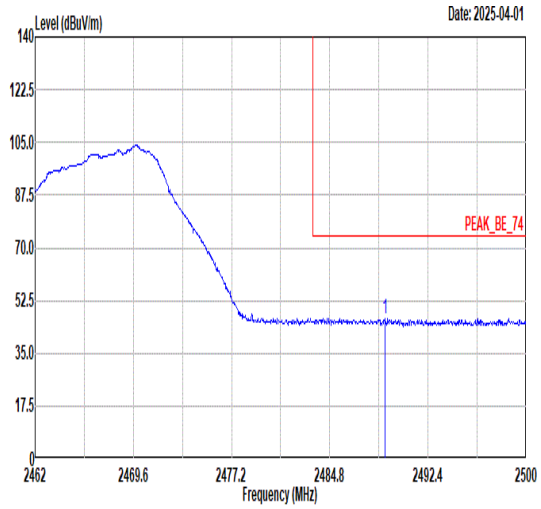	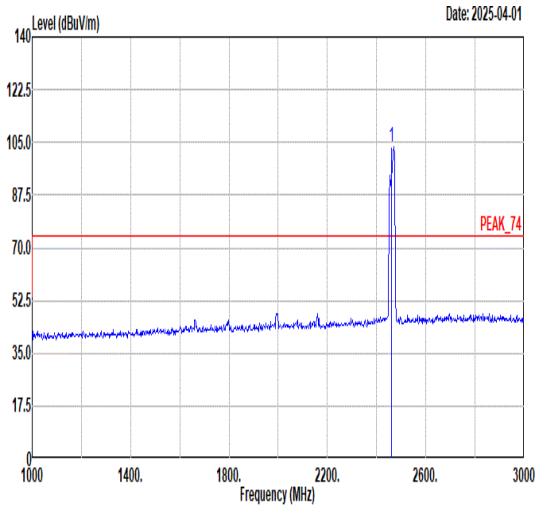
Avg	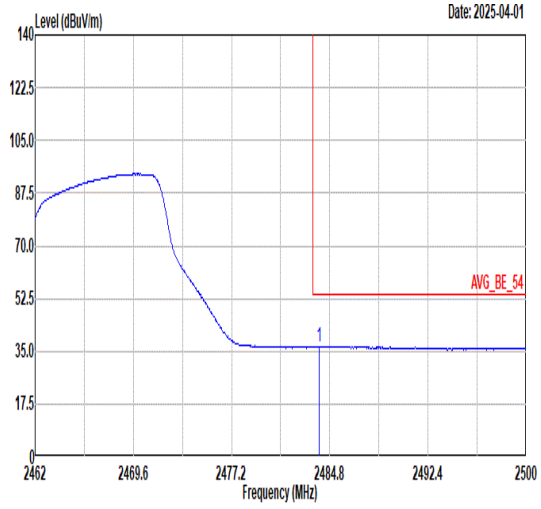	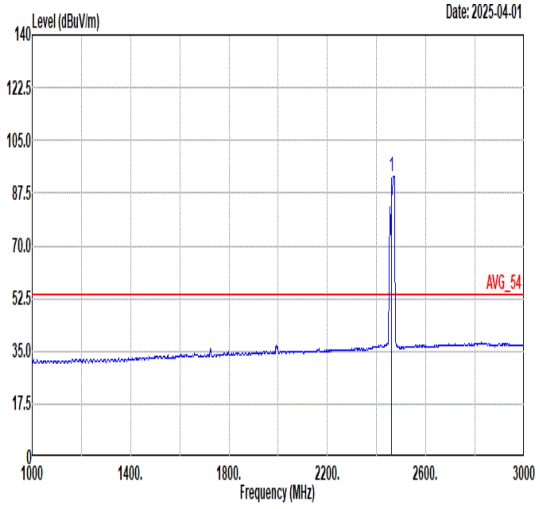

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2489.09	46.67	74.00	-27.33	40.77	30.62	7.88	32.60	358	299	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2462.00	103.66	------	------	97.75	30.66	7.86	32.61	358	299	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2484.00	36.71	54.00	-17.29	30.81	30.63	7.88	32.61	358	299	AVERAGE

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2462.00	93.20	------	------	87.29	30.66	7.86	32.61	358	299	AVERAGE

Mode	20	
	Band Edge	
	2400-2483.5_802.11be EHT20_CH11_Small RU 106+26_2462MHz	
ANT	CDD 7+6	
Pol.	Vertical	Fundamental
Peak	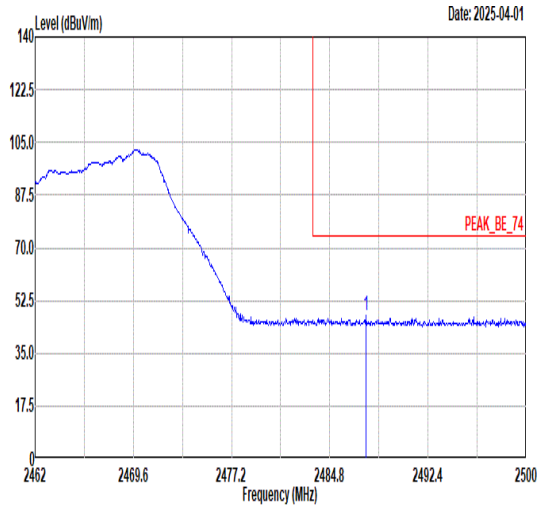	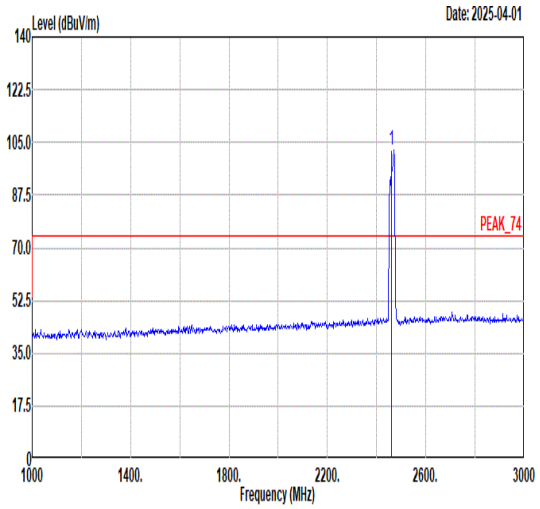
Avg	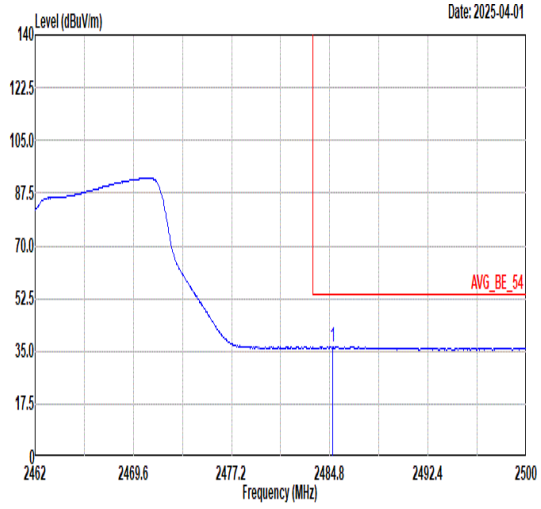	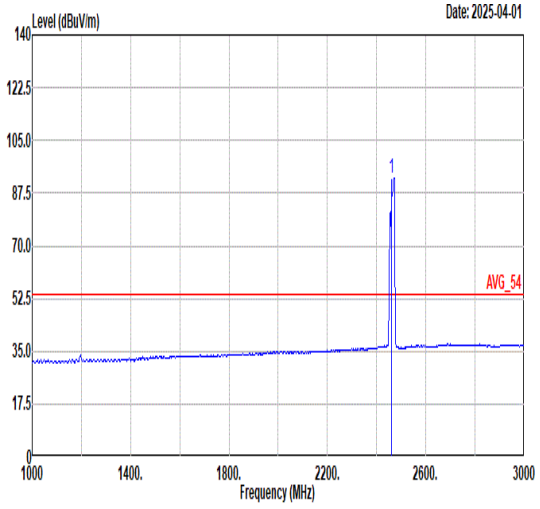

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2487.57	47.60	74.00	-26.40	41.70	30.62	7.88	32.60	365	1	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2462.00	102.73	------	------	96.82	30.66	7.86	32.61	365	1	PEAK

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2485.03	36.43	54.00	-17.57	30.53	30.63	7.88	32.61	365	1	AVERAGE

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	
1	2462.00	92.38	------	------	86.47	30.66	7.86	32.61	365	1	AVERAGE

Mode	21	
	LF	
	2400-2483.5_802.11b_CH01_2412MHz	
ANT	CDD 7+6	
Pol.	Horizontal	Vertical

QP/ Peak

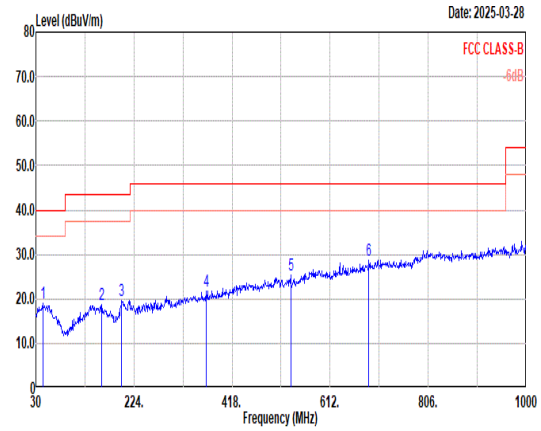

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	43.58	18.98	40.00	-21.02	37.56	20.12	1.22	39.92	---	---	Peak
2	159.98	18.57	43.50	-24.93	36.97	19.32	2.30	40.02	---	---	Peak
3	199.75	19.67	43.50	-23.83	40.66	16.43	2.57	39.99	---	---	Peak
4	366.59	21.73	46.00	-24.27	36.81	21.28	3.45	39.81	---	---	Peak
5	534.40	25.25	46.00	-20.75	36.32	24.45	4.16	39.68	---	---	Peak
6	688.63	28.70	46.00	-17.30	36.77	26.79	4.71	39.57	---	---	Peak

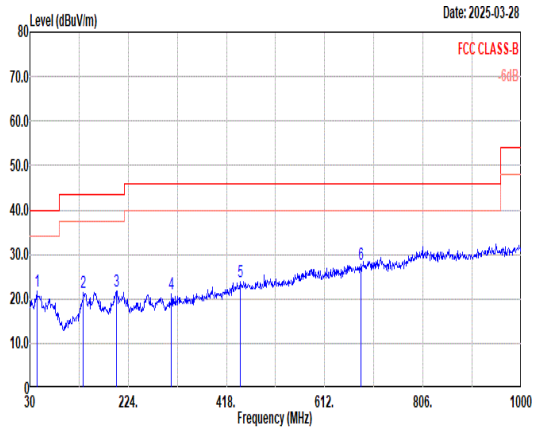

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	43.58	21.64	40.00	-18.36	40.22	20.12	1.22	39.92	---	---	Peak
2	135.73	21.41	43.50	-22.09	40.63	18.71	2.11	40.04	---	---	Peak
3	200.72	21.69	43.50	-21.81	42.67	16.43	2.58	39.99	---	---	Peak
4	309.36	21.01	46.00	-24.99	37.83	19.93	3.17	39.92	---	---	Peak
5	445.16	23.98	46.00	-22.02	36.83	23.08	3.80	39.73	---	---	Peak
6	683.78	27.82	46.00	-18.18	36.01	26.69	4.69	39.57	---	---	Peak

Co-location

Mode	22	
	Band Edge	
	2400-2483.5_802.11b_CH01_2412MHz Tx + Band14 LINK	
ANT	CDD 7+6	
Pol.	Horizontal	Fundamental
Peak	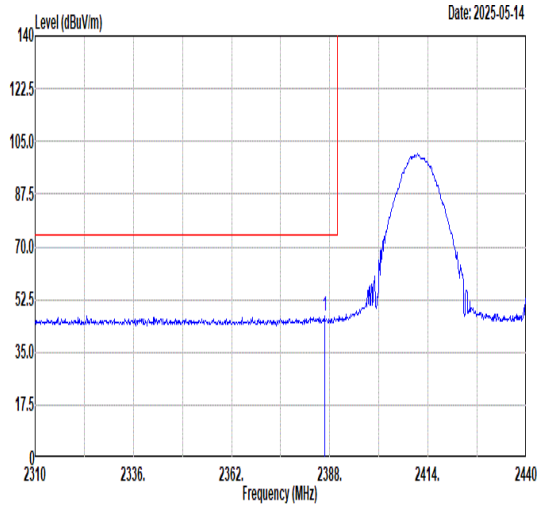	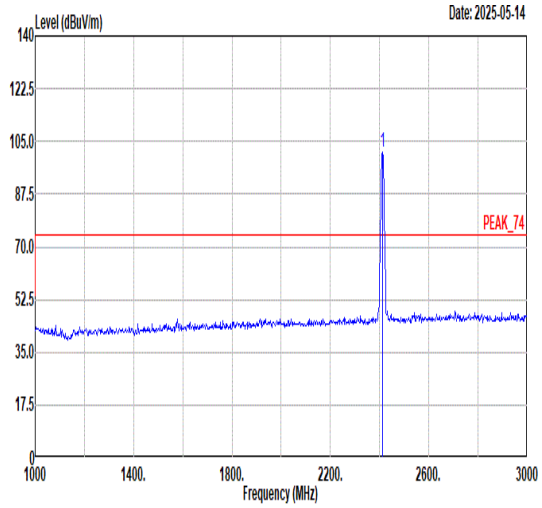
Avg	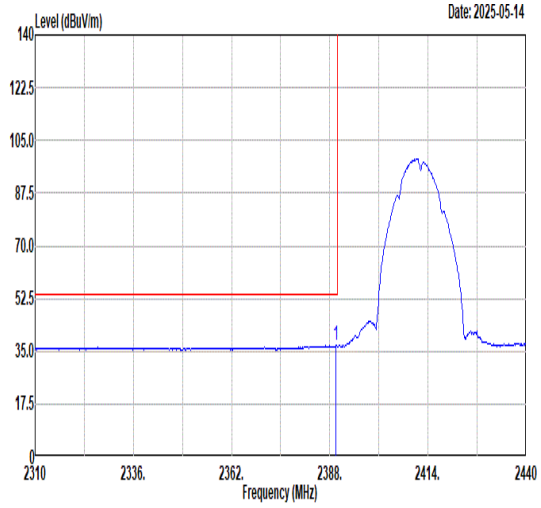	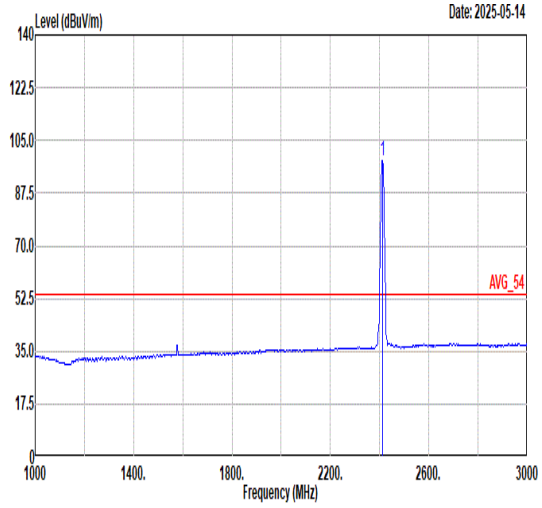

	Freq	Level	Limit Line	Margin (dB)	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	
1	2386.57	47.22	74.00	-26.78	42.41	30.60	6.86	32.65	400	134	PEAK

	Freq	Level	Limit Line	Margin (dB)	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	
1	2412.00	101.26	------	------	96.39	30.62	6.89	32.64	400	134	PEAK

	Freq	Level	Limit Line	Margin (dB)	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	
1	2389.69	36.80	54.00	-17.20	31.97	30.60	6.87	32.64	400	134	AVERAGE

	Freq	Level	Limit Line	Margin (dB)	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	
1	2412.00	98.36	------	------	93.49	30.62	6.89	32.64	400	134	AVERAGE

Mode	22	
	Band Edge	
	2400-2483.5_802.11b_CH01_2412MHz Tx + Band14 LINK	
ANT	CDD 7+6	
Pol.	Vertical	Fundamental
Peak	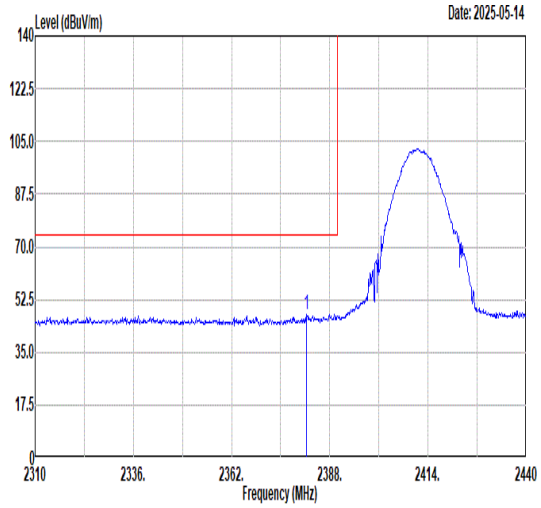	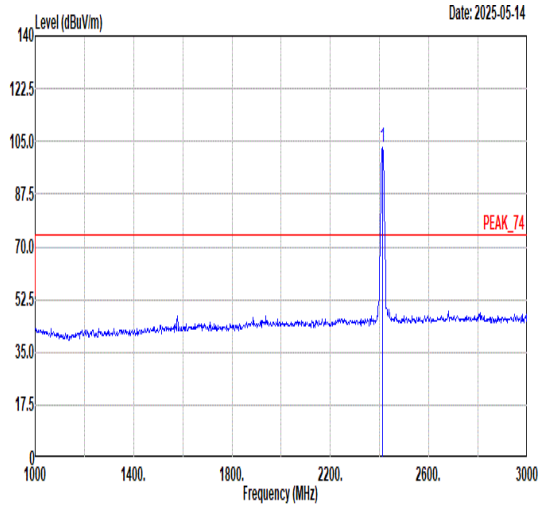
Avg	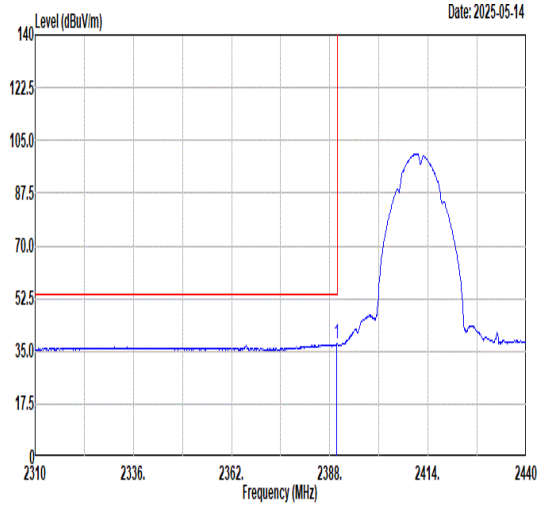	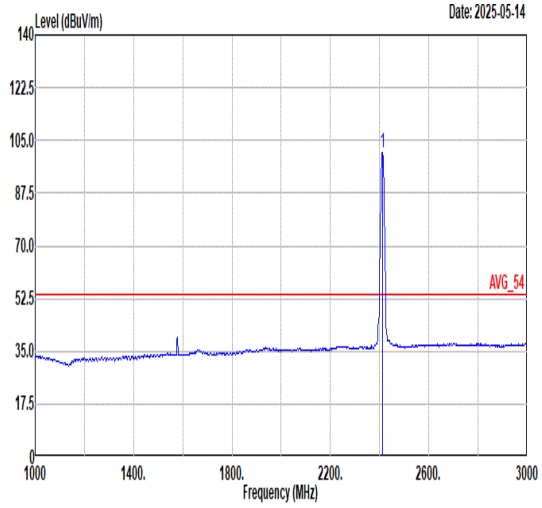

	Freq	Level	Limit Line	Margin (dB)	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	
1	2381.76	47.59	74.00	-26.41	42.78	30.60	6.86	32.65	360	171	PEAK

	Freq	Level	Limit Line	Margin (dB)	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	
1	2412.00	102.84	------	------	97.97	30.62	6.89	32.64	360	171	PEAK

	Freq	Level	Limit Line	Margin (dB)	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	
1	2389.82	37.40	54.00	-16.60	32.57	30.60	6.87	32.64	360	171	AVERAGE

	Freq	Level	Limit Line	Margin (dB)	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	
1	2412.00	100.78	------	------	95.91	30.62	6.89	32.64	360	171	AVERAGE

Mode	22	
	Harmonic	
	2400-2483.5_802.11b_CH01_2412MHz Tx + Band14 LINK	
ANT	CDD 7+6	
Pol.	Horizontal	Vertical
Peak Avg	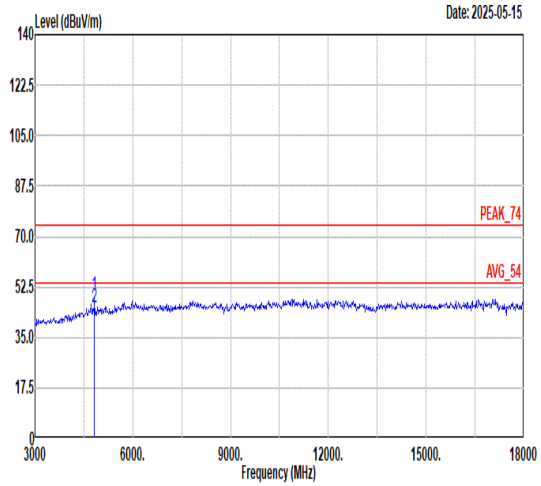	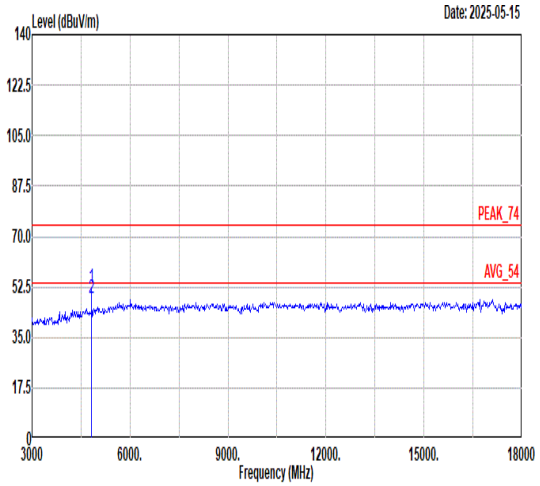

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	4824.00	49.83	74.00	-24.17	56.96	35.30	10.16	52.59	400	360	Peak
2	4824.00	45.40	54.00	-8.60	52.53	35.30	10.16	52.59	400	360	Average

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	4824.00	52.29	74.00	-21.71	59.42	35.30	10.16	52.59	249	155	Peak
2	4824.00	48.65	54.00	-5.35	55.78	35.30	10.16	52.59	249	155	Average

Appendix D. Duty Cycle Plots

Ant	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Ant6	802.11b	100	-	-	10Hz
Ant6	802.11g	98.68	-	-	10Hz
Ant6	802.11n HT20	100	-	-	10Hz
Ant6	802.11n HT40	100	-	-	10Hz
Ant6	802.11be EHT20	100	-	-	10Hz
Ant6	802.11be EHT40	100	-	-	10Hz
Ant6-Small RU	802.11be EHT20	98.97	-	-	10Hz
Ant7	802.11b	100	-	-	10Hz
Ant7	802.11g	98.68	-	-	10Hz
Ant7	802.11n HT20	100	-	-	10Hz
Ant7	802.11n HT40	100	-	-	10Hz
Ant7	802.11be EHT20	100	-	-	10Hz
Ant7	802.11be EHT40	100	-	-	10Hz
Ant7-Small RU	802.11be EHT20	98.97	-	-	10Hz

<Ant 6>

802.11b

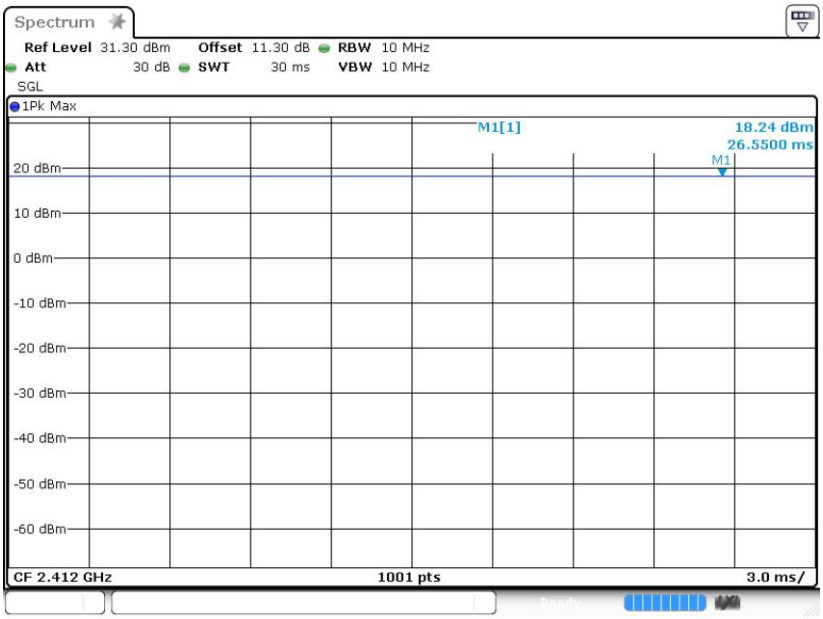

802.11g

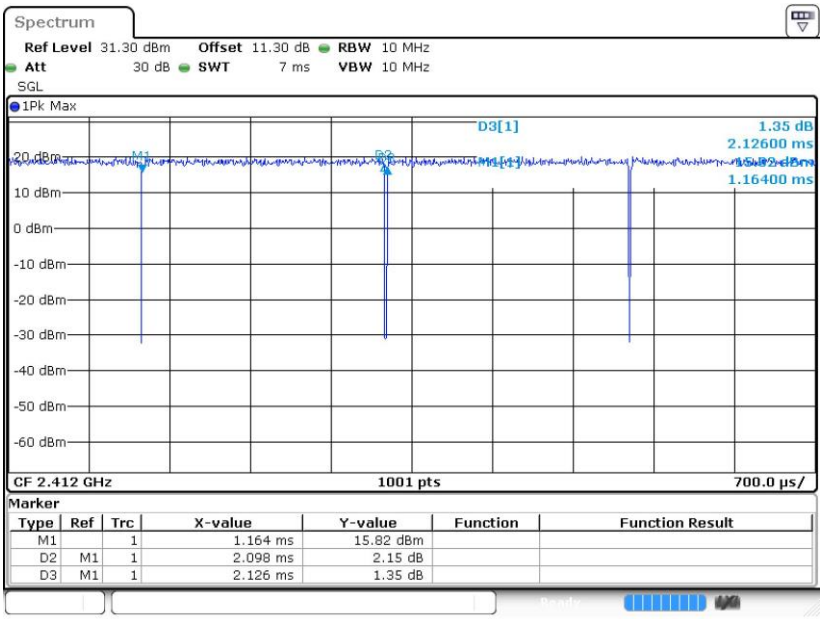

802.11n HT20

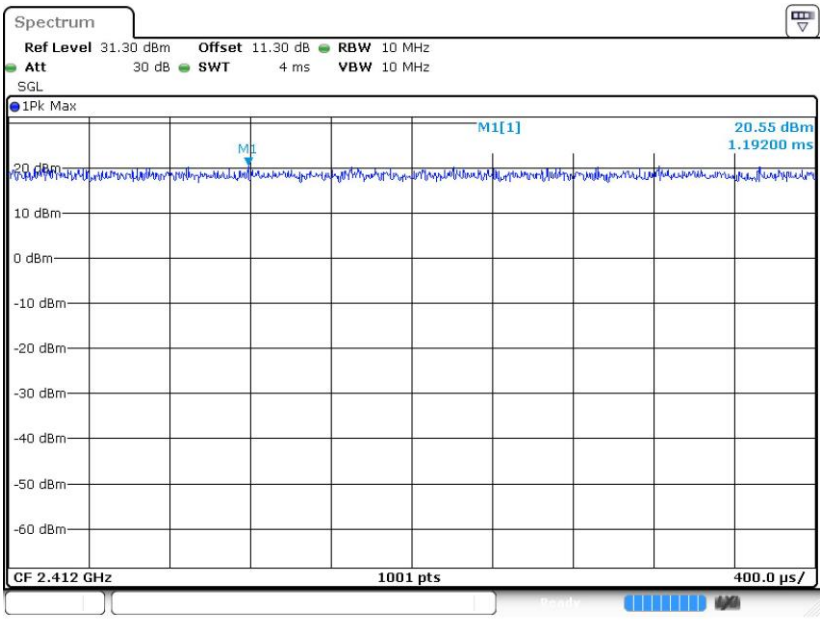

802.11n HT40

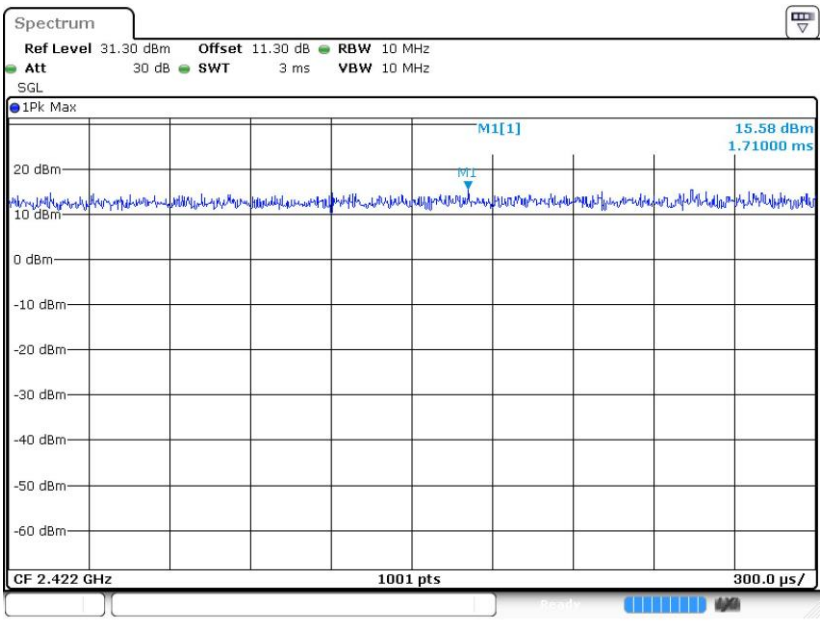

802.11be EHT20

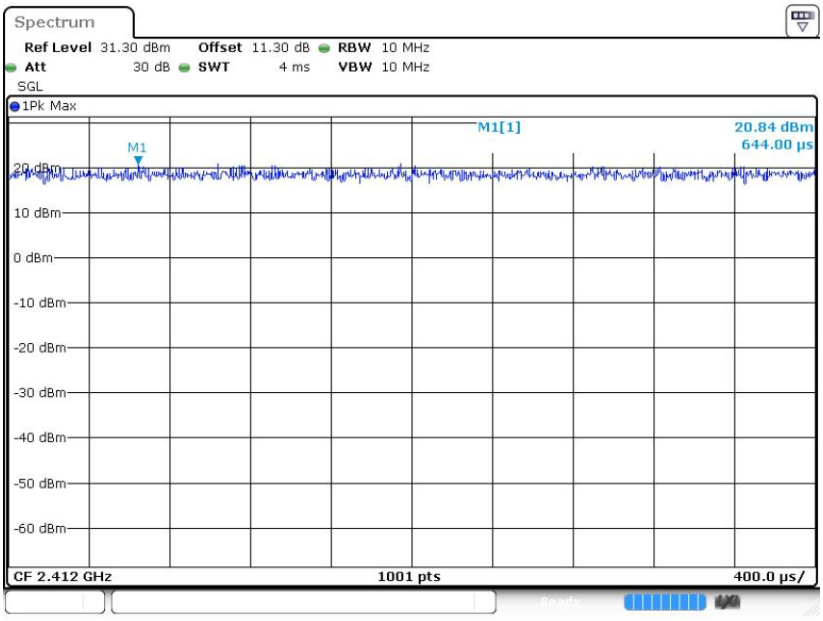

802.11be EHT40

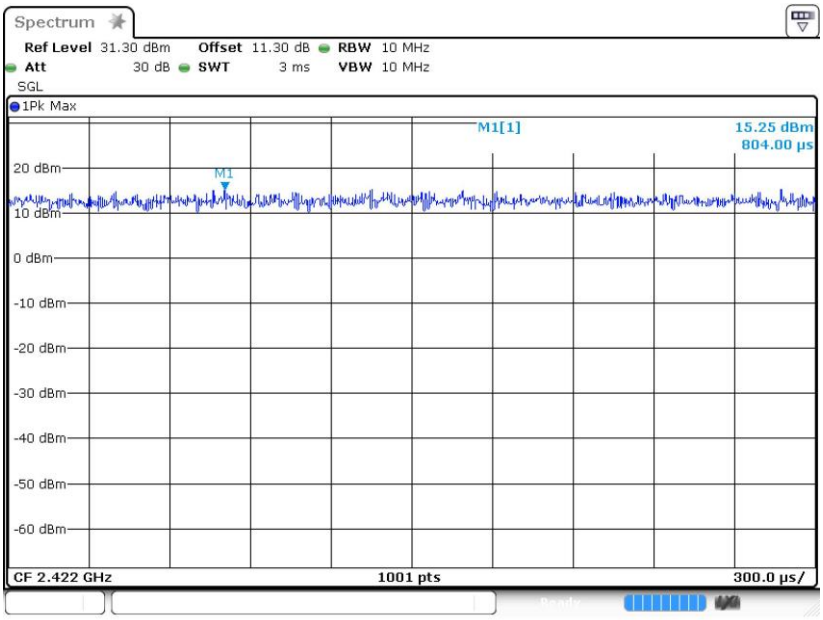

802.11be EHT20-Small RU

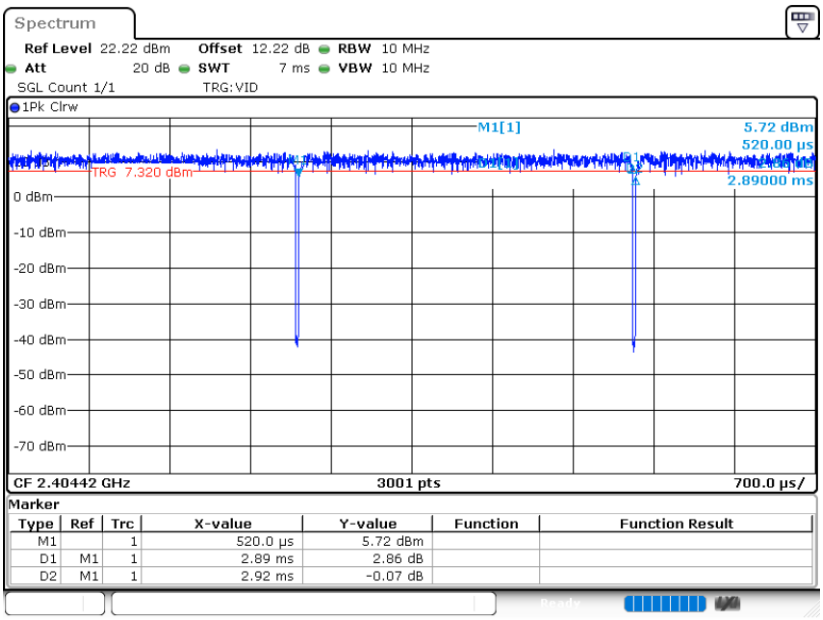

<Ant 7>

802.11b

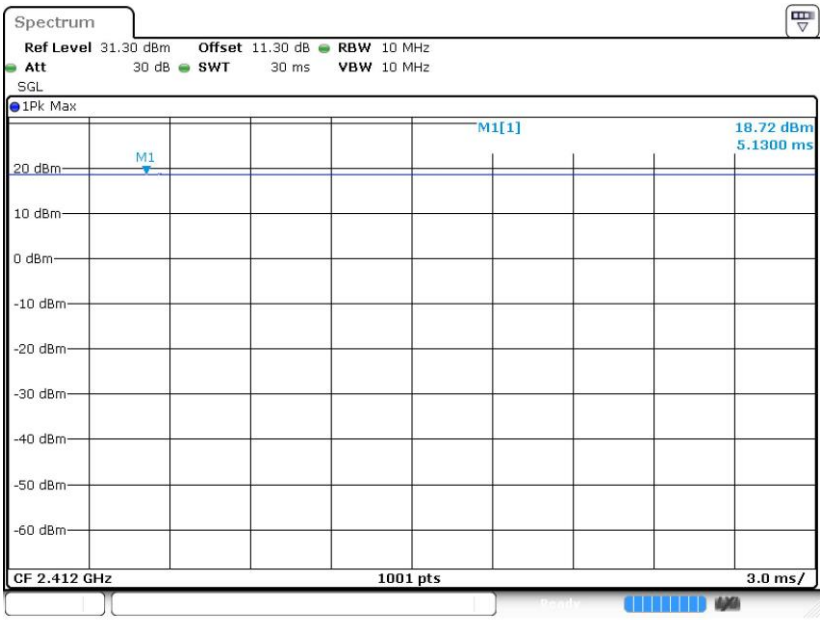

802.11g

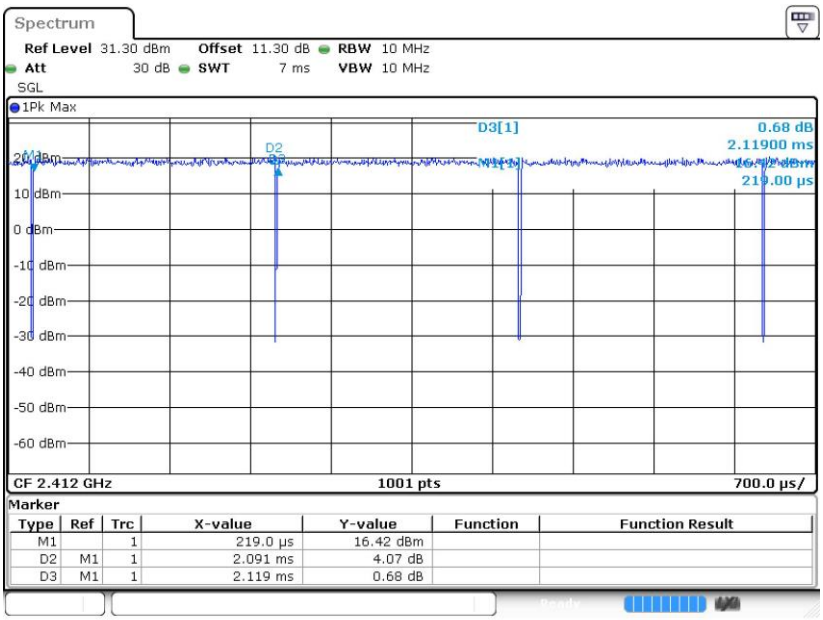

802.11n HT20

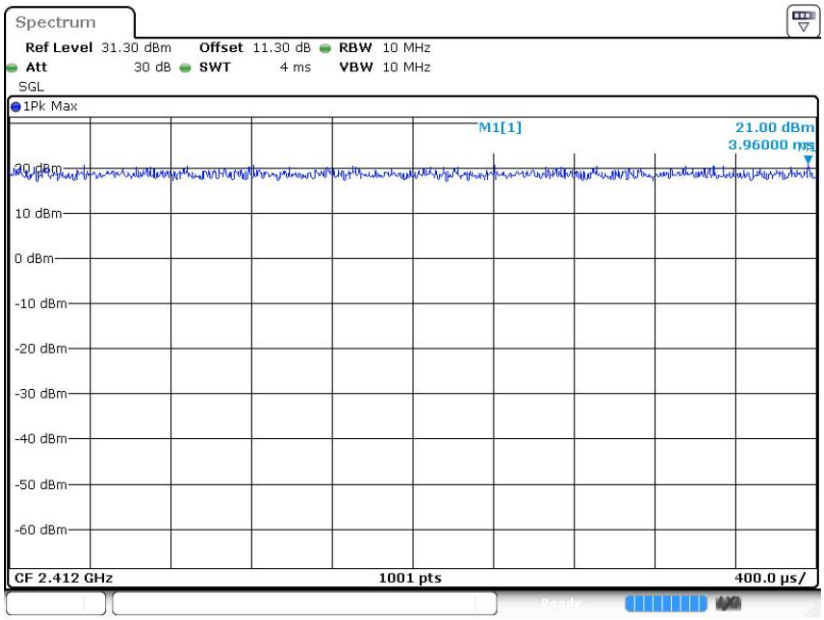

802.11n HT40

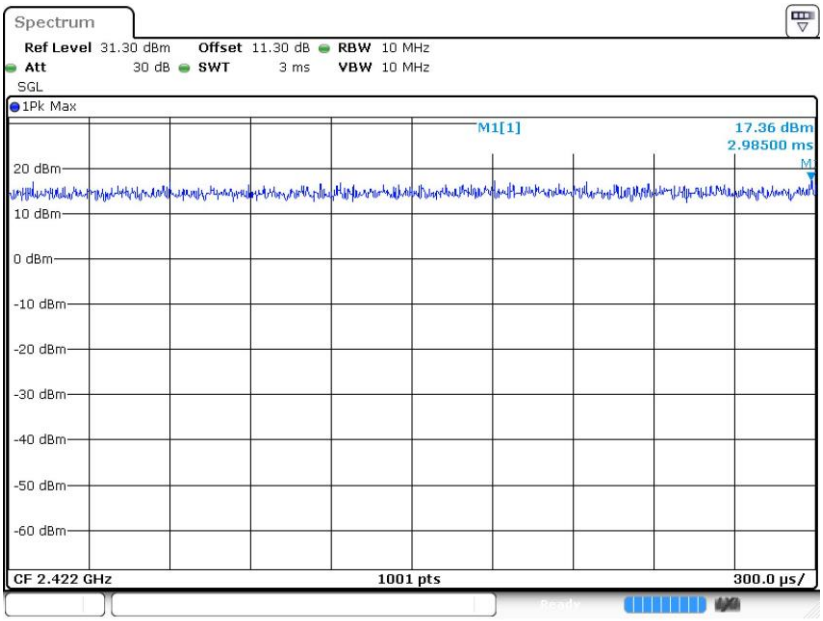

802.11be EHT20

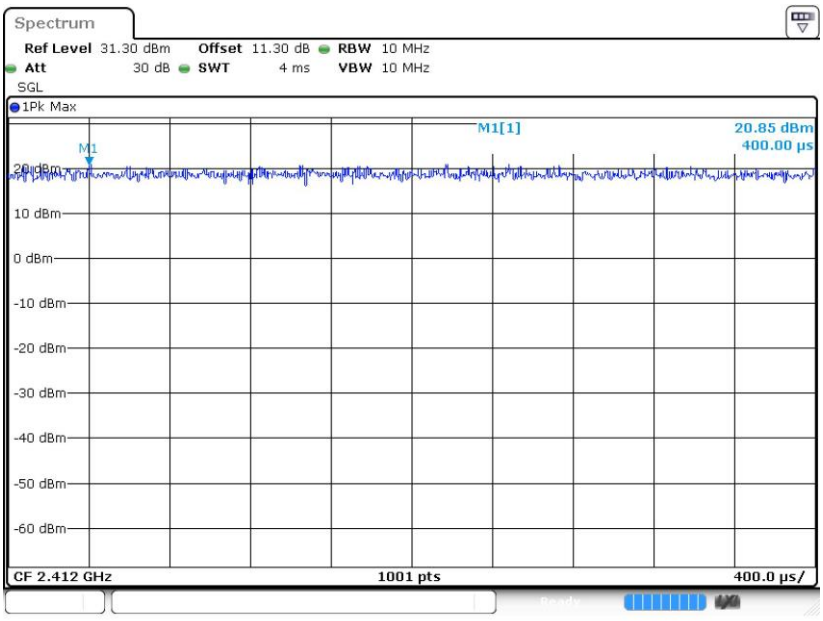

802.11be EHT40

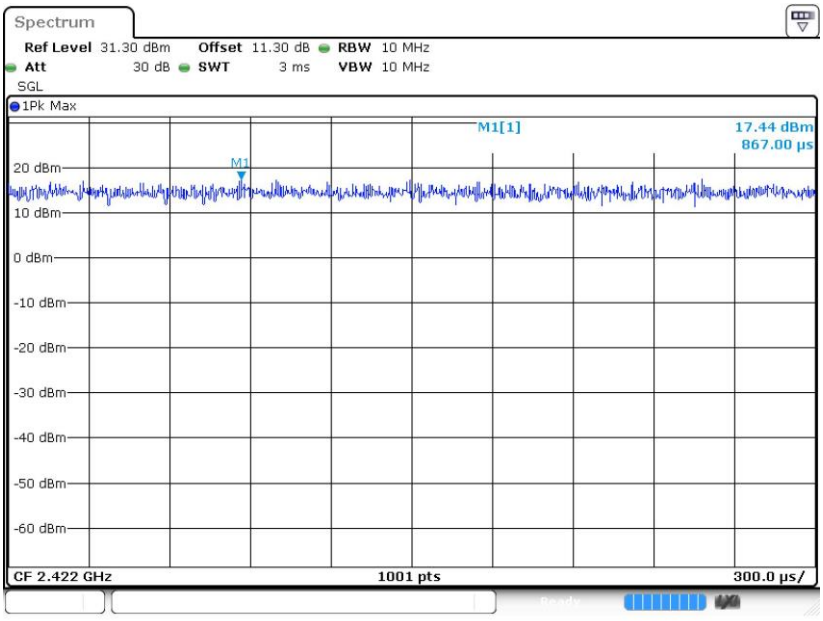
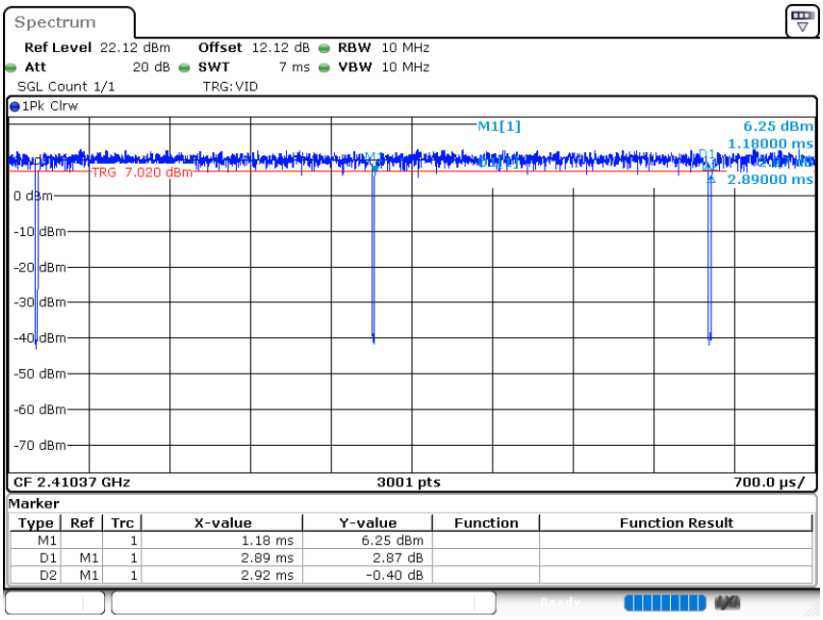
802.11be EHT20-Small RU