

FCC PART 15.407

TEST REPORT

For

INGENICO

9 Avenue de la gare - Rovaltain TGV BP25156 26958 Valence Cedex 9, France

FCC ID: XKB-EXSBASEW


Report Type: Original Report	Product Name: Smart POS Terminal BASE
Report Number: <u>XMDN210621-24577E-00B</u>	
Report Date: <u>2021-07-27</u>	
Reviewed By:	Rocky Xiao RF Engineer 
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.12, Pulong East 1 st Road, Tangxia Town, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
DECLARATIONS.....	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	7
EQUIPMENT MODIFICATIONS	10
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	11
SUPPORT CABLE LIST AND DETAILS	11
BLOCK DIAGRAM OF TEST SETUP	11
SUMMARY OF TEST RESULTS.....	12
FCC §15.407 (f) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	13
APPLICABLE STANDARD	13
FCC §15.203- ANTENNA REQUIREMENT.....	15
APPLICABLE STANDARD	15
ANTENNA CONNECTOR CONSTRUCTION	15
FCC §15.207(a)– CONDUCTED EMISSIONS.....	16
APPLICABLE STANDARD	16
EUT SETUP.....	16
EMI TEST RECEIVER SETUP.....	16
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST PROCEDURE	17
TEST DATA	18
FCC §15.209, §15.205 , §15.407(b) –UNWANTED EMISSION	20
APPLICABLE STANDARD	20
EUT SETUP.....	21
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	22
TEST PROCEDURE	22
CORRECTED AMPLITUDE & MARGIN CALCULATION	23
TEST EQUIPMENT LIST AND DETAILS.....	24
TEST DATA	24
FCC §15.407(a)(e)–EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH.....	49
APPLICABLE STANDARD	49
TEST EQUIPMENT LIST AND DETAILS.....	49
TEST PROCEDURE	49
TEST DATA	49
FCC §15.407(a) –MAXIMUM CONDUCTED OUTPUT POWER.....	94
APPLICABLE STANDARD	94
TEST EQUIPMENT LIST AND DETAILS.....	95

TEST PROCEDURE	95
TEST DATA	95
FCC §15.407(a) - POWER SPECTRAL DENSITY	98
APPLICABLE STANDARD	98
TEST PROCEDURE	99
TEST EQUIPMENT LIST AND DETAILS.....	99
TEST DATA	99

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:		Smart POS Terminal BASE
EUT Model:		AXIUM EX-SBASE-W
Operation Frequency:		5180-5240 MHz (802.11a/n ht20/ac vht20) 5190-5230 MHz(802.11n ht40/ac vht40) 5210 MHz(802.11ac vht80) 5260-5320 MHz (802.11a/n ht20/ac vht20) 5270-5310 MHz(802.11n ht40/ac vht40) 5290 MHz(802.11ac vht80) 5500-5720 MHz (802.11a/n ht20/ac vht20) 5510-5710 MHz(802.11n ht40/ac vht40) 5530-5690 MHz(802.11ac vht80) 5745-5825 MHz (802.11a/n ht20/ac vht20) 5755-5795 MHz(802.11n ht40/ac vht40) 5775 MHz(802.11ac vht80)
Maximum Average Output Power (Conducted):		18.13 dBm @5.2G, 17.92 dBm @5.3G, 17.92 dBm @5.6G, 17.67 dBm @5.8G,
Antenna Gain[▲]:		2.32dBi@5.2G;3.58dBi@5.3G;3.35dBi@5.6G;2.63dBi@5.8G
Modulation Type:		OFDM
Rated Input Voltage:		DC 5V from Adapter
Adapter 1# Information	Model:	SW-0983
	Input:	100-240Vac 50/60Hz 0.5A
	Output:	5.0Vdc 2.0A
Adapter 2# Information	Model:	A8-050200U-US3
	Input:	100-240Vac 50/60Hz 0.35A
	Output:	5.0Vdc 2.0A
Serial Number:		XMDN210621-24577E-RF-S1
EUT Received Date:		2021.06.21
EUT Received Status:		Good

Objective

This type approval report is prepared on behalf of **INGENICO** in accordance with Part 2-Subpart J, Part 15-Subparts A, and E of the Federal Communications Commission's rules.

The tests were performed in order to determine compliance with FCC Rules Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB 789033 D02 General U-NII Test Procedures New Rules v02r01.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage Factor K with the 95% confidence interval.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system support 802.11a/n ht20/n ht40/ac vht20/ac vht40/ac vht80, the vht20/vht40 were reduced since the identical parameters with 802.11n ht20 and ht40.

For 5150~5250 MHz band, 7 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

For 802.11a, 802.11n ht20, channel 36, 40 and 48 was tested, for 802.11n ht40, channel 38, 46 were tested, for 802.11ac vht80, channel 42 was tested.

For 5250~5350 MHz band, 7 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	60	5300
54	5270	62	5310
56	5280	64	5320
58	5290	/	/

For 802.11a, 802.11n ht20, Channel 52, 56 and 64 were tested, for 802.11n ht40 Channel 54, 62 were tested, for 802.11ac vht80 channel 58 was tested.

For 5470~5725 MHz band, 21 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	116	5580	132	5660
102	5510	118	5590	134	5670
104	5520	120	5600	136	5680
106	5530	122	5610	138	5690
108	5540	124	5620	140	5700
110	5550	126	5630	142	5710
112	5560	128	5640	144	5720

For 802.11a, 802.11n ht20 Channel 100, 116 and 140 were tested, for 802.11n ht40 Channel 102, 110 and 134 were tested, for 802.11ac vht80 channel 106,122.

Channel 144 for 802.11a and n ht20, Channel 142 for 802.11n ht40, Channel 138 for 802.11ac vht80 crossed the band U-NII 2C to U-NII 3, were choose to test for compliance requirement.

For 5725~5850MHz band, 8 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785
151	5755	159	5795
153	5765	161	5805
155	5775	165	5825

For 802.11a, 802.11n ht20, channel 149, 157 and 165 was tested, for 802.11n ht40, channel 151, 159 were tested, for 802.11ac vht80, channel 155 was tested.

EUT Exercise Software

The software “RTL819X 3.6” was used for testing, which was provided by Manufacturer. The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations. The device supports SISO and MIMO at 802.11n and ac mode, per pre-test, MIMO 2TX mode was the worst and reported. The maximum power was configured as below table, that provided by the Manufacturer▲:


Band	Mode	Channel	Frequency (MHz)	Data rate	Power level Setting	
					Chain 0	Chain 1
5150 - 5250 MHz	802.11a	Low	5180	6Mbps	100	100
		Middle	5200	6Mbps	100	100
		High	5240	6Mbps	100	100
	802.11n ht20	Low	5180	MCS8	93	93
		Middle	5200	MCS8	93	93
		High	5240	MCS8	93	93
	802.11n ht40	Low	5190	MCS8	93	93
		High	5230	MCS8	93	93
	802.11ac vht80	Middle	5210	MCS8	100	100
5250-5350 MHz	802.11a	Low	5260	6Mbps	100	100
		Middle	5280	6Mbps	100	100
		High	5320	6Mbps	100	100
	802.11n ht20	Low	5260	MCS8	93	93
		Middle	5280	MCS8	93	93
		High	5320	MCS8	93	93
	802.11n ht40	Low	5270	MCS8	93	93
		High	5310	MCS8	93	93
	802.11ac vht80	Middle	5290	MCS8	100	100

Band	Mode	Channel	Frequency (MHz)	Data rate	Power level Setting	
					Chain 0	Chain 1
5470-5725	802.11a	Low	5500	6Mbps	100	95
		Middle	5580	6Mbps	105	100
		High	5700	6Mbps	110	95
		Additional	5720	6Mbps	110	95
	802.11n ht20	Low	5500	MCS8	100	100
		Middle	5580	MCS8	100	100
		High	5700	MCS8	100	100
		Additional	5720	MCS8	100	100
	802.11n ht40	Low	5510	MCS8	95	95
		Middle	5550	MCS8	95	95
		High	5670	MCS8	95	95
		Additional	5710	MCS8	95	95
	802.11ac vht80	Low	5530	MCS8	95	95
		Middle	5610	MCS8	95	95
		Additional	5690	MCS8	95	95
5725 - 5850 MHz	802.11a	Low	5745	6Mbps	110	110
		Middle	5785	6Mbps	110	110
		High	5825	6Mbps	110	110
	802.11n ht20	Low	5745	MCS8	105	105
		Middle	5785	MCS8	105	105
		High	5825	MCS8	105	105
	802.11n ht40	Low	5755	MCS8	107	107
		High	5795	MCS8	107	107
	802.11ac vht80	Middle	5775	MCS8	110	110


The duty cycle as below:

Mode	T _{on} (ms)	T _{on+off} (ms)	Duty Cycle (%)
802.11 a	1.4144	1.6207	87.27
802.11n ht20	0.69646	0.91652	75.99
802.11n ht40	0.37594	0.59833	62.83
802.11ac vht80	0.08209	0.32122	25.56


802.11a

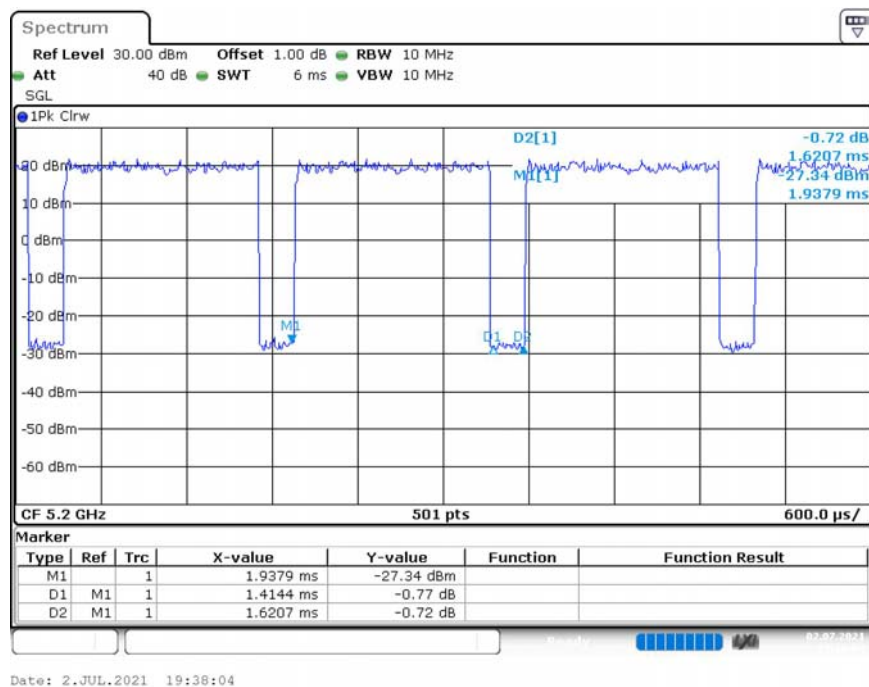


802.11n ht20

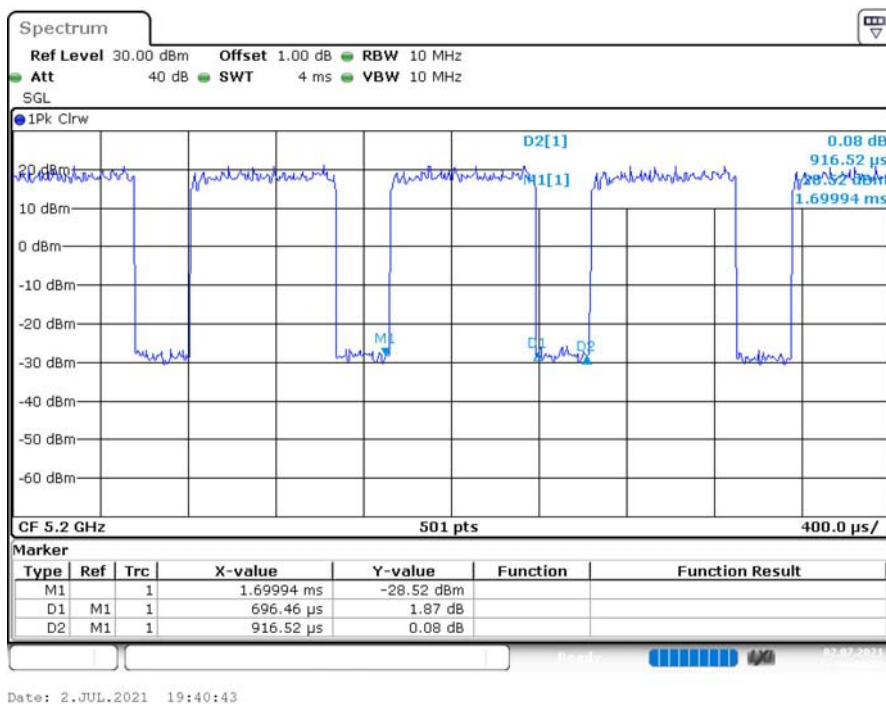

802.11n ht40

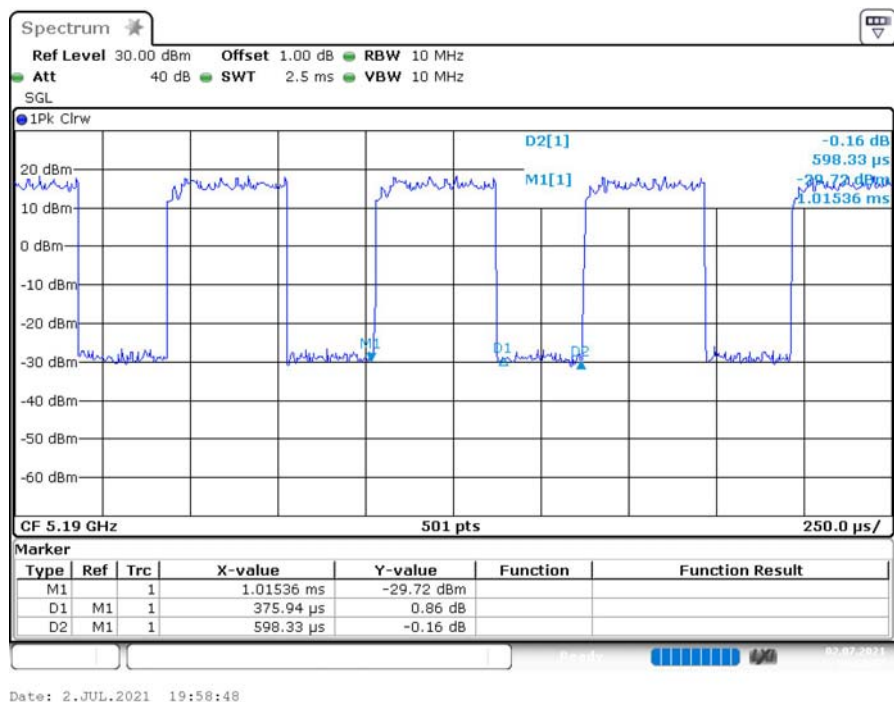

802.11ac vht80

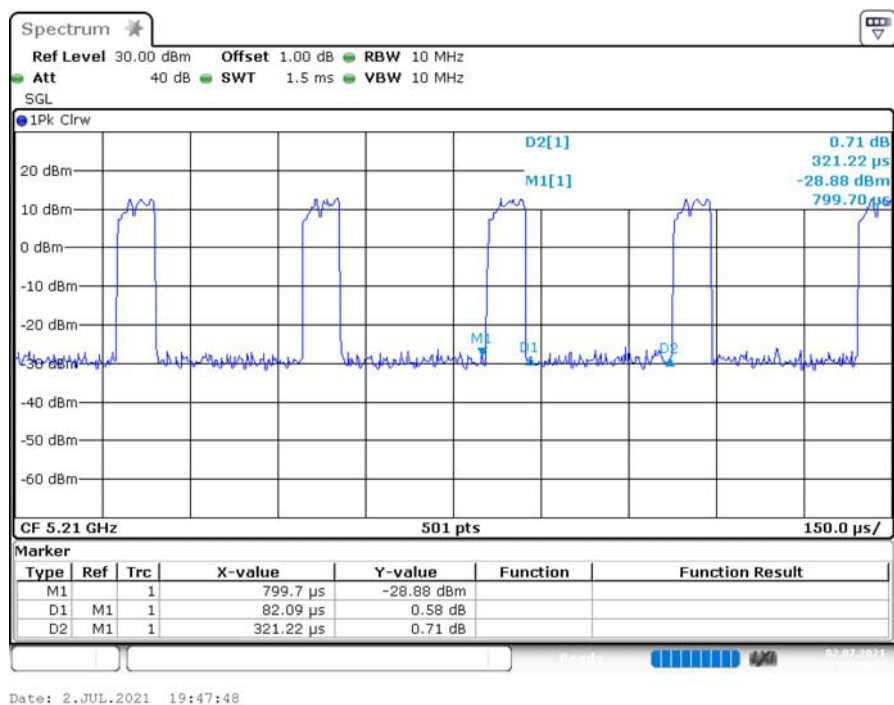

Equipment Modifications

No modification was made to the EUT.


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017
ingenico	POS	EX8000	RXM210324052-RF-S8
DELL	Mouse	MO56UOA	F0Y02P7Y
DELL	Keyboard	L100	CNORH656658907BL05DC
ThinkPad	Laptop	E450	PF-0MR8KV 16/08
D-Link	Router	DGS-1100-08PD	S01Z1H000012

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
RJ45 Cable	Yes	No	10	EUT/Laptop	Router
USB Cable	Yes	No	1.5	EUT	Laptop
USB Cable	No	No	1.5	Laptop	Keyboard
USB Cable	No	No	1.5	Laptop	Mouse
USB Cable	No	No	1.5	EUT	Adapter

Block Diagram of Test Setup

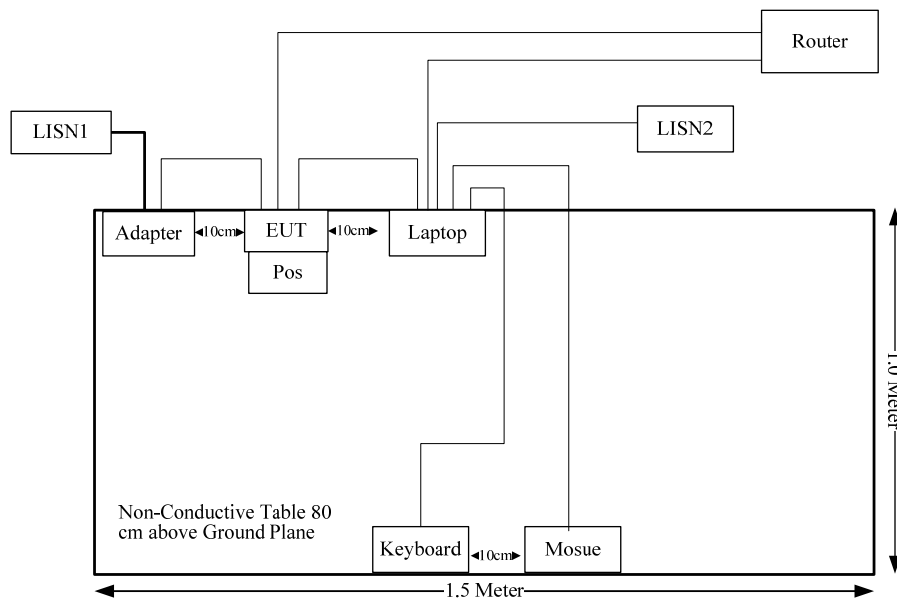

SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC §15.407 (f) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
FCC§15.203	Antenna Requirement	Compliance
FCC§15.407(b)(6)& §15.207(a)	Conducted Emissions	Compliance
FCC§15.205& §15.209 &§15.407(b)	Undesirable Emission& Restricted Bands	Compliance
FCC§15.407(b)	Out Of Band Emissions	Compliance
FCC§15.407(a) (e)	Emission Bandwidth	Compliance
FCC§15.407(a)	Conducted Transmitter Output Power	Compliance
FCC§15.407 (a)	Power Spectral Density	Compliance

FCC §15.407 (f) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.407(f) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain Factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Calculated Data:

Mode	Frequency (MHz)	Antenna Gain		Conducted output power including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
WLAN	2412-2462	2.36	1.72	24	251.19	20	0.086	1.0
WLAN	5150-5850	3.58	2.28	18.5	70.79	20	0.033	1.0

The WLAN 2.4G and 5G can transmit simultaneously:

$$\sum_i \frac{S_i}{S_{Limit,i}}$$

$$=S_{2.4}/S_{limit-2.4}+ S_5/S_{limit-5}$$

$$=0.086/1+0.033/1$$

$$=0.119$$

$$< 1.0$$

Result: The device meet FCC MPE at **20 cm** distance

FCC §15.203- ANTENNA REQUIREMENT

Applicable Standard

According to FCC§ 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- Antenna must be permanently attached to the unit.
- Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has 2 internal antenna for 2.4G WLAN and 2 internal antenna for 5G WLAN, which was permanently attached to the unit, fulfill the requirement of this section. Please refer to the EUT photos and below information:

Antenna	Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
2.4G Chain 0 (2.4G ANT 1)	FPC	50	2.36 dBi/2.4-2.5GHz
2.4G Chain 1 (2.4G ANT 2)	FPC	50	2.36 dBi/2.4-2.5GHz
5G Chain 0 (5G ANT 1)	FPC	50	2.32 dBi/5.15-5.25GHz 3.58 dBi/5.25-5.35GHz 3.35 dBi/5.47-5.725GHz 2.63 dBi/5.725-5.85GHz
5G Chain 1 (5G ANT 2)	FPC	50	2.32 dBi/5.15-5.25GHz 3.58 dBi/5.25-5.35GHz 3.35 dBi/5.47-5.725GHz 2.63 dBi/5.725-5.85GHz


Result: Compliance.

FCC §15.207(a)– CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a), §15.407(b) (6).

EUT Setup

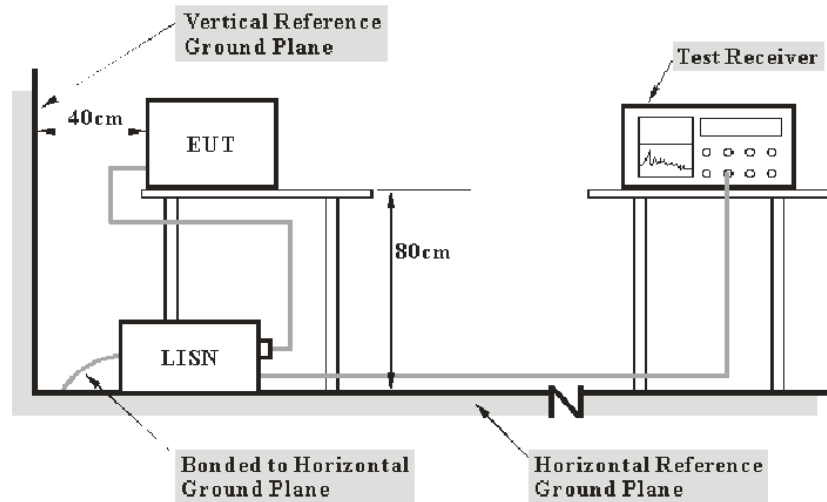

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main lisn with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_c : attenuation caused by cable loss

VDF: voltage division Factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV 216	101614	2020-09-12	2021-09-12
R&S	EMI Test Receiver	ESCI	101121	2020-07-07	2021-07-07
MICRO-COAX	Coaxial Cable	C-NJNJ-50	C-0200-01	2020-09-05	2021-09-05
R&S	Test Software	EMC32	Version 9.10.00	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

Test Data


Environmental Conditions

Temperature:	25.7°C
Relative Humidity:	70%
ATM Pressure:	100.3kPa
Tester:	Walker Chen
Test Date:	2021-06-28

Test Result: Compliance.


Test Mode: Transmitting (802.11a 5700MHz chain 1 with Adapter 1# was the worst)

AC120 V, 60 Hz, Line:

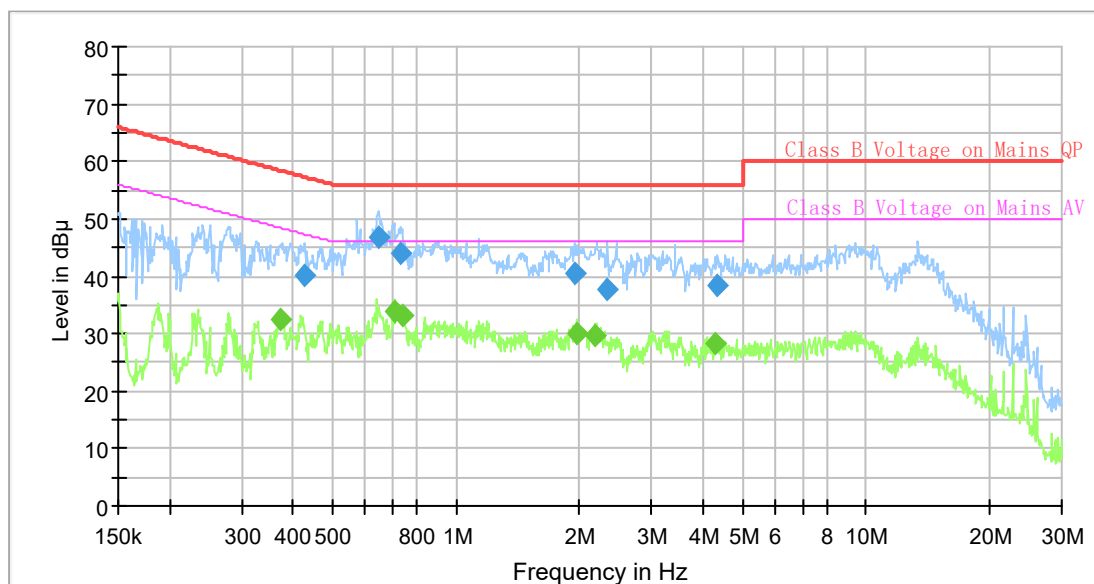

Final Result

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.373663	---	32.33	48.42	16.09	9.000	L1	9.6
0.427528	40.20	---	57.30	17.10	9.000	L1	9.6
0.646766	46.88	---	56.00	9.12	9.000	L1	9.6
0.707516	---	33.82	46.00	12.18	9.000	L1	9.7
0.736317	43.89	---	56.00	12.11	9.000	L1	9.7
0.739999	---	33.18	46.00	12.82	9.000	L1	9.7
1.947363	40.61	---	56.00	15.39	9.000	L1	9.7
1.966886	---	30.09	46.00	15.91	9.000	L1	9.7
2.173203	---	29.70	46.00	16.30	9.000	L1	9.7
2.342024	37.81	---	56.00	18.19	9.000	L1	9.7
4.282376	---	28.27	46.00	17.73	9.000	L1	9.7
4.346933	38.45	---	56.00	17.55	9.000	L1	9.7

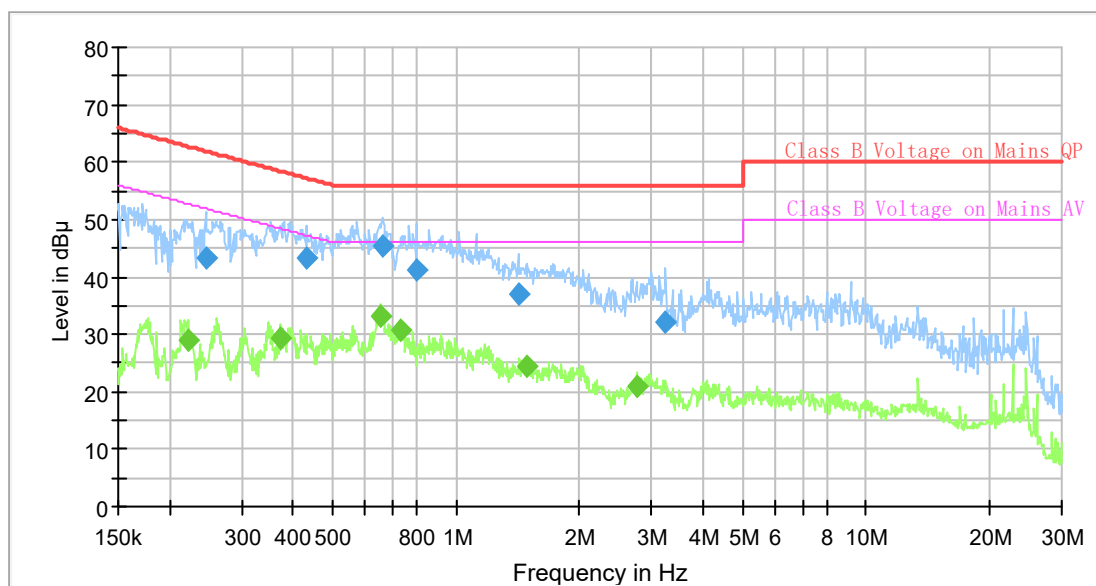AC120 V, 60 Hz, Neutral:**Final Result**

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.222439	---	29.00	52.73	23.73	9.000	N	9.6
0.245771	43.27	---	61.90	18.63	9.000	N	9.6
0.371804	---	29.39	48.46	19.07	9.000	N	9.6
0.431814	43.20	---	57.22	14.02	9.000	N	9.6
0.653250	---	33.25	46.00	12.75	9.000	N	9.6
0.659799	45.32	---	56.00	10.68	9.000	N	9.6
0.736317	---	30.73	46.00	15.27	9.000	N	9.6
0.801471	41.25	---	56.00	14.75	9.000	N	9.6
1.415204	37.16	---	56.00	18.84	9.000	N	9.6
1.480177	---	24.43	46.00	21.57	9.000	N	9.6
2.761031	---	21.09	46.00	24.91	9.000	N	9.6
3.238809	32.09	---	56.00	23.91	9.000	N	9.6

FCC §15.209, §15.205 , §15.407(b) –UNWANTED EMISSION

Applicable Standard

FCC §15.407; §15.209; §15.205;

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufac vhturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufac vhturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.


(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.


(7) The provisions of §15.205 apply to intentional radiators operating under this section.

EUT Setup


Below 1 GHz:

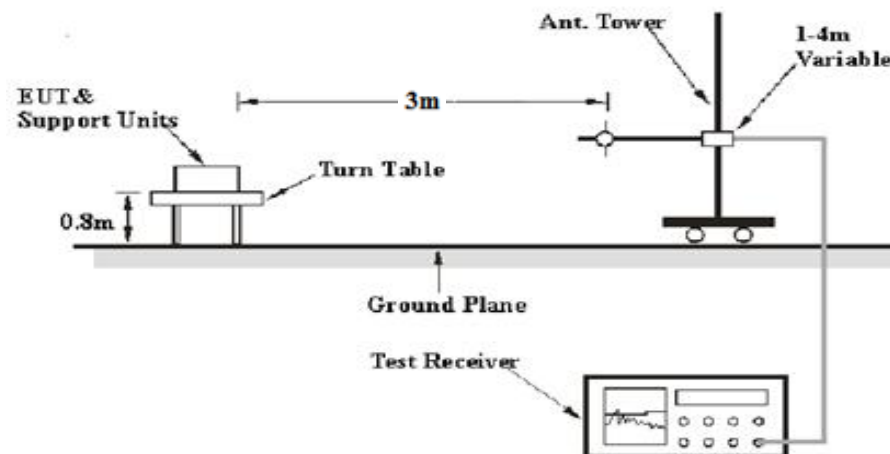

1-26.5 GHz:

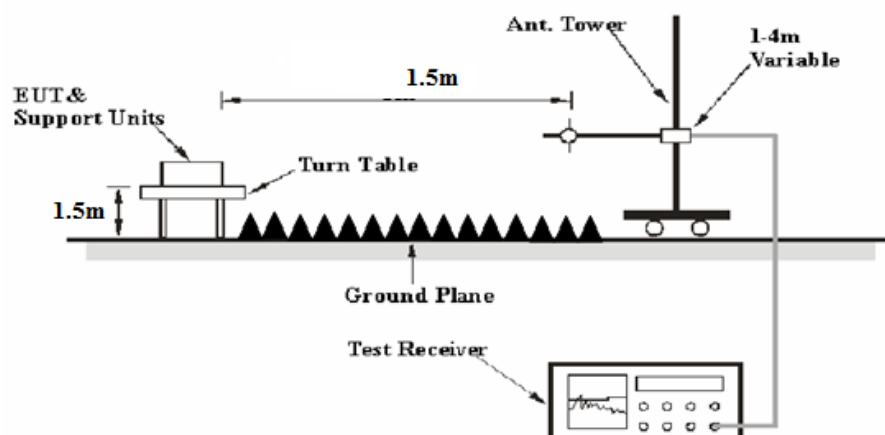

26.5-40 GHz:

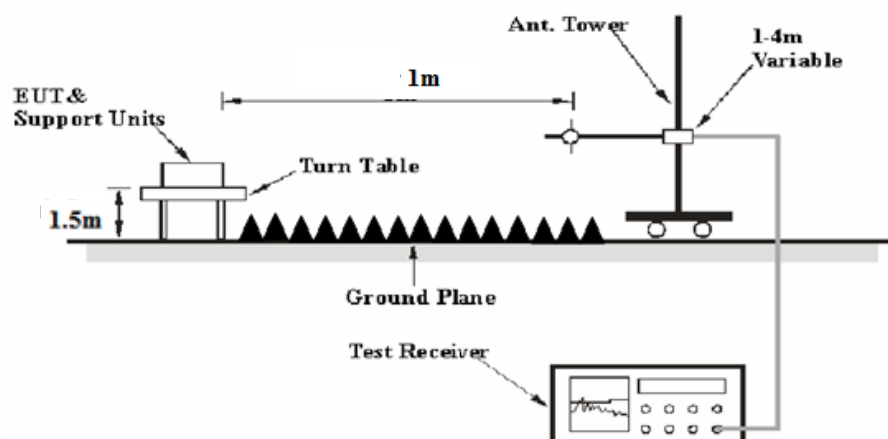

The radiated emission Below 1GHz tests were performed in the 3 meters chamber test site, above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Ave.	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.5m or 1m

Distance extrapolation Factor = $20 \log (\text{specific distance } [3m]/\text{test distance } [1.5m])$ dB= 6.02 dB

or

Distance extrapolation Factor = $20 \log (\text{specific distance } [3m]/\text{test distance } [1m])$ dB= 9.54 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

Corrected Amplitude & Margin Calculation

For the range 30MHz-1GHz, the Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

For the range 1GHz-40GHz, Test performed at 1.5m or 1m, the Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading and the Distance extrapolation Factor. The basic equation is as follows:

$$\begin{aligned} &\text{Corrected Amplitude} \\ &= \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain} - \text{Distance extrapolation factor} \end{aligned}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiation Below 1GHz Test					
Sunol Sciences	Antenna	JB3	A060611-2	2020-08-25	2023-08-25
R&S	EMI Test Receiver	ESCI	100224	2020-09-12	2021-09-12
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-02	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2020-09-24	2021-09-24
Sonoma	Amplifier	310N	185914	2020-10-13	2021-10-13
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Radiation Above 1GHz Test					
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020-10-13	2023-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2020-12-05	2023-12-04
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2020-12-05	2023-12-04
R&S	Spectrum Analyzer	FSP 38	100478	2020-07-07	2021-07-07
Agilent	Spectrum Analyzer	E4440A	MY44303352	2021-04-25	2022-04-24
HUBER+SUHNER	Coaxial Cable	SUCOFLEX 126EA	MY369/26/26E A	2020-09-25	2021-09-25
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2020-09-05	2021-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2021-06-27	2022-06-26
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Test Items	Radiation Below 1GHz	Radiation Above 1GHz
Temperature:	21.4°C	29.4 °C
Relative Humidity:	53 %	25 %
ATM Pressure:	100.8kPa	100.5kPa
Tester:	Burt Hu	Alex Hu, Joker Chen
Test Date:	2021-07-07	2021-07-14


Test Mode: Transmitting

Note: 2.4GHz and 5 GHz radios can transmit simultaneously, per pretest, no additional emission was created when simultaneous transmitting.


Test Mode: Transmitting

1) Below 1GHz(802.11a chain 0 5700 MHz with Adapter 1# was the worst):

Horizontal:

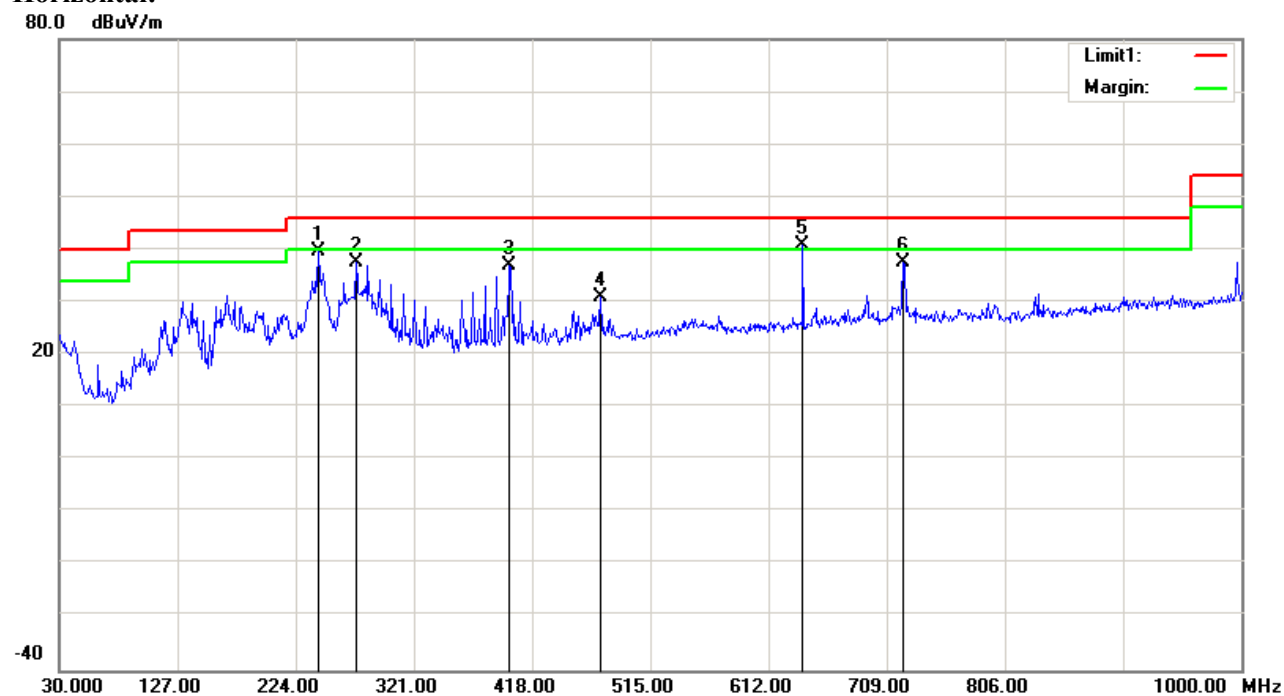

Frequency (MHz)	Receiver Reading (dB μ V)	Detector	Correction Factor (dB/m)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
242.4300	49.53	peak	-9.87	39.66	46.00	6.34
273.4700	46.13	peak	-8.57	37.56	46.00	8.44
399.5700	42.10	peak	-5.27	36.83	46.00	9.17
474.2600	34.75	peak	-3.81	30.94	46.00	15.06
640.1300	41.67	peak	-0.79	40.88	46.00	5.12
722.5800	37.03	peak	0.57	37.60	46.00	8.40

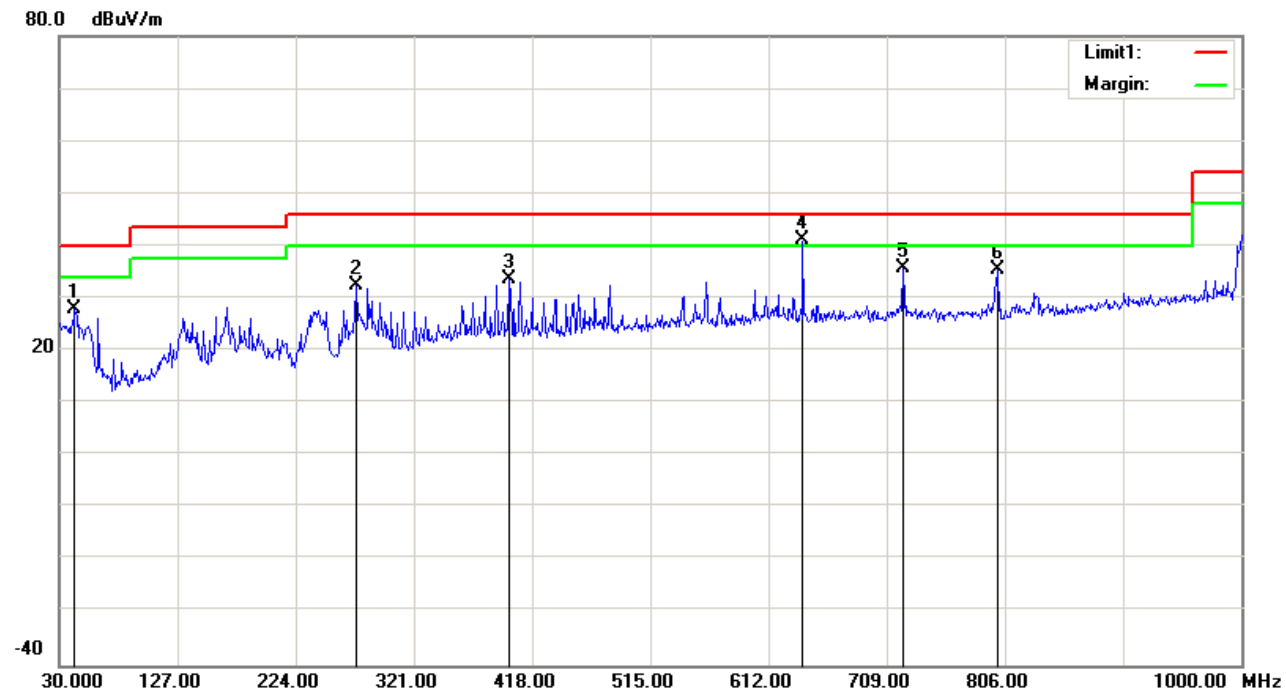Vertical:

Frequency (MHz)	Receiver Reading (dB μ V)	Detector	Correction Factor (dB/m)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
42.6100	39.04	peak	-11.05	27.99	40.00	12.01
273.4700	40.96	peak	-8.57	32.39	46.00	13.61
398.6000	38.88	peak	-5.29	33.59	46.00	12.41
640.1300	42.09	QP	-0.79	41.30	46.00	4.70
722.5800	35.23	peak	0.57	35.80	46.00	10.20
800.1800	34.49	peak	1.03	35.52	46.00	10.48

2) 1GHz-40GHz:
5150-5250MHz
802.11a, Chain 0

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5180 MHz										
5180.00	69.22	PK	H	33.52	4.71	0.00	107.45	101.43	N/A	N/A
5180.00	59.74	AV	H	33.52	4.71	0.00	97.97	91.95	N/A	N/A
5180.00	76.80	PK	V	33.52	4.71	0.00	115.03	109.01	N/A	N/A
5180.00	67.37	AV	V	33.52	4.71	0.00	105.60	99.58	N/A	N/A
5150.00	30.95	PK	V	33.47	4.70	0.00	69.12	63.1	74.00	10.90
5150.00	17.80	AV	V	33.47	4.70	0.00	55.97	49.95	54.00	4.05
10360.00	36.79	PK	V	37.93	6.91	26.86	54.77	48.75	68.20	19.45
15540.00	36.03	PK	V	37.96	8.39	25.66	56.72	50.7	74.00	23.30
15540.00	23.08	AV	V	37.96	8.39	25.66	43.77	37.75	54.00	16.25
Middle Channel: 5200 MHz										
5200.00	68.92	PK	H	33.56	4.71	0.00	107.19	101.17	N/A	N/A
5200.00	59.54	AV	H	33.56	4.71	0.00	97.81	91.79	N/A	N/A
5200.00	75.77	PK	V	33.56	4.71	0.00	114.04	108.02	N/A	N/A
5200.00	66.35	AV	V	33.56	4.71	0.00	104.62	98.6	N/A	N/A
10400.00	36.57	PK	V	37.92	6.92	26.84	54.57	48.55	68.20	19.65
15600.00	36.01	PK	V	37.90	8.43	25.97	56.37	50.35	74.00	23.65
15600.00	23.05	AV	V	37.90	8.43	25.97	43.41	37.39	54.00	16.61
High Channel: 5240 MHz										
5240.00	68.53	PK	H	33.63	4.75	0.00	106.91	100.89	N/A	N/A
5240.00	58.99	AV	H	33.63	4.75	0.00	97.37	91.35	N/A	N/A
5240.00	74.75	PK	V	33.63	4.75	0.00	113.13	107.11	N/A	N/A
5240.00	65.38	AV	V	33.63	4.75	0.00	103.76	97.74	N/A	N/A
5350.00	27.12	PK	V	33.83	4.84	0.00	65.79	59.77	74.00	14.23
5350.00	16.71	AV	V	33.83	4.84	0.00	55.38	49.36	54.00	4.64
10480.00	36.64	PK	V	37.90	6.94	27.02	54.46	48.44	68.20	19.76
15720.00	36.12	PK	V	37.78	8.51	25.68	56.73	50.71	74.00	23.29
15720.00	23.09	AV	V	37.78	8.51	25.68	43.70	37.68	54.00	16.32

Chain 1

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5180 MHz										
5180.00	65.87	PK	H	33.52	4.71	0.00	104.10	98.08	N/A	N/A
5180.00	56.29	AV	H	33.52	4.71	0.00	94.52	88.5	N/A	N/A
5180.00	74.69	PK	V	33.52	4.71	0.00	112.92	106.9	N/A	N/A
5180.00	65.20	AV	V	33.52	4.71	0.00	103.43	97.41	N/A	N/A
5150.00	29.04	PK	V	33.47	4.70	0.00	67.21	61.19	74.00	12.81
5150.00	17.04	AV	V	33.47	4.70	0.00	55.21	49.19	54.00	4.81
10360.00	36.86	PK	V	37.93	6.91	26.86	54.84	48.82	68.20	19.38
15540.00	36.05	PK	V	37.96	8.39	25.66	56.74	50.72	74.00	23.28
15540.00	23.20	AV	V	37.96	8.39	25.66	43.89	37.87	54.00	16.13
Middle Channel: 5200 MHz										
5200.00	65.57	PK	H	33.56	4.71	0.00	103.84	97.82	N/A	N/A
5200.00	56.10	AV	H	33.56	4.71	0.00	94.37	88.35	N/A	N/A
5200.00	74.51	PK	V	33.56	4.71	0.00	112.78	106.76	N/A	N/A
5200.00	65.08	AV	V	33.56	4.71	0.00	103.35	97.33	N/A	N/A
10400.00	37.22	PK	V	37.92	6.92	26.84	55.22	49.2	68.20	19.00
15600.00	36.24	PK	V	37.90	8.43	25.97	56.60	50.58	74.00	23.42
15600.00	23.25	AV	V	37.90	8.43	25.97	43.61	37.59	54.00	16.41
High Channel: 5240 MHz										
5240.00	66.04	PK	H	33.63	4.75	0.00	104.42	98.4	N/A	N/A
5240.00	56.59	AV	H	33.63	4.75	0.00	94.97	88.95	N/A	N/A
5240.00	75.36	PK	V	33.63	4.75	0.00	113.74	107.72	N/A	N/A
5240.00	65.28	AV	V	33.63	4.75	0.00	103.66	97.64	N/A	N/A
5350.00	28.15	PK	V	33.83	4.84	0.00	66.82	60.8	74.00	13.20
5350.00	16.56	AV	V	33.83	4.84	0.00	55.23	49.21	54.00	4.79
10480.00	38.24	PK	V	37.90	6.94	27.02	56.06	50.04	68.20	18.16
15720.00	37.15	PK	V	37.78	8.51	25.68	57.76	51.74	74.00	22.26
15720.00	23.54	AV	V	37.78	8.51	25.68	44.15	38.13	54.00	15.87

802.11n ht20(2Tx mode was the worst):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5180 MHz										
5180.00	66.27	PK	H	33.52	4.71	0.00	104.50	98.48	N/A	N/A
5180.00	56.27	AV	H	33.52	4.71	0.00	94.50	88.48	N/A	N/A
5180.00	75.29	PK	V	33.52	4.71	0.00	113.52	107.5	N/A	N/A
5180.00	65.29	AV	V	33.52	4.71	0.00	103.52	97.5	N/A	N/A
5150.00	28.33	PK	V	33.47	4.70	0.00	66.50	60.48	74.00	13.52
5150.00	16.92	AV	V	33.47	4.70	0.00	55.09	49.07	54.00	4.93
10360.00	36.49	PK	V	37.93	6.91	26.86	54.47	48.45	68.20	19.75
15540.00	36.11	PK	V	37.96	8.39	25.66	56.80	50.78	74.00	23.22
15540.00	23.14	AV	V	37.96	8.39	25.66	43.83	37.81	54.00	16.19
Middle Channel: 5200 MHz										
5200.00	67.05	PK	H	33.56	4.71	0.00	105.32	99.3	N/A	N/A
5200.00	55.67	AV	H	33.56	4.71	0.00	93.94	87.92	N/A	N/A
5200.00	75.88	PK	V	33.56	4.71	0.00	114.15	108.13	N/A	N/A
5200.00	64.76	AV	V	33.56	4.71	0.00	103.03	97.01	N/A	N/A
10400.00	36.55	PK	V	37.92	6.92	26.84	54.55	48.53	68.20	19.67
15600.00	36.15	PK	V	37.90	8.43	25.97	56.51	50.49	74.00	23.51
15600.00	23.17	AV	V	37.90	8.43	25.97	43.53	37.51	54.00	16.49
High Channel: 5240 MHz										
5240.00	65.49	PK	H	33.63	4.75	0.00	103.87	97.85	N/A	N/A
5240.00	54.16	AV	H	33.63	4.75	0.00	92.54	86.52	N/A	N/A
5240.00	74.66	PK	V	33.63	4.75	0.00	113.04	107.02	N/A	N/A
5240.00	64.14	AV	V	33.63	4.75	0.00	102.52	96.5	N/A	N/A
5350.00	27.42	PK	V	33.83	4.84	0.00	66.09	60.07	74.00	13.93
5350.00	16.54	AV	V	33.83	4.84	0.00	55.21	49.19	54.00	4.81
10480.00	36.67	PK	V	37.90	6.94	27.02	54.49	48.47	68.20	19.73
15720.00	36.02	PK	V	37.78	8.51	25.68	56.63	50.61	74.00	23.39
15720.00	23.04	AV	V	37.78	8.51	25.68	43.65	37.63	54.00	16.37

802.11n ht40(2Tx mode was the worst)::

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5190 MHz										
5190.00	63.47	PK	H	33.54	4.71	0.00	101.72	95.7	N/A	N/A
5190.00	50.94	AV	H	33.54	4.71	0.00	89.19	83.17	N/A	N/A
5190.00	73.61	PK	V	33.54	4.71	0.00	111.86	105.84	N/A	N/A
5190.00	60.90	AV	V	33.54	4.71	0.00	99.15	93.13	N/A	N/A
5150.00	29.88	PK	V	33.47	4.70	0.00	68.05	62.03	74.00	11.97
5150.00	17.38	AV	V	33.47	4.70	0.00	55.55	49.53	54.00	4.47
10380.00	36.24	PK	V	37.92	6.92	26.85	54.23	48.21	68.20	19.99
15570.00	35.97	PK	V	37.93	8.41	25.82	56.49	50.47	74.00	23.53
15570.00	23.04	AV	V	37.93	8.41	25.82	43.56	37.54	54.00	16.46
High Channel: 5230 MHz										
5230.00	62.77	PK	H	33.61	4.74	0.00	101.12	95.1	N/A	N/A
5230.00	50.24	AV	H	33.61	4.74	0.00	88.59	82.57	N/A	N/A
5230.00	72.52	PK	V	33.61	4.74	0.00	110.87	104.85	N/A	N/A
5230.00	60.48	AV	V	33.61	4.74	0.00	98.83	92.81	N/A	N/A
5350.00	29.17	PK	V	33.83	4.84	0.00	67.84	61.82	74.00	12.18
5350.00	16.54	AV	V	33.83	4.84	0.00	55.21	49.19	54.00	4.81
10460.00	36.35	PK	V	37.91	6.93	26.98	54.21	48.19	68.20	20.01
15690.00	36.04	PK	V	37.81	8.49	25.71	56.63	50.61	74.00	23.39
15690.00	23.05	AV	V	37.81	8.49	25.71	43.64	37.62	54.00	16.38

802.11ac vht80(2Tx mode was the worst):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (Db)	Amplifier Gain (Db)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (Db)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (Db/m)						
Middle Channel: 5210 MHz										
5210.00	62.09	PK	H	33.58	4.72	0.00	100.39	94.37	N/A	N/A
5210.00	51.94	AV	H	33.58	4.72	0.00	90.24	84.22	N/A	N/A
5210.00	72.27	PK	V	33.58	4.72	0.00	110.57	104.55	N/A	N/A
5210.00	62.04	AV	V	33.58	4.72	0.00	100.34	94.32	N/A	N/A
5150.00	34.37	PK	V	33.47	4.70	0.00	72.54	66.52	74.00	7.48
5150.00	20.56	AV	V	33.47	4.70	0.00	58.73	52.71	54.00	1.29
5350.00	27.14	PK	V	33.83	4.84	0.00	65.81	59.79	74.00	14.21
5350.00	16.40	AV	V	33.83	4.84	0.00	55.07	49.05	54.00	4.95
10420.00	36.18	PK	V	37.92	6.93	26.89	54.14	48.12	68.20	20.08
15630.00	35.87	PK	V	37.87	8.45	25.88	56.31	50.29	74.00	23.71
15630.00	23.01	AV	V	37.87	8.45	25.88	43.45	37.43	54.00	16.57

5250-5350MHz:
802.11a, Chain 0:

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5260 MHz										
5260.00	67.40	PK	H	33.67	4.76	0.00	105.83	99.81	N/A	N/A
5260.00	59.17	AV	H	33.67	4.76	0.00	97.60	91.58	N/A	N/A
5260.00	75.65	PK	V	33.67	4.76	0.00	114.08	108.06	N/A	N/A
5260.00	67.52	AV	V	33.67	4.76	0.00	105.95	99.93	N/A	N/A
5150.00	28.43	PK	V	33.47	4.70	0.00	66.60	60.58	74.00	13.42
5150.00	16.59	AV	V	33.47	4.70	0.00	54.76	48.74	54.00	5.26
10520.00	36.34	PK	V	37.92	6.94	27.04	54.16	48.14	68.20	20.06
15780.00	36.16	PK	V	37.72	8.55	25.69	56.74	50.72	74.00	23.28
15780.00	23.11	AV	V	37.72	8.55	25.69	43.69	37.67	54.00	16.33
Middle Channel: 5280 MHz										
5280.00	68.56	PK	H	33.70	4.78	0.00	107.04	101.02	N/A	N/A
5280.00	60.40	AV	H	33.70	4.78	0.00	98.88	92.86	N/A	N/A
5280.00	76.94	PK	V	33.70	4.78	0.00	115.42	109.4	N/A	N/A
5280.00	69.08	AV	V	33.70	4.78	0.00	107.56	101.54	N/A	N/A
10560.00	36.25	PK	V	37.95	6.94	26.97	54.17	48.15	68.20	20.05
15840.00	36.17	PK	V	37.66	8.59	25.67	56.75	50.73	74.00	23.27
15840.00	23.09	AV	V	37.66	8.59	25.67	43.67	37.65	54.00	16.35
High Channel: 5320 MHz										
5320.00	67.93	PK	H	33.78	4.81	0.00	106.52	100.5	N/A	N/A
5320.00	59.79	AV	H	33.78	4.81	0.00	98.38	92.36	N/A	N/A
5320.00	75.97	PK	V	33.78	4.81	0.00	114.56	108.54	N/A	N/A
5320.00	66.46	AV	V	33.78	4.81	0.00	105.05	99.03	N/A	N/A
5350.00	28.95	PK	V	33.83	4.84	0.00	67.62	61.6	74.00	12.40
5350.00	16.99	AV	V	33.83	4.84	0.00	55.66	49.64	54.00	4.36
10640.00	36.33	PK	V	38.01	6.94	26.95	54.33	48.31	74.00	25.69
15960.00	36.15	PK	V	37.54	8.67	25.71	56.65	50.63	74.00	23.37
15960.00	23.06	AV	V	37.54	8.67	25.71	43.56	37.54	54.00	16.46

Chain 1:

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5260 MHz										
5260.00	66.37	PK	H	33.67	4.76	0.00	104.80	98.78	N/A	N/A
5260.00	56.44	AV	H	33.67	4.76	0.00	94.87	88.85	N/A	N/A
5260.00	74.60	PK	V	33.67	4.76	0.00	113.03	107.01	N/A	N/A
5260.00	64.71	AV	V	33.67	4.76	0.00	103.14	97.12	N/A	N/A
5150.00	28.96	PK	V	33.47	4.70	0.00	67.13	61.11	74.00	12.89
5150.00	16.56	AV	V	33.47	4.70	0.00	54.73	48.71	54.00	5.29
10520.00	36.45	PK	V	37.92	6.94	27.04	54.27	48.25	68.20	19.95
15780.00	36.27	PK	V	37.72	8.55	25.69	56.85	50.83	74.00	23.17
15780.00	23.15	AV	V	37.72	8.55	25.69	43.73	37.71	54.00	16.29
Middle Channel: 5280 MHz										
5280.00	66.37	PK	H	33.70	4.78	0.00	104.85	98.83	N/A	N/A
5280.00	56.50	AV	H	33.70	4.78	0.00	94.98	88.96	N/A	N/A
5280.00	74.94	PK	V	33.70	4.78	0.00	113.42	107.4	N/A	N/A
5280.00	65.25	AV	V	33.70	4.78	0.00	103.73	97.71	N/A	N/A
10560.00	36.51	PK	V	37.95	6.94	26.97	54.43	48.41	68.20	19.79
15840.00	36.22	PK	V	37.66	8.59	25.67	56.80	50.78	74.00	23.22
15840.00	23.13	AV	V	37.66	8.59	25.67	43.71	37.69	54.00	16.31
High Channel: 5320 MHz										
5320.00	67.85	PK	H	33.78	4.81	0.00	106.44	100.42	N/A	N/A
5320.00	57.98	AV	H	33.78	4.81	0.00	96.57	90.55	N/A	N/A
5320.00	76.22	PK	V	33.78	4.81	0.00	114.81	108.79	N/A	N/A
5320.00	66.44	AV	V	33.78	4.81	0.00	105.03	99.01	N/A	N/A
5350.00	28.56	PK	V	33.83	4.84	0.00	67.23	61.21	74.00	12.79
5350.00	16.98	AV	V	33.83	4.84	0.00	55.65	49.63	54.00	4.37
10640.00	36.37	PK	V	38.01	6.94	26.95	54.37	48.35	74.00	25.65
15960.00	36.25	PK	V	37.54	8.67	25.71	56.75	50.73	74.00	23.27
15960.00	23.13	AV	V	37.54	8.67	25.71	43.63	37.61	54.00	16.39

802.11n ht20(2Tx mode was the worst):

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5260 MHz										
5260.00	66.82	PK	H	33.67	4.76	0.00	105.25	99.23	N/A	N/A
5260.00	55.95	AV	H	33.67	4.76	0.00	94.38	88.36	N/A	N/A
5260.00	75.99	PK	V	33.67	4.76	0.00	114.42	108.4	N/A	N/A
5260.00	65.32	AV	V	33.67	4.76	0.00	103.75	97.73	N/A	N/A
5150.00	28.91	PK	V	33.47	4.70	0.00	67.08	61.06	74.00	12.94
5150.00	16.67	AV	V	33.47	4.70	0.00	54.84	48.82	54.00	5.18
10520.00	36.39	PK	V	37.92	6.94	27.04	54.21	48.19	68.20	20.01
15780.00	36.27	PK	V	37.72	8.55	25.69	56.85	50.83	74.00	23.17
15780.00	23.16	AV	V	37.72	8.55	25.69	43.74	37.72	54.00	16.28
Middle Channel: 5280 MHz										
5280.00	67.17	PK	H	33.70	4.78	0.00	105.65	99.63	N/A	N/A
5280.00	56.25	AV	H	33.70	4.78	0.00	94.73	88.71	N/A	N/A
5280.00	76.37	PK	V	33.70	4.78	0.00	114.85	108.83	N/A	N/A
5280.00	65.69	AV	V	33.70	4.78	0.00	104.17	98.15	N/A	N/A
10560.00	36.44	PK	V	37.95	6.94	26.97	54.36	48.34	68.20	19.86
15840.00	36.18	PK	V	37.66	8.59	25.67	56.76	50.74	74.00	23.26
15840.00	23.07	AV	V	37.66	8.59	25.67	43.65	37.63	54.00	16.37
High Channel: 5320 MHz										
5320.00	66.18	PK	H	33.78	4.81	0.00	104.77	98.75	N/A	N/A
5320.00	55.50	AV	H	33.78	4.81	0.00	94.09	88.07	N/A	N/A
5320.00	75.53	PK	V	33.78	4.81	0.00	114.12	108.1	N/A	N/A
5320.00	64.73	AV	V	33.78	4.81	0.00	103.32	97.3	N/A	N/A
5350.00	28.43	PK	V	33.83	4.84	0.00	67.10	61.08	74.00	12.92
5350.00	16.73	AV	V	33.83	4.84	0.00	55.40	49.38	54.00	4.62
10640.00	36.48	PK	V	38.01	6.94	26.95	54.48	48.46	74.00	25.54
15960.00	36.27	PK	V	37.54	8.67	25.71	56.77	50.75	74.00	23.25
15960.00	23.12	AV	V	37.54	8.67	25.71	43.62	37.6	54.00	16.40

802.11n ht40(2Tx mode was the worst):

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5270 MHz										
5270.00	63.56	PK	H	33.69	4.77	0.00	102.02	96	N/A	N/A
5270.00	51.72	AV	H	33.69	4.77	0.00	90.18	84.16	N/A	N/A
5270.00	73.61	PK	V	33.69	4.77	0.00	112.07	106.05	N/A	N/A
5270.00	61.87	AV	V	33.69	4.77	0.00	100.33	94.31	N/A	N/A
5150.00	28.53	PK	V	33.47	4.70	0.00	66.70	60.68	74.00	13.32
5150.00	16.65	AV	V	33.47	4.70	0.00	54.82	48.8	54.00	5.20
10540.00	36.53	PK	V	37.93	6.94	27.01	54.39	48.37	68.20	19.83
15810.00	36.24	PK	V	37.69	8.57	25.69	56.81	50.79	74.00	23.21
15810.00	23.08	AV	V	37.69	8.57	25.69	43.65	37.63	54.00	16.37
High Channel: 5310 MHz										
5310.00	62.30	PK	H	33.76	4.81	0.00	100.87	94.85	N/A	N/A
5310.00	50.73	AV	H	33.76	4.81	0.00	89.30	83.28	N/A	N/A
5310.00	72.71	PK	V	33.76	4.81	0.00	111.28	105.26	N/A	N/A
5310.00	61.94	AV	V	33.76	4.81	0.00	100.51	94.49	N/A	N/A
5350.00	27.91	PK	V	33.83	4.84	0.00	66.58	60.56	74.00	13.44
5350.00	17.26	AV	V	33.83	4.84	0.00	55.93	49.91	54.00	4.09
10620.00	36.55	PK	V	38.00	6.94	26.93	54.56	48.54	74.00	25.46
15930.00	36.21	PK	V	37.57	8.65	25.68	56.75	50.73	74.00	23.27
15930.00	23.13	AV	V	37.57	8.65	25.68	43.67	37.65	54.00	16.35

802.11ac vht80(2Tx mode was the worst):

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5290 MHz										
5290.00	62.78	PK	H	33.72	4.79	0.00	101.29	95.27	N/A	N/A
5290.00	51.05	AV	H	33.72	4.79	0.00	89.56	83.54	N/A	N/A
5290.00	73.17	PK	V	33.72	4.79	0.00	111.68	105.66	N/A	N/A
5290.00	62.90	AV	V	33.72	4.79	0.00	101.41	95.39	N/A	N/A
5150.00	28.28	PK	V	33.47	4.70	0.00	66.45	60.43	74.00	13.57
5150.00	16.77	AV	V	33.47	4.70	0.00	54.94	48.92	54.00	5.08
5350.00	30.23	PK	V	33.83	4.84	0.00	68.90	62.88	74.00	11.12
5350.00	18.25	AV	V	33.83	4.84	0.00	56.92	50.9	54.00	3.10
10580.00	36.61	PK	V	37.96	6.94	26.94	54.57	48.55	68.20	19.65
15870.00	36.35	PK	V	37.63	8.61	25.66	56.93	50.91	74.00	23.09
15870.00	23.19	AV	V	37.63	8.61	25.66	43.77	37.75	54.00	16.25

5470-5725MHz:
802.11a, Chain 0:

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5500 MHz										
5500.00	72.14	PK	H	34.10	4.91	0.00	111.15	105.13	N/A	N/A
5500.00	62.40	AV	H	34.10	4.91	0.00	101.41	95.39	N/A	N/A
5500.00	79.94	PK	V	34.10	4.91	0.00	118.95	112.93	N/A	N/A
5500.00	70.11	AV	V	34.10	4.91	0.00	109.12	103.1	N/A	N/A
5470.00	30.47	PK	V	34.05	4.90	0.00	69.42	63.4	68.20	4.80
11000.00	37.20	PK	V	38.30	6.95	26.61	55.84	49.82	74.00	24.18
11000.00	24.20	AV	V	38.30	6.95	26.61	42.84	36.82	54.00	17.18
16500.00	36.65	PK	V	38.20	8.89	25.17	58.57	52.55	68.20	15.65
Middle Channel: 5580 MHz										
5580.00	72.12	PK	H	34.14	4.93	0.00	111.19	105.17	N/A	N/A
5580.00	62.26	AV	H	34.14	4.93	0.00	101.33	95.31	N/A	N/A
5580.00	79.88	PK	V	34.14	4.93	0.00	118.95	112.93	N/A	N/A
5580.00	70.24	AV	V	34.14	4.93	0.00	109.31	103.29	N/A	N/A
11160.00	37.23	PK	V	38.54	6.96	26.93	55.80	49.78	74.00	24.22
11160.00	24.21	AV	V	38.54	6.96	26.93	42.78	36.76	54.00	17.24
16740.00	36.57	PK	V	39.34	8.93	25.83	59.01	52.99	68.20	15.21
High Channel: 5700 MHz										
5700.00	68.57	PK	H	34.18	4.97	0.00	107.72	101.7	N/A	N/A
5700.00	58.88	AV	H	34.18	4.97	0.00	98.03	92.01	N/A	N/A
5700.00	77.34	PK	V	34.18	4.97	0.00	116.49	110.47	N/A	N/A
5700.00	67.83	AV	V	34.18	4.97	0.00	106.98	100.96	N/A	N/A
5725.00	32.85	PK	V	34.19	4.96	0.00	72.00	65.98	68.20	2.22
11400.00	37.27	PK	V	38.78	6.97	27.09	55.93	49.91	74.00	24.09
11400.00	24.24	AV	V	38.78	6.97	27.09	42.90	36.88	54.00	17.12
17100.00	36.64	PK	V	40.72	8.98	24.46	61.88	55.86	68.20	12.34

Chain 1:

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5500 MHz										
5500.00	70.04	PK	H	34.10	4.91	0.00	109.05	103.03	N/A	N/A
5500.00	60.43	AV	H	34.10	4.91	0.00	99.44	93.42	N/A	N/A
5500.00	78.69	PK	V	34.10	4.91	0.00	117.70	111.68	N/A	N/A
5500.00	69.23	AV	V	34.10	4.91	0.00	108.24	102.22	N/A	N/A
5470.00	32.01	PK	V	34.05	4.90	0.00	70.96	64.94	68.20	3.26
11000.00	37.22	PK	V	38.30	6.95	26.61	55.86	49.84	74.00	24.16
11000.00	24.21	AV	V	38.30	6.95	26.61	42.85	36.83	54.00	17.17
16500.00	36.57	PK	V	38.20	8.89	25.17	58.49	52.47	68.20	15.73
Middle Channel: 5580 MHz										
5580.00	69.55	PK	H	34.13	4.93	0.00	108.61	102.59	N/A	N/A
5580.00	60.22	AV	H	34.13	4.93	0.00	99.28	93.26	N/A	N/A
5580.00	78.77	PK	V	34.13	4.93	0.00	117.83	111.81	N/A	N/A
5580.00	69.23	AV	V	34.13	4.93	0.00	108.29	102.27	N/A	N/A
11160.00	37.18	PK	V	38.49	6.96	26.86	55.77	49.75	74.00	24.25
11160.00	24.17	AV	V	38.49	6.96	26.86	42.76	36.74	54.00	17.26
16740.00	36.49	PK	V	39.11	8.92	25.36	59.16	53.14	68.20	15.06
High Channel: 5700 MHz										
5700.00	66.41	PK	H	34.18	4.97	0.00	105.56	99.54	N/A	N/A
5700.00	56.78	AV	H	34.18	4.97	0.00	95.93	89.91	N/A	N/A
5700.00	75.58	PK	V	34.18	4.97	0.00	114.73	108.71	N/A	N/A
5700.00	66.05	AV	V	34.18	4.97	0.00	105.20	99.18	N/A	N/A
5725.00	32.72	PK	V	34.19	4.96	0.00	71.87	65.85	68.20	2.35
11400.00	37.27	PK	V	38.78	6.97	27.09	55.93	49.91	74.00	24.09
11400.00	24.23	AV	V	38.78	6.97	27.09	42.89	36.87	54.00	17.13
17100.00	36.45	PK	V	40.72	8.98	24.46	61.69	55.67	68.20	12.53

802.11n ht20(2TX was the worst):

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5500 MHz										
5500.00	70.99	PK	H	34.10	4.91	0.00	110.00	103.98	N/A	N/A
5500.00	60.22	AV	H	34.10	4.91	0.00	99.23	93.21	N/A	N/A
5500.00	81.61	PK	V	34.10	4.91	0.00	120.62	114.6	N/A	N/A
5500.00	70.83	AV	V	34.10	4.91	0.00	109.84	103.82	N/A	N/A
5470.00	30.53	PK	V	34.05	4.90	0.00	69.48	63.46	68.20	4.74
11000.00	37.08	PK	V	38.30	6.95	26.61	55.72	49.7	74.00	24.30
11000.00	24.04	AV	V	38.30	6.95	26.61	42.68	36.66	54.00	17.34
16500.00	36.38	PK	V	38.20	8.89	25.17	58.30	52.28	68.20	15.92
Middle Channel: 5580 MHz										
5580.00	70.84	PK	H	34.13	4.93	0.00	109.90	103.88	N/A	N/A
5580.00	60.21	AV	H	34.13	4.93	0.00	99.27	93.25	N/A	N/A
5580.00	81.22	PK	V	34.13	4.93	0.00	120.28	114.26	N/A	N/A
5580.00	70.56	AV	V	34.13	4.93	0.00	109.62	103.6	N/A	N/A
11160.00	37.13	PK	V	38.49	6.96	26.86	55.72	49.7	74.00	24.30
11160.00	24.08	AV	V	38.49	6.96	26.86	42.67	36.65	54.00	17.35
16740.00	36.29	PK	V	39.11	8.92	25.36	58.96	52.94	68.20	15.26
High Channel: 5700 MHz										
5700.00	69.73	PK	H	34.18	4.97	0.00	108.88	102.86	N/A	N/A
5700.00	58.91	AV	H	34.18	4.97	0.00	98.06	92.04	N/A	N/A
5700.00	80.19	PK	V	34.18	4.97	0.00	119.34	113.32	N/A	N/A
5700.00	69.61	AV	V	34.18	4.97	0.00	108.76	102.74	N/A	N/A
5725.00	32.73	PK	V	34.19	4.96	0.00	71.88	65.86	68.20	2.34
11400.00	37.19	PK	V	38.78	6.97	27.09	55.85	49.83	74.00	24.17
11400.00	24.11	AV	V	38.78	6.97	27.09	42.77	36.75	54.00	17.25
17100.00	36.36	PK	V	40.72	8.98	24.46	61.60	55.58	68.20	12.62

802.11n ht40(2TX was the worst):

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5510 MHz										
5510.00	66.27	PK	H	34.10	4.91	0.00	105.28	99.26	N/A	N/A
5510.00	56.15	AV	H	34.10	4.91	0.00	95.16	89.14	N/A	N/A
5510.00	76.79	PK	V	34.10	4.91	0.00	115.80	109.78	N/A	N/A
5510.00	66.43	AV	V	34.10	4.91	0.00	105.44	99.42	N/A	N/A
5470.00	32.55	PK	V	34.05	4.90	0.00	71.50	65.48	68.20	2.72
11020.00	37.36	PK	V	38.32	6.95	26.64	55.99	49.97	74.00	24.03
11020.00	24.23	AV	V	38.32	6.95	26.64	42.86	36.84	54.00	17.16
16530.00	36.41	PK	V	38.31	8.89	25.32	58.29	52.27	68.20	15.93
Middle Channel: 5550 MHz										
5550.00	66.80	PK	H	34.12	4.92	0.00	105.84	99.82	N/A	N/A
5550.00	56.39	AV	H	34.12	4.92	0.00	95.43	89.41	N/A	N/A
5550.00	77.35	PK	V	34.12	4.92	0.00	116.39	110.37	N/A	N/A
5550.00	66.96	AV	V	34.12	4.92	0.00	106.00	99.98	N/A	N/A
11100.00	37.48	PK	V	38.42	6.96	26.75	56.11	50.09	74.00	23.91
11100.00	24.38	AV	V	38.42	6.96	26.75	43.01	36.99	54.00	17.01
16650.00	36.37	PK	V	38.77	8.91	25.36	58.69	52.67	68.20	15.53
High Channel: 5670 MHz										
5670.00	66.39	PK	H	34.17	4.96	0.00	105.52	99.5	N/A	N/A
5670.00	55.79	AV	H	34.17	4.96	0.00	94.92	88.9	N/A	N/A
5670.00	77.09	PK	V	34.17	4.96	0.00	116.22	110.2	N/A	N/A
5670.00	66.80	AV	V	34.17	4.96	0.00	105.93	99.91	N/A	N/A
5725.00	32.62	PK	V	34.19	4.96	0.00	71.77	65.75	68.20	2.45
11340.00	37.42	PK	V	38.71	6.97	26.87	56.23	50.21	74.00	23.79
11340.00	24.33	AV	V	38.71	6.97	26.87	43.14	37.12	54.00	16.88
17010.00	36.35	PK	V	40.16	8.96	25.47	60.00	53.98	68.20	14.22

802.11ac vht80(2TX was the worst):

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5530 MHz										
5530.00	62.44	PK	H	34.11	4.92	0.00	101.47	95.45	N/A	N/A
5530.00	52.05	AV	H	34.11	4.92	0.00	91.08	85.06	N/A	N/A
5530.00	73.15	PK	V	34.11	4.92	0.00	112.18	106.16	N/A	N/A
5530.00	62.85	AV	V	34.11	4.92	0.00	101.88	95.86	N/A	N/A
5470.00	32.44	PK	V	34.05	4.90	0.00	71.39	65.37	68.20	2.83
11060.00	37.28	PK	V	38.37	6.95	26.69	55.91	49.89	74.00	24.11
11060.00	24.22	AV	V	38.37	6.95	26.69	42.85	36.83	54.00	17.17
16590.00	36.19	PK	V	38.54	8.90	25.62	58.01	51.99	68.20	16.21
High Channel: 5610 MHz										
5610.00	67.79	PK	H	34.14	4.93	0.00	106.86	100.84	N/A	N/A
5610.00	57.63	AV	H	34.14	4.93	0.00	96.70	90.68	N/A	N/A
5610.00	78.35	PK	V	34.14	4.93	0.00	117.42	111.4	N/A	N/A
5610.00	67.72	AV	V	34.14	4.93	0.00	106.79	100.77	N/A	N/A
5725.00	29.38	PK	V	34.19	4.96	0.00	68.53	62.51	68.20	5.69
11220.00	37.19	PK	V	38.56	6.96	26.89	55.82	49.8	74.00	24.20
11220.00	24.14	AV	V	38.56	6.96	26.89	42.77	36.75	54.00	17.25
16830.00	36.15	PK	V	39.45	8.94	25.58	58.96	52.94	68.20	15.26

5725-5850MHz
802.11a, Chain 0

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5745 MHz										
5745.00	72.00	PK	H	34.20	4.96	0.00	111.16	105.14	N/A	N/A
5745.00	62.63	AV	H	34.20	4.96	0.00	101.79	95.77	N/A	N/A
5745.00	80.54	PK	V	34.20	4.96	0.00	119.70	113.68	N/A	N/A
5745.00	70.90	AV	V	34.20	4.96	0.00	110.06	104.04	N/A	N/A
5725.00	47.32	PK	V	34.19	4.96	0.00	86.47	80.45	122.20	41.75
5720.00	45.44	PK	V	34.19	4.96	0.00	84.59	78.57	110.80	32.23
5700.00	33.74	PK	V	34.18	4.97	0.00	72.89	66.87	105.20	38.33
5650.00	27.67	PK	V	34.16	4.95	0.00	66.78	60.76	68.20	7.44
11490.00	37.26	PK	V	38.89	6.98	26.57	56.56	50.54	74.00	23.46
11490.00	24.18	AV	V	38.89	6.98	26.57	43.48	37.46	54.00	16.54
17235.00	36.28	PK	V	41.56	9.01	25.11	61.74	55.72	68.20	12.48
Middle Channel: 5785 MHz										
5785.00	71.42	PK	H	34.21	4.94	0.00	110.57	104.55	N/A	N/A
5785.00	61.98	AV	H	34.21	4.94	0.00	101.13	95.11	N/A	N/A
5785.00	80.36	PK	V	34.21	4.94	0.00	119.51	113.49	N/A	N/A
5785.00	70.63	AV	V	34.21	4.94	0.00	109.78	103.76	N/A	N/A
11570.00	37.33	PK	V	38.94	6.98	26.97	56.28	50.26	74.00	23.74
11570.00	24.21	AV	V	38.94	6.98	26.97	43.16	37.14	54.00	16.86
17355.00	36.32	PK	V	42.30	9.04	25.16	62.50	56.48	68.20	11.72
High Channel: 5825 MHz										
5825.00	70.86	PK	H	34.23	4.94	0.00	110.03	104.01	N/A	N/A
5825.00	61.46	AV	H	34.23	4.94	0.00	100.63	94.61	N/A	N/A
5825.00	79.23	PK	V	34.23	4.94	0.00	118.40	112.38	N/A	N/A
5825.00	69.63	AV	V	34.23	4.94	0.00	108.80	102.78	N/A	N/A
5850.00	42.87	PK	V	34.24	4.95	0.00	82.06	76.04	122.20	46.16
5855.00	41.43	PK	V	34.24	4.95	0.00	80.62	74.6	110.80	36.20
5875.00	32.17	PK	V	34.25	4.95	0.00	71.37	65.35	105.20	39.85
5925.00	27.79	PK	V	34.27	4.95	0.00	67.01	60.99	68.20	7.21
11650.00	37.24	PK	V	38.99	6.99	26.84	56.38	50.36	74.00	23.64
11650.00	24.17	AV	V	38.99	6.99	26.84	43.31	37.29	54.00	16.71
17475.00	36.27	PK	V	43.05	9.06	24.55	63.83	57.81	68.20	10.39

Chain 1

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5745 MHz										
5745.00	69.33	PK	H	34.20	4.96	0.00	108.49	102.47	N/A	N/A
5745.00	59.93	AV	H	34.20	4.96	0.00	99.09	93.07	N/A	N/A
5745.00	79.92	PK	V	34.20	4.96	0.00	119.08	113.06	N/A	N/A
5745.00	70.50	AV	V	34.20	4.96	0.00	109.66	103.64	N/A	N/A
5725.00	51.48	PK	V	34.19	4.96	0.00	90.63	84.61	122.20	37.59
5720.00	45.56	PK	V	34.19	4.96	0.00	84.71	78.69	110.80	32.11
5700.00	38.00	PK	V	34.18	4.97	0.00	77.15	71.13	105.20	34.07
5650.00	28.45	PK	V	34.16	4.95	0.00	67.56	61.54	68.20	6.66
11490.00	37.17	PK	V	38.89	6.98	26.57	56.47	50.45	74.00	23.55
11490.00	24.13	AV	V	38.89	6.98	26.57	43.43	37.41	54.00	16.59
17235.00	36.15	PK	V	41.56	9.01	25.11	61.61	55.59	68.20	12.61
Middle Channel: 5785 MHz										
5785.00	68.86	PK	H	34.21	4.94	0.00	108.01	101.99	N/A	N/A
5785.00	58.69	AV	H	34.21	4.94	0.00	97.84	91.82	N/A	N/A
5785.00	79.36	PK	V	34.21	4.94	0.00	118.51	112.49	N/A	N/A
5785.00	70.20	AV	V	34.21	4.94	0.00	109.35	103.33	N/A	N/A
11570.00	37.25	PK	V	38.94	6.98	26.97	56.20	50.18	74.00	23.82
11570.00	24.14	AV	V	38.94	6.98	26.97	43.09	37.07	54.00	16.93
17355.00	36.13	PK	V	42.30	9.04	25.16	62.31	56.29	68.20	11.91
High Channel: 5825 MHz										
5825.00	68.36	PK	H	34.23	4.94	0.00	107.53	101.51	N/A	N/A
5825.00	58.74	AV	H	34.23	4.94	0.00	97.91	91.89	N/A	N/A
5825.00	78.62	PK	V	34.23	4.94	0.00	117.79	111.77	N/A	N/A
5825.00	69.54	AV	V	34.23	4.94	0.00	108.71	102.69	N/A	N/A
5850.00	47.99	PK	V	34.24	4.95	0.00	87.18	81.16	122.20	41.04
5855.00	46.57	PK	V	34.24	4.95	0.00	85.76	79.74	110.80	31.06
5875.00	37.40	PK	V	34.25	4.95	0.00	76.60	70.58	105.20	34.62
5925.00	29.68	PK	V	34.27	4.95	0.00	68.90	62.88	68.20	5.32
11650.00	37.35	PK	V	38.99	6.99	26.84	56.49	50.47	74.00	23.53
11650.00	24.18	AV	V	38.99	6.99	26.84	43.32	37.3	54.00	16.70
17475.00	36.21	PK	V	43.05	9.06	24.55	63.77	57.75	68.20	10.45

802.11n ht20(2Tx mode was the worst):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5745 MHz										
5745.00	69.11	PK	H	34.20	4.96	0.00	108.27	102.25	N/A	N/A
5745.00	59.92	AV	H	34.20	4.96	0.00	99.08	93.06	N/A	N/A
5745.00	78.10	PK	V	34.20	4.96	0.00	117.26	111.24	N/A	N/A
5745.00	67.85	AV	V	34.20	4.96	0.00	107.01	100.99	N/A	N/A
5725.00	43.03	PK	V	34.19	4.96	0.00	82.18	76.16	122.20	46.04
5720.00	39.05	PK	V	34.19	4.96	0.00	78.20	72.18	110.80	38.62
5700.00	32.43	PK	V	34.18	4.97	0.00	71.58	65.56	105.20	39.64
5650.00	28.86	PK	V	34.16	4.95	0.00	67.97	61.95	68.20	6.25
11490.00	37.26	PK	V	38.89	6.98	26.57	56.56	50.54	74.00	23.46
11490.00	24.22	AV	V	38.89	6.98	26.57	43.52	37.5	54.00	16.50
17235.00	36.27	PK	V	41.56	9.01	25.11	61.73	55.71	68.20	12.49
Middle Channel: 5785 MHz										
5785.00	68.86	PK	H	34.21	4.94	0.00	108.01	101.99	N/A	N/A
5785.00	59.54	AV	H	34.21	4.94	0.00	98.69	92.67	N/A	N/A
5785.00	77.81	PK	V	34.21	4.94	0.00	116.96	110.94	N/A	N/A
5785.00	67.83	AV	V	34.21	4.94	0.00	106.98	100.96	N/A	N/A
11570.00	37.18	PK	V	38.94	6.98	26.97	56.13	50.11	74.00	23.89
11570.00	24.17	AV	V	38.94	6.98	26.97	43.12	37.1	54.00	16.90
17355.00	36.23	PK	V	42.30	9.04	25.16	62.41	56.39	68.20	11.81
High Channel: 5825 MHz										
5825.00	68.78	PK	H	34.23	4.94	0.00	107.95	101.93	N/A	N/A
5825.00	59.62	AV	H	34.23	4.94	0.00	98.79	92.77	N/A	N/A
5825.00	77.54	PK	V	34.23	4.94	0.00	116.71	110.69	N/A	N/A
5825.00	67.15	AV	V	34.23	4.94	0.00	106.32	100.3	N/A	N/A
5850.00	44.22	PK	V	34.24	4.95	0.00	83.41	77.39	122.20	44.81
5855.00	39.44	PK	V	34.24	4.95	0.00	78.63	72.61	110.80	38.19
5875.00	33.28	PK	V	34.25	4.95	0.00	72.48	66.46	105.20	38.74
5925.00	28.17	PK	V	34.27	4.95	0.00	67.39	61.37	68.20	6.83
11650.00	37.15	PK	V	38.99	6.99	26.84	56.29	50.27	74.00	23.73
11650.00	24.13	AV	V	38.99	6.99	26.84	43.27	37.25	54.00	16.75
17475.00	36.19	PK	V	43.05	9.06	24.55	63.75	57.73	68.20	10.47

802.11n ht40(2Tx mode was the worst):




Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5755 MHz										
5755.00	68.20	PK	H	34.20	4.95	0.00	107.35	101.33	N/A	N/A
5755.00	59.10	AV	H	34.20	4.95	0.00	98.25	92.23	N/A	N/A
5755.00	76.85	PK	V	34.20	4.95	0.00	116.00	109.98	N/A	N/A
5755.00	67.59	AV	V	34.20	4.95	0.00	106.74	100.72	N/A	N/A
5725.00	57.48	PK	V	34.19	4.96	0.00	96.63	90.61	122.20	31.59
5720.00	57.74	PK	V	34.19	4.96	0.00	96.89	90.87	110.80	19.93
5700.00	45.27	PK	V	34.18	4.97	0.00	84.42	78.4	105.20	26.80
5650.00	30.69	PK	V	34.16	4.95	0.00	69.80	63.78	68.20	4.42
11510.00	37.09	PK	V	38.91	6.98	26.58	56.40	50.38	74.00	23.62
11510.00	24.11	AV	V	38.91	6.98	26.58	43.42	37.4	54.00	16.60
17265.00	36.16	PK	V	41.74	9.02	24.84	62.08	56.06	68.20	12.14
High Channel: 5795 MHz										
5795.00	66.36	PK	H	34.22	4.94	0.00	105.52	99.5	N/A	N/A
5795.00	57.60	AV	H	34.22	4.94	0.00	96.76	90.74	N/A	N/A
5795.00	75.84	PK	V	34.22	4.94	0.00	115.00	108.98	N/A	N/A
5795.00	66.75	AV	V	34.22	4.94	0.00	105.91	99.89	N/A	N/A
5850.00	44.72	PK	V	34.24	4.95	0.00	83.91	77.89	122.20	44.31
5855.00	44.36	PK	V	34.24	4.95	0.00	83.55	77.53	110.80	33.27
5875.00	41.53	PK	V	34.25	4.95	0.00	80.73	74.71	105.20	30.49
5925.00	30.74	PK	V	34.27	4.95	0.00	69.96	63.94	68.20	4.26
11590.00	37.18	PK	V	38.95	6.99	27.10	56.02	50	74.00	24.00
11590.00	24.16	AV	V	38.95	6.99	27.10	43.00	36.98	54.00	17.02
17385.00	36.15	PK	V	42.49	9.04	25.51	62.17	56.15	68.20	12.05


802.11ac vht80(2Tx mode was the worst):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)						
Middle Channel: 5775 MHz										
5775.00	66.48	PK	H	34.21	4.95	0.00	105.64	99.62	N/A	N/A
5775.00	57.47	AV	H	34.21	4.95	0.00	96.63	90.61	N/A	N/A
5775.00	74.27	PK	V	34.21	4.95	0.00	113.43	107.41	N/A	N/A
5775.00	64.33	AV	V	34.21	4.95	0.00	103.49	97.47	N/A	N/A
5725.00	45.29	PK	V	34.19	4.96	0.00	84.44	78.42	122.20	43.78
5720.00	44.50	PK	V	34.19	4.96	0.00	83.65	77.63	110.80	33.17
5700.00	43.02	PK	V	34.18	4.97	0.00	82.17	76.15	105.20	29.05
5650.00	33.39	PK	V	34.16	4.95	0.00	72.50	66.48	68.20	1.72
5850.00	42.00	PK	V	34.24	4.95	0.00	81.19	75.17	122.20	47.03
5855.00	41.36	PK	V	34.24	4.95	0.00	80.55	74.53	110.80	36.27
5875.00	35.97	PK	V	34.25	4.95	0.00	75.17	69.15	105.20	36.05
5925.00	30.17	PK	V	34.27	4.95	0.00	69.39	63.37	68.20	4.83
11550.00	36.97	PK	V	38.93	6.98	26.84	56.04	50.02	74.00	23.98
11550.00	24.07	AV	V	38.93	6.98	26.84	43.14	37.12	54.00	16.88
17325.00	36.09	PK	V	42.12	9.03	24.81	62.43	56.41	68.20	11.79



Test Plots(802.11a mode chain 1 5580MHz was the worst)



Horizontal

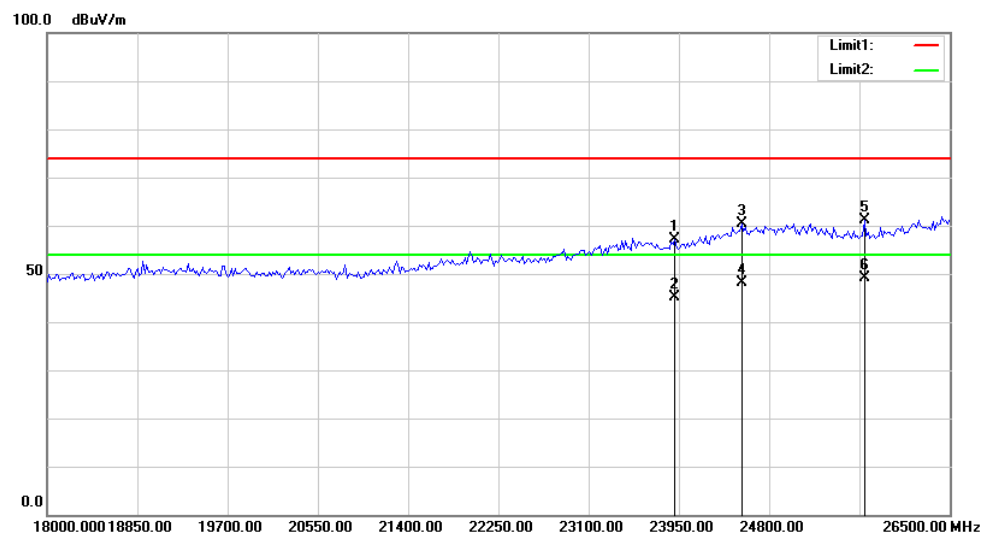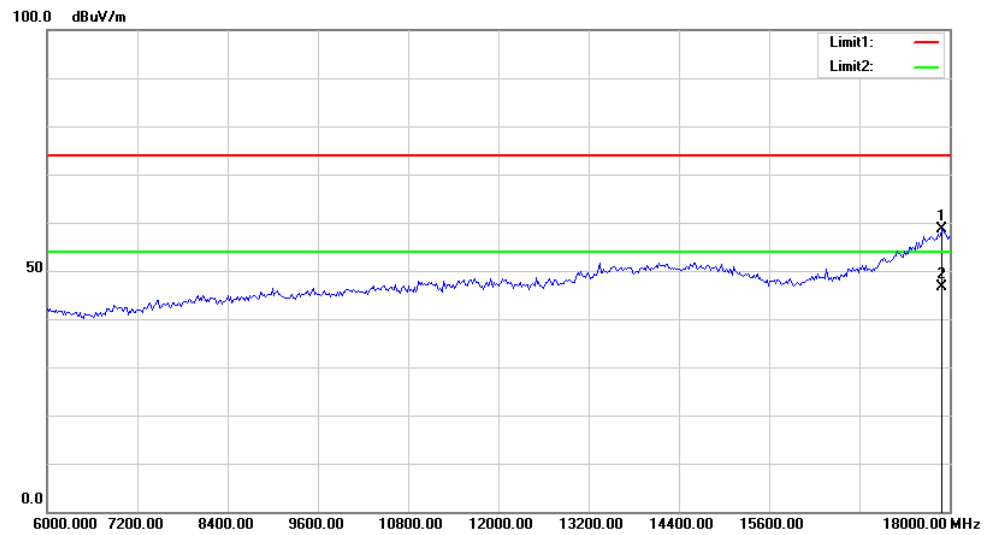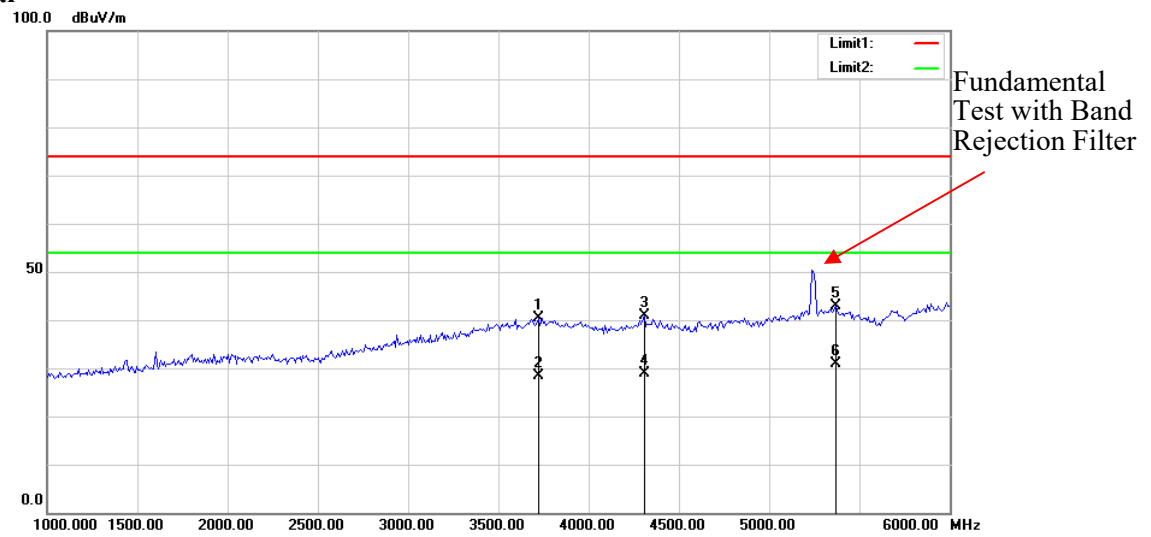

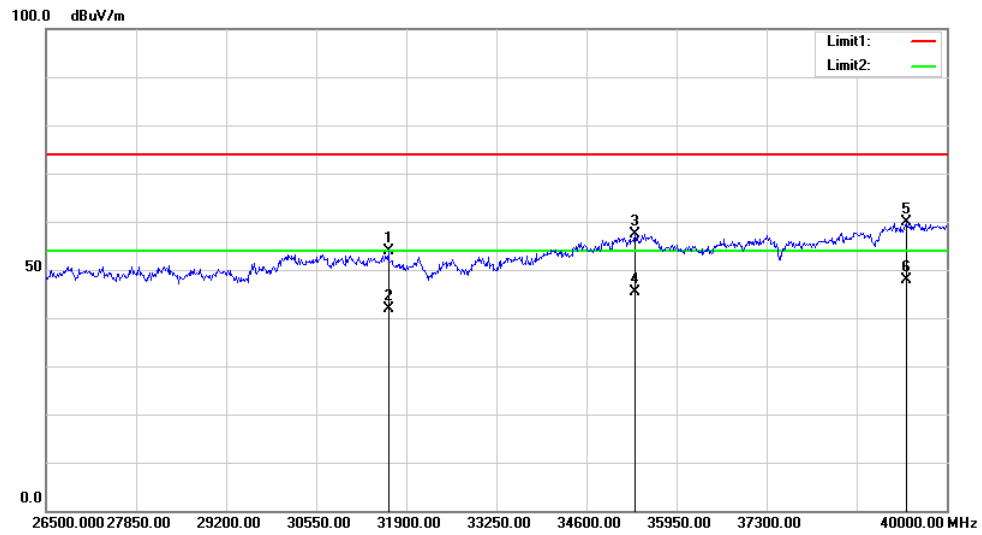

Vertical

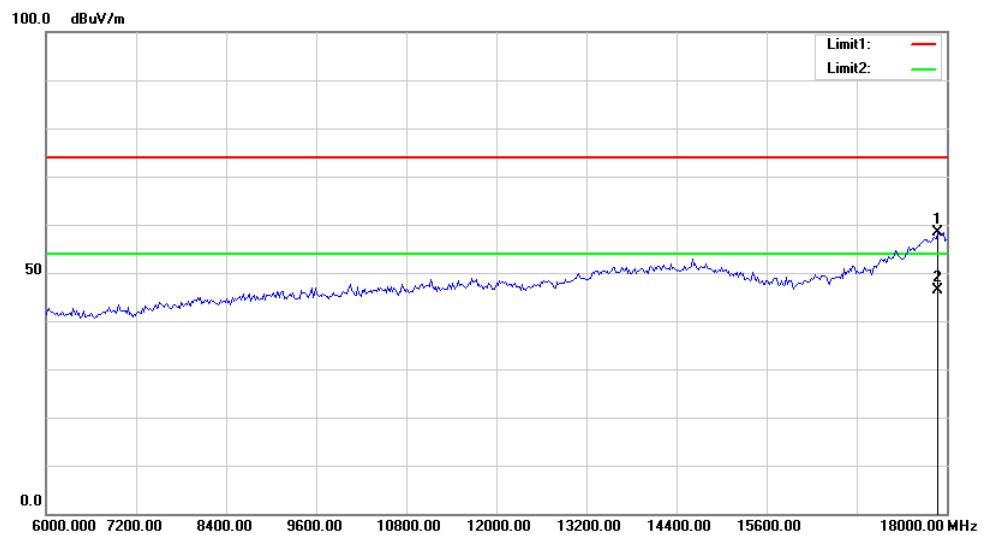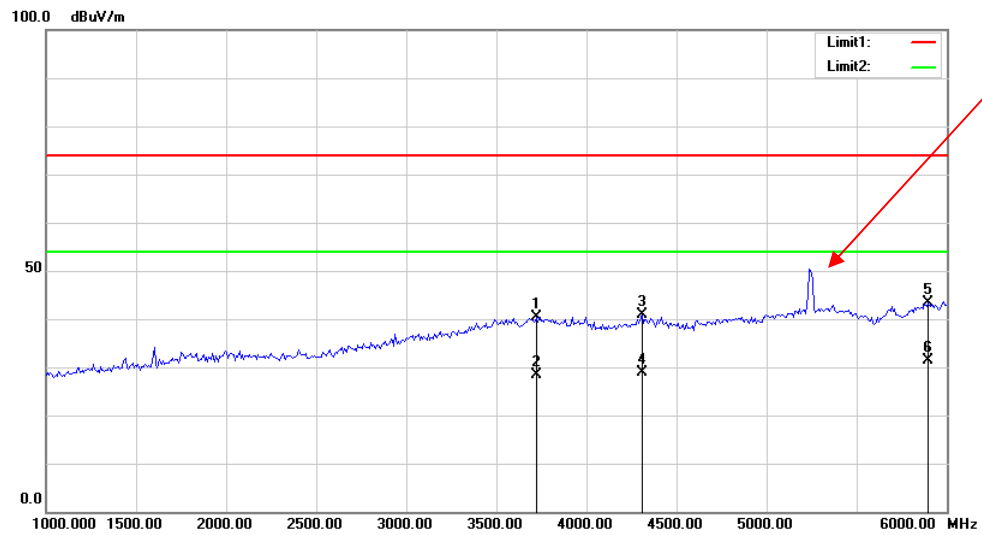

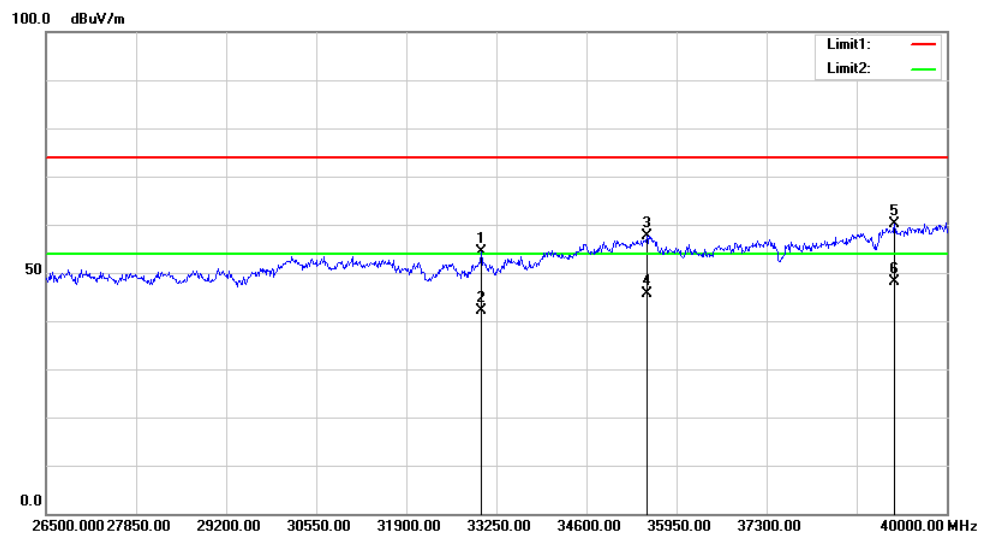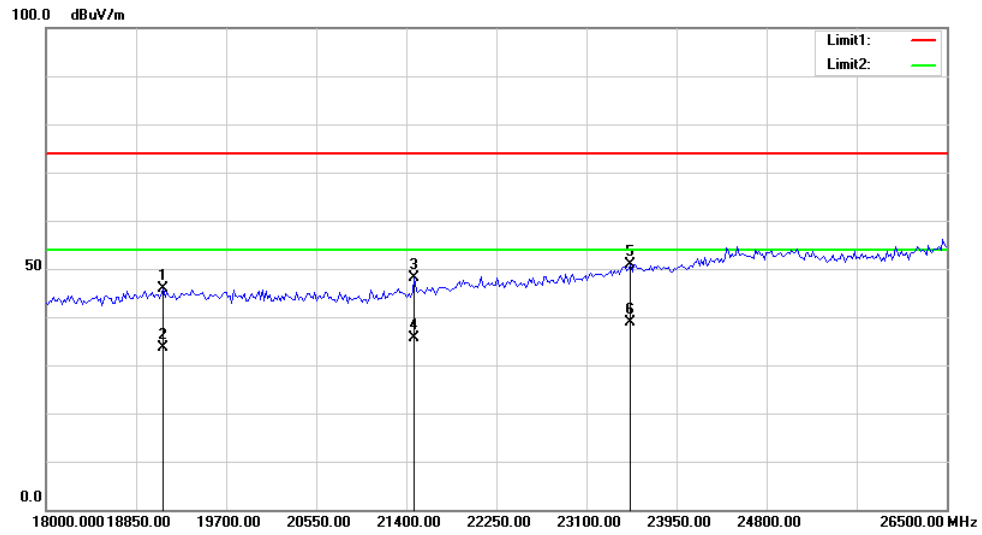

FCC §15.407(a)(e)–EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH

Applicable Standard

15.407(a) (e).

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2021-07-07	2022-07-07
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Data

Environmental Conditions

Temperature:	25~27.4 °C
Relative Humidity:	55~60 %
ATM Pressure:	100~100.7 kPa
Test by:	Joe Qiao
Test Date:	2021-07-01~2021-07-23

Test Result: Pass.

Please refer to the following tables and plots.

Test mode: Transmitting (test was only performed at chain 0)

5150-5250MHz:

Mode	Frequency (MHz)	26 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11 a	5180	19.040	16.527
	5200	18.880	16.527
	5240	18.880	16.447
802.11n ht20	5180	19.760	17.645
	5200	19.760	17.645
	5240	19.760	17.645
802.11n ht40	5190	40.960	36.407
	5230	40.960	36.407
802.11ac vht80	5210	81.599	75.369

5250-5350MHz:

Mode	Frequency (MHz)	26 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11 a	5260	18.880	16.367
	5280	18.880	16.367
	5320	18.880	16.447
802.11n ht20	5260	19.760	17.645
	5280	19.760	17.645
	5320	19.840	17.645
802.11n ht40	5270	40.800	36.407
	5310	40.960	36.567
802.11ac vht80	5290	81.280	75.369

5470-5725 MHz:


Mode	Frequency (MHz)	26 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11 a	5500	19.040	16.527
	5580	19.120	16.447
	5700	21.600	16.527
802.11n ht20	5500	19.760	17.645
	5580	19.760	17.645
	5700	24.800	17.725
802.11n ht40	5510	40.960	36.567
	5550	40.800	36.567
	5670	43.060	37.365
802.11ac vht80	5530	82.070	76.008
	5610	81.280	76.327
	5690	81.372	76.647

5725-5850MHz:

Mode	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	6 dB Emission Bandwidth Limits (MHz)	99% Occupied Bandwidth (MHz)
802.11 a	5745	16.000	≥0.5	16.687
	5785	16.160	≥0.5	16.687
	5825	16.160	≥0.5	16.687
802.11n ht20	5745	17.360	≥0.5	17.725
	5785	17.600	≥0.5	17.645
	5825	17.600	≥0.5	17.645
802.11n ht40	5755	35.520	≥0.5	37.046
	5795	35.520	≥0.5	37.365
802.11ac vht80	5775	74.560	≥0.5	81.118


5150-5250MHz:
26dB Emission Bandwidth:

802.11a Low Channel

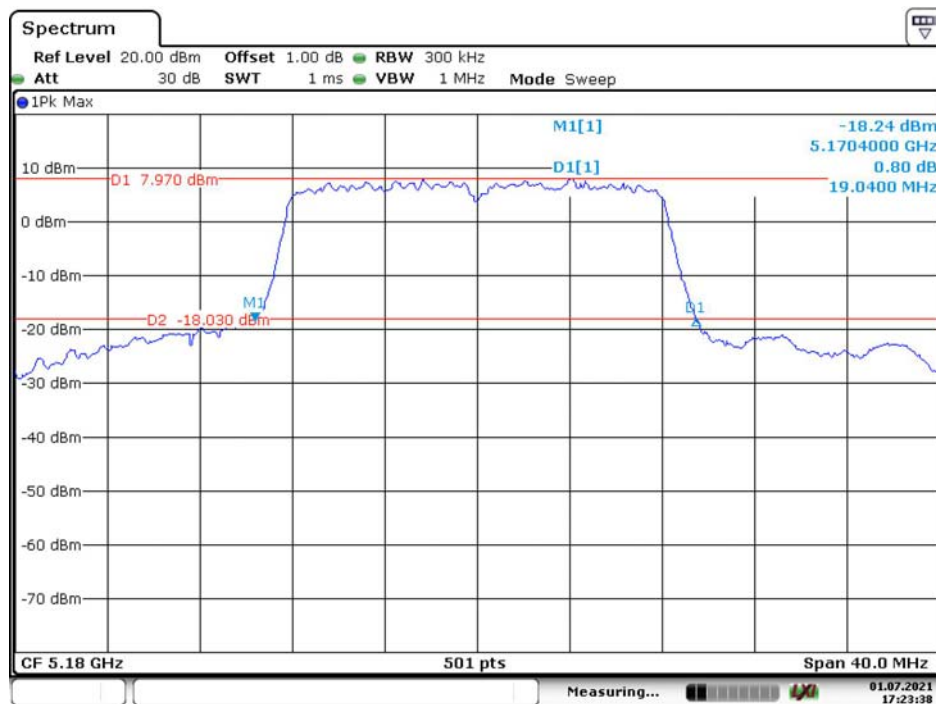


Date: 1.JUL.2021 17:23:38

802.11a Middle Channel

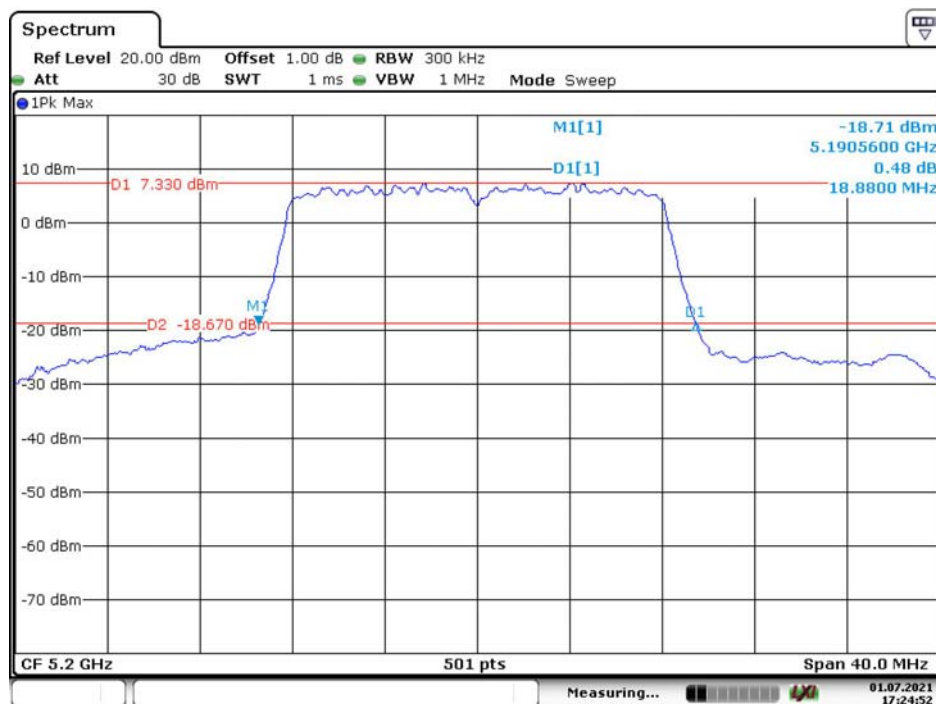


Date: 1.JUL.2021 17:24:53

802.11a High Channel

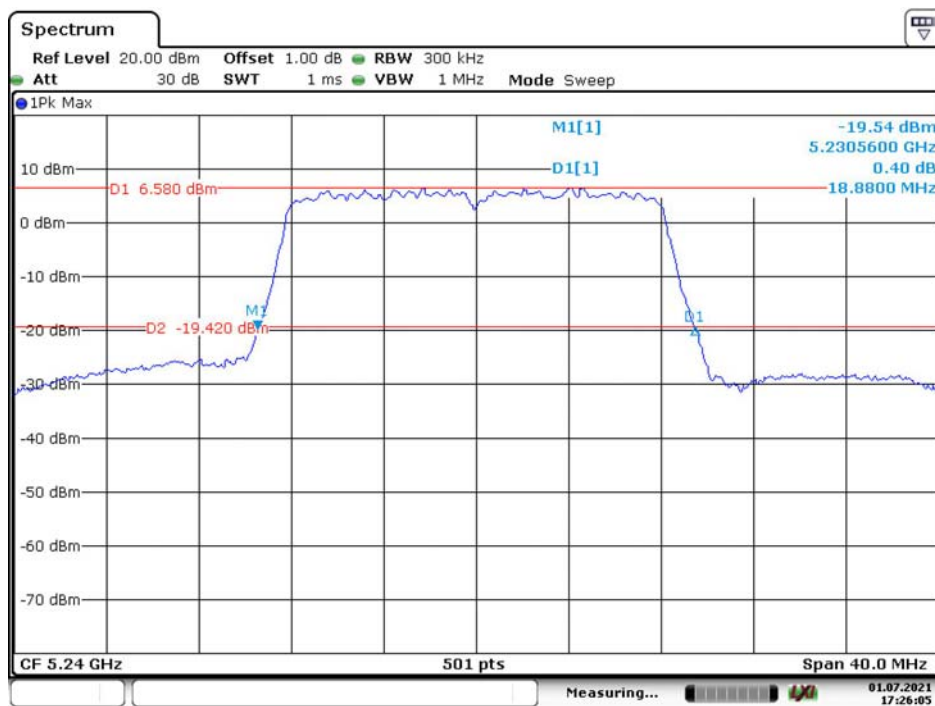


Date: 1.JUL.2021 17:26:06

802.11n ht20 Low Channel

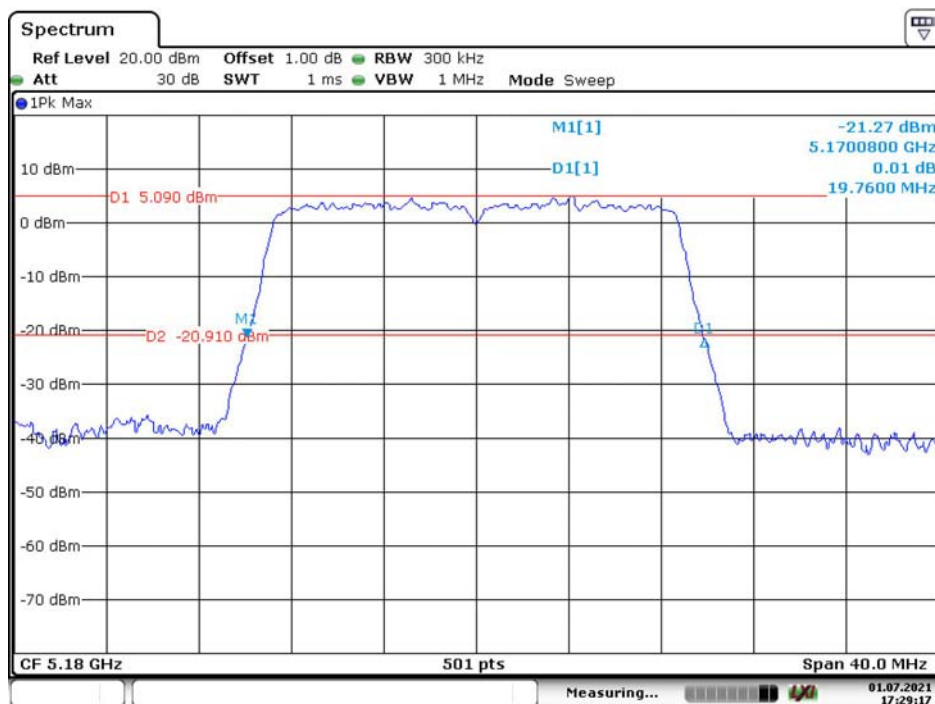


Date: 1.JUL.2021 17:29:18

802.11n ht20 Middle Channel

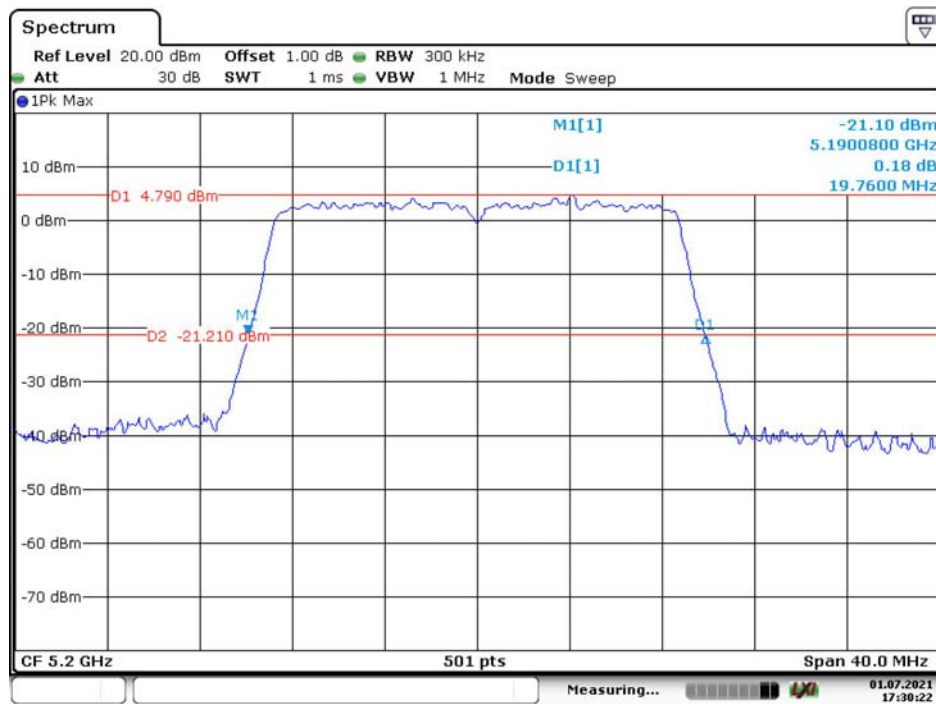


Date: 1.JUL.2021 17:30:23

802.11n ht20 High Channel

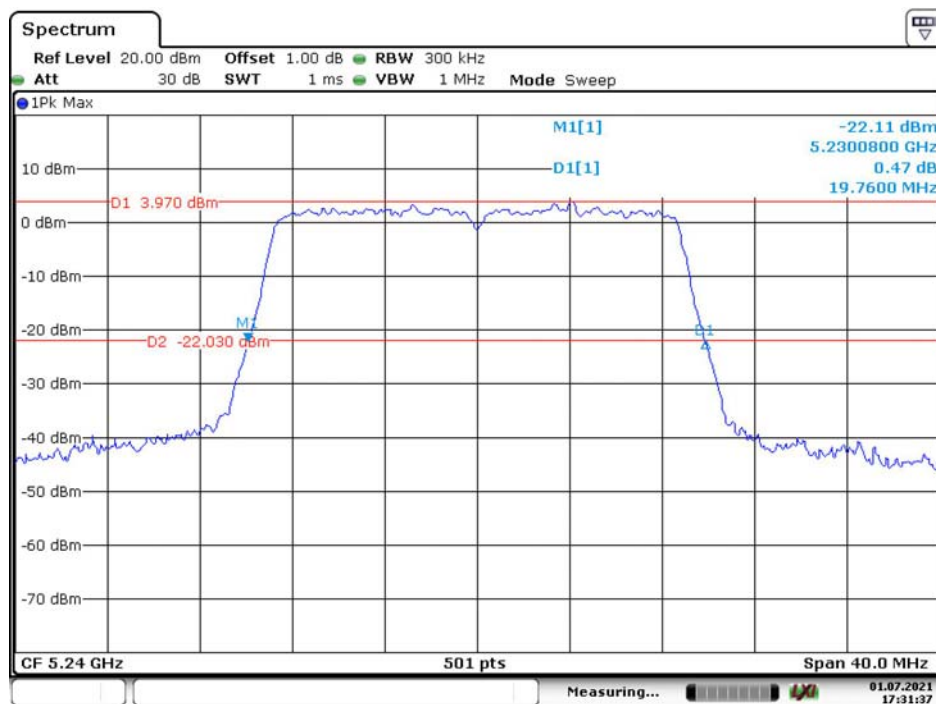


Date: 1.JUL.2021 17:31:38

802.11n ht40 Low Channel

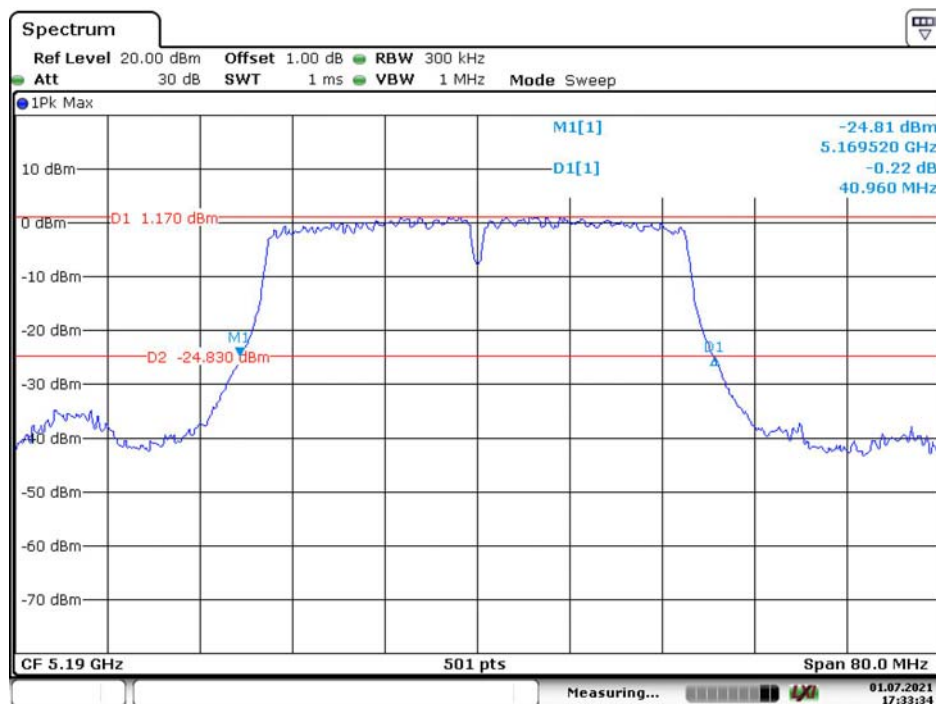


Date: 1.JUL.2021 17:33:34

802.11n ht40 High Channel

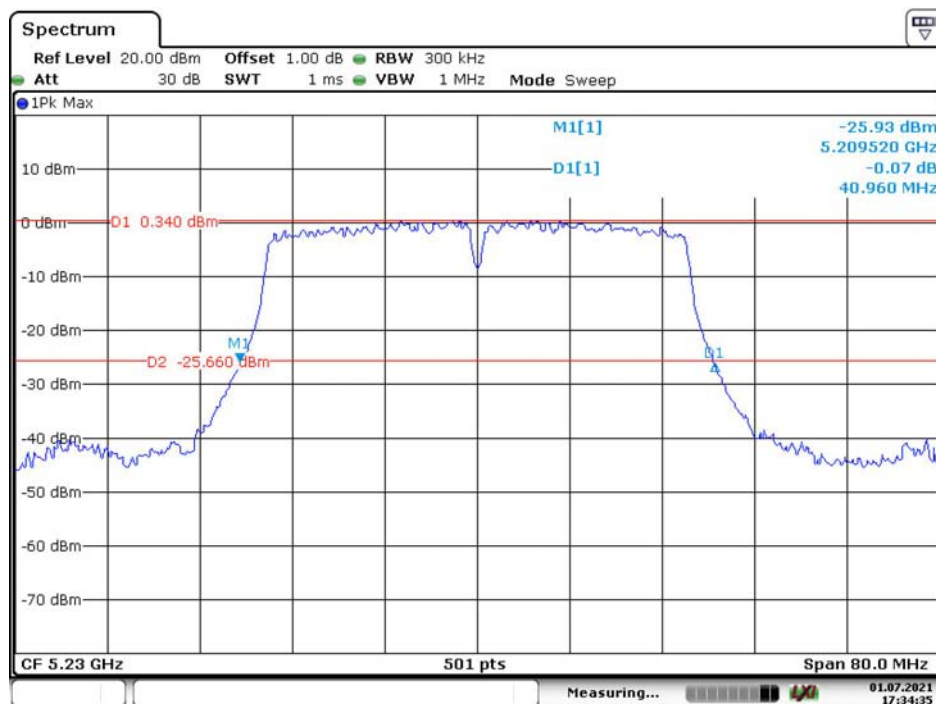


Date: 1.JUL.2021 17:34:36

802.11ac vht80 Middle Channel

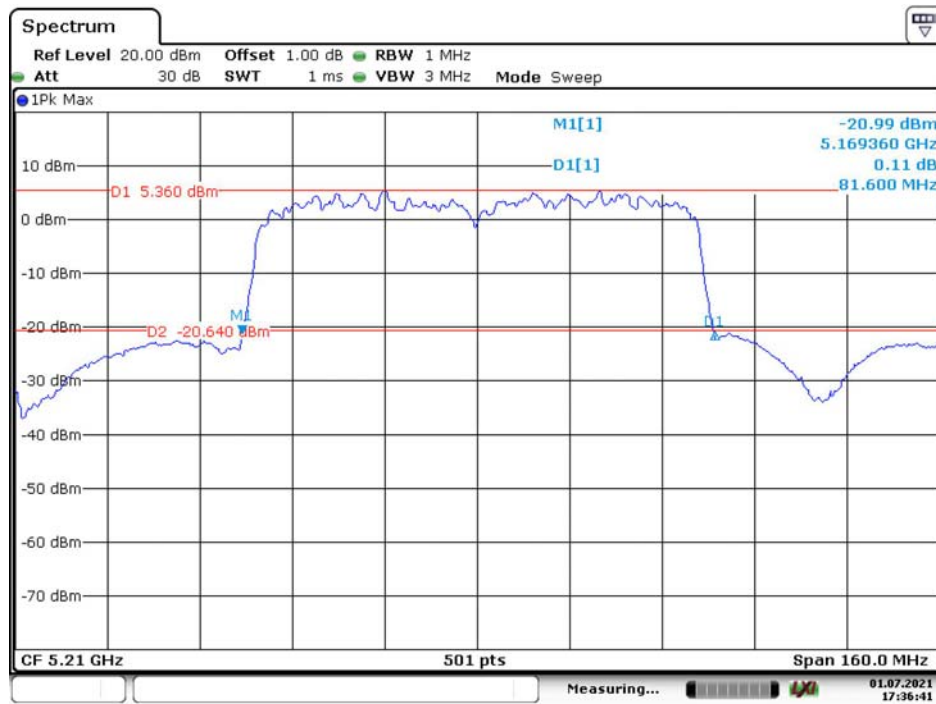

Date: 1.JUL.2021 17:36:42

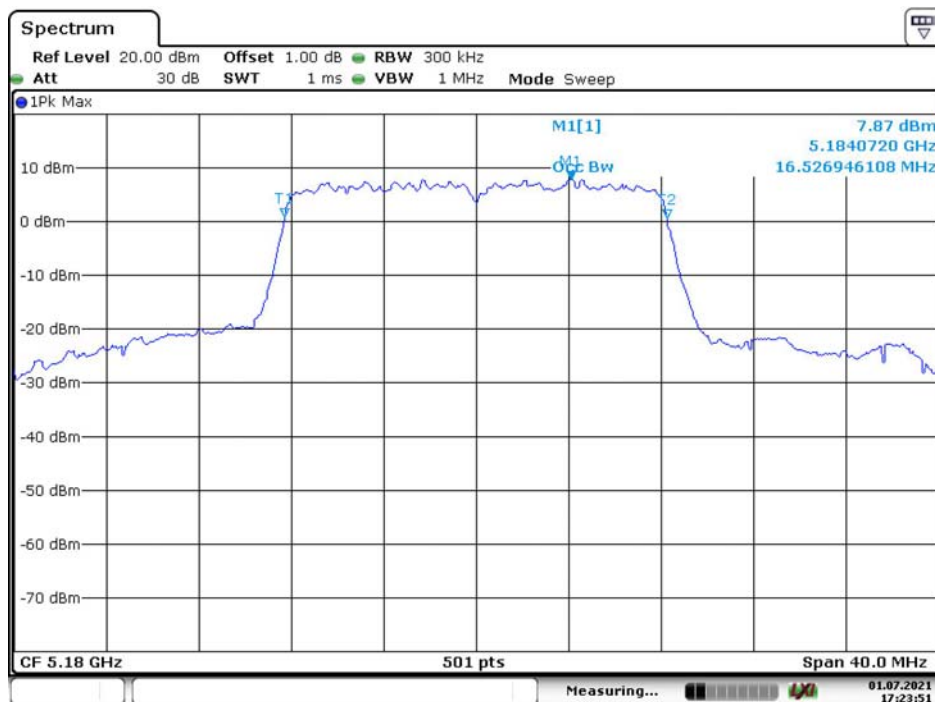
99% Occupied Bandwidth:**802.11a Low Channel**

Date: 1.JUL.2021 17:23:52

802.11a Middle Channel


Date: 1.JUL.2021 17:25:07

802.11a High Channel

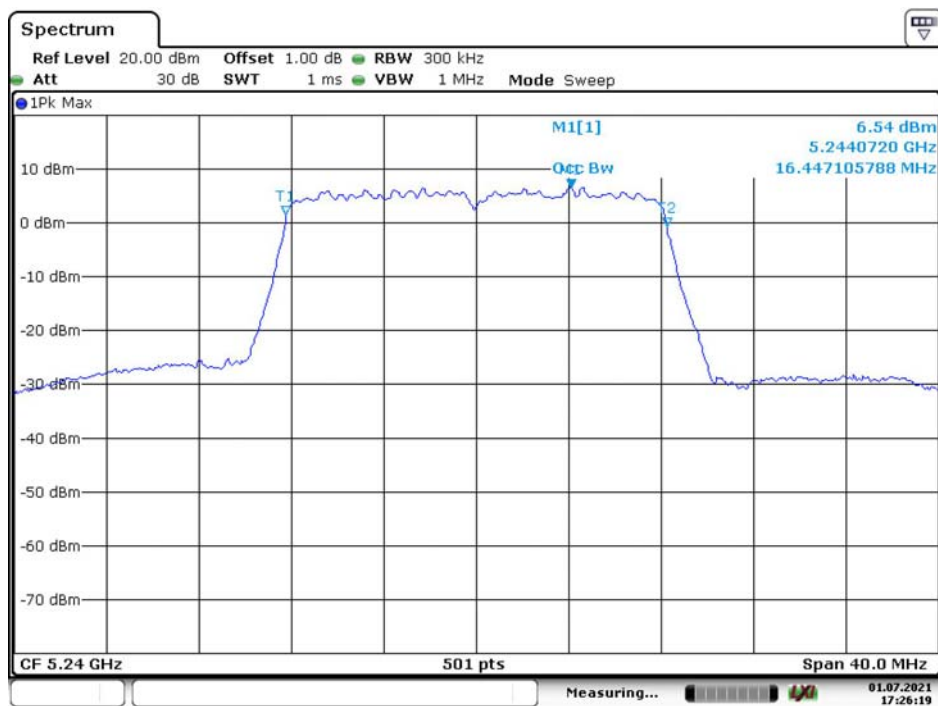


Date: 1.JUL.2021 17:26:20

802.11n ht20 Low Channel

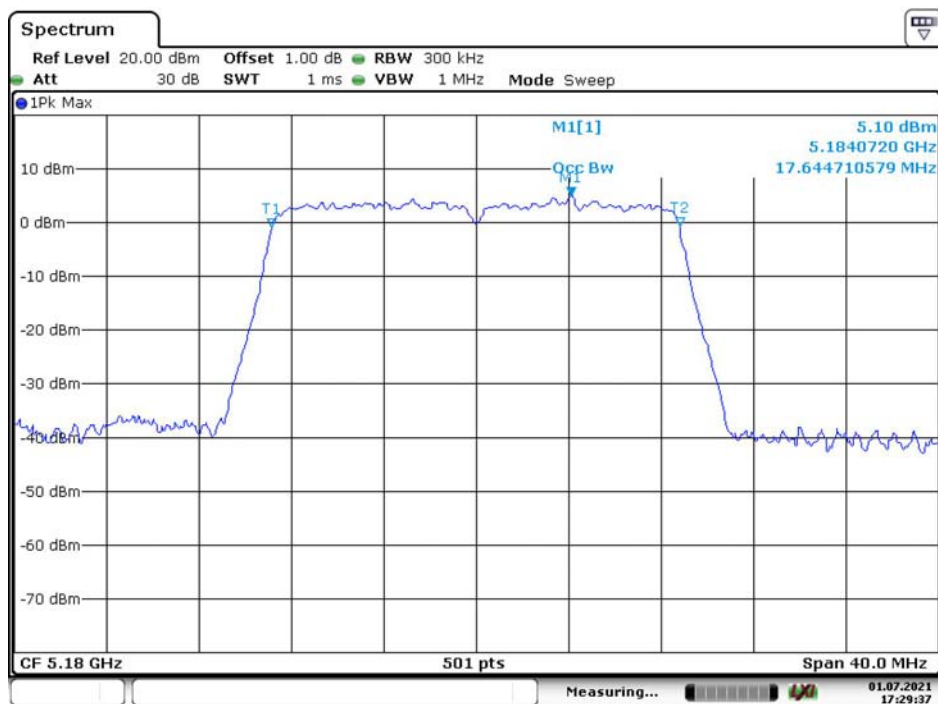


Date: 1.JUL.2021 17:29:38

802.11n ht20 Middle Channel

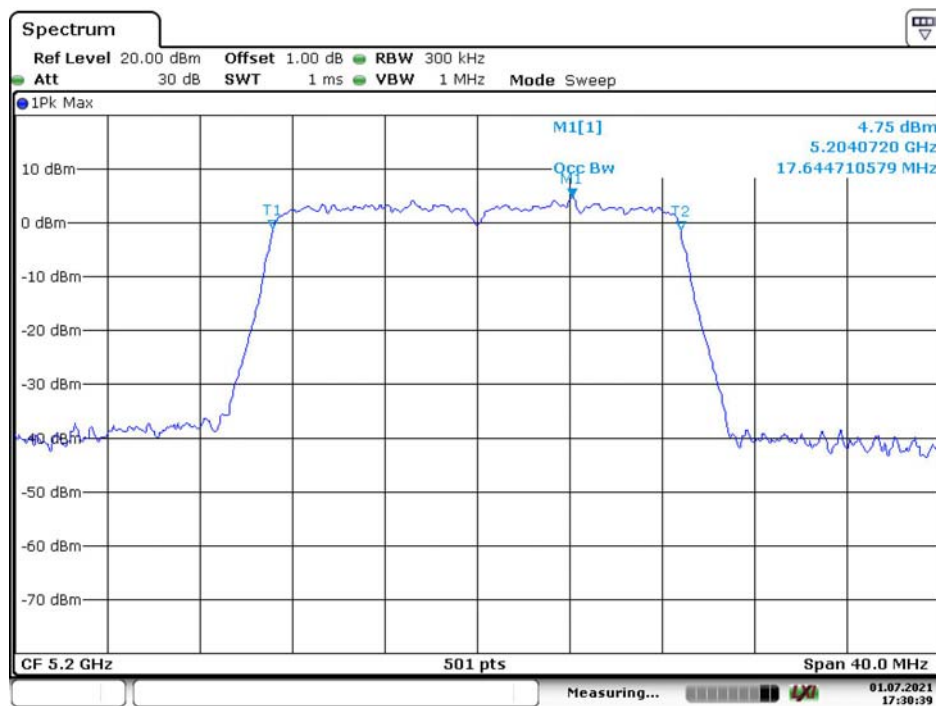

Date: 1.JUL.2021 17:30:40

802.11n ht20 High Channel

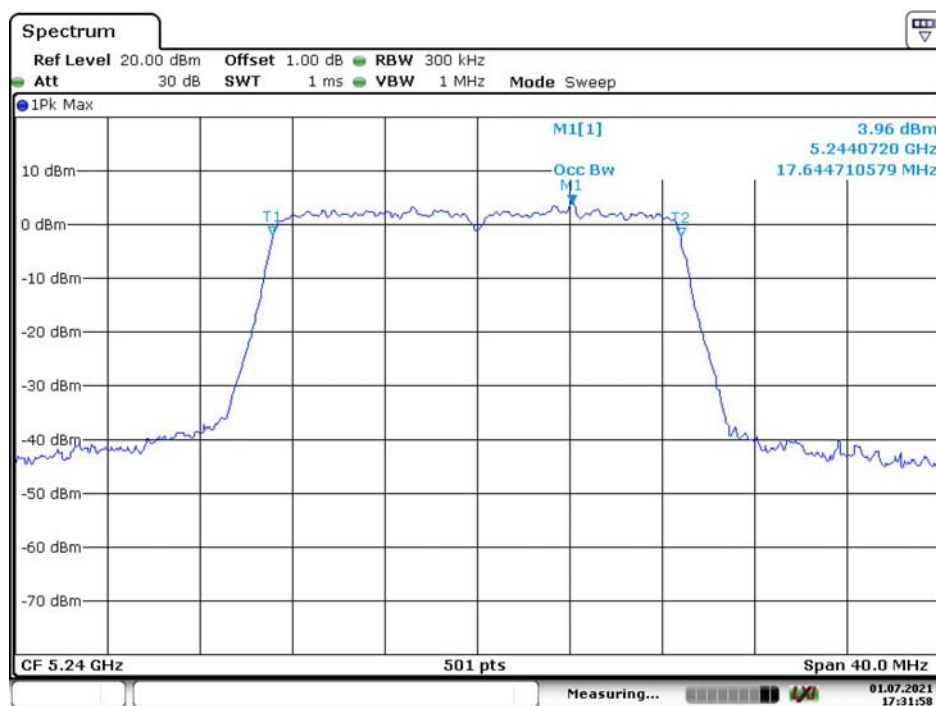

Date: 1.JUL.2021 17:31:58

802.11n ht40 Low Channel




Date: 1.JUL.2021 17:33:48

802.11n ht40 High Channel



Date: 1.JUL.2021 17:34:50


802.11ac vht80 Middle Channel

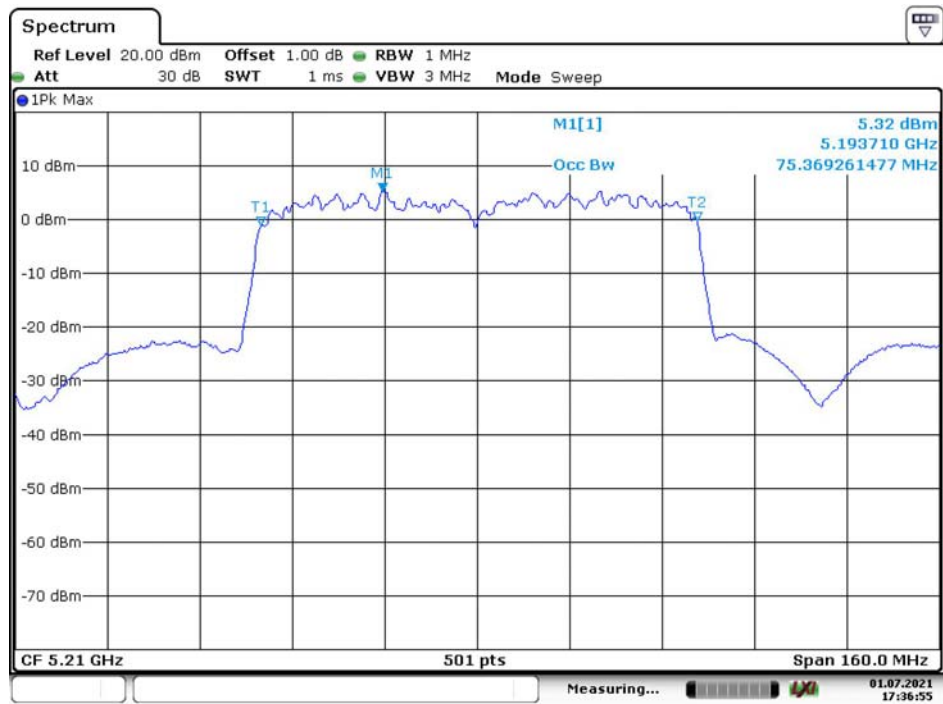


Date: 1.JUL.2021 17:36:56

5250-5350MHz:
26dB Emission Bandwidth:


802.11a Low Channel

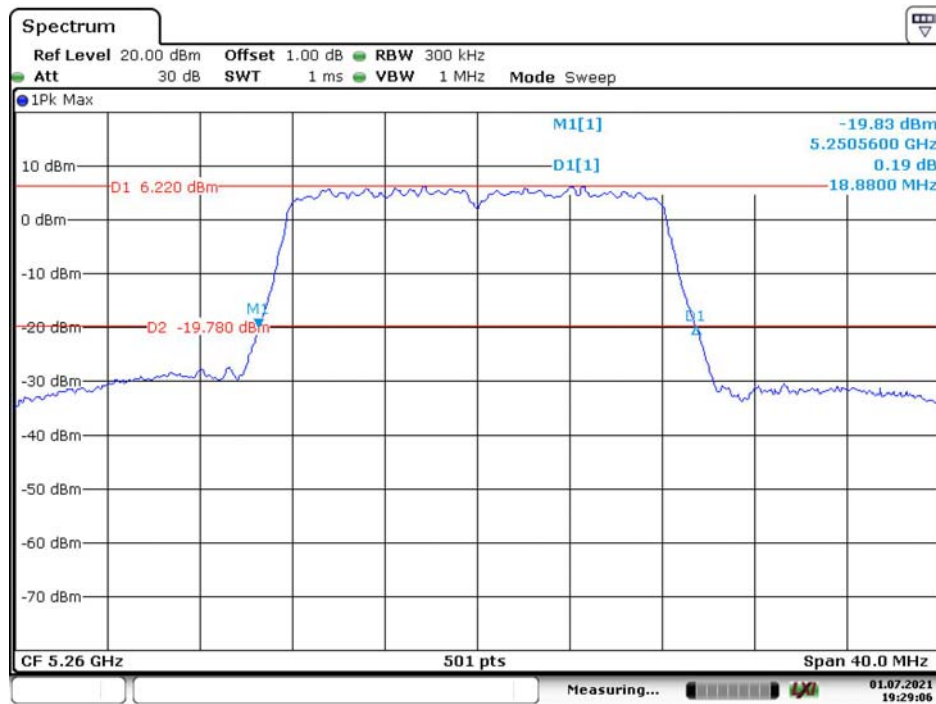

802.11a Middle Channel

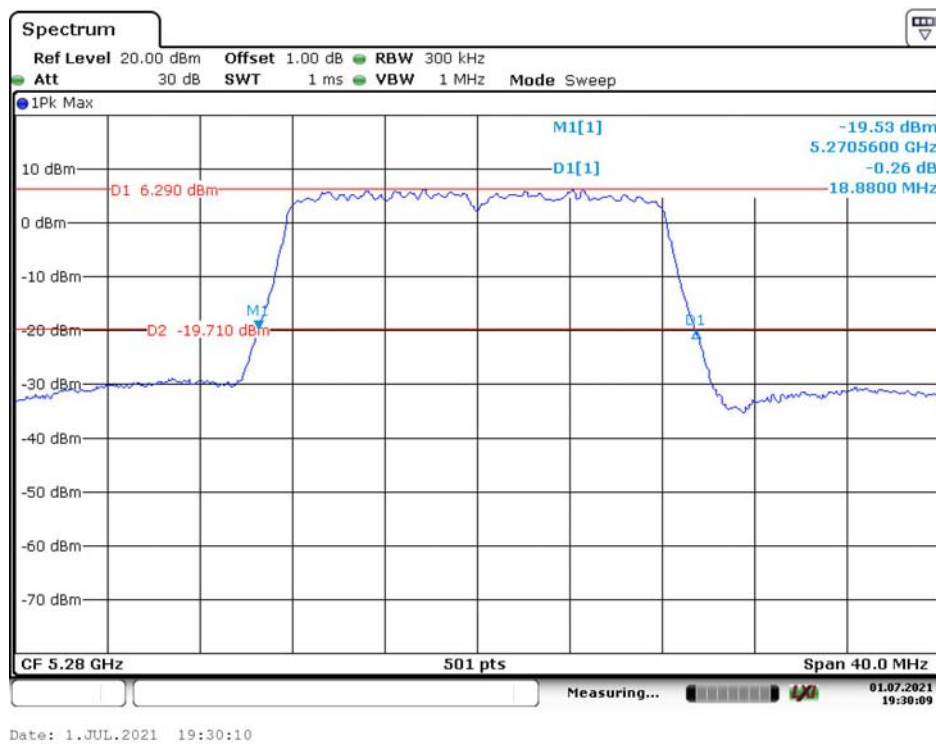


802.11a High Channel

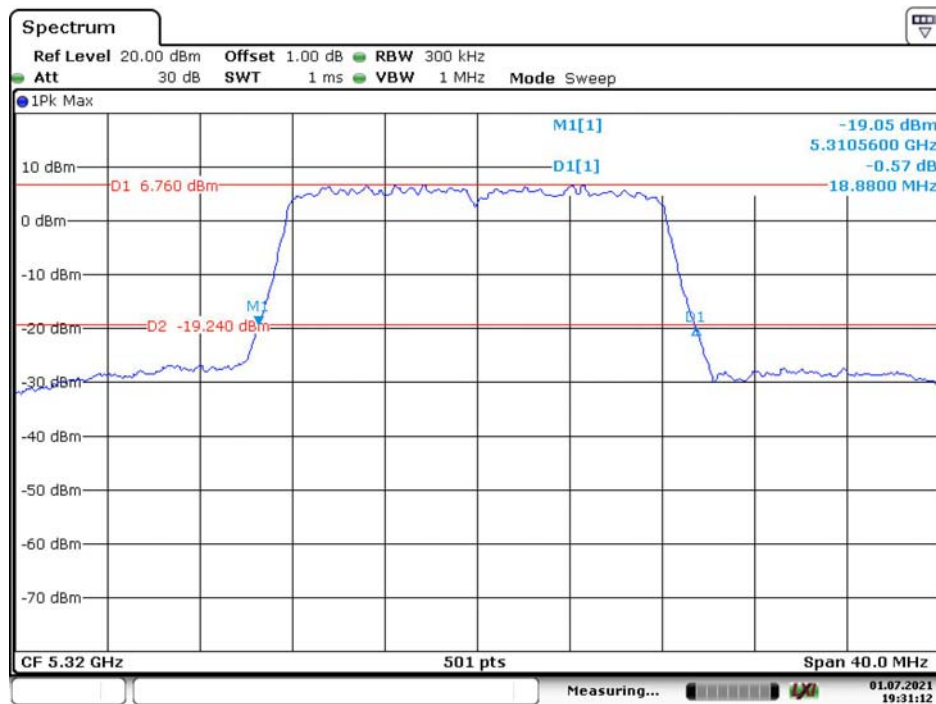


Date: 1.JUL.2021 19:31:13

802.11n ht20 Low Channel

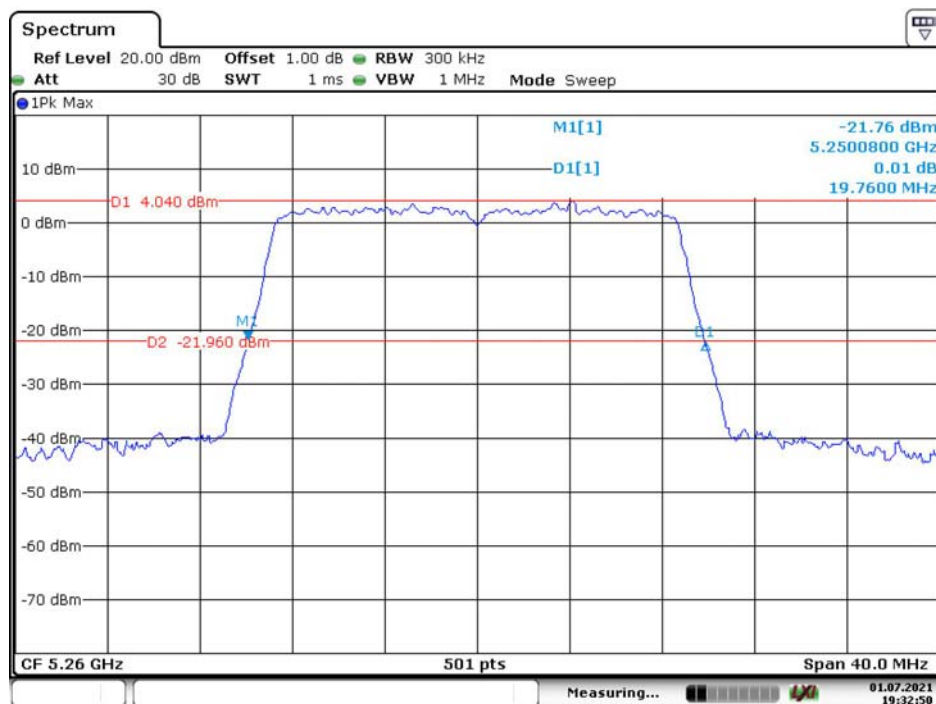


Date: 1.JUL.2021 19:32:51

802.11n ht20 Middle Channel

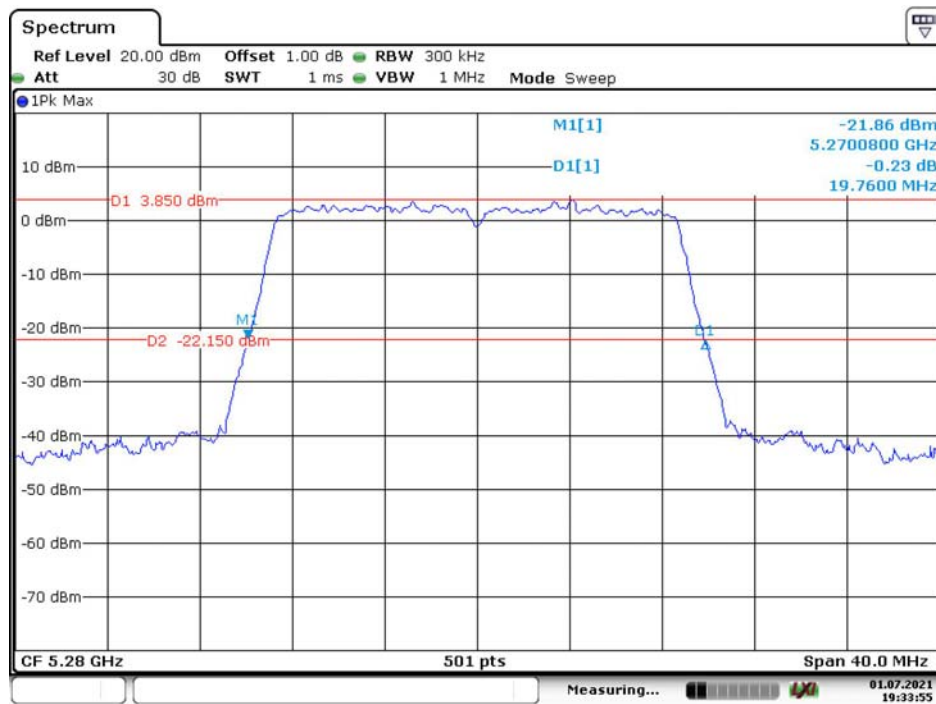


Date: 1.JUL.2021 19:33:56

802.11n ht20 High Channel

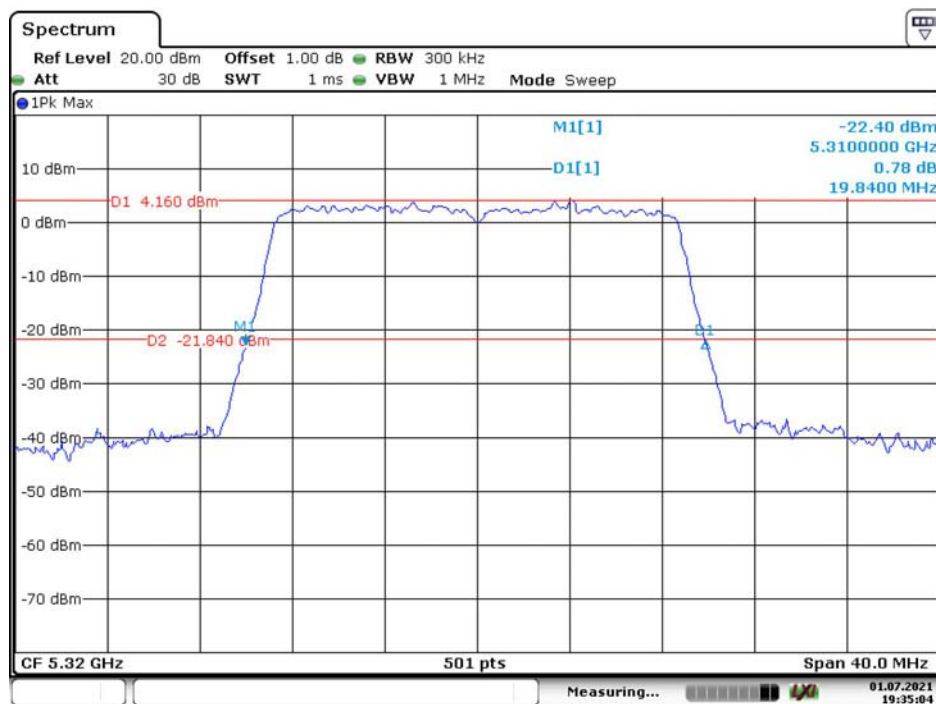


Date: 1.JUL.2021 19:35:05

802.11n ht40 Low Channel

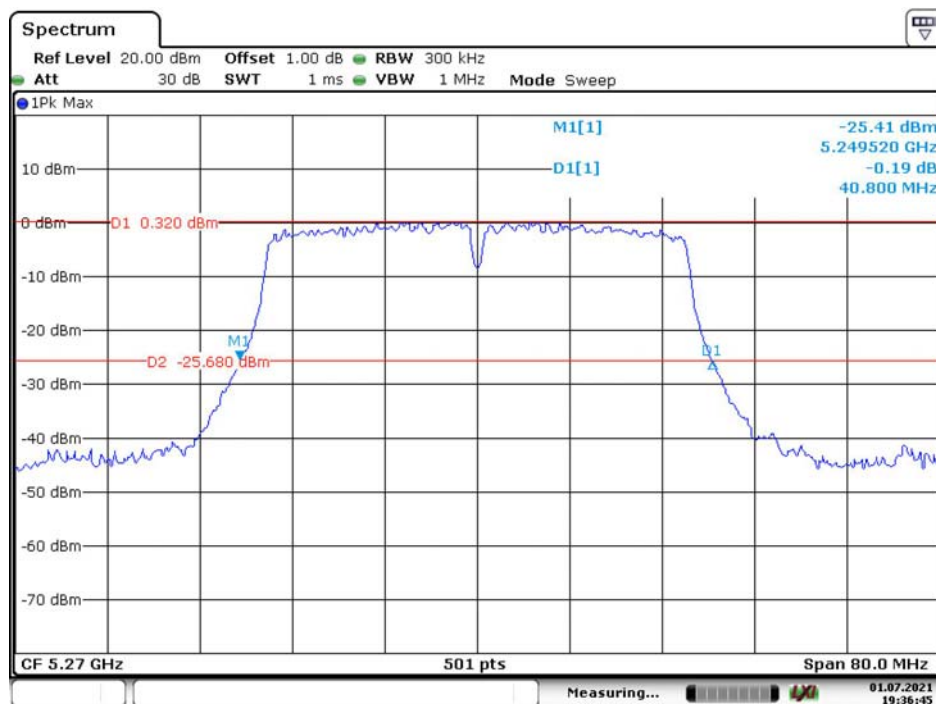


Date: 1.JUL.2021 19:36:46

802.11n ht40 High Channel

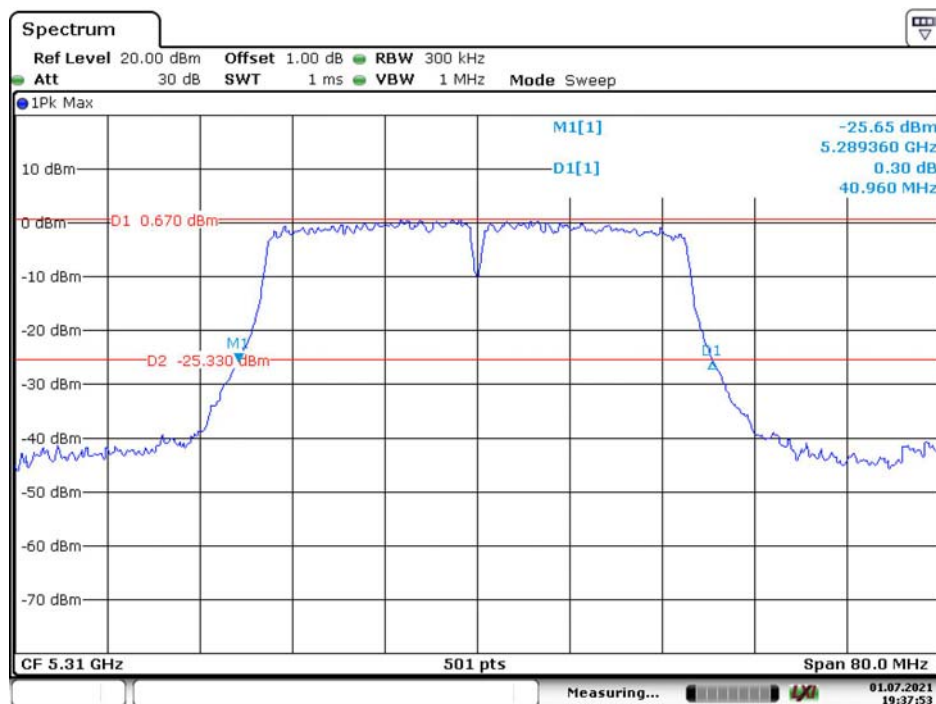


Date: 1.JUL.2021 19:37:54


802.11ac vht80 Middle Channel

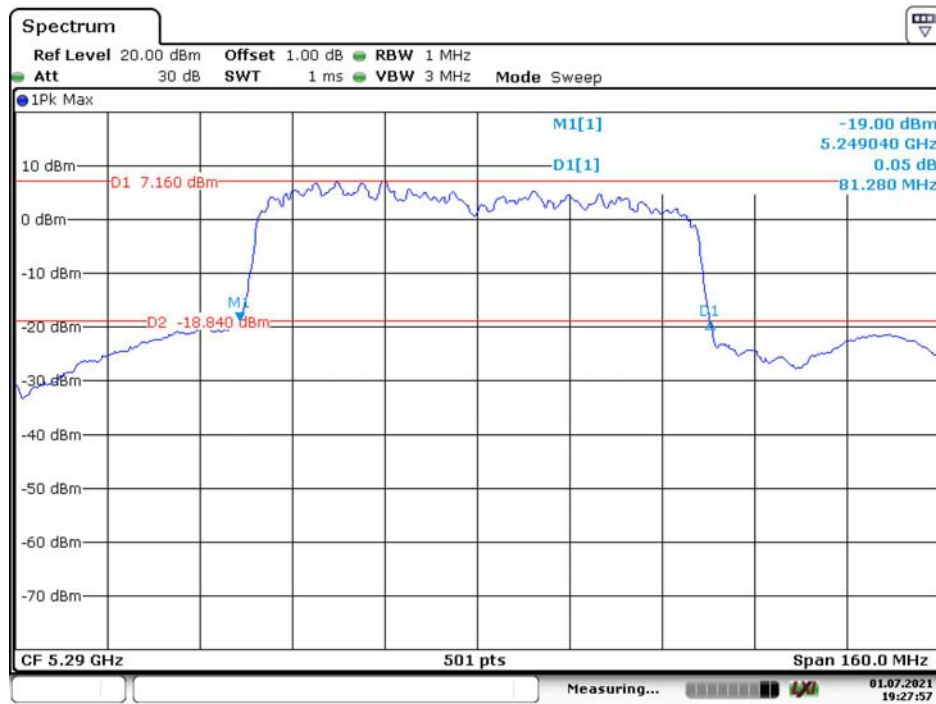

Date: 1.JUL.2021 19:27:58

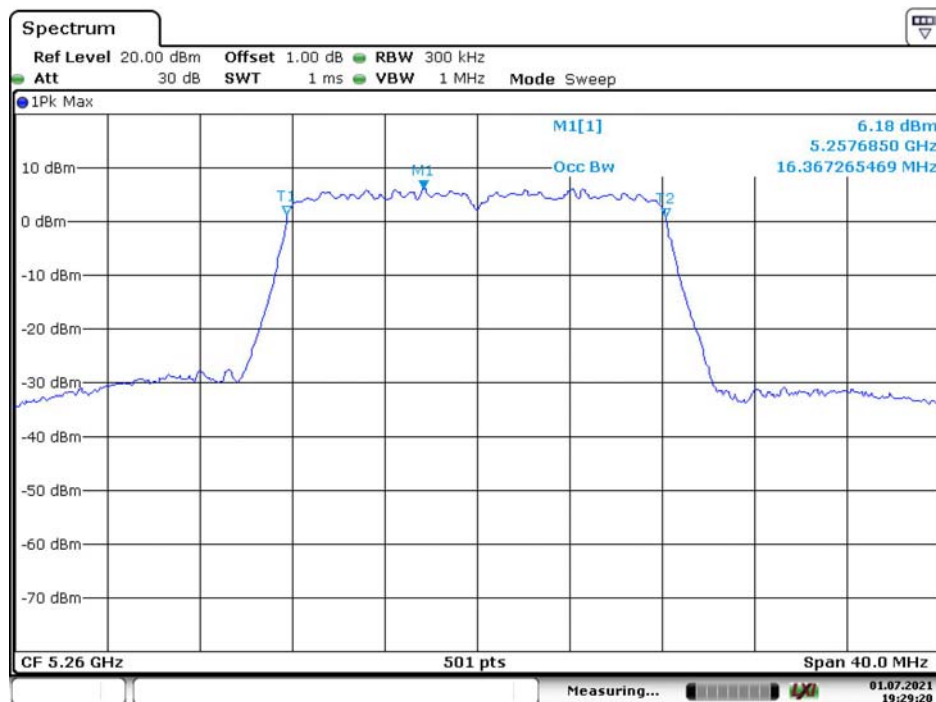
99% Occupied Bandwidth:**802.11a Low Channel**

Date: 1.JUL.2021 19:29:21

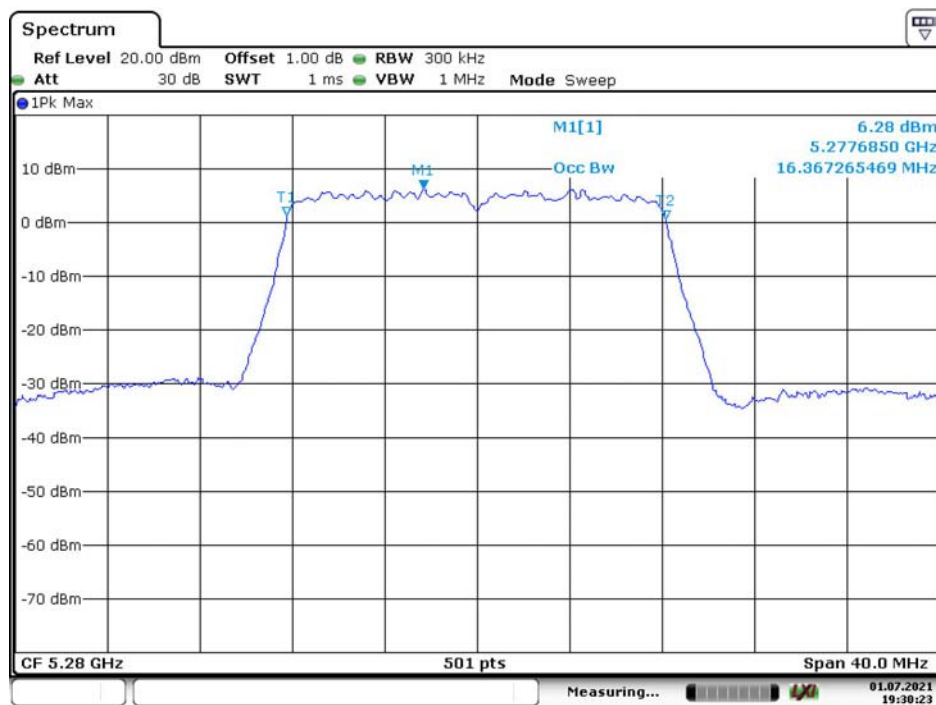802.11a Middle Channel


Date: 1.JUL.2021 19:30:24

802.11a High Channel

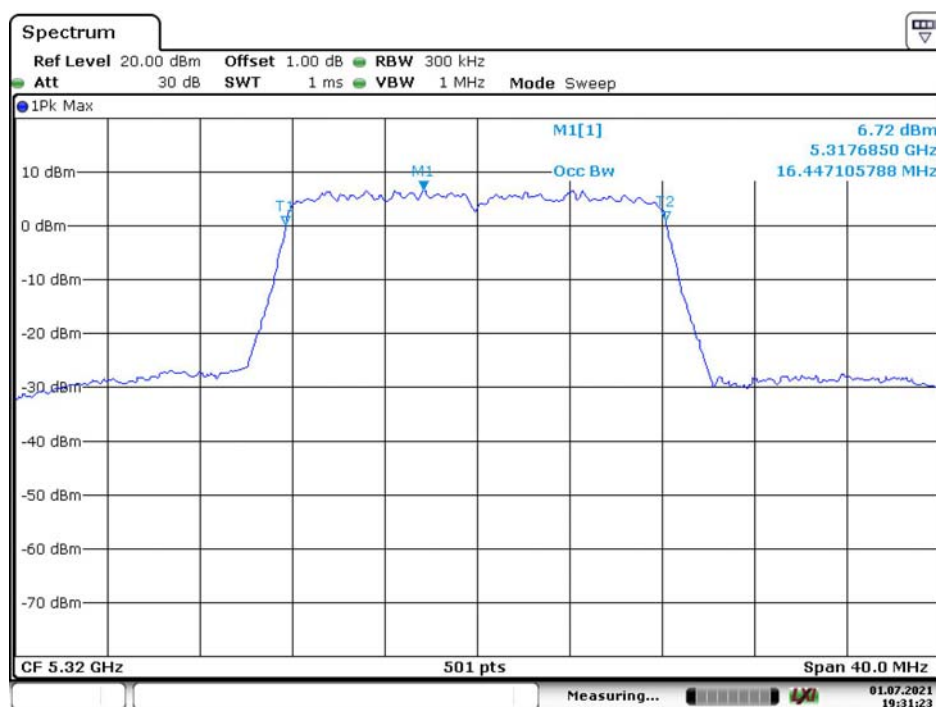


Date: 1.JUL.2021 19:31:24

802.11n ht20 Low Channel

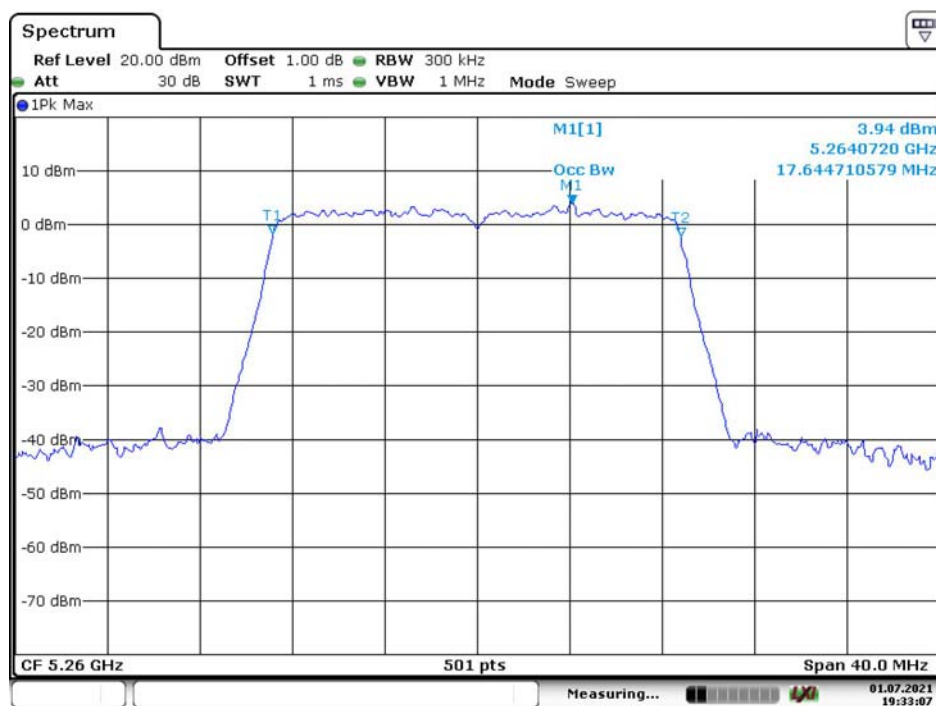


Date: 1.JUL.2021 19:33:08

802.11n ht20 Middle Channel

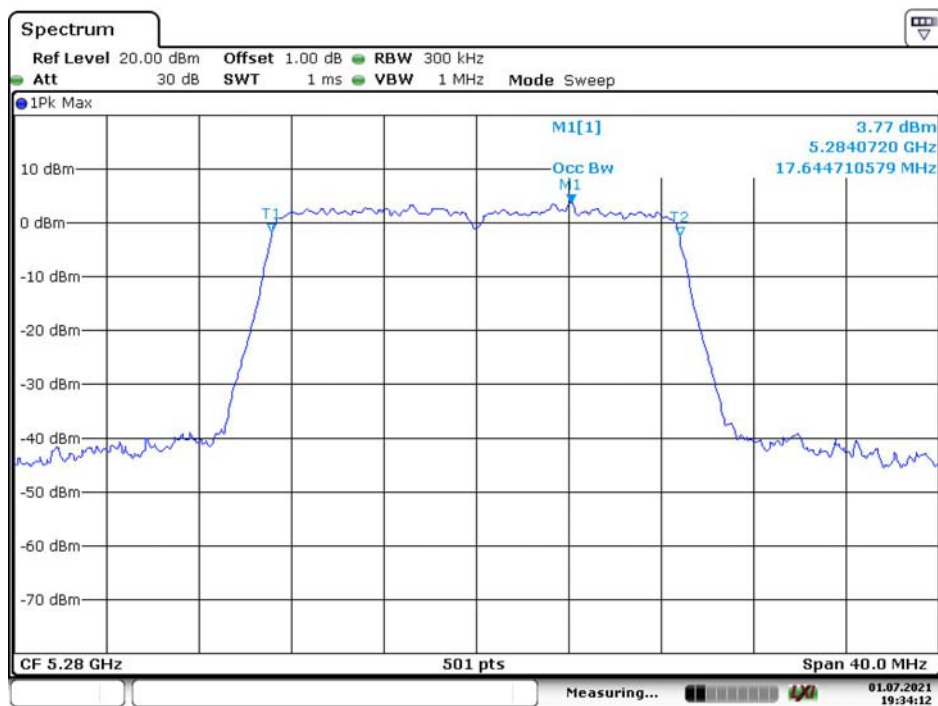

Date: 1.JUL.2021 19:34:13

802.11n ht20 High Channel

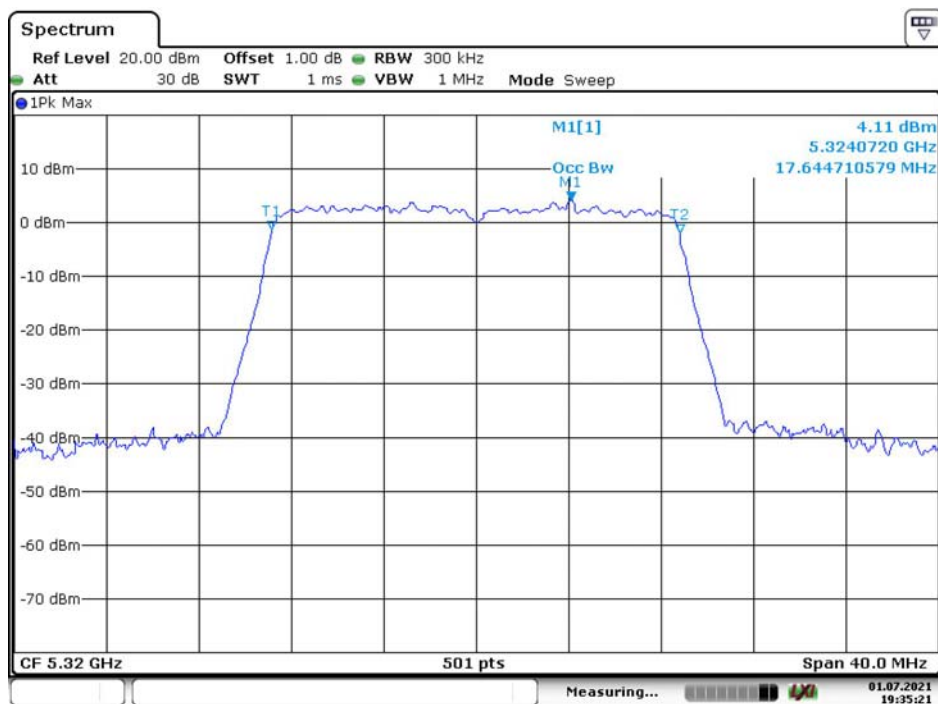

Date: 1.JUL.2021 19:35:22

802.11n ht40 Low Channel



Date: 1.JUL.2021 19:37:00

802.11n ht40 High Channel



Date: 1.JUL.2021 19:38:08


802.11ac vht80 Middle Channel




Date: 1.JUL.2021 19:28:09

5470-5725MHz:
26dB Emission Bandwidth:


802.11a Low Channel

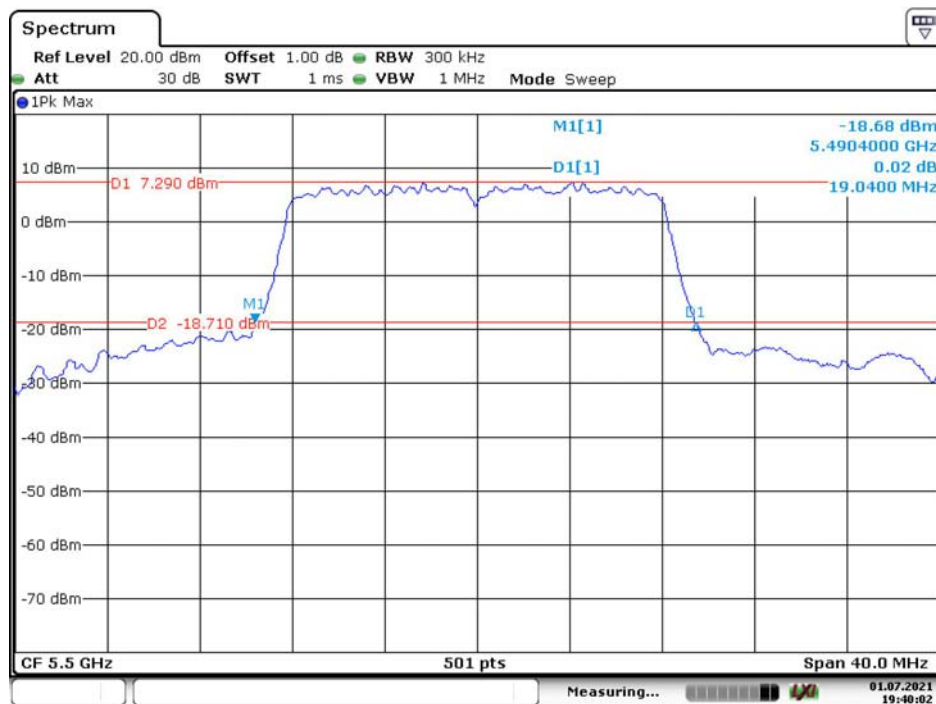

802.11a Middle Channel

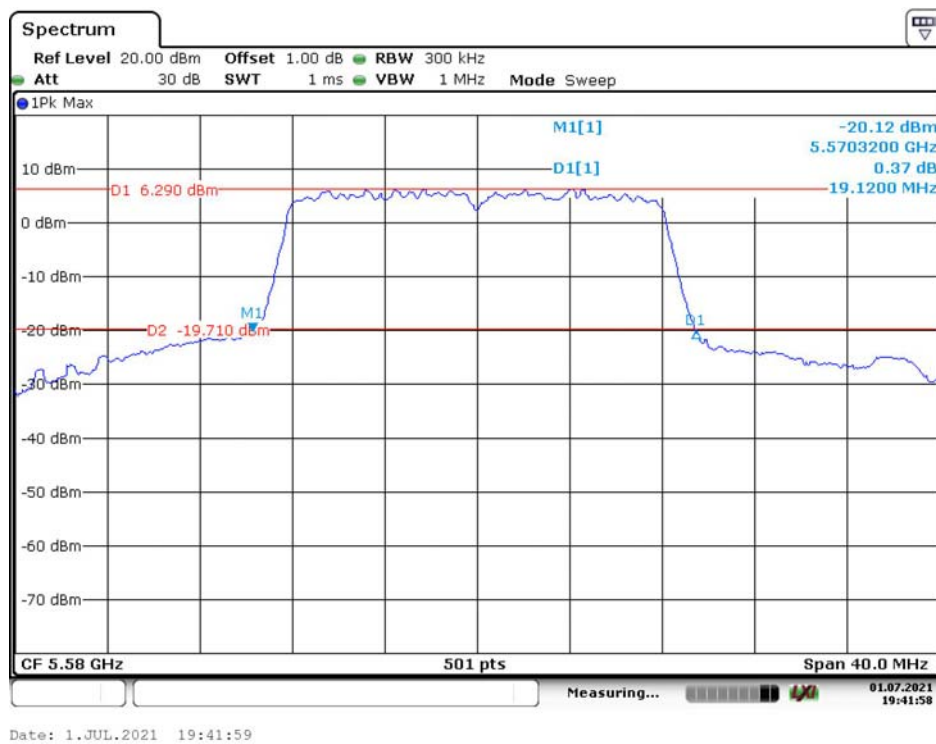


802.11a High Channel

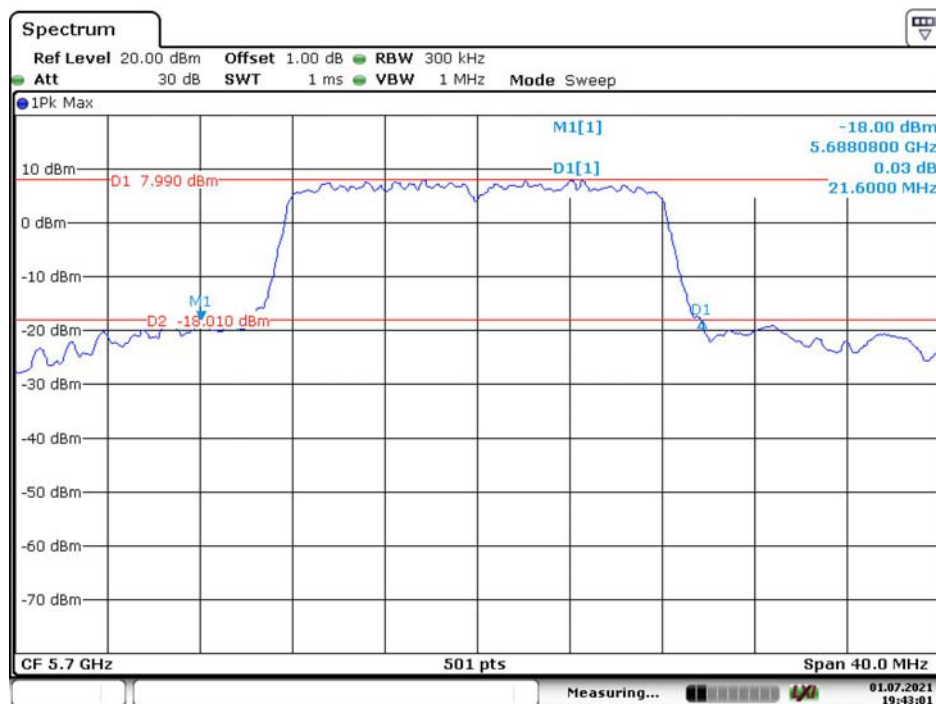

Date: 1.JUL.2021 19:43:02

802.11n ht20 Low Channel

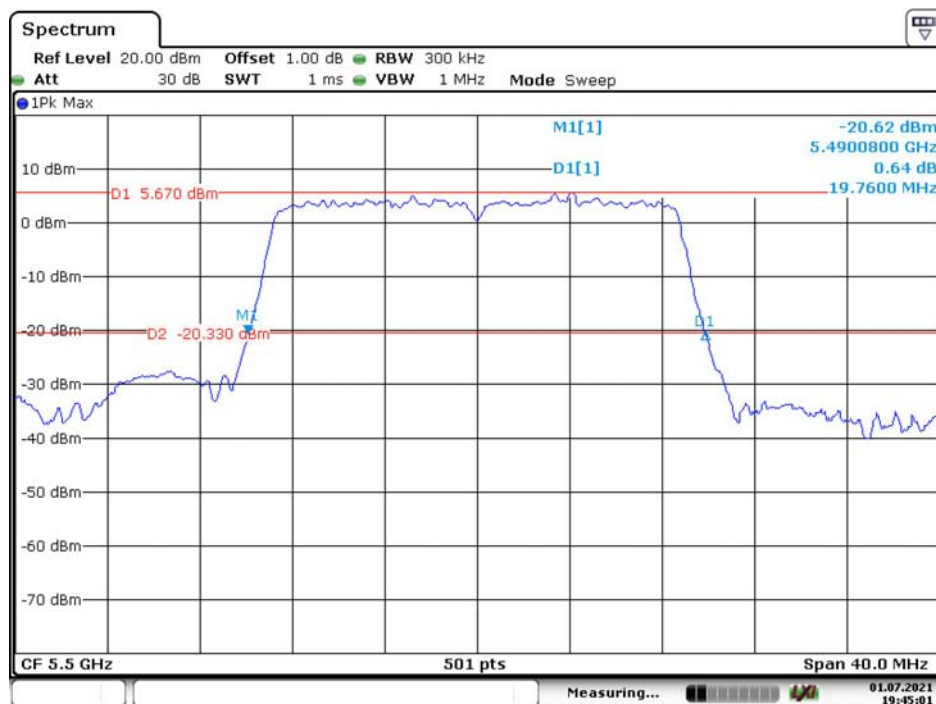


Date: 1.JUL.2021 19:45:02

802.11n ht20 Middle Channel




Date: 1.JUL.2021 20:10:04

802.11n ht20 High Channel

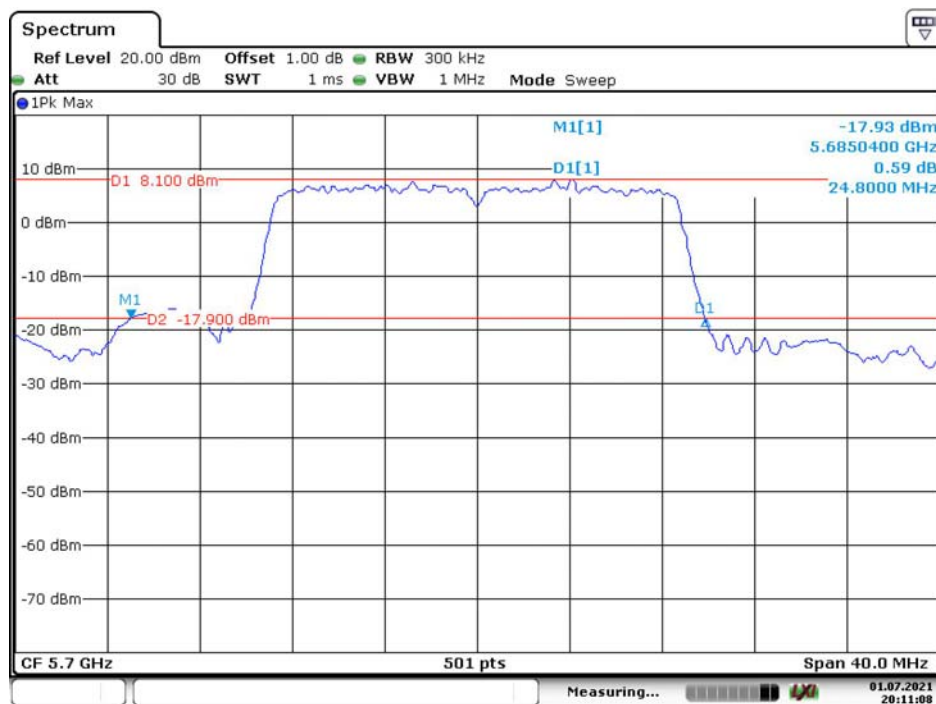


Date: 1.JUL.2021 20:11:08

802.11n ht40 Low Channel

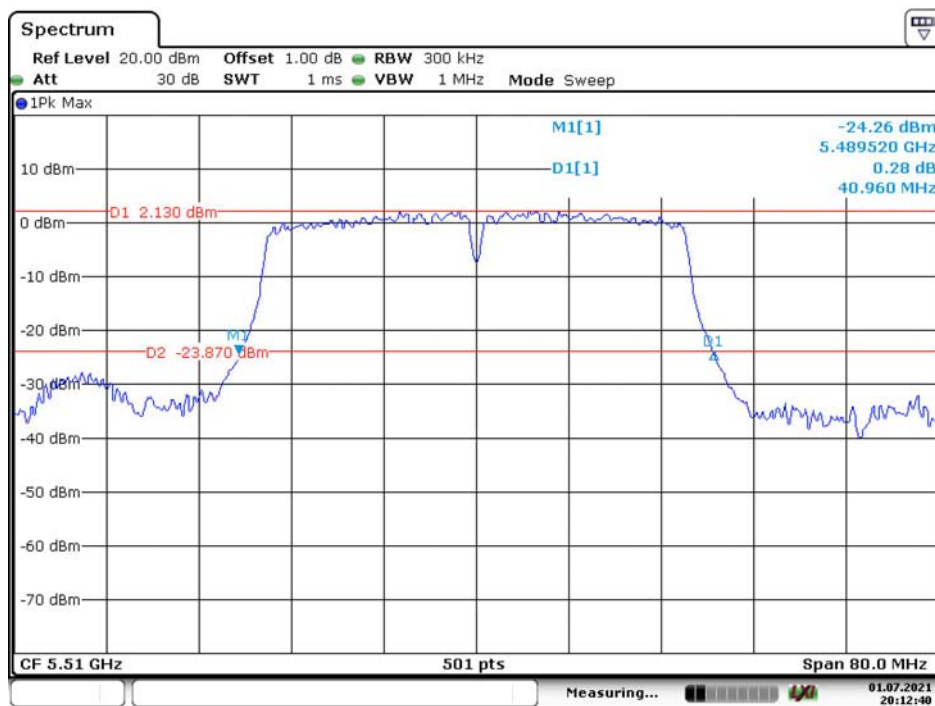


Date: 1.JUL.2021 20:12:40

802.11n ht40 Middle Channel

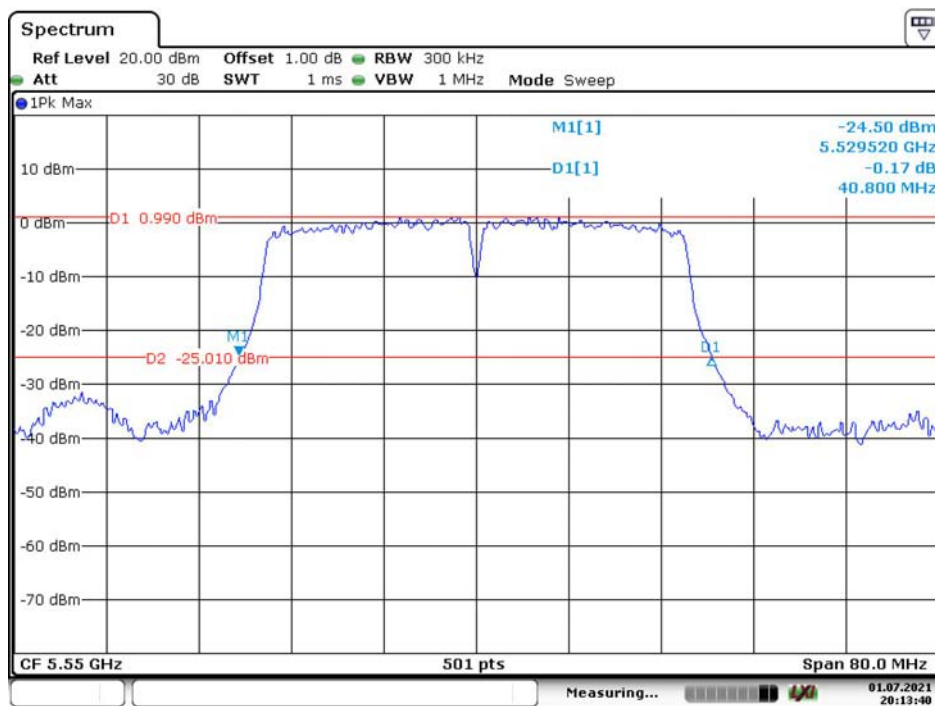


Date: 1.JUL.2021 20:13:40

802.11n ht40 High Channel

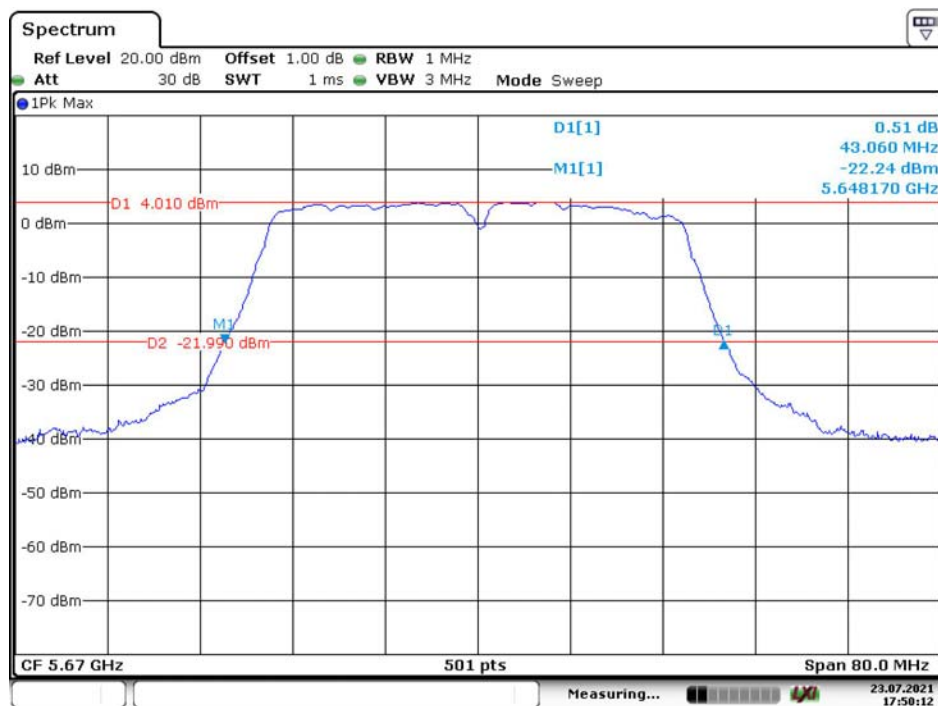

Date: 23.JUL.2021 17:50:13

802.11ac vht80 Low Channel

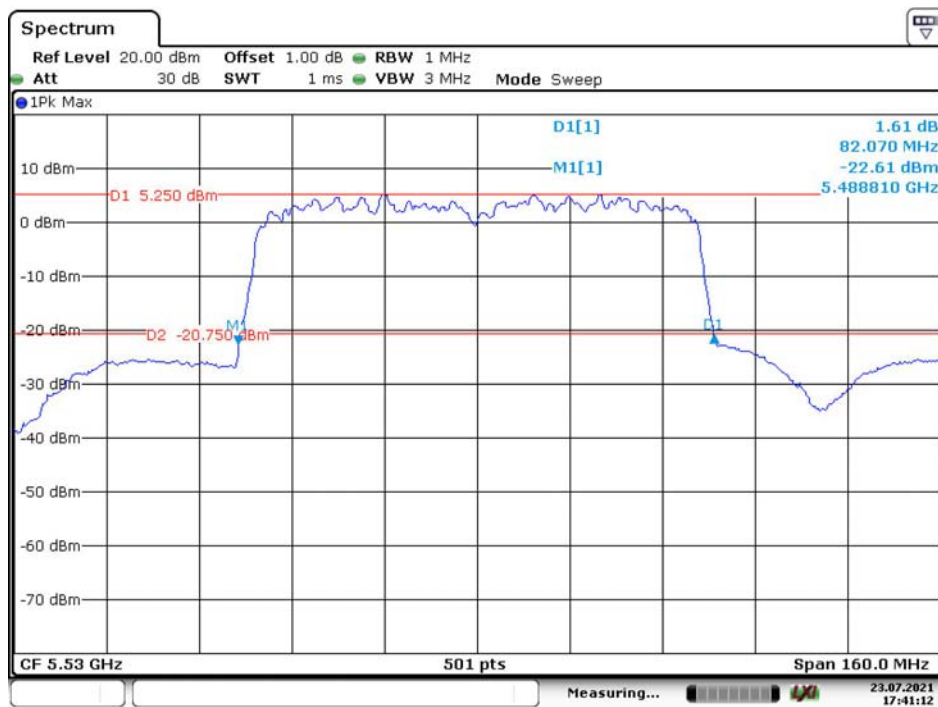


Date: 23.JUL.2021 17:41:13

802.11ac vht80 Middle Channel




Date: 23.JUL.2021 17:35:51


802.11ac vht80 High Channel

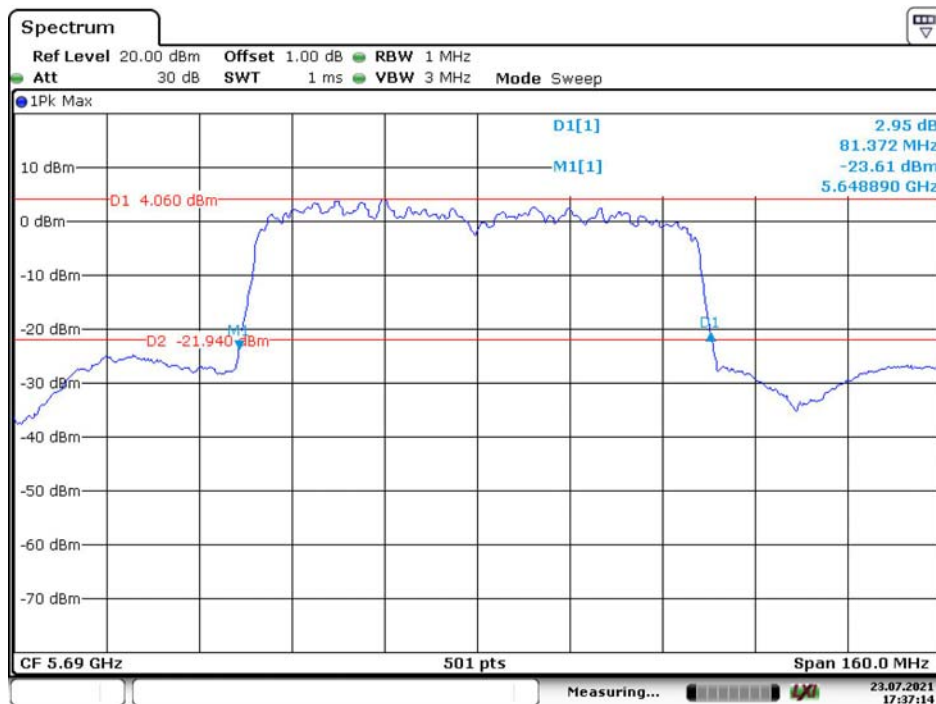

Date: 23.JUL.2021 17:37:14

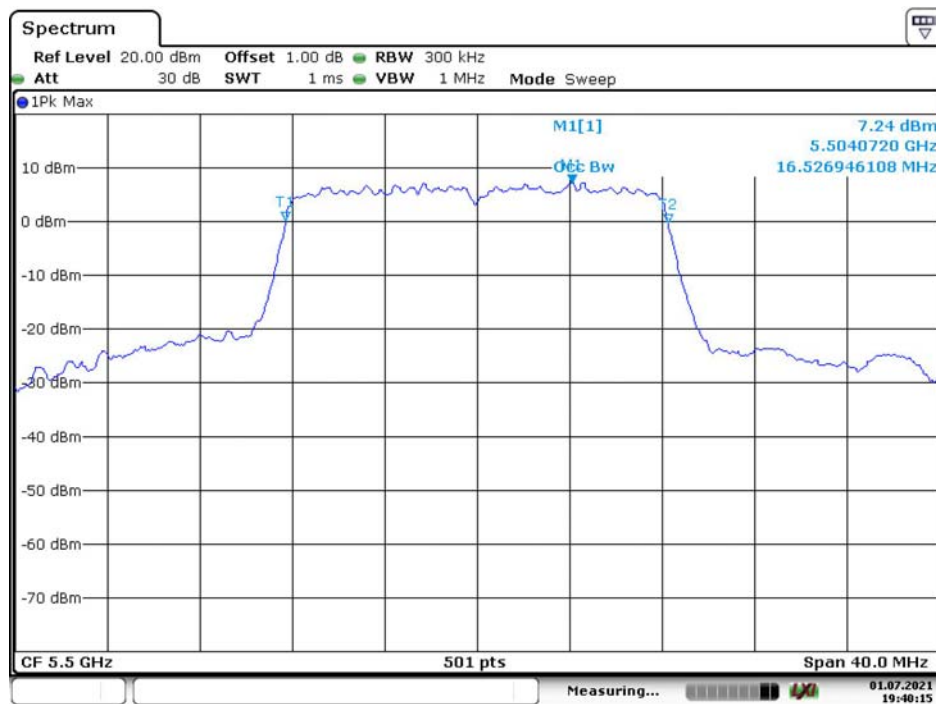99% Occupied Bandwidth:**802.11a Low Channel**

Date: 1.JUL.2021 19:40:16

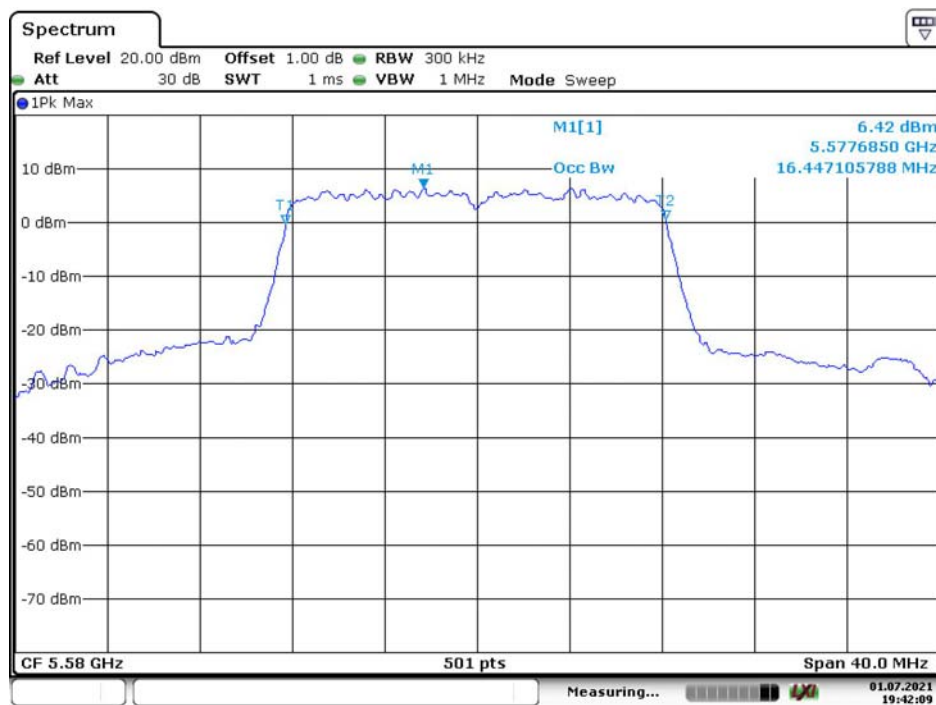802.11a Middle Channel


Date: 1.JUL.2021 19:42:10

802.11a High Channel



Date: 1.JUL.2021 19:43:16

802.11n ht20 Low Channel

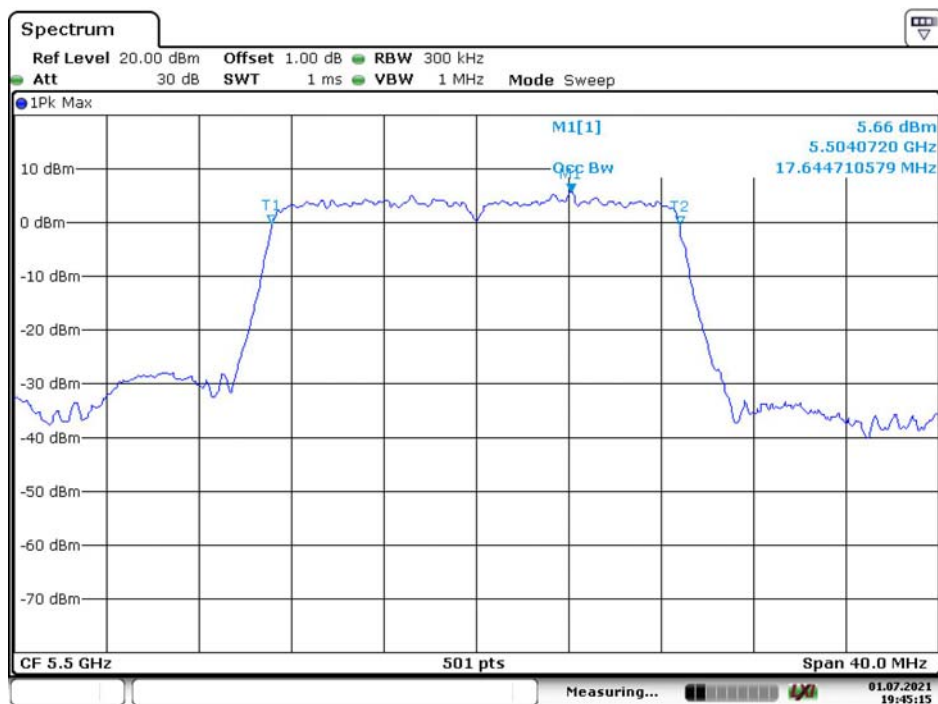

Date: 1.JUL.2021 19:45:16

802.11n ht20 Middle Channel



Date: 1.JUL.2021 20:10:18

802.11n ht20 High Channel



Date: 1.JUL.2021 20:11:19

802.11n ht40 Low Channel



Date: 1.JUL.2021 20:12:51

802.11n ht40 Middle Channel



Date: 1.JUL.2021 20:13:54

802.11n ht40 High Channel




Date: 1.JUL.2021 20:15:00

802.11ac vht80 Low Channel



Date: 1.JUL.2021 20:48:54

802.11ac vht80 Middle Channel

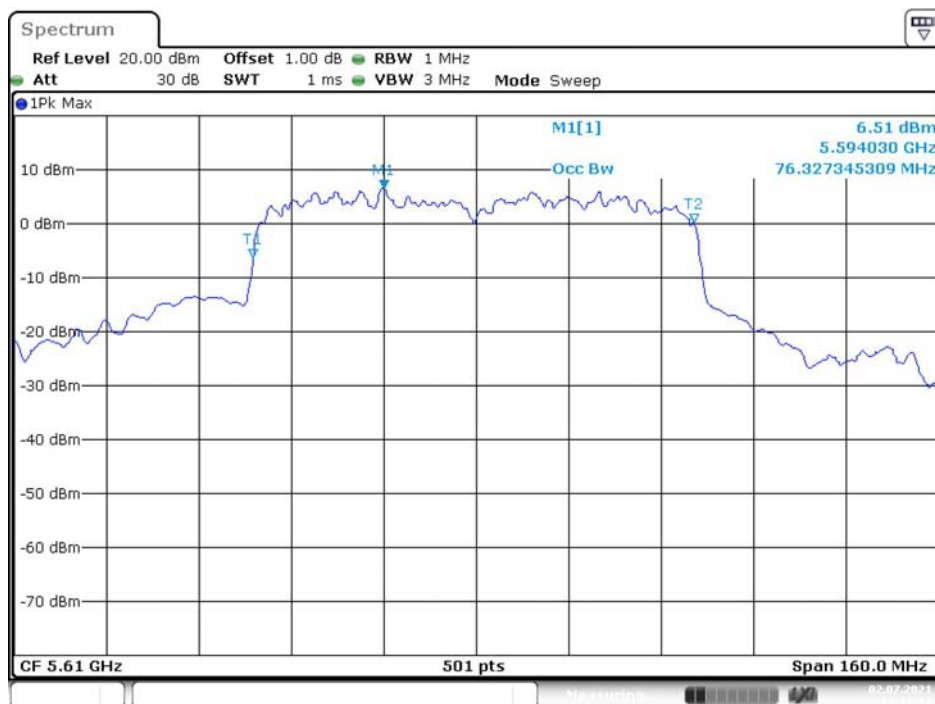

Date: 2.JUL.2021 19:21:17

802.11ac vht80 High Channel




Date: 1.JUL.2021 20:49:45

5725-5850MHz:


6dB Emission Bandwidth:

802.11a Low Channel

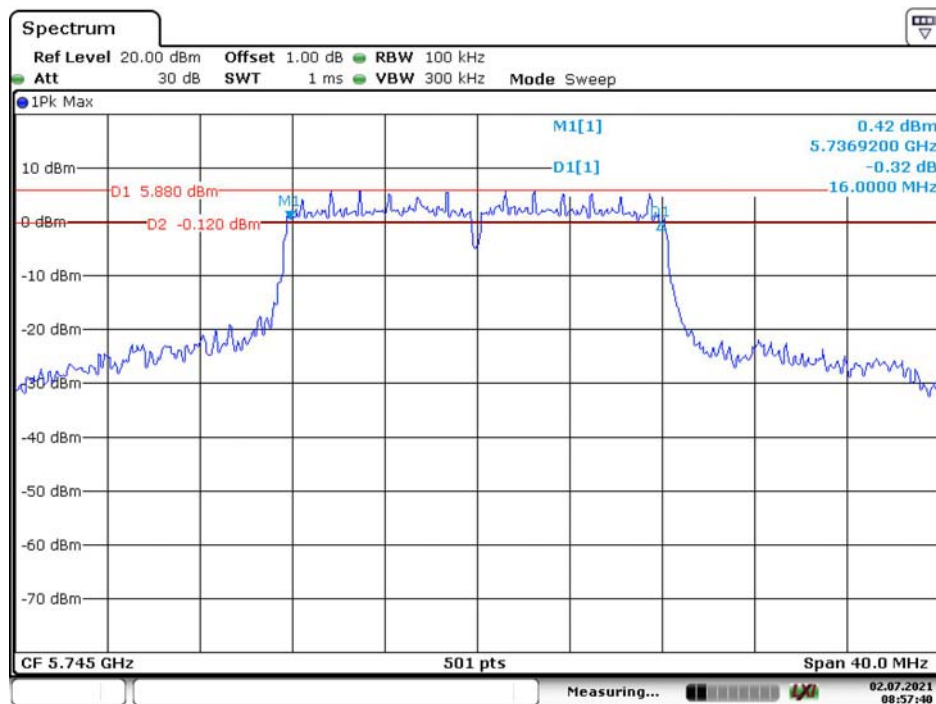


Date: 2.JUL.2021 08:57:40

802.11a Middle Channel

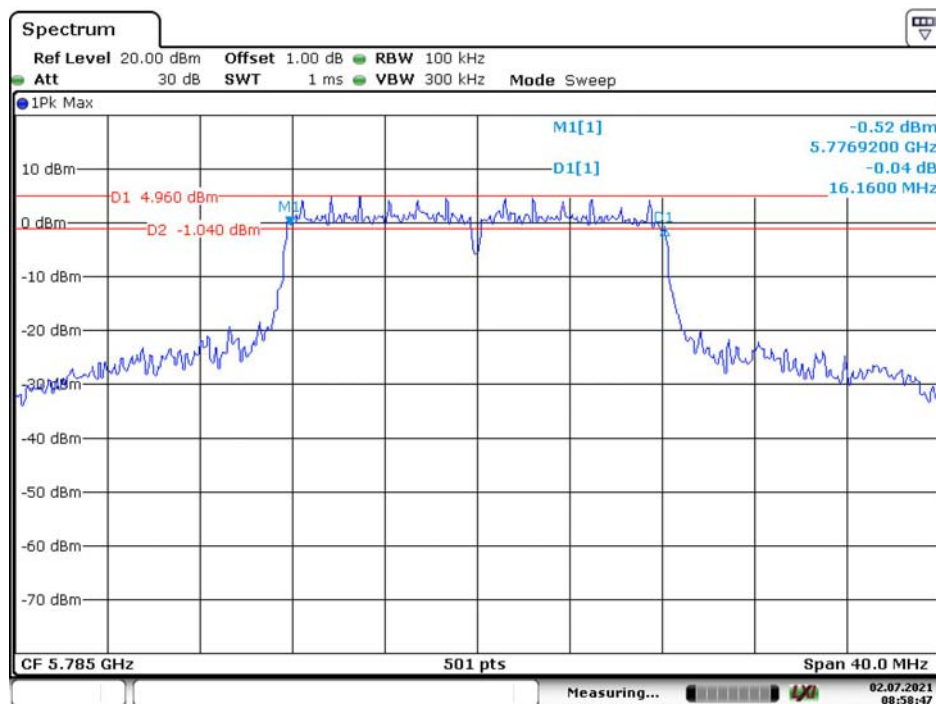


Date: 2.JUL.2021 08:58:48

802.11a High Channel

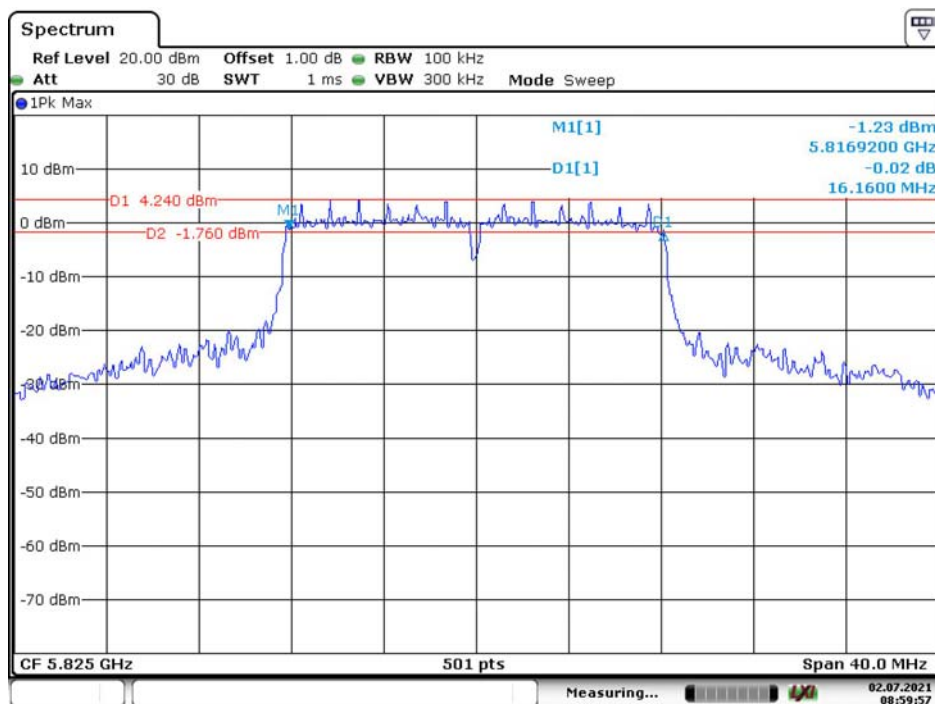


Date: 2.JUL.2021 08:59:58

802.11n ht20 Low Channel

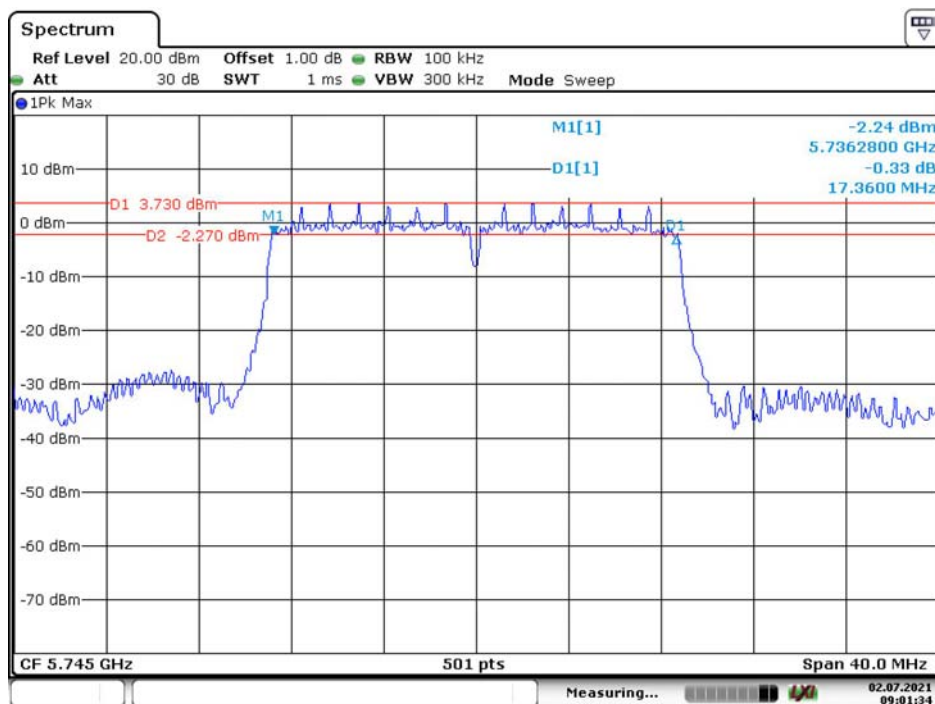


Date: 2.JUL.2021 09:01:35

802.11n ht20 Middle Channel

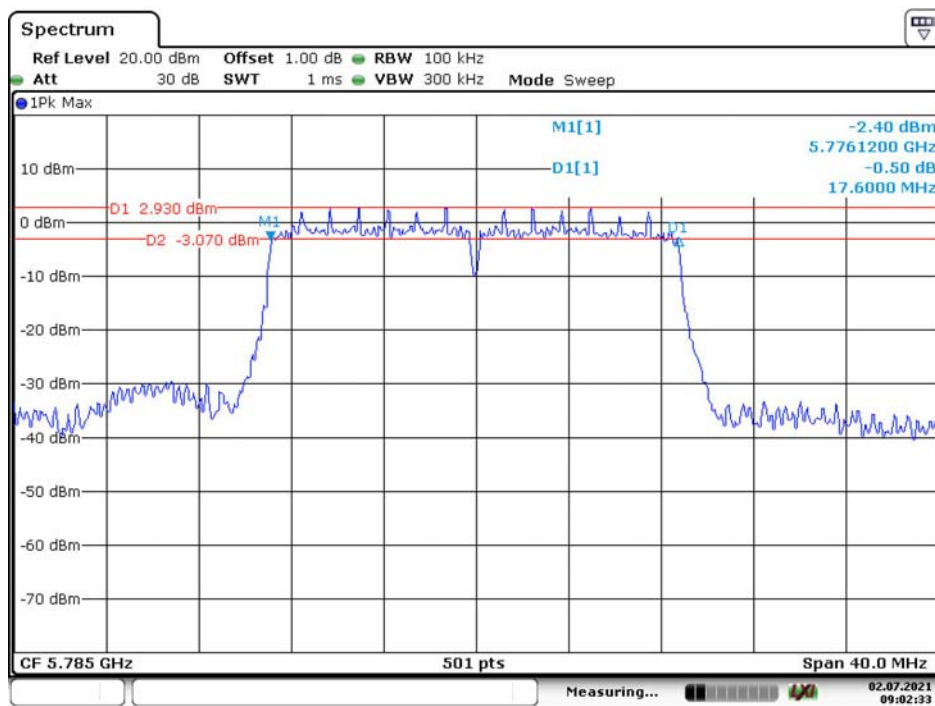


Date: 2.JUL.2021 09:02:34

802.11n ht20 High Channel

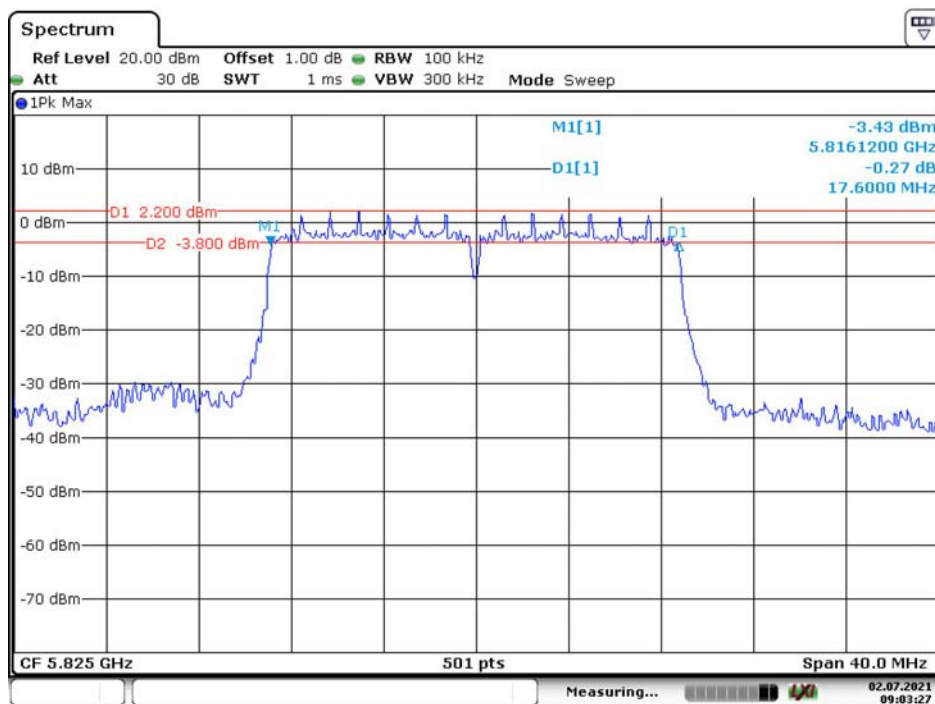


Date: 2.JUL.2021 09:03:28

802.11n ht40 Low Channel

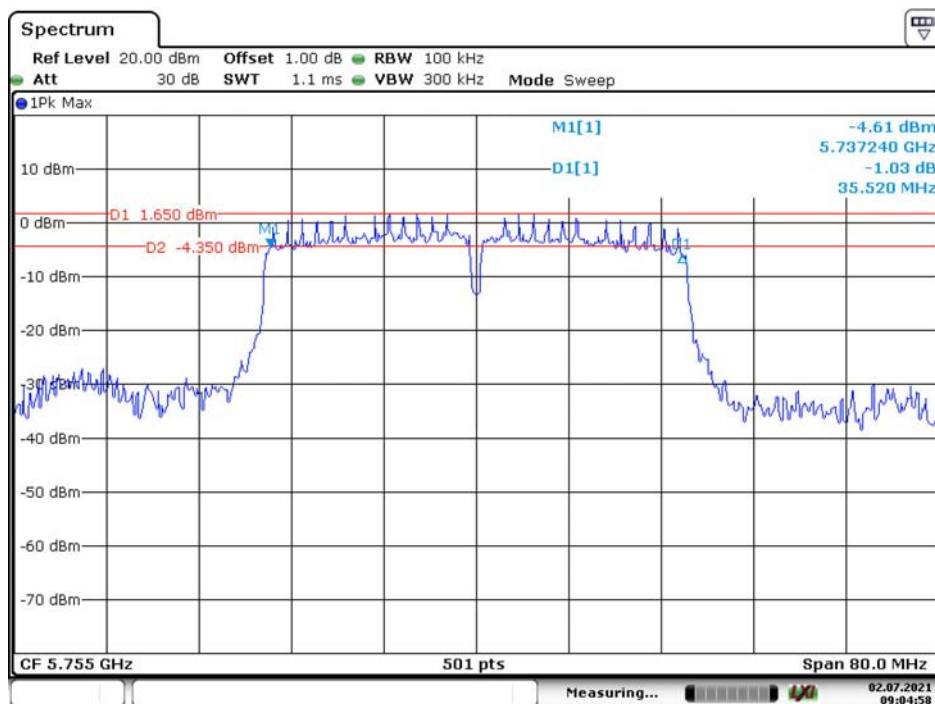


Date: 2.JUL.2021 09:04:59

802.11n ht40 High Channel

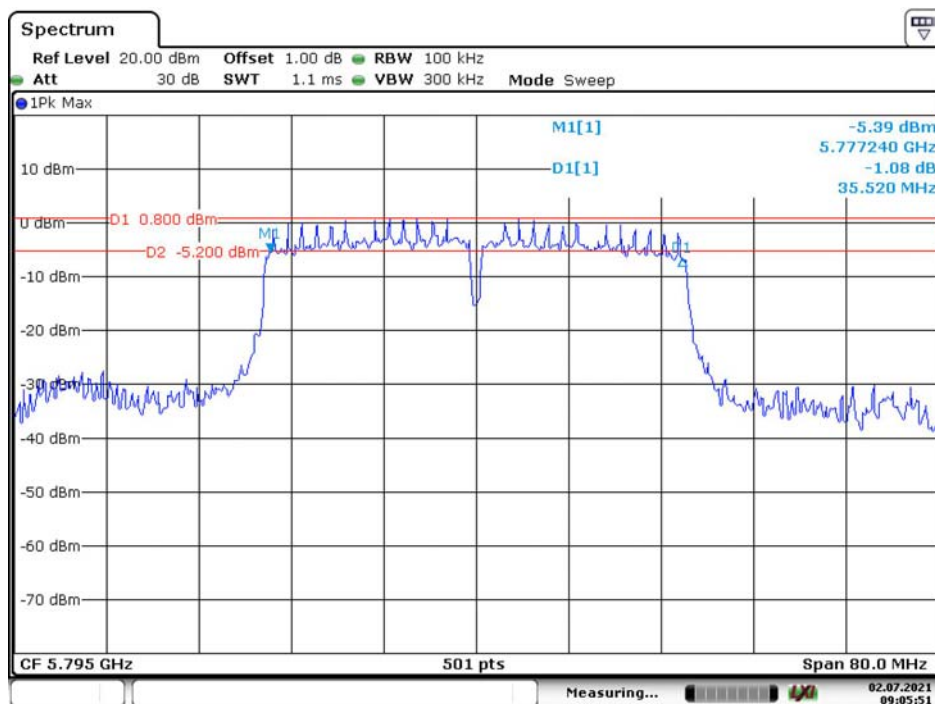

Date: 2.JUL.2021 09:05:52

802.11ac vht80 Middle Channel

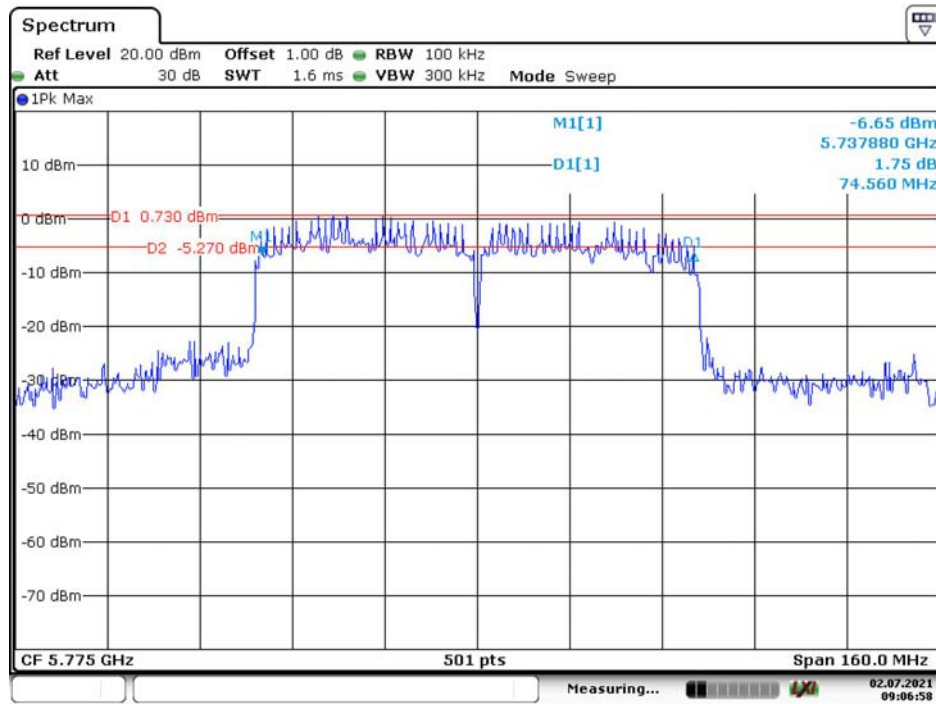

Date: 2.JUL.2021 09:06:58


99% Occupied Bandwidth:**802.11a Low Channel**

Date: 2.JUL.2021 08:57:51

802.11a Middle Channel


Date: 2.JUL.2021 08:59:01

802.11a High Channel

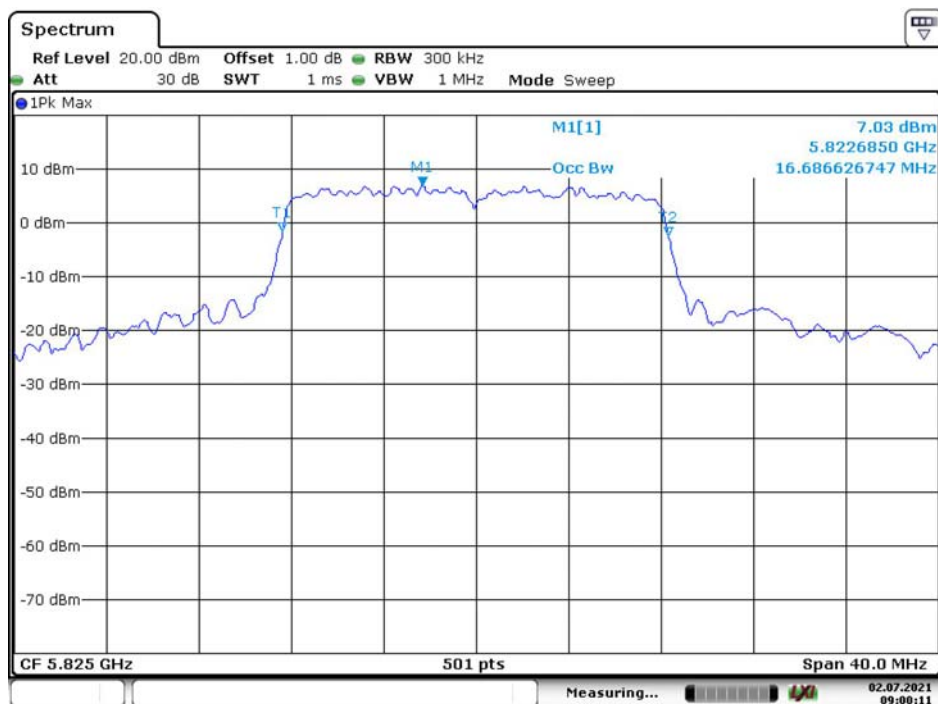


Date: 2.JUL.2021 09:00:12

802.11n ht20 Low Channel

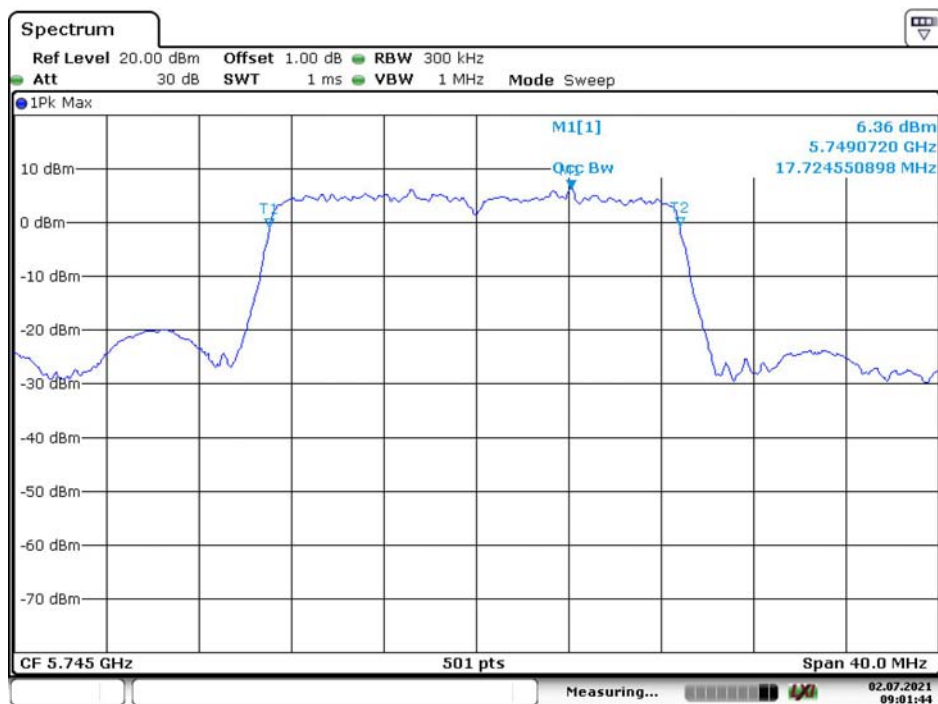


Date: 2.JUL.2021 09:01:45

802.11n ht20 Middle Channel

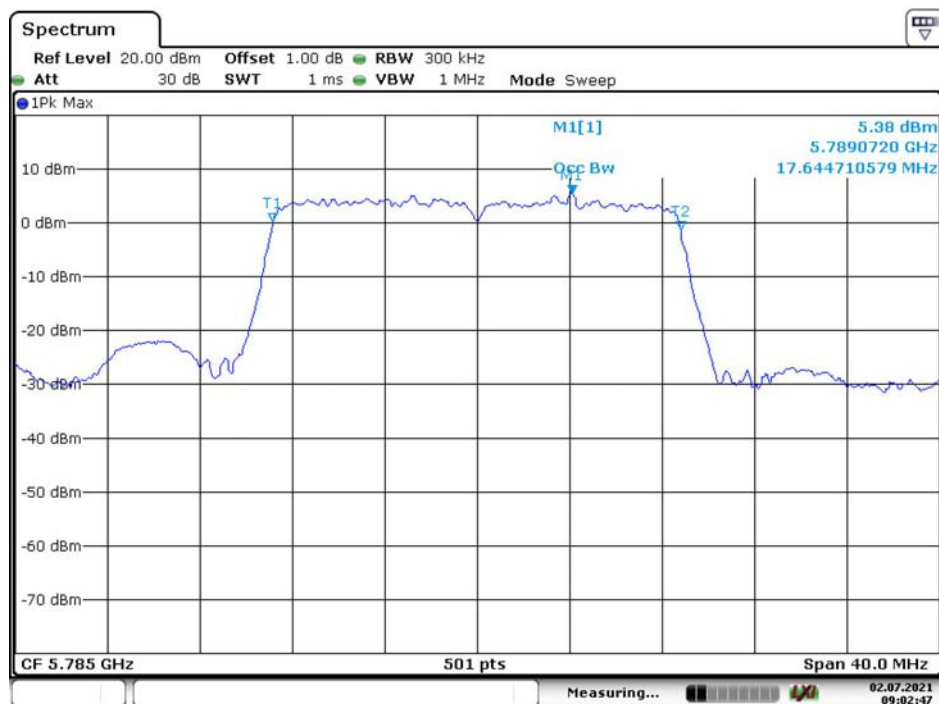

Date: 2.JUL.2021 09:02:48

802.11n ht20 High Channel

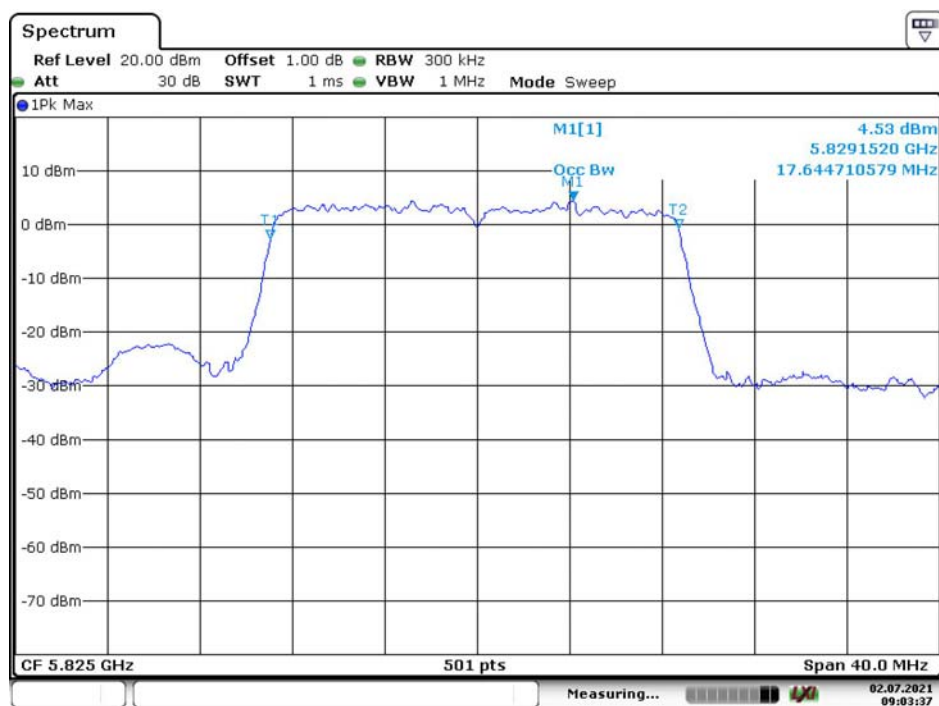

Date: 2.JUL.2021 09:03:38

802.11n ht40 Low Channel




Date: 2.JUL.2021 09:05:09

802.11n ht40 High Channel



Date: 2.JUL.2021 09:06:02

802.11ac vht80 Middle Channel

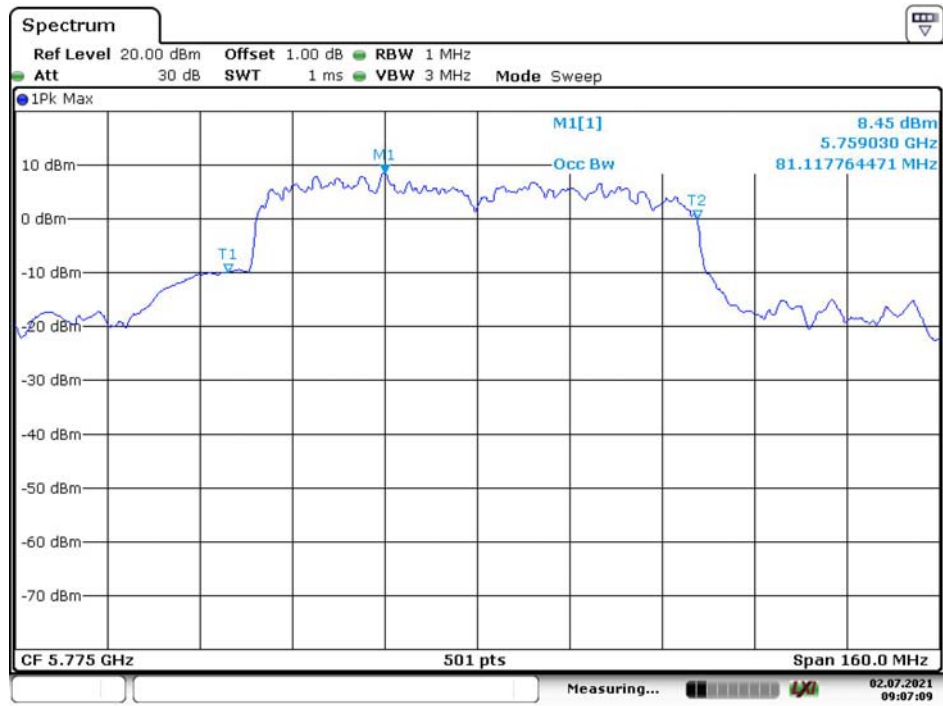

Date: 2.JUL.2021 09:07:09

FCC §15.407(a) –MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.407(a)

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(4) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
E-Microwave	Blocking Control	EMDCB-00036	0E01201047	2021-05-06	2022-05-05
E-Microwave	Coaxial Attenuators	EMCA10-5RN-6	OE01203239	2020-09-06	2021-09-06
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2020-09-12	2021-09-12

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Data

Environmental Conditions

Temperature:	25~27.4 °C
Relative Humidity:	55~60 %
ATM Pressure:	100~100.7 kPa
Test by:	Joe Qiao
Test Date:	2021-07-01~2021-07-20

Test Mode: Transmitting

Band	Mode	Channel	Frequency (MHz)	Maximum Average Conducted Output Power (dBm)			Limit (dBm)
				Chain 0	Chain 1	Total	
5150 - 5250 MHz	802.11 a	Low	5180	17.23	16.58	/	30
		Middle	5200	17.26	16.48	/	
		High	5240	17.4	16.49	/	
	802.11n ht20	Low	5180	15.03	14.32	17.7	
		Middle	5200	14.91	14.21	17.58	
		High	5240	15.01	14.08	17.58	
	802.11n ht40	Low	5190	14.82	14.11	17.49	
		High	5230	14.87	14.13	17.53	
	802.11ac vht80	Middle	5210	15.09	15.14	18.13	
5250 - 5350 MHz	802.11 a	Low	5260	17.41	16.58	/	24
		Middle	5280	17.38	16.18	/	
		High	5320	17.24	16.11	/	
	802.11n ht20	Low	5260	15	14.81	17.92	
		Middle	5280	15.06	14.65	17.87	
		High	5320	14.97	14.46	17.73	
	802.11n ht40	Low	5270	15.12	14.42	17.79	
		High	5310	15.05	14.17	17.64	
	802.11ac vht80	Middle	5290	14.93	14.14	17.56	
5470 - 5725 MHz	802.11 a	Low	5500	17.21	16.46	/	24
		Middle	5580	17.05	16.3	/	
		High	5700	16.29	16.54	/	
		Additional	5720	16.52	16.38	/	
	802.11n ht20	Low	5500	14.93	14.41	17.69	
		Middle	5580	14.82	15	17.92	
		High	5700	14.97	14.42	17.71	
		Additional	5720	14.59	14.65	17.63	
	802.11n ht40	Low	5510	14.76	14.64	17.71	
		Middle	5550	14.07	15.15	17.65	
		High	5670	14.09	14.95	17.55	
		Additional	5710	14.21	14.57	17.4	
	802.11ac vht80	Low	5530	14.97	14.59	17.79	
		Middle	5610	14.76	14.55	17.67	
		Additional	5690	14.5	14.28	17.4	
5725 - 5850 MHz	802.11 a	Low	5745	16.15	16.12	/	30
		Middle	5785	16.24	16.56	/	
		High	5825	16.31	17.05	/	
	802.11n ht20	Low	5745	14.19	14.08	17.15	
		Middle	5785	14.36	14.32	17.35	
		High	5825	14.32	14.97	17.67	
	802.11n ht40	Low	5755	14.38	14.23	17.32	
		High	5795	14.4	14.77	17.6	
	802.11ac vht80	Middle	5775	14.51	14.56	17.55	

Note:

The device is an Indoor AP.

The duty cycle factor has been calculated into the test data.

The maximum antenna gain is 3.58dBi in 5GHz band. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

So:

Directional gain = 3.58dBi

FCC §15.407(a) - POWER SPECTRAL DENSITY

Applicable Standard

According to FCC §15.407(a)

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm $10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output

power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2021-07-07	2022-07-07
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25~27.4 °C
Relative Humidity:	55~60 %
ATM Pressure:	100~100.7 kPa
Test by:	Joe Qiao
Test Date:	2021-07-01~2021-07-20

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plot.

5150-5250MHz:

Mode	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)			Limit (dBm/MHz)
		Chain 0	Chain 1	Total	
802.11a	5180	9.65	8.49	/	17
	5200	9.18	8.05	/	17
	5240	8.35	7.86	/	17
802.11n ht20	5180	6.92	6.49	9.72	17
	5200	6.46	6.92	9.71	17
	5240	5.88	6.02	8.96	17
802.11n ht40	5190	3.74	3.83	6.8	17
	5230	2.89	3.56	6.25	17
802.11ac vht80	5210	1.35	2.81	5.15	17

5250-5350MHz:

Mode	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)			Limit (dBm/MHz)
		Chain 0	Chain 1	Total	
802.11a	5260	8.06	7.56	/	11
	5280	8.03	8.08	/	11
	5320	8.76	9.03	/	11
802.11n ht20	5260	5.78	5.97	8.89	10.42
	5280	5.47	6.14	8.83	10.42
	5320	5.91	6.23	9.08	10.42
802.11n ht40	5270	2.90	3.40	6.17	10.42
	5310	3.48	4.03	6.77	10.42
802.11ac vht80	5290	3.32	3.27	6.31	10.42

5470-5725MHz:

Mode	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)			Limit (dBm/MHz)
		Chain 0	Chain 1	Total	
802.11a	5500	9.15	8.00	N/A	11.00
	5580	8.09	7.83	N/A	11.00
	5700	9.73	9.49	N/A	11.00
	5720	8.41	8.47	N/A	11.00
802.11n ht20	5500	6.47	6.39	9.44	10.65
	5580	6.78	6.37	9.59	10.65
	5700	6.35	6.54	6.54	10.65
	5720	5.93	6.22	5.93	10.65
802.11n ht40	5510	3.92	3.30	6.63	10.65
	5550	3.64	3.62	6.64	10.65
	5670	3.15	3.31	6.24	10.65
	5710	3.62	3.65	6.65	10.65
802.11ac vht80	5530	2.49	2.88	5.7	10.65
	5610	2.54	2.51	5.54	10.65
	5690	2.04	2.16	5.11	10.65