



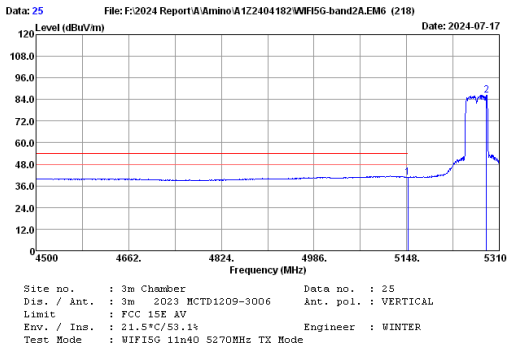


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	7.61	31.39	30.59	40.91	54.00	13.09	Average
2	5287.32	32.85	7.71	76.60	30.77	86.39	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

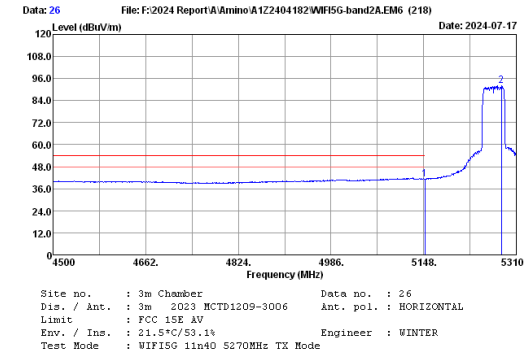


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	7.61	31.86	30.59	41.38	54.00	12.62	Peak
2	5284.08	32.84	7.70	82.45	30.77	92.22	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

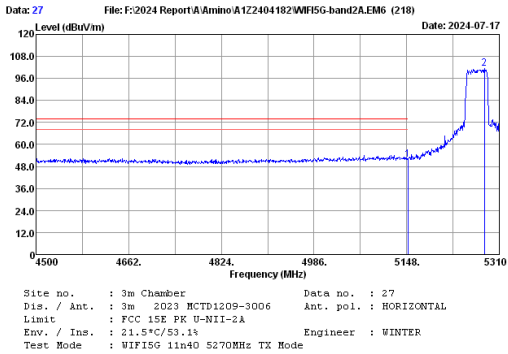

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	7.61	42.13	30.59	51.65	74.00	22.35	Peak
2	5284.08	32.84	7.70	91.61	30.77	101.38	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

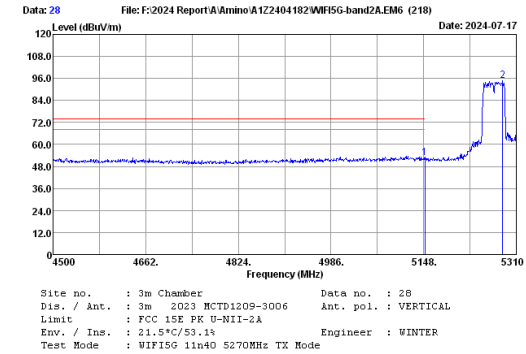

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	7.61	43.33	30.59	52.85	74.00	21.15	Peak
2	5286.51	32.85	7.71	85.02	30.77	94.81	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: XVG500107APBT

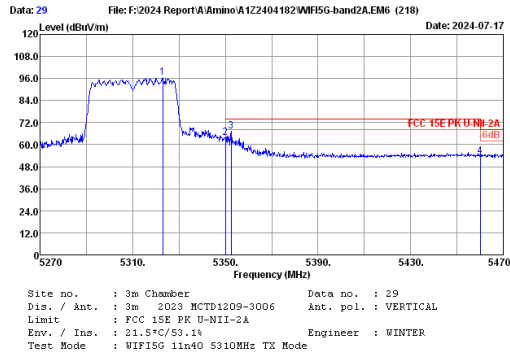


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5323.00	33.08	7.73	86.73	30.82	96.72	74.00	10.34	Peak
2	5350.00	33.30	7.74	53.47	30.85	63.66	74.00	10.34	Peak
3	5352.60	33.33	7.74	57.32	30.86	67.53	74.00	6.47	Peak
4	5460.00	34.02	7.82	42.60	31.00	53.44	68.20	14.76	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

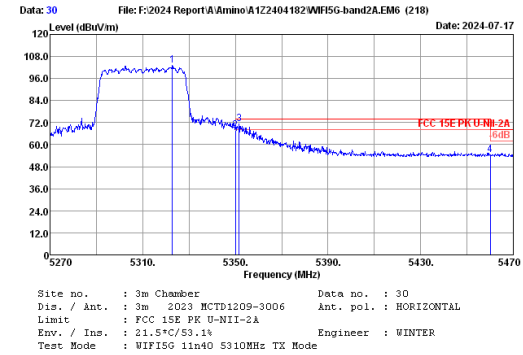


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5322.80	33.08	7.73	93.00	30.82	102.99	74.00	6.10	Peak
2	5350.00	33.30	7.74	57.71	30.85	67.90	74.00	6.10	Peak
3	5351.60	33.32	7.74	61.12	30.86	71.32	74.00	2.68	Peak
4	5460.00	34.02	7.82	43.66	31.00	54.50	68.20	13.70	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

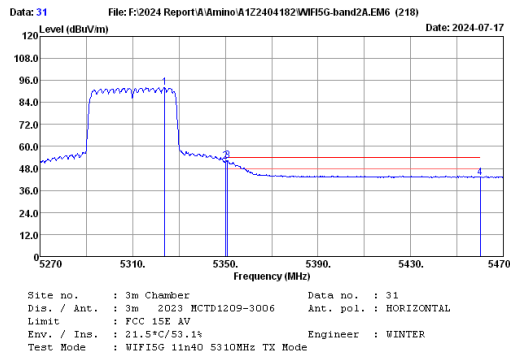

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5323.80	33.09	7.73	82.04	30.82	92.04	54.00	2.07	Average
2	5350.00	33.30	7.74	41.74	30.85	51.93	54.00	1.57	Average
3	5351.00	33.31	7.74	42.24	30.86	52.43	54.00	1.57	Average
4	5460.00	34.02	7.82	32.30	31.00	43.14	54.00	10.86	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

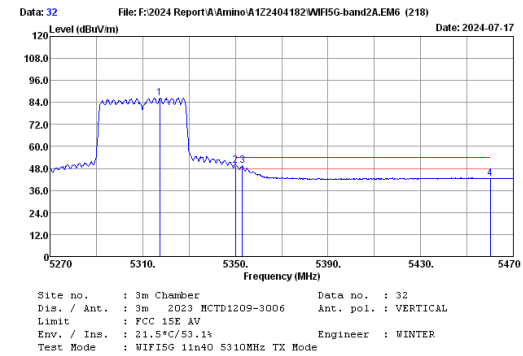

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5317.40	33.04	7.72	76.54	30.81	86.49	54.00	4.19	Average
2	5350.00	33.30	7.74	39.62	30.85	49.81	54.00	4.45	Average
3	5353.00	33.33	7.74	39.34	30.86	49.55	54.00	4.45	Average
4	5460.00	34.02	7.82	31.61	31.00	42.45	54.00	11.55	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: XVG500107APBT

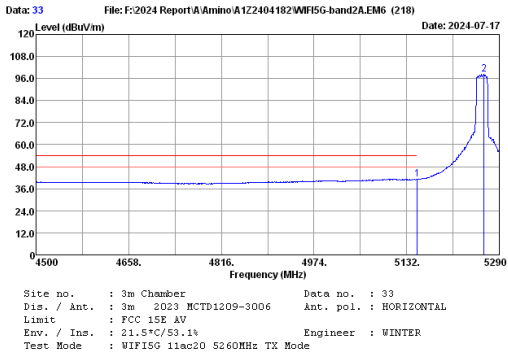


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	7.61	31.64	30.59	41.16	54.00	12.84	Average
2	5263.93	32.76	7.68	88.44	30.74	98.14	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

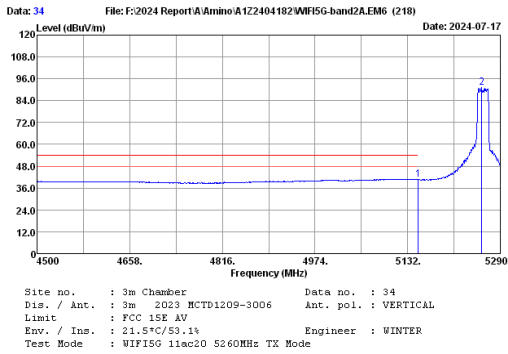


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	7.61	31.09	30.59	40.61	54.00	13.39	Average
2	5263.93	32.73	7.68	81.37	30.74	91.04	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

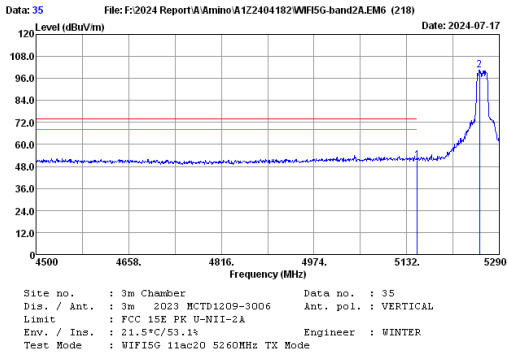

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	7.61	41.63	30.59	51.15	74.00	22.85	Peak
2	5263.93	32.72	7.68	91.05	30.73	100.72	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

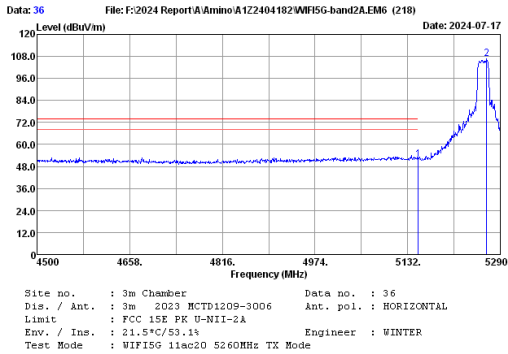

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	7.61	42.17	30.59	51.69	74.00	22.31	Peak
2	5263.93	32.77	7.70	97.13	30.75	106.85	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: XVG500107APBT

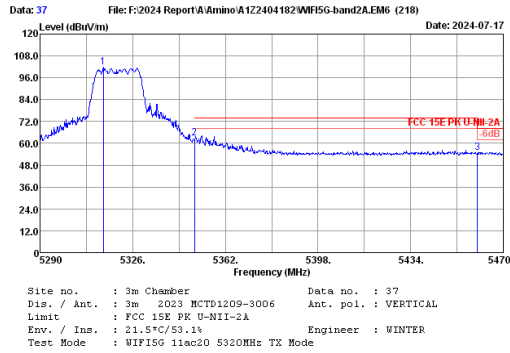


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5314.66	33.02	7.72	91.73	30.81	101.66	74.00	11.26	Peak
2	5350.00	33.30	7.74	52.55	30.85	62.74	74.00	11.26	Peak
3	5460.00	34.02	7.82	44.00	31.00	54.84	68.20	13.36	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

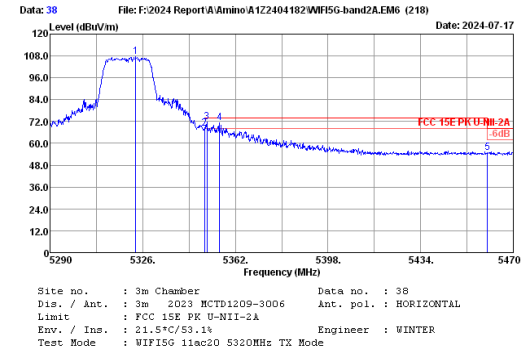


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5323.30	33.09	7.73	97.58	30.82	107.58	74.00	5.95	Peak
2	5350.00	33.30	7.74	57.86	30.85	68.05	74.00	2.46	Peak
3	5351.02	33.31	7.74	61.35	30.86	71.54	74.00	2.60	Peak
4	5355.88	33.36	7.74	61.16	30.86	71.40	74.00	13.34	Peak
5	5460.00	34.02	7.82	44.02	31.00	54.86	68.20	13.34	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

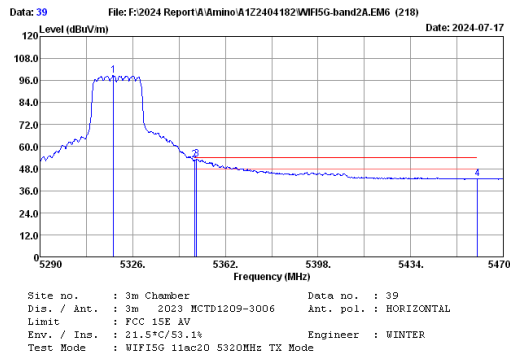

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5318.62	33.05	7.72	88.74	30.81	98.70	54.00	1.31	Average
2	5350.00	33.30	7.74	42.50	30.85	52.69	54.00	0.76	Average
3	5350.84	33.31	7.74	43.05	30.86	53.24	54.00	11.61	Average
4	5460.00	34.02	7.82	31.55	31.00	42.39	54.00	11.61	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

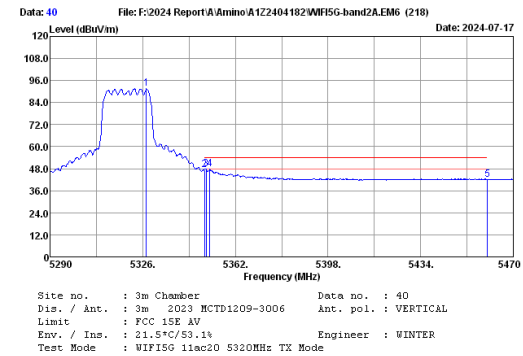

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5327.44	33.12	7.73	81.47	30.83	91.49	54.00	6.75	Average
2	5350.00	33.30	7.74	37.06	30.85	47.25	54.00	6.15	Average
3	5350.66	33.31	7.74	37.66	30.86	47.85	54.00	6.39	Average
4	5352.10	33.32	7.74	37.41	30.86	47.61	54.00	11.87	Average
5	5460.00	34.02	7.82	31.29	31.00	42.13	54.00	11.87	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: XVG500107APBT

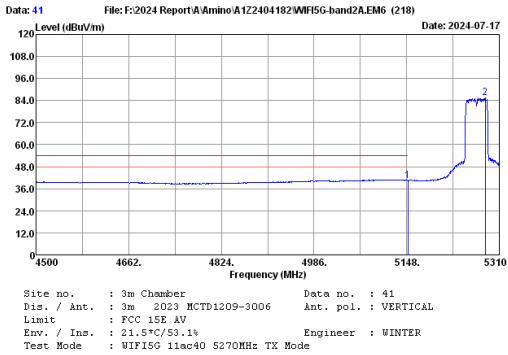


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	7.61	30.99	30.59	40.51	54.00	13.49	Average
2	5285.70	32.84	7.71	75.55	30.77	85.33	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

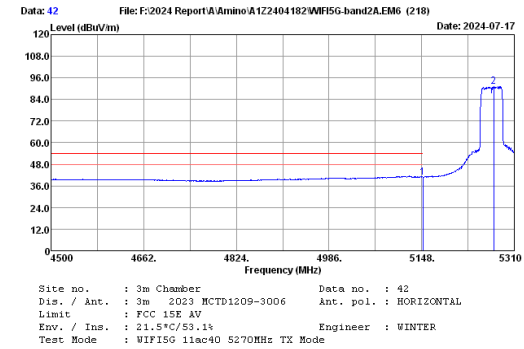


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	7.61	31.40	30.59	40.92	54.00	13.08	Average
2	5274.36	32.80	7.70	81.47	30.76	91.21	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

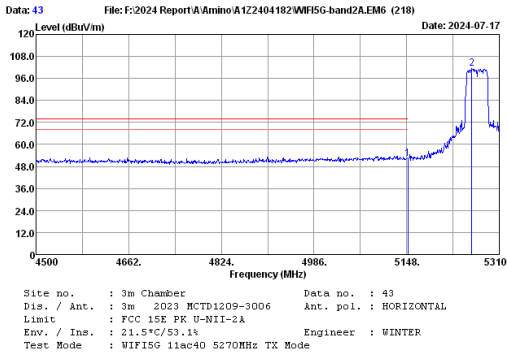

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	7.61	42.52	30.59	52.04	74.00	21.96	Peak
2	5262.21	32.75	7.68	91.77	30.74	101.46	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

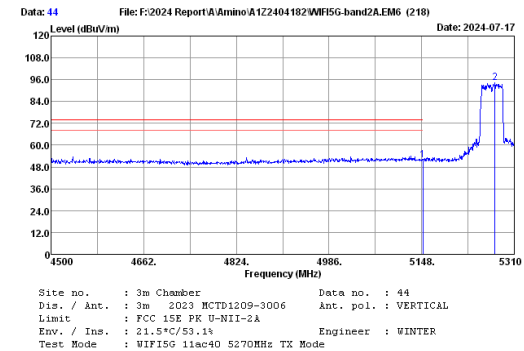

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	7.61	42.16	30.59	51.68	74.00	22.32	Peak
2	5275.98	32.80	7.70	84.47	30.76	94.21	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: XVG500107APBT

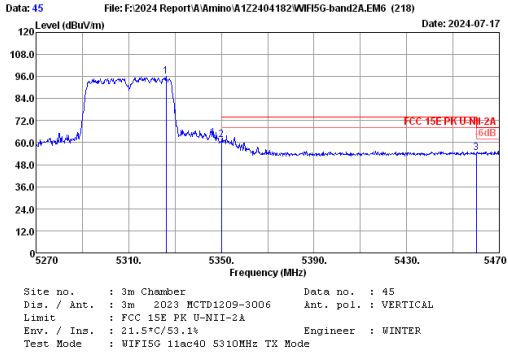


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5325.20	33.11	7.73	85.95	30.82	95.97	72.00	12.62	Peak
2	5350.00	33.30	7.74	51.19	30.85	61.38	74.00	12.62	Peak
3	5460.00	34.02	7.82	43.64	31.00	54.48	68.20	13.72	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

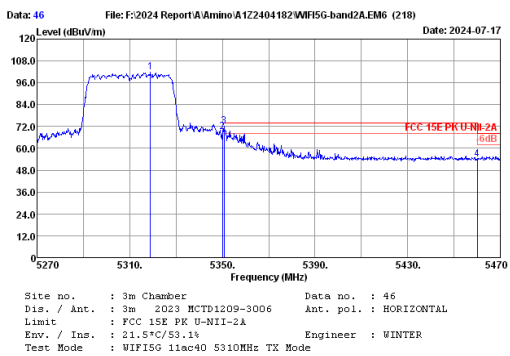


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5319.00	33.05	7.72	91.92	30.81	101.88	72.00	4.87	Peak
2	5350.00	33.30	7.74	58.94	30.85	69.13	74.00	14.14	Peak
3	5350.80	33.31	7.74	61.86	30.86	72.05	74.00	1.95	Peak
4	5460.00	34.02	7.82	43.22	31.00	54.06	68.20	14.14	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

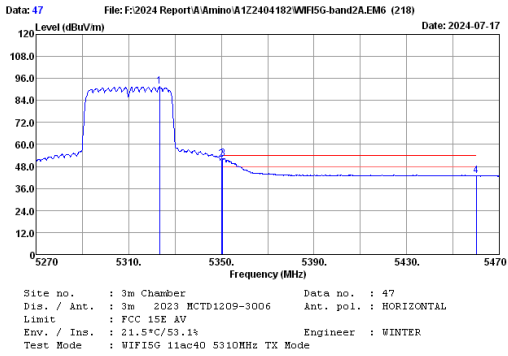


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5323.40	33.09	7.73	81.52	30.82	91.52	74.00	2.16	Average
2	5350.00	33.30	7.74	41.65	30.85	51.84	54.00	1.63	Average
3	5350.60	33.31	7.74	42.18	30.86	52.37	54.00	1.18	Average
4	5460.00	34.02	7.82	31.98	31.00	42.82	54.00	11.18	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

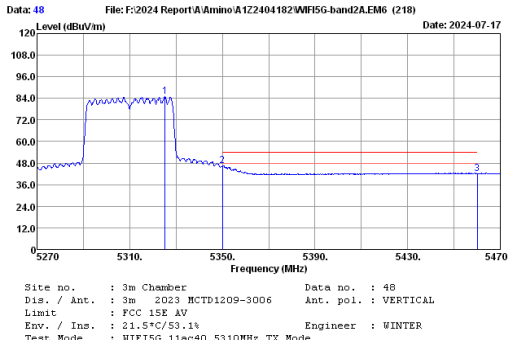


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5325.20	33.10	7.73	74.81	30.82	84.82	74.00	7.51	Average
2	5350.00	33.30	7.74	36.30	30.85	46.49	54.00	11.75	Average
3	5460.00	34.02	7.82	31.41	31.00	42.25	54.00	11.75	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

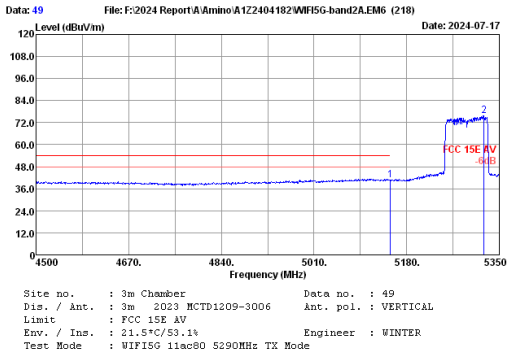


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	7.61	31.16	30.59	40.68	54.00	13.32	Average
2	5321.95	33.08	7.72	65.59	30.82	75.57	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

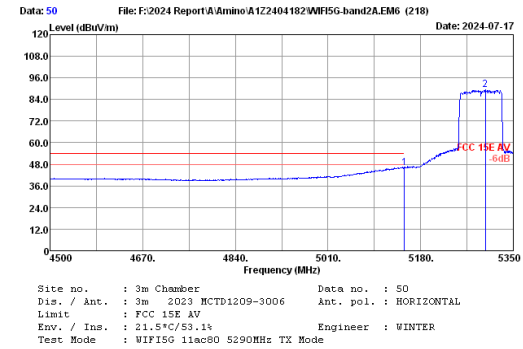


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	7.61	36.56	30.59	46.08	54.00	7.92	Average
2	5299.00	32.90	7.71	79.60	30.79	89.42	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

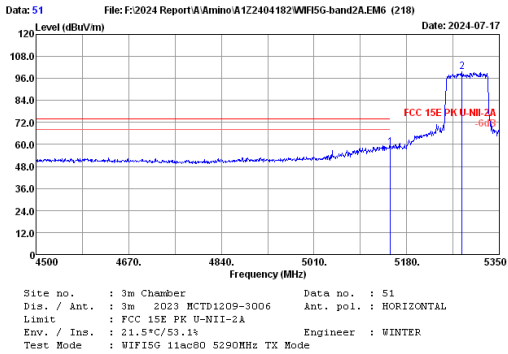

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	7.61	49.02	30.59	58.54	74.00	15.46	Peak
2	5282.00	32.83	7.70	89.89	30.77	99.65	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

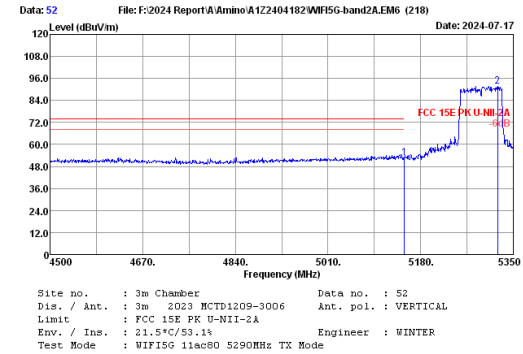

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	7.61	43.35	30.59	52.87	74.00	21.13	Peak
2	5321.10	33.07	7.72	81.77	30.82	91.74	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: XVG500107APBT

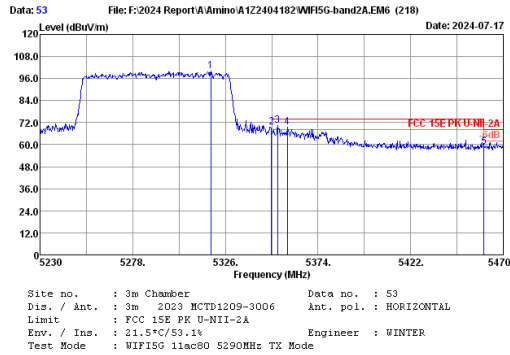


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5318.56	33.05	7.72	89.98	30.81	99.94	74.00	4.49	Peak
2	5350.00	33.30	7.74	59.32	30.85	69.51	74.00	4.49	Peak
3	5353.12	33.33	7.74	60.34	30.86	70.55	74.00	3.45	Peak
4	5358.16	33.38	7.74	59.09	30.87	69.34	74.00	4.66	Peak
5	5460.00	34.02	7.82	48.07	31.00	58.91	68.20	9.29	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

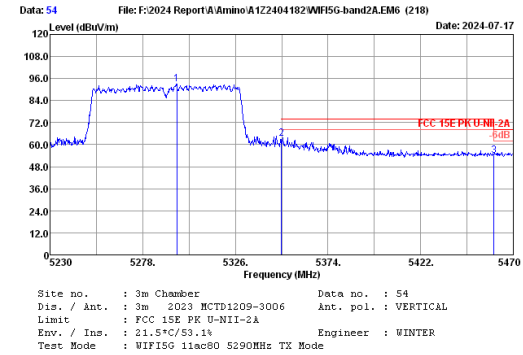


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5295.76	32.88	7.71	83.17	30.78	92.98	74.00	18.98	Peak
2	5350.00	33.30	7.74	53.12	30.85	63.31	74.00	10.69	Peak
3	5460.00	34.02	7.82	43.34	31.00	54.18	68.20	14.02	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

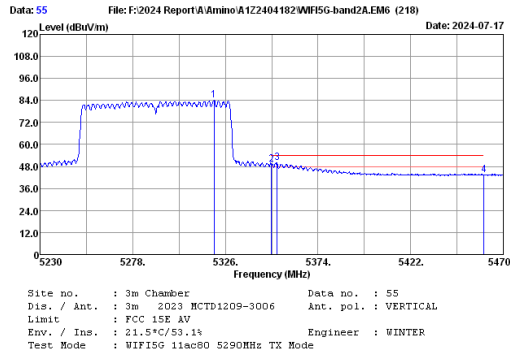

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5320.24	33.06	7.72	73.97	30.82	83.93	54.00	29.93	Average
2	5350.00	33.30	7.74	38.93	30.85	49.12	54.00	4.88	Average
3	5352.88	33.33	7.74	39.84	30.86	50.05	54.00	3.95	Average
4	5460.00	34.02	7.82	32.77	31.00	43.61	54.00	10.39	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

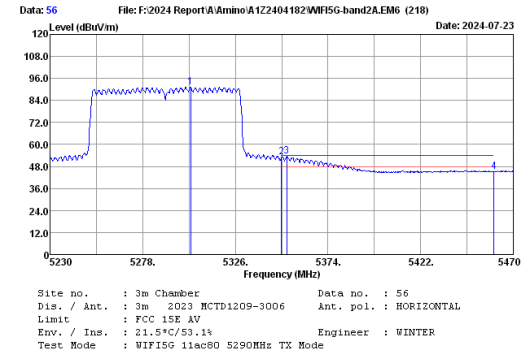

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5302.96	32.92	7.71	61.47	30.79	91.31	74.00	17.31	Average
2	5350.00	33.30	7.74	42.87	30.85	53.06	54.00	0.94	Average
3	5352.64	33.33	7.74	43.25	30.86	53.46	54.00	0.54	Average
4	5460.00	34.02	7.82	34.42	31.00	45.26	54.00	8.74	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: XVG500107APBT

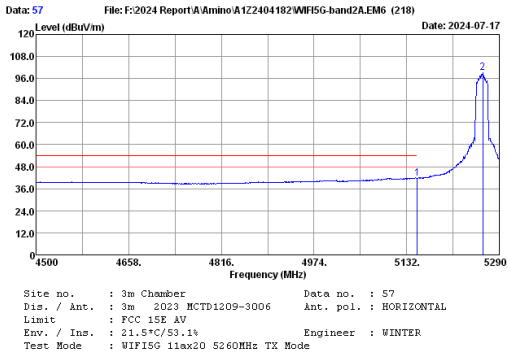


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	7.61	32.10	30.59	41.62	54.00	12.38	Average
2	5261.56	32.75	7.68	89.52	30.74	99.21	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

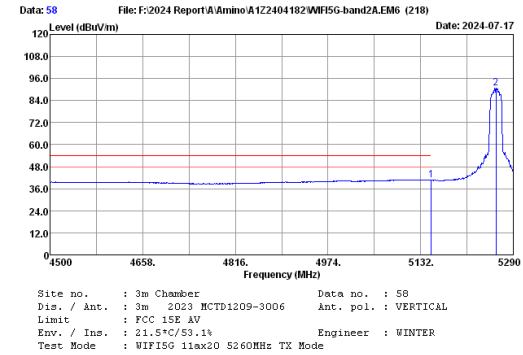


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	7.61	31.11	30.59	40.63	54.00	13.37	Average
2	5260.77	32.74	7.68	81.22	30.74	90.90	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

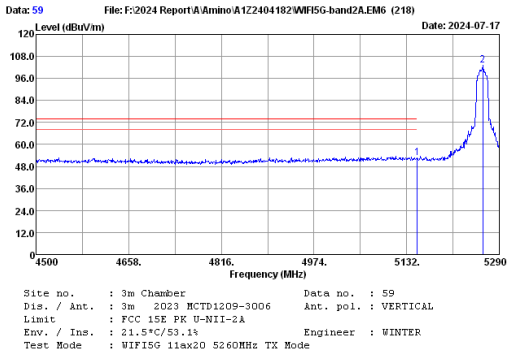


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	7.61	43.20	30.59	52.72	74.00	21.28	Peak
2	5261.56	32.75	7.68	93.32	30.74	103.01	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

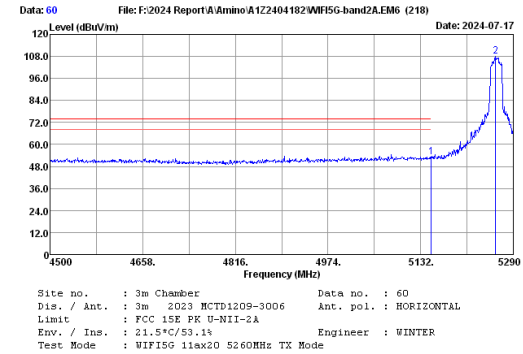


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	7.61	43.71	30.59	53.23	74.00	20.77	Peak
2	5259.98	32.74	7.68	98.47	30.74	108.15	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

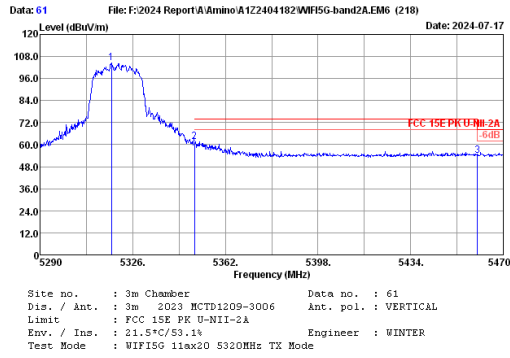


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5317.72	33.04	7.72	94.70	30.81	104.65	-----	-----	Peak
2	5350.00	33.30	7.74	51.33	30.85	61.52	74.00	12.48	Peak
3	5460.00	34.02	7.82	43.23	31.00	54.07	68.20	14.13	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

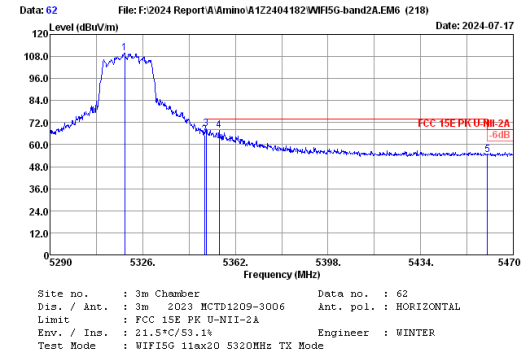


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5318.98	33.05	7.72	99.70	30.81	109.66	-----	-----	Peak
2	5350.00	33.30	7.74	54.97	30.85	65.16	74.00	8.84	Peak
3	5350.66	33.31	7.74	58.39	30.86	68.58	74.00	5.42	Peak
4	5355.70	33.36	7.74	57.50	30.86	67.74	74.00	6.26	Peak
5	5460.00	34.02	7.82	43.66	31.00	54.50	68.20	13.70	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

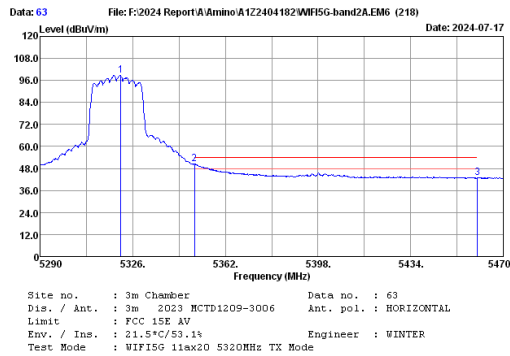


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5321.32	33.07	7.72	88.66	30.82	98.83	-----	-----	Average
2	5350.00	33.30	7.74	40.37	30.85	50.56	54.00	3.44	Average
3	5460.00	34.02	7.82	31.98	31.00	42.82	54.00	11.18	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

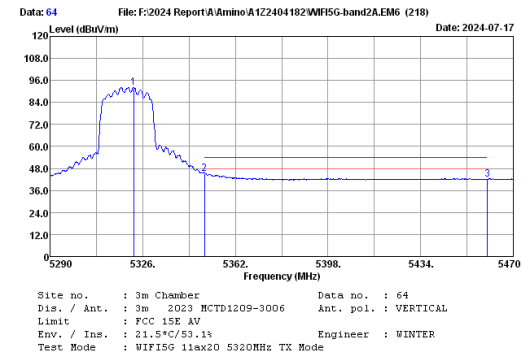


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5322.58	33.08	7.73	82.28	30.82	92.27	-----	-----	Average
2	5350.00	33.30	7.74	35.06	30.85	45.25	54.00	8.75	Average
3	5460.00	34.02	7.82	31.36	31.00	42.20	54.00	11.80	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

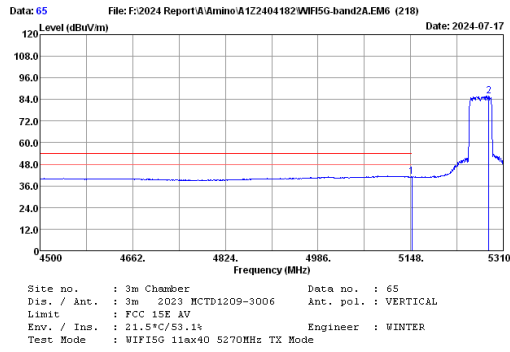


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	7.61	31.52	30.59	41.04	54.00	12.96	Average
2	5284.89	32.84	7.71	76.03	30.77	85.81	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

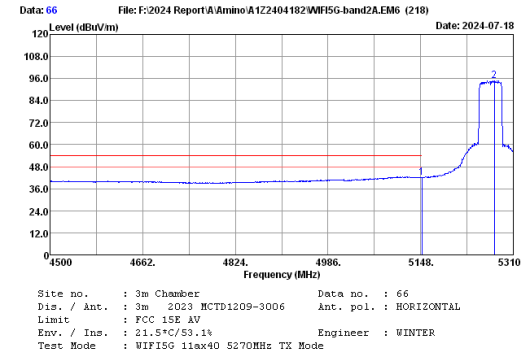


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	7.61	32.61	30.59	42.13	54.00	11.87	Average
2	5276.79	32.81	7.70	85.14	30.76	94.89	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

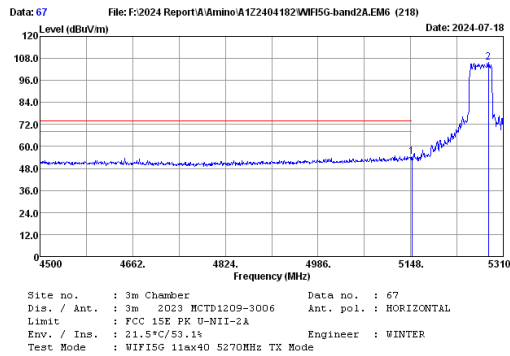


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	7.61	44.82	30.59	54.34	74.00	19.66	Peak
2	5284.08	32.84	7.70	96.01	30.77	105.78	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

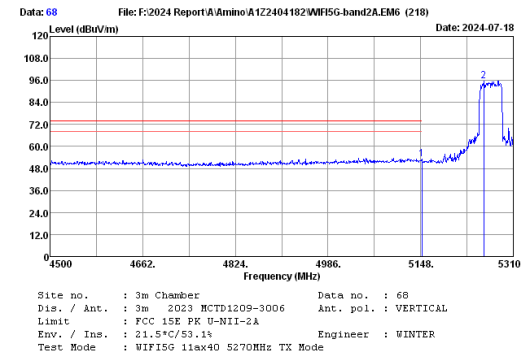


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	7.61	43.70	30.59	53.22	74.00	20.78	Peak
2	5258.16	32.73	7.68	85.99	30.74	95.66	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

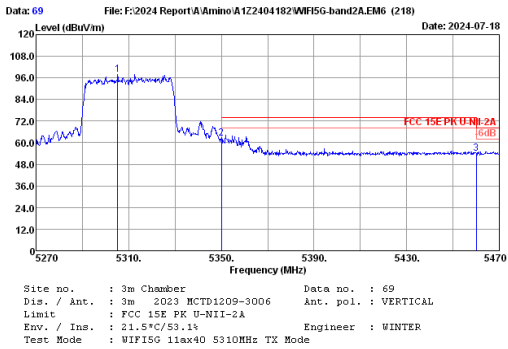


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5305.20	32.94	7.72	87.94	30.80	97.80	74.00	11.58	Peak
2	5350.00	33.30	7.74	52.23	30.85	62.42	74.00	11.58	Peak
3	5460.00	34.02	7.82	43.23	31.00	54.07	68.20	14.13	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

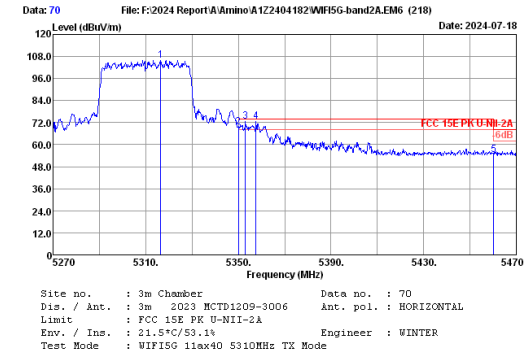


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5316.40	33.03	7.72	95.97	30.81	105.91	74.00	4.51	Peak
2	5350.00	33.30	7.74	59.30	30.85	69.49	74.00	4.51	Peak
3	5353.00	33.33	7.74	62.24	30.86	72.45	74.00	1.55	Peak
4	5357.60	33.38	7.74	62.36	30.86	72.62	74.00	1.38	Peak
5	5460.20	34.02	7.82	43.61	31.00	54.45	68.20	13.75	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

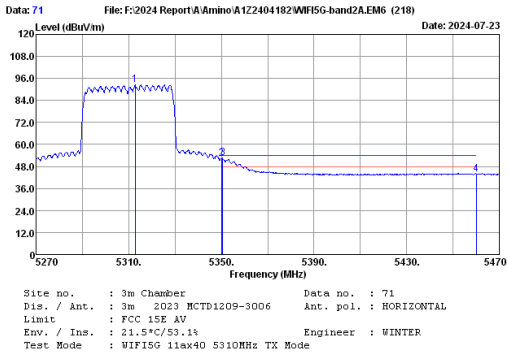


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5312.80	33.00	7.72	82.67	30.81	92.58	74.00	1.65	Average
2	5350.00	33.30	7.74	42.16	30.85	52.35	74.00	1.65	Average
3	5350.60	33.31	7.74	42.32	30.86	52.51	74.00	1.49	Average
4	5460.00	34.02	7.82	32.98	31.00	43.82	68.20	10.18	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

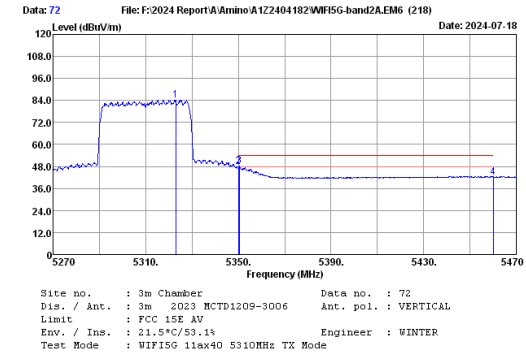


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5323.00	33.08	7.73	74.31	30.82	84.30	74.00	6.27	Average
2	5350.00	33.30	7.74	37.54	30.85	47.73	74.00	5.79	Average
3	5350.40	33.30	7.74	38.03	30.86	48.21	74.00	5.79	Average
4	5460.00	34.02	7.82	31.36	31.00	42.20	68.20	11.80	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

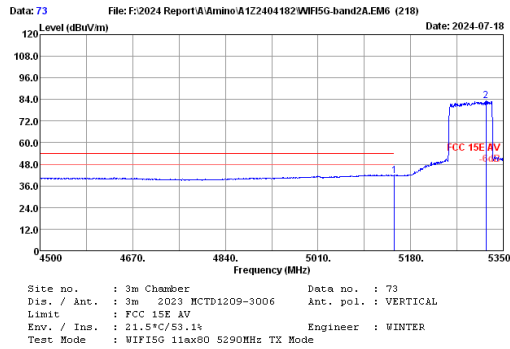


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	7.61	32.09	30.59	41.61	54.00	12.39	Average
2	5301.55	33.05	7.72	73.20	30.81	83.16	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

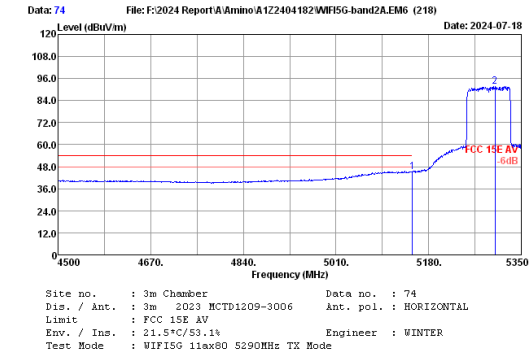


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	7.61	35.51	30.59	45.03	54.00	8.97	Average
2	5301.55	32.91	7.71	81.77	30.79	91.60	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

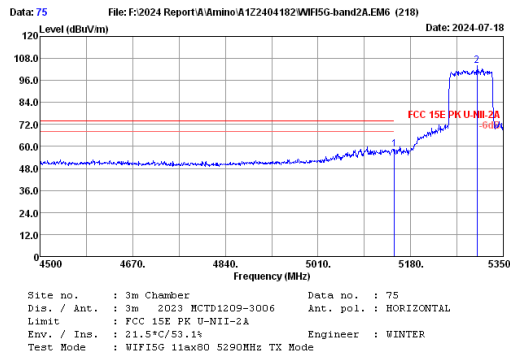


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	7.61	48.78	30.59	58.30	74.00	15.70	Peak
2	5301.55	32.91	7.71	94.36	30.79	104.19	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

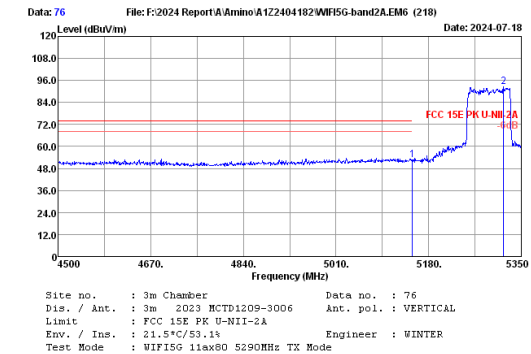


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.50	7.61	49.00	30.59	52.52	74.00	21.48	Peak
2	5301.70	33.04	7.72	82.45	30.81	92.40	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

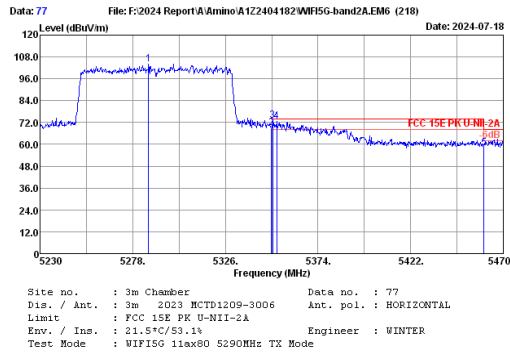


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5286.16	32.84	7.71	94.11	30.77	103.89	-----	-----	Peak
2	5350.00	33.30	7.74	59.06	30.85	69.25	74.00	4.75	Peak
3	5350.48	33.30	7.74	63.09	30.86	73.27	74.00	0.73	Peak
4	5352.64	33.33	7.74	62.53	30.86	72.74	74.00	1.26	Peak
5	5460.00	34.02	7.82	47.20	31.00	58.04	68.20	10.16	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

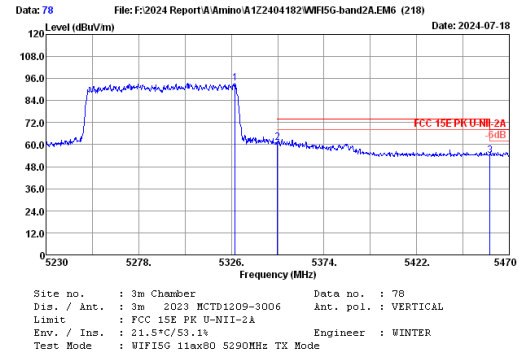


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5327.92	33.12	7.73	83.59	30.83	93.61	-----	-----	Peak
2	5350.00	33.30	7.74	50.89	30.85	61.08	74.00	12.92	Peak
3	5460.00	34.02	7.82	43.16	31.00	54.00	68.20	14.20	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

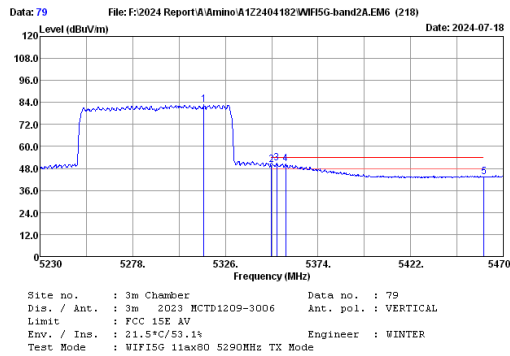

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5314.96	33.02	7.72	72.71	30.81	82.64	-----	-----	Average
2	5350.00	33.30	7.74	39.74	30.85	49.93	54.00	4.07	Average
3	5352.64	33.33	7.74	40.57	30.86	50.78	54.00	3.22	Average
4	5357.20	33.37	7.74	40.40	30.86	50.65	54.00	3.35	Average
5	5460.00	34.02	7.82	32.56	31.00	43.40	54.00	10.60	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

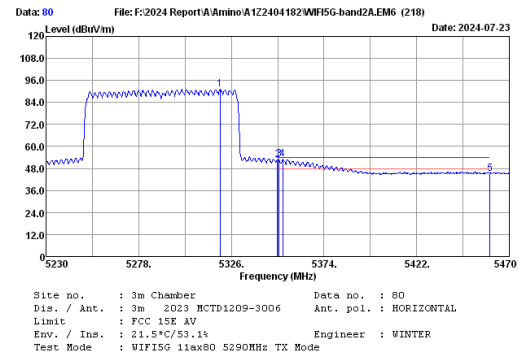

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5320.24	33.06	7.72	61.11	30.82	91.07	-----	-----	Average
2	5350.00	33.30	7.74	42.57	30.85	52.76	54.00	1.24	Average
3	5350.72	33.31	7.74	42.61	30.86	53.00	54.00	1.00	Average
4	5352.64	33.33	7.74	42.79	30.86	53.00	54.00	1.00	Average
5	5460.00	34.02	7.82	34.54	31.00	45.38	54.00	8.62	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

U-NII-2C Band: SISO Mode

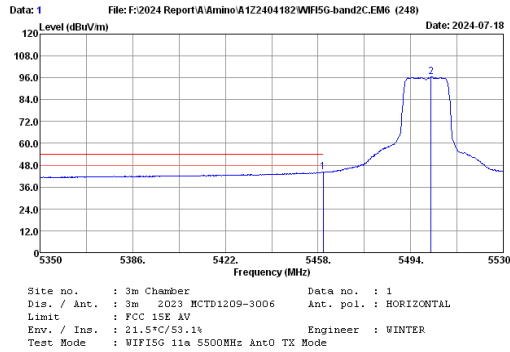


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	33.32	31.00	44.16	54.00	9.84	Average
2	5501.92	33.69	7.84	86.01	31.05	96.49	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

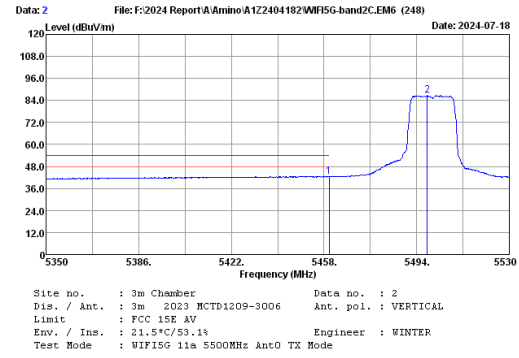


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	31.70	31.00	42.54	54.00	11.46	Average
2	5498.14	33.71	7.84	76.22	31.05	86.72	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

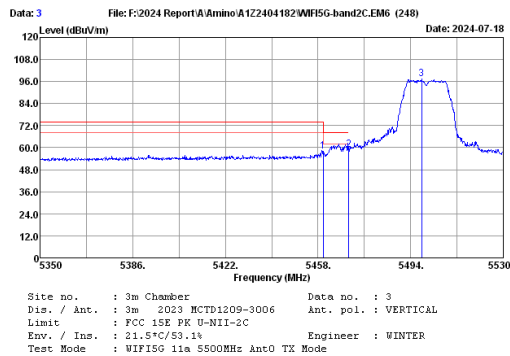


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	47.18	31.00	58.02	68.20	10.18	Peak
2	5470.00	33.94	7.82	47.99	31.01	58.74	68.20	9.46	Peak
3	5498.32	33.71	7.84	86.77	31.05	97.27	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

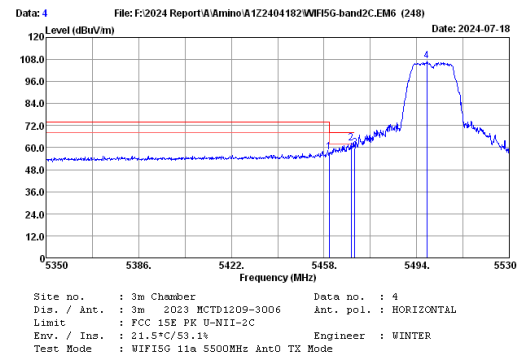


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	46.65	31.00	57.49	68.20	10.71	Peak
2	5468.62	33.95	7.82	51.89	31.01	62.65	68.20	5.55	Peak
3	5470.00	33.94	7.82	49.97	31.01	59.72	68.20	8.48	Peak
4	5497.96	33.72	7.84	96.69	31.05	107.20	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

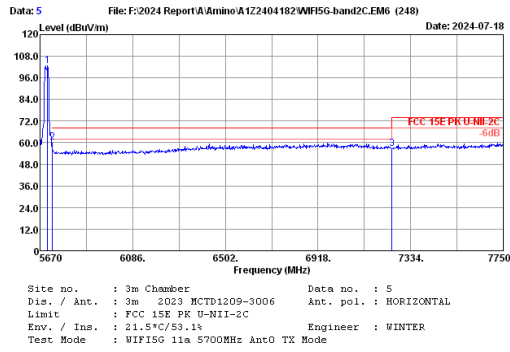


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5703.28	33.41	7.97	92.83	31.31	102.90	68.20	7.88	Peak
2	5725.00	33.50	7.98	50.18	31.34	60.32	68.20	11.42	Peak
3	7250.00	36.70	8.48	43.20	31.60	56.78	68.20	10.15	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

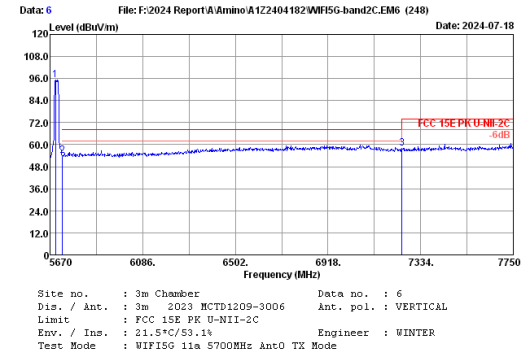


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5694.96	33.38	7.96	85.34	31.30	95.38	68.20	14.22	Peak
2	5725.00	33.50	7.98	43.84	31.34	53.98	68.20	10.15	Peak
3	7250.00	36.70	8.48	44.47	31.60	58.05	68.20	10.15	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

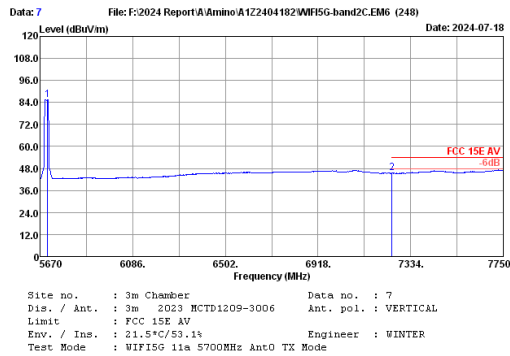


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5703.28	33.41	7.97	75.60	31.31	85.67	54.00	8.52	Average
2	7250.00	36.70	8.48	31.90	31.60	45.48	54.00	8.52	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

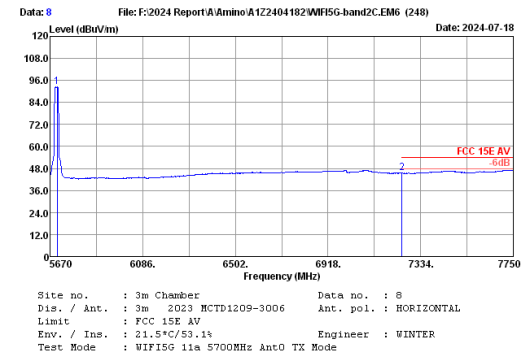


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5701.20	33.40	7.96	82.40	31.31	92.45	54.00	8.56	Average
2	7250.00	36.70	8.48	31.86	31.60	45.44	54.00	8.56	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

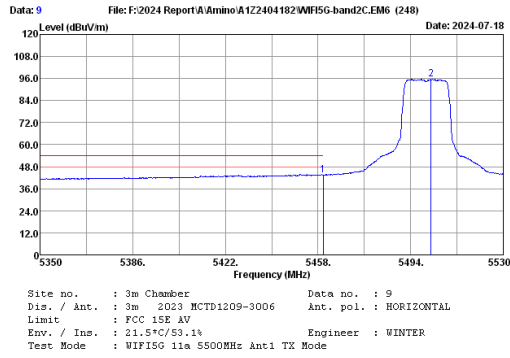


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	32.59	31.00	43.43	54.00	10.57	Average
2	5501.92	33.69	7.84	85.13	31.05	95.61	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

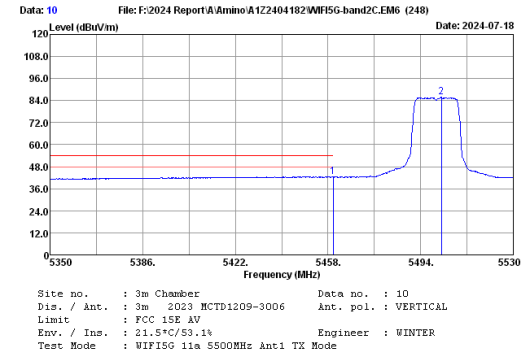


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	31.53	31.00	42.37	54.00	11.63	Average
2	5502.10	33.69	7.84	75.30	31.05	85.78	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

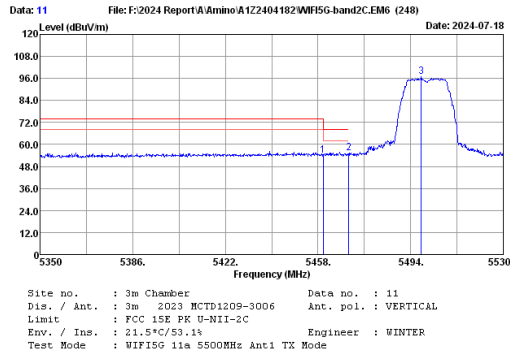

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	43.02	31.00	53.86	68.20	14.34	Peak
2	5470.00	33.94	7.82	44.79	31.01	55.54	68.20	12.66	Peak
3	5498.14	33.71	7.84	86.32	31.05	96.82	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

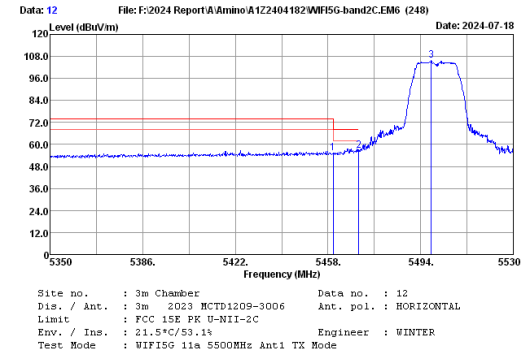

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	44.61	31.00	55.45	68.20	12.75	Peak
2	5470.00	33.94	7.82	46.15	31.01	56.90	68.20	11.30	Peak
3	5498.14	33.71	7.84	95.37	31.05	105.87	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.


FCC ID: XVG500107APBT

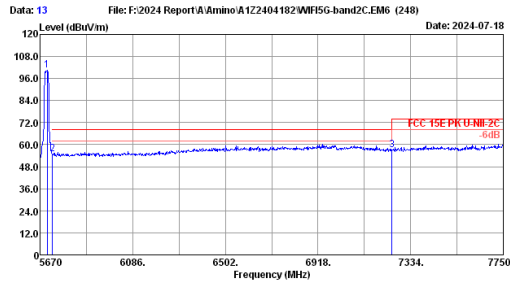

Site no. : 3m Chamber Data no. : 13
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-2C
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WiFi5G 11a 5700MHz Ant1 TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5701.20	33.40	7.96	90.53	31.31	100.58	-----	-----	Peak
2	5725.00	33.50	7.98	44.84	31.34	54.98	68.20	13.22	Peak
3	7250.00	36.70	8.48	43.70	31.60	57.28	68.20	10.92	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

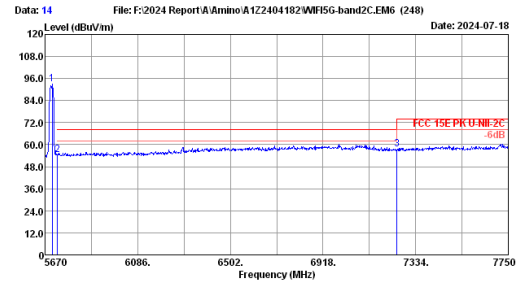

Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-2C
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WiFi5G 11a 5700MHz Ant1 TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5701.20	33.40	7.96	83.11	31.31	93.16	-----	-----	Peak
2	5725.00	33.50	7.98	44.54	31.34	54.68	68.20	13.52	Peak
3	7250.00	36.70	8.48	44.01	31.60	57.59	68.20	10.61	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

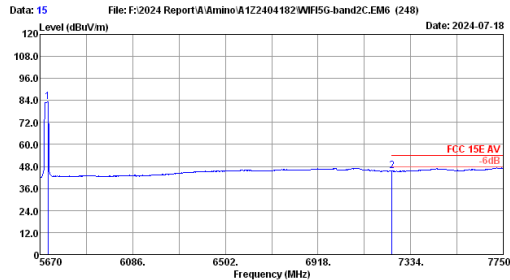

Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WiFi5G 11a 5700MHz Ant1 TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5705.36	33.42	7.97	73.20	31.32	63.27	-----	-----	Average
2	7250.00	36.70	8.48	31.87	31.60	45.45	54.00	8.55	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

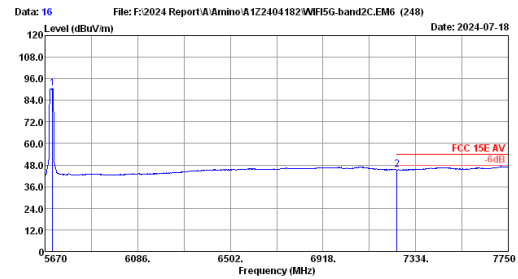


Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WiFi5G 11a 5700MHz Ant1 TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5703.28	33.41	7.97	80.75	31.31	90.82	-----	-----	Average
2	7250.00	36.70	8.48	31.98	31.60	45.56	54.00	8.44	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

MIMO Mode

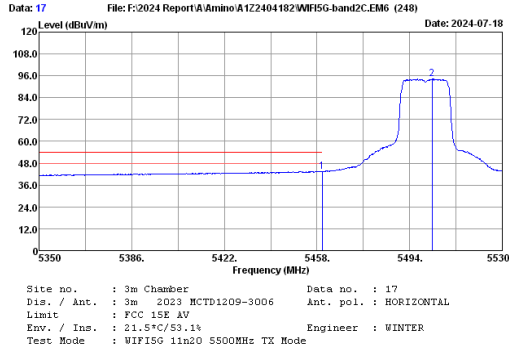


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	32.52	31.00	43.36	54.00	10.64	Average
2	5502.64	33.68	7.84	83.77	31.05	94.24	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

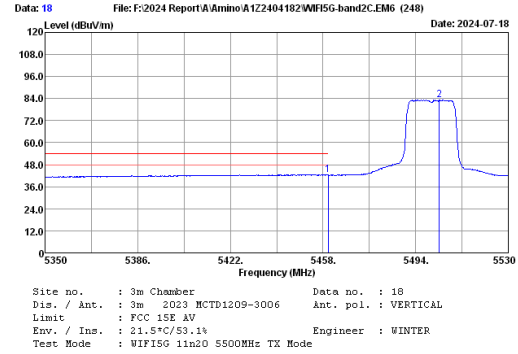


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	31.46	31.00	42.30	54.00	11.70	Average
2	5503.18	33.68	7.84	72.98	31.05	83.45	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

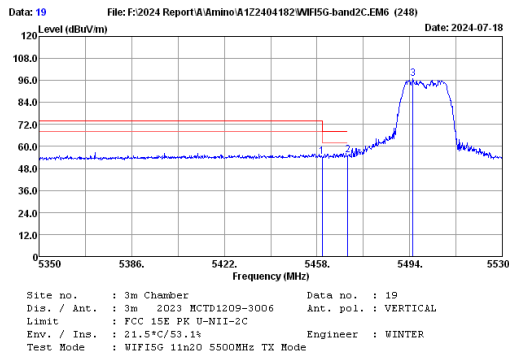

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	43.51	31.00	54.35	68.20	13.85	Peak
2	5470.00	33.94	7.82	44.66	31.01	55.41	68.20	12.79	Peak
3	5495.26	33.74	7.84	86.28	31.04	96.82	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

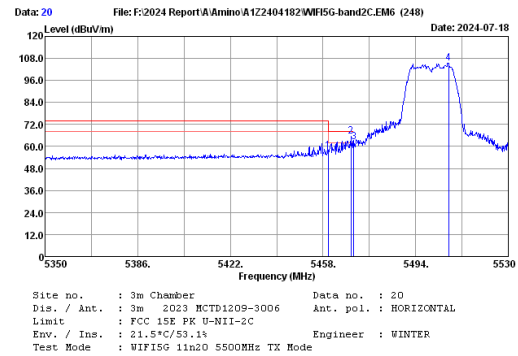

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	46.92	31.00	57.76	68.20	10.44	Peak
2	5468.80	33.95	7.82	54.58	31.01	65.34	68.20	2.86	Peak
3	5470.00	33.94	7.82	51.54	31.01	62.29	68.20	5.91	Peak
4	5506.78	33.66	7.84	94.97	31.06	105.41	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.


FCC ID: XVG500107APBT

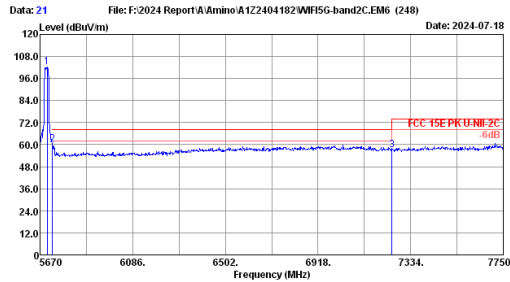

Site no. : 3m Chamber Data no. : 21
Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC 15E PK U-NII-2C
Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
Test Mode : WIFI5G 11n20 5700MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5701.20	33.40	7.96	92.14	31.31	102.19	-----	-----	Peak
2	5725.00	33.50	7.98	50.30	31.34	60.44	68.20	7.76	Peak
3	7250.00	36.70	8.48	43.38	31.60	56.96	68.20	11.24	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

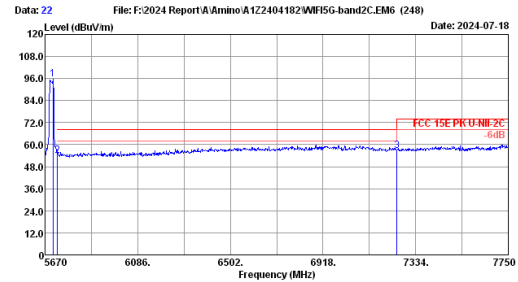

Site no. : 3m Chamber Data no. : 22
Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC 15E PK U-NII-2C
Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
Test Mode : WIFI5G 11n20 5700MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5705.36	33.42	7.97	85.46	31.32	95.53	-----	-----	Peak
2	5725.00	33.50	7.98	44.09	31.34	54.23	68.20	13.97	Peak
3	7250.00	36.70	8.48	43.17	31.60	56.75	68.20	11.45	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

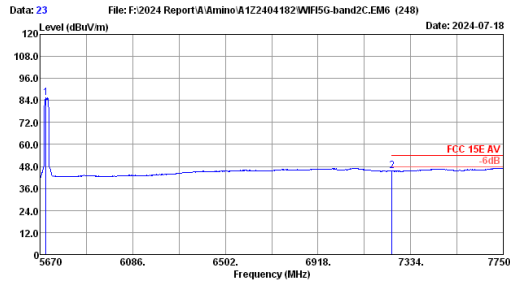

Site no. : 3m Chamber Data no. : 23
Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC 15E AV
Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
Test Mode : WIFI5G 11n20 5700MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5697.04	33.39	7.96	75.31	31.31	85.35	-----	-----	Average
2	7250.00	36.70	8.48	31.85	31.60	45.43	54.00	8.57	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

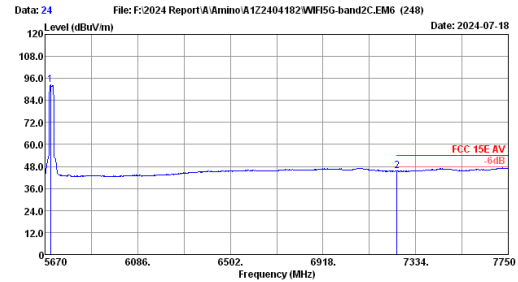


Site no. : 3m Chamber Data no. : 24
Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC 15E AV
Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
Test Mode : WIFI5G 11n20 5700MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5694.96	33.38	7.96	82.42	31.30	92.46	-----	-----	Average
2	7250.00	36.70	8.48	31.85	31.60	45.43	54.00	8.57	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: XVG500107APBT

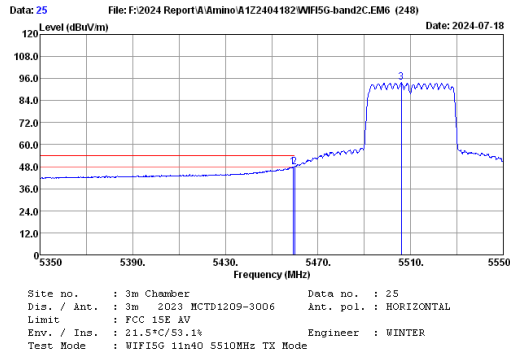


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5459.20	34.03	7.82	37.06	31.00	47.91	54.00	6.09	Average
2	5460.00	34.02	7.82	37.02	31.00	47.86	54.00	6.14	Average
3	5506.00	33.66	7.84	83.24	31.06	93.68	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

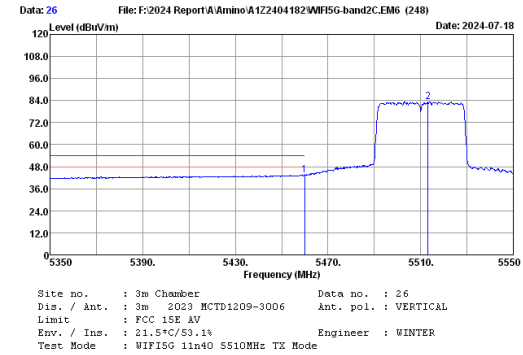


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	32.70	31.00	43.54	54.00	10.46	Average
2	5513.20	33.62	7.85	73.05	31.07	83.45	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

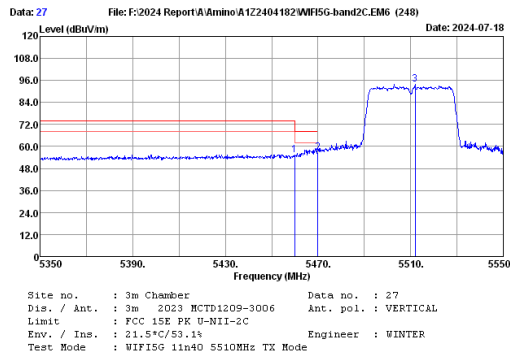


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	44.32	31.00	55.16	68.20	13.04	Peak
2	5470.00	33.94	7.82	45.98	31.01	56.73	68.20	11.47	Peak
3	5512.00	33.63	7.84	83.36	31.07	93.76	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

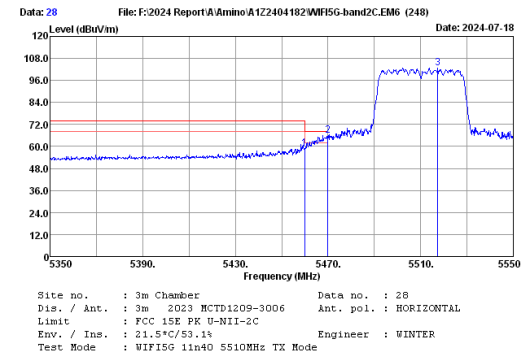


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	47.94	31.00	56.78	68.20	9.42	Peak
2	5470.00	33.94	7.82	55.44	31.01	66.19	68.20	2.01	Peak
3	5517.40	33.60	7.85	92.50	31.07	102.88	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

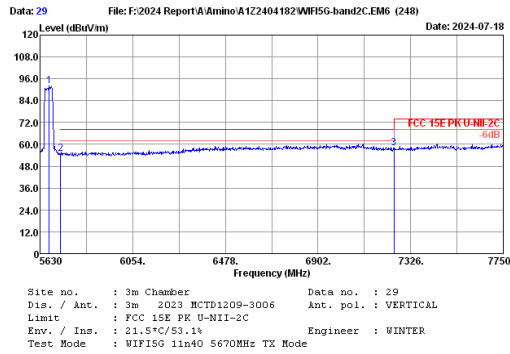


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5672.40	33.29	7.95	82.09	31.27	92.06	-----	-----	Peak
2	5725.00	33.50	7.98	44.61	31.34	54.75	68.20	13.45	Peak
3	7250.00	36.70	8.48	44.50	31.60	58.08	68.20	10.12	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

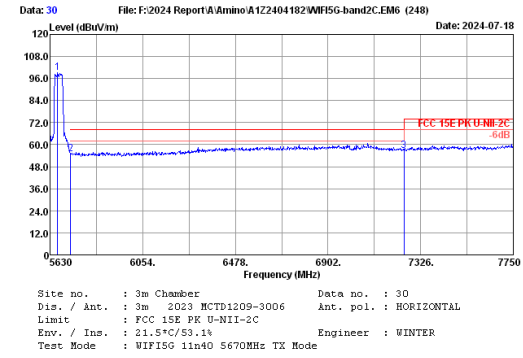


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5663.92	33.26	7.94	89.16	31.26	99.10	-----	-----	Peak
2	5725.00	33.50	7.98	44.83	31.34	54.97	68.20	13.23	Peak
3	7250.00	36.70	8.48	43.30	31.60	56.88	68.20	11.32	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

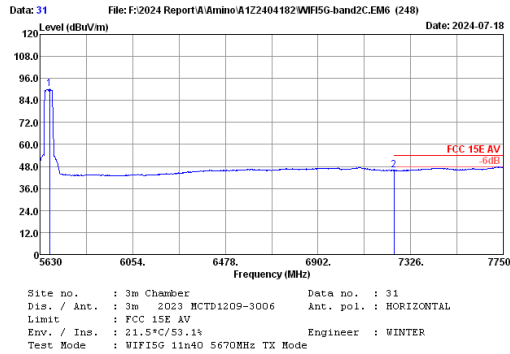


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5674.52	33.30	7.95	80.34	31.28	90.31	-----	-----	Average
2	7250.00	36.70	8.48	32.31	31.60	45.89	54.00	8.11	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

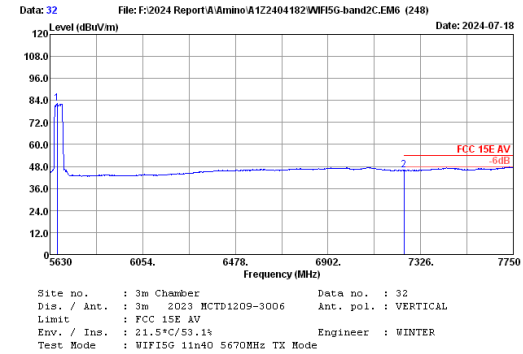


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5661.80	33.25	7.94	72.23	31.26	82.16	-----	-----	Average
2	7250.00	36.70	8.48	32.29	31.60	45.87	54.00	8.13	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

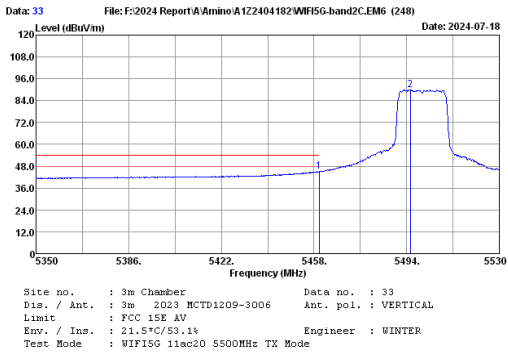


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	34.54	31.00	45.38	54.00	8.62	Average
2	5495.44	33.74	7.84	79.42	31.04	89.96	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

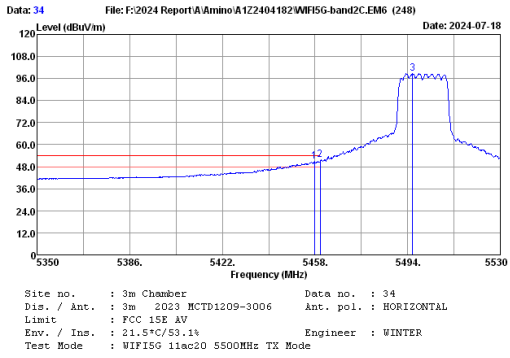


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5457.82	34.04	7.82	40.01	31.00	50.87	54.00	3.13	Average
2	5460.00	34.02	7.82	40.90	31.00	51.74	54.00	2.26	Average
3	5495.98	33.73	7.84	88.20	31.04	98.73	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

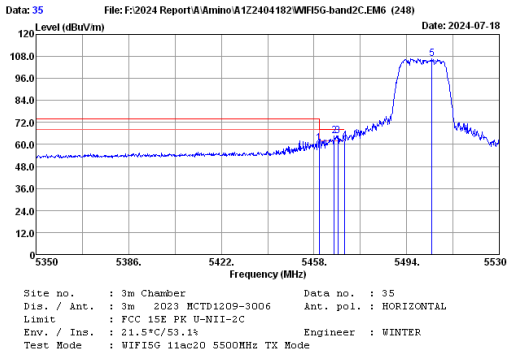


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	49.81	31.00	60.65	68.20	7.55	Peak
2	5465.92	33.97	7.82	53.89	31.01	64.67	68.20	3.53	Peak
3	5467.36	33.96	7.82	53.98	31.01	64.75	68.20	3.45	Peak
4	5470.00	33.94	7.82	51.22	31.01	61.97	68.20	6.23	Peak
5	5503.90	33.68	7.84	96.46	31.06	106.92	-----	-----	Peak

Remarks: 1. Emission level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

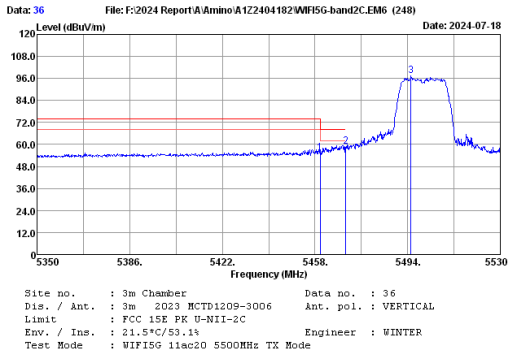

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	44.70	31.00	55.54	68.20	12.66	Peak
2	5470.00	33.94	7.82	48.07	31.01	58.82	68.20	9.38	Peak
3	5495.26	33.74	7.84	86.78	31.04	97.32	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

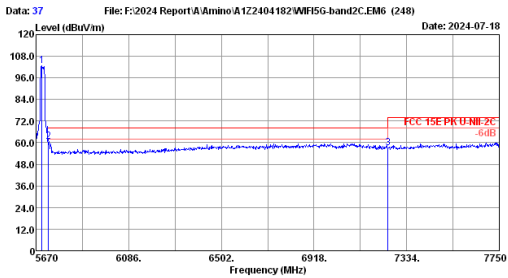

Site no. : 3m Chamber Data no. : 37
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-2C
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WiFi5G 11ac20 5700MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5697.04	33.39	7.96	92.53	31.31	102.57	68.20	7.37	Peak
2	5725.00	33.50	7.98	50.69	31.34	60.83	68.20	10.93	Peak
3	7250.00	36.70	8.48	43.69	31.60	57.27	68.20	10.93	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

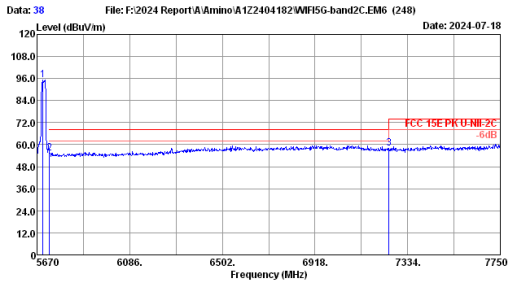

Site no. : 3m Chamber Data no. : 38
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-2C
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WiFi5G 11ac20 5700MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5697.04	33.39	7.96	85.28	31.31	95.32	68.20	12.94	Peak
2	5725.00	33.50	7.98	45.12	31.34	55.26	68.20	10.18	Peak
3	7250.00	36.70	8.48	44.44	31.60	58.02	68.20	10.18	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

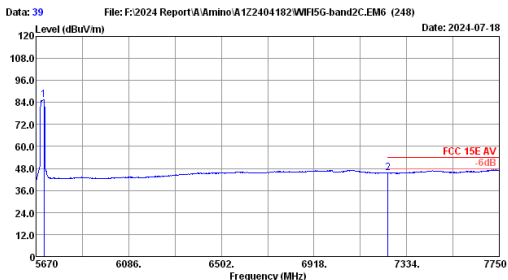

Site no. : 3m Chamber Data no. : 39
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WiFi5G 11ac20 5700MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5705.36	33.42	7.97	75.58	31.32	85.65	54.00	8.51	Average
2	7250.00	36.70	8.48	31.91	31.60	45.49	54.00	8.51	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

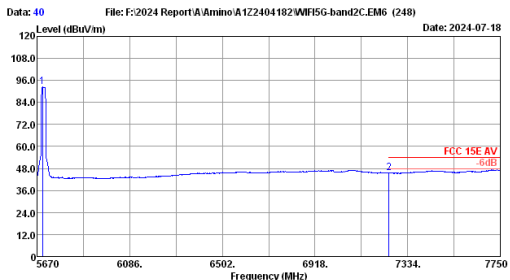

Site no. : 3m Chamber Data no. : 40
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WiFi5G 11ac20 5700MHz TX Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5694.96	33.38	7.96	82.34	31.30	92.38	54.00	8.48	Average
2	7250.00	36.70	8.48	31.94	31.60	45.52	54.00	8.48	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

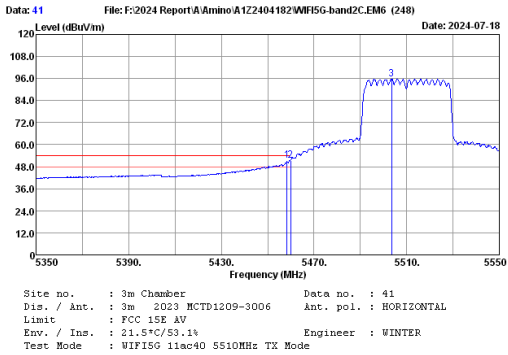


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5458.40	34.03	7.82	40.48	31.00	51.33	54.00	2.67	Average
2	5460.00	34.02	7.82	40.62	31.00	51.46	54.00	2.54	Average
3	5503.60	33.68	7.84	85.25	31.05	95.72	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

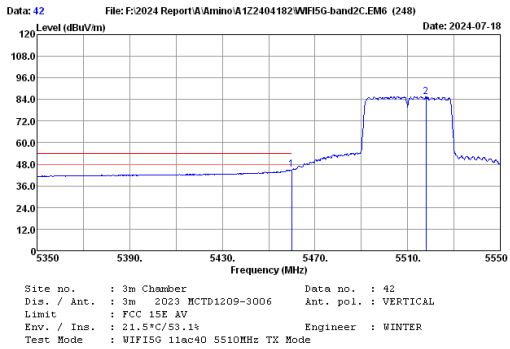


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	34.42	31.00	45.26	54.00	8.74	Average
2	5518.00	33.59	7.85	75.19	31.07	85.56	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

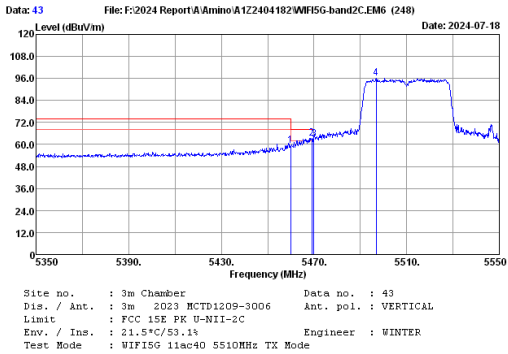


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	48.48	31.00	59.32	68.20	8.88	Peak
2	5469.00	33.95	7.82	52.67	31.01	63.43	68.20	4.77	Peak
3	5470.00	33.94	7.82	51.92	31.01	62.67	68.20	5.53	Peak
4	5496.80	33.73	7.84	85.49	31.05	96.01	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

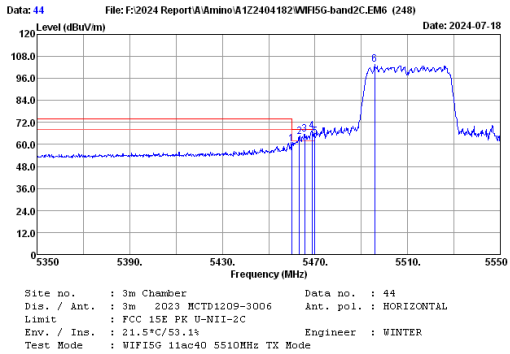

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	49.58	31.00	60.42	68.20	7.78	Peak
2	5463.20	33.99	7.82	53.28	31.00	64.09	68.20	4.11	Peak
3	5465.60	33.96	7.82	54.74	31.01	65.53	68.20	2.67	Peak
4	5468.80	33.95	7.82	56.37	31.01	67.13	68.20	1.07	Peak
5	5470.00	33.94	7.82	53.35	31.01	64.10	68.20	4.10	Peak
6	5495.80	33.73	7.84	93.01	31.04	103.54	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

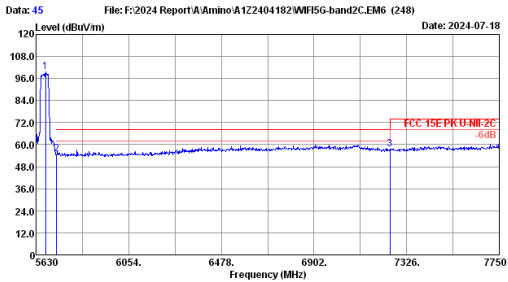

Site no. : 3m Chamber Data no. : 45
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-2C
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WIFI5G 11ac40 5670MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5674.52	33.30	7.95	89.47	31.28	99.44	-----	-----	Peak
2	5725.00	33.50	7.98	44.89	31.34	55.03	68.20	13.17	Peak
3	7250.00	36.70	8.48	43.96	31.60	57.54	68.20	10.66	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

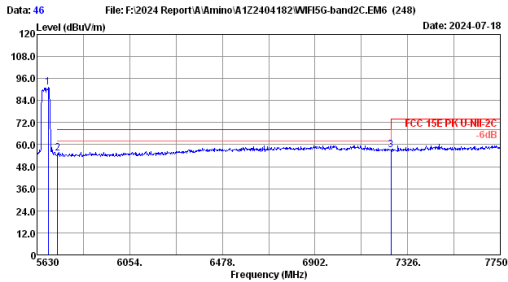

Site no. : 3m Chamber Data no. : 46
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-2C
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WIFI5G 11ac40 5670MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5680.88	33.32	7.95	81.19	31.29	91.17	-----	-----	Peak
2	5725.00	33.50	7.98	45.15	31.34	55.29	68.20	12.91	Peak
3	7250.00	36.70	8.48	43.51	31.60	57.09	68.20	11.11	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

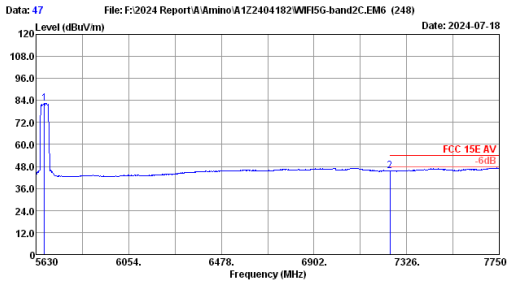

Site no. : 3m Chamber Data no. : 47
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WIFI5G 11ac40 5670MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5668.16	33.27	7.95	72.50	31.27	82.45	-----	-----	Average
2	7250.00	36.70	8.48	31.99	31.60	45.57	54.00	8.43	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

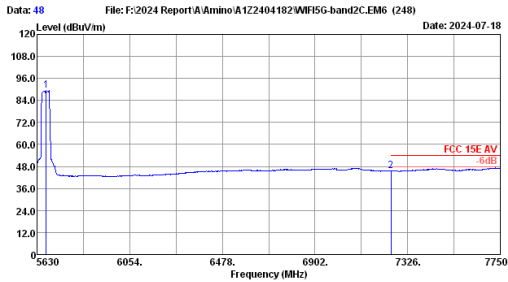

Site no. : 3m Chamber Data no. : 48
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WIFI5G 11ac40 5670MHz TX Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5672.40	33.29	7.95	79.57	31.27	89.54	-----	-----	Average
2	7250.00	36.70	8.48	32.04	31.60	45.62	54.00	8.38	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

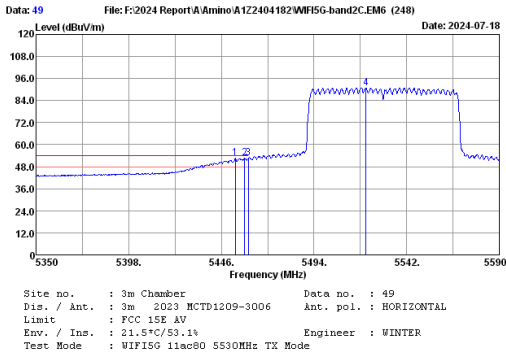


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5453.20	34.07	7.80	41.65	30.99	52.53	54.00	1.47	Average
2	5458.00	34.04	7.82	41.73	31.00	52.59	54.00	1.41	Average
3	5460.00	34.02	7.82	41.74	31.00	52.58	54.00	1.42	Average
4	5520.88	33.57	7.85	80.59	31.08	90.93	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

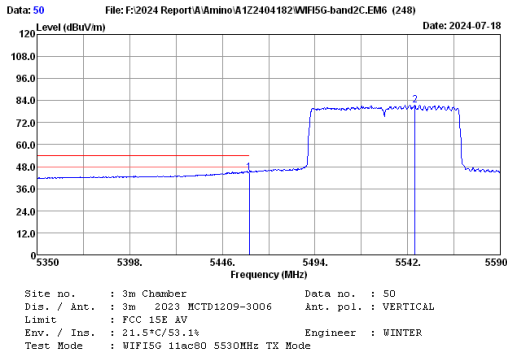


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	33.95	31.00	44.79	54.00	9.21	Average
2	5545.84	33.42	7.86	71.27	31.11	81.44	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

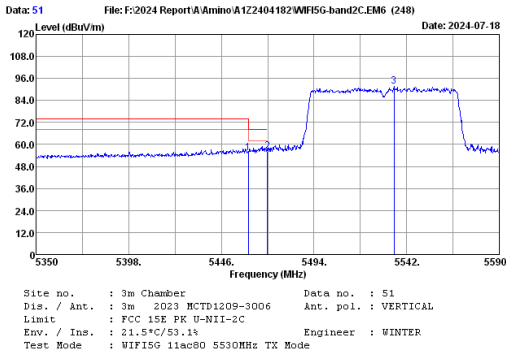


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	44.68	31.00	55.52	68.20	12.68	Peak
2	5470.00	33.94	7.82	45.51	31.01	56.26	68.20	11.94	Peak
3	5535.52	33.49	7.86	81.21	31.10	91.46	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

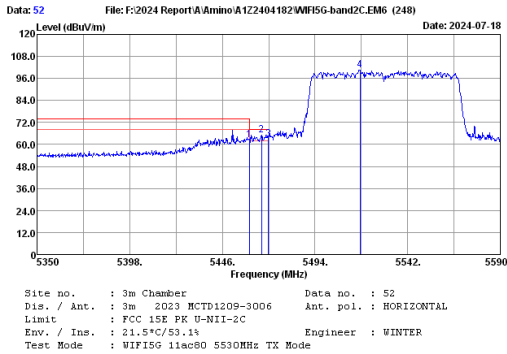

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	51.61	31.00	62.45	68.20	5.75	Peak
2	5466.40	33.97	7.82	54.21	31.01	64.99	68.20	3.21	Peak
3	5470.00	33.94	7.82	52.34	31.01	63.09	68.20	5.11	Peak
4	5517.28	33.60	7.85	90.05	31.07	100.43	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

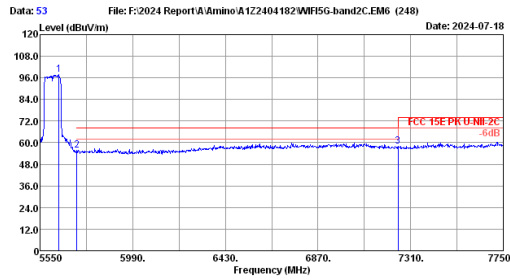

Site no. : 3m Chamber Data no. : 53
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-2C
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WIFI5G 11ac80 5610MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5640.20	33.20	7.92	88.09	31.23	97.98	72.00	25.98	Peak
2	5725.00	33.50	7.98	45.54	31.34	55.68	68.20	12.52	Peak
3	7250.00	36.70	8.48	44.60	31.60	58.18	68.20	10.02	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

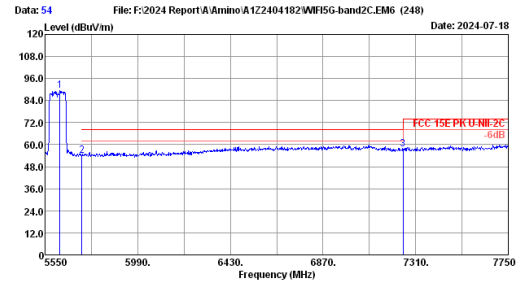

Site no. : 3m Chamber Data no. : 54
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-2C
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WIFI5G 11ac80 5610MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5620.40	33.20	7.91	79.59	31.21	89.49	72.00	17.49	Peak
2	5725.00	33.50	7.98	44.10	31.34	54.24	68.20	13.96	Peak
3	7250.00	36.70	8.48	43.93	31.60	57.51	68.20	10.69	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

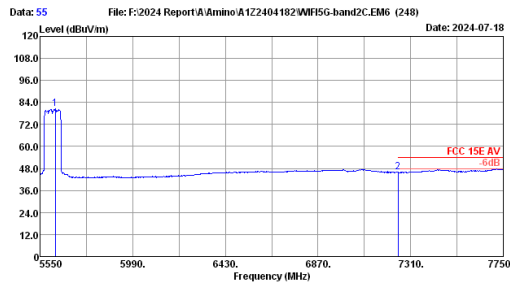

Site no. : 3m Chamber Data no. : 55
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WIFI5G 11ac80 5610MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5622.60	33.20	7.91	70.75	31.21	80.65	72.00	8.65	Average
2	7250.00	36.70	8.48	32.29	31.60	45.87	54.00	8.13	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

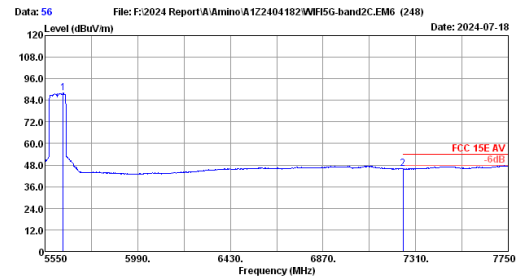


Site no. : 3m Chamber Data no. : 56
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WIFI5G 11ac80 5610MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5635.80	33.20	7.92	78.17	31.23	88.06	72.00	16.06	Average
2	7250.00	36.70	8.48	32.31	31.60	45.89	54.00	8.11	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: XVG500107APBT

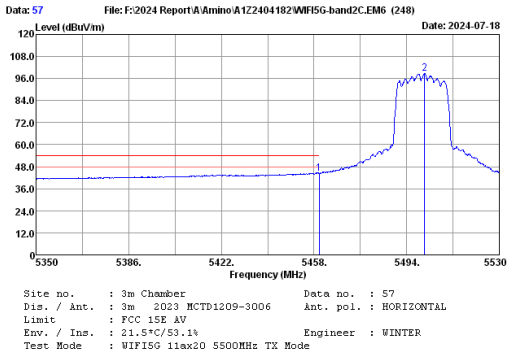


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	33.64	31.00	44.48	54.00	9.52	Average
2	5501.02	33.69	7.84	88.26	31.05	98.74	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

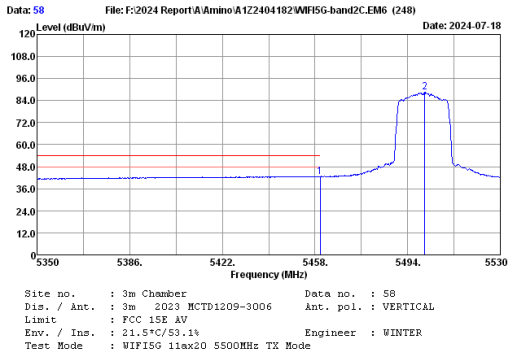


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	31.76	31.00	42.60	54.00	11.40	Average
2	5500.66	33.70	7.84	78.08	31.05	88.57	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

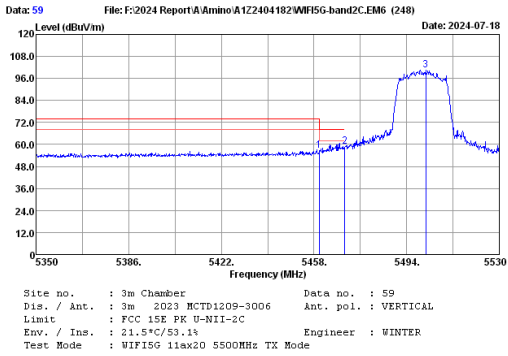


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	45.70	31.00	56.54	68.20	11.66	Peak
2	5470.00	33.94	7.82	48.00	31.01	58.75	68.20	9.45	Peak
3	5501.38	33.69	7.84	90.18	31.05	100.66	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

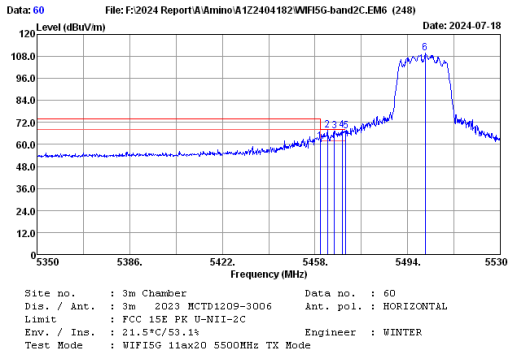


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	50.72	31.00	61.56	68.20	6.64	Peak
2	5462.86	34.00	7.82	57.05	31.00	67.87	68.20	0.33	Peak
3	5465.56	33.98	7.82	56.41	31.01	67.20	68.20	1.00	Peak
4	5468.62	33.95	7.82	57.14	31.01	67.90	68.20	0.30	Peak
5	5470.00	33.94	7.82	56.57	31.01	67.32	68.20	0.88	Peak
6	5500.84	33.69	7.84	99.44	31.05	109.92	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

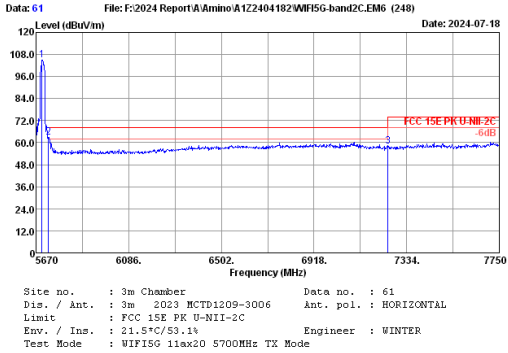


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5697.04	33.39	7.96	95.09	31.31	105.13	-----	-----	Peak
2	5725.00	33.50	7.98	52.84	31.34	62.98	68.20	5.22	Peak
3	7250.00	36.70	8.48	44.40	31.60	57.98	68.20	10.22	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

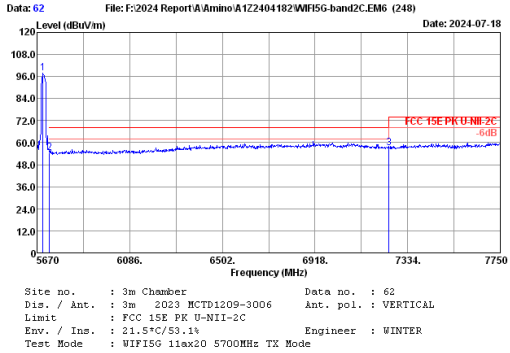


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5697.04	33.39	7.96	87.98	31.31	98.02	-----	-----	Peak
2	5725.00	33.50	7.98	44.50	31.34	54.64	68.20	13.56	Peak
3	7250.00	36.70	8.48	43.74	31.60	57.32	68.20	10.88	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

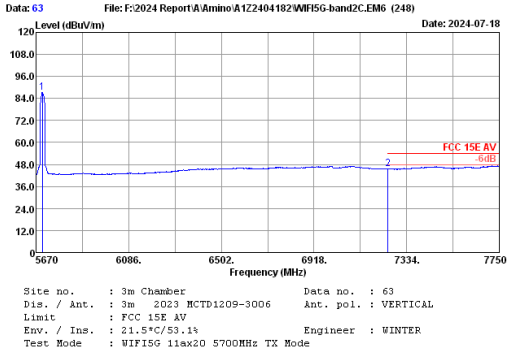


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5699.12	33.40	7.96	77.29	31.31	87.34	-----	-----	Average
2	7250.00	36.70	8.48	31.91	31.60	45.49	54.00	8.51	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

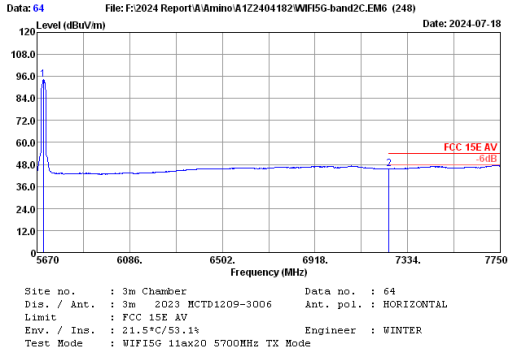

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5699.12	33.40	7.96	84.31	31.31	94.36	-----	-----	Average
2	7250.00	36.70	8.48	32.09	31.60	45.67	54.00	8.33	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

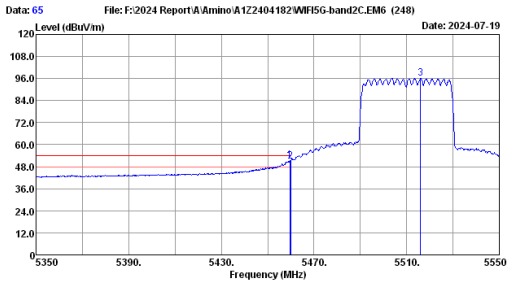

Site no. : 3m Chamber Data no. : 65
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WIFI5G 11ax40 5510MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5459.60	34.02	7.82	40.41	31.00	51.25	54.00	2.75	Average
2	5460.00	34.02	7.82	40.24	31.00	51.08	54.00	2.92	Average
3	5516.00	33.60	7.85	85.69	31.07	96.07	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

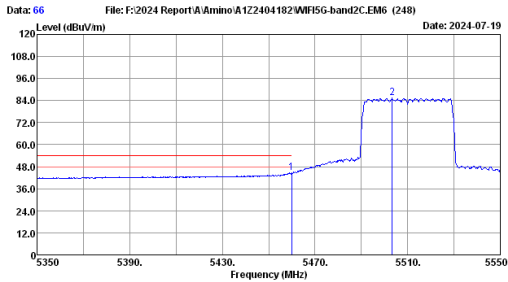

Site no. : 3m Chamber Data no. : 66
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WIFI5G 11ax40 5510MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	33.73	31.00	44.57	54.00	9.43	Average
2	5503.40	33.68	7.84	74.77	31.05	85.24	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

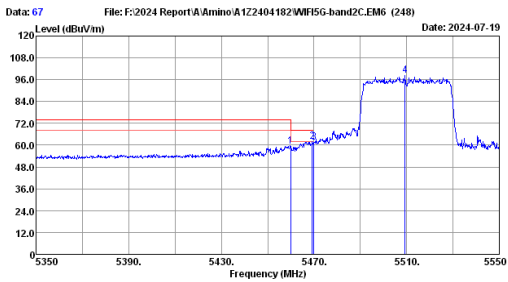

Site no. : 3m Chamber Data no. : 67
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-2C
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WIFI5G 11ax40 5510MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	48.62	31.00	59.46	68.20	8.74	Peak
2	5469.20	33.95	7.82	51.33	31.01	62.09	68.20	6.11	Peak
3	5470.00	33.94	7.82	50.91	31.01	61.66	68.20	6.54	Peak
4	5509.40	33.64	7.84	87.78	31.06	96.20	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

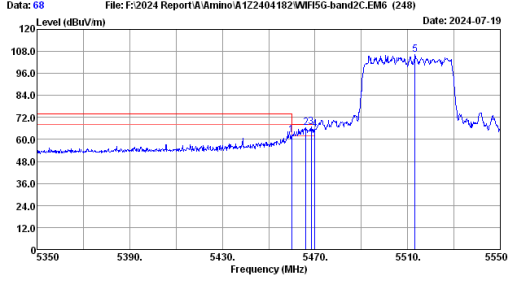


Site no. : 3m Chamber Data no. : 68
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-2C
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WIFI5G 11ax40 5510MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	51.60	31.00	62.44	68.20	5.76	Peak
2	5466.00	33.97	7.82	55.64	31.01	66.42	68.20	1.78	Peak
3	5468.40	33.95	7.82	56.13	31.01	66.89	68.20	1.31	Peak
4	5470.00	33.94	7.82	55.00	31.01	65.75	68.20	2.45	Peak
5	5513.20	33.62	7.85	96.09	31.07	106.49	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.


FCC ID: XVG500107APBT

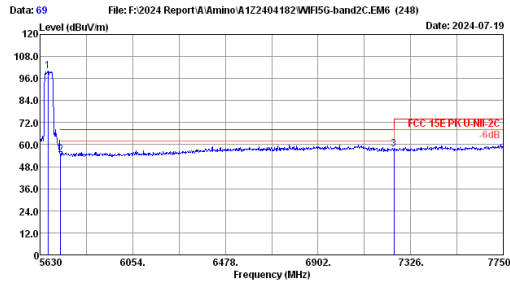

Site no. : 3m Chamber Data no. : 69
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-2C
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WIFI5G 11ax40 5670MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5666.04	33.26	7.95	89.99	31.27	99.93	-----	-----	Peak
2	5725.00	33.50	7.98	44.50	31.34	54.64	68.20	13.56	Peak
3	7250.00	36.70	8.48	43.80	31.60	57.38	68.20	10.82	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

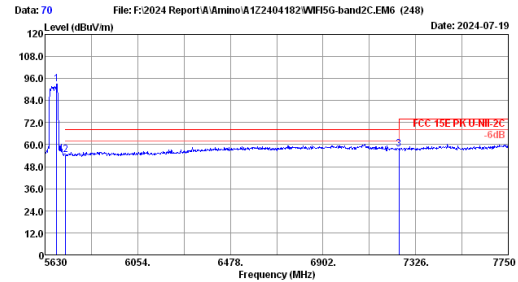

Site no. : 3m Chamber Data no. : 70
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-2C
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WIFI5G 11ax40 5670MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5683.00	33.33	7.95	82.89	31.29	92.88	-----	-----	Peak
2	5725.00	33.50	7.98	44.25	31.34	54.39	68.20	13.81	Peak
3	7250.00	36.70	8.48	43.88	31.60	57.46	68.20	10.74	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

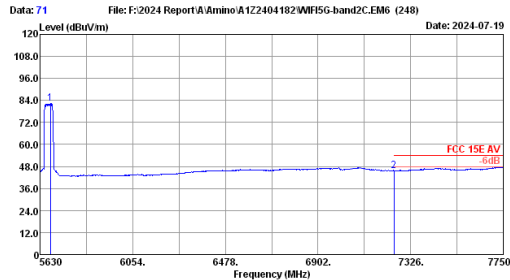

Site no. : 3m Chamber Data no. : 71
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WIFI5G 11ax40 5670MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5676.64	33.31	7.95	72.23	31.28	82.21	-----	-----	Average
2	7250.00	36.70	8.48	32.02	31.60	45.60	54.00	8.40	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

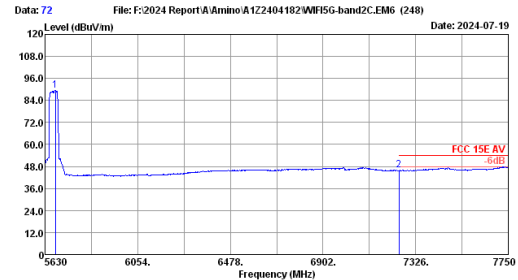

Site no. : 3m Chamber Data no. : 72
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WIFI5G 11ax40 5670MHz TX Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5676.64	33.31	7.95	79.42	31.28	89.40	-----	-----	Average
2	7250.00	36.70	8.48	32.27	31.60	45.85	54.00	8.15	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

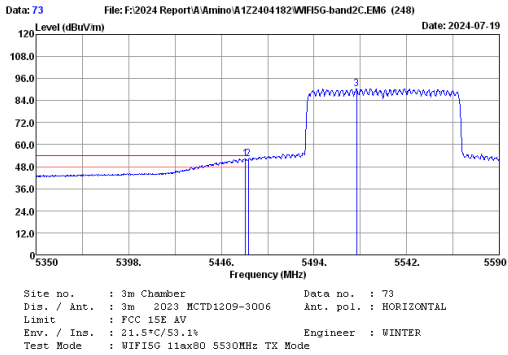


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5458.48	34.03	7.82	41.37	31.00	52.22	54.00	1.78	Average
2	5460.00	34.02	7.82	41.33	31.00	52.17	54.00	1.83	Average
3	5516.08	33.60	7.85	80.12	31.07	90.50	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

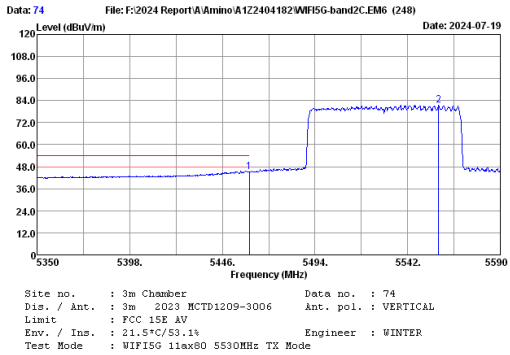


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	34.23	31.00	45.07	54.00	8.93	Average
2	5558.08	33.37	7.88	71.27	31.13	81.39	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

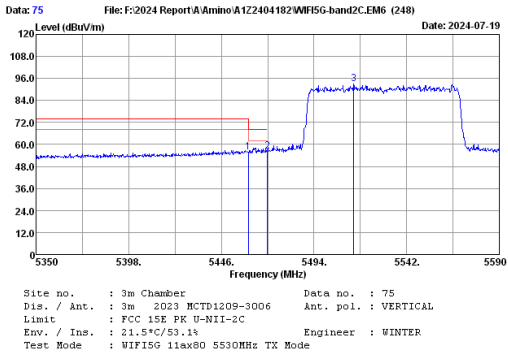


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	44.91	31.00	55.75	68.20	12.45	Peak
2	5470.00	33.94	7.82	45.49	31.01	56.24	68.20	11.96	Peak
3	5514.64	33.61	7.85	82.41	31.07	92.80	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

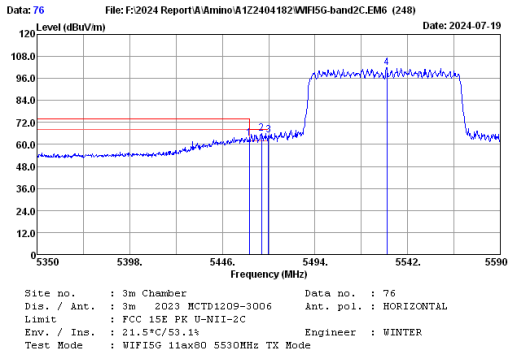


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	52.32	31.00	63.16	68.20	5.04	Peak
2	5466.40	33.97	7.82	55.17	31.01	65.95	68.20	2.25	Peak
3	5470.00	33.94	7.82	54.23	31.01	64.98	68.20	3.22	Peak
4	5531.20	33.51	7.85	91.68	31.09	101.95	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

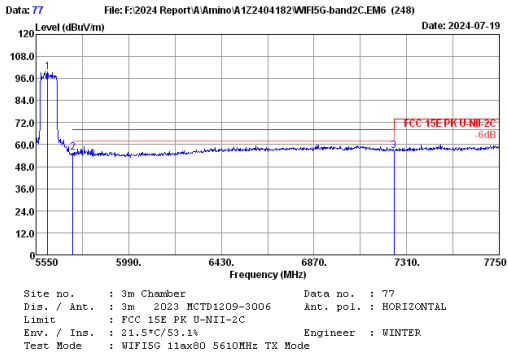


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5605.00	33.20	7.90	89.58	31.19	99.49	68.20	12.44	Peak
2	5725.00	33.50	7.98	45.62	31.34	55.76	68.20	11.61	Peak
3	7250.00	36.70	8.48	43.01	31.60	56.59	68.20	11.61	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

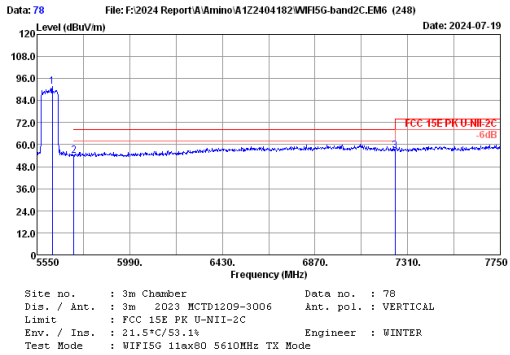


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5622.60	33.20	7.91	81.76	31.21	91.66	68.20	14.23	Peak
2	5725.00	33.50	7.98	43.83	31.34	53.97	68.20	11.34	Peak
3	7250.00	36.70	8.48	43.28	31.60	56.86	68.20	11.34	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

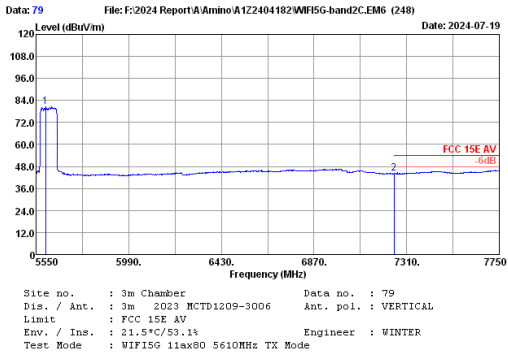

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5596.20	33.22	7.90	70.60	31.18	80.54	54.00	9.92	Average
2	7250.00	36.70	8.48	30.50	31.60	44.08	54.00	9.92	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

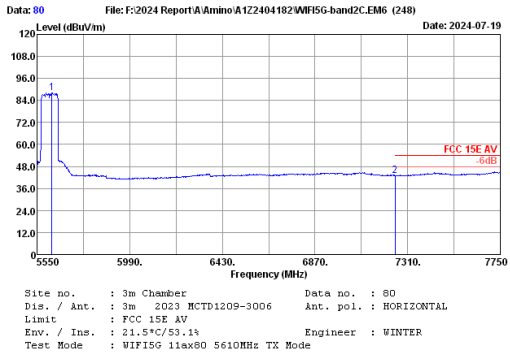

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5620.40	33.20	7.91	78.22	31.21	86.12	54.00	10.97	Average
2	7250.00	36.70	8.48	29.45	31.60	43.03	54.00	10.97	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.


U-NII-3 Band: SISO Mode

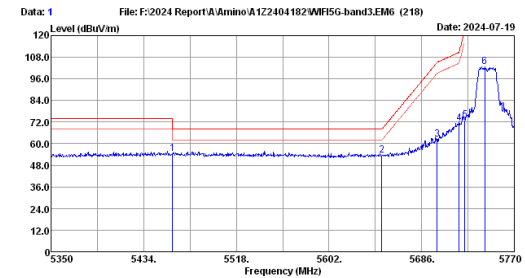

Site no. : 3m Chamber Data no. : 1
Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC 15E PK U-NII-3
Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
Test Mode : WiFi5G 11a S745MHz Ant0 TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	43.42	31.00	54.26	68.20	13.94	Peak
2	5650.00	33.20	7.94	43.65	31.25	53.54	68.20	14.66	Peak
3	5700.00	33.40	7.96	52.38	31.31	62.43	105.20	42.77	Peak
4	5720.00	33.48	7.97	61.24	31.34	71.35	110.80	39.45	Peak
5	5725.00	33.50	7.98	69.08	31.34	73.22	122.80	49.58	Peak
6	5743.12	33.57	7.99	92.53	31.37	102.72	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

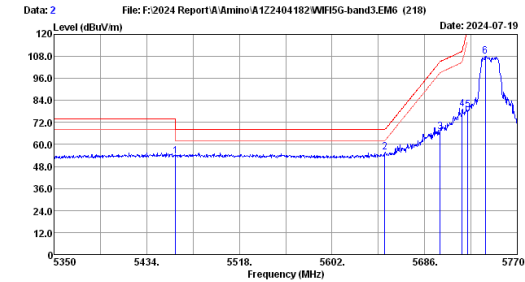

Site no. : 3m Chamber Data no. : 2
Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC 15E PK U-NII-3
Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
Test Mode : WiFi5G 11a S745MHz Ant0 TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	42.67	31.00	53.51	68.20	14.69	Peak
2	5650.00	33.20	7.94	46.11	31.25	56.00	68.20	12.20	Peak
3	5700.00	33.40	7.96	57.02	31.31	67.07	105.20	38.13	Peak
4	5720.00	33.48	7.97	69.21	31.34	79.32	110.80	31.48	Peak
5	5725.00	33.50	7.98	68.48	31.34	78.62	122.80	44.18	Peak
6	5741.02	33.56	7.99	97.85	31.36	108.04	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

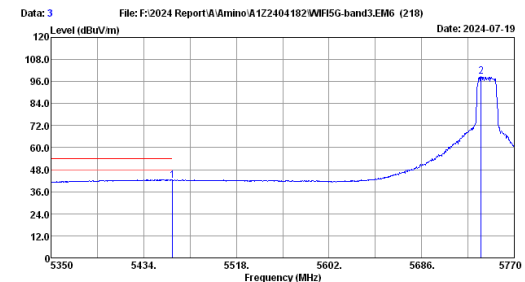

Site no. : 3m Chamber Data no. : 3
Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC 15E AV
Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
Test Mode : WiFi5G 11a S745MHz Ant0 TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	31.41	31.00	42.25	54.00	11.75	Average
2	5739.76	33.56	7.98	88.56	31.36	98.74	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

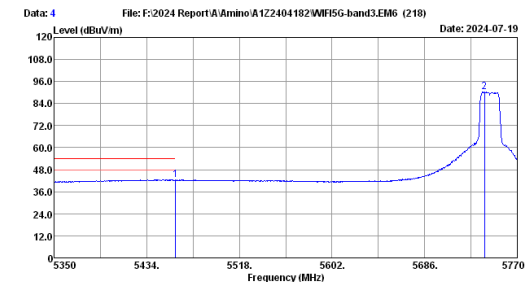

Site no. : 3m Chamber Data no. : 4
Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC 15E AV
Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
Test Mode : WiFi5G 11a S745MHz Ant0 TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	31.54	31.00	42.38	54.00	11.62	Average
2	5740.18	33.56	7.98	79.97	31.36	90.15	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

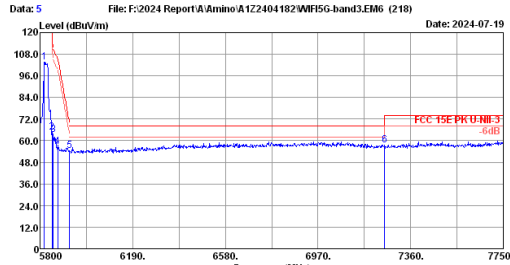

Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WiFi5G 11a 5825MHz Ant0 TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5817.55	33.60	8.04	93.39	31.46	103.57	122.20	-----	Peak
2	5850.00	33.60	8.05	54.36	31.51	64.50	122.20	57.70	Peak
3	5855.00	33.59	8.07	53.19	31.51	63.34	110.80	47.46	Peak
4	5875.00	33.55	8.08	46.80	31.54	56.89	105.20	48.31	Peak
5	5925.00	33.45	8.10	44.59	31.60	54.54	68.20	13.66	Peak
6	7250.00	36.70	8.48	43.88	31.60	57.46	68.20	10.74	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

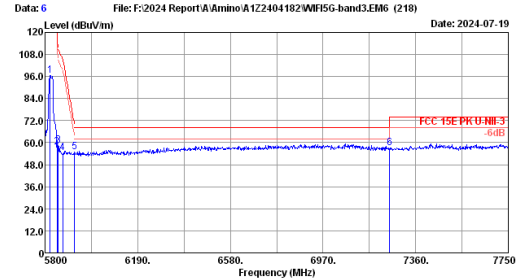

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WiFi5G 11a 5825MHz Ant0 TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5821.45	33.60	8.04	86.39	31.47	96.56	122.20	-----	Peak
2	5850.00	33.60	8.05	47.26	31.51	57.40	122.20	64.80	Peak
3	5855.00	33.59	8.07	48.32	31.51	58.47	110.80	52.33	Peak
4	5875.00	33.55	8.08	44.20	31.54	54.29	105.20	50.91	Peak
5	5925.00	33.45	8.10	44.75	31.60	54.70	68.20	13.50	Peak
6	7250.00	36.70	8.48	43.58	31.60	57.16	68.20	11.04	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

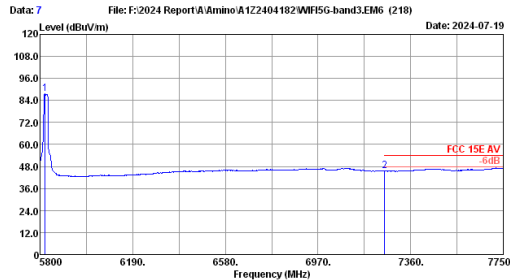

Site no. : 3m Chamber Data no. : 7
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WiFi5G 11a 5825MHz Ant0 TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5821.45	33.60	8.04	77.29	31.47	87.46	122.20	-----	Average
2	7250.00	36.70	8.48	31.82	31.60	45.40	54.00	8.60	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

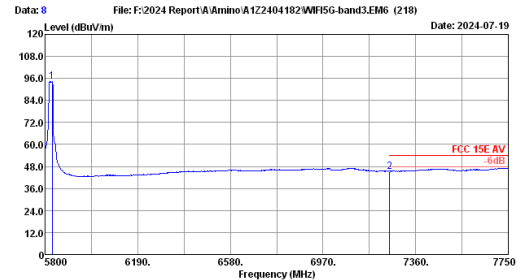


Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WiFi5G 11a 5825MHz Ant0 TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5829.25	33.60	8.04	84.04	31.48	94.20	122.20	-----	Average
2	7250.00	36.70	8.48	31.79	31.60	45.37	54.00	8.63	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: XVG500107APBT

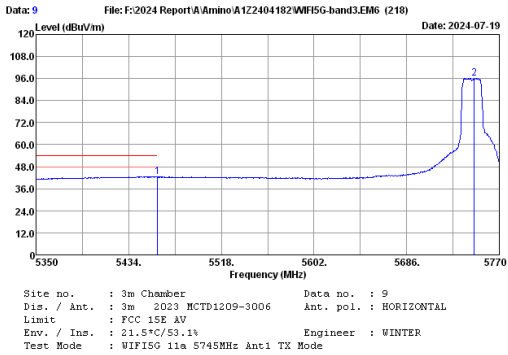


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	31.58	31.00	42.42	54.00	11.58	Average
2	5747.32	33.59	7.99	85.98	31.37	96.19	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

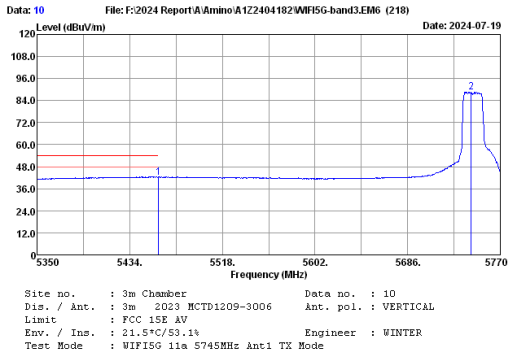


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	31.38	31.00	42.22	54.00	11.78	Average
2	5743.54	33.57	7.99	78.55	31.37	86.74	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

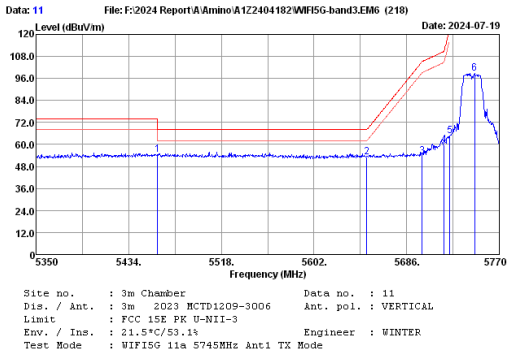


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	43.72	31.00	54.56	68.20	13.64	Peak
2	5650.00	33.20	7.94	43.28	31.25	53.17	68.20	15.03	Peak
3	5700.00	33.40	7.96	43.71	31.31	53.76	105.20	51.44	Peak
4	5720.00	33.48	7.97	49.50	31.34	59.61	110.80	51.19	Peak
5	5725.00	33.50	7.98	54.66	31.34	64.80	122.80	58.00	Peak
6	5747.74	33.59	7.99	88.52	31.37	98.73	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

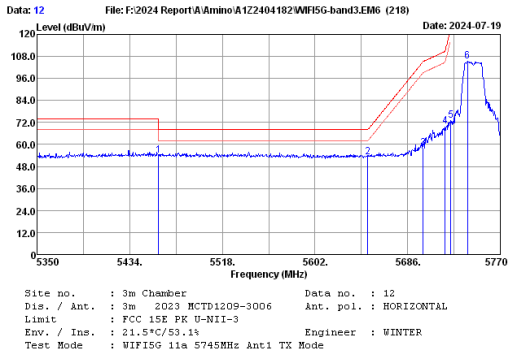

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	43.08	31.00	53.92	68.20	14.28	Peak
2	5650.00	33.20	7.94	43.46	31.25	53.35	68.20	14.85	Peak
3	5700.00	33.40	7.96	48.12	31.31	58.17	105.20	47.03	Peak
4	5720.00	33.48	7.97	59.82	31.34	69.93	110.80	40.87	Peak
5	5725.00	33.50	7.98	62.82	31.34	72.96	122.80	49.84	Peak
6	5740.18	33.56	7.98	95.09	31.36	105.27	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

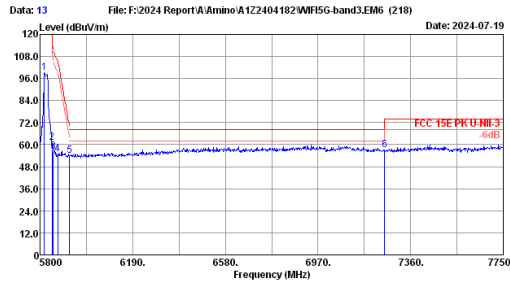

Site no. : 3m Chamber Data no. : 13
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WIFI5G 11a 5825MHz Ant1 TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5817.55	33.60	8.04	88.99	31.46	99.17	-----	-----	Peak
2	5850.00	33.60	8.05	50.80	31.51	60.94	122.20	61.26	Peak
3	5855.00	33.59	8.07	46.29	31.51	56.44	110.80	54.36	Peak
4	5875.00	33.55	8.08	44.77	31.54	54.86	105.20	50.34	Peak
5	5925.00	33.45	8.10	43.95	31.60	53.90	68.20	14.30	Peak
6	7250.00	36.70	8.48	43.47	31.60	57.05	68.20	11.15	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

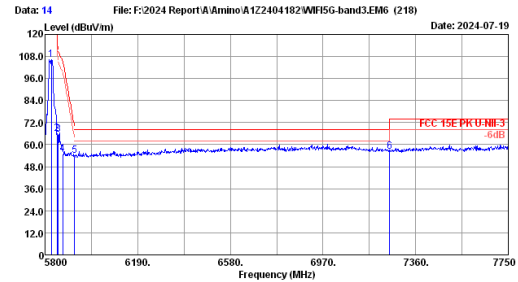

Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WIFI5G 11a 5825MHz Ant1 TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5827.30	33.60	8.04	96.28	31.48	106.44	-----	-----	Peak
2	5850.00	33.60	8.05	56.01	31.51	66.15	122.20	56.05	Peak
3	5855.00	33.59	8.07	55.50	31.51	65.65	110.80	45.15	Peak
4	5875.00	33.55	8.08	44.82	31.54	54.91	105.20	50.29	Peak
5	5925.00	33.45	8.10	43.91	31.60	53.86	68.20	14.34	Peak
6	7250.00	36.70	8.48	42.62	31.60	56.20	68.20	12.00	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

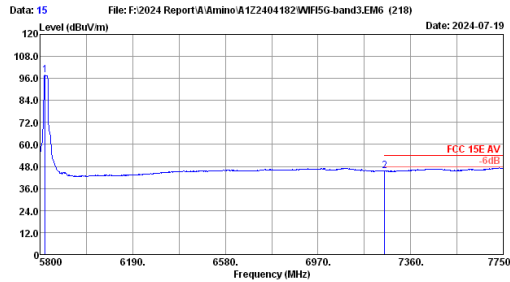

Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WIFI5G 11a 5825MHz Ant1 TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5821.45	33.60	8.04	87.48	31.47	97.65	-----	-----	Average
2	7250.00	36.70	8.48	31.90	31.60	45.48	54.00	8.52	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

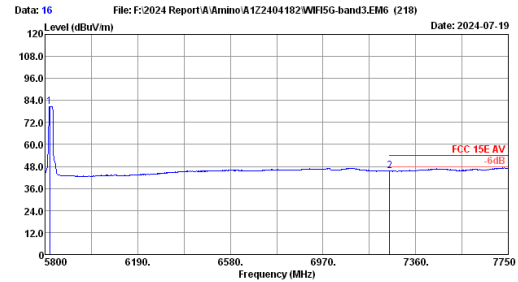


Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WIFI5G 11a 5825MHz Ant1 TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5819.50	33.60	8.04	70.63	31.47	80.80	-----	-----	Average
2	7250.00	36.70	8.48	31.92	31.60	45.50	54.00	8.50	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.


MIMO Mode

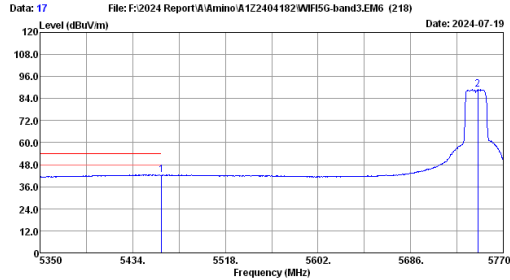

Site no. : 3m Chamber Data no. : 17
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WiFi5G 11n20 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	31.50	31.00	42.34	54.00	11.66	Average
2	5746.90	33.59	7.99	76.79	31.37	89.00	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

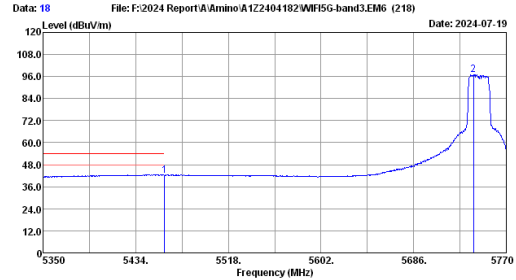

Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WiFi5G 11n20 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	31.41	31.00	42.25	54.00	11.75	Average
2	5740.18	33.56	7.98	86.74	31.36	96.92	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

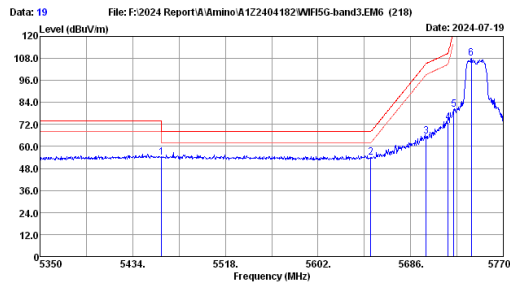

Site no. : 3m Chamber Data no. : 19
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WiFi5G 11n20 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	43.11	31.00	53.95	68.20	14.25	Peak
2	5650.00	33.20	7.94	44.16	31.25	54.05	68.20	14.15	Peak
3	5700.00	33.40	7.96	55.57	31.31	65.62	105.20	39.58	Peak
4	5720.00	33.48	7.97	63.14	31.34	73.25	110.80	37.55	Peak
5	5725.00	33.50	7.98	69.91	31.34	80.05	122.80	42.75	Peak
6	5741.02	33.56	7.99	97.97	31.36	108.16	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

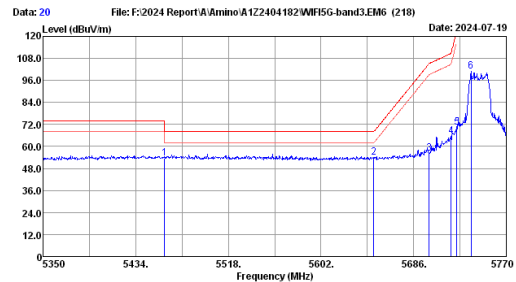

Site no. : 3m Chamber Data no. : 20
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
 Test Mode : WiFi5G 11n20 5745MHz TX Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	42.56	31.00	53.40	68.20	14.80	Peak
2	5650.00	33.20	7.94	44.30	31.25	54.19	68.20	14.01	Peak
3	5700.00	33.40	7.96	46.29	31.31	56.34	105.20	48.86	Peak
4	5720.00	33.48	7.97	55.30	31.34	65.41	110.80	45.39	Peak
5	5725.00	33.50	7.98	60.26	31.34	70.40	122.80	52.40	Peak
6	5738.08	33.55	7.98	90.90	31.36	101.07	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

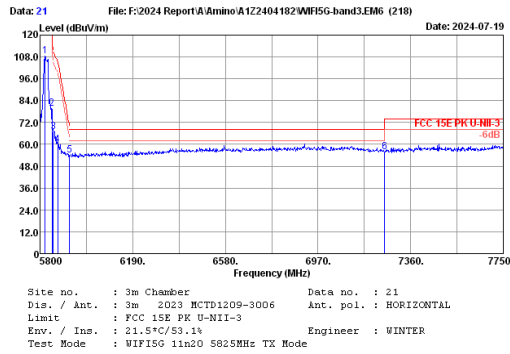


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5821.45	33.60	8.04	98.54	31.47	108.71	-----	-----	Peak
2	5850.00	33.60	8.05	69.47	31.51	79.61	122.20	42.59	Peak
3	5855.00	33.59	8.07	56.90	31.51	67.05	110.80	43.75	Peak
4	5875.00	33.55	8.08	49.49	31.54	59.58	105.20	45.62	Peak
5	5925.00	33.45	8.10	44.14	31.60	54.09	68.20	14.11	Peak
6	7250.00	36.70	8.48	42.42	31.60	56.00	68.20	12.20	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

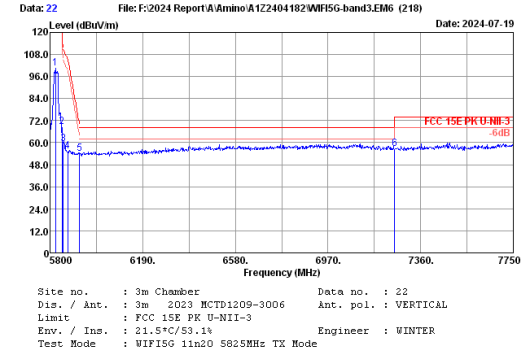


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5823.40	33.60	8.04	90.42	31.47	100.59	-----	-----	Peak
2	5850.00	33.60	8.05	58.36	31.51	68.50	122.20	53.70	Peak
3	5855.00	33.59	8.07	49.00	31.51	59.15	110.80	51.65	Peak
4	5875.00	33.55	8.08	45.39	31.54	55.48	105.20	49.72	Peak
5	5925.00	33.45	8.10	44.02	31.60	53.97	68.20	14.23	Peak
6	7250.00	36.70	8.48	43.19	31.60	56.77	68.20	11.43	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

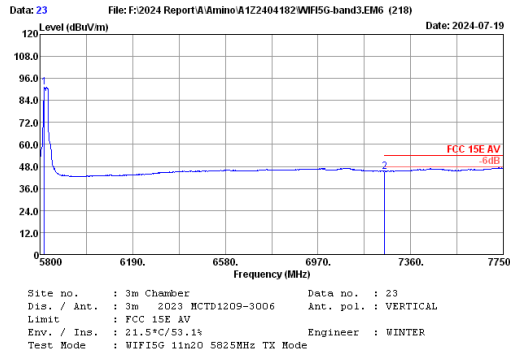

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5817.55	33.60	8.04	81.08	31.46	91.26	-----	-----	Average
2	7250.00	36.70	8.48	31.76	31.60	45.34	54.00	8.66	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

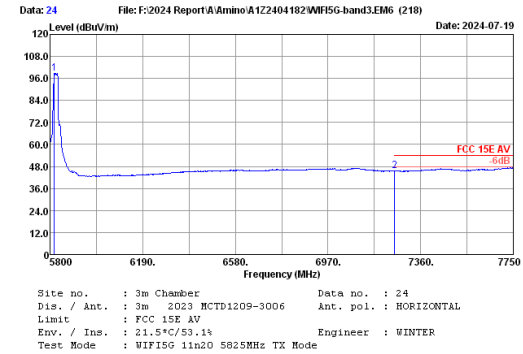

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5817.55	33.60	8.04	88.63	31.46	96.81	-----	-----	Average
2	7250.00	36.70	8.48	31.85	31.60	45.43	54.00	8.57	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: XVG500107APBT

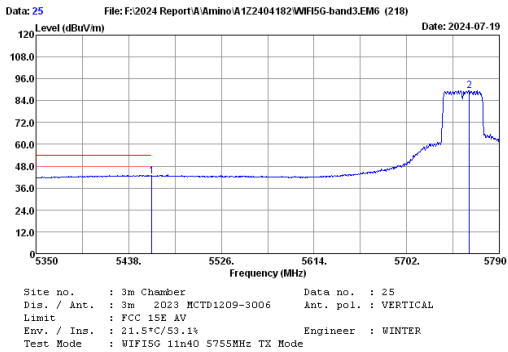


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	31.75	31.00	42.59	54.00	11.41	Average
2	5761.40	33.60	8.01	79.44	31.39	89.66	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

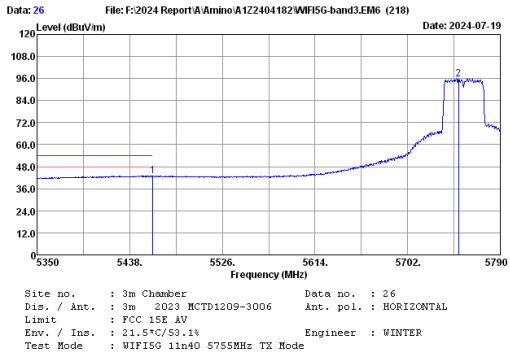


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	31.94	31.00	42.78	54.00	11.22	Average
2	5750.40	33.60	7.99	85.62	31.38	95.83	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

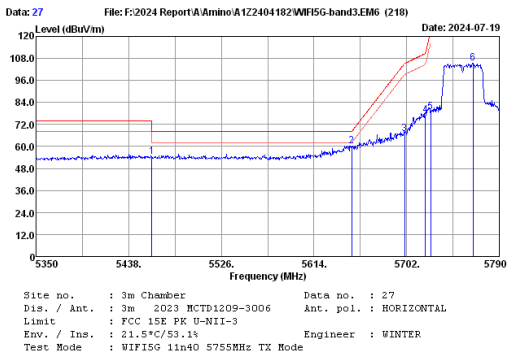


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	43.71	31.00	54.55	68.20	13.65	Peak
2	5650.00	33.20	7.94	50.41	31.25	60.30	68.20	7.90	Peak
3	5700.00	33.40	7.96	56.62	31.31	66.67	105.20	38.53	Peak
4	5720.00	33.48	7.97	66.81	31.34	76.92	110.80	33.88	Peak
5	5725.00	33.50	7.98	68.71	31.34	78.85	122.80	43.95	Peak
6	5764.92	33.60	8.01	95.08	31.39	105.30	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

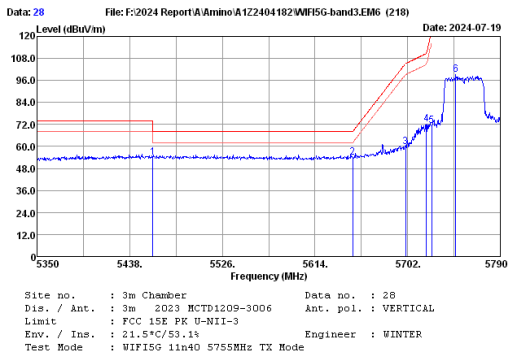


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	43.32	31.00	54.16	68.20	14.04	Peak
2	5650.00	33.20	7.94	44.09	31.25	53.98	68.20	14.22	Peak
3	5700.00	33.40	7.96	49.56	31.31	59.61	105.20	45.59	Peak
4	5720.00	33.48	7.97	62.06	31.34	72.17	110.80	38.63	Peak
5	5725.00	33.50	7.98	61.23	31.34	71.37	122.80	51.43	Peak
6	5747.76	33.59	7.99	89.02	31.37	99.23	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

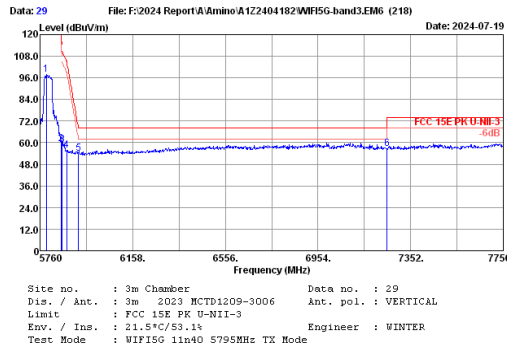


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5787.86	33.60	8.02	87.83	31.42	98.03	122.20	62.73	Peak
2	5850.00	33.60	8.05	49.33	31.51	59.47	110.80	51.97	Peak
3	5855.00	33.59	8.07	48.68	31.51	58.63	110.80	51.97	Peak
4	5875.00	33.55	8.08	45.66	31.54	55.75	105.20	49.45	Peak
5	5925.00	33.45	8.10	43.91	31.60	53.86	68.20	14.34	Peak
6	7250.00	36.70	8.48	43.30	31.60	56.88	68.20	11.32	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

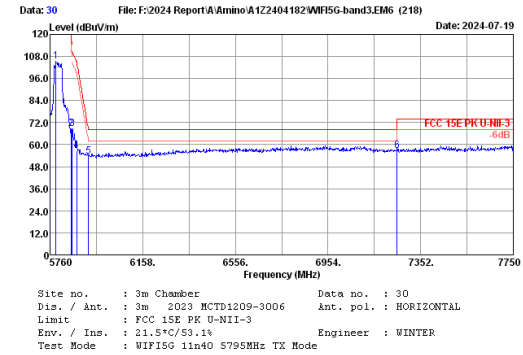


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.87	33.60	8.02	95.30	31.42	105.50	122.20	53.76	Peak
2	5850.00	33.60	8.05	58.30	31.51	68.44	110.80	42.24	Peak
3	5855.00	33.59	8.07	58.41	31.51	68.56	110.80	42.24	Peak
4	5875.00	33.55	8.08	46.62	31.54	56.71	105.20	48.49	Peak
5	5925.00	33.45	8.10	43.84	31.60	53.79	68.20	14.41	Peak
6	7250.00	36.70	8.48	43.03	31.60	56.61	68.20	11.59	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

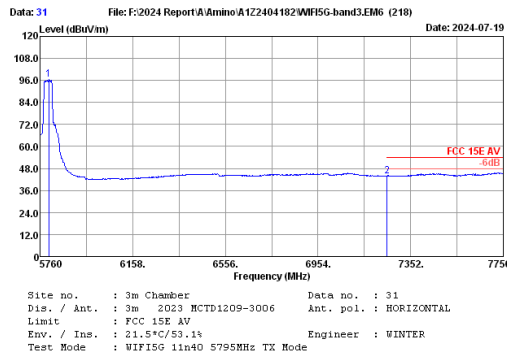


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5797.81	33.60	8.03	86.15	31.44	96.34	122.20	62.73	Peak
2	7250.00	36.70	8.48	30.31	31.60	43.89	54.00	10.11	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

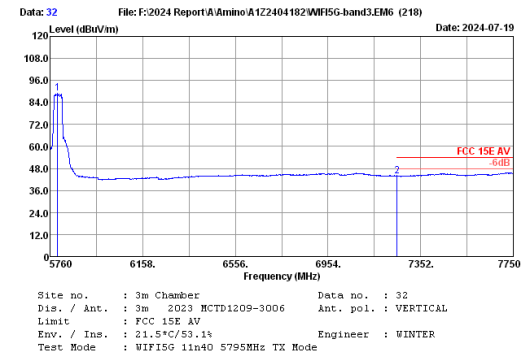

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5791.84	33.60	8.02	79.03	31.43	89.22	122.20	53.76	Peak
2	7250.00	36.70	8.48	30.30	31.60	43.88	54.00	10.12	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

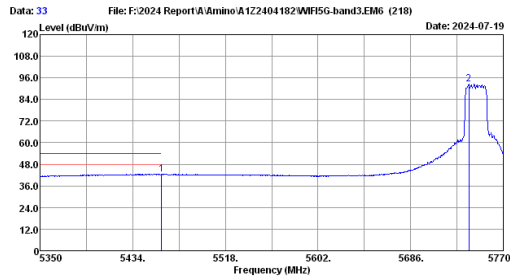

Site no. : 3m Chamber Data no. : 33
Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC 15E AV
Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
Test Mode : WIFI5G 11ac20 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	31.49	31.00	42.33	54.00	11.67	Average
2	5738.92	33.56	7.98	82.31	31.36	92.49	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

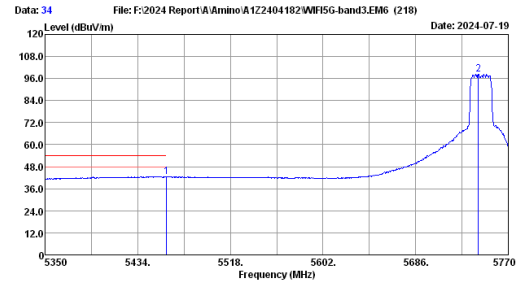

Site no. : 3m Chamber Data no. : 34
Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC 15E AV
Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
Test Mode : WIFI5G 11ac20 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	31.71	31.00	42.55	54.00	11.45	Average
2	5742.70	33.57	7.99	88.31	31.37	98.50	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

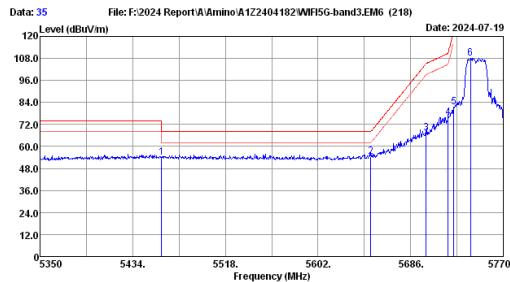

Site no. : 3m Chamber Data no. : 35
Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC 15E PK U-NII-3
Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
Test Mode : WIFI5G 11ac20 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	43.23	31.00	54.07	68.20	14.13	Peak
2	5650.00	33.20	7.94	44.48	31.25	54.37	68.20	13.83	Peak
3	5700.00	33.40	7.96	57.41	31.31	67.46	105.20	37.74	Peak
4	5720.00	33.48	7.97	65.49	31.34	75.60	110.80	35.20	Peak
5	5725.00	33.50	7.98	71.18	31.34	81.32	122.80	41.48	Peak
6	5740.18	33.56	7.98	98.05	31.36	108.23	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

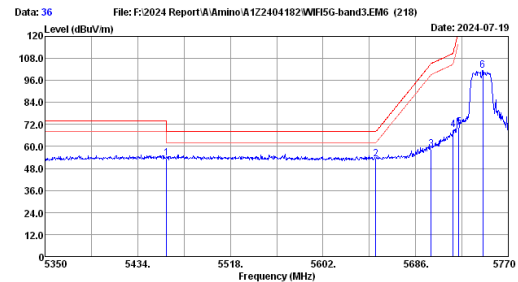

Site no. : 3m Chamber Data no. : 36
Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC 15E PK U-NII-3
Env. / Ins. : 21.5°C/53.1% Engineer : WINTER
Test Mode : WIFI5G 11ac20 5745MHz TX Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	42.63	31.00	53.47	68.20	14.73	Peak
2	5650.00	33.20	7.94	43.25	31.25	53.14	68.20	15.06	Peak
3	5700.00	33.40	7.96	49.52	31.31	58.57	105.20	46.63	Peak
4	5720.00	33.48	7.97	58.88	31.34	68.99	110.80	41.81	Peak
5	5725.00	33.50	7.98	60.41	31.34	70.55	122.80	52.25	Peak
6	5746.90	33.59	7.99	91.28	31.37	101.49	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

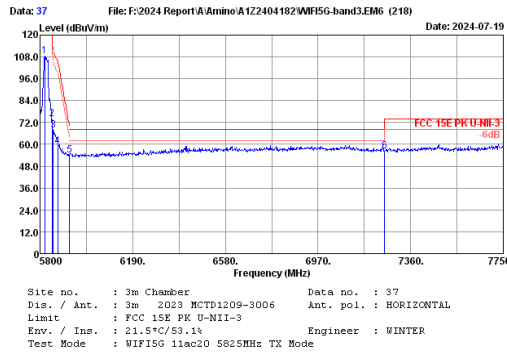


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5819.50	33.60	8.04	98.44	31.47	108.61	-----	-----	Peak
2	5850.00	33.60	8.05	63.76	31.51	73.90	122.20	48.30	Peak
3	5855.00	33.59	8.07	57.77	31.51	67.92	110.80	42.88	Peak
4	5875.00	33.55	8.08	48.60	31.54	58.69	105.20	46.51	Peak
5	5925.00	33.45	8.10	44.22	31.60	54.17	68.20	14.03	Peak
6	7250.00	36.70	8.48	42.75	31.60	56.33	68.20	11.87	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

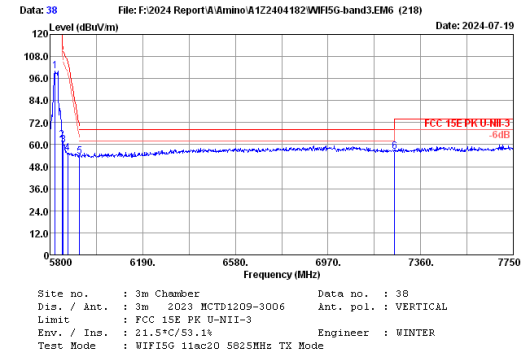


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5821.45	33.60	8.04	90.07	31.47	100.24	-----	-----	Peak
2	5850.00	33.60	8.05	52.32	31.51	62.46	122.20	59.74	Peak
3	5855.00	33.59	8.07	49.75	31.51	59.90	110.80	50.90	Peak
4	5875.00	33.55	8.08	45.18	31.54	55.27	105.20	49.93	Peak
5	5925.00	33.45	8.10	43.75	31.60	53.70	68.20	14.50	Peak
6	7250.00	36.70	8.48	42.56	31.60	56.14	68.20	12.06	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

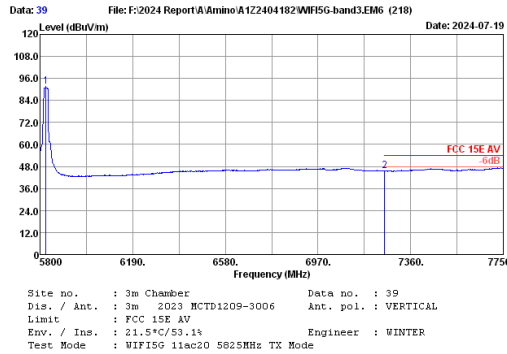


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.35	33.60	8.04	81.31	31.47	91.48	-----	-----	Average
2	7250.00	36.70	8.48	31.94	31.60	45.32	54.00	8.48	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

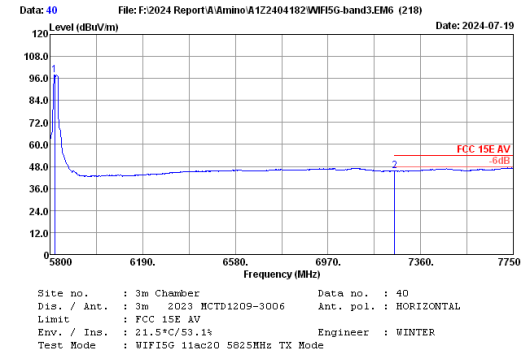

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5819.50	33.60	8.04	87.75	31.47	97.92	-----	-----	Average
2	7250.00	36.70	8.48	31.89	31.60	45.47	54.00	8.53	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

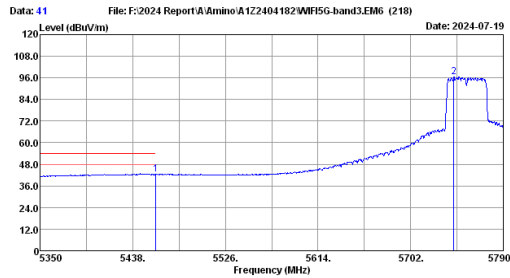

Site no. : 3m Chamber Data no. : 41
Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC 15E AV
Env. / Ins. : 21.5°C/53.1k Engineer : WINTER
Test Mode : WiFi5G 11ac40 5755MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	31.50	31.00	42.34	54.00	11.66	Average
2	5742.92	33.57	7.99	86.47	31.37	96.66	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

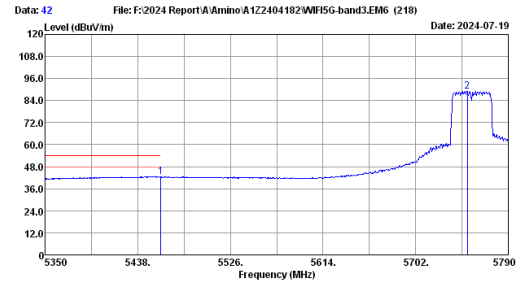

Site no. : 3m Chamber Data no. : 42
Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC 15E AV
Env. / Ins. : 21.5°C/53.1k Engineer : WINTER
Test Mode : WiFi5G 11ac40 5755MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	31.53	31.00	42.37	54.00	11.63	Average
2	5751.28	33.60	7.99	78.97	31.38	89.18	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

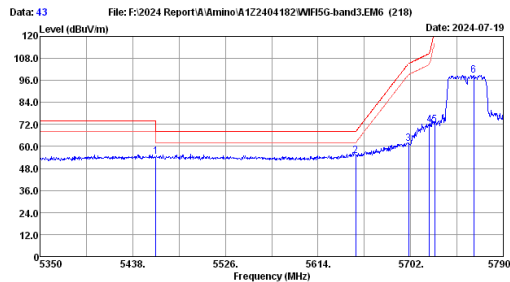

Site no. : 3m Chamber Data no. : 43
Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC 15E PK U-NII-3
Env. / Ins. : 21.5°C/53.1k Engineer : WINTER
Test Mode : WiFi5G 11ac40 5755MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	43.58	31.00	54.42	68.20	13.78	Peak
2	5650.00	33.20	7.94	44.86	31.25	54.75	68.20	13.45	Peak
3	5700.00	33.40	7.96	51.47	31.31	61.52	105.20	43.68	Peak
4	5720.00	33.48	7.97	61.76	31.34	71.87	110.80	38.93	Peak
5	5725.00	33.50	7.98	61.80	31.34	71.94	122.80	50.86	Peak
6	5761.84	33.60	8.01	68.70	31.39	98.92	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

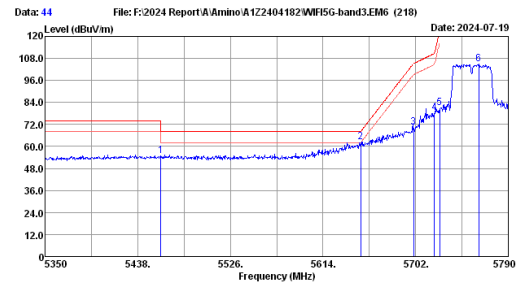

Site no. : 3m Chamber Data no. : 44
Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC 15E PK U-NII-3
Env. / Ins. : 21.5°C/53.1k Engineer : WINTER
Test Mode : WiFi5G 11ac40 5755MHz TX Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	44.21	31.00	55.05	68.20	13.15	Peak
2	5650.00	33.20	7.94	52.55	31.25	62.44	68.20	5.76	Peak
3	5700.00	33.40	7.96	60.49	31.31	70.54	105.20	34.66	Peak
4	5720.00	33.48	7.97	68.12	31.34	78.23	110.80	32.57	Peak
5	5725.00	33.50	7.98	71.10	31.34	81.24	122.80	41.56	Peak
6	5761.84	33.60	8.01	94.90	31.39	105.12	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

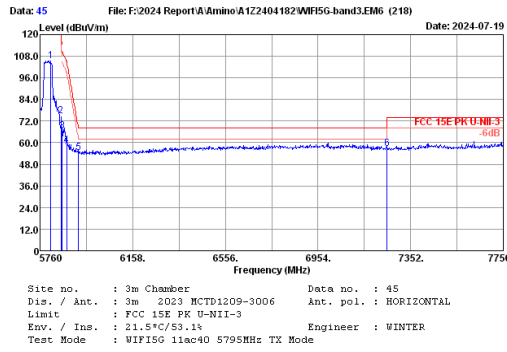


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5805.77	33.60	8.03	95.35	31.45	105.53	122.20	47.39	Peak
2	5850.00	33.60	8.05	64.67	31.51	74.81	110.80	44.28	Peak
3	5855.00	33.59	8.07	56.37	31.51	66.52	110.80	44.28	Peak
4	5875.00	33.55	8.08	48.14	31.54	58.23	105.20	46.97	Peak
5	5925.00	33.45	8.10	44.30	31.60	54.25	68.20	13.95	Peak
6	7250.00	36.70	8.48	42.97	31.60	56.55	68.20	11.65	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

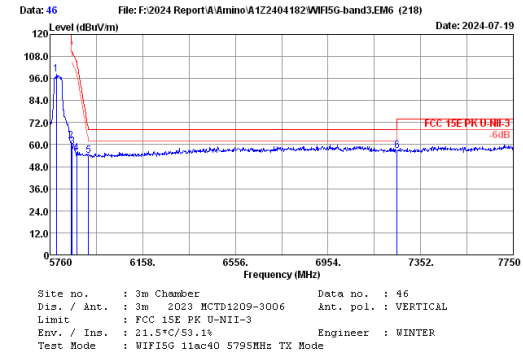


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5787.86	33.60	8.02	88.01	31.42	98.21	122.20	60.08	Peak
2	5850.00	33.60	8.05	51.98	31.51	62.12	110.80	51.75	Peak
3	5855.00	33.59	8.07	48.90	31.51	59.05	105.20	49.68	Peak
4	5875.00	33.55	8.08	45.43	31.54	55.82	105.20	49.68	Peak
5	5925.00	33.45	8.10	43.92	31.60	53.87	68.20	14.33	Peak
6	7250.00	36.70	8.48	42.98	31.60	56.56	68.20	11.64	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

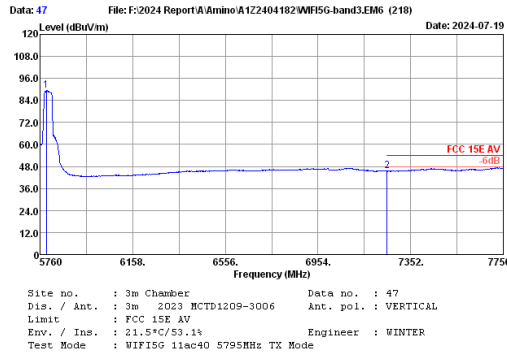


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5787.86	33.60	8.02	79.26	31.42	89.46	54.00	8.60	Average
2	7250.00	36.70	8.48	31.82	31.60	45.40	54.00	8.60	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

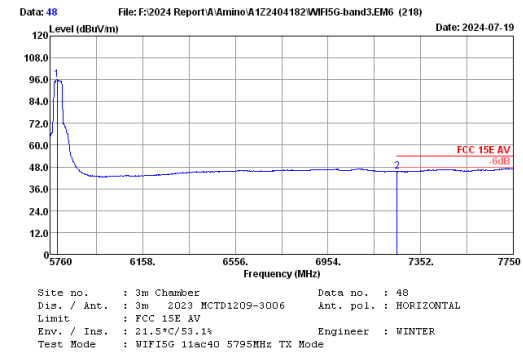


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5789.85	33.60	8.02	85.88	31.43	96.07	54.00	8.53	Average
2	7250.00	36.70	8.48	31.89	31.60	45.47	54.00	8.53	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

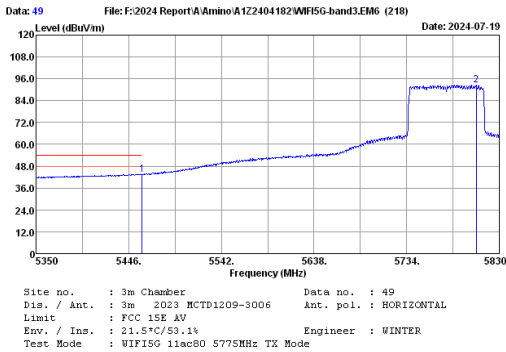


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	32.39	31.00	43.23	54.00	10.77	Average
2	5806.00	33.60	8.03	82.37	31.45	92.55	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

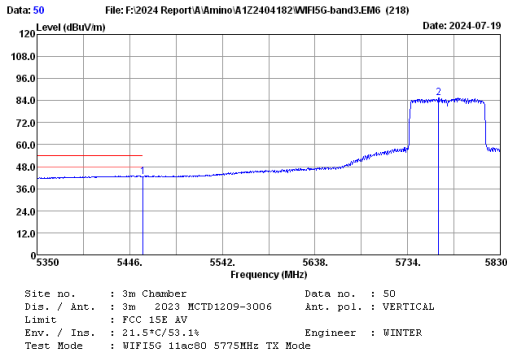


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	31.80	31.00	42.64	54.00	11.36	Average
2	5766.16	33.60	8.01	75.40	31.40	85.61	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

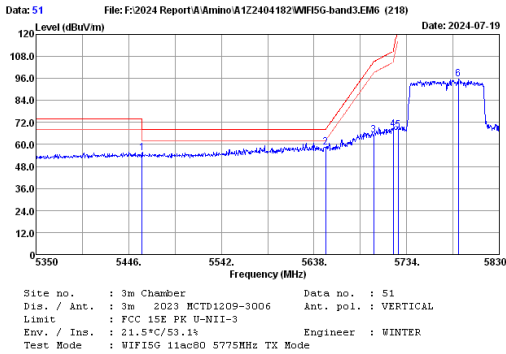


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	44.29	31.00	55.13	68.20	13.07	Peak
2	5650.00	33.20	7.94	48.51	31.25	58.40	68.20	9.80	Peak
3	5700.00	33.40	7.96	55.16	31.31	65.21	105.20	39.99	Peak
4	5720.00	33.48	7.97	58.17	31.34	68.28	110.80	42.52	Peak
5	5725.00	33.50	7.98	57.82	31.34	67.96	122.80	54.84	Peak
6	5787.76	33.60	8.02	65.24	31.42	95.44	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

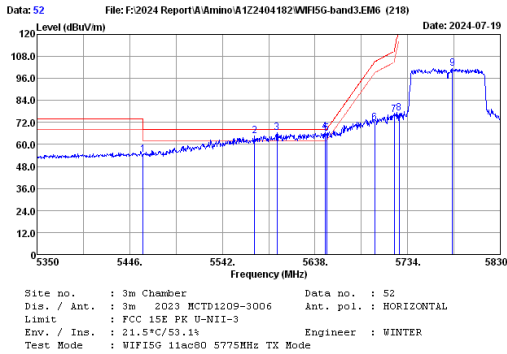


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	43.69	31.00	54.53	68.20	13.67	Peak
2	5575.60	33.30	7.89	54.75	31.15	64.79	68.20	3.41	Peak
3	5598.64	33.21	7.90	56.44	31.18	66.37	68.20	1.83	Peak
4	5648.56	33.20	7.94	56.94	31.24	66.84	68.20	1.36	Peak
5	5650.00	33.20	7.94	56.29	31.25	66.18	68.20	2.02	Peak
6	5700.00	33.40	7.96	61.59	31.31	71.64	105.20	33.56	Peak
7	5720.00	33.48	7.97	65.88	31.34	75.99	110.80	34.81	Peak
8	5725.00	33.50	7.98	66.75	31.34	76.89	122.80	45.91	Peak
9	5780.56	33.60	8.02	91.24	31.41	101.45	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

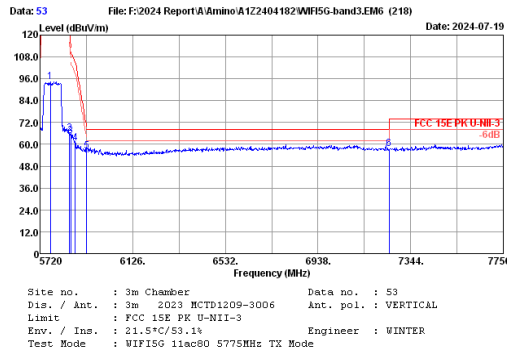


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5764.66	33.60	8.01	84.30	31.39	94.52	-----	-----	Peak
2	5850.00	33.60	8.05	55.65	31.51	65.79	122.20	56.41	Peak
3	5855.00	33.59	8.07	54.53	31.51	64.68	110.80	46.12	Peak
4	5875.00	33.55	8.08	50.36	31.54	60.45	105.20	44.75	Peak
5	5925.00	33.45	8.10	46.35	31.60	56.30	68.20	11.90	Peak
6	7250.00	36.70	8.48	44.05	31.60	57.63	68.20	10.57	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

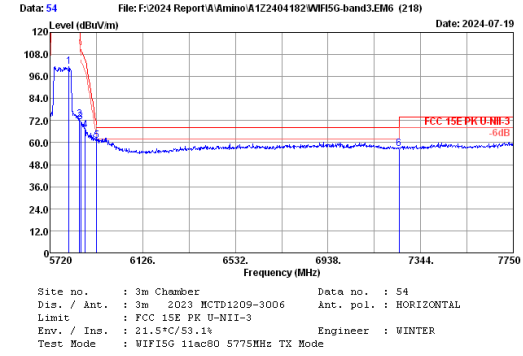


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5803.23	33.60	8.03	91.26	31.44	101.45	-----	-----	Peak
2	5850.00	33.60	8.05	62.31	31.51	72.45	122.20	49.75	Peak
3	5855.00	33.59	8.07	61.34	31.51	71.49	110.80	39.31	Peak
4	5875.00	33.55	8.08	56.62	31.54	66.71	105.20	38.49	Peak
5	5925.00	33.45	8.10	50.95	31.60	60.90	68.20	7.30	Peak
6	7250.00	36.70	8.48	42.94	31.60	56.52	68.20	11.68	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

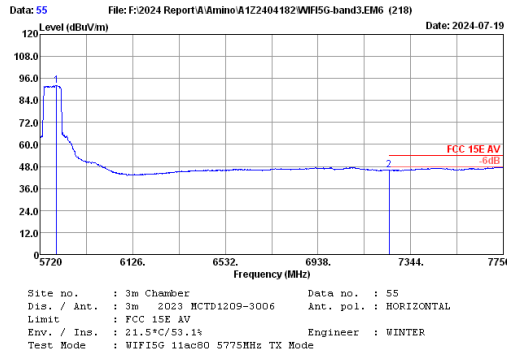


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5793.08	33.60	8.02	81.91	31.43	92.10	-----	-----	Average
2	7250.00	36.70	8.48	32.28	31.60	45.86	54.00	8.14	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

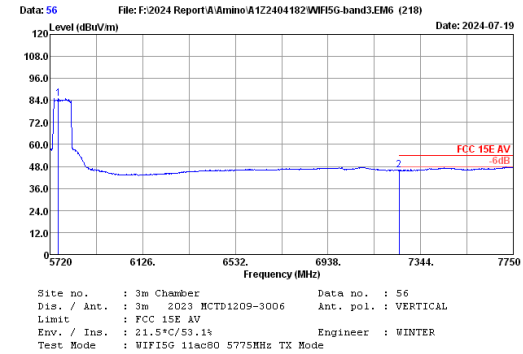


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5756.54	33.60	7.99	74.98	31.38	85.19	-----	-----	Average
2	7250.00	36.70	8.48	32.29	31.60	45.87	54.00	8.13	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

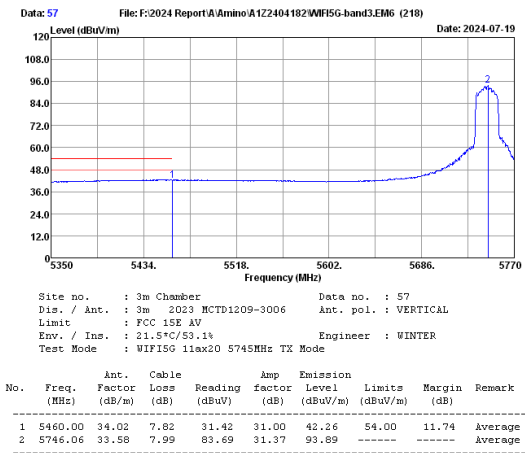


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

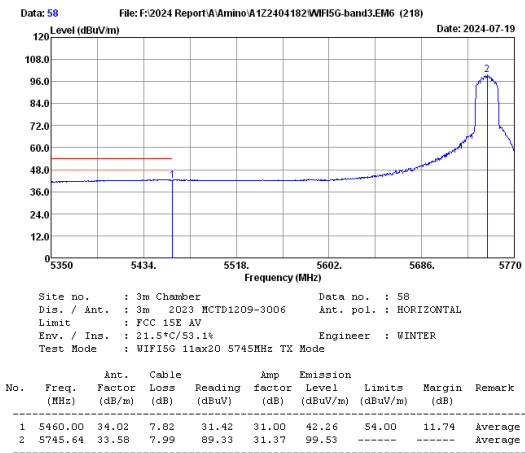


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

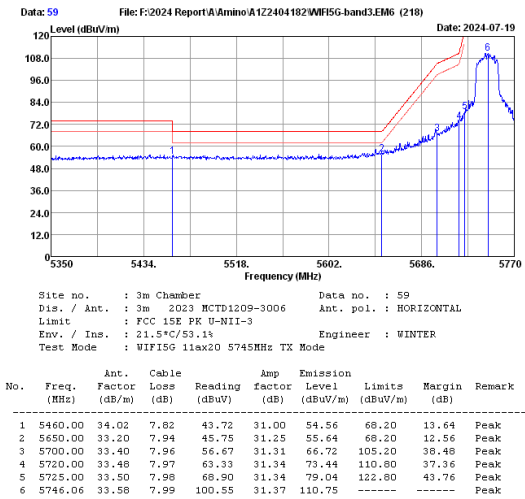

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

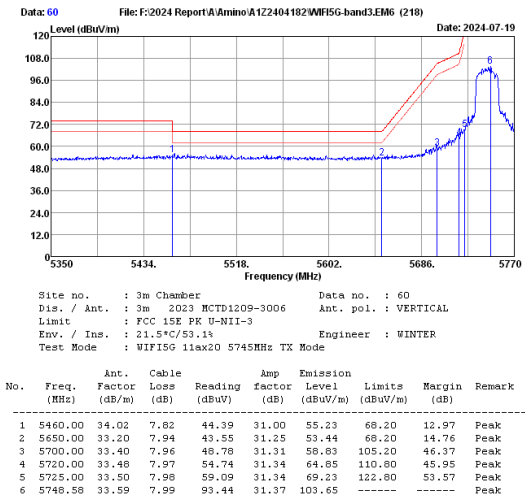


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

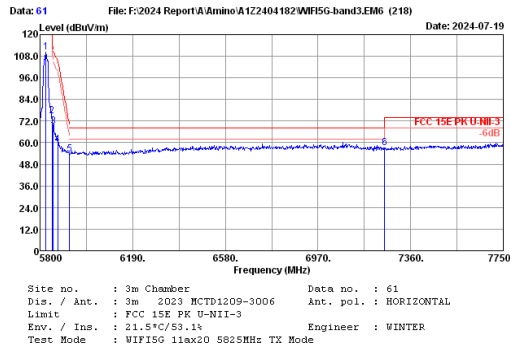


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.35	33.60	8.04	99.89	31.47	110.06	-----	-----	Peak
2	5850.00	33.60	8.05	64.67	31.51	74.81	122.20	47.39	Peak
3	5855.00	33.59	8.07	58.73	31.51	68.88	110.80	41.92	Peak
4	5875.00	33.55	8.08	48.58	31.54	58.67	105.20	46.53	Peak
5	5925.00	33.45	8.10	43.51	31.60	53.46	68.20	14.74	Peak
6	7250.00	36.70	8.48	43.57	31.60	57.15	68.20	11.05	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

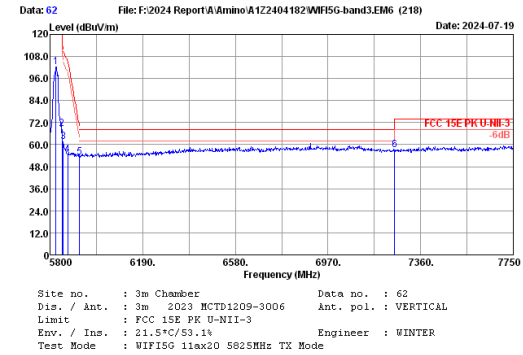


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.35	33.60	8.04	92.23	31.47	102.40	-----	-----	Peak
2	5850.00	33.60	8.05	58.71	31.51	68.85	122.20	53.35	Peak
3	5855.00	33.59	8.07	51.40	31.51	61.55	110.80	49.25	Peak
4	5875.00	33.55	8.08	44.24	31.54	54.33	105.20	50.87	Peak
5	5925.00	33.45	8.10	43.03	31.60	52.98	68.20	15.22	Peak
6	7250.00	36.70	8.48	43.56	31.60	57.14	68.20	11.06	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

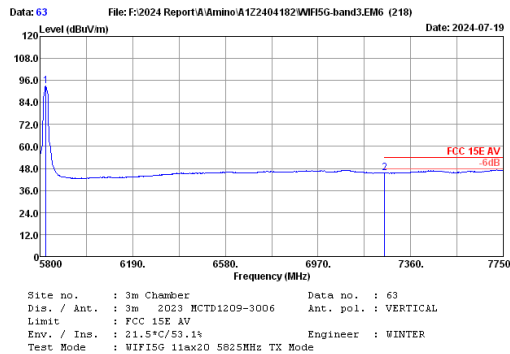


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.35	33.60	8.04	82.72	31.47	92.89	-----	-----	Average
2	7250.00	36.70	8.48	32.04	31.60	45.62	54.00	8.38	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

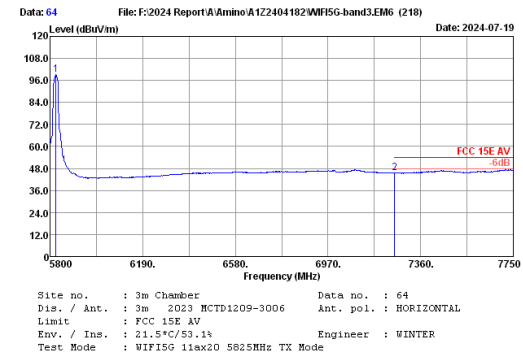


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.35	33.60	8.04	89.17	31.47	99.34	-----	-----	Average
2	7250.00	36.70	8.48	32.05	31.60	45.63	54.00	8.37	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

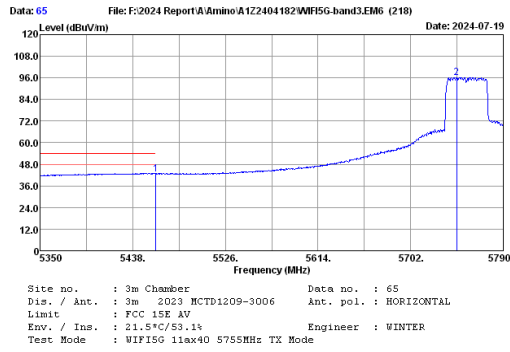


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	31.87	31.00	42.71	54.00	11.29	Average
2	5745.56	33.58	7.99	86.09	31.37	96.29	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

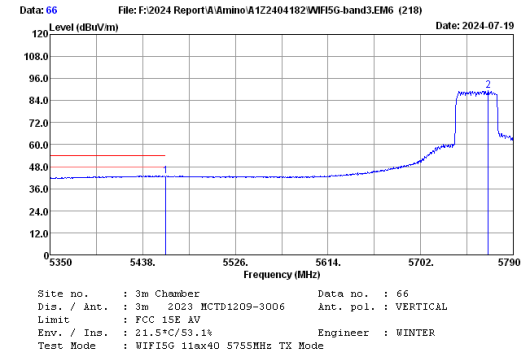


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	31.98	31.00	42.82	54.00	11.18	Average
2	5766.24	33.60	8.01	79.18	31.40	89.39	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

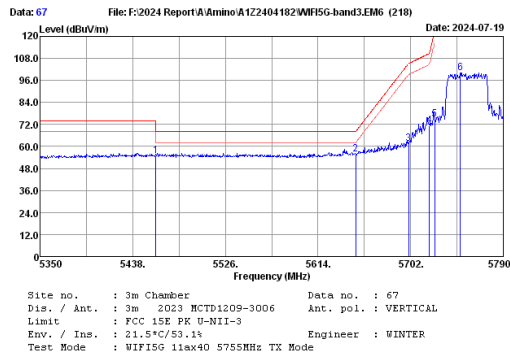


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	44.08	31.00	54.92	68.20	13.28	Peak
2	5650.00	33.20	7.94	45.77	31.25	55.66	68.20	12.54	Peak
3	5700.00	33.40	7.96	51.43	31.31	61.48	105.20	43.72	Peak
4	5720.00	33.48	7.97	61.14	31.34	71.25	110.80	39.55	Peak
5	5725.00	33.50	7.98	64.78	31.34	74.92	122.80	47.88	Peak
6	5749.08	33.60	7.99	89.98	31.37	100.20	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

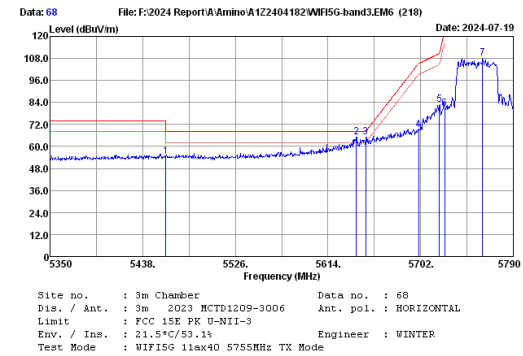


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	43.50	31.00	54.34	68.20	13.86	Peak
2	5640.84	33.20	7.92	55.21	31.23	65.10	68.20	3.10	Peak
3	5650.00	33.20	7.94	55.06	31.25	64.95	68.20	3.25	Peak
4	5700.00	33.40	7.96	59.12	31.31	69.17	105.20	36.03	Peak
5	5720.00	33.48	7.97	72.73	31.34	82.84	110.80	27.96	Peak
6	5725.00	33.50	7.98	70.47	31.34	80.61	122.80	42.19	Peak
7	5760.96	33.60	8.01	97.82	31.39	108.04	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

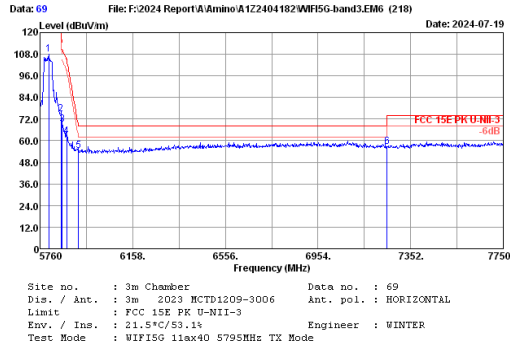


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5797.01	33.60	8.03	97.77	31.44	107.96	-----	-----	Peak
2	5850.00	33.60	8.05	64.49	31.51	74.63	122.20	47.57	Peak
3	5855.00	33.59	8.07	58.88	31.51	69.03	110.80	41.77	Peak
4	5875.00	33.55	8.08	52.26	31.54	62.35	105.20	42.85	Peak
5	5925.00	33.45	8.10	44.35	31.60	54.30	68.20	13.90	Peak
6	7250.00	36.70	8.48	43.23	31.60	56.81	68.20	11.39	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

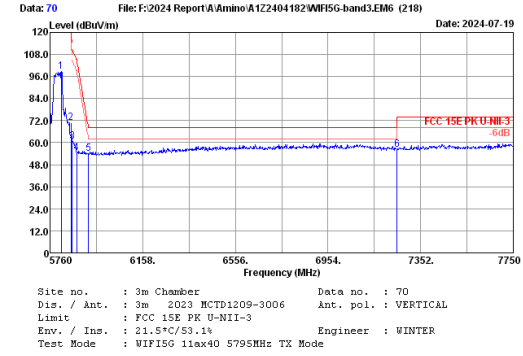


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5807.76	33.60	8.03	88.36	31.45	98.54	-----	-----	Peak
2	5850.00	33.60	8.05	60.51	31.51	70.65	122.20	51.55	Peak
3	5855.00	33.59	8.07	50.66	31.51	60.81	110.80	49.99	Peak
4	5875.00	33.55	8.08	44.33	31.54	54.42	105.20	50.78	Peak
5	5925.00	33.45	8.10	44.01	31.60	53.96	68.20	14.24	Peak
6	7250.00	36.70	8.48	42.66	31.60	56.24	68.20	11.96	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

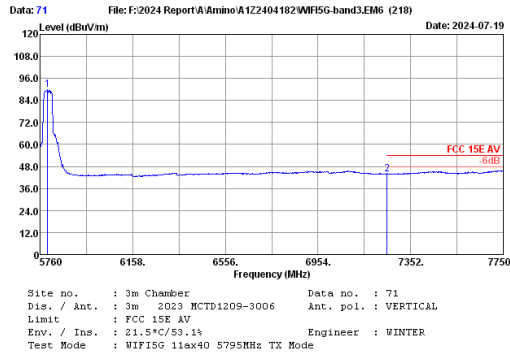


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5791.84	33.60	8.02	79.51	31.43	89.70	-----	-----	Average
2	7250.00	36.70	8.48	30.40	31.60	43.98	54.00	10.02	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

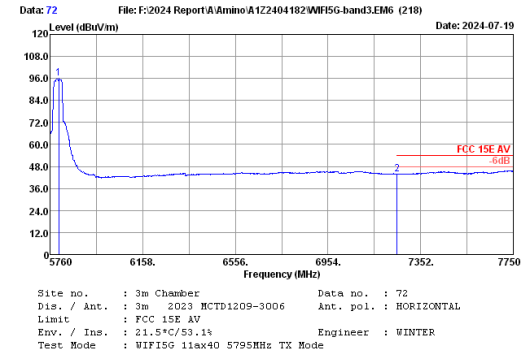


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5797.81	33.60	8.03	85.80	31.44	95.99	-----	-----	Average
2	7250.00	36.70	8.48	30.39	31.60	43.97	54.00	10.03	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

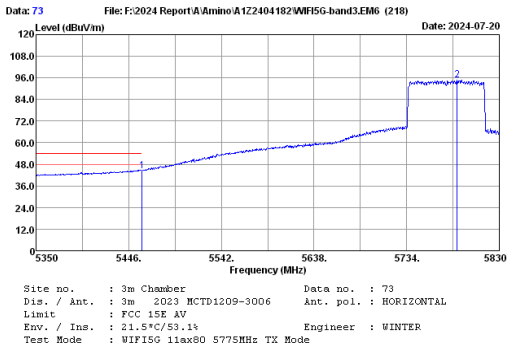


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	33.55	31.00	44.39	54.00	9.61	Average
2	5796.32	33.60	8.02	84.47	31.42	94.67	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

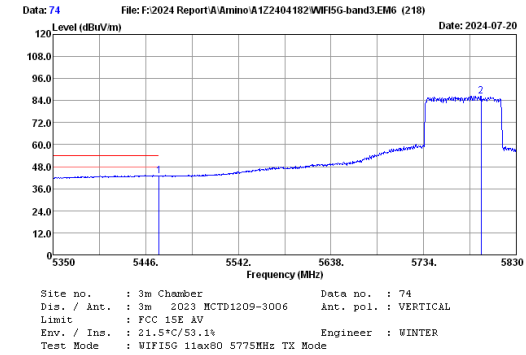


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	32.31	31.00	43.15	54.00	10.85	Average
2	5793.52	33.60	8.02	76.25	31.43	86.44	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

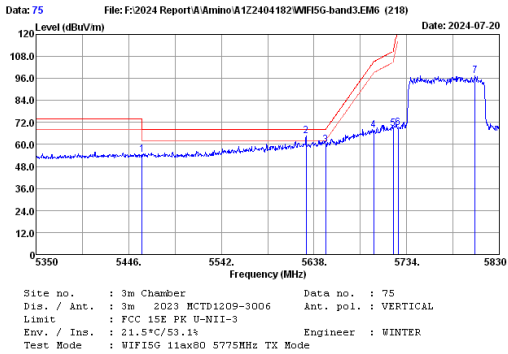


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	43.49	31.00	54.33	68.20	13.87	Peak
2	5629.84	33.20	7.92	54.64	31.22	64.54	68.20	3.66	Peak
3	5650.00	33.20	7.94	49.50	31.25	59.79	68.20	8.41	Peak
4	5700.00	33.40	7.96	57.74	31.31	67.79	105.20	37.41	Peak
5	5720.00	33.48	7.97	58.66	31.34	68.77	110.80	42.03	Peak
6	5725.00	33.50	7.98	59.11	31.34	69.25	122.80	53.55	Peak
7	5805.04	33.60	8.03	87.31	31.45	97.49	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

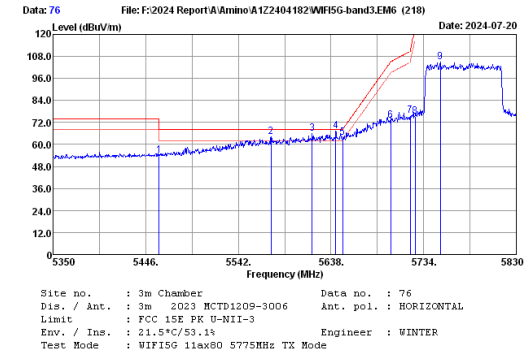


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	34.02	7.82	43.39	31.00	54.23	68.20	13.97	Peak
2	5576.08	33.30	7.89	54.25	31.15	64.29	68.20	3.91	Peak
3	5618.32	33.20	7.91	56.07	31.20	65.98	68.20	2.22	Peak
4	5642.80	33.20	7.92	57.53	31.24	67.41	68.20	0.79	Peak
5	5650.00	33.20	7.94	54.01	31.25	63.90	68.20	4.30	Peak
6	5700.00	33.40	7.96	63.04	31.31	73.09	105.20	32.11	Peak
7	5720.00	33.48	7.97	65.55	31.34	75.66	110.80	35.14	Peak
8	5725.00	33.50	7.98	65.18	31.34	75.32	122.80	47.48	Peak
9	5751.28	33.60	7.99	94.93	31.38	105.14	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

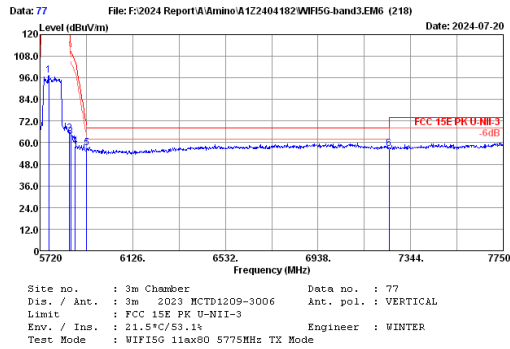


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5750.57	33.60	7.99	87.33	31.39	97.53	122.20	24.67	Peak
2	5850.00	33.60	8.05	54.90	31.51	65.04	122.20	57.16	Peak
3	5855.00	33.59	8.07	52.99	31.51	63.14	110.80	47.66	Peak
4	5875.00	33.55	8.08	48.03	31.54	58.12	105.20	47.08	Peak
5	5925.00	33.45	8.10	47.36	31.60	57.31	68.20	10.89	Peak
6	7250.00	36.70	8.48	42.99	31.60	56.57	68.20	11.63	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

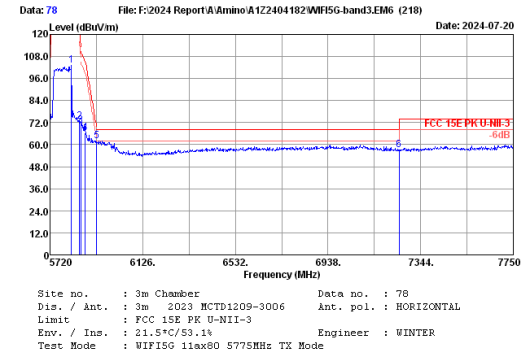


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5813.38	33.60	8.03	92.85	31.46	103.02	122.20	19.18	Peak
2	5850.00	33.60	8.05	62.60	31.51	72.74	122.20	49.46	Peak
3	5855.00	33.59	8.07	60.15	31.51	70.30	110.80	40.50	Peak
4	5875.00	33.55	8.08	56.54	31.54	66.63	105.20	38.57	Peak
5	5925.00	33.45	8.10	51.91	31.60	61.86	68.20	6.34	Peak
6	7250.00	36.70	8.48	43.46	31.60	57.04	68.20	11.16	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

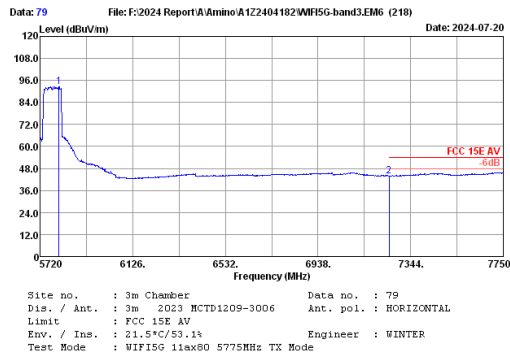

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5803.23	33.60	8.03	82.38	31.44	92.57	122.20	29.63	Average
2	7250.00	36.70	8.48	30.39	31.60	43.97	54.00	10.03	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

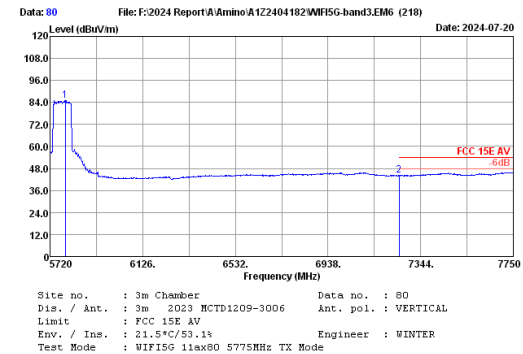

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5786.99	33.60	8.02	74.98	31.42	85.18	122.20	37.02	Average
2	7250.00	36.70	8.48	30.69	31.60	44.27	54.00	9.73	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

6. 6dB & 26dB & 99% Occupied Bandwidth Test

6.1.Limit

6dB Bandwidth should be not less than 500kHz

6.2.Test Procedure

26dB Bandwidth:

Use the test method descried in ANSI C63.10 clause 12.4.1:

- (a) Set RBW = approximately 1% of the emission bandwidth.
- (b) Set the VBW > RBW.
- (c) Detector = Peak.
- (d) Trace mode = max hold.
- (e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

6dB Bandwidth:

Use the test method descried in 789033 D02 v02r01:

- (f) Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 kHz for the band 5.725–5.85 GHz. The following procedure shall be used for measuring this bandwidth:
 - (a) Set RBW = 100 kHz.
 - (b) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (c) Detector = Peak.
 - (d) Trace mode = max hold
 - (e) Sweep = auto couple
 - (f) Allow the trace to stabilize
 - (g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

99% Occupied bandwidth:

Use the test method described in ANSI C63.10 Section 6.9.2:

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

6.3. Test Results

FCC ID: XVG500107APBT

EUT: STB		
M/N: H200W		
Test date: 2024-08-16~09-11	Pressure: 103.4±1.0 kpa	Humidity: 51.4±3.0%
Tested by: Epoch	Test site: RF site	Temperature: 22.4±0.6℃

U-NII-1 Band:
26dB bandwidth

Test Mode	Frequency (MHz)	-26dBBandwidth(MHz)		Limit (MHz)
		ANT0	ANT1	
11a	5180	21.20	21.25	N/A
	5200	21.45	24.26	
	5240	21.61	23.91	
11n20	5180	25.73	23.39	N/A
	5200	32.19	24.59	
	5240	27.17	21.65	
11n40	5190	40.69	39.62	N/A
	5230	47.10	39.58	
11ac20	5180	24.23	28.71	N/A
	5200	22.06	26.17	
	5240	28.33	21.97	
11ac40	5190	40.44	39.47	N/A
	5230	40.34	40.05	
11ac80	5210	81.77	81.78	N/A
11ax20	5180	21.59	21.65	N/A
	5200	21.30	21.63	
	5240	21.70	21.14	
11ax40	5190	40.52	40.35	N/A
	5230	42.79	39.76	
11ax80	5210	81.14	81.09	N/A
Conclusion:PASS				

99% Occupied bandwidth:

Test Mode	Frequency (MHz)	99% Bandwidth(MHz)		Limit (MHz)
		ANT0	ANT1	
11a	5180	16.847	16.837	N/A
	5200	16.881	16.997	
	5240	16.891	16.871	
11n20	5180	18.090	18.006	N/A
	5200	18.433	17.916	
	5240	18.112	17.967	
11n40	5190	36.439	36.281	N/A
	5230	36.476	36.298	
11ac20	5180	18.081	17.995	N/A
	5200	18.082	17.994	
	5240	18.134	17.949	
11ac40	5190	36.402	36.319	N/A
	5230	36.418	36.317	
11ac80	5210	76.004	76.002	N/A
11ax20	5180	18.970	18.893	N/A
	5200	18.971	19.018	
	5240	18.969	18.876	
11ax40	5190	37.655	37.661	N/A
	5230	37.657	37.579	
11ax80	5210	77.130	77.165	N/A
Conclusion:PASS				

**U-NII-2A Band:
26dB bandwidth**

Test Mode	Frequency (MHz)	-26dBBandwidth(MHz)		Limit (MHz)
		ANT0	ANT1	
11a	5260	21.67	21.14	N/A
	5300	21.44	21.16	
	5320	21.34	21.13	
11n20	5260	34.22	21.34	
	5300	27.89	21.85	
	5320	26.25	21.36	
11n40	5270	40.18	39.93	
	5310	40.05	39.46	
11ac20	5260	23.41	21.92	
	5300	23.84	21.49	
	5320	23.27	21.54	
11ac40	5270	40.48	39.85	
	5310	40.27	39.45	
11ac80	5290	82.48	82.42	
11ax20	5260	21.51	21.21	N/A
	5300	21.20	21.07	
	5320	21.70	20.79	
11ax40	5270	40.36	57.81	
	5310	40.15	57.61	
11ax80	5290	81.53	81.31	
Conclusion:PASS				

99% Occupied bandwidth:

Test Mode	Frequency (MHz)	99% Bandwidth(MHz)		Limit (MHz)
		ANT0	ANT1	
11a	5260	16.792	16.744	N/A
	5300	16.796	16.745	
	5320	16.800	16.760	
11n20	5260	18.352	17.870	
	5300	18.095	17.908	
	5320	18.072	17.829	
11n40	5270	36.439	36.295	
	5310	36.435	36.350	
11ac20	5260	18.002	17.926	
	5300	18.023	17.896	
	5320	18.003	17.895	
11ac40	5270	36.481	36.345	
	5310	36.439	36.372	
11ac80	5290	76.146	75.978	
11ax20	5260	18.973	18.926	N/A
	5300	18.969	18.985	
	5320	18.922	18.899	
11ax40	5270	37.657	37.710	
	5310	37.648	37.651	
11ax80	5290	77.312	77.098	
Conclusion:PASS				

**U-NII-2C Band:
26dB bandwidth**

Test Mode	Frequency (MHz)	-26dB Bandwidth(MHz)		Limit (MHz)
		ANT0	ANT1	
11a	5500	21.43	21.24	N/A
	5600	21.29	21.45	
	5700	21.25	21.27	
11n20	5500	21.66	21.46	N/A
	5600	21.49	21.22	
	5700	21.68	21.45	
11n40	5510	40.29	39.70	N/A
	5590	40.13	39.84	
	5670	40.28	39.29	
11ac20	5500	21.77	21.34	N/A
	5600	21.54	21.21	
	5700	21.94	21.24	
11ac40	5510	40.22	39.52	N/A
	5590	40.38	39.41	
	5670	40.18	39.41	
11ac80	5530	81.96	81.22	N/A
	5610	82.14	81.27	
11ax20	5500	21.32	21.11	N/A
	5600	21.30	21.22	
	5700	21.01	20.92	
11ax40	5510	40.31	51.06	N/A
	5590	40.44	39.79	
	5670	40.19	39.82	
11ax80	5530	81.04	80.87	N/A
	5610	81.36	81.16	

Conclusion:PASS

99% Occupied bandwidth:

Test Mode	Frequency (MHz)	99% Bandwidth(MHz)		Limit (MHz)
		ANT0	ANT1	
11a	5500	16.782	16.742	N/A
	5600	16.768	16.743	
	5700	16.842	16.767	
11n20	5500	17.948	17.849	N/A
	5600	17.937	17.822	
	5700	17.951	17.828	
11n40	5510	36.484	36.316	N/A
	5590	36.442	36.349	
	5670	36.464	36.373	
11ac20	5500	17.962	17.841	N/A
	5600	17.965	17.822	
	5700	17.968	17.831	
11ac40	5510	36.435	36.298	N/A
	5590	36.438	36.297	
	5670	36.477	36.330	
11ac80	5530	75.932	75.823	N/A
	5610	76.103	75.803	
11ax20	5500	18.971	18.943	N/A
	5600	18.901	18.917	
	5700	18.929	18.887	
11ax40	5510	37.659	37.633	N/A
	5590	37.601	37.601	
	5670	37.699	37.625	
11ax80	5530	77.151	77.056	N/A
	5610	77.255	77.114	

Conclusion:PASS

**U-NII3 Band:
6dB bandwidth**

Test Mode	Frequency (MHz)	-6dBBandwidth(MHz)		Limit (MHz)
		ANT0	ANT1	
11a	5745	16.42	16.40	N/A
	5785	16.39	16.38	
	5825	16.40	16.40	
11n20	5745	17.67	17.63	
	5785	17.63	17.61	
	5825	17.64	17.62	
11n40	5755	36.40	36.41	
	5795	36.35	36.36	
11ac20	5745	17.67	17.63	N/A
	5785	17.64	17.60	
	5825	17.67	17.66	
11ac40	5755	36.40	36.41	
	5795	36.35	36.36	
11ac80	5775	76.36	76.37	
11ax20	5745	17.79	16.93	N/A
	5785	18.55	17.32	
	5825	18.48	17.62	
11ax40	5755	37.91	37.52	
	5795	37.67	36.73	
11ax80	5775	77.64	76.12	
Conclusion:PASS				

26dB bandwidth

Test Mode	Frequency (MHz)	-26dBBandwidth(MHz)		Limit (MHz)
		ANT0	ANT1	
11a	5745	25.14	27.58	N/A
	5785	28.57	26.58	
	5825	31.29	23.79	
11n20	5745	35.11	30.87	
	5785	32.32	29.24	
	5825	32.35	30.08	
11n40	5755	71.16	60.54	
	5795	78.27	64.07	
11ac20	5745	34.31	28.97	N/A
	5785	35.32	30.53	
	5825	37.30	25.87	
11ac40	5755	78.05	68.88	
	5795	72.70	60.39	
11ac80	5775	152.70	130.00	
11ax20	5745	33.86	26.52	N/A
	5785	25.85	27.52	
	5825	27.38	26.63	
11ax40	5755	70.40	70.15	
	5795	75.88	77.35	
11ax80	5775	113.10	118.80	
Conclusion:PASS				

99% Occupied bandwidth:


Test Mode	Frequency (MHz)	99% Bandwidth(MHz)		Limit (MHz)
		ANT0	ANT1	
11a	5745	16.974	17.071	N/A
	5785	17.113	16.985	
	5825	17.152	16.879	
11n20	5745	18.475	18.224	
	5785	18.356	18.229	
	5825	18.260	18.120	
11n40	5755	37.004	36.758	
	5795	37.899	37.244	
11ac20	5745	18.394	18.456	N/A
	5785	18.628	18.213	
	5825	18.550	17.978	
11ac40	5755	37.583	38.758	
	5795	38.419	37.113	
11ac80	5775	76.404	76.287	
11ax20	5745	19.076	19.026	N/A
	5785	19.032	19.008	
	5825	19.044	19.002	
11ax40	5755	38.103	38.571	
	5795	38.313	39.100	
11ax80	5775	77.638	77.667	

Conclusion:PASS


26dB bandwidth & 99% Occupied bandwidth

U-NII-1 Band: ANT 0


IEEE 802.11a

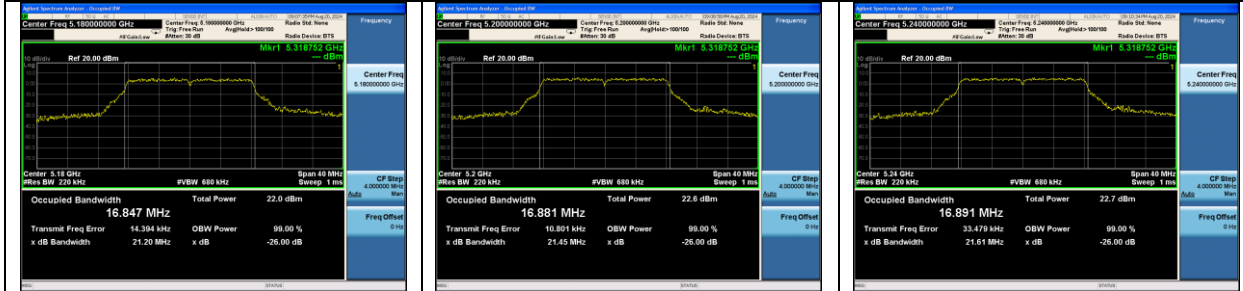


IEEE 802.11n HT20

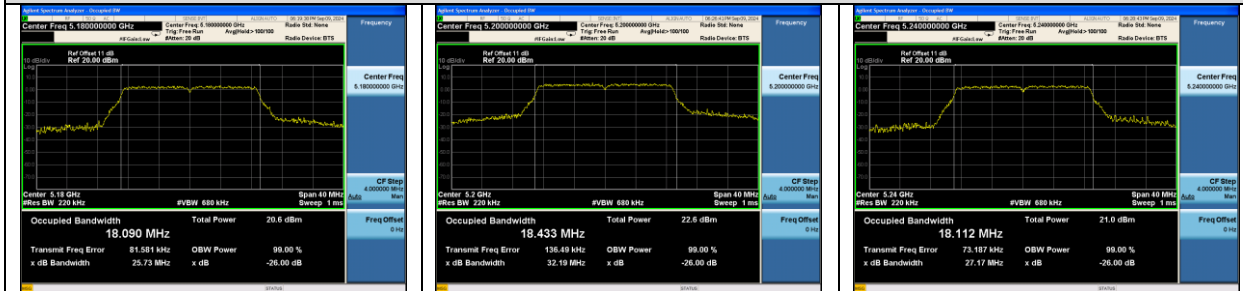



IEEE 802.11n HT40

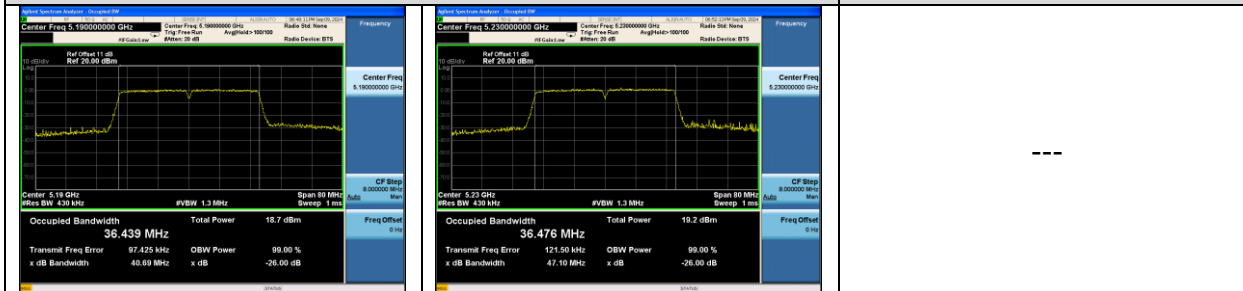


IEEE 802.11ac VHT20

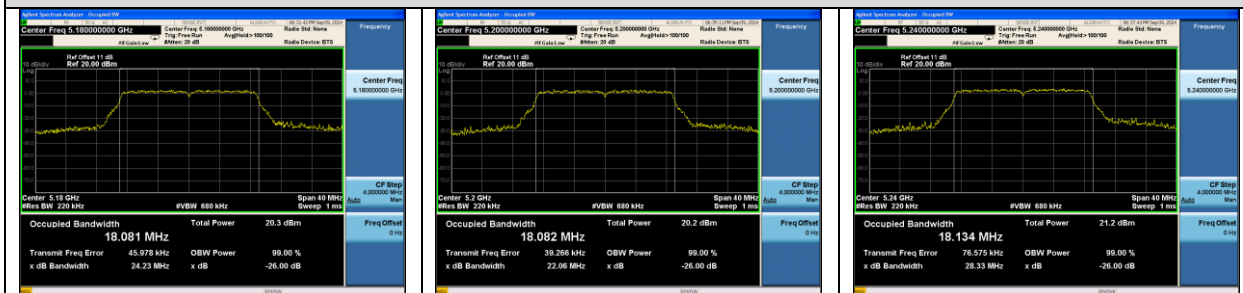




IEEE 802.11ac VHT40

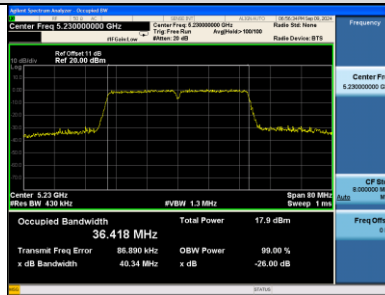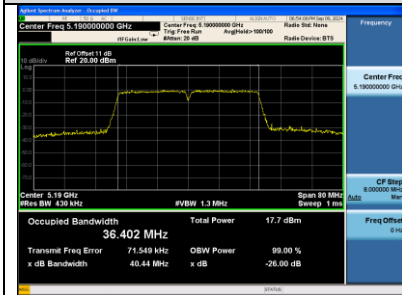



IEEE 802.11ac VHT80

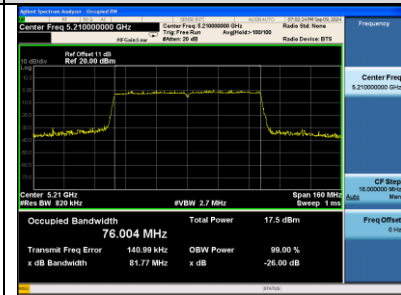


IEEE 802.11ax HE20

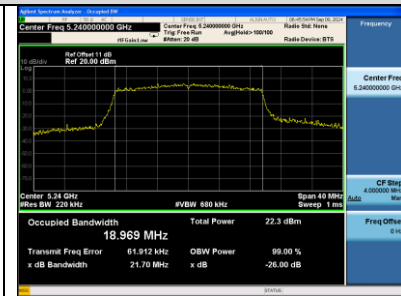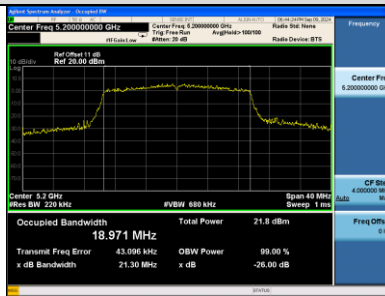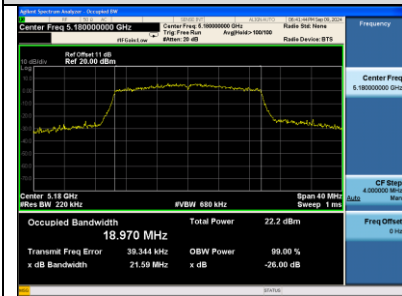

IEEE 802.11ax HE40

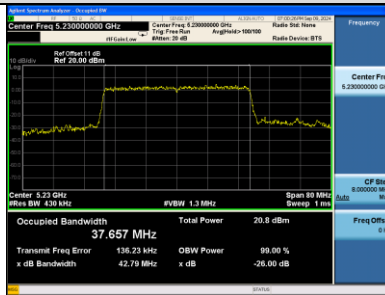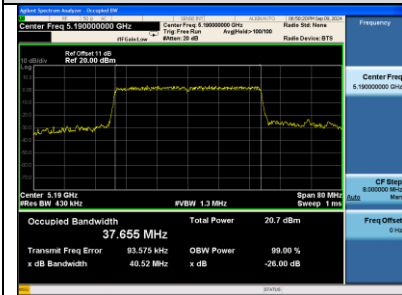


IEEE 802.11ax HE80

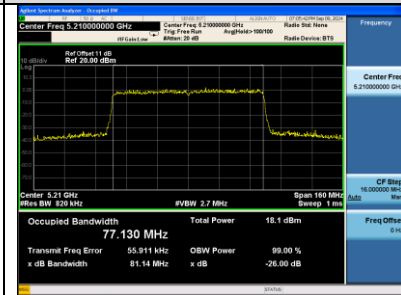


26dB bandwidth & 99% Occupied bandwidth

U-NII-1 Band: ANT 1


IEEE 802.11a

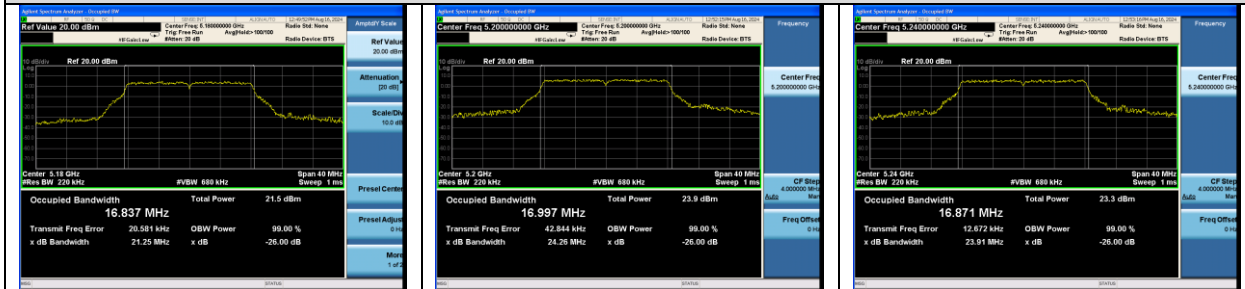


IEEE 802.11n HT20

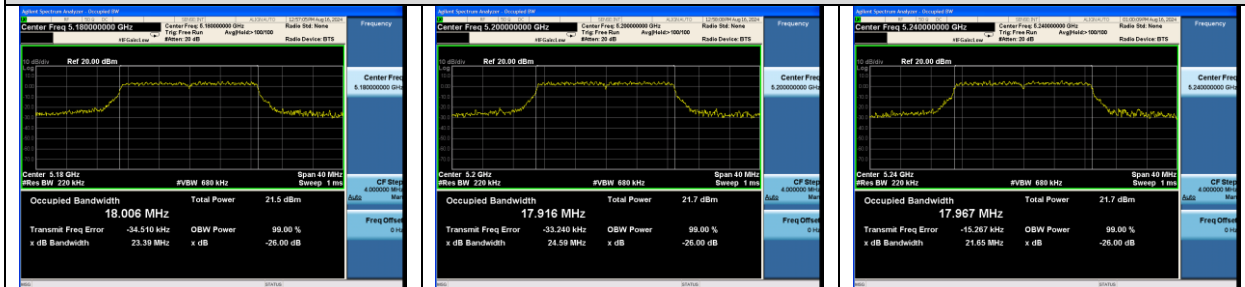



IEEE 802.11n HT40

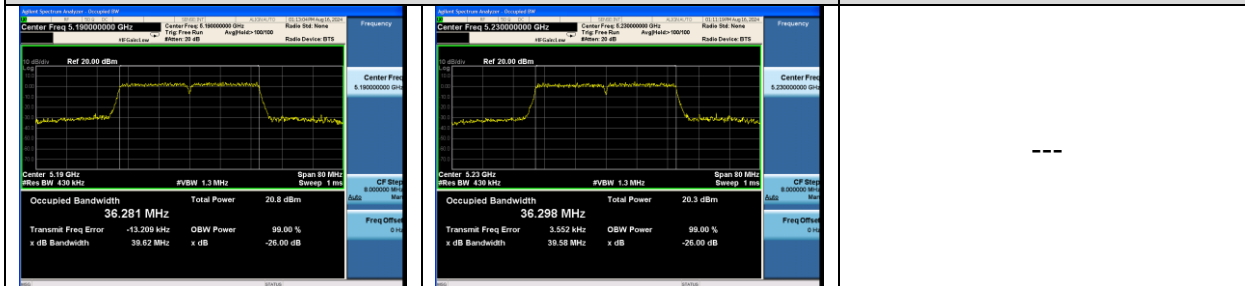


IEEE 802.11ac VHT20

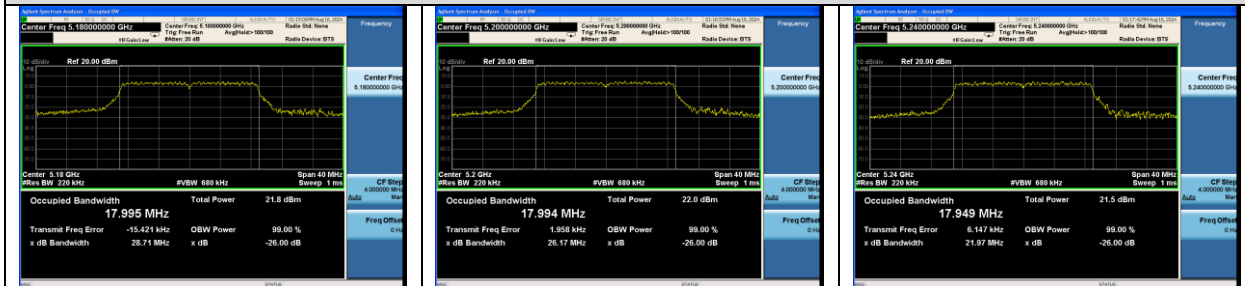




IEEE 802.11ac VHT40

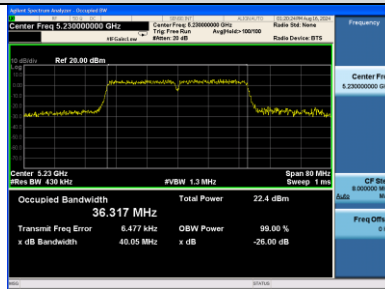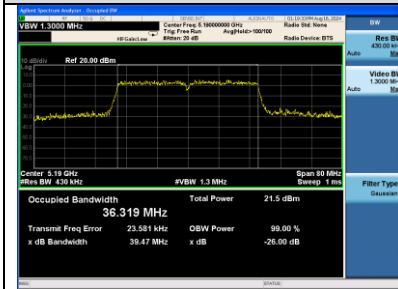



IEEE 802.11ac VHT80

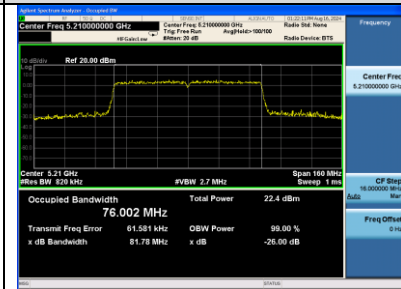

IEEE 802.11ax HE20

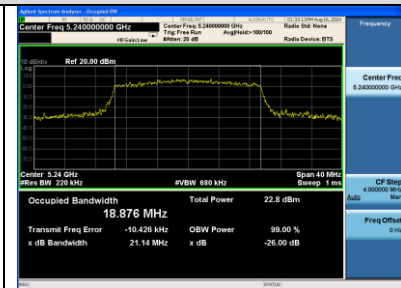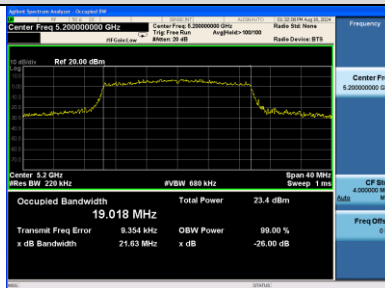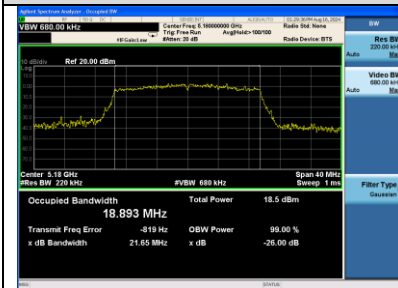

IEEE 802.11ax HE40

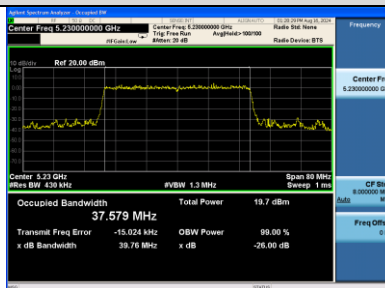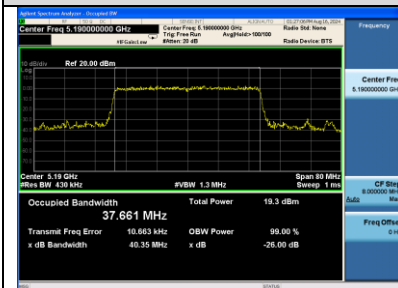

IEEE 802.11ax HE80

