




FCC PART 15B, CLASS B TEST REPORT

For

BLU Products, Inc.

10814 NW 33rd St # 100 Doral, FL 33172, United States

FCC ID: YHLBLUDASHXL

Report Type: Original Report	Product Type: Mobile phone
Report Number: <u>RSZ160912001-00A</u>	
Report Date: <u>2016-10-18</u>	
Jesse Huang 	
Reviewed By: <u>Manager</u>	
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) Chenghu Road, Kunshan Development Zone No.248, Kunshan, Jiangsu, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
MEASUREMENT UNCERTAINTY	3
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EUT EXERCISE SOFTWARE	5
SPECIAL ACCESSORIES	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS.....	7
TEST EQUIPMENT LIST	8
FCC §15.107 – AC LINE CONDUCTED EMISSIONS.....	9
APPLICABLE STANDARD	9
EUT SETUP	9
EMI TEST RECEIVER SETUP.....	9
TEST PROCEDURE	9
CORRECTED FACTOR & MARGIN CALCULATION	10
TEST RESULTS SUMMARY	10
TEST DATA	10
FCC §15.109 - RADIATED SPURIOUS EMISSIONS	13
APPLICABLE STANDARD	13
EUT SETUP	13
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	14
CORRECTED AMPLITUDE & MARGIN CALCULATION	14
TEST RESULTS SUMMARY	14
TEST DATA	15

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *BLU Products, Inc.*'s product, model number: *DASH XL (FCC ID: YHLBLUDASHXL)* or the "EUT" in this report was a *Mobile phone*, which was measured approximately: 155 mm (L) × 83 mm (W) × 7 mm (H), rated with input voltage: DC 3.8 V battery or DC 5V from adapter. The highest operating frequency is 2480 MHz.

Adapter Information:

Model: US-WW-1001

Input: AC 100-240V, 50/60Hz, 0.2A

Output: DC 5V, 1000 mA

**All measurement and test data in this report was gathered from production sample serial number: 1603258 (Assigned by BACL, Kunshan). The EUT supplied by the applicant was received on 2016-09-12.*

Objective

This test report is prepared on behalf of *BLU Products, Inc.* in accordance with Part 2-Subpart J, Part 15-Subparts A, B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine the compliance of the EUT with FCC Part 15 B.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS, Part 15.247 DTS and Part 22H/24E/27 PCE submissions with FCC ID: YHLBLUDASHXL.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		±3.26 dB
RF conducted test with spectrum		±0.9dB
RF Output Power with Power meter		±0.5dB
Radiated emission	30MHz~1GHz	±5.91dB
	Above 1G	±4.92dB
Occupied Bandwidth		±0.5kHz
Temperature		±1.0°C
Humidity		±6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the Chenghu Lake Road, Kunshan Development Zone No.248, Kunshan, Jiangsu, China

Test site at Bay Area Compliance Laboratories Corp. (Kunshan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 06, 2014. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a manufacturer testing fashion.

EUT operation mode: Downloading (data transfer with computer)

EUT Exercise Software

“BurnIn test v5.3” exercise software was used.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	PC	E6410	GYXJ3A00 JSD2
DELL	Mouse	MOC5UO	G1900NKD
DELL	Adapter	E6410	10912240373
Kingston	U disk	4 GB	N/A

External I/O Cable

Cable Description	Length (m)	From/Port	To
Un-Shielding Detachable USB Cable	0.5	PC	U disk
Un-Shielding Detachable USB Cable	1.5	PC	Mouse
Un-shielding Detachable USB Cable	1.0	EUT	PC
Un-shielding Detachable AC Cable	0.9	Adapter	LISN 1
Un-shielding Un-detachable DC Cable	0.9	Adapter	PC

Block Diagram of Test Setup

For conducted emission:

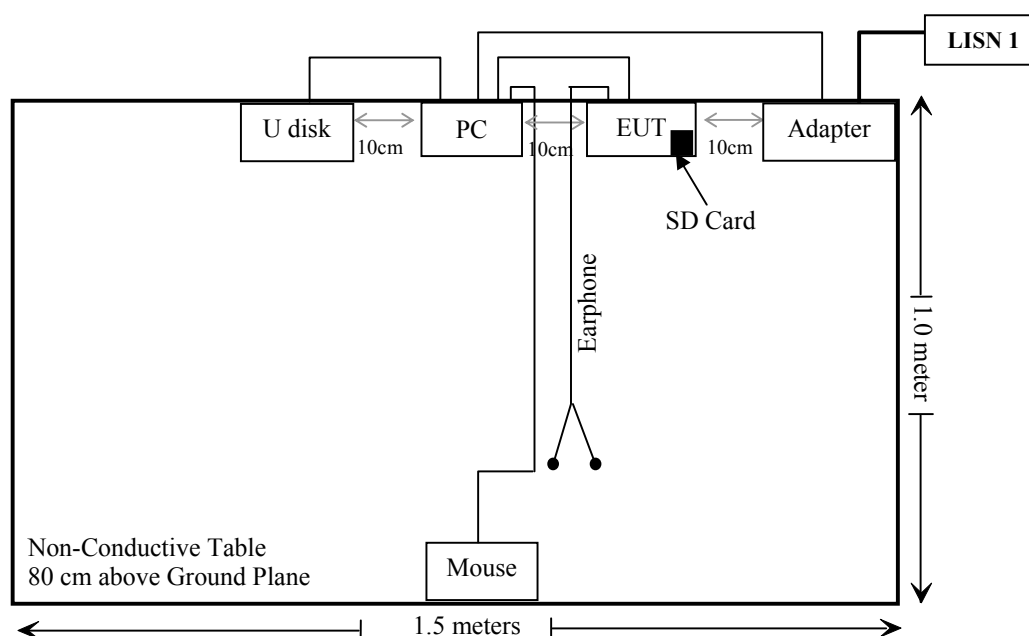

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Compliance
§15.109	Radiated Spurious Emissions	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	934115/007	2015-11-12	2016-11-11
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2015-11-12	2016-11-11
Rohde & Schwarz	LISN	ESH3-Z5	892239/018	2016-06-23	2017-06-22
Rohde & Schwarz	Pulse limiter	ESH3-Z2	879940/0058	2016-06-19	2017-06-18
MICRO-COAX	Coaxial line	UFB-293B-1-0480-50X50	97F0173	2016-09-01	2017-09-01
Rohde & Schwarz	CE Test software	EMC 32	V 09.10.0	NCR	NCR
Radiated Emission Test					
Sonoma Instrument	Amplifier	330	171377	2016-09-16	2017-09-16
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2015-11-12	2016-11-11
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2015-11-07	2016-11-06
ETS	Horn Antenna	3115	6229	2015-11-07	2016-11-06
EMCO	Horn Antenna	3116	9510-2384	2015-11-07	2016-11-06
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2015-11-12	2016-11-11
Mini	Pre-amplifier	ZVA-183-S+	857001418	2016-09-16	2017-09-16
R&S	Auto test Software	EMC32	V 09.10.0	NCR	NCR
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15


* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.107 – AC LINE CONDUCTED EMISSIONS

Applicable Standard

According to FCC §15.107

EUT Setup

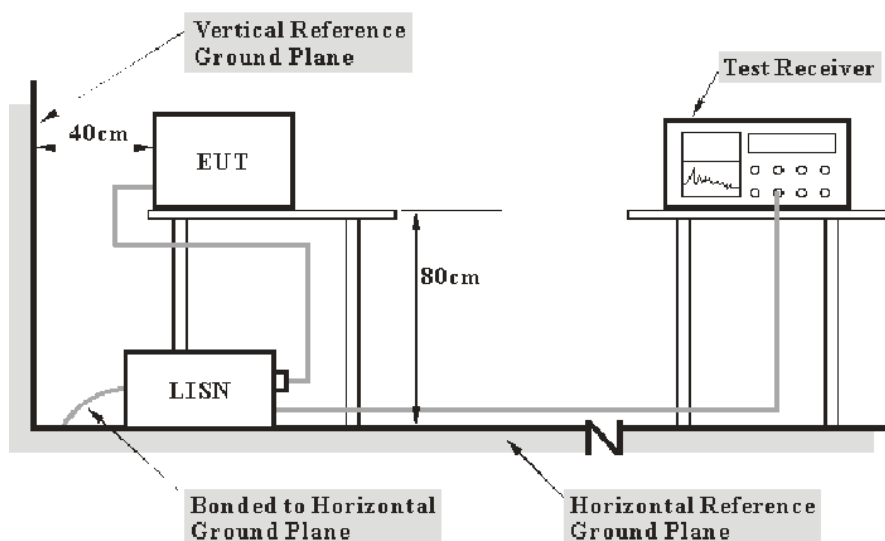

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with per ANSI C63.4-2014. The related limit was specified in FCC Part 15.107 Class B.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the host PC was connected to the first LISN and the other relevant equipments were connected to the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.107,

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL., $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data


Environmental Conditions

Temperature:	24 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa


The testing was performed by Chris Wang on 2016-10-24.

EUT Operation Mode: Downloading

AC 120V/60 Hz, Line

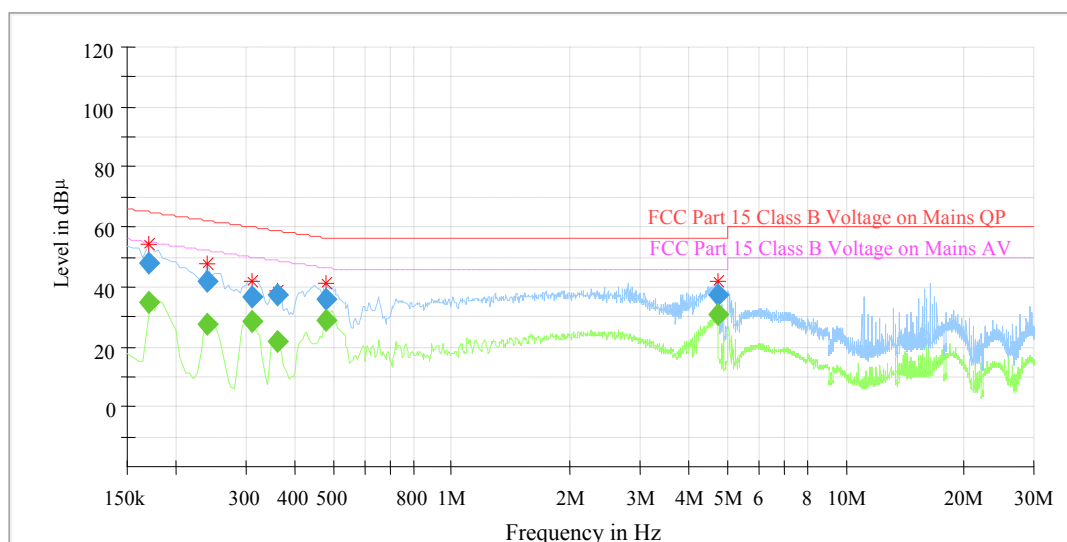

Frequency (MHz)	QuasiPeak (dBμV)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.170000	---	34.54	9.000	L1	10.3	20.42	54.96	Compliance
0.170000	48.44	---	9.000	L1	10.3	16.52	64.96	Compliance
0.240000	---	27.53	9.000	L1	10.3	24.57	52.10	Compliance
0.240000	42.15	---	9.000	L1	10.3	19.95	62.10	Compliance
0.310000	---	27.95	9.000	L1	10.3	22.02	49.97	Compliance
0.310000	36.37	---	9.000	L1	10.3	23.60	59.97	Compliance
0.360000	---	22.54	9.000	L1	10.3	26.19	48.73	Compliance
0.360000	37.41	---	9.000	L1	10.3	21.32	58.73	Compliance
0.480000	---	28.64	9.000	L1	10.3	17.70	46.34	Compliance
0.480000	35.58	---	9.000	L1	10.3	20.76	56.34	Compliance
4.720000	---	30.47	9.000	L1	10.5	15.53	46.00	Compliance
4.720000	37.05	---	9.000	L1	10.5	18.95	56.00	Compliance

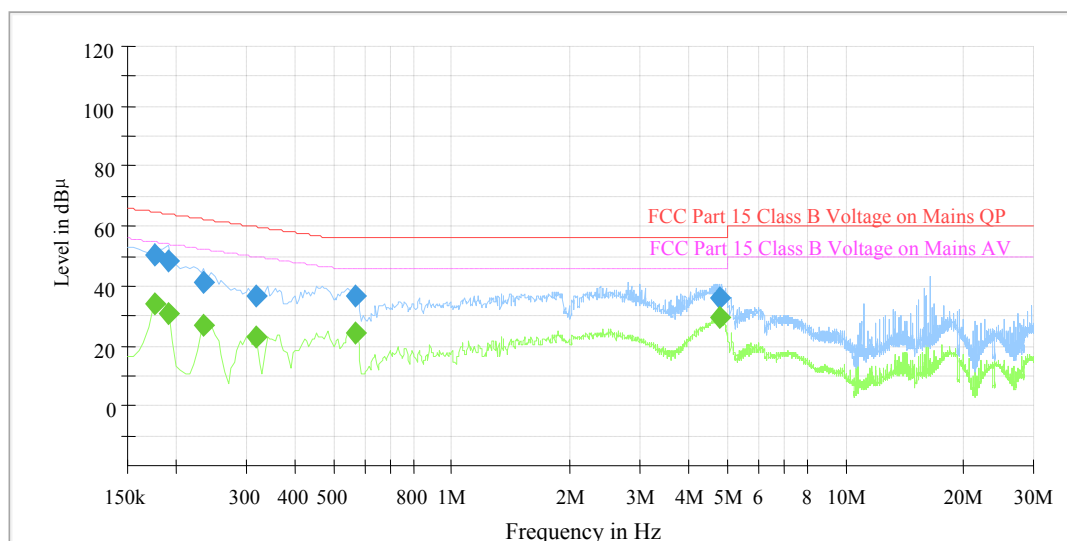AC 120V/60 Hz, Neutral

Frequency (MHz)	QuasiPeak (dBμV)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.175000	---	34.02	9.000	N	10.3	20.70	54.72	Compliance
0.175000	50.56	---	9.000	N	10.3	14.16	64.72	Compliance
0.190000	---	30.85	9.000	N	10.3	23.19	54.04	Compliance
0.190000	48.19	---	9.000	N	10.3	15.85	64.04	Compliance
0.235000	---	26.78	9.000	N	10.3	25.49	52.27	Compliance
0.235000	41.00	---	9.000	N	10.3	21.27	62.27	Compliance
0.320000	---	23.05	9.000	N	10.3	26.66	49.71	Compliance
0.320000	36.44	---	9.000	N	10.3	23.27	59.71	Compliance
0.570000	---	24.58	9.000	N	10.3	21.42	46.00	Compliance
0.570000	36.84	---	9.000	N	10.3	19.16	56.00	Compliance
4.805000	---	29.46	9.000	N	10.6	16.54	46.00	Compliance
4.805000	36.16	---	9.000	N	10.6	19.84	56.00	Compliance

Note:

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude


FCC §15.109 - RADIATED SPURIOUS EMISSIONS

Applicable Standard


FCC §15.109

EUT Setup

Below 1GHz:

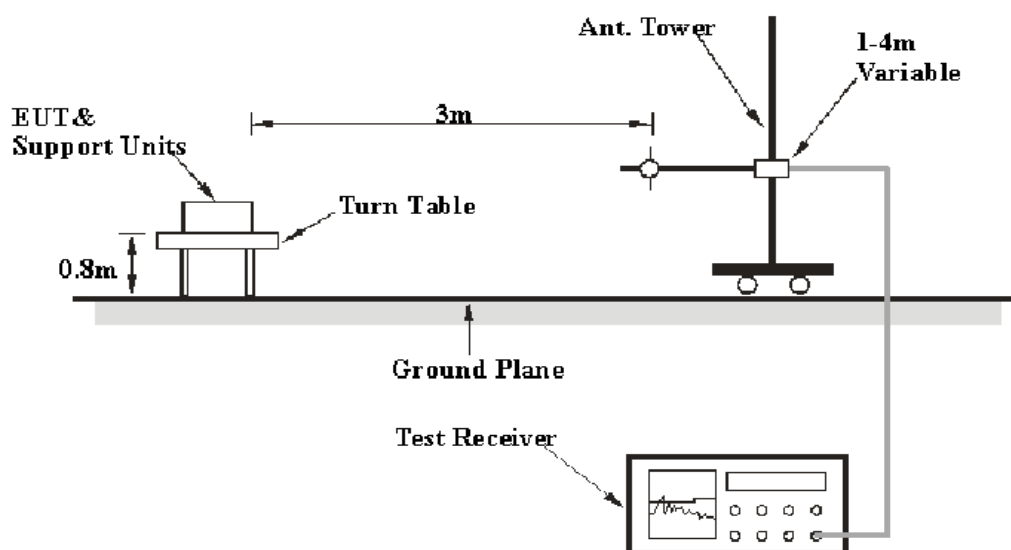

Above 1GHz:

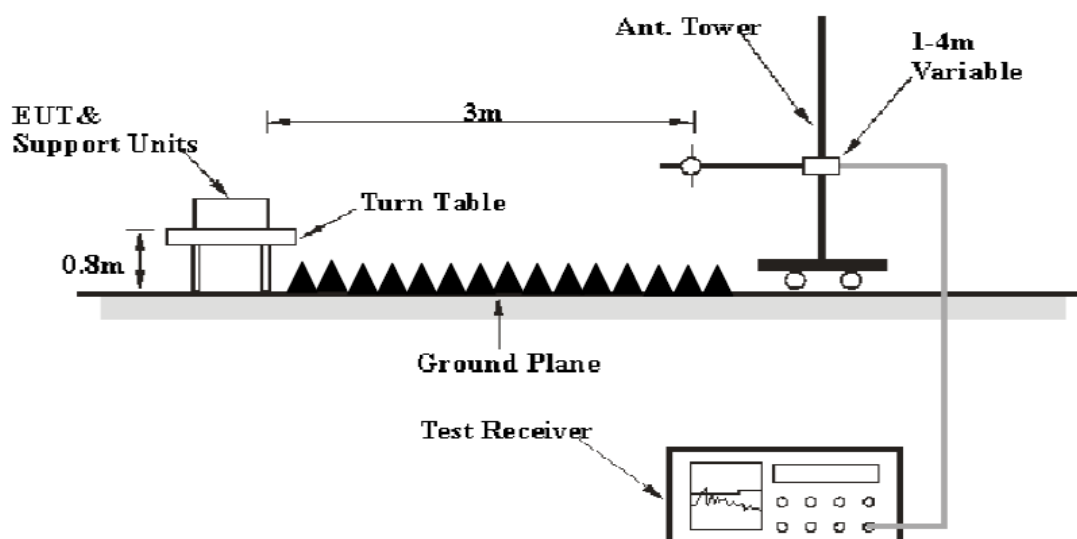

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC Part 15.109 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 12.4 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC §15.109 Class B,

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data**Environmental Conditions**

Temperature:	24 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Chris Wang on 2016-10-24.

EUT Operation Mode: Downloading

30MHz – 12.4 GHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBuV/m)	FCC Part 15B	
	Reading (dBuV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H / V)			Limit (dBuV/m)	Margin (dB)
32.01	30.57	QP	302	1.1	V	3.48	34.05	40.00	5.95
40.29	42.42	QP	115	1.0	V	-10.38	32.04	40.00	7.96
45.99	34.58	QP	201	1.3	V	-13.96	20.62	40.00	19.38
76.20	53.27	QP	285	3.9	H	-16.88	36.39	40.00	3.61
182.26	52.20	QP	74	1.9	H	-11.96	40.24	43.50	3.26
897.80	27.06	QP	62	2.0	H	-0.88	26.18	46.00	19.82
1325.15	49.12	PK	258	2.1	H	-4.24	44.88	74	29.12
1325.15	27.00	Ave.	258	2.1	H	-4.24	22.76	54	31.24
1652.74	49.96	PK	221	1.1	H	-5.73	44.23	74	29.77
1652.74	26.39	Ave.	221	1.1	H	-5.73	20.66	54	33.34

Note:

- 1) Correction Factor=Antenna factor (RX) + cable loss – amplifier factor
- 2) Corrected Amplitude = Correction Factor + Reading
- 3) Margin = Limit - Corrected Amplitude

******* END OF REPORT *******