

FCC RF Test Report


APPLICANT : CT Asia
EQUIPMENT : Smartphone
BRAND NAME : BLU
MODEL NAME : STUDIO C SUPER CAMERA
FCC ID : YHLBLUSTUDIOCAM
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Mar. 24, 2015 and testing was completed on Apr. 28, 2015. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-C-2004 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (SHENZHEN) INC.

1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town,
Nanshan District, Shenzhen, Guangdong, P. R. China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification subjective to this standard.....	6
1.5 Modification of EUT	7
1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	7
1.7 Testing Location	8
1.8 Applicable Standards	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Test Mode.....	10
2.2 Connection Diagram of Test System	13
2.3 Support Unit used in test configuration	13
2.4 Measurement Results Explanation Example	14
3 TEST RESULT	15
3.1 Conducted Output Power Measurement.....	15
3.2 Peak-to-Average Ratio	17
3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement	33
3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	37
3.5 Band Edge Measurement.....	61
3.6 Conducted Spurious Emission Measurement.....	69
3.7 Field Strength of Spurious Radiation Measurement	91
3.8 Frequency Stability Measurement.....	114
4 LIST OF MEASURING EQUIPMENT	120
5 UNCERTAINTY OF EVALUATION	121
APPENDIX A. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG532407	Rev. 01	Initial issue of report	May 14, 2015



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	§2.1046	RSS-132 (5.4) RSS-133 (6.4) RSS-139 (6.4)	Conducted Output Power	Reporting Only	PASS	-
3.2	§24.232(d)	RSS-132 (5.4) RSS-133 (6.4) RSS-139 (6.4)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.3	§22.913(a)(2)	RSS-132(5.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts	PASS	-
	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
	§27.50(d)(4)	RSS-139 (6.4) SRSP-513(5.1.2)	Equivalent Isotropic Radiated Power	< 1 Watts	PASS	-
3.4	§2.1049	RSS-GEN(6.6) RSS-133(6.5) RSS-139 (6.5)	Occupied Bandwidth	Reporting Only	PASS	-
3.5	§2.1051 §22.917(a) §24.238(a) §27.53(h)	RSS-132 (5.5) RSS-133 (6.5) RSS-139 (6.5)	Band Edge Measurement	< 43+10log10(P[Watts])	PASS	-
3.6	§2.1051 §22.917(a) §24.238(a) §27.53(h)	RSS-132 (5.5) RSS-133 (6.5) RSS-139 (6.5)	Conducted Emission	< 43+10log10(P[Watts])	PASS	-
3.7	§2.1053 §22.917(a) §24.238(a) §27.53(h)	RSS-132 (5.5) RSS-133 (6.5) RSS-139 (6.5)	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	Under limit 5.44 dB at 7522.000 MHz
3.8	§2.1055 §22.355	RSS-GEN(6.11) RSS-132 (5.3)	Frequency Stability for Temperature & Voltage	< 2.5 ppm for Part 22 Within Authorized Band	PASS	-
	§2.1055 §24.235 §27.54	RSS-GEN(6.11) RSS-133 (6.3) RSS-139 (6.3)				

1 General Description

1.1 Applicant

CT Asia

Unit 01, 15/F, Seaview Centre, 139-141 Hoi bun road, Kwun Tong, Kowloon, Hongkong

1.2 Manufacturer

Tinno Mobile Technology Corp.

4/F, H-3 Building, OCT Eastern industrial Park, No.1 XiangShan East Road, Nan Shan District, Shenzhen, P.R. China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smartphone
Brand Name	BLU
Model Name	STUDIO C SUPER CAMERA
FCC ID	YHLBLUSTUDIOCAM
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/HSPA+(Downlink Only)/ WLAN 2.4GHz 802.11b/g/n HT20/HT40/ Bluetooth v3.0 + EDR/Bluetooth v4.0 LE
IMEI Code	Conducted: 353919026699441/353924026699441 Radiation: 353919026699144/ 353919026699144 ERP&EIRP: 353919026699144/ 353919026699144
HW Version	V1.0
SW Version	S5400AP_PR2_5.0_00_08
EUT Stage	Pre-Production

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band IV : 2112.4 MHz ~ 2152.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz
Maximum Output Power to Antenna	GSM850 : 32.23 dBm GSM1900 : 29.26 dBm WCDMA Band V : 23.49 dBm WCDMA Band IV : 22.24 dBm WCDMA Band II : 21.86 dBm
Antenna Type	PIFA Antenna
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA: QPSK (Uplink) HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink) HSPA+: 16QAM (Downlink Only)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	GSM850 GSM	GMSK	0.5236	0.0574 ppm	246KGXW
Part 22	GSM850 EDGE class 8	8PSK	0.1409	0.0538 ppm	246KG7W
Part 22	WCDMA Band V RMC 12.2Kbps	QPSK	0.0731	0.0263 ppm	4M15F9W
Part 24	GSM1900 GSM	GMSK	0.8222	0.0426 ppm	246KGXW
Part 24	GSM1900 EDGE class 8	8PSK	0.5598	0.0372 ppm	250KG7W
Part 24	WCDMA Band II RMC 12.2Kbps	QPSK	0.2099	0.0037 ppm	4M17F9W
Part 27	WCDMA Band IV RMC 12.2Kbps	QPSK	0.2780	0.0127 ppm	4M17F9W

1.7 Testing Location

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.
Test Site Location	1F & 2F,Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595
Test Site No.	Sporton Site No.
	TH01-SZ

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	FCC/IC Registration No.
	03CH11-HY	TW1022/4086B

Note: The test site complies with ANSI C63.4 2009 requirement.

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02
- ♦ IC RSS-132 Issue 3
- ♦ IC RSS-133 Issue 6
- ♦ IC RSS-139 Issue 2
- ♦ IC RSS-Gen Issue 4

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 10th harmonic for GSM850 and WCDMA Band V.
2. 30 MHz to 10th harmonic for WCDMA Band IV
3. 30 MHz to 10th harmonic for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	■ GSM Link ■ EDGE class 8 Link	■ GSM Link ■ EDGE class 8 Link
GSM 1900	■ GSM Link ■ EDGE class 8 Link	■ GSM Link ■ EDGE class 8 Link
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

Note: The maximum power levels are chosen to test as the worst case configuration as follows:

GSM mode for GMSK modulation,

EDGE multi-slot class 8 mode for 8PSK modulation,

RMC 12.2Kbps mode for WCDMA band V and WCDMA band IV,

RMC 12.2Kbps mode for WCDMA band II, only these modes were used for all tests.

Conducted Power Measurement Results:
For SIM1 Card

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM	32.23	32.22	32.21	29.09	29.26	29.17
GPRS class 8	32.21	32.20	32.19	29.08	29.24	29.16
GPRS class 10	31.38	31.36	31.35	27.35	27.55	27.54
GPRS class 11	29.72	29.71	29.70	25.31	25.54	25.52
GPRS class 12	28.91	28.90	28.88	24.12	24.48	24.46
EGPRS class 8	26.36	26.23	25.81	26.44	25.92	25.73
EGPRS class 10	25.26	25.03	24.73	25.22	24.68	24.45
EGPRS class 11	23.06	22.81	22.52	22.93	22.62	22.20
EGPRS class 12	21.91	21.66	21.37	21.71	21.37	21.04


Conducted Power (*Unit: dBm)									
Band	WCDMA Band V			WCDMA Band II			WCDMA Band IV		
Channel	4132	4182	4233	9262	9400	9538	1312	1413	1513
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
AMR 12.2K	23.21	22.41	23.48	21.71	21.85	21.77	22.15	22.20	22.22
RMC 12.2K	23.22	22.42	23.49	21.72	21.86	21.78	22.16	22.21	22.24
HSDPA Subtest-1	22.05	21.33	22.15	20.13	20.31	20.08	20.67	20.79	20.81
HSDPA Subtest-2	22.08	21.31	22.15	20.10	20.37	20.13	20.67	20.79	20.84
HSDPA Subtest-3	21.61	20.85	21.65	19.65	19.93	19.67	20.25	20.33	20.39
HSDPA Subtest-4	21.60	20.82	21.67	19.66	19.90	19.65	20.20	20.30	20.38
HSUPA Subtest-1	20.04	19.47	19.94	18.11	18.34	18.23	18.70	18.82	18.90
HSUPA Subtest-2	20.03	19.43	19.99	18.12	18.33	18.23	18.74	18.82	18.88
HSUPA Subtest-3	21.09	20.36	20.93	19.14	19.33	19.21	19.67	19.83	19.85
HSUPA Subtest-4	19.49	18.86	19.45	17.68	17.78	17.64	18.16	18.28	18.33
HSUPA Subtest-5	22.10	21.40	22.00	20.10	20.30	20.30	20.64	20.78	20.80

For SIM2 Card

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM	32.22	32.20	32.19	29.06	29.25	29.16
GPRS class 8	32.19	32.18	32.16	29.04	29.22	29.14
GPRS class 10	31.36	31.33	31.31	27.34	27.54	27.52
GPRS class 11	29.71	29.69	29.67	25.30	25.52	25.50
GPRS class 12	28.90	28.89	28.87	24.10	24.47	24.43
EGPRS class 8	26.33	26.22	25.80	26.40	25.90	25.71
EGPRS class 10	25.24	25.01	24.70	25.20	24.67	24.44
EGPRS class 11	23.05	22.80	22.50	22.92	22.61	22.18
EGPRS class 12	21.90	21.64	21.36	21.70	21.35	21.00

Conducted Power (*Unit: dBm)									
Band	WCDMA Band V			WCDMA Band II			WCDMA Band IV		
Channel	4132	4182	4233	9262	9400	9538	1312	1413	1513
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
AMR 12.2K	23.20	22.40	23.46	21.69	21.82	21.74	22.13	22.19	22.21
RMC 12.2K	23.21	22.41	23.47	21.71	21.83	21.76	22.14	22.20	22.22
HSDPA Subtest-1	22.04	21.30	22.12	20.12	20.30	20.07	20.65	20.78	20.80
HSDPA Subtest-2	22.06	21.30	22.14	20.08	20.36	20.12	20.66	20.77	20.82
HSDPA Subtest-3	21.60	20.82	21.64	19.64	19.90	19.65	20.23	20.32	20.38
HSDPA Subtest-4	21.58	20.80	21.65	19.63	19.89	19.63	20.18	20.28	20.36
HSUPA Subtest-1	20.00	19.46	19.92	18.10	18.32	18.22	18.69	18.81	18.89
HSUPA Subtest-2	20.00	19.42	19.98	18.11	18.31	18.20	18.72	18.80	18.86
HSUPA Subtest-3	21.07	20.35	20.90	19.11	19.30	19.20	19.66	19.81	19.84
HSUPA Subtest-4	19.48	18.84	19.43	17.67	17.76	17.62	18.14	18.27	18.32
HSUPA Subtest-5	22.08	21.36	21.98	20.08	20.28	20.28	20.62	20.76	20.78

2.2 Connection Diagram of Test System

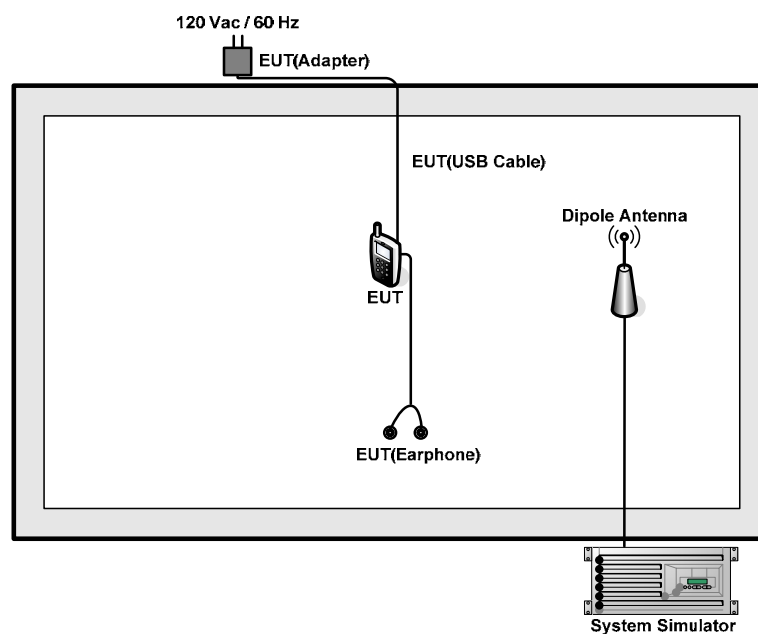

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	TOPWORD	3303DR	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.5 dB and a 10dB attenuator.

Example :

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.5 + 10 = 14.5 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

3.1.4 Test Setup

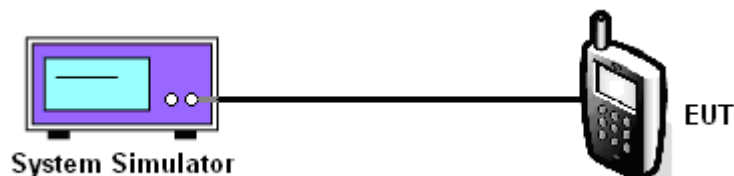

3.1.5 Test Result of Conducted Output Power

Cellular Band									
Modes	GSM850 (GSM)			GSM850 (EDGE class 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	826.4	836.4	846.6
Conducted Power (dBm)	32.23	32.22	32.21	26.36	26.23	25.81	23.22	22.42	23.49

PCS Band									
Modes	GSM1900 (GSM)			GSM1900 (EDGE class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Conducted Power (dBm)	29.09	29.26	29.17	26.44	25.92	25.73	21.72	21.86	21.78

AWS Band			
Modes	WCDMA Band IV (RMC 12.2Kbps)		
Channel	1312(Low)	1413 (Mid)	1513 (High)
Frequency (MHz)	1712.4	1732.6	1752.6
Conducted Power (dBm)	22.16	22.21	22.24

Note: maximum burst average power for GSM, and maximum average power for WCDMA.

3.2 Peak-to-Average Ratio

3.2.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. For GSM/EGPRS operating modes:
 - a. Set EUT in maximum power output.
 - b. Set the RBW = 1MHz, VBW = 3MHz, Peak detector on spectrum analyzer for first trace.
 - c. Set the RBW = 1MHz, VBW = 3MHz, RMS detector on spectrum analyzer for second trace.
 - d. The wanted burst signal is triggered by spectrum analyzer, and measured respectively the peak level and Mean level without burst-off time, after system simulator has synchronized with the spectrum analyzer.
4. For UMTS operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option on the spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.2.4 Test Setup

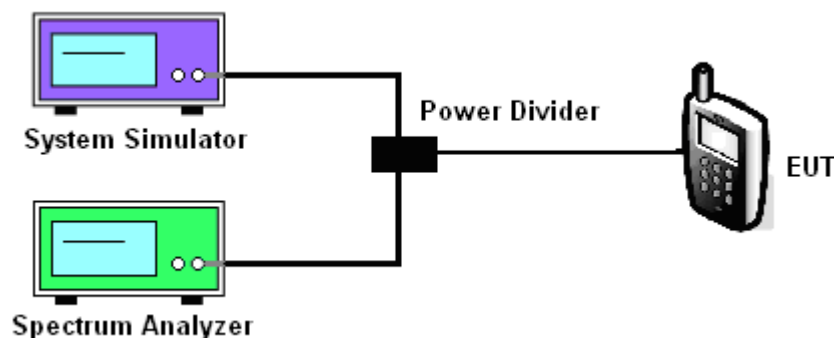

3.2.5 Test Result of Peak-to-Average Ratio



Cellular Band									
Modes	GSM850 (GSM)			GSM850 (EDGE class 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	826.4	836.4	846.6
Peak-to-Average Ratio (dB)	0.30	0.29	0.29	2.90	2.70	2.87	2.78	2.78	2.26

PCS Band									
Modes	GSM1900 (GSM)			GSM1900 (EDGE class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Peak-to-Average Ratio (dB)	0.26	0.26	0.26	2.69	2.77	2.78	2.20	2.81	2.61

AWS Band			
Modes	WCDMA Band IV (RMC 12.2Kbps)		
Channel	1312(Low)	1413 (Mid)	1513 (High)
Frequency (MHz)	1712.4	1732.6	1752.6
Peak-to-Average Ratio (dB)	2.84	2.90	2.96


3.2.6 Test Result (Plots) of Peak-to-Average Ratio

Band :	GSM 850	Test Mode :	GSM Link (GMSK)
---------------	---------	--------------------	-----------------

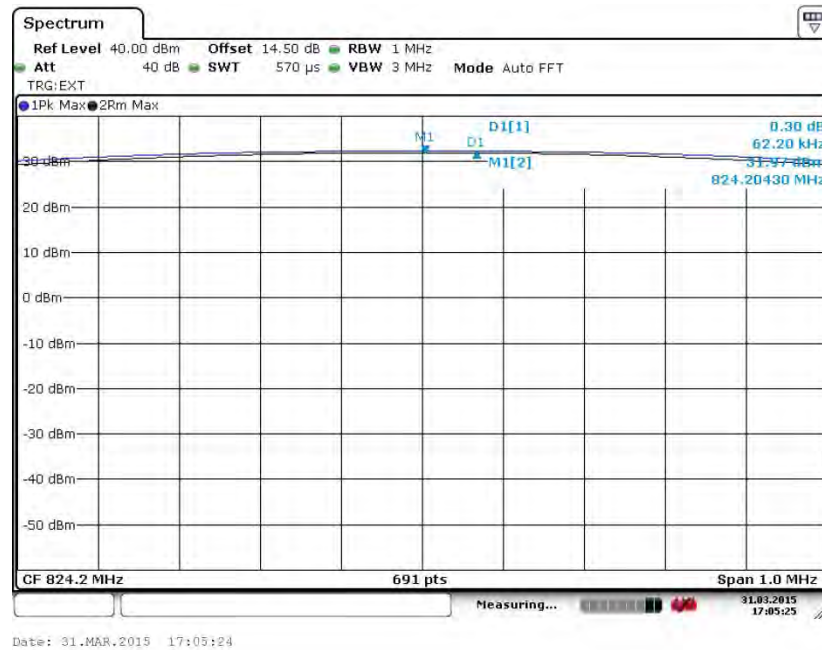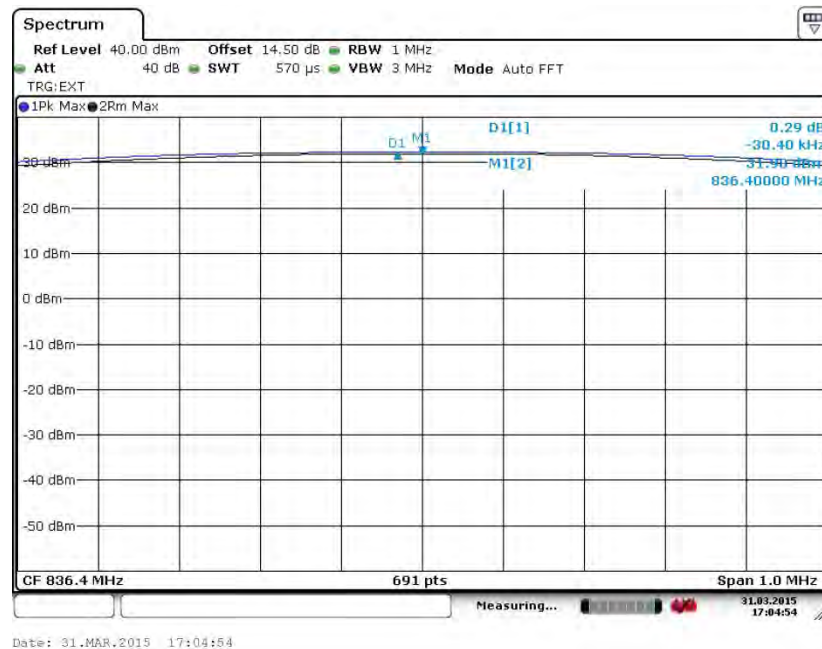Peak-to-Average Ratio on Channel 128 (824.2 MHz)

Peak-to-Average Ratio on Channel 189 (836.4 MHz)

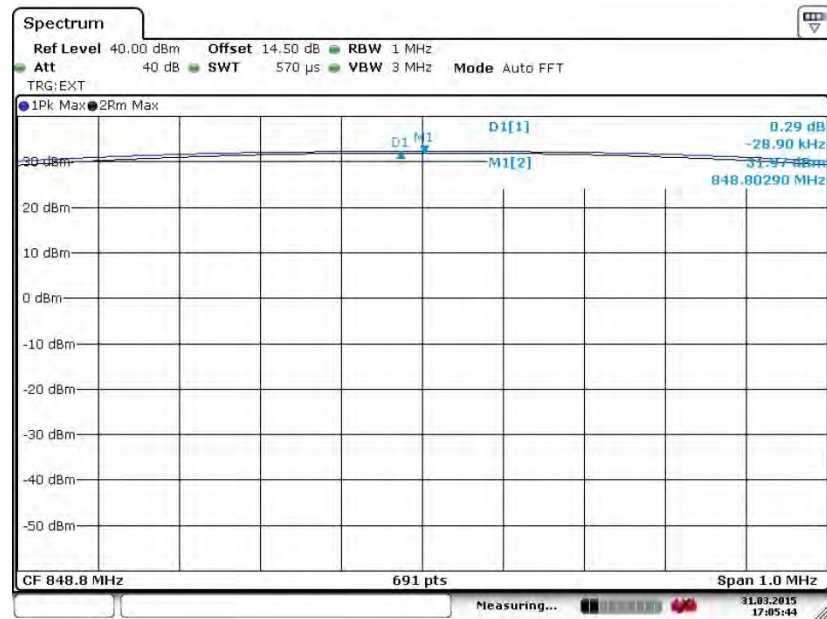


Peak-to-Average Ratio on Channel 251 (848.8 MHz)




Date: 31.MAR.2015 17:05:43




Band :	GSM 850	Test Mode :	EDGE class 8 Link (8PSK)
--------	---------	-------------	--------------------------

Peak-to-Average Ratio on Channel 128 (824.2 MHz)

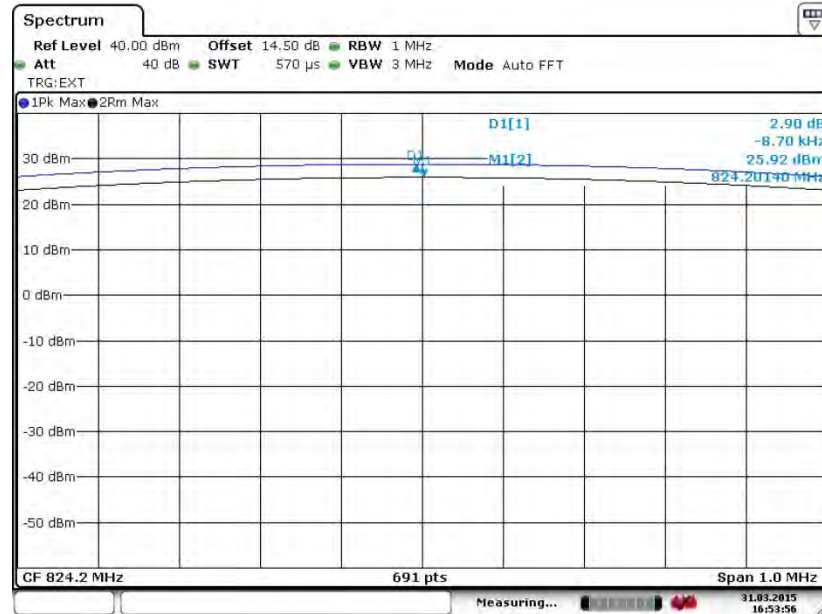

Date: 31.MAR.2015 16:53:56


Peak-to-Average Ratio on Channel 189 (836.4 MHz)

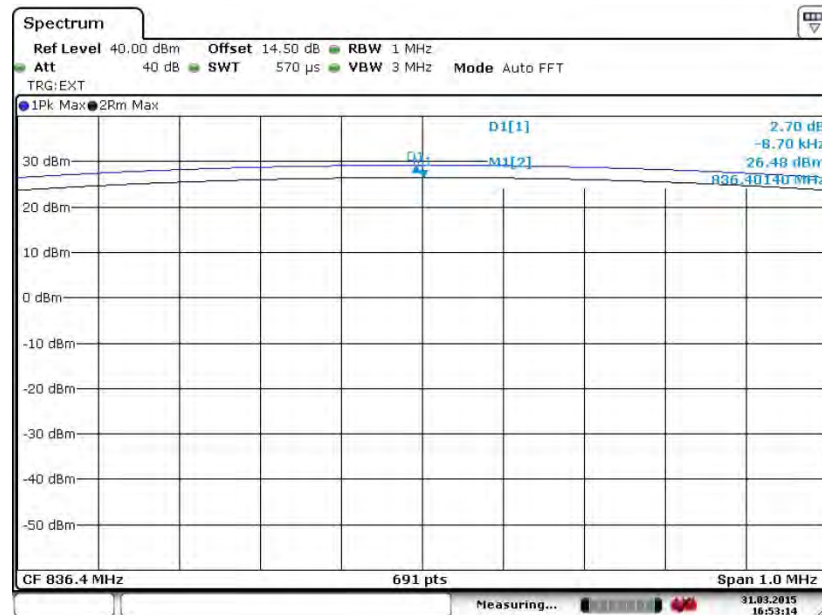

Date: 31.MAR.2015 16:53:14



Peak-to-Average Ratio on Channel 251 (848.8 MHz)

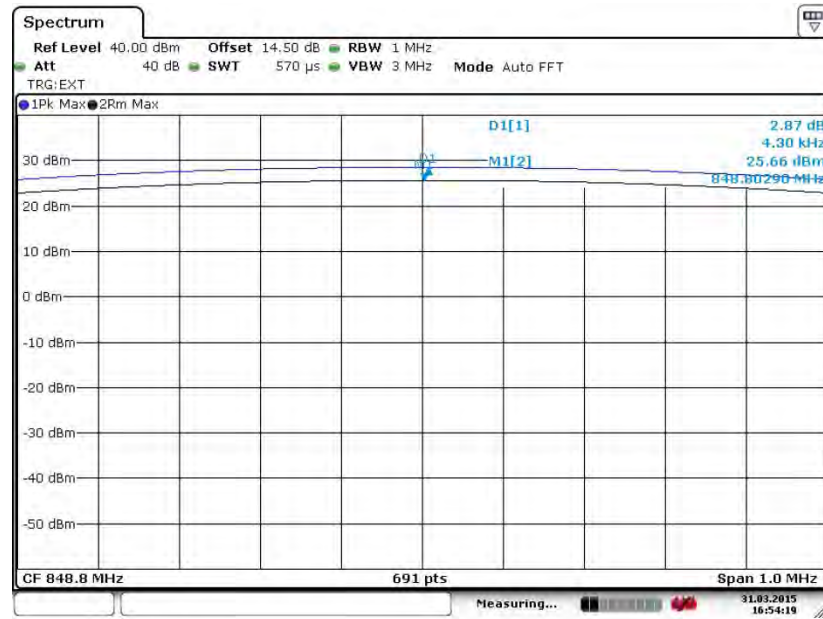


Date: 31.MAR.2015 16:54:19




Band :	GSM 1900	Test Mode :	GSM Link (GMSK)
--------	----------	-------------	-----------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

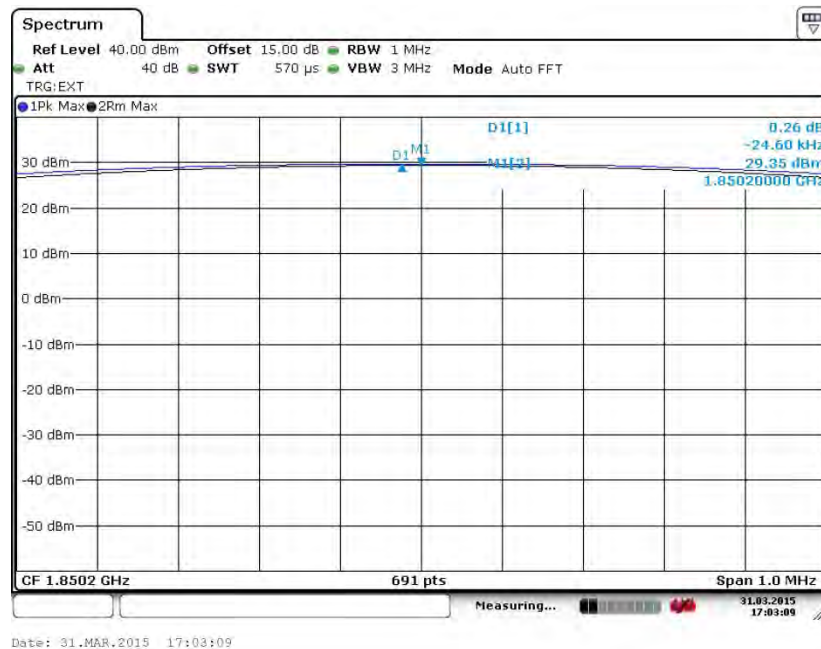


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

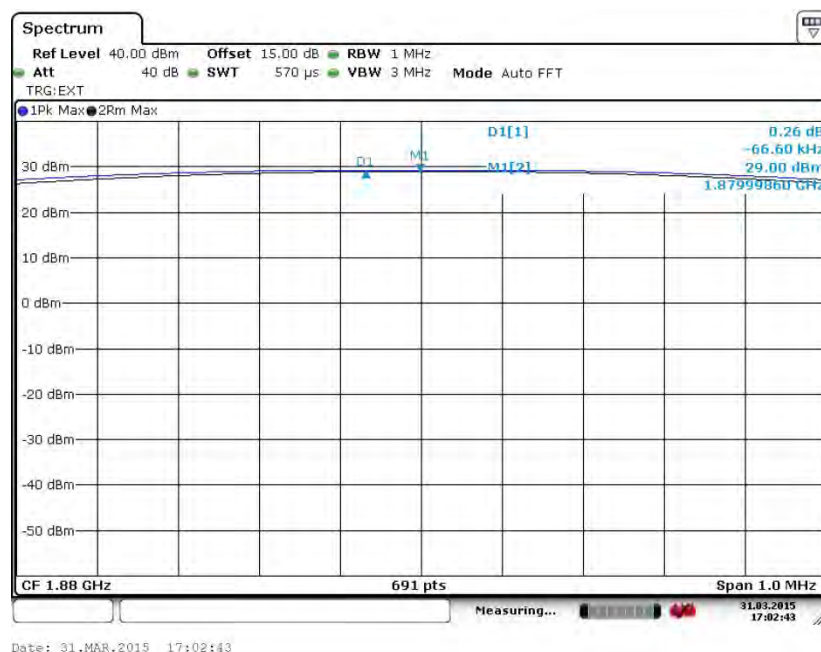




Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

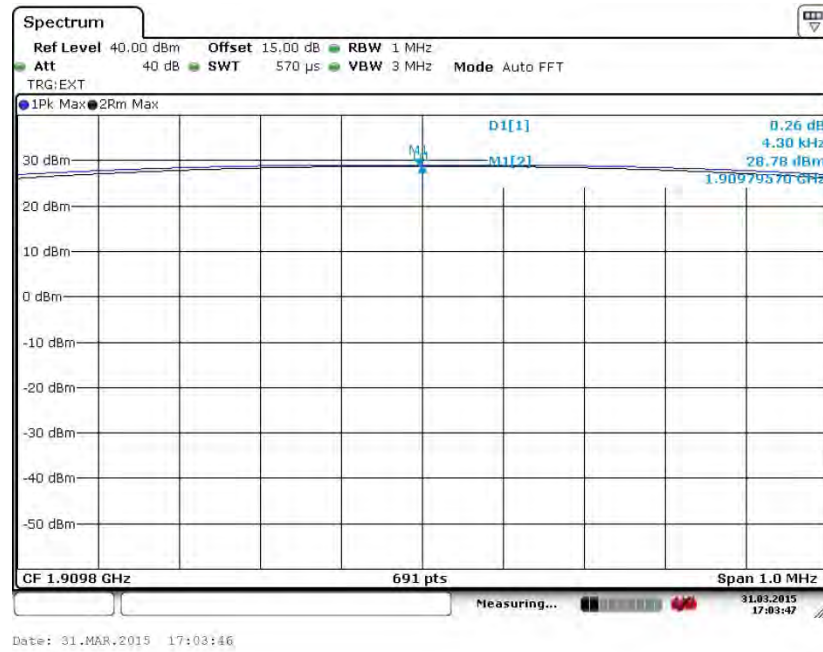




Band :	GSM 1900	Test Mode :	EDGE class 8 Link (8PSK)
--------	----------	-------------	--------------------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

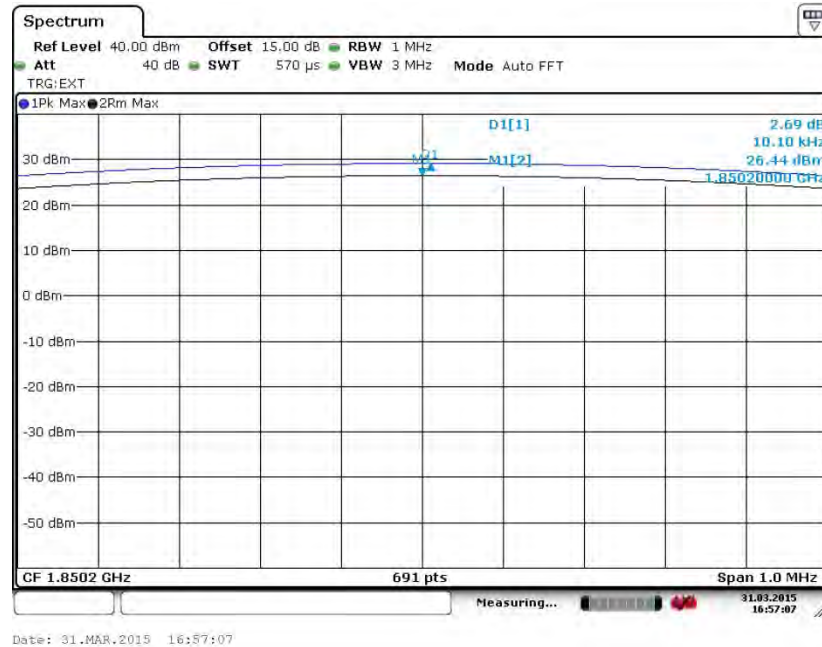


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

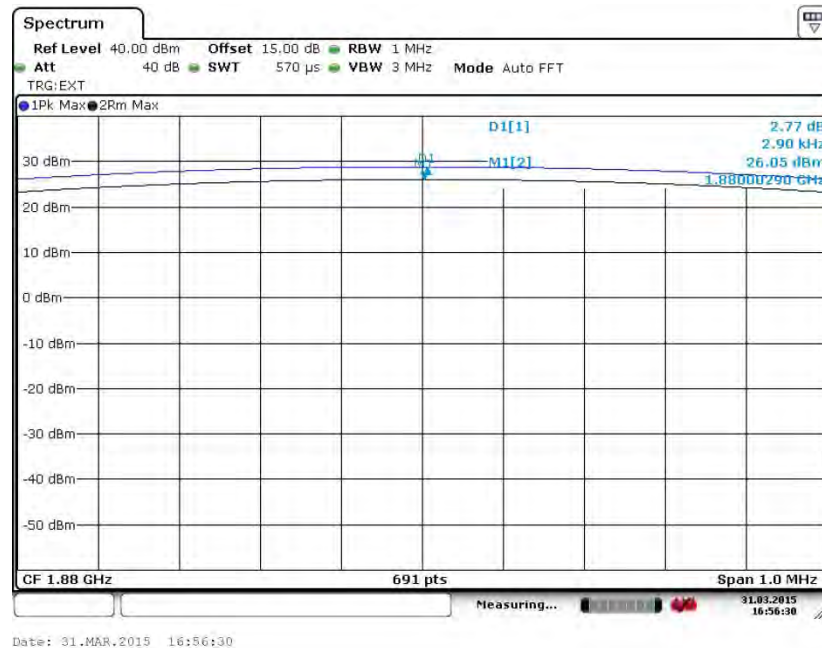





Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

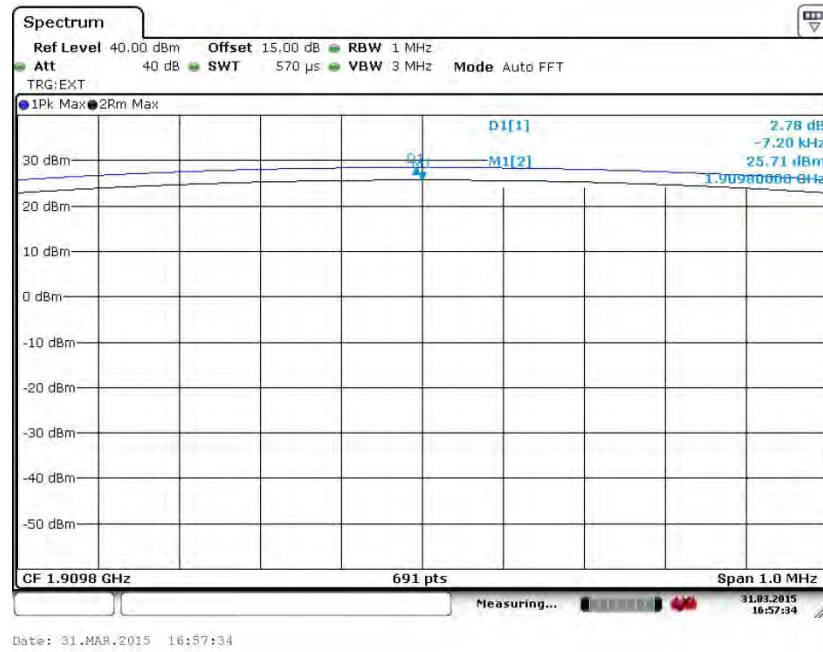




Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
---------------	--------------	--------------------	--------------------------

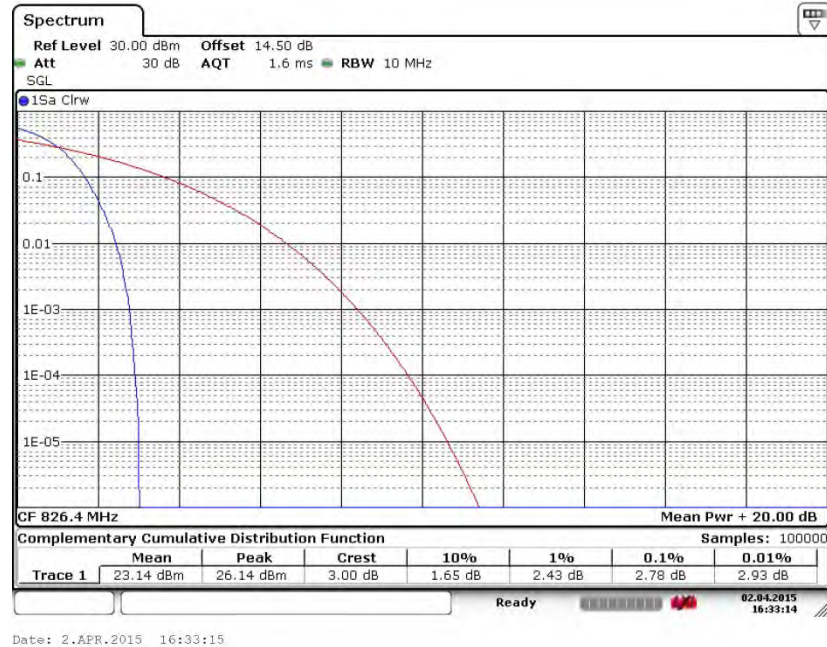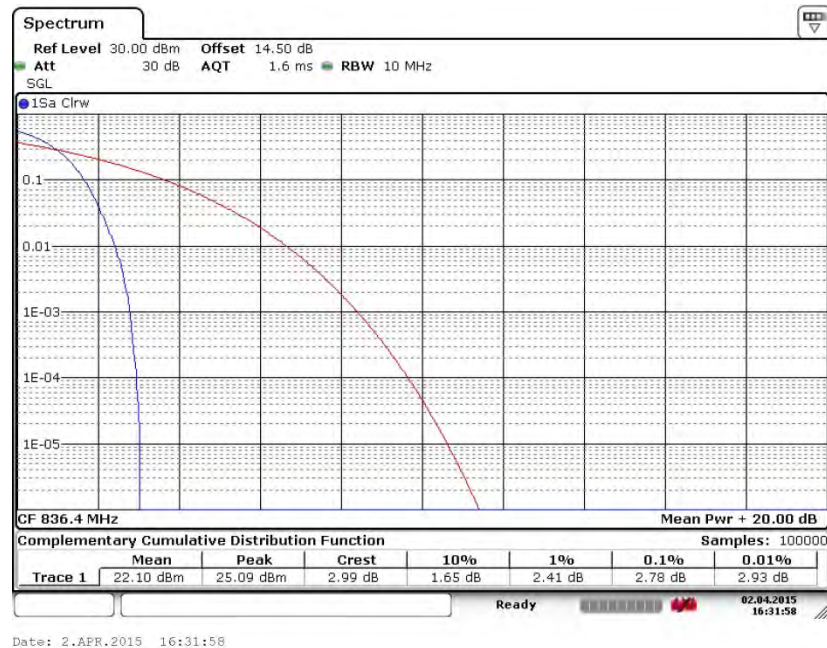Peak-to-Average Ratio on Channel 4132 (826.4 MHz)**Peak-to-Average Ratio on Channel 4182 (836.4 MHz)**

Peak-to-Average Ratio on Channel 4233 (846.6 MHz)

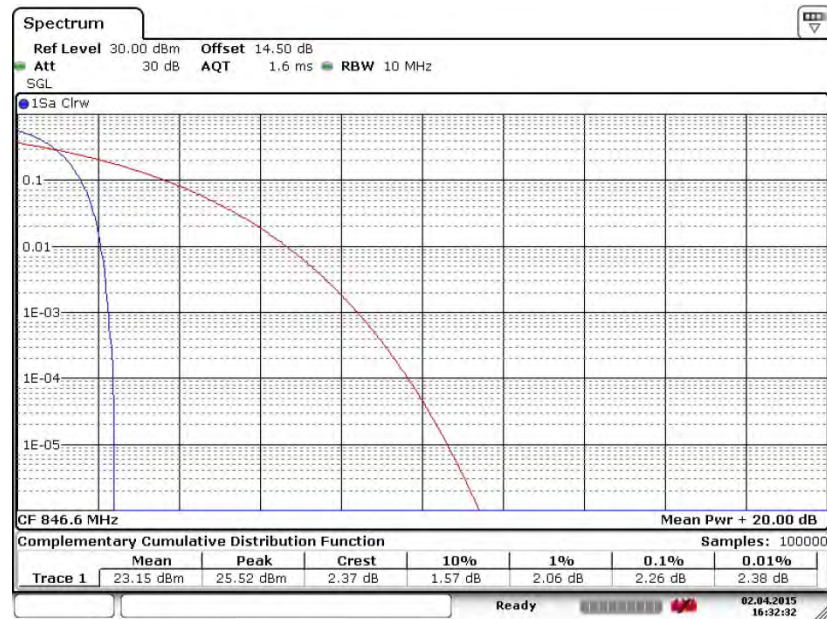


Date: 2.APR.2015 16:32:32




Band :	WCDMA Band IV	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

Peak-to-Average Ratio on Channel 1312 (1712.4 MHz)

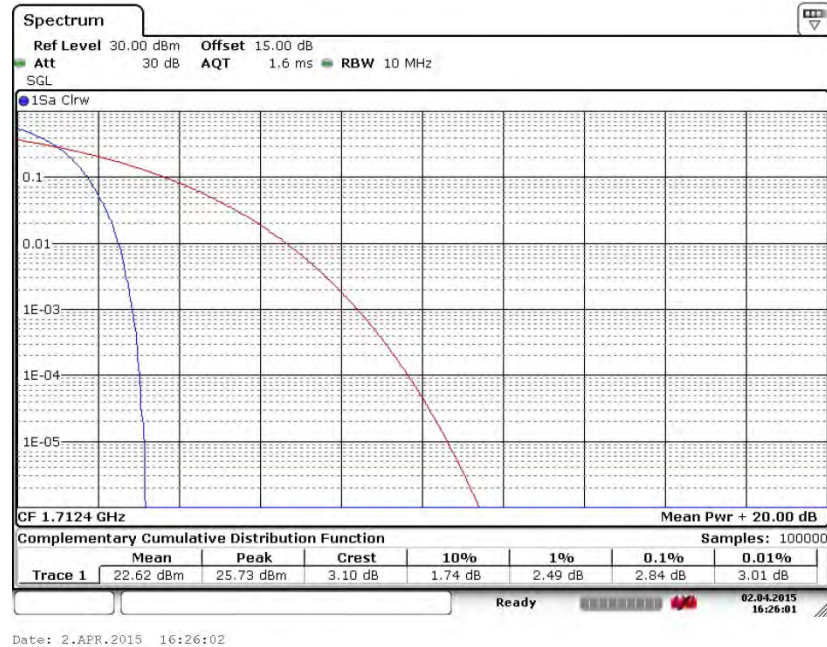


Peak-to-Average Ratio on Channel 1413 (1732.6 MHz)

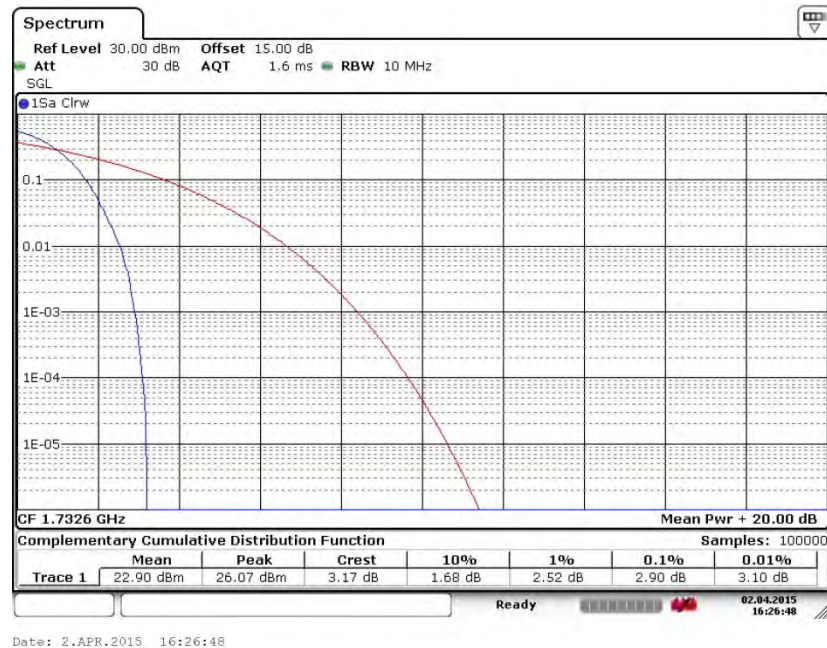



Peak-to-Average Ratio on Channel 1513 (1752.6 MHz)

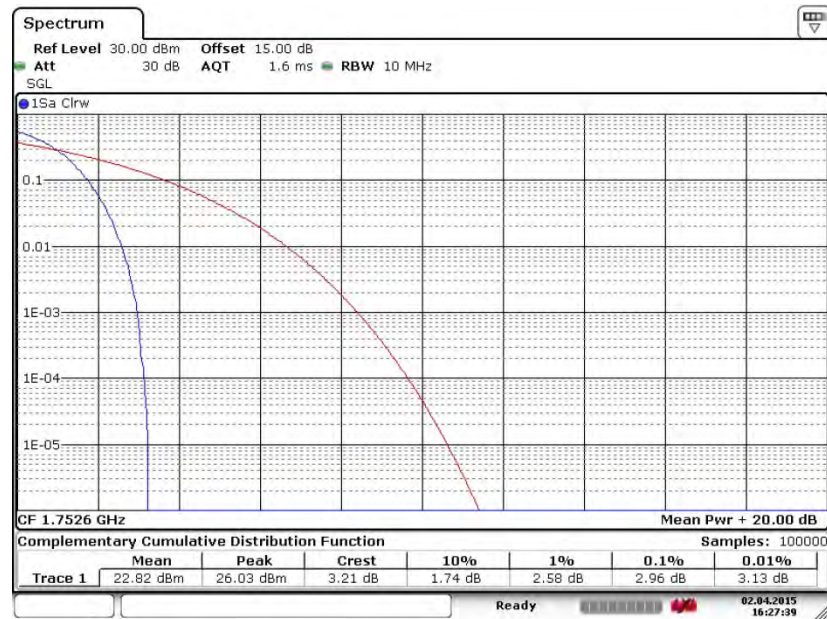


Date: 2.APR.2015 16:27:39




Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

Peak-to-Average Ratio on Channel 9262 (1852.4 MHz)

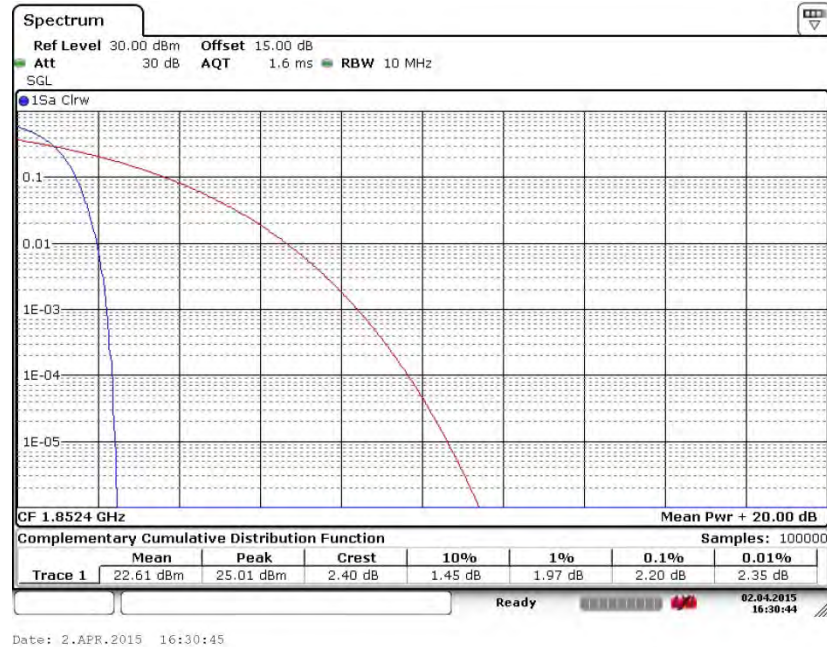


Peak-to-Average Ratio on Channel 9400 (1880.0 MHz)

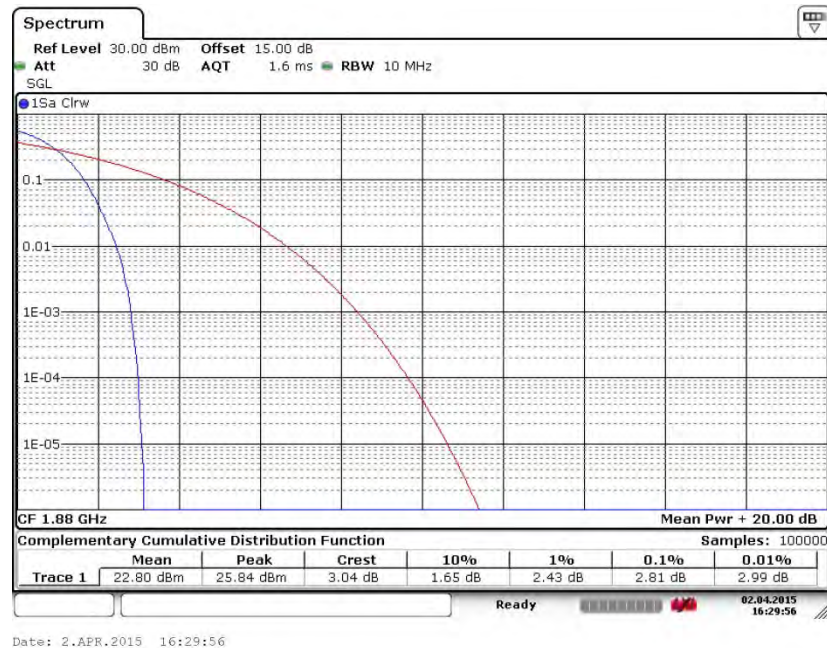



Peak-to-Average Ratio on Channel 9538 (1907.6 MHz)

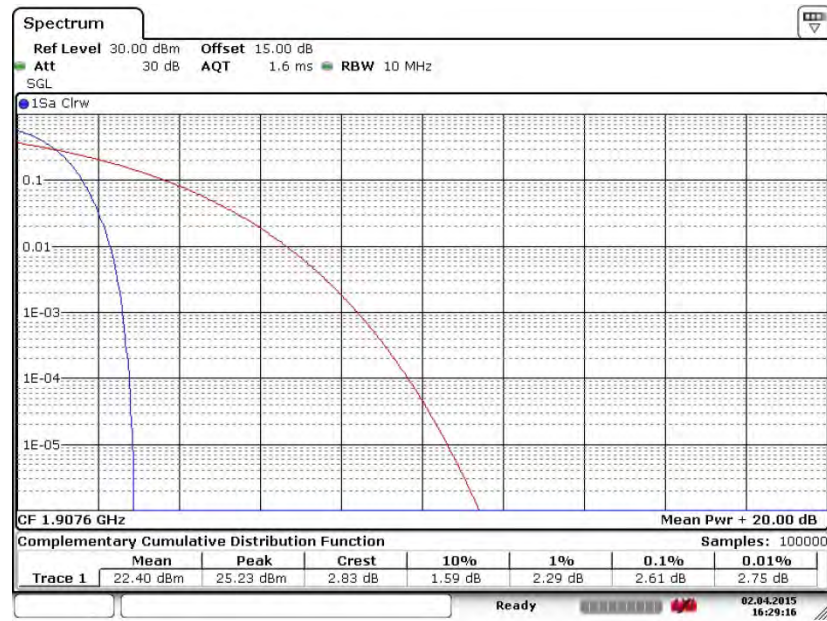

Date: 2.APR.2015 16:29:16

3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

3.3.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band) and 1 Watts (AWS Band).

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.2.1. (for CDMA/WCDMA), Section 5.2.2.2 (for GSM/GPRS/EDGE) and ANSI / TIA-603-C-2004 Section 2.2.17.
2. The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
3. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
4. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$. Take the record of the output power at substitution antenna.



	GSM/GPRS/EDGE	WCDMA/HSPA
SPAN	500kHz	10MHz
RBW	10kHz	100kHz
VBW	30kHz	300kHz
Detector	RMS	RMS
Trace	Average	Average
Average Type	Power	Power
Sweep Count	100	100

3.3.4 Test Result of ERP

GSM850 (GSM) Radiated Power ERP					
Channel	Frequency (MHz)	Horizontal		Vertical	
		ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)
Lowest	824.20	15.42	0.0348	26.73	0.4710
Middle	836.40	15.79	0.0379	27.19	0.5236
Highest	848.80	15.87	0.0386	27.06	0.5082
Limit	ERP < 7W	Result		PASS	

GSM850 (EDGE class 8) Radiated Power ERP					
Channel	Frequency (MHz)	Horizontal		Vertical	
		ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)
Lowest	824.20	8.68	0.0074	19.79	0.0953
Middle	836.40	9.51	0.0089	21.04	0.1271
Highest	848.80	10.18	0.0104	21.49	0.1409
Limit	ERP < 7W	Result		PASS	

WCDMA Band V (RMC 12.2Kbps) Radiated Power ERP					
Channel	Frequency (MHz)	Horizontal		Vertical	
		ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)
Lowest	826.40	5.68	0.0037	16.93	0.0493
Middle	836.40	4.91	0.0031	16.45	0.0442
Highest	846.60	7.43	0.0055	18.64	0.0731
Limit	ERP < 7W	Result		PASS	

3.3.5 Test Result of EIRP

GSM1900 (GSM) Radiated Power EIRP					
Channel	Frequency (MHz)	Horizontal		Vertical	
		EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	1850.20	28.44	0.6982	29.12	0.8166
Middle	1880.00	28.44	0.6982	29.02	0.7980
Highest	1909.80	28.61	0.7261	29.15	0.8222
Limit	EIRP < 2W	Result		PASS	

GSM1900 (EDGE class 8) Radiated Power EIRP					
Channel	Frequency (MHz)	Horizontal		Vertical	
		EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	1850.20	26.82	0.4808	27.48	0.5598
Middle	1880.00	26.07	0.4046	26.55	0.4519
Highest	1909.80	24.91	0.3097	25.23	0.3334
Limit	EIRP < 2W	Result		PASS	

WCDMA Band II (RMC 12.2Kbps) Radiated Power EIRP					
Channel	Frequency (MHz)	Horizontal		Vertical	
		EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	1852.40	22.65	0.1841	23.22	0.2099
Middle	1880.00	22.26	0.1683	22.93	0.1963
Highest	1907.60	22.22	0.1667	22.83	0.1919
Limit	EIRP < 2W	Result		PASS	

WCDMA Band IV(RMC 12.2Kbps) Radiated Power EIRP					
Channel	Frequency (MHz)	Horizontal		Vertical	
		EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	1712.40	24.26	0.2667	24.44	0.2780
Middle	1732.60	22.91	0.1954	23.62	0.2301
Highest	1752.60	23.50	0.2239	24.34	0.2716
Limit	EIRP < 1W	Result		PASS	

3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

5. The testing follows FCC KDB 971168 v02r02 Section 4.2.
6. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
7. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
8. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 3*RBW, peak detector, trace maximum hold.
9. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3*RBW, peak detector, trace maximum hold.

3.4.4 Test Setup

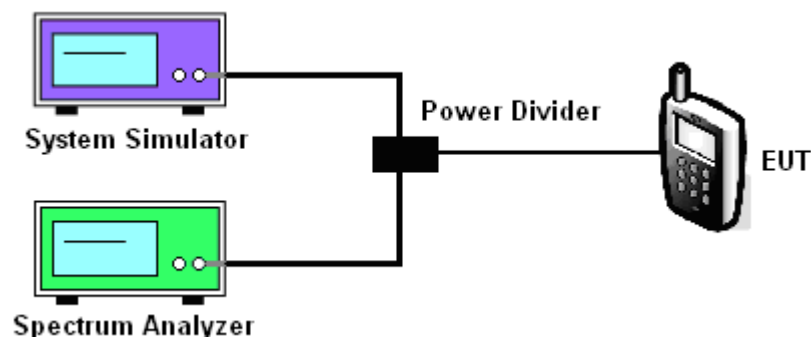

3.4.5 Test Result of Occupied Bandwidth and 26dB Bandwidth

Cellular Band						
Modes	GSM850 (GSM)			GSM850 (EDGE class 8)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8
99% OBW (kHz)	246.02	244.57	246.02	244.57	244.57	246.02
26dB BW (kHz)	315.50	318.40	316.90	293.80	295.20	289.40

PCS Band						
Modes	GSM1900 (GSM)			GSM1900 (EDGE class 8)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8
99% OBW (kHz)	243.13	246.02	243.13	248.91	250.36	244.57
26dB BW (kHz)	319.80	314.00	315.50	309.70	312.60	309.70

Cellular Band			
Modes	WCDMA Band V (RMC 12.2Kbps)		
Channel	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	826.4	836.4	846.6
99% OBW (MHz)	4.12	4.15	4.14
26dB BW (MHz)	4.69	4.70	4.70

AWS Band			
Modes	WCDMA Band IV (RMC 12.2Kbps)		
Channel	1312(Low)	1413 (Mid)	1513 (High)
Frequency (MHz)	1712.4	1732.6	1752.6
99% OBW (MHz)	4.15	4.17	4.14
26dB BW (MHz)	4.69	4.69	4.67




PCS Band			
Modes	WCDMA Band II (RMC 12.2Kbps)		
Channel	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1852.4	1880	1907.6
99% OBW (MHz)	4.17	4.15	4.17
26dB BW (MHz)	4.75	4.69	4.70



3.4.6 Test Result (Plots) of Occupied Bandwidth and 26dB Bandwidth


Band :	GSM 850	Test Mode :	GSM Link (GMSK)
--------	---------	-------------	-----------------

99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)


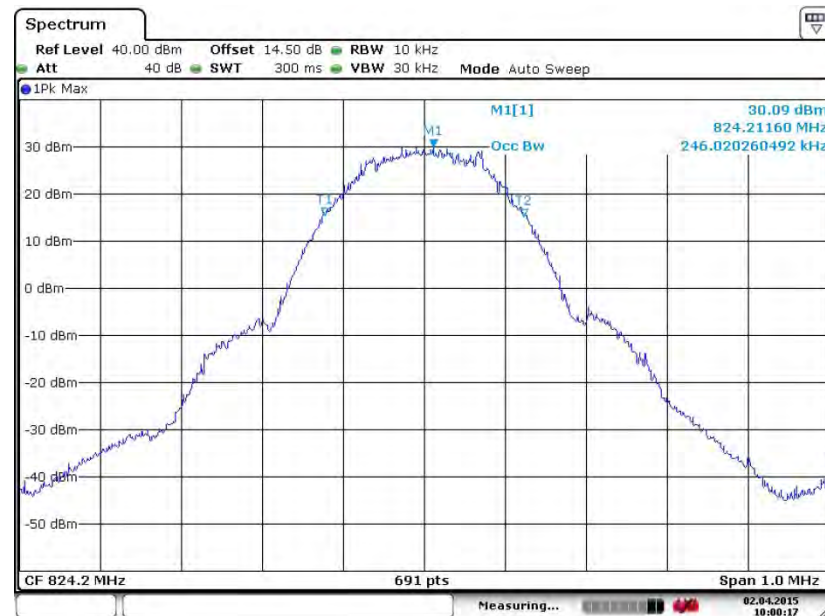


Date: 2.APR.2015 10:00:17

26dB Bandwidth Plot on Channel 128 (824.2 MHz)

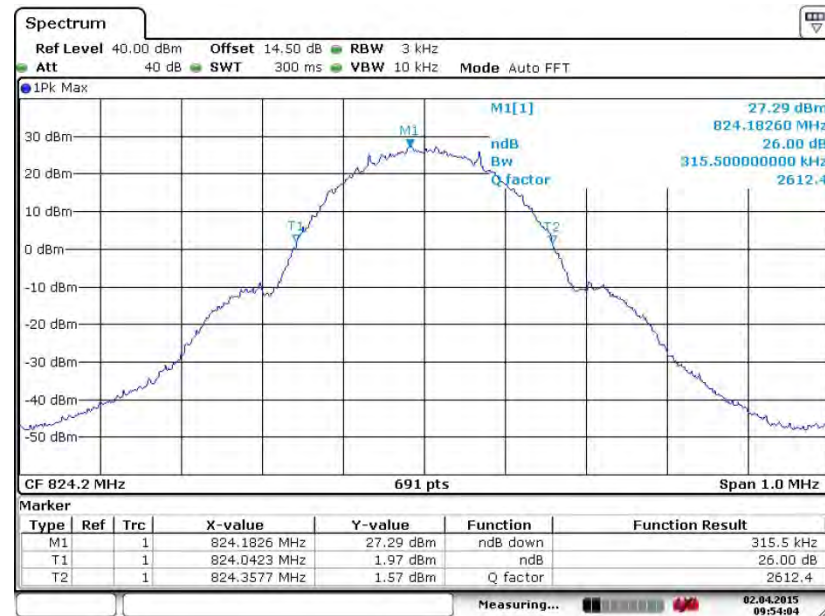


Date: 2.APR.2015 09:54:04

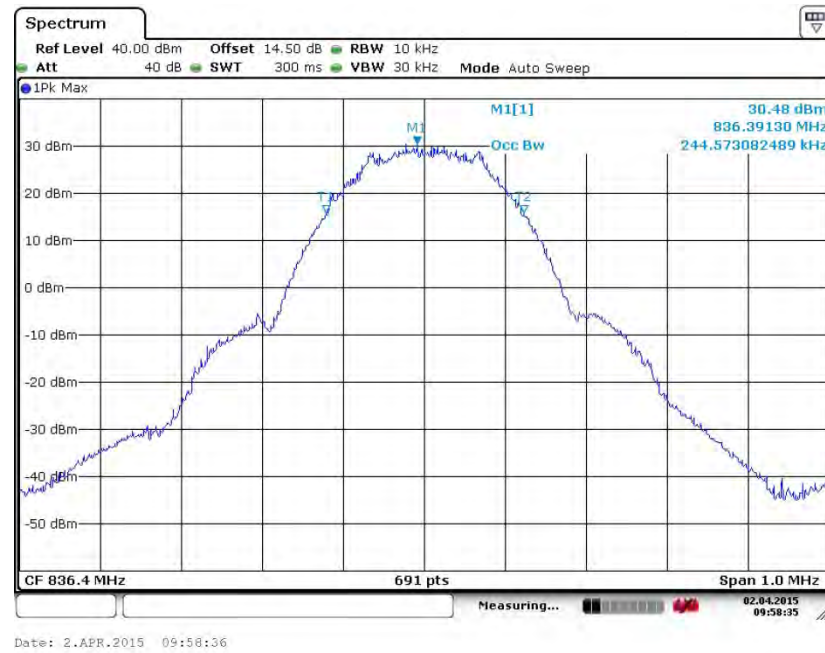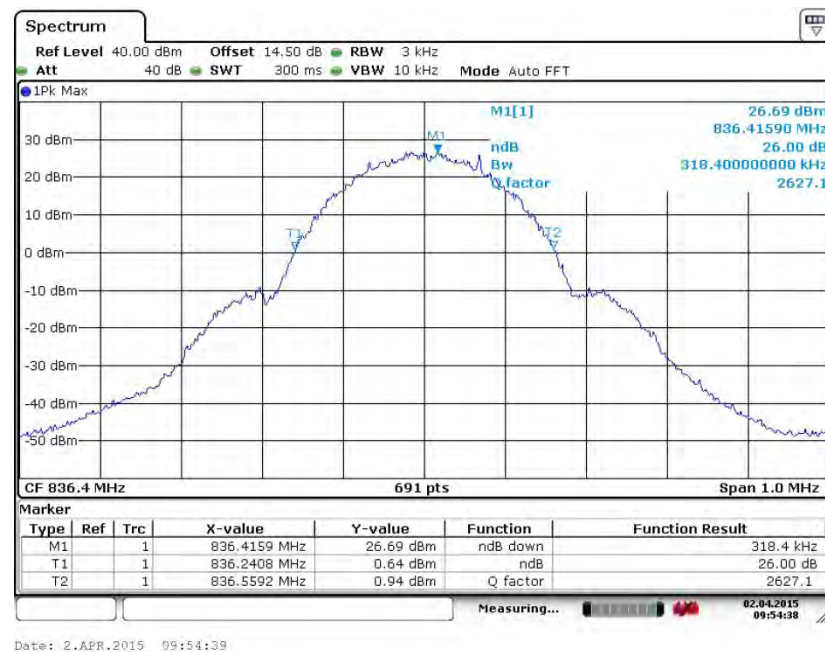
99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

26dB Bandwidth Plot on Channel 189 (836.4 MHz)

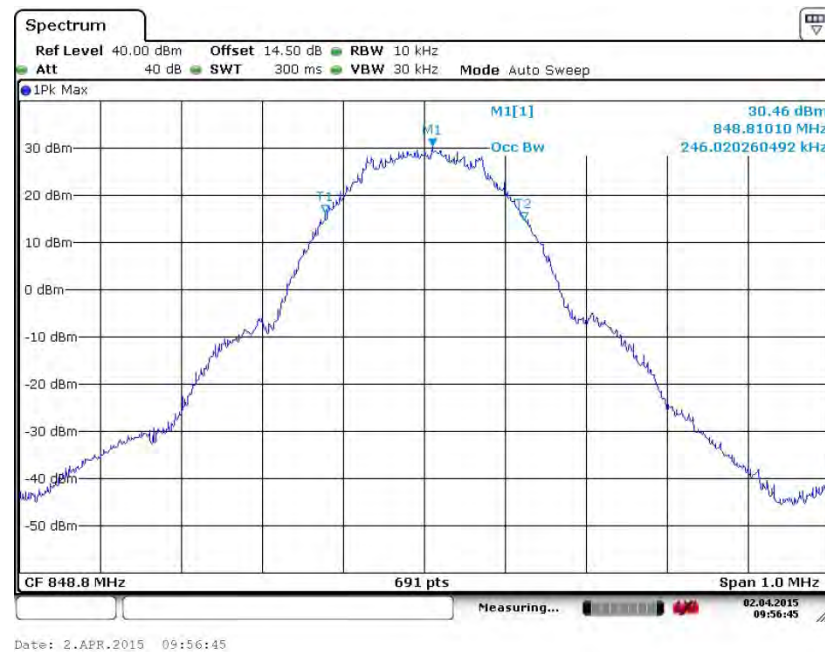


99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)


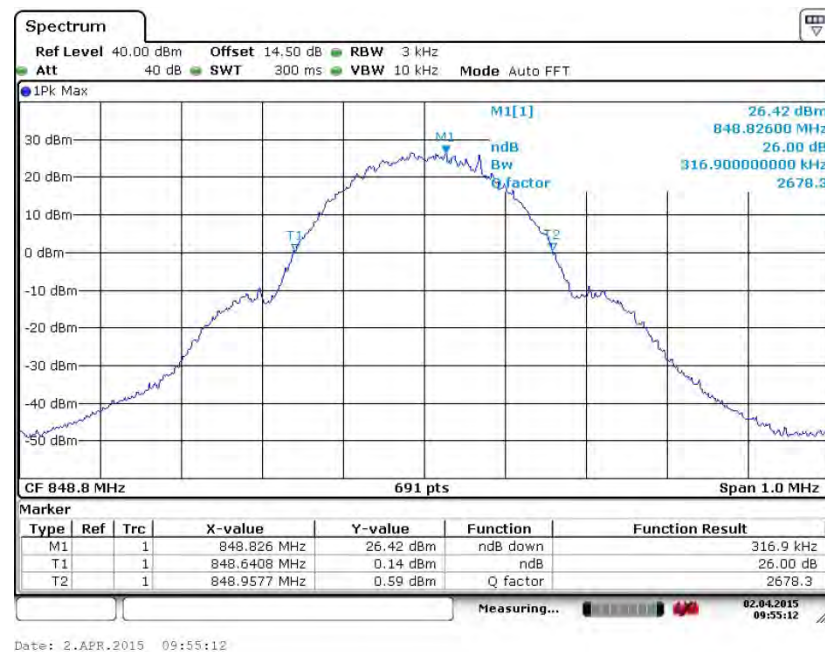


26dB Bandwidth Plot on Channel 251 (848.8 MHz)







Band : GSM 850 Test Mode : EDGE class 8 Link (8PSK)

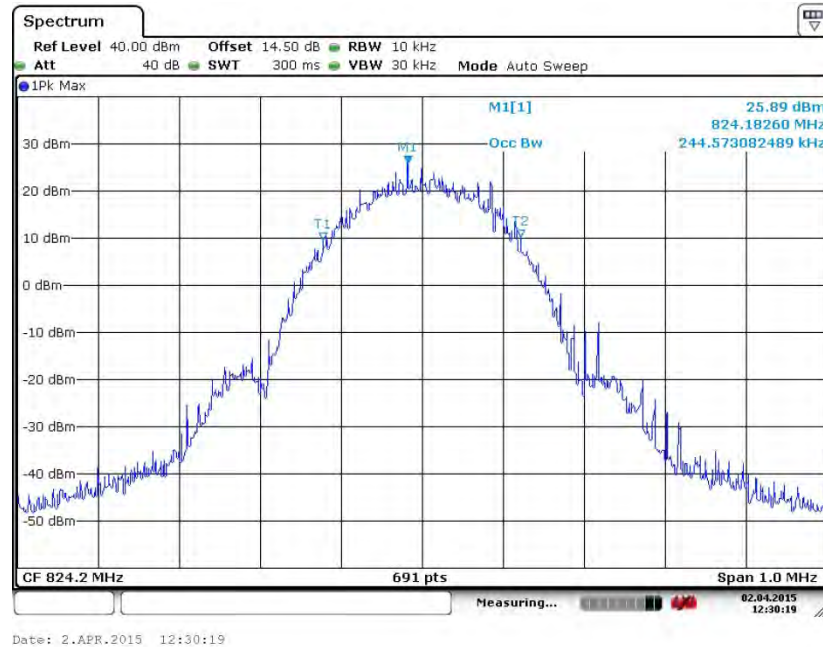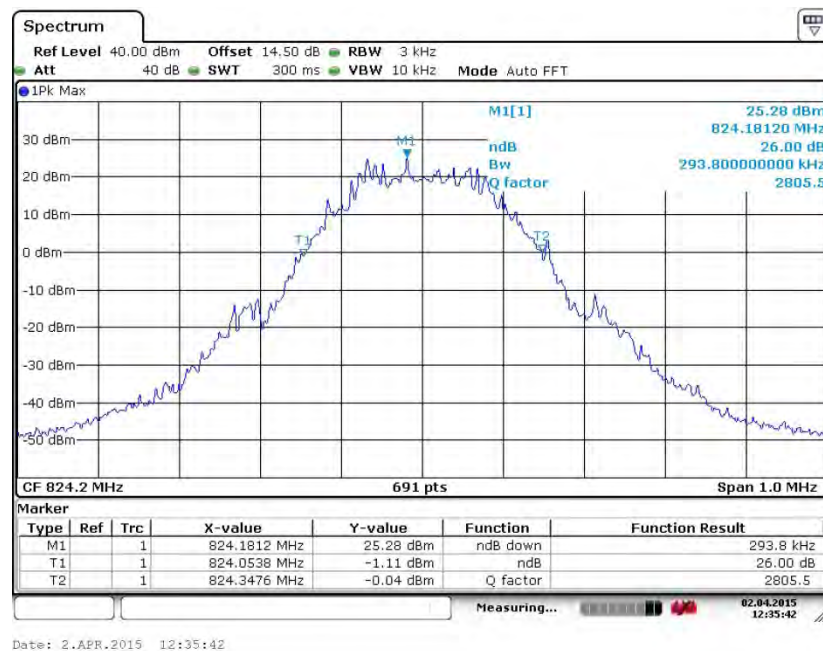99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)**26dB Bandwidth Plot on Channel 128 (824.2 MHz)**

99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

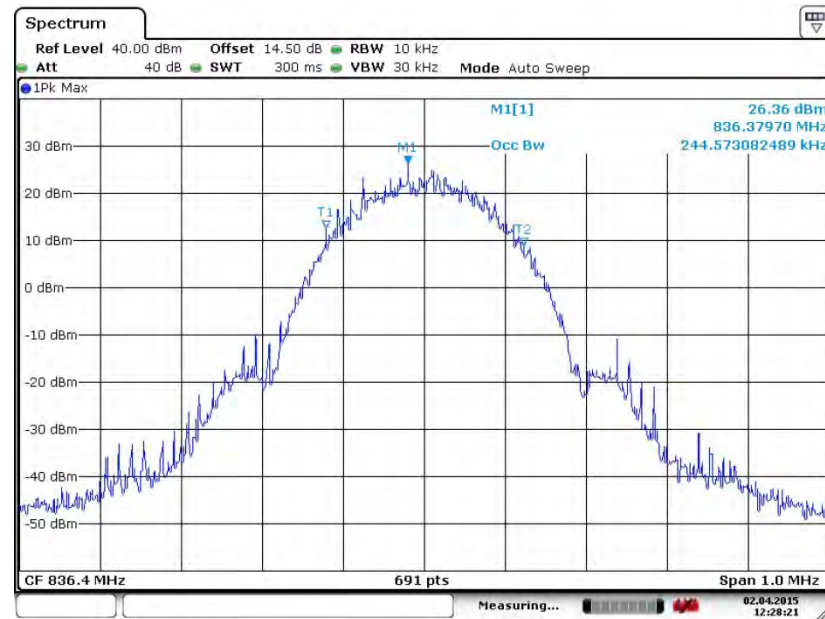


26dB Bandwidth Plot on Channel 189 (836.4 MHz)

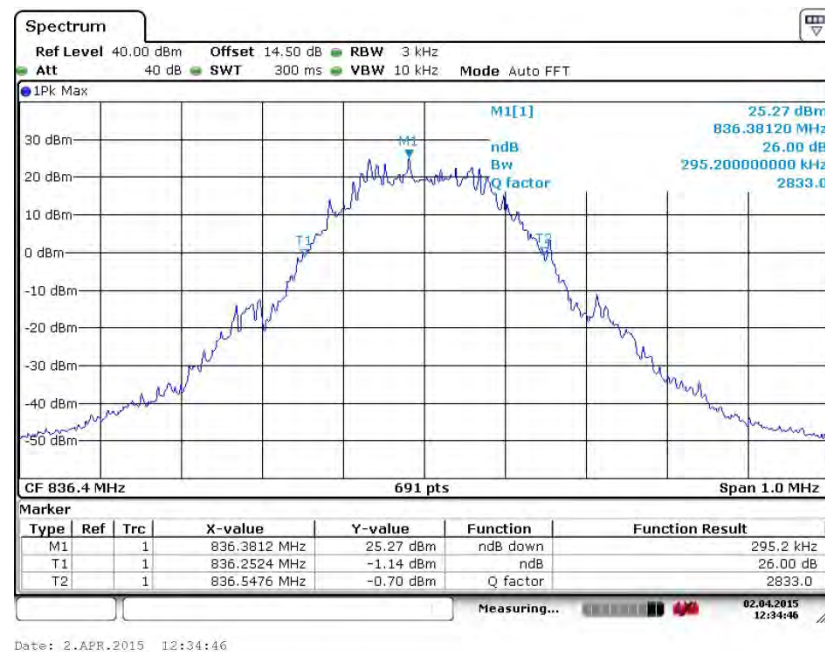




99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

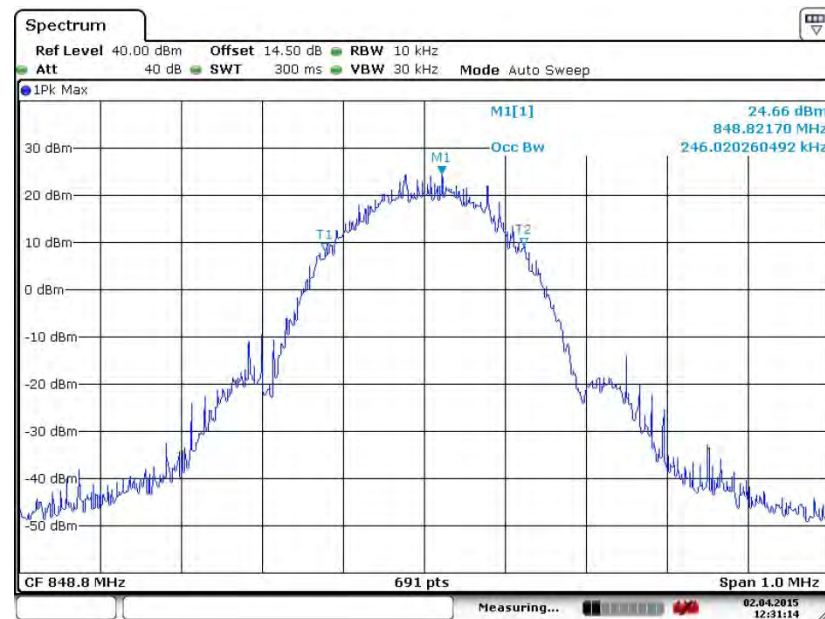

Date: 2.APR.2015 12:31:14

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

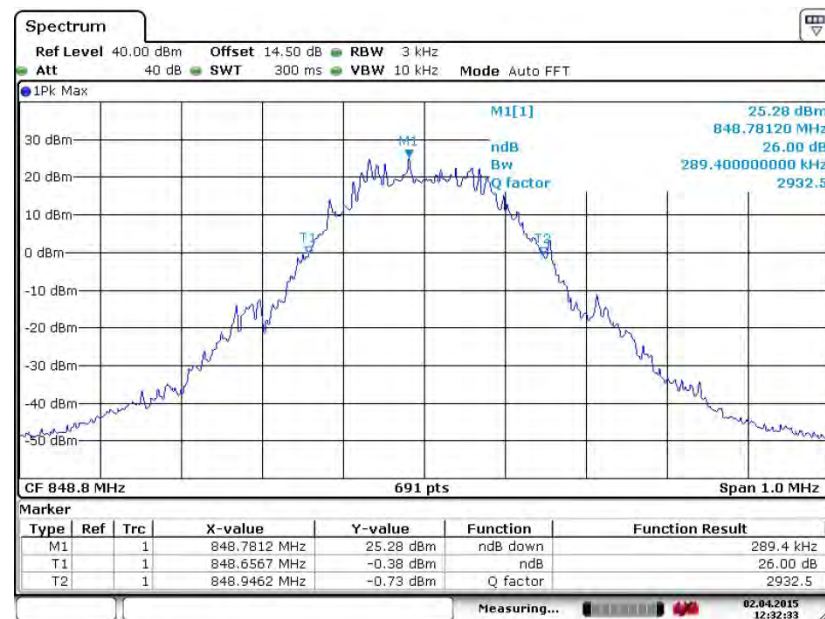

Date: 2.APR.2015 12:32:33



Band :	GSM 1900	Test Mode :	GSM Link (GMSK)
--------	----------	-------------	-----------------

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)



Date: 2.APR.2015 11:17:41


26dB Bandwidth Plot on Channel 512 (1850.2 MHz)



Date: 2.APR.2015 11:19:12




99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

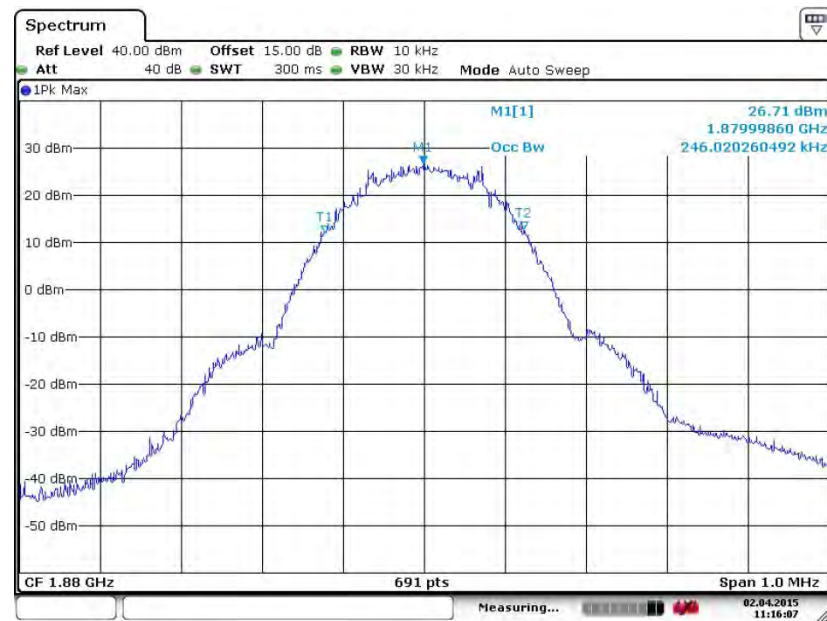

Date: 2.APR.2015 11:16:07


26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

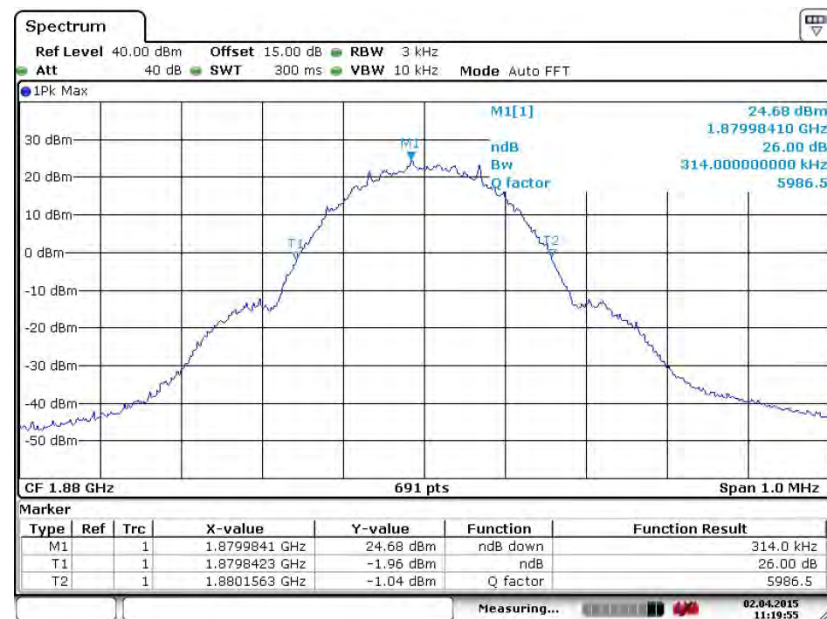

Date: 2.APR.2015 11:19:55




99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

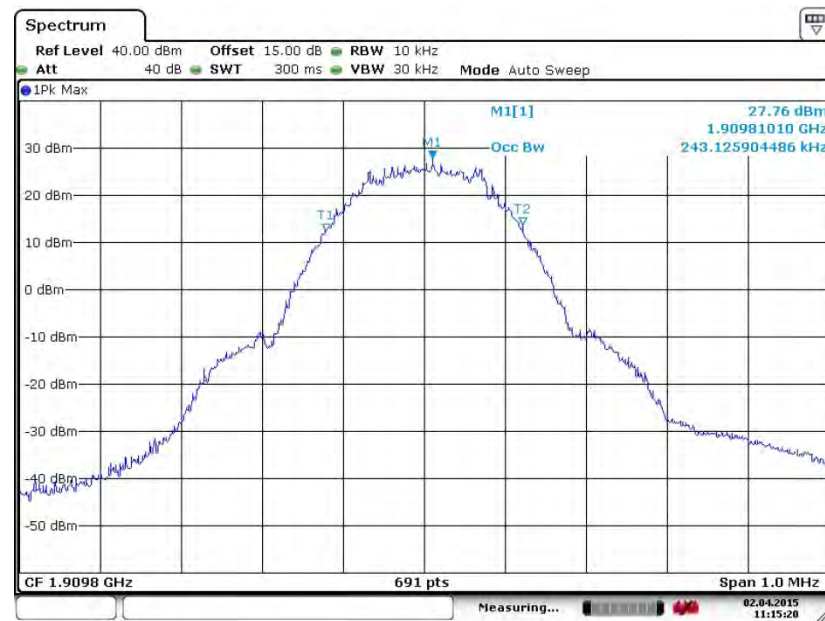

Date: 2.APR.2015 11:15:20

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

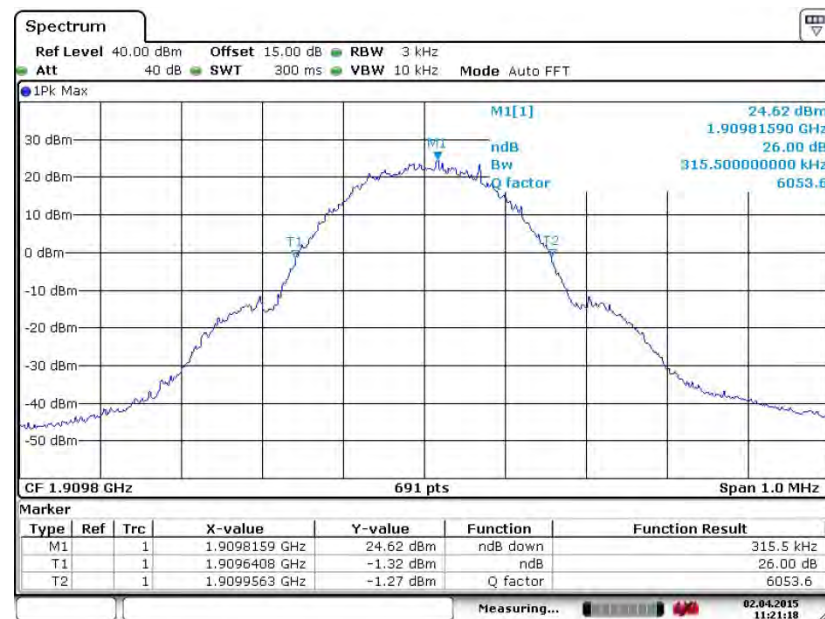


Date: 2.APR.2015 11:21:18




Band :	GSM 1900	Test Mode :	EDGE class 8 Link (8PSK)
--------	----------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

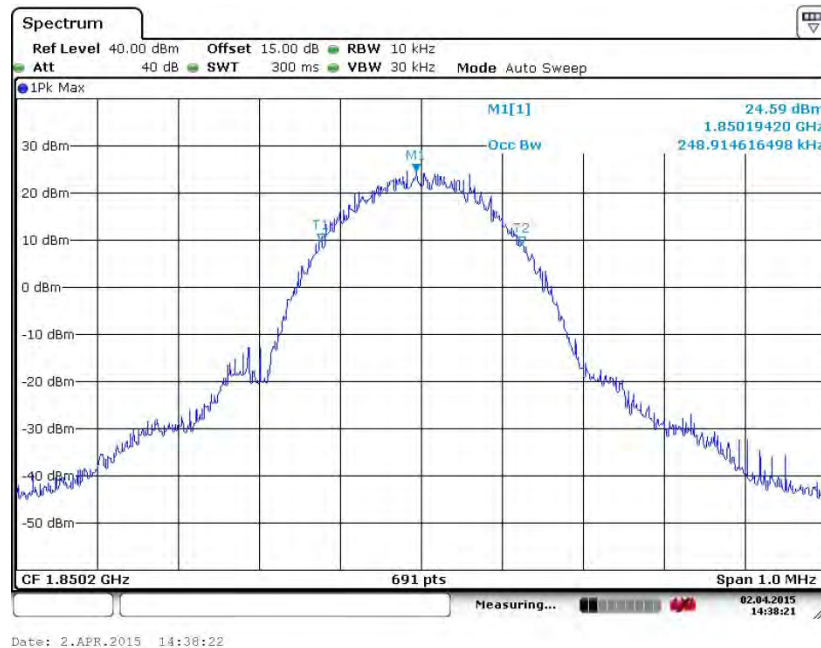


26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

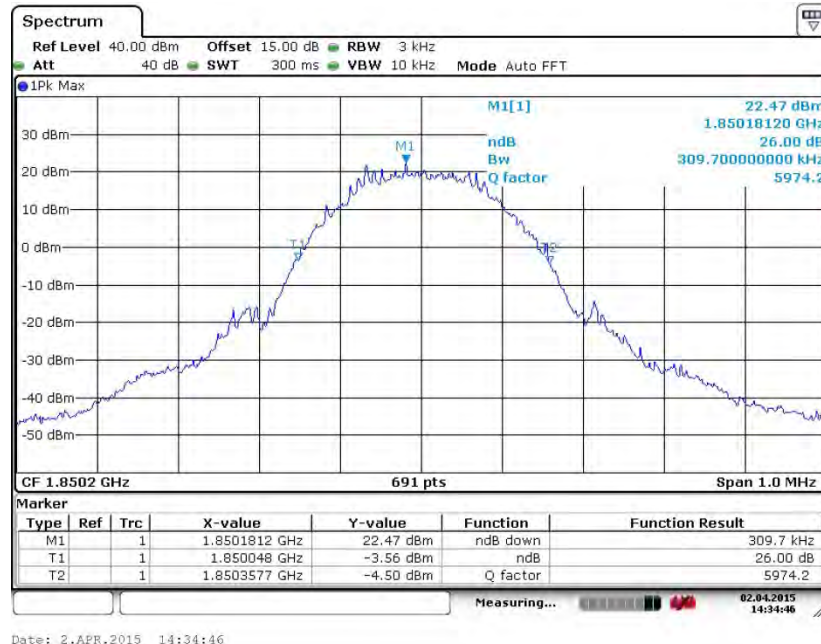




99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

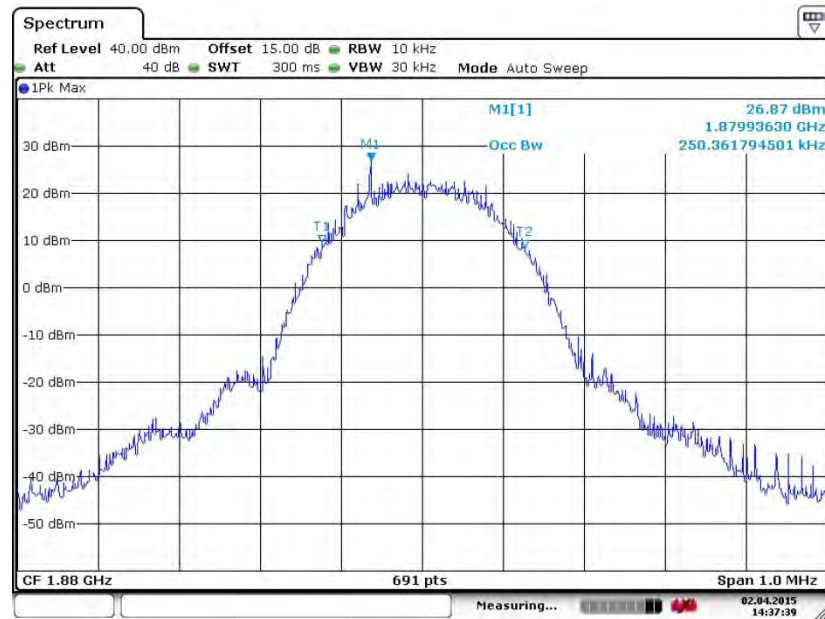

Date: 2.APR.2015 14:37:40


26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

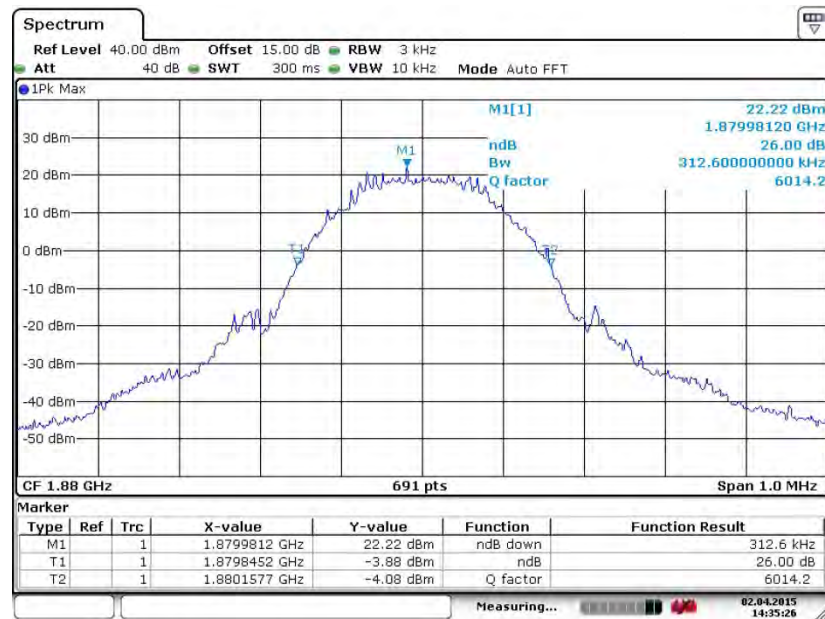

Date: 2.APR.2015 14:35:26




99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

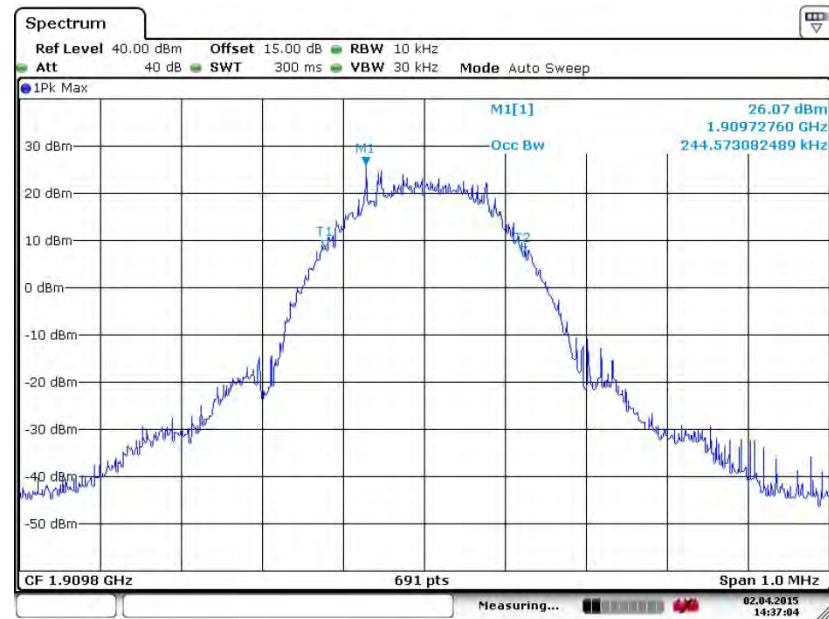

Date: 2.APR.2015 14:37:04

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

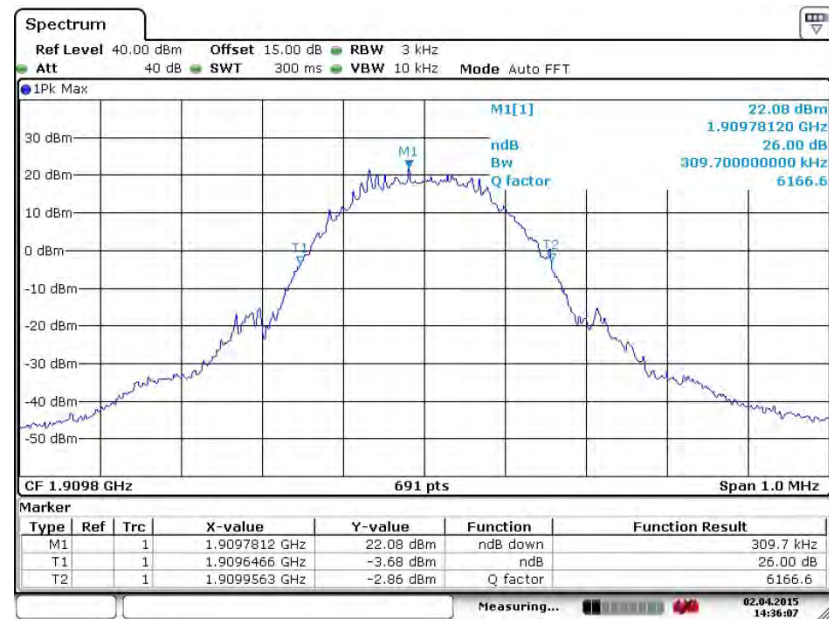

Date: 2.APR.2015 14:36:07




Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	--------------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 4132 (826.4 MHz)



26dB Bandwidth Plot on Channel 4132 (826.4 MHz)

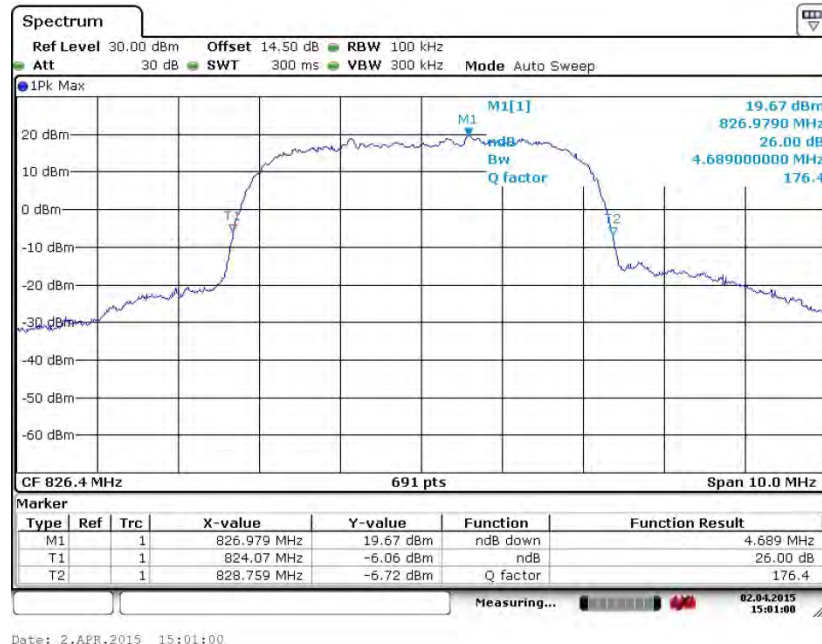




99% Occupied Bandwidth Plot on Channel 4182 (836.4 MHz)



Date: 2.APR.2015 15:07:16


26dB Bandwidth Plot on Channel 4182 (836.4 MHz)

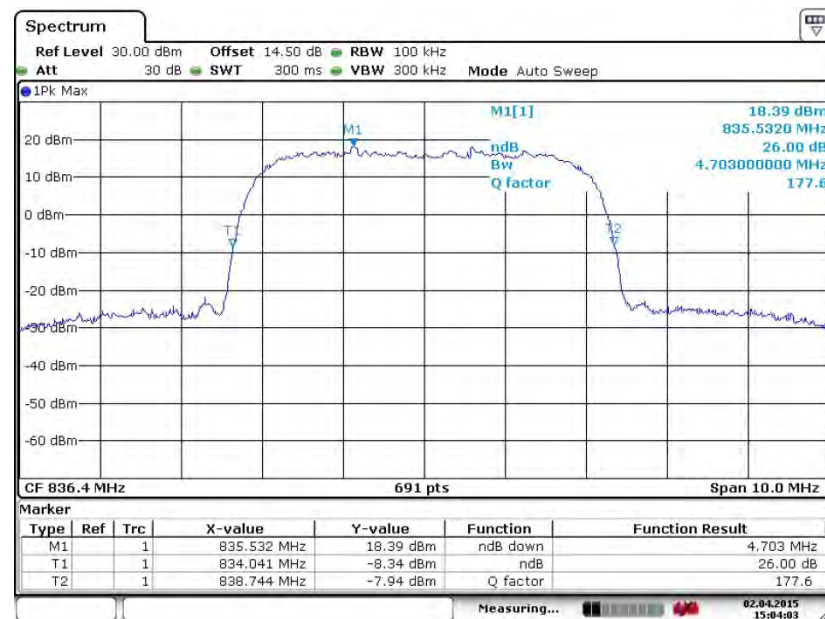


Date: 2.APR.2015 15:04:03



99% Occupied Bandwidth Plot on Channel 4233 (846.6 MHz)

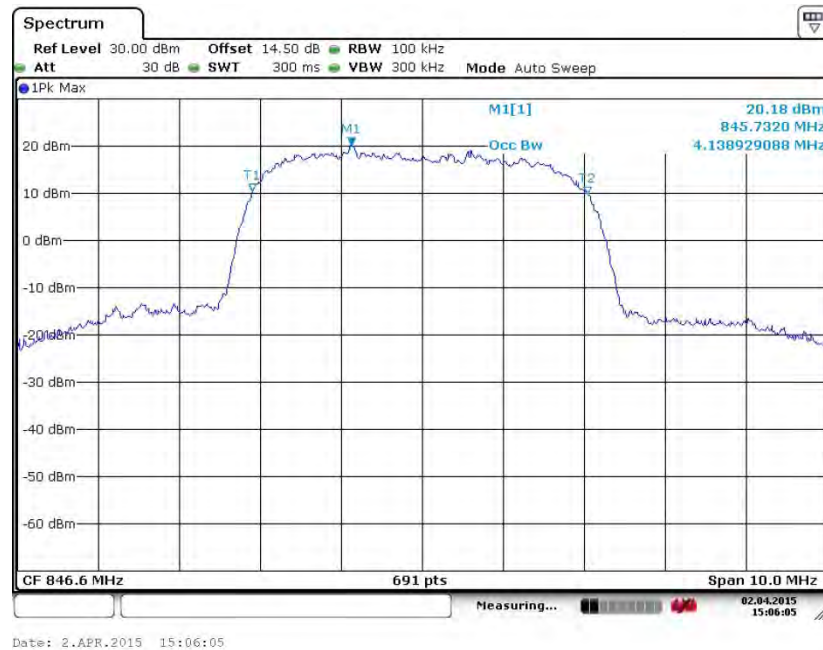


26dB Bandwidth Plot on Channel 4233 (846.6 MHz)

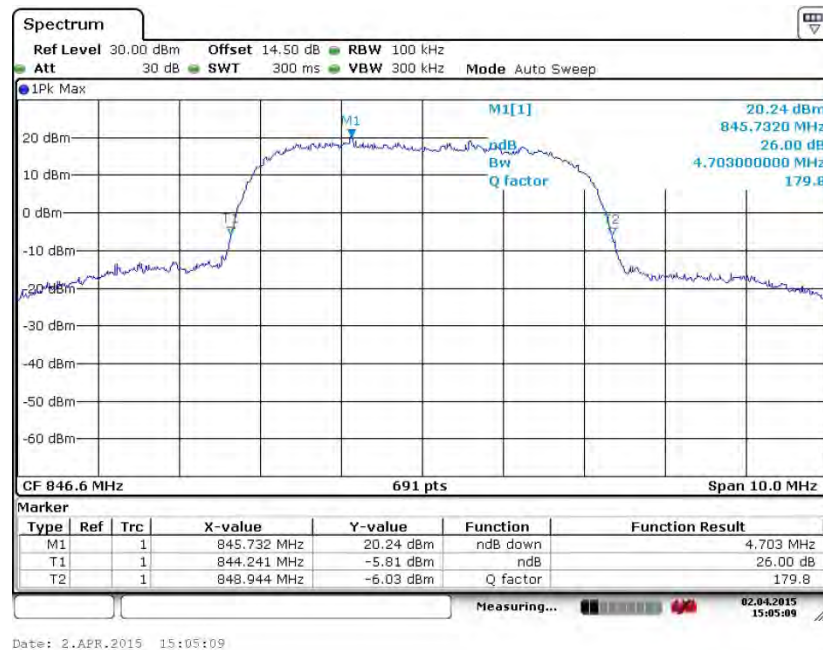



Band :	WCDMA Band IV	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 1312 (1712.4 MHz)

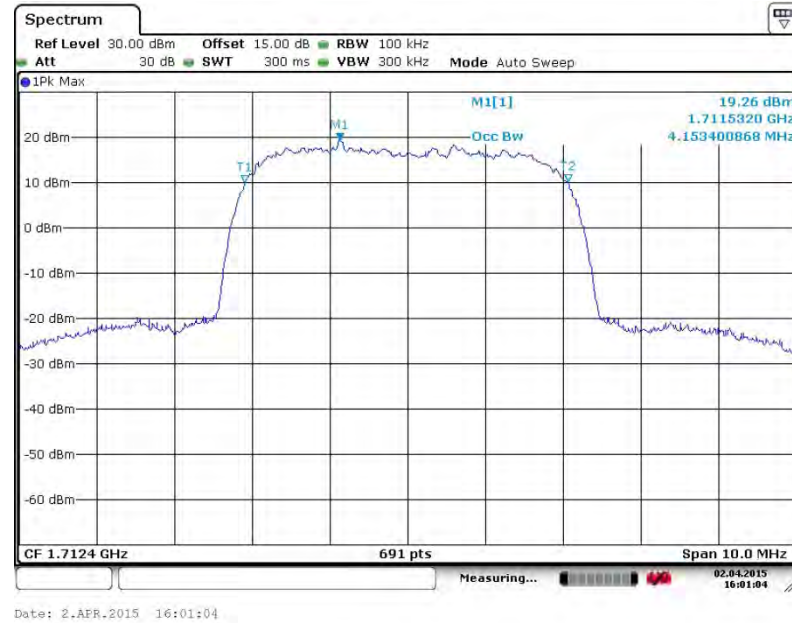

26dB Bandwidth Plot on Channel 1312 (1712.4 MHz)






99% Occupied Bandwidth Plot on Channel 1413 (1732.6 MHz)



26dB Bandwidth Plot on Channel 1413 (1732.6 MHz)

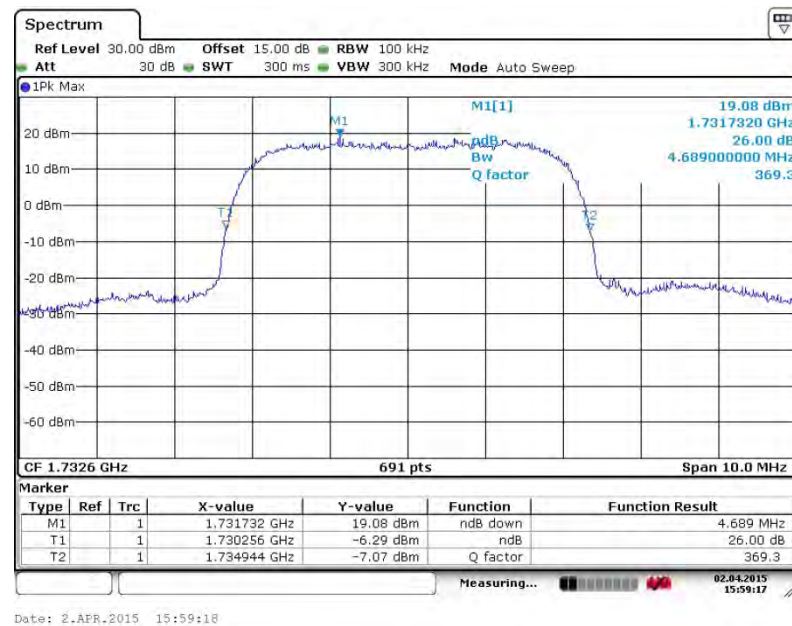




99% Occupied Bandwidth Plot on Channel 1513 (1752.6 MHz)




26dB Bandwidth Plot on Channel 1513 (1752.6 MHz)

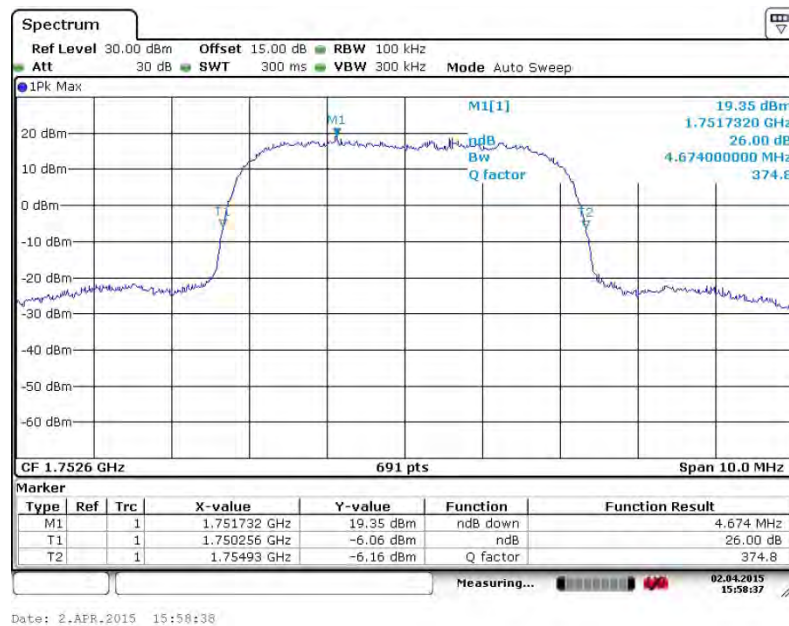




Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 9262 (1852.4 MHz)

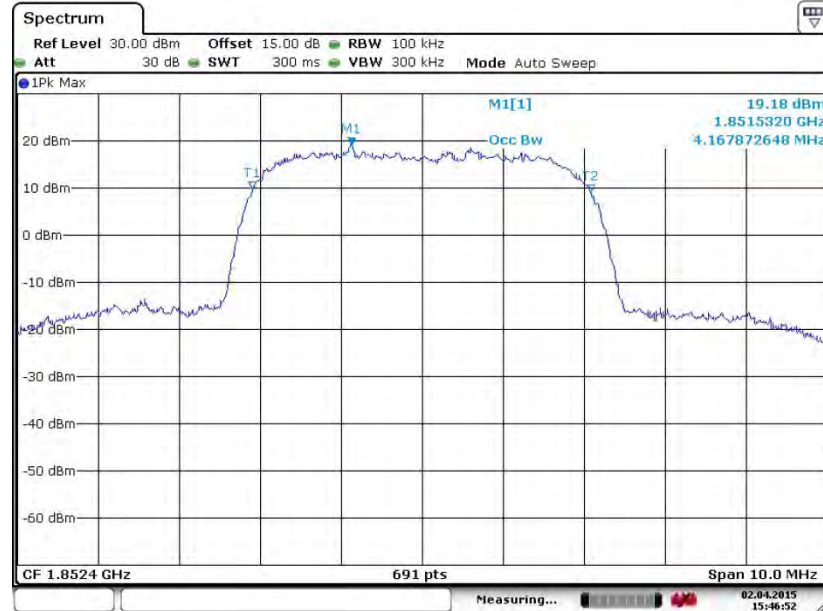

Date: 2.APR.2015 15:46:52


26dB Bandwidth Plot on Channel 9262 (1852.4 MHz)

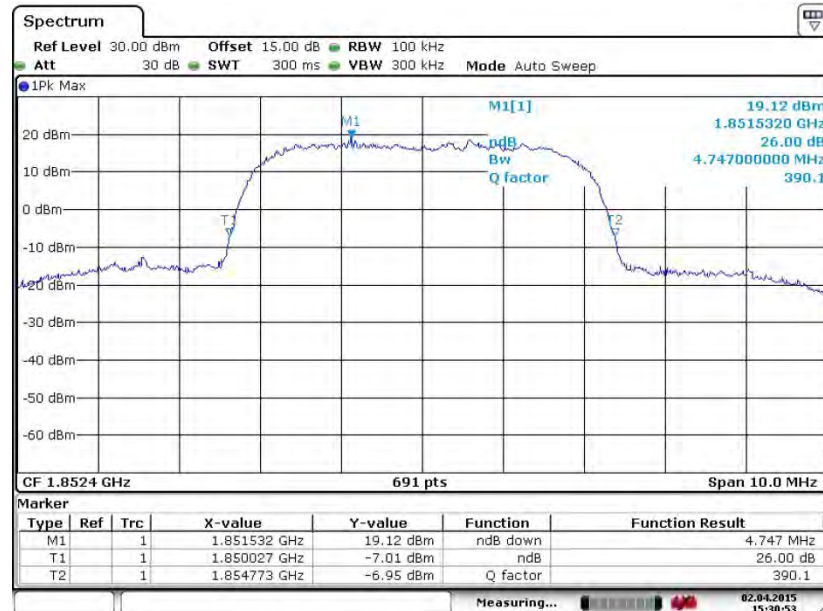


Date: 2.APR.2015 15:30:53




99% Occupied Bandwidth Plot on Channel 9400 (1880.0 MHz)

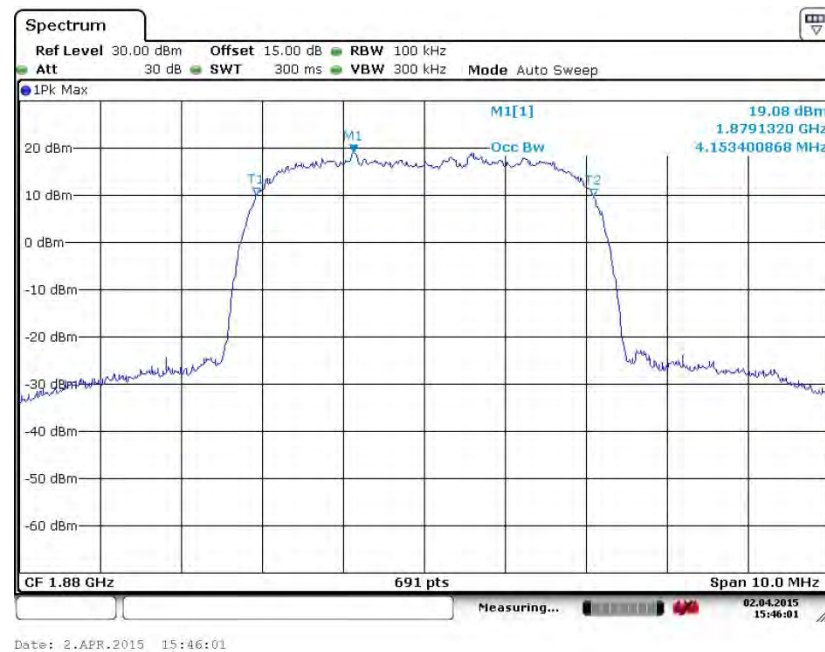


26dB Bandwidth Plot on Channel 9400 (1880.0 MHz)

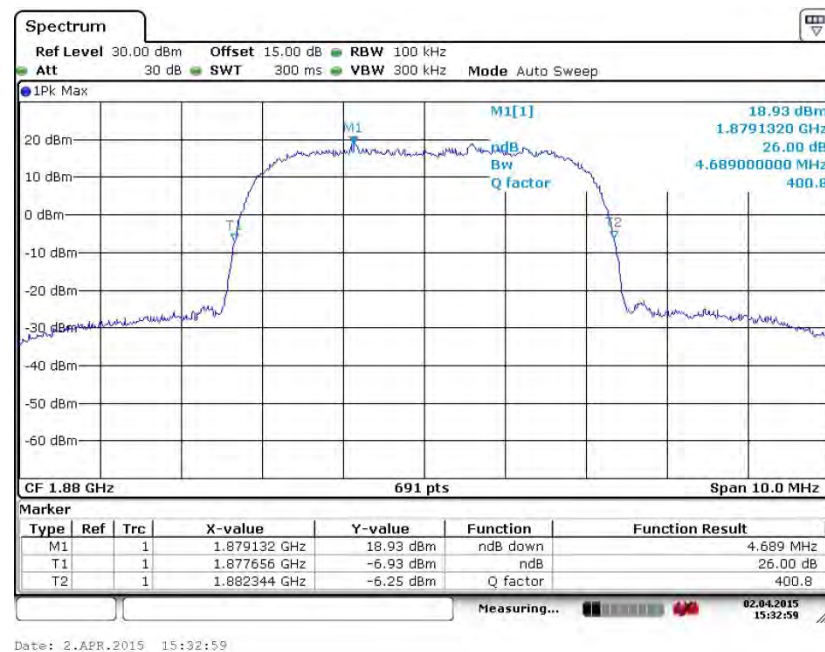

99% Occupied Bandwidth Plot on Channel 9538 (1907.6 MHz)

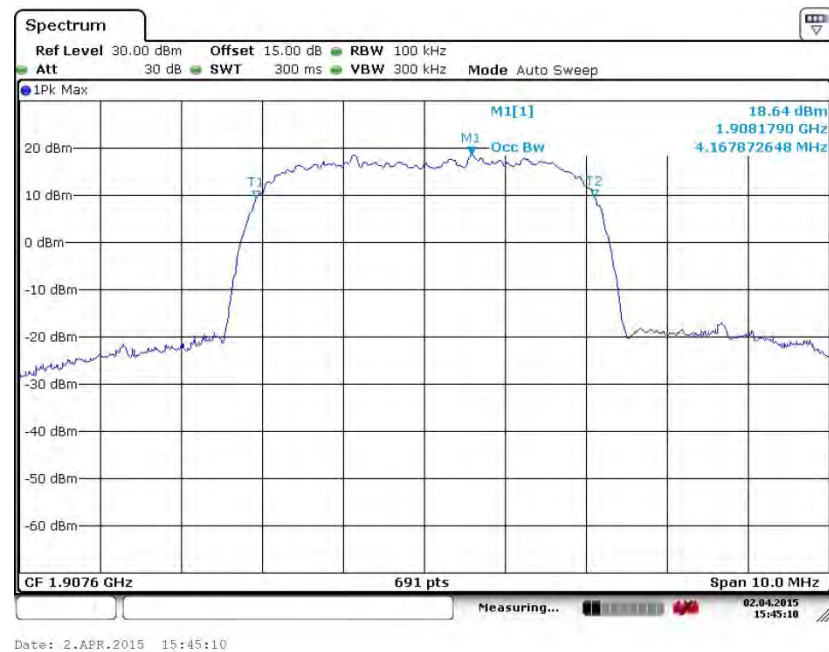

26dB Bandwidth Plot on Channel 9538 (1907.6 MHz)

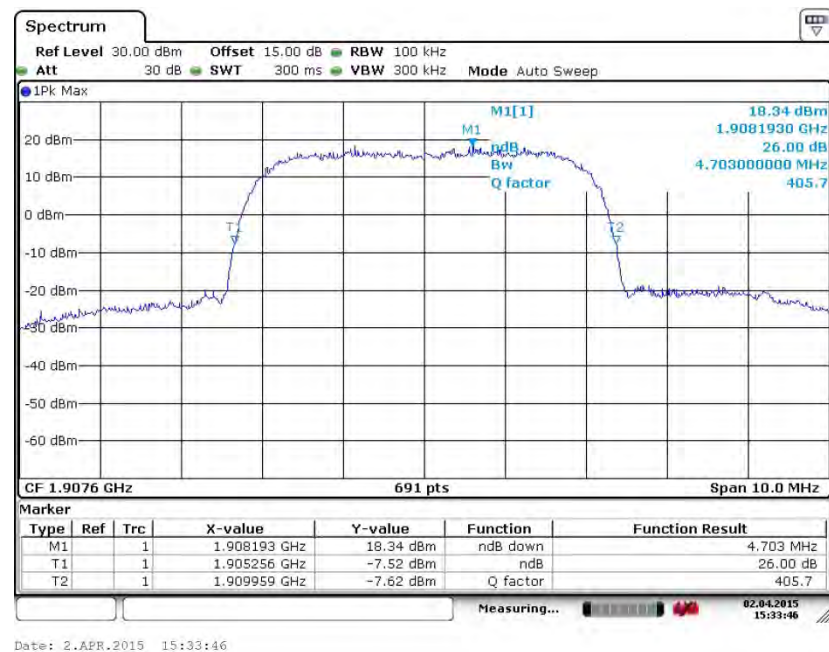

3.5 Band Edge Measurement

3.5.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The band edges of low and high channels for the highest RF powers were measured.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

3.5.4 Test Setup

<Conducted Band Edge >

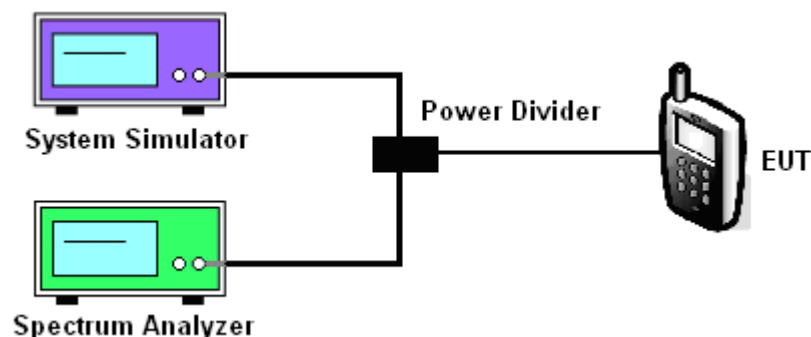





3.5.5 Test Result (Plots) of Conducted Band Edge

Band :	GSM850	Test Mode :	GSM Link (GMSK)
--------	--------	-------------	-----------------

Lower Band Edge Plot on Channel 128 (824.2 MHz)

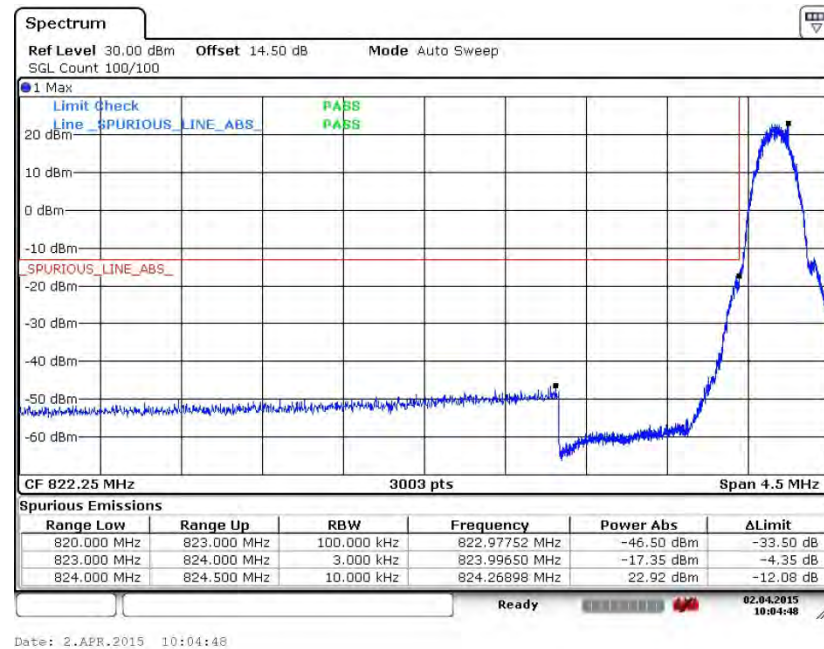


Higher Band Edge Plot on Channel 251 (848.8 MHz)

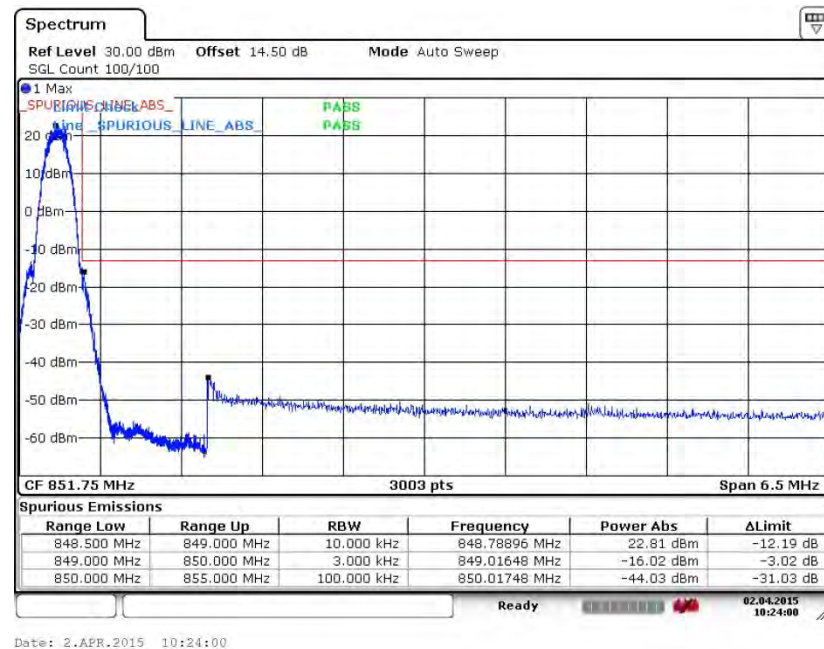




Band :	GSM850	Test Mode :	EDGE class 8 Link (8PSK)
--------	--------	-------------	--------------------------

Lower Band Edge Plot on Channel 128 (824.2 MHz)

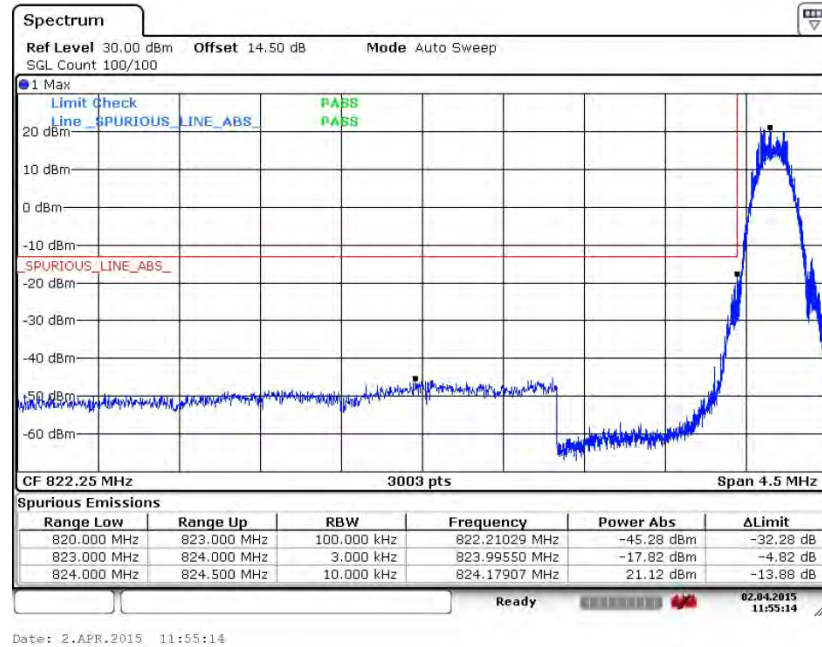


Higher Band Edge Plot on Channel 251 (848.8 MHz)

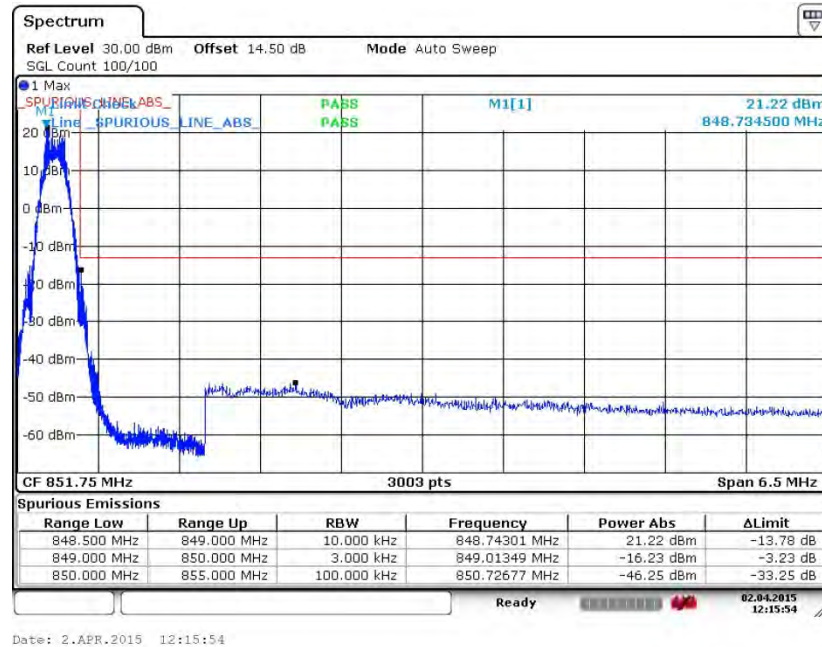




Band :	GSM1900	Test Mode :	GSM Link (GMSK)
--------	---------	-------------	-----------------

Lower Band Edge Plot on Channel 512 (1850.2 MHz)

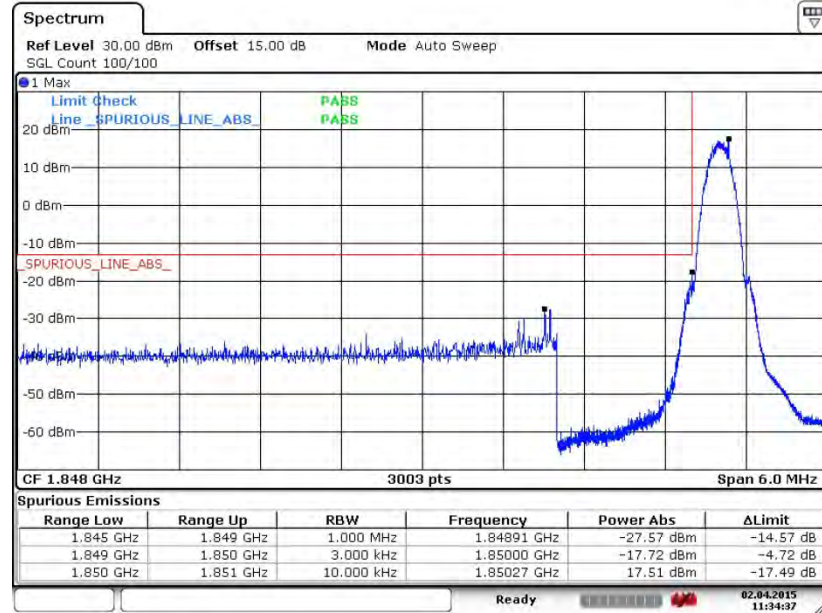

Date: 2.APR.2015 11:34:37

Higher Band Edge Plot on Channel 810 (1909.8 MHz)

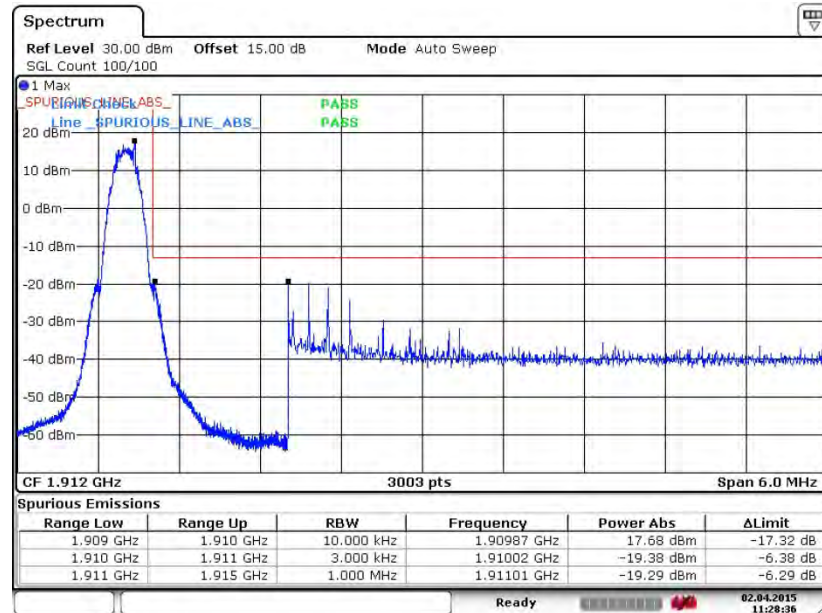


Date: 2.APR.2015 11:28:36




Band :	GSM1900	Test Mode :	EDGE class 8 Link (8PSK)
--------	---------	-------------	--------------------------

Lower Band Edge Plot on Channel 512 (1850.2 MHz)

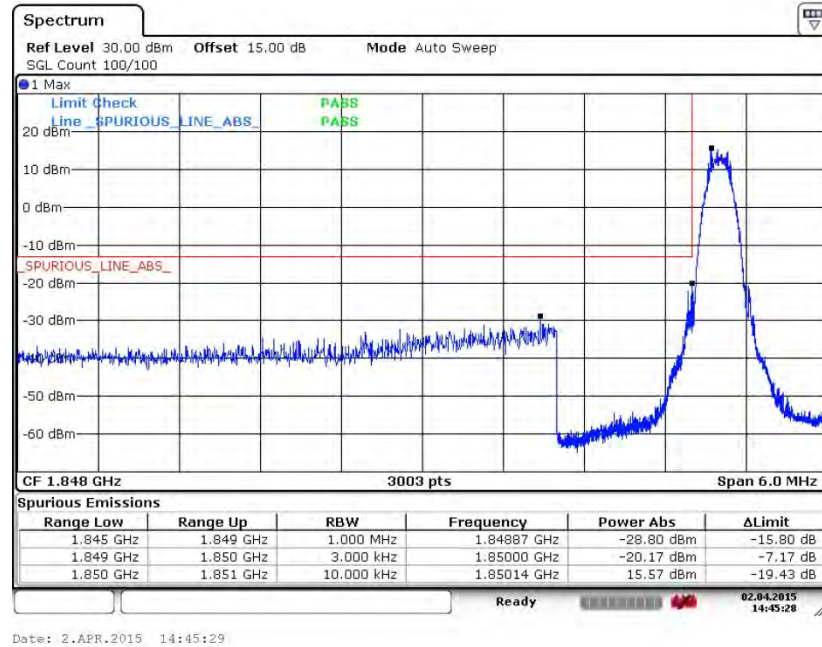

Higher Band Edge Plot on Channel 810 (1909.8 MHz)

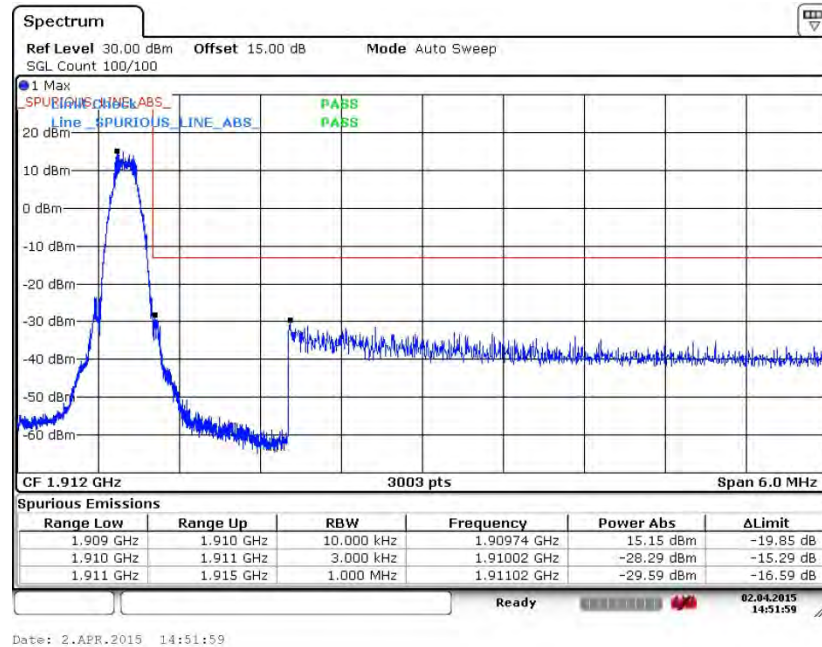




Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	--------------	-------------	--------------------------

Lower Band Edge Plot on Channel 4132 (826.4 MHz)




Higher Band Edge Plot on Channel 4233 (846.6 MHz)

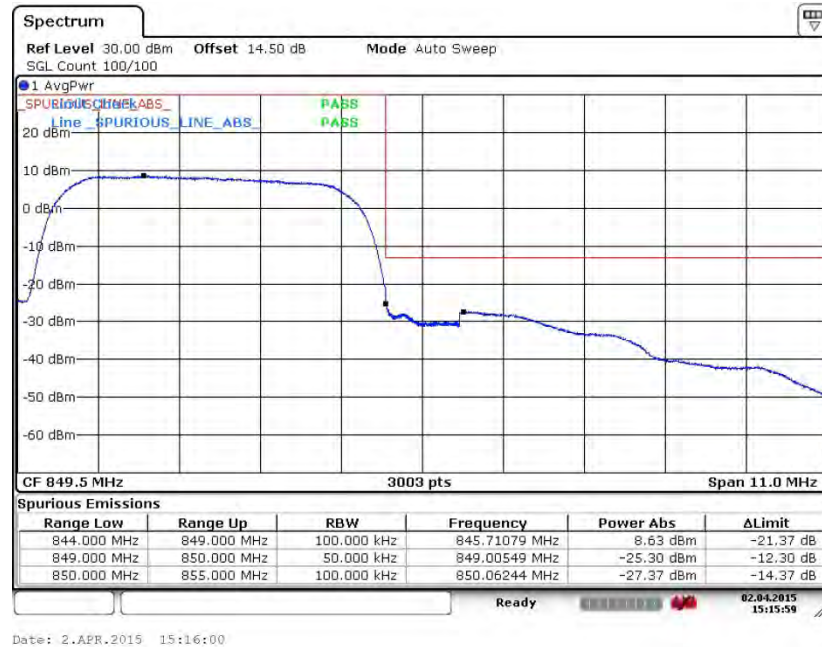




Band :	WCDMA Band IV	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

Lower Band Edge Plot on Channel 1312 (1712.4 MHz)

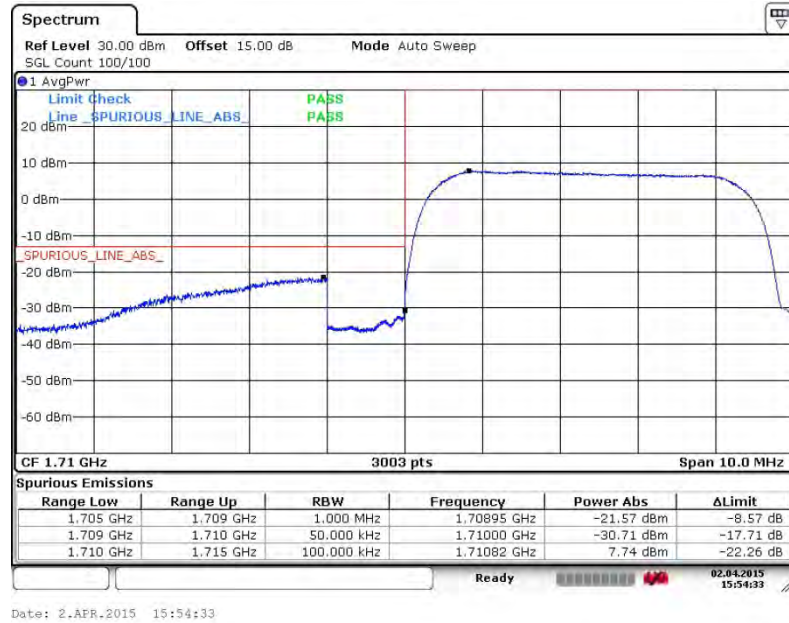


Higher Band Edge Plot on Channel 1513 (1752.6 MHz)

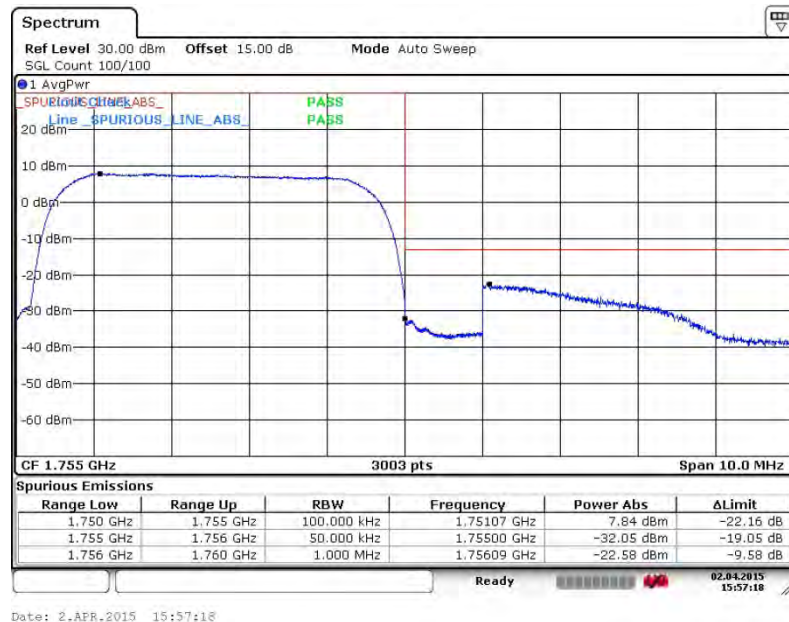



Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

Lower Band Edge Plot on Channel 9262 (1852.4 MHz)

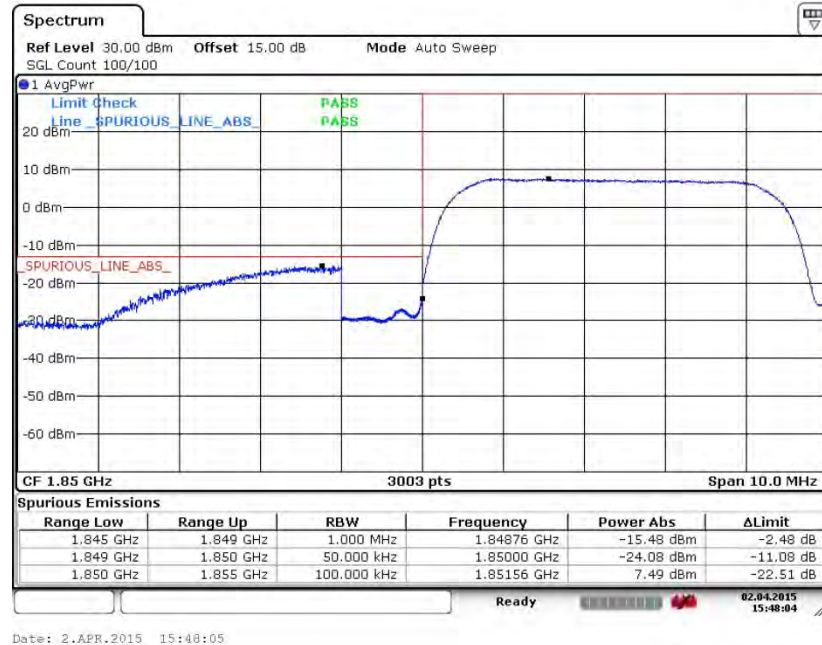

Higher Band Edge Plot on Channel 9538 (1907.6 MHz)



3.6 Conducted Spurious Emission Measurement

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

3.6.4 Test Setup

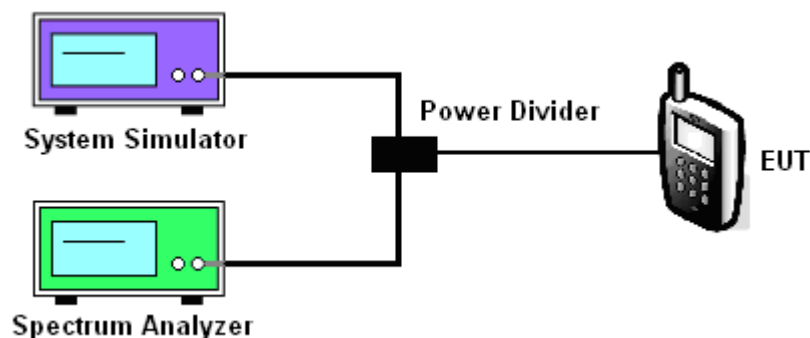




3.6.5 Test Result (Plots) of Conducted Spurious Emission


Band :	GSM850	Channel :	CH128
Test Mode :	GSM Link (GMSK)	Frequency :	824.2 MHz

Conducted Spurious Emission Plot between 30MHz ~ 9GHz

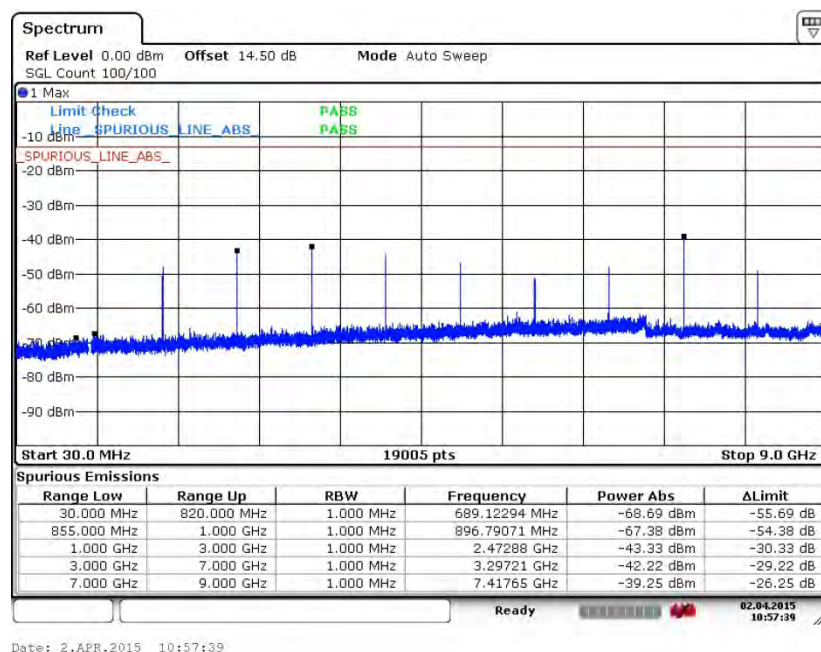




Band :	GSM850	Channel :	CH189
Test Mode :	GSM Link (GMSK)	Frequency :	836.4 MHz

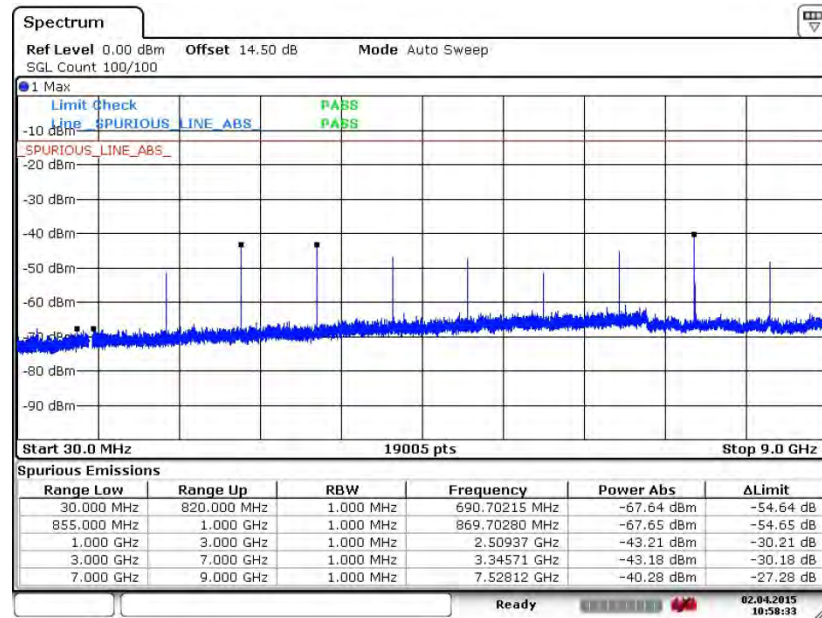Conducted Spurious Emission Plot between 30MHz ~ 1GHz

Date: 2.APR.2015 10:58:33




Band :	GSM850	Channel :	CH 251
Test Mode :	GSM Link (GMSK)	Frequency :	848.8 MHz

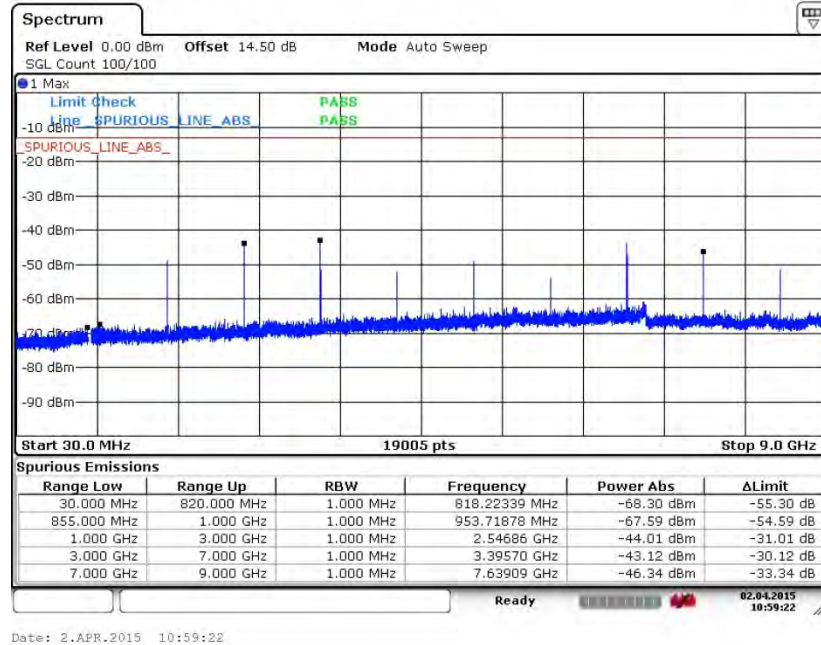Conducted Spurious Emission Plot between 30MHz ~ 9GHz




Band :	GSM850	Channel :	CH128
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	824.2 MHz

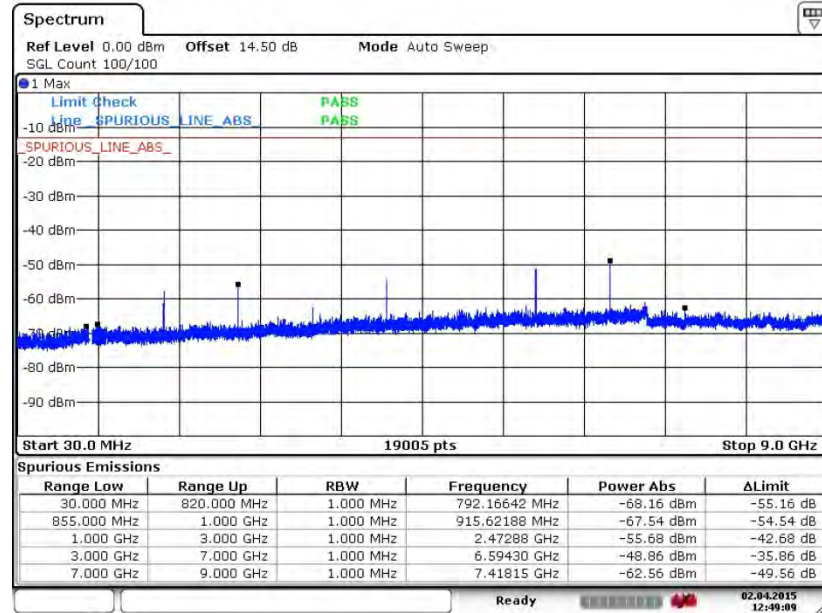Conducted Spurious Emission Plot between 30MHz ~ 9GHz

Date: 2.APR.2015 12:49:09




Band :	GSM850	Channel :	CH189
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	836.4 MHz

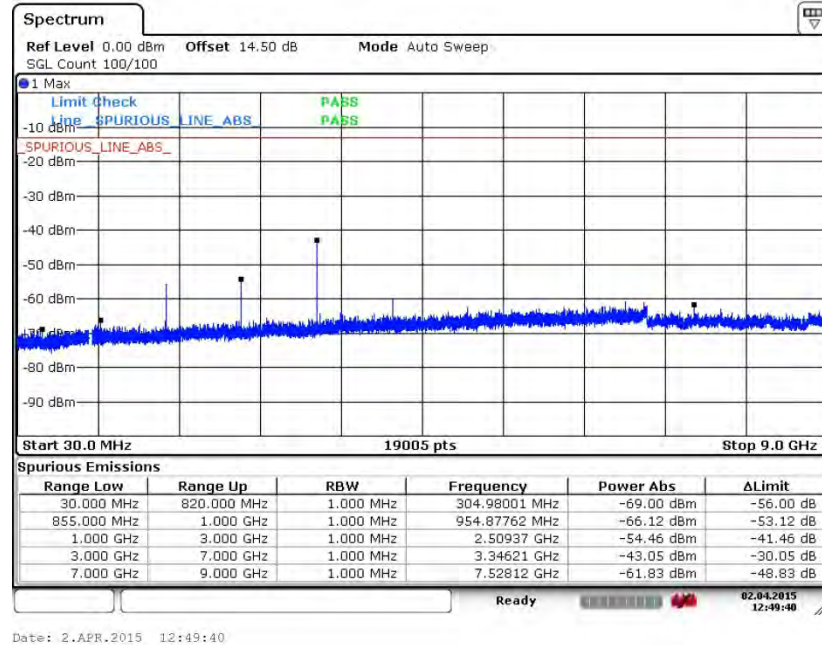Conducted Spurious Emission Plot between 30MHz ~ 9GHz




Band :	GSM850	Channel :	CH251
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	848.8 MHz

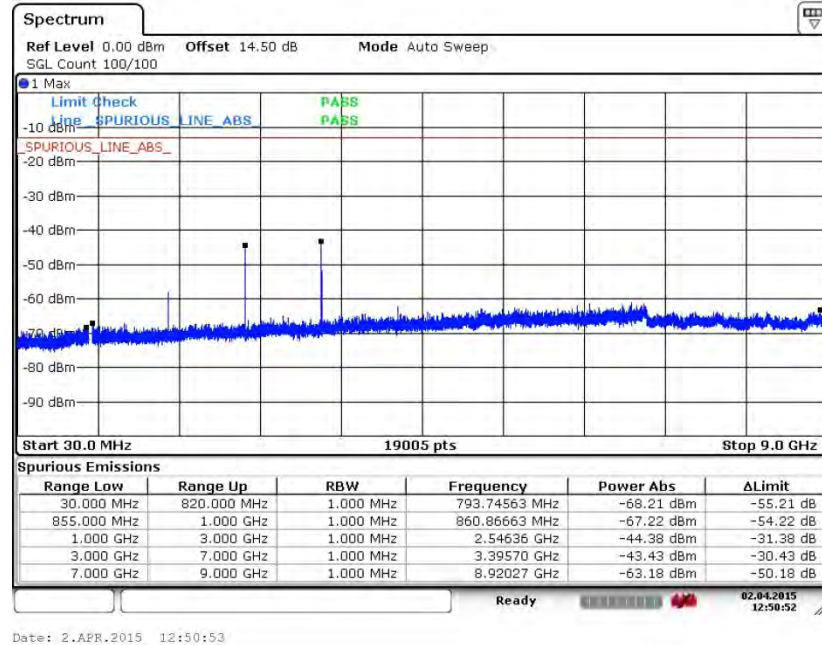Conducted Spurious Emission Plot between 30MHz ~ 9GHz



Band :	GSM1900	Channel :	CH512
Test Mode :	GSM Link (GMSK)	Frequency :	1850.2 MHz


Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz

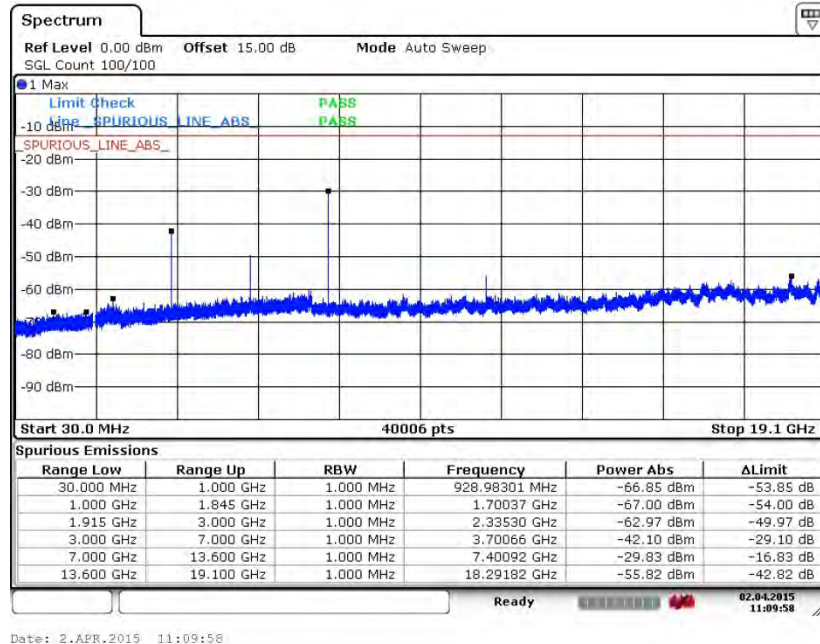



Band :	GSM1900	Channel :	CH661
Test Mode :	GSM Link (GMSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz

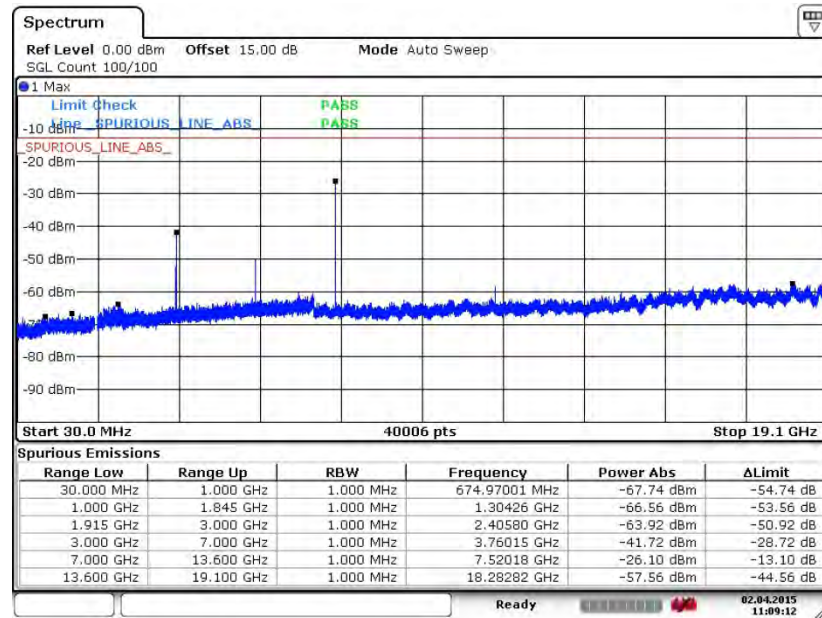


Date: 2.APR.2015 11:09:12



Band :	GSM1900	Channel :	CH810
Test Mode :	GSM Link (GMSK)	Frequency :	1909.8 MHz


Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz

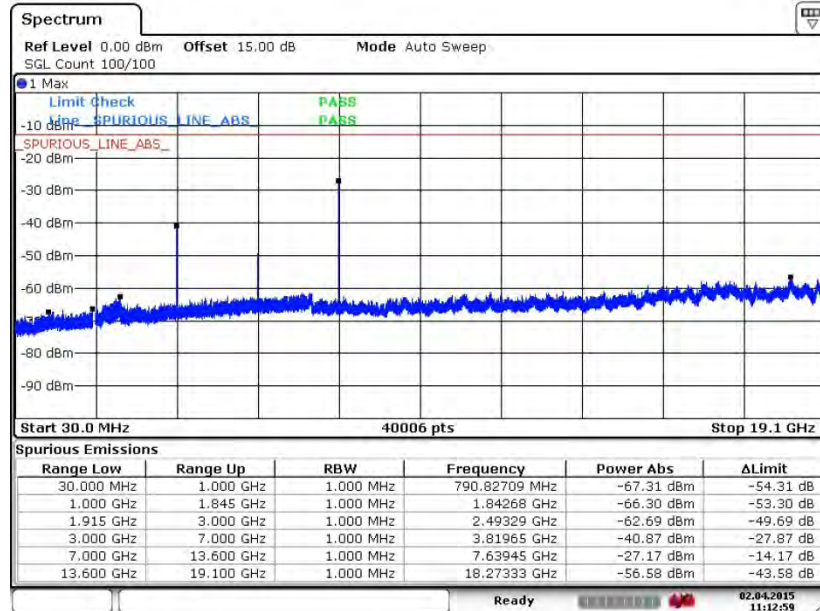

Date: 2.APR.2015 11:12:59




Band :	GSM1900	Channel :	CH512
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	1850.2 MHz

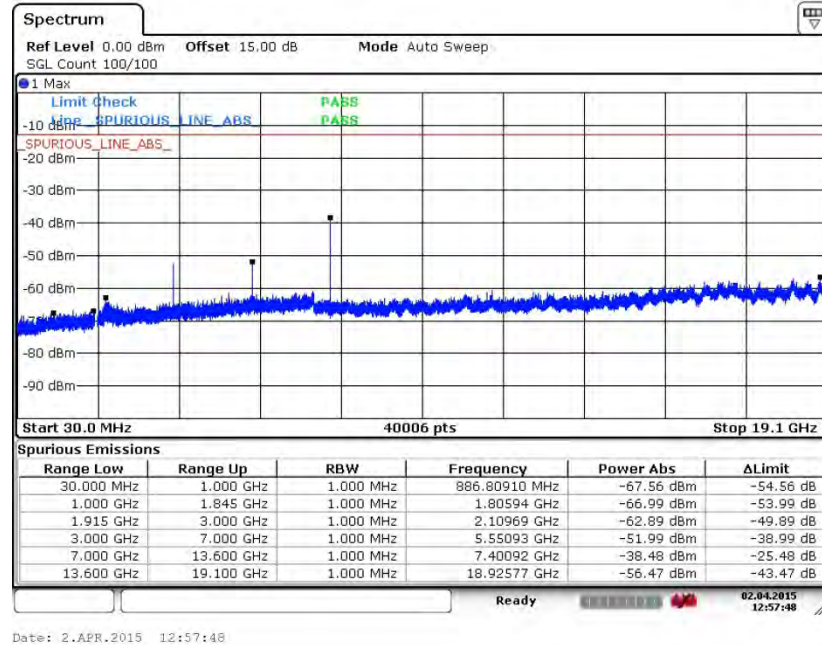Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz




Band :	GSM1900	Channel :	CH661
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	1880.0 MHz

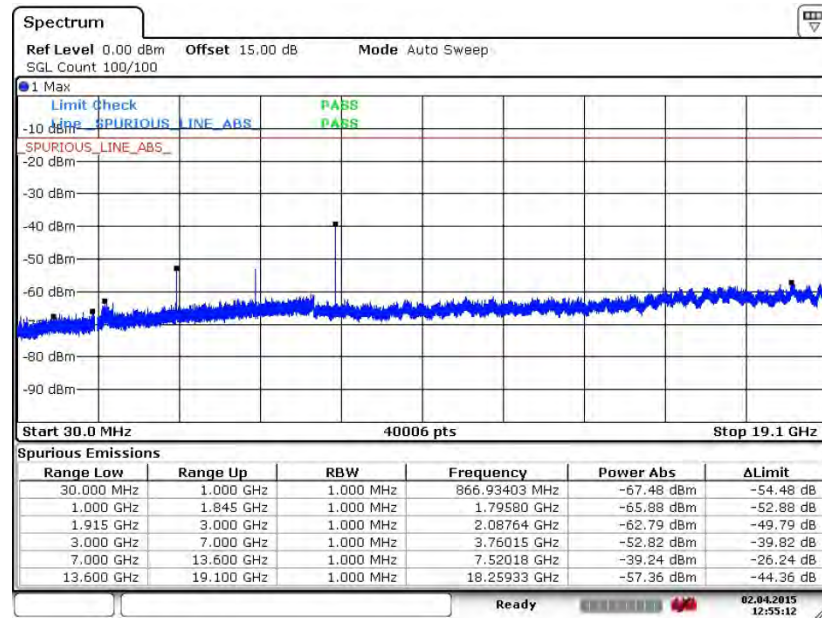Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz

Date: 2.APR.2015 12:55:12




Band :	GSM1900	Channel :	CH810
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	1909.8 MHz

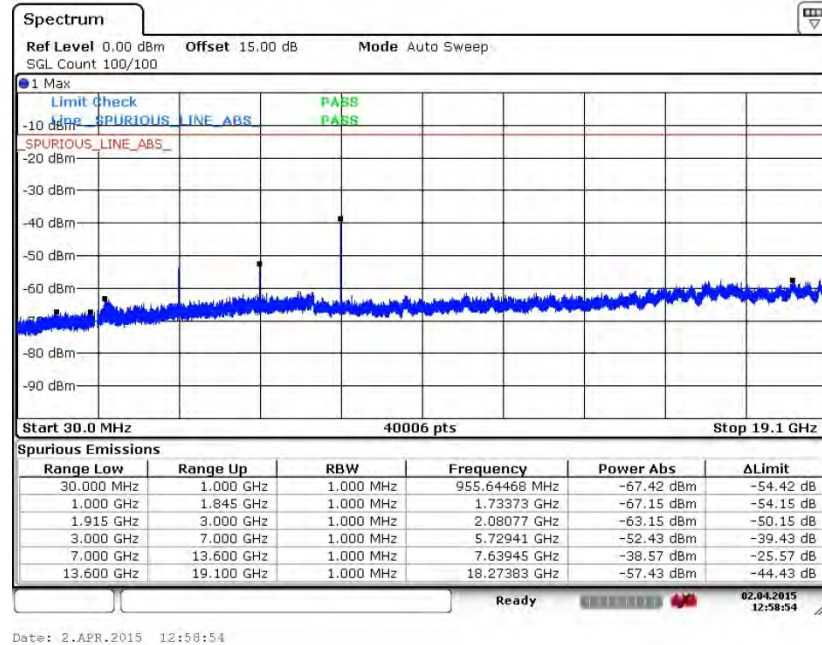Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz



Band :	WCDMA Band V	Channel :	CH4132
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	826.4 MHz

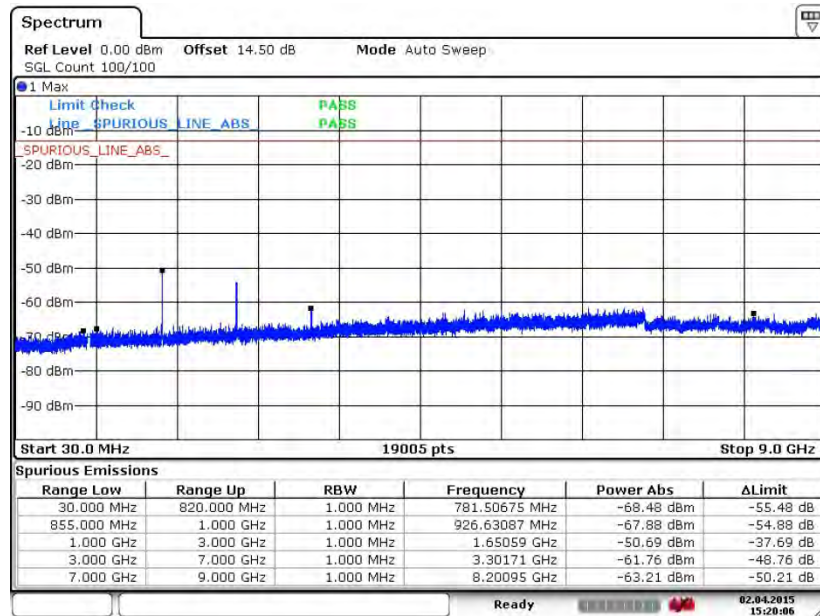
Conducted Spurious Emission Plot between 30MHz ~ 9GHz

Date: 2.APR.2015 15:20:06



Band :	WCDMA Band V	Channel :	CH4182
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	836.4 MHz


Conducted Spurious Emission Plot between 30MHz ~ 9GHz

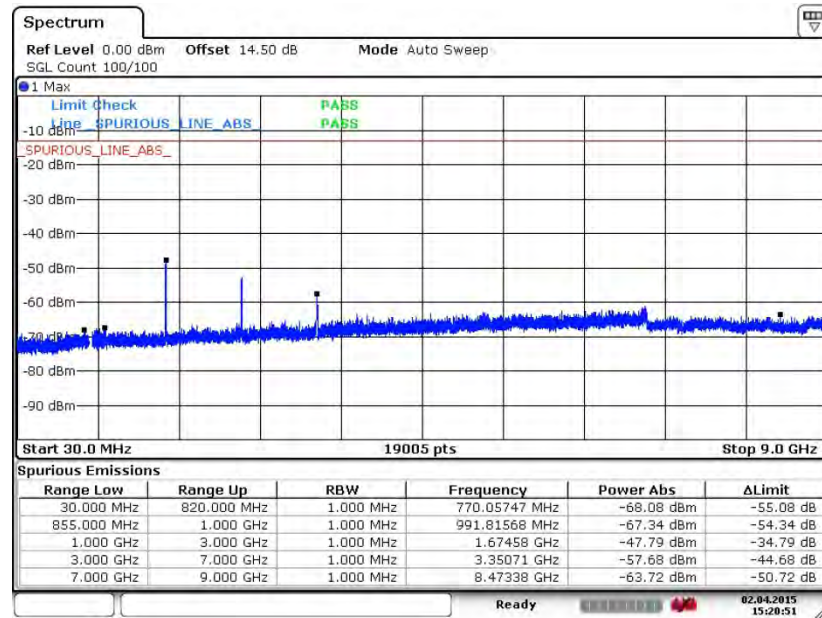

Date: 2.APR.2015 15:20:51




Band :	WCDMA Band V	Channel :	CH4233
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	846.6 MHz

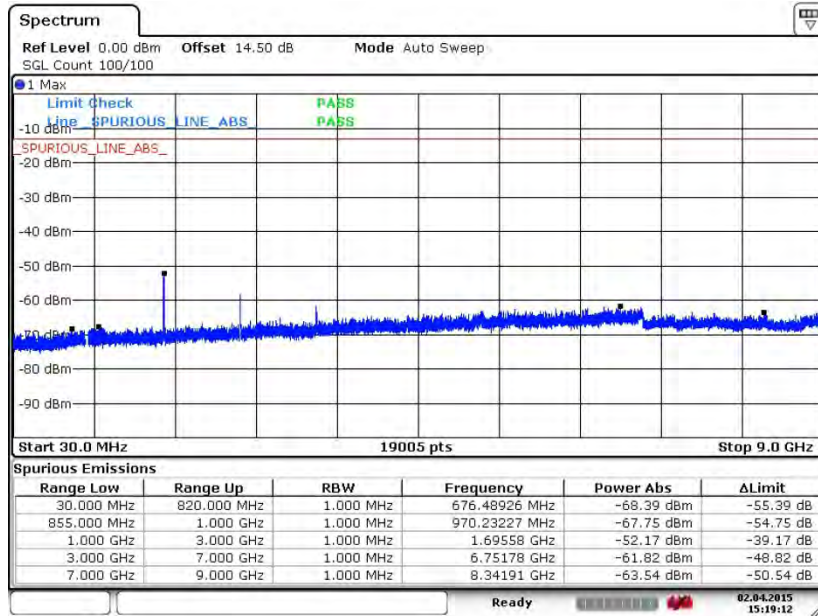Conducted Spurious Emission Plot between 30MHz ~ 9GHz

Date: 2.APR.2015 15:19:12



Band :	WCDMA Band IV	Channel :	CH1312
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1712.4 MHz

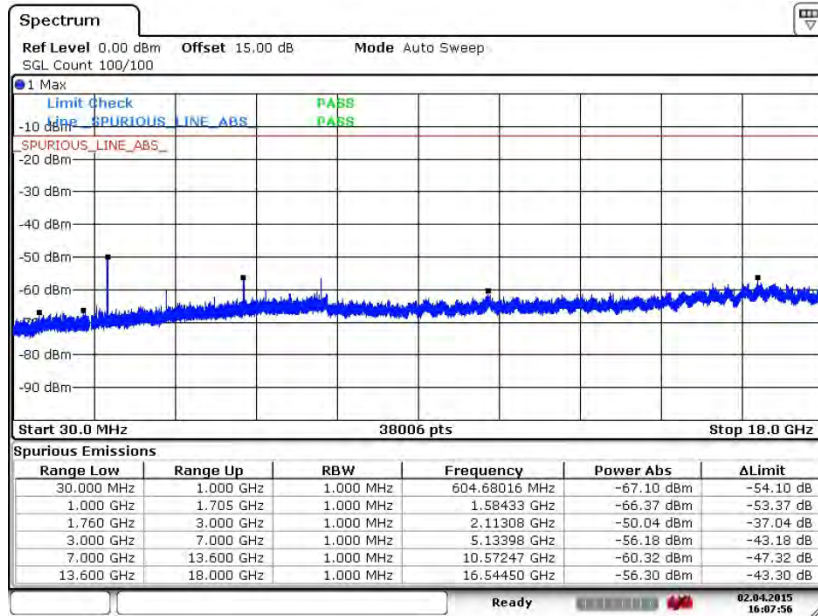
Conducted Spurious Emission Plot between 30MHz ~ 18GHz

Date: 2.APR.2015 16:07:56




Band :	WCDMA Band IV	Channel :	CH1413
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1732.6 MHz

Conducted Spurious Emission Plot between 30MHz ~ 18GHz

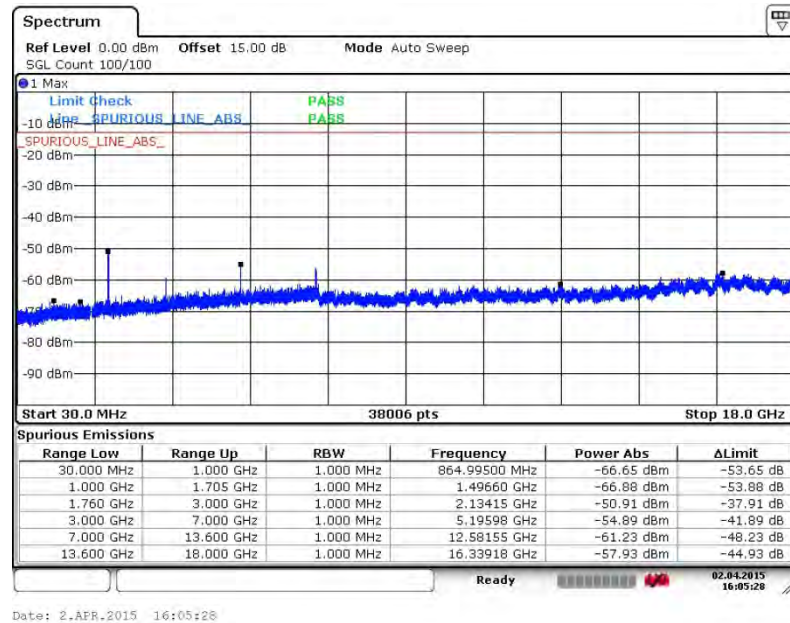




Band :	WCDMA Band IV	Channel :	CH1513
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1752.6 MHz

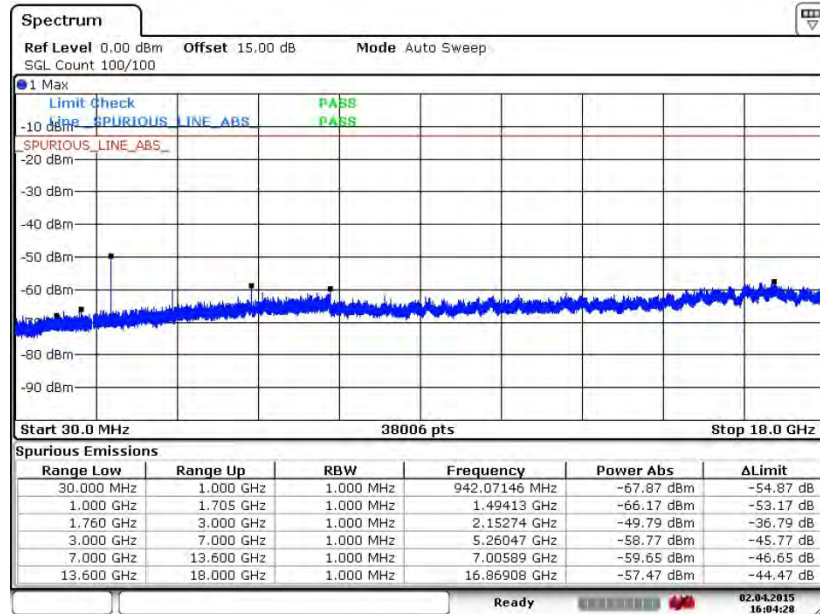Conducted Spurious Emission Plot between 30MHz ~ 18GHz

Date: 2.APR.2015 16:04:28



Band :	WCDMA Band II	Channel :	CH9262
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1852.4MHz

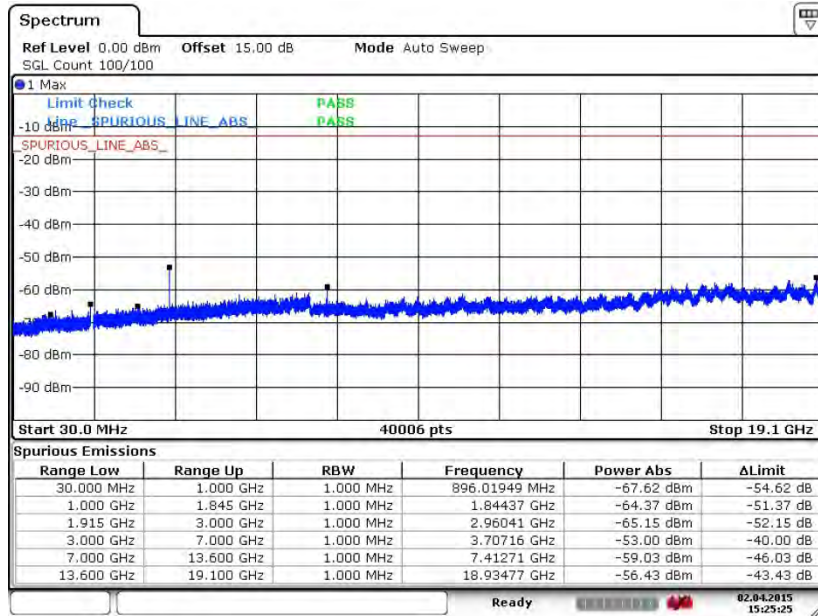
Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz

Date: 2.APR.2015 15:25:25



Band :	WCDMA Band II	Channel :	CH9400
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1880.0 MHz


Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz

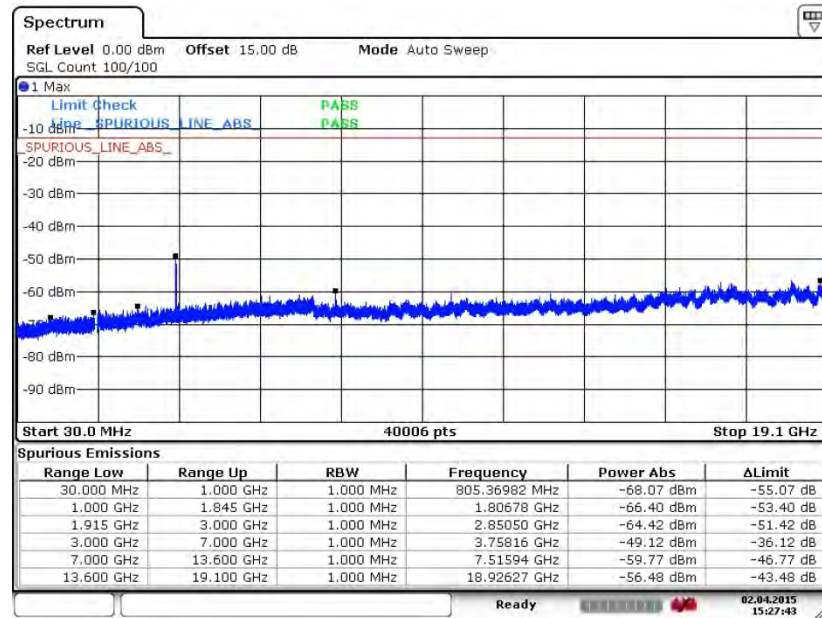

Date: 2.APR.2015 15:27:44



Band :	WCDMA Band II	Channel :	CH9538
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1907.6 MHz

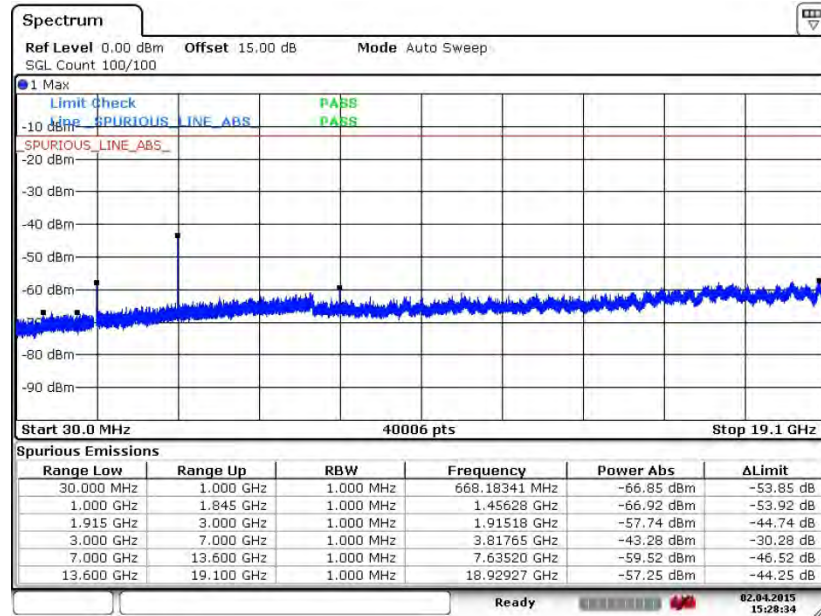Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz

Date: 2.APR.2015 15:28:34

3.7 Field Strength of Spurious Radiation Measurement

3.7.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.7.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedures


1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-C-2004 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
12. $ERP \text{ (dBm)} = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

3.7.4 Test Setup

For radiated emissions from 30MHz to 1GHz

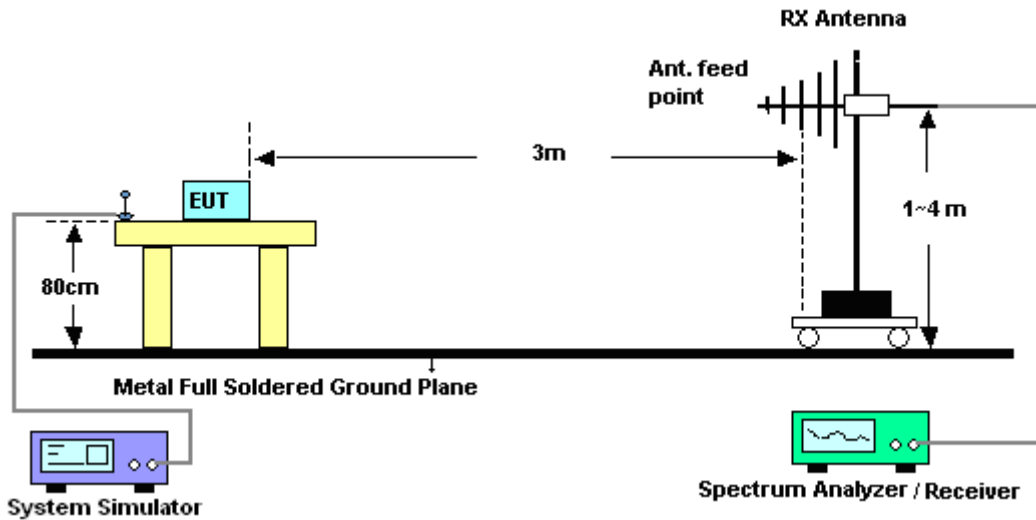

For radiated emissions above 1GHz

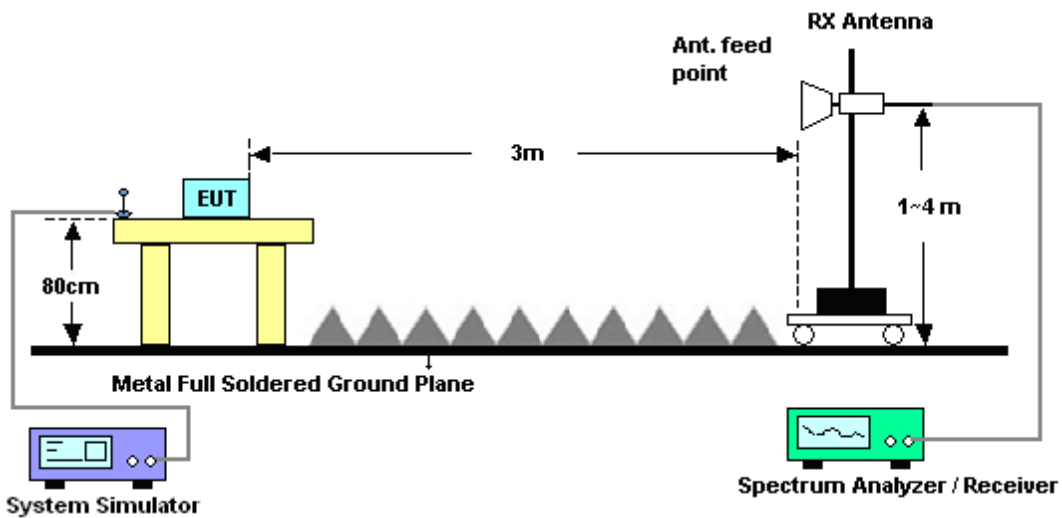



3.7.5 Test Result of Field Strength of Spurious Radiated

Band :	GSM850 for CH128					Temperature :	23~25℃		
Test Mode :	GSM Link (GMSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
1648	-34.46	-13	-21.46	-38.9	-36.22	0.98	4.89	H	Pass
2472	-46.14	-13	-33.14	-55.31	-48.02	1.28	5.32	H	Pass
3296	-46.78	-13	-33.78	-58.75	-50.19	1.54	7.10	H	Pass
4120	-58.93	-13	-45.93	-74.37	-63.57	1.83	8.62	H	Pass
4944	-51.26	-13	-38.26	-69.11	-56.39	2.30	9.59	H	Pass
5768	-41.10	-13	-28.10	-61.47	-45.98	2.78	9.81	H	Pass
6592	-44.14	-13	-31.14	-64.41	-49.58	2.72	10.31	H	Pass
7416	-44.05	-13	-31.05	-69.13	-51.08	2.46	11.63	H	Pass
8240	-41.90	-13	-28.90	-65.12	-49.72	2.32	12.29	H	Pass

Band :	GSM850 for CH128					Temperature :	23~25℃		
Test Mode :	GSM Link (GMSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
1648	-40.82	-13	-27.82	-43.68	-42.58	0.98	4.89	V	Pass
2472	-47.95	-13	-34.95	-58.01	-49.83	1.28	5.32	V	Pass
3296	-50.80	-13	-37.80	-62.05	-54.21	1.54	7.10	V	Pass
4120	-53.72	-13	-40.72	-69.23	-58.36	1.83	8.62	V	Pass
4944	-52.31	-13	-39.31	-69.03	-57.44	2.30	9.59	V	Pass
5768	-48.59	-13	-35.59	-67.66	-53.47	2.78	9.81	V	Pass
6592	-42.59	-13	-29.59	-64.84	-48.03	2.72	10.31	V	Pass
7416	-44.76	-13	-31.76	-68.35	-51.79	2.46	11.63	V	Pass
8240	-47.45	-13	-34.45	-72.26	-55.27	2.32	12.29	V	Pass



Band :	GSM850 for CH189					Temperature :	23~25℃		
Test Mode :	GSM Link (GMSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
1672	-46.22	-13	-33.22	-50.36	-47.9	0.99	4.82	H	Pass
2512	-51.04	-13	-38.04	-60.15	-53.01	1.29	5.41	H	Pass
3344	-52.86	-13	-39.86	-64.63	-56.47	1.56	7.31	H	Pass
4184	-55.89	-13	-42.89	-71.1	-60.51	1.87	8.64	H	Pass
5016	-48.61	-13	-35.61	-67.05	-53.81	2.35	9.70	H	Pass
5856	-41.96	-13	-28.96	-62.29	-46.82	2.83	9.84	H	Pass
6688	-44.98	-13	-31.98	-67.22	-50.56	2.69	10.43	H	Pass
7528	-41.69	-13	-28.69	-66.17	-48.94	2.42	11.82	H	Pass
8368	-38.04	-13	-25.04	-63.29	-45.94	2.35	12.39	H	Pass

Band :	GSM850 for CH189					Temperature :	23~25°C		
Test Mode :	GSM Link (GMSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
1672	-44.75	-13	-31.75	-47.31	-46.43	0.99	4.82	V	Pass
2512	-53.59	-13	-40.59	-63.35	-55.56	1.29	5.41	V	Pass
3344	-53.27	-13	-40.27	-64.17	-56.88	1.56	7.31	V	Pass
4184	-52.61	-13	-39.61	-67.86	-57.23	1.87	8.64	V	Pass
5016	-49.73	-13	-36.73	-66.79	-54.93	2.35	9.70	V	Pass
5856	-45.64	-13	-32.64	-65.28	-50.5	2.83	9.84	V	Pass
6688	-47.62	-13	-34.62	-69.88	-53.2	2.69	10.43	V	Pass
7528	-42.72	-13	-29.72	-66.37	-49.97	2.42	11.82	V	Pass
8368	-43.98	-13	-30.98	-68.51	-51.88	2.35	12.39	V	Pass



Band :	GSM850 for CH251					Temperature :	23~25℃		
Test Mode :	GSM Link (GMSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
1696	-48.52	-13	-35.52	-52.83	-50.12	1.00	4.75	H	Pass
2544	-51.71	-13	-38.71	-60.89	-53.69	1.30	5.44	H	Pass
3392	-53.49	-13	-40.49	-65.86	-57.29	1.57	7.52	H	Pass
4248	-50.06	-13	-37.06	-65.92	-54.66	1.90	8.65	H	Pass
5096	-50.53	-13	-37.53	-68.97	-55.69	2.39	9.70	H	Pass
5944	-41.01	-13	-28.01	-62.02	-45.86	2.88	9.88	H	Pass
6792	-41.54	-13	-28.54	-64.46	-47.28	2.66	10.55	H	Pass
7640	-39.34	-13	-26.34	-63.18	-46.69	2.38	11.88	H	Pass
8488	-39.24	-13	-26.24	-65.37	-47.21	2.37	12.49	H	Pass

Band :	GSM850 for CH251					Temperature :	23~25°C		
Test Mode :	GSM Link (GMSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
1696	-47.43	-13	-34.43	-51.37	-49.03	1.00	4.75	V	Pass
2544	-53.65	-13	-40.65	-63.82	-55.63	1.30	5.44	V	Pass
3392	-51.52	-13	-38.52	-62.88	-55.32	1.57	7.52	V	Pass
4248	-47.57	-13	-34.57	-62.83	-52.17	1.90	8.65	V	Pass
5096	-53.31	-13	-40.31	-70.66	-58.47	2.39	9.70	V	Pass
5944	-45.47	-13	-32.47	-67.53	-50.32	2.88	9.88	V	Pass
6792	-45.48	-13	-32.48	-67.77	-51.22	2.66	10.55	V	Pass
7640	-40.04	-13	-27.04	-63.39	-47.39	2.38	11.88	V	Pass
8488	-41.39	-13	-28.39	-66.53	-49.36	2.37	12.49	V	Pass



Band :	GSM850 for CH128					Temperature :	23~25°C		
Test Mode :	EDGE class 8 Link (8PSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
1648	-43.63	-13	-30.63	-47.89	-45.39	0.98	4.89	H	Pass
2472	-55.08	-13	-42.08	-64.28	-56.96	1.28	5.32	H	Pass
3296	-48.98	-13	-35.98	-61.18	-52.39	1.54	7.10	H	Pass

Band :	GSM850 for CH128					Temperature :	23~25°C		
Test Mode :	EDGE class 8 Link (8PSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
1648	-53.00	-13	-40.00	-55.63	-54.76	0.98	4.89	V	Pass
2472	-54.00	-13	-41.00	-64.11	-55.88	1.28	5.32	V	Pass
3296	-52.80	-13	-39.80	-64.11	-56.21	1.54	7.10	V	Pass



Band :	GSM850 for CH189					Temperature :	23~25°C		
Test Mode :	EDGE class 8 Link (8PSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
1672	-48.71	-13	-35.71	-53.24	-50.39	0.99	4.82	H	Pass
2512	-54.99	-13	-41.99	-63.91	-56.96	1.29	5.41	H	Pass
3344	-51.97	-13	-38.97	-63.76	-55.58	1.56	7.31	H	Pass

Band :	GSM850 for CH189					Temperature :	23~25°C		
Test Mode :	EDGE class 8 Link (8PSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
1672	-57.01	-13	-44.01	-59.75	-58.69	0.99	4.82	V	Pass
2512	-53.75	-13	-40.75	-63.73	-55.72	1.29	5.41	V	Pass
3344	-56.05	-13	-43.05	-67.19	-59.66	1.56	7.31	V	Pass



Band :	GSM850 for CH251					Temperature :	23~25℃		
Test Mode :	EDGE class 8 Link (8PSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
1696	-53.03	-13	-40.03	-56.78	-54.63	1.00	4.75	H	Pass
2544	-61.60	-13	-48.60	-70.98	-63.58	1.30	5.44	H	Pass
3392	-49.41	-13	-36.41	-61.46	-53.21	1.57	7.52	H	Pass

Band :	GSM850 for CH251					Temperature :	23~25°C		
Test Mode :	EDGE class 8 Link (8PSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
1696	-58.03	-13	-45.03	-61.42	-59.63	1.00	4.75	V	Pass
2544	-56.82	-13	-43.82	-69.2	-60.95	1.30	5.44	V	Pass
3392	-50.44	-13	-37.44	-64.21	-56.39	1.57	7.52	V	Pass



Band :	GSM1900 for CH512					Temperature :	23~25℃		
Test Mode :	GSM Link (GMSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
3700	-38.96	-13	-25.96	-53	-45.53	1.67	8.24	H	Pass
5548	-37.98	-13	-24.98	-57.69	-45.05	2.65	9.72	H	Pass
7403	-23.87	-13	-10.87	-48.84	-33.02	2.46	11.61	H	Pass
9251	-38.11	-13	-25.11	-66.44	-48.17	2.54	12.60	H	Pass
11098	-38.00	-13	-25.00	-67.7	-47.77	2.69	12.46	H	Pass
12952	-28.91	-13	-15.91	-65.87	-38.93	2.92	12.94	H	Pass
14806	-42.41	-13	-29.41	-77.06	-52.26	3.52	13.37	H	Pass
16651	-36.71	-13	-23.71	-77.19	-45.17	3.93	12.38	H	Pass

Band :	GSM1900 for CH512					Temperature :	23~25°C		
Test Mode :	GSM Link (GMSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit	Reading	Power	loss	Gain	(H/V)	
3700	-43.23	-13	-30.23	-57.16	-49.8	1.67	8.24	V	Pass
5548	-40.87	-13	-27.87	-58.8	-47.94	2.65	9.72	V	Pass
7403	-27.94	-13	-14.94	-51.68	-37.09	2.46	11.61	V	Pass
9251	-47.36	-13	-34.36	-73	-57.42	2.54	12.60	V	Pass
11098	-36.39	-13	-23.39	-64.72	-46.16	2.69	12.46	V	Pass
12952	-44.48	-13	-31.48	-77.57	-54.5	2.92	12.94	V	Pass
14806	-42.31	-13	-29.31	-77.68	-52.16	3.52	13.37	V	Pass
16651	-33.74	-13	-20.74	-71.66	-42.2	3.93	12.38	V	Pass



Band :	GSM1900 for CH661					Temperature :	23~25°C		
Test Mode :	GSM Link (GMSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization Result	
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
3763	-42.31	-13	-29.31	-56.47	-48.94	1.69	8.32	H	Pass
5639	-37.68	-13	-24.68	-57.06	-44.73	2.71	9.76	H	Pass
7522	-18.44	-13	-5.44	-42.79	-27.83	2.42	11.81	H	Pass
9398	-40.76	-13	-27.76	-68.98	-50.73	2.57	12.54	H	Pass
11278	-37.38	-13	-24.38	-67.01	-47.08	2.68	12.39	H	Pass
13159	-37.52	-13	-24.52	-74.64	-47.77	2.97	13.22	H	Pass

Band :	GSM1900 for CH661					Temperature :	23~25°C		
Test Mode :	GSM Link (GMSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
3763	-44.12	-13	-31.12	-57.87	-50.75	1.69	8.32	V	Pass
5639	-38.62	-13	-25.62	-56.37	-45.67	2.71	9.76	V	Pass
7522	-25.58	-13	-12.58	-49.05	-34.97	2.42	11.81	V	Pass
9398	-44.98	-13	-31.98	-69.91	-54.95	2.57	12.54	V	Pass
11278	-41.12	-13	-28.12	-69.71	-50.82	2.68	12.39	V	Pass
13159	-41.84	-13	-28.84	-75.73	-52.09	2.97	13.22	V	Pass



Band :	GSM1900 for CH810					Temperature :	23~25℃		
Test Mode :	GSM Link (GMSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	EIRP	Limit	Over Limit	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	(dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
3819	-38.11	-13	-25.11	-52.44	-44.79	1.70	8.38	H	Pass
5730	-31.34	-13	-18.34	-51	-38.37	2.76	9.79	H	Pass
7641	-21.62	-13	-8.62	-45.79	-31.12	2.38	11.88	H	Pass
9552	-42.11	-13	-29.11	-70.79	-51.98	2.60	12.47	H	Pass
11458	-43.05	-13	-30.05	-72.91	-52.68	2.68	12.32	H	Pass
13366	-37.86	-13	-24.86	-74.8	-48.35	3.02	13.51	H	Pass

Band :	GSM1900 for CH810					Temperature :	23~25°C		
Test Mode :	GSM Link (GMSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	EIRP	Limit	Over Limit	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	(dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
3819	-40.86	-13	-27.86	-54.67	-47.54	1.70	8.38	V	Pass
5730	-38.36	-13	-25.36	-56.62	-45.39	2.76	9.79	V	Pass
7641	-25.71	-13	-12.71	-49.21	-35.21	2.38	11.88	V	Pass
9552	-45.41	-13	-32.41	-71.75	-55.28	2.60	12.47	V	Pass
11458	-42.55	-13	-29.55	-71.62	-52.18	2.68	12.32	V	Pass
13366	-43.20	-13	-30.20	-78.13	-53.69	3.02	13.51	V	Pass



Band :	GSM1900 for CH512					Temperature :	23~25℃		
Test Mode :	EDGE class 8 Link (8PSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
3700	-40.22	-13	-27.22	-54.47	-46.79	1.67	8.24	H	Pass
5548	-39.83	-13	-26.83	-59.52	-46.9	2.65	9.72	H	Pass
7403	-24.77	-13	-11.77	-49.85	-33.92	2.46	11.61	H	Pass
9251	-39.92	-13	-26.92	-68.38	-49.98	2.54	12.60	H	Pass
11098	-39.31	-13	-26.31	-68.99	-49.08	2.69	12.46	H	Pass
12952	-32.34	-13	-19.34	-69.37	-42.36	2.92	12.94	H	Pass

Band :	GSM1900 for CH512					Temperature :	23~25°C		
Test Mode :	EDGE class 8 Link (8PSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
3700	-40.82	-13	-27.82	-54.77	-47.39	1.67	8.24	V	Pass
5548	-41.63	-13	-28.63	-59.63	-48.7	2.65	9.72	V	Pass
7403	-27.61	-13	-14.61	-51.35	-36.76	2.46	11.61	V	Pass
9251	-40.99	-13	-27.99	-66.77	-51.05	2.54	12.60	V	Pass
11098	-36.72	-13	-23.72	-64.85	-46.49	2.69	12.46	V	Pass
12952	-38.97	-13	-25.97	-72.18	-48.99	2.92	12.94	V	Pass



Band :	GSM1900 for CH661					Temperature :	23~25°C		
Test Mode :	EDGE class 8 Link (8PSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
3763	-42.29	-13	-29.29	-57.15	-48.92	1.69	8.32	H	Pass
5639	-39.94	-13	-26.94	-59.42	-46.99	2.71	9.76	H	Pass
7522	-24.32	-13	-11.32	-48.69	-33.71	2.42	11.81	H	Pass
9398	-42.76	-13	-29.76	-71.2	-52.73	2.57	12.54	H	Pass
11278	-36.58	-13	-23.58	-66.32	-46.28	2.68	12.39	H	Pass
13159	-36.03	-13	-23.03	-73.37	-46.28	2.97	13.22	H	Pass

Band :	GSM1900 for CH661					Temperature :	23~25°C		
Test Mode :	EDGE class 8 Link (8PSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
3763	-39.97	-13	-26.97	-53.62	-46.6	1.69	8.32	V	Pass
5639	-39.87	-13	-26.87	-57.62	-46.92	2.71	9.76	V	Pass
7522	-25.53	-13	-12.53	-49.3	-34.92	2.42	11.81	V	Pass
9398	-46.91	-13	-33.91	-72.04	-56.88	2.57	12.54	V	Pass
11278	-39.67	-13	-26.67	-68.35	-49.37	2.68	12.39	V	Pass
13159	-41.81	-13	-28.81	-75.6	-52.06	2.97	13.22	V	Pass



Band :	GSM1900 for CH810					Temperature :	23~25°C		
Test Mode :	EDGE class 8 Link (8PSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
3819	-39.47	-13	-26.47	-53.74	-46.15	1.70	8.38	H	Pass
5730	-33.38	-13	-20.38	-53.12	-40.41	2.76	9.79	H	Pass
7641	-22.74	-13	-9.74	-46.81	-32.24	2.38	11.88	H	Pass
9552	-41.08	-13	-28.08	-69.77	-50.95	2.60	12.47	H	Pass
11458	-43.21	-13	-30.21	-72.99	-52.84	2.68	12.32	H	Pass

Band :	GSM1900 for CH810					Temperature :	23~25°C		
Test Mode :	EDGE class 8 Link (8PSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
3819	-42.27	-13	-29.27	-56.1	-48.95	1.70	8.38	V	Pass
5730	-34.61	-13	-21.61	-53.05	-41.64	2.76	9.79	V	Pass
7641	-26.33	-13	-13.33	-49.96	-35.83	2.38	11.88	V	Pass
9552	-45.42	-13	-32.42	-70.97	-55.29	2.60	12.47	V	Pass
11458	-44.57	-13	-31.57	-73.35	-54.2	2.68	12.32	V	Pass



Band :	WCDMA Band V for CH4132					Temperature :	23~25°C		
Test Mode :	RMC 12.2Kbps Link (QPSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
1648	-42.47	-13	-29.47	-46.9	-44.23	0.98	4.89	H	Pass
2480	-47.05	-13	-34.05	-56.3	-48.96	1.28	5.34	H	Pass
3304	-40.08	-13	-27.08	-51.87	-43.52	1.54	7.14	H	Pass
4128	-55.58	-13	-42.58	-70.72	-60.22	1.83	8.63	H	Pass
4952	-57.33	-13	-44.33	-75.53	-62.47	2.31	9.60	H	Pass
5776	-50.94	-13	-37.94	-71.24	-55.82	2.78	9.81	H	Pass

Band :	WCDMA Band V for CH4132					Temperature :	23~25°C		
Test Mode :	RMC 12.2Kbps Link (QPSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
1648	-43.93	-13	-30.93	-47.05	-45.69	0.98	4.89	V	Pass
2480	-50.56	-13	-37.56	-60.55	-52.47	1.28	5.34	V	Pass
3304	-43.82	-13	-30.82	-54.98	-47.26	1.54	7.14	V	Pass
4128	-55.63	-13	-42.63	-71.05	-60.27	1.83	8.63	V	Pass
4952	-60.44	-13	-47.44	-77.45	-65.58	2.31	9.60	V	Pass
5776	-54.44	-13	-41.44	-73.42	-59.32	2.78	9.81	V	Pass



Band :	WCDMA Band V for CH4182					Temperature :	23~25℃		
Test Mode :	RMC 12.2Kbps Link (QPSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization Result	
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
1672	-39.60	-13	-26.60	-42.55	-41.28	0.99	4.82	H	Pass
2504	-44.36	-13	-31.36	-53.86	-46.32	1.29	5.40	H	Pass
3344	-35.94	-13	-22.94	-48.15	-39.55	1.56	7.31	H	Pass
4184	-51.74	-13	-38.74	-67.27	-56.36	1.87	8.64	H	Pass
5016	-54.32	-13	-41.32	-72.33	-59.52	2.35	9.70	H	Pass
5864	-48.83	-13	-35.83	-69.27	-53.69	2.83	9.85	H	Pass

Band :	WCDMA Band V for CH4182					Temperature :	23~25°C		
Test Mode :	RMC 12.2Kbps Link (QPSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
1672	-41.91	-13	-28.91	-44.7	-43.59	0.99	4.82	V	Pass
2504	-48.79	-13	-35.79	-58.47	-50.75	1.29	5.40	V	Pass
3344	-38.75	-13	-25.75	-49.62	-42.36	1.56	7.31	V	Pass
4184	-52.07	-13	-39.07	-67.32	-56.69	1.87	8.64	V	Pass
5016	-57.92	-13	-44.92	-75.01	-63.12	2.35	9.70	V	Pass
5864	-52.99	-13	-39.99	-72.32	-57.85	2.83	9.85	V	Pass



Band :	WCDMA Band V for CH4233					Temperature :	23~25°C		
Test Mode :	RMC 12.2Kbps Link (QPSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
1688	-54.00	-13	-41.00	-58.24	-55.63	1.00	4.77	H	Pass
2536	-50.29	-13	-37.29	-59.6	-52.27	1.30	5.43	H	Pass
3384	-47.92	-13	-34.92	-60.07	-51.69	1.57	7.49	H	Pass
4232	-50.61	-13	-37.61	-66.14	-55.21	1.89	8.65	H	Pass
5088	-57.42	-13	-44.42	-75.91	-62.58	2.39	9.70	H	Pass

Band :	WCDMA Band V for CH4233					Temperature :	23~25°C		
Test Mode :	RMC 12.2Kbps Link (QPSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
1696	-52.59	-13	-39.59	-56.14	-54.19	1.00	4.75	V	Pass
2536	-53.30	-13	-40.30	-63.18	-55.28	1.30	5.43	V	Pass
3384	-49.55	-13	-36.55	-60.86	-53.32	1.57	7.49	V	Pass
4224	-52.87	-13	-39.87	-68.53	-57.47	1.89	8.64	V	Pass
5088	-58.42	-13	-45.42	-75.48	-63.58	2.39	9.70	V	Pass



Band :	WCDMA Band IV for CH1312					Temperature :	23~25°C		
Test Mode :	RMC 12.2Kbps Link (QPSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
3427	-40.38	-13	-27.38	-52.54	-46.48	1.58	7.68	H	Pass
5142	-45.91	-13	-32.91	-64.54	-53.19	2.42	9.70	H	Pass
6850	-41.28	-13	-28.28	-63.94	-49.26	2.64	10.62	H	Pass

Band :	WCDMA Band IV for CH1312					Temperature :	23~25℃		
Test Mode :	RMC 12.2Kbps Link (QPSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
3427	-41.96	-13	-28.96	-53.92	-48.06	1.58	7.68	V	Pass
5142	-47.34	-13	-34.34	-65.04	-54.62	2.42	9.70	V	Pass
6850	-46.36	-13	-33.36	-68.81	-54.34	2.64	10.62	V	Pass



Band :	WCDMA Band IV for CH1413					Temperature :	23~25°C		
Test Mode :	RMC 12.2Kbps Link (QPSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit	Reading	Power	loss	Gain	(H/V)	
			(dB)	(dBm)	(dBm)	(dB)	(dBi)		
3462	-36.14	-13	-23.14	-48.68	-42.38	1.59	7.83	H	Pass
5198	-37.83	-13	-24.83	-56.58	-45.08	2.45	9.70	H	Pass
6927	-39.43	-13	-26.43	-62.29	-47.53	2.61	10.71	H	Pass
13864	-40.11	-13	-27.11	-75.77	-51.03	3.15	14.06	H	Pass

Band :	WCDMA Band IV for CH1413					Temperature :	23~25°C		
Test Mode :	RMC 12.2Kbps Link (QPSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
3462	-38.11	-13	-25.11	-50.75	-44.35	1.59	7.83	V	Pass
5198	-39.32	-13	-26.32	-57.13	-46.57	2.45	9.70	V	Pass
6927	-42.98	-13	-29.98	-65.66	-51.08	2.61	10.71	V	Pass
13864	-42.10	-13	-29.10	-77.33	-53.02	3.15	14.06	V	Pass



Band :	WCDMA Band IV for CH1513					Temperature :	23~25°C		
Test Mode :	RMC 12.2Kbps Link (QPSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
3504	-39.97	-13	-26.97	-52.69	-46.37	1.61	8.00	H	Pass
5261	-42.95	-13	-29.95	-61.68	-50.16	2.49	9.70	H	Pass
7011	-44.02	-13	-31.02	-67.3	-52.26	2.59	10.82	H	Pass

Band :	WCDMA Band IV for CH1513					Temperature :	23~25℃		
Test Mode :	RMC 12.2Kbps Link (QPSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
3504	-41.43	-13	-28.43	-54.83	-47.83	1.61	8.00	V	Pass
5261	-44.77	-13	-31.77	-62.81	-51.98	2.49	9.70	V	Pass
7011	-47.72	-13	-34.72	-70.69	-55.96	2.59	10.82	V	Pass



Band :	WCDMA Band II for CH9262					Temperature :	23~25℃		
Test Mode :	RMC 12.2Kbps Link (QPSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
3707	-41.88	-13	-28.88	-55.88	-48.46	1.67	8.25	H	Pass
5555	-47.73	-13	-34.73	-67.15	-54.8	2.66	9.72	H	Pass
7410	-45.99	-13	-32.99	-71.09	-55.15	2.46	11.62	H	Pass
9265	-46.91	-13	-33.91	-75.29	-56.96	2.54	12.59	H	Pass
11116	-44.98	-13	-31.98	-74.79	-54.75	2.69	12.45	H	Pass
12970	-30.89	-13	-17.89	-67.95	-40.93	2.92	12.96	H	Pass

Band :	WCDMA Band II for CH9262					Temperature :	23~25°C		
Test Mode :	RMC 12.2Kbps Link (QPSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
3707	-40.58	-13	-27.58	-54.44	-47.16	1.67	8.25	V	Pass
5555	-47.86	-13	-34.86	-65.89	-54.93	2.66	9.72	V	Pass
7410	-50.68	-13	-37.68	-74.36	-59.84	2.46	11.62	V	Pass
9265	-51.89	-13	-38.89	-77.52	-61.94	2.54	12.59	V	Pass
11116	-48.69	-13	-35.69	-76.88	-58.46	2.69	12.45	V	Pass
12970	-39.36	-13	-26.36	-72.58	-49.4	2.92	12.96	V	Pass



Band :	WCDMA Band II for CH9400					Temperature :	23~25°C		
Test Mode :	RMC 12.2Kbps Link (QPSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
3756	-44.71	-13	-31.71	-58.76	-51.33	1.68	8.31	H	Pass
5639	-51.77	-13	-38.77	-71.09	-58.82	2.71	9.76	H	Pass
7515	-48.83	-13	-35.83	-73.34	-58.21	2.42	11.81	H	Pass
9398	-48.21	-13	-35.21	-76.57	-58.18	2.57	12.54	H	Pass
13150	-33.11	-13	-20.11	-70.42	-43.35	2.97	13.21	H	Pass

Band :	WCDMA Band II for CH9400					Temperature :	23~25°C		
Test Mode :	RMC 12.2Kbps Link (QPSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
3756	-42.68	-13	-29.68	-56.56	-49.3	1.68	8.31	V	Pass
5639	-52.35	-13	-39.35	-70.27	-59.4	2.71	9.76	V	Pass
7515	-52.71	-13	-39.71	-76.26	-62.09	2.42	11.81	V	Pass
9398	-52.97	-13	-39.97	-77.86	-62.94	2.57	12.54	V	Pass
13150	-41.39	-13	-28.39	-75.27	-51.63	2.97	13.21	V	Pass

Band :	WCDMA Band II for CH9538					Temperature :	23~25°C		
Test Mode :	RMC 12.2Kbps Link (QPSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
3812	-42.11	-13	-29.11	-56.46	-48.78	1.70	8.37	H	Pass
5723	-49.77	-13	-36.77	-69.39	-56.81	2.75	9.79	H	Pass
7627	-49.61	-13	-36.61	-73.72	-59.1	2.39	11.88	H	Pass
9531	-46.97	-13	-33.97	-75.53	-56.86	2.60	12.48	H	Pass
13348	-34.91	-13	-21.91	-72.12	-45.38	3.02	13.49	H	Pass

Band :	WCDMA Band II for CH9538					Temperature :	23~25℃		
Test Mode :	RMC 12.2Kbps Link (QPSK)					Relative Humidity :	42~58%		
Test Engineer :	Lewis He					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3812	-41.28	-13	-28.28	-54.8	-47.95	1.70	8.37	V	Pass
5723	-49.11	-13	-36.11	-67.58	-56.15	2.75	9.79	V	Pass
7627	-53.86	-13	-40.86	-77.19	-63.35	2.39	11.88	V	Pass
9531	-51.91	-13	-38.91	-77.27	-61.8	2.60	12.48	V	Pass
13348	-39.90	-13	-26.90	-74.59	-50.37	3.02	13.49	V	Pass

3.8 Frequency Stability Measurement

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.8.3 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.4 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

3.8.5 Test Setup

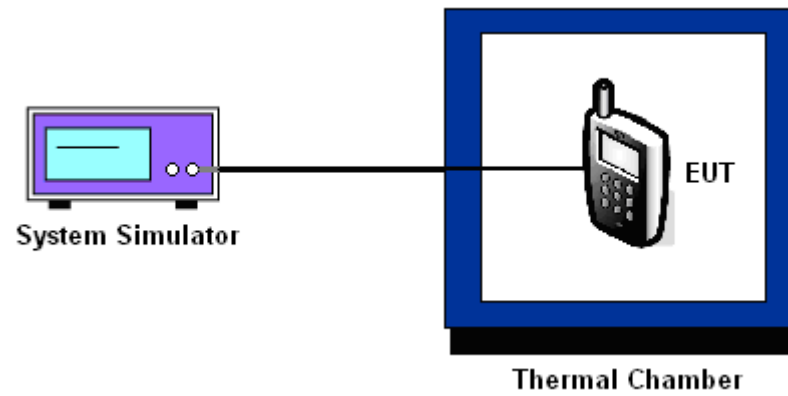

3.8.6 Test Result of Temperature Variation

Band :	GSM 850	Channel :	189
Limit (ppm) :	2.5	Frequency :	836.4 MHz

Temperature (°C)	GSM		EDGE class 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
50	32	0.0084	31	0.0143	PASS
40	28	0.0036	26	0.0084	
30	30	0.0060	17	0.0024	
20(Ref.)	25	0.0000	19	0.0000	
10	27	0.0024	23	0.0048	
0	22	0.0036	-18	0.0442	
-10	-23	0.0574	-26	0.0538	
-20	-19	0.0526	-21	0.0478	
-30	-17	0.0502	-22	0.0490	

Band :	GSM 1900	Channel :	661
Limit (ppm) :	within authorized band	Frequency :	1880.0 MHz

Temperature (°C)	GSM		EDGE class 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
50	65	0.0128	63	0.0154	PASS
40	56	0.0080	59	0.0133	
30	49	0.0043	45	0.0059	
20(Ref.)	41	0.0000	34	0.0000	
10	48	0.0037	46	0.0064	
0	-39	0.0426	39	0.0027	
-10	-27	0.0362	-29	0.0335	
-20	-32	0.0388	-36	0.0372	
-30	-35	0.0404	-34	0.0362	

Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Band :	WCDMA Band V	Channel :	4182
Limit (ppm) :	2.5	Frequency :	836.4 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
50	8	0.0239	PASS
40	10	0.0263	
30	-10	0.0024	
20(Ref.)	-12	0.0000	
10	-16	0.0048	
0	-20	0.0096	
-10	-16	0.0048	
-20	-19	0.0084	
-30	-14	0.0024	

Band :	WCDMA Band IV	Channel :	1413
Limit (ppm) :	within authorized band	Frequency :	1732.6 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
50	11	0.0115	PASS
40	9	0.0104	
30	10	0.0110	
20(Ref.)	-9	0.0000	
10	-12	0.0017	
0	-15	0.0035	
-10	13	0.0127	
-20	11	0.0115	
-30	8	0.0098	

Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Band :	WCDMA Band II	Channel :	9400
Limit (ppm) :	within authorized band	Frequency :	1880.0 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
50	14	0.0016	PASS
40	16	0.0005	
30	13	0.0021	
20(Ref.)	17	0.0000	
10	19	0.0011	
0	13	0.0021	
-10	10	0.0037	
-20	13	0.0021	
-30	14	0.0016	

Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

3.8.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Freq. Dev. (Hz)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH189	GSM	3.7	28	0.0036	2.5	PASS
		BEP	27	0.0024		
		4.2	26	0.0012		
	EDGE class 8	3.7	23	0.0048		
		BEP	20	0.0012		
		4.2	20	0.0012		
GSM 1900 CH661	GSM	3.7	42	0.0005	(Note 3.)	
		BEP	38	0.0016		
		4.2	39	0.0011		
	EDGE class 8	3.7	37	0.0016		
		BEP	36	0.0011		
		4.2	36	0.0011		
WCDMA Band V CH4182	RMC 12.2Kbps	3.7	-12	0.0000	2.5	
		BEP	-14	0.0024		
		4.2	-15	0.0036		
WCDMA Band IV CH1413	RMC 12.2Kbps	3.7	-13	0.0023	(Note 3.)	
		BEP	-12	0.0017		
		4.2	-15	0.0035		
WCDMA Band II CH9400	RMC 12.2Kbps	3.7	18	0.0005	(Note 3.)	
		BEP	19	0.0011		
		4.2	20	0.0016		

Note:

1. Normal Voltage = 3.7V.
2. Battery End Point (BEP) = 3.5 V.
3. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	May 08, 2014	Mar. 31, 2015~ Apr. 02, 2015	May 07, 2015	Conducted (TH01-SZ)
Thermal Chamber	Hong zhangroup	LP-150U	HD20120425	-40℃~150℃	Jan. 28, 2015	Mar. 31, 2015~ Apr. 02, 2015	Jan. 27, 2016	Conducted (TH01-SZ)
Filter	Wainwright	WHK1.5/15 G-10SS	SN32	1.5G High Pass	Oct. 01, 2014	Apr. 27, 2015~ Apr. 28, 2015	Sep. 30, 2015	Radiation (03CH11-HY)
Filter	Microwave	H3G018G1	SN477220	3.0G High Pass	Oct. 01, 2014	Apr. 27, 2015~ Apr. 28, 2015	Sep. 30, 2015	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz ~ 44GHZ	Sep. 24, 2014	Apr. 27, 2015~ Apr. 28, 2015	Sep. 23, 2015	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D	35414	30MHz~1GHz	Oct. 24, 2014	Apr. 27, 2015~ Apr. 28, 2015	Oct. 23, 2015	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Oct. 03, 2014	Apr. 27, 2015~ Apr. 28, 2015	Oct. 02, 2015	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA917025 1	18GHz~40GHz	Oct. 02, 2014	Apr. 27, 2015~ Apr. 28, 2015	Oct. 01, 2015	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 24, 2014	Apr. 27, 2015~ Apr. 28, 2015	Nov. 23, 2015	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 20, 2014	Apr. 27, 2015~ Apr. 28, 2015	Nov. 19, 2015	Radiation (03CH11-HY)
Hygrometer	TECEPEL	DTN-303B	TP140325	N/A	Nov. 19, 2014	Apr. 27, 2015~ Apr. 28, 2015	Nov. 18, 2015	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24967/4 MY28419/4	25GHz~40GHz	Nov. 06, 2014	Apr. 27, 2015~ Apr. 28, 2015	Nov. 05, 2015	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24967/4 MY28419/4	30MHz~1GHz	Nov. 06, 2014	Apr. 27, 2015~ Apr. 28, 2015	Nov. 05, 2015	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Apr. 27, 2015~ Apr. 28, 2015	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-450 0-B	N/A	1~4m	N/A	Apr. 27, 2015~ Apr. 28, 2015	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0-360 degree	N/A	Apr. 27, 2015~ Apr. 28, 2015	N/A	Radiation (03CH11-HY)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.9dB
--	-------