


RF TEST REPORT



Report No.: 17070764-FCC-R1

Supersede Report No.: N/A

Applicant	BLU Products, Inc.	
Product Name	Mobile Phone	
Model No.	STUDIO G3	
Serial No.	N/A	
Test Standard	FCC Part 22(H):2016 ;FCC Part 24(E):2016; FCC Part 27:2016; ANSI/TIA-603-D: 2010	
Test Date	August 19 to September 05, 2017	
Issue Date	September 06, 2017	
Test Result	☒ Pass ☐ Fail	
Equipment complied with the specification	☒	
Equipment did not comply with the specification	☐	
		
Loren Luo Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION.....	5
3. TEST SITE INFORMATION	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	9
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS.....	10
6.1 RF EXPOSURE (SAR)	10
6.2 RF OUTPUT POWER.....	11
6.3 PEAK-AVERAGE RATIO	24
6.4 OCCUPIED BANDWIDTH	29
6.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS	44
6.6 SPURIOUS RADIATED EMISSIONS.....	60
6.7 BAND EDGE	67
6.8 FREQUENCY STABILITY.....	81
ANNEX A. TEST INSTRUMENT	86
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	88
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	99
ANNEX C.II. EUT OPERATING CONKITIONS	101
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	102
ANNEX E. DECLARATION OF SIMILARITY	103

1. Report Revision History

Report No.	Report Version	Description	Issue Date
17070764-FCC-R1	NONE	Original	September 06, 2017

2. Customer information

Applicant Name	BLU Products, Inc.
Applicant Add	10814 NW 33rd St # 100 Doral, FL 33172
Manufacturer	BLU Products, Inc.
Manufacturer Add	10814 NW 33rd St # 100 Doral, FL 33172

3. Test site information

Test Lab A:

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	535293
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

Test Lab B:

Lab performing tests	SIEMIC (Nanjing-China) Laboratories
Lab Address	2-1 Longcang Avenue Yuhua Economic and Technology Development Park, Nanjing, China
FCC Test Site No.	694825
IC Test Site No.	4842B-1
Test Software	EZ_EMG(ver.lcp-03A1)

Note: We just perform Radiated Spurious Emission above 18GHz in the test Lab. B.

4. Equipment under Test (EUT) Information

Description of EUT: Mobile Phone

Main Model: STUDIO G3

Serial Model: N/A

Date EUT received: August 18, 2017

Test Date(s): August 19 to September 05, 2017

Equipment Category : PCE

Antenna Gain:

- GSM850: -3.7dBi
- PCS1900: -3.5dBi
- UMTS-FDD Band V: -3.0dBi
- UMTS-FDD Band IV: -2.5dBi
- UMTS-FDD Band II: -2.5dBi
- WIFI: -4.13dBi
- Bluetooth/BLE: -4.13dBi
- GPS: -3.2dBi

Antenna Type: PIFA antenna

Type of Modulation:

- GSM / GPRS: GMSK
- EGPRS: GMSK, 8PSK
- UMTS-FDD: QPSK
- 802.11b/g/n: DSSS, OFDM
- Bluetooth: GFSK, π /4DQPSK, 8DPSK
- BLE: GFSK
- GPS: BPSK

RF Operating Frequency (ies):

- GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz
- PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz
- UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz
- UMTS-FDD Band IV TX: 1712.4 ~ 1752.6 MHz;
RX : 2112.4 ~ 2152.6 MHz
- UMTS-FDD Band II TX: 1852.4 ~ 1907.6 MHz;
RX: 1932.4 ~ 1987.6 MHz

WIFI: 802.11b/g/n(20M): 2412-2462 MHz

WIFI: 802.11n(40M): 2422-2452 MHz

Bluetooth& BLE: 2402-2480 MHz

GPS: 1575.42 MHz

GSM Voce:GSM850: 32.54 dBm

PCS1900: 29.68 dBm

GPRS:GSM850: 32.53 dBm

PCS1900: 29.40 dBm

EGPRS(MCS1):GSM850: 32.38 dBm

PCS1900: 29.33 dBm

EGPRS(MCS5):GSM850: 27.32 dBm

PCS1900: 26.49 dBm

Maximum Conducted

AV Power to Antenna:

RMC:UMTS-FDD Band V: 22.62 dBm

UMTS-FDD Band II: 22.58 dBm

UMTS-FDD Band IV: 22.54 dBm

HSDPA:UMTS-FDD Band V: 22.00 dBm

UMTS-FDD Band II: 21.98 dBm

UMTS-FDD Band IV: 22.00 dBm

HSUPA:UMTS-FDD Band V: 22.02 dBm

UMTS-FDD Band II: 21.93 dBm

UMTS-FDD Band IV: 21.91dBm

GSM Voce:GSM850: 26.69 dBm / ERP

PCS1900: 26.18 dBm / EIRP

GPRS:GSM850: 26.68 dBm / ERP

PCS1900: 25.90 dBm / EIRP

EGPRS(MCS5):GSM850: 21.47 dBm / ERP

PCS1900: 22.99 dBm / EIRP

ERP/EIRP:

RMC:UMTS-FDD Band V: 17.47 dBm / ERP

UMTS-FDD Band II: 20.08 dBm / EIRP

UMTS-FDD Band IV: 20.04 dBm / EIRP

HSDPA:UMTS-FDD Band V: 16.85dBm / ERP

UMTS-FDD Band II: 19.48 dBm / EIRP

UMTS-FDD Band IV: 19.50 dBm / EIRP

HSUPA:UMTS-FDD Band V: 16.87 dBm / ERP

UMTS-FDD Band II: 18.97 dBm / EIRP

UMTS-FDD Band IV: 19.41dBm / EIRP

Number of Channels:	GSM 850: 124CH PCS1900: 299CH UMTS-FDD Band V: 102CH UMTS-FDD Band IV: 202CH UMTS-FDD Band II: 277CH WIFI :802.11b/g/n(20M): 11CH WIFI :802.11n(40M): 7CH Bluetooth: 79CH BLE: 40CH GPS:1CH
Port:	USB Port, Earphone Port Adapter: Model: US-BB-1000 Input: AC100-240V~50/60Hz,0.2A
Input Power:	Output: DC 5.0V,1.0A Battery: Model: C745343205L Spec: 3.8V, 2050mAh, 7.79Wh
Trade Name :	BLU
GPRS/EGPRS Multi-slot class	8/10/12
FCC ID:	YHLBLUSTUDIOG3

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§ 1.1307; § 2.1093	RF Exposure (SAR)	Compliance
§2.1046; § 22.913(a); § 24.232(c); § 27.50(c.10) ; § 27.50(d.4)	RF Output Power	Compliance
§ 24.232 (d) ; § 27.50(d)	Peak-Average Ratio	Compliance
§ 2.1049; § 22.905; § 22.917; § 24.238; § 27.53(a.5)	99% & -26 dB Occupied Bandwidth	Compliance
§ 2.1051; § 22.917(a); § 24.238(a); § 27.53(h)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917(a); § 24.238(a); § 27.53(h)	Field Strength of Spurious Radiation	Compliance
§ 22.917(a); § 24.238(a); § 27.53(h)	Out of band emission, Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235; § 27.5(h); § 27.54	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

Note: Testing was performed by configuring EUT to maximum output power status, the declared output power class for different

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS

6.1 RF Exposure (SAR)

Test Result: Pass


The EUT is a portable device, thus requires SAR evaluation;
Please refer to RF Exposure Evaluation Report: 17070764-FCC-H.

6.2 RF Output Power

Temperature	23 °C
Relative Humidity	55%
Atmospheric Pressure	1012mbar
Test date :	September 04, 2017
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§22.913 (a)	a)	ERP:38.45dBm	☒
§24.232 (c)	b)	EIRP:33dBm	☒
§27.50 (c)	c)	EIRP: 30dBm	☒

Test Setup	 Base Station EUT
------------	---

Test Procedure	For Conducted Power: - The transmitter output port was connected to base station. - Set EUT at maximum power through base station. - Select lowest, middle, and highest channels for each band and different test mode. For ERP/EIRP: According with KDB 971168 v02r02 - The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable. - The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis. - The frequency range up to tenth harmonic of the fundamental
----------------	---

	frequency was investigated. - Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution. - Spurious emissions in dB = $10 \log (\text{TX power in Watts}/0.001)$ – the absolute level - Spurious attenuation limit in dB = $43 + 10 \text{ Log}_{10} (\text{power out in Watts})$.
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A
 Test Plot ☐ Yes (See below) ☒ N/A

Conducted Power

GSM Mode:

Burst Average Power (dBm);								
Band	GSM850				PCS1900			
Channel	128	190	251	Tune up Power tolerant	512	661	810	Tune up Power tolerant
Frequency (MHz)	824.2	836.6	848.8	/	1850.2	1880	1909.8	/
GSM Voice (1 uplink),GMSK	32.36	32.44	32.54	33±1	29.28	29.62	29.68	30±1
GPRS Multi-Slot Class 8 (1 uplink),GMSK	32.38	32.41	32.53	33±1	29.06	29.27	29.4	30±1
GPRS Multi-Slot Class 10 (2 uplink) GMSK	31.44	31.47	31.53	32±1	28.28	28.57	28.58	29±1
GPRS Multi-Slot Class 12 (3 uplink) GMSK	29.62	29.63	29.76	30±1	26.69	27.01	27.02	27±1
GPRS Multi-Slot Class 12 (4 uplink) GMSK	28.73	28.76	28.85	29±1	25.87	26.14	26.13	26±1
EGPRS Multi-Slot Class 8 (1 uplink) GMSK MCS1	32.17	32.21	32.38	33±1	29.03	29.31	29.33	29±1
EGPRS Multi-Slot Class 10 (2 uplink) GMSK MCS1	31.28	31.26	31.32	31±1	28.24	28.48	28.44	28±1
EGPRS Multi-Slot Class 12 (3 uplink) GMSK MCS1	29.28	29.31	29.45	29±1	26.53	26.82	26.86	27±1
EGPRS Multi-Slot Class 12 (4 uplink) GMSK MCS1	28.4	28.44	28.54	28±1	25.75	25.97	25.98	26±1
EGPRS Multi-Slot Class 8 (1 uplink) 8PSK MCS5	27.32	27.32	26.94	27±1	26.25	26.4	26.49	26±1

EGPRS Multi-Slot Class 10 (2 uplink) 8PSK MCS5	26.14	26.15	25.77	26±1	25.33	25.51	25.69	26±1
EGPRS Multi-Slot Class 12 (3 uplink) 8PSK MCS5	24.18	24.04	23.61	24±1	23.44	23.68	23.82	24±1
EGPRS Multi-Slot Class 12 (4 uplink) 8PSK MCS5	22.46	22.31	22.11	22±1	22.41	22.66	22.91	23±1

Remark :

GPRS, CS1 coding scheme.

EGPRS, MCS1 coding scheme.

EGPRS, MCS5 coding scheme.

Multi-Slot Class 8 , Support Max 4 downlink, 1 uplink , 5 working link

Multi-Slot Class 10 , Support Max 4 downlink, 2 uplink , 5 working link

Multi-Slot Class 12 , Support Max 4 downlink, 4 uplink , 5 working link

UMTS Mode:

UMTS-FDD Band V

Band/ Time Slot configuration	Channel	Frequency	Average power (dBm)	Tune up Power tolerant
RMC 12.2kbps	4132	826.4	22.62	23±1
	4175	835	22.34	23±1
	4233	846.6	22.29	23±1
HSDPA Subtest1	4132	826.4	21.98	22±1
	4175	835	21.58	22±1
	4233	846.6	21.51	22±1
HSDPA Subtest2	4132	826.4	22.00	22±1
	4175	835	21.66	22±1
	4233	846.6	21.64	22±1
HSDPA Subtest3	4132	826.4	21.83	22±1
	4175	835	21.64	22±1
	4233	846.6	21.59	22±1
HSDPA Subtest4	4132	826.4	22.00	22±1
	4175	835	21.73	22±1
	4233	846.6	21.58	22±1
HSUPA Subtest1	4132	826.4	21.99	22±1
	4175	835	21.58	22±1
	4233	846.6	21.67	22±1
HSUPA Subtest2	4132	826.4	21.76	22±1
	4175	835	21.63	22±1
	4233	846.6	21.51	22±1
HSUPA Subtest3	4132	826.4	21.87	22±1
	4175	835	21.68	22±1
	4233	846.6	21.58	22±1
HSUPA Subtest4	4132	826.4	21.91	22±1
	4175	835	21.46	22±1
	4233	846.6	21.54	22±1
HSUPA Subtest5	4132	826.4	22.02	22±1
	4175	835	21.73	22±1
	4233	846.6	21.65	22±1

UMTS-FDD Band II

Band/ Time Slot configuration	Channel	Frequency	Average power (dBm)	Tune up Power tolerant
RMC 12.2kbps	9262	1852.4	22.58	23±1
	9400	1880	22.3	23±1
	9538	1907.6	22.18	23±1
HSDPA Subtest1	9262	1852.4	21.95	22±1
	9400	1880	21.67	22±1
	9538	1907.6	21.49	22±1
HSDPA Subtest2	9262	1852.4	21.98	22±1
	9400	1880	21.7	22±1
	9538	1907.6	21.51	22±1
HSDPA Subtest3	9262	1852.4	21.96	22±1
	9400	1880	21.55	22±1
	9538	1907.6	21.4	22±1
HSDPA Subtest4	9262	1852.4	21.95	22±1
	9400	1880	21.68	22±1
	9538	1907.6	21.49	22±1
HSUPA Subtest1	9262	1852.4	21.88	22±1
	9400	1880	21.62	22±1
	9538	1907.6	21.5	22±1
HSUPA Subtest2	9262	1852.4	21.88	22±1
	9400	1880	21.54	22±1
	9538	1907.6	21.47	22±1
HSUPA Subtest3	9262	1852.4	21.88	22±1
	9400	1880	21.56	22±1
	9538	1907.6	21.41	22±1
HSUPA Subtest4	9262	1852.4	21.79	22±1
	9400	1880	21.36	22±1
	9538	1907.6	21.46	22±1
HSUPA Subtest5	9262	1852.4	21.93	22±1
	9400	1880	21.7	22±1
	9538	1907.6	21.49	22±1

UMTS-FDD Band IV

Band/ Time Slot configuration	Channel	Frequency	Average power (dBm)	Tune up Power tolerant
RMC 12.2kbps	1313	1712.6	22.21	23±1
	1413	1732.6	22.54	23±1
	1512	1752.4	21.96	23±1
HSDPA Subtest1	1313	1712.6	21.59	22±1
	1413	1732.6	21.89	22±1
	1512	1752.4	21.24	22±1
HSDPA Subtest2	1313	1712.6	21.52	22±1
	1413	1732.6	22.00	22±1
	1512	1752.4	21.37	22±1
HSDPA Subtest3	1313	1712.6	21.54	22±1
	1413	1732.6	21.92	22±1
	1512	1752.4	21.22	22±1
HSDPA Subtest4	1313	1712.6	21.46	22±1
	1413	1732.6	21.85	22±1
	1512	1752.4	21.22	22±1
HSUPA Subtest1	1313	1712.6	21.46	22±1
	1413	1732.6	21.91	22±1
	1512	1752.4	21.34	22±1
HSUPA Subtest2	1313	1712.6	21.47	22±1
	1413	1732.6	21.74	22±1
	1512	1752.4	21.29	22±1
HSUPA Subtest3	1313	1712.6	21.61	22±1
	1413	1732.6	21.85	22±1
	1512	1752.4	21.34	22±1
HSUPA Subtest4	1313	1712.6	21.46	22±1
	1413	1732.6	21.75	22±1
	1512	1752.4	21.01	22±1
HSUPA Subtest5	1313	1712.6	21.67	22±1
	1413	1732.6	21.82	22±1
	1512	1752.4	21.42	22±1

ERP & EIRP

GSM Voice

ERP for Cellular Band (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	20.94	V	6.1	0.53	26.51	38.45
824.2	19.58	H	6.1	0.53	25.15	38.45
836.6	20.92	V	6.2	0.53	26.59	38.45
836.6	20.01	H	6.2	0.53	25.68	38.45
848.8	21.02	V	6.2	0.53	26.69	38.45
848.8	19.18	H	6.2	0.53	24.85	38.45

EIRP for PCS Band (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	18.62	V	7.88	0.72	25.78	33
1850.2	17.57	H	7.88	0.72	24.73	33
1880	18.96	V	7.88	0.72	26.12	33
1880	16.96	H	7.88	0.72	24.12	33
1909.8	19.04	V	7.86	0.72	26.18	33
1909.8	17.3	H	7.86	0.72	24.44	33

GPRS:

ERP for Cellular Band (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	20.96	V	6.1	0.53	26.53	38.45
824.2	20	H	6.1	0.53	25.57	38.45
836.6	20.89	V	6.2	0.53	26.56	38.45
836.6	19.43	H	6.2	0.53	25.1	38.45
848.8	21.01	V	6.2	0.53	26.68	38.45
848.8	19.73	H	6.2	0.53	25.4	38.45

EIRP for PCS Band (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	18.4	V	7.88	0.72	25.56	33
1850.2	17.62	H	7.88	0.72	24.78	33
1880	18.61	V	7.88	0.72	25.77	33
1880	16.88	H	7.88	0.72	24.04	33
1909.8	18.76	V	7.86	0.72	25.9	33
1909.8	17.83	H	7.86	0.72	24.97	33

EGPRS (MCS5):

ERP for Cellular Band (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	15.9	V	6.1	0.53	21.47	38.45
824.2	13.95	H	6.1	0.53	19.52	38.45
836.6	15.8	V	6.2	0.53	21.47	38.45
836.6	14.1	H	6.2	0.53	19.77	38.45
848.8	15.42	V	6.2	0.53	21.09	38.45
848.8	14.59	H	6.2	0.53	20.26	38.45

EIRP for PCS Band (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	15.59	V	7.88	0.72	22.75	33
1850.2	14.83	H	7.88	0.72	21.99	33
1880	15.74	V	7.88	0.72	22.9	33
1880	14.02	H	7.88	0.72	21.18	33
1909.8	15.85	V	7.86	0.72	22.99	33
1909.8	14.82	H	7.86	0.72	21.96	33

RMC

ERP for UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
826.4	11.9	V	6.1	0.53	17.47	38.45
826.4	10.64	H	6.1	0.53	16.21	38.45
835	11.52	V	6.2	0.53	17.19	38.45
835	10.62	H	6.2	0.53	16.29	38.45
846.6	11.47	V	6.2	0.53	17.14	38.45
846.6	10.29	H	6.2	0.53	15.96	38.45

EIRP for UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1852.4	12.92	V	7.88	0.72	20.08	33
1852.4	12.19	H	7.88	0.72	19.35	33
1880	12.64	V	7.88	0.72	19.8	33
1880	11.61	H	7.88	0.72	18.77	33
1907.6	12.54	V	7.86	0.72	19.68	33
1907.6	11.16	H	7.86	0.72	18.3	33

EIRP for UMTS-FDD Band IV (Part 27H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1712.4	12.45	V	7.95	0.69	19.71	30
1712.4	10.97	H	7.95	0.69	18.23	30
1740	12.8	V	7.93	0.69	20.04	30
1740	11.19	H	7.93	0.69	18.43	30
1752.6	12.23	V	7.92	0.69	19.46	30
1752.6	11.04	H	7.92	0.69	18.27	30

HSDPA

ERP for UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
826.4	11.28	V	6.1	0.53	16.85	38.45
826.4	10.35	H	6.1	0.53	15.92	38.45
835	10.91	V	6.2	0.53	16.58	38.45
835	9.59	H	6.2	0.53	15.26	38.45
846.6	10.82	V	6.2	0.53	16.49	38.45
846.6	8.88	H	6.2	0.53	14.55	38.45

EIRP for UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1852.4	12.32	V	7.88	0.72	19.48	33
1852.4	11.13	H	7.88	0.72	18.29	33
1880	12.04	V	7.88	0.72	19.2	33
1880	11.28	H	7.88	0.72	18.44	33
1907.6	11.87	V	7.86	0.72	19.01	33
1907.6	10.8	H	7.86	0.72	17.94	33

EIRP for UMTS-FDD Band IV (Part 27H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1712.4	11.83	V	7.95	0.69	19.09	30
1712.4	10.21	H	7.95	0.69	17.47	30
1740	12.26	V	7.93	0.69	19.5	30
1740	11.35	H	7.93	0.69	18.59	30
1752.6	11.64	V	7.92	0.69	18.87	30
1752.6	9.82	H	7.92	0.69	17.05	30

HSUPA

ERP for UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
826.4	11.3	V	6.1	0.53	16.87	38.45
826.4	9.69	H	6.1	0.53	15.26	38.45
835	10.86	V	6.2	0.53	16.53	38.45
835	9.56	H	6.2	0.53	15.23	38.45
846.6	10.85	V	6.2	0.53	16.52	38.45
846.6	9.16	H	6.2	0.53	14.83	38.45

EIRP for UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1852.4	11.76	V	7.88	0.72	18.92	33
1852.4	9.78	H	7.88	0.72	16.94	33
1880	11.81	V	7.88	0.72	18.97	33
1880	10.29	H	7.88	0.72	17.45	33
1907.6	11.8	V	7.86	0.72	18.94	33
1907.6	10.71	H	7.86	0.72	17.85	33


EIRP for UMTS-FDD Band IV (Part 27H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1712.4	11.91	V	7.95	0.69	19.17	30
1712.4	10.96	H	7.95	0.69	18.22	30
1740	12.17	V	7.93	0.69	19.41	30
1740	11.12	H	7.93	0.69	18.36	30
1752.6	11.69	V	7.92	0.69	18.92	30
1752.6	10.27	H	7.92	0.69	17.5	30

6.3 Peak-Average Ratio

Temperature	23 °C
Relative Humidity	55%
Atmospheric Pressure	1012mbar
Test date :	September 04, 2017
Tested By :	Loren Luo

Requirement(s):

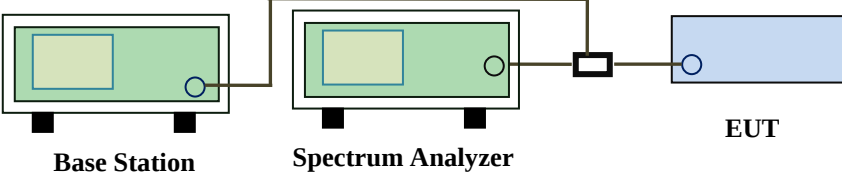Spec	Item	Requirement	Applicable
§24.232(d) § 27.50(d)	a)	The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	☒
Test Setup	 Base Station Spectrum Analyzer EUT		
Test Procedure	According with KDB 971168 v02r02 5.7.2 Alternate procedure for PAPR 5.1.2 Peak power measurements with a peak power meter The total peak output power may be measured using a broadband peak RF power meter. The power meter must have a video bandwidth that is greater than or equal to the emission bandwidth and utilize a fast-responding diode detector. 5.2.3 Average power measurement with average power meter As an alternative to the use of a spectrum/signal analyzer or EMI receiver to perform a measurement of the total in-band average output power, a wideband RF average power meter with a thermocouple detector or equivalent can be used under certain conditions If the EUT can be configured to transmit continuously (i.e., the burst duty cycle $\geq 98\%$) and at all times the EUT is transmitting at its maximum output		

	power level, then a conventional wide-band RF power meter can be used. If the EUT cannot be configured to transmit continuously (i.e., the burst duty cycle < 98%), then there are two options for the use of an average power meter. First, a gated average power meter can be used to perform the measurement if the gating parameters can be adjusted such that the power is measured only over active transmission bursts at maximum output power levels. A conventional average power meter can also be used if the measured burst duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent) by performing the measurement over the on/off burst cycles and then correcting (increasing) the measured level by a factor equal to $10\log(1/\text{duty cycle})$
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A
 Test Plot ☐ Yes (See below) ☒ N/A

GSM : GSM 1900 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1850.2	32.22	29.28	2.94
1880	32.16	29.62	2.54
1909.8	32.36	29.68	2.68

GPRS 1900 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1850.2	32.32	29.06	3.26
1880	32.06	29.27	2.79
1909.8	32.19	29.4	2.79

EGPRS (MCS5) 1900 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1850.2	28.55	25.57	2.98
1880	28.41	25.58	2.83
1909.8	28.29	25.71	2.58

RMC : UMTS-FDD Band II PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1852.4	25.79	22.58	3.21
1880	25.39	22.3	3.09
1907.6	24.96	22.18	2.78

UMTS-FDD Band IV PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1712.6	25.12	22.21	2.91
1732.6	25.35	22.54	2.81
1752.4	24.89	21.96	2.93

HSUPA : UMTS-FDD Band II PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1852.4	24.53	21.88	2.65
1880	24.39	21.62	2.77
1907.6	24.41	21.5	2.91

UMTS-FDD Band IV PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1712.6	24.22	21.46	2.76
1732.6	24.16	21.91	2.25
1752.4	24.36	21.34	3.02

HSDPA : UMTS-FDD Band II PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1852.4	24.53	21.95	2.58
1880	24.39	21.67	2.72
1907.6	24.51	21.49	3.02


UMTS-FDD Band IV PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1712.6	24.39	21.59	2.8
1732.6	24.28	21.89	2.39
1752.4	24.31	21.24	3.07

6.4 Occupied Bandwidth

Temperature	27 °C
Relative Humidity	55%
Atmospheric Pressure	1023mbar
Test date :	August 22, 2017
Tested By :	Loren Luo

Requirement(s):

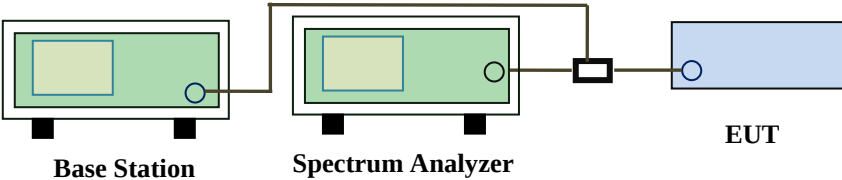Spec	Item	Requirement	Applicable
§2.1049, §22.917, §22.905 §24.238 §27.53(a)	a)	99% Occupied Bandwidth(kHz)	☒
	b)	26 dB Bandwidth(kHz)	☒
Test Setup			
Test Procedure	- The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers.		
Remark			
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A
 Test Plot ☒ Yes (See below) ☐ N/A

GSM Voice:

Cellular Band (Part 22H) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	244.1426	318.274
190	836.6	244.9412	318.266
251	848.8	251.3381	321.746

PCS Band (Part 24E) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850.2	249.7342	322.550
661	1880.0	244.6515	324.566
810	1909.8	248.8820	322.154

GPRS:

Cellular Band (Part 22H) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	243.8348	318.036
190	836.6	247.3857	318.240
251	848.8	245.3798	321.657

PCS Band (Part 24E) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850.2	243.0589	321.676
661	1880.0	246.9934	323.817
810	1909.8	245.8774	321.821

EGPRS (MCS5):

Cellular Band (Part 22H) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	245.7131	318.898
190	836.6	244.5093	318.171
251	848.8	245.7804	320.447

PCS Band (Part 24E) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850.2	243.9369	321.038
661	1880.0	248.2953	324.238
810	1909.8	245.0778	322.303

RMC:

UMTS-FDD Band V (Part 22H)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
4132	826.4	4.1549	4.712
4175	835.0	4.1420	4.700
4233	846.6	4.1552	4.703

UMTS-FDD Band II (Part 24E)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
9262	1852.4	4.1631	4.730
9400	1880.0	4.1649	4.734
9538	1907.6	4.1621	4.741

UMTS-FDD Band IV (Part 27)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
1313	1713	4.1654	4.726
1413	1733	4.1747	4.740
1512	1752	4.1763	4.718

HSDPA:

UMTS-FDD Band V (Part 22H)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
4132	826.6	4.1490	4.697
4175	835.0	4.1470	4.715
4233	846.6	4.1527	4.719

UMTS-FDD Band II (Part 24E)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
9262	1852.4	4.1638	4.711
9400	1880.0	4.1600	4.718
9538	1907.6	4.1791	4.751

UMTS-FDD Band IV (Part 27)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
1313	1713	4.1763	4.718
1413	1733	4.1593	4.727
1512	1752	4.1667	4.724

HSUPA:

UMTS-FDD Band V (Part 22H)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
4132	826.4	4.1495	4.705
4175	835.0	4.1510	4.726
4233	846.6	4.1596	4.710

UMTS-FDD Band II (Part 24E)


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
9262	1852.4	4.1518	4.731
9400	1880.0	4.1715	4.712
9538	1907.6	4.1568	4.723

UMTS-FDD Band IV (Part 27)


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
1313	1713	4.1758	4.725
1413	1733	4.1668	4.724
1512	1752	4.1694	4.723

Test Plots


GMS Voice:

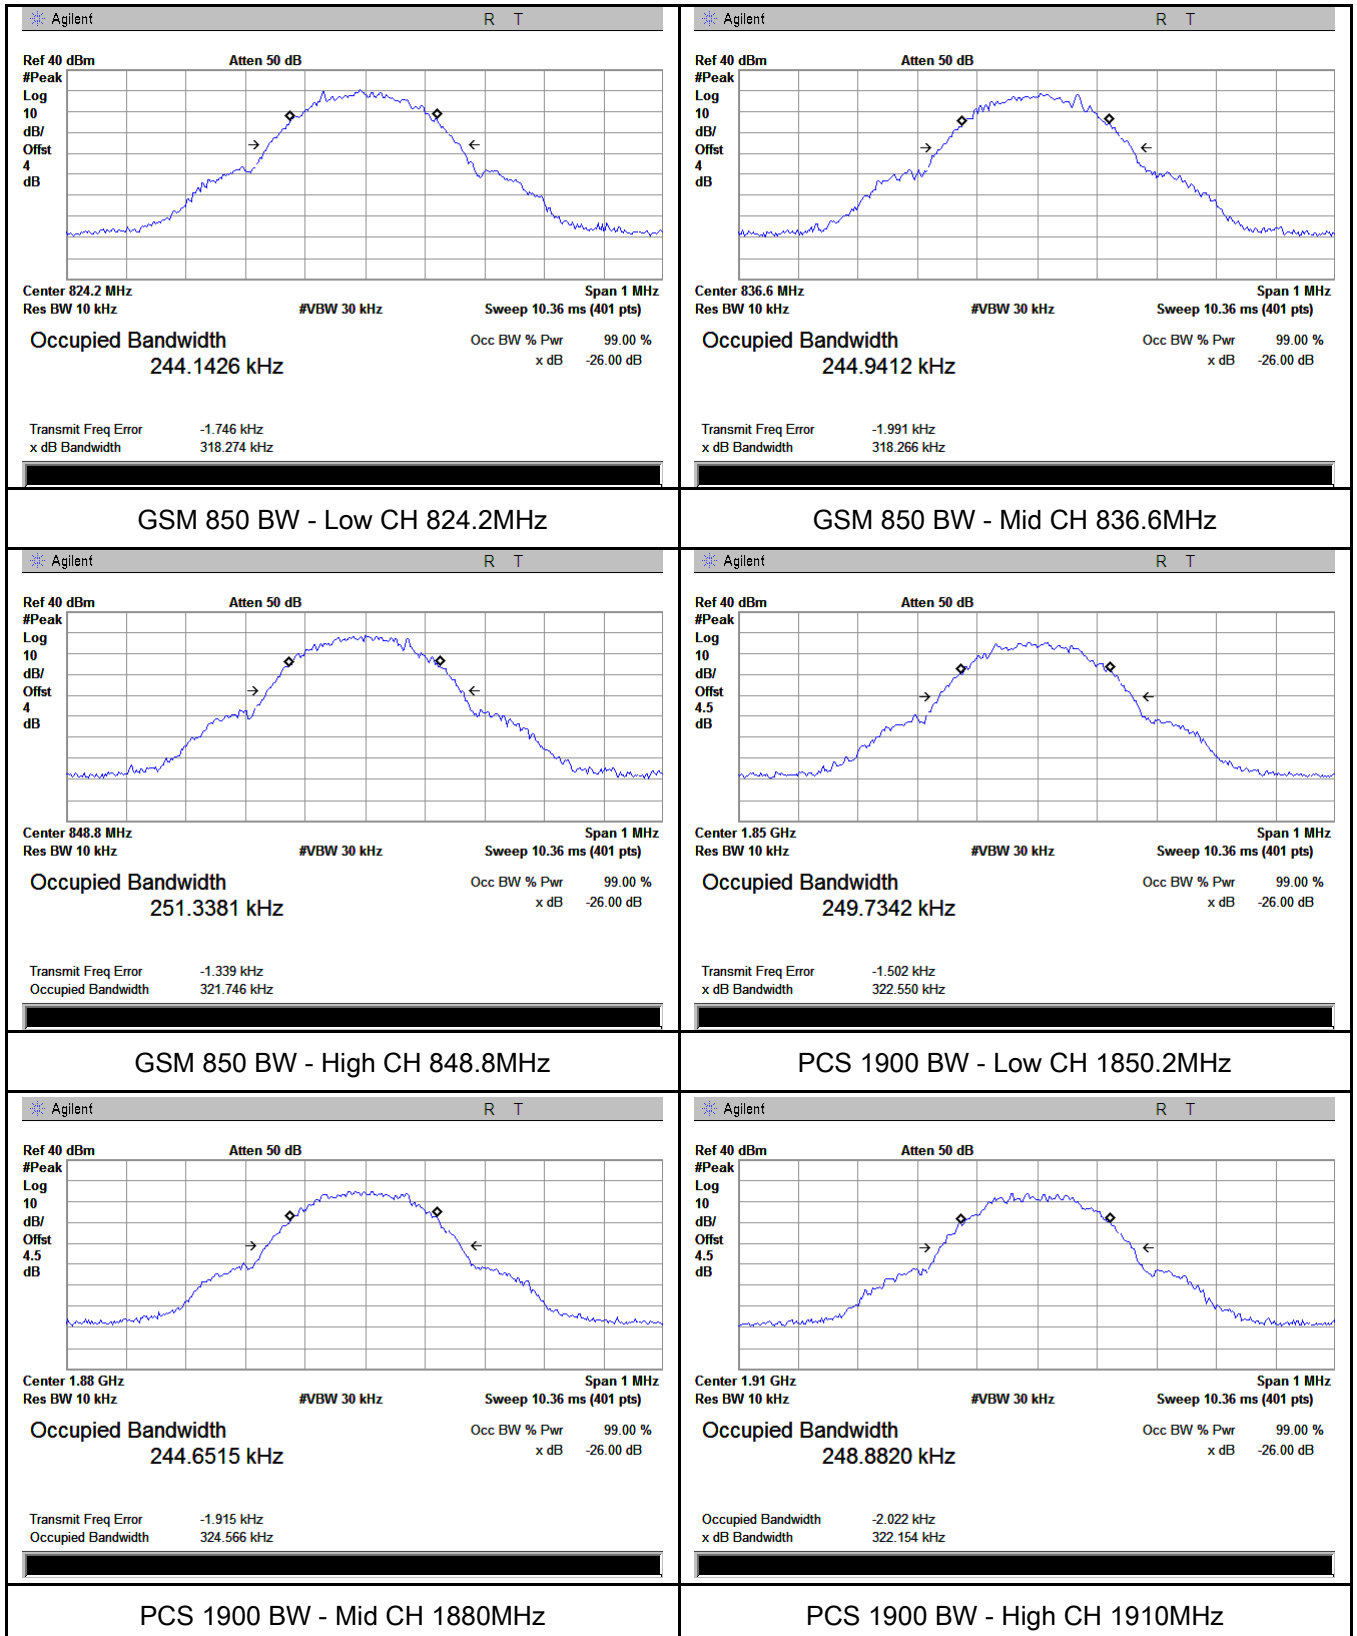


GPRS:

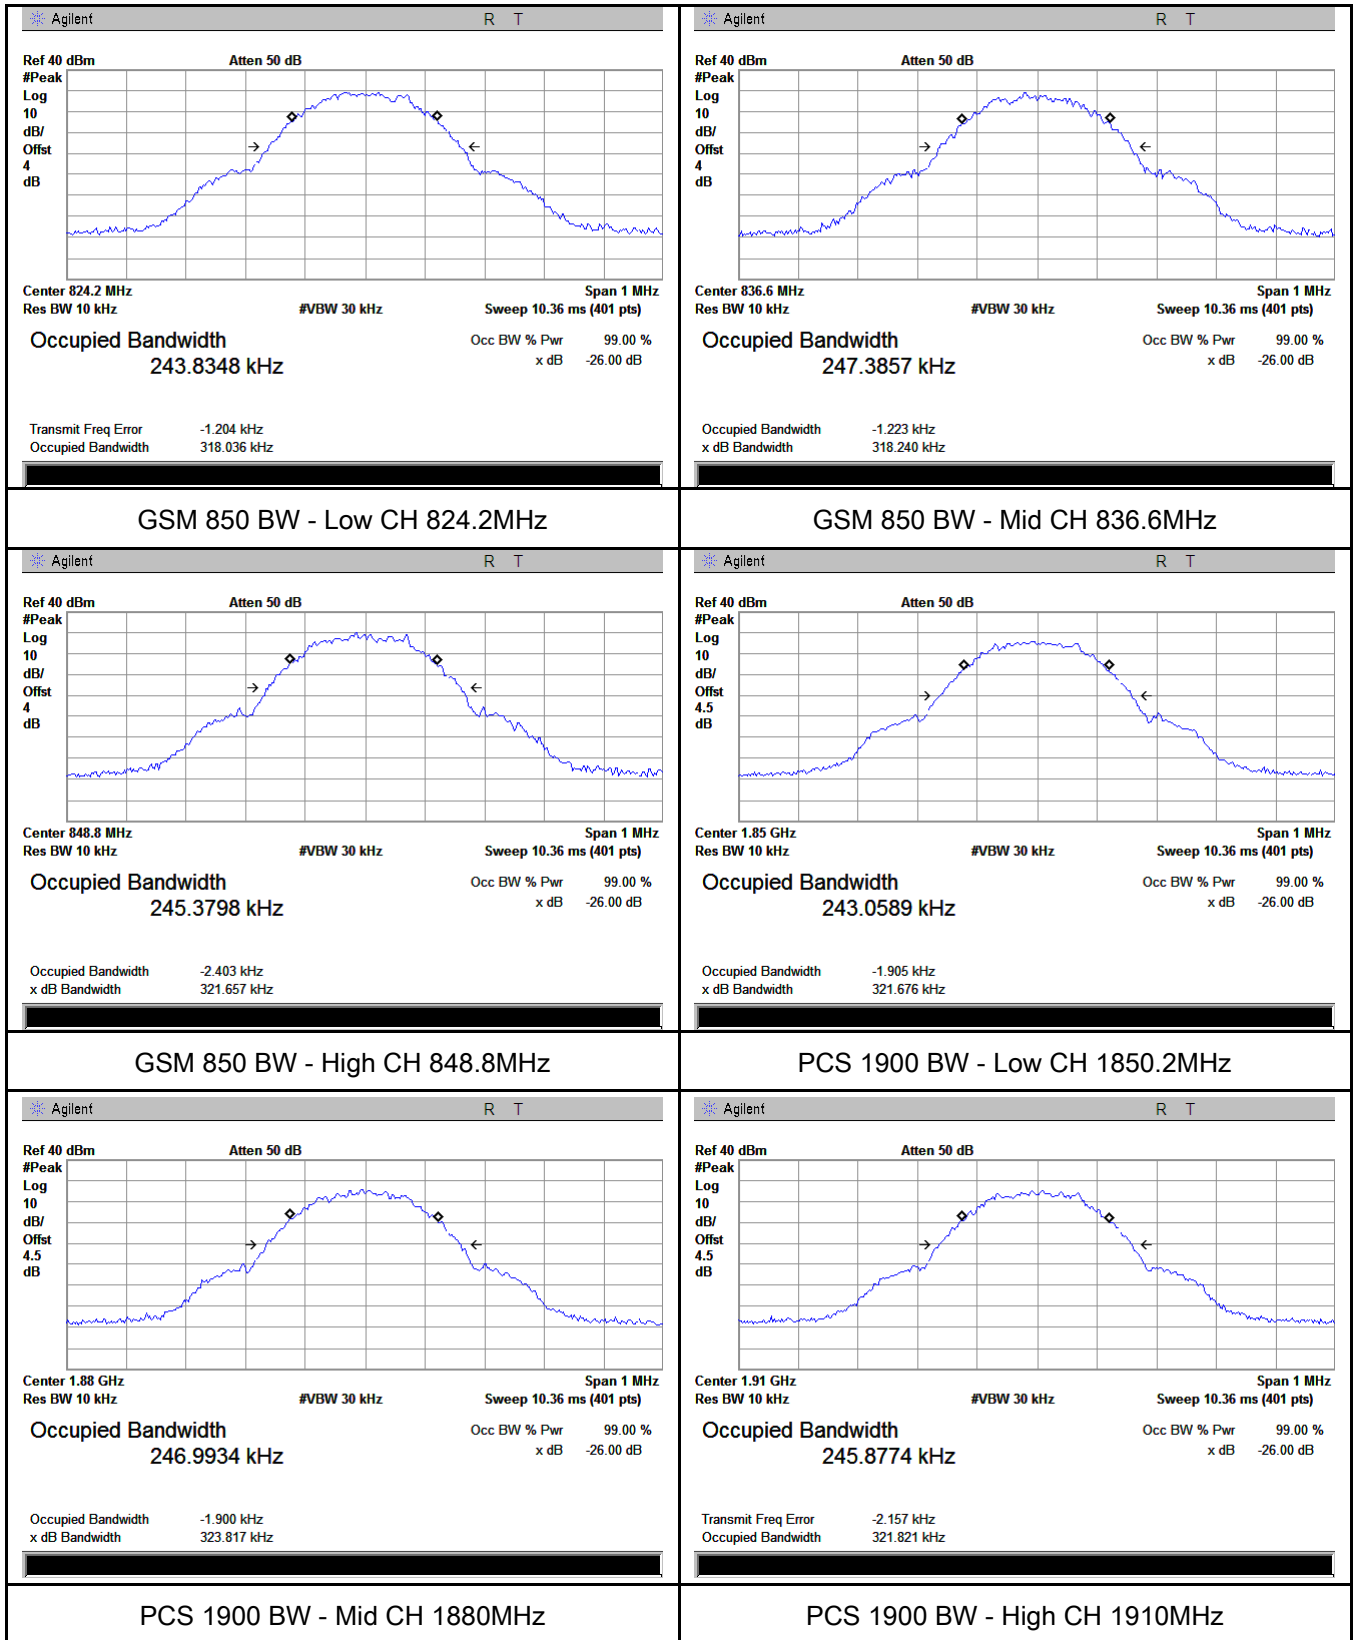


EGPRS:

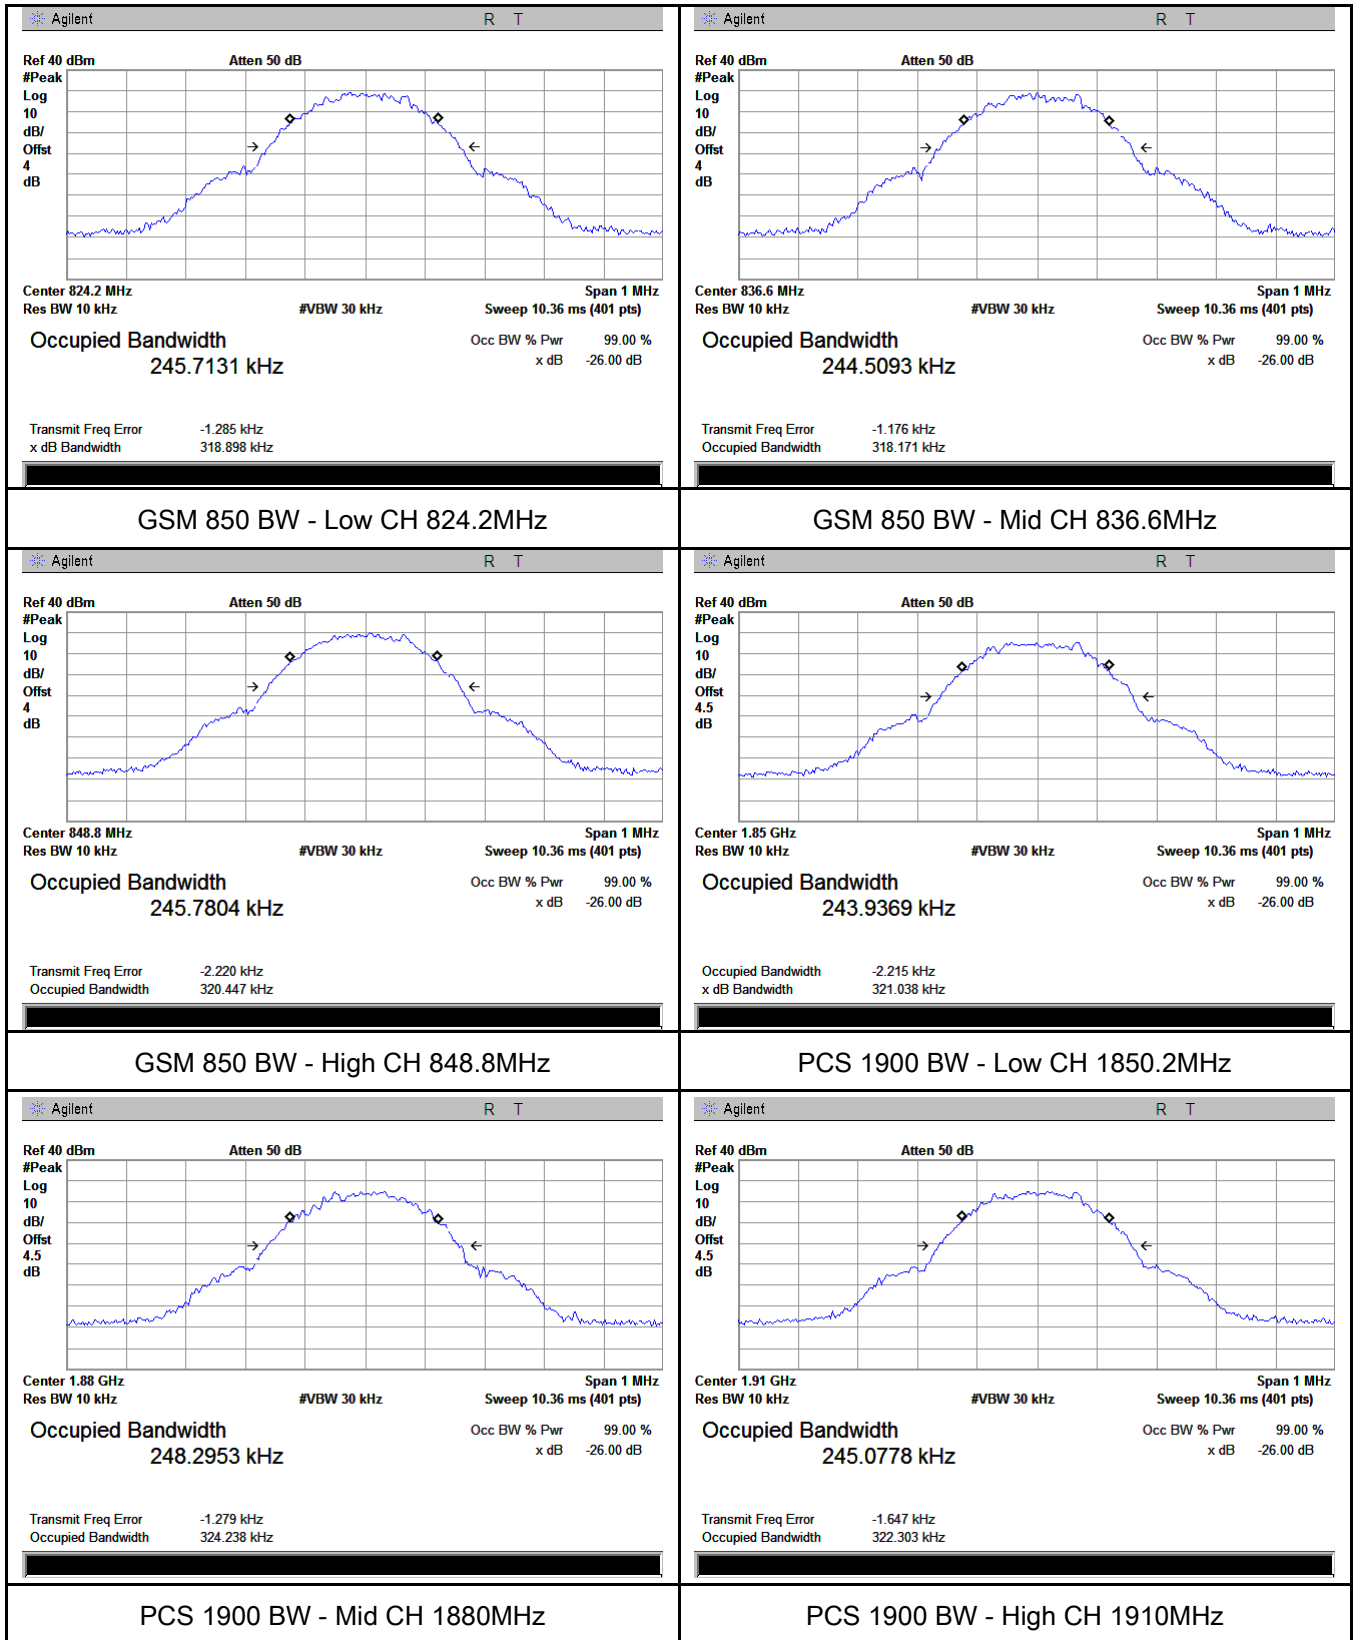


RMC:

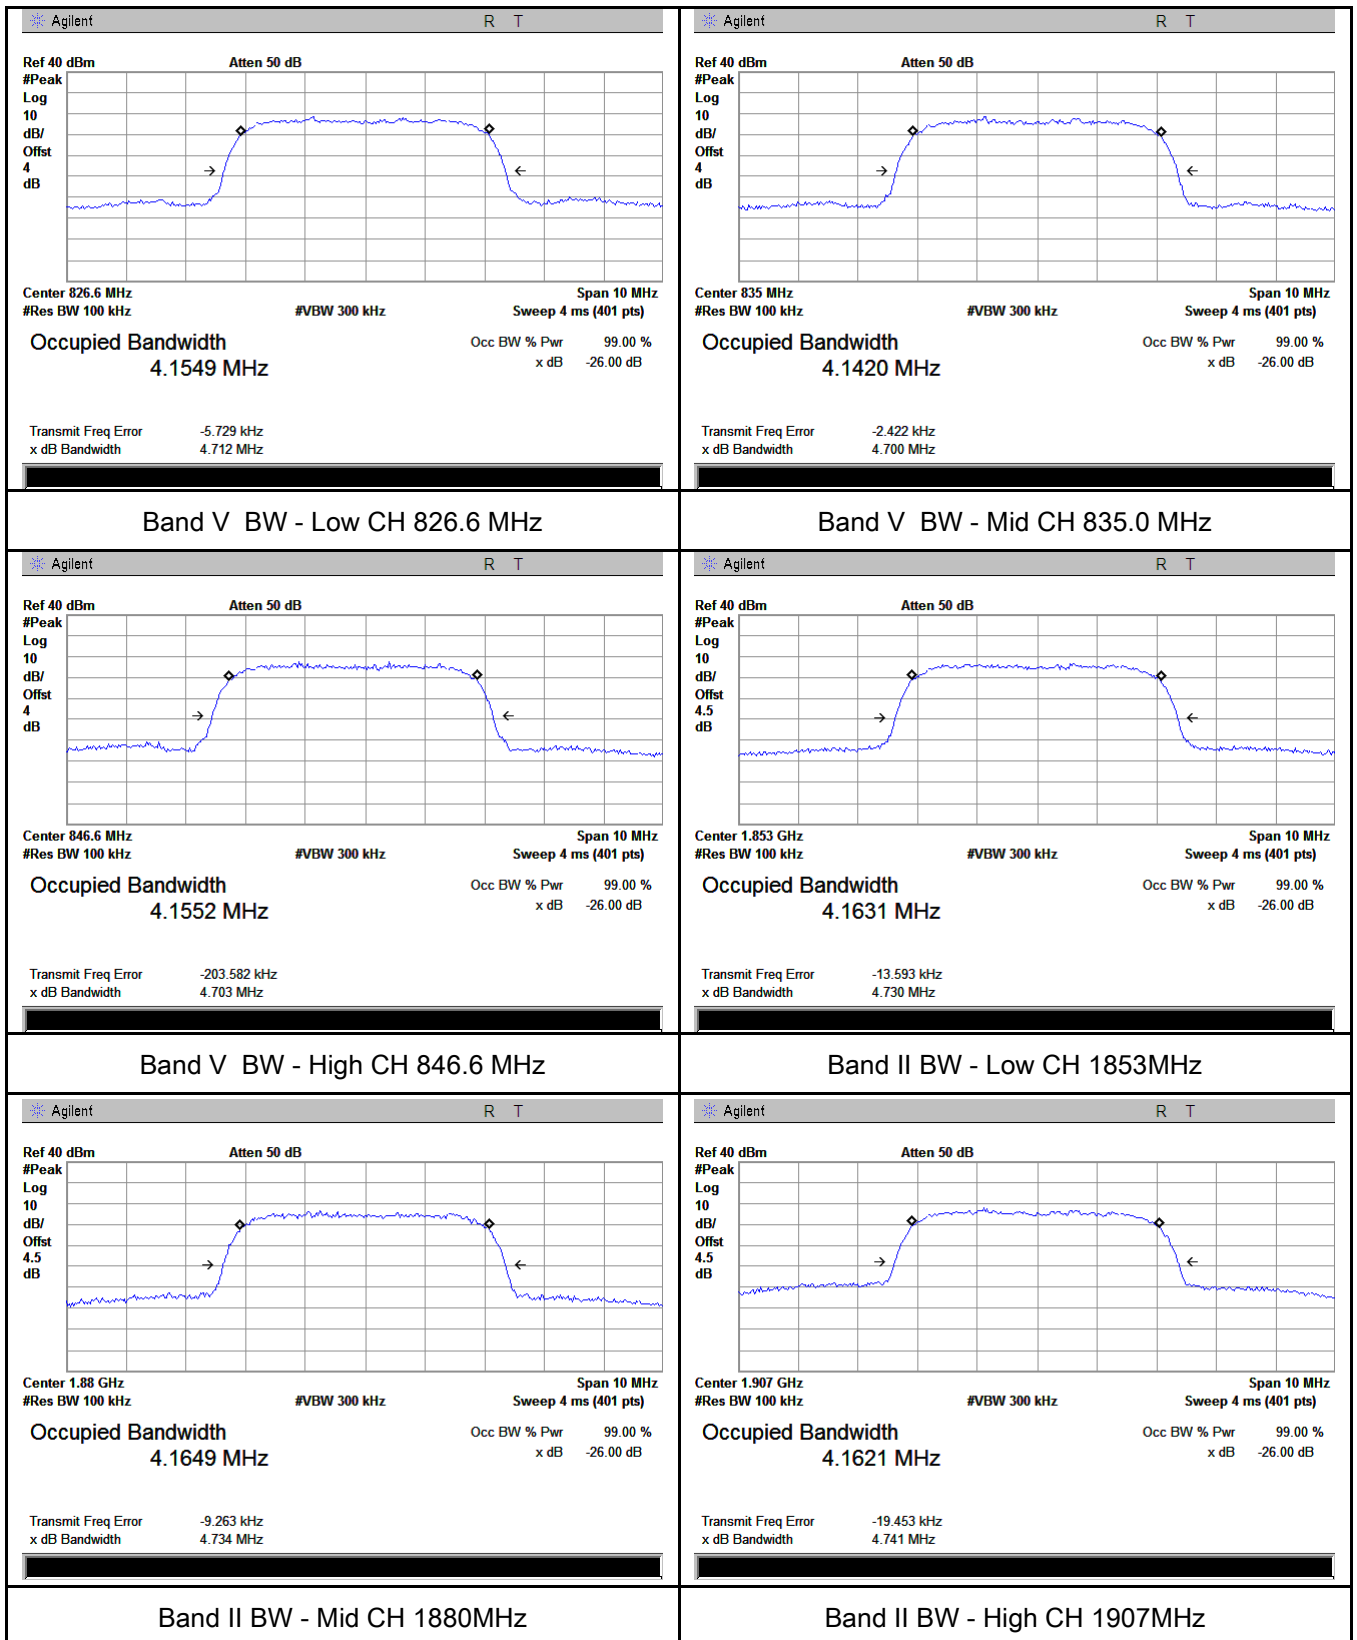


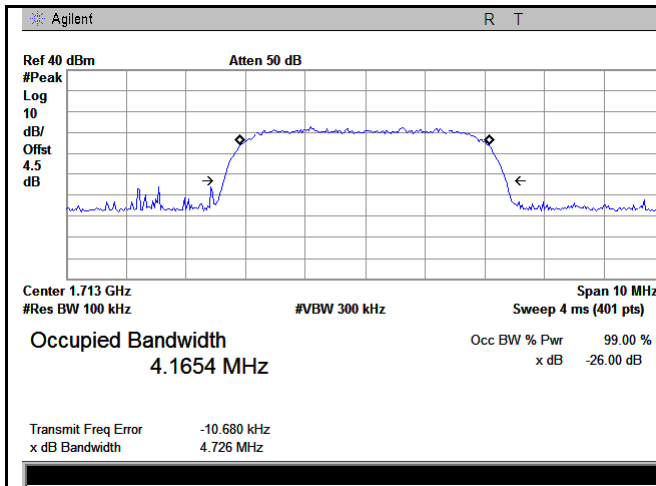

Band IV BW - Low CH 1713MHz

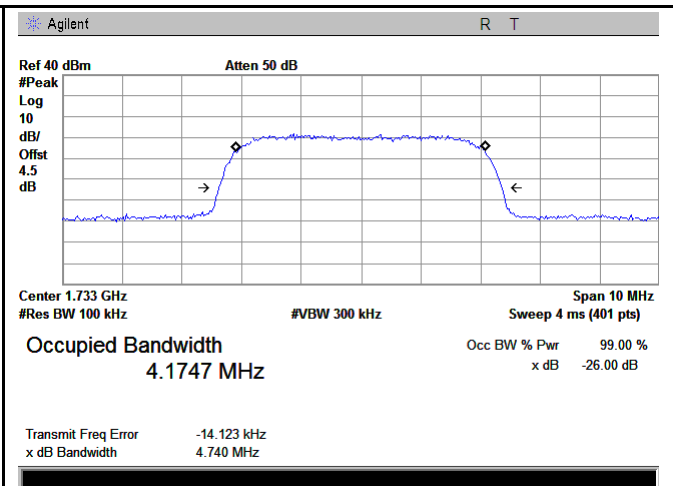



Band IVBW - Mid CH 1733MHz

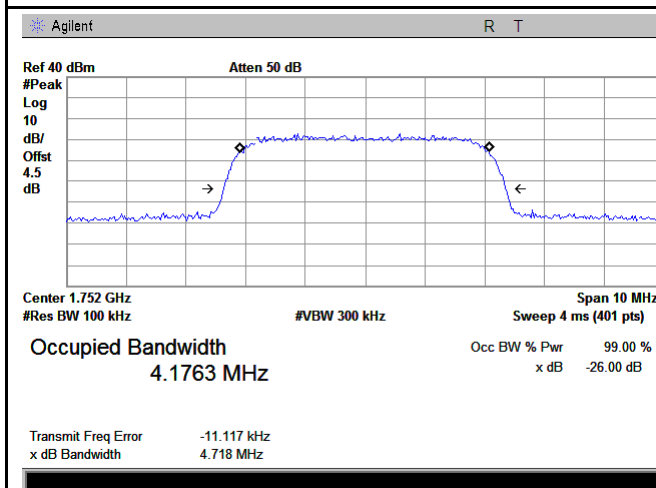


Band IV BW - High CH 1752MHz

HSDPA:

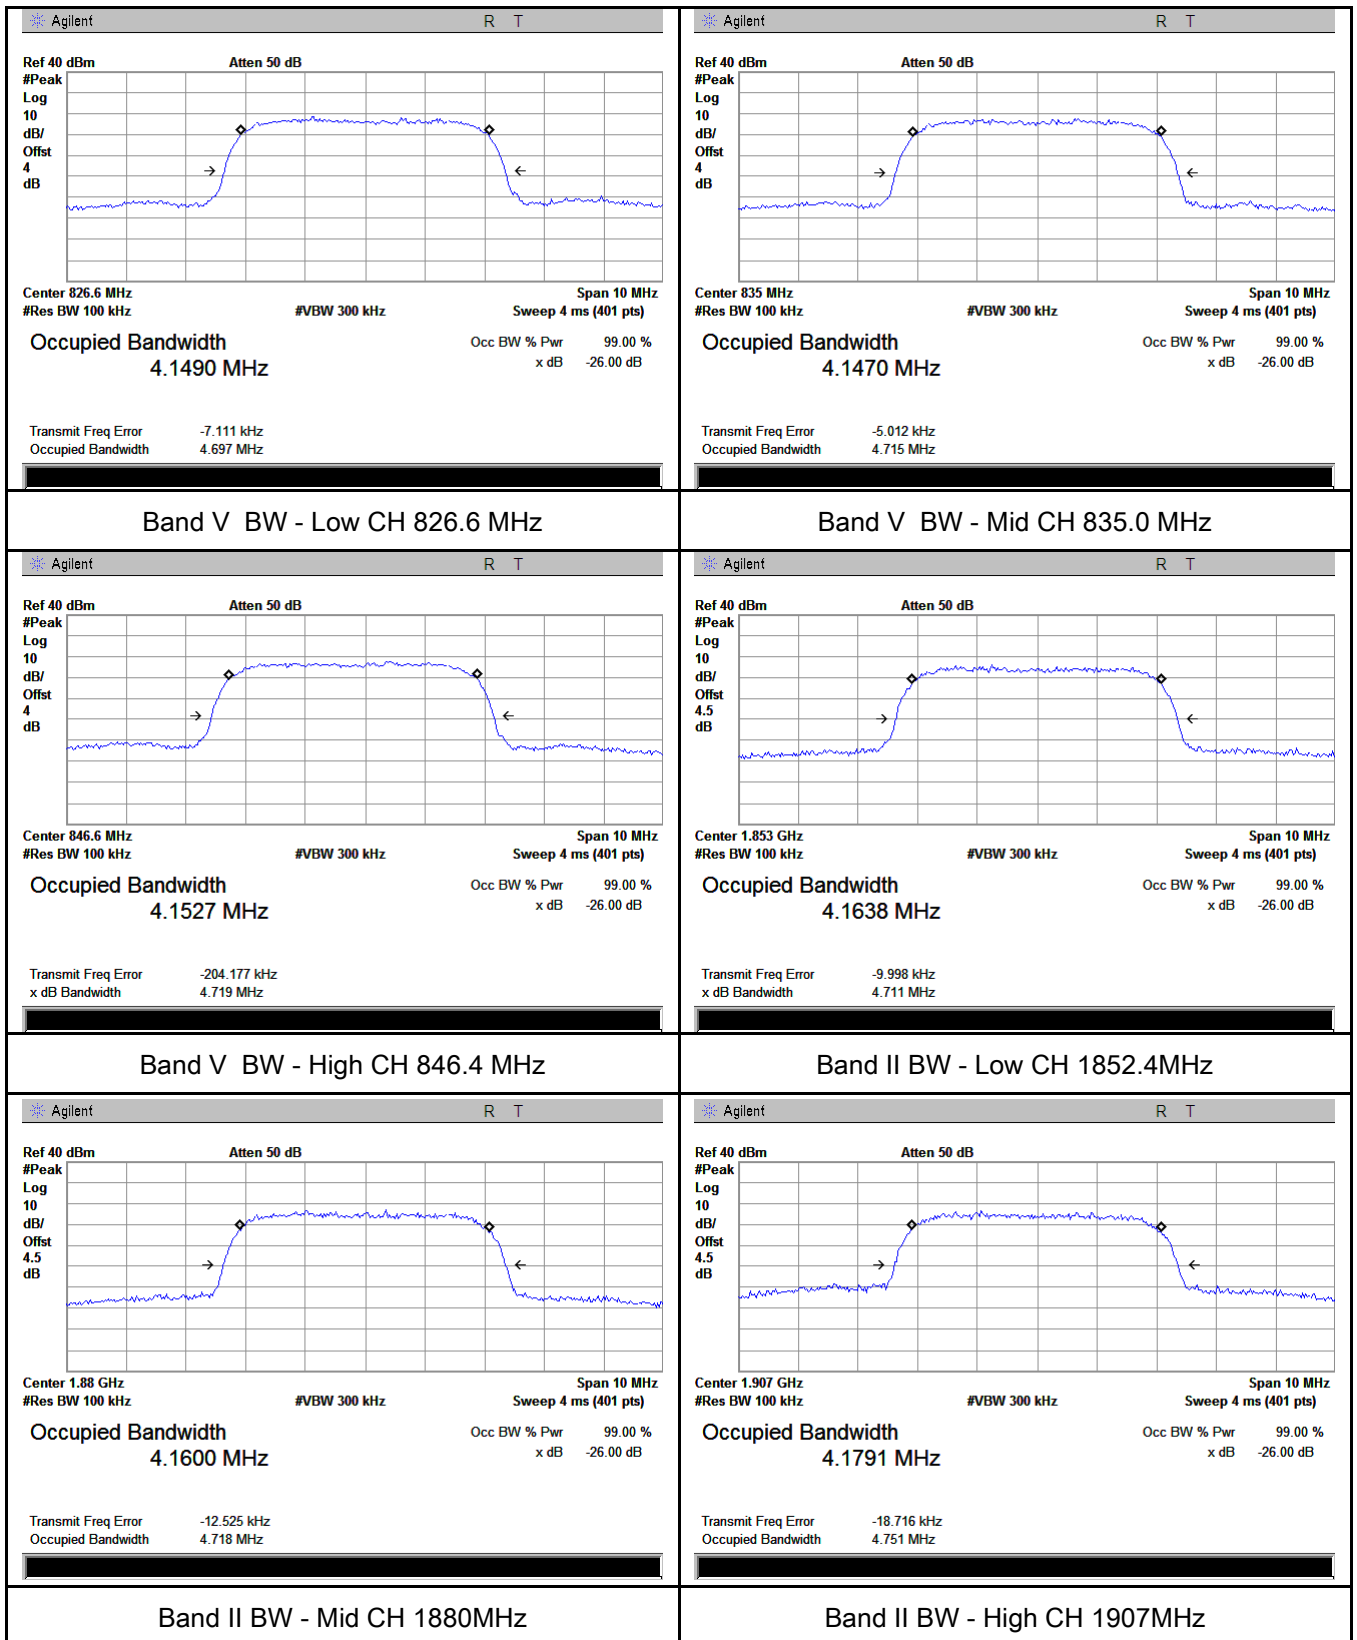


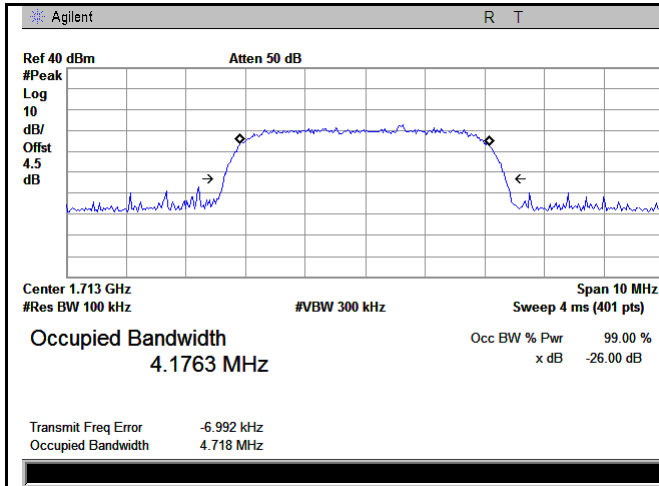

Band IV BW - Low CH 1713MHz

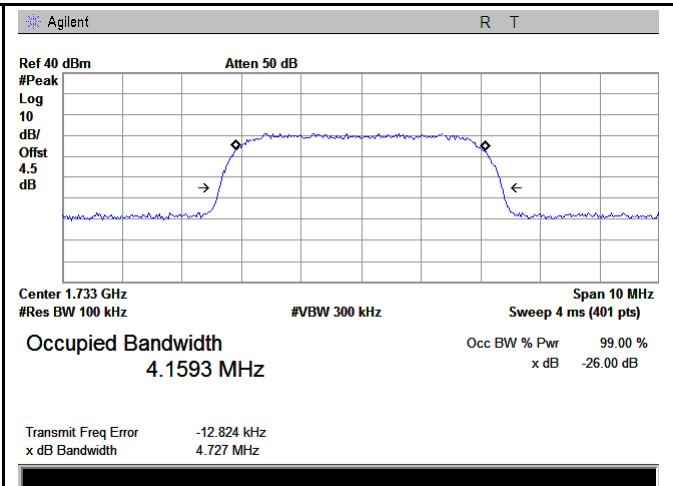



Band IVBW - Mid CH 1733MHz

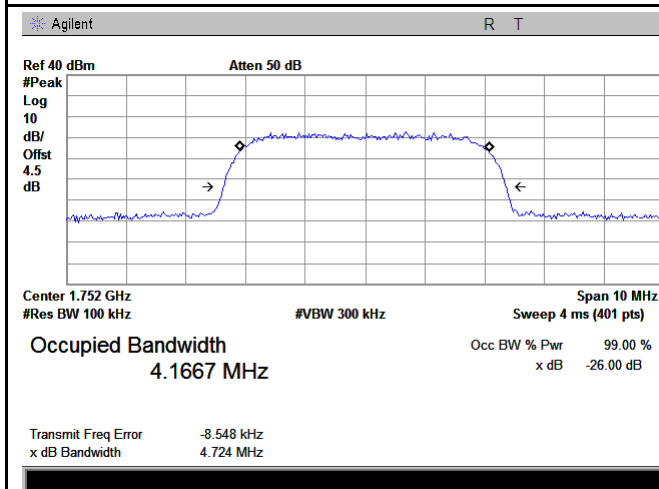


Band IV BW - High CH 1752MHz

HSUPA:

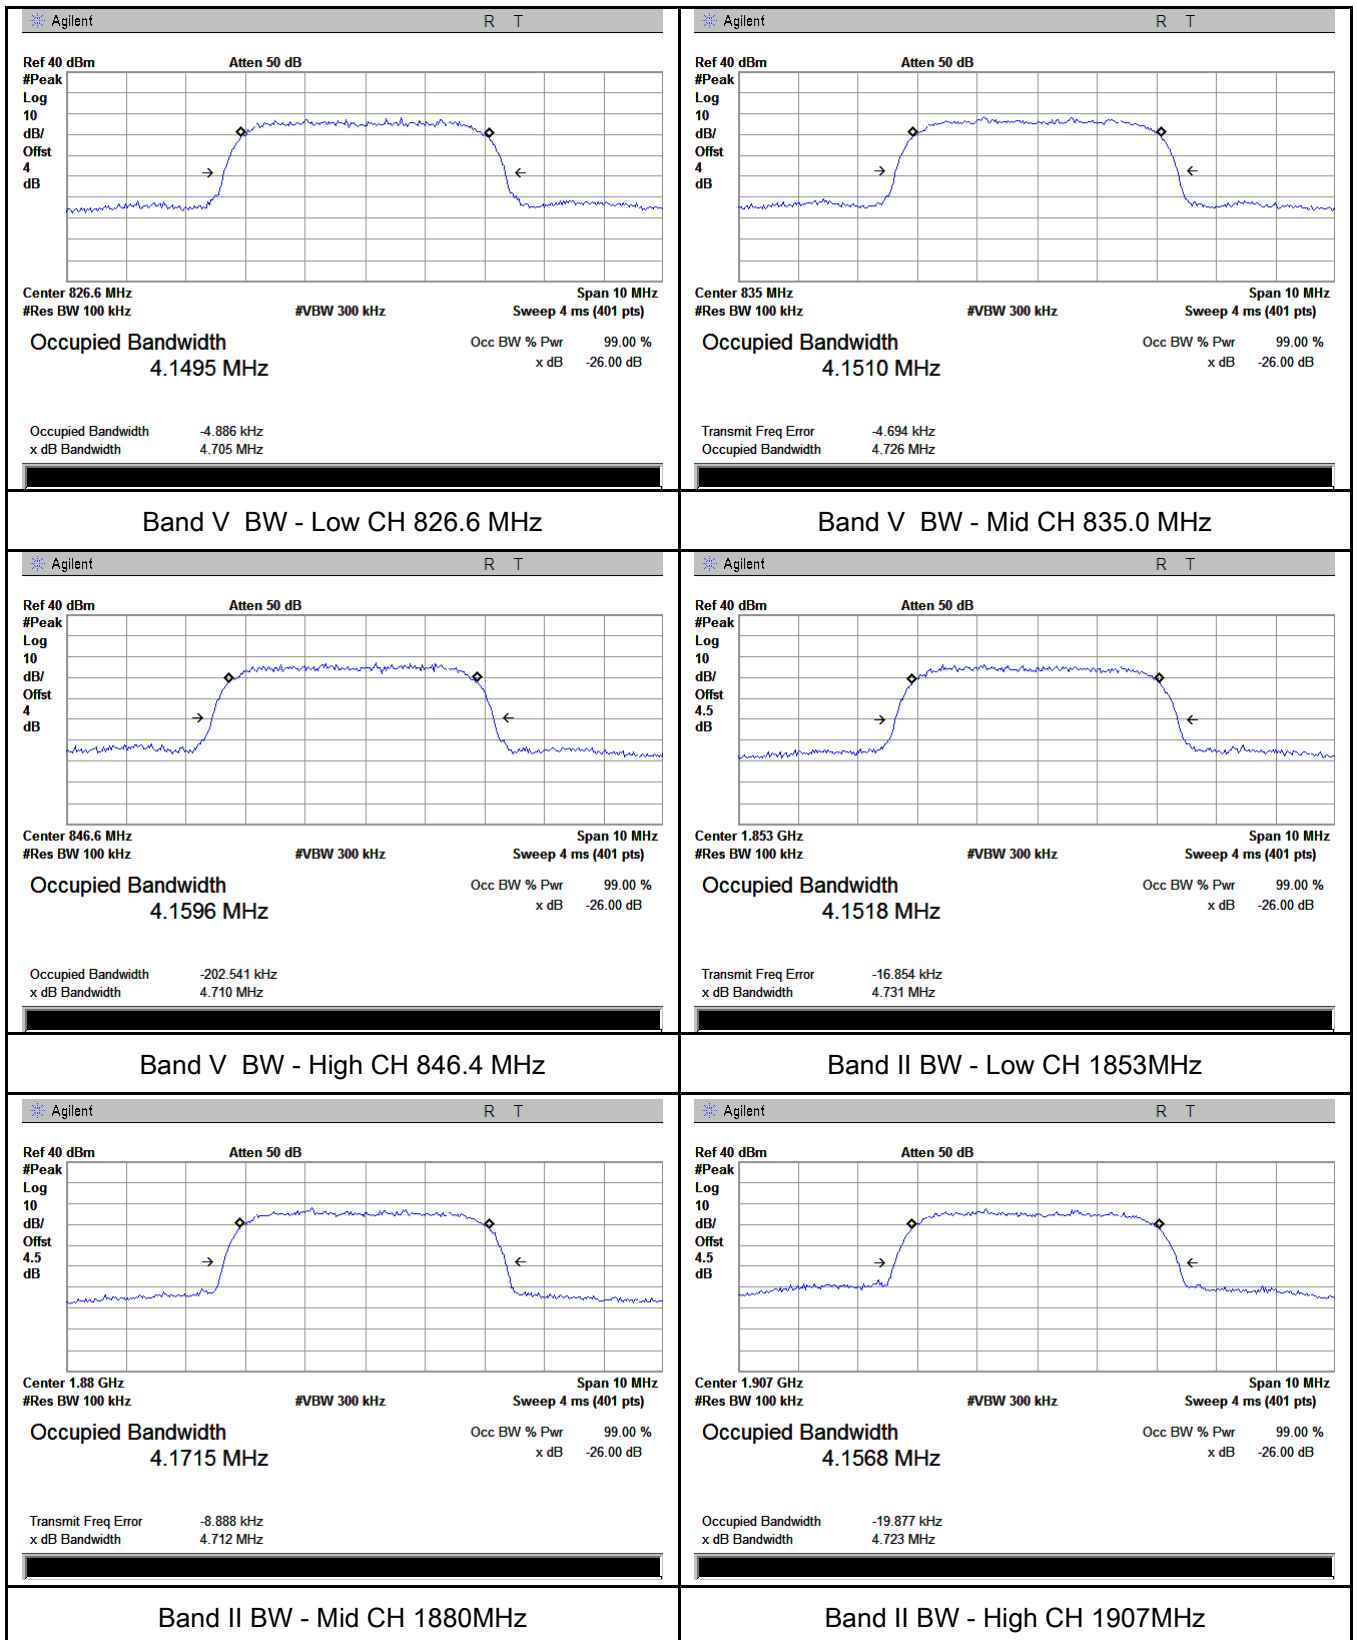


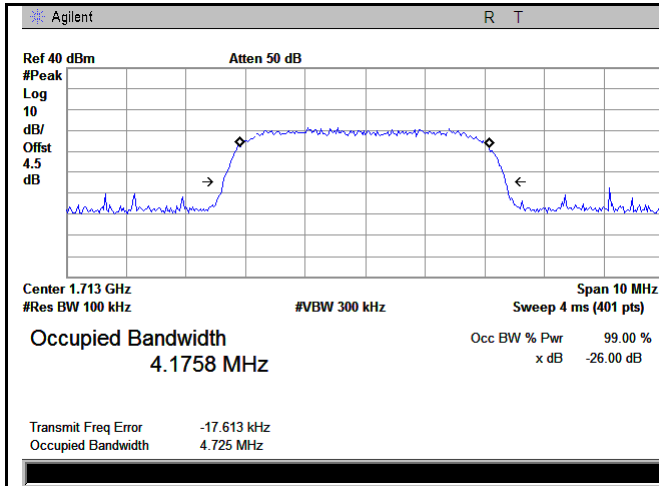

Band IV BW - Low CH 1713MHz

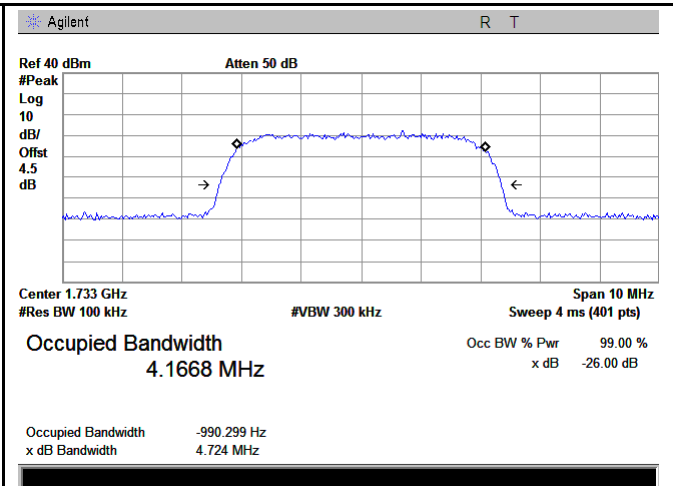

Band IVBW - Mid CH 1733MHz

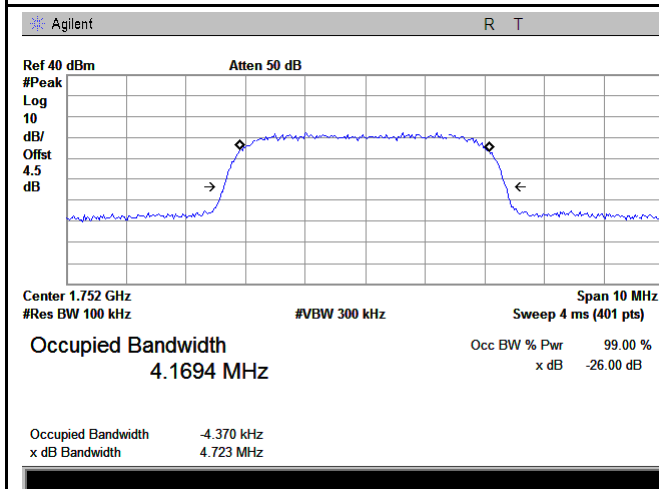


Band IV BW - High CH 1752MHz

6.5 Spurious Emissions at Antenna Terminals

Temperature	27 °C
Relative Humidity	55%
Atmospheric Pressure	1023mbar
Test date :	August 22, 2017
Tested By :	Loren Luo

Requirement(s):

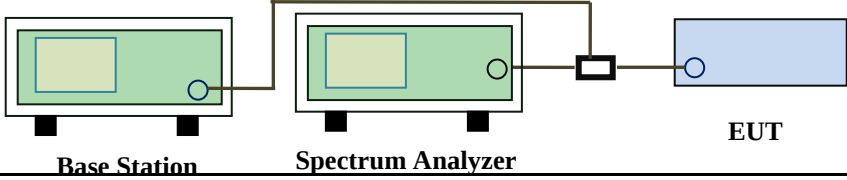
Spec	Item	Requirement	Applicable
§2.1051, §22.917(a)& §24.238(a) § 27.53(h)	a)	The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB	☒
Test Setup			
Test Procedure	- The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The Band Edges of low and high channels for the highest RF powers were measured. - Setting RBW as roughly BW/100.		
Remark			
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A
 Test Plot ☒ Yes (See below) ☐ N/A


Test Plots

GSM Voice:

Cellular Band (Part 22H) result

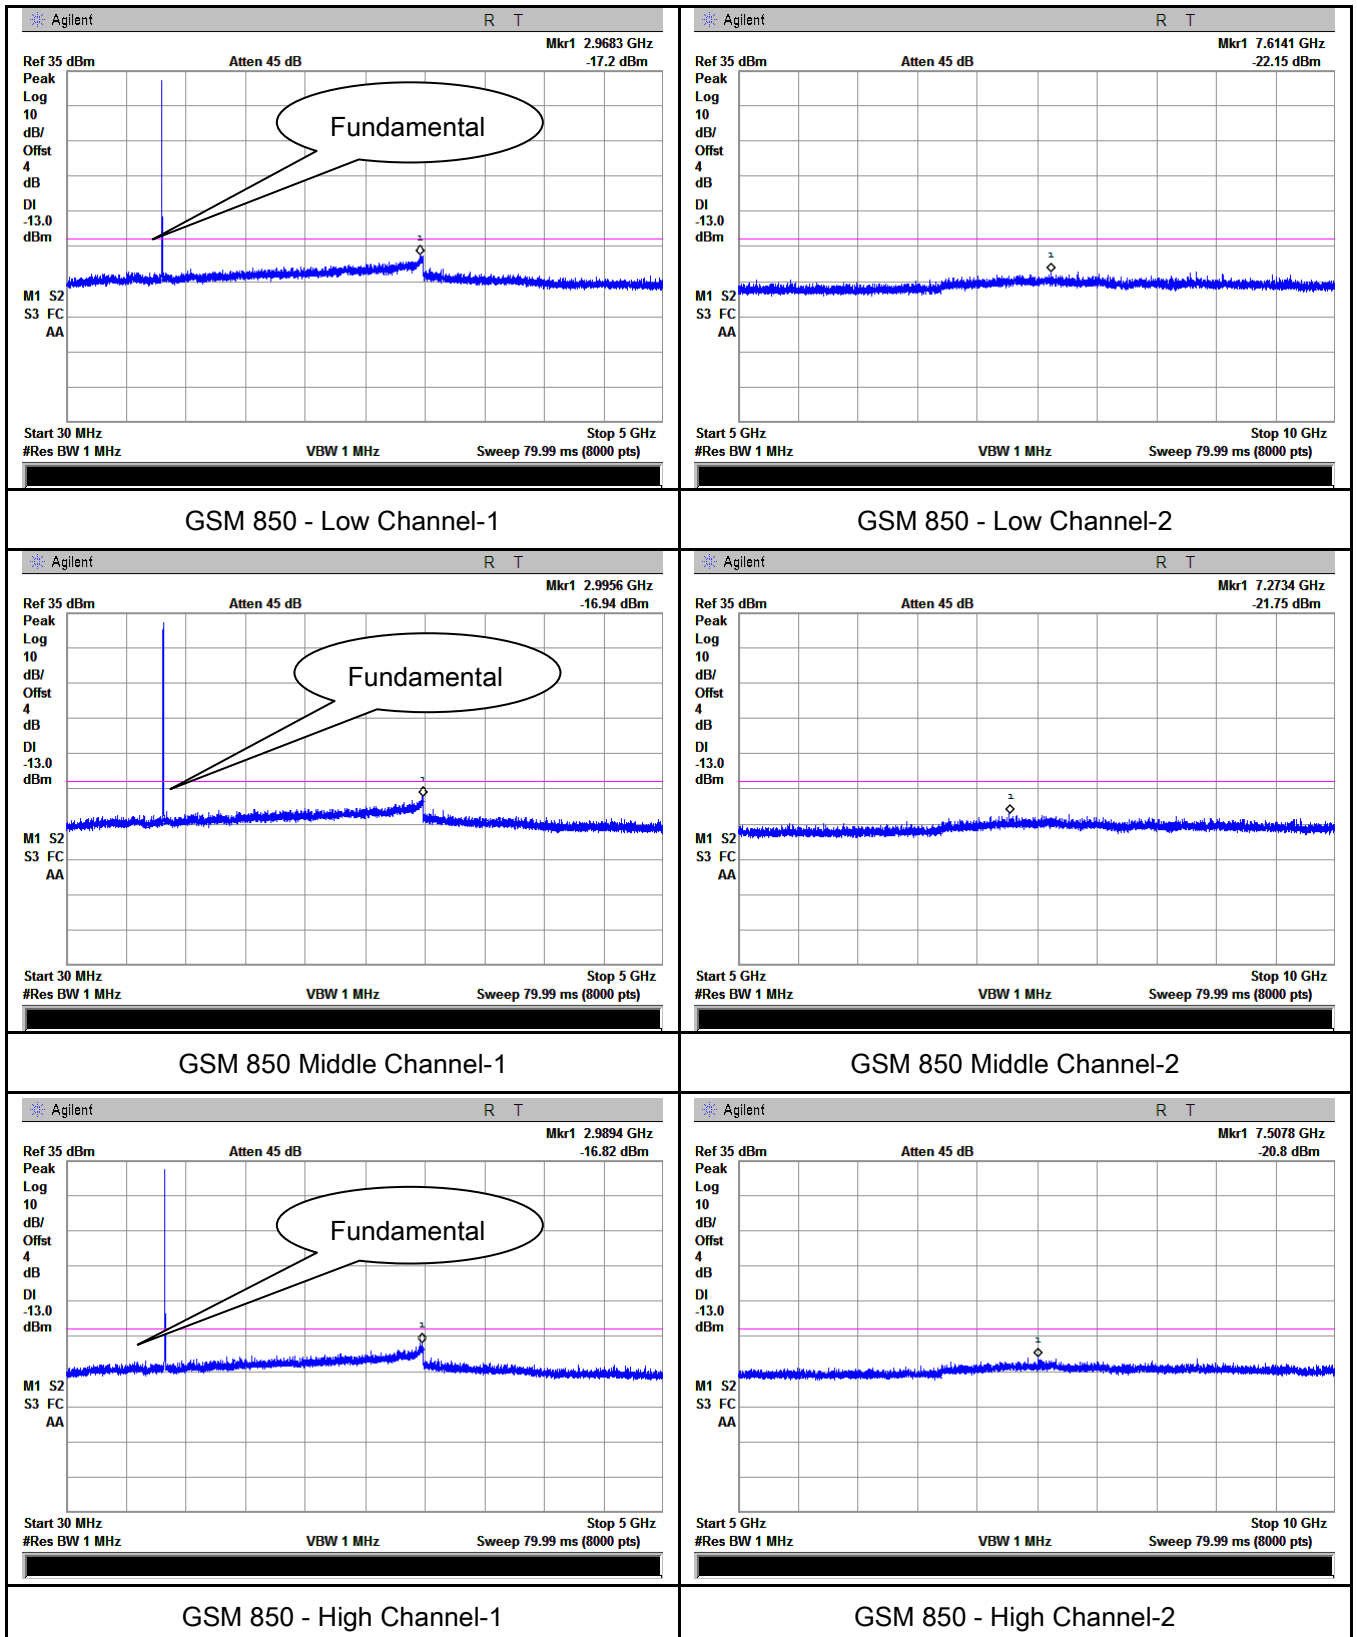


PCS Band (Part24E) result

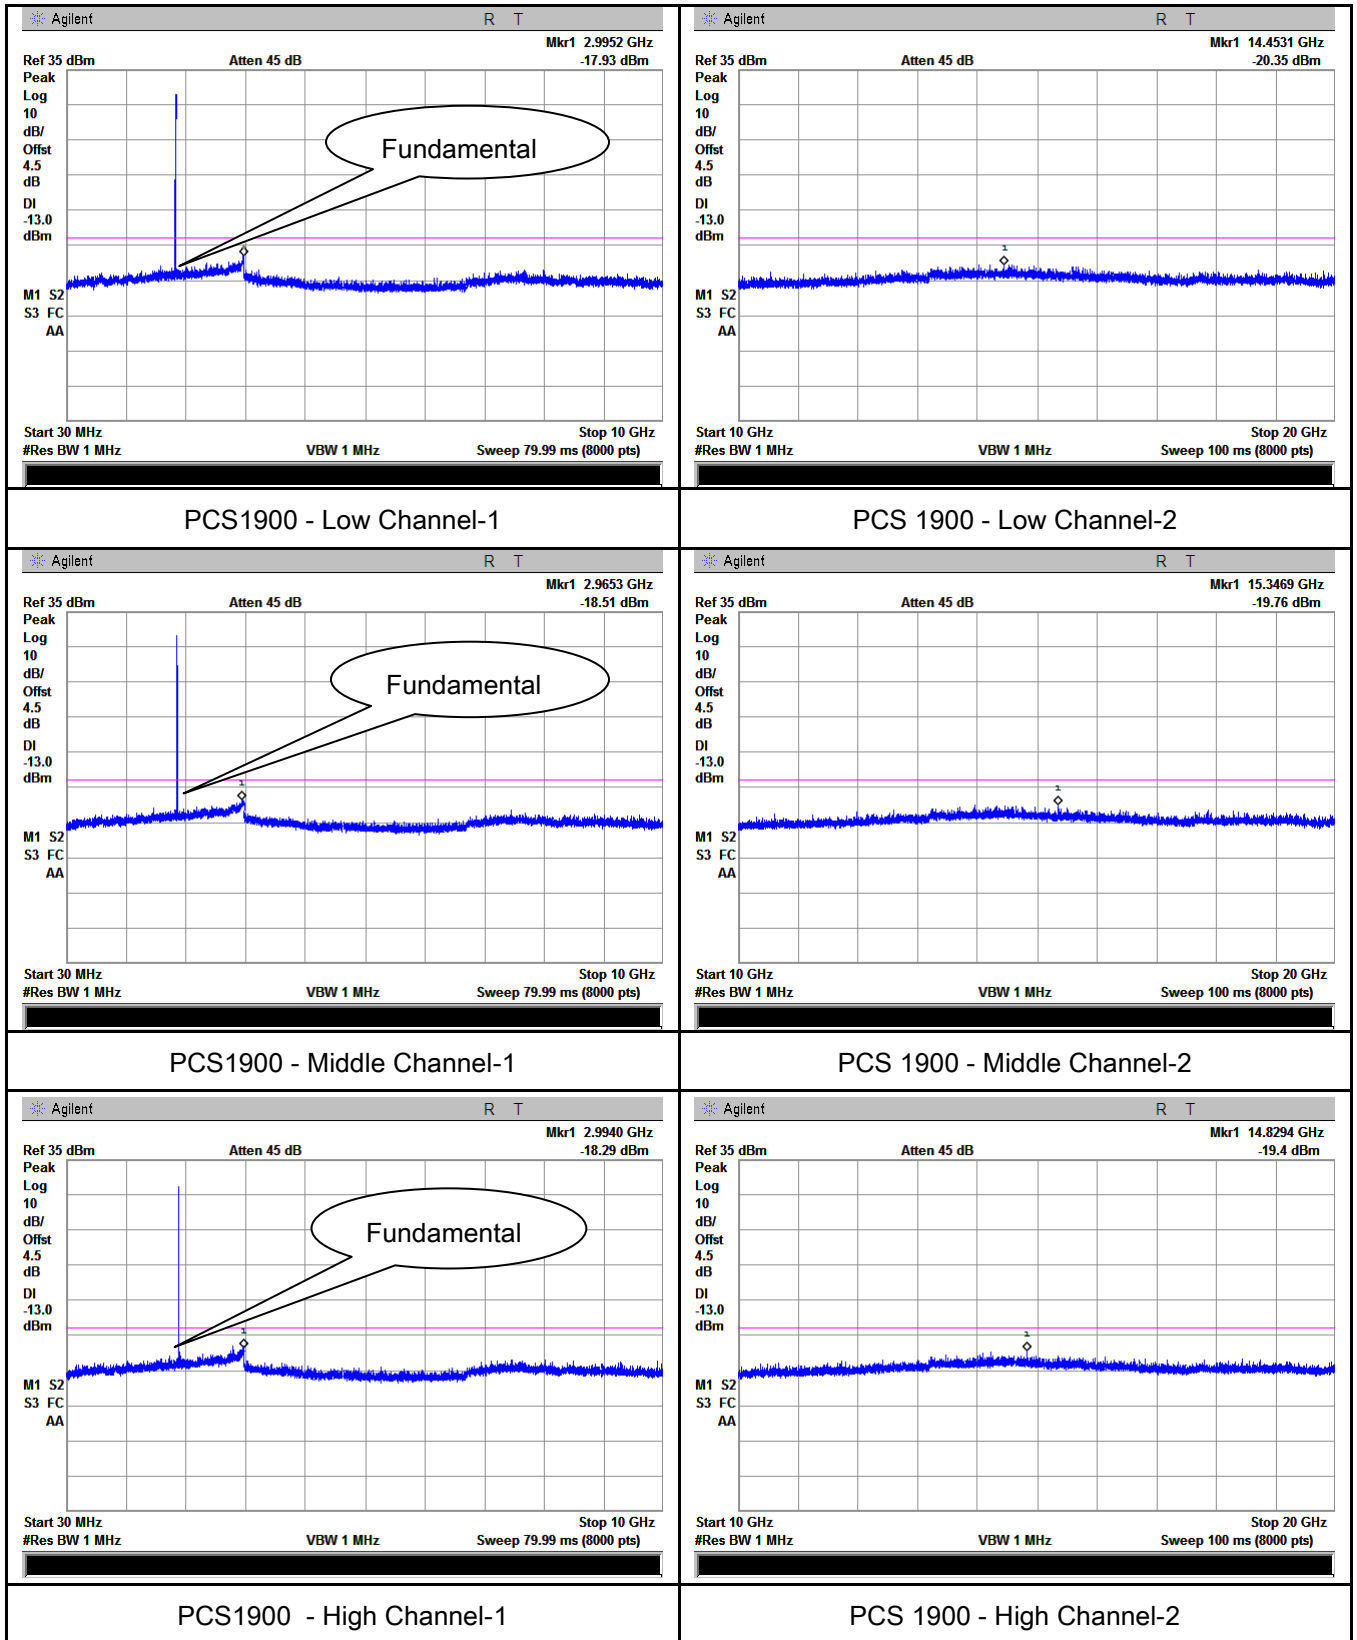


GPRS:

Cellular Band (Part 22H) result

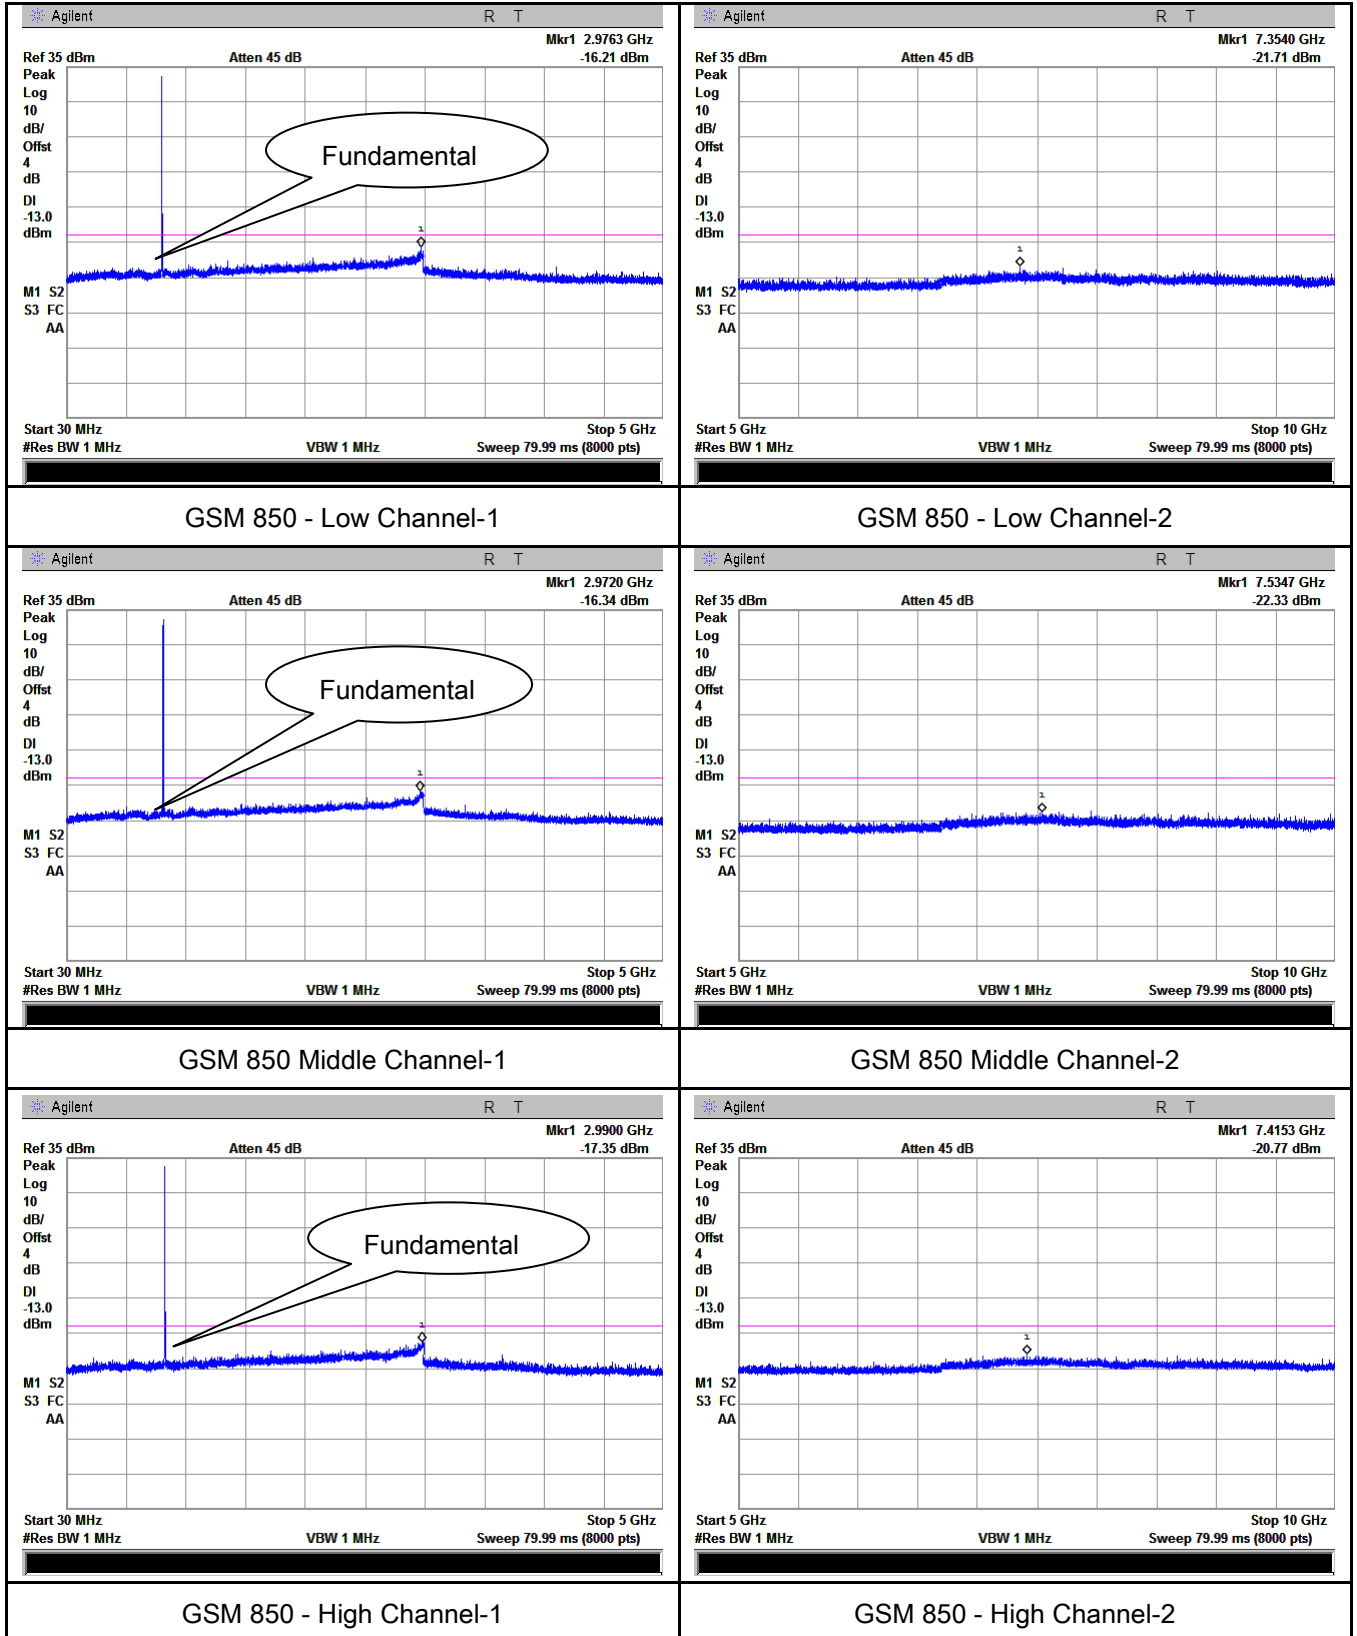


PCS Band (Part24E) result

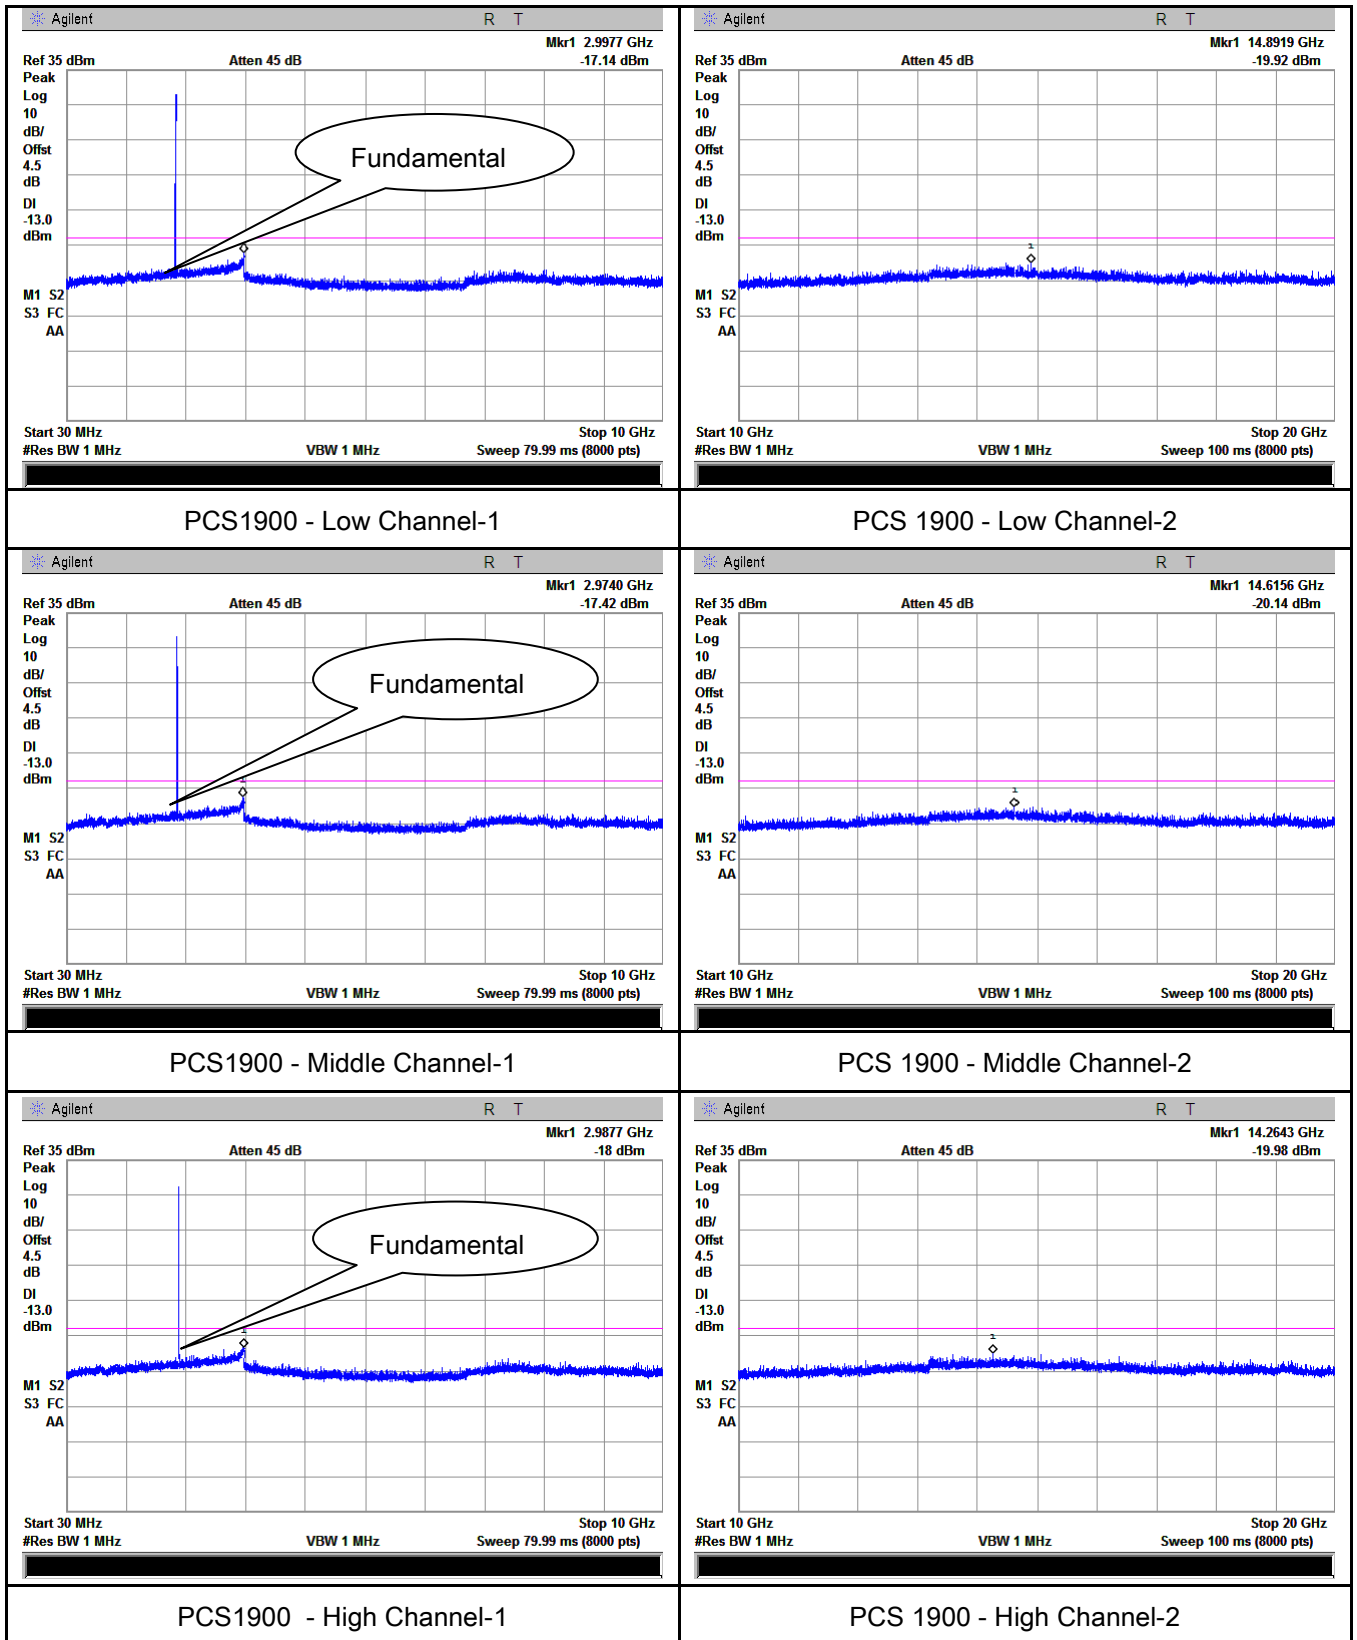


EGPRS (MCS5):

Cellular Band (Part 22H) result

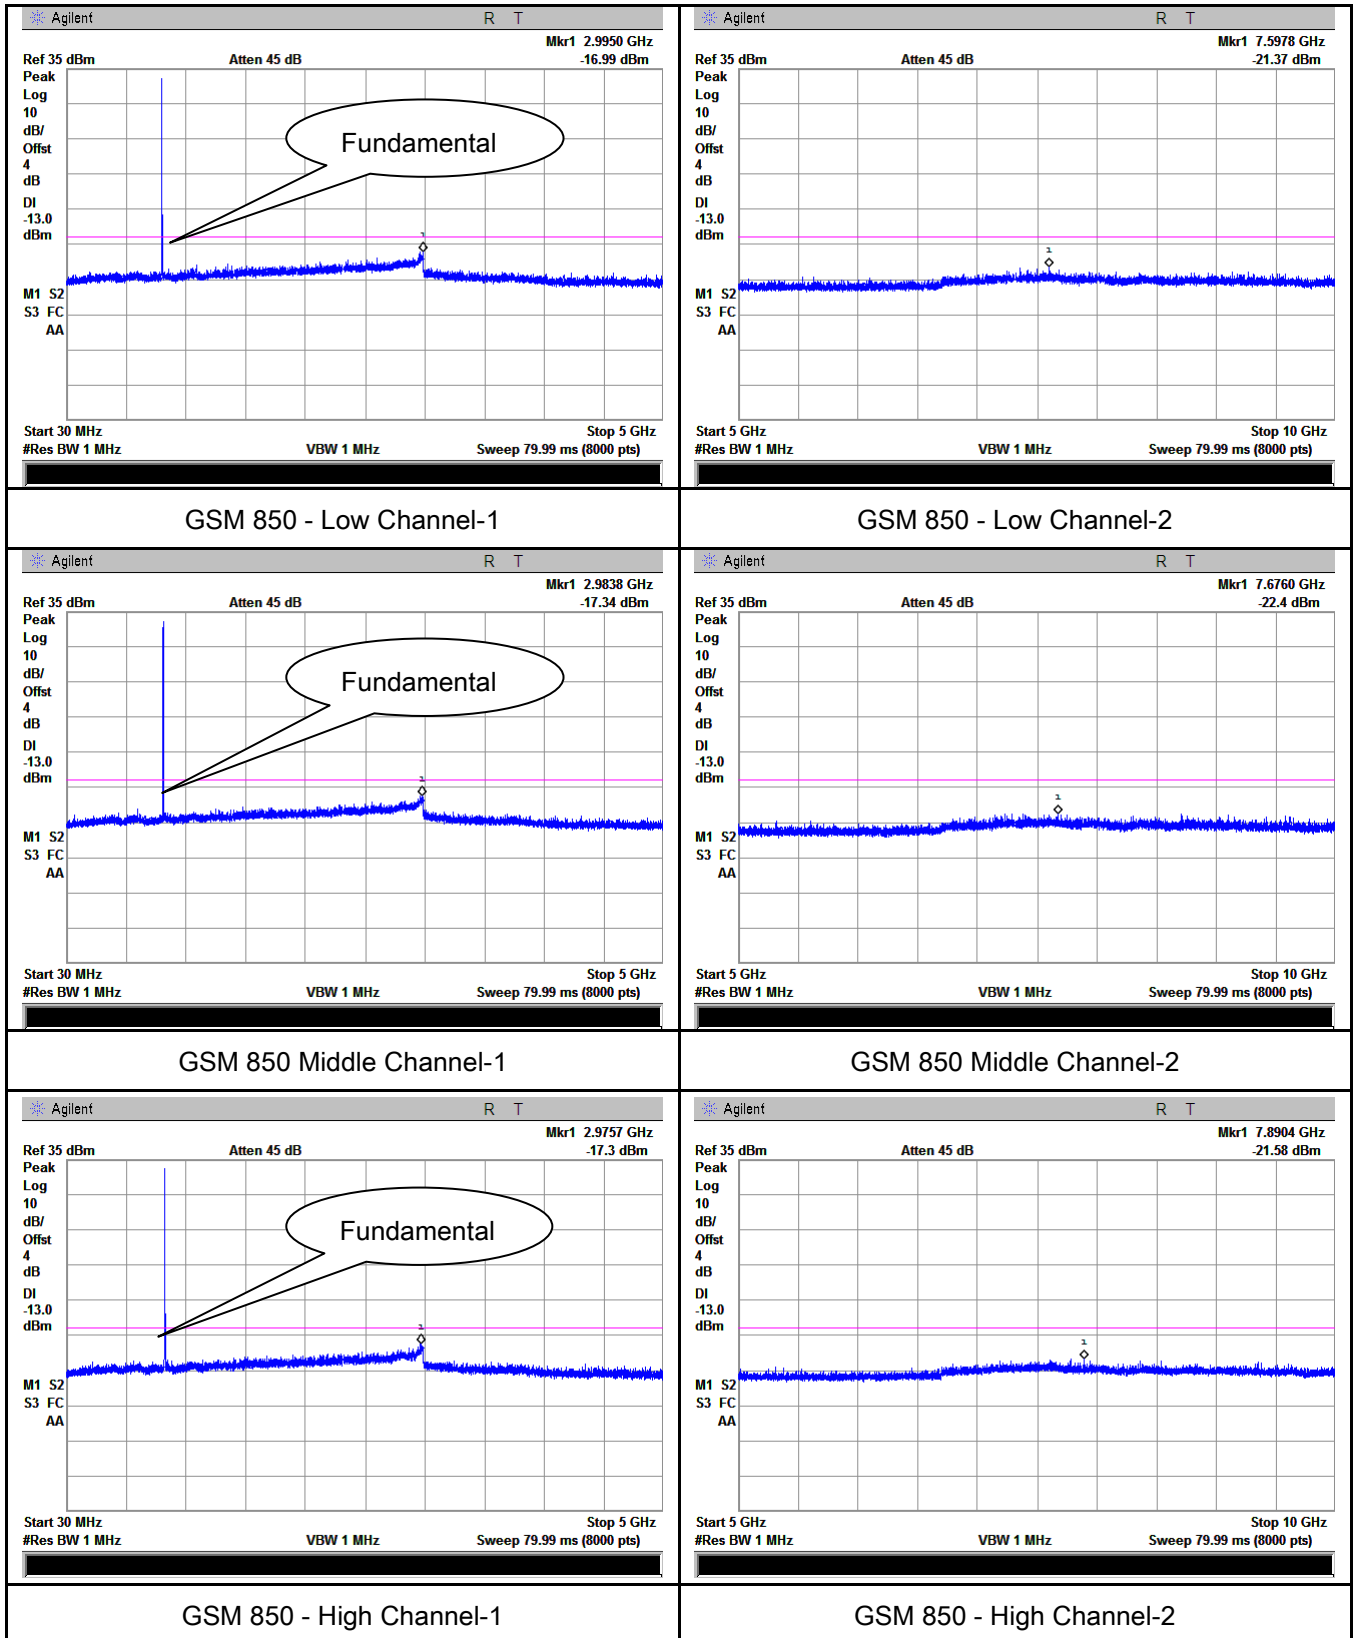


PCS Band (Part24E) result

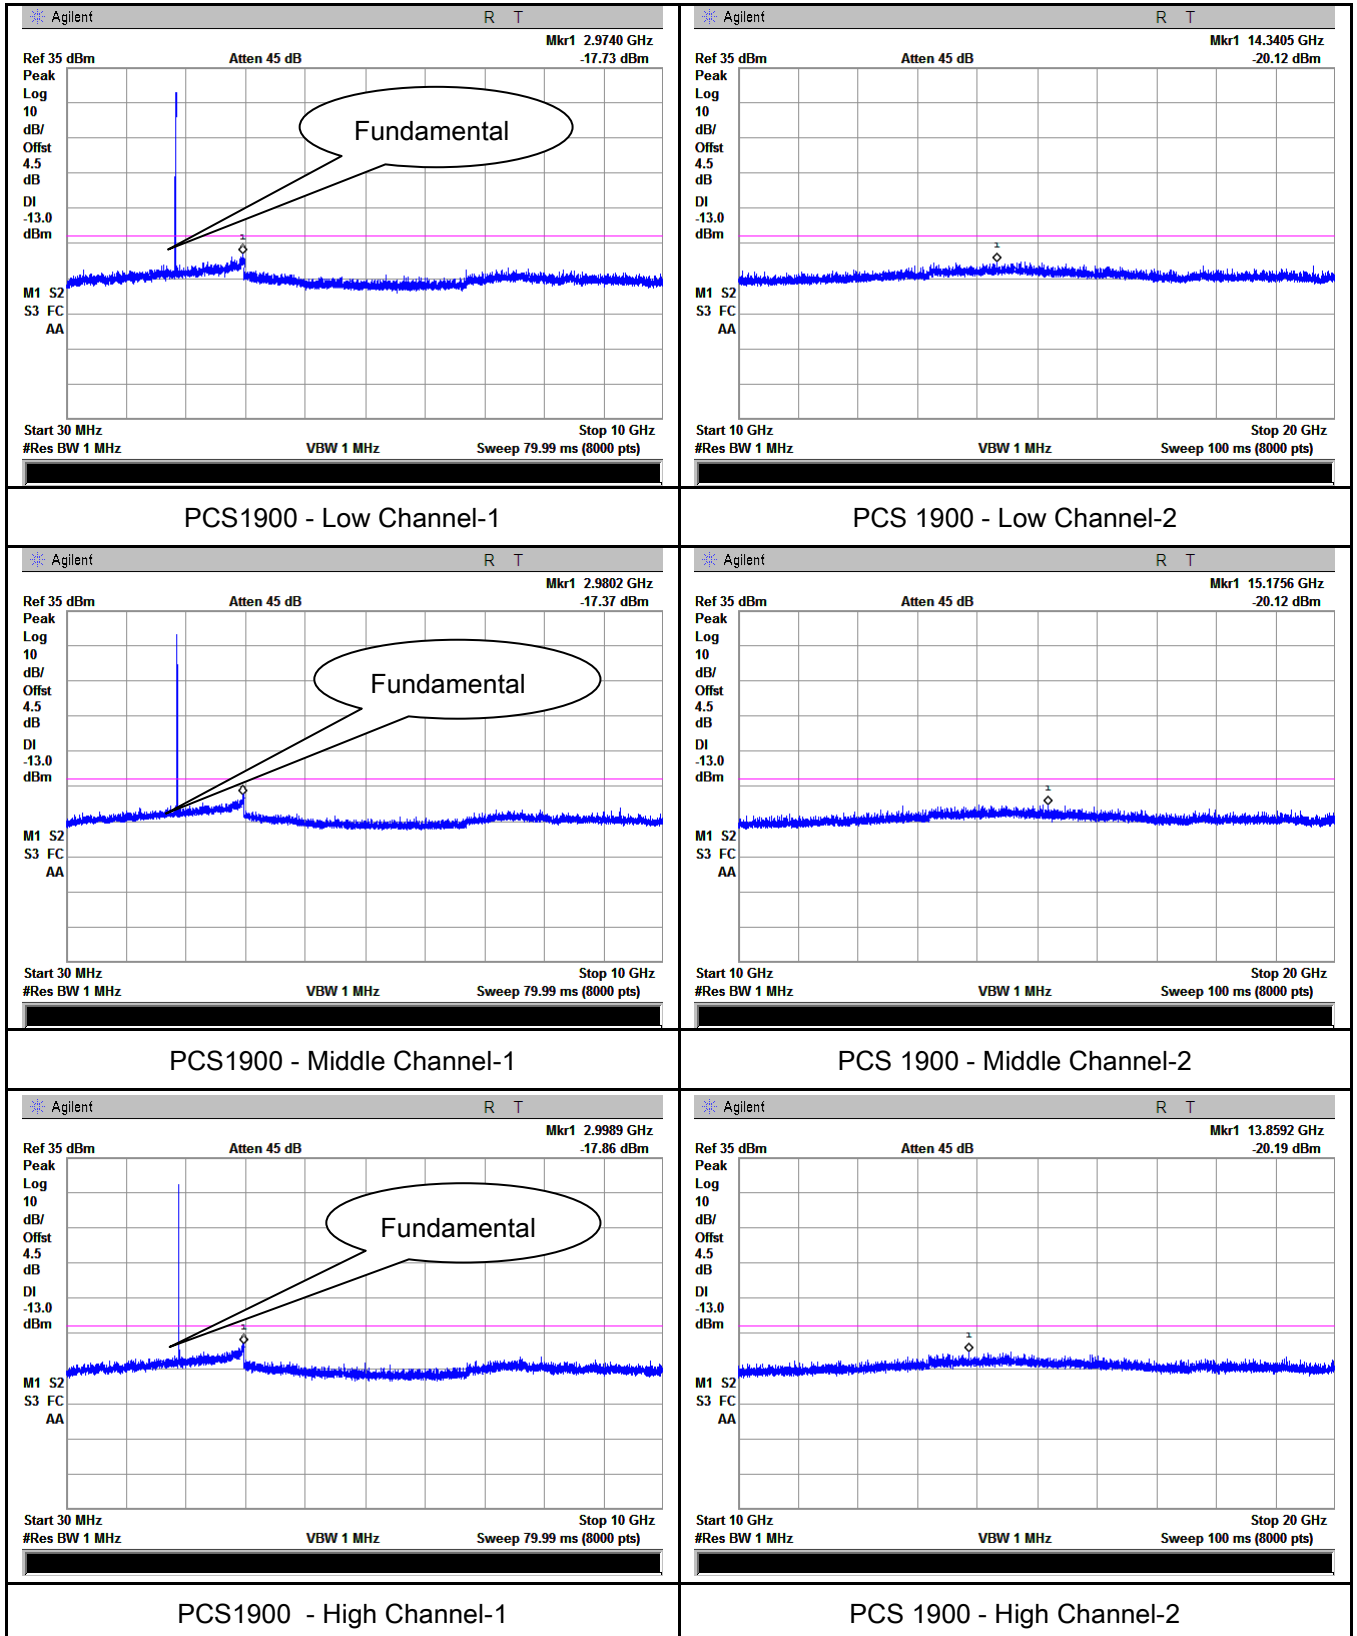


RMC


UMTS-FDD Band V (Part 22H)

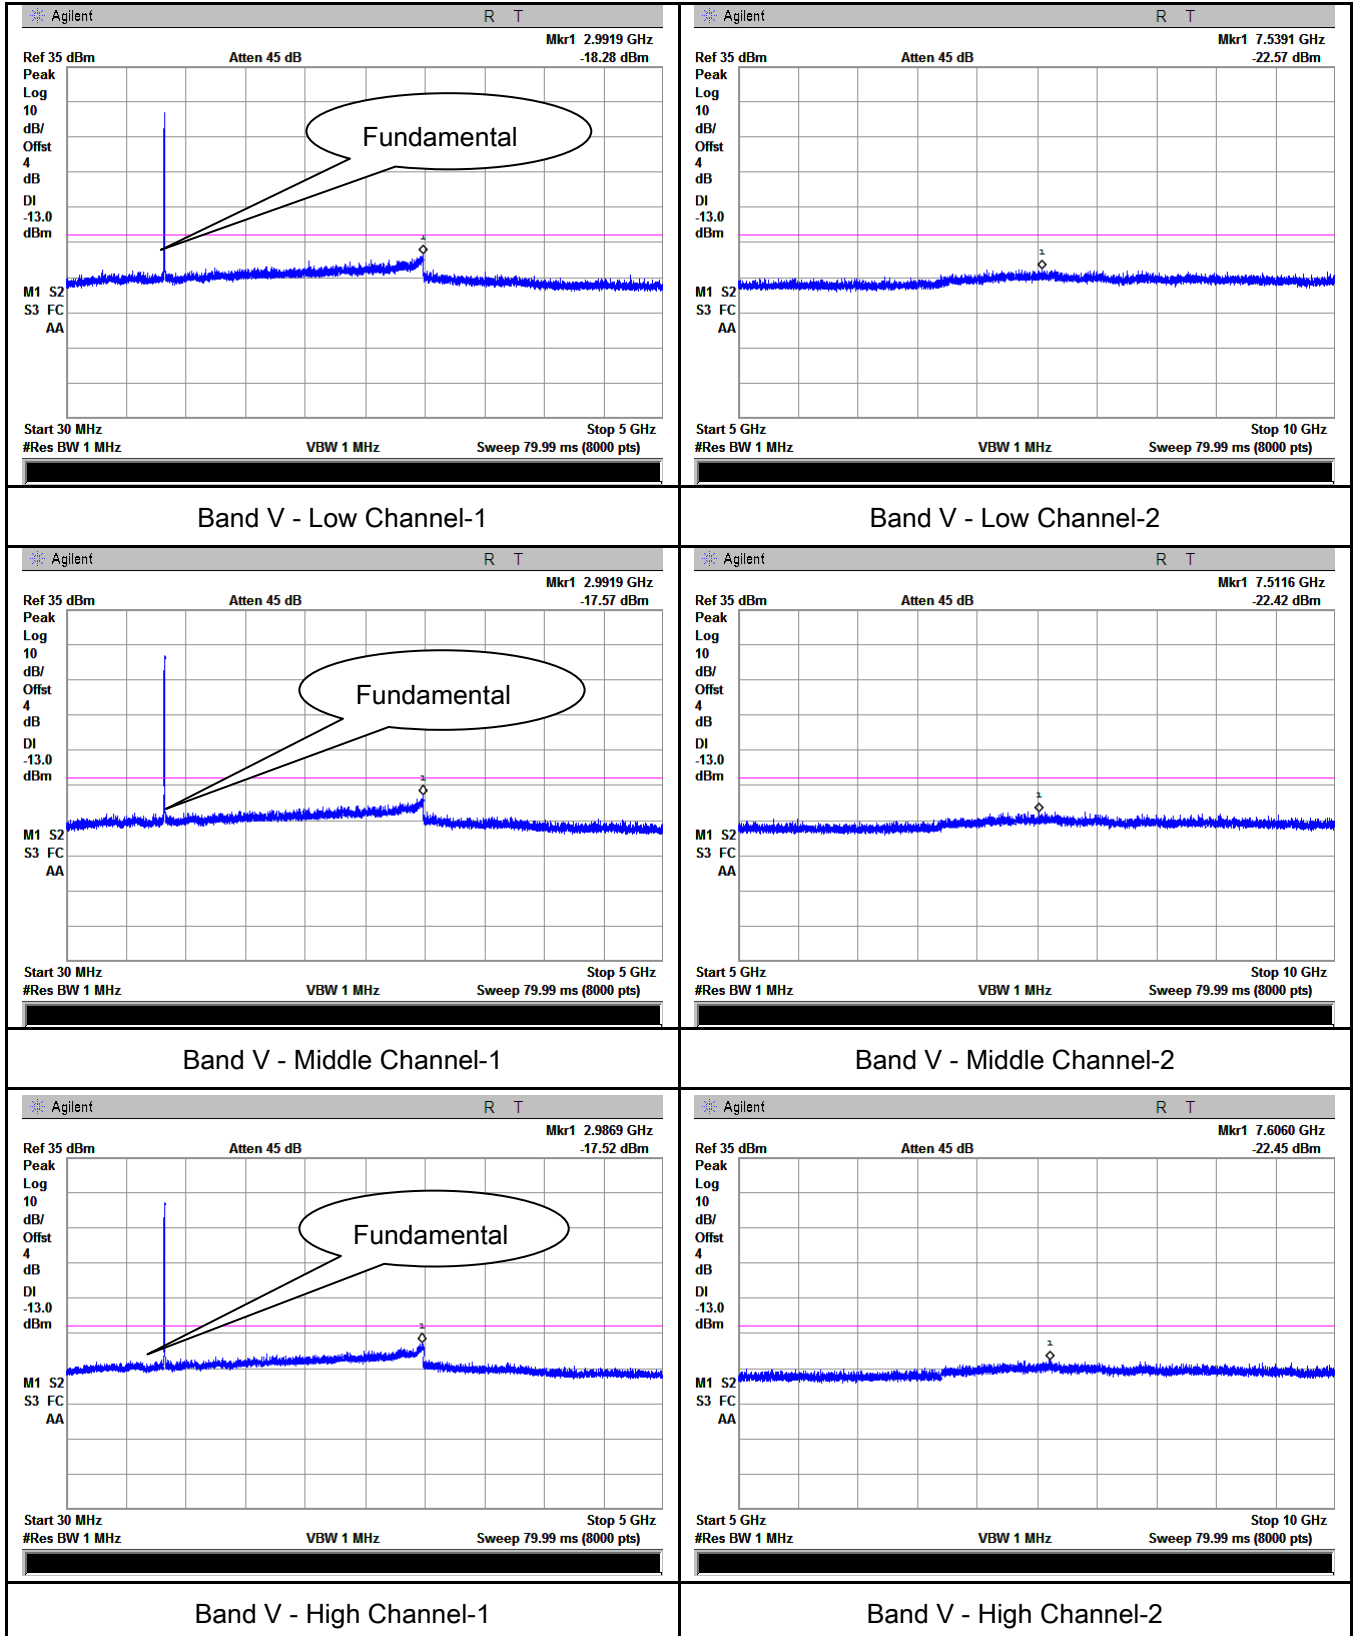

UMTS-FDD Band II (Part 24E)

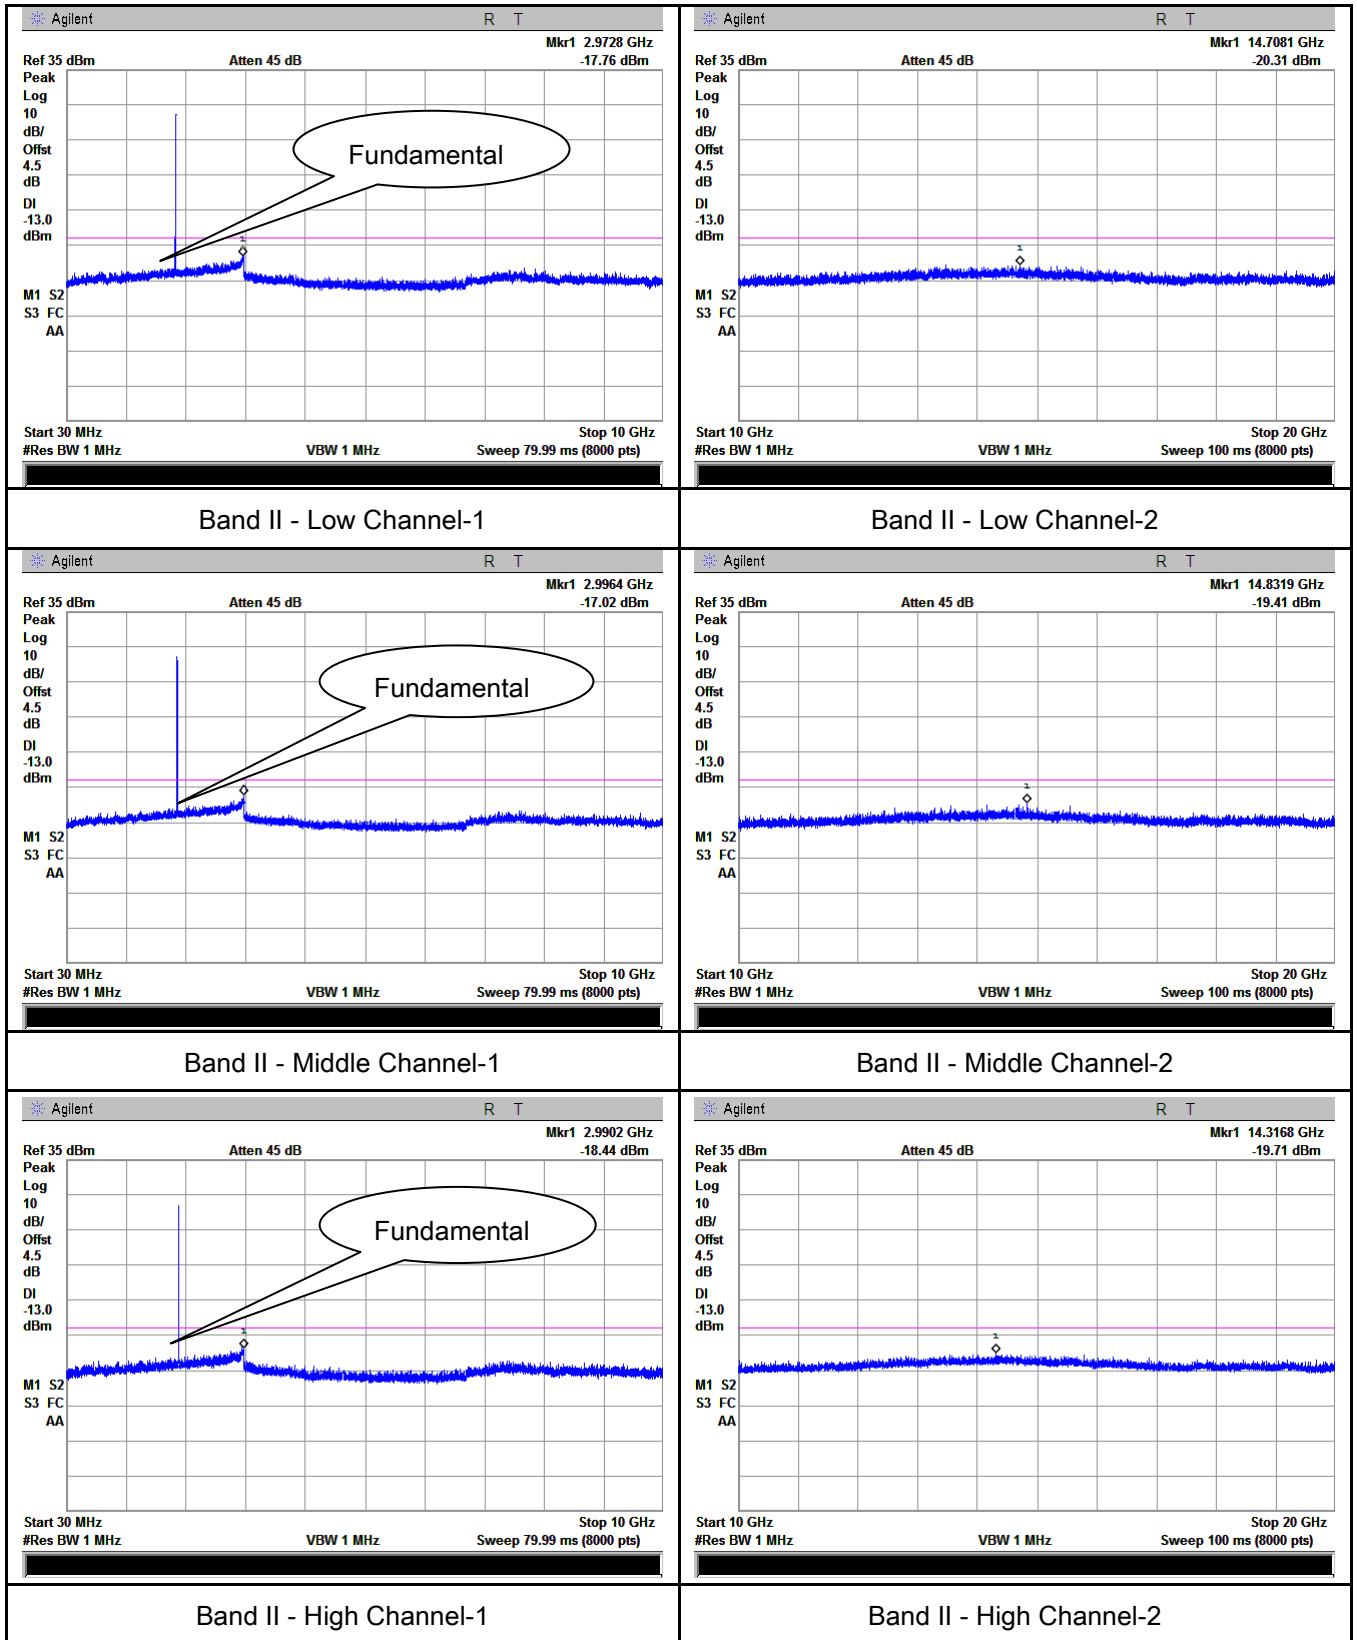


UMTS-FDD Band IV (Part 27)

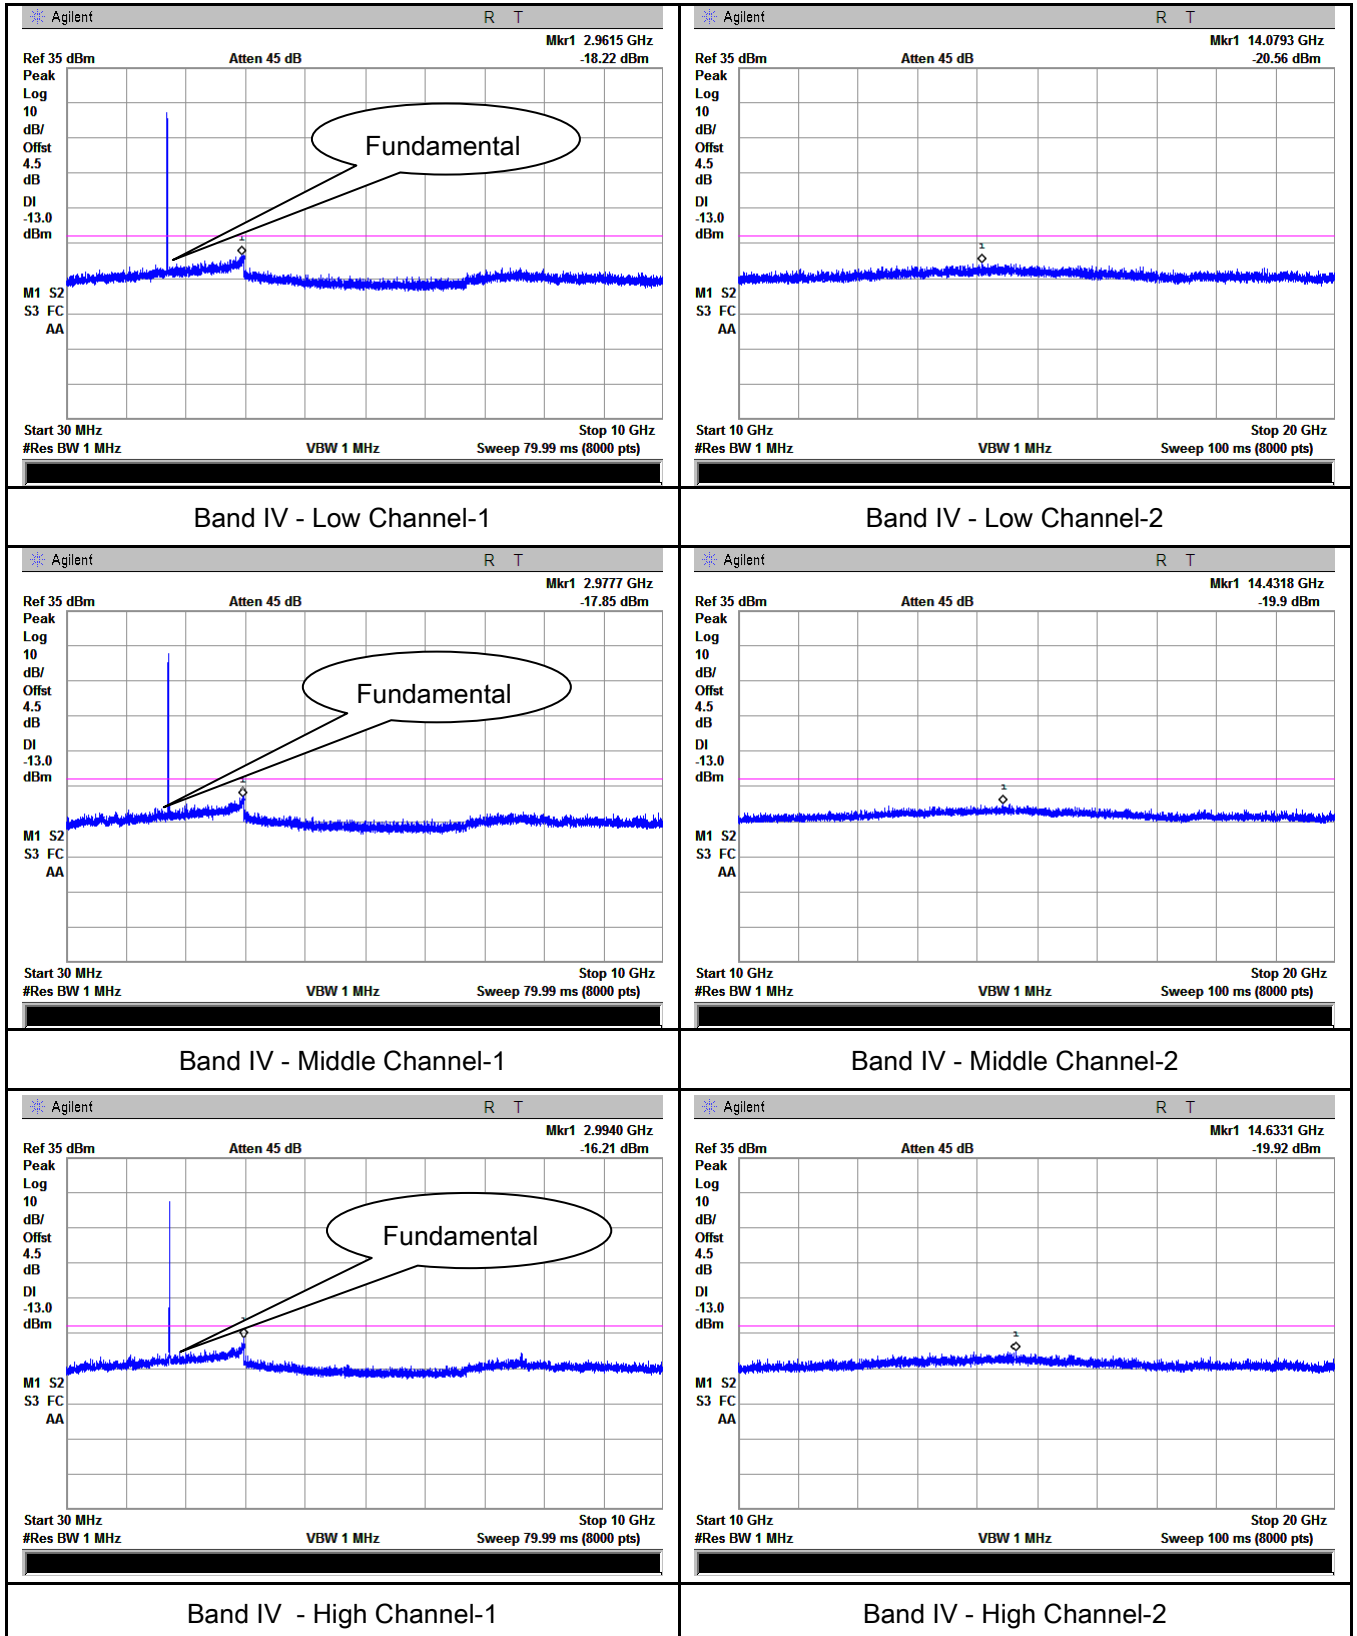


HSUPA:


UMTS-FDD Band V (Part 22H)

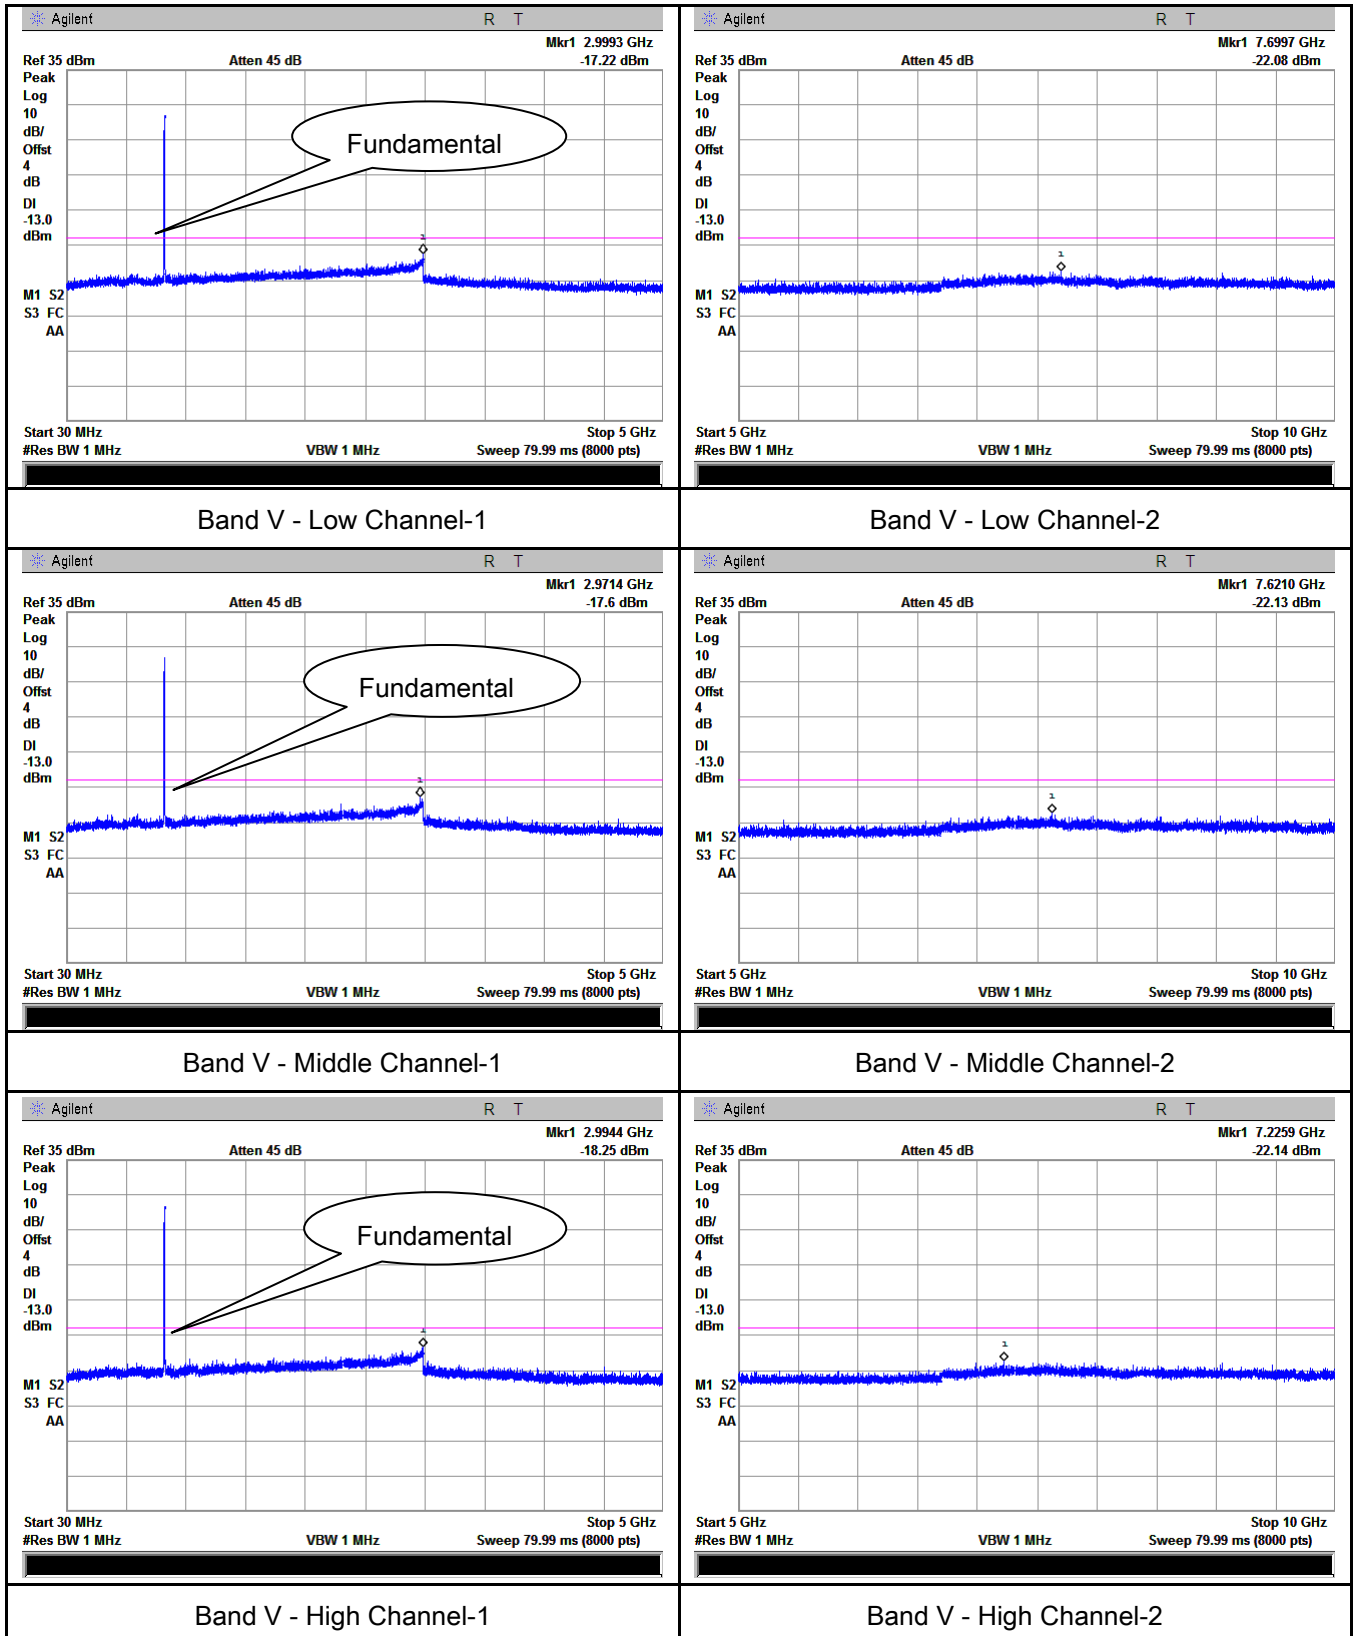

UMTS-FDD Band II (Part 24E)

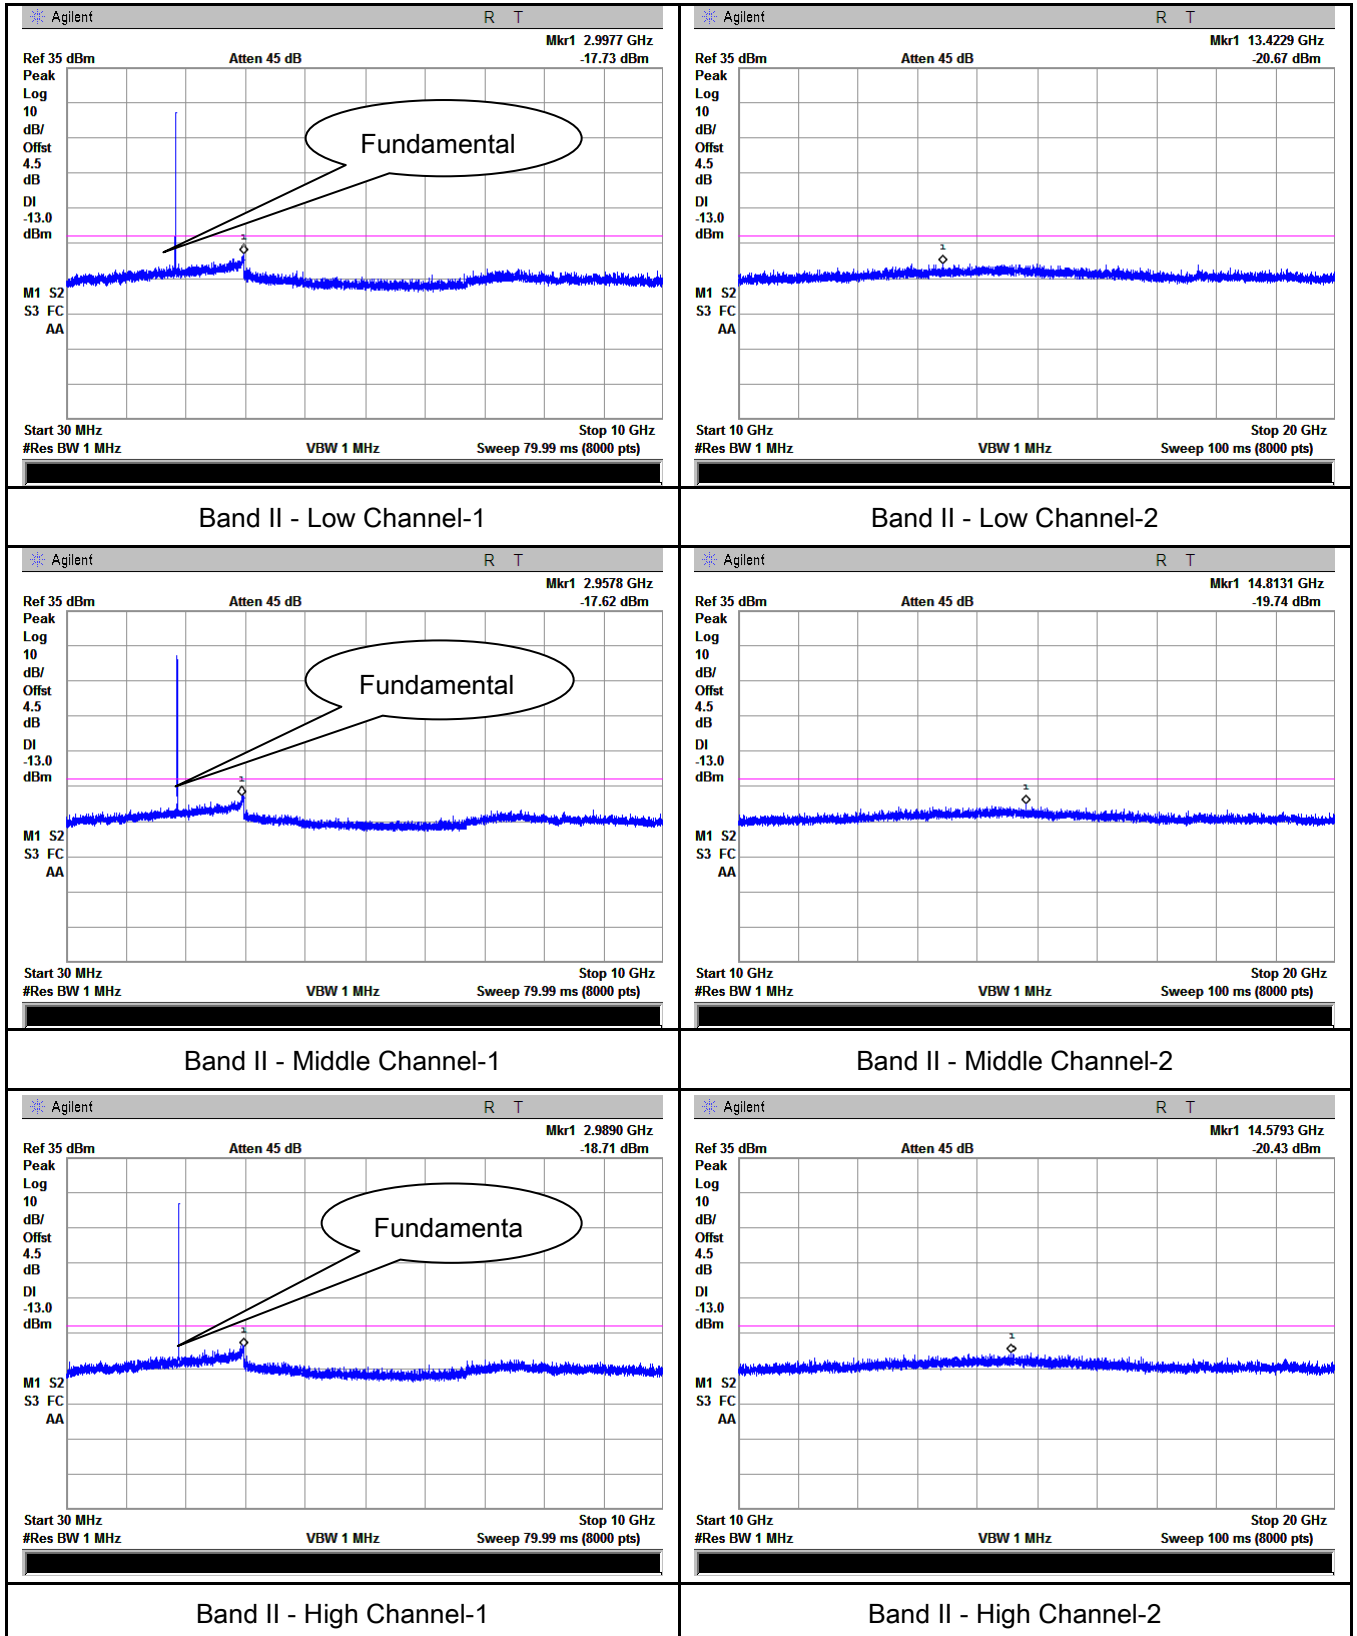


UMTS-FDD Band IV (Part 27)

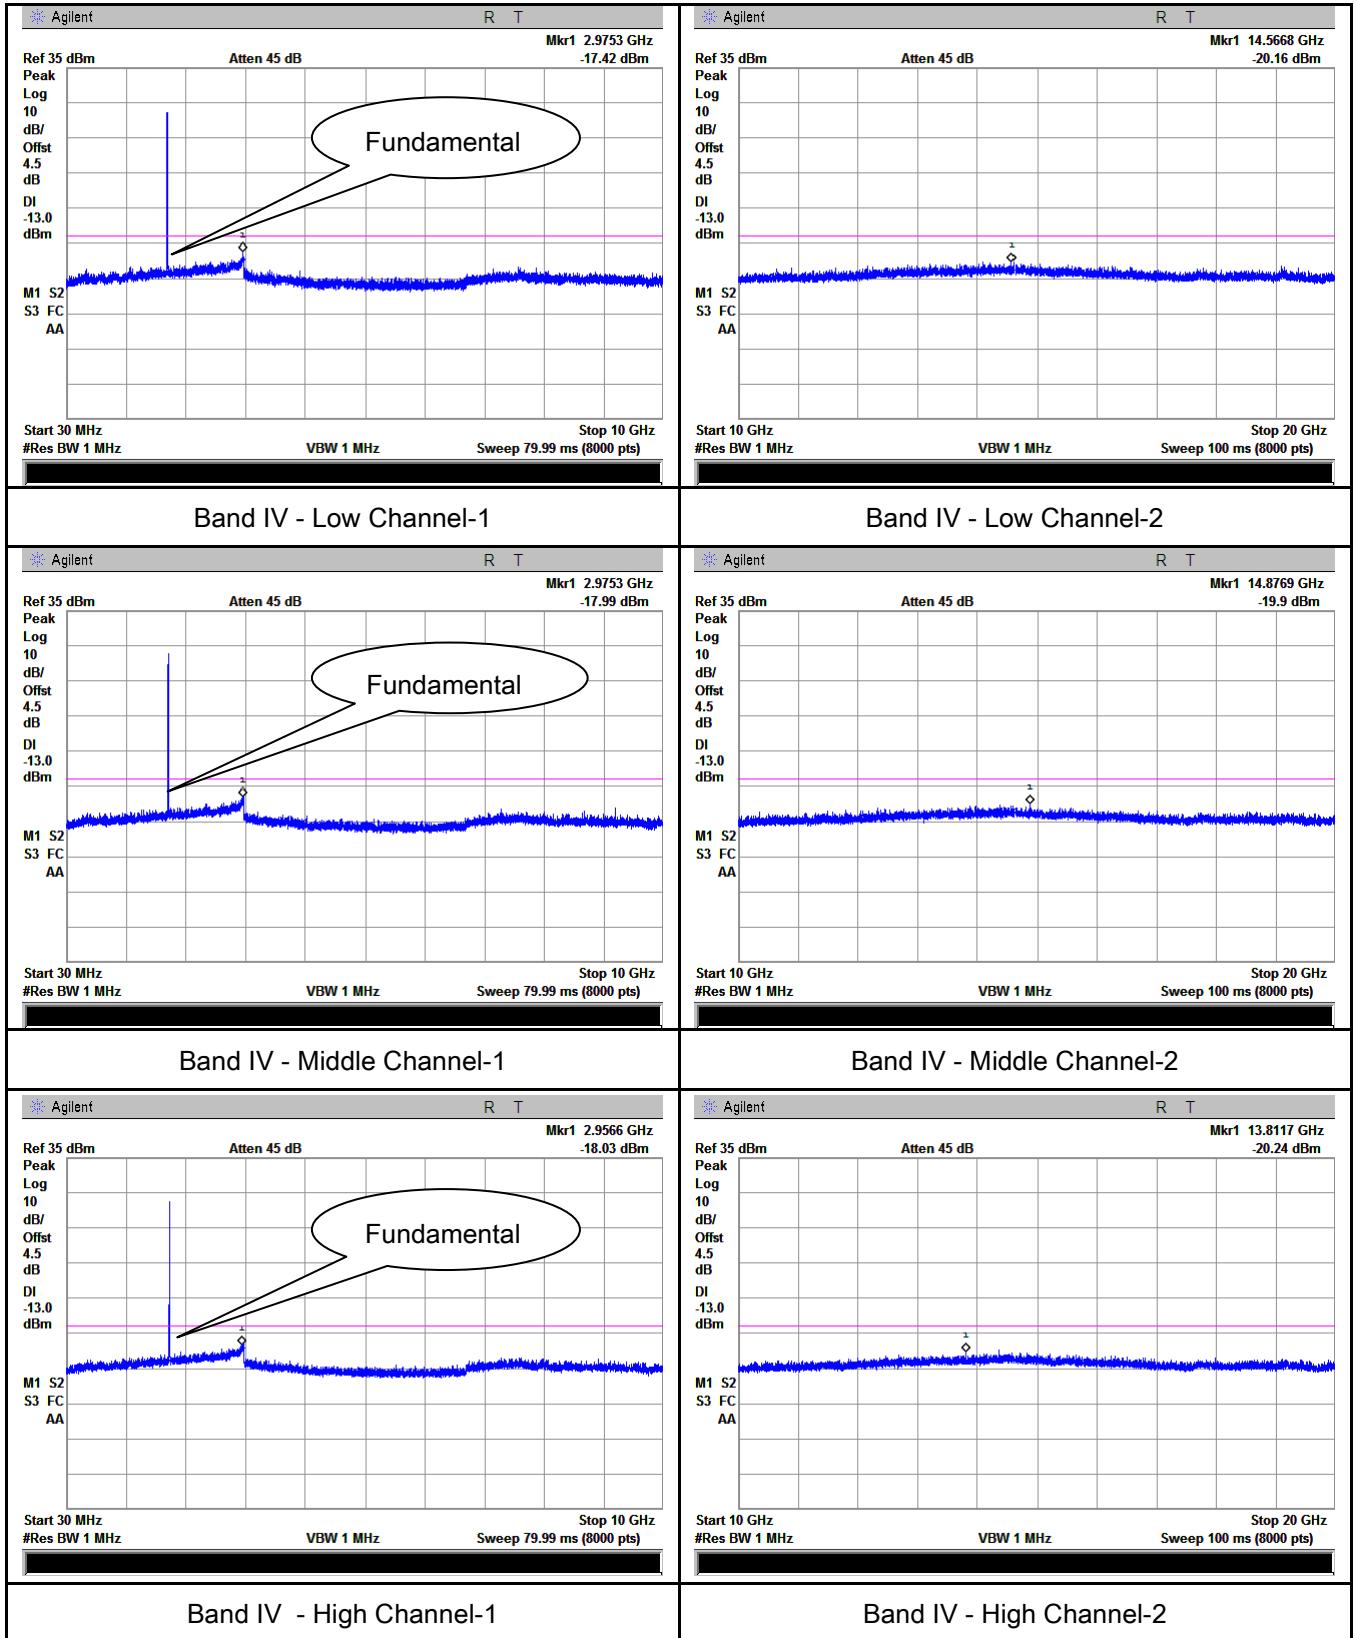


HSDPA:


UMTS-FDD Band V (Part 22H)

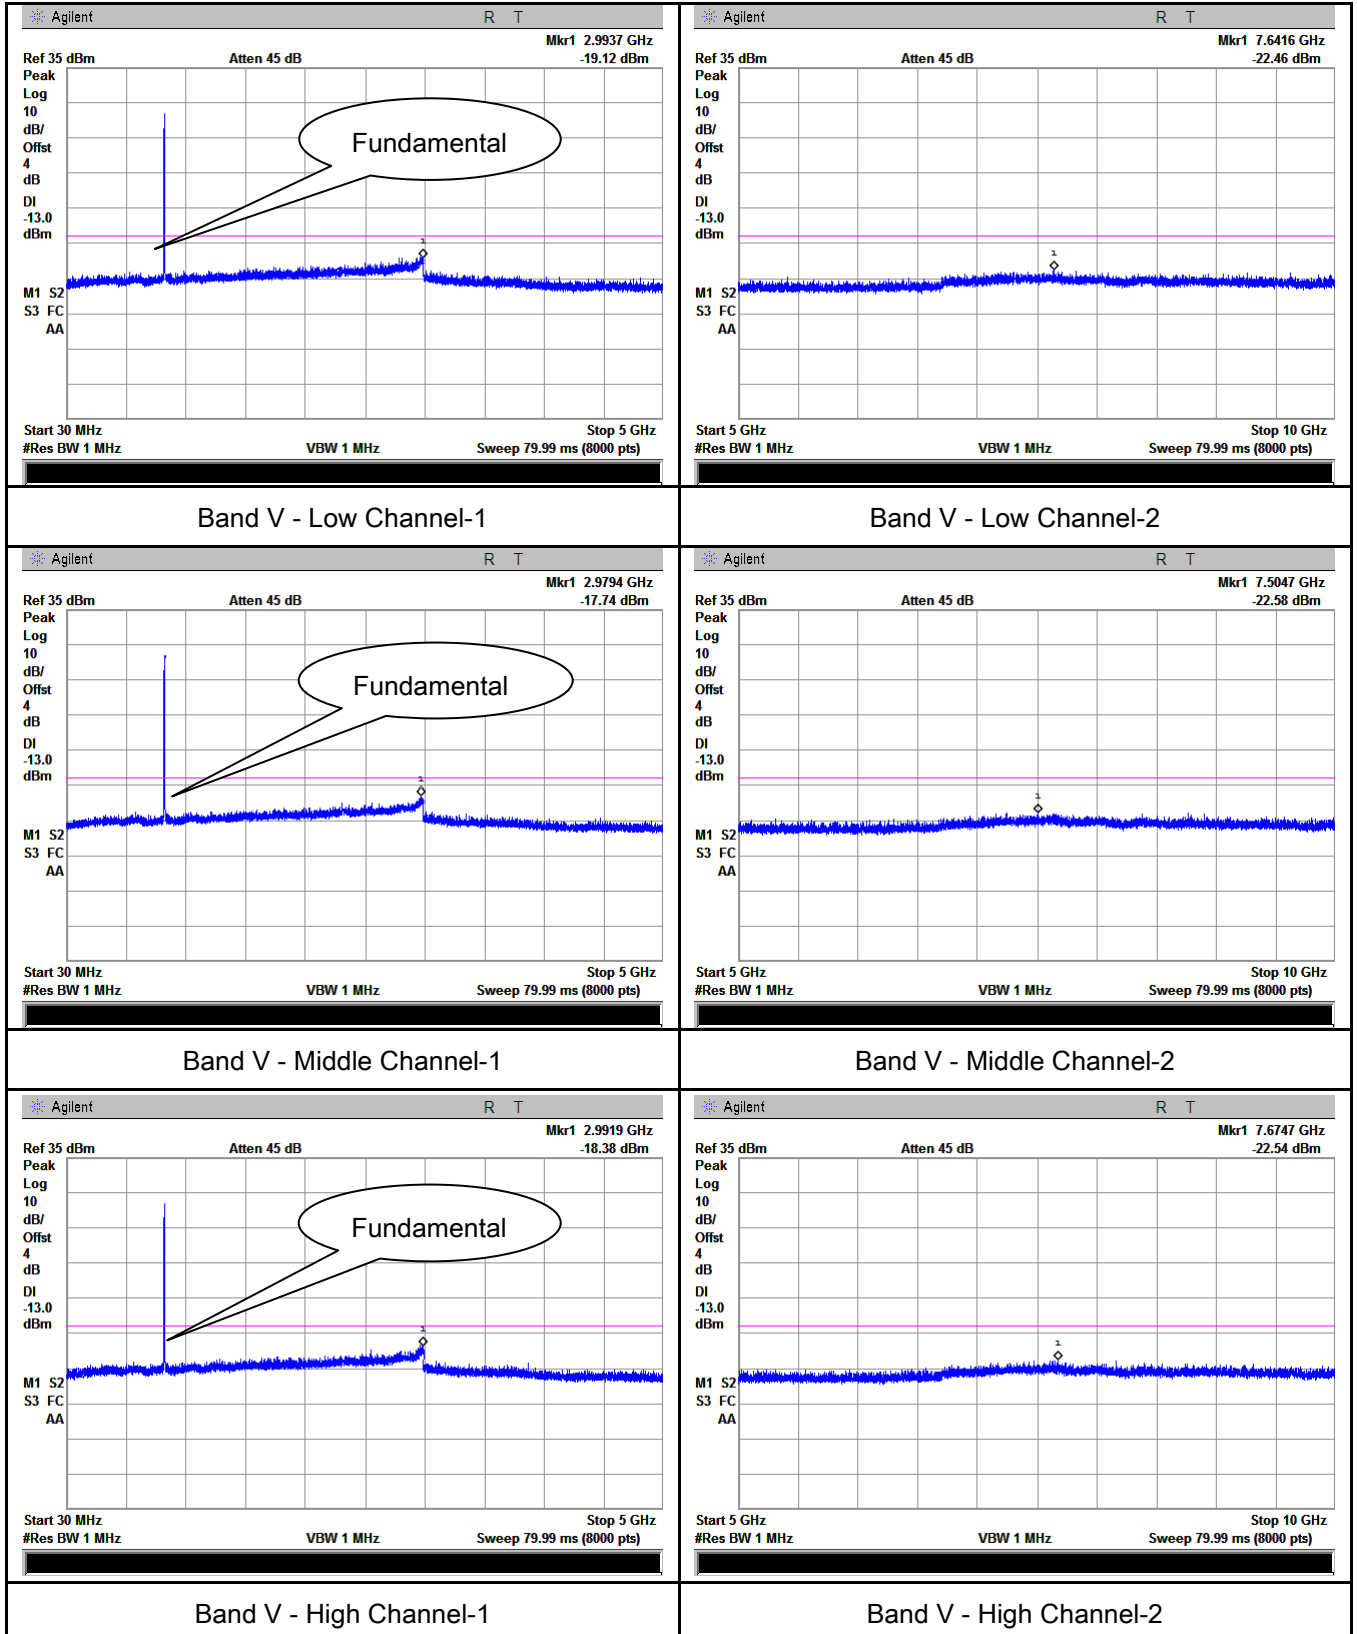

UMTS-FDD Band II (Part 24E)

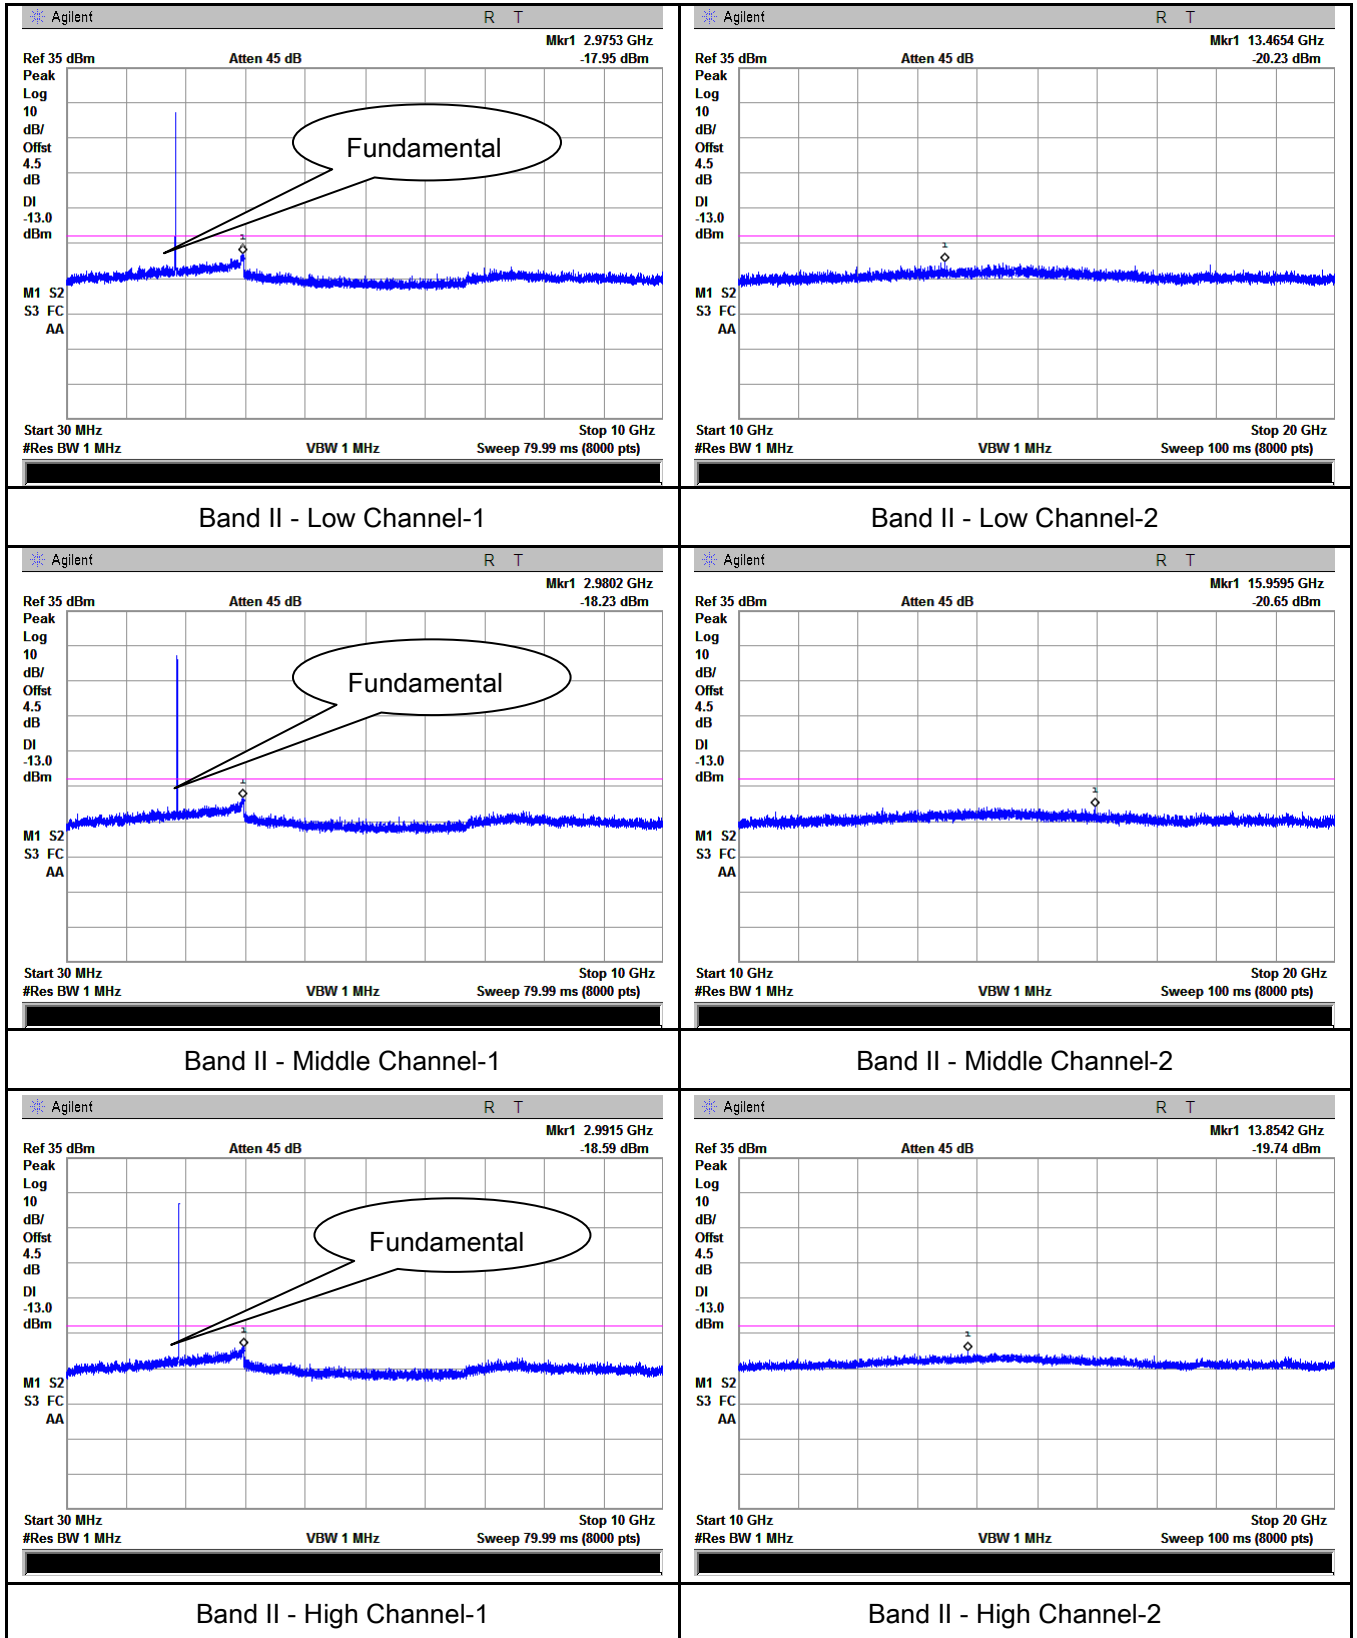

UMTS-FDD Band IV (Part 27)

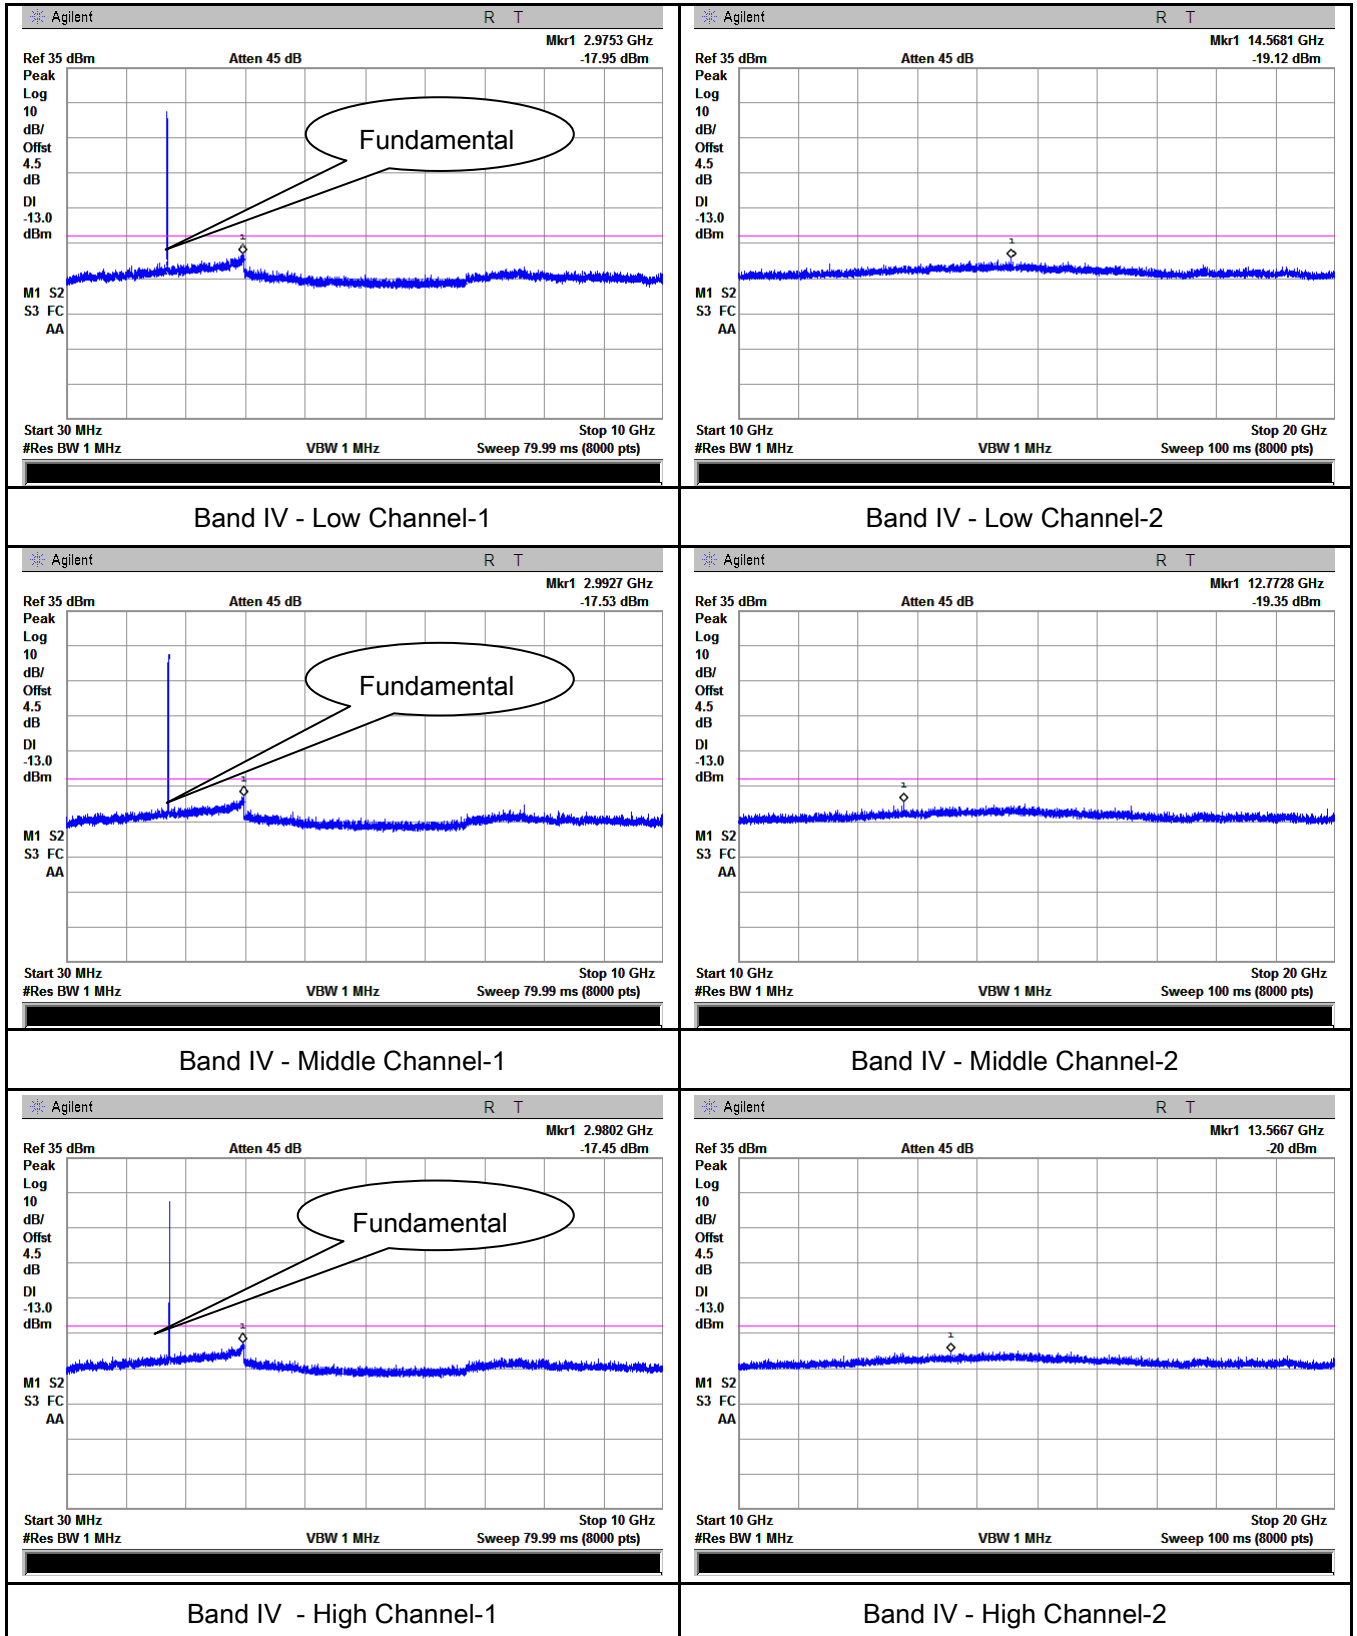


6.6 Spurious Radiated Emissions

Temperature	25 °C
Relative Humidity	56%
Atmospheric Pressure	1018mbar
Test date :	September 09, 2017
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§2.1053, §22.917 & §24.238 § 27.53(h)	a)	The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.	☒

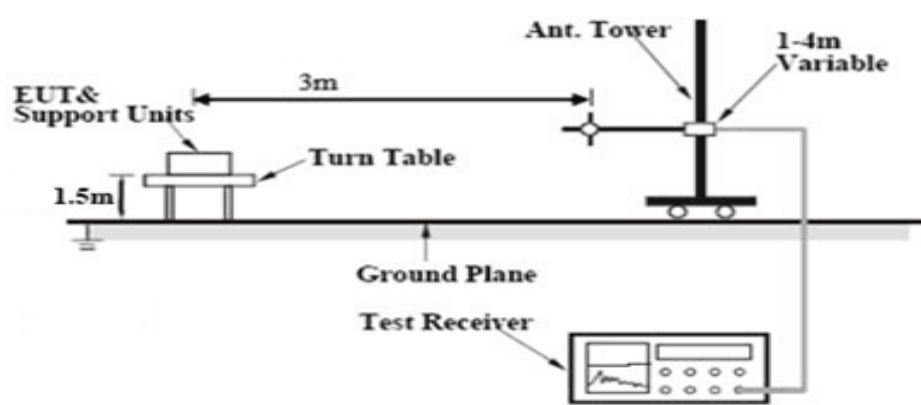Test setup	
------------	--

Test Procedure	- The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable. - The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis. - Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution. Sample Calculation: EUT Field Strength = Raw Amplitude (dBμV/m) – Amplifier Gain (dB) + Antenna Factor (dB) + Cable Loss (dB) + Filter Attenuation (dB, if used)
----------------	---

Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A
 Test Plot ☐ Yes (See below) ☒ N/A

Cellular Band (Part 22H) result

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1648.4	-43.76	V	7.95	0.67	-36.48	-13	-23.48
1648.4	-44.76	H	7.95	0.67	-37.48	-13	-24.48
324.4	-52.72	V	5.6	0.25	-47.37	-13	-34.37
606.1	-51.92	H	6.1	0.37	-46.19	-13	-33.19

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1673.2	-42.78	V	7.95	0.67	-35.5	-13	-22.5
1673.2	-44.06	H	7.95	0.67	-36.78	-13	-23.78
257	-53.3	V	6	0.24	-47.54	-13	-34.54
673.9	-52.49	H	6.1	0.37	-46.76	-13	-33.76

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1697.6	-42.65	V	7.95	0.68	-35.38	-13	-22.38
1697.6	-44.53	H	7.95	0.68	-37.26	-13	-24.26
236.5	-52.61	V	6	0.24	-46.85	-13	-33.85
485.2	-53.52	H	6.1	0.34	-47.76	-13	-34.76

Note:

1, The testing has been conformed to $10 \times 848.8 \text{ MHz} = 8,488 \text{ MHz}$

2, All other emissions more than 30 dB below the limit

3, GSM voice, GPRS and EGPRS mode were investigated. The results above show only the worse cases

4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

5, The radiated spurious test above 18GHz is subcontracted to SIEMIC (Nanjing-China) Laboratories. and found 30dB below the limit at least.

PCS Band (Part24E) result

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3700.4	-48.96	V	10.25	1	-39.71	-13	-26.71
3700.4	-48.66	H	10.25	1	-39.41	-13	-26.41
258.7	-53.46	V	6	0.24	-47.7	-13	-34.7
161.3	-53.69	H	1	0.19	-52.88	-13	-39.88

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3760	-49.32	V	10.25	1.01	-40.08	-13	-27.08
3760	-50.2	H	10.25	1.01	-40.96	-13	-27.96
154.5	-52.63	V	1	0.19	-51.82	-13	-38.82
368.7	-53.88	H	5.9	0.27	-48.25	-13	-35.25

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3819.6	-47.6	V	10.36	1.02	-38.26	-13	-25.26
3819.6	-48.46	H	10.36	1.02	-39.12	-13	-26.12
282.2	-54.03	V	5.6	0.25	-48.68	-13	-35.68
711	-51.93	H	6.1	0.37	-46.2	-13	-33.2

Note:

1, The testing has been conformed to $10 \times 1909.8 \text{ MHz} = 19,098 \text{ MHz}$

2, All other emissions more than 30 dB below the limit

3, GSM voice, GPRS and EGPRS mode were investigated. The results above show only the worse cases

4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

5, The radiated spurious test above 18GHz is subcontracted to SIEMIC (Nanjing-China) Laboratories. and found 30dB below the limit at least.

UMTS-FDD Band V (Part 22H)

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1652.8	-46.52	V	7.95	0.67	-39.24	-13	-26.24
1652.8	-45.5	H	7.95	0.67	-38.22	-13	-25.22
190.4	-51.71	V	3.7	0.18	-48.19	-13	-35.19
446.4	-53.63	H	6	0.29	-47.92	-13	-34.92

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1670	-47.32	V	7.95	0.67	-40.04	-13	-27.04
1670	-46.4	H	7.95	0.67	-39.12	-13	-26.12
383.5	-53.03	V	6	0.3	-47.33	-13	-34.33
783	-53.13	H	6.1	0.44	-47.47	-13	-34.47

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1693.2	-45.55	V	7.95	0.68	-38.28	-13	-25.28
1693.2	-45.18	H	7.95	0.68	-37.91	-13	-24.91
645.1	-51.92	V	6.1	0.39	-46.21	-13	-33.21
826.8	-52.69	H	6.2	0.45	-46.94	-13	-33.94

Note:

1, The testing has been conformed to $10 \times 846.6 \text{ MHz} = 8,466 \text{ MHz}$

2, All other emissions more than 30 dB below the limit

3, RMC, HSUPA and HSDPA mode were investigated. The results above show only the worse cases

4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

5, The radiated spurious test above 18GHz is subcontracted to SIEMIC (Nanjing-China) Laboratories. and found 30dB below the limit at least.

UMTS-FDD Band II (Part 24E)

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3704.8	-50.22	V	10.25	1	-40.97	-13	-27.97
3704.8	-49.03	H	10.25	1	-39.78	-13	-26.78
669.9	-54.21	V	6.1	0.37	-48.48	-13	-35.48
815	-52.43	H	6.1	0.44	-46.77	-13	-33.77

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3760	-49.85	V	10.25	1.01	-40.61	-13	-27.61
3760	-50.47	H	10.25	1.01	-41.23	-13	-28.23
251.6	-52.75	V	6	0.24	-46.99	-13	-33.99
398.4	-53.01	H	6	0.3	-47.31	-13	-34.31

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3815.2	-48.91	V	10.36	1.02	-39.57	-13	-26.57
3815.2	-48.97	H	10.36	1.02	-39.63	-13	-26.63
371.9	-54.32	V	5.9	0.27	-48.69	-13	-35.69
880.5	-54.2	H	6.2	0.44	-48.44	-13	-35.44

Note:

1, The testing has been conformed to $10 \times 1907.6 \text{ MHz} = 19,076 \text{ MHz}$

2, All other emissions more than 30 dB below the limit

3, RMC, HSUPA and HSDPA mode were investigated. The results above show only the worse cases

4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case

5, The radiated spurious test above 18GHz is subcontracted to SIEMIC (Nanjing-China) Laboratories. and found 30dB below the limit at least.

UMTS-FDD Band IV (Part 27)

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3424.8	-46.44	V	10.07	0.96	-37.33	-13	-24.33
3424.8	-48.72	H	10.07	0.96	-39.61	-13	-26.61
158.3	-56.14	V	1	0.19	-55.33	-13	-42.33
736.8	-51.79	H	6.4	0.43	-45.82	-13	-32.82

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3480	-46.48	V	10.09	0.96	-37.35	-13	-24.35
3480	-46.19	H	10.09	0.96	-37.06	-13	-24.06
324.4	-56.58	V	6	0.27	-50.85	-13	-37.85
548.2	-52.56	H	6.4	0.35	-46.51	-13	-33.51

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3505.2	-45.19	V	10.09	0.97	-36.07	-13	-23.07
3505.2	-45.93	H	10.09	0.97	-36.81	-13	-23.81
365.2	-57.36	V	5.9	0.27	-51.73	-13	-38.73
684.3	-51.22	H	6.3	0.4	-45.32	-13	-32.32

Note:

1, The testing has been conformed to $10 \times 1752.6 \text{ MHz} = 17,526 \text{ MHz}$

2, All other emissions more than 30 dB below the limit

3, RMC, HSUPA and HSDPA mode were investigated. The results above show only the worse cases.


4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

5, The radiated spurious test above 18GHz is subcontracted to SIEMIC (Nanjing-China) Laboratories. and found 30dB below the limit at least.

6.7 Band Edge

Temperature	25 °C
Relative Humidity	56%
Atmospheric Pressure	1018mbar
Test date :	September 09, 2017
Tested By :	Loren Luo

Requirement(s):

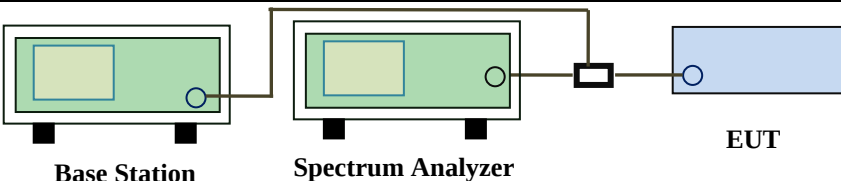Spec	Item	Requirement	Applicable
§22.917(a) §24.238(a) § 27.53(h)	a)	The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.	☒
Test setup	 Base Station Spectrum Analyzer EUT		
Procedure	- The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The Band Edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.		
Remark			
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

GSM Voice:

Cellular Band (Part 22H) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.995	-15.09	-13
849.0025	-15.60	-13

PCS Band (Part24E) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.9975	-18.26	-13
1910.0225	-18.56	-13

GPRS:

Cellular Band (Part 22H) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.9975	-14.95	-13
849.0225	-14.75	-13

PCS Band (Part24E) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.9975	-15.30	-13
1910.005	-16.98	-13

EGPRS (MCS5):

Cellular Band (Part 22H) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.9975	-17.26	-13
849.015	-16.07	-13

PCS Band (Part24E) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.9975	-15.34	-13
1910.02	-18.08	-13

RCM:

UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.125	-25.39	-13
850.125	-25.94	-13

UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.175	-27.57	-13
1910.05	-20.80	-13

UMTS-FDD Band IV (Part 27)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1708.775	-23.53	-13
1755.275	-29.48	-13

HSUPA:

UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.025	-25.43	-13
850.05	-26.01	-13

UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.2	-27.66	-13
1910.05	-21.69	-27.66

UMTS-FDD Band IV (Part 27)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1709.875	-23.55	-13
1756	-29.08	-13

HSDPA:

UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.1	-25.24	-13
849.85	-27.04	-13

UMTS-FDD Band II (Part 24E)


Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.125	-27.27	-13
1910.05	-21.1	-13

UMTS-FDD Band IV (Part 27)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1709.075	-24.81	-13
1755.1	-28.15	-13


GSM Voice:

Test Plots

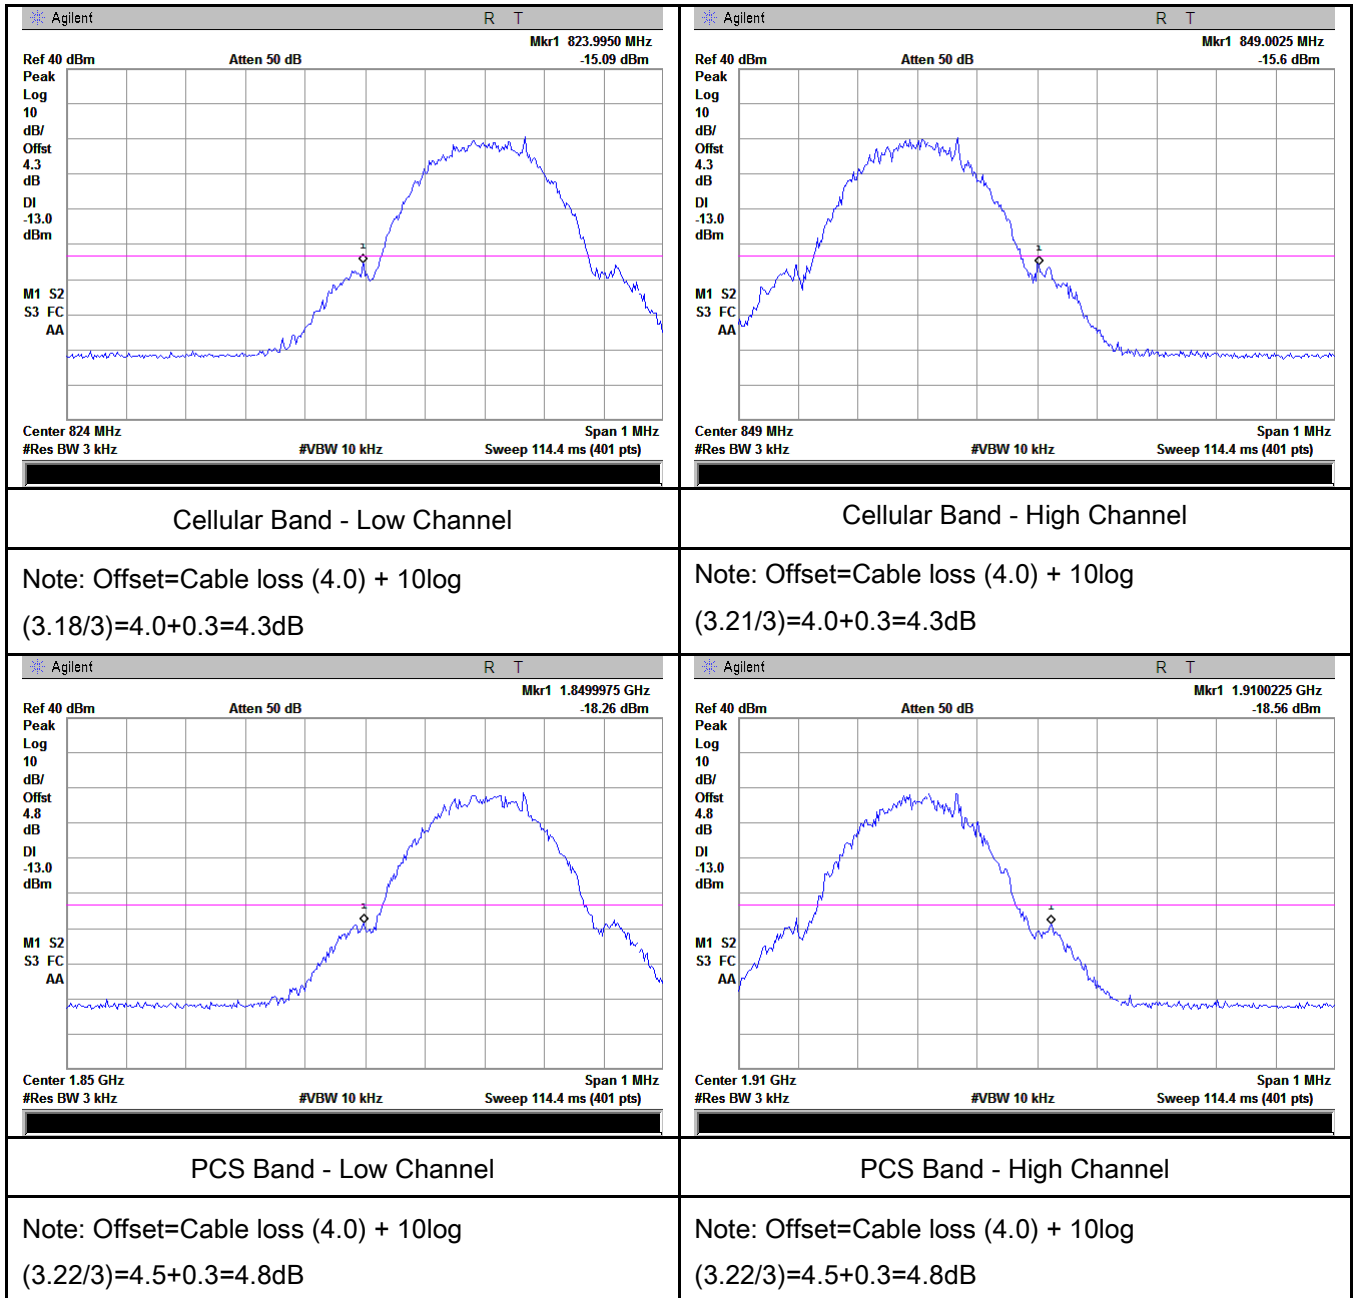


GPRS:

Test Plots

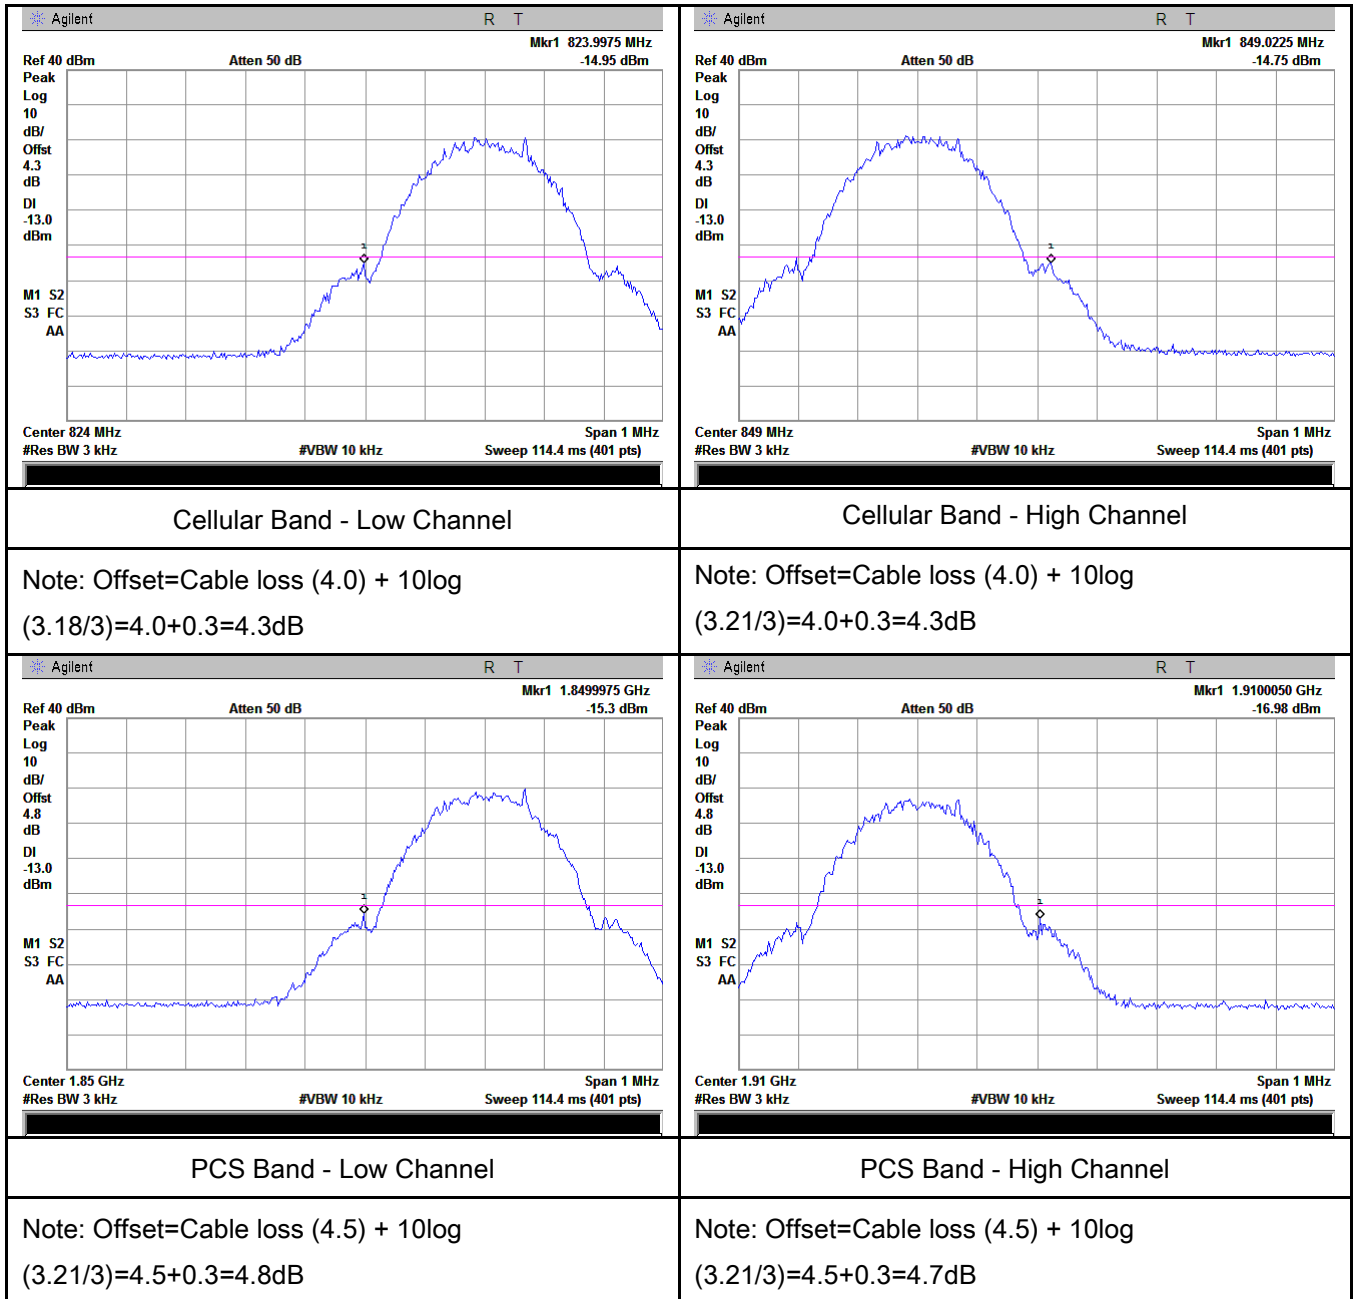


EGPRS (MCS5):

Test Plots

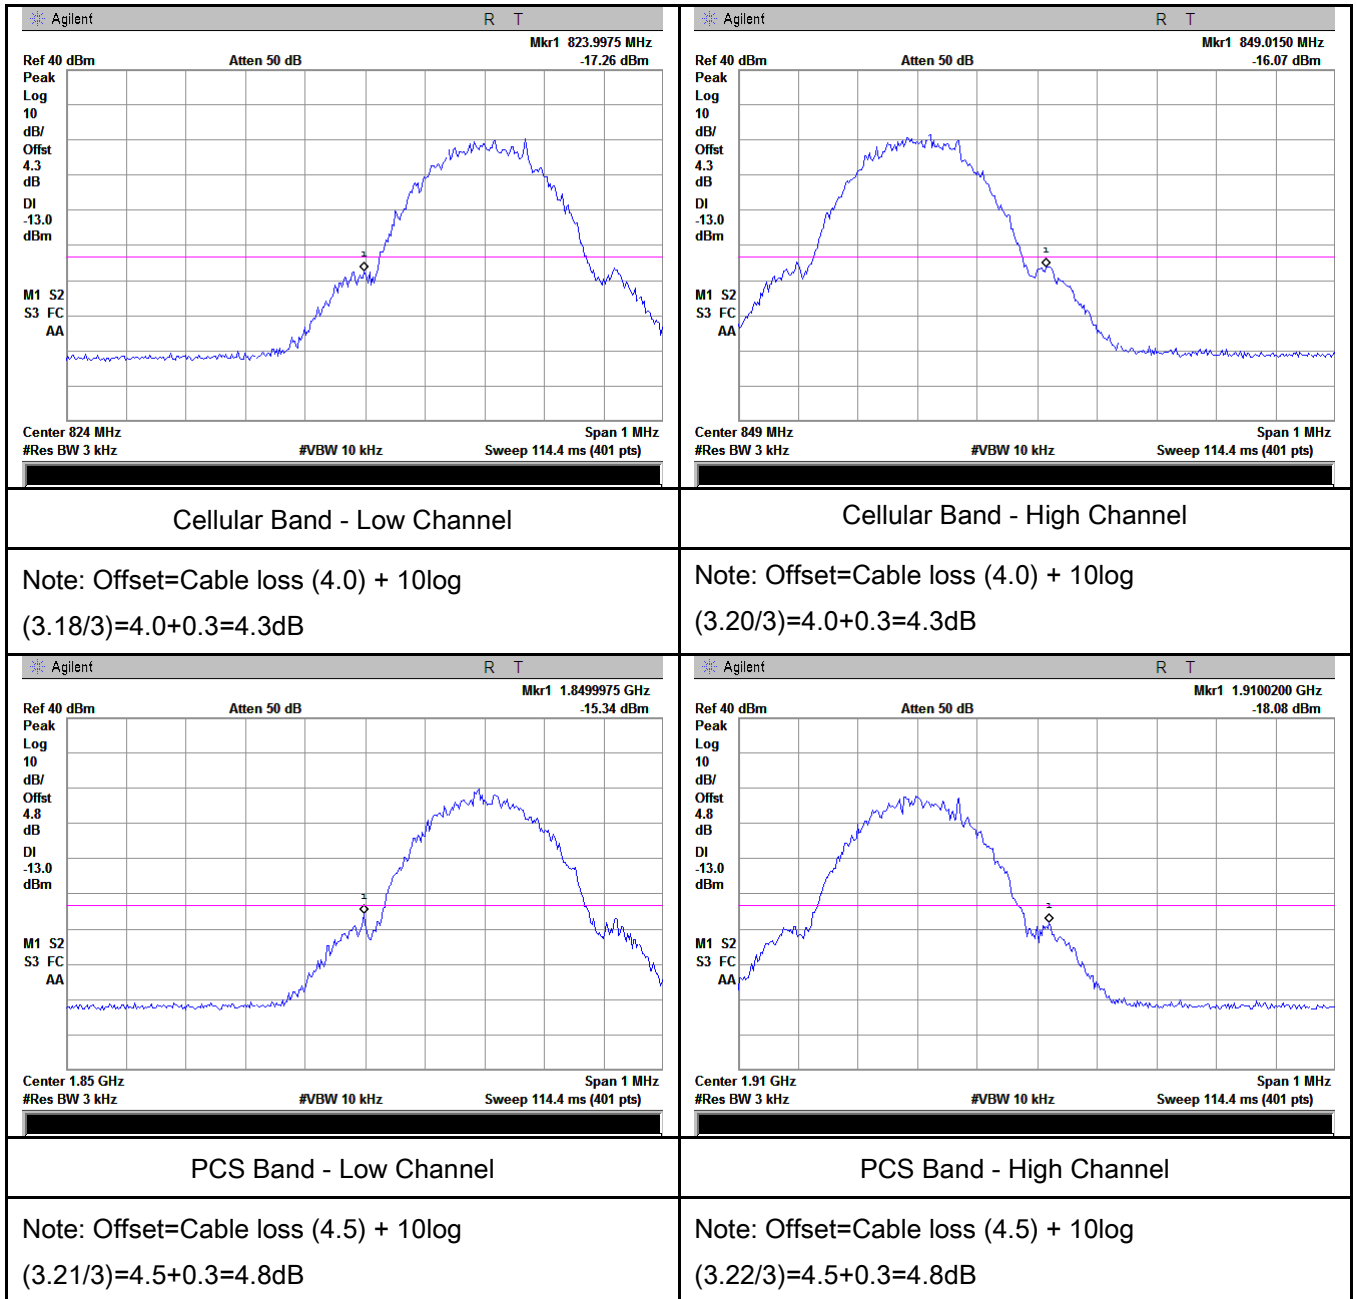


RMC:

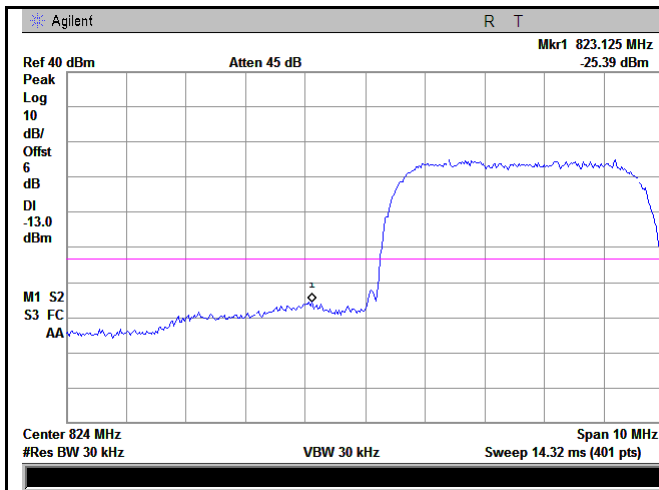


UMTS-FDD Band V - Low Channel

Note: Offset=Cable loss (4.0) + 10log
(47.12/30)=4.0+2.0=6.0 dB

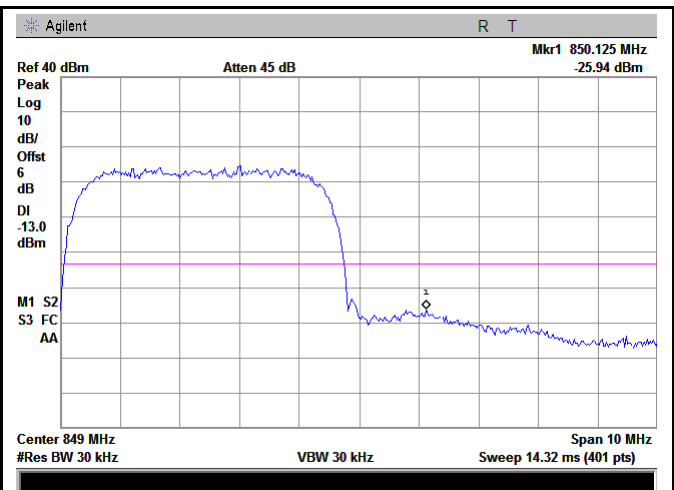


UMTS-FDD Band V - High Channel

Note: Offset=Cable loss (4.0) + 10log
(47.03/30)=4.0+2.0=6.0dB

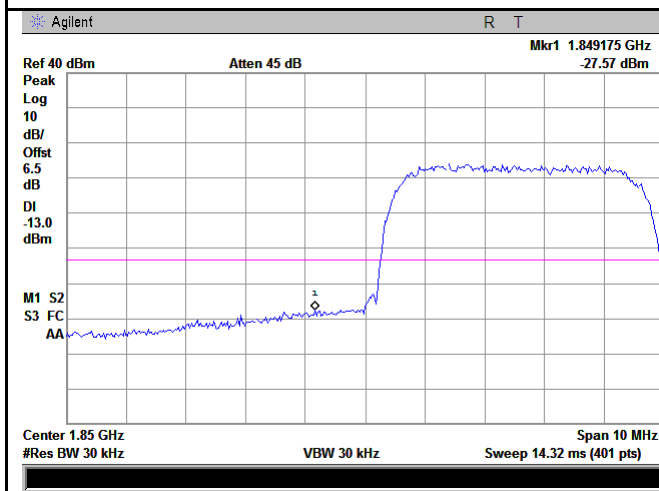


UMTS-FDD Band II - Low Channel

Note: Offset=Cable loss (4.5) + 10log
(47.30/30)=4.5+2.0=6.5 dB

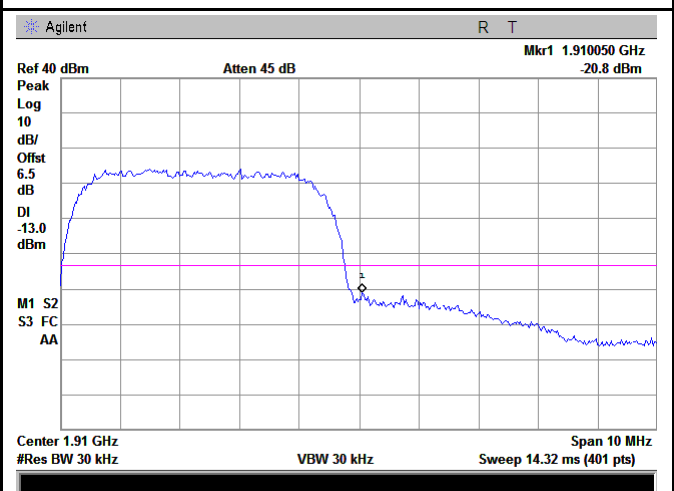


UMTS-FDD Band II - High Channel

Note: Offset=Cable loss (4.5) + 10log
(47.41/30)=4.5+2.0=6.5 dB

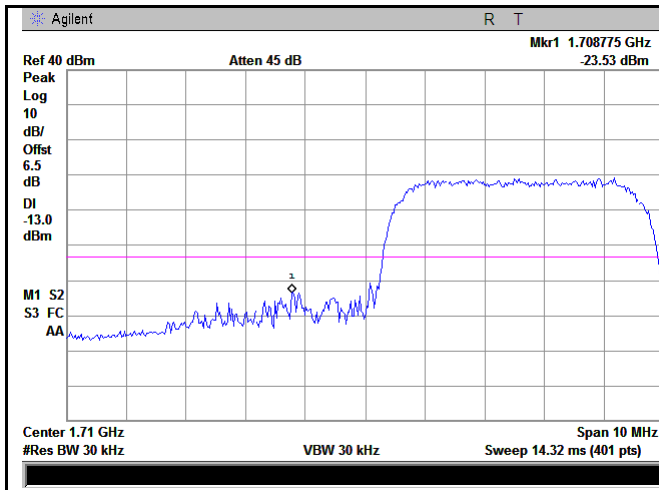

UMTS-FDD Band IV - Low Channel


Note: Offset=Cable loss (4.5) + 10log
(47.26/30)=4.5+2.0=6.5dB

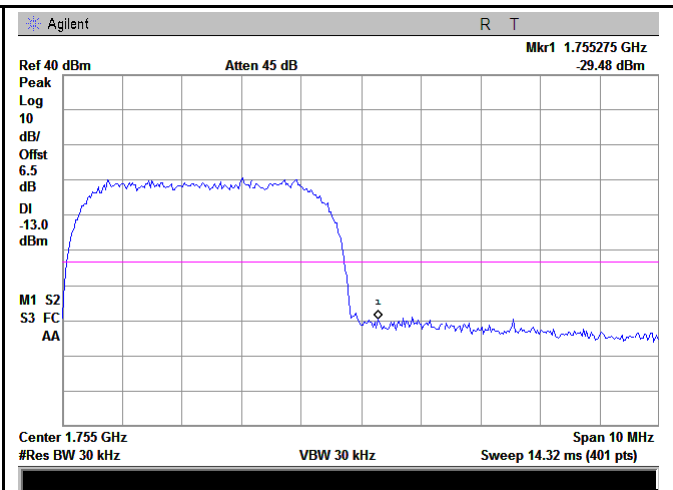

UMTS-FDD Band IV - High Channel


Note: Offset=Cable loss (4.0) + 10log
(47.18/30)=4.5+2.0=6.5dB

HSUPA:

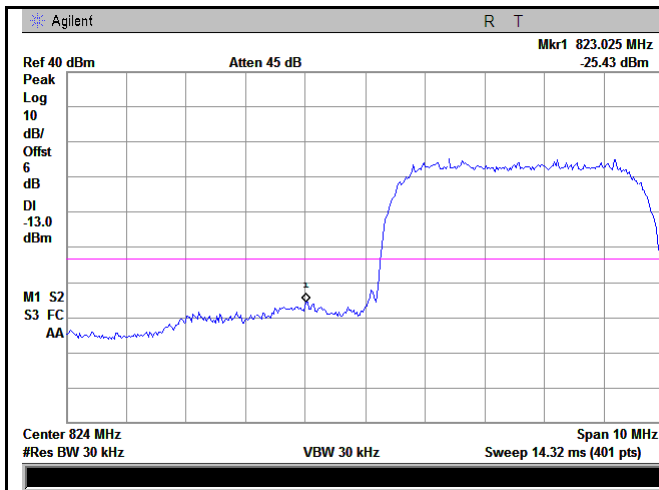


UMTS-FDD Band V - Low Channel

Note: Offset=Cable loss (4.0) + 10log
(47.05/30)=4.0+2.0=6.0 dB

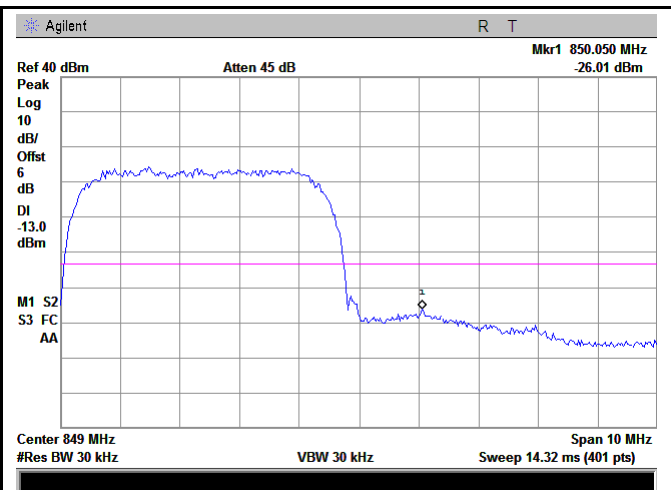


UMTS-FDD Band V - High Channel

Note: Offset=Cable loss (4.0) + 10log
(47.10/30)=4.0+2.0=6.0 dB

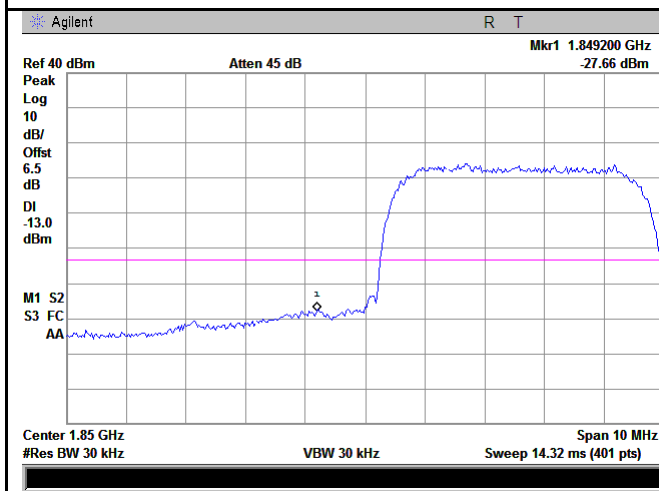


UMTS-FDD Band II - Low Channel

Note: Offset=Cable loss (4.5) + 10log
(47.31/30)=4.5+2.0=6.5 dB

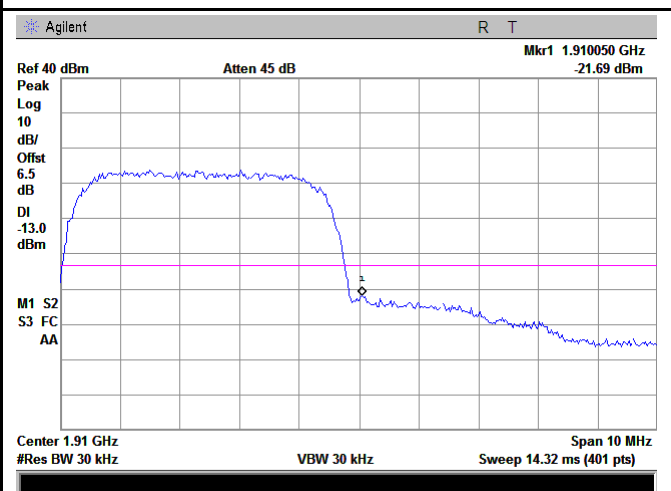


UMTS-FDD Band II - High Channel

Note: Offset=Cable loss (4.5) + 10log
(47.23/30)=4.5+2.0=6.5 dB

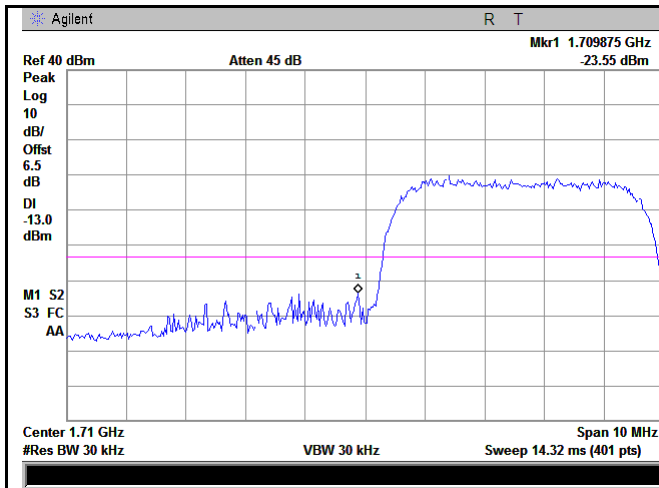

UMTS-FDD Band IV - Low Channel


Note: Offset=Cable loss (4.5) + 10log
(47.25/30)=4.5+2.0=6.5 dB

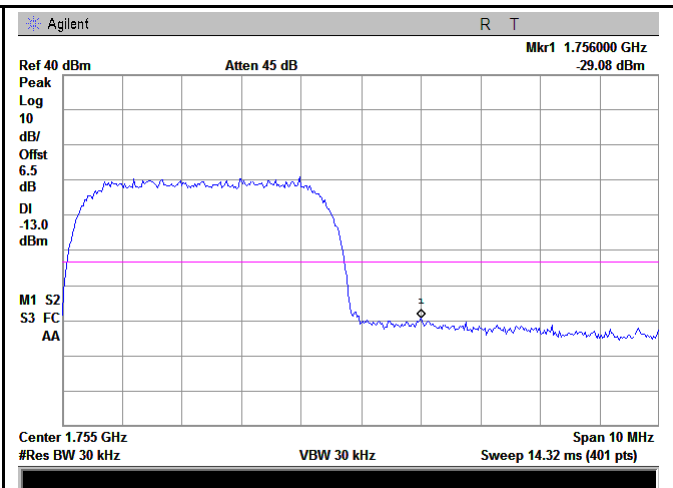

UMTS-FDD Band IV - High Channel


Note: Offset=Cable loss (4.5) + 10log
(47.23/30)=4.5+2.0=6.5 dB

HSDPA:

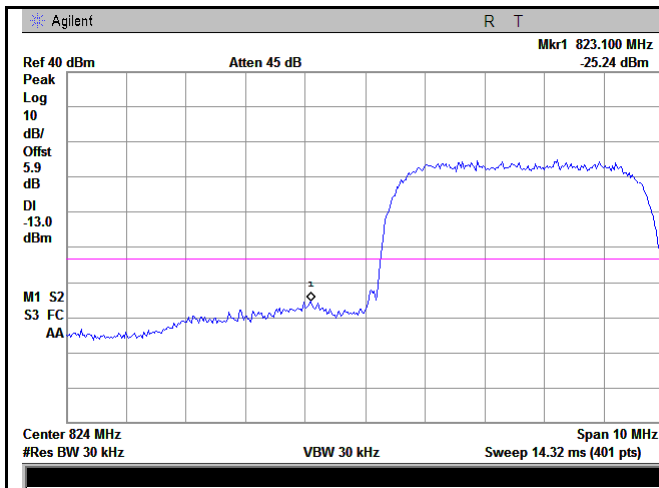


UMTS-FDD Band V - Low Channel

Note: Offset=Cable loss (4.0) + 10log
(46.97/30)=4.0+1.9=5.9 dB

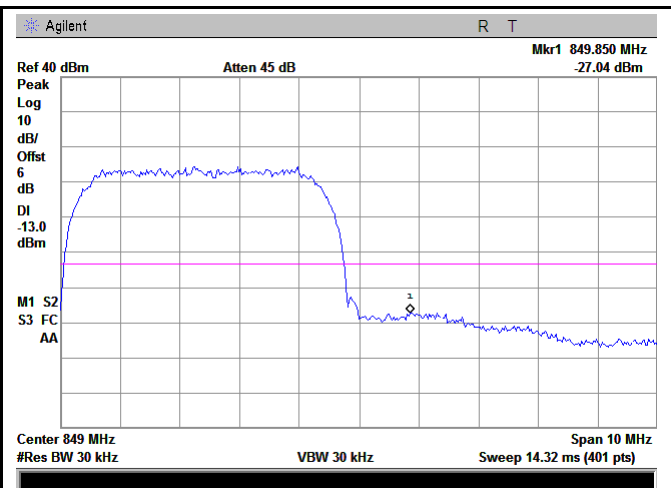


UMTS-FDD Band V - High Channel

Note: Offset=Cable loss (4.0) + 10log
(47.19/30)=4.0+2.0=6.0 dB

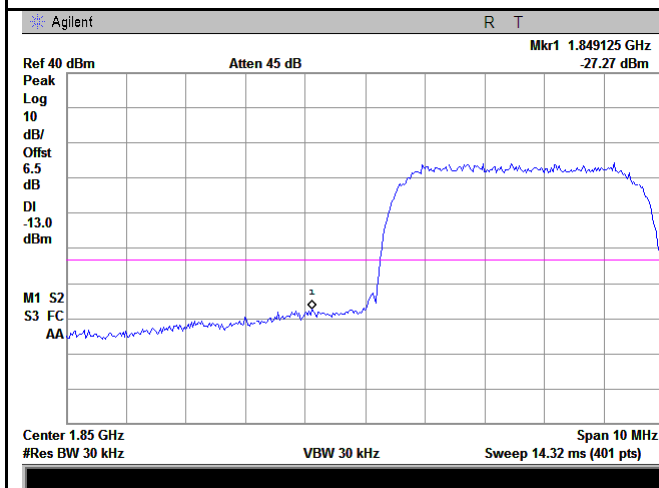


UMTS-FDD Band II - Low Channel

Note: Offset=Cable loss (4.5) + 10log
(47.11/30)=4.5+2.0=6.5 dB

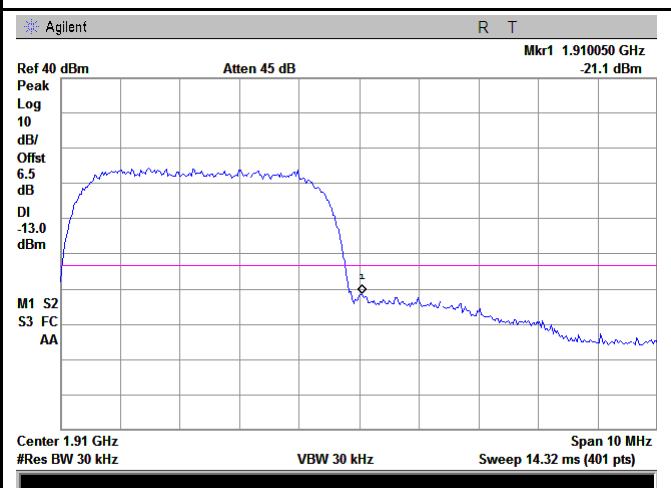


UMTS-FDD Band II - High Channel

Note: Offset=Cable loss (4.5) + 10log
(47.51/30)=4.5+2.0=6.5 dB

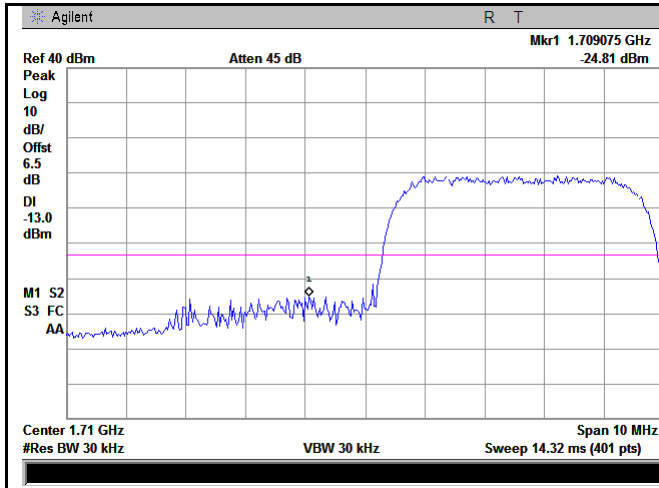

UMTS-FDD Band IV - Low Channel

Note: Offset=Cable loss (4.5) + 10log
(47.18/30)=4.5+2.0=6.5 dB

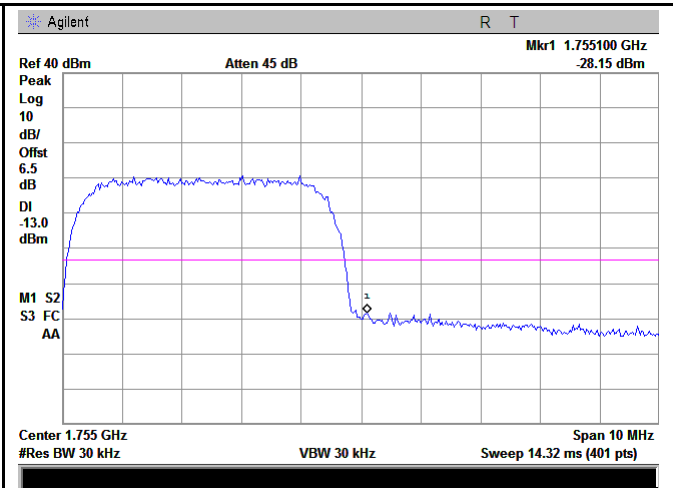


UMTS-FDD Band IV - High Channel

Note: Offset=Cable loss (4.5) + 10log
(47.24/30)=4.5+2.0=6.5 dB

6.8 Frequency Stability

Temperature	23 °C
Relative Humidity	55%
Atmospheric Pressure	1012mbar
Test date :	September 04, 2017
Tested By :	Loren Luo

Requirement(s):

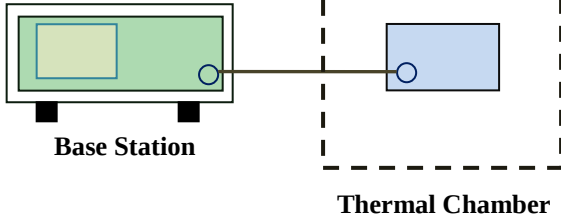Spec	Item	Requirement	Applicable																																
§2.1055, §22.355 & §24.235 § 27.5(h); § 27.54	a)	According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below: Frequency Tolerance for Transmitters in the Public Mobile Services <table border="1"> <thead> <tr> <th>Frequency Range (MHz)</th><th>Base, fixed (ppm)</th><th>Mobile ≤ 3 watts (ppm)</th><th>Mobile ≤ 3 watts (ppm)</th></tr> </thead> <tbody> <tr> <td>25 to 50</td><td>20.0</td><td>20.0</td><td>50.0</td></tr> <tr> <td>50 to 450</td><td>5.0</td><td>5.0</td><td>50.0</td></tr> <tr> <td>450 to 512</td><td>2.5</td><td>5.0</td><td>50.0</td></tr> <tr> <td>821 to 896</td><td>1.5</td><td>2.5</td><td>2.5</td></tr> <tr> <td>928 to 960</td><td>5.0</td><td>N/A</td><td>N/A</td></tr> <tr> <td>929 to 960</td><td>1.5</td><td>N/A</td><td>N/A</td></tr> <tr> <td>2110 to 2220</td><td>10.0</td><td>N/A</td><td>N/A</td></tr> </tbody> </table> According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized frequency block.	Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)	25 to 50	20.0	20.0	50.0	50 to 450	5.0	5.0	50.0	450 to 512	2.5	5.0	50.0	821 to 896	1.5	2.5	2.5	928 to 960	5.0	N/A	N/A	929 to 960	1.5	N/A	N/A	2110 to 2220	10.0	N/A	N/A	
Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)																																
25 to 50	20.0	20.0	50.0																																
50 to 450	5.0	5.0	50.0																																
450 to 512	2.5	5.0	50.0																																
821 to 896	1.5	2.5	2.5																																
928 to 960	5.0	N/A	N/A																																
929 to 960	1.5	N/A	N/A																																
2110 to 2220	10.0	N/A	N/A																																
Test setup	 The diagram shows a Base Station (represented by a green rectangle with a yellow square inside) connected by a line to a Thermal Chamber (represented by a blue rectangle inside a dashed black border). Both components have a small circle representing an antenna or connector.																																		

Procedure	A communication link was established between EUT and base station. The frequency error was monitored and measured by base station under variation of ambient temperature and variation of primary supply voltage. Limit: The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

GSM Voice:

Cellular Band (Part 22H) result

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.8	22	0.0263	2.5
0		15	0.0179	2.5
10		16	0.0191	2.5
20		14	0.0167	2.5
30		16	0.0191	2.5
40		17	0.0203	2.5
50		22	0.0263	2.5
55		17	0.0203	2.5
25	4.3	21	0.0251	2.5
	3.3	17	0.0203	2.5

PCS Band (Part 24E) result

Middle Channel, $f_0 = 1880$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.8	18	0.0096	2.5
0		17	0.0090	2.5
10		17	0.0090	2.5
20		14	0.0074	2.5
30		17	0.0090	2.5
40		13	0.0069	2.5
50		22	0.0117	2.5
55		19	0.0101	2.5
25	4.3	19	0.0101	2.5
	3.3	18	0.0096	2.5

RMC:

UMTS-FDD Band V (Part 22H)

Middle Channel, $f_0 = 835$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.8	14	0.0168	2.5
0		15	0.0180	2.5
10		18	0.0216	2.5
20		14	0.0168	2.5
30		13	0.0156	2.5
40		12	0.0144	2.5
50		17	0.0204	2.5
55		17	0.0204	2.5
25	4.3	15	0.0180	2.5
	3.3	15	0.0180	2.5

UMTS-FDD Band II (Part 24E)

Middle Channel, $f_0 = 1880$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.8	18	0.0096	2.5
0		17	0.0090	2.5
10		17	0.0090	2.5
20		14	0.0074	2.5
30		17	0.0090	2.5
40		13	0.0069	2.5
50		22	0.0117	2.5
55		19	0.0101	2.5
25	4.3	19	0.0101	2.5
	3.3	18	0.0096	2.5

UMTS-FDD Band IV (Part 27)

Middle Channel, $f_0 = 1733$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.8	22	0.0263	2.5
0		17	0.0204	2.5
10		14	0.0168	2.5
20		14	0.0168	2.5
30		17	0.0204	2.5
40		13	0.0156	2.5
50		21	0.0251	2.5
55		18	0.0216	2.5
25	4.3	20	0.0240	2.5
	3.3	17	0.0204	2.5

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
RF Conducted Test					
Agilent ESA-E SERIES SPECTRUM ANALYZER	E4407B	MY45108319	09/15/2016	09/14/2017	☒
Power Splitter	1#	1#	08/31/2016	08/30/2017	☒
Universal Radio Communication Tester	CMU200	121393	09/24/2016	09/23/2017	☒
Temperature/Humidity Chamber	UHL-270	001	10/08/2016	10/07/2017	☒
DC Power Supply	E3640A	MY40004013	09/16/2016	09/15/2017	☒
RF Power Sensor	Dare RPR3006C/P/W	AY554013	09/16/2016	09/15/2017	☒
Radiated Emissions					
EMI test receiver	ESL6	100262	09/16/2016	09/15/2017	☒
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/31/2016	08/30/2017	☒
Horn Antenna	BBHA9170	3145226D1	09/28/2016	09/27/2017	☒
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/23/2017	03/22/2018	☒
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/20/2016	09/19/2017	☒
Bilog Antenna (30MHz~2GHz)	JB1	A112017	09/20/2016	09/19/2017	☒
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71259	09/23/2016	09/22/2017	☒
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/23/2016	09/22/2017	☒
SYNTHESIZED SIGNAL GENERATOR	8665B	3744A01293	09/16/2016	09/15/2017	☒
Power Amplifier	SMC150D	R1553-0313	03/08/2017	03/07/2018	☒
Power Amplifier	S41-25D	R1553-0314	05/26/2017	05/25/2018	☒

Test Report	17070764-FCC-R1
Page	87 of 103

Tunable Notch Filter	3NF-800/1000-S	AA4	08/31/2016	08/30/2017	☒
Tunable Notch Filter	3NF-1000/2000-S	AM 4	08/31/2016	08/30/2017	☒

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo

Whole Package View



Adapter View



EUT - Front View




EUT - Rear View



EUT - Top View




EUT - Bottom View

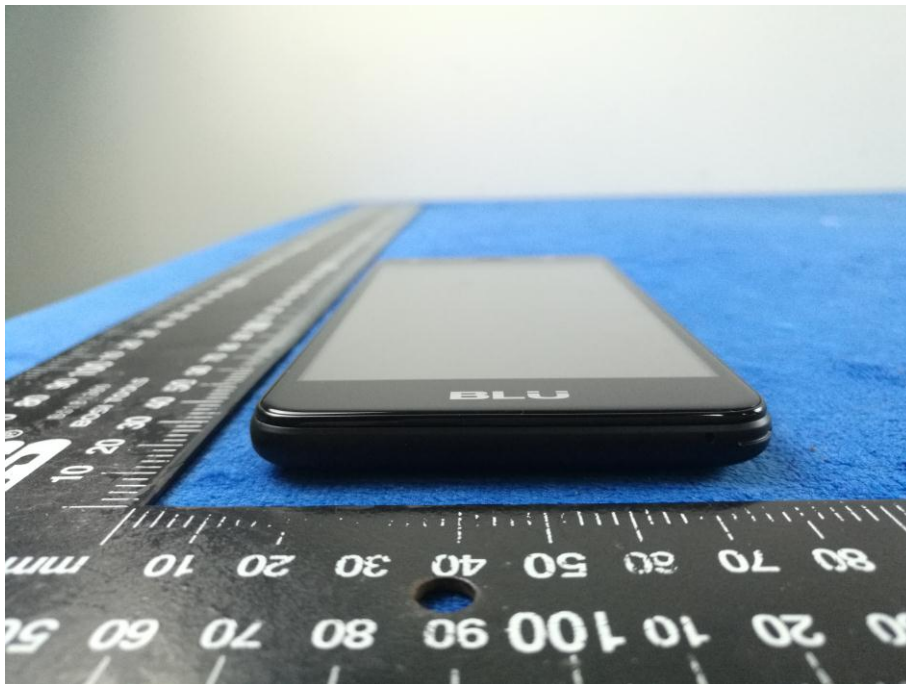

EUT - Left View




EUT - Right View

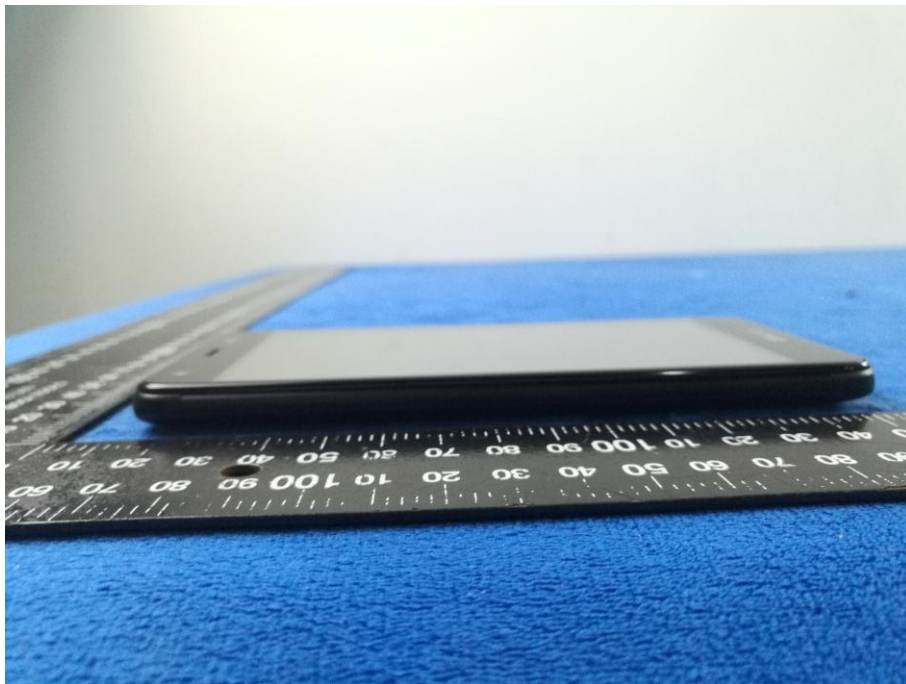




Battery - Front View

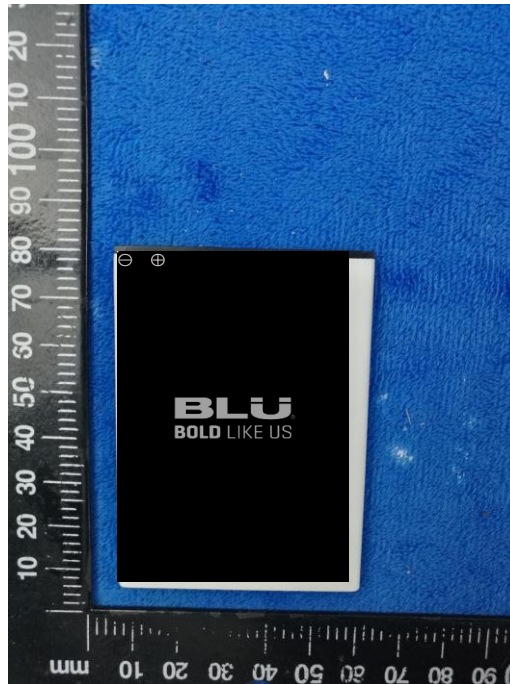

Battery - Rear View



Mainboard with Shielding – Front View

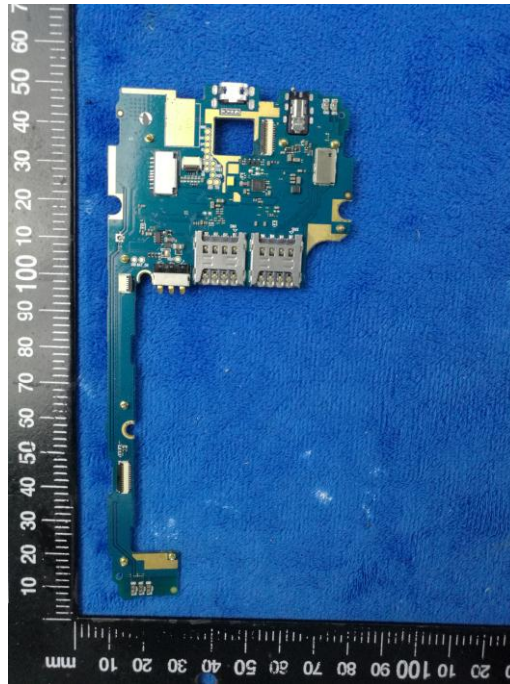

Mainboard with Shielding – Rear View



Mainboard without Shielding – Rear View




LCD – Front View



LCD – Rear View




GSM/PCS/UMTS-FDD - Antenna View

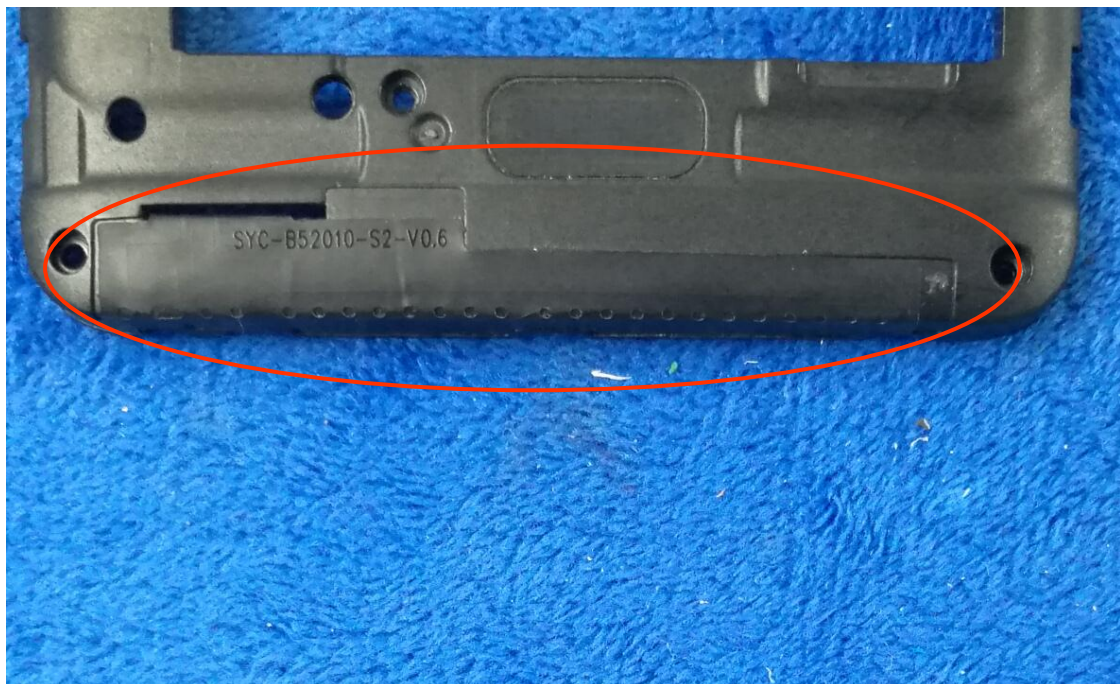


WIFI/BT/BLE/GPS - Antenna View



Annex B.iii. Photograph: Test Setup Photo

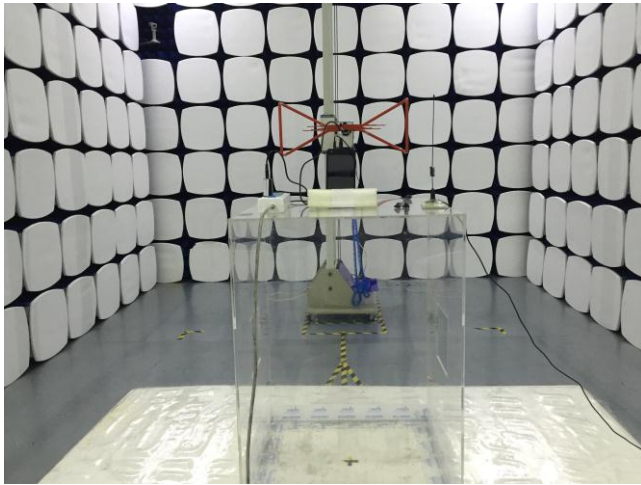

Radiated Spurious Emissions Test Setup Below 1GHz

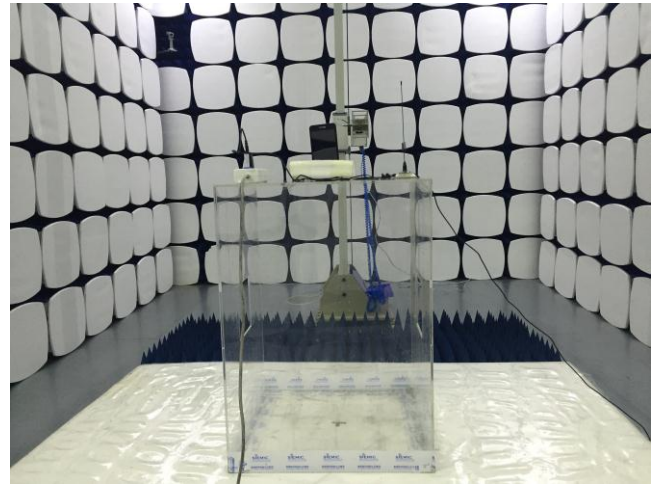


Radiated Spurious Emissions Test Setup Above
1GHz

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for Radiated Emissions

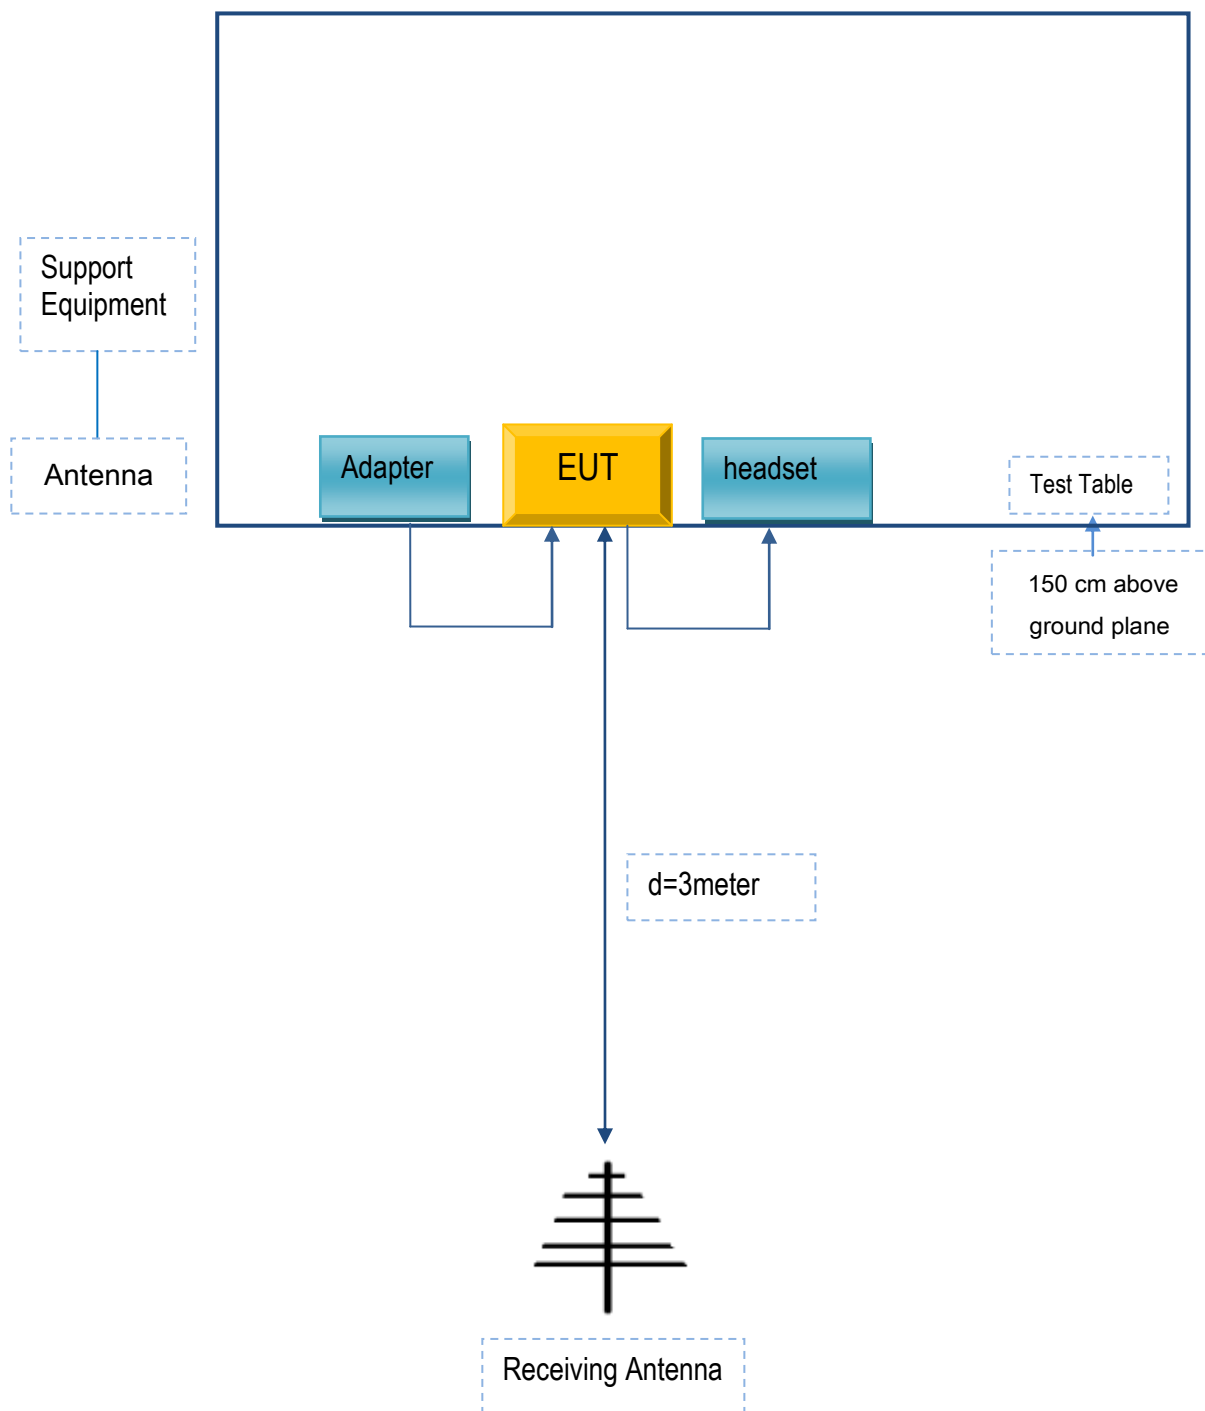

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
BLU Products, Inc.	Adapter	US-BB-1000	N/A
SAMSUNG	headset	HS330	N/A

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	N/A

Annex C.ii. EUT OPERATING CONKITIONS

N/A

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see the attachment

Annex E. DECLARATION OF SIMILARITY

N/A