

Appendix: Bluetooth LE

Content

1. Duty Cycle	4
1.1 Test Result	4
1.1.1 Ant1	4
1.2 Test Graph	5
1.2.1 Ant1	5
2. Bandwidth	8
2.1 Test Result	8
2.1.1 OBW	8
2.1.2 6dB BW	8
2.2 Test Graph	9
2.2.1 OBW	9
2.2.2 6dB BW	12
3. Maximum Conducted Output Power	15
3.1 Test Result	15
3.1.1 Power	15
3.2 Test Graph	16
3.2.1 Power	16
4. Maximum Power Spectral Density	19
4.1 Test Result	19
4.1.1 PSD	19
4.2 Test Graph	20
4.2.1 PSD	20
5. Unwanted Emissions In Non-restricted Frequency Bands	23
5.1 Test Result	23
5.1.1 Ref	23

5.1.2 CSE 23

5.2 Test Graph 24

5.2.1 Ref 24

5.2.2 CSE 27

6. Form731 32

6.1 Test Result 32

6.1.1 Form731 32

1. Duty Cycle


1.1 Test Result

1.1.1 Ant1


Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	100.000	100.000	100.00	0.00	0.00
		2440	100.000	100.000	100.00	0.00	0.00
		2480	100.000	100.000	100.00	0.00	0.00
2M	SISO	2402	100.000	100.000	100.00	0.00	0.00
		2440	100.000	100.000	100.00	0.00	0.00
		2480	100.000	100.000	100.00	0.00	0.00

1.2 Test Graph


1.2.1 Ant1

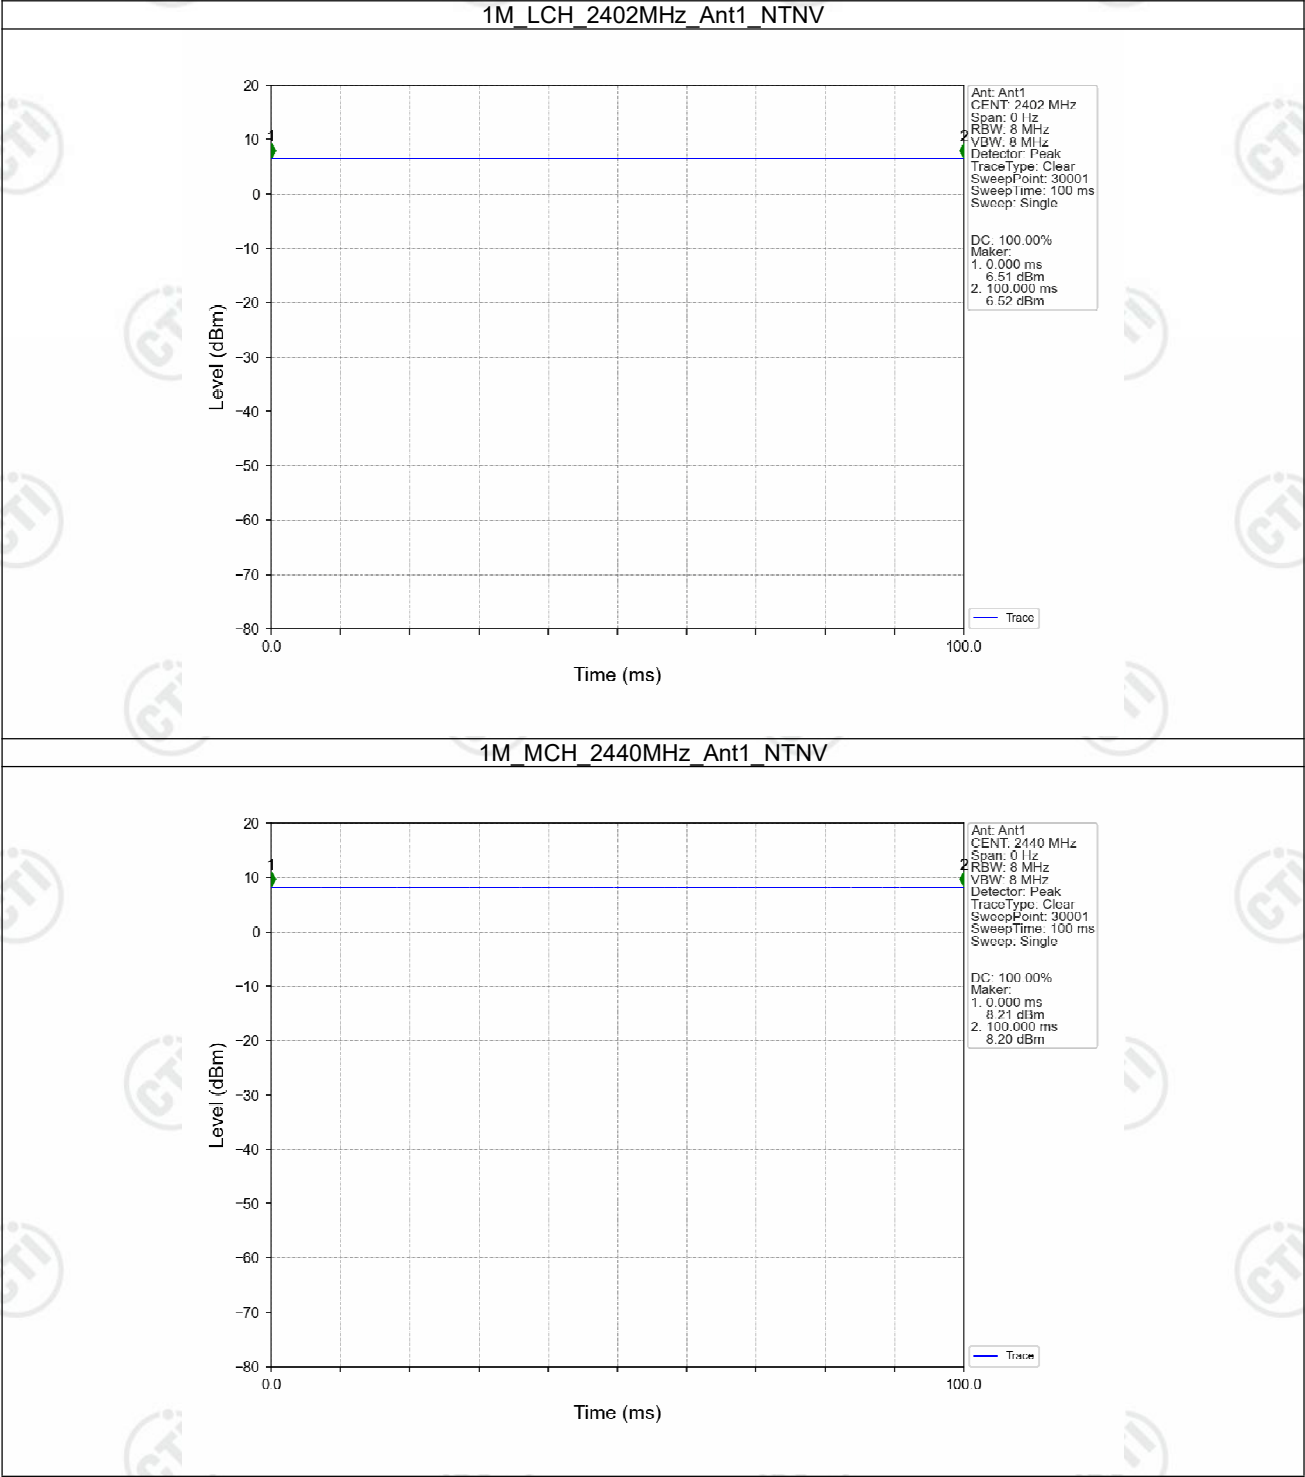


1M_HCH_2480MHz_Ant1_NTNV

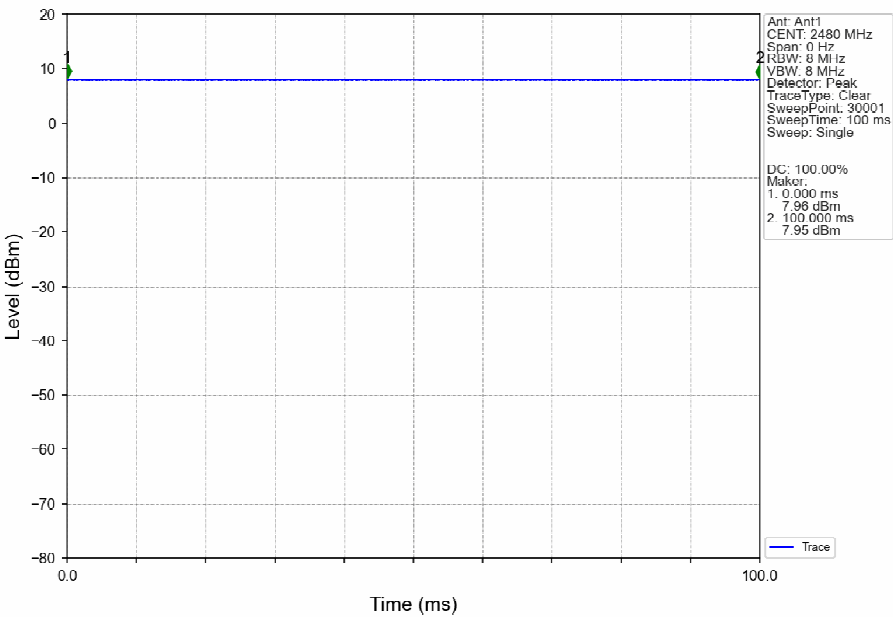


2M_LCH_2402MHz_Ant1_NTNV

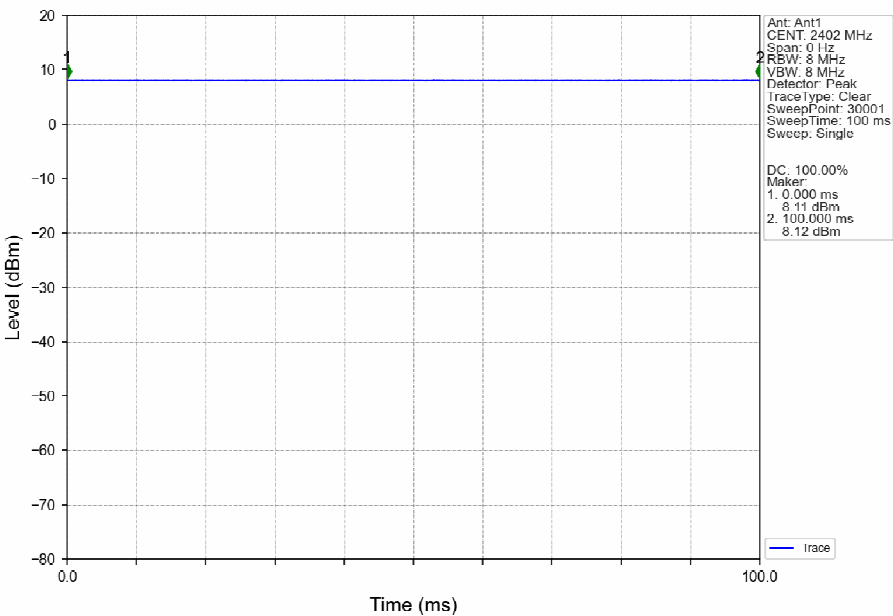

2M_MCH_2440MHz_Ant1_NTNV

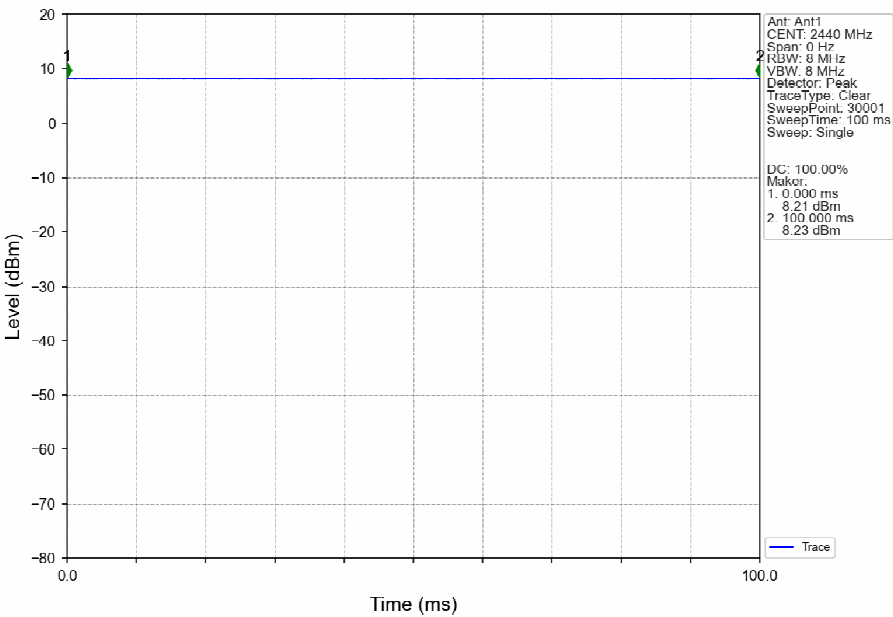

2M_HCH_2480MHz_Ant1_NTNV

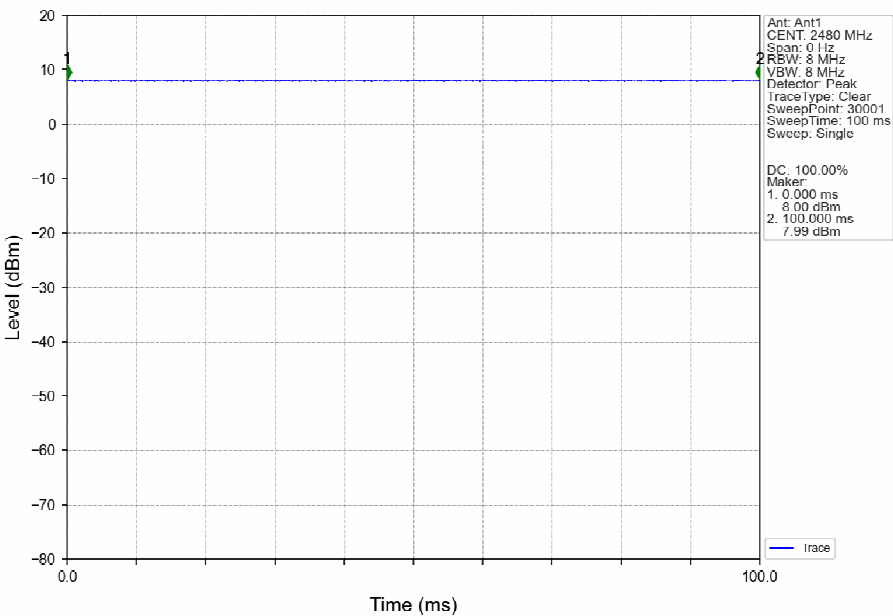

2. Bandwidth

2.1 Test Result

2.1.1 OBW


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.061	/	Pass
		2440	1	1.068	/	Pass
		2480	1	1.064	/	Pass
2M	SISO	2402	1	2.041	/	Pass
		2440	1	2.059	/	Pass
		2480	1	2.081	/	Pass

2.1.2 6dB BW


Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.744	≥ 0.5	Pass
		2440	1	0.710	≥ 0.5	Pass
		2480	1	0.737	≥ 0.5	Pass
2M	SISO	2402	1	1.368	≥ 0.5	Pass
		2440	1	1.391	≥ 0.5	Pass
		2480	1	1.275	≥ 0.5	Pass

2.2 Test Graph


2.2.1 OBW

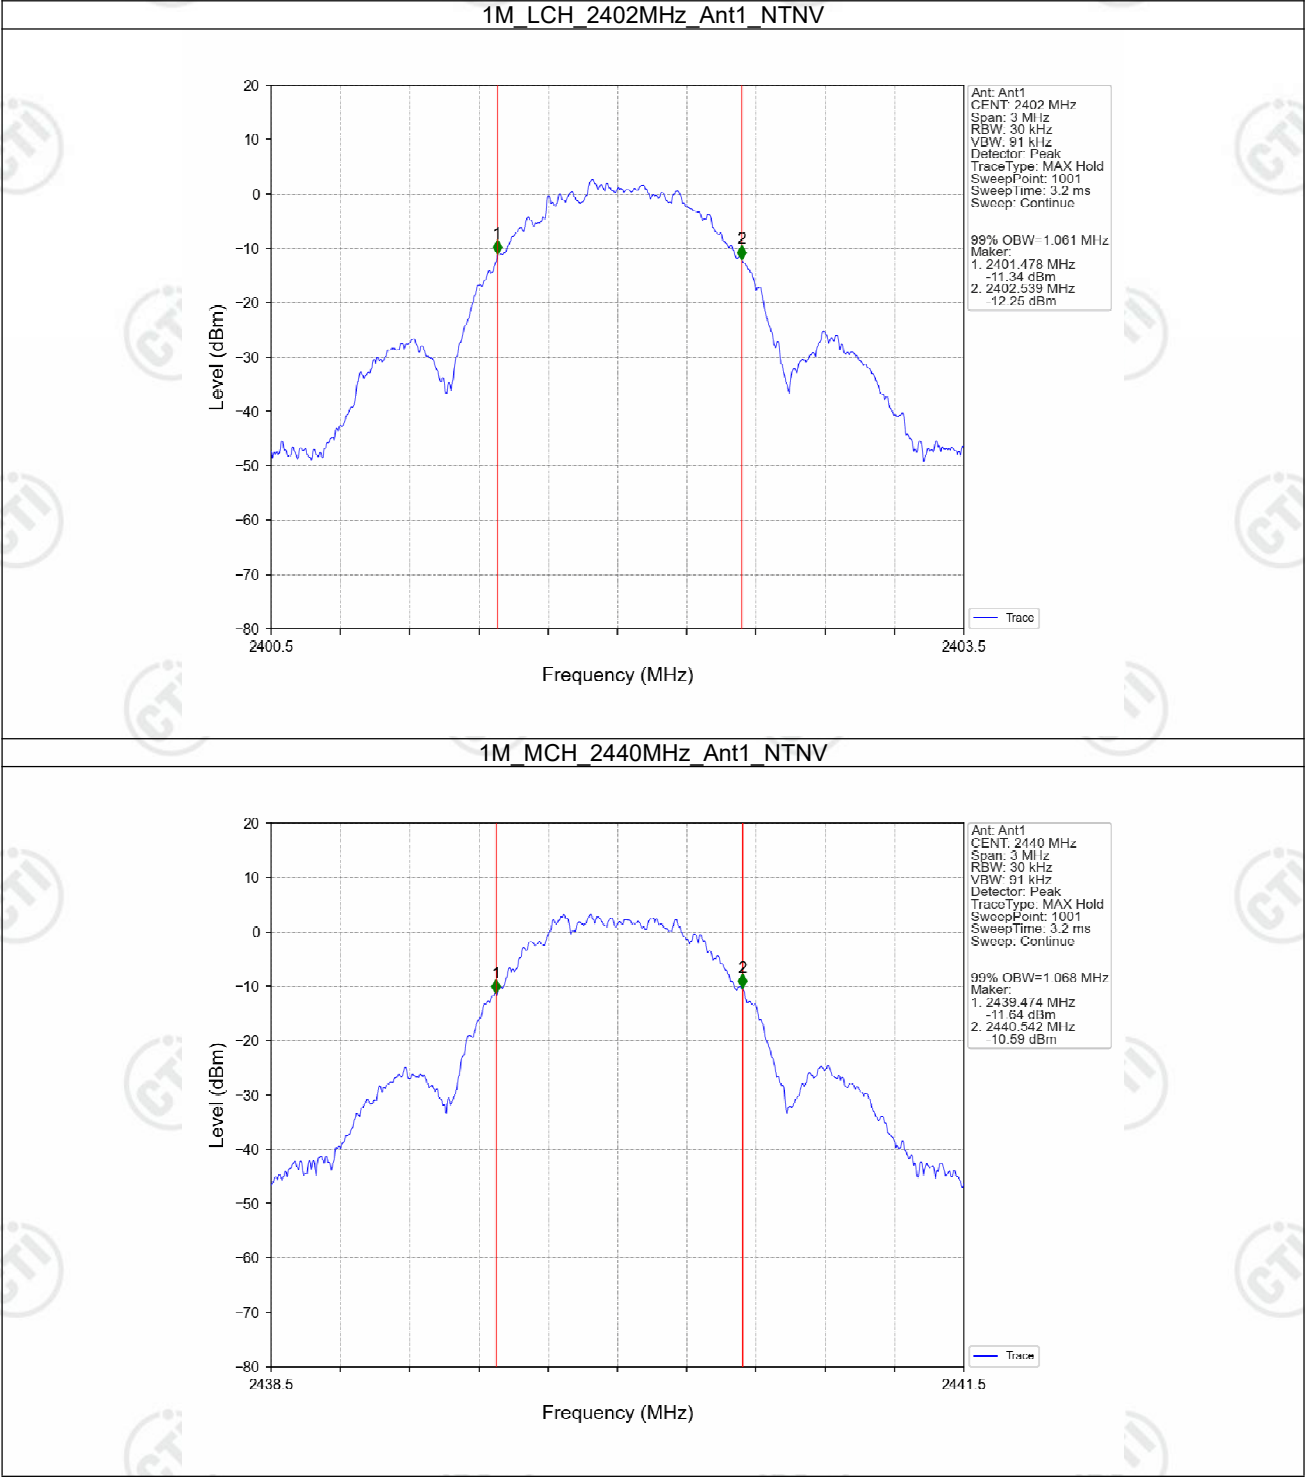


1M_HCH_2480MHz_Ant1_NTNV

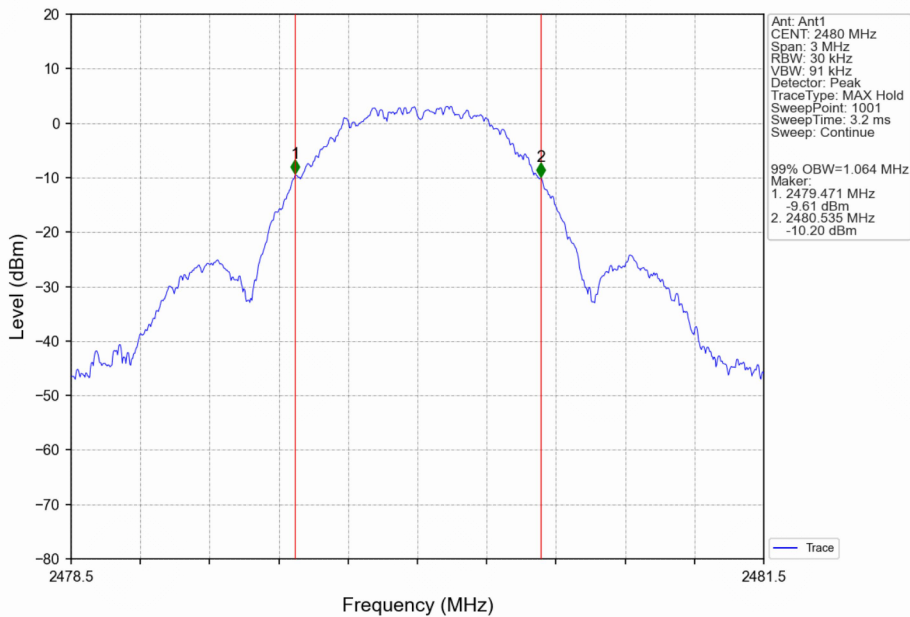



2M_LCH_2402MHz_Ant1_NTNV

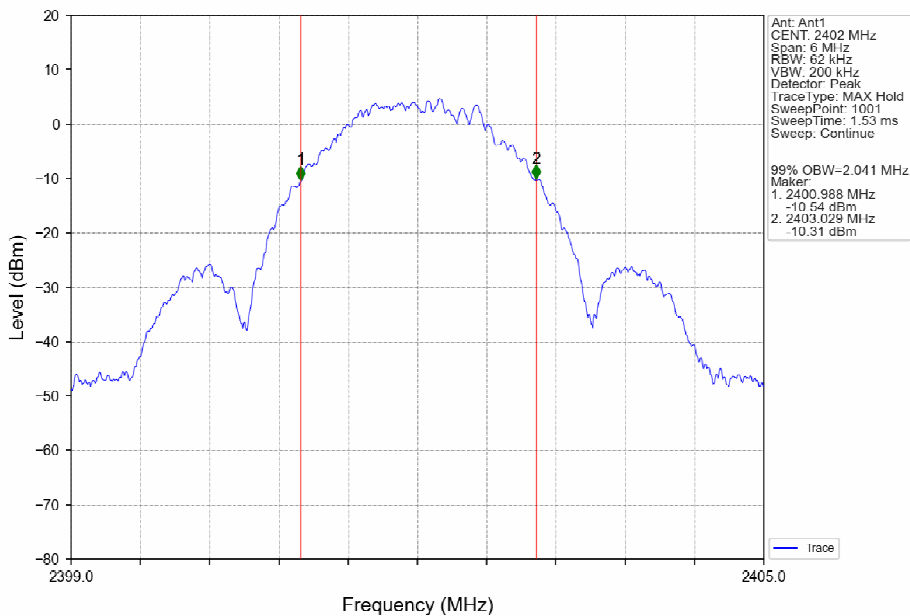


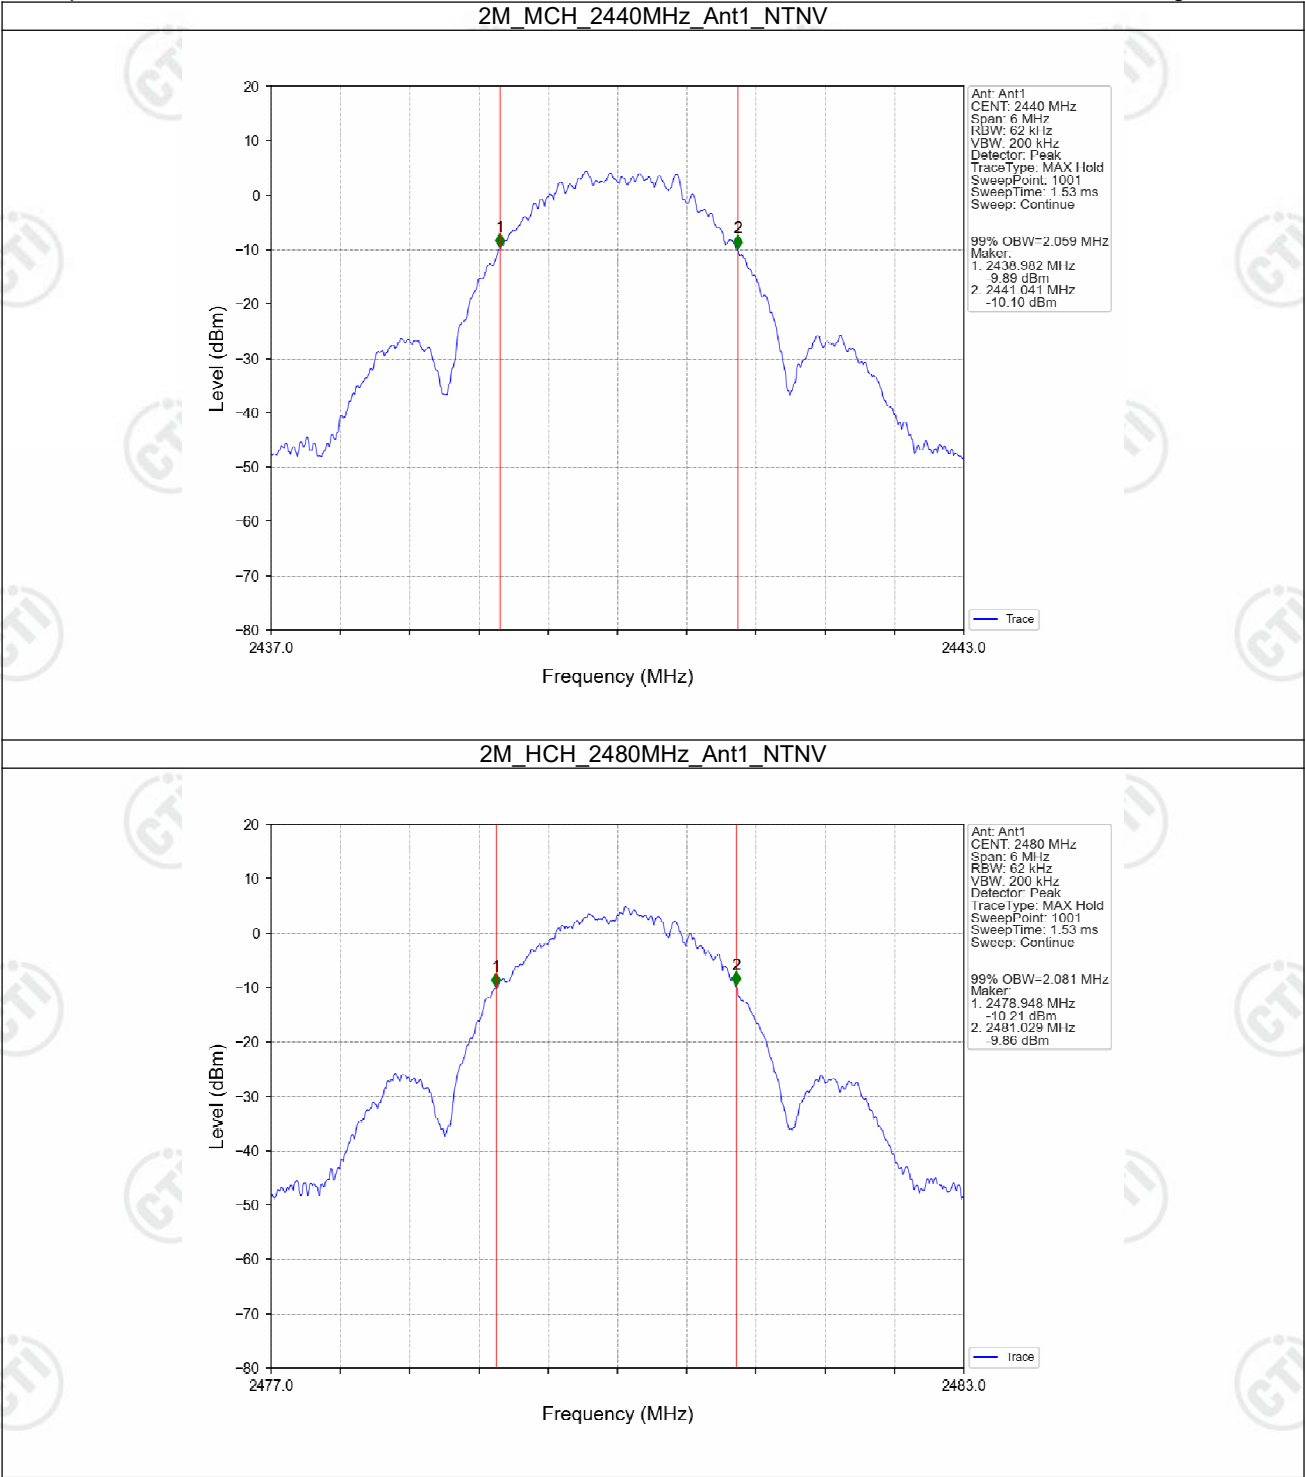

2.2.2 6dB BW

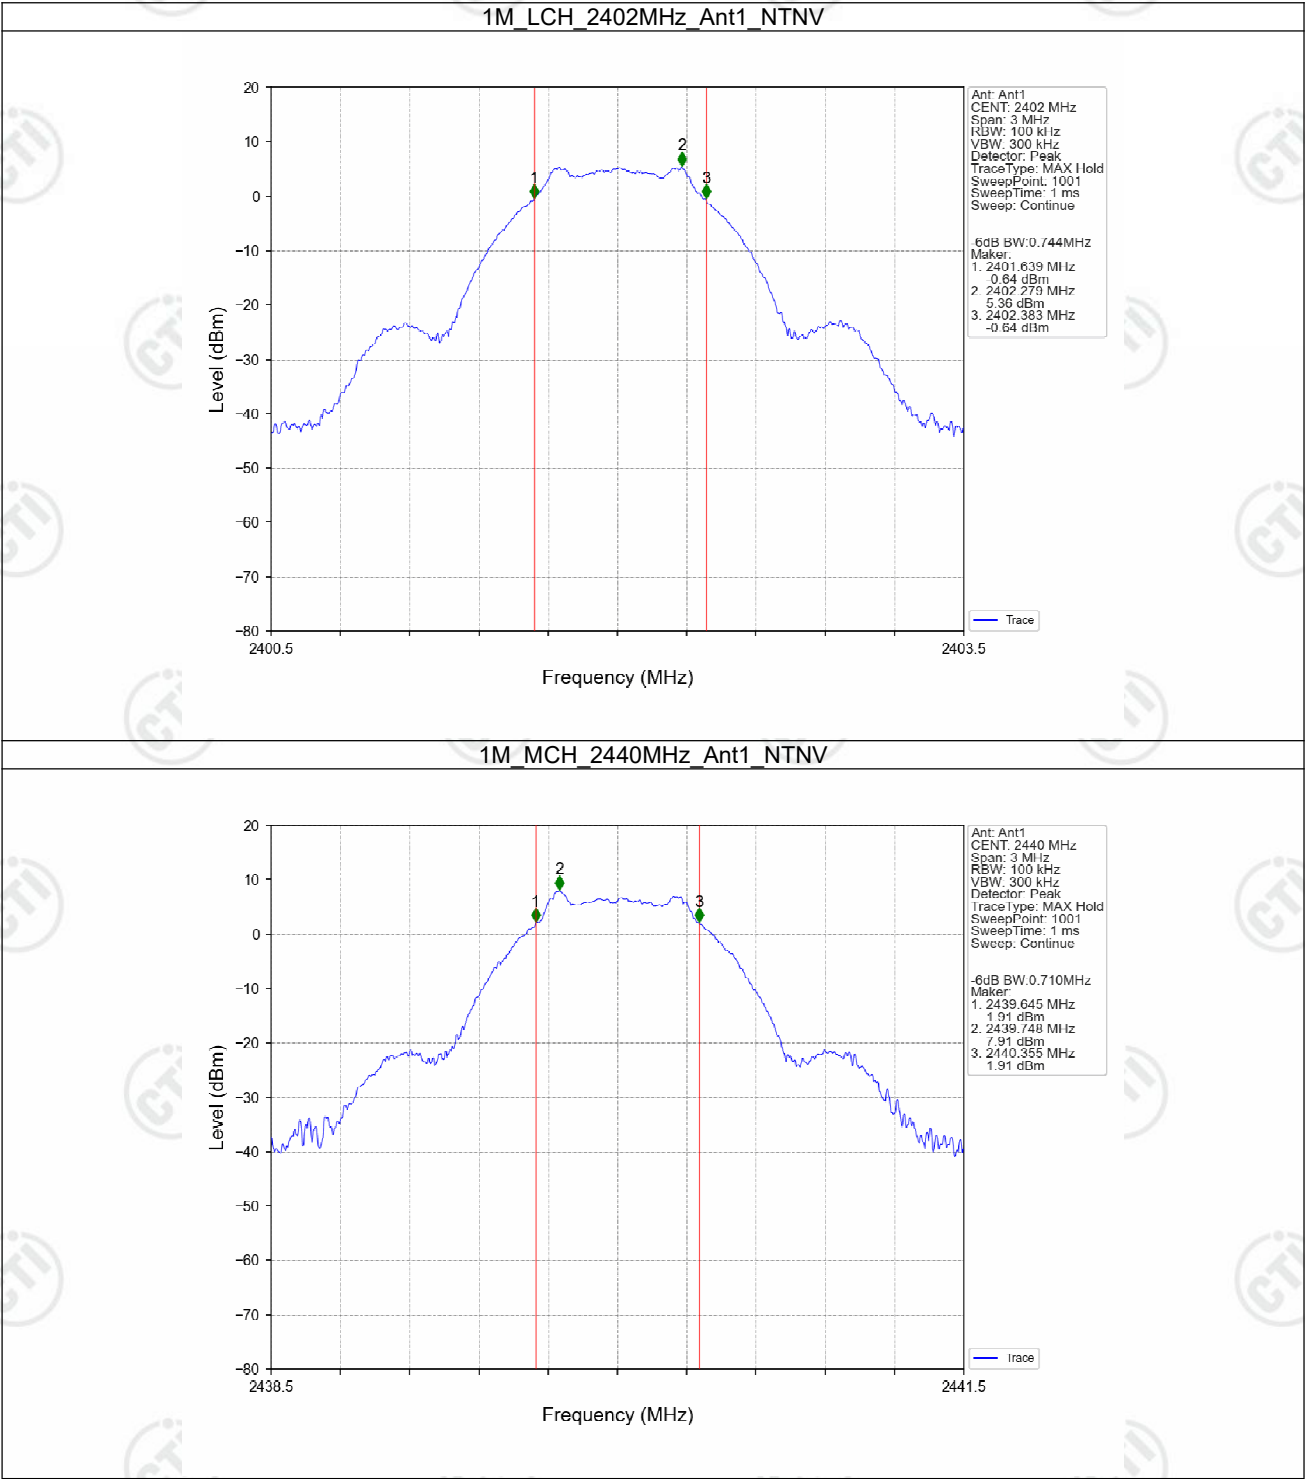

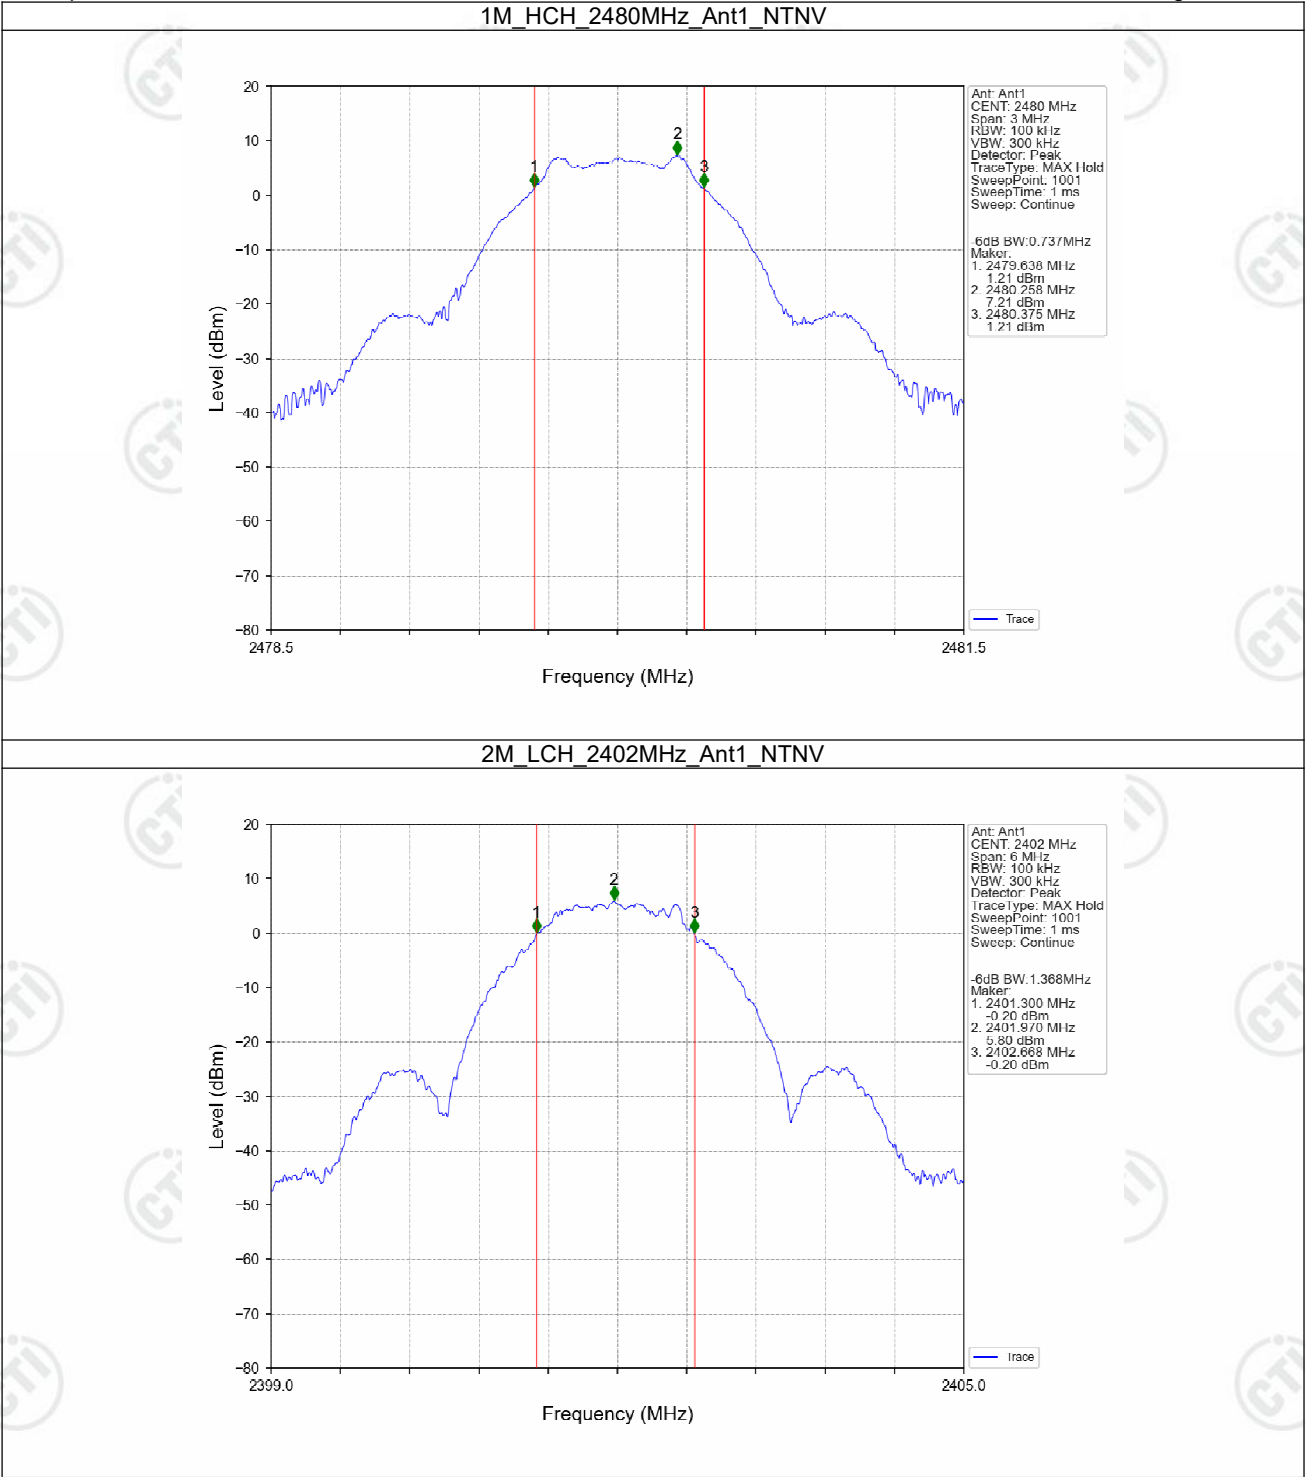

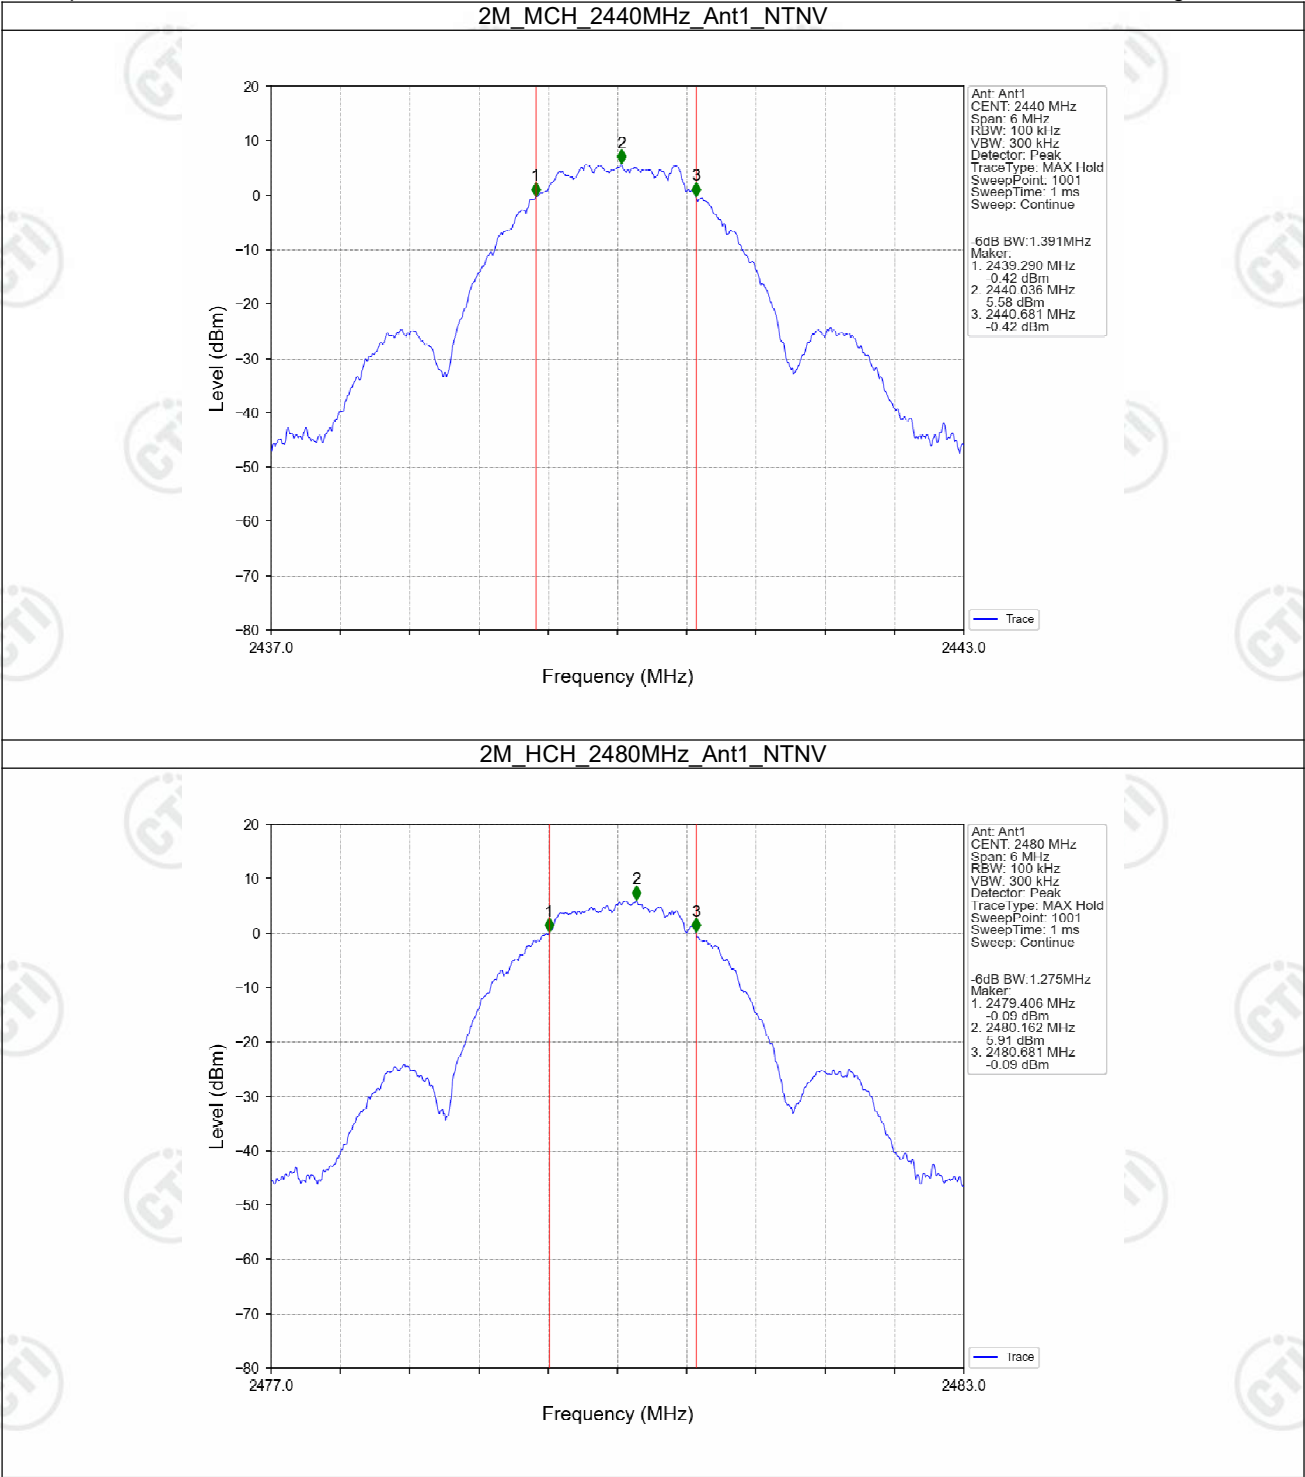

3. Maximum Conducted Output Power

3.1 Test Result


3.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	6.47	<=30	Pass
		2440	8.17	<=30	Pass
		2480	7.94	<=30	Pass
2M	SISO	2402	8.06	<=30	Pass
		2440	8.16	<=30	Pass
		2480	7.94	<=30	Pass


Note1: Antenna Gain: Ant1: 1.24dBi;

3.2 Test Graph


3.2.1 Power

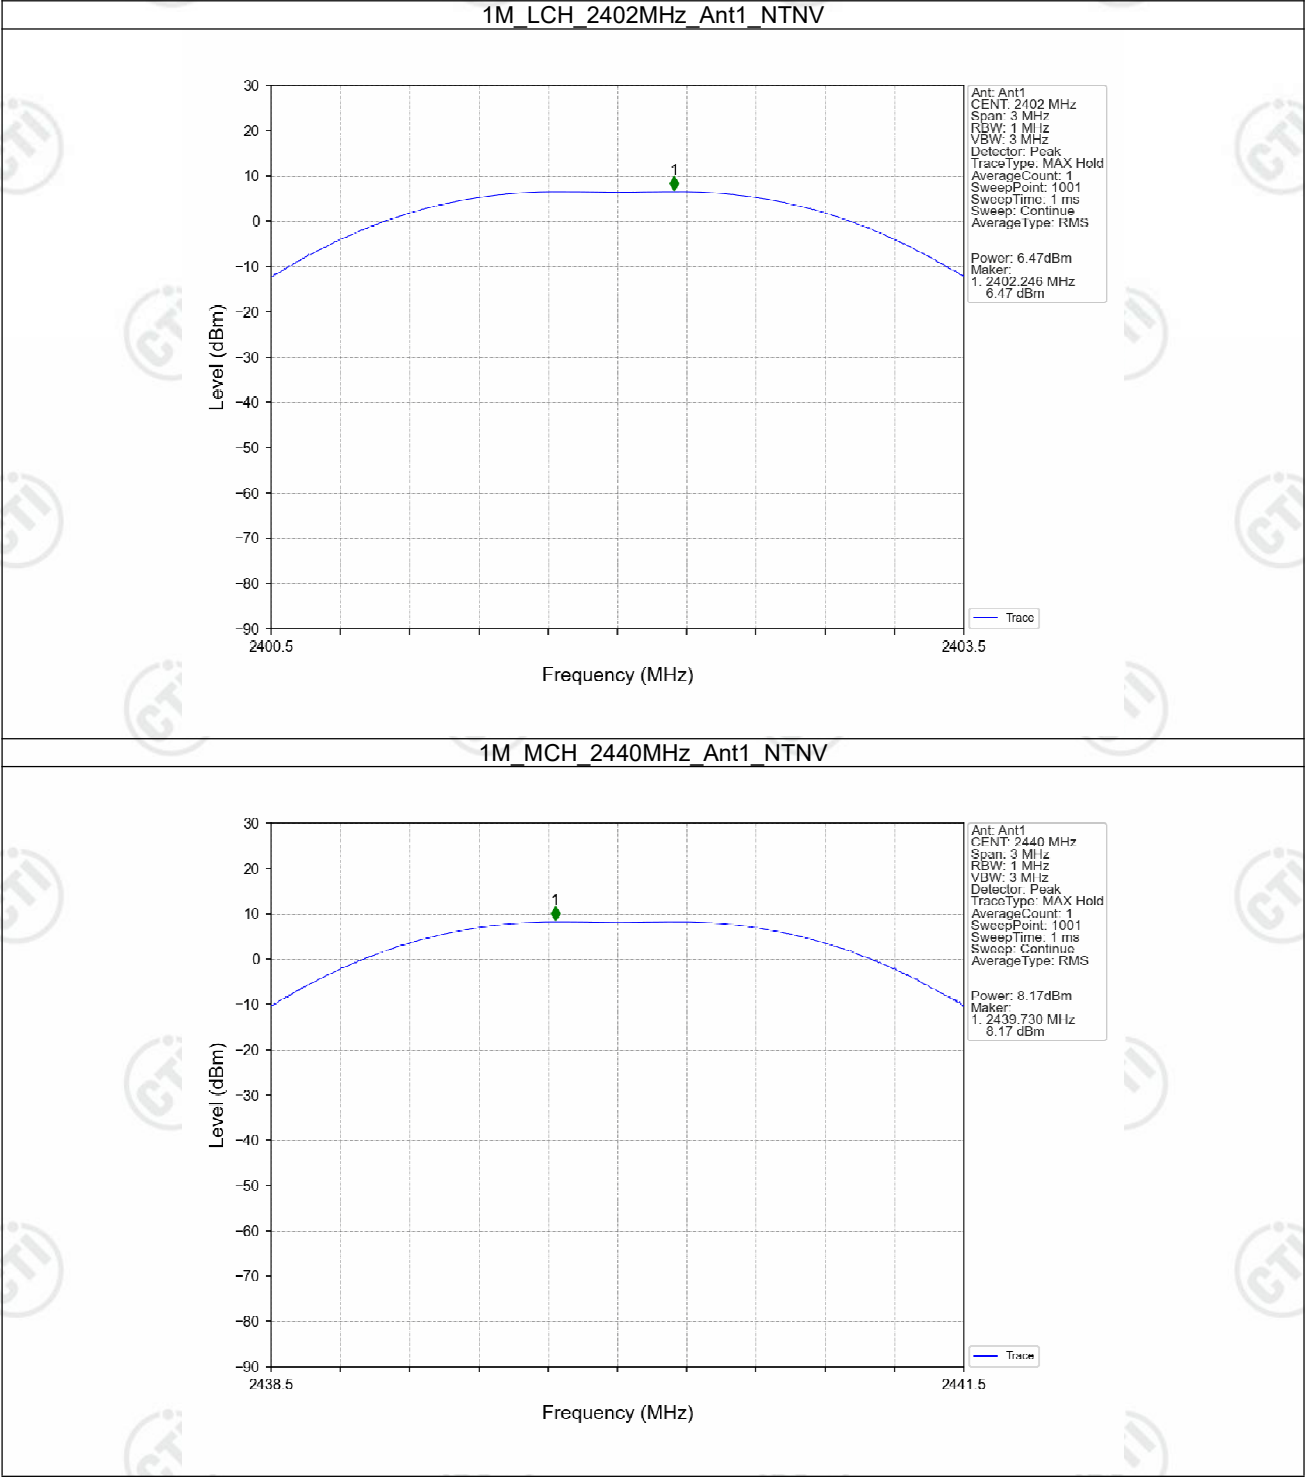


1M_HCH_2480MHz_Ant1_NTNV

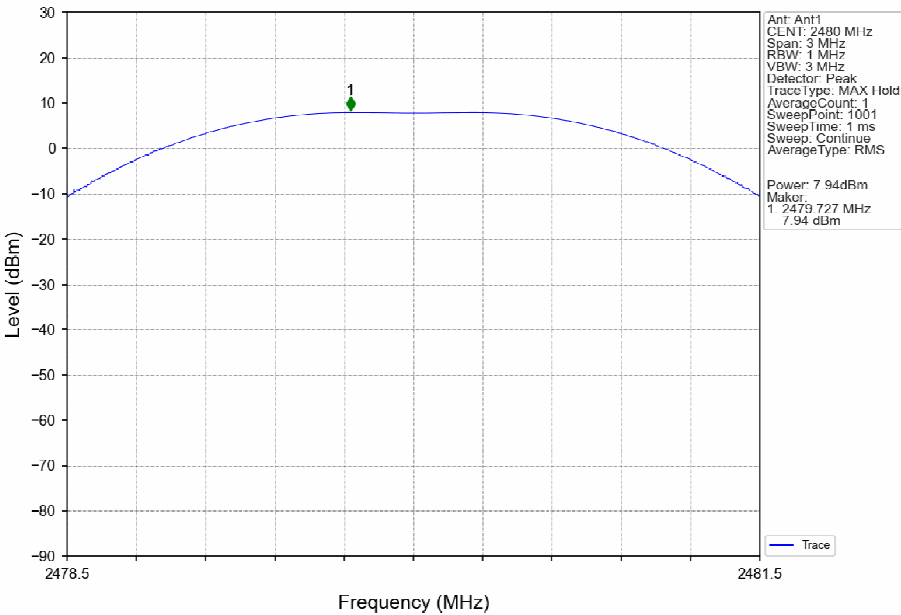

2M_LCH_2402MHz_Ant1_NTNV

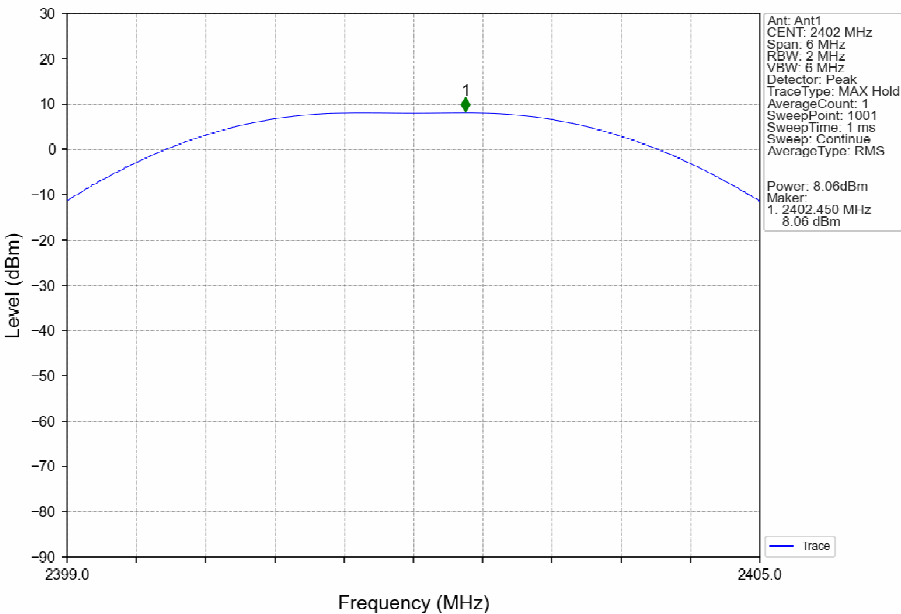

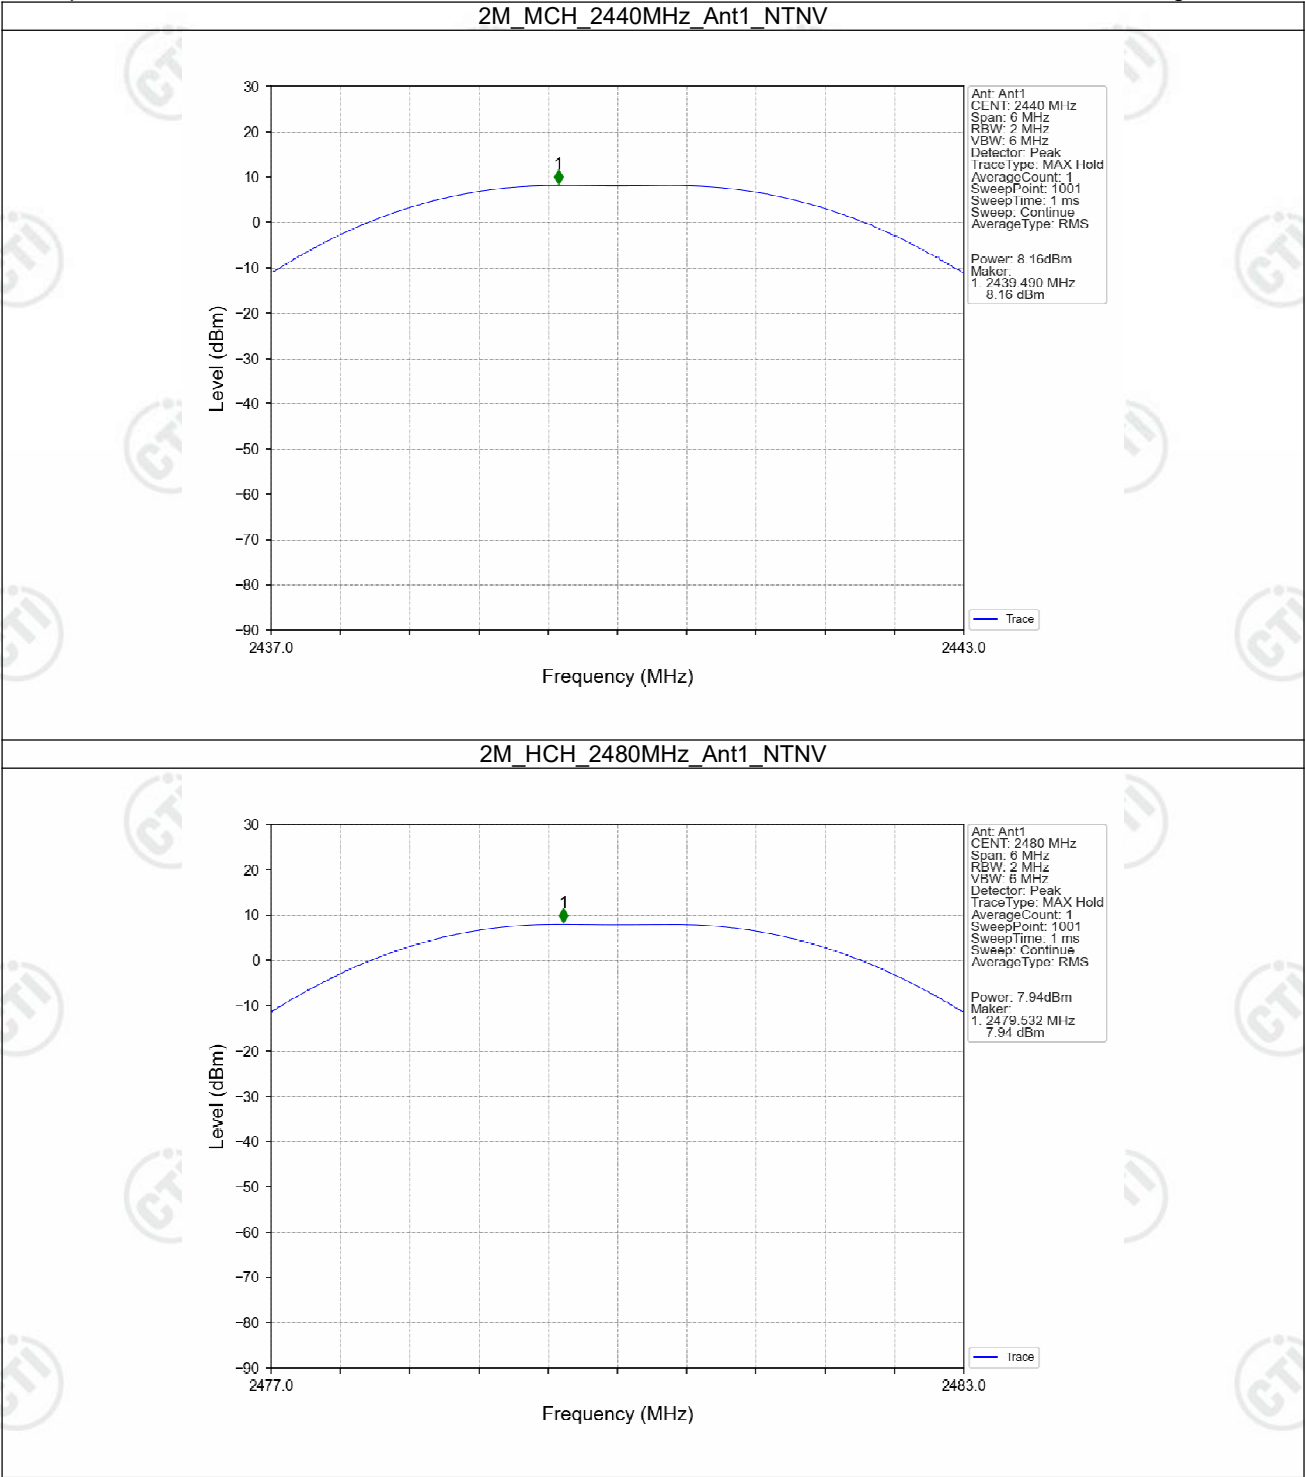

4. Maximum Power Spectral Density

4.1 Test Result

4.1.1 PSD

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3KHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	-5.03	<=8	Pass
		2440	-4.97	<=8	Pass
		2480	-3.93	<=8	Pass
2M	SISO	2402	-6.41	<=8	Pass
		2440	-6.50	<=8	Pass
		2480	-6.73	<=8	Pass

Note1: Antenna Gain: Ant1: 1.24dBi;

4.2 Test Graph

4.2.1 PSD

