

FCC Test Report

(PART 24)

Report No.: RF160517W003-4

FCC ID: ZC4X710

Test Model: Ilium X710

Received Date: May 17, 2016

Test Date: May 18, 2016 ~ May 31, 2016

Issued Date: Jun. 01, 2016

Applicant: Corporativo Lanix S.A. de C.V.

Address: Carretera Internacional Hermosillo-Nogales Km 8.5, Hermosillo
Sonora, Mexico

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd.,
Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Cau Vil., Lin Kou Dist., New Taipei
City, Taiwan (R.O.C.)

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei Shan Hsiang,
Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim
product certification, approval, or endorsement by
TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

TABLE OF CONTENTS

RELEASE CONTROL RECORD	3
1 Certificate of Conformity.....	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Test Site And Instruments	5
3 General Information.....	7
3.1 General Description of EUT	7
3.2 Configuration Of System Under Test.....	9
3.2.1 Description Of Support Units.....	10
3.3 Test Mode Applicability and Tested Channel Detail	10
3.4 EUT Operating Conditions	12
3.5 General Description of Applied Standards	12
4 Test Types and Results	13
4.1 Output Power Measurement	13
4.1.1 Limits of Output Power Measurement.....	13
4.1.2 Test Procedures.....	13
4.1.3 Test Setup.....	14
4.1.4 Test Results	15
4.2 Frequency Stability Measurement.....	17
4.2.1 Limits of Frequency Stability Measurement.....	17
4.2.2 Test Procedure	17
4.2.3 Test Setup.....	17
4.2.4 Test Results	18
4.3 Occupied Bandwidth Measurement	19
4.3.1 Test Procedure	19
4.3.2 Test Setup.....	19
4.3.3 Test Result.....	20
4.4 Band Edge Measurement	22
4.4.1 Limits of Band Edge Measurement	22
4.4.2 Test Setup.....	22
4.4.3 Test Procedures.....	22
4.4.4 Test Results	23
4.5 Peak To Average Ratio.....	24
4.5.1 Limits of Peak To Average Ratio Measurement	24
4.5.2 Test Setup.....	24
4.5.3 Test Procedures.....	24
4.5.4 Test Results	25
4.6 Conducted Spurious Emissions	26
4.6.1 Limits of Conducted Spurious Emissions Measurement.....	26
4.6.2 Test Setup.....	26
4.6.3 Test Procedure	26
4.6.4 Test Results	27
4.7 Radiated Emission Measurement	30
4.7.1 Limits of Radiated Emission Measurement.....	30
4.7.2 Test Procedure	30
4.7.3 Deviation from Test Standard	30
4.7.4 Test Setup.....	31
4.7.5 Test Results	32
5 Pictures of Test Arrangements.....	40
Appendix – Information on the Testing Laboratories	41



A D T

RELEASE CONTROL RECORD

Issue No.	Description	Date Issued
RF160517W003-4	Original release	Jun. 01, 2016

1 Certificate of Conformity

Product: Smartphone

Brand: LANIX

Test Model: Ilium X710

Sample Status: Production unit

Applicant: Corporativo Lanix S.A. de C.V.

Test Date: May 18, 2016 ~ May 31, 2016

Standards: FCC Part 24, Subpart E

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :  , **Date:** Jun. 01, 2016
Amyee Qian / Engineer

Approved by :  , **Date:** Jun. 01, 2016
William Chung / Manager

2 Summary of Test Results

Applied Standard: FCC Part 24 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 24.232	Effective Radiated Power	PASS	Meet the requirement of limit.
2.1046 24.232(d)	Peak To Average Ratio	PASS	Meet the requirement of limit.
2.1055 24.235	Frequency Stability	PASS	Meet the requirement of limit.
2.1049 24.238(b)	Occupied Bandwidth	PASS	Meet the requirement of limit.
24.238(b)	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 24.238	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 24.238	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -23.18dB at 38.730MHz.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.44 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	2.93 dB
	200MHz ~1000MHz	2.95 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2.2 Test Site And Instruments

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Apr. 05,16	Apr. 04,17
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101094	Apr. 05,16	Apr. 04,17
Bilog Antenna 1	Teseq	CBL 6111D	30643	Jun. 25,15	Jun. 24,16
Bilog Antenna 2	Teseq	CBL 6111D	27089	Jun. 25,15	Jun. 24,16
Horn Antenna	ETS-Lindgren	3117	00062558	May 30,14	May 29,17
Horn Antenna (15GHz-40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170147	Jan. 21,14	Jan. 20,17
Amplifier	Burgeon	BPA-530	100220	Apr. 05,16	Apr. 04,17
Pre-Amplifier	HP	8449B	3008A00409	Apr. 24,16	Apr. 23,17
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 11,15	Nov. 10,16
GPS Generator+ Antenna	TOJOIN	GNSS-5000A	E1-010119	Aug. 08, 14	Aug. 07, 16
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	Mar. 12,16	Mar. 11,18
Test Software	ADT	ADT_Radiated V7.6.15.9.2	N/A	N/A	N/A
Power Meter	Anritsu	ML2495A	1139001	Feb.19,16	Feb. 18,17
Power Sensor	Anritsu	MA2411B	1126068	Feb.19,16	Feb. 18,17
Power Sensor	Keysight	U2021XA	MY55060016	May 27,15	May 26,17
Power Sensor	Keysight	U2021XA	MY55060018	May 27,15	May 26,17
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 12, 15	Oct. 11, 16
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep.07,15	Sep. 06,16
Oscilloscope	Agilent	DSO9254A	MY51260160	Nov. 09,15	Nov. 08,16
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Nov. 09,15	Nov. 08,16
Signal Generator	Agilent	N5183A	MY50140980	Apr. 21, 16	Apr. 20, 17
ESG Vector Signal Generator	Agilent	E4438C	MY49072505	Sep. 01,15	Aug. 31,16
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Oct. 12, 15	Oct. 11, 16

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The calibration interval of the loop antenna is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.

3. The test was performed in HwaYa Chamber 4.

4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.

5. The FCC Site Registration No. is 460141.

6. The IC Site Registration No. is IC7450F-4.

3 General Information

3.1 General Description of EUT

PRODUCT	Smartphone	
BRAND	LANIX	
MODEL NAME	Ilium X710	
POWER SUPPLY	5.0Vdc (adapter or host equipment) 3.8Vdc (battery)	
MODULATION TYPE	GSM/GPRS	GMSK
	EDGE	GMSK, 8PSK
	WCDMA	BPSK
FREQUENCY RANGE	GSM/GPRS/EDGE	1850.2MHz ~ 1909.8MHz
	WCDMA	1852.4MHz ~ 1907.6MHz
MAX. EIRP POWER	GSM	1049mW
	EDGE	600mW
	WCDMA	254mW
EMISSION DESIGNATOR	GSM	247KGXW
	EDGE	248KG7W
	WCDMA	4M17F9W
ANTENNA TYPE	Fixed Internal antenna with 0dBi gain	
HW VERSION	V1.0	
SW VERSION	Ilium X710_TELCEL_SW_01	
ACCESSORY DEVICE	Refer to note as below	
DATA CABLE	USB cable: shielded, detachable, 0.8 m Earphone cable: Unshielded, detachable, 1.5m	

Note:

- The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.
- The EUT was powered by the following adapters:

ADAPTER 1	
BRAND:	LANIX
MODEL:	Ilium X710-C
INPUT:	AC 100-240V, 150mA
OUTPUT:	DC 5V, 1000mA

ADAPTER 2	
BRAND:	LANIX
MODEL:	Ilium X710-C
INPUT:	AC 100-240V, 150mA
OUTPUT:	DC 5V, 1000mA

- The EUT matched the following USB Cable and Earphone.


USB CABLE	
BRAND:	LANIX
MODEL:	Ilium X710
SIGNAL LINE:	0.8 METER

EARPHONE	
BRAND:	LANIX
MODEL:	Ilium X710
SIGNAL LINE:	1.5 METER


4. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

3.2 Configuration Of System Under Test

FOR RADIATION EMISSION TEST

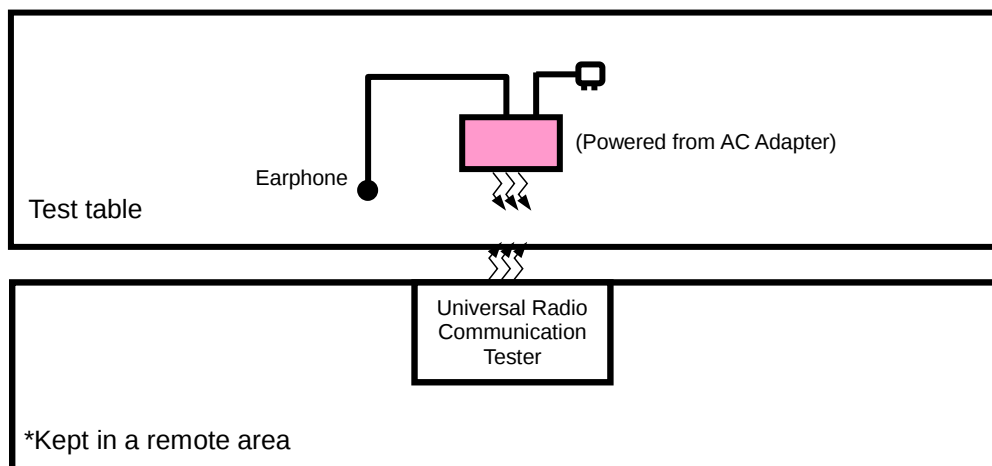

FOR E.R.P. TEST

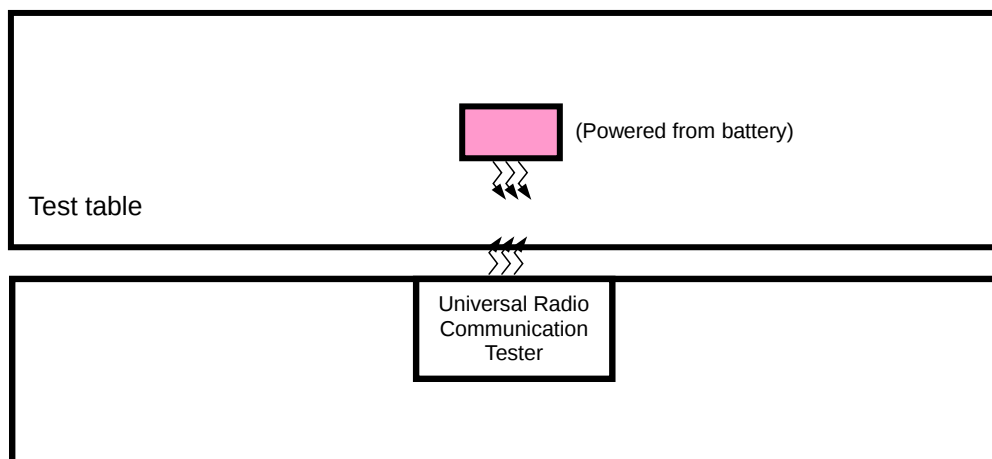

3.2.1 Description Of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	LONG WEI	PS-6403D	010934269	N/A
2	PC	HP	A6608CN	3CR83825X3	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m
2	AC Line: Unshielded, Detachable 1.5m

NOTE:

1. All power cords of the above support units are non shielded (1.8m).

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports
The worst case was found when positioned on Z-plane. Following channel(s) was (were) selected for the final test as listed below:

Test results are presented in the report as below.

Test Mode	Test Condition
A	Power from adapter
B	Power from battery

GSM MODE

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
A	EIRP	512 to 810	512, 661, 810	GSM
B	Frequency Stability	512 to 810	661	GSM
A	Occupied Bandwidth	512 to 810	512, 661, 810	GSM, EDGE
A	Band Edge	512 to 810	512, 810	GSM, EDGE
A	Peak To Average Ratio	512 to 810	512, 661, 810	GSM, EDGE
A	Condcudeted Emission	512 to 810	512, 661, 810	GSM, EDGE
A	Radiated Emission Below 1GHz	512 to 810	512	GSM
A	Radiated Emission Above 1GHz	512 to 810	512, 661, 810	GSM

WCDMA MODE

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
A	EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
B	Frequency Stability	9262 to 9538	9400	WCDMA
A	Occupied Bandwidth	9262 to 9538	9262, 9400, 9538	WCDMA
A	Band Edge	9262 to 9538	9262, 9538	WCDMA
A	Peak To Average Ratio	9262 to 9538	9262, 9400, 9538	WCDMA
A	Concduted Emission	9262 to 9538	9262, 9400, 9538	WCDMA
A	Radiated Emission Below 1GHz	9262 to 9538	9262	WCDMA
A	Radiated Emission Above 1GHz	9262 to 9538	9262, 9400, 9538	WCDMA

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
EIRP	25deg. C, 57%RH	5Vdc from adapter	Alex Chen
Frequency Stability	23deg. C, 61%RH	3.8Vdc from Battery	Yuqiang Yin
Occupied Bandwidth	23deg. C, 61%RH	3.8Vdc from Battery	Yuqiang Yin
Band Edge	23deg. C, 61%RH	3.8Vdc from Battery	Yuqiang Yin
Peak To Average Ratio	23deg. C, 61%RH	3.8Vdc from Battery	Yuqiang Yin
Concduted Emission	23deg. C, 61%RH	3.8Vdc from Battery	Yuqiang Yin
Radiated Emission	25deg. C, 57%RH	5Vdc from adapter	Alex Chen

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

KDB 971168 D01 Power Meas License Digital Systems v02r02

ANSI/TIA/EIA-603-D

NOTE: All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 2 watts e.i.r.p.

4.1.2 Test Procedures

EIRP / ERP Measurement:


- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 1MHz for GSM, GPRS and 5MHz for WCDMA mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$

Conducted Power Measurement:

The EUT was set up for the maximum power with GSM, GPRS & WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

4.1.3 Test Setup

EIRP / ERP MEASUREMENT:

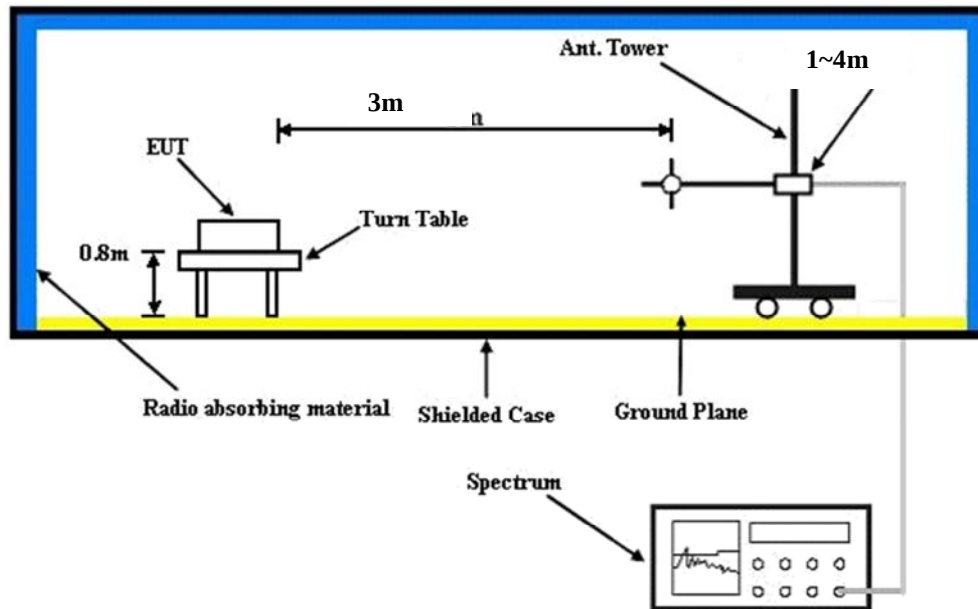

For the actual test configuration, please refer to the attached file (Test Setup Photo).

CONDUCTED POWER MEASUREMENT:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.4 Test Results

CONDUCTED OUTPUT POWER (dBm)

Band	GSM1900		
Channel	512	661	810
Frequency (MHz)	1850.2	1880.0	1909.8
GSM	29.61	29.62	29.55
GPRS 8	29.60	29.59	29.53
GPRS 10	28.86	28.86	28.80
GPRS 11	27.07	27.14	27.14
GPRS 12	25.94	26.04	26.03
EDGE 8 (MCS9)	25.98	26.08	25.83
EDGE 10 (MCS9)	24.90	24.94	24.80
EDGE 11 (MCS9)	22.63	22.76	22.56
EDGE 12 (MCS9)	21.33	21.43	21.28

Band	WCDMA II		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880.0	1907.6
RMC 12.2K	22.59	22.48	22.36
HSPA			
HSDPA Subtest-1	21.63	21.52	21.45
HSDPA Subtest-2	21.63	21.50	21.38
HSDPA Subtest-3	21.19	20.92	20.88
HSDPA Subtest-4	21.21	20.92	20.89
HSUPA Subtest-1	19.54	19.46	19.37
HSUPA Subtest-2	19.61	19.46	19.37
HSUPA Subtest-3	20.46	20.47	20.40
HSUPA Subtest-4	19.93	19.95	19.85
HSUPA Subtest-5	21.62	21.87	21.42

EIRP POWER (dBm)

GSM

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
512	1850.2	-19.22	43.83	24.61	289.07	H
661	1880.0	-18.49	43.57	25.08	322.11	H
810	1909.8	-19.95	44.57	24.62	289.73	H
512	1850.2	-16.87	46.39	29.52	895.36	V
661	1880.0	-16.89	47.10	30.21	1049.06	V
810	1909.8	-17.26	45.98	28.72	744.05	V

EDGE

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
512	1850.2	-23.56	43.83	20.27	106.41	H
661	1880.0	-23.22	43.57	20.35	108.39	H
810	1909.8	-23.19	44.57	21.38	137.40	H
512	1850.2	-19.88	46.39	26.51	447.71	V
661	1880.0	-19.32	47.10	27.78	599.51	V
810	1909.8	-19.11	45.98	26.87	485.96	V

WCDMA

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
9262	1852.4	-24.47	43.83	19.36	86.30	H
9400	1880.0	-23.71	43.57	19.86	96.83	H
9538	1907.6	-24.12	44.57	20.45	110.92	H
9262	1852.4	-23.21	46.39	23.18	207.97	V
9400	1880.0	-23.05	47.10	24.05	253.98	V
9538	1907.6	-23.01	45.98	22.97	197.97	V

REMARKS: 1. EIRP Output Power (dBm) = LVL (dBm) + Correction Factor (dB).
2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss

4.2 Frequency Stability Measurement

4.2.1 Limits of Frequency Stability Measurement


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

4.2.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.2.3 Test Setup

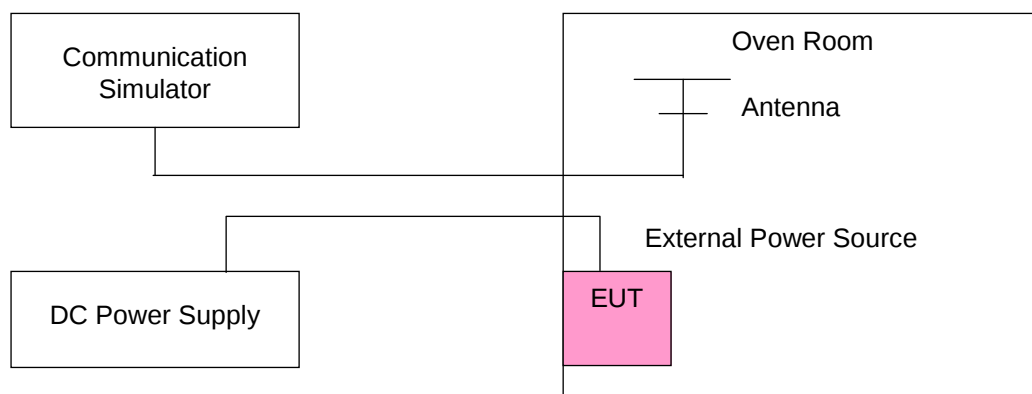

4.2.4 Test Results

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)			LIMIT (ppm)
	GSM	EDGE	WCDMA	
3.8	0.0013	0.0015	0.0012	2.5
3.6	-0.0017	-0.0016	-0.0016	2.5
4.2	-0.0015	-0.0015	-0.0013	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.6Vdc to 4.2Vdc.

FREQUENCY ERROR vs. TEMPERATURE.


TEMP. (°C)	FREQUENCY ERROR (ppm)			LIMIT (ppm)
	GSM	EDGE	WCDMA	
-30	-0.0054	-0.0053	-0.0052	2.5
-20	-0.0048	-0.0047	-0.0046	2.5
-10	-0.0042	-0.0040	-0.0040	2.5
0	-0.0036	-0.0035	-0.0033	2.5
10	-0.0030	-0.0029	-0.0027	2.5
20	-0.0024	-0.0023	-0.0019	2.5
30	-0.0018	-0.0017	-0.0013	2.5
40	-0.0012	-0.0011	-0.0007	2.5
50	-0.0006	-0.0005	-0.0001	2.5
60	0.0002	0.0003	0.0004	2.5

4.3 Occupied Bandwidth Measurement

4.3.1 Test Procedure


The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.3.2 Test Setup

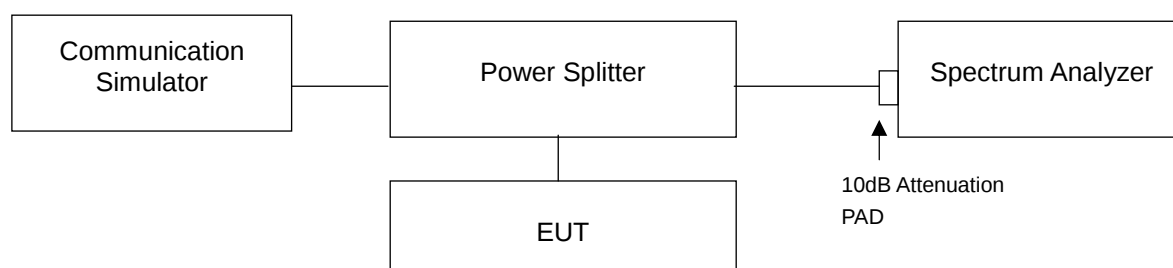

4.3.3 Test Result


CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (kHz)		CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)
		GSM	EDGE			
512	1850.2	245.00	248.00	9262	1852.4	4.16
661	1880.0	245.00	247.00	9400	1880.0	4.16
810	1909.8	247.00	248.00	9538	1907.6	4.17

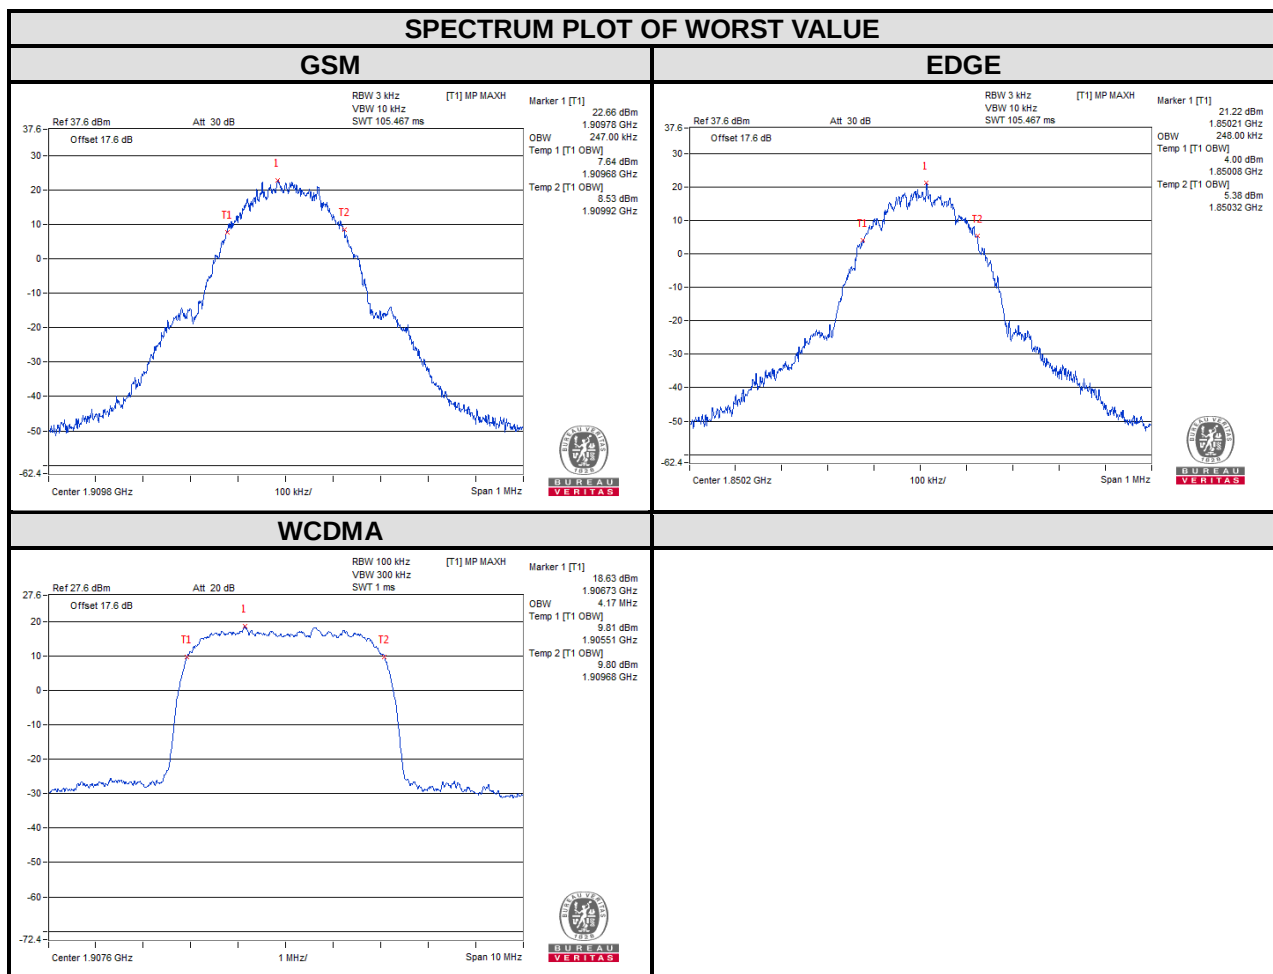


CHANNEL	FREQUENCY (MHz)	26dB BANDWIDTH (kHz)		CHANNEL	FREQUENCY (MHz)	26dB BANDWIDTH (MHz)
		GSM	EDGE			
512	1850.2	318.86	323.69	9262	1852.4	4.70
661	1880.0	314.91	320.12	9400	1880.0	4.69
810	1909.8	318.46	320.08	9538	1907.6	4.70

SPECTRUM PLOT OF WORST VALUE


GSM

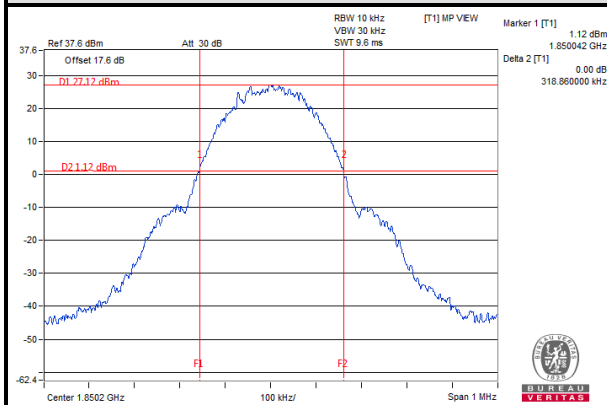

EDGE

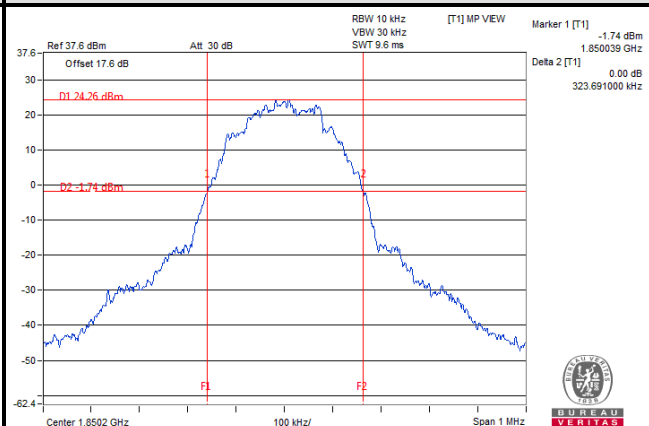

WCDMA

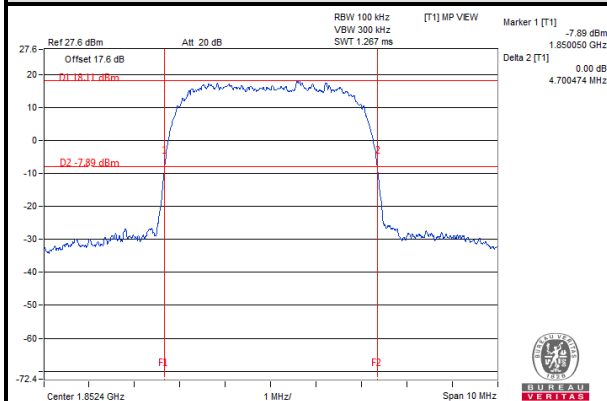


4.4 Band Edge Measurement

4.4.1 Limits of Band Edge Measurement

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

4.4.2 Test Setup

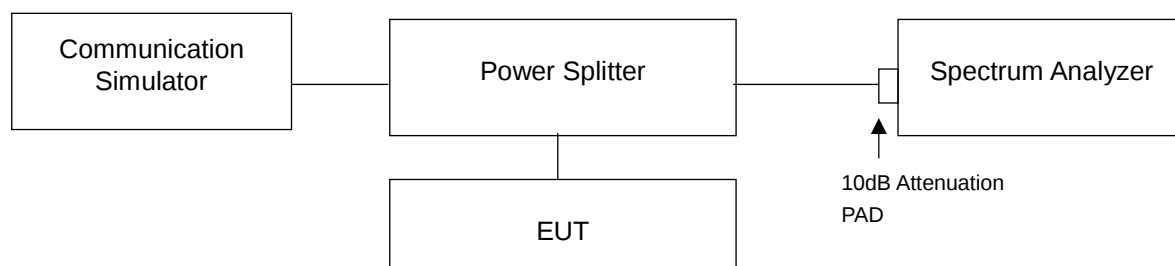


4.4.3 Test Procedures


- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 1.5MHz. RB of the spectrum is 3kHz and VB of the spectrum is 10kHz (GSM/ GPRS/EDGE).
- The center frequency of spectrum is the band edge frequency and span is 10MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (WCDMA).
- Record the max trace plot into the test report.

4.4.4 Test Results


GSM

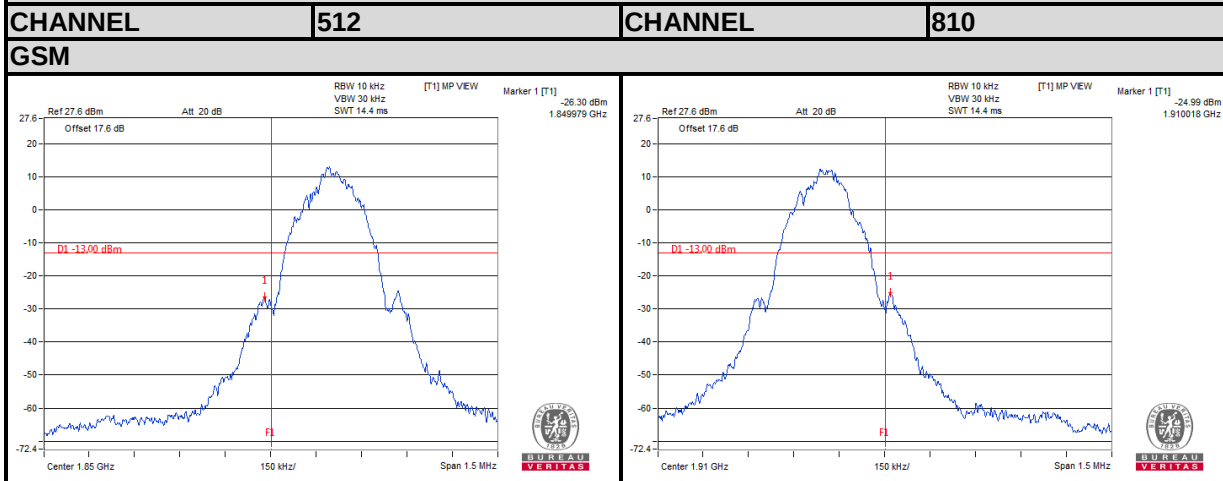

EDGE

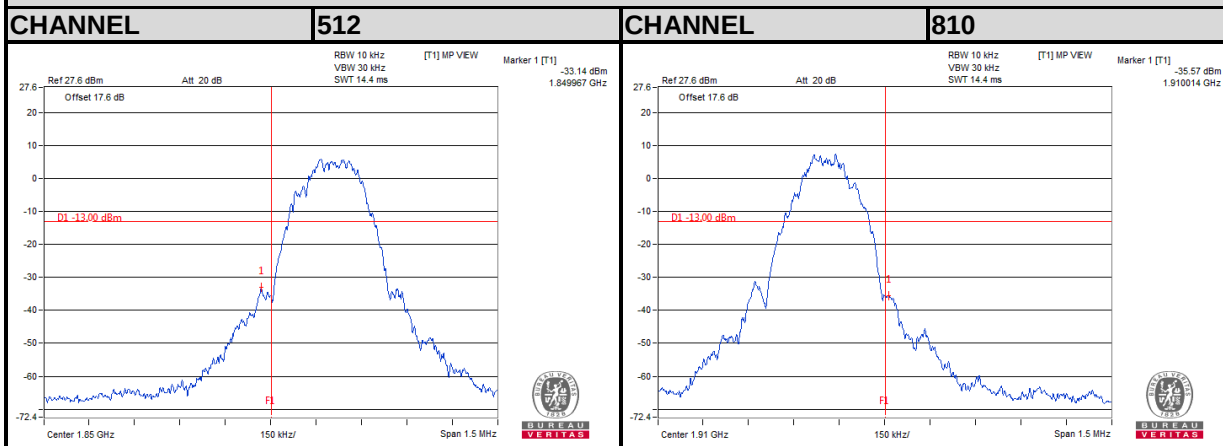

WCDMA

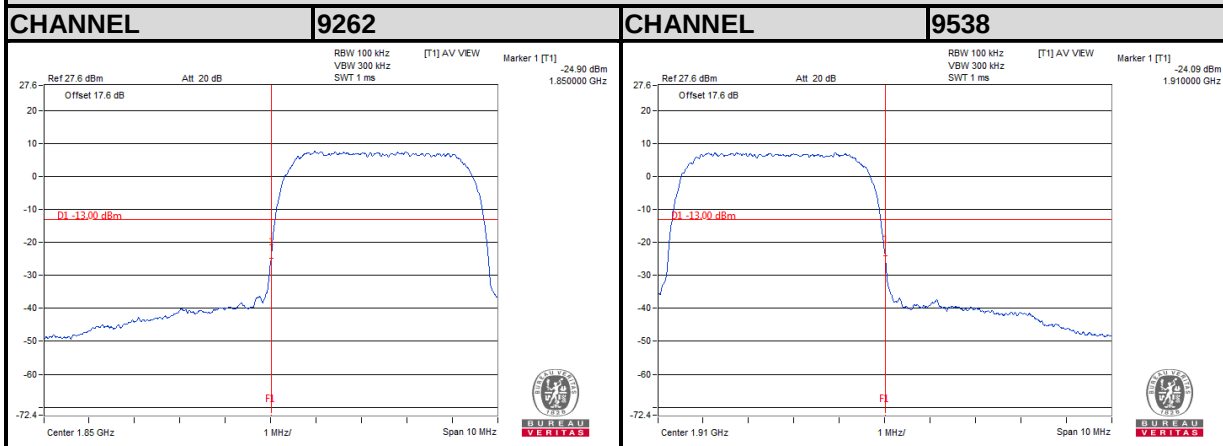


4.5 Peak To Average Ratio

4.5.1 Limits of Peak To Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.5.2 Test Setup

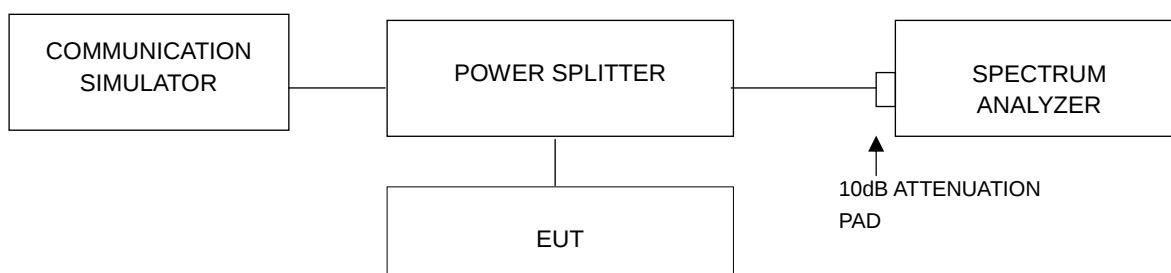


4.5.3 Test Procedures

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

4.5.4 Test Results

Channel	Frequency (MHz)	Peak To Average Ratio (dB)		Channel	Frequency (MHz)	Peak To Average Ratio (dB)
		GSM	EDGE			WCDMA
661	1880.0	9.70	9.51	9400	1880.0	3.07

SPECTRUM PLOT OF WORST VALUE

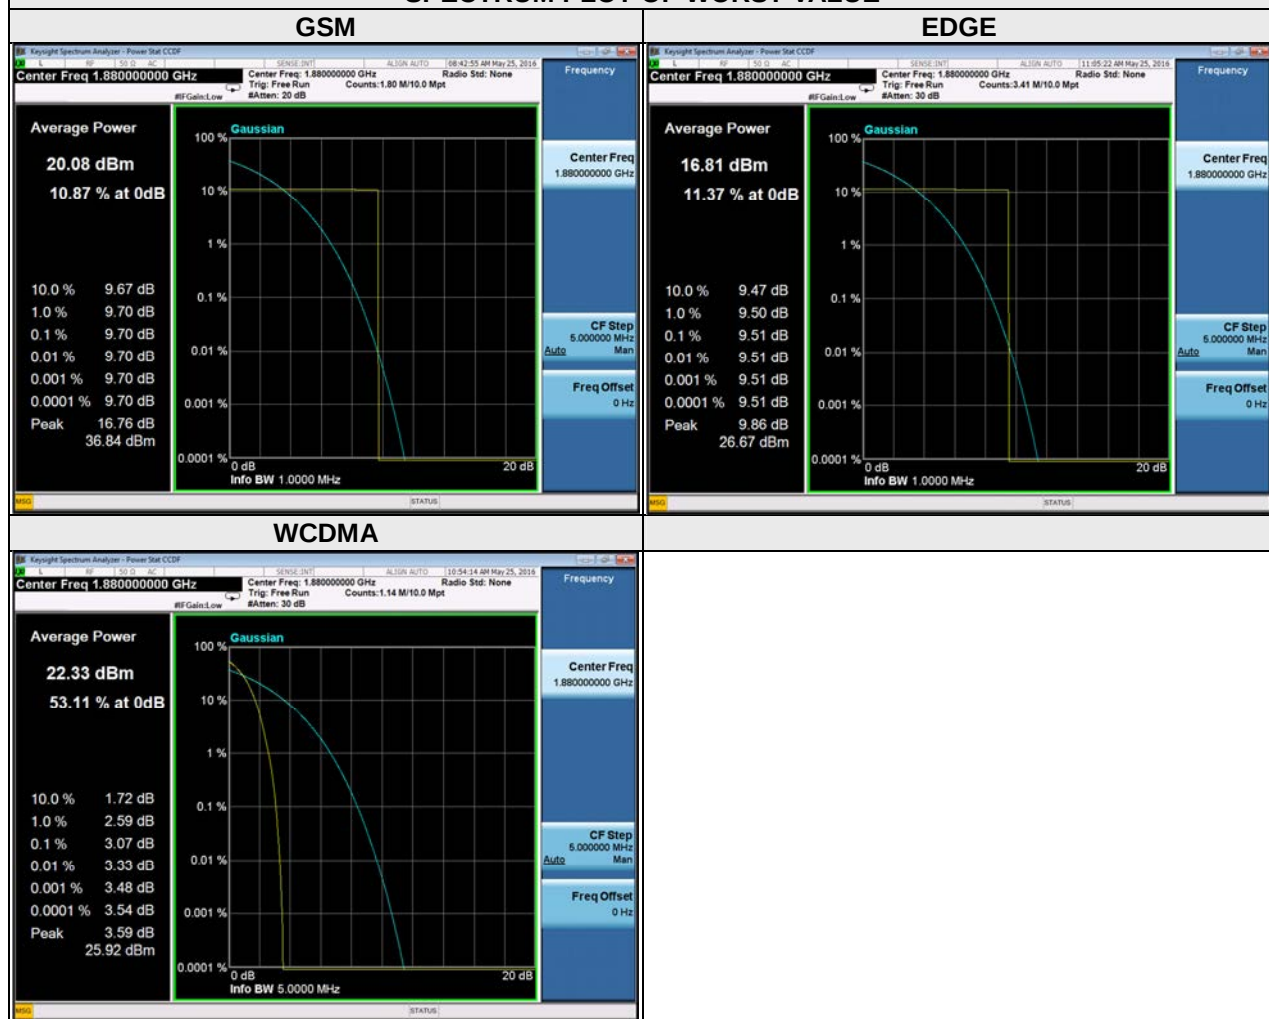


4.6 Conducted Spurious Emissions

4.6.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

4.6.2 Test Setup

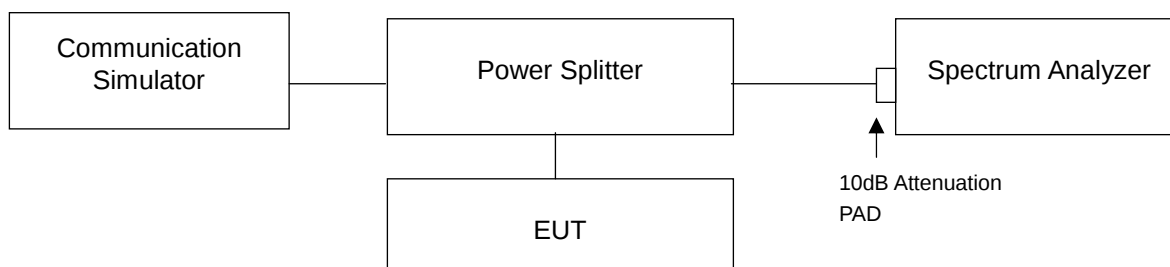

4.6.3 Test Procedure


- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 9GHz. 20dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

4.6.4 Test Results


GSM

CHANNEL 661


FREQUENCY RANGE : 30MHz~1GHz

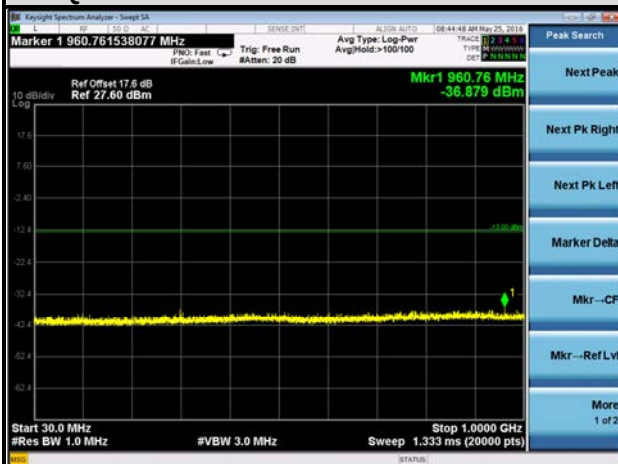


FREQUENCY RANGE : 1GHz~3GHz

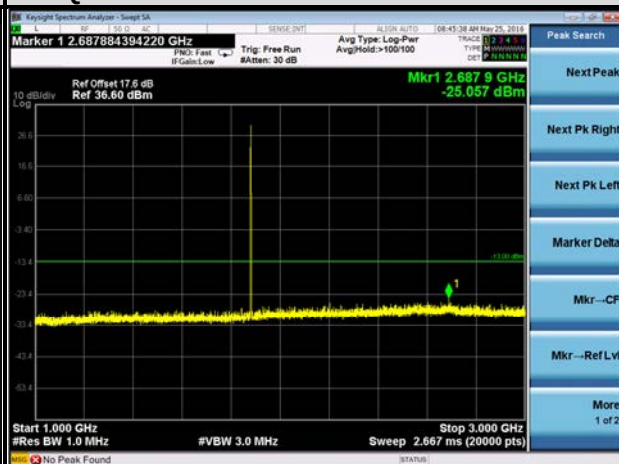


FREQUENCY RANGE : 3GHz~7GHz

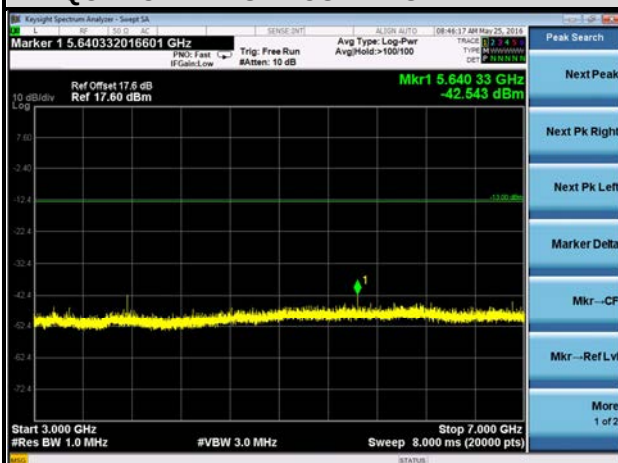

FREQUENCY RANGE : 7GHz~13GHz

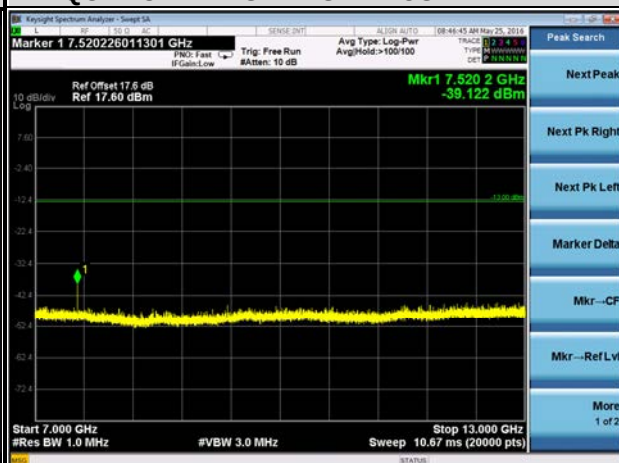


FREQUENCY RANGE : 13GHz~19.1GHz

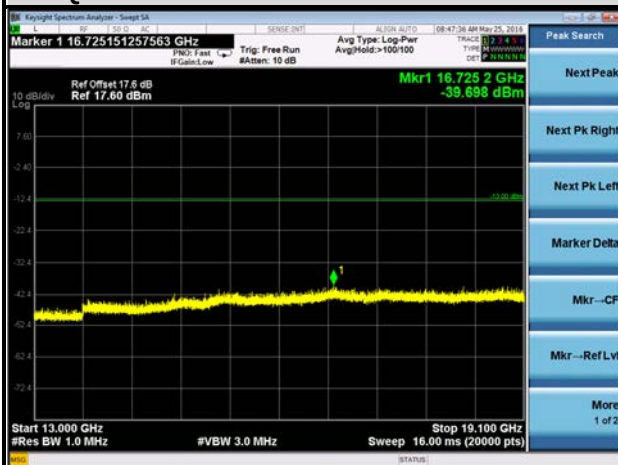


EDGE

CHANNEL 512


FREQUENCY RANGE : 30MHz~1GHz

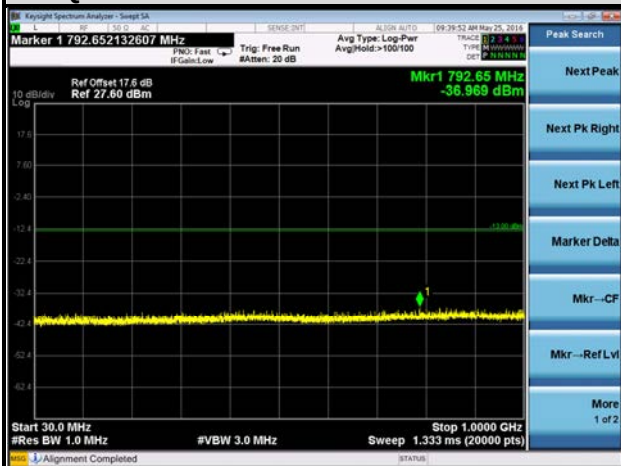


FREQUENCY RANGE : 1GHz~3GHz

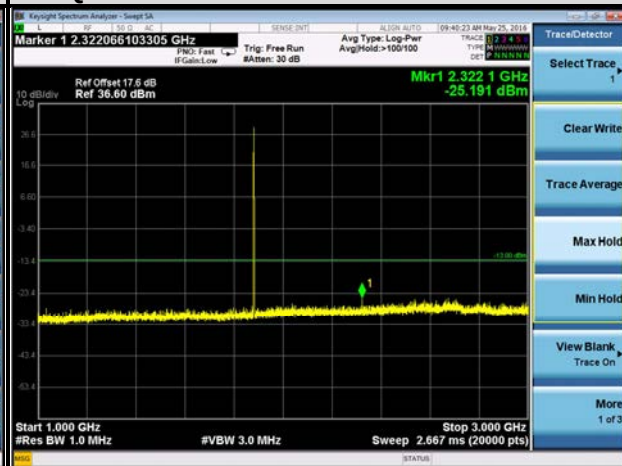


FREQUENCY RANGE : 3GHz~7GHz

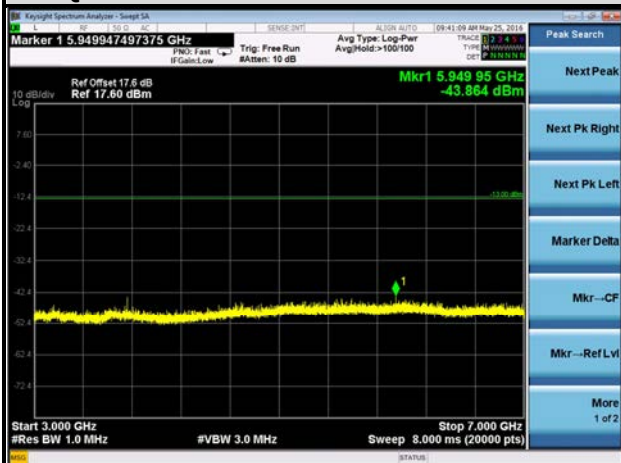

FREQUENCY RANGE : 7GHz~13GHz

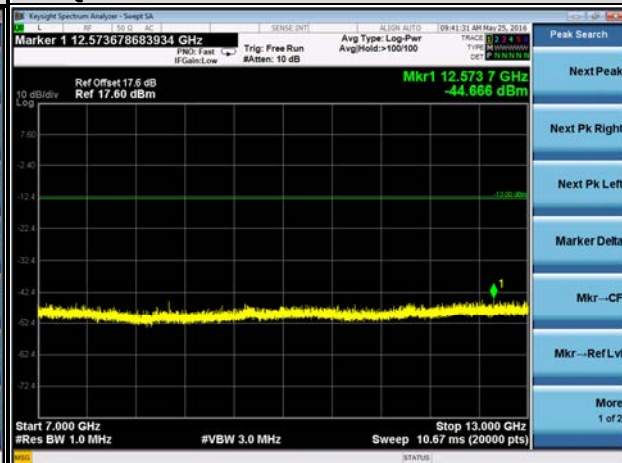


FREQUENCY RANGE : 13GHz~19.1GHz

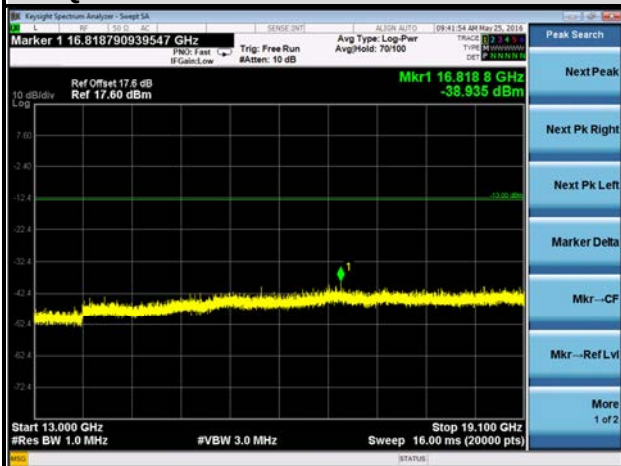


WCDMA

CHANNEL 9400


FREQUENCY RANGE : 30MHz~1GHz

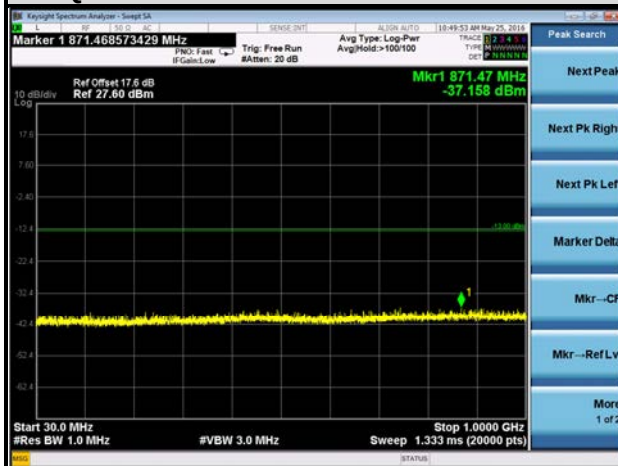


FREQUENCY RANGE : 1GHz~3GHz

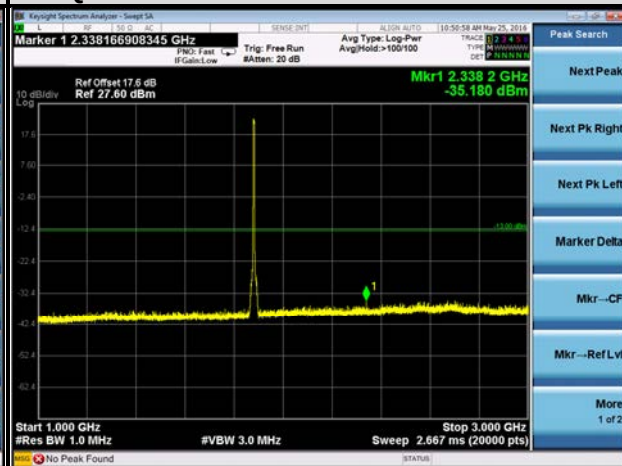


FREQUENCY RANGE : 3GHz~7GHz

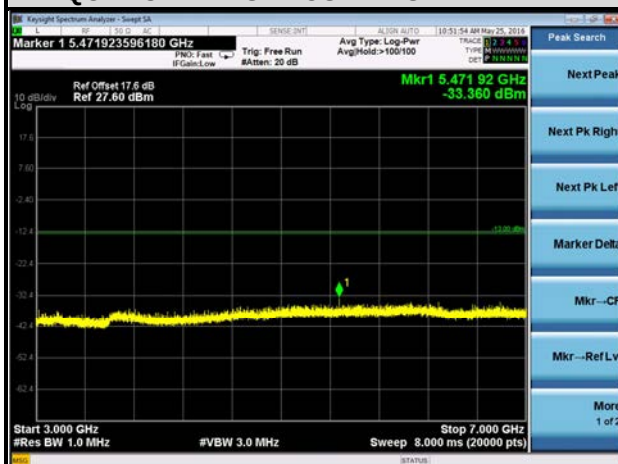

FREQUENCY RANGE : 7GHz~13GHz

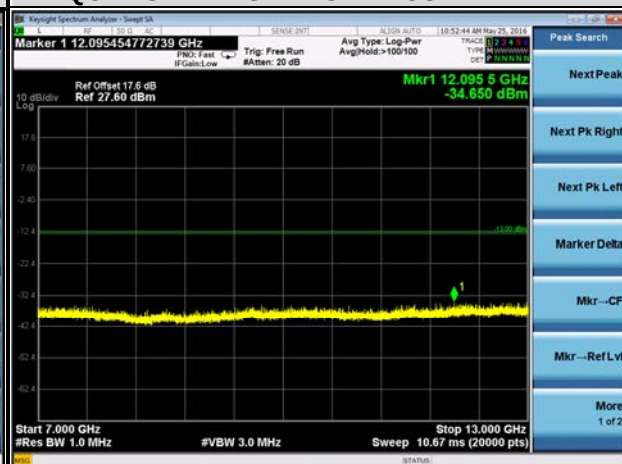

FREQUENCY RANGE : 13GHz~19.1GHz

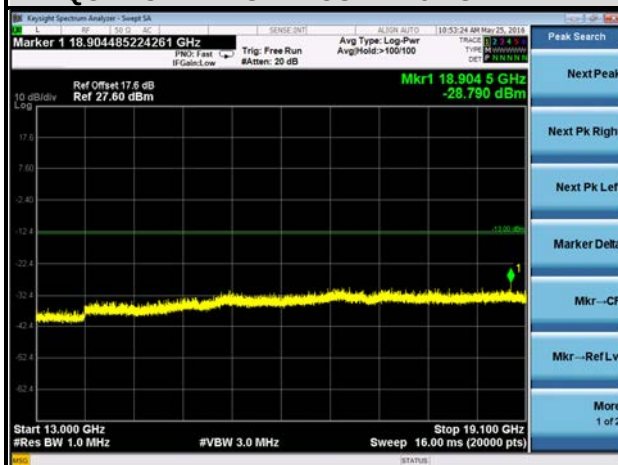

4.7 Radiated Emission Measurement

4.7.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

4.7.2 Test Procedure


- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi}$.

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.7.3 Deviation from Test Standard

No deviation.

4.7.4 Test Setup

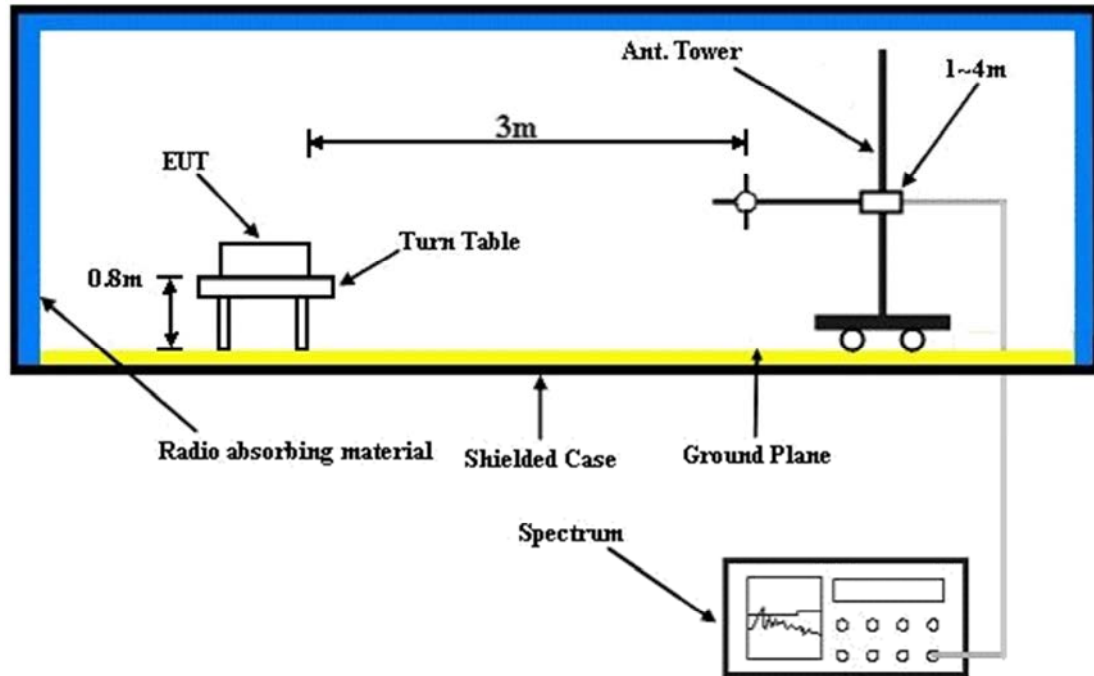


For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.7.5 Test Results


BELOW 1GHz WORST-CASE DATA

GSM:

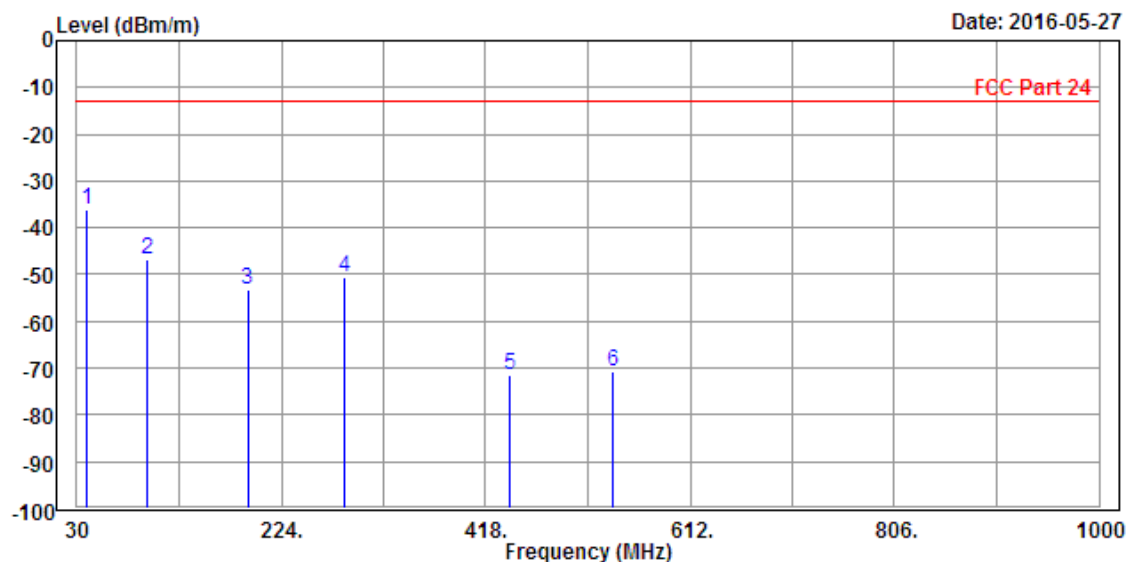

Condition: FCC Part 24 3m EIRP_26M-1GHz-20160505-EMC9135+3143B-FCC Horizontal
 EUT : Baifone P3750
 Mode : PCS 1900
 Test By : Alex Chen
 Remark : IMEI 357288070009527

			Read	Limit	Over			
	Freq	Level	Level	Line	Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	38.730	-36.18	-48.34	-13.00	-23.18	12.16	Peak	Horizontal
2	96.930	-46.82	-36.31	-13.00	-33.82	-10.51	Peak	Horizontal
3	191.990	-53.21	-35.76	-13.00	-40.21	-17.45	Peak	Horizontal
4	283.170	-50.69	-36.05	-13.00	-37.69	-14.64	Peak	Horizontal
5	440.310	-71.48	-61.05	-13.00	-58.48	-10.43	Peak	Horizontal
6	539.250	-70.54	-60.82	-13.00	-57.54	-9.72	Peak	Horizontal

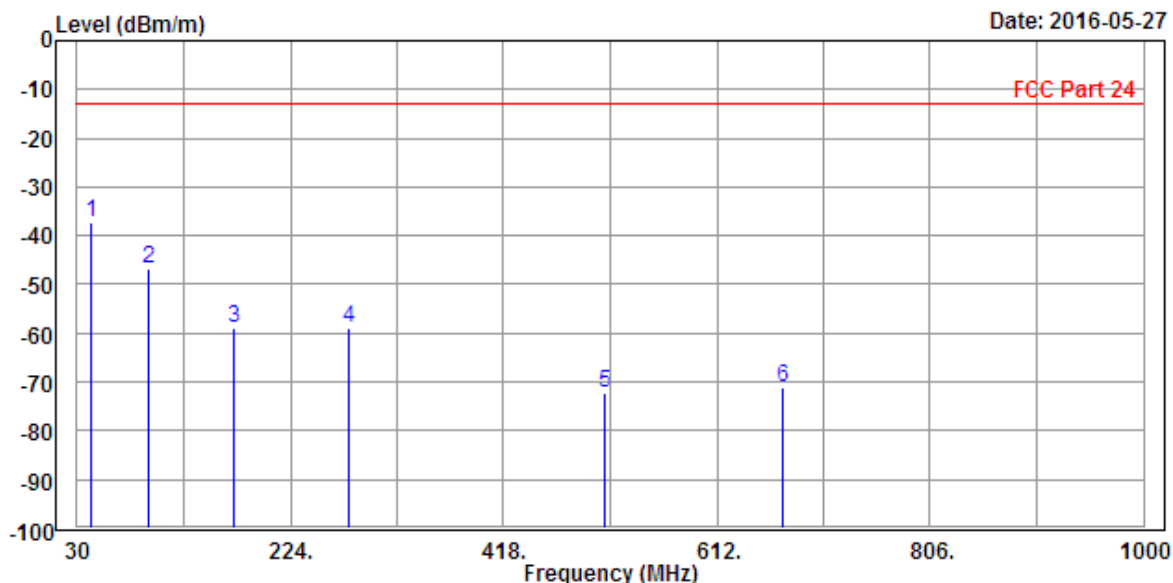


Condition: FCC Part 24 3m EIRP_26M-1GHz-20160505-EMC9135+3143B-FCC Vertical
 EUT : Baifone P3750
 Mode : PCS 1900
 Test By : Alex Chen
 Remark : IMEI 357288070009527

			Read	Limit	Over			
	Freq	Level	Level	Line	Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	42.610	-37.08	-34.81	-13.00	-24.08	-2.27	Peak	Vertical
2	94.990	-46.88	-36.27	-13.00	-33.88	-10.61	Peak	Vertical
3	172.590	-58.75	-44.80	-13.00	-45.75	-13.95	Peak	Vertical
4	276.380	-59.10	-47.70	-13.00	-46.10	-11.40	Peak	Vertical
5	509.180	-72.14	-64.89	-13.00	-59.14	-7.25	Peak	Vertical
6	672.140	-71.14	-64.61	-13.00	-58.14	-6.53	Peak	Vertical


ABOVE 1GHz DATA

GSM:

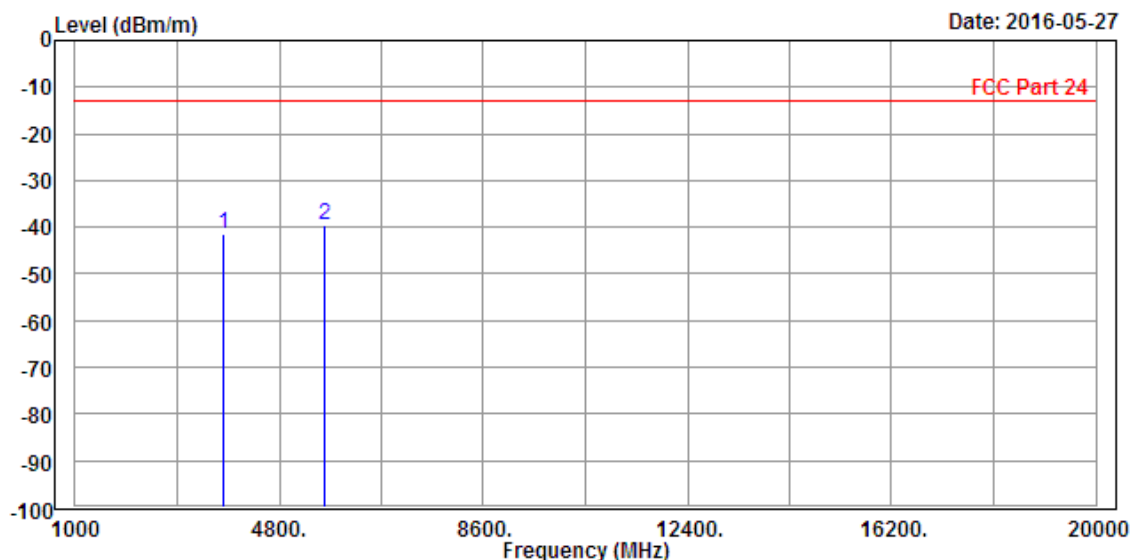

Condition: FCC Part 24 3m EIRP_1G-18G-_20160505-EMC012645B+3117-FCC Horizontal
EUT : Baifone P3750
Mode : PCS 1900
Plan : X-Plan
Test By : Alex Chen
Remark : IMEI 357288070009527

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-41.61	-45.00	-13.00	-28.61	3.39	Peak	Horizontal
2 PP	5640.000	-39.68	-48.80	-13.00	-26.68	9.12	Peak	Horizontal

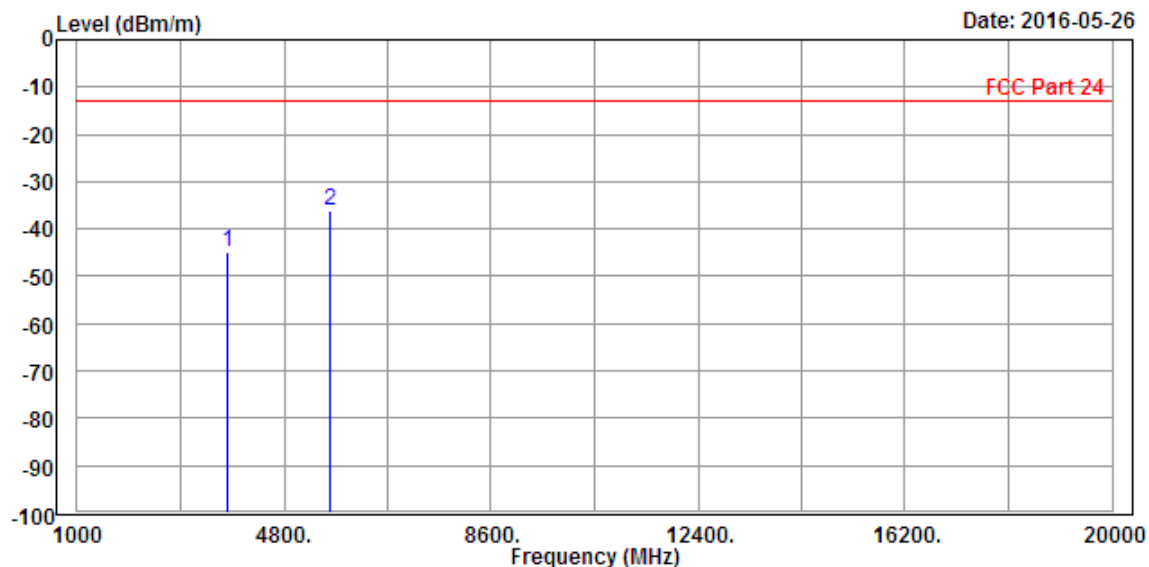

Condition: FCC Part 24 3m EIRP_1G-18G-_20160505-EMC012645B+3117-FCC Vertical

EUT : Baifone P3750

Mode : PCS 1900


Plan : X-Plan

Test By : Alex Chen

Remark : IMEI 357288070009527


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3754.000	-44.92	-48.77	-13.00	-31.92	3.85	Peak	Horizontal
2 PP	5640.000	-36.18	-44.44	-13.00	-23.18	8.26	Peak	Horizontal

EDGE:

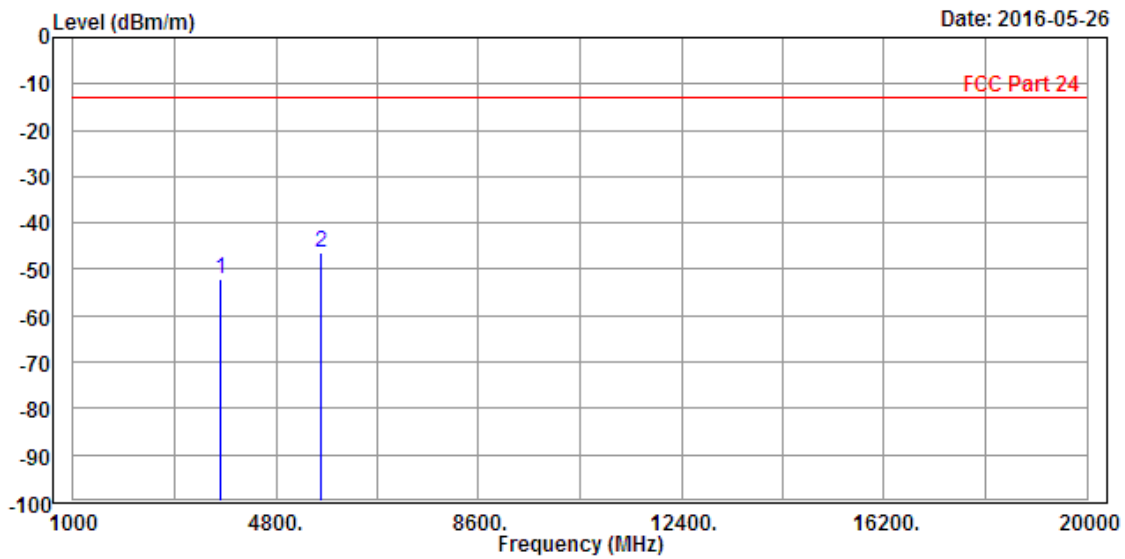

Condition: FCC Part 24 3m EIRP_1G-18G-_20160505-EMC012645B+3117-FCC Horizontal
EUT : Baifone P3750
Mode : Edge 1900
Plan : X-Plan
Test By : Alex Chen
Remark : IMEI 357288070009527


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-52.14	-55.53	-13.00	-39.14	3.39	Peak	Horizontal
2 PP	5640.000	-46.31	-55.43	-13.00	-33.31	9.12	Peak	Horizontal

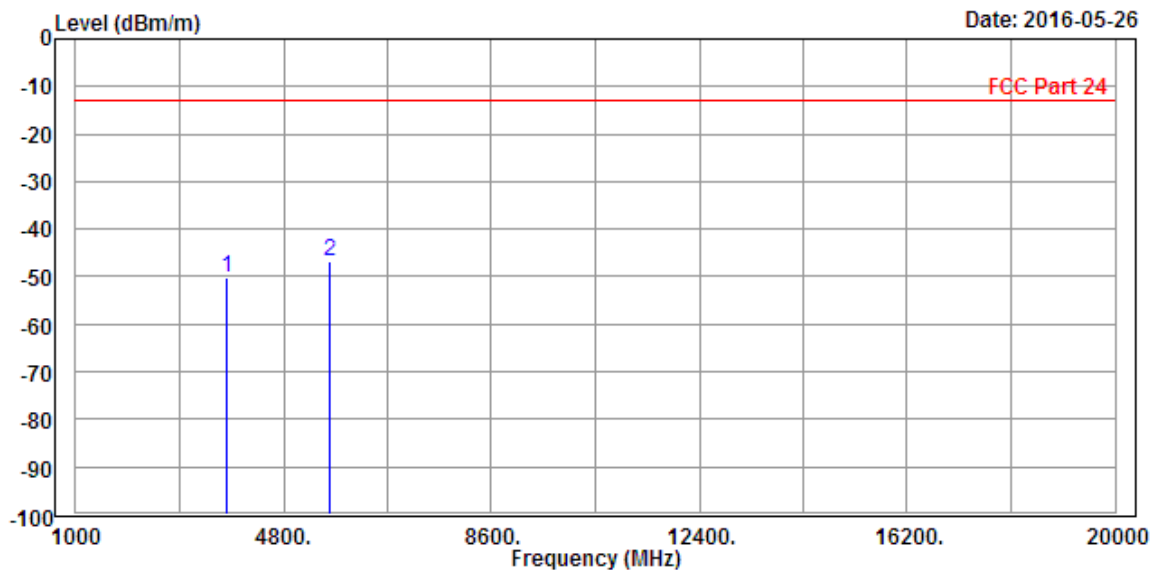

Condition: FCC Part 24 3m EIRP_1G-18G-_20160505-EMC012645B+3117-FCC Vertical
 EUT : Baifone P3750
 Mode : Edge 1900
 Plan : X-Plan
 Test By : Alex Chen
 Remark : IMEI 357288070009527


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-50.22	-54.07	-13.00	-37.22	3.85	Peak	Vertical
2 PP	5640.000	-46.65	-54.91	-13.00	-33.65	8.26	Peak	Vertical

WCDMA:

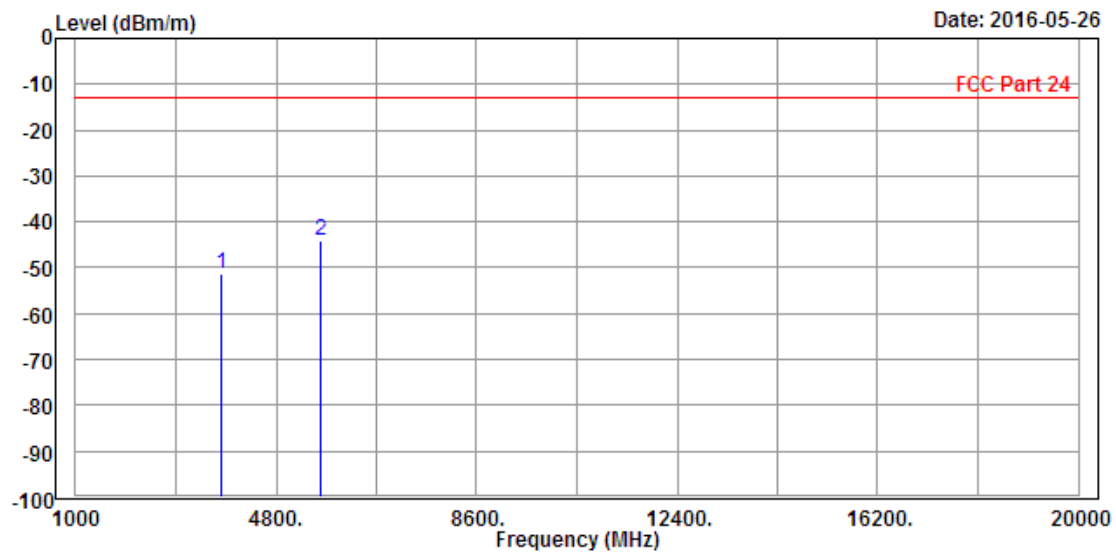

Condition: FCC Part 24 3m EIRP_1G-18G-_20160505-EMC012645B+3117-FCC Horizontal
EUT : Baifone P3750
Mode : WCDMA Band2
Plan : X-Plan
Test By : Alex Chen
Remark : IMEI 357288070009527

			Read	Limit	Over			
	Freq	Level	Level	Line	Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-51.52	-54.91	-13.00	-38.52	3.39	Peak	Horizontal
2 PP	5640.000	-43.95	-53.07	-13.00	-30.95	9.12	Peak	Horizontal

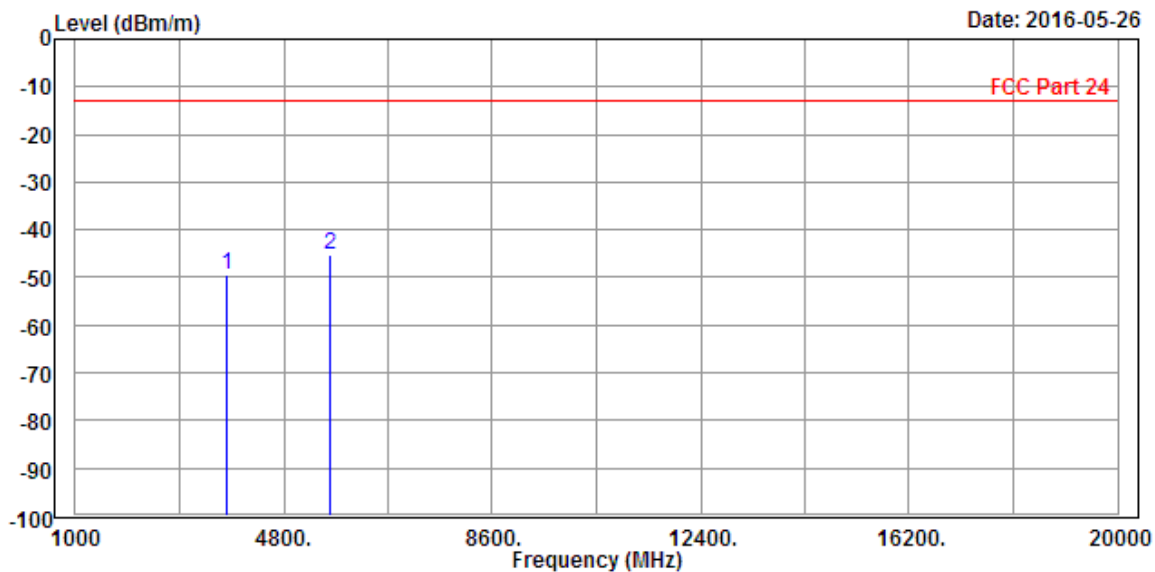

Condition: FCC Part 24 3m EIRP_1G-18G-_20160505-EMC012645B+3117-FCC Vertical
 EUT : Baifone P3750
 Mode : WCDMA Band2
 Plan : X-Plan
 Test By : Alex Chen
 Remark : IMEI 357288070009527

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-49.54	-53.39	-13.00	-36.54	3.85	Peak	Vertical
2 PP	5640.000	-45.20	-53.46	-13.00	-32.20	8.26	Peak	Vertical

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab/Telecom Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---