



FCC Part 15B TEST REPORT

FCC ID: 2ACXUHUASEMI

Product : Waterproof WCDMA Tablet

Trade Name : ENJOY

Model Number : W69

Serial Model : T1

Report No. : STS140739E01

Prepared for

ENJOY GROUP(HK) CO,LIMITED

**Rm. 1305A, Fujian Building, Caitian Road, Futian District, Shenzhen, Guangdong,
China**

Prepared by

Shenzhen STS Test Services Co., Ltd.

**1/F, Building 2, Zhuoke Science Park, Chongqing Road, Fuyong,
Baoan District, Shenzhen, China**

TEL: +86-755 6119 6328

FAX: +86-755 6119 6328

E-mail:sts@stsapp.com

TEST RESULT CERTIFICATION

Applicant's name: ENJOY GROUP(HK) CO,LIMITED
Address.....: Rm. 1305A, Fujian Building, Caitian Road, Futian District,
 Shenzhen, Guangdong, China
Manufacture's Name: ENJOY GROUP(HK) CO,LIMITED
Address.....: Rm. 1305A, Fujian Building, Caitian Road, Futian District,
 Shenzhen, Guangdong, China

Product description

Product name: Waterproof WCDMA Tablet
Brand name: ENJOY
Model and/or type reference ...: W69
Serial Model.....: T1
Ratings.....: DC 5V/0.5A

Standards: FCC 47 CFR Part 15 Subpart B

Test procedure.....: ANSI C63.4-2009

This device described above has been tested by BZT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BZT, this document may be altered or revised by BZT, personal only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests .. 08 August, 2014 ~12 August, 2014

Date of Issue..... 13 August, 2014

Test Result **Pass**

Testing Engineer :




(Tony Liu)

Technical Manager :



(Vita Li)

Authorized Signatory :



(Bovey Yang)



Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	4
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	7
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	7
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	8
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	9
3 . EMC EMISSION TEST	10
3.1 CONDUCTED EMISSION MEASUREMENT	10
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	10
3.1.2 TEST PROCEDURE	11
3.1.3 DEVIATION FROM TEST STANDARD	11
3.1.4 TEST SETUP	11
3.1.5 EUT OPERATING CONDITIONS	11
3.1.6 TEST RESULTS	12
3.2 RADIATED EMISSION MEASUREMENT	14
3.2.1 RADIATED EMISSION LIMITS	14
3.2.2 TEST PROCEDURE	15
3.2.3 DEVIATION FROM TEST STANDARD	15
3.2.4 TEST SETUP	16
3.2.5 EUT OPERATING CONDITIONS	17
3.2.6 TEST RESULTS (BELOW 30 MHZ)	18
3.2.7 TEST RESULTS (BETWEEN 30M – 6000 MHZ)	19
4 . EUT TEST PHOTO	21
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

EMISSION			
Standard	Item	Result	Remarks
FCC 47 CFR Part 15 Subpart B (10-1-05 Edition)	Conducted Emission	PASS	Meet Class B limit
	Radiated Emission	PASS	Meet Class B limit

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 TEST FACILITY

BZT Testing Technology Co., Ltd

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration No.: 701733

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Waterproof WCDMA Tablet
Trade Name	ENJOY
Model Name	W69
Serial Model	T1
Model Difference	Only difference in model name
Channel List	Please refer to the Note 2.
Adapter	Input:AC 100-240V,50/60Hz,0.15A Output:DC 5V,500mA
Battery	Rated Voltage: 3.7V Charge Limit: 4.2V capacity :15000mAh
Hardware version number	V1.0
Software versioning number	ALPS.JB5.TABLET.MP.V1
Connecting I/O Port(s)	Please refer to the User's Manual
CPU processor speed	1.2GHz

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	USB Model
Mode 2	GSM/WCDMA Mode
Mode 3	MP3/MP4 Mode
Mode 4	Idle Mode


For Conducted Emission	
Final Test Mode	Description
Mode1	USB Model

For Radiated Emission	
Final Test Mode	Description
Mode 1	USB Model

Note:

(1) Due to the different configuration and test, in this list only some worse mode. The worst test data of the worse mode is reported by this report.

2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

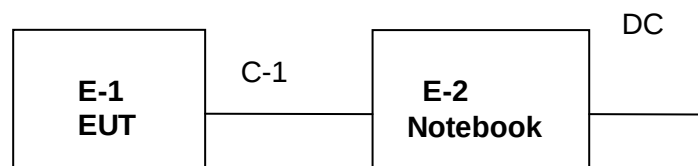

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Waterproof WCDMA Tablet	ENJOY	W69	T1	EUT
E-2	Notebook	Lenovo	B460	WB03928113	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	0.5m	
C-2	NO	NO	1.2m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS**Radiation Test equipment**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Due
1	Spectrum Analyzer	Agilent	E4407B	160400005	Jul. 06. 2015
2	Test Receiver	R&S	ESPI	101318	Jul. 06. 2015
3	Bilog Antenna	TESEQ	CBL6111D	31216	Nov.23. 2014
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	Jul. 06. 2015
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	Jul. 06. 2015
6	Horn Antenna	EM	EM-AH-10180	2011071402	Nov.23. 2014
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	Jul. 06. 2015
8	Amplifier	EM	EM-30180	060538	Jul. 06. 2015
9	Loop Antenna	ARA	PLA-1030/B	1029	Jul. 06. 2015
10	Power Meter	R&S	NRVS	100696	Jul. 06. 2015
11	Power Sensor (Peak)	R&S	NRV-Z31	0396.0101.1 9	Jul. 06. 2015

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Test Receiver	R&S	ESCI	101160	Jul. 06. 2015
2	LISN	R&S	ENV216	101313	Jul. 06. 2015
3	LISN	EMCO	3816/2	00042990	Jul. 06. 2015
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	Jul. 06. 2015
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	Jul. 06. 2015
6	Absorbing clamp	R&S	MOS-21	100423	Jul. 06. 2015

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

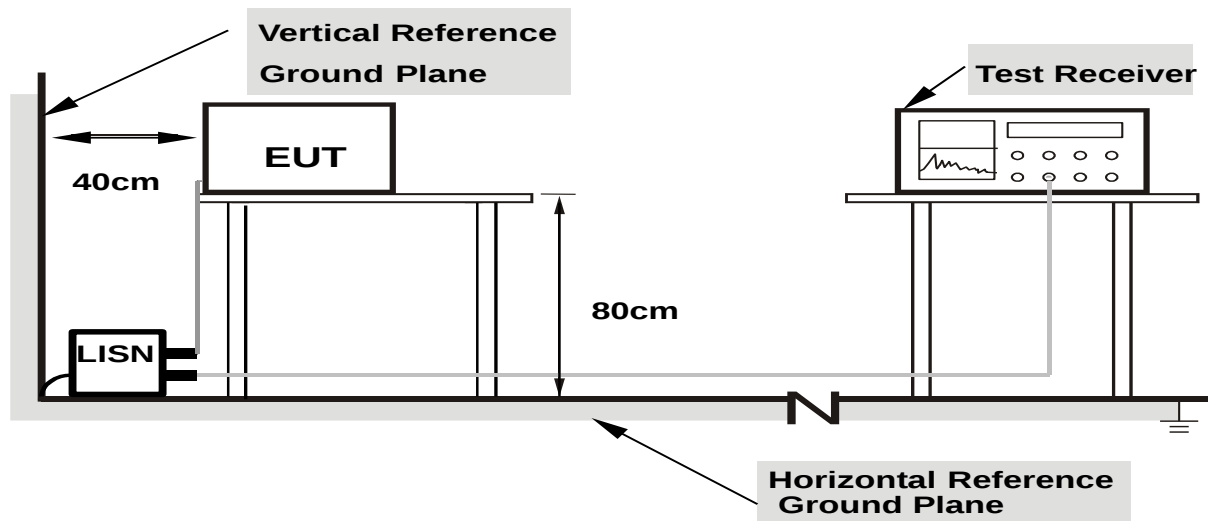

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


3.1.6 TEST RESULTS

EUT :	Waterproof WCDMA Tablet	Model Name. :	W69
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter with AC 120V/60Hz	Test Mode :	1

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
0.194	41.51	9.52	51.03	63.86	-12.83	QP
0.194	14.61	9.52	24.13	53.86	-29.73	AVG
0.254	36.26	9.51	45.77	61.62	-15.85	QP
0.254	12.46	9.51	21.97	51.62	-29.65	AVG
0.5658	29.3	9.53	38.83	56	-17.17	QP
0.5658	10.41	9.53	19.94	46	-26.06	AVG
6.1459	20.14	9.64	29.78	60	-30.22	QP
6.1459	14.56	9.64	24.2	50	-25.8	AVG
12.3498	24.71	9.78	34.49	60	-25.51	QP
12.3498	17.02	9.78	26.8	50	-23.2	AVG
25.5538	31.6	10.29	41.89	60	-18.11	QP
25.5538	18.36	10.29	28.65	50	-21.35	AVG

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

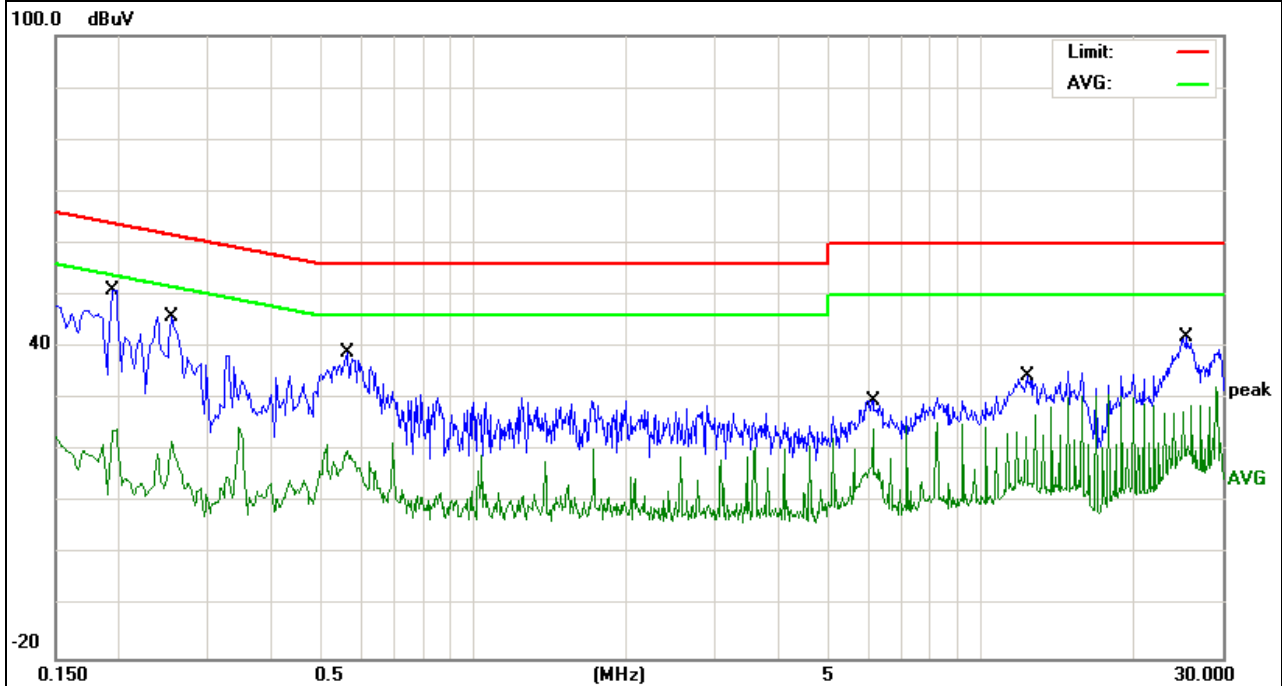


EUT :	Waterproof WCDMA Tablet	Model Name. :	W69
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter with AC 120V/60Hz	Test Mode :	1

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
0.1779	45.65	9.58	55.23	64.58	-9.35	QP
0.1779	17.6	9.58	27.18	54.58	-27.4	AVG
0.2379	36.62	9.5	46.12	62.17	-16.05	QP
0.2379	10.85	9.5	20.35	52.17	-31.82	AVG
0.6219	30.78	9.53	40.31	56	-15.69	QP
0.6219	10.33	9.53	19.86	46	-26.14	AVG
1.29	26.41	9.56	35.97	56	-20.03	QP
1.29	5.28	9.56	14.84	46	-31.16	AVG
12.3978	22.04	9.78	31.82	60	-28.18	QP
12.3978	10.73	9.78	20.51	50	-29.49	AVG
25.2939	28.95	10.29	39.24	60	-20.76	QP
25.2939	18.18	10.29	28.47	50	-21.53	AVG

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

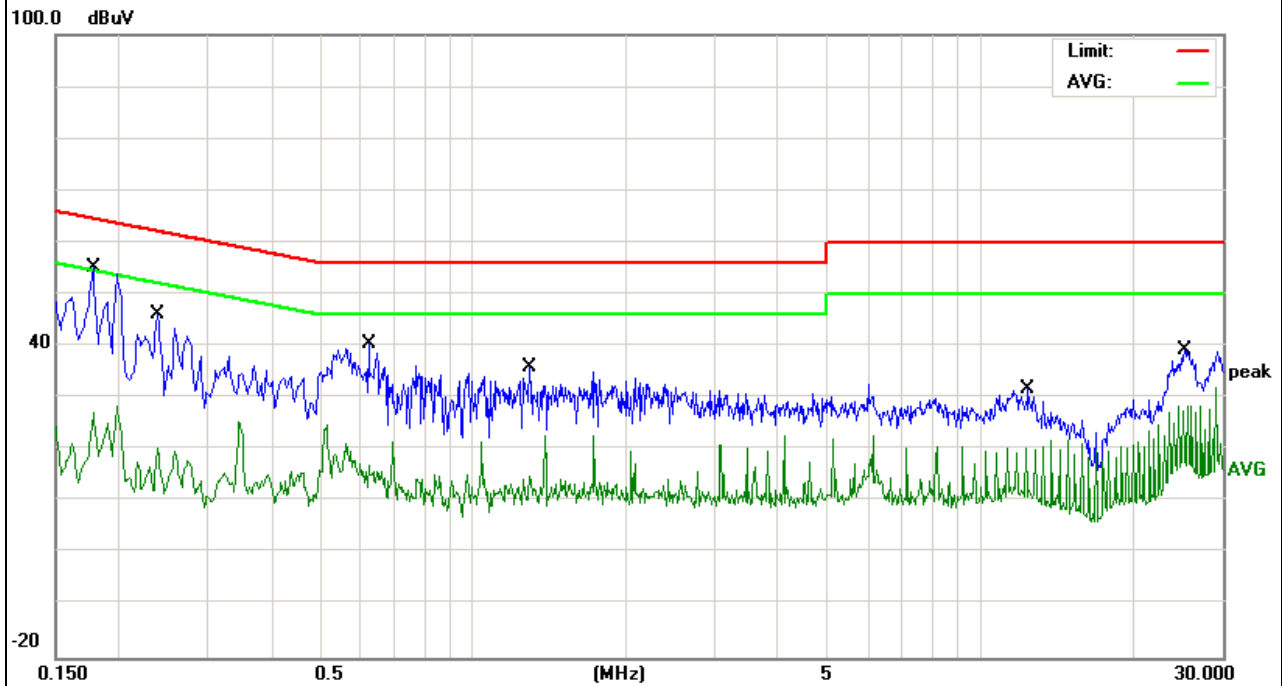

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m) (at 3M)		Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 1 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 1 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

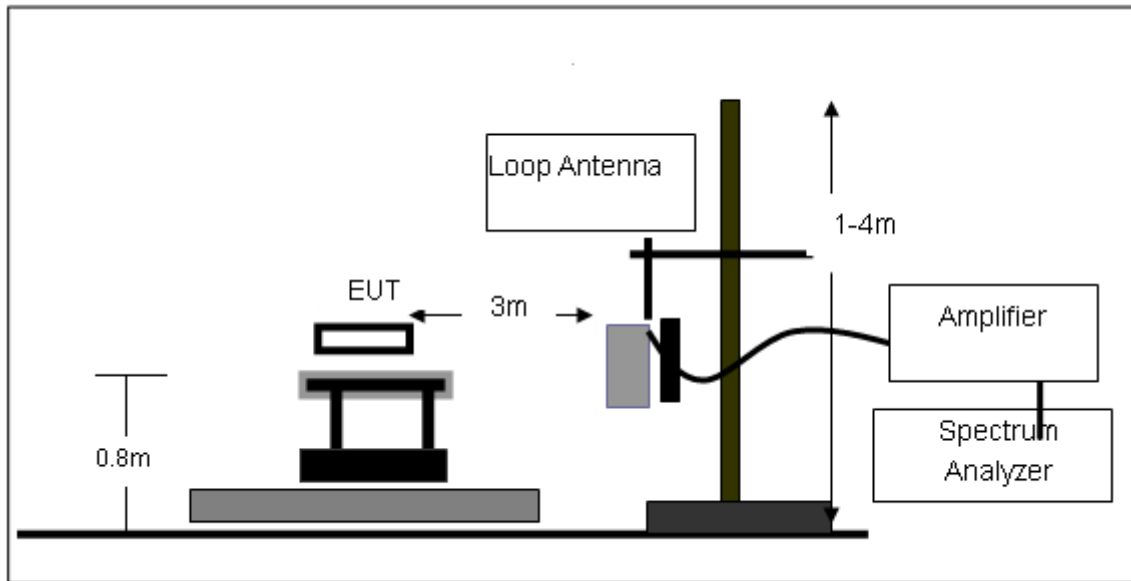

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

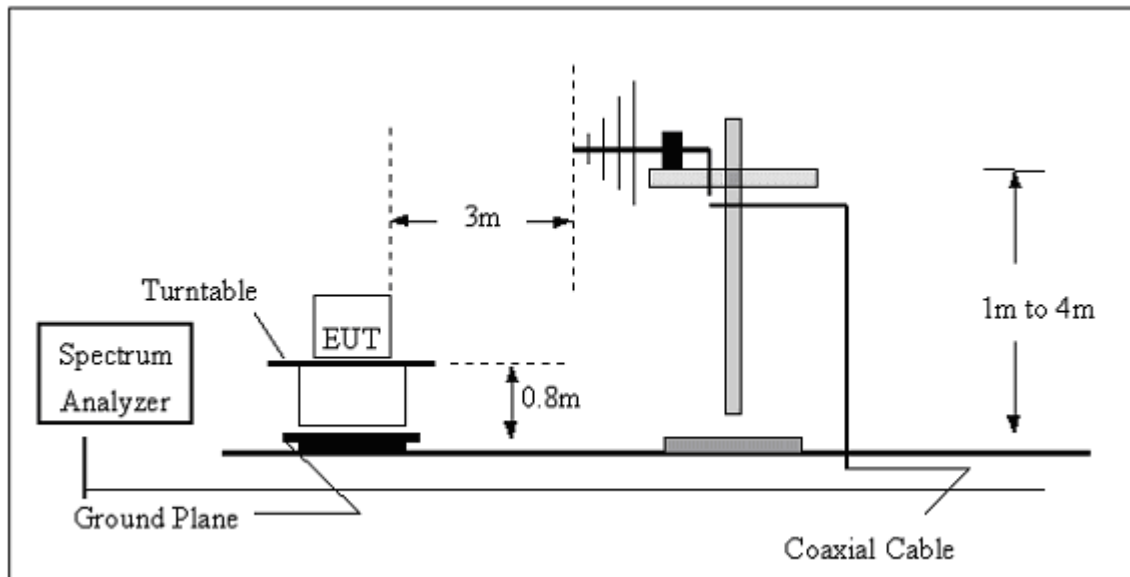

(C) Radiated Emission Test-Up Frequency Above 1GHz

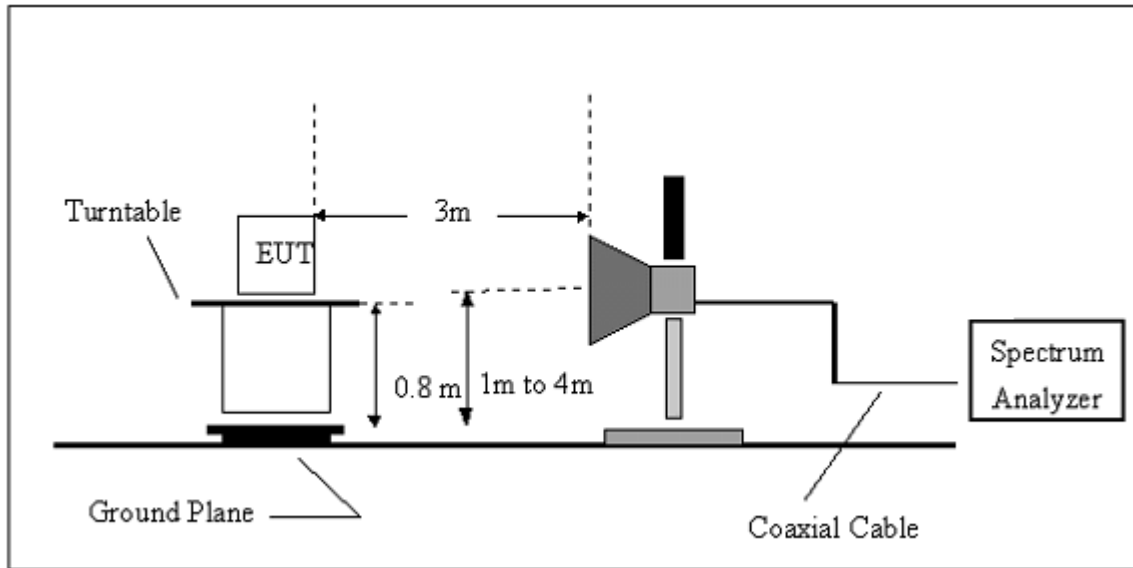

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.6 TEST RESULTS (BELOW 30 MHZ)

EUT :	Waterproof WCDMA Tablet	Model Name. :	W69
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Polarization :	---
Test Voltage :	DC 5V from Adapter AC 120V/60Hz		
Test Mode :	Mode 1		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.


3.2.7 TEST RESULTS (BETWEEN 30M – 1000 MHZ)

EUT :	Waterproof WCDMA Tablet	Model Name. :	W69
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 5V from Adapter AC 120V/60Hz		
Test Mode :	Mode 1		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
46.0162	14.38	10.06	24.44	40	-15.56	QP
129.9225	17.01	12.2	29.21	43.5	-14.29	QP
260.1444	20.54	14.93	35.47	46	-10.53	QP
455.9057	20.45	19.39	39.84	46	-6.16	QP
665.8034	16.02	23.77	39.79	46	-6.21	QP
716.682	15.11	25.26	40.37	46	-5.63	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

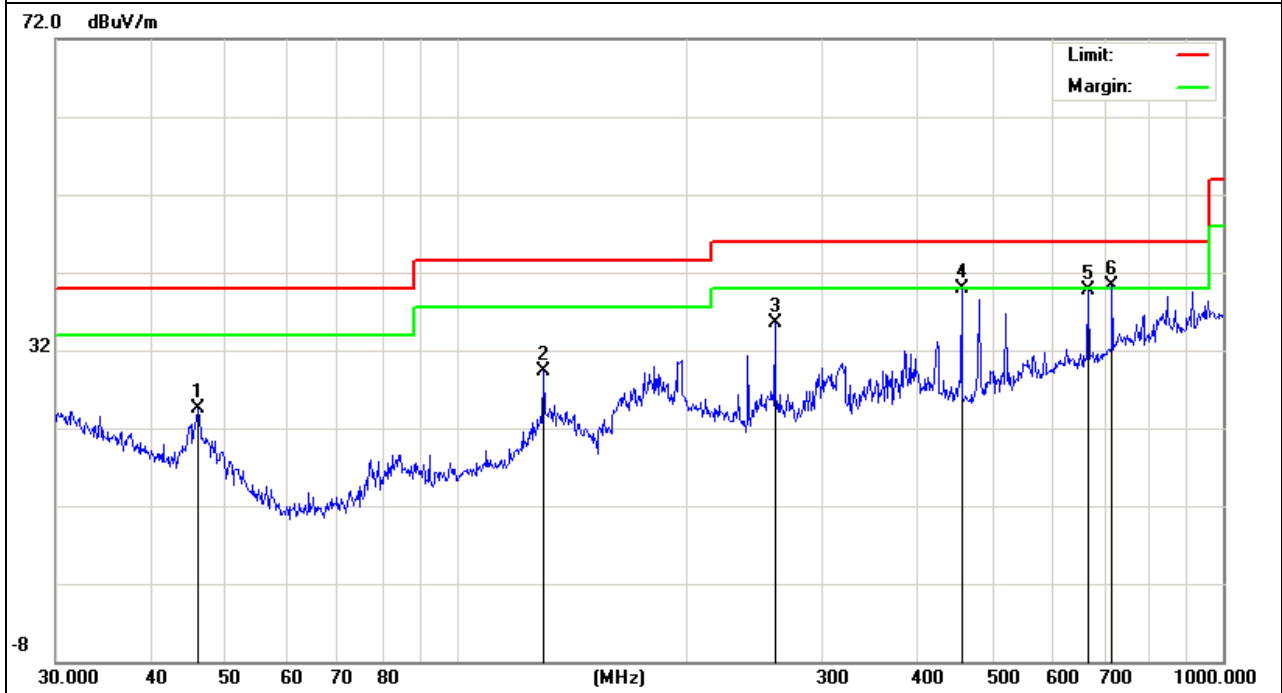


EUT :	Waterproof WCDMA Tablet	Model Name. :	W69
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 5V from Adapter AC 120V/60Hz		
Test Mode :	Mode 1		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
46.1779	13.7	9.99	23.69	40	-16.31	QP
131.7577	18.39	12.22	30.61	43.5	-12.89	QP
195.822	19.66	8.97	28.63	43.5	-14.87	QP
455.9058	17.94	19.39	37.33	46	-8.67	QP
520.8881	16.42	20.86	37.28	46	-8.72	QP
665.8034	13.54	23.77	37.31	46	-8.69	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

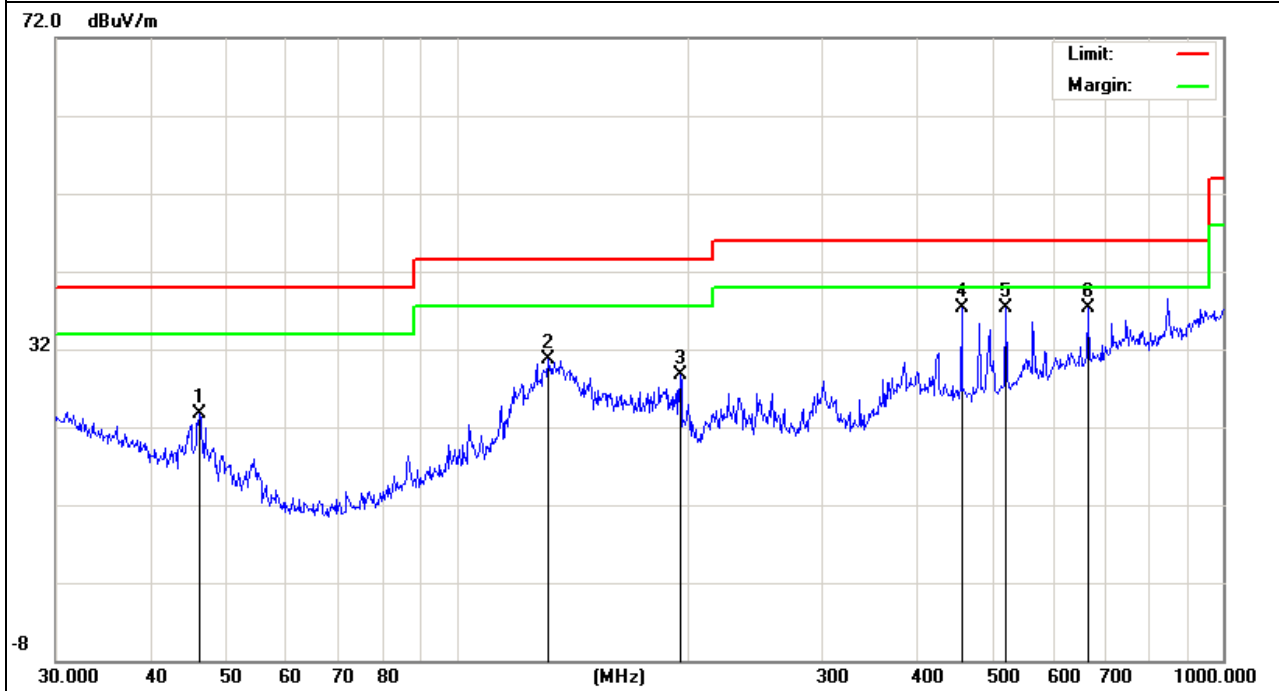

The worst test data above 1 GHz was showed as the follow:

EUT :	Waterproof WCDMA Tablet	Model Name. :	W69
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 5V from Adapter AC 120V/60Hz		
Test Mode :	Mode 1		


Freq.	Ant. Pol	Peak	AV	Ant./CL	Actual Fs		Peak	AV	Peak	AV
(MHz)	H/V	Reading	Reading	CF			Limit	Limit	Margin	Margin
		(dBuV)	(dBuV)	(dB)	Peak	AV	(dBuV/m)	(dBuV/m)	(dB)	(dB)
					(dBuV/m)	(dBuV/m)				
1095.34	H	59.91	42.46	5.19	65.10	47.65	74.00	54.00	-8.90	-6.35
2661.65	H	53.23	38.37	9.64	62.87	48.01	74.00	54.00	-11.13	-5.99
N/A										>20
1095.34	V	55.82	38.37	5.19	61.01	43.56	74.00	54.00	-12.99	-10.44
2661.65	V	50.47	33.89	9.64	60.11	43.53	74.00	54.00	-13.89	-10.47
N/A										>20

Notes:


1. Measuring frequencies from 1 GHz to 6GHz.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
3. The frequency that above 3GHz is mainly from the environment noise.

4. EUT TEST PHOTO

**Radiated Measurement Photos
Blow 1GHz**

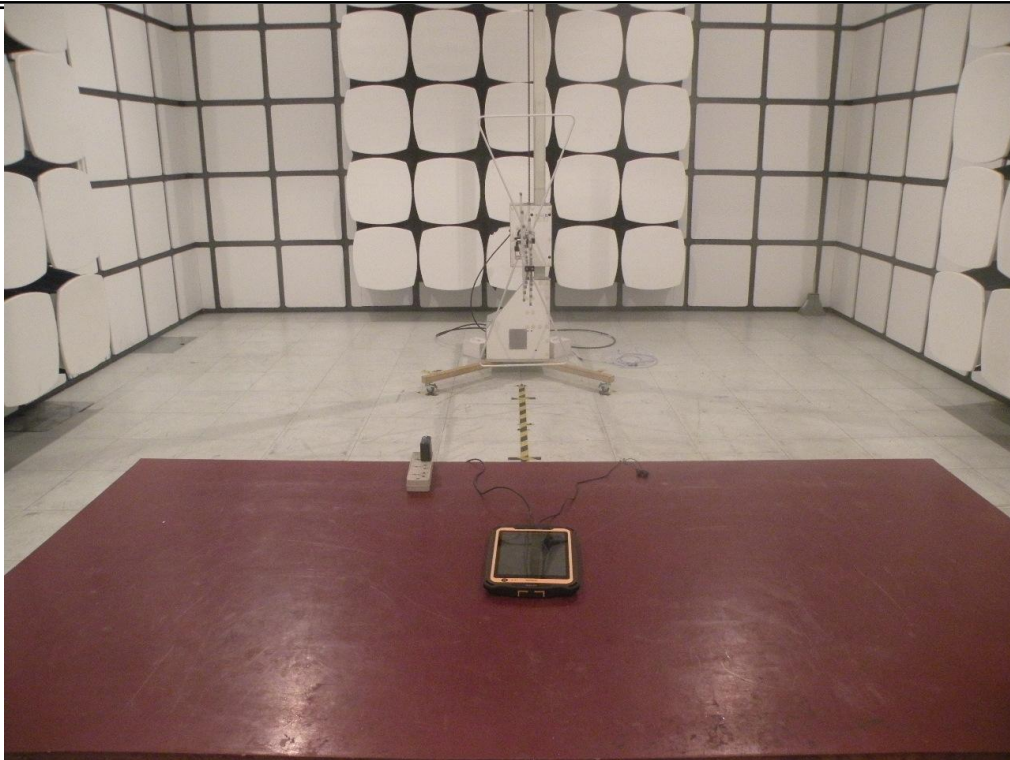

Above 1GHz

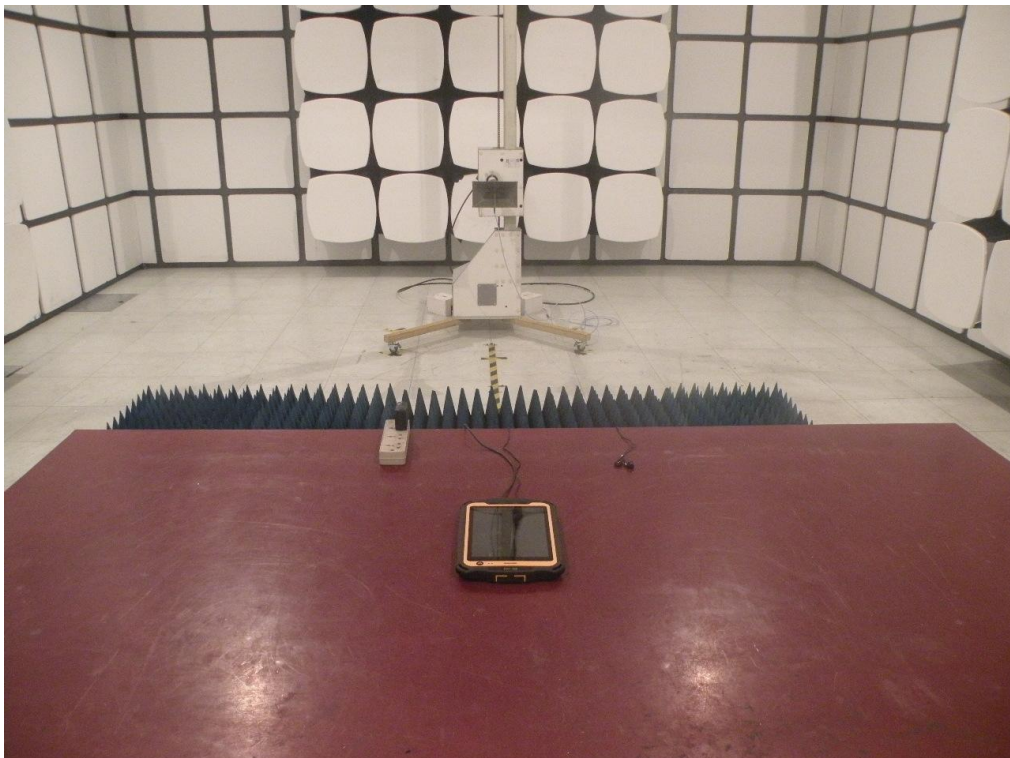

Conducted Measurement Photos

