

HCT CO., LTD.

CERTIFICATE OF COMPLIANCE FCC Certification

Applicant Name:
LG Electronics MobileComm U.S.A., Inc.

Address:
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Date of Issue:
May 06, 2013

Test Site/Location:
HCT CO., LTD., 105-1, Jangam-ri, Majang-Myeon,
Icheon-si, Kyunggi-Do, Korea

Report No.: HCTR1304FR29-1

HCT FRN: 0005866421

FCC ID: ZNFE450J

APPLICANT: LG Electronics MobileComm U.S.A., Inc.

FCC Model(s): LG-E450j
Additional FCC Model(s): LGE450j, E450j
EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n
FCC Classification: Licensed Portable Transmitter Held to Ear (PCE)
FCC Rule Part(s): §22, §24, §2
Tx Frequency: 824.20 - 848.80 MHz (GSM850)
1 850.20 - 1 909.80 MHz (GSM1900)
1 852.40 - 1 907.60 MHz (WCDMA1900)
Rx Frequency: 869.20 - 893.80 MHz (GSM850)
1 930.20 - 1 989.80 MHz (GSM1900)
1 932.40 - 1 987.60 MHz (WCDMA1900)
Max. RF Output Power: 0.158 W GSM850 (21.99 dBm) / 0.830 W GSM1900 (29.19 dBm)
0.356 W WCDMA1900 (25.52 dBm)
Emission Designator(s): 249 KGXW (GSM850) / 249 KGXW (GSM1900)
4M16F9W (WCDMA1900)

The measurements shown in this report were made in accordance with the procedures specified in §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)



Report prepared by
: Jae Chul Shin
Test engineer of RF Team



Approved by
: Chang Seok Choi
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No.
HCTR1304FR29-1

Date of Issue:
May 06, 2013

EUT Type:
GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n

FCC ID:
ZNFE450J

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCTR1304FR29	April 25, 2013	First Approval Report
HCTR1304FR29-1	May 06,2013	Change the font(P.20-P.22:Dotum-> Arial)

Table of Contents

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
2.1. EUT DESCRIPTION.....	5
2.2. MEASURING INSTRUMENT CALIBRATION.....	5
2.3. TEST FACILITY	5
3. DESCRIPTION OF TESTS	6
3.1 ERP/EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS.....	6
3.2 PEAK- TO- AVERAGE RATIO	6
3.3 OCCUPIED BANDWIDTH.	7
3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	8
3.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	9
4. LIST OF TEST EQUIPMENT	10
5. SUMMARY OF TEST RESULTS	11
6. SAMPLE CALCULATION	12
7. TEST DATA	13
7.1 EFFECTIVE RADIATED POWER OUTPUT (GSM).....	13
7.2 EQUIVALENT ISOTROPIC RADIATED POWER (GSM / WCDMA).....	14
7.3 RADIATED SPURIOUS EMISSIONS	15
7.3.1 RADIATED SPURIOUS EMISSIONS (GSM850).....	15
7.3.2 RADIATED SPURIOUS EMISSIONS (GSM1900).....	16
7.3.3 SPURIOUS EMISSIONS (WCDMA1900).....	17
7.4 PEAK-TO-AVERAGE RATIO	18
7.5 OCCUPIED BANDWIDTH	18
7.6 CONDUCTED SPURIOUS EMISSIONS	19
7.6.1 BAND EDGE.....	19
7.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	20
7.7.1 FREQUENCY STABILITY (GSM850)	20
7.7.2 FREQUENCY STABILITY (GSM1900)	21
7.7.3 FREQUENCY STABILITY (WCDMA1900)	22
8. TEST PLOTS.....	23

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name: LG Electronics MobileComm U.S.A., Inc.
Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632
FCC ID: ZNFE450J
Application Type: Certification
FCC Classification: Licensed Portable Transmitter Held to Ear (PCE)
FCC Rule Part(s): §22, §24, §2
EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n
FCC Model(s): LG-E450j
Additional FCC Model(s): LGE450j, E450j
Tx Frequency: 824.20 - 848.80 MHz (GSM850)
1 850.20 - 1 909.80 MHz (GSM1900)
1 852.40 - 1 907.60 MHz (WCDMA1900)
Rx Frequency: 869.20 - 893.80 MHz (GSM850)
1 930.20 - 1 989.80 MHz (GSM1900)
1 932.40 - 1 987.60 MHz (WCDMA1900)
Max. RF Output Power: 0.158 W GSM850 (21.99 dBm) / 0.830 W GSM1900 (29.19 dBm)
0.356 W WCDMA1900 (25.52 dBm)
Emission Designator(s): 249 KGXW (GSM850) / 249 KGXW (GSM1900)
4M16F9W (WCDMA1900)
Date(s) of Tests: April 02, 2013 ~ April 17, 2013
Antenna Specification Manufacturer: Komatech Co., Ltd.
Antenna type: Internal antenna
Peak Gain: GSM850 : -0.87 dBi
GSM1900/WCDMA1900 : -1.06 dBi

FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No.
HCTR1304FR29-1

Date of Issue:
May 06, 2013

EUT Type:
GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n

FCC ID:
ZNFE450J

2. INTRODUCTION

2.1. EUT DESCRIPTION

The LG Electronics MobileComm U.S.A., Inc. LG-E450j GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n consists of GSM850, GSM1900, WCDMA1900, GPRS Class12 and HSDPA.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 105-1, Jangam-ri , Majang-Myeon, Icheon-si, 467-811, KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated March 02, 2011 (Registration Number: 90661)

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1304FR29-1	Date of Issue: May 06,2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

3. DESCRIPTION OF TESTS

3.1 ERP/EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS

Note: ERP(Effective Radiated Power), EIRP(Effective Isotropic Radiated Power)

Test Procedure

Radiated emission measurements are performed in the Fully-anechoic chamber. The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-C-2004 Clause 2.2.17. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission. The level and position of the maximized emission is recorded with the spectrum analyzer using a positive peak detector.

A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

The maximum EIRP is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration


3.2 PEAK- TO- AVERAGE RATIO

A peak to average ratio measurement is performed at the conducted port of the EUT. For CDMA and WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. Plots of the EUT's Peak- to- Average Ratio are shown herein.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1304FR29-1	Date of Issue: May 06,2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

3.3 OCCUPIED BANDWIDTH.

Test set-up

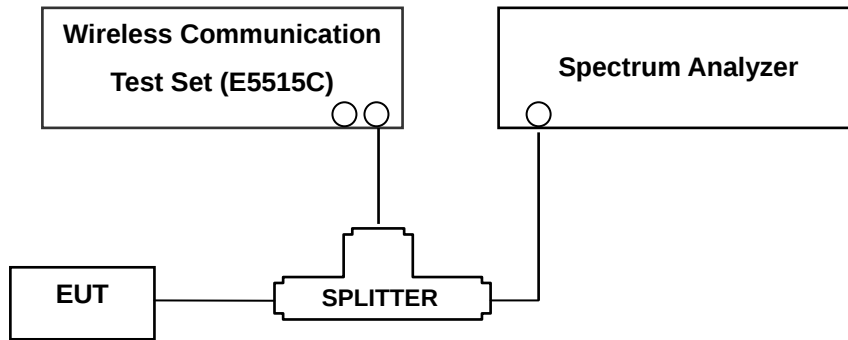

(Configuration of conducted Emission measurement)

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

Test Procedure

The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels(low, middle and high operational range.)

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1304FR29-1	Date of Issue: May 06,2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.

Test Procedure

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.

On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB. The RBW settings used in the testing are greater than 1 % of the occupied bw. The 1 MHz RBW was used to scan from 10 MHz to 10 GHz. (GSM1900 Mode: 10 MHz to 20 GHz). A display line was placed at - 13 dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Measurements of all out of band are made on RBW = 1MHz and VBW $\geq$ 3 MHz in the worst case despite RBW = 100 kHz and VBW $\geq$ 300 kHz upon 1 GHz.

- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Detector = Peak
- Trace Mode = max hold
- Sweep time = auto
- Number of points in sweep $\geq 2 * \text{Span} / \text{RBW}$

- Band Edge Requirement : According to FCC 22.917 , 24.238(a) specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The center frequency of spectrum is the band edge frequency and span is 1MHz RB of the spectrum is 3KHz and VB of the spectrum is 3KHz (GSM)

The center frequency of spectrum is the band edge frequency and span is 5MHz RB of the spectrum is 100KHz and VB of the spectrum is 100KHz(WCDMA)


NOTES: The analyzer plot offsets have been determined by below conditions.

- For GSM850, total offset 27.1 dBm = 20 dBm attenuator + 6 dBm Splitter + 1.1 dBm RF cables.
- For GSM1900 and WCDMA1900, total offset 27.7 dBm
= 20 dBm attenuator + 6 dBm Splitter + 1.7 dBm RF cables.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1304FR29-1	Date of Issue: May 06,2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

3.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

Test Set-up

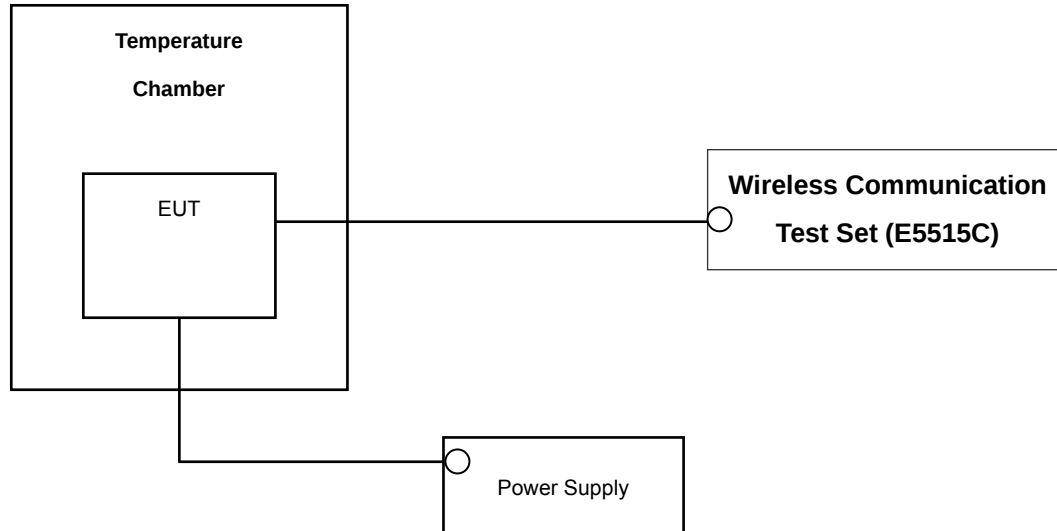

* Nominal Operating Voltage

Test Procedure

The frequency stability of the transmitter is measured by:

a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.

b.) **Primary Supply Voltage:** The primary supply voltage is varied from battery end point to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).

1. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

NOTE: The EUT is tested down to the battery endpoint.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1304FR29-1	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Interval	Calibration Due
Agilent	E9327A/ Power Sensor	MY4442009	Annual	05/02/2013
MITEQ	AMF-6D-001180-35-20P/AMP	1081666	Annual	09/11/2013
Wainwright	WHK1.2/15G-10EF/H.P.F	2	Annual	05/02/2013
Wainwright	WHK3.3/18G-10EF/H.P.F	1	Annual	05/02/2013
Hewlett Packard	11667B / Power Splitter	10126	Annual	11/07/2013
Digital	EP-3010/ Power Supply	3110117	Annual	11/07/2013
Schwarzbeck	UHA9105/ Dipole Antenna	91052371	Biennial	05/30/2013
Schwarzbeck	UHA9105/ Dipole Antenna	91052372	Biennial	05/30/2013
Korea Engineering	KR-1005L / Chamber	KRAB05063-3CH	Annual	11/07/2013
Schwarzbeck	BBHA 9120D/ Horn Antenna	296	Biennial	02/20/2014
Agilent	E4440A/Spectrum Analyzer	US45303008	Annual	05/02/2013
WEINSCHL	ATTENUATOR	BR0592	Annual	11/07/2013
REOHDE&SCHWARZ	FSV40/Spectrum Analyzer	1307.9002K40-100931-NK	Annual	06/11/2013
Agilent	8960 (E5515C)/ Base Station	GB44400269	Annual	02/14/2014

5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result
2.1049, 22.917(a), 24.238(a)	Occupied Bandwidth	N/A	CONDUCTED	PASS
2.1051, 22.917(a), 24.238(a)	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	$< 43 + 10\log_{10} (P[\text{Watts}])$ at Band Edge and for all out-of-band emissions		PASS
* 2.1046	Conducted Output Power	N/A		PASS
24.232(d)	Peak- to- Average Ratio	$< 13 \text{ dB}$		PASS
2.1055, 22.355, 24.235	Frequency stability / variation of ambient temperature	$< 2.5 \text{ ppm}$		PASS
22.913(a)(2) 24.232(c)	Effective Radiated Power	$< 7 \text{ Watts max. ERP}$	RADIATED	PASS
	Equivalent Isotropic Radiated Power	$< 2 \text{ Watts max. EIRP}$		PASS
2.1053, 22.917(a), 24.238(a)	Radiated Spurious and Harmonic Emissions	$< 43 + 10\log_{10} (P[\text{Watts}])$ for all out-of band emissions		PASS

*: See RF Exposure Report

6. SAMPLE CALCULATION

A. ERP Sample Calculation

Mode	Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
	channel	Freq.(MHz)						W	dBm
GSM850	128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{SubstituteLEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 0.8 meter above test site ground level.
- 2) During the test , the turn table is rotated and the antenna height is also varied from 1 to 4 meters until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power (ERP).

B. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1304FR29-1	Date of Issue: May 06,2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

7. TEST DATA

7.1 EFFECTIVE RADIATED POWER OUTPUT (GSM)

(GSM850 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-26.22	33.55	-10.61	0.95	V	0.158	21.99
190	836.60	-27.22	32.96	-10.54	0.96	V	0.140	21.46
251	848.80	-27.85	32.57	-10.47	1.10	V	0.126	21.00

Note: Standard batteries are the only options for this phone. And a peak detector is used.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is in y plane in GSM850 mode. Also worst case of detecting Antenna is in vertical polarization in GSM850 mode.

FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No.
HCTR1304FR29-1

Date of Issue:
May 06, 2013

EUT Type:
GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n

FCC ID:
ZNFE450J

7.2 EQUIVALENT ISOTROPIC RADIATED POWER (GSM / WCDMA)

(GSM1900 Mode)

Ch./ Freq.		Measured	Substitute	Ant. Gain	C.L	Pol.	EIRP	
channel	Freq.(MHz)	Level(dBm)	LEVEL (dBm)	(dBi)			W	dBm
512	1,850.20	-11.69	20.34	10.02	1.41	H	0.785	28.95
661	1,880.00	-12.07	20.24	10.04	1.45	H	0.764	28.83
810	1,909.80	-11.67	20.58	10.05	1.44	H	0.830	29.19

(WCDMA1900 Mode)

Ch./ Freq.		Measured	Substitute	Ant. Gain	C.L	Pol.	EIRP	
channel	Freq.(MHz)	Level(dBm)	LEVEL (dBm)	(dBi)			W	dBm
9262	1,852.40	-16.04	16.11	10.02	1.40	H	0.297	24.73
9400	1,880.00	-15.38	16.93	10.04	1.45	H	0.356	25.52
9538	1,907.60	-16.15	16.41	10.05	1.48	H	0.315	24.98

Note: Standard batteries are the only options for this phone. And a peak detector is used.

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in GSM1900 and WCDMA1900 mode. Also worst case of detecting Antenna is in horizontal polarization in GSM1900 and WCDMA1900 mode.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1304FR29-1	Date of Issue: May 06,2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

7.3 RADIATED SPURIOUS EMISSIONS

7.3.1 RADIATED SPURIOUS EMISSIONS (GSM850)

- ☐ MEASURED OUTPUT POWER: 21.99 dBm = 0.158 W
☐ MODULATION SIGNAL: GSM850
☐ DISTANCE: 3 meters
☐ LIMIT: - (43 + 10 log₁₀ (W)) = - 34.99 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	Substitute Level [dBm]	C.L	Pol.	ERP (dBm)	dBc
128 (824.2)	1,648.40	-46.06	7.05	-52.90	1.18	H	-47.03	-69.02
	2,472.60	-45.30	7.90	-49.05	1.57	V	-42.72	-64.71
	3,296.80	-	-	-	-	-	-	-
190 (836.6)	1,673.20	-45.37	7.22	-52.37	1.20	H	-46.35	-68.34
	2,509.80	-43.37	8.51	-47.16	1.65	V	-40.30	-62.29
	3,346.40	-	-	-	-	-	-	-
251 (848.8)	1,697.60	-44.14	7.34	-51.16	1.20	H	-45.02	-67.01
	2,546.40	-42.56	8.61	-46.10	1.65	H	-39.14	-61.13
	3,395.20	-	-	-	-	-	-	-

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

7.3.2 RADIATED SPURIOUS EMISSIONS (GSM1900)

■ MEASURED OUTPUT POWER: 29.19 dBm = 0.830 W
 ■ MODULATION SIGNAL: GSM1900
 ■ DISTANCE: 3 meters
 ■ LIMIT: - (43 + 10 log₁₀ (W)) = - 42.19 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	EIRP (dBm)	dBc
512 (1850.2)	3,700.40	-	-	-	-	-	-	-
	5,550.60	-52.94	13.40	-52.61	2.88	V	-42.09	-71.28
	7,400.80	-	-	-	-	-	-	-
661 (1880.0)	3,760.00	-54.56	12.31	-59.11	2.11	H	-48.91	-78.10
	5,640.00	-52.91	13.41	-52.24	2.92	H	-41.75	-70.94
	7,520.00	-	-	-	-	-	-	-
810 (1909.8)	3,819.60	-	-	-	-	-	-	-
	5,729.40	-50.71	13.42	-49.27	3.02	V	-38.87	-68.06
	7,639.20	-	-	-	-	-	-	-

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

7.3.3 SPURIOUS EMISSIONS (WCDMA1900)

■ MEASURED OUTPUT POWER: 25.52 dBm = 0.356 W
 ■ MODULATION SIGNAL: WCDMA1900
 ■ DISTANCE: 3 meters
 ■ LIMIT: - (43 + 10 log₁₀ (W)) = - 38.52 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	EIRP (dBm)	dBc
9262	3,704.80	-53.24	12.27	-57.98	2.19	H	-47.90	-73.42
	5,557.20	-53.10	13.40	-52.77	2.88	V	-42.25	-67.77
	7,409.60	-	-	-	-	-	-	-
9400	3,760.00	-50.74	12.31	-55.29	2.11	H	-45.09	-70.61
	5,640.00	-53.00	13.41	-52.33	2.92	V	-41.84	-67.36
	7,520.00	-55.23	11.55	-45.71	3.34	H	-37.50	-63.02
9538	3,815.20	-53.26	12.37	-57.74	2.14	H	-47.51	-73.03
	5,722.80	-48.56	13.42	-47.12	3.02	H	-36.72	-62.24
	7,630.40	-55.28	11.70	-45.52	3.13	H	-36.95	-62.47

NOTES:

1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.
3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

7.4 PEAK-TO-AVERAGE RATIO

- Plots of the EUT's Peak- to- Average Ratio are shown Page 27, 29.

7.5 OCCUPIED BANDWIDTH

Band	Channel	Frequency(MHz)	Data (GSM: kHz / WCDMA : MHz)
GSM850	128	824.20	243.4351
	190	836.60	245.6367
	251	848.80	248.6009
GSM1900	512	1850.20	249.4081
	661	1880.00	245.1112
	810	1909.80	239.8500
WCDMA1900	9262	1852.40	4.1496
	9400	1880.00	4.1617
	9538	1907.60	4.1480

- Plots of the EUT's Occupied Bandwidth are shown Page 24 ~ 26, 27 ~ 28.

7.6 CONDUCTED SPURIOUS EMISSIONS

Band	Channel	Frequency of Maximum Harmonic (GHz)	Maximum Data (dBm)
GSM850	128	4.780570	-27.95
	190	4.961480	-28.20
	251	4.277110	-28.41
GSM1900	512	6.994580	-25.57
	661	10.292160	-25.27
	810	10.273510	-25.38
WCDMA1900	9262	10.334400	-25.45
	9400	6.985250	-24.64
	9538	10.296550	-26.16

- Plots of the EUT's Conducted Spurious Emissions are shown Page 35 ~ 44.

7.6.1 BAND EDGE


- Plots of the EUT's Band Edge are shown Page 29 ~ 35.

7.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

7.7.1 FREQUENCY STABILITY (GSM850)

☒ OPERATING FREQUENCY: 836,600,000 Hz
☒ CHANNEL: 190
☒ REFERENCE VOLTAGE: 3.8 VDC
☒ DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.800	+20(Ref)	836 600 006	0	0.000 000	0.000
100%		-30	836 600 014	7.51	0.000 001	0.009
100%		-20	836 600 013	6.73	0.000 001	0.008
100%		-10	836 600 014	7.68	0.000 001	0.009
100%		0	836 600 015	8.82	0.000 001	0.011
100%		+10	836 600 000	-6.50	-0.000 001	-0.008
100%		+30	836 599 999	-7.23	-0.000 001	-0.009
100%		+40	836 600 014	7.13	0.000 001	0.009
100%		+50	836 599 998	-8.16	-0.000 001	-0.010
115%	4.370	+20	836 600 000	-6.43	-0.000 001	-0.008
Batt. Endpoint	3.500	+20	836 599 999	-7.18	-0.000 001	-0.009

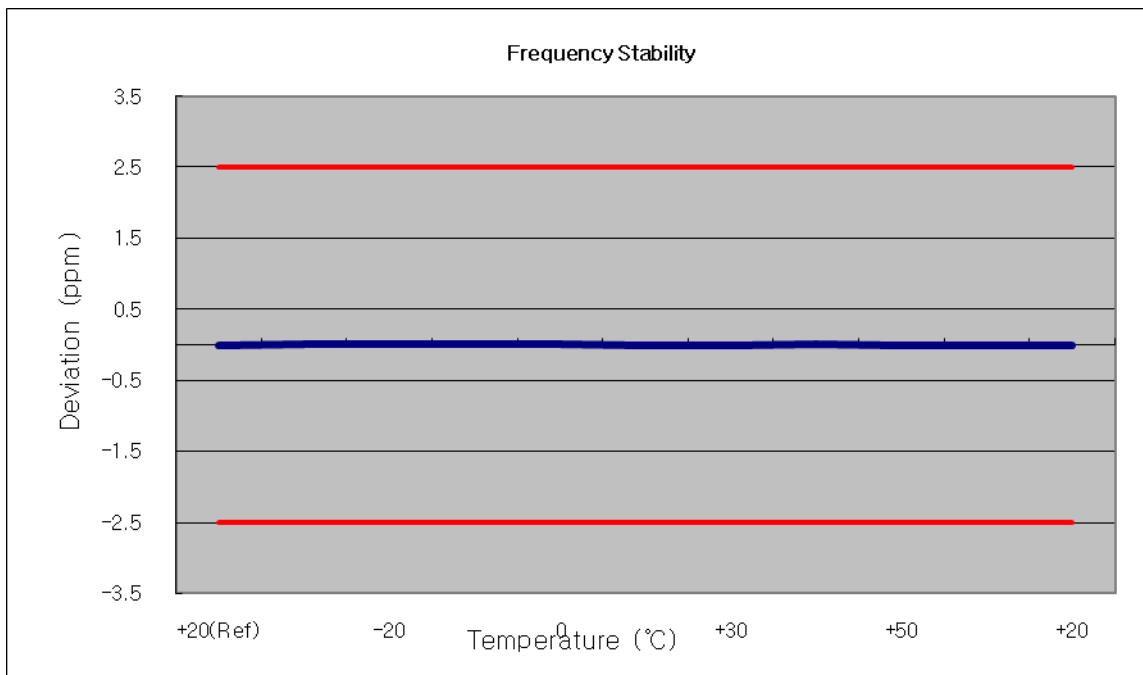

7.7.2 FREQUENCY STABILITY (GSM1900)

■ OPERATING FREQUENCY: 1880,000,000 Hz
 ■ CHANNEL: 661
 ■ REFERENCE VOLTAGE: 3.8 VDC
 ■ DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.800	+20(Ref)	1879 999 970	0	0.000 000	0.000
100%		-30	1879 999 997	26.84	0.000 001	0.014
100%		-20	1880 000 001	31.57	0.000 002	0.017
100%		-10	1879 999 997	27.64	0.000 001	0.015
100%		0	1880 000 001	30.93	0.000 002	0.016
100%		+10	1880 000 002	32.64	0.000 002	0.017
100%		+30	1880 000 002	32.29	0.000 002	0.017
100%		+40	1880 000 001	31.43	0.000 002	0.017
100%		+50	1880 000 004	34.55	0.000 002	0.018
115%	4.370	+20	1880 000 001	30.73	0.000 002	0.016
Batt. Endpoint	3.500	+20	1879 999 999	29.61	0.000 002	0.016

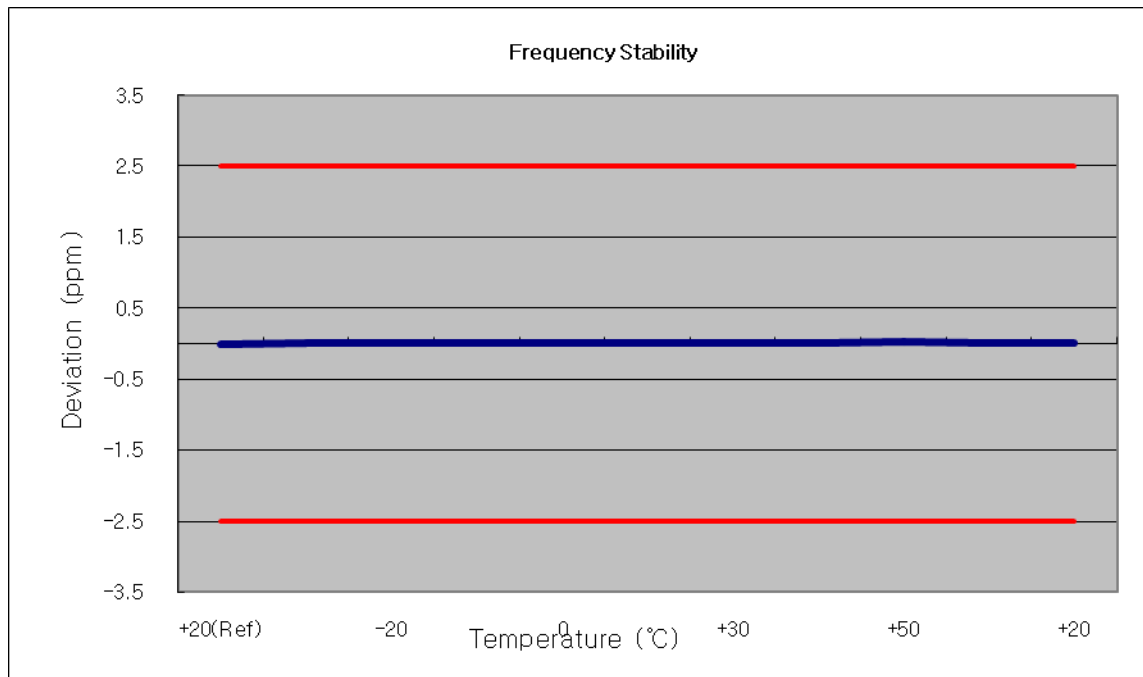

FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No.
HCTR1304FR29-1

Date of Issue:
May 06, 2013


EUT Type:
GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n

FCC ID:
ZNFE450J

7.7.3 FREQUENCY STABILITY (WCDMA1900)


☒ OPERATING FREQUENCY: 1,880,000,000 Hz
☒ CHANNEL: 9400
☒ REFERENCE VOLTAGE: 3.8 VDC
☒ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.800	+20(Ref)	1879 999 992	0	0.000 000	0.000
100%		-30	1880 000 010	9.60	0.000 001	0.005
100%		-20	1880 000 008	7.59	0.000 000	0.004
100%		-10	1880 000 006	6.44	0.000 000	0.003
100%		0	1880 000 007	7.08	0.000 000	0.004
100%		+10	1880 000 005	5.42	0.000 000	0.003
100%		+30	1880 000 006	6.24	0.000 000	0.003
100%		+40	1879 999 994	-6.37	0.000 000	-0.003
100%		+50	1880 000 008	8.00	0.000 000	0.004
115%	4.370	+20	1879 999 993	-6.62	0.000 000	-0.004
Batt. Endpoint	3.500	+20	1880 000 007	6.65	0.000 000	0.004

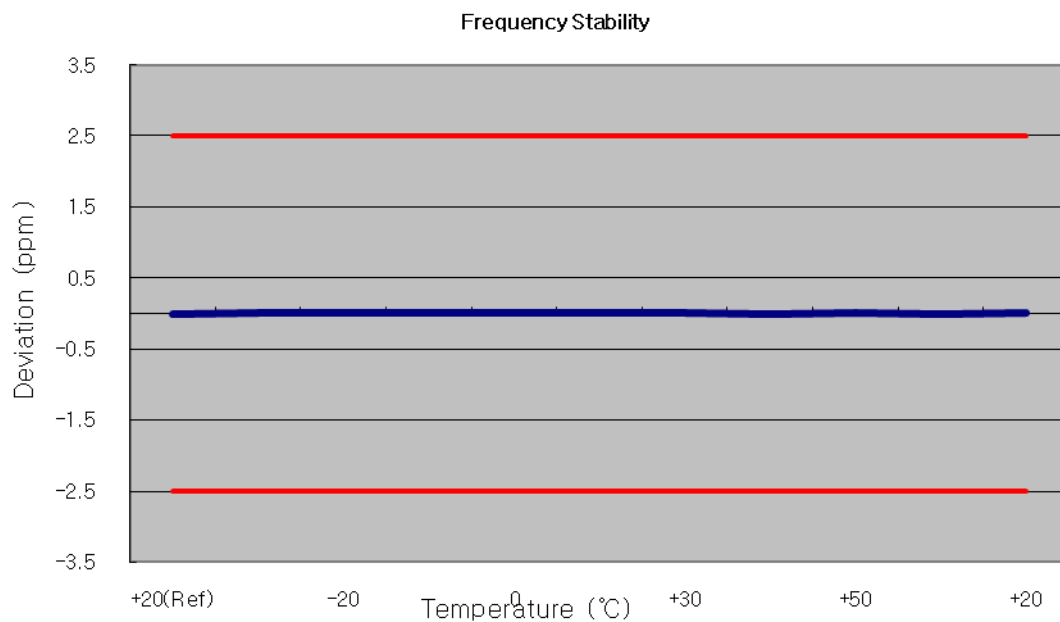


8. TEST PLOTS

■ GSM850 MODE (128 CH.) Occupied Bandwidth

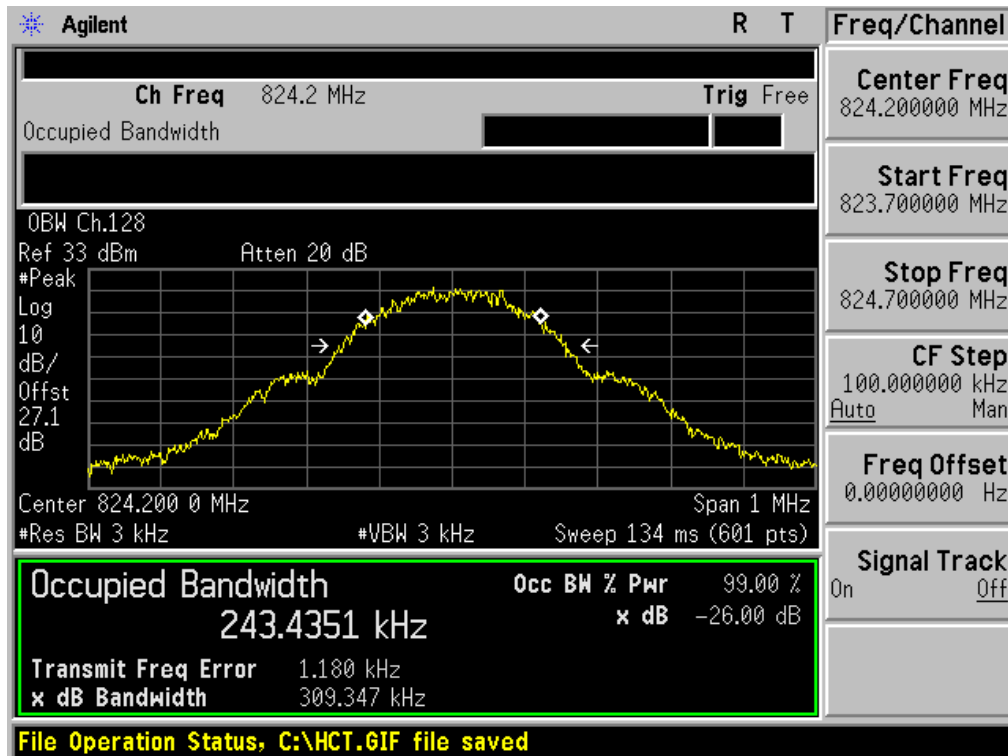

■ GSM850 MODE (190 CH.) Occupied Bandwidth

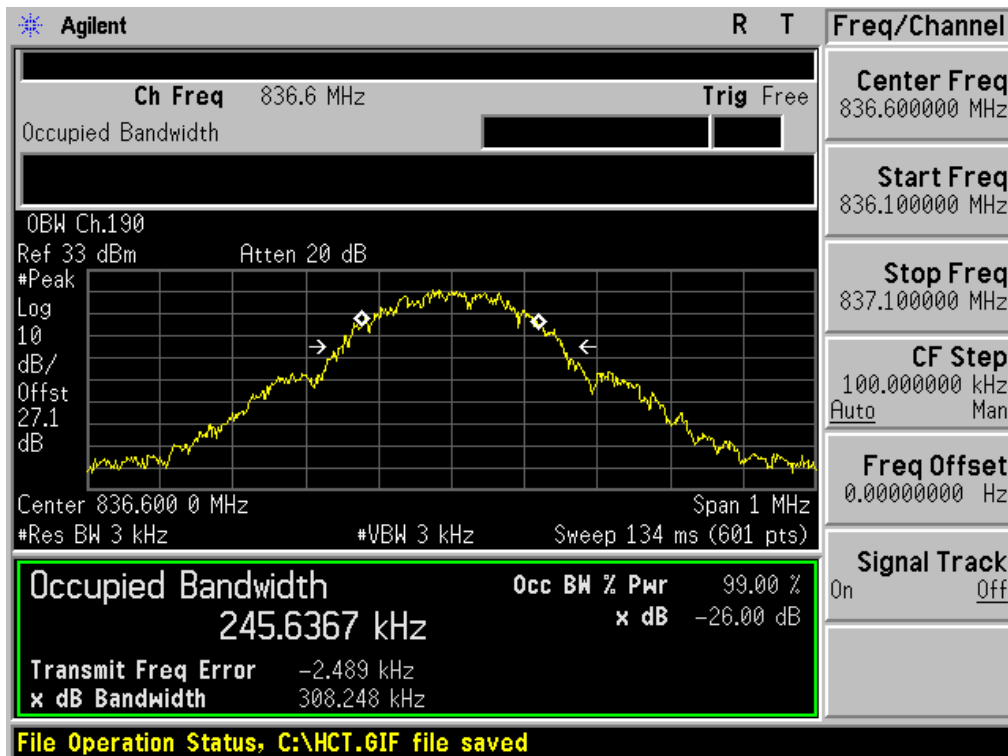

FCC CERTIFICATION REPORT

www.hct.co.kr


Test Report No.
HCTR1304FR29-1

Date of Issue:
May 06, 2013


EUT Type:
GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n

FCC ID:
ZNFE450J


■ GSM850 MODE (251 CH.) Occupied Bandwidth

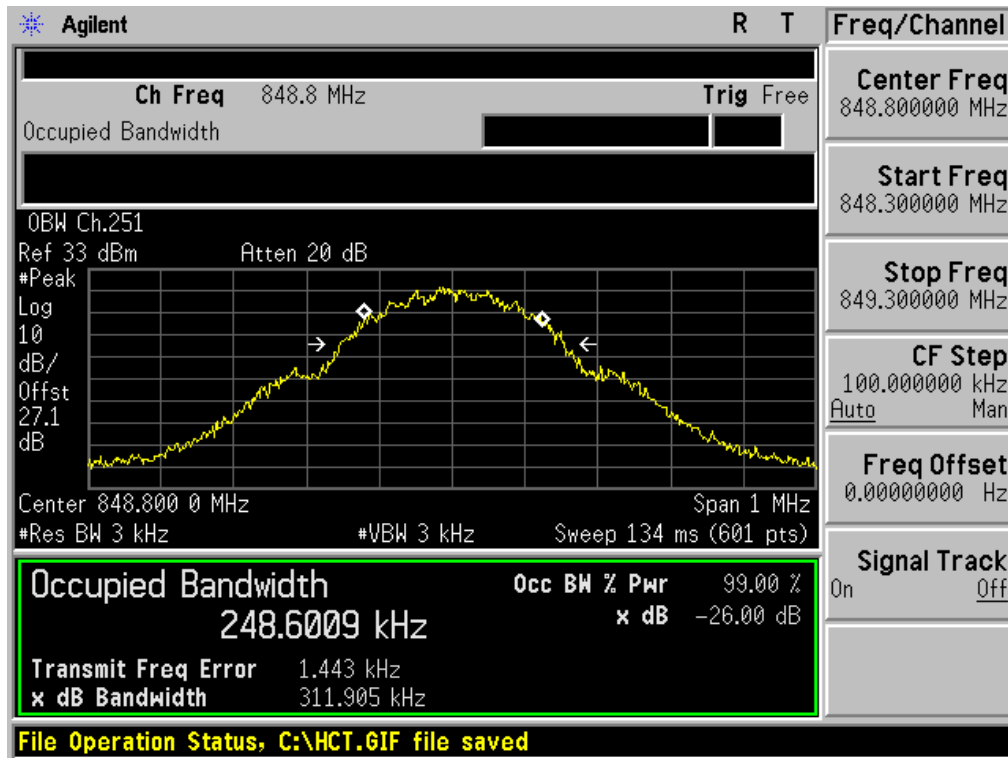


■ GSM1900 MODE (512 CH.) Occupied Bandwidth

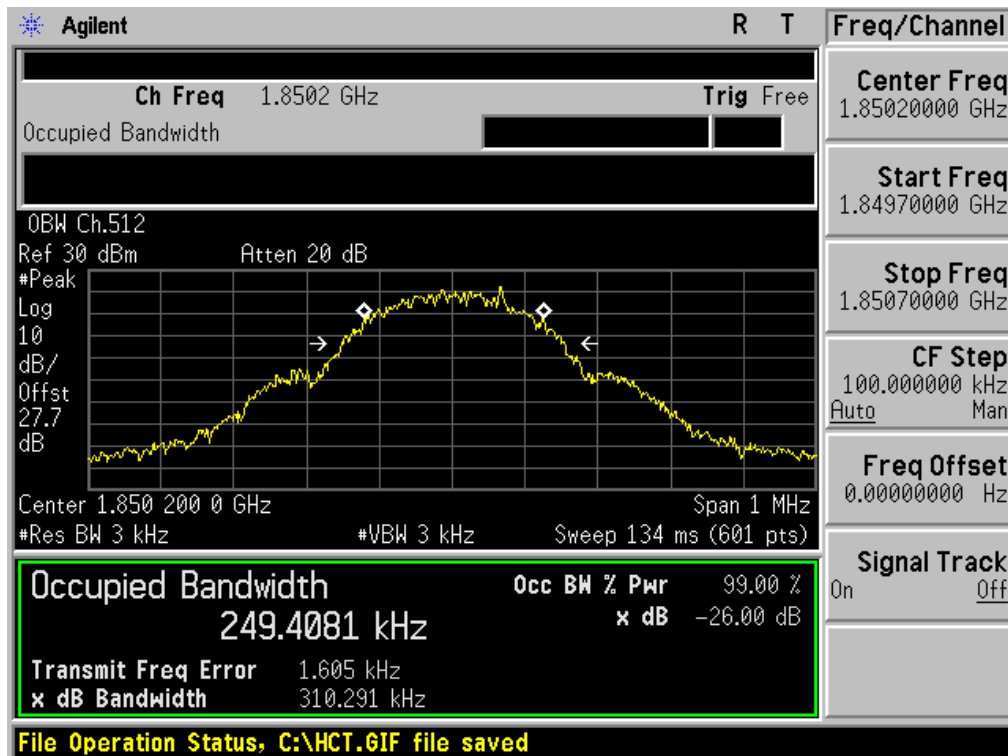

■ GSM1900 MODE (661 CH.) Occupied Bandwidth

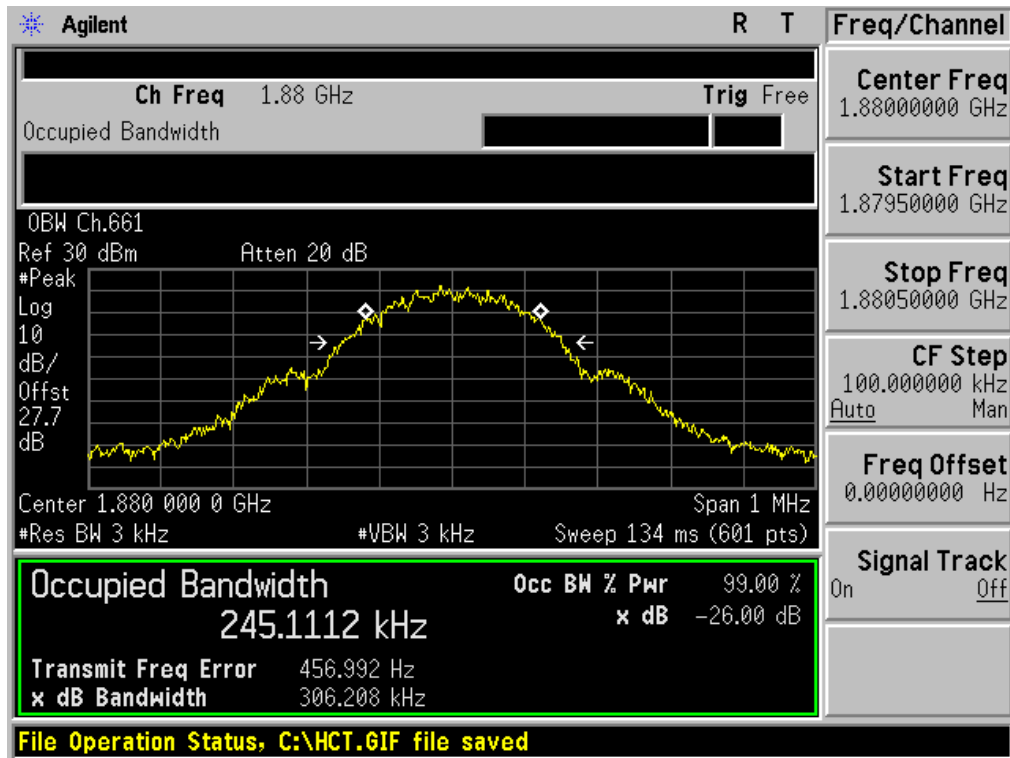

■ GSM1900 MODE (810 CH.) Occupied Bandwidth

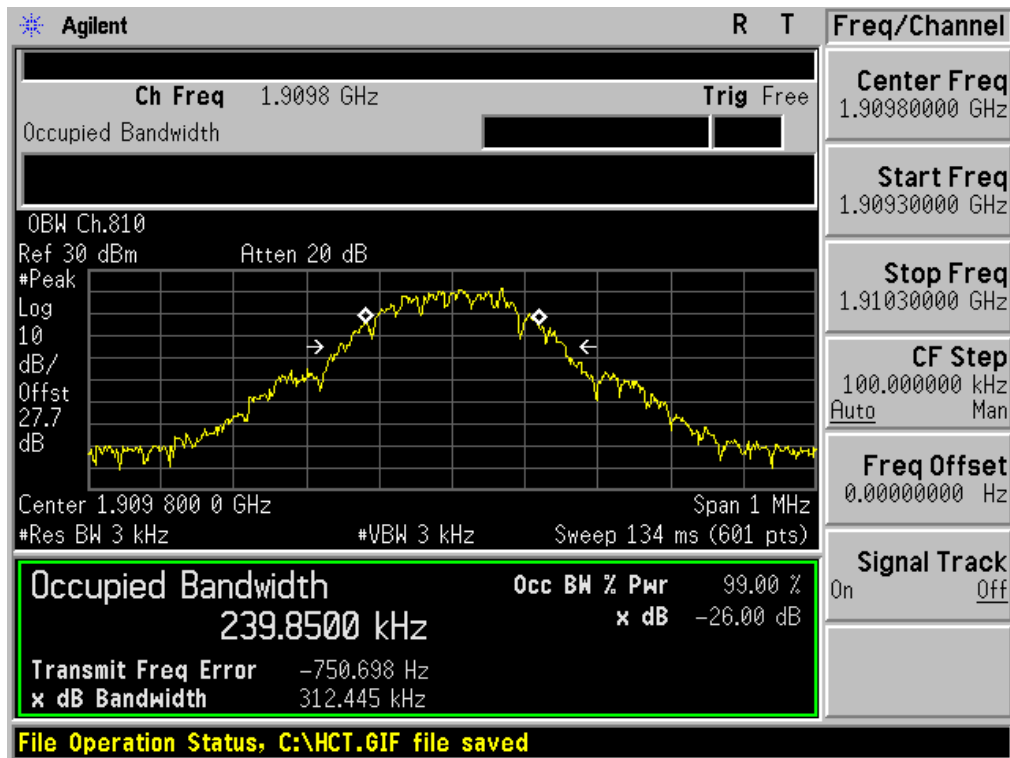

FCC CERTIFICATION REPORT

www.hct.co.kr


Test Report No.
HCTR1304FR29-1

Date of Issue:
May 06, 2013


EUT Type:
GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n

FCC ID:
ZNFE450J

■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio

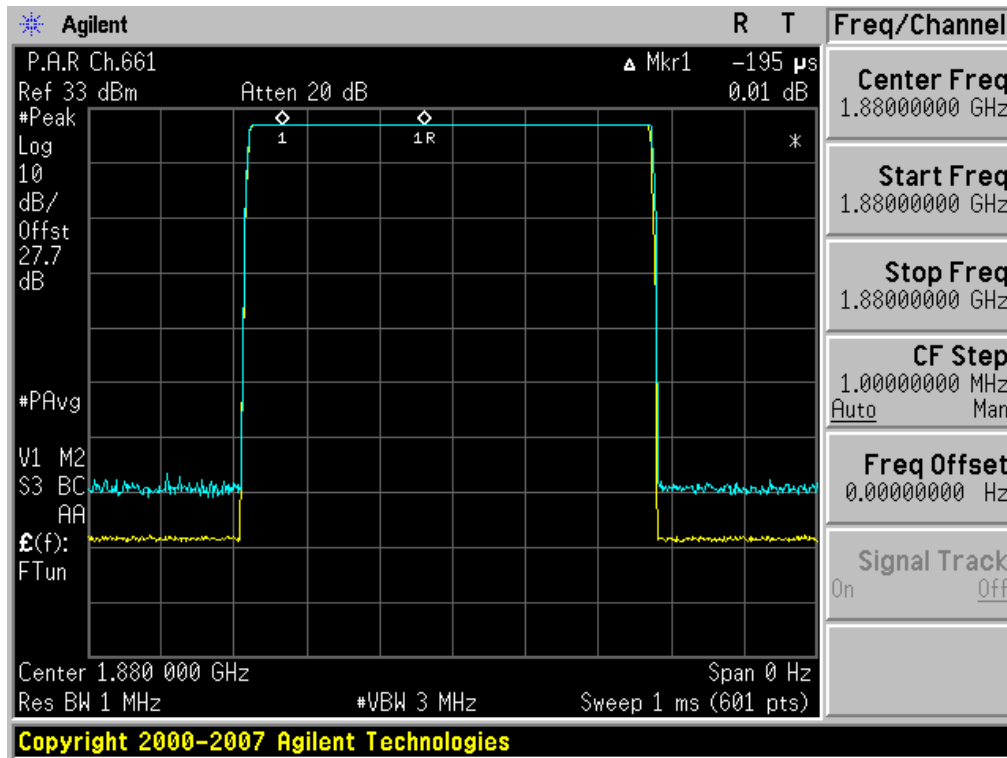


■ WCDMA1900 MODE (9262 CH.) Occupied Bandwidth

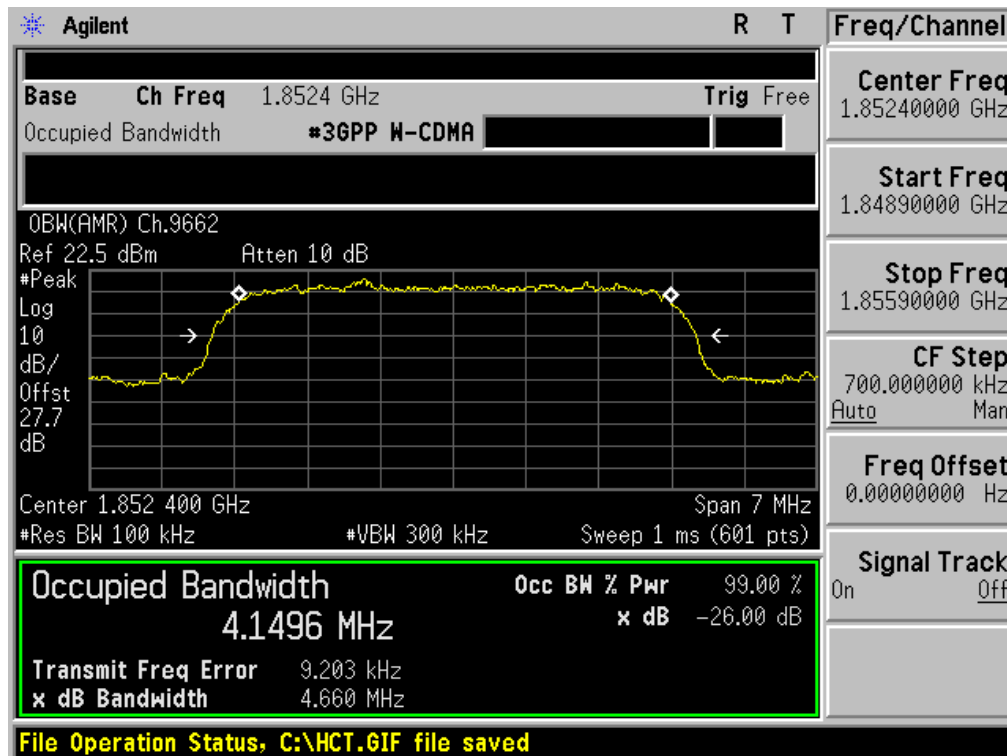


FCC CERTIFICATION REPORT

Test Report No. HCTR1304FR29-1	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	www.hct.co.kr FCC ID: ZNFE450J
-----------------------------------	--------------------------------	--	---

■ WCDMA1900 MODE (9400 CH.) Occupied Bandwidth

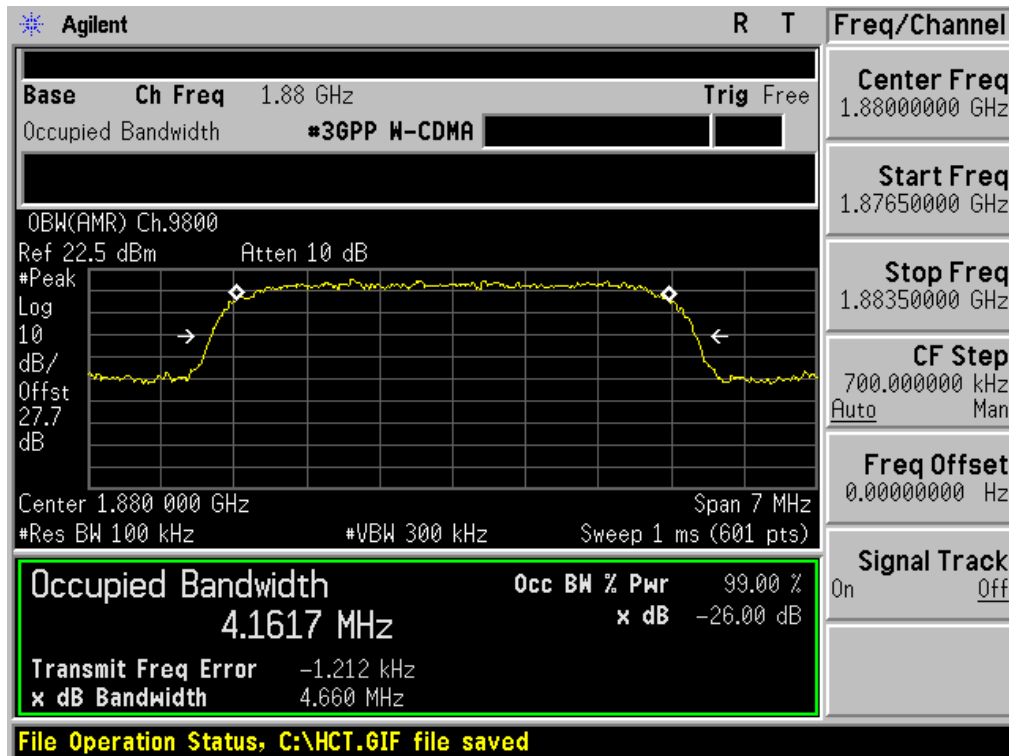

■ WCDMA1900 MODE (9538 CH.) Occupied Bandwidth

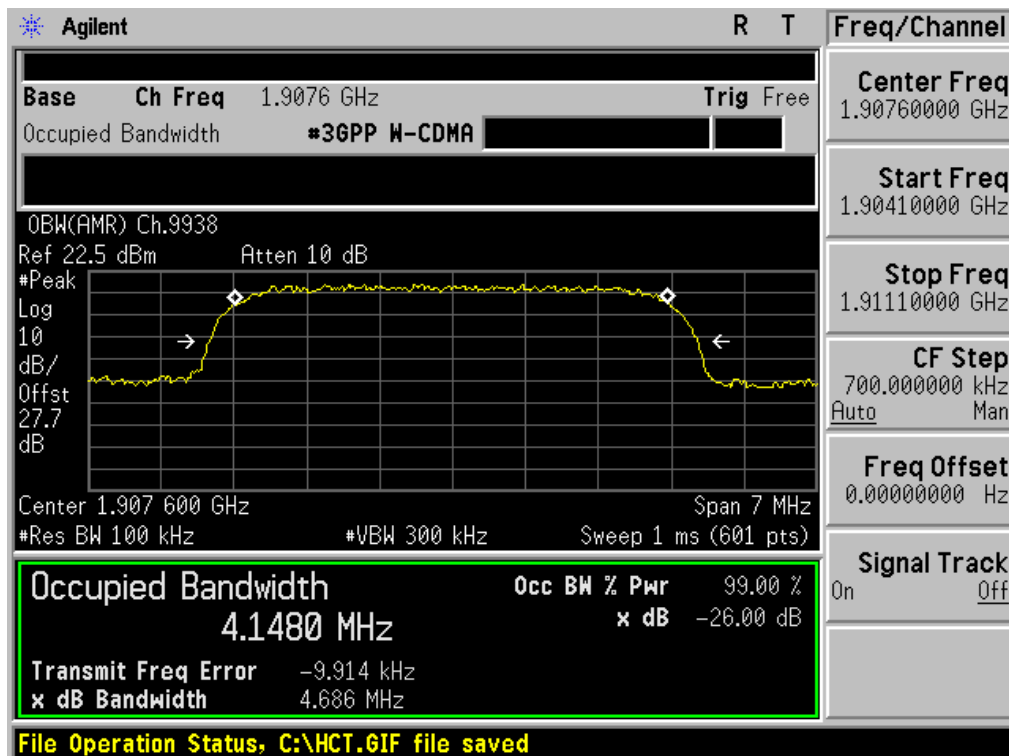

FCC CERTIFICATION REPORT

www.hct.co.kr


Test Report No.
HCTR1304FR29-1

Date of Issue:
May 06, 2013


EUT Type:
GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n

FCC ID:
ZNFE450J

■ WCDMA1900 MODE (9400 CH.) Peak-to-Average Ratio

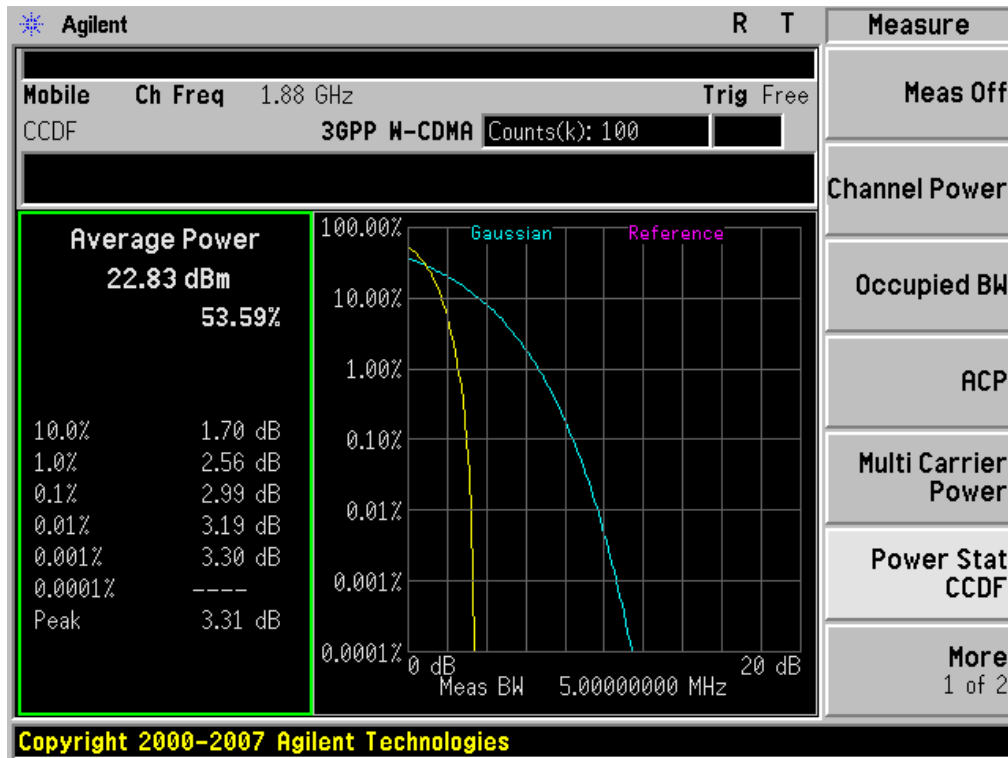


■ GSM850 MODE (128 CH.) Block Edge 1

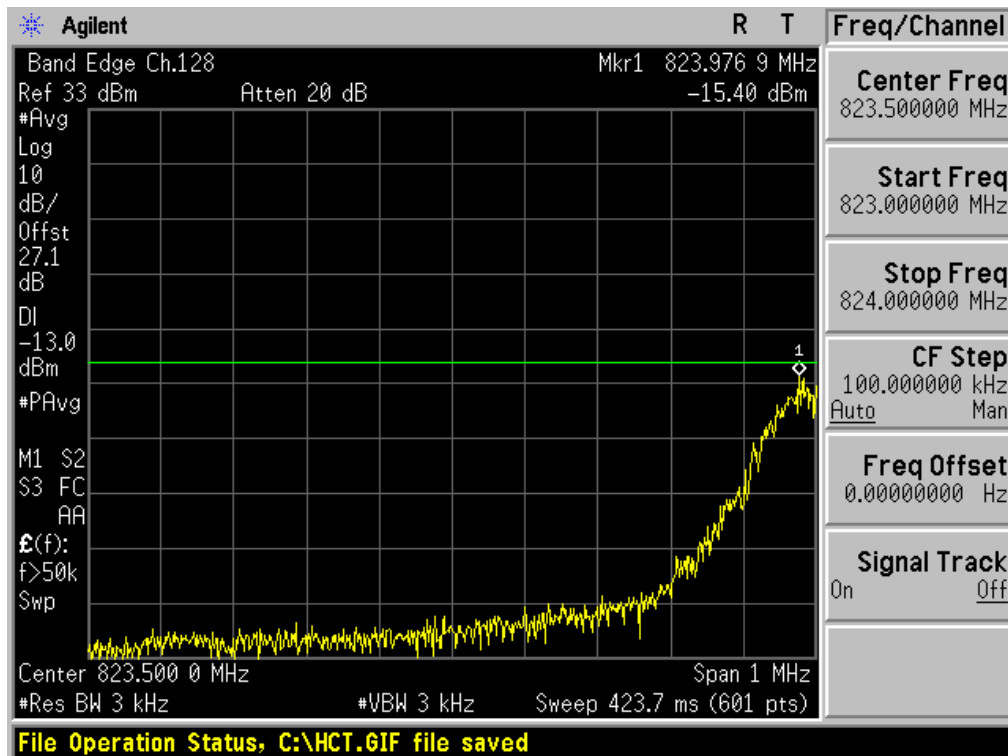


FCC CERTIFICATION REPORT

Test Report No. HCTR1304FR29-1	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	www.hct.co.kr FCC ID: ZNFE450J
-----------------------------------	--------------------------------	--	---

■ GSM850 MODE (128 CH.) Block Edge 2

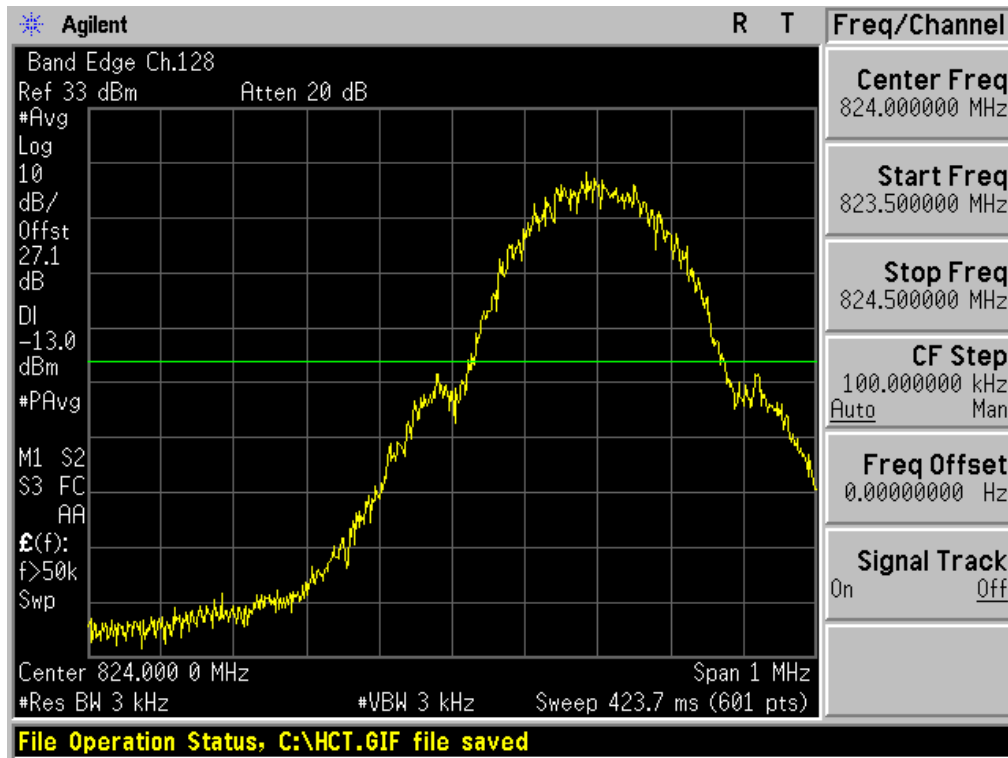

■ GSM850 MODE (251 CH.) Block Edge 1

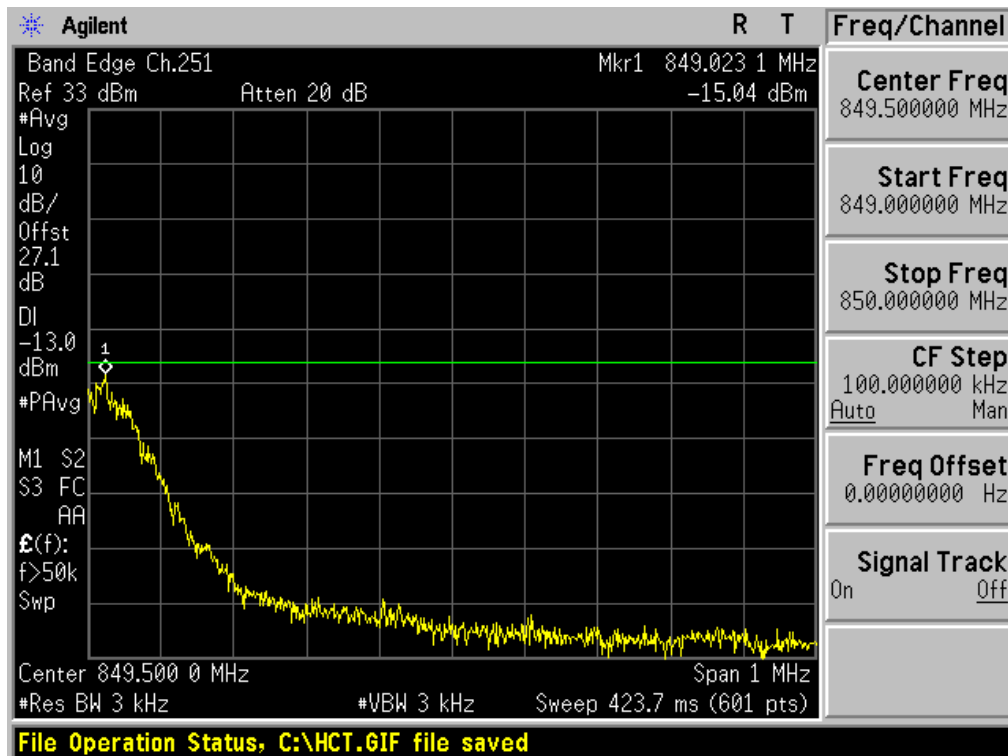

FCC CERTIFICATION REPORT

www.hct.co.kr


Test Report No.
HCTR1304FR29-1

Date of Issue:
May 06, 2013


EUT Type:
GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n

FCC ID:
ZNFE450J

■ GSM850 MODE (251 CH.) Block Edge 2

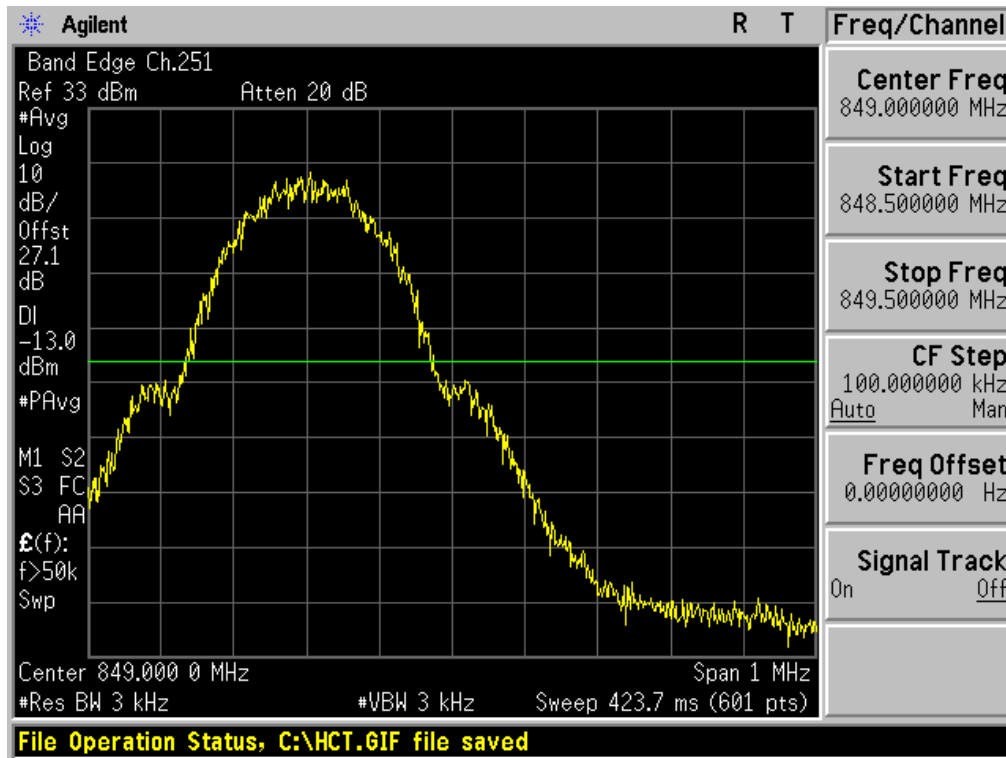

■ GSM1900 MODE (512 CH.) Block Edge 1

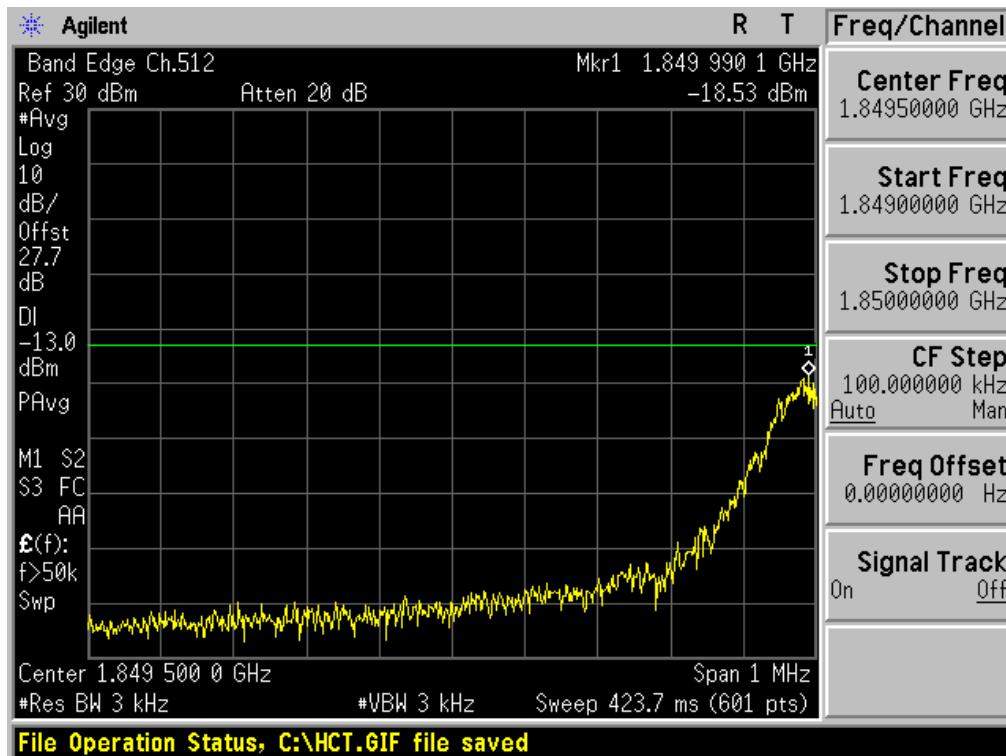

FCC CERTIFICATION REPORT

www.hct.co.kr


Test Report No.
HCTR1304FR29-1

Date of Issue:
May 06, 2013


EUT Type:
GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n

FCC ID:
ZNFE450J

■ GSM1900 MODE (512 CH.) Block Edge 2

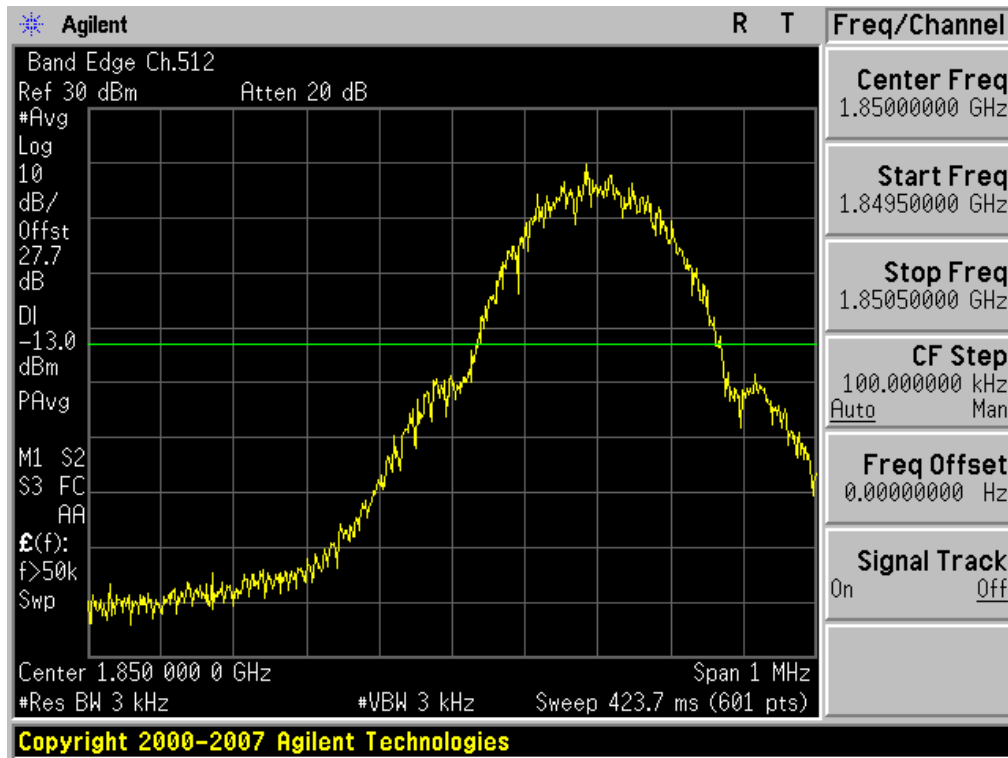

■ GSM1900 MODE (810 CH.) Block Edge 1

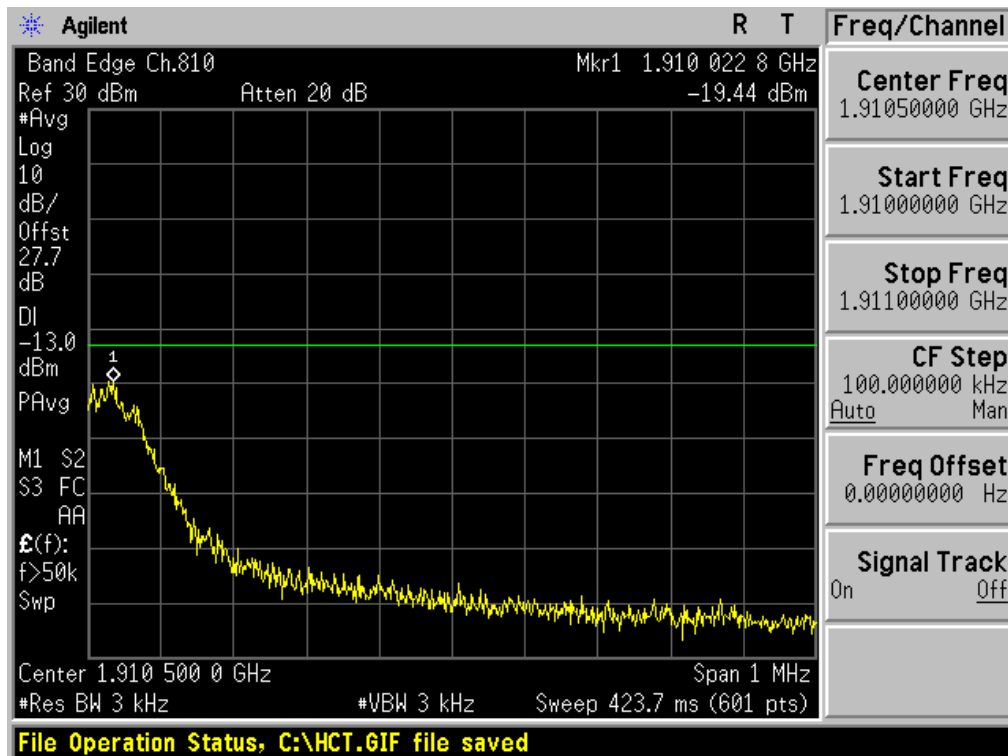

FCC CERTIFICATION REPORT

www.hct.co.kr


Test Report No.
HCTR1304FR29-1

Date of Issue:
May 06, 2013


EUT Type:
GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n

FCC ID:
ZNFE450J

■ GSM1900 MODE (810 CH.) Block Edge 2

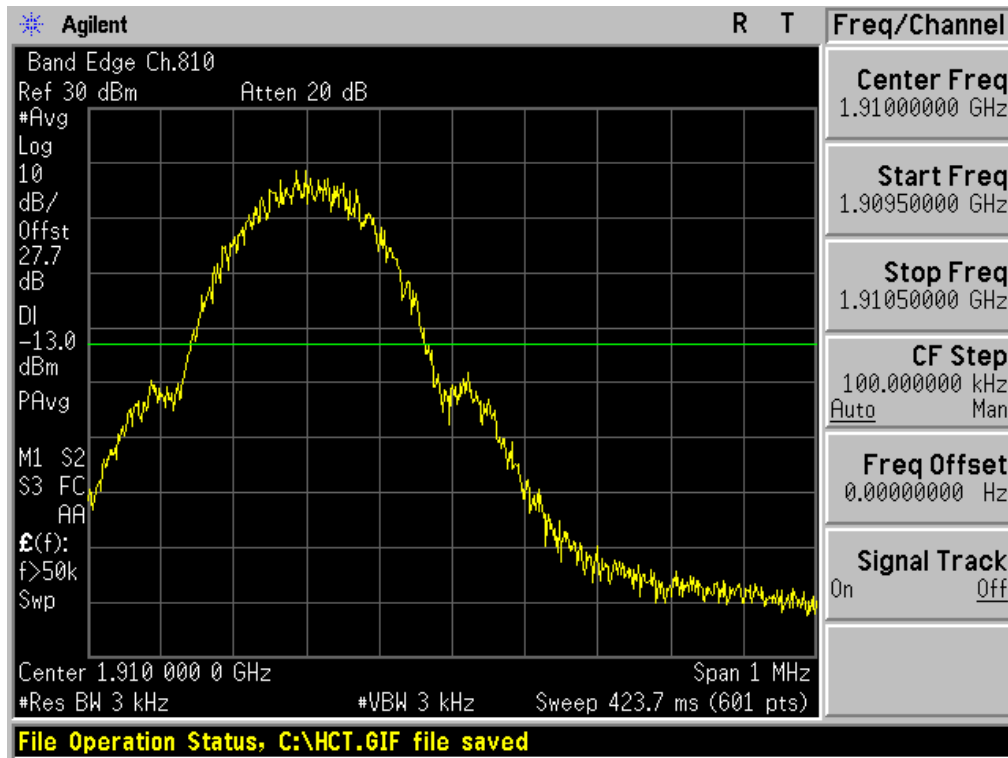

■ WCDMA1900 MODE (9262 CH.) Block Edge

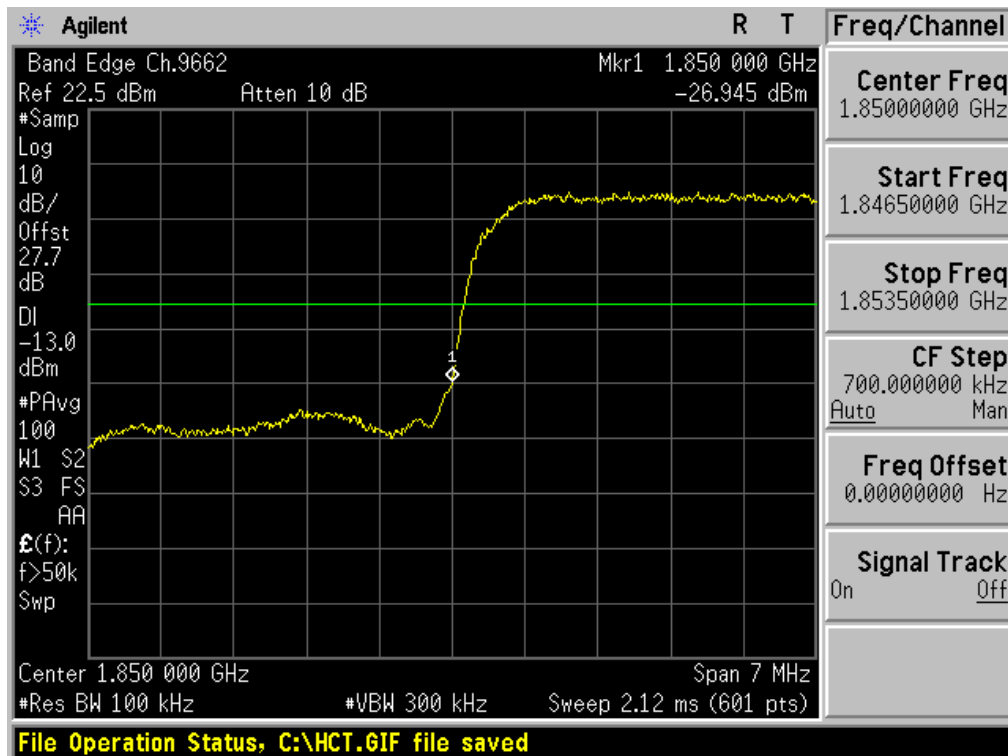

FCC CERTIFICATION REPORT

www.hct.co.kr


Test Report No.
HCTR1304FR29-1

Date of Issue:
May 06, 2013


EUT Type:
GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n

FCC ID:
ZNFE450J

■ WCDMA1900 MODE (9538 CH.) Block Edge

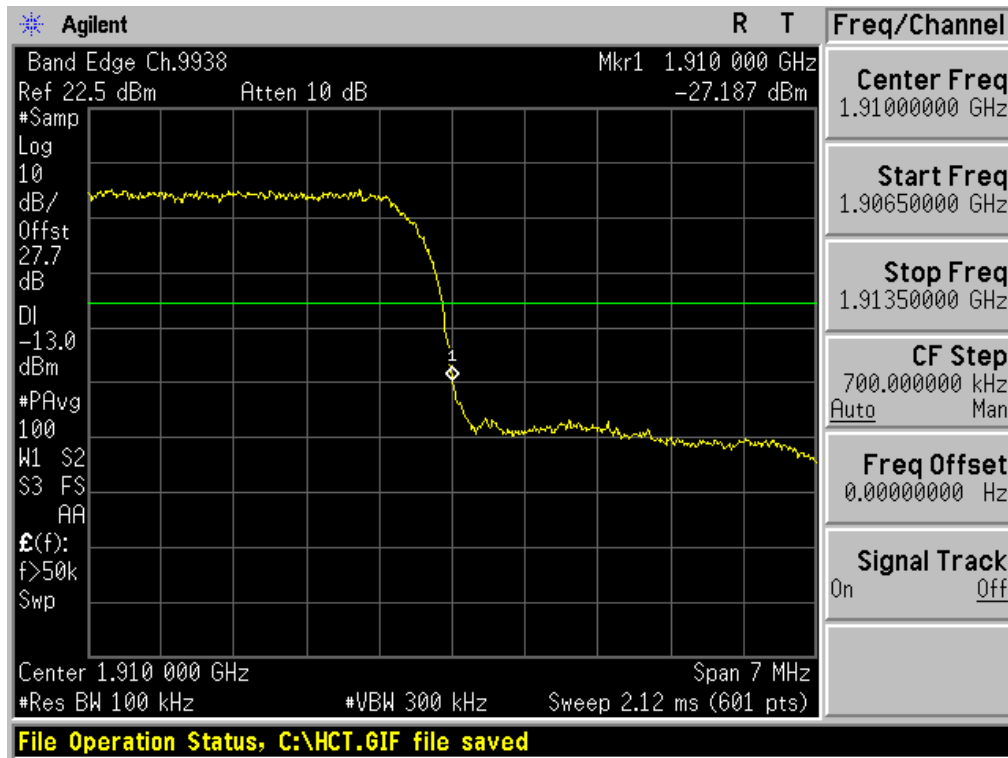

■ WCDMA1900 MODE (9262 CH.) – 4 MHz Span

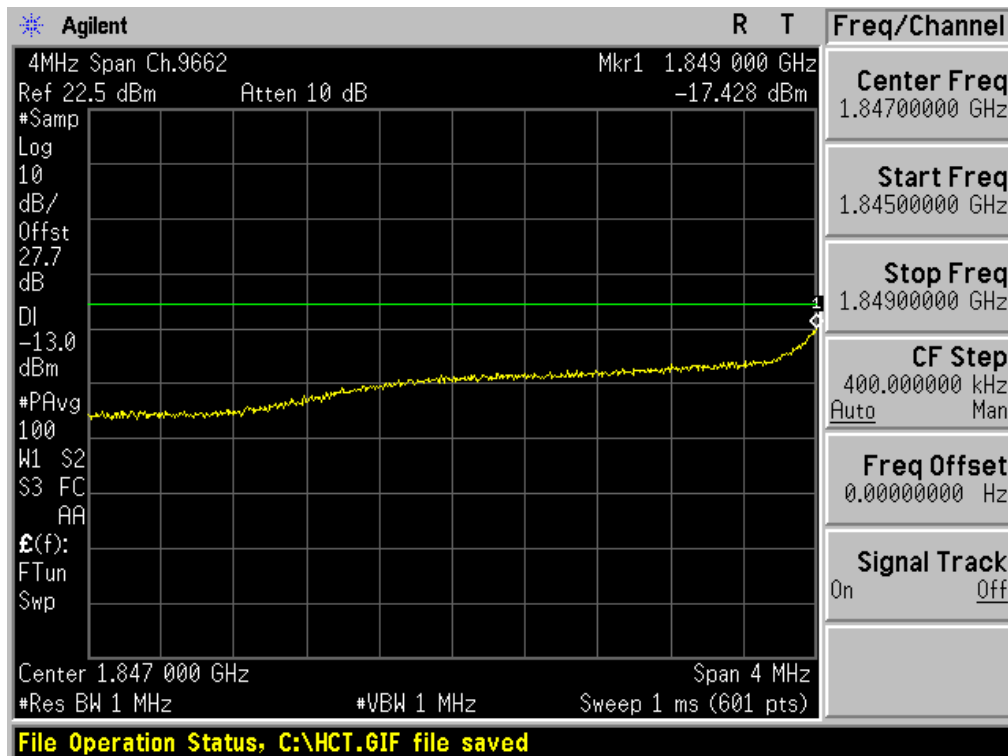

FCC CERTIFICATION REPORT

www.hct.co.kr


Test Report No.
HCTR1304FR29-1

Date of Issue:
May 06, 2013


EUT Type:
GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n

FCC ID:
ZNFE450J

■ WCDMA1900 MODE (9538 CH.) – 4 MHz Span

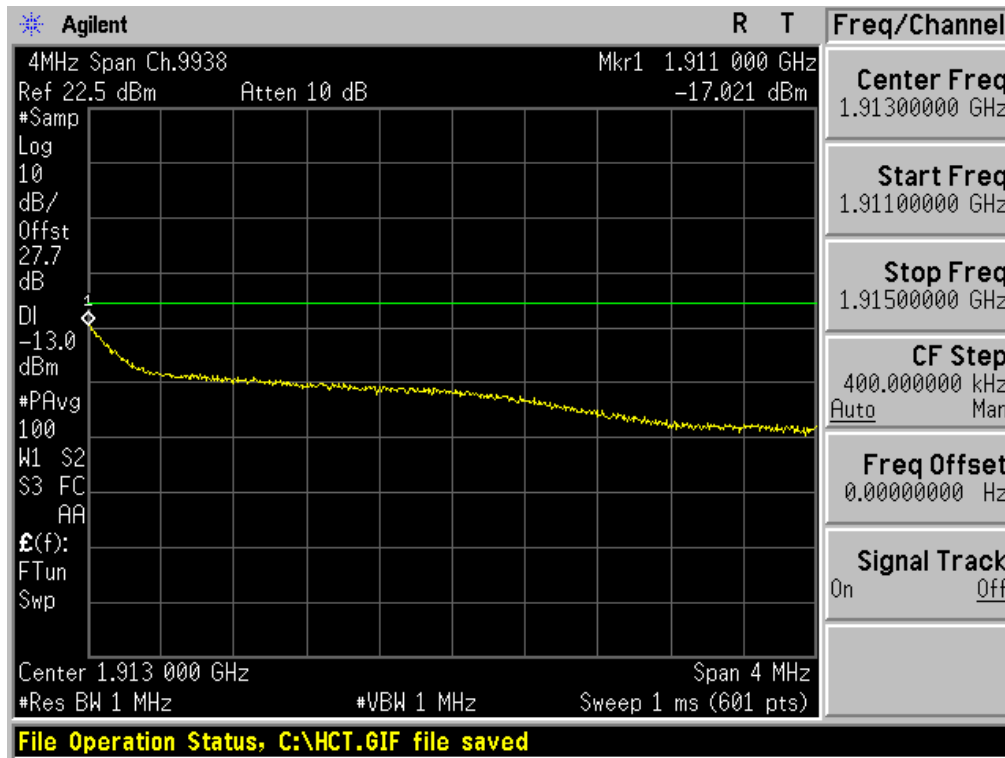

■ GSM850 MODE (128 CH.) Conducted Spurious Emissions1

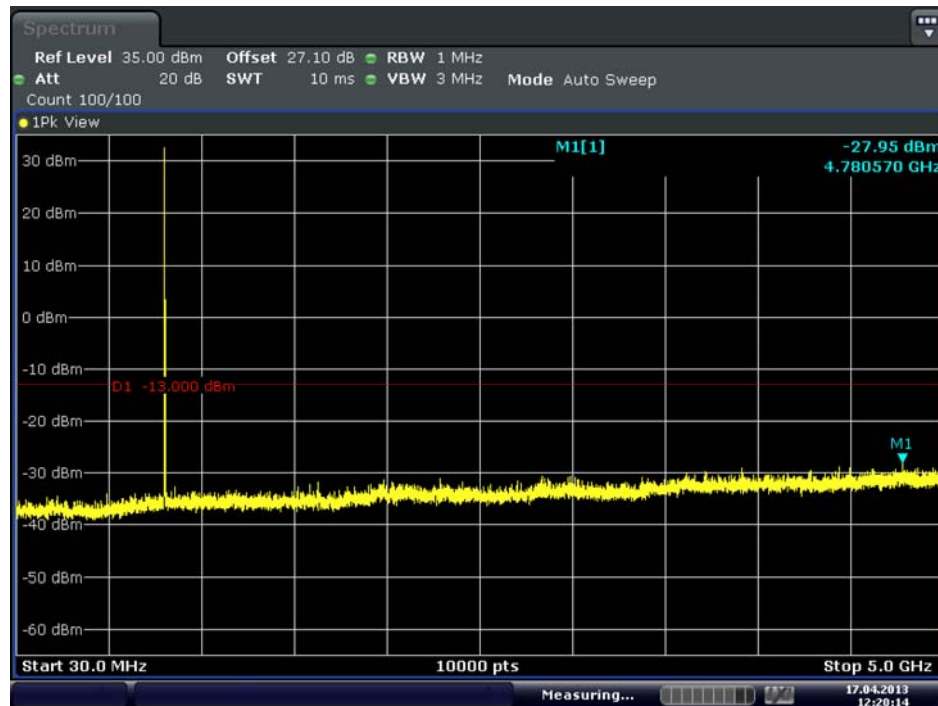

Date: 17.APR.2013 12:20:14

FCC CERTIFICATION REPORT

www.hct.co.kr


Test Report No.
HCTR1304FR29-1

Date of Issue:
May 06, 2013

EUT Type:
GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n


FCC ID:
ZNFE450J

■ GSM850 MODE (128 CH.) Conducted Spurious Emissions2

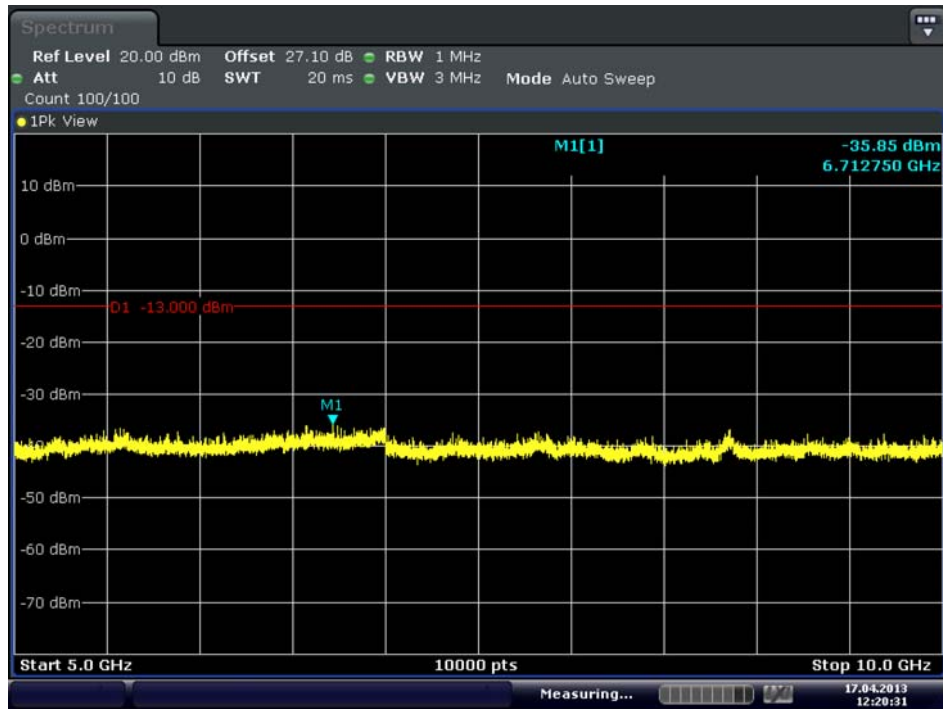

Date: 17.APR.2013 12:20:31

■ GSM850 MODE (190 CH.) Conducted Spurious Emissions1

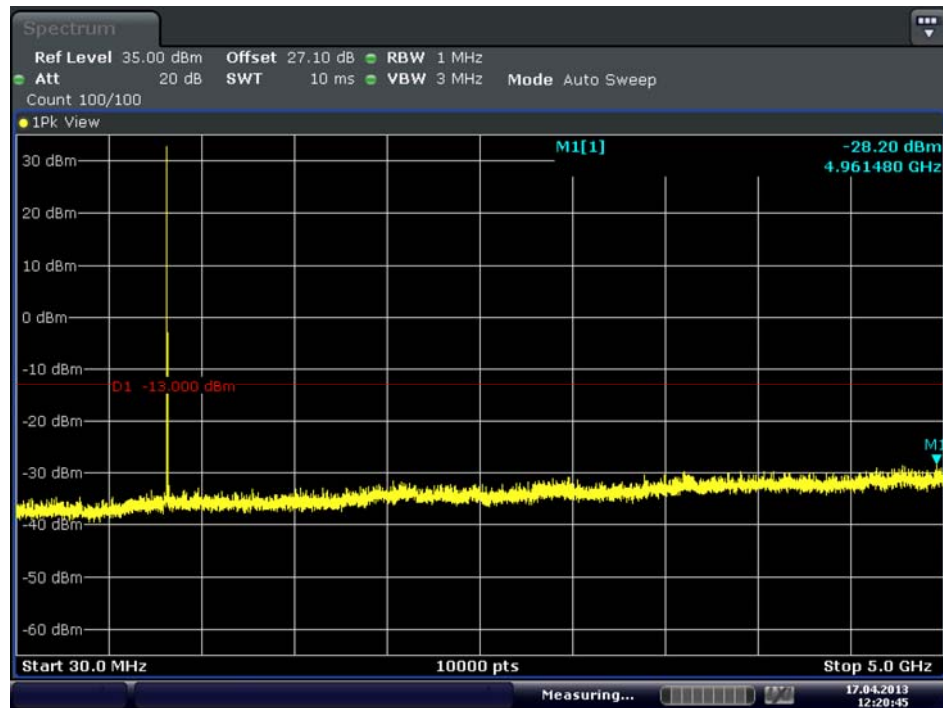

Date: 17.APR.2013 12:20:45

FCC CERTIFICATION REPORT

www.hct.co.kr


Test Report No.
HCTR1304FR29-1

Date of Issue:
May 06, 2013

EUT Type:
GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n


FCC ID:
ZNFE450J

■ GSM850 MODE (190 CH.) Conducted Spurious Emissions2

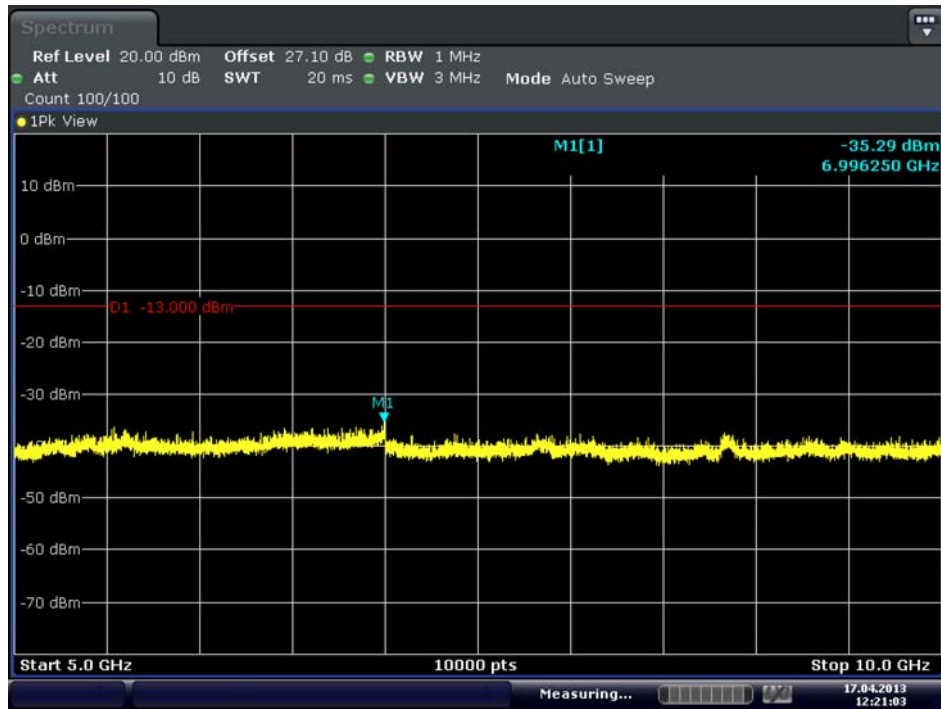

Date: 17.APR.2013 12:21:02

■ GSM850 MODE (251 CH.) Conducted Spurious Emissions1

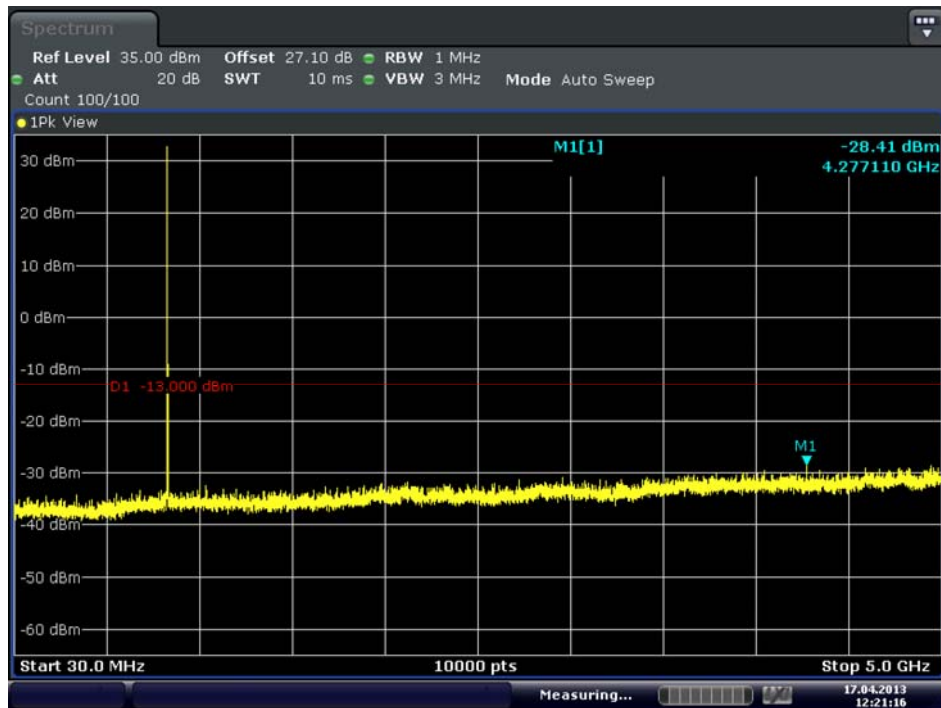

Date: 17.APR.2013 12:21:16

FCC CERTIFICATION REPORT

www.hct.co.kr


Test Report No.
HCTR1304FR29-1

Date of Issue:
May 06, 2013

EUT Type:
GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n


FCC ID:
ZNFE450J

■ GSM850 MODE (251 CH.) Conducted Spurious Emissions2

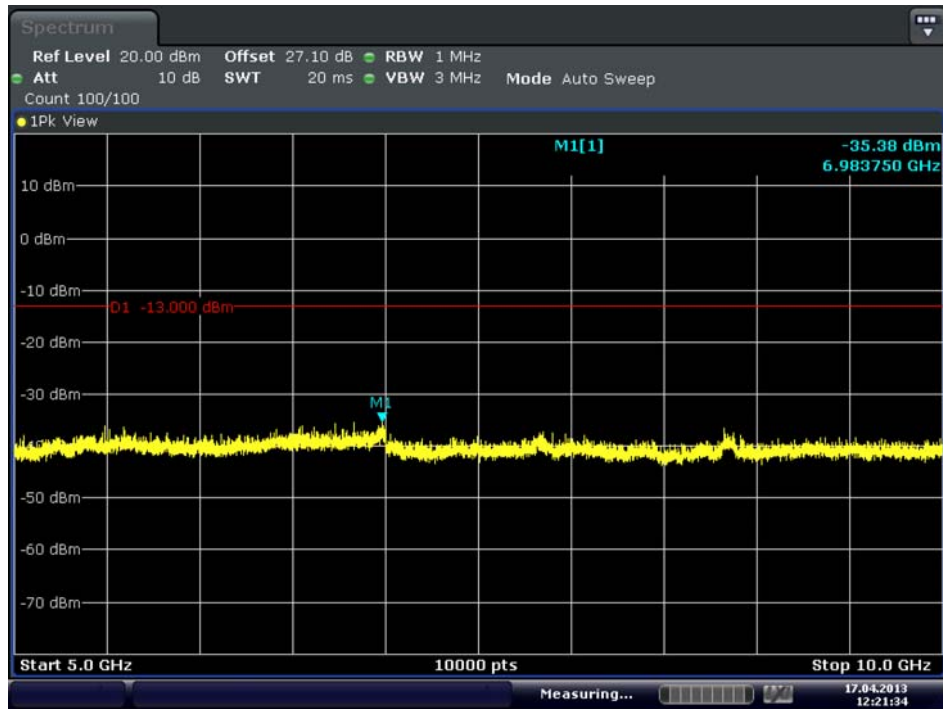

Date: 17.APR.2013 12:21:34

■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions1

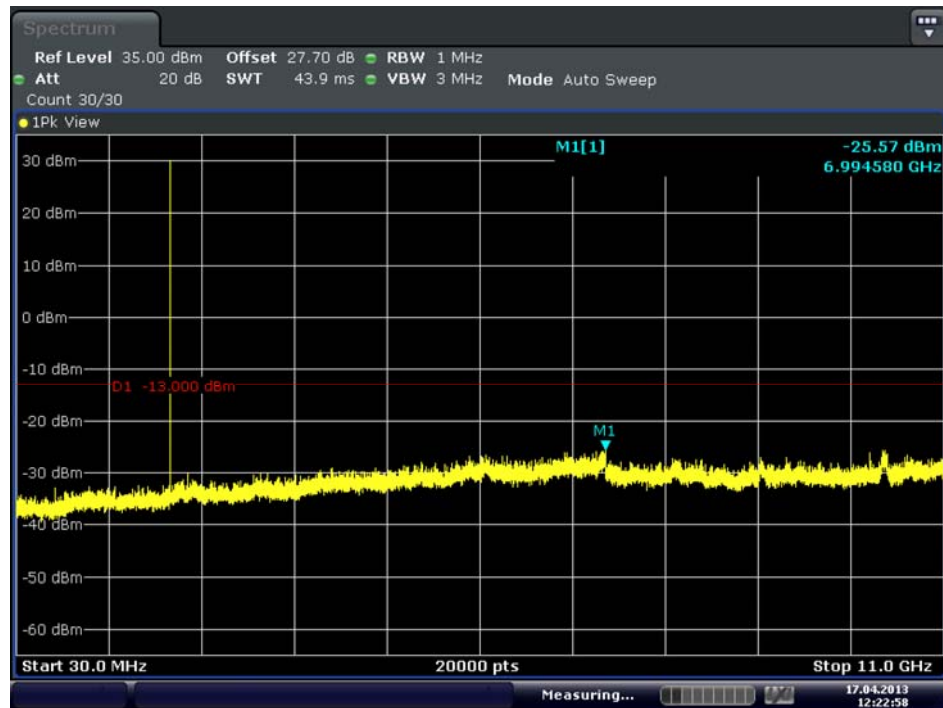

Date: 17.APR.2013 12:22:58

FCC CERTIFICATION REPORT

www.hct.co.kr


Test Report No.
HCTR1304FR29-1

Date of Issue:
May 06, 2013

EUT Type:
GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n


FCC ID:
ZNFE450J

■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions2

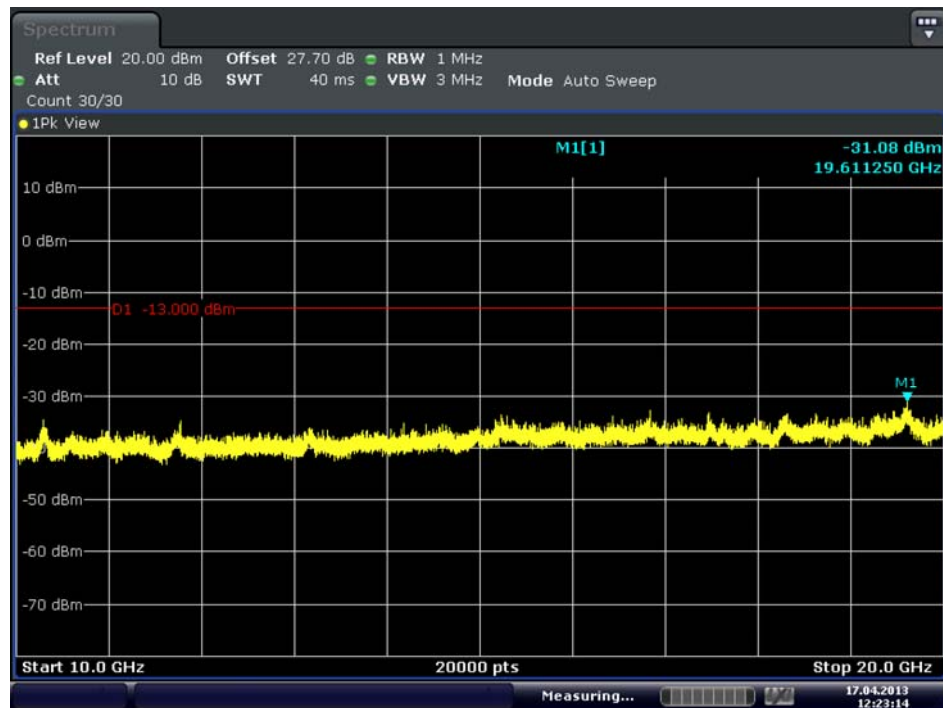

Date: 17.APR.2013 12:23:13

■ GSM1900 MODE (661 CH) Conducted Spurious Emissions1

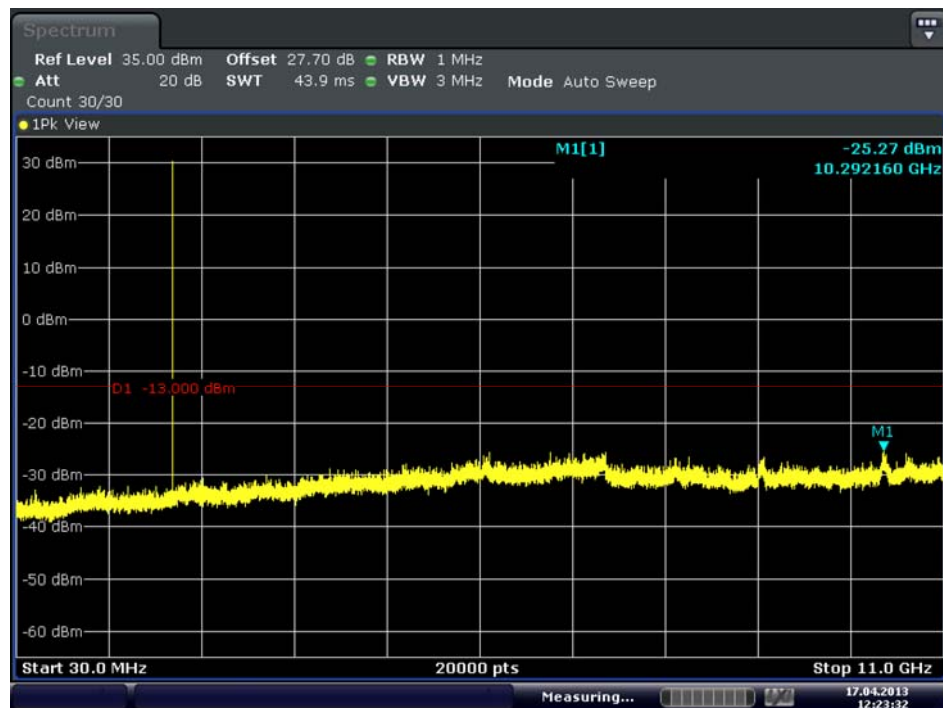

Date: 17.APR.2013 12:23:32

FCC CERTIFICATION REPORT

www.hct.co.kr


Test Report No.
HCTR1304FR29-1

Date of Issue:
May 06, 2013

EUT Type:
GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n


FCC ID:
ZNFE450J

■ GSM1900 MODE (661 CH.) Conducted Spurious Emissions2

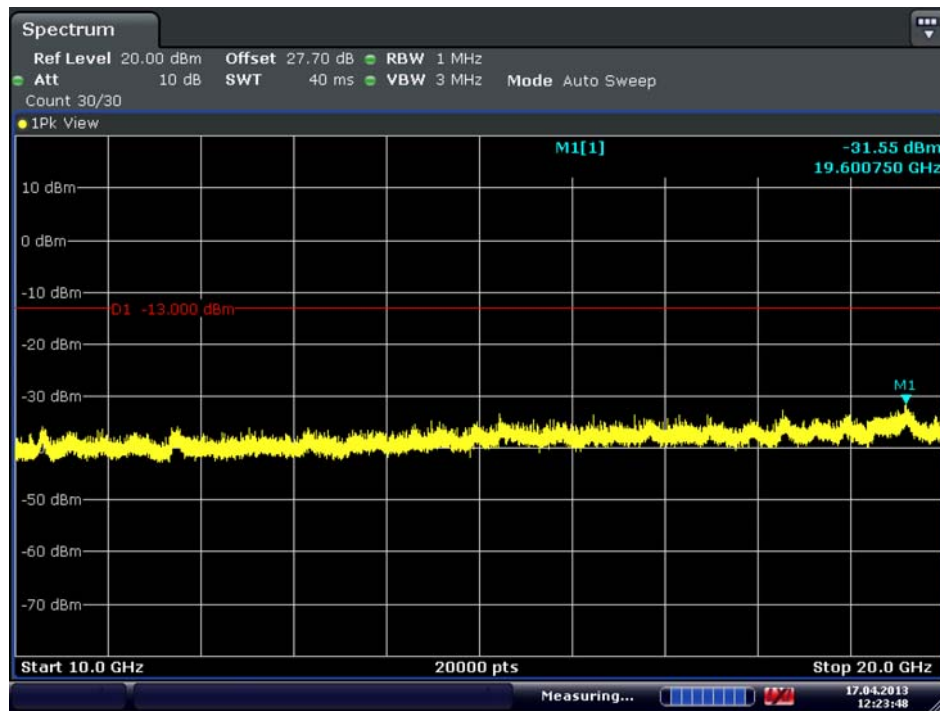

Date: 17.APR.2013 12:23:48

■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions1

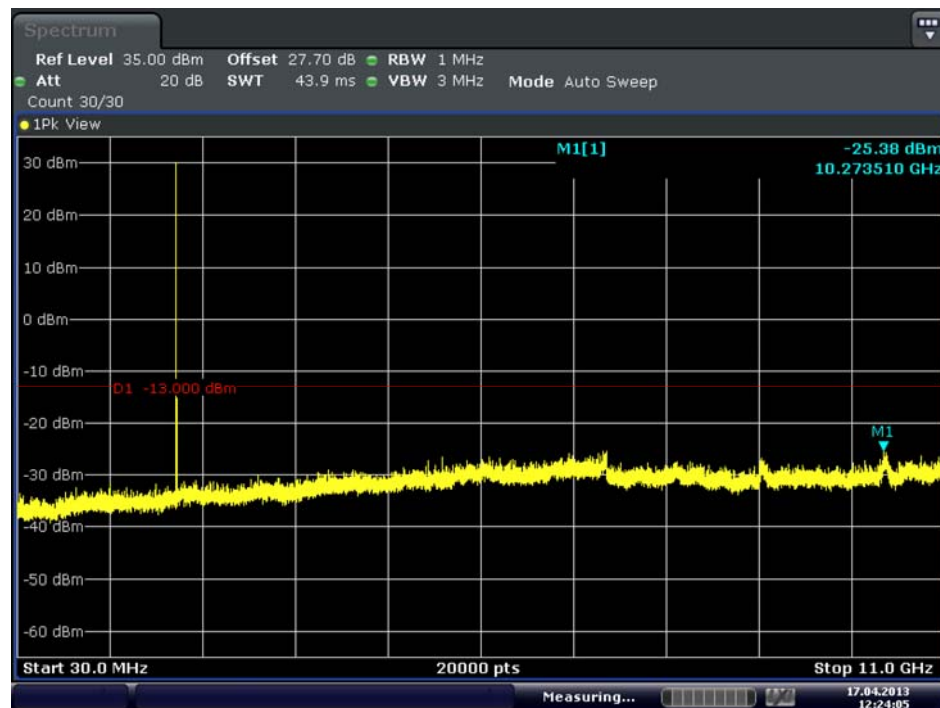

Date: 17.APR.2013 12:24:05

FCC CERTIFICATION REPORT

www.hct.co.kr


Test Report No.
HCTR1304FR29-1

Date of Issue:
May 06, 2013

EUT Type:
GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n


FCC ID:
ZNFE450J

■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions2

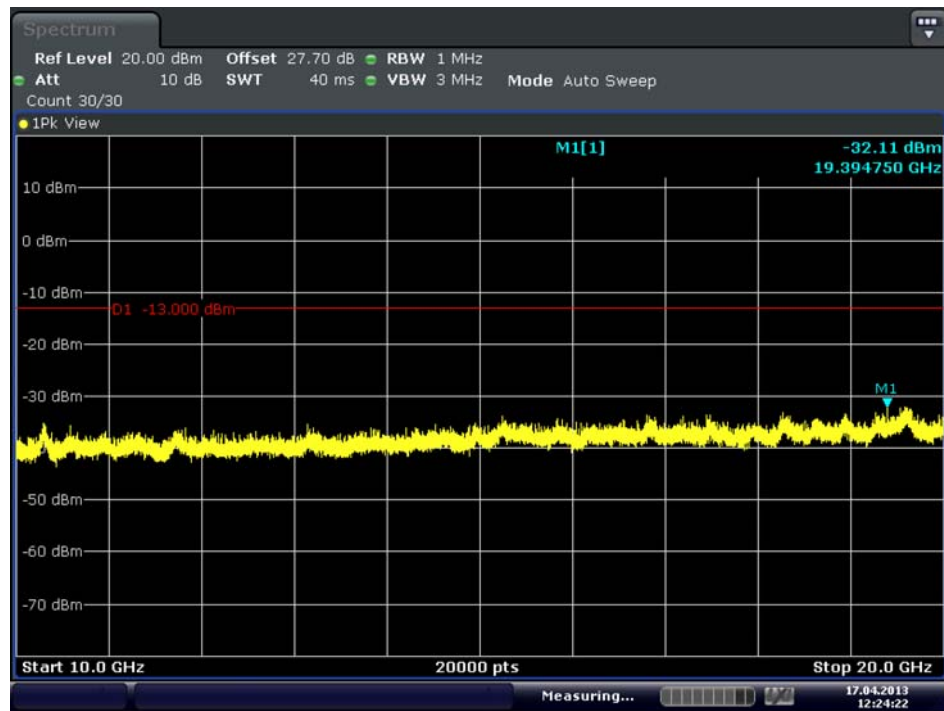

Date: 17.APR.2013 12:24:22

■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions1

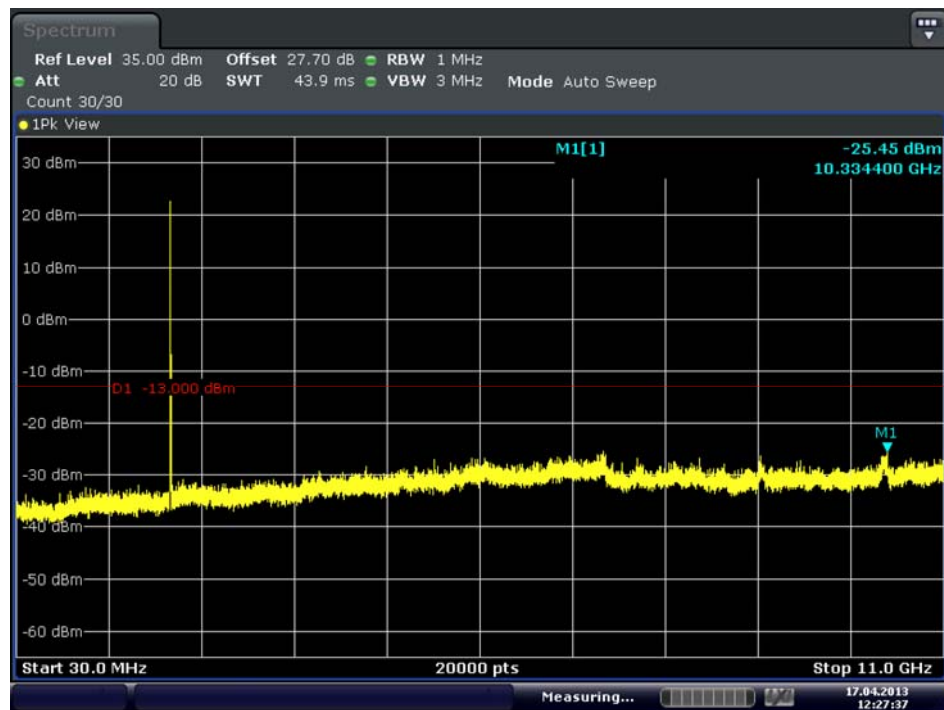

Date: 17.APR.2013 12:27:37

FCC CERTIFICATION REPORT

www.hct.co.kr


Test Report No.
HCTR1304FR29-1

Date of Issue:
May 06, 2013

EUT Type:
GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n


FCC ID:
ZNFE450J

■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions2

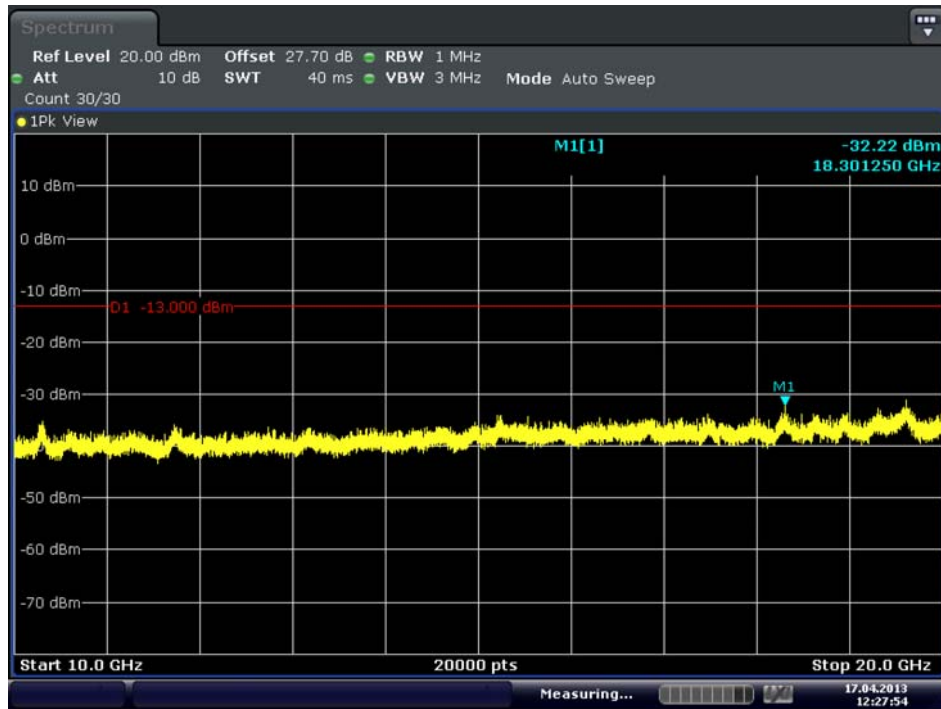

Date: 17.APR.2013 12:27:53

■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions1

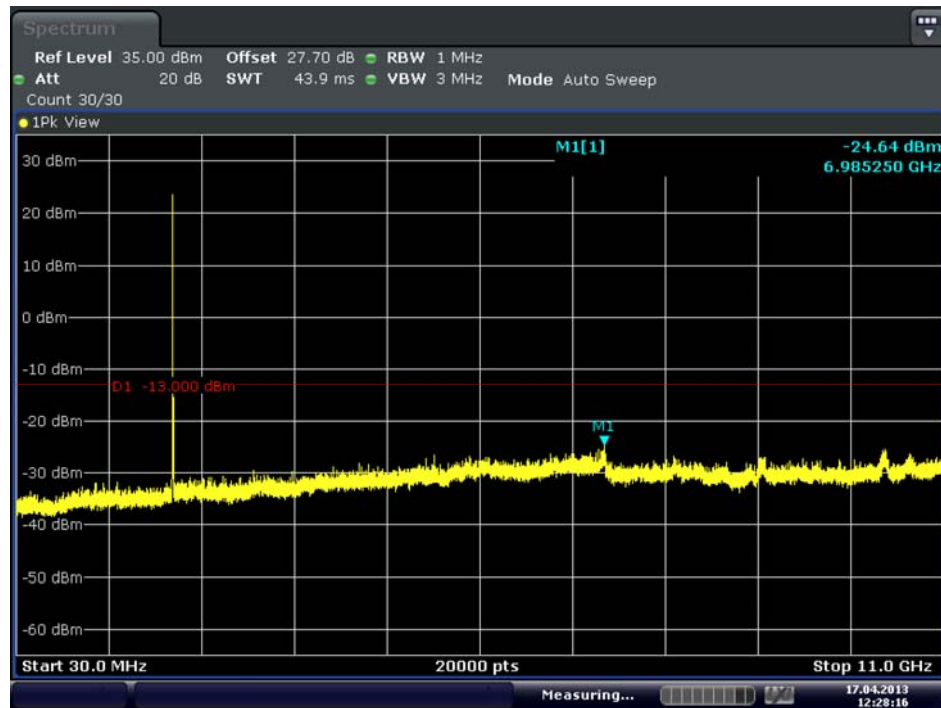

Date: 17.APR.2013 12:28:15

FCC CERTIFICATION REPORT

www.hct.co.kr


Test Report No.
HCTR1304FR29-1

Date of Issue:
May 06, 2013

EUT Type:
GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n


FCC ID:
ZNFE450J

■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions2

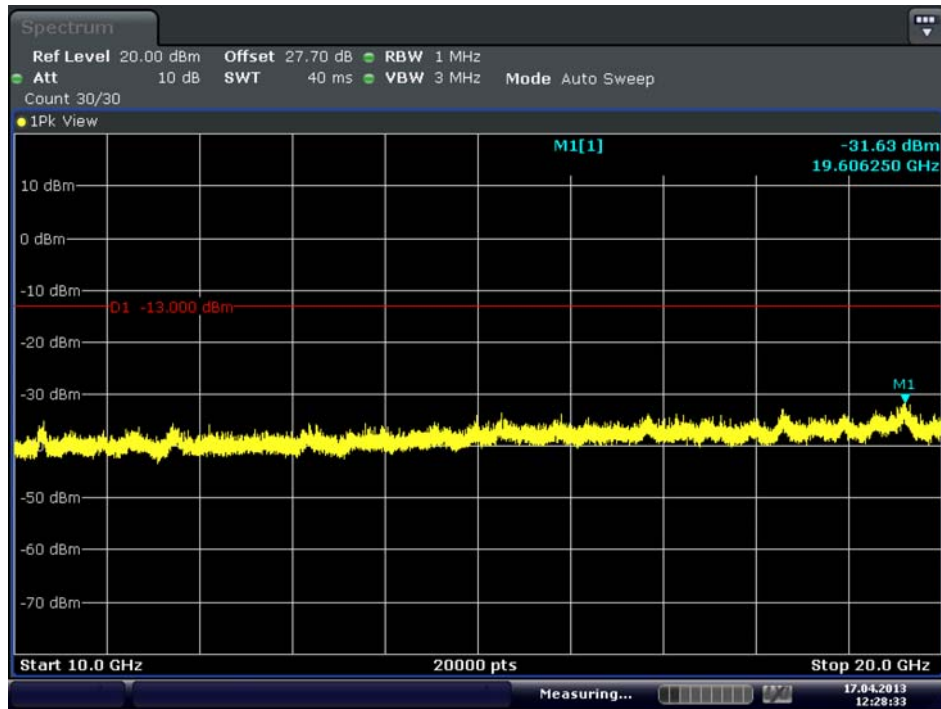

Date: 17.APR.2013 12:28:33

■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions1

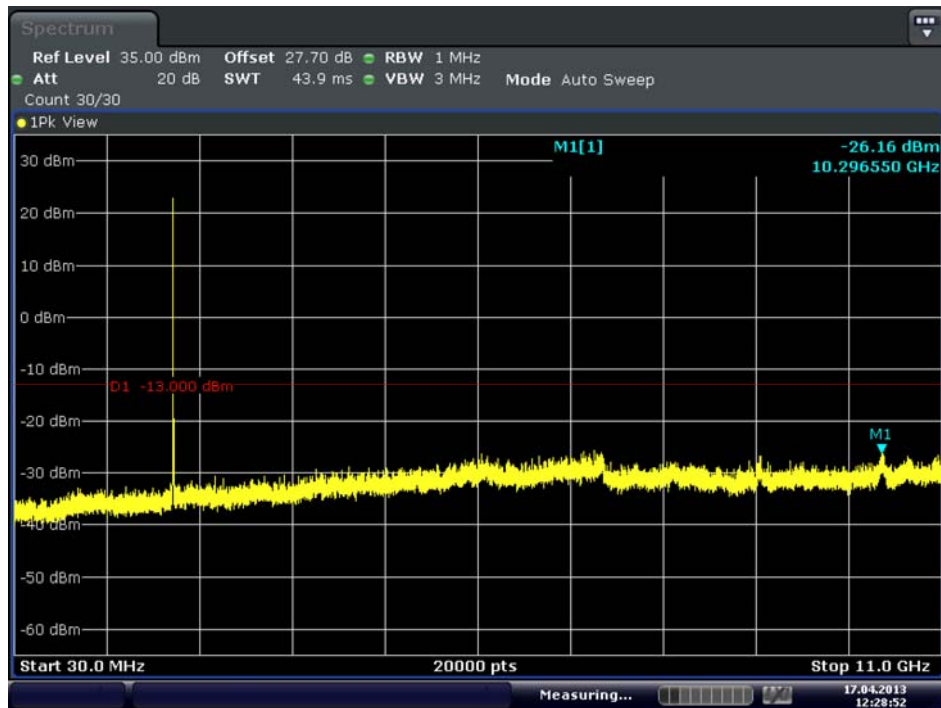

Date: 17.APR.2013 12:28:52

FCC CERTIFICATION REPORT

www.hct.co.kr


Test Report No.
HCTR1304FR29-1

Date of Issue:
May 06, 2013

EUT Type:
GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n

FCC ID:
ZNFE450J

■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions2

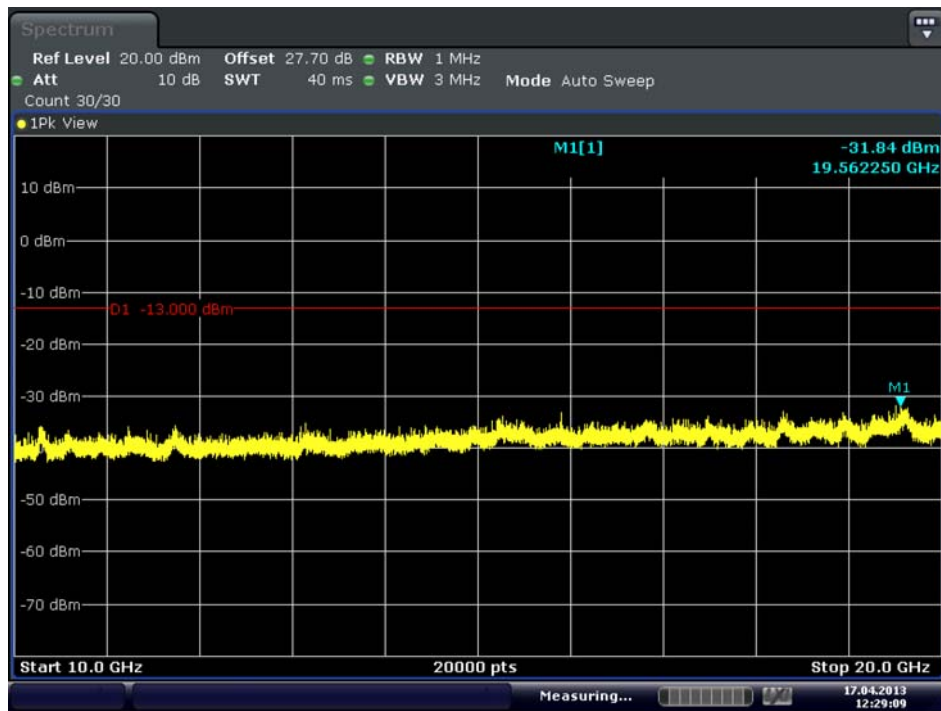

Date: 17.APR.2013 12:29:09

FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No.
HCTR1304FR29-1

Date of Issue:
May 06, 2013

EUT Type:
GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n

FCC ID:
ZNFE450J