



MEASUREMENT REPORT GSM / GPRS / EDGE / WCDMA

Applicant Name:

LG Electronics USA, Inc.
111 Sylvan Avenue, North Building
Englewood Cliffs, NJ 07632
United States

Date of Testing:

6/28 - 8/20/2020

Test Site/Location:

PCTEST Lab. Columbia, MD, USA

Test Report Serial No.:

1M2006150095-02.ZNF

FCC ID:

ZNFF100TM

APPLICANT:

LG Electronics USA, Inc.

Application Type:

Certification

Model:

LM-F100TM

Additional Model(s):

LMF100TM, F100TM

EUT Type:

Portable Handset

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part(s):

22, 24, & 27

Test Procedure(s):

ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01
KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President




FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 1 of 110

TABLE OF CONTENTS


1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration	5
2.4	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Evaluation Procedure	6
3.2	Radiated Measurements	6
4.0	MEASUREMENT UNCERTAINTY	7
5.0	TEST EQUIPMENT CALIBRATION DATA	8
6.0	SAMPLE CALCULATIONS	9
7.0	TEST RESULTS.....	10
7.1	Summary.....	10
7.2	Occupied Bandwidth	11
7.3	Spurious and Harmonic Emissions at Antenna Terminal	17
7.4	Band Edge Emissions at Antenna Terminal	53
7.5	Peak-Average Ratio	67
7.6	Radiated Power (ERP/EIRP).....	71
7.7	Radiated Spurious Emissions Measurements.....	77
7.8	Frequency Stability / Temperature Variation	95
8.0	CONCLUSION.....	110

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 2 of 110



MEASUREMENT REPORT

GSM / GPRS / EDGE / WCDMA



Mode	FCC Rule Part	Tx Frequency (MHz)	ERP		EIRP		Emission Designator
			Max. Power (W)	Max. Power (dBm)	Max. Power (W)	Max. Power (dBm)	
GPRS850	22H	824.2 - 848.8	0.354	25.49	0.580	27.64	246KGXW
EDGE850	22H	824.2 - 848.8	0.121	20.85	0.199	23.00	243KG7W
CDMA850	22H	824.70 - 848.31	0.053	17.26	0.087	19.41	1M28F9W
WCDMA850	22H	826.4 - 846.6	0.040	16.06	0.066	18.21	4M17F9W
WCDMA1700	27	1712.4 - 1752.6			0.160	22.05	4M16F9W
GPRS1900	24E	1850.2 - 1909.8			1.039	30.17	241KGXW
EDGE1900	24E	1850.2 - 1909.8			0.365	25.63	241KG7W
CDMA1900	24E	1851.25 - 1908.75			0.243	23.85	1M28F9W
WCDMA1900	24E	1852.4 - 1907.6			0.142	21.52	4M16F9W

EUT Overview

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 3 of 110

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISSED.

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 4 of 110

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFF100TM**. The test data contained in this report pertains only to the emissions due to the EUT's 2G/3G licensed transmitters.

Test Device Serial No.: 00227, 00219, 00151

2.2 Device Capabilities

This device contains the following capabilities:

800/850/1900 CDMA/EvDO Rev0/A, 1x Advanced (BC0, BC1, BC10), 850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, Multi-Band 5G NR, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

The EUT is capable of operating in screen closed and screen open configurations. The worst-case configuration for radiated emissions was determined from open and closed configurations in X, Y, and Z orientations for horizontal and vertical antenna polarizations. The worst case radiated emissions data is shown in this report. Additionally, the EUT is support a camera that mechanically pops up from the device. The worst case configuration was investigated with the camera down and popped up and worst case radiated data is reported herein.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 5 of 110

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Measurements

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [\text{dBm}] = P_g [\text{dBm}] - \text{cable loss} [\text{dB}] + \text{antenna gain} [\text{dBd/dBi}]$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g [\text{dBm}] - \text{cable loss} [\text{dB}]$.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-E-2016.

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 6 of 110

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: ZNFF100TM	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset	Page 7 of 110

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTX2	Licensed Transmitter Cable Set	4/9/2020	Annual	4/9/2021	LTX2
-	LTX3	Licensed Transmitter Cable Set	10/30/2019	Annual	10/30/2020	LTX3
-	LTX5	Licensed Transmitter Cable Set	4/9/2020	Annual	4/9/2021	LTX5
Agilent	8648D	(9kHz-4GHz) Signal Generator	6/23/2020	Annual	6/23/2021	3613A00315
Anritsu	MT8821C	Radio Communication Analyzer	3/10/2020	Annual	3/10/2021	6200901190
Anritsu	MS46322A	Vector Network Analyzer	8/19/2019	Annual	8/19/2020	1521001
Anritsu	MT8821C	Radio Communication Analyzer	6/15/2020	Annual	6/15/2021	6201381794
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2019	Biennial	10/10/2021	121034
Emco	3115	Horn Antenna (1-18GHz)	6/18/2020	Biennial	6/18/2022	9704-5182
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	2/14/2019	Biennial	2/14/2021	125518
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	3/12/2020	Biennial	3/12/2022	128337
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	2/22/2019	Biennial	2/22/2021	128338
ETS-Lindgren	3115	Double Ridged Guide Horn 750MHz - 18GHz	3/12/2020	Biennial	3/12/2022	150693
Mini Circuits	TVA-11-422	RF Power Amp	N/A			QA1317001
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11208010032
Rohde & Schwarz	CMU200	Base Station Simulator	N/A			107826
Rohde & Schwarz	CMW500	Radio Communication Tester	8/26/2019	Annual	8/26/2020	100976
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	11/1/2019	Annual	11/1/2020	100040
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	7/15/2020	Annual	7/15/2021	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	9/23/2019	Annual	9/23/2020	100348
Rohde & Schwarz	TC-TA18	Cross-Pol Antenna 400MHz-18GHz	7/8/2020	Biennial	7/8/2022	101058
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2/10/2020	Annual	2/10/2021	102134
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2/21/2020	Annual	2/21/2021	102133
Sunol	DRH-118	Horn Antenna (1-18GHz)	10/3/2019	Biennial	10/3/2021	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	7/27/2020	Biennial	7/27/2022	A051107
Sunol	DRH-118	Horn Antenna (1-18 GHz)	8/27/2019	Biennial	8/27/2021	A042511

Table 5-1. Test Equipment

Notes:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset	Page 8 of 110	

6.0 SAMPLE CALCULATIONS

GPRS Emission Designator

Emission Designator = 250KGXW

GPRS BW = 250 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 250KG7W

EDGE BW = 250 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

CDMA Emission Designator

Emission Designator = 1M25F9W

CDMA BW = 1.25 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M16F9W

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm - (-24.80) = 50.3 dBc.

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 9 of 110

7.0 TEST RESULTS

7.1 Summary

Company Name: LG Electronics USA, Inc.
 FCC ID: ZNFF100TM
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): GSM / GPRS / EDGE / WCDMA

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	RSS-Gen (4.6.1) RSS-133(2.3) RSS-139(2.3)	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
2.1051 22.917(a) 24.238(a) 27.53(h)	RSS-132(5.5) RSS-133(6.5) RSS-139(6.6)	Conducted Band Edge / Spurious Emissions	$> 43 + 10 \log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions		PASS	Sections 7.3, 7.4
24.232(d)	RSS-132(5.4) RSS-133(6.4) RSS-139(6.5)	Peak-Average Ratio	$< 13 \text{ dB}$		PASS	Section 7.5
2.1046	RSS-132(5.4) RSS-133(4.1) RSS-139(4.1)	Transmitter Conducted Output Power	N/A		PASS	RF Exposure Report
2.1055 22.355 24.235 27.54	RSS-132(5.3) RSS-133(6.3) RSS-139(6.4)	Frequency Stability	$< 2.5 \text{ ppm}$ (Part 22) Emission must remain in band (Part 24, 27)		PASS	Section 7.8
22.913(a)(5)	RSS-132(5.4)	Effective Radiated Power	$< 7 \text{ Watts max. ERP}$	RADIATED	PASS	Section 7.6
24.232(c)	RSS-133(6.4)	Equivalent Isotropic Radiated Power	$< 2 \text{ Watts max. EIRP}$		PASS	Section 7.6
27.50(d)(4)	RSS-139(6.5)	Equivalent Isotropic Radiated Power	$< 1 \text{ Watts max. EIRP}$		PASS	Section 7.6
2.1053 22.917(a) 24.238(a) 27.53(h)	RSS-132(5.5) RSS-133(6.5) RSS-139(6.6)	Radiated Spurious Emissions	$> 43 + 10 \log_{10}(P[\text{Watts}])$ for all out-of-band emissions		PASS	Section 7.7

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "2G/3G Automation," Version 4.5.

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 10 of 110

7.2 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 11 of 110



Plot 7-1. Occupied Bandwidth Plot (Cellular GPRS Mode)




Plot 7-2. Occupied Bandwidth Plot (EDGE850 Mode)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 12 of 110




Plot 7-3. Occupied Bandwidth Plot (PCS GPRS Mode)

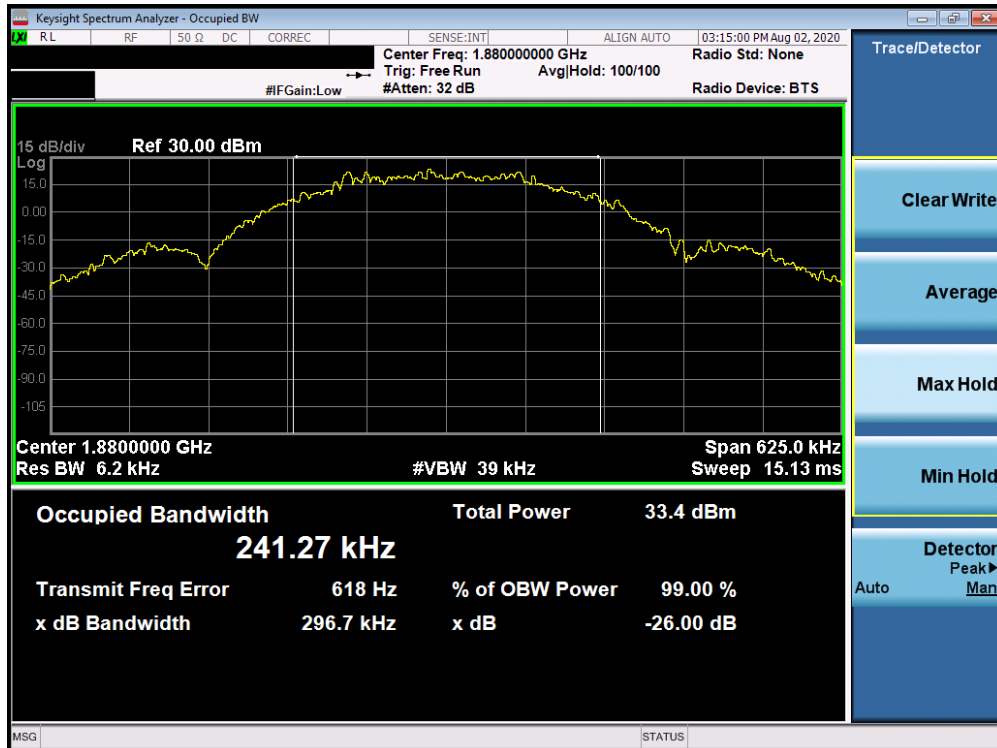


Plot 7-4. Occupied Bandwidth Plot (EDGE1900 Mode)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 13 of 110

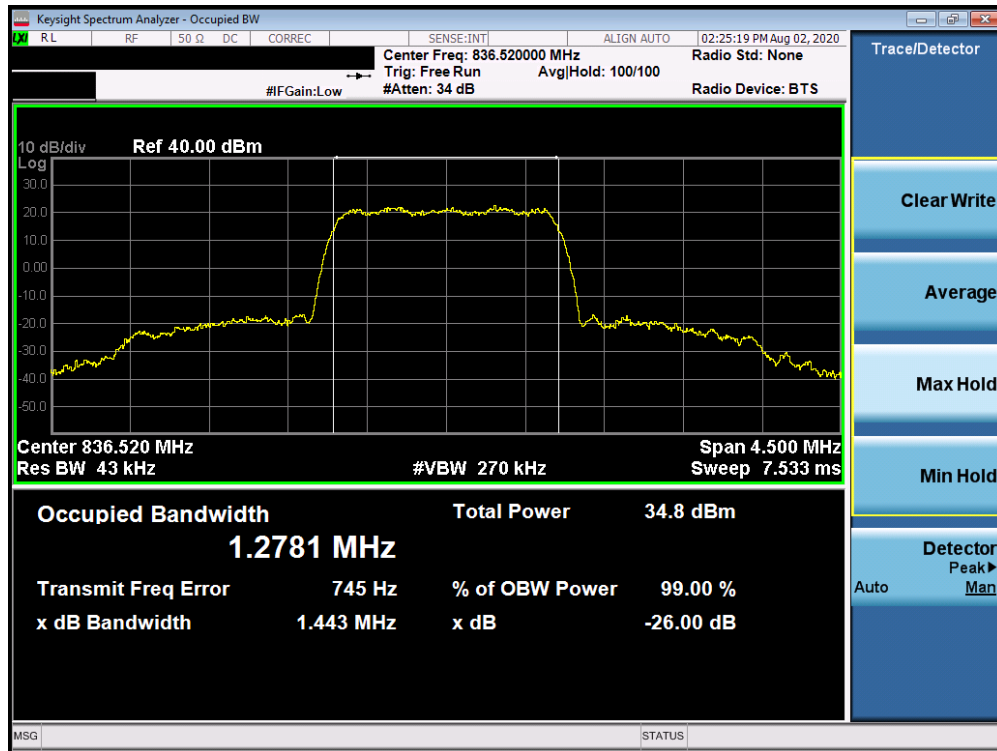


Plot 7-5. Occupied Bandwidth Plot (Cellular CDMA Mode)

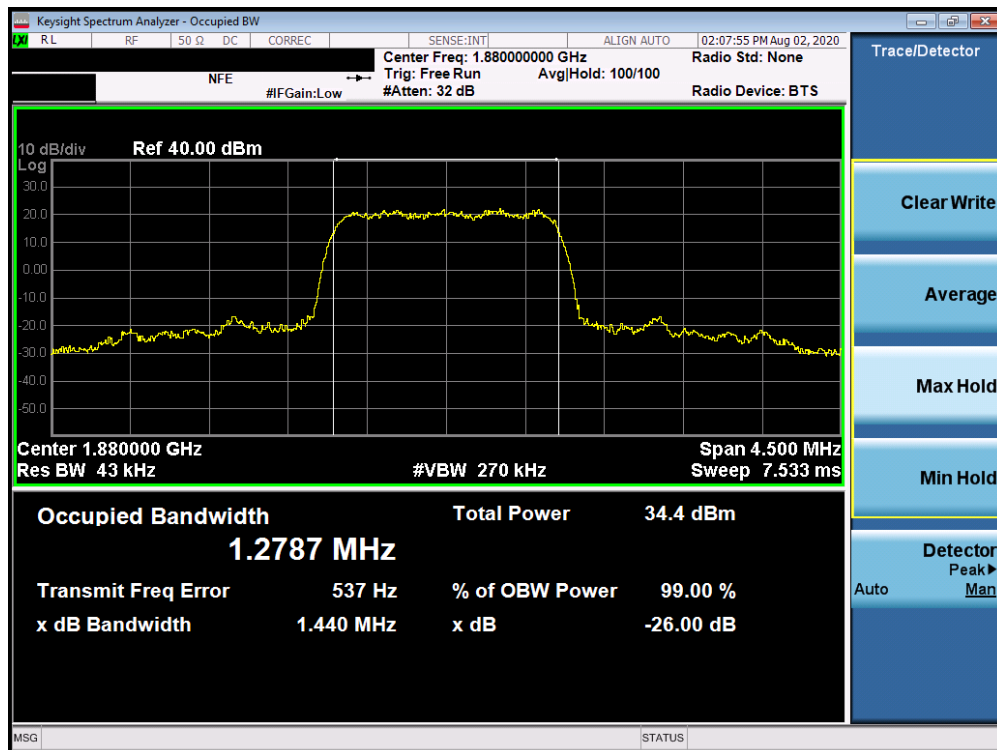


Plot 7-6. Occupied Bandwidth Plot (PCS CDMA Mode)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 14 of 110

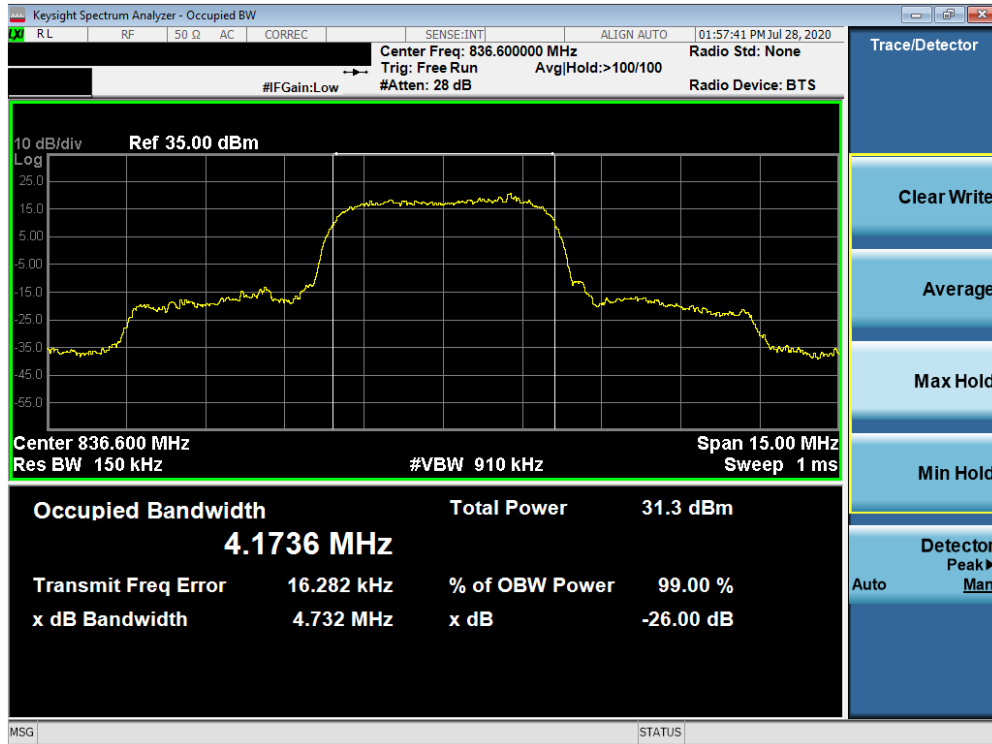


Plot 7-7. Occupied Bandwidth Plot (Cellular WCDMA Mode)

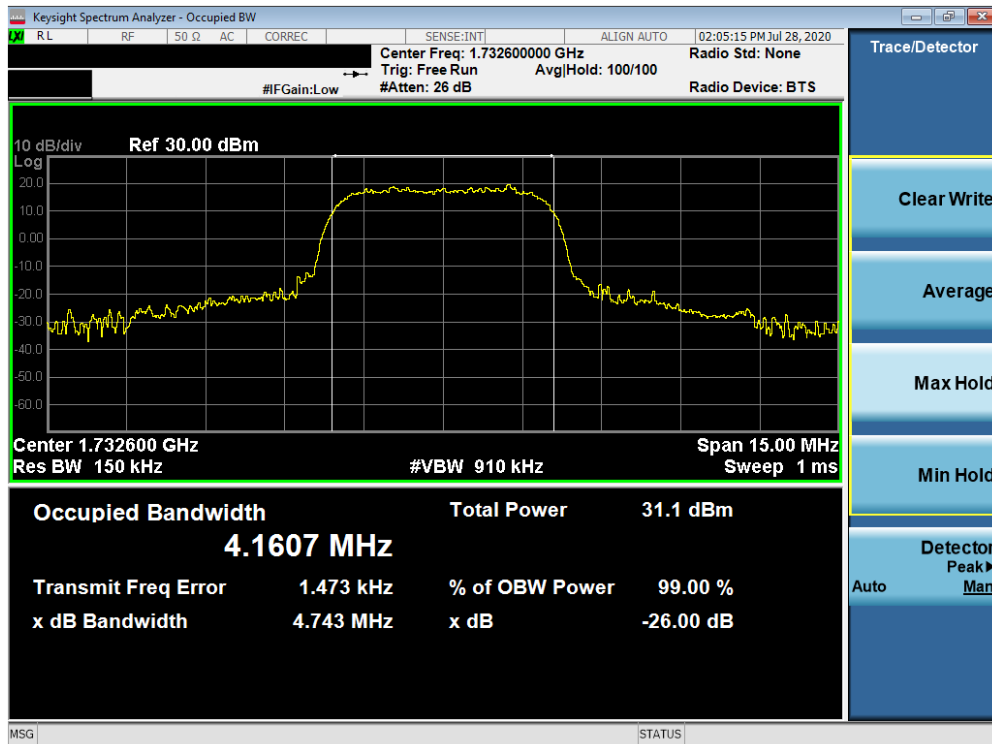

Plot 7-8. Occupied Bandwidth Plot (AWS WCDMA Mode)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 15 of 110

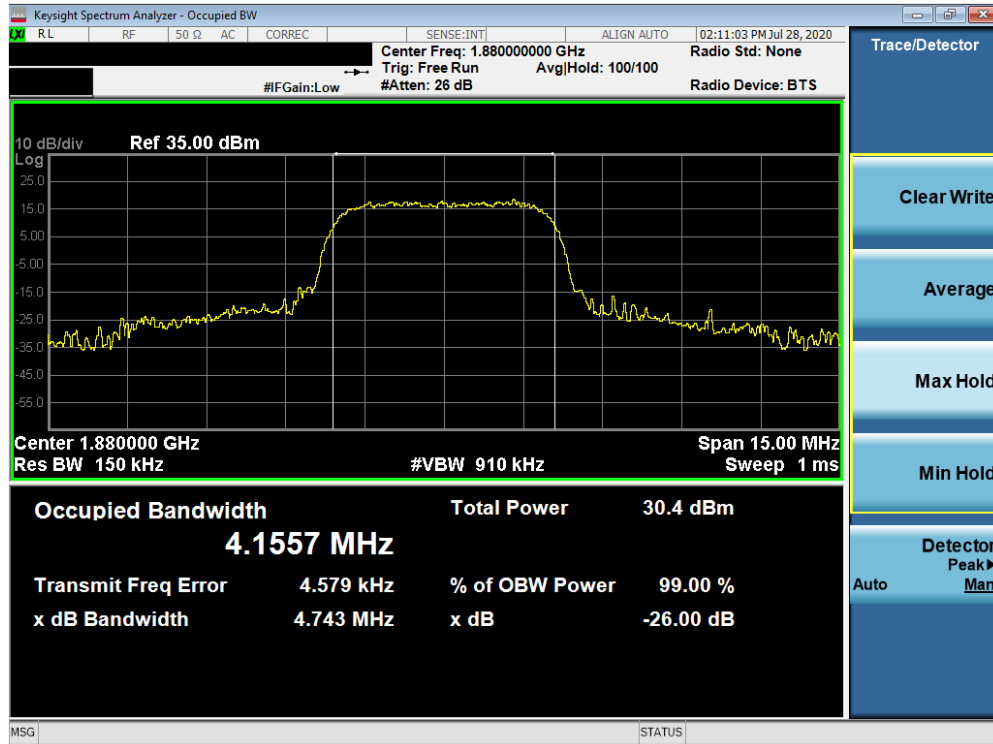

Plot 7-9. Occupied Bandwidth Plot (PCS WCDMA Mode)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 16 of 110

7.3 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10\log_{10}(P_{\text{Watts}})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz for Cell, 20GHz for AWS, 20GHz for PCS (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-2. Test Instrument & Measurement Setup

Test Notes


Per 24.238(b), 27.53(h)(3), and RSS-133(6.5), RSS-139(6.5), compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 1MHz, and 100 kHz or greater for Part 22 and RSS-132 measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 17 of 110

Cellular GPRS Mode

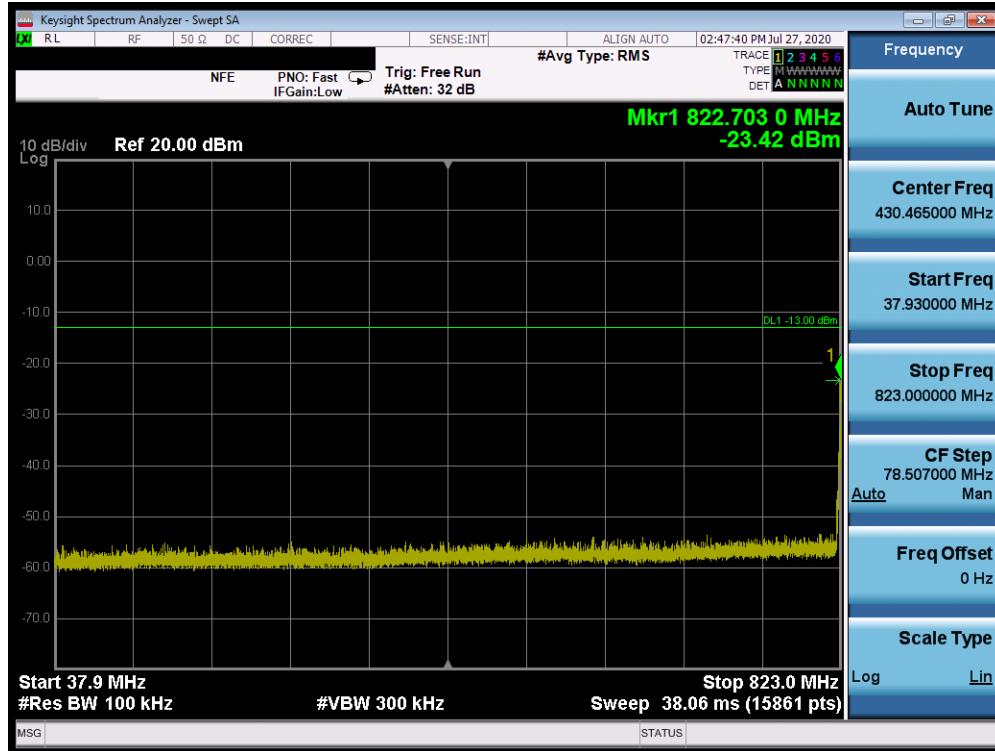


Plot 7-10. Conducted Spurious Plot (Cellular GPRS Mode - Low Channel)

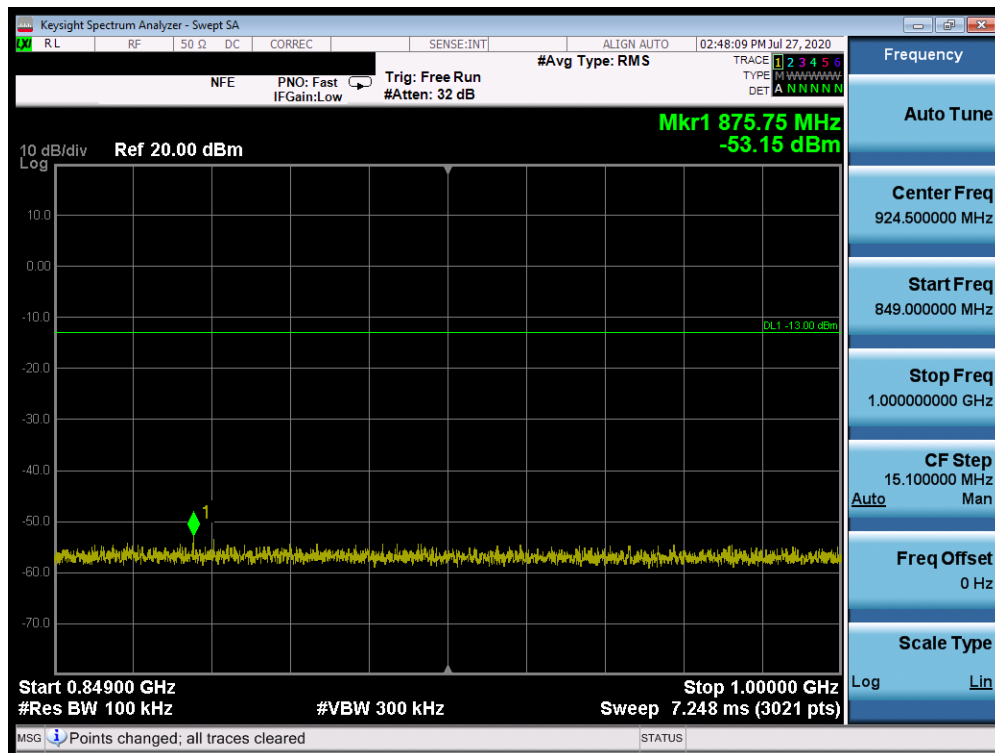


Plot 7-11. Conducted Spurious Plot (Cellular GPRS Mode - Low Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 18 of 110

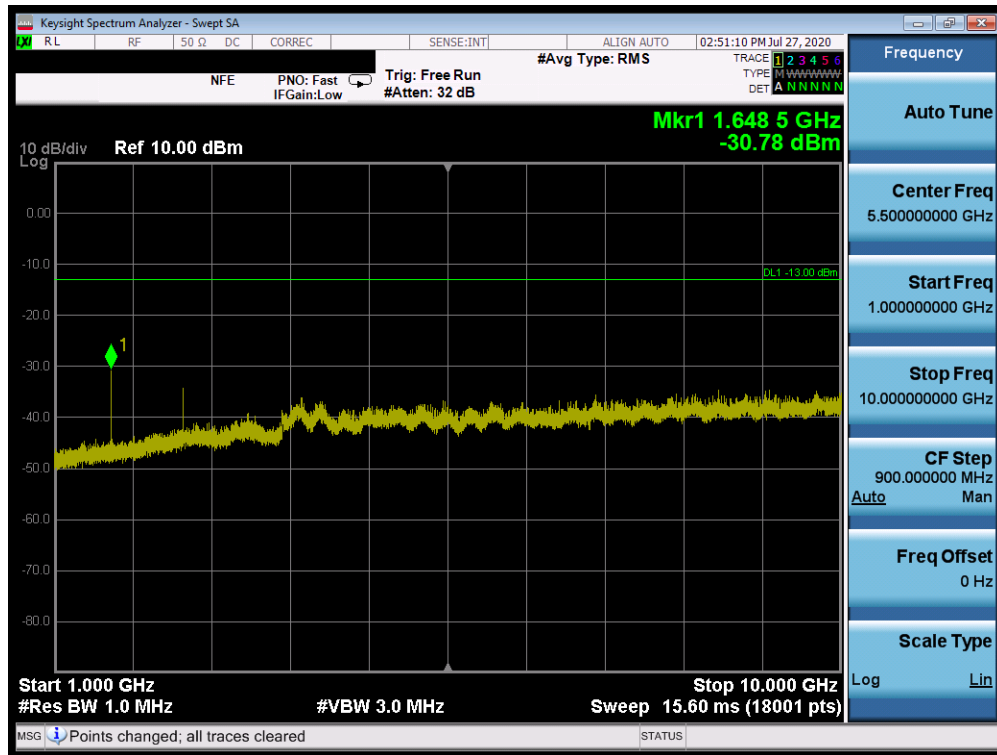


Plot 7-12. Conducted Spurious Plot (Cellular GPRS Mode - Low Channel)

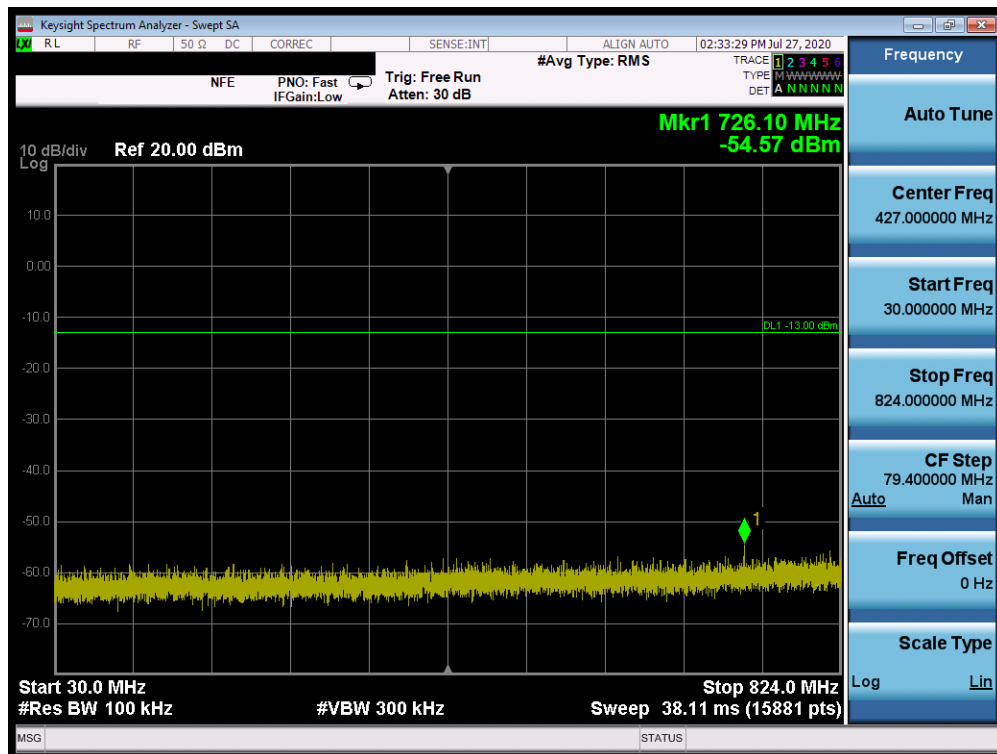


Plot 7-13. Conducted Spurious Plot (Cellular GPRS Mode - Mid Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 19 of 110

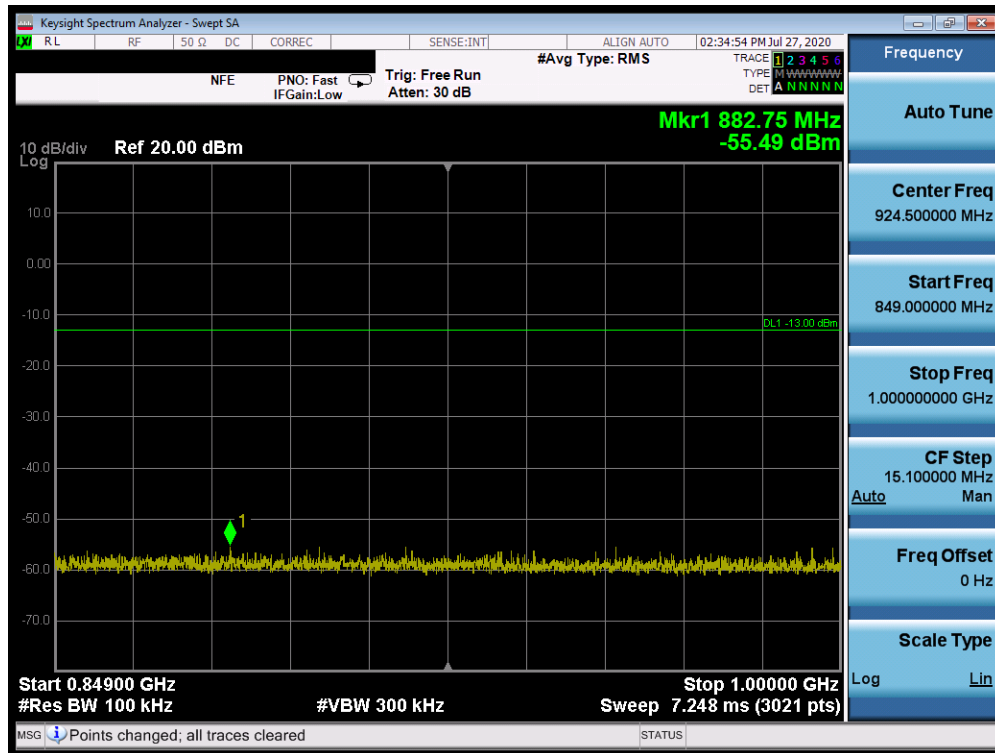


Plot 7-14. Conducted Spurious Plot (Cellular GPRS Mode - Mid Channel)

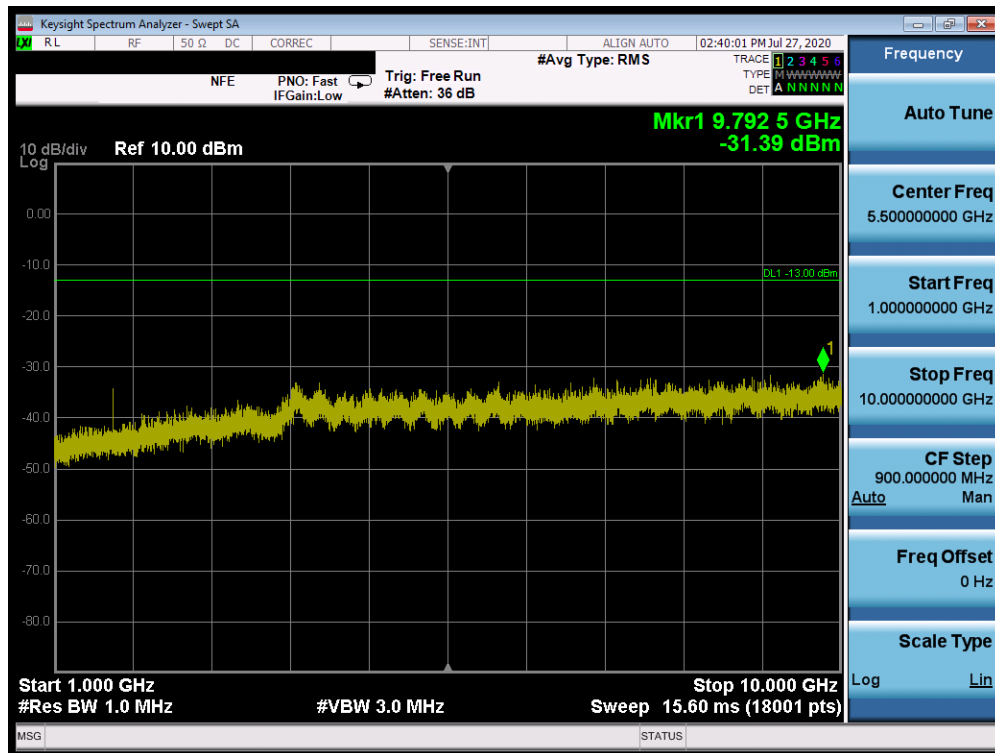


Plot 7-15. Conducted Spurious Plot (Cellular GPRS Mode - Mid Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 20 of 110

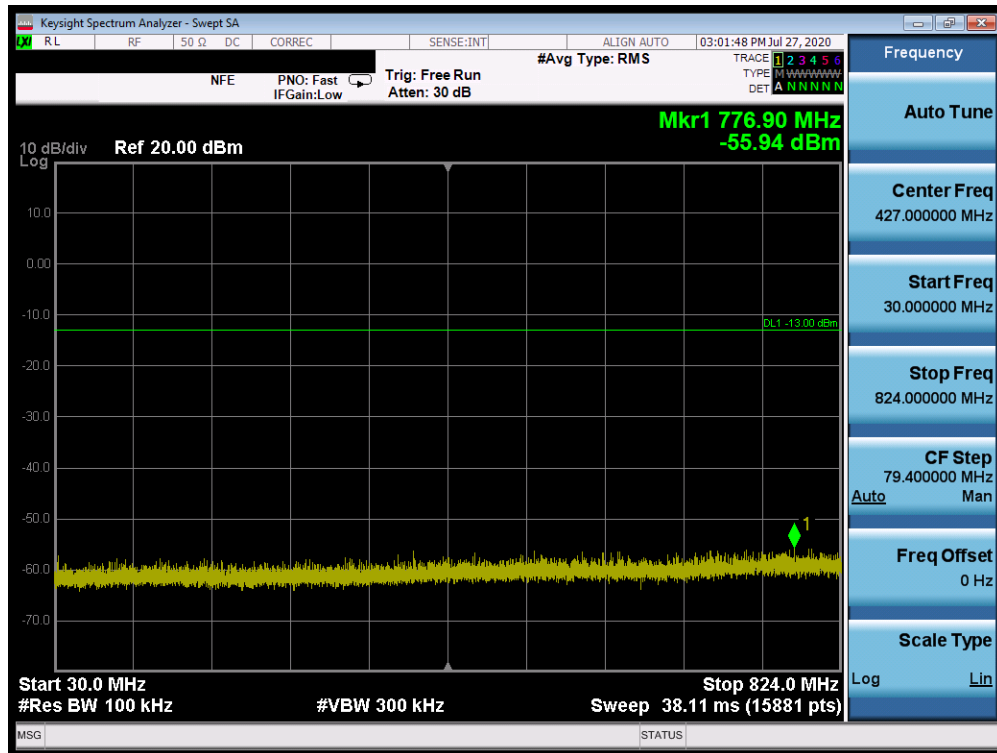


Plot 7-16. Conducted Spurious Plot (Cellular GPRS Mode - High Channel)

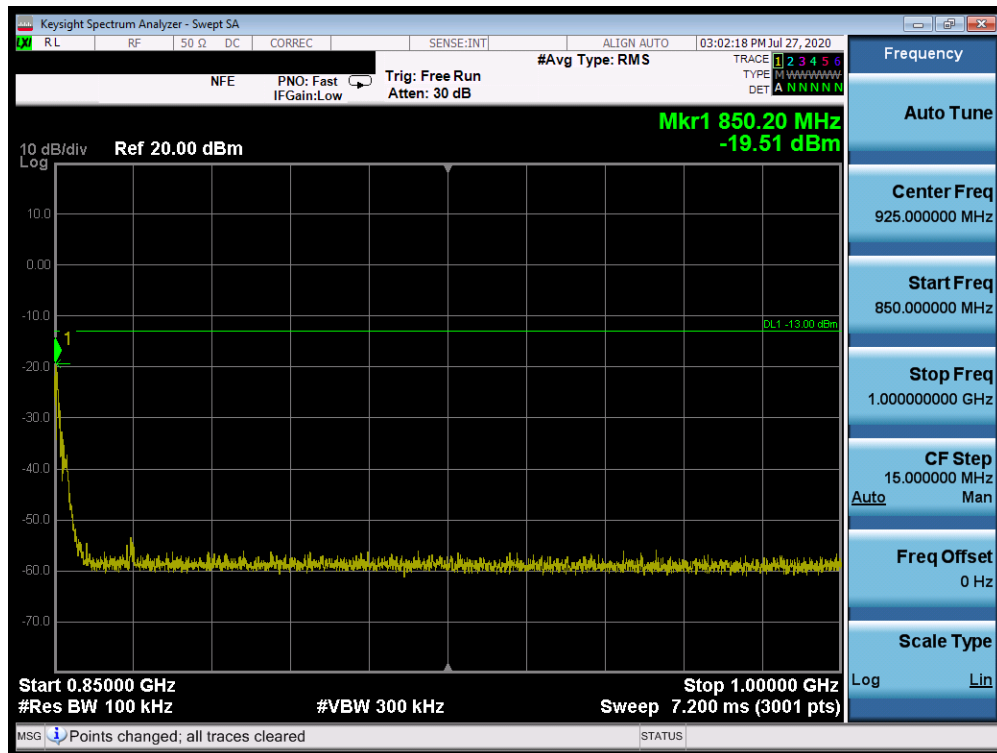

Plot 7-17. Conducted Spurious Plot (Cellular GPRS Mode - High Channel)


FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 21 of 110

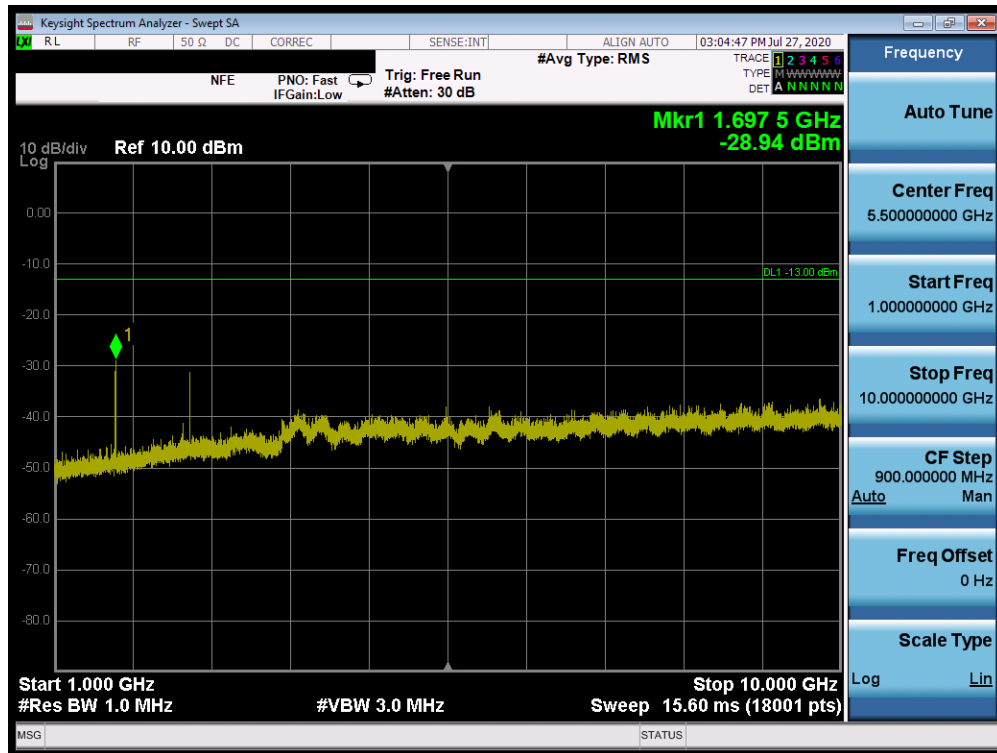


Plot 7-18. Conducted Spurious Plot (Cellular GPRS Mode - High Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 22 of 110

PCS GPRS Mode

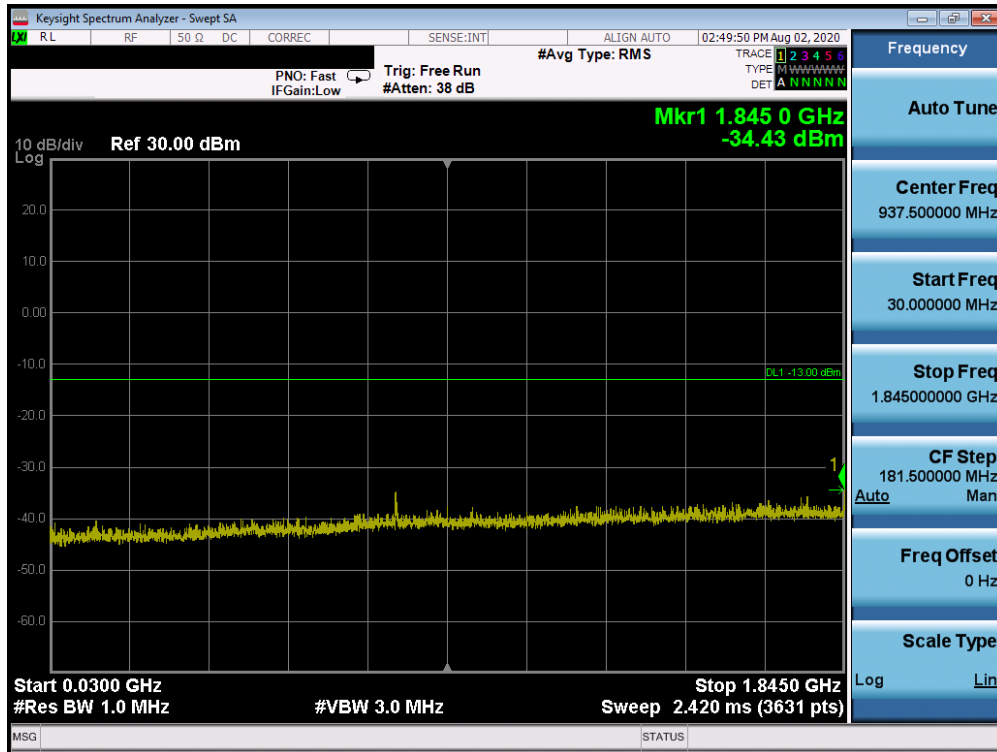


Plot 7-19. Conducted Spurious Plot (PCS GPRS Mode - Low Channel)

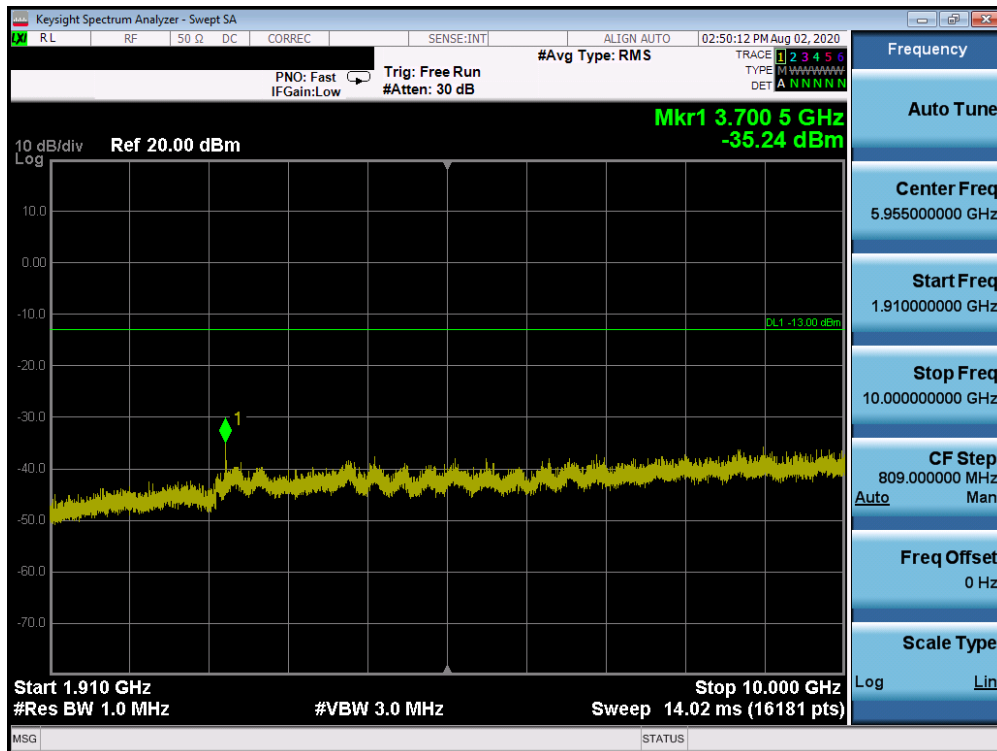


Plot 7-20. Conducted Spurious Plot (PCS GPRS Mode - Low Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 23 of 110

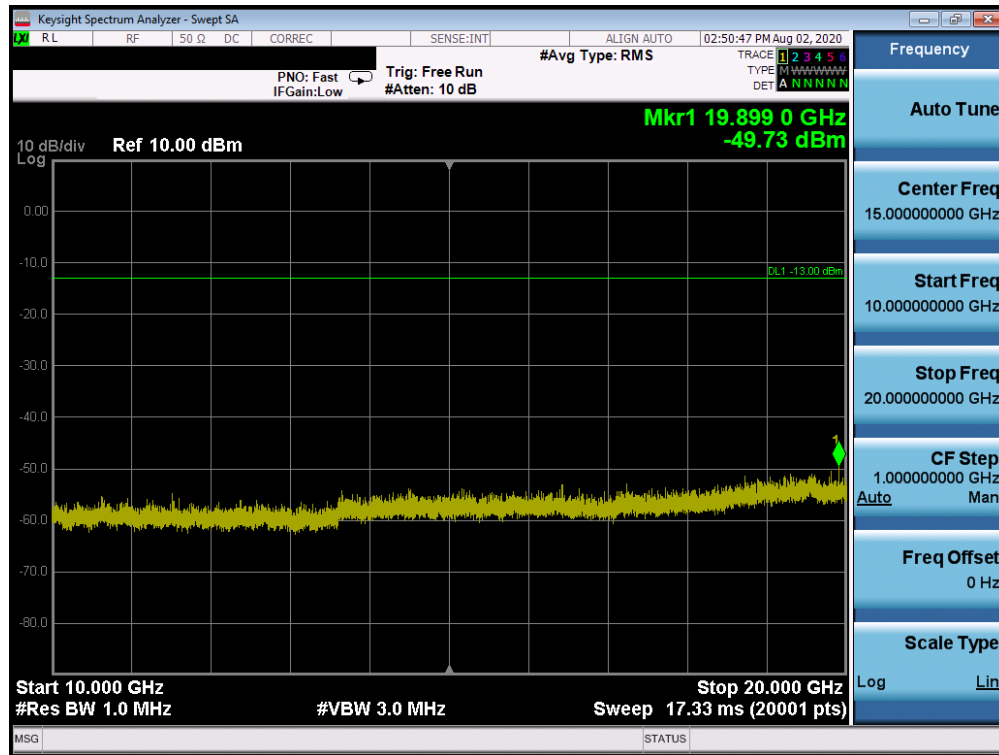


Plot 7-21. Conducted Spurious Plot (PCS GPRS Mode - Low Channel)

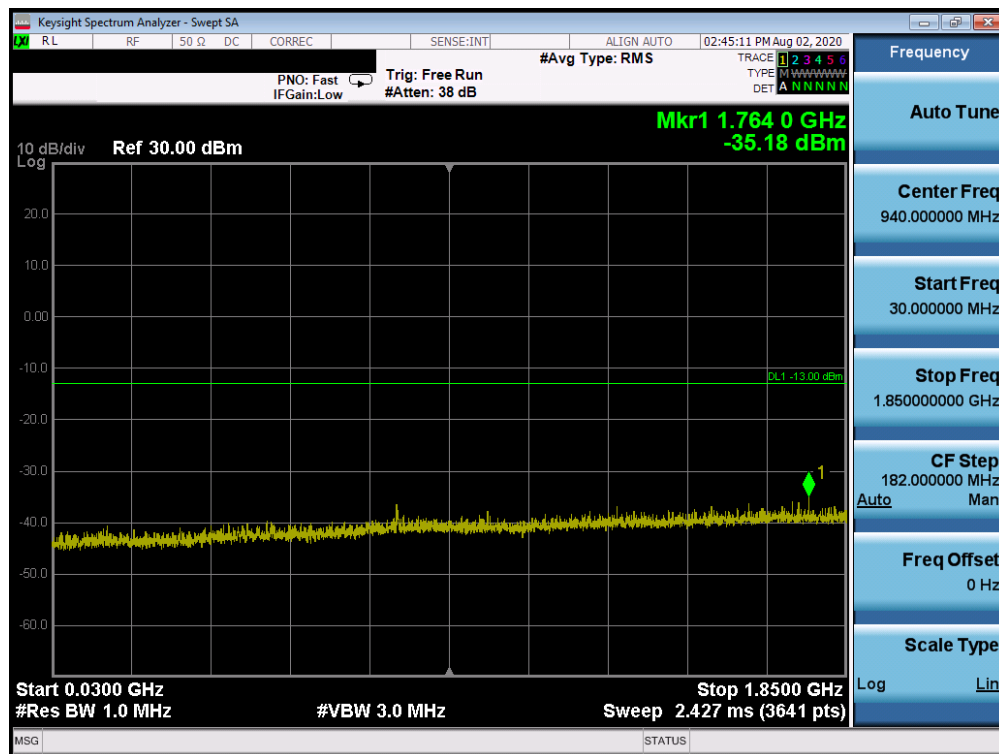


Plot 7-22. Conducted Spurious Plot (PCS GPRS Mode - Mid Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 24 of 110

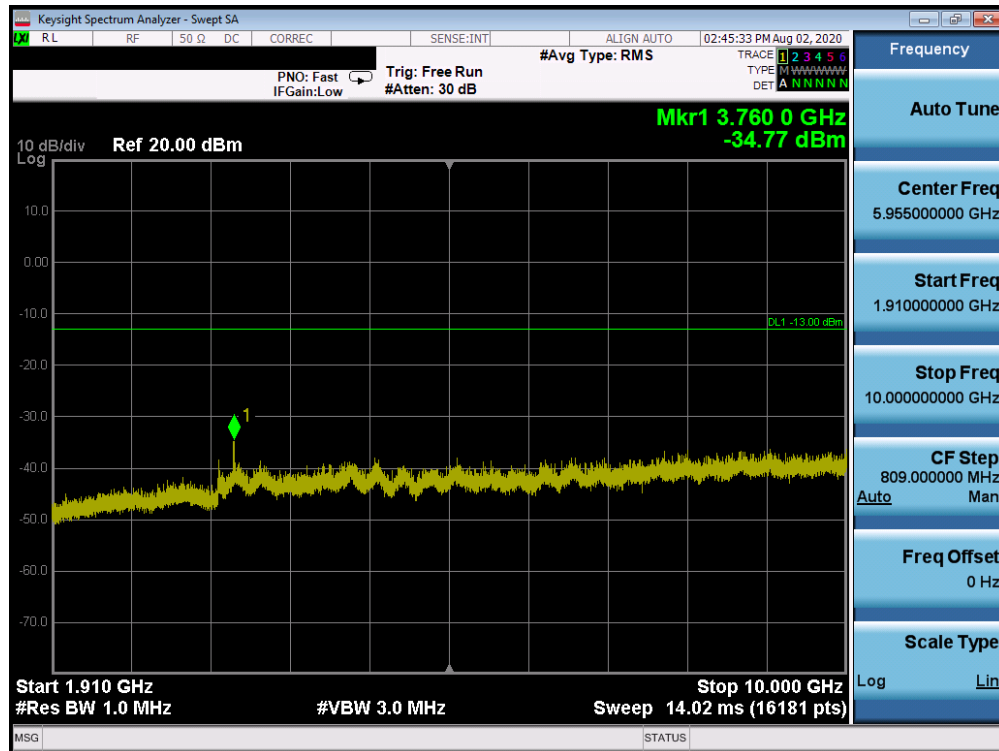


Plot 7-23. Conducted Spurious Plot (PCS GPRS Mode - Mid Channel)

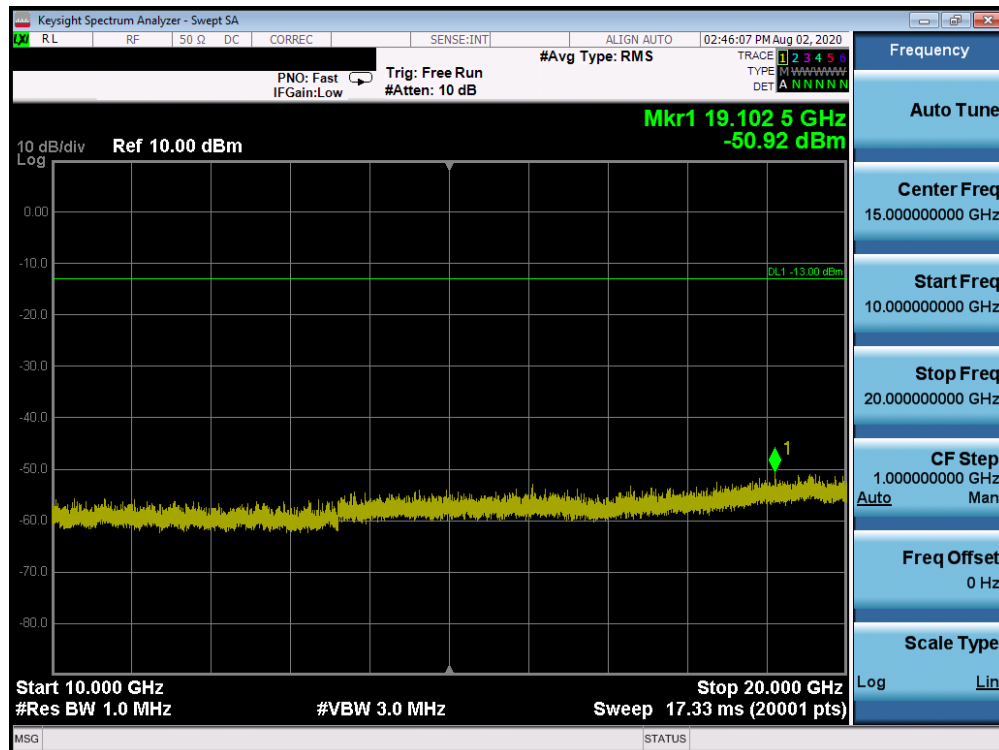


Plot 7-24. Conducted Spurious Plot (PCS GPRS Mode - Mid Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 25 of 110

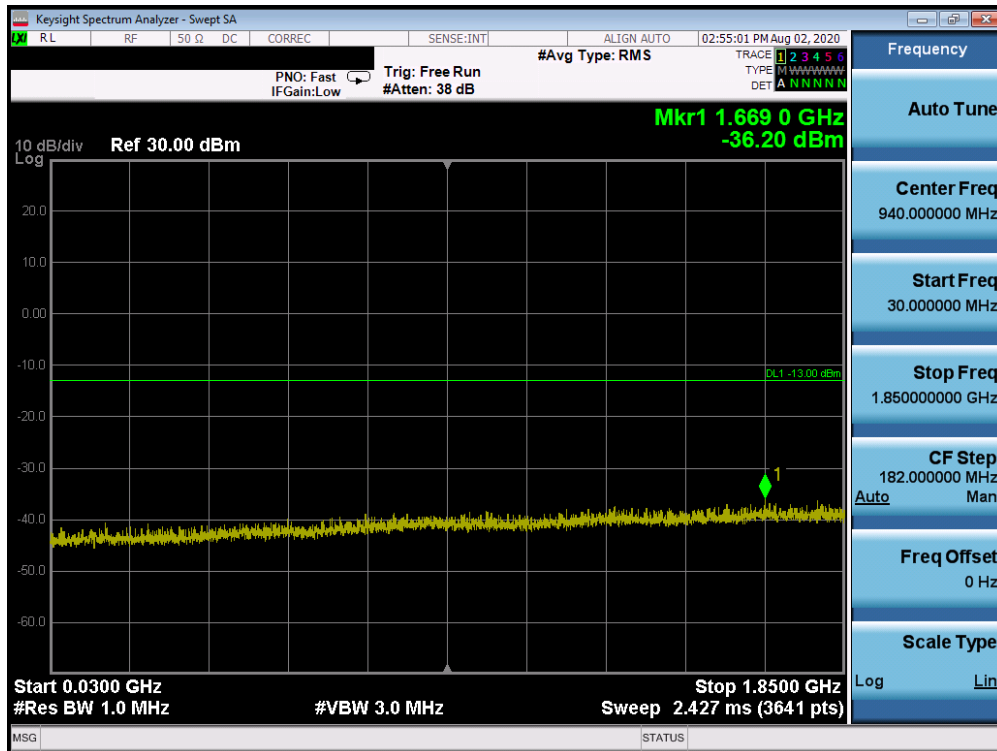

Plot 7-25. Conducted Spurious Plot (PCS GPRS Mode - High Channel)

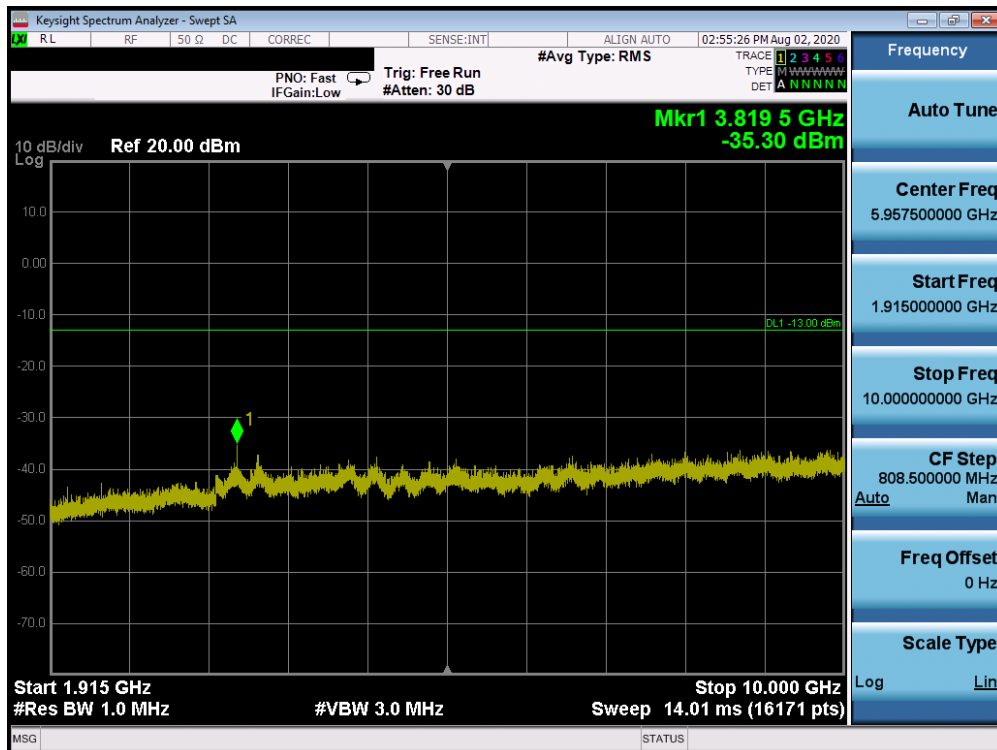


Plot 7-26. Conducted Spurious Plot (PCS GPRS Mode - High Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 26 of 110


Plot 7-27. Conducted Spurious Plot (PCS GPRS Mode - High Channel)

FCC ID: ZNFF100TM	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset	Page 27 of 110

Cellular CDMA Mode

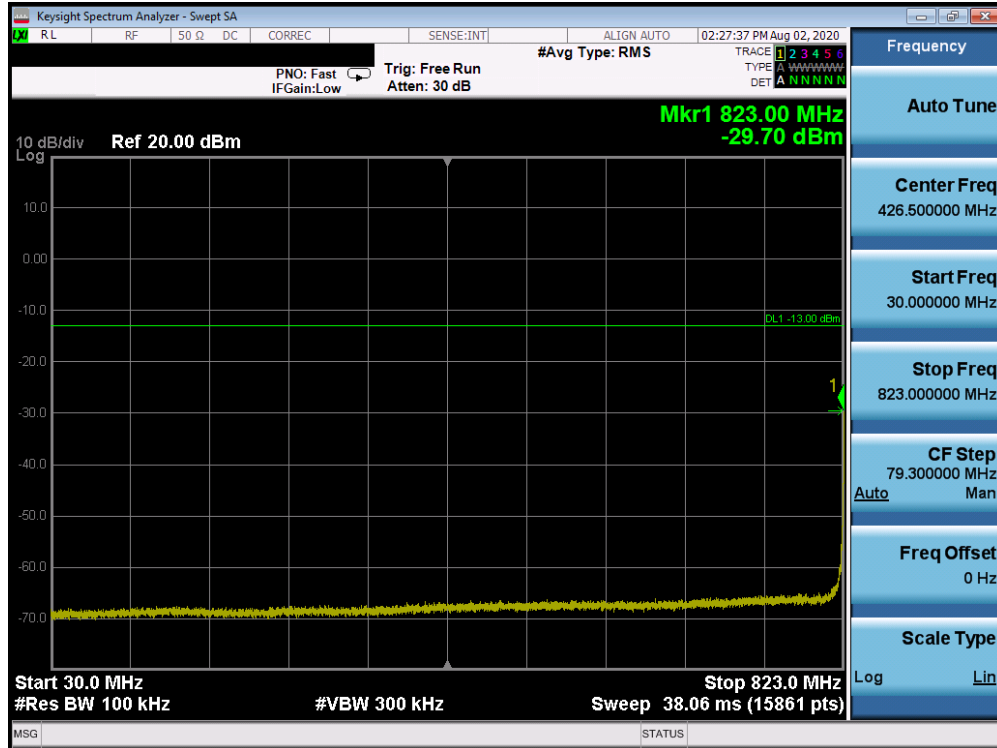


Plot 7-28. Conducted Spurious Plot (Cellular CDMA Mode - Low Channel)

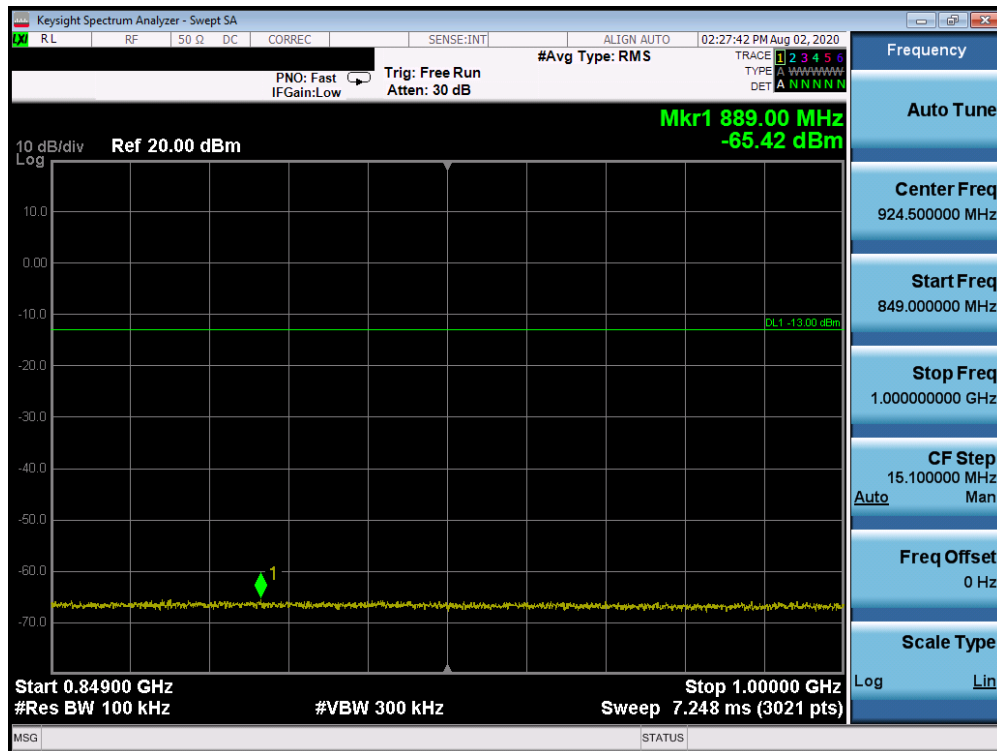


Plot 7-29. Conducted Spurious Plot (Cellular CDMA Mode - Low Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 28 of 110

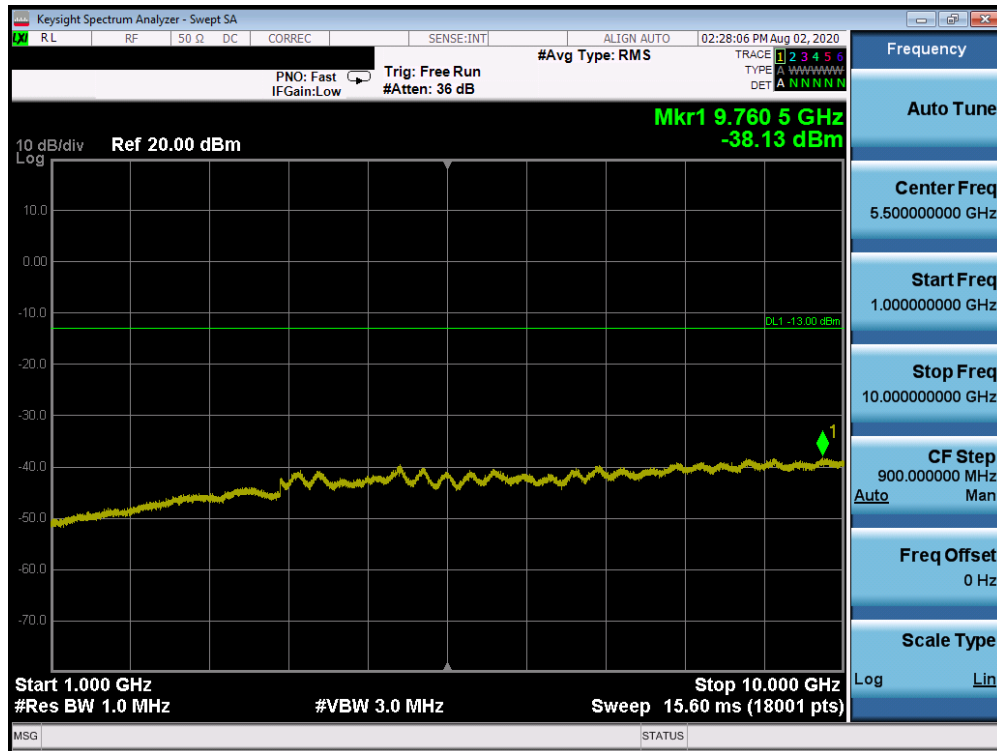


Plot 7-30. Conducted Spurious Plot (Cellular CDMA Mode - Low Channel)

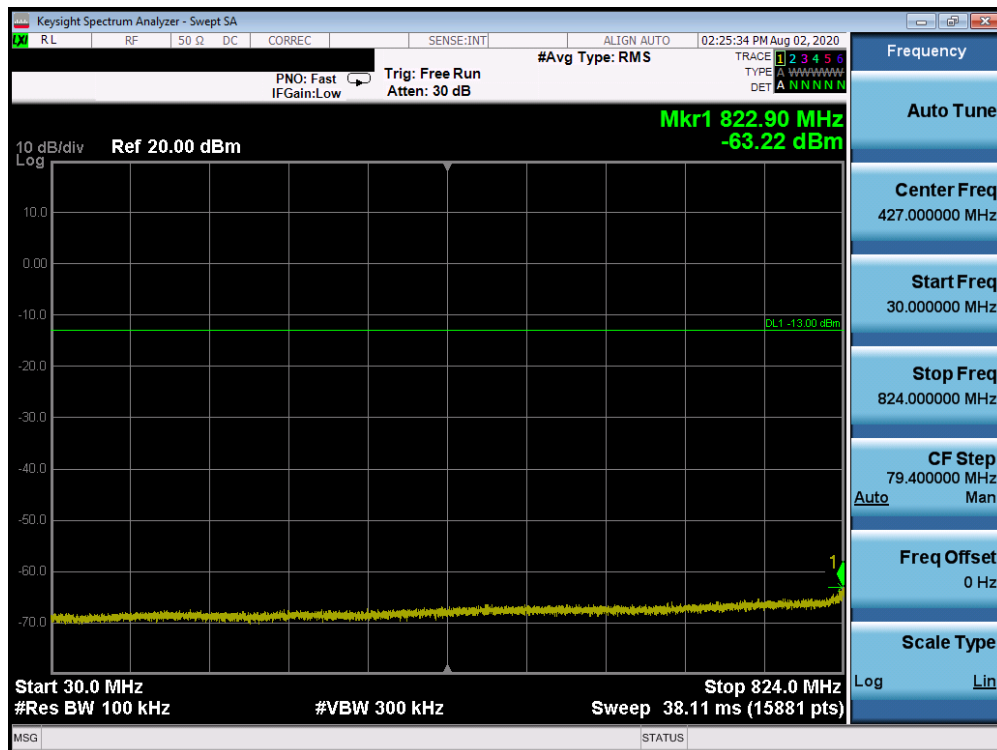


Plot 7-31. Conducted Spurious Plot (Cellular CDMA Mode - Mid Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 29 of 110

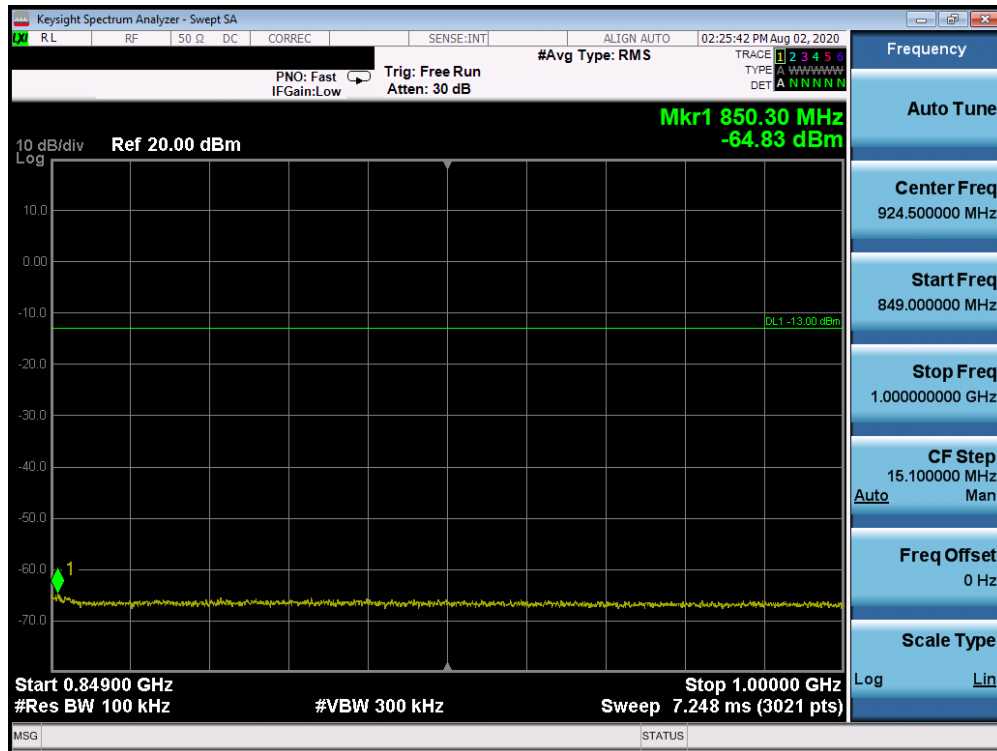


Plot 7-32. Conducted Spurious Plot (Cellular CDMA Mode - Mid Channel)

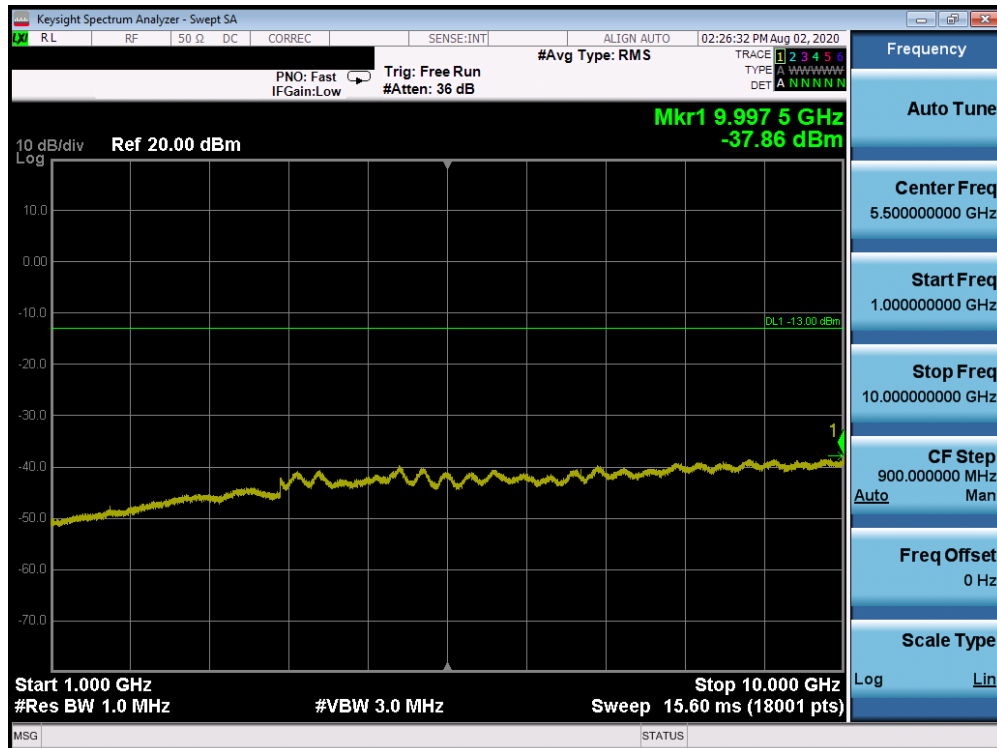


Plot 7-33. Conducted Spurious Plot (Cellular CDMA Mode - Mid Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 30 of 110

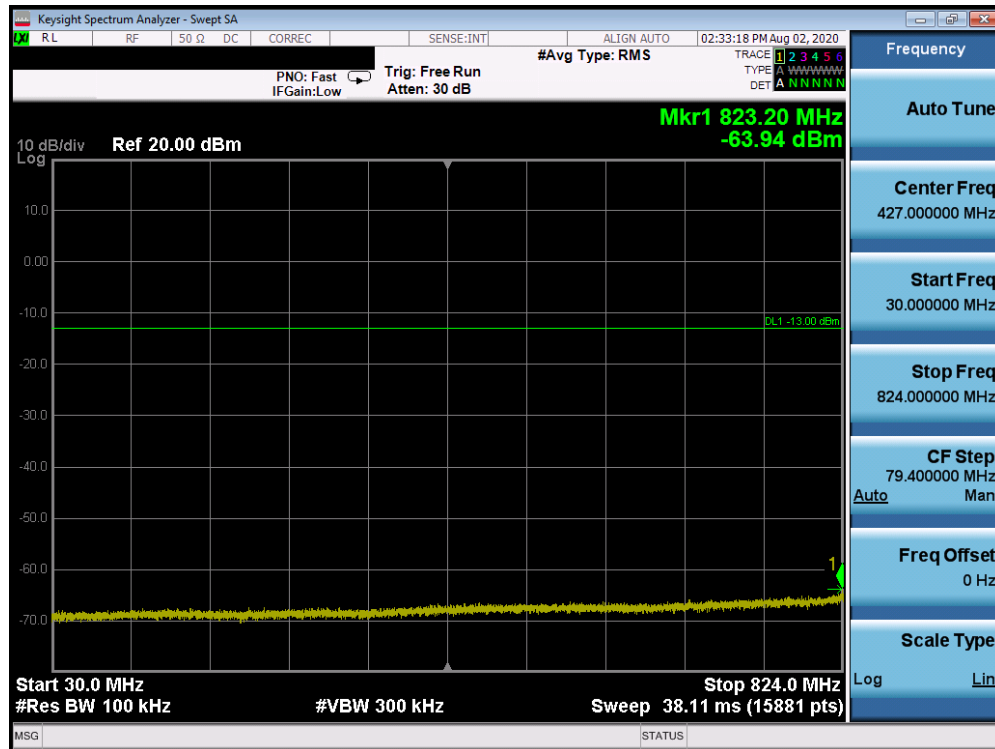


Plot 7-34. Conducted Spurious Plot (Cellular CDMA Mode - High Channel)

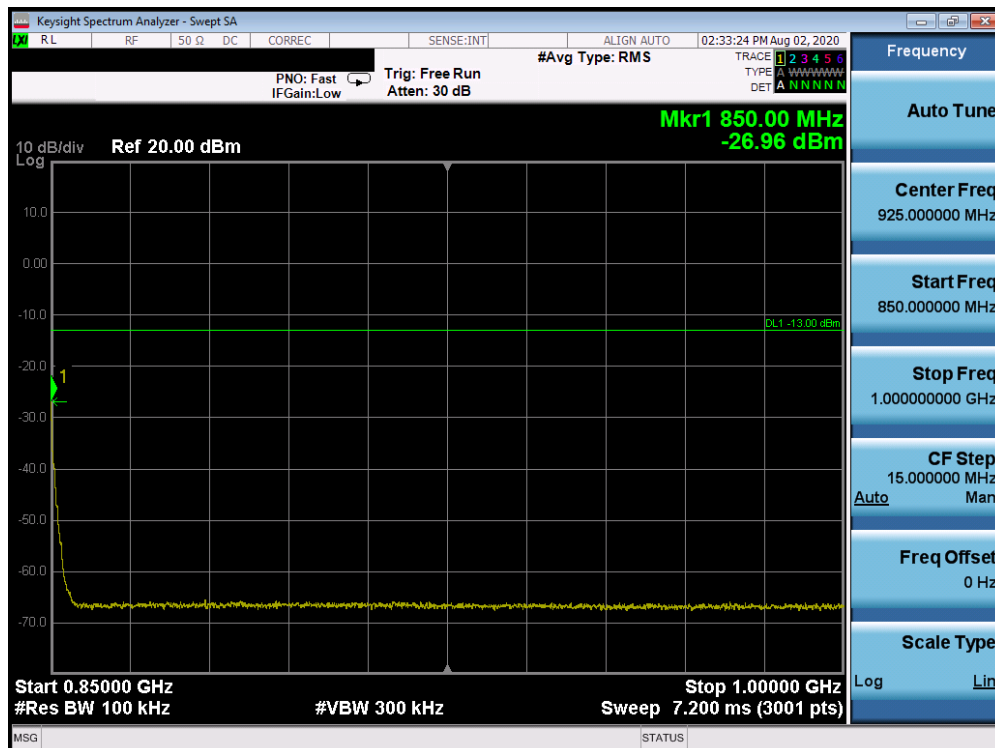

Plot 7-35. Conducted Spurious Plot (Cellular CDMA Mode - High Channel)


FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 31 of 110

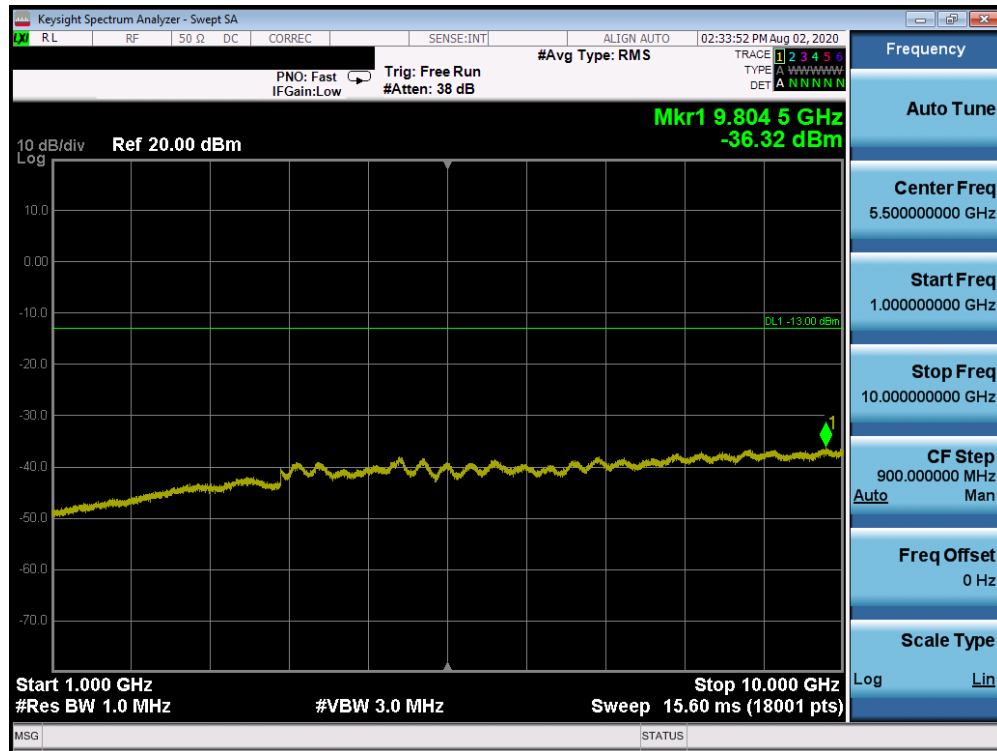


Plot 7-36. Conducted Spurious Plot (Cellular CDMA Mode - High Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 32 of 110

PCS CDMA Mode

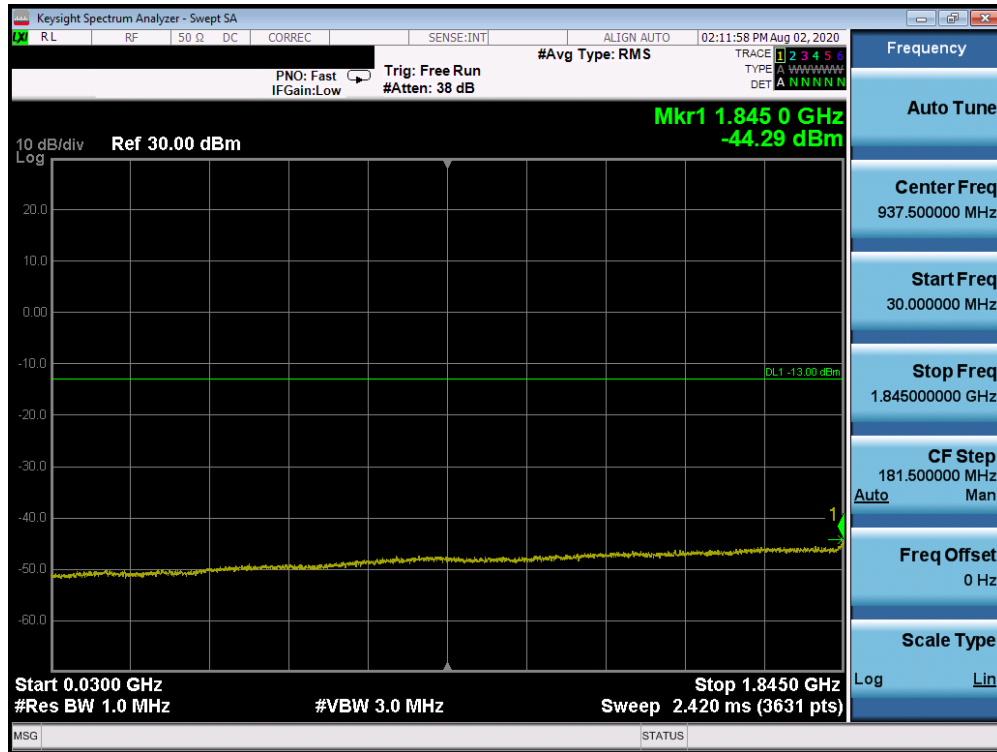


Plot 7-37. Conducted Spurious Plot (PCS CDMA Mode - Low Channel)

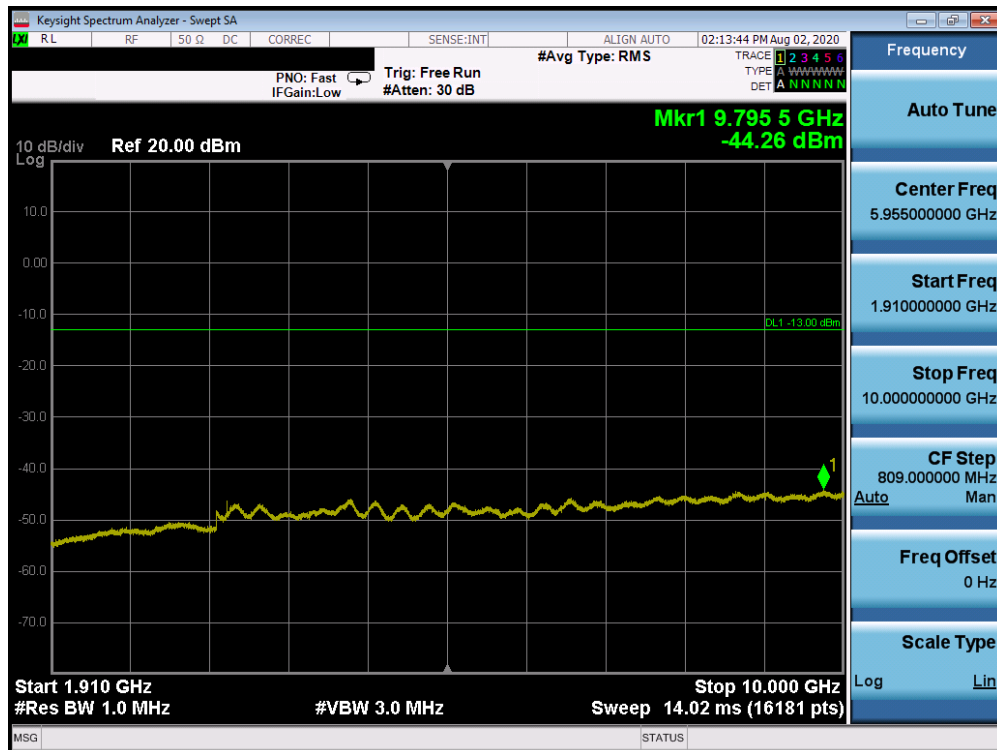


Plot 7-38. Conducted Spurious Plot (PCS CDMA Mode - Low Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 33 of 110

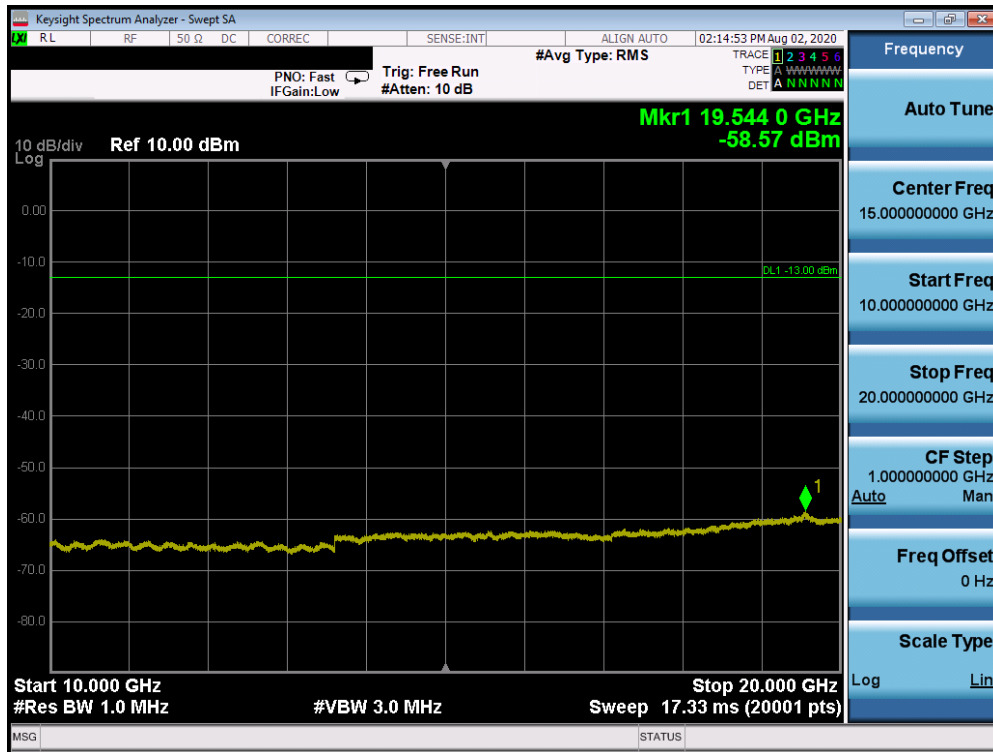


Plot 7-39. Conducted Spurious Plot (PCS CDMA Mode - Low Channel)

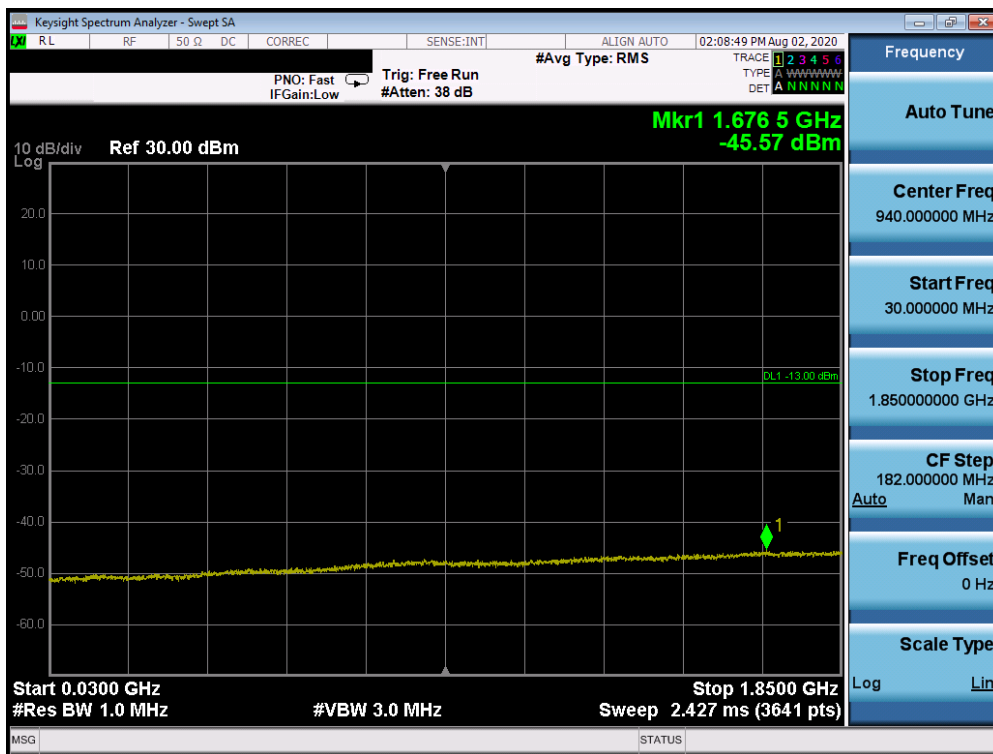


Plot 7-40. Conducted Spurious Plot (PCS CDMA Mode - Mid Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 34 of 110

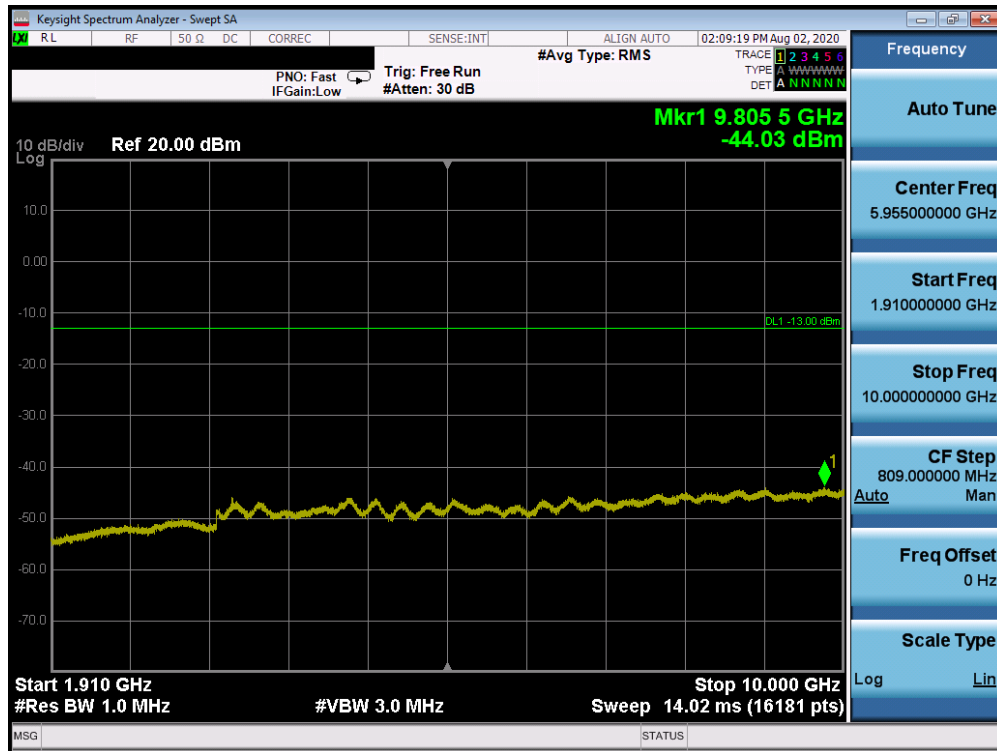


Plot 7-41. Conducted Spurious Plot (PCS CDMA Mode - Mid Channel)

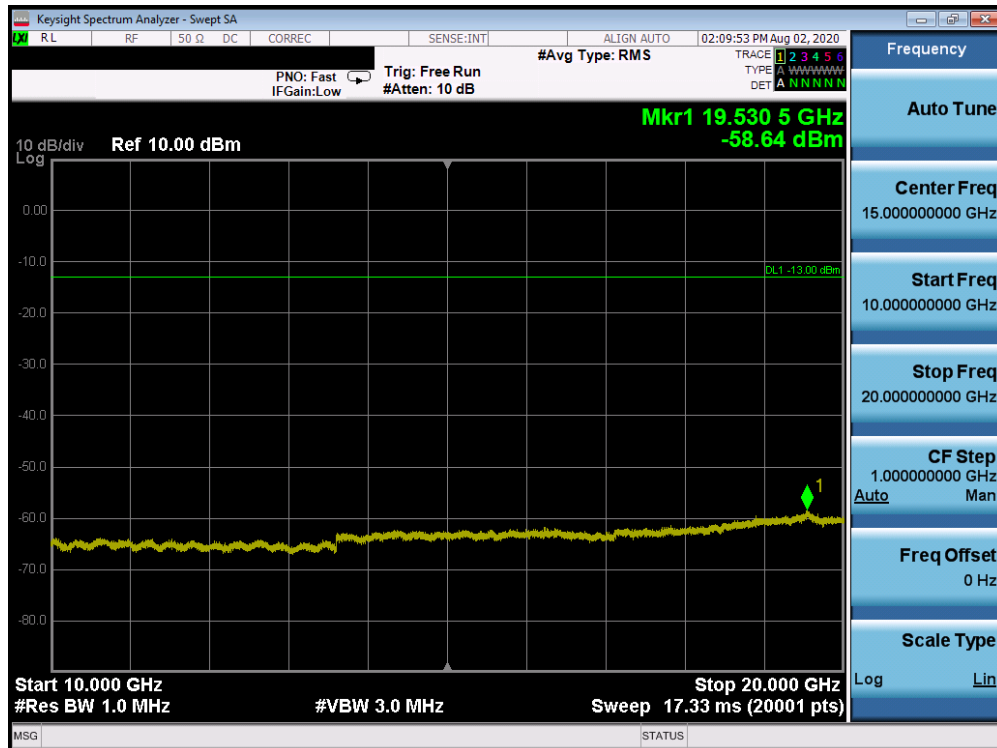


Plot 7-42. Conducted Spurious Plot (PCS CDMA Mode - Mid Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 35 of 110

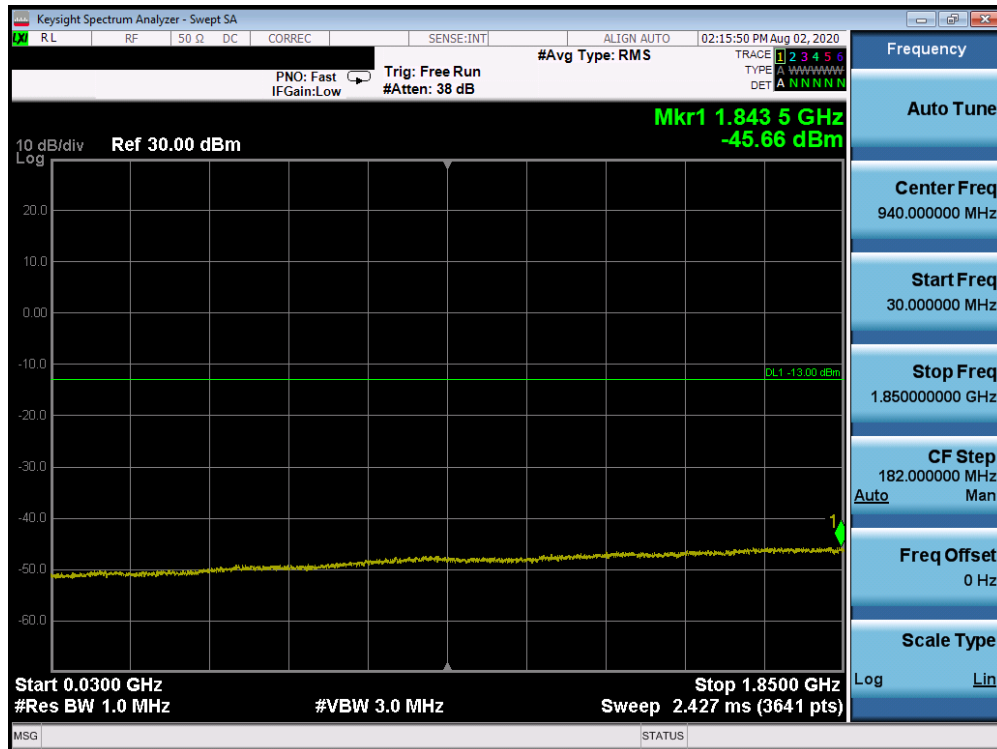


Plot 7-43. Conducted Spurious Plot (PCS CDMA Mode - High Channel)

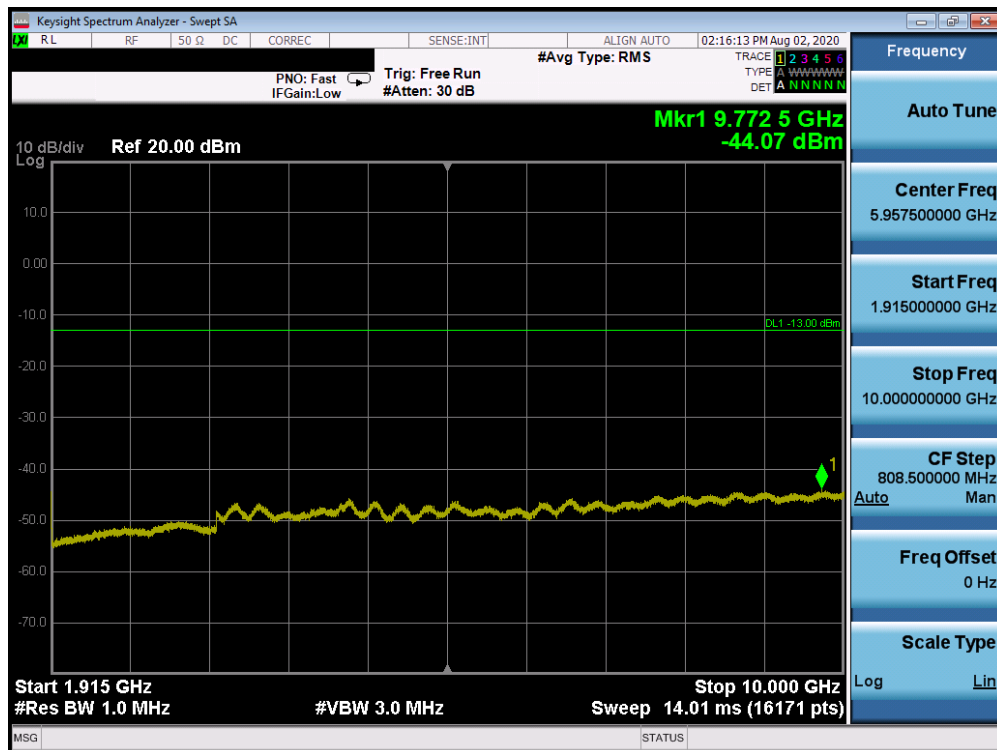

Plot 7-44. Conducted Spurious Plot (PCS CDMA Mode - High Channel)


FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 36 of 110

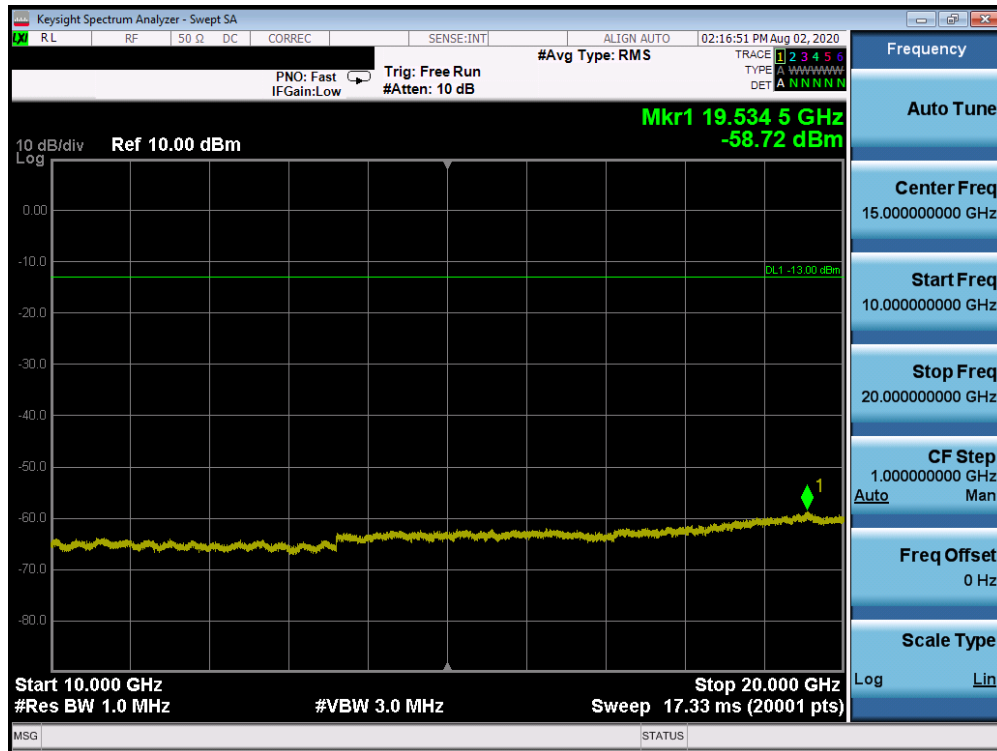


Plot 7-45. Conducted Spurious Plot (PCS CDMA Mode - High Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 37 of 110

Cellular WCDMA Mode

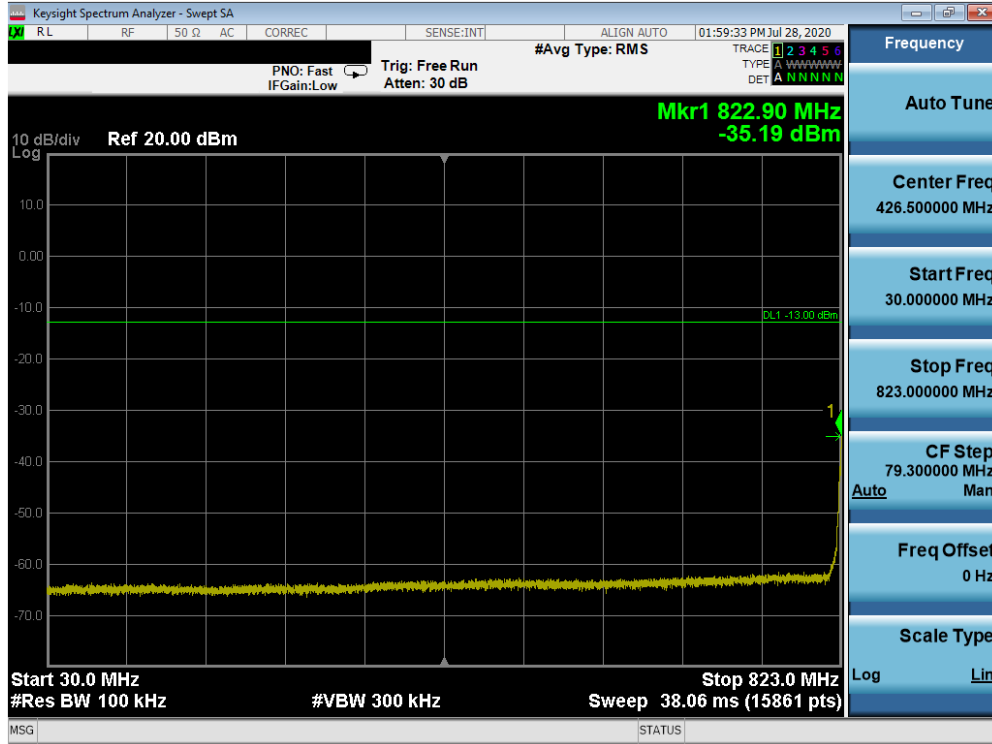


Plot 7-46. Conducted Spurious Plot (Cellular WCDMA Mode - Low Channel)

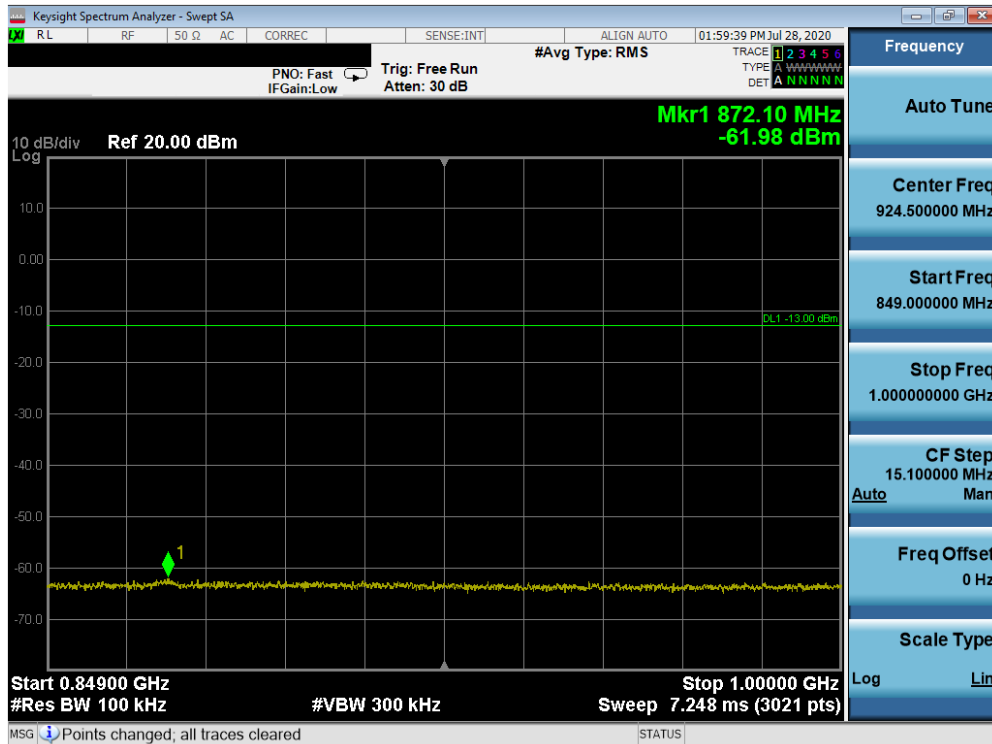


Plot 7-47. Conducted Spurious Plot (Cellular WCDMA Mode - Low Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 38 of 110

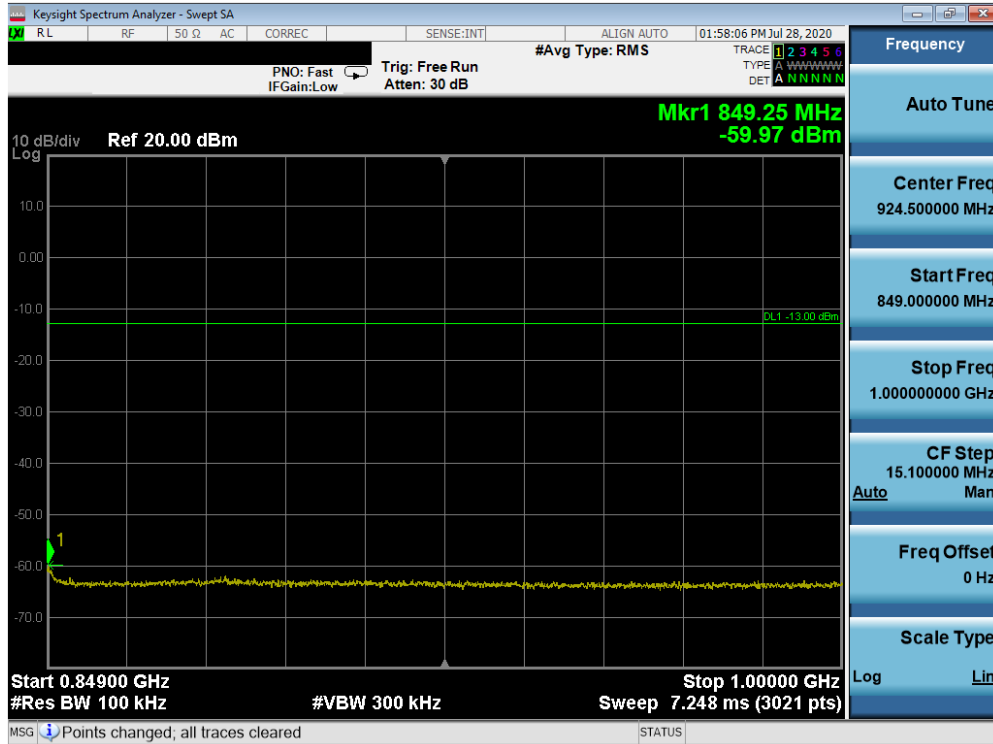


Plot 7-50. Conducted Spurious Plot (Cellular WCDMA Mode - Mid Channel)

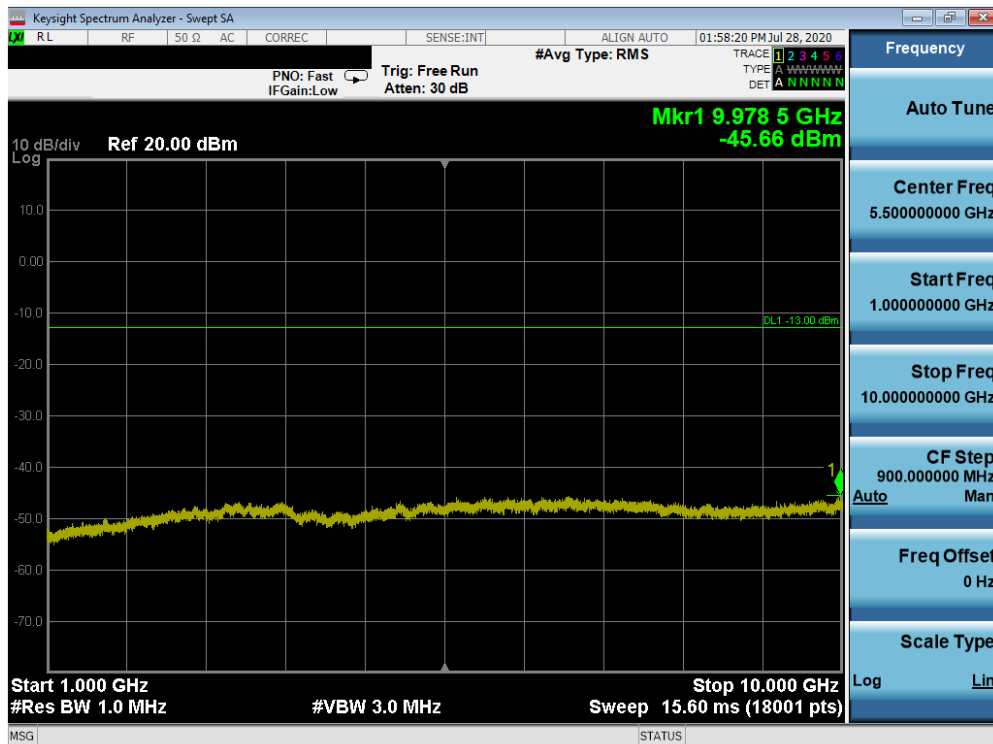


Plot 7-51. Conducted Spurious Plot (Cellular WCDMA Mode - Mid Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 40 of 110

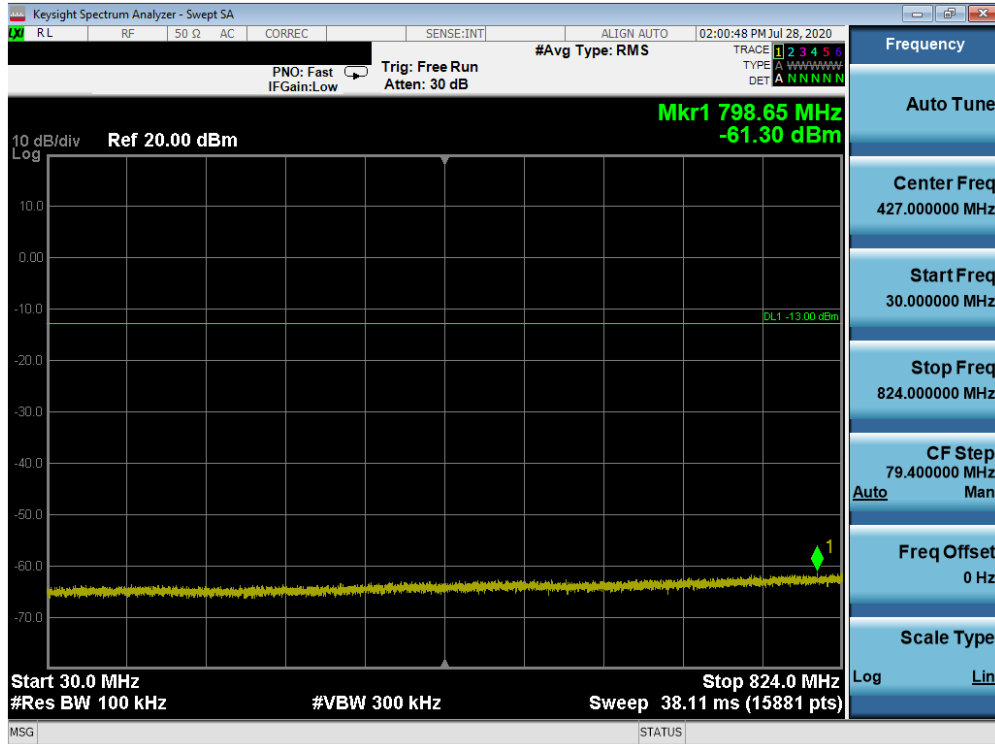


Plot 7-52. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)

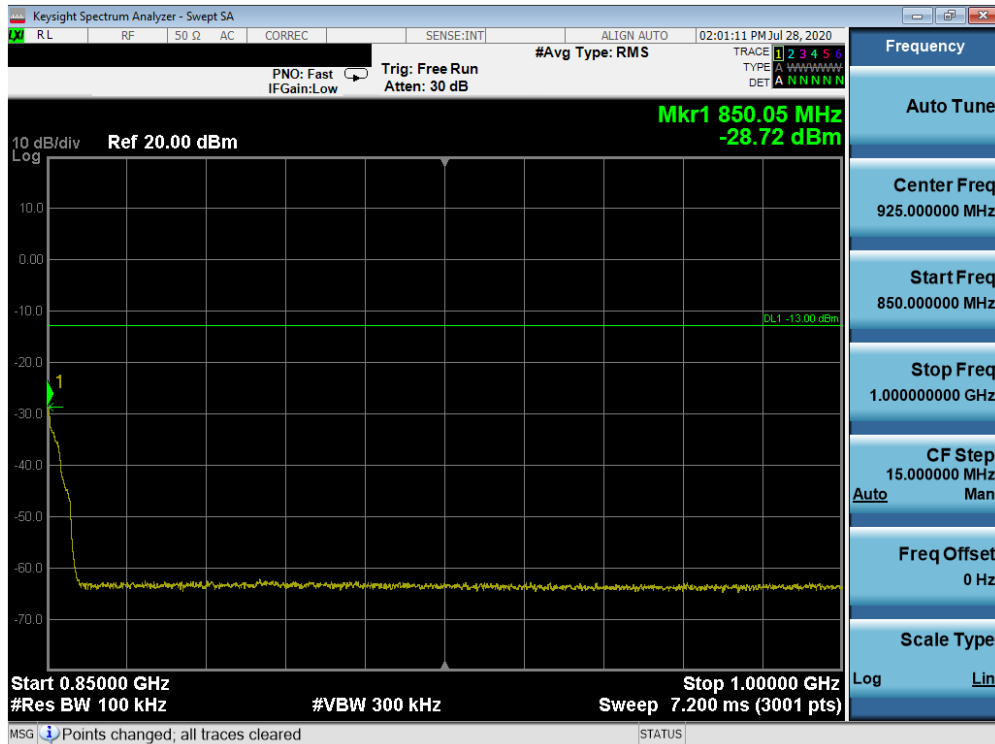

Plot 7-53. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)


FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 41 of 110

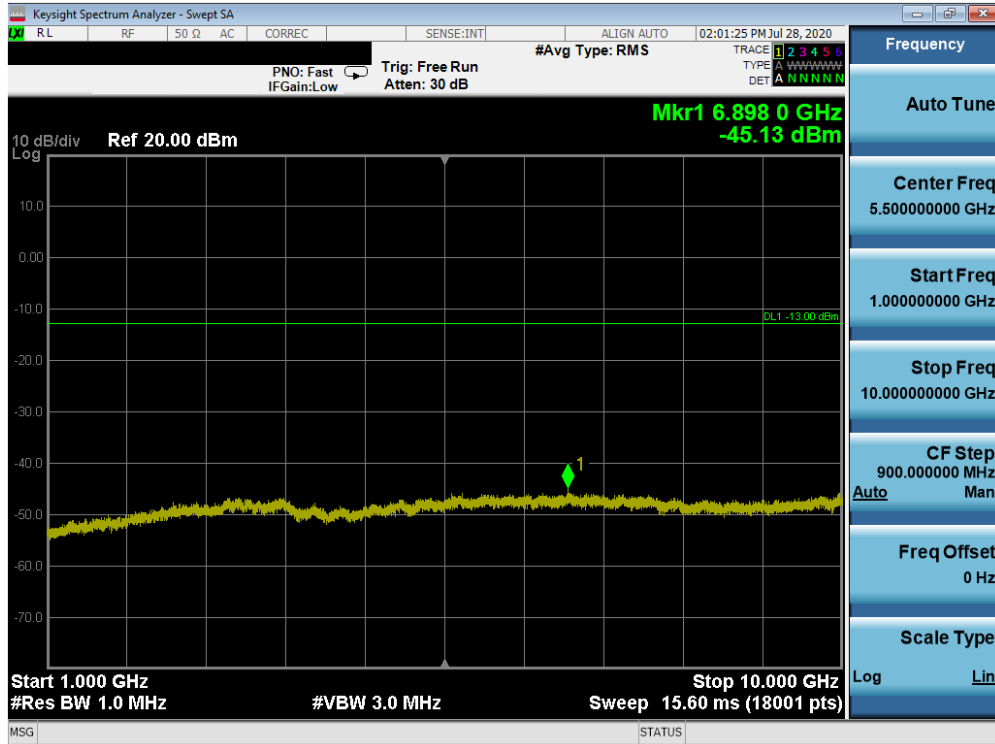


Plot 7-54. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 42 of 110

AWS WCDMA Mode

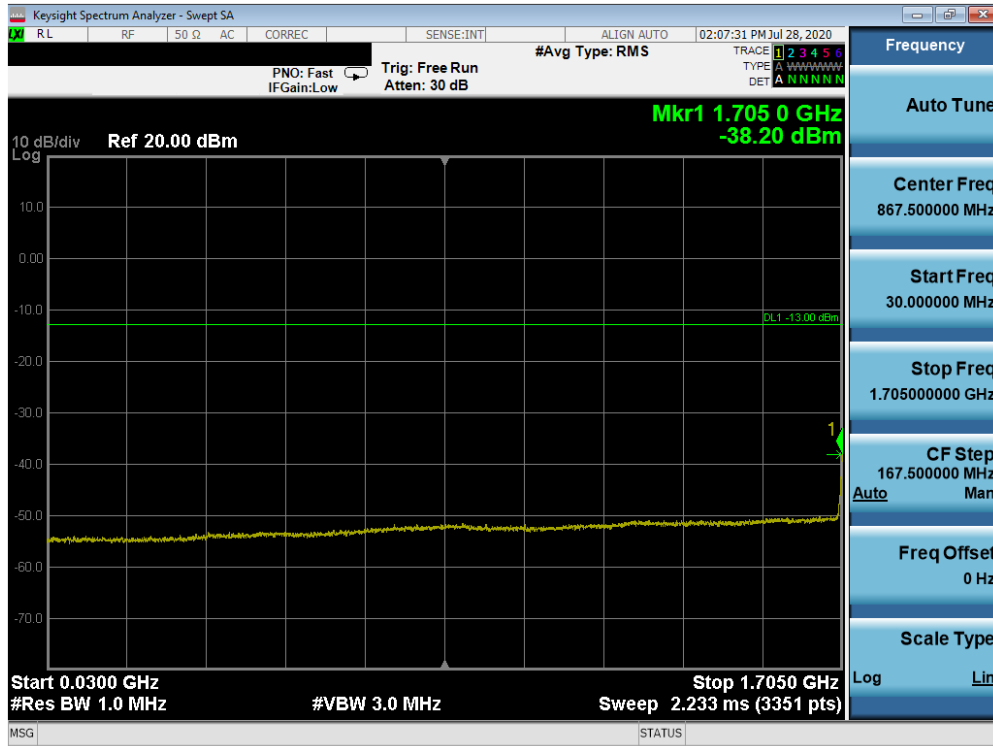


Plot 7-55. Conducted Spurious Plot (AWS WCDMA Mode - Low Channel)

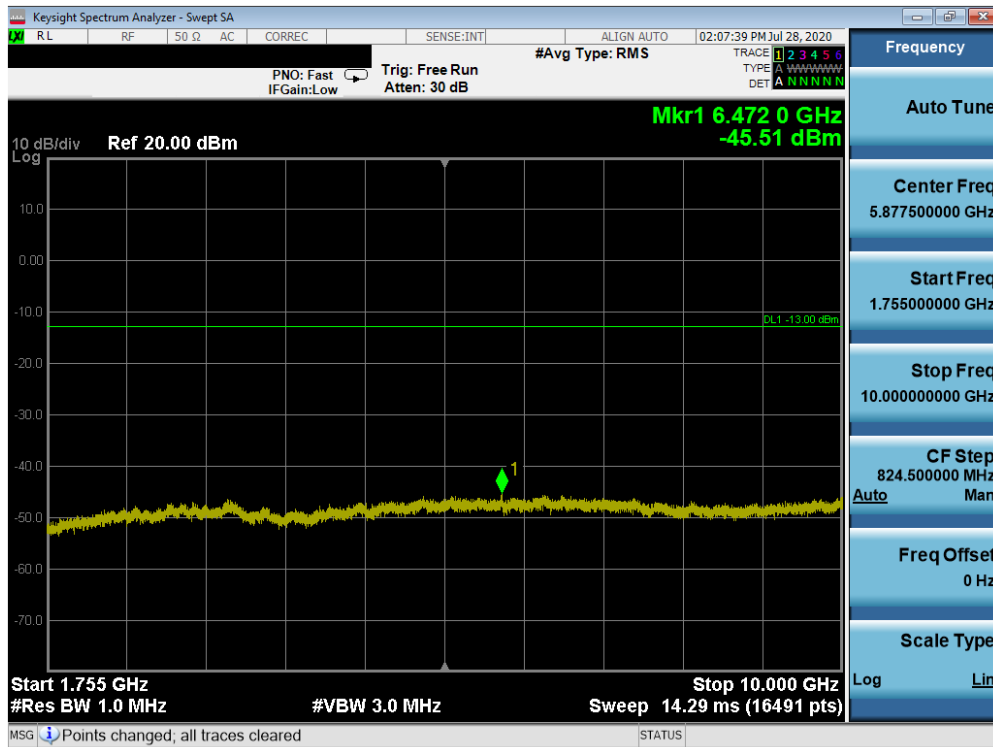


Plot 7-56. Conducted Spurious Plot (AWS WCDMA Mode - Low Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 43 of 110

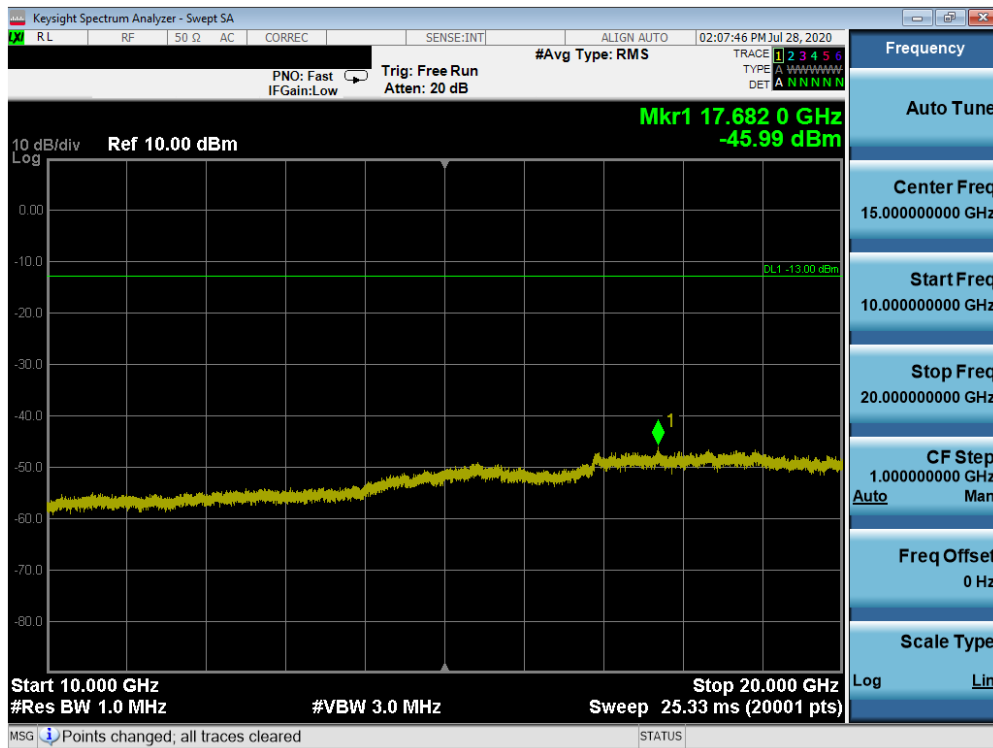


Plot 7-57. Conducted Spurious Plot (AWS WCDMA Mode - Low Channel)

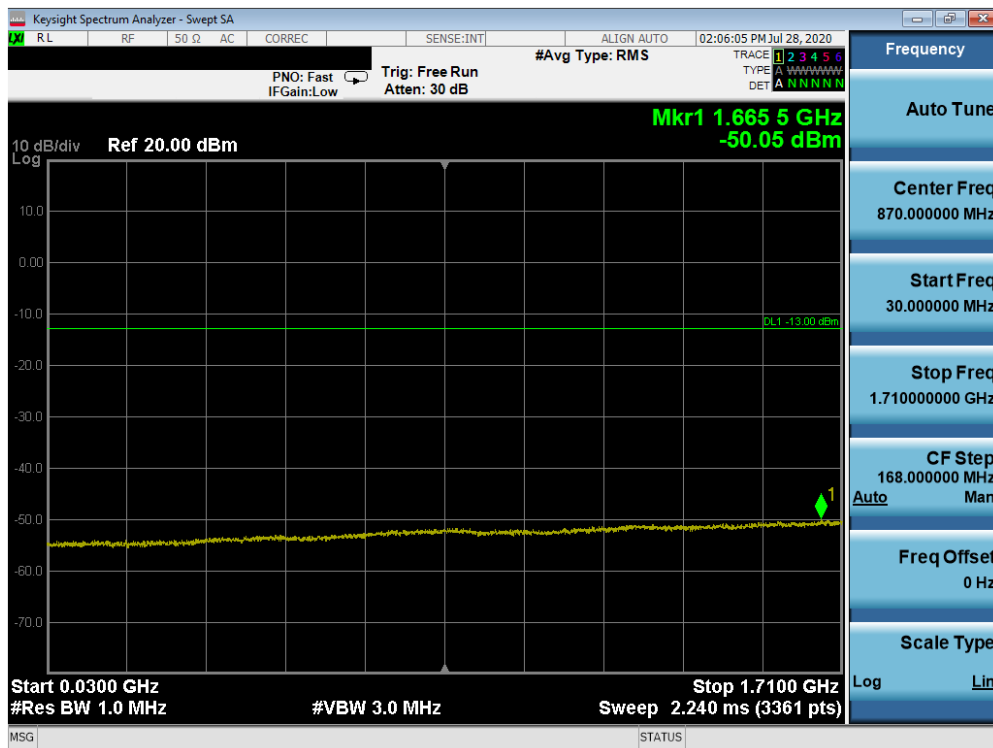


Plot 7-58. Conducted Spurious Plot (AWS WCDMA Mode - Mid Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 44 of 110

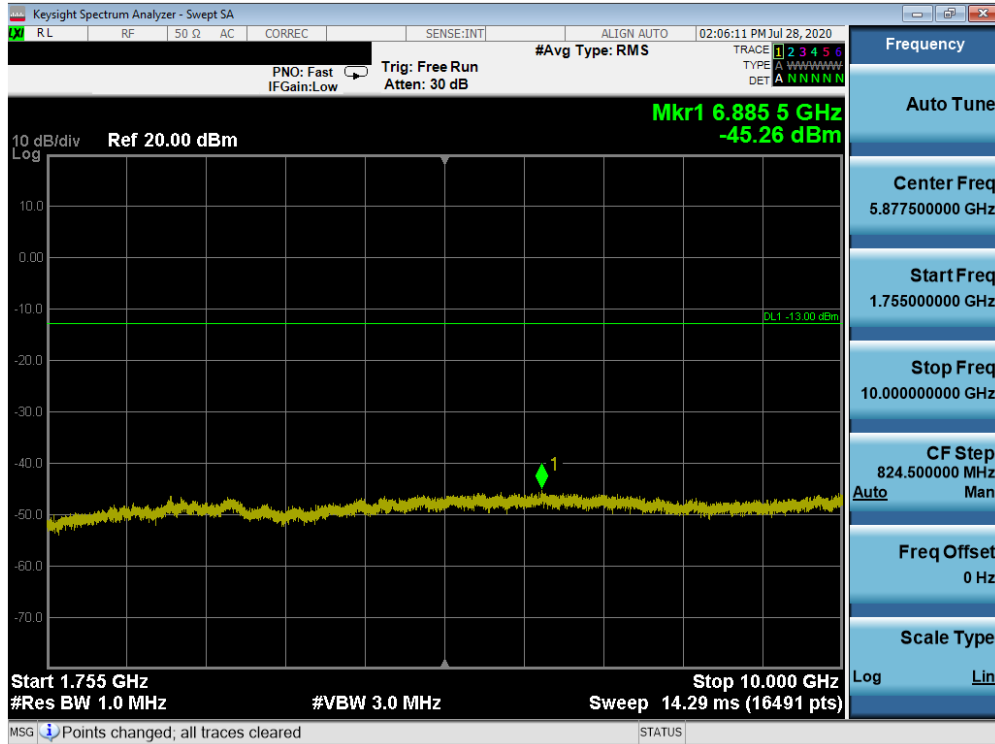


Plot 7-59. Conducted Spurious Plot (AWS WCDMA Mode - Mid Channel)

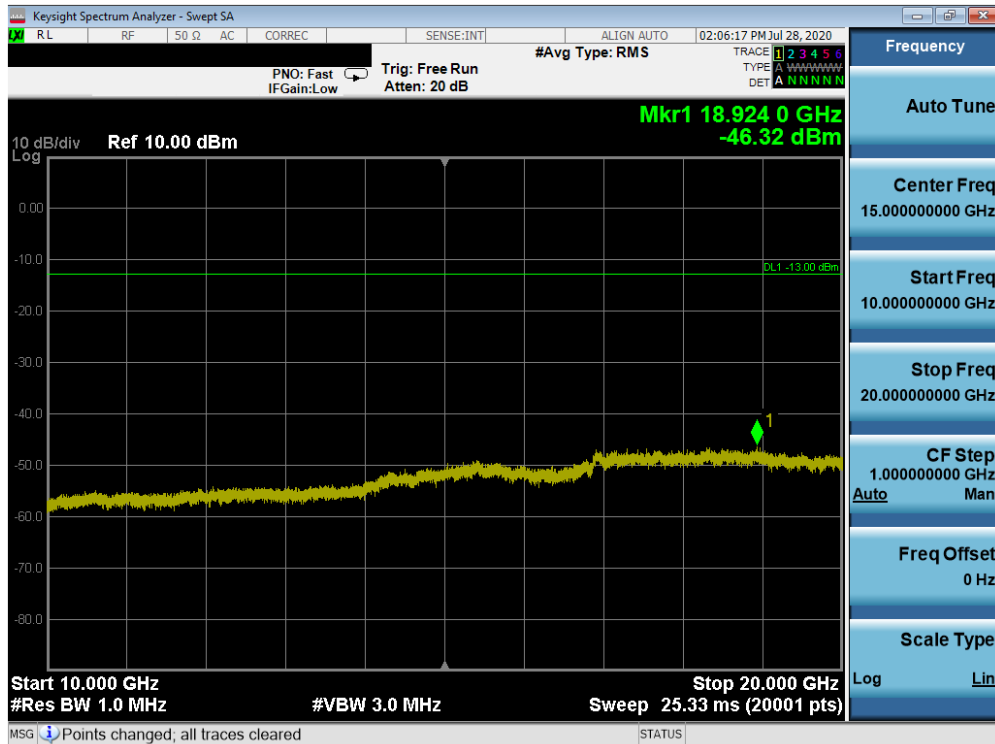


Plot 7-60. Conducted Spurious Plot (AWS WCDMA Mode - Mid Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 45 of 110

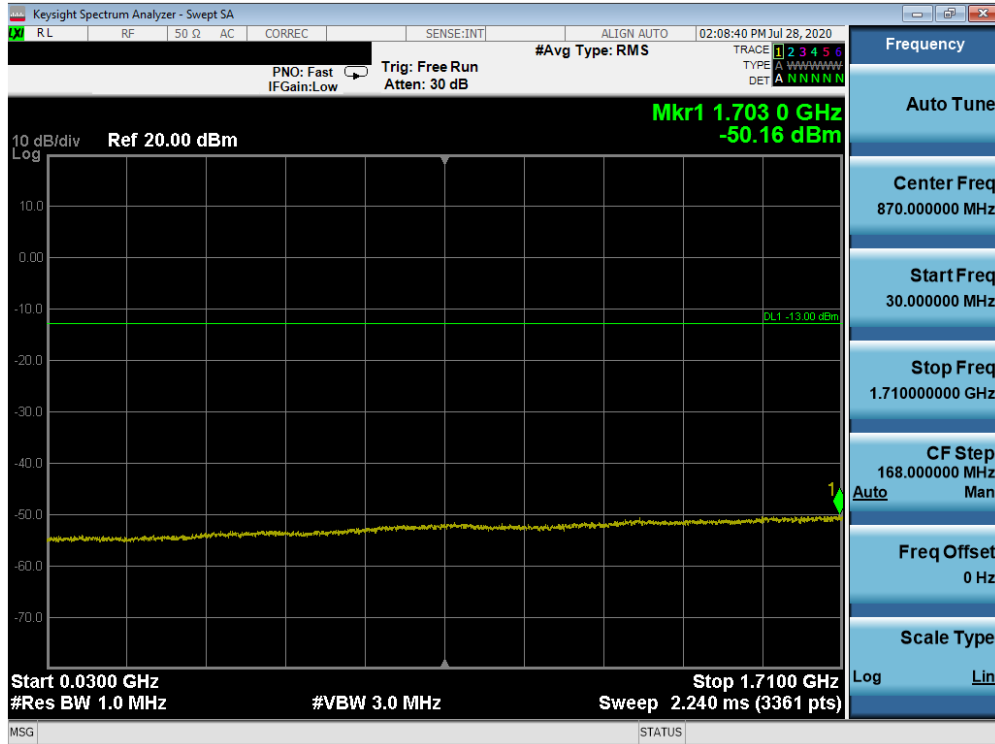


Plot 7-61. Conducted Spurious Plot (AWS WCDMA Mode - High Channel)

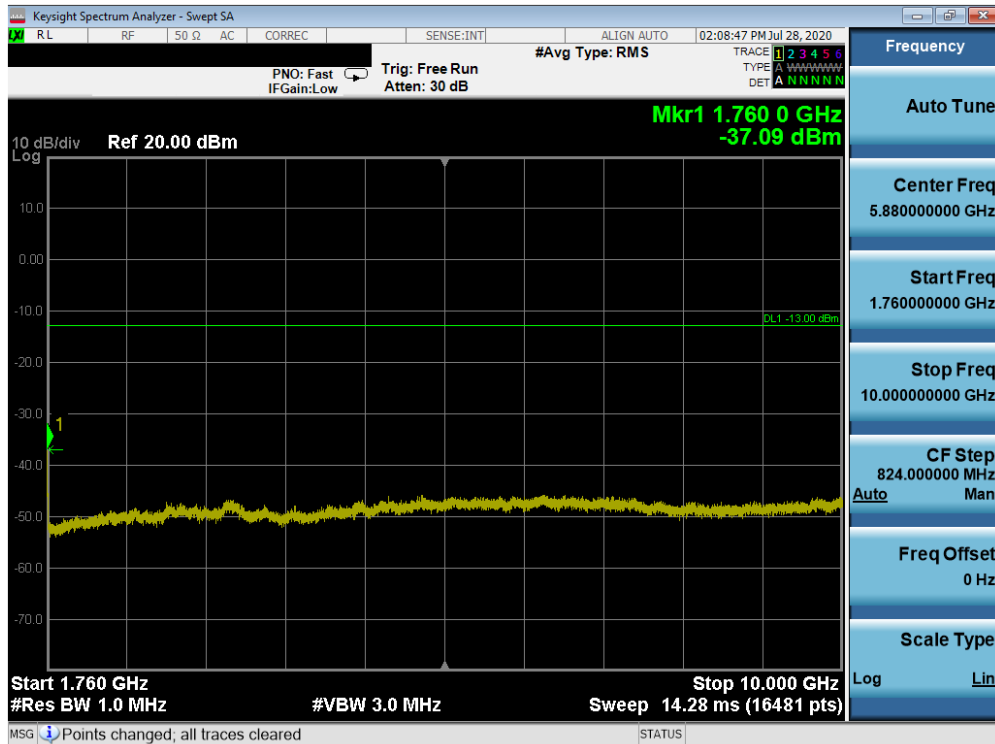


Plot 7-62. Conducted Spurious Plot (AWS WCDMA Mode - High Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 46 of 110

PCS WCDMA Mode

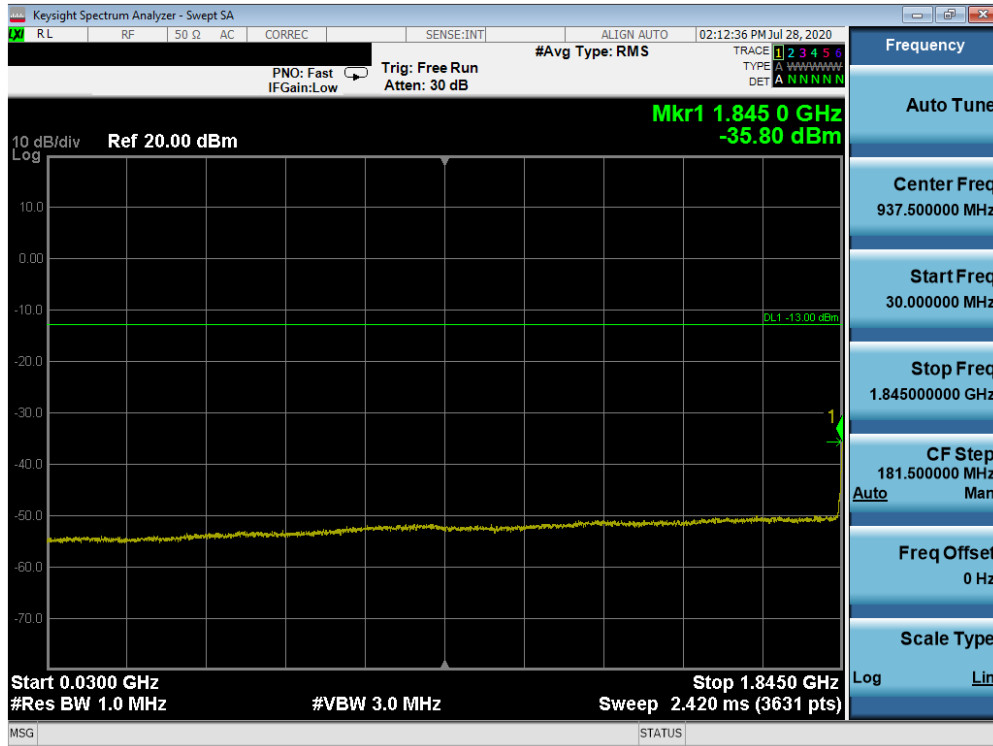


Plot 7-64. Conducted Spurious Plot (PCS WCDMA Mode - Low Channel)

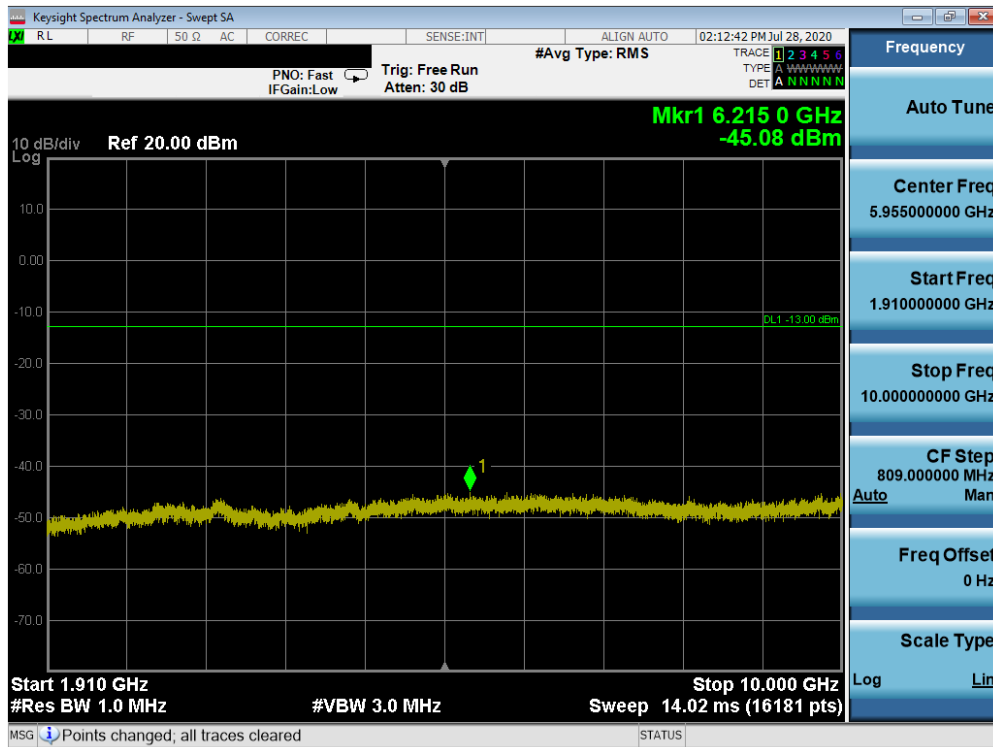


Plot 7-65. Conducted Spurious Plot (PCS WCDMA Mode - Low Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 48 of 110

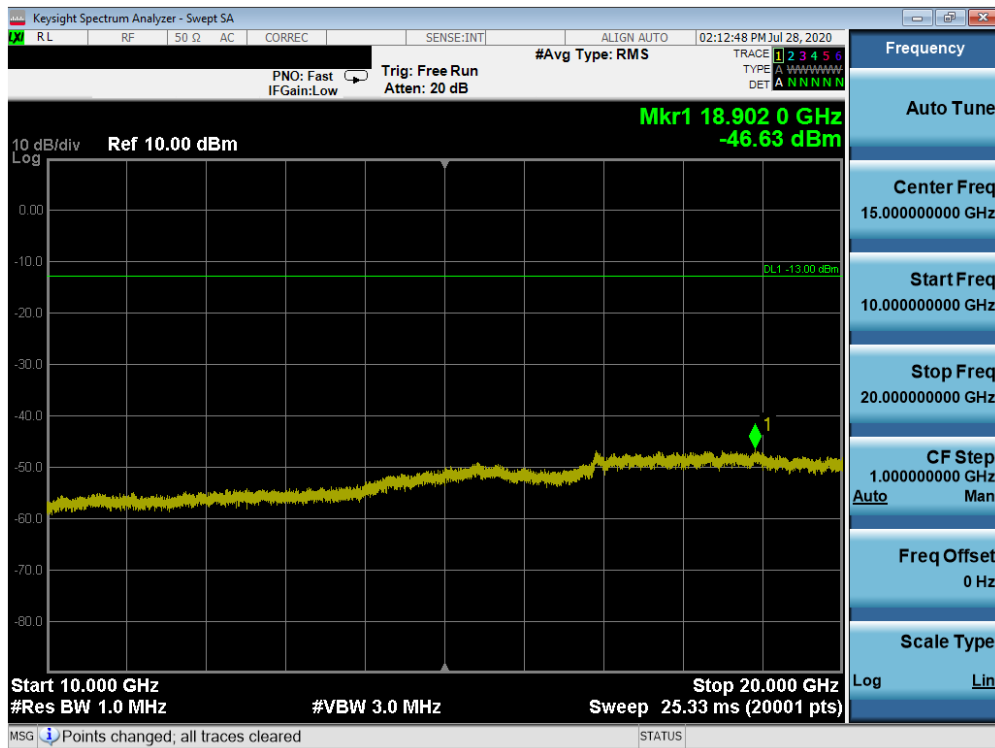


Plot 7-66. Conducted Spurious Plot (PCS WCDMA Mode - Low Channel)

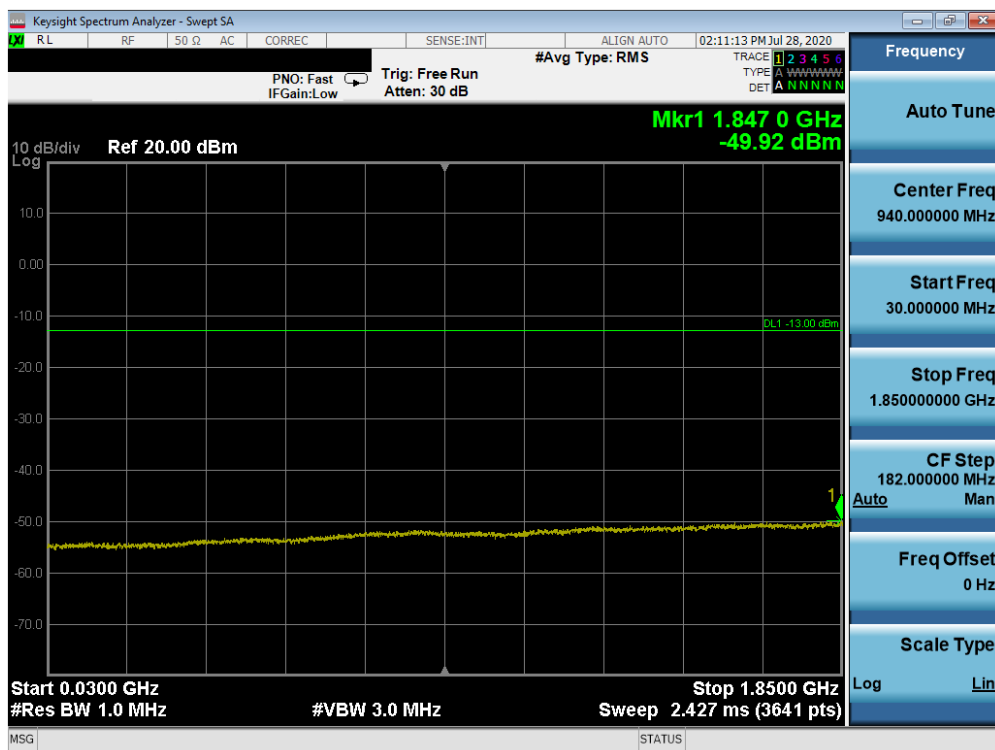


Plot 7-67. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)

FCC ID: ZNFF100TM	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset	Page 49 of 110

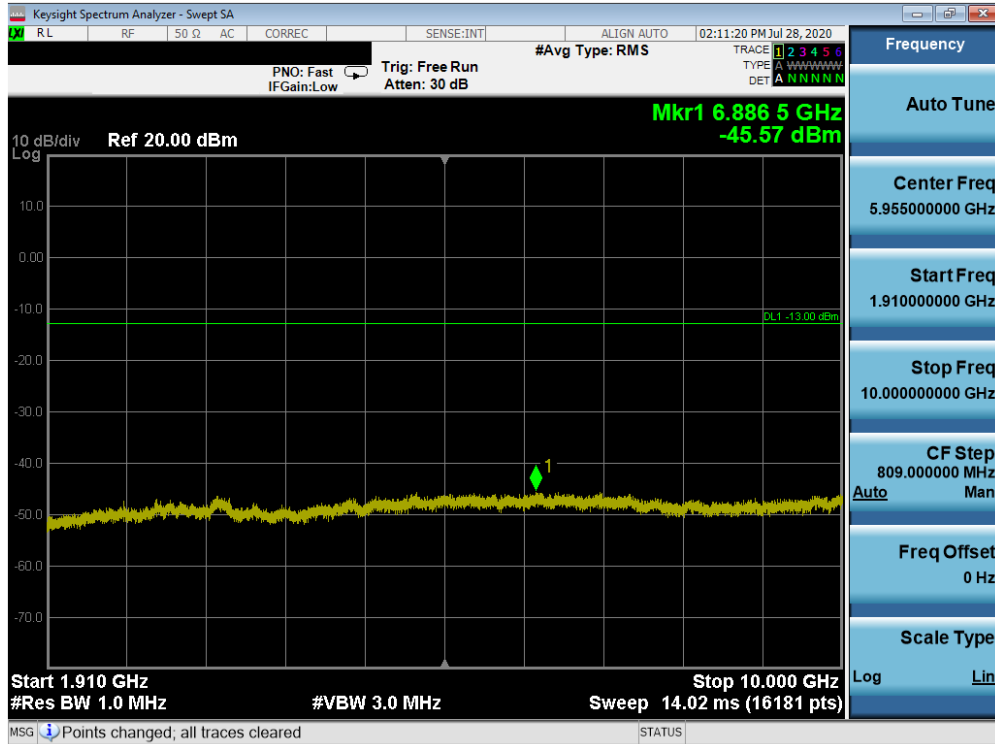


Plot 7-68. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)

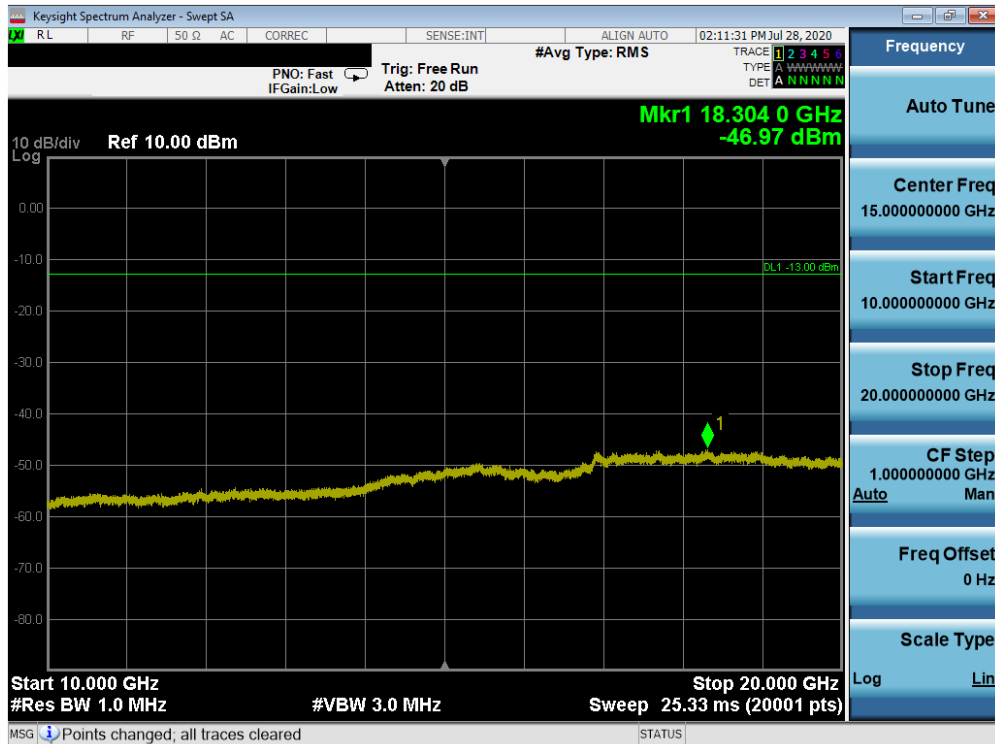


Plot 7-69. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 50 of 110

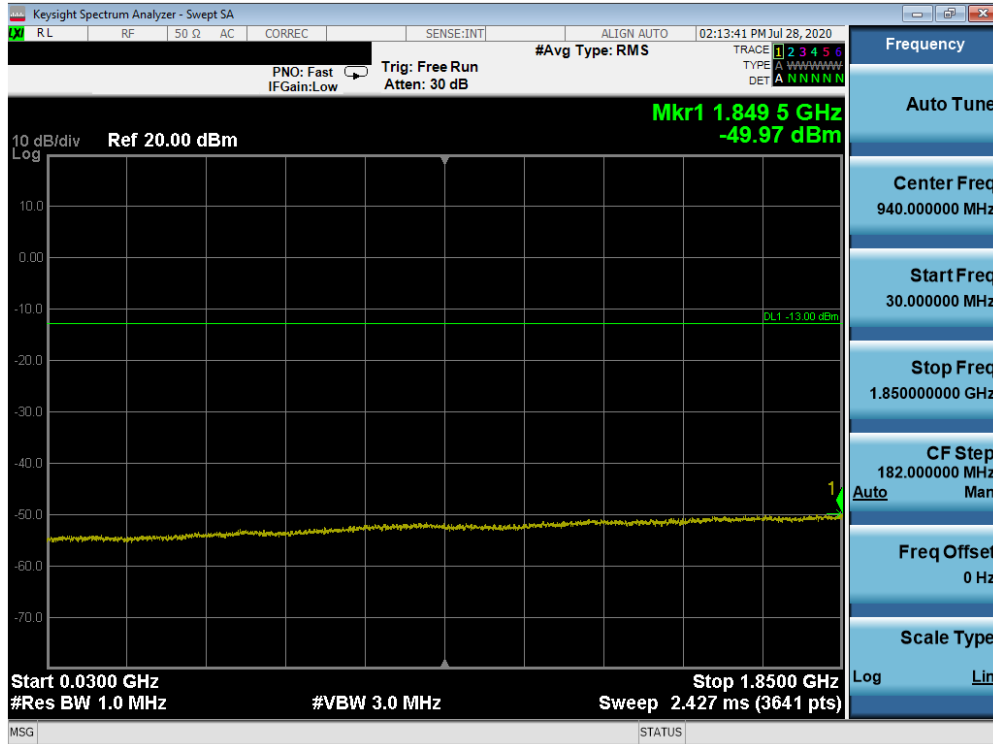


Plot 7-70. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

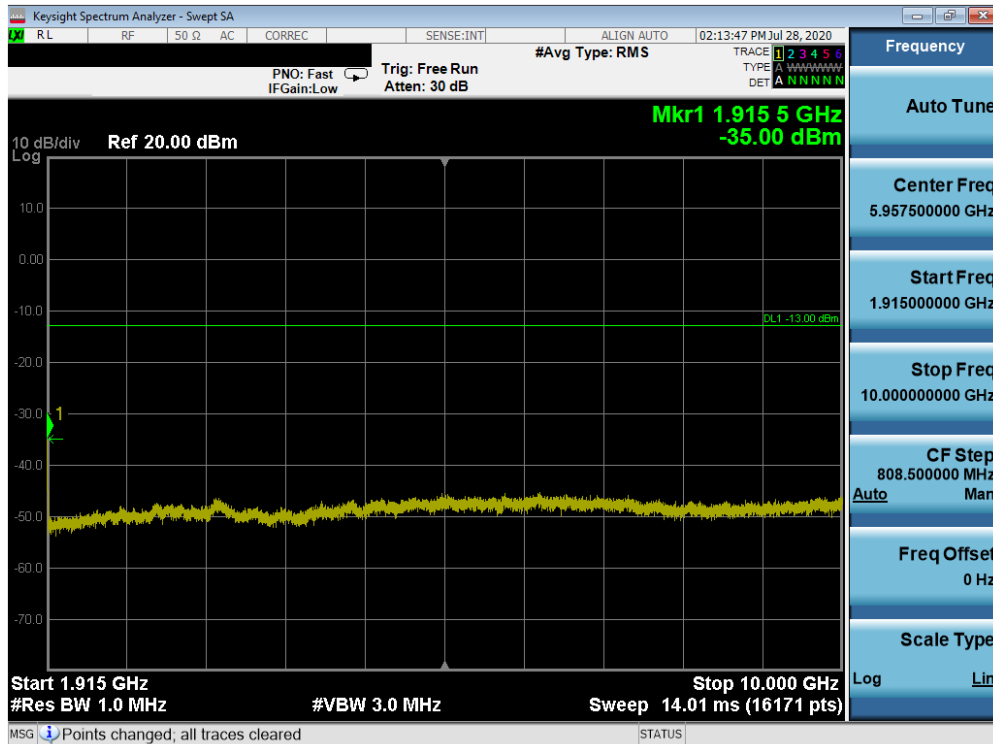

Plot 7-71. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 51 of 110

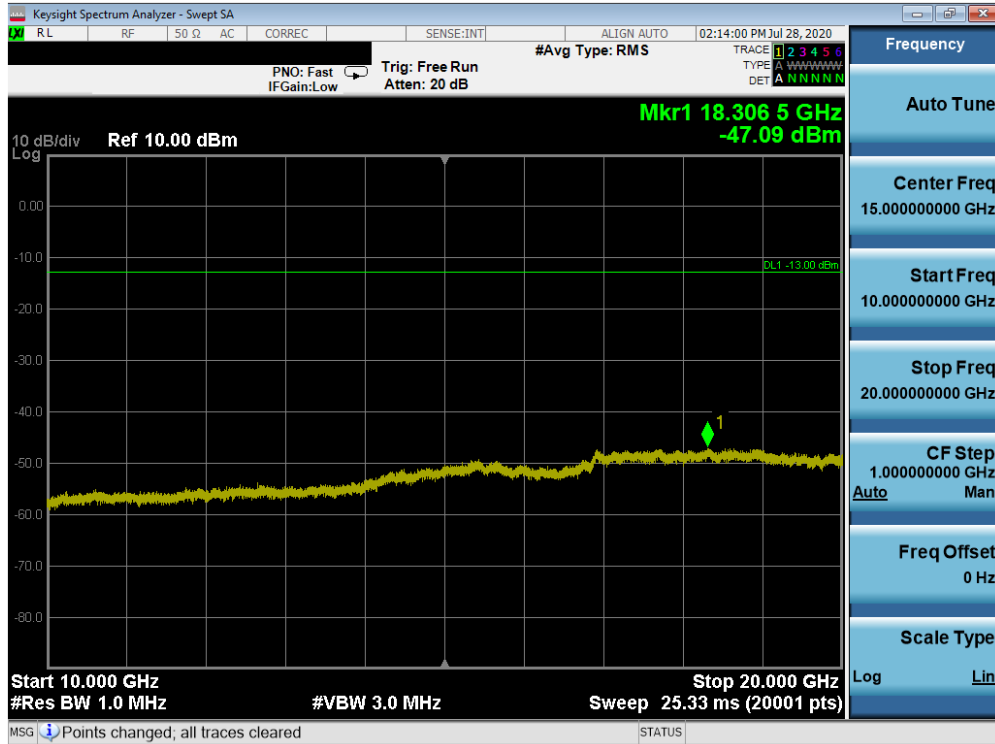

Plot 7-72. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 52 of 110

7.4 Band Edge Emissions at Antenna Terminal

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{\text{Watts}})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. $\text{RBW} \geq 1\%$ of the emission bandwidth
4. $\text{VBW} \geq 3 \times \text{RBW}$
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-3. Test Instrument & Measurement Setup

Test Notes


Per 22.917(b), 24.238(b), 27.53(h)(3), and RSS-132(5.5), RSS-133(6.5), RSS-139(6.5), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 53 of 110

Cellular GPRS Mode

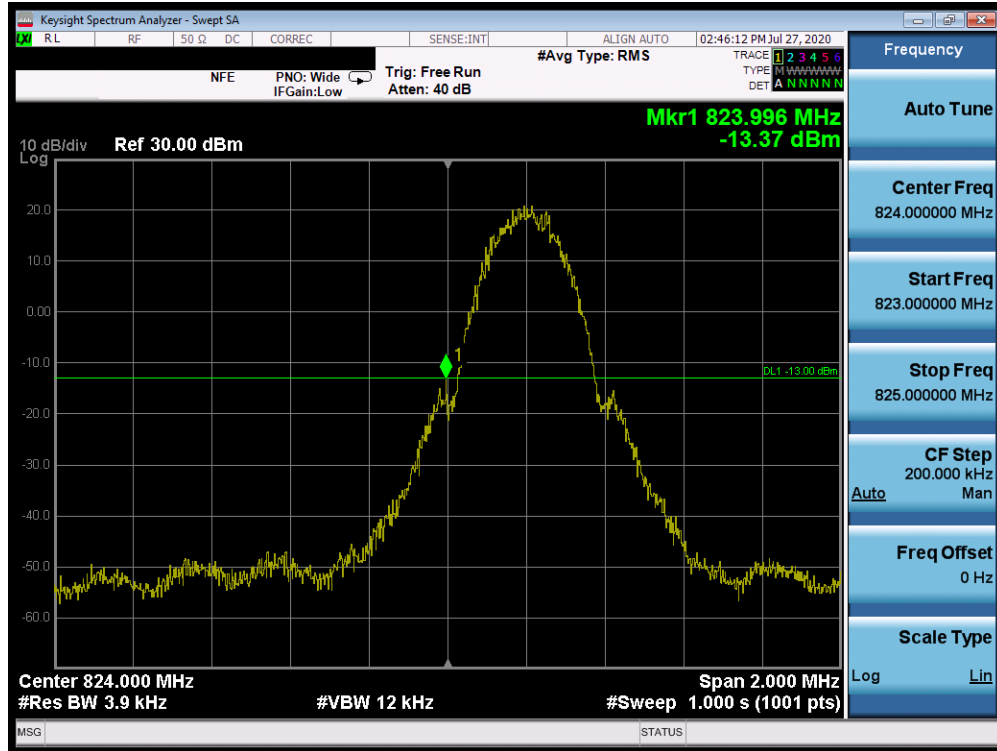


Plot 7-73. Band Edge Plot (Cellular GPRS Mode - Low Channel)

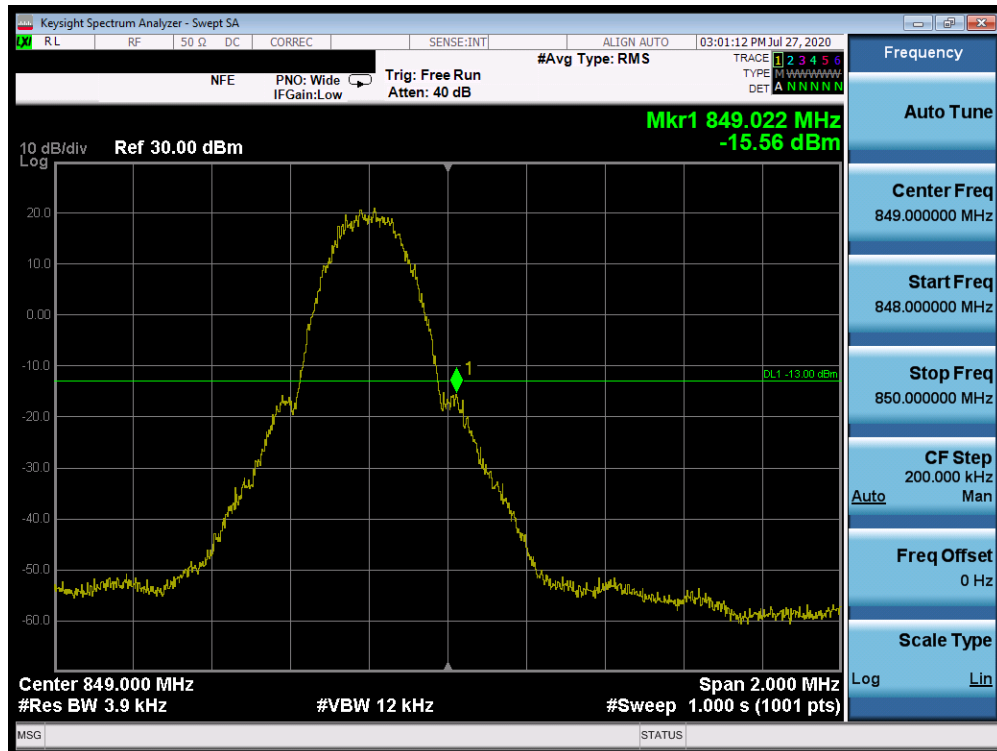


Plot 7-74. Band Edge Plot (Cellular GPRS Mode - High Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 54 of 110

PCS GPRS Mode

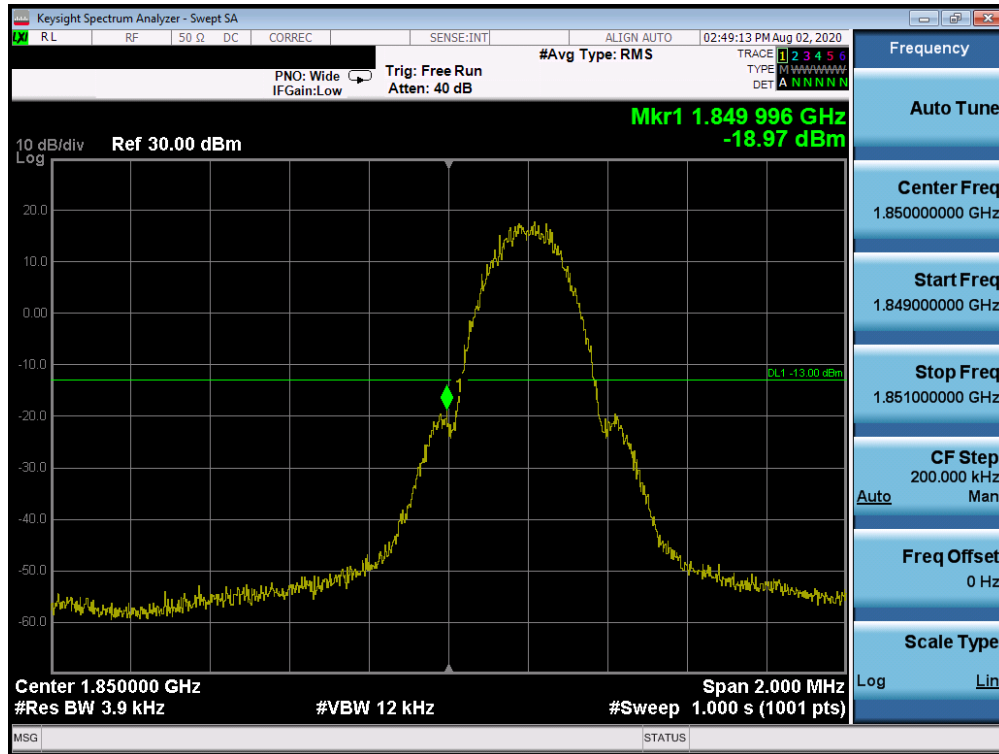


Plot 7-75. Band Edge Plot (PCS GPRS Mode - Low Channel)

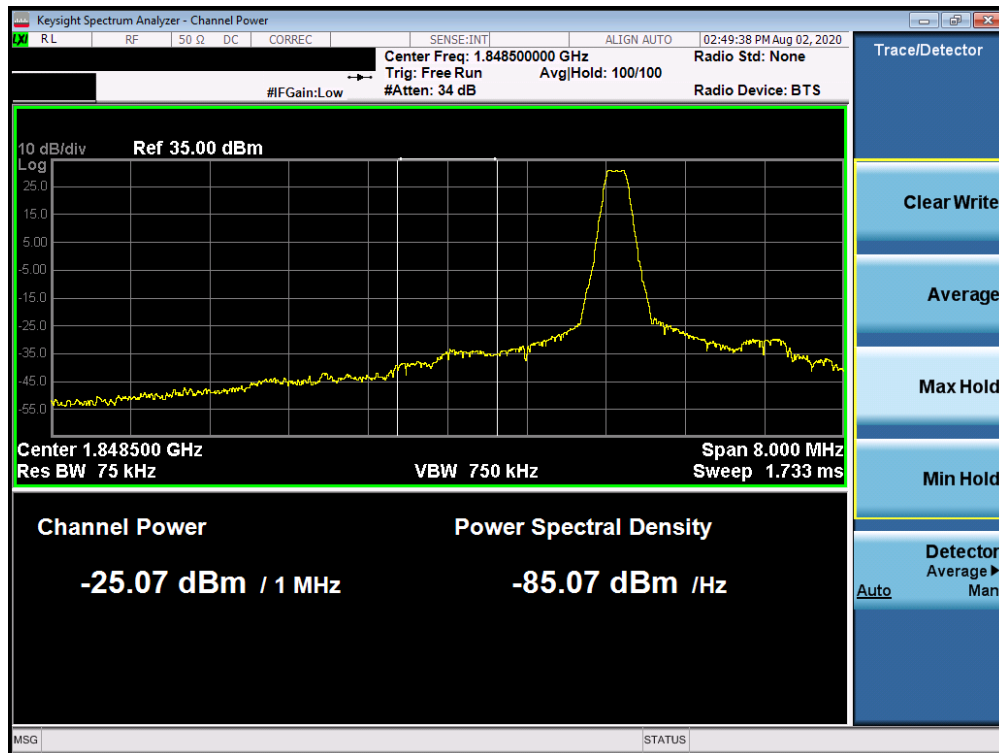


Plot 7-76. 4MHz Span Plot (PCS GPRS Mode - Low Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 55 of 110

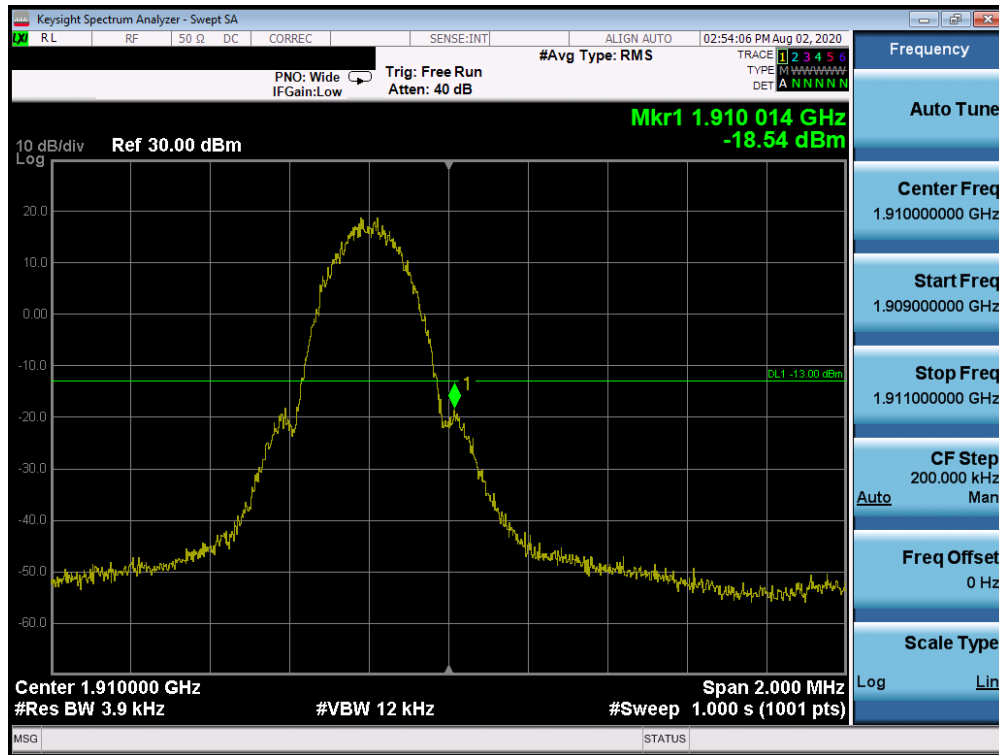


Plot 7-77. Band Edge Plot (PCS GPRS Mode - High Channel)

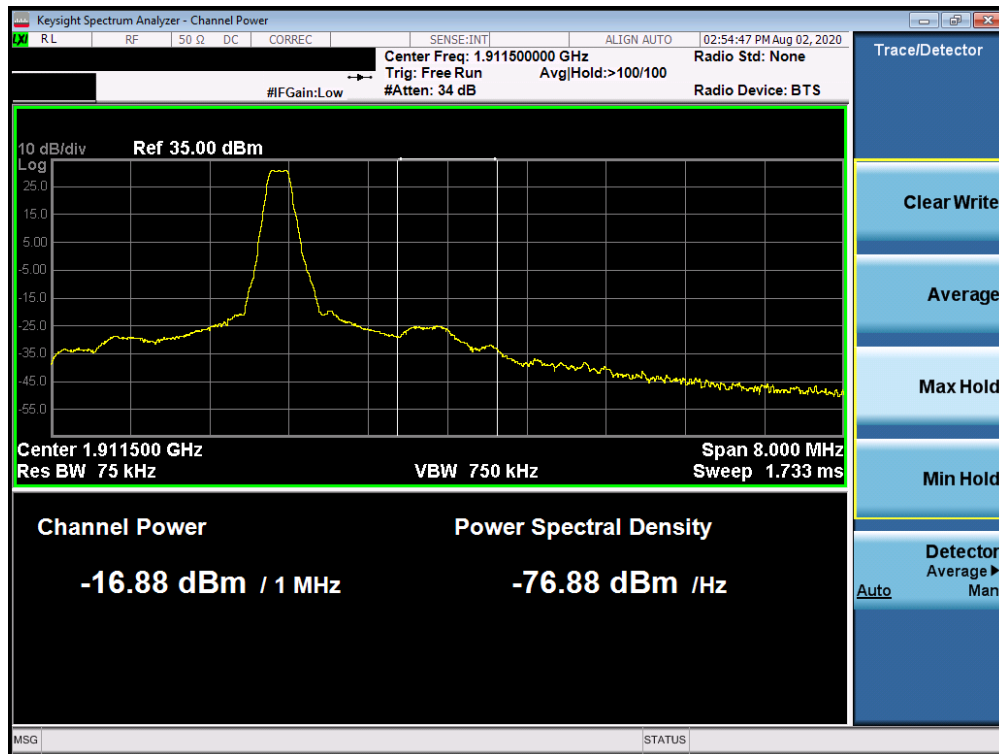

Plot 7-78. 4MHz Span Plot (PCS GPRS Mode - High Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 56 of 110

Cellular CDMA Mode

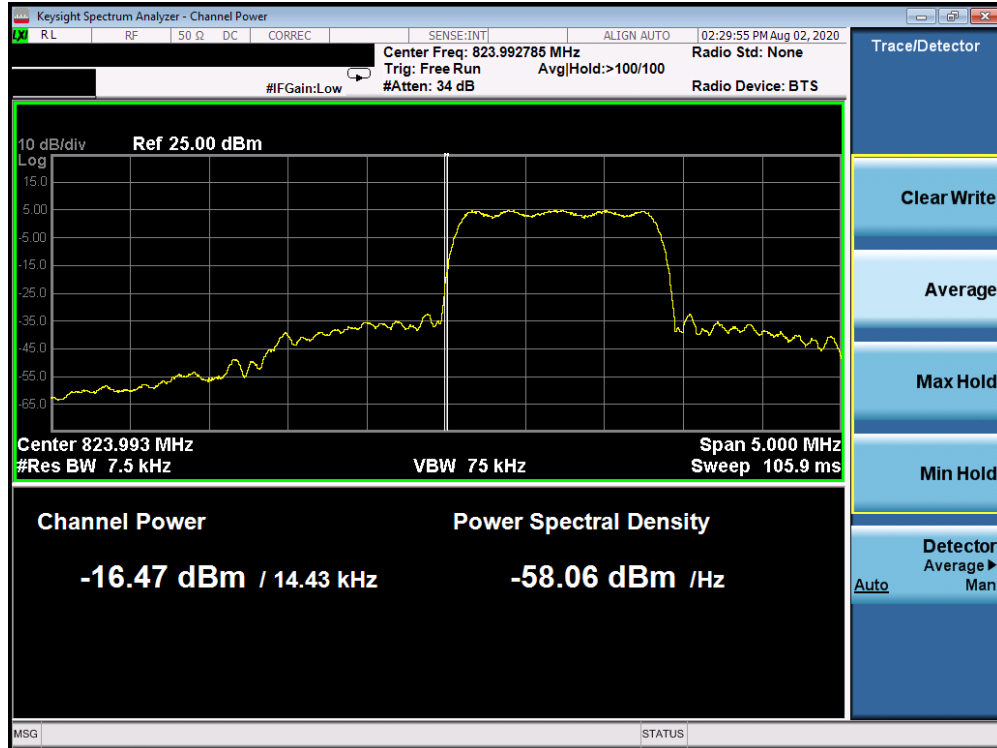


Plot 7-79. Band Edge Plot (Cellular CDMA Mode - Low Channel)



Plot 7-80. 4MHz Span Plot (Cellular CDMA Mode - Low Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 57 of 110

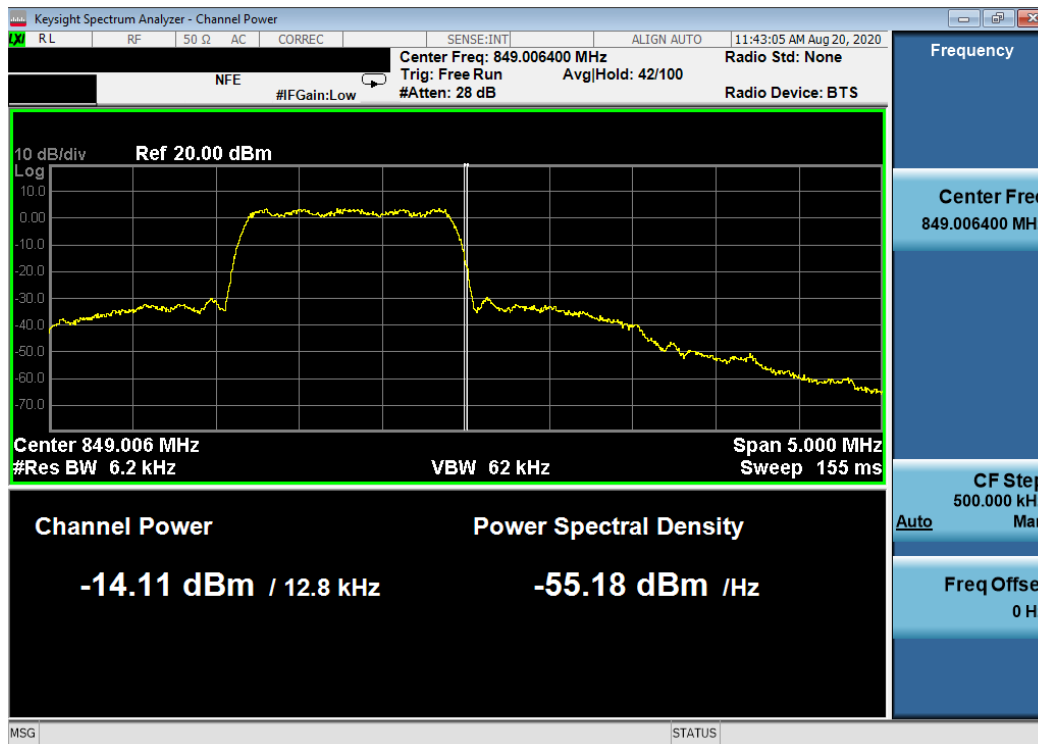


Plot 7-81. Band Edge Plot (Cellular CDMA Mode - High Channel)




Plot 7-82. 4MHz Span Plot (Cellular CDMA Mode - High Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 58 of 110

PCS CDMA Mode

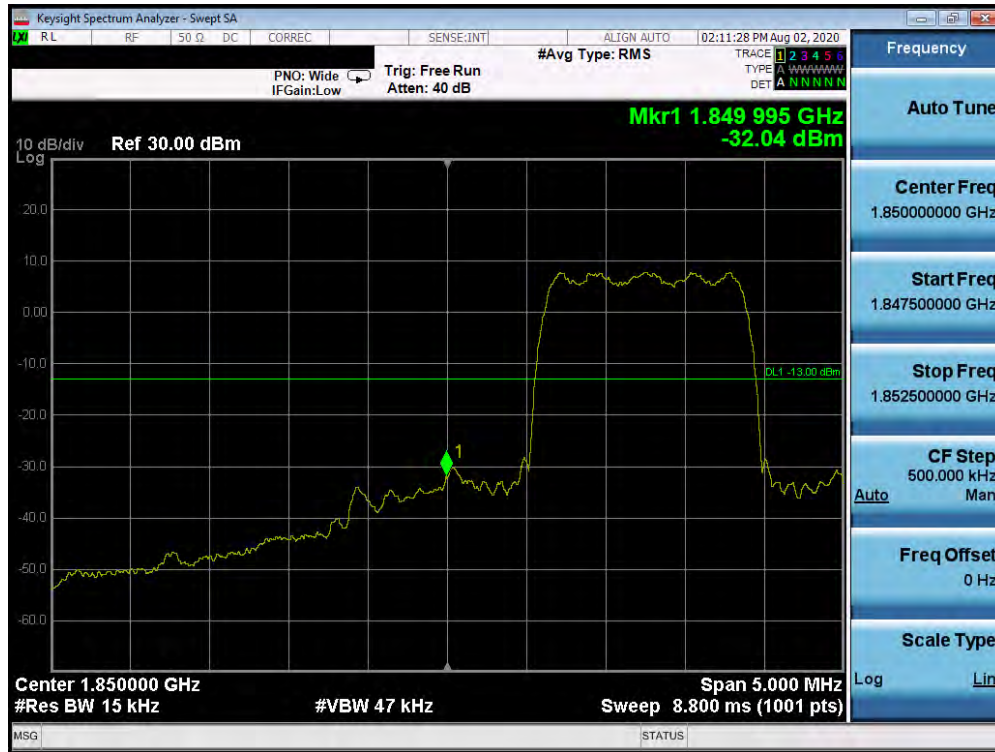

Plot 7-83. Band Edge Plot (PCS CDMA Mode - Low Channel)

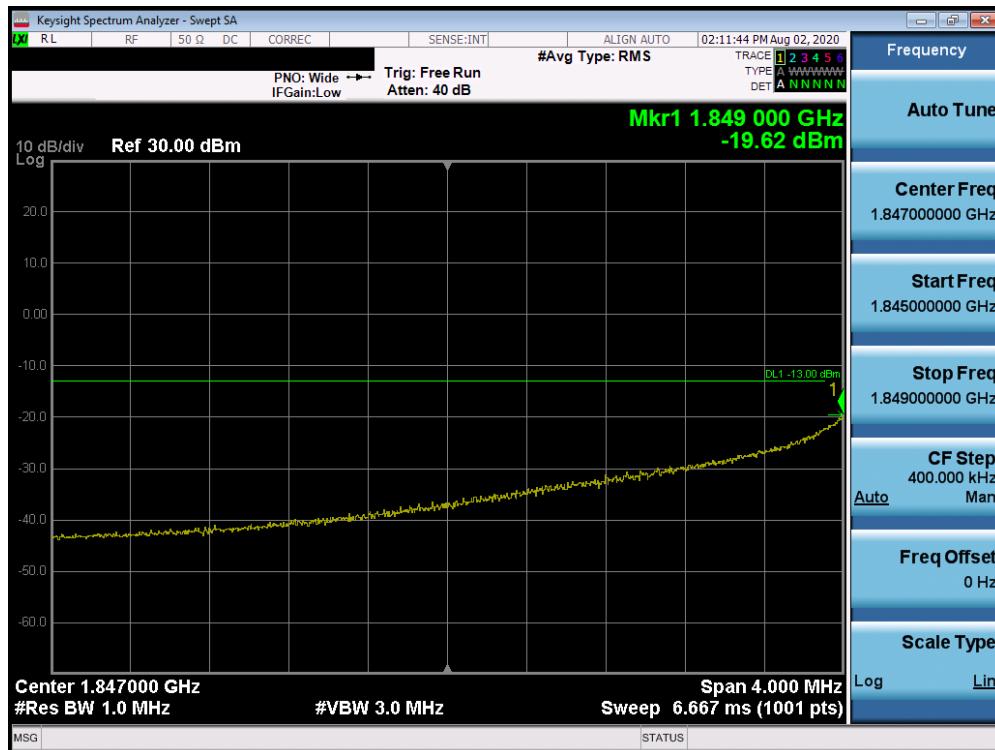

Plot 7-84. 4MHz Span Plot (PCS CDMA Mode - Low Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 59 of 110




Plot 7-85. Band Edge Plot (PCS CDMA Mode - High Channel)



Plot 7-86. 4MHz Span Plot (PCS CDMA Mode - High Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 60 of 110

Cellular WCDMA Mode

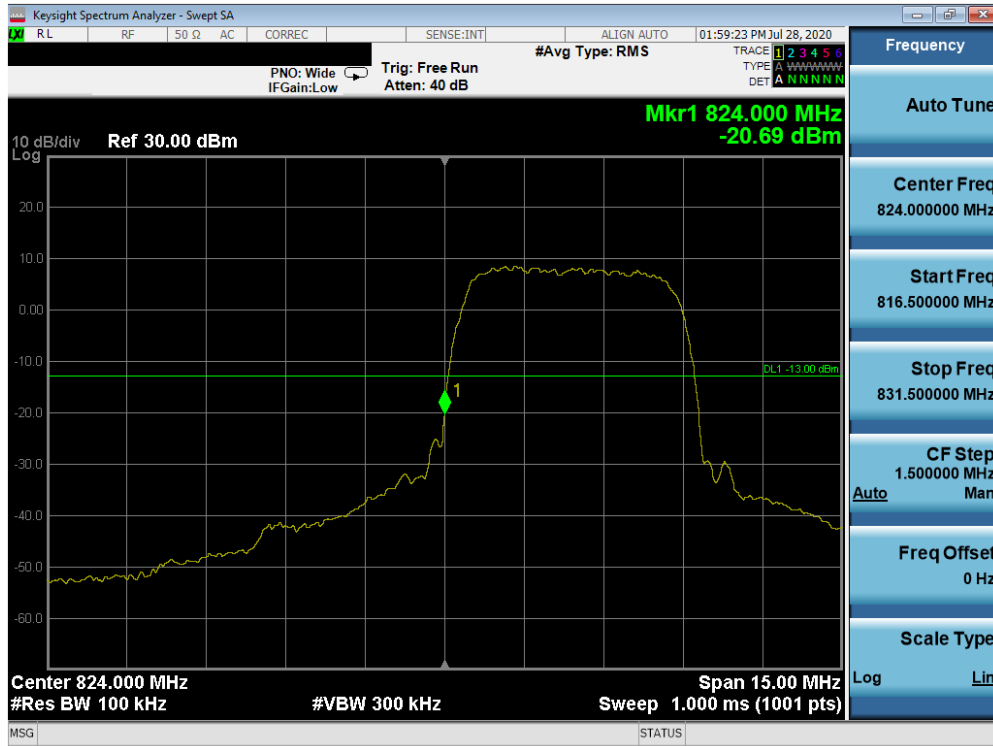

Plot 7-87. Band Edge Plot (Cellular WCDMA Mode - Low Channel)




Plot 7-88. Band Edge Plot (Cellular WCDMA Mode - High Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 61 of 110

AWS WCDMA Mode



Plot 7-89. Band Edge Plot (AWS WCDMA Mode - Low Channel)

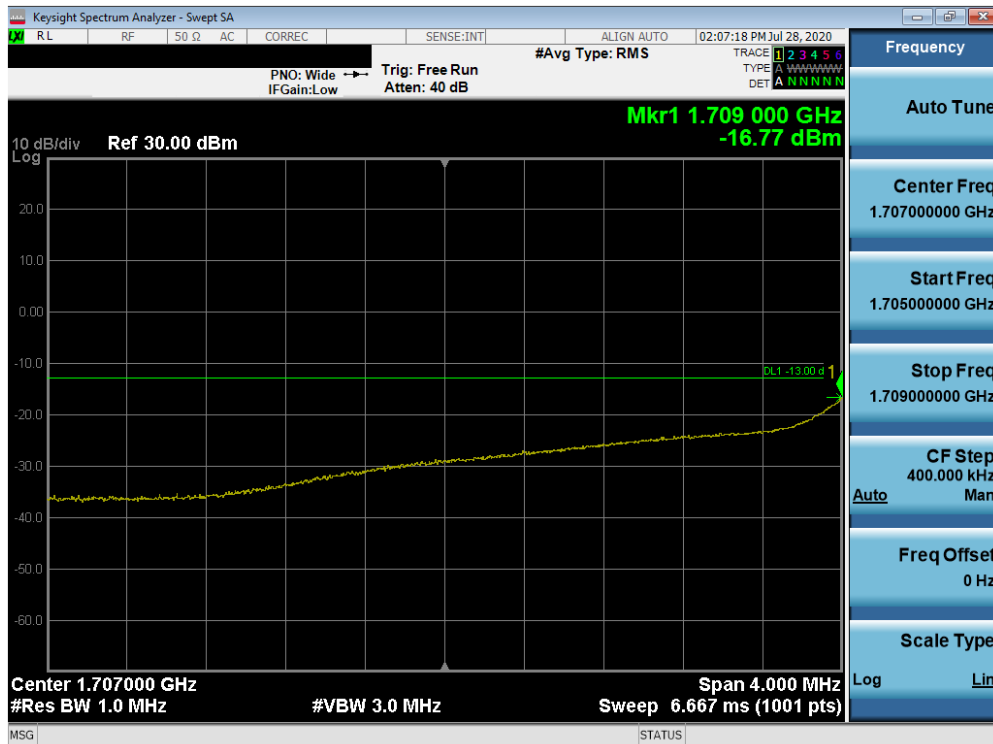


Plot 7-90. 4MHz Span Plot (AWS WCDMA Mode - Low Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 62 of 110




Plot 7-91. Band Edge Plot (AWS WCDMA Mode - High Channel)

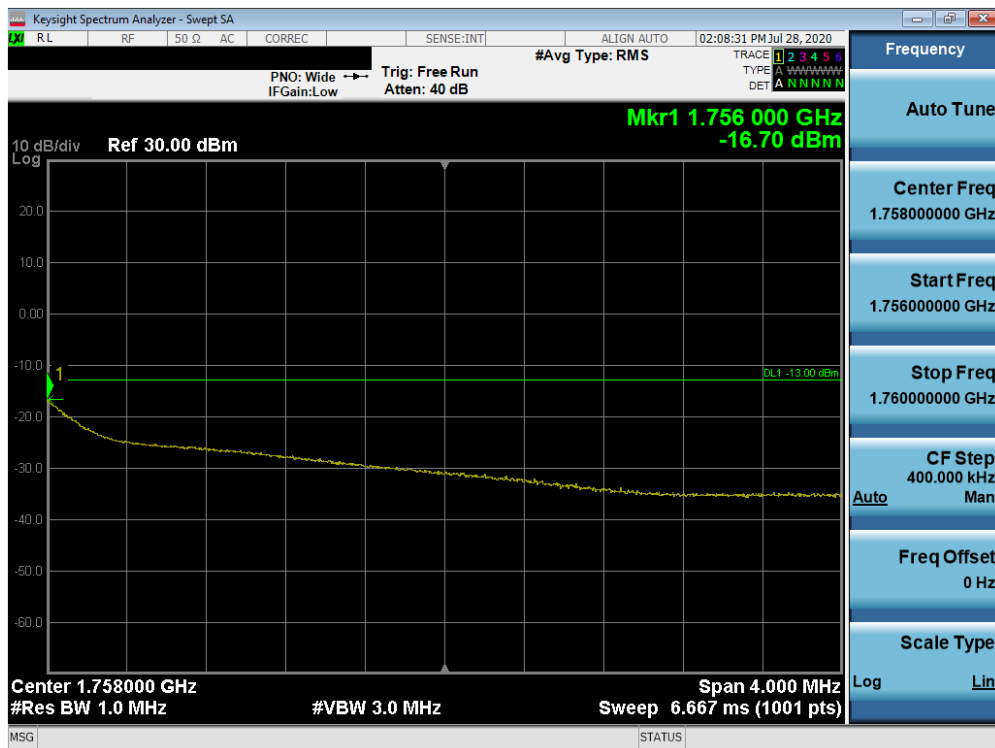


Plot 7-92. 4MHz Span Plot (AWS WCDMA Mode - High Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 63 of 110

PCS WCDMA Mode

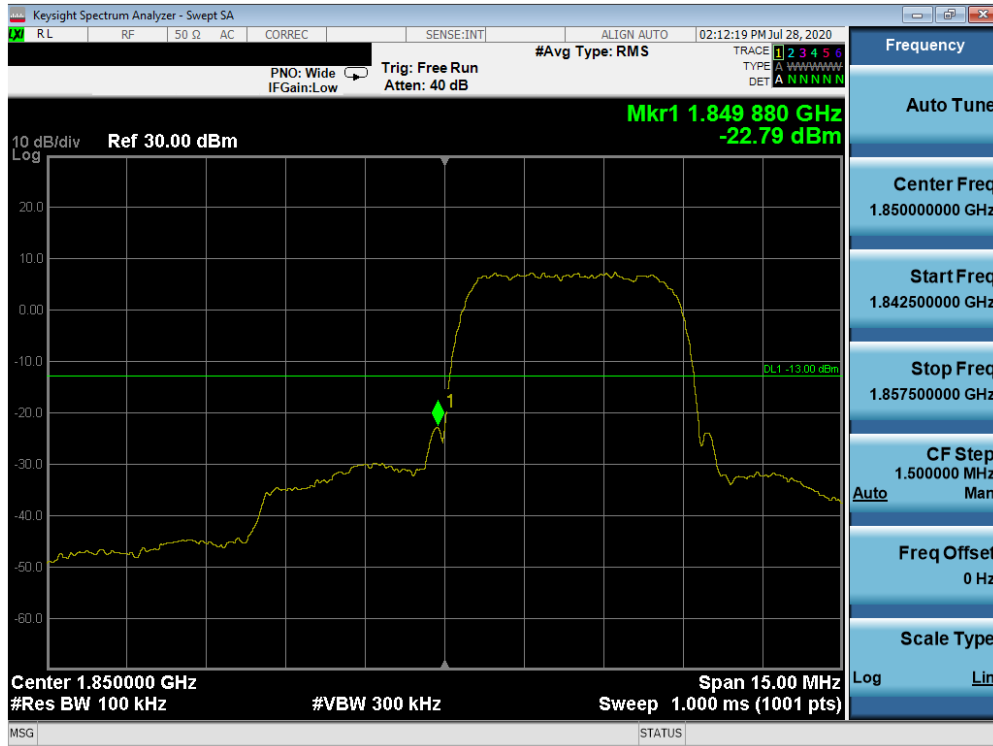

Plot 7-93. Band Edge Plot (PCS WCDMA Mode - Low Channel)

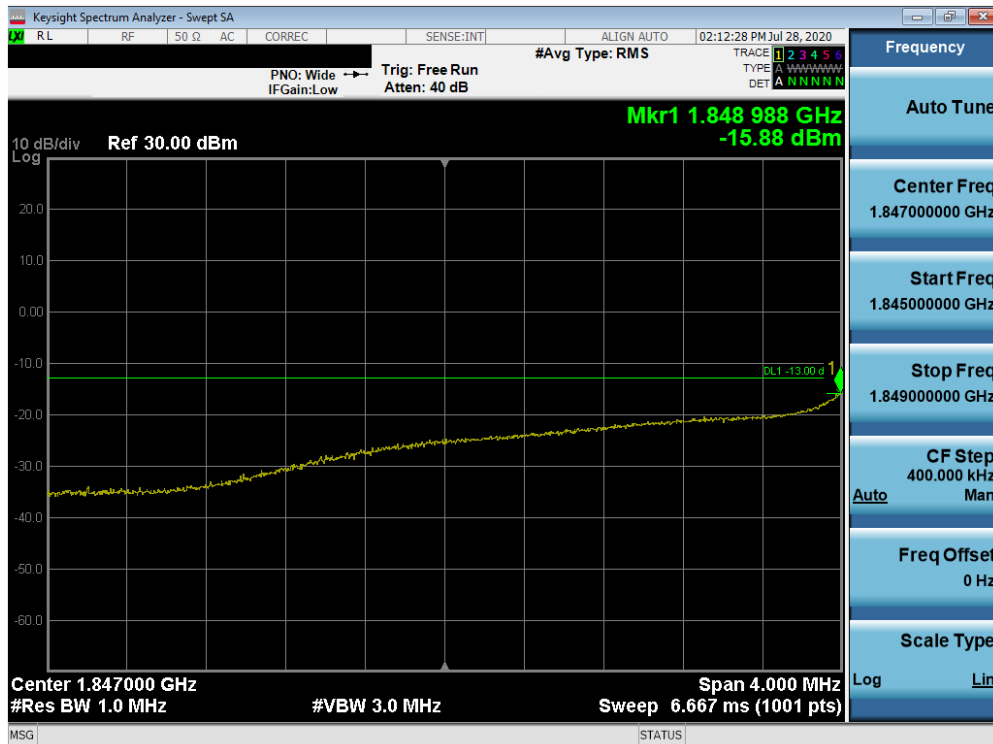


Plot 7-94. 4MHz Span Plot (PCS WCDMA Mode - Low Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 64 of 110



Plot 7-95. Band Edge Plot (PCS WCDMA Mode - High Channel)

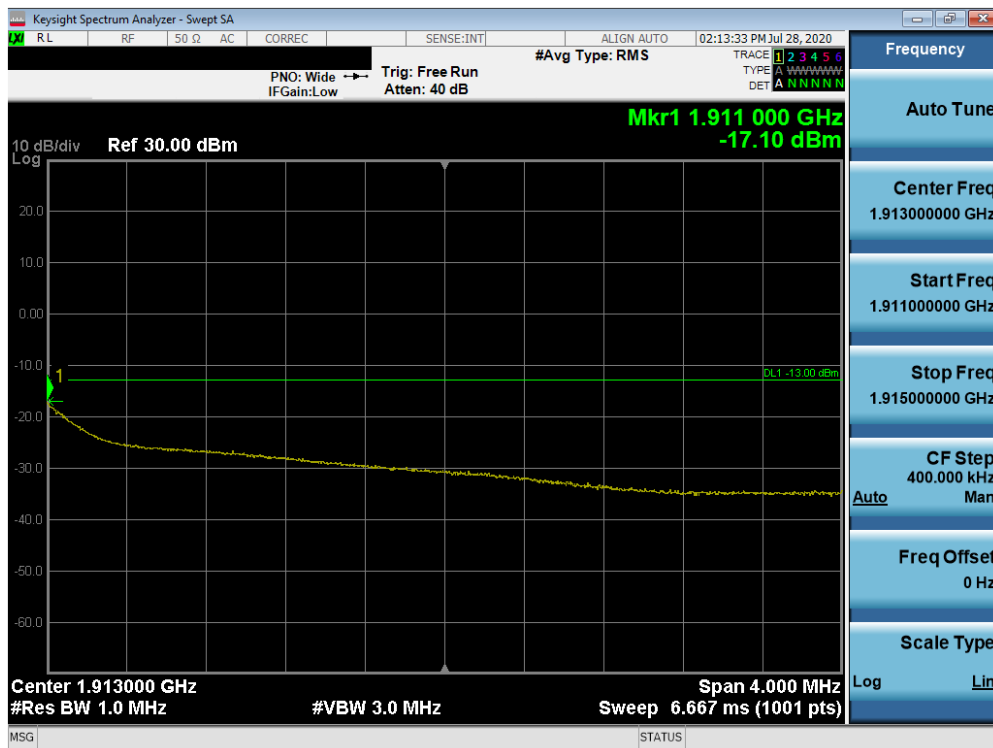

Plot 7-96. 4MHz Span Plot (PCS WCDMA Mode - High Channel)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 65 of 110

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 66 of 110

7.5 Peak-Average Ratio

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 5.7.1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

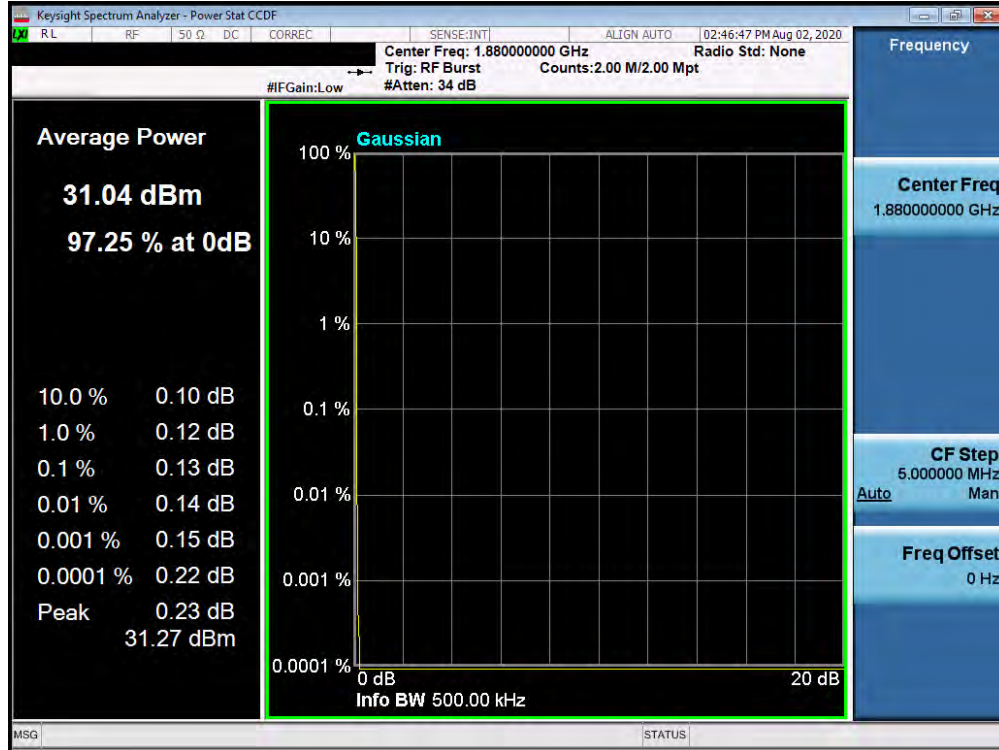


Figure 7-4. Test Instrument & Measurement Setup


Test Notes

None

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 67 of 110




Plot 7-97. Peak-Average Ratio Plot (PCS GPRS Mode)

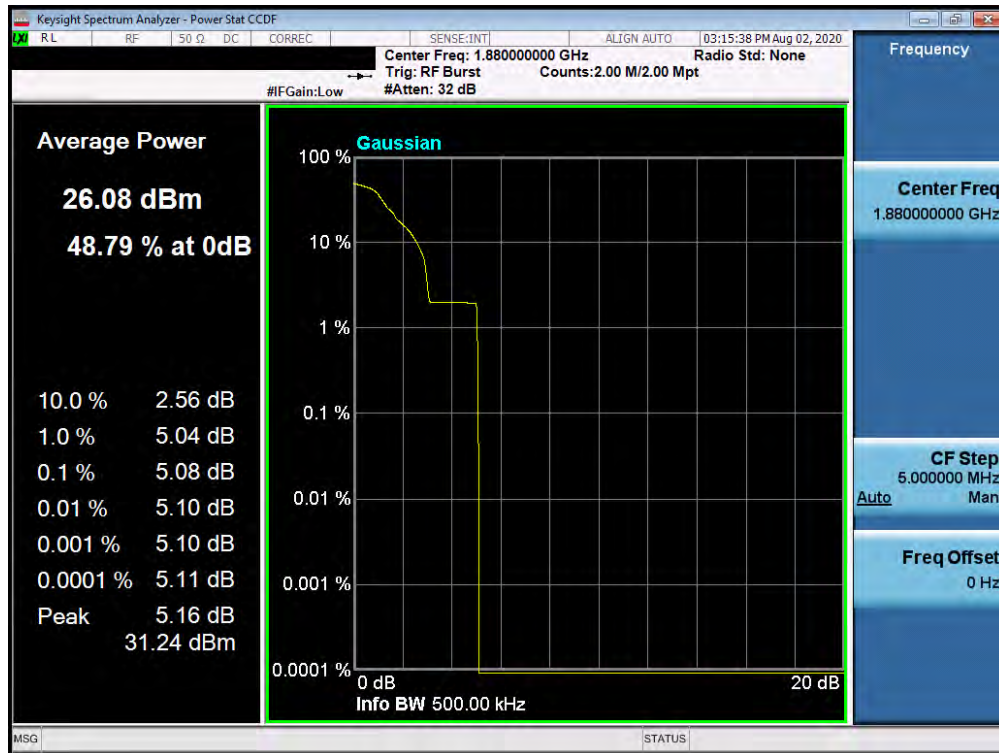


Plot 7-98. Peak-Average Ratio Plot (EDGE1900 Mode)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 68 of 110

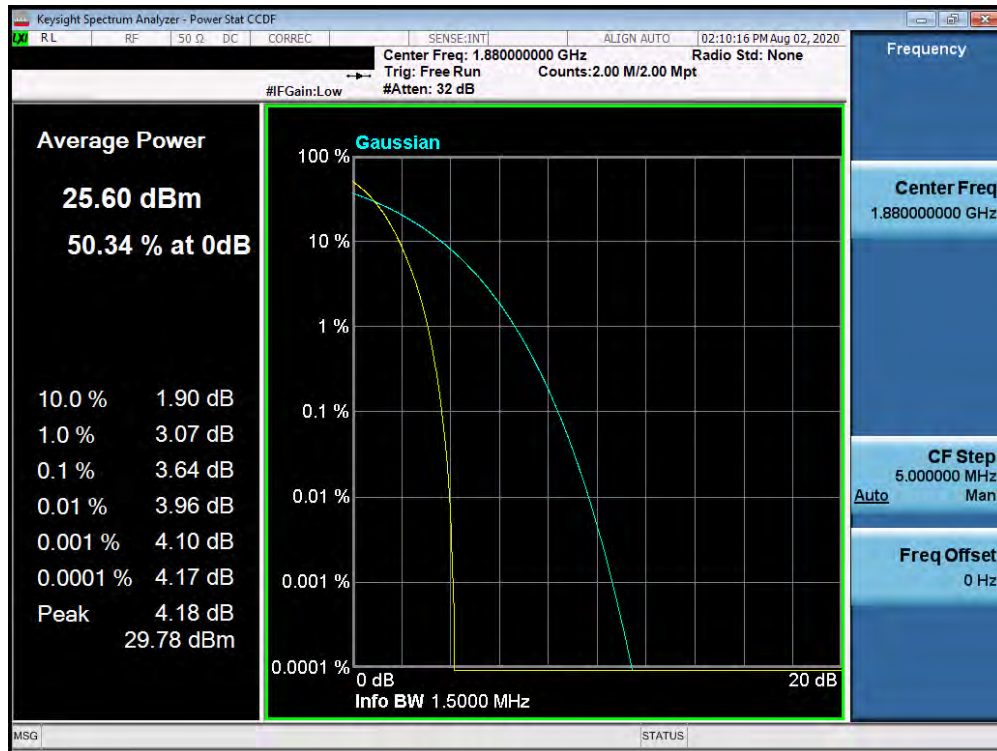


Plot 7-99. Peak-Average Ratio Plot (PCS CDMA Mode)

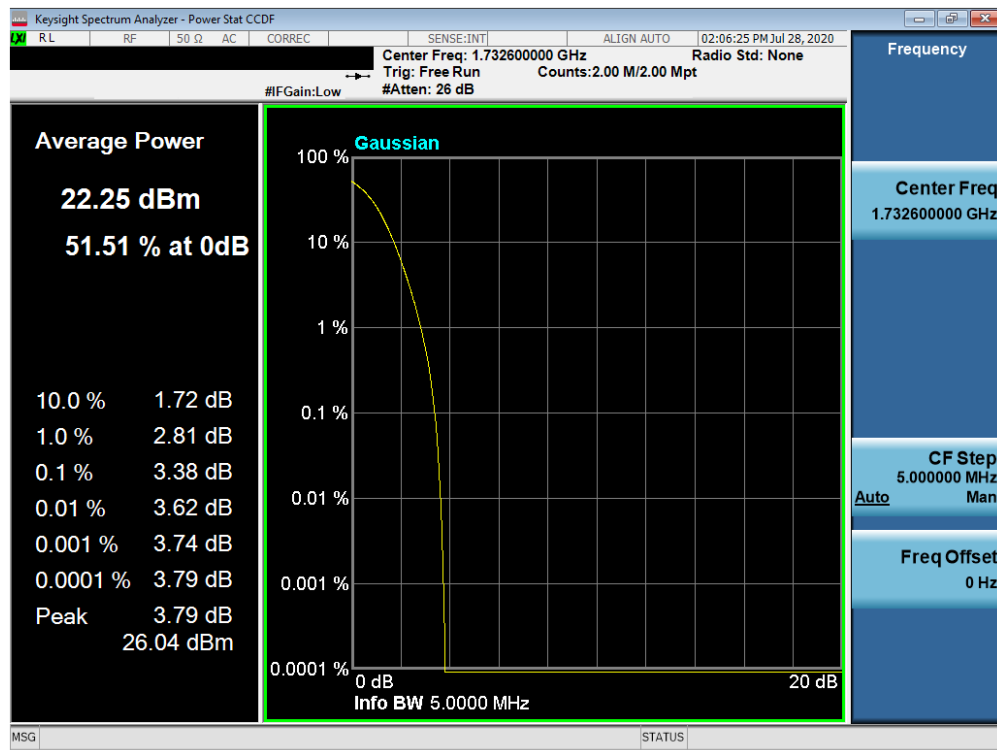

Plot 7-100. Peak-Average Ratio Plot (AWS WCDMA Mode)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 69 of 110

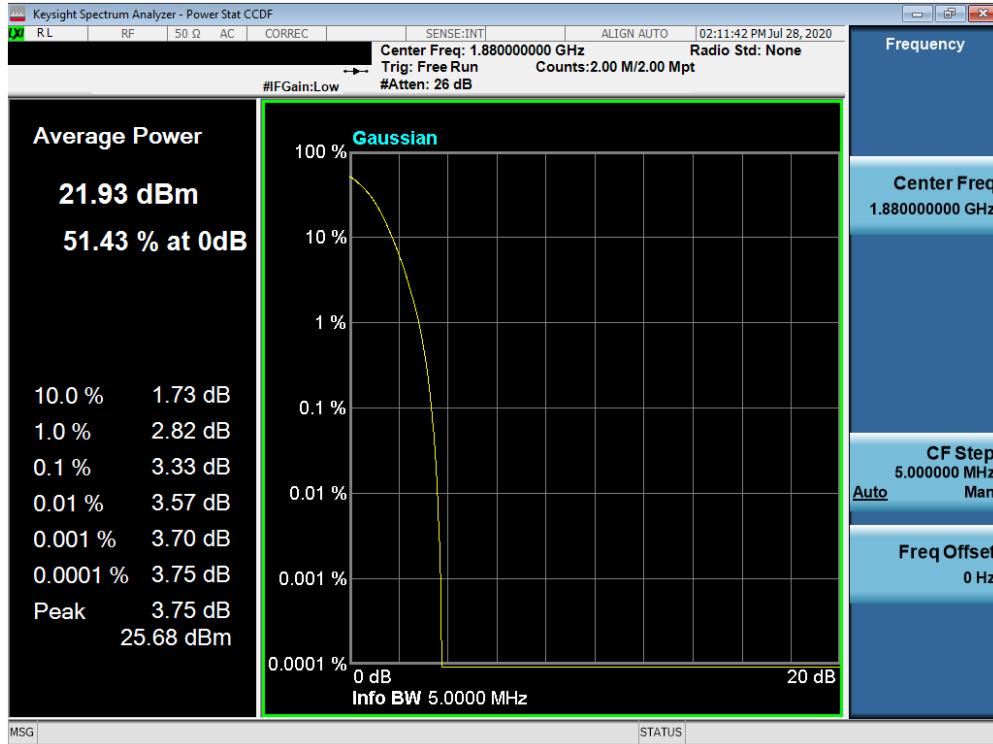

Plot 7-101. Peak-Average Ratio Plot (PCS WCDMA Mode)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 70 of 110

7.6 Radiated Power (ERP/EIRP)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer's "time domain power" measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $\geq 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto". Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the "gating" function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 71 of 110

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

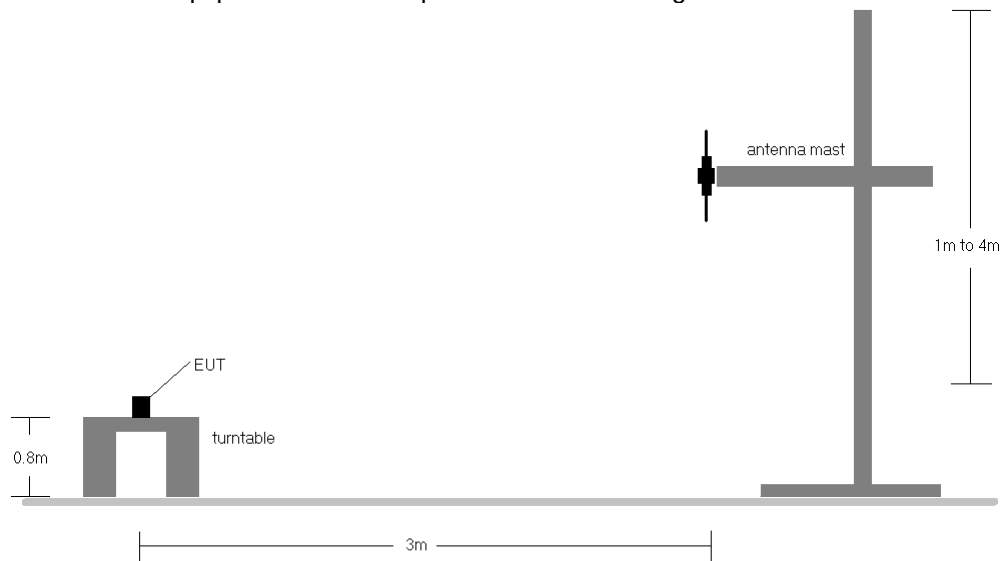


Figure 7-5. Radiated Test Setup <1GHz

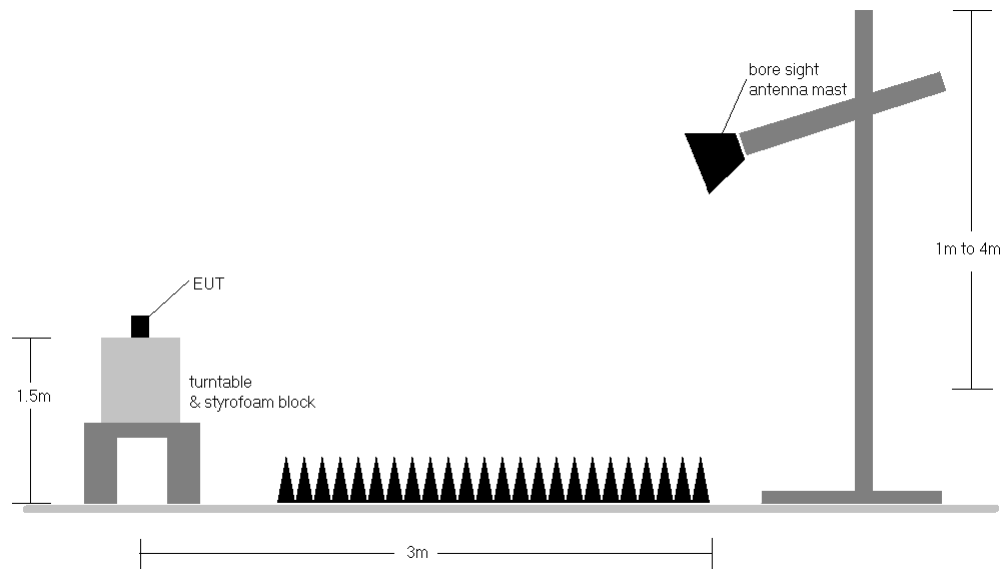


Figure 7-6. Radiated Test Setup >1GHz

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 72 of 110

Test Notes

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, and HSUPA capabilities. For WCDMA and HSUPA transmission, all configurations were investigated and the worst case UMTS emissions were found in RMC WCDMA mode at 12.2kbps with HSDPA inactive and TPC bits all set to "1."
- 3) This device employs CDMA mode. The EUT was tested under all RC and SO combinations and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 4) This unit was tested with its standard battery.
- 5) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 73 of 110

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
824.20	GPRS850 (Open)	V	134	117	20.20	6.75	24.80	0.302	38.45	-13.65	26.95	0.495	40.61	-13.66
836.60	GPRS850 (Open)	V	131	117	19.65	6.68	24.18	0.262	38.45	-14.27	26.33	0.430	40.61	-14.28
848.80	GPRS850 (Open)	V	117	231	20.93	6.71	25.49	0.354	38.45	-12.97	27.64	0.580	40.61	-12.97
848.80	GPRS850 (Open)	H	126	342	17.21	6.71	21.77	0.150	38.45	-16.69	23.92	0.246	40.61	-16.69
848.80	EDGE850	V	117	231	16.29	6.71	20.85	0.121	38.45	-17.61	23.00	0.199	40.61	-17.61
848.80	GPRS850 (WCP)	V	198	91	17.85	6.71	22.41	0.174	38.45	-16.05	24.56	0.285	40.61	-16.05
848.80	GPRS850 (Closed)	H	141	93	17.38	6.71	21.94	0.156	38.45	-16.52	24.09	0.256	40.61	-16.52
848.80	GPRS (Camera)	H	135	16	14.98	6.71	19.54	0.090	38.45	-18.92	21.69	0.147	40.61	-18.92

Table 7-2. ERP/EIRP (Cellular GPRS)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
824.70	CDMA850 (Open)	V	172	279	12.71	6.70	17.26	0.053	38.45	-21.19	19.41	0.087	40.61	-21.20
836.52	CDMA850 (Open)	V	128	272	12.30	6.70	16.85	0.048	38.45	-21.60	19.00	0.079	40.61	-21.61
848.31	CDMA850 (Open)	V	235	338	12.11	6.70	16.66	0.046	38.45	-21.79	18.81	0.076	40.61	-21.80
824.70	CDMA850 (Open)	V	241	231	7.96	6.70	12.51	0.018	38.45	-25.94	14.66	0.029	40.61	-25.95
824.70	CDMA850 (Closed)	H	124	251	6.65	6.70	11.20	0.013	38.45	-27.25	13.35	0.022	40.61	-27.26
824.70	CDMA850 (WCP)	V	133	244	8.80	6.70	13.35	0.022	38.45	-25.10	15.50	0.035	40.61	-25.11
824.70	CDMA850 (Camera)	H	128	268	6.95	6.70	11.50	0.014	38.45	-26.95	13.65	0.023	40.61	-26.96

Table 7-3. ERP/EIRP (Cellular CDMA)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
826.40	WCDMA850 (Open)	H	171	62	11.13	6.77	15.75	0.038	38.45	-22.70	17.90	0.062	40.61	-22.70
836.60	WCDMA850 (Open)	H	139	351	11.44	6.77	16.06	0.040	38.45	-22.39	18.21	0.066	40.61	-22.40
846.60	WCDMA850 (Open)	H	120	2	10.93	6.77	15.55	0.036	38.45	-22.90	17.70	0.059	40.61	-22.91
836.60	WCDMA850 (Closed)	V	244	257	10.07	6.77	14.69	0.029	38.45	-23.76	16.84	0.048	40.61	-23.77
836.60	WCDMA850 (Camera)	H	152	35	9.59	6.77	14.21	0.026	38.45	-24.24	16.36	0.043	40.61	-24.25
836.60	WCDMA850 (WCP)	H	228	278	9.55	6.77	14.17	0.026	38.45	-24.28	16.32	0.043	40.61	-24.29

Table 7-4. ERP/EIRP (Cellular WCDMA)

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 74 of 110

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1712.40	WCDMA1700 (Open)	H	147	277	12.59	9.46	22.05	0.160	30.00	-7.95
1732.60	WCDMA1700 (Open)	H	251	295	12.44	9.34	21.78	0.151	30.00	-8.22
1752.60	WCDMA1700 (Open)	H	158	344	12.80	9.24	22.04	0.160	30.00	-7.96
1712.40	WCDMA1700 (Open)	V	136	7	12.41	9.46	21.87	0.154	30.00	-8.13
1712.40	WCDMA1700 (Closed)	H	132	104	12.01	9.46	21.47	0.140	30.00	-8.53
1712.40	WCDMA1700 (WCP)	V	141	195	9.60	9.46	19.06	0.081	30.00	-10.94
1712.40	WCDMA1700 (Camera)	V	220	95	9.62	9.46	19.08	0.081	30.00	-10.92

Table 7-5. EIRP (AWS WCDMA)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GPRS1900 (Open)	H	166	283	18.97	9.51	28.48	0.704	33.01	-4.53
1880.00	GPRS1900 (Open)	H	152	240	20.24	9.93	30.17	1.039	33.01	-2.84
1909.80	GPRS1900 (Open)	H	155	358	19.63	10.28	29.91	0.980	33.01	-3.10
1880.00	GPRS1900 (Open)	V	115	14	18.58	9.93	28.51	0.709	33.01	-4.50
1880.00	EDGE1900 (Open)	H	152	240	15.70	9.93	25.63	0.365	33.01	-7.38
1880.00	GPRS1900 (Closed)	H	117	2	18.30	9.93	28.23	0.665	33.01	-4.78
1880.00	GPRS1900 (WCP)	H	135	143	18.41	9.93	28.34	0.682	33.01	-4.67
1880.00	GPRS (Camera)	H	151	277	18.37	9.93	28.30	0.675	33.01	-4.71

Table 7-6. EIRP (PCS GPRS)

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 75 of 110

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1851.25	CDMA1900 (Closed)	H	124	151	13.95	9.90	23.85	0.243	33.01	-9.16
1880.00	CDMA1900 (Closed)	H	117	180	13.80	9.90	23.70	0.234	33.01	-9.31
1908.75	CDMA1900 (Closed)	H	102	182	13.53	9.90	23.43	0.220	33.01	-9.58
1851.25	CDMA1900 (Closed)	V	111	158	10.95	9.90	20.85	0.122	33.01	-12.16
1851.25	CDMA1900 (Open)	H	120	165	12.85	9.90	22.75	0.188	33.01	-10.26
1851.25	CDMA1900 (WCP)	H	127	167	12.09	9.90	21.99	0.158	33.01	-11.02
1851.25	CDMA1900 (Camera)	H	134	164	13.73	9.90	23.63	0.231	33.01	-9.38

Table 7-7. EIRP (PCS CDMA)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900 (Closed)	V	139	285	11.39	9.92	21.31	0.135	33.01	-11.70
1880.00	WCDMA1900 (Closed)	V	139	285	11.39	10.13	21.52	0.142	33.01	-11.49
1907.60	WCDMA1900 (Closed)	V	177	325	11.00	10.33	21.33	0.136	33.01	-11.68
1880.00	WCDMA1900 (Closed)	H	152	235	10.98	10.13	21.11	0.129	33.01	-11.90
1880.00	WCDMA1900 (WCP)	V	166	249	8.09	9.92	18.01	0.063	33.01	-15.00
1880.00	WCDMA1900 (Open)	H	127	259	9.51	10.13	19.64	0.092	33.01	-13.37
1880.00	WCDMA1900 (Camera)	V	163	247	11.09	10.13	21.22	0.133	33.01	-11.79

Table 7-8. EIRP (PCS WCDMA)

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 76 of 110

7.7 Radiated Spurious Emissions Measurements

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 77 of 110

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

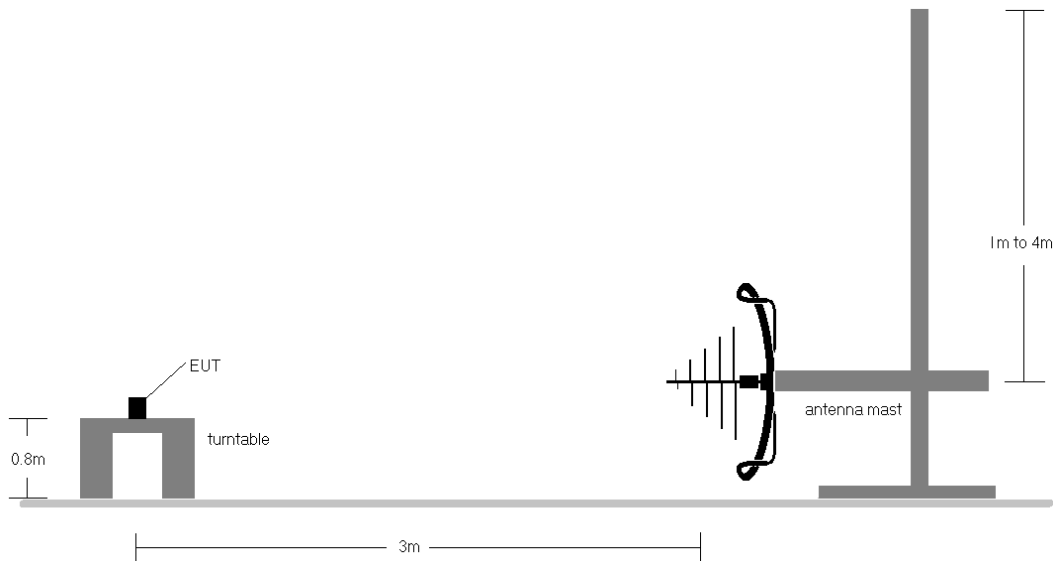


Figure 7-7. Test Instrument & Measurement Setup < 1GHz

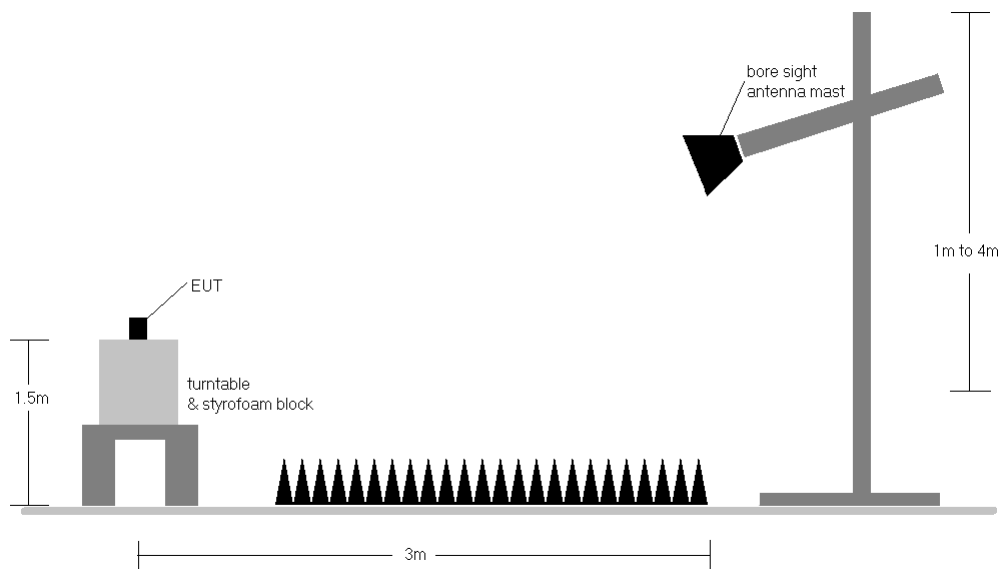


Figure 7-8. Test Instrument & Measurement Setup >1 GHz

Test Notes


- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, and HSUPA capabilities. For WCDMA and HSUPA transmission, all configurations were investigated and the worst case UMTS emissions were found in RMC WCDMA mode at 12.2kbps with HSDPA inactive and TPC bits all set to "1."

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 78 of 110

- 3) This device employs CDMA mode. The EUT was tested under all RC and SO combinations and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 4) This unit was tested with its standard battery.
- 5) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 6) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 7) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 8) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 79 of 110

Cellular GPRS Mode

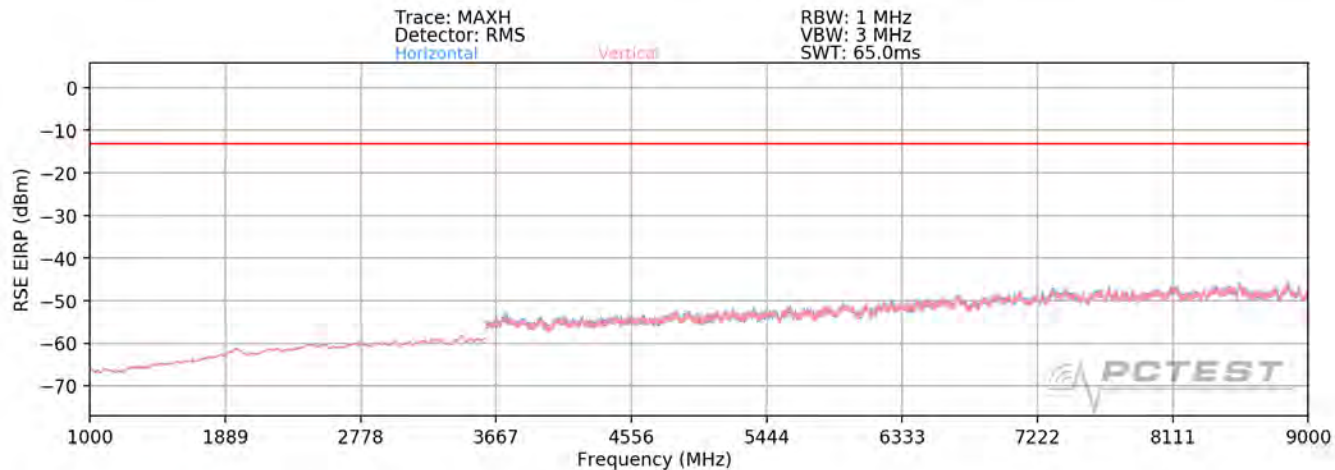

Plot 7-102. Radiated Spurious Plot above 1GHz (Cellular GPRS Mode)

OPERATING FREQUENCY: 824.20 MHz

MODULATION SIGNAL: GPRS (GMSK)

DISTANCE: 3 meters

LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1648.40	V	128	178	-63.96	3.61	-60.35	-47.4
2472.60	V	115	110	-52.52	4.21	-48.31	-35.3
3296.80	V	118	320	-63.27	5.77	-57.50	-44.5
4121.00	V	122	356	-64.57	7.59	-56.98	-44.0
4945.20	V	127	352	-65.01	8.56	-56.45	-43.4
5769.40	V	100	330	-63.48	8.81	-54.67	-41.7
6593.60	V	-	-	-64.00	8.95	-55.05	-42.0

Table 7-9. Radiated Spurious Data (Cellular GPRS Mode – Ch. 128)

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 80 of 110

OPERATING FREQUENCY: 836.60 MHz
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	V	147	325	-61.68	3.62	-58.06	-45.1
2509.80	V	101	107	-48.19	4.34	-43.85	-30.9
3346.40	V	221	346	-64.21	5.92	-58.29	-45.3
4183.00	V	251	335	-61.09	7.70	-53.39	-40.4
5019.60	V	246	346	-66.62	8.56	-58.06	-45.1
5856.20	V	102	336	-61.67	8.87	-52.80	-39.8
6692.80	V	-	-	-62.76	8.92	-53.84	-40.8

Table 7-10. Radiated Spurious Data (Cellular GPRS Mode – Ch. 190)

OPERATING FREQUENCY: 848.80 MHz
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1697.60	V	128	325	-60.07	3.63	-56.44	-43.4
2546.40	V	104	104	-53.68	4.56	-49.13	-36.1
3395.20	V	121	12	-63.99	6.14	-57.85	-44.9
4244.00	V	251	350	-61.82	7.80	-54.02	-41.0
5092.80	V	137	343	-66.95	8.64	-58.31	-45.3
5941.60	V	355	337	-62.07	8.83	-53.24	-40.2
6790.40	V	-	-	-64.24	8.82	-55.41	-42.4

Table 7-11. Radiated Spurious Data (Cellular GPRS Mode – Ch. 251)

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 81 of 110


OPERATING FREQUENCY: 836.60 MHz
 CHANNEL: 190
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	H	-	-	-65.85	3.62	-62.23	-49.2
2509.80	H	-	-	-67.38	4.34	-63.04	-50.0

Table 7-12. Radiated Spurious Data with WCP (Cellular GPRS Mode – Ch. 190)

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 82 of 110

Cellular CDMA Mode

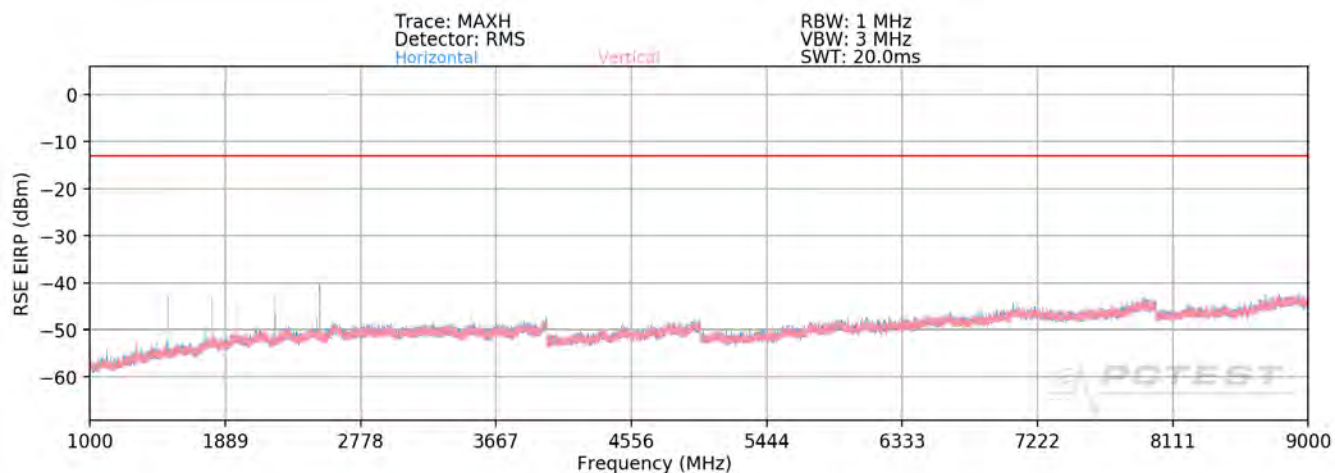

Plot 7-103. Radiated Spurious Plot above 1GHz (Cellular CDMA Mode)

OPERATING FREQUENCY: 824.70 MHz
CHANNEL: 1013
MODULATION SIGNAL: CDMA
DISTANCE: 3 meters
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1649.40	H	-	-	-58.46	3.08	-55.39	-42.4
2474.10	H	106	48	-45.43	3.84	-41.59	-28.6
3298.80	H	-	-	-55.93	6.00	-49.93	-36.9
4123.50	H	-	-	-53.67	7.68	-45.99	-33.0

Table 7-13. Radiated Spurious Data (Cellular CDMA Mode – Ch. 1013)

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 83 of 110

OPERATING FREQUENCY: 836.52 MHz
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.04	H	-	-	-63.02	3.10	-59.92	-46.9
2509.56	H	168	53	-44.05	4.02	-40.03	-27.0
3346.08	H	-	-	-55.87	6.03	-49.84	-36.8
4182.60	H	-	-	-58.49	7.79	-50.70	-37.7

Table 7-14. Radiated Spurious Data (Cellular CDMA Mode – Ch. 384)


OPERATING FREQUENCY: 848.31 MHz
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1696.62	H	-	-	-48.77	3.15	-45.61	-32.6
2544.93	H	117	39	-45.76	4.14	-41.61	-28.6
3393.24	H	-	-	-56.12	6.23	-49.89	-36.9
4241.55	H	-	-	-57.07	7.96	-49.11	-36.1

Table 7-15. Radiated Spurious Data (Cellular CDMA Mode – Ch. 777)

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 84 of 110

Cellular WCDMA Mode

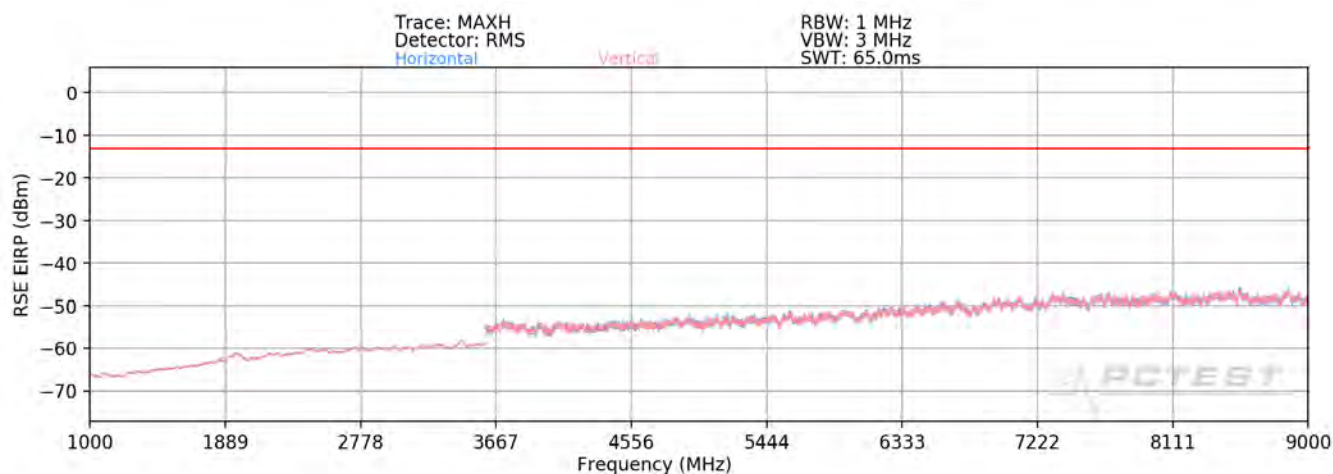

Plot 7-104. Radiated Spurious Plot above 1GHz (Cellular WCDMA Mode)

OPERATING FREQUENCY: 826.40 MHz
MODULATION SIGNAL: WCDMA
DISTANCE: 3 meters
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1652.80	H	-	-	-68.99	3.61	-65.38	-52.4
2479.20	H	-	-	-66.22	4.23	-61.99	-49.0

Table 7-16. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4132)

OPERATING FREQUENCY: 836.60 MHz
MODULATION SIGNAL: WCDMA
DISTANCE: 3 meters
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	H	-	-	-69.00	3.62	-65.38	-52.4
2509.80	H	-	-	-66.27	4.34	-61.93	-48.9

Table 7-17. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4183)

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 85 of 110


OPERATING FREQUENCY: 846.60 MHz
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1693.20	H	-	-	-68.91	3.63	-65.29	-52.3
2539.80	H	-	-	-66.55	4.52	-62.04	-49.0

Table 7-18. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4233)

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 86 of 110

AWS WCDMA Mode

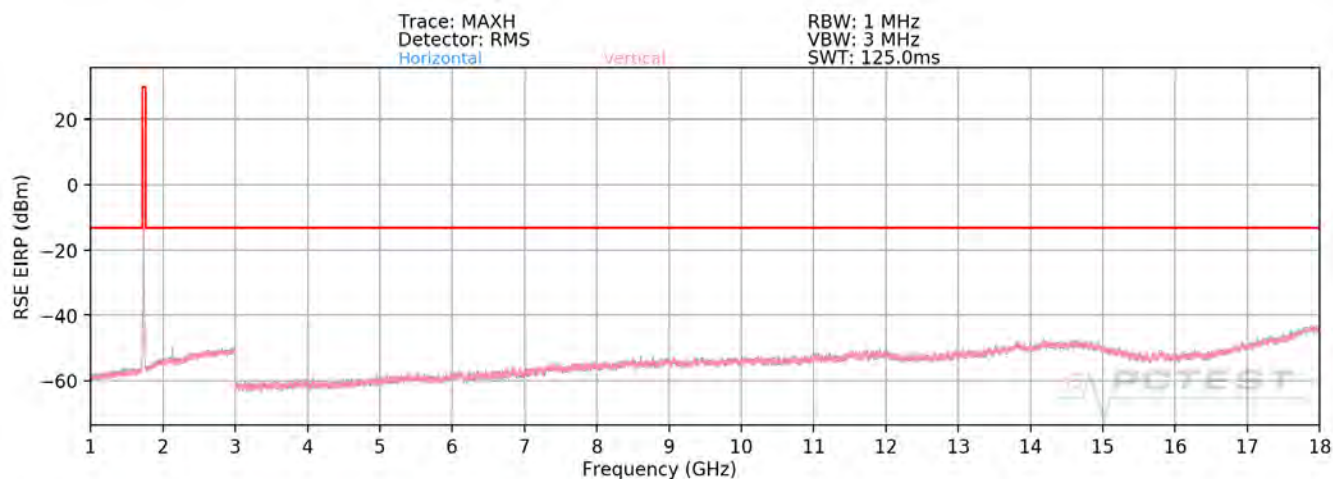

Plot 7-105. Radiated Spurious Plot above 1GHz (AWS WCDMA Mode)

OPERATING FREQUENCY: 1712.40 MHz
MODULATION SIGNAL: WCDMA
DISTANCE: 3 meters
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3424.80	H	-	-	-66.05	6.20	-59.86	-46.9
5137.20	H	-	-	-66.65	8.66	-57.99	-45.0

Table 7-19. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1312)

OPERATING FREQUENCY: 1732.60 MHz
MODULATION SIGNAL: WCDMA
DISTANCE: 3 meters
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3465.20	H	-	-	-66.49	6.27	-60.22	-47.2
5197.80	H	-	-	-67.18	8.71	-58.47	-45.5

Table 7-20. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1413)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 87 of 110


OPERATING FREQUENCY: 1752.60 MHz
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3505.20	H	-	-	-66.21	6.34	-59.87	-46.9
5257.80	H	-	-	-66.38	8.72	-57.66	-44.7

Table 7-21. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1513)

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 88 of 110

PCS GPRS Mode

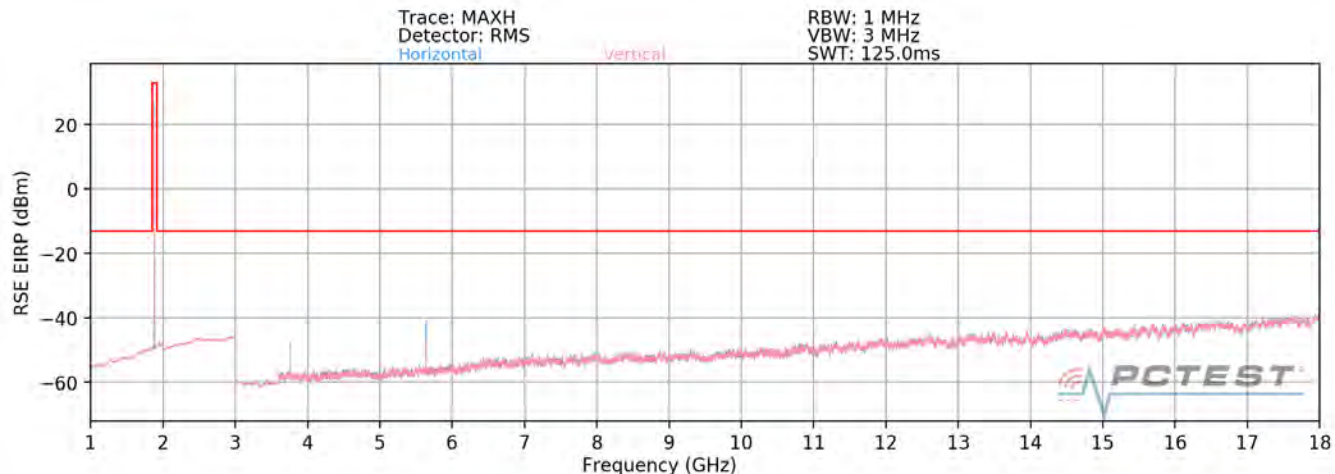

Plot 7-106. Radiated Spurious Plot above 1GHz (PCS GPRS Mode)

OPERATING FREQUENCY: 1850.20 MHz
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3700.40	H	125	331	-50.67	6.56	-44.11	-31.1
5550.60	H	174	346	-53.64	8.72	-44.92	-31.9
7400.80	H	185	333	-46.82	8.41	-38.41	-25.4
9251.00	H	168	296	-57.30	9.47	-47.84	-34.8
11101.20	H	-	-	-58.81	9.31	-49.50	-36.5
12951.40	H	-	-	-59.58	8.99	-50.59	-37.6

Table 7-22. Radiated Spurious Data (PCS GPRS Mode – Ch. 512)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 89 of 110

OPERATING FREQUENCY: 1880.00 MHz
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	110	316	-50.83	6.67	-44.16	-31.2
5640.00	H	247	20	-48.85	8.81	-40.03	-27.0
7520.00	H	146	331	-49.26	8.48	-40.78	-27.8
9400.00	H	286	356	-59.46	9.32	-50.14	-37.1
11280.00	H	-	-	-59.70	9.24	-50.47	-37.5
13160.00	H	-	-	-56.54	9.07	-47.47	-34.5

Table 7-23. Radiated Spurious Data (PCS GPRS Mode – Ch. 661)


OPERATING FREQUENCY: 1909.80 MHz
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3819.60	H	143	323	-53.35	7.00	-46.36	-33.4
5729.40	H	123	351	-46.95	8.77	-38.18	-25.2
7639.20	H	186	333	-50.18	8.54	-41.64	-28.6
9549.00	H	164	302	-61.34	9.43	-51.91	-38.9
11458.80	H	-	-	-58.57	9.17	-49.40	-36.4
13368.60	H	-	-	-57.99	8.85	-49.14	-36.1

Table 7-24. Radiated Spurious Data (PCS GPRS Mode – Ch. 810)

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 90 of 110

PCS CDMA Mode

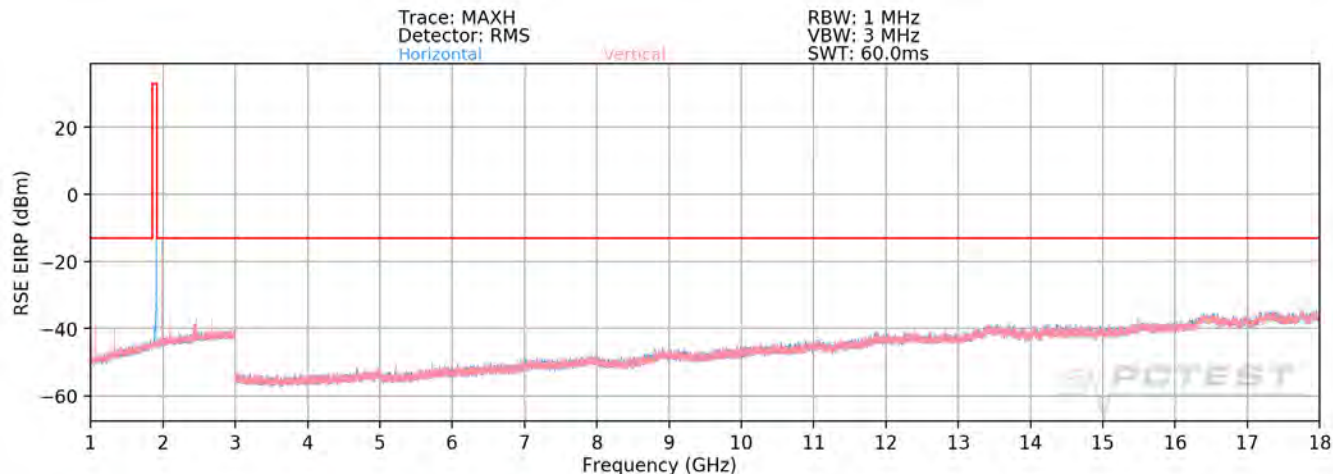

Plot 7-107. Radiated Spurious Plot above 1GHz (PCS CDMA Mode)

OPERATING FREQUENCY: 1851.25 MHz
CHANNEL: 25
MODULATION SIGNAL: CDMA
DISTANCE: 3 meters
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3702.50	H	139	147	-52.78	6.89	-45.89	-32.9
5553.75	H	163	246	-54.80	9.02	-45.78	-32.8
7405.00	H	-	-	-52.23	9.22	-43.01	-30.0

Table 7-25. Radiated Spurious Data (PCS CDMA Mode – Ch. 25)

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 91 of 110

OPERATING FREQUENCY: 1880.00 MHz
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	128	153	-54.41	6.93	-47.48	-34.5
5640.00	H	127	248	-55.21	9.15	-46.05	-33.1
7520.00	H	-	-	-54.13	9.31	-44.81	-31.8

Table 7-26. Radiated Spurious Data (PCS CDMA Mode – Ch. 600)


OPERATING FREQUENCY: 1908.75 MHz
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3817.50	H	109	144	-54.39	7.10	-47.29	-34.3
5726.25	H	399	149	-50.01	9.03	-40.98	-28.0
7635.00	H	-	-	-52.30	9.29	-43.02	-30.0

Table 7-27. Radiated Spurious Data (PCS CDMA Mode – Ch. 1175)

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 92 of 110

PCS WCDMA Mode

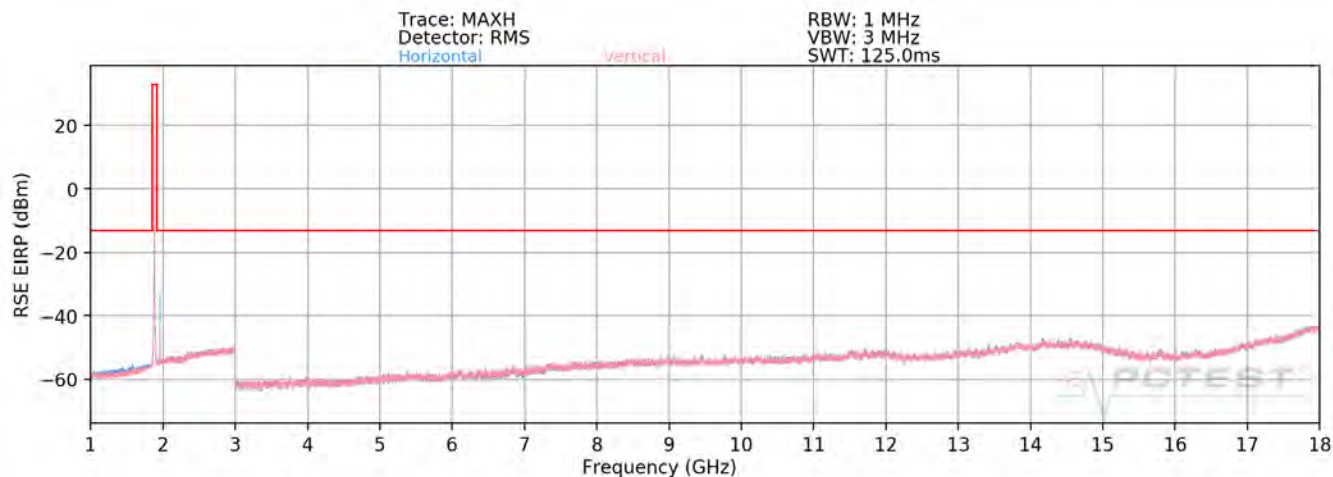

Plot 7-108. Radiated Spurious Plot above 1GHz (PCS WCDMA Mode)

OPERATING FREQUENCY: 1852.40 MHz
MODULATION SIGNAL: WCDMA
DISTANCE: 3 meters
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3704.80	H	-	-	-67.99	6.57	-61.42	-48.4
5557.20	H	-	-	-65.77	8.72	-57.05	-44.0

Table 7-28. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)

OPERATING FREQUENCY: 1880.00 MHz
MODULATION SIGNAL: WCDMA
DISTANCE: 3 meters
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	-	-	-66.84	6.67	-60.17	-47.2
5640.00	H	-	-	-66.99	8.81	-58.17	-45.2

Table 7-29. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 93 of 110

OPERATING FREQUENCY: 1907.60 MHz
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3815.20	H	-	-	-67.74	6.97	-60.78	-47.8
5722.80	H	-	-	-66.88	8.77	-58.12	-45.1

Table 7-30. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 94 of 110

7.8 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, RSS-132, and RSS-133, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Part 24, Part 27, and RSS-139, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI/TIA-603-E-2016

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 95 of 110

Frequency Stability / Temperature Variation

OPERATING FREQUENCY:	836,600,000	Hz
CHANNEL:	190	
REFERENCE VOLTAGE:	3.80	VDC
DEVIATION LIMIT:	± 0.00025 % or 2.5 ppm	

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	836,599,907	-93	-0.0000111
100 %		- 20	836,600,090	90	0.0000108
100 %		- 10	836,599,864	-136	-0.0000163
100 %		0	836,599,895	-105	-0.0000126
100 %		+ 10	836,600,034	34	0.0000041
100 %		+ 20	836,599,964	-36	-0.0000043
100 %		+ 30	836,599,963	-37	-0.0000044
100 %		+ 40	836,600,019	19	0.0000023
100 %		+ 50	836,600,043	43	0.0000051
BATT. ENDPOINT	3.40	+ 20	836,599,925	-75	-0.0000090

Table 7-31. Frequency Stability Data (Cellular GPRS Mode – Ch. 190)

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 96 of 110

Frequency Stability / Temperature Variation

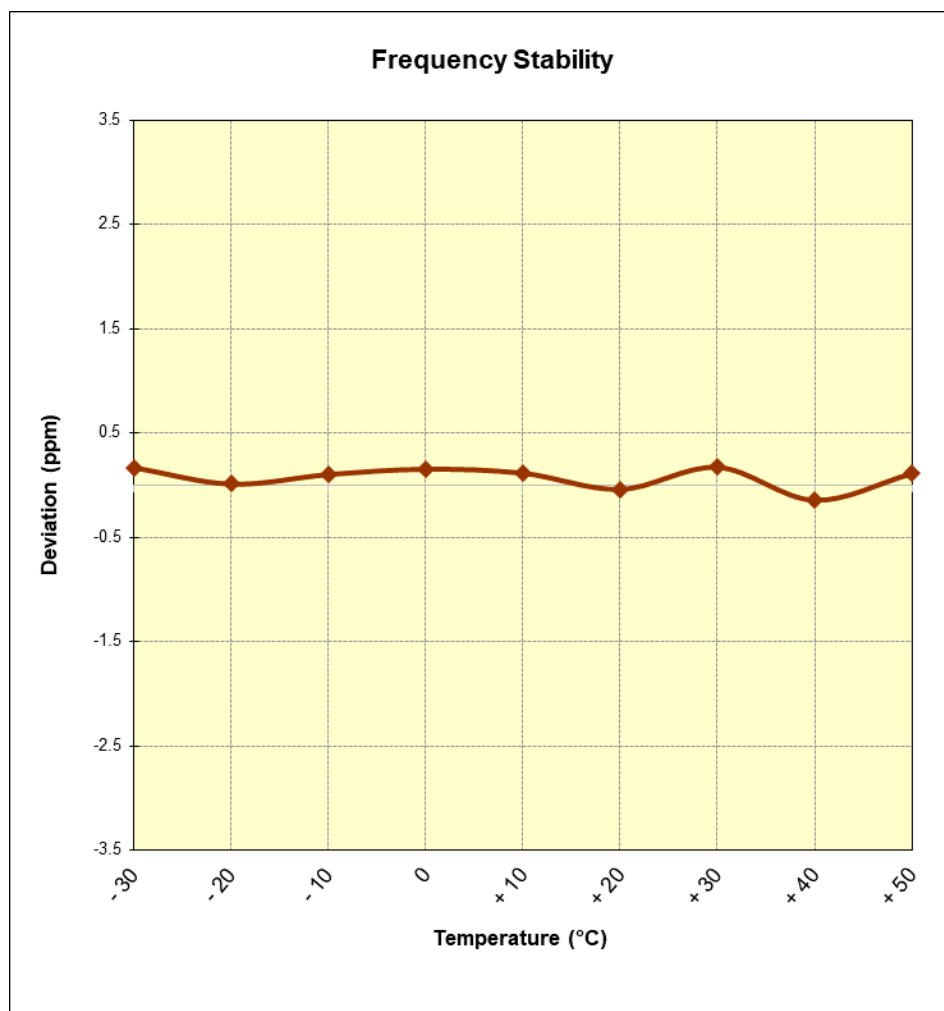


Figure 7-9. Frequency Stability Graph (Cellular GPRS Mode – Ch. 190)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 97 of 110

Frequency Stability / Temperature Variation

OPERATING FREQUENCY: 836,520,000 Hz
 CHANNEL: 384
 REFERENCE VOLTAGE: 3.80 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	836,519,912	-88	-0.0000105
100 %		- 20	836,520,097	97	0.0000116
100 %		- 10	836,520,109	109	0.0000130
100 %		0	836,520,002	2	0.0000002
100 %		+ 10	836,520,009	9	0.0000011
100 %		+ 20	836,520,202	202	0.0000241
100 %		+ 30	836,519,867	-133	-0.0000159
100 %		+ 40	836,520,398	398	0.0000476
100 %		+ 50	836,520,110	110	0.0000131
BATT. ENDPOINT	3.40	+ 20	836,520,141	141	0.0000169

Table 7-32. Frequency Stability Data (Cellular CDMA Mode – Ch. 384)

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 98 of 110

Frequency Stability / Temperature Variation

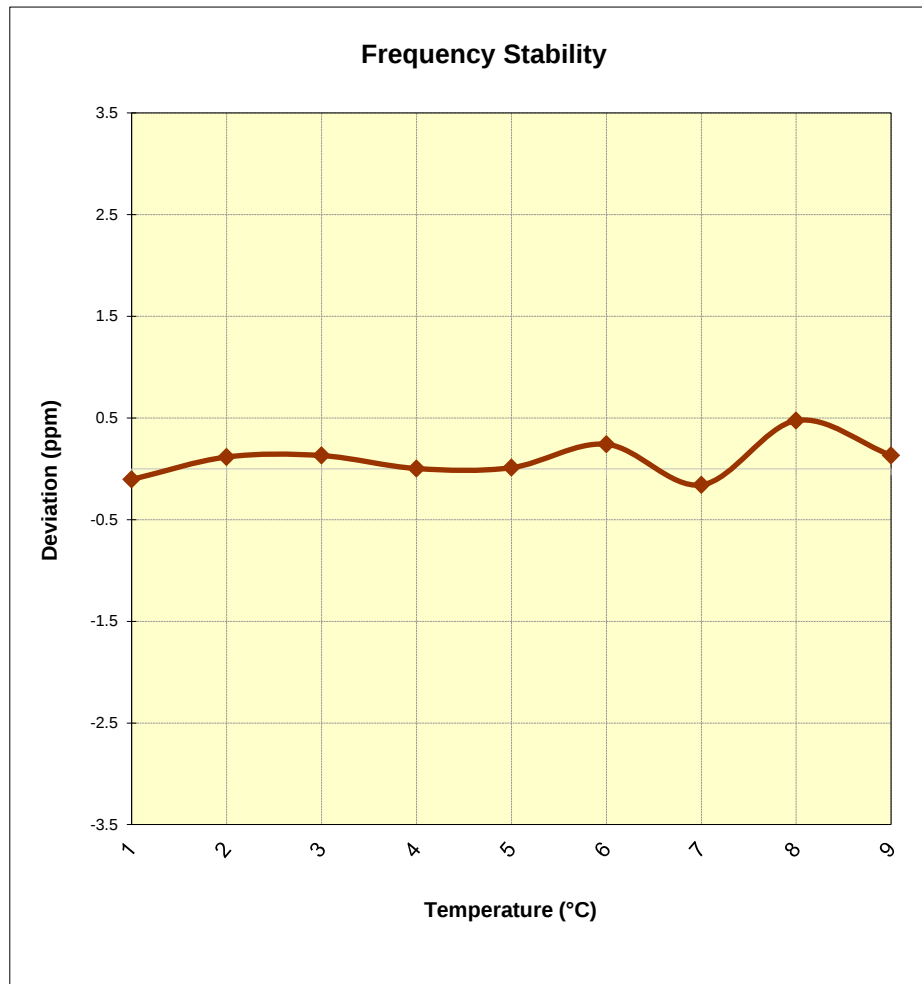


Figure 7-10. Frequency Stability Graph (Cellular CDMA Mode – Ch. 384)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 99 of 110

Frequency Stability / Temperature Variation

OPERATING FREQUENCY: 836,600,000 Hz
 CHANNEL: 4183
 REFERENCE VOLTAGE: 3.80 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	836,599,981	-19	-0.0000023
100 %		- 20	836,600,228	228	0.0000273
100 %		- 10	836,600,326	326	0.0000390
100 %		0	836,599,865	-135	-0.0000161
100 %		+ 10	836,599,995	-5	-0.0000006
100 %		+ 20	836,600,122	122	0.0000146
100 %		+ 30	836,599,787	-213	-0.0000255
100 %		+ 40	836,599,767	-233	-0.0000279
100 %		+ 50	836,599,805	-195	-0.0000233
BATT. ENDPOINT	3.40	+ 20	836,600,224	224	0.0000268

Table 7-33. Frequency Stability Data (Cellular WCDMA Mode – Ch. 4183)

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 100 of 110

Frequency Stability / Temperature Variation

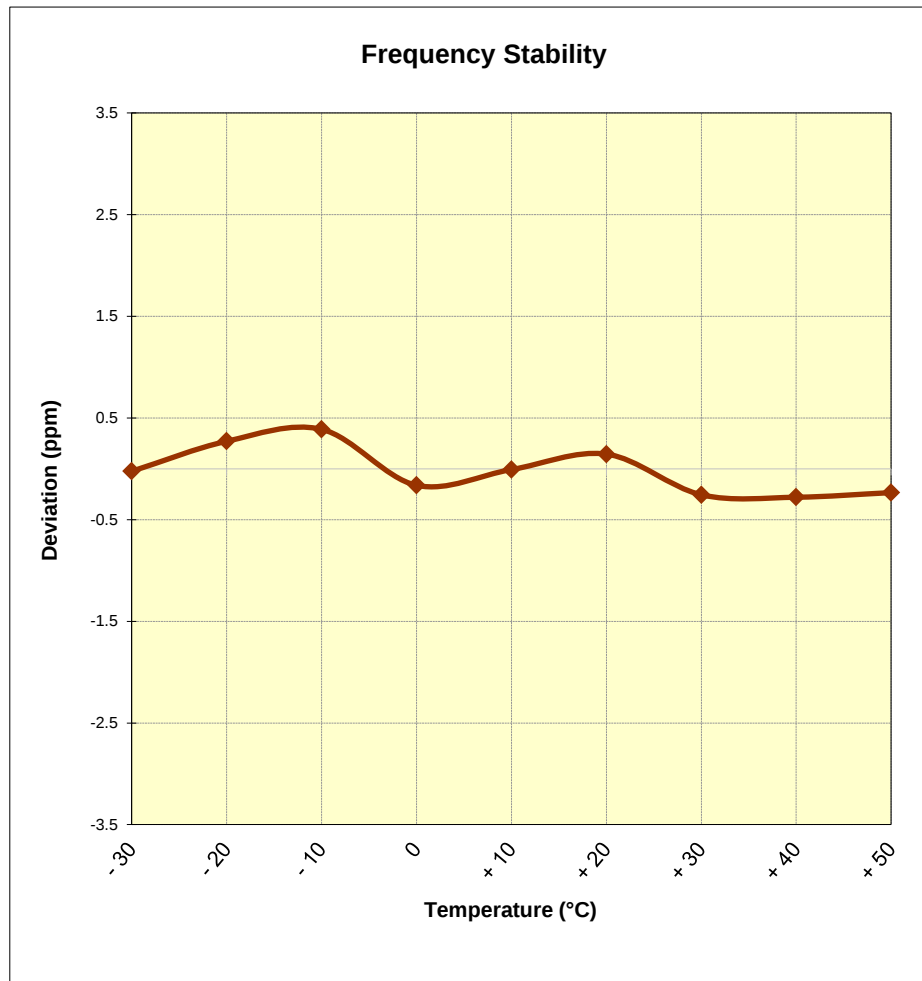


Figure 7-11. Frequency Stability Graph (Cellular WCDMA Mode – Ch. 4183)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 101 of 110

Frequency Stability / Temperature Variation

OPERATING FREQUENCY: 1,732,600,000 Hz
CHANNEL: 1413
REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	1,732,599,662	-338	-0.0000195
100 %		- 20	1,732,600,022	22	0.0000013
100 %		- 10	1,732,599,803	-197	-0.0000114
100 %		0	1,732,599,747	-253	-0.0000146
100 %		+ 10	1,732,599,733	-267	-0.0000154
100 %		+ 20	1,732,599,738	-262	-0.0000151
100 %		+ 30	1,732,600,262	262	0.0000151
100 %		+ 40	1,732,600,340	340	0.0000196
100 %		+ 50	1,732,600,034	34	0.0000020
BATT. ENDPOINT	3.40	+ 20	1,732,600,329	329	0.0000190

Table 7-34. Frequency Stability Data (AWS WCDMA Mode – Ch. 1413)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 102 of 110

Frequency Stability / Temperature Variation

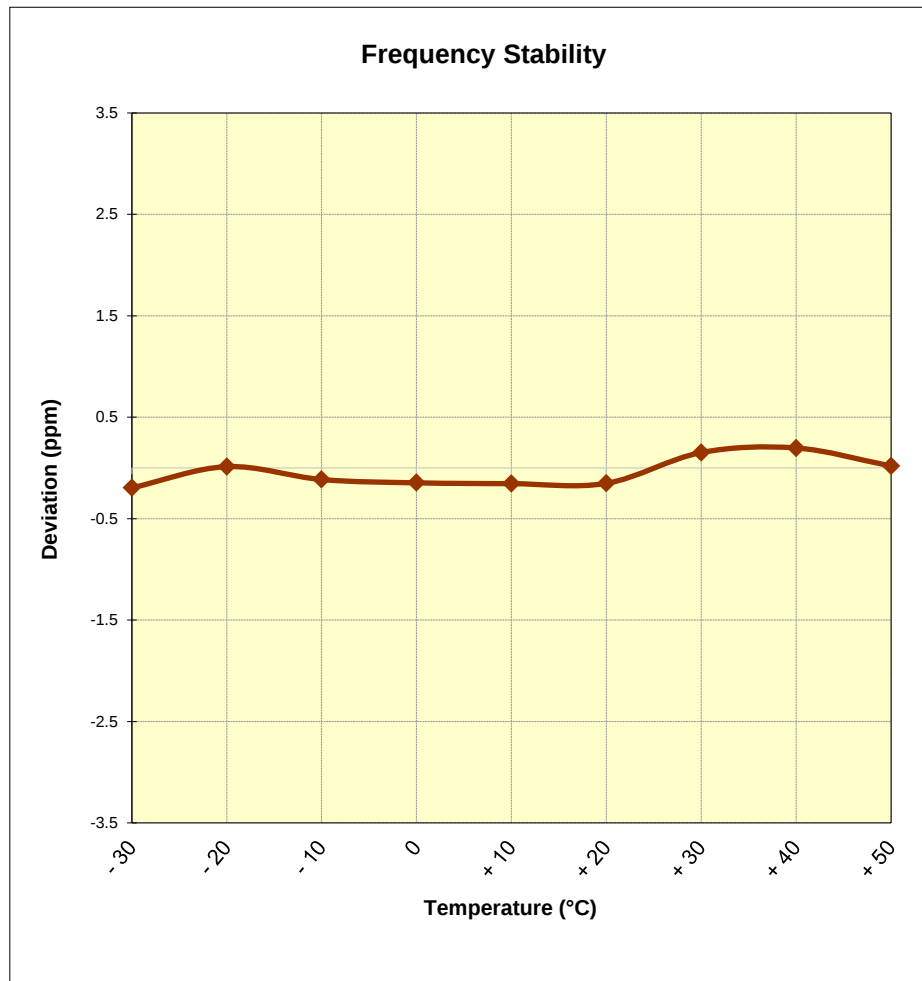


Figure 7-12. Frequency Stability Graph (AWS WCDMA Mode – Ch. 1413)

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 103 of 110

Frequency Stability / Temperature Variation

OPERATING FREQUENCY: 1,880,000,000 Hz
 CHANNEL: 661
 REFERENCE VOLTAGE: 3.80 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	1,879,999,751	-249	-0.0000132
100 %		- 20	1,880,000,057	57	0.0000030
100 %		- 10	1,879,999,713	-287	-0.0000153
100 %		0	1,880,000,031	31	0.0000016
100 %		+ 10	1,880,000,142	142	0.0000076
100 %		+ 20	1,880,000,023	23	0.0000012
100 %		+ 30	1,879,999,853	-147	-0.0000078
100 %		+ 40	1,880,000,022	22	0.0000012
100 %		+ 50	1,879,999,950	-50	-0.0000027
BATT. ENDPOINT	3.40	+ 20	1,880,000,066	66	0.0000035

Table 7-35. Frequency Stability Data (PCS GPRS Mode – Ch. 661)

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 104 of 110

Frequency Stability / Temperature Variation

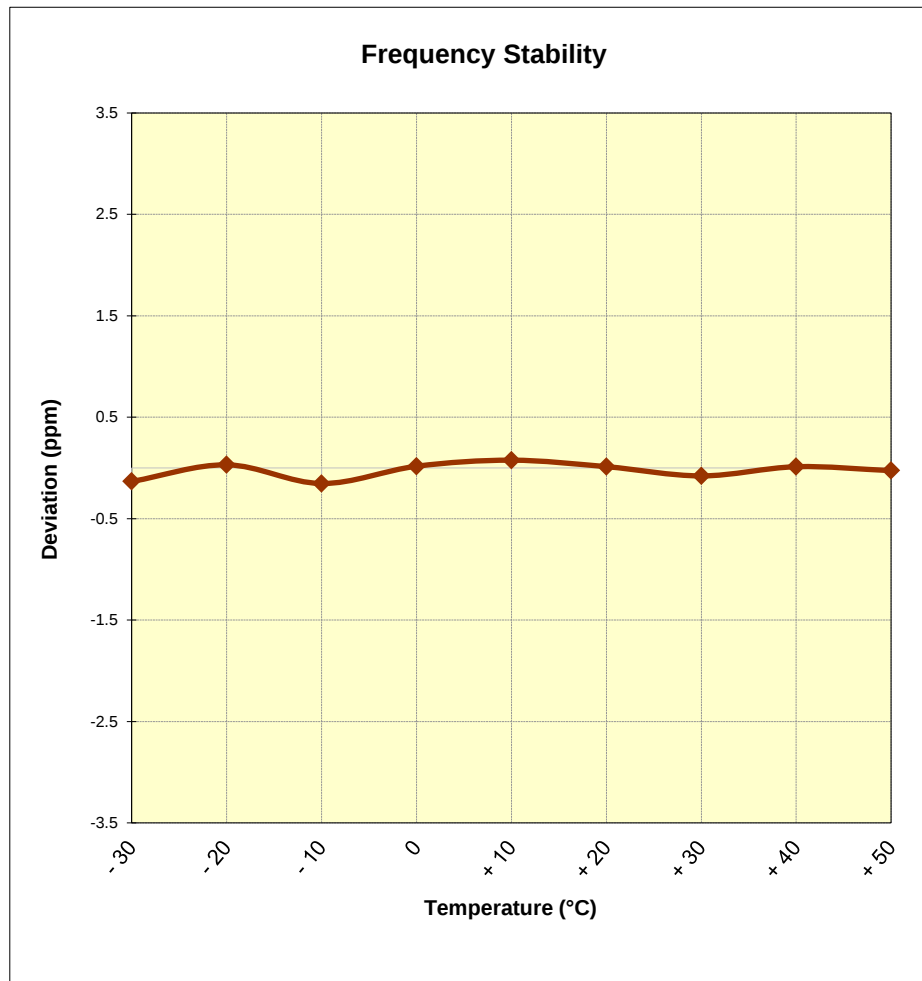


Figure 7-13. Frequency Stability Graph (PCS GPRS Mode – Ch. 661)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset	Page 105 of 110

Frequency Stability / Temperature Variation

OPERATING FREQUENCY:	1,880,000,000	Hz
CHANNEL:	600	
REFERENCE VOLTAGE:	3.80	VDC
DEVIATION LIMIT:	± 0.00025 % or 2.5 ppm	

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	1,880,000,211	211	0.0000112
100 %		- 20	1,879,999,804	-196	-0.0000104
100 %		- 10	1,879,999,934	-66	-0.0000035
100 %		0	1,879,999,814	-186	-0.0000099
100 %		+ 10	1,880,000,053	53	0.0000028
100 %		+ 20	1,880,000,140	140	0.0000074
100 %		+ 30	1,879,999,956	-44	-0.0000023
100 %		+ 40	1,880,000,476	476	0.0000253
100 %		+ 50	1,880,000,076	76	0.0000040
BATT. ENDPOINT	3.40	+ 20	1,880,000,269	269	0.0000143

Table 7-36. Frequency Stability Data (PCS CDMA Mode – Ch. 600)

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 106 of 110

Frequency Stability / Temperature Variation

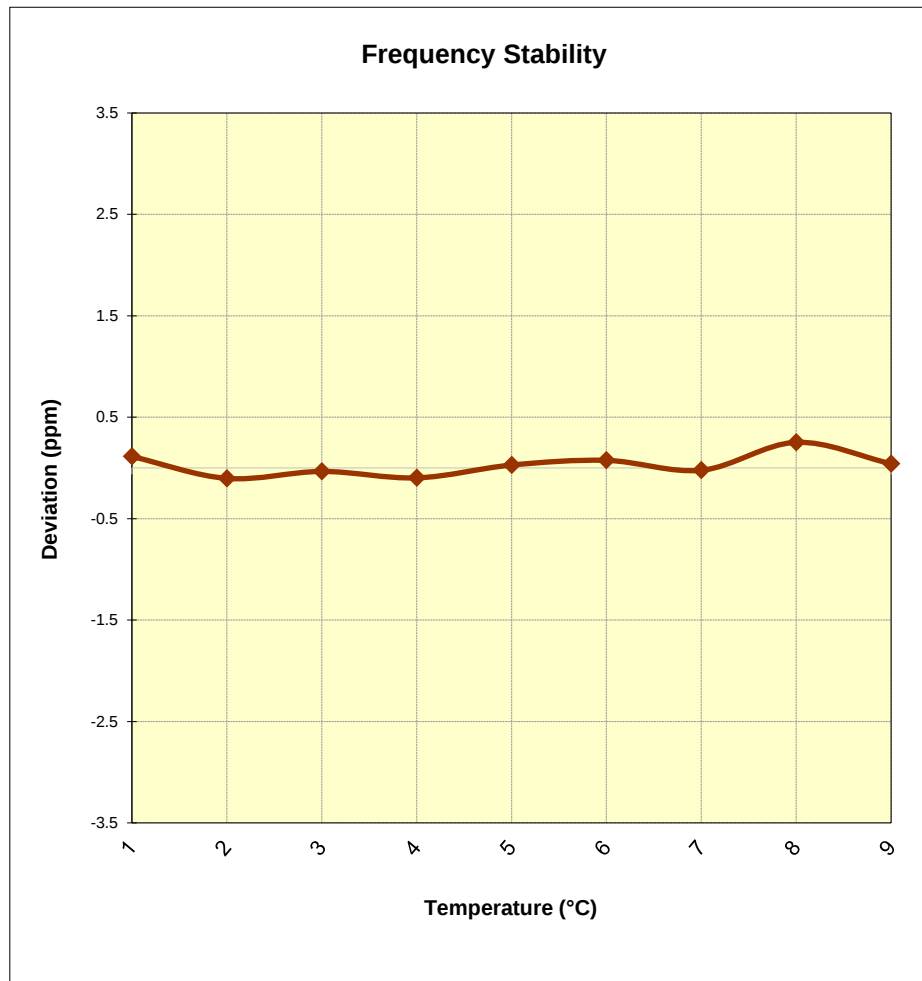


Figure 7-14. Frequency Stability Graph (PCS CDMA Mode – Ch. 600)

FCC ID: ZNFF100TM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset	Page 107 of 110

Frequency Stability / Temperature Variation

OPERATING FREQUENCY: 1,880,000,000 Hz
 CHANNEL: 9400
 REFERENCE VOLTAGE: 3.80 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	1,880,000,160	160	0.0000085
100 %		- 20	1,880,000,159	159	0.0000085
100 %		- 10	1,880,000,042	42	0.0000022
100 %		0	1,879,999,899	-101	-0.0000054
100 %		+ 10	1,879,999,885	-115	-0.0000061
100 %		+ 20	1,879,999,969	-31	-0.0000016
100 %		+ 30	1,880,000,199	199	0.0000106
100 %		+ 40	1,879,999,906	-94	-0.0000050
100 %		+ 50	1,880,000,001	1	0.0000001
BATT. ENDPOINT	3.40	+ 20	1,880,000,276	276	0.0000147

Table 7-37. Frequency Stability Data (PCS WCDMA Mode – Ch. 9400)

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 108 of 110

Frequency Stability / Temperature Variation

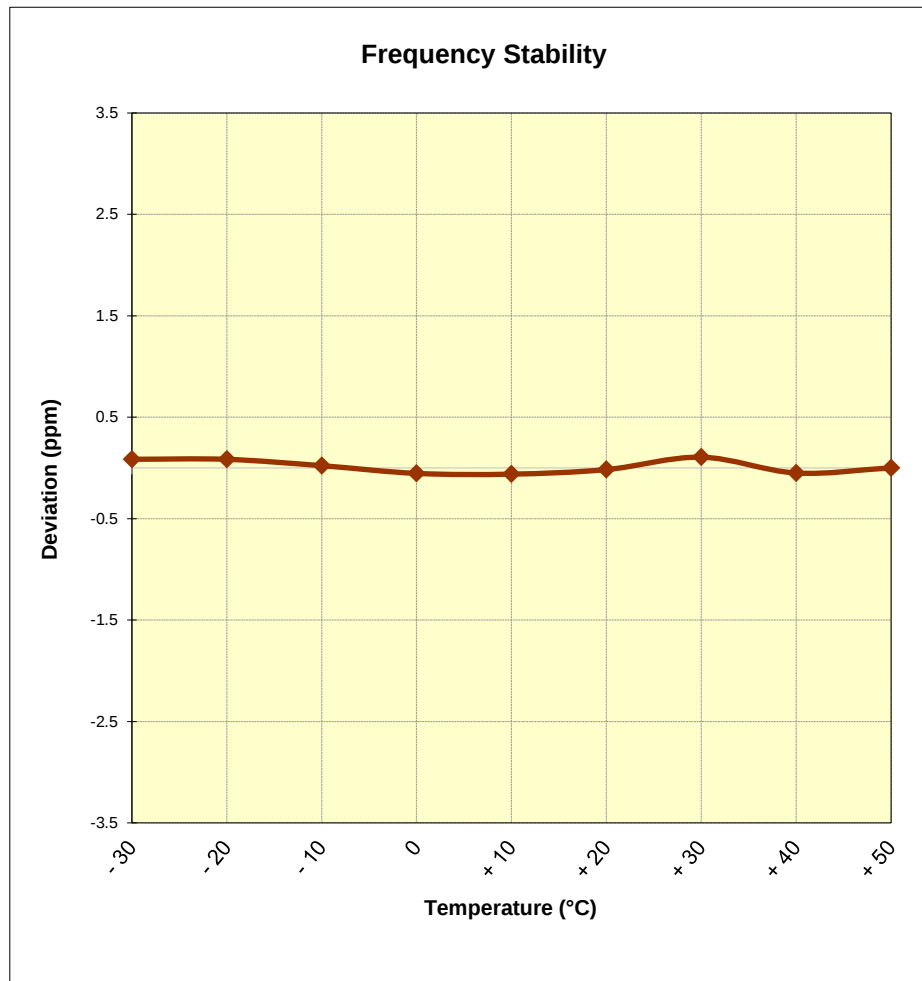


Figure 7-15. Frequency Stability Graph (PCS WCDMA Mode – Ch. 9400)

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 109 of 110

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Handset** **FCC ID: ZNFF100TM** complies with all the requirements of Part 22, 24, & 27 of the FCC Rules.

FCC ID: ZNFF100TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2006150095-02.ZNF	Test Dates: 6/28 - 8/20/2020	EUT Type: Portable Handset		Page 110 of 110