


7.4.2. Conducted Spurious Emissions


Low Band-edge

Lowest Channel & Modulation : GFSK

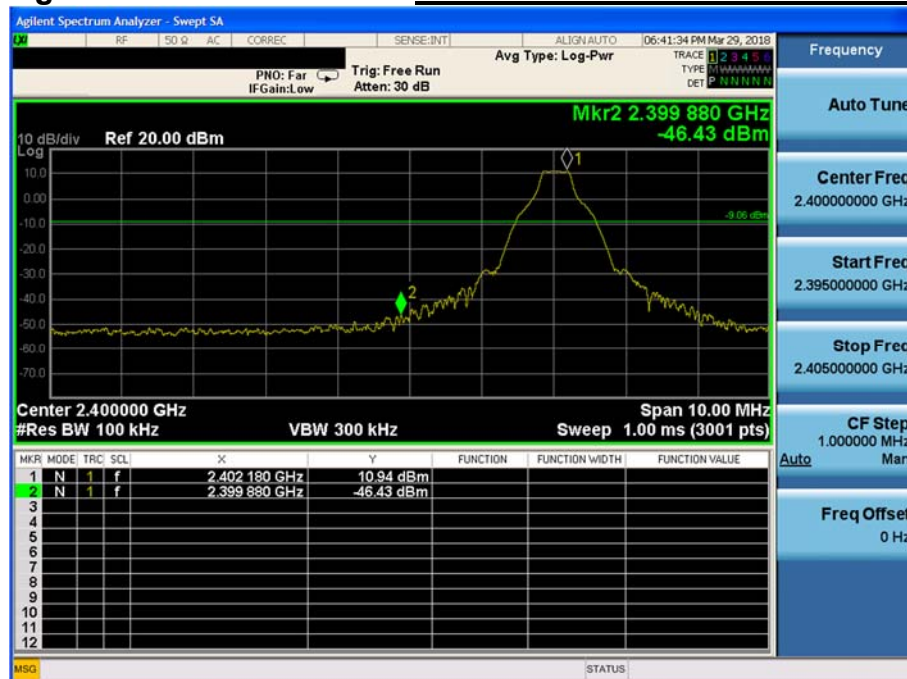


Low Band-edge

Hopping mode & Modulation : GFSK

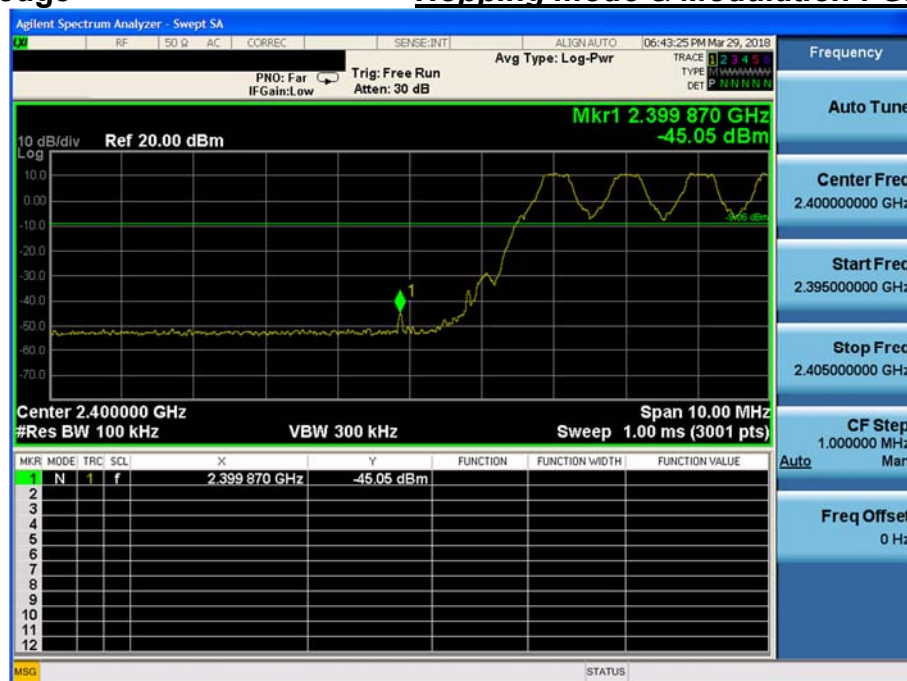


Lowest Channel & Modulation : GFSK

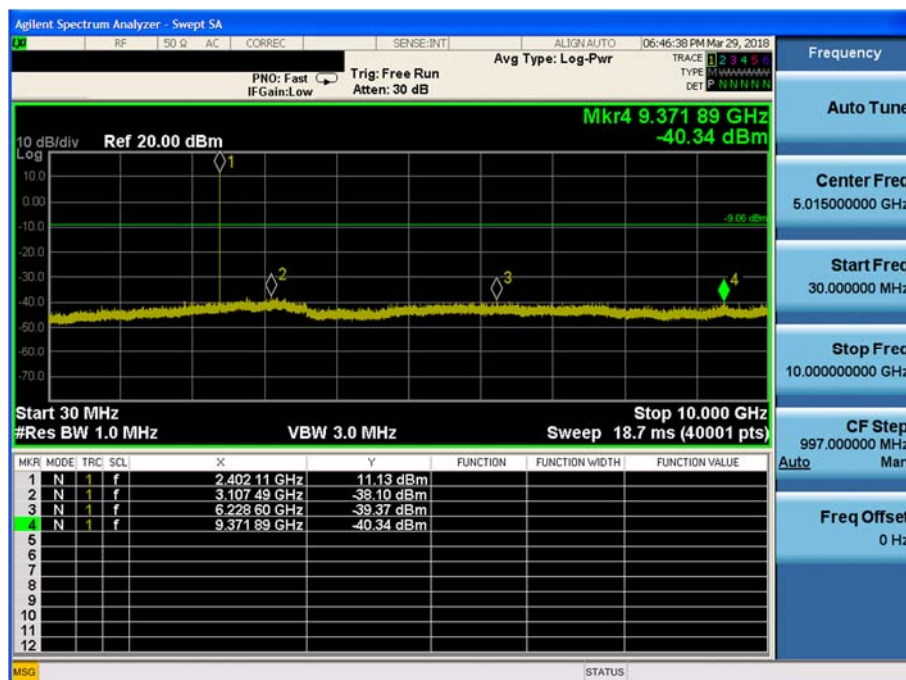


Conducted Spurious Emissions

Lowest Channel & Modulation : GFSK

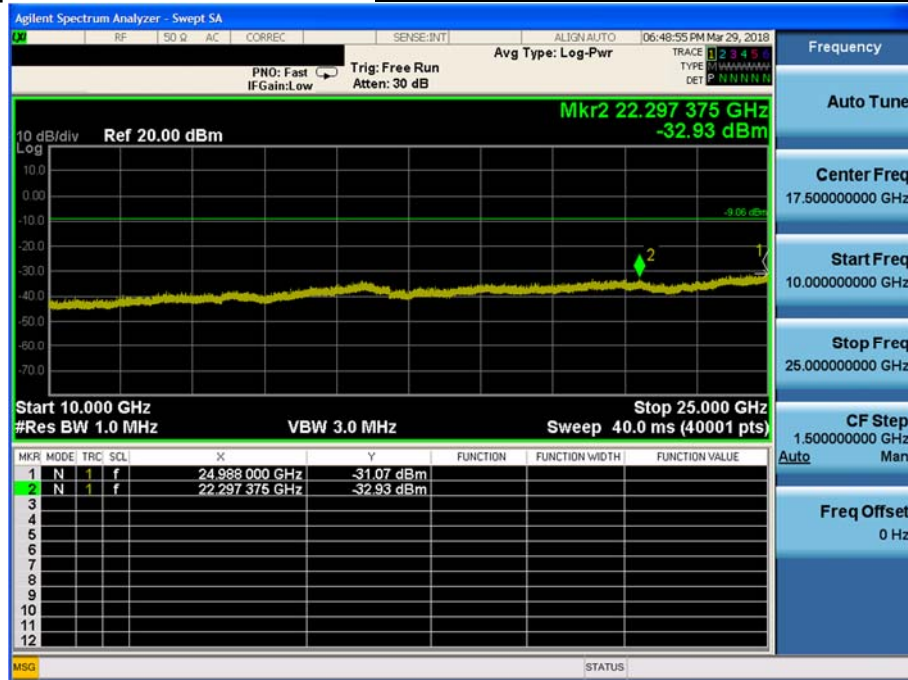


Reference for limit

Middle Channel & Modulation : GFSK

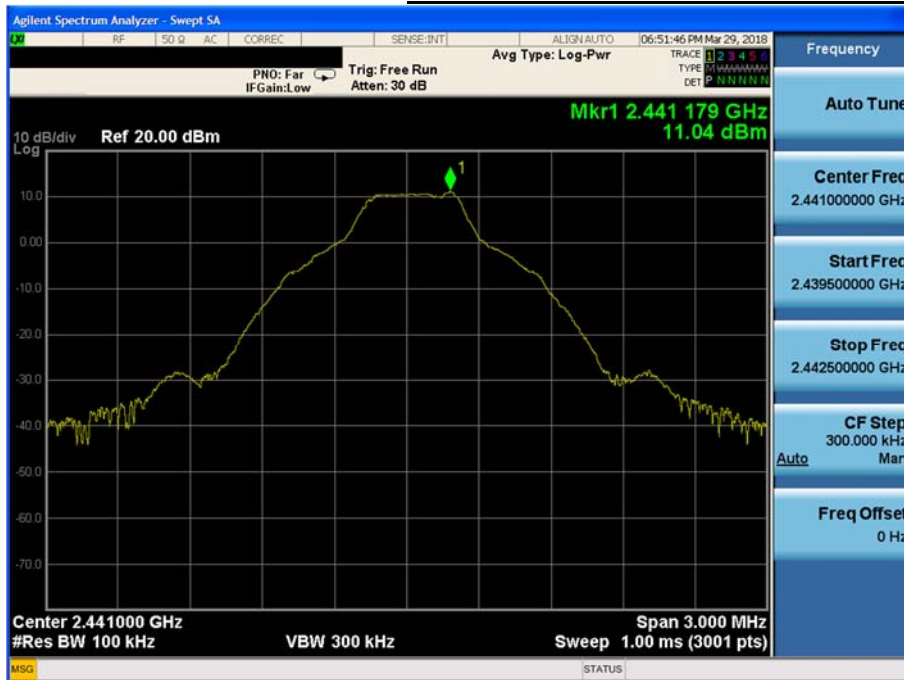



Conducted Spurious Emissions

Middle Channel & Modulation : GFSK

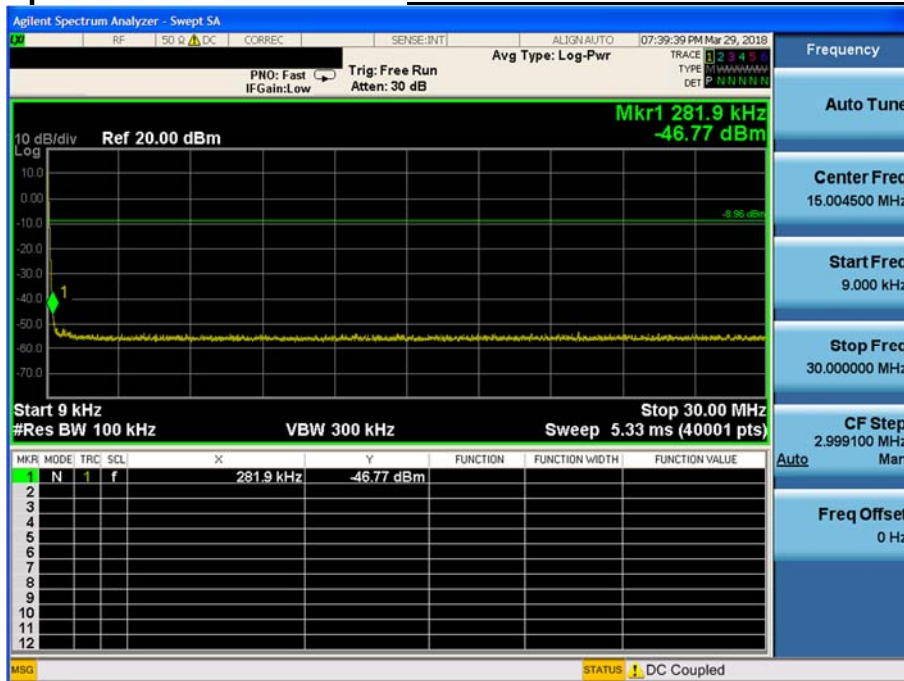


Conducted Spurious Emissions

Middle Channel & Modulation : GFSK

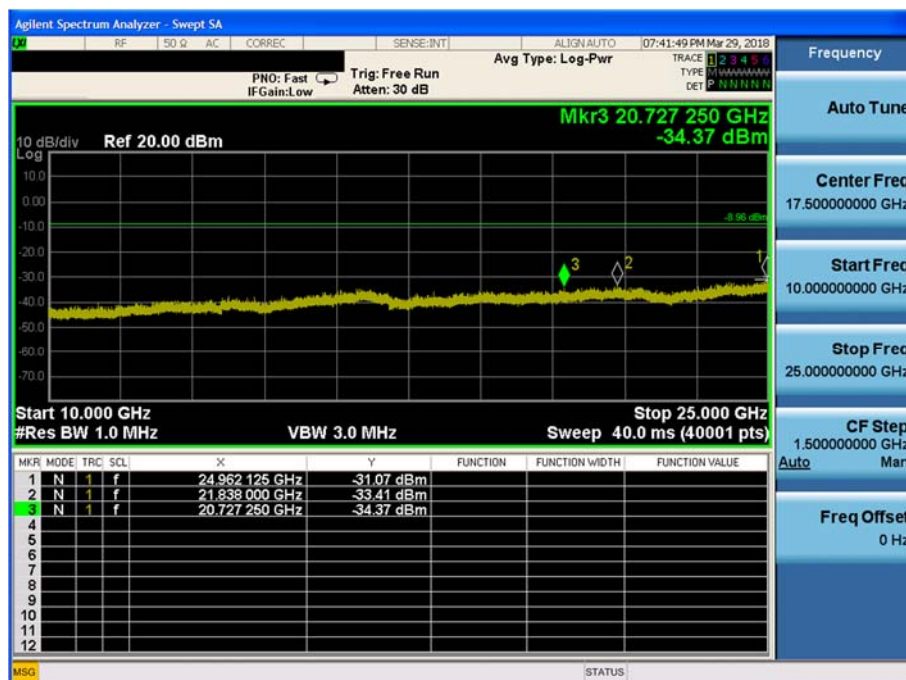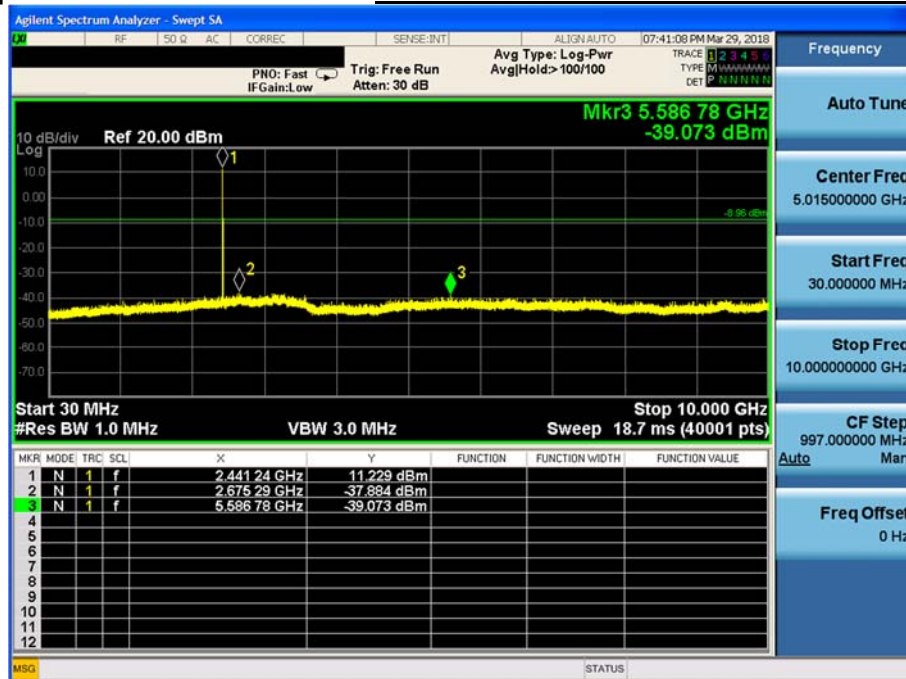


High Band-edge

Highest Channel & Modulation : GFSK

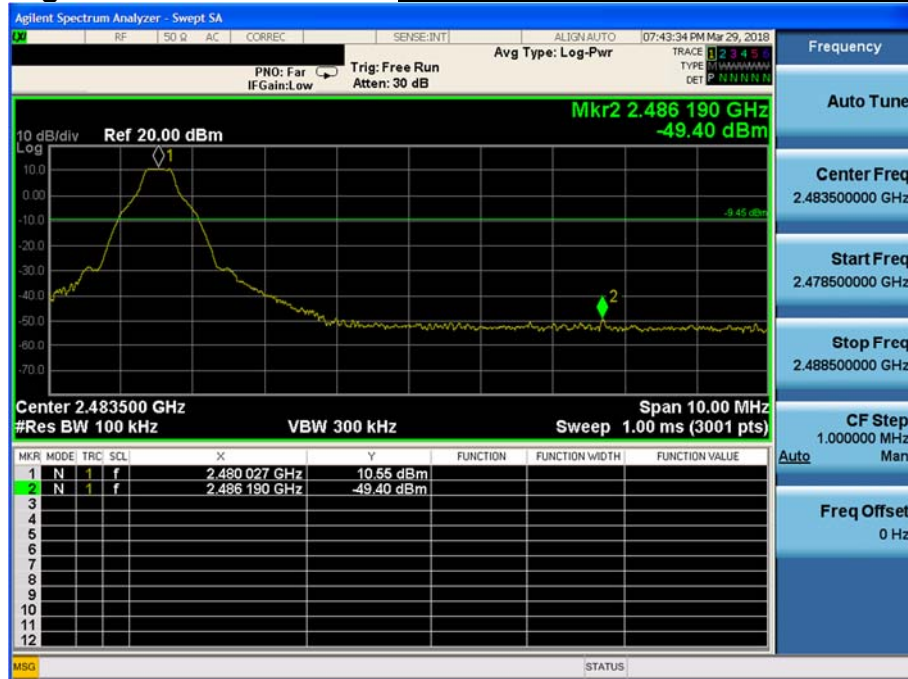



High Band-edge

Hopping mode & Modulation : GFSK

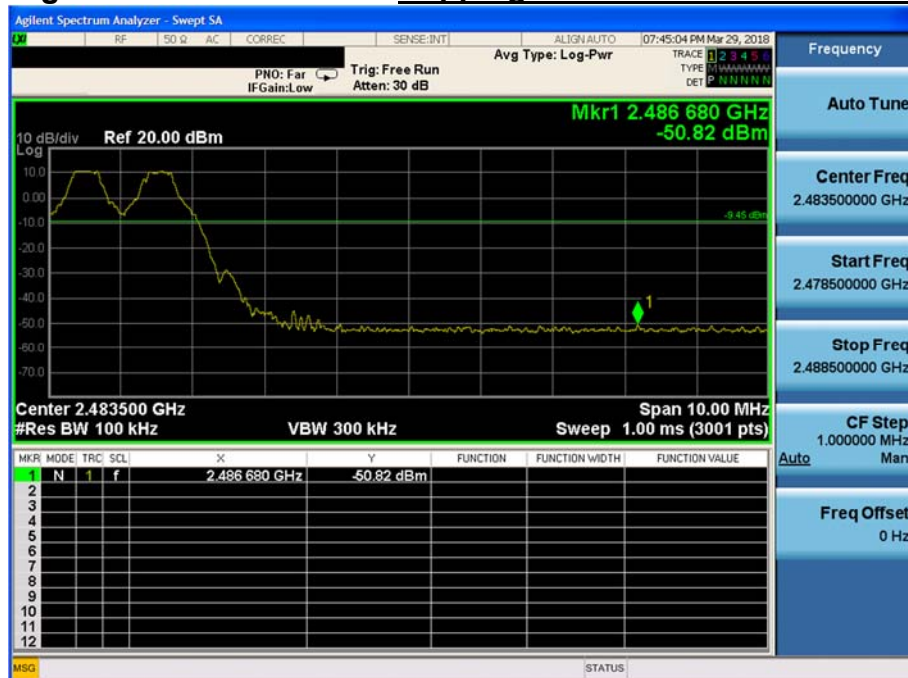

Conducted Spurious Emissions

Highest Channel & Modulation : GFSK

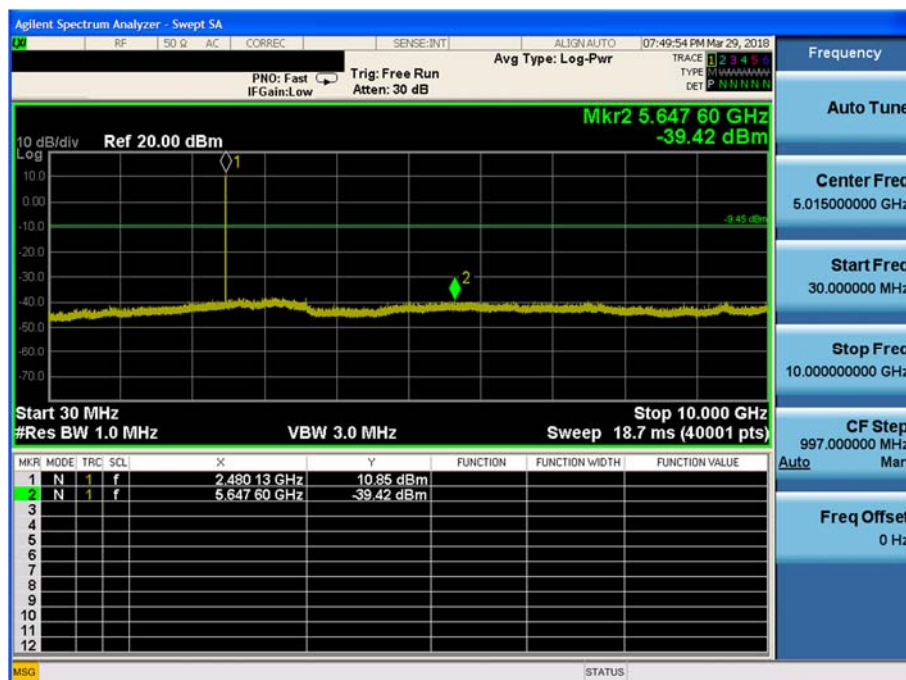
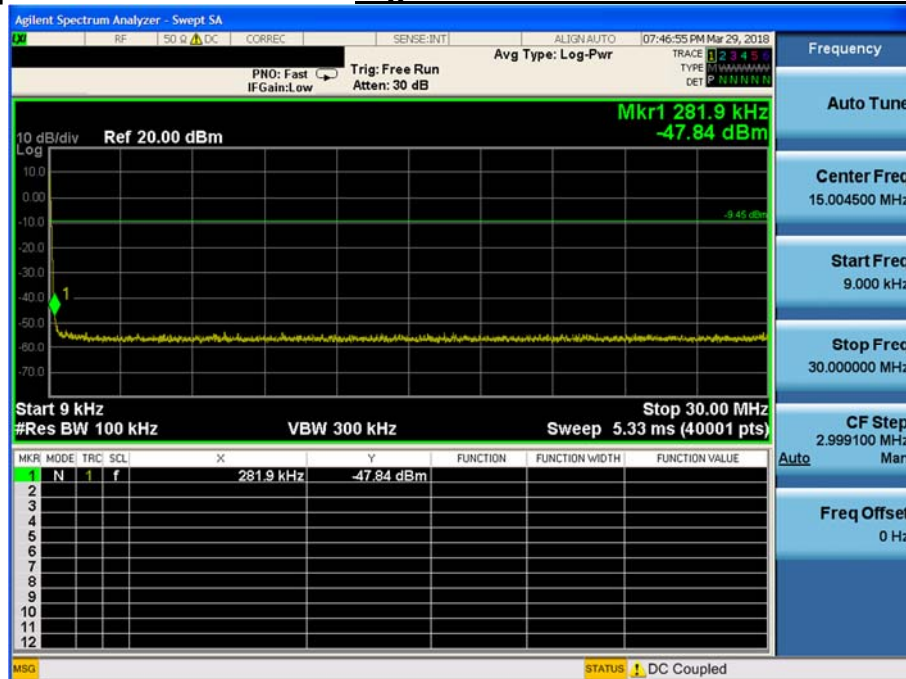


Lowest Channel & Modulation : $\pi/4$ DQPSK

Hopping mode & Modulation : $\pi/4$ DQPSK

Conducted Spurious Emissions

Lowest Channel & Modulation : $\pi/4$ DQPSK

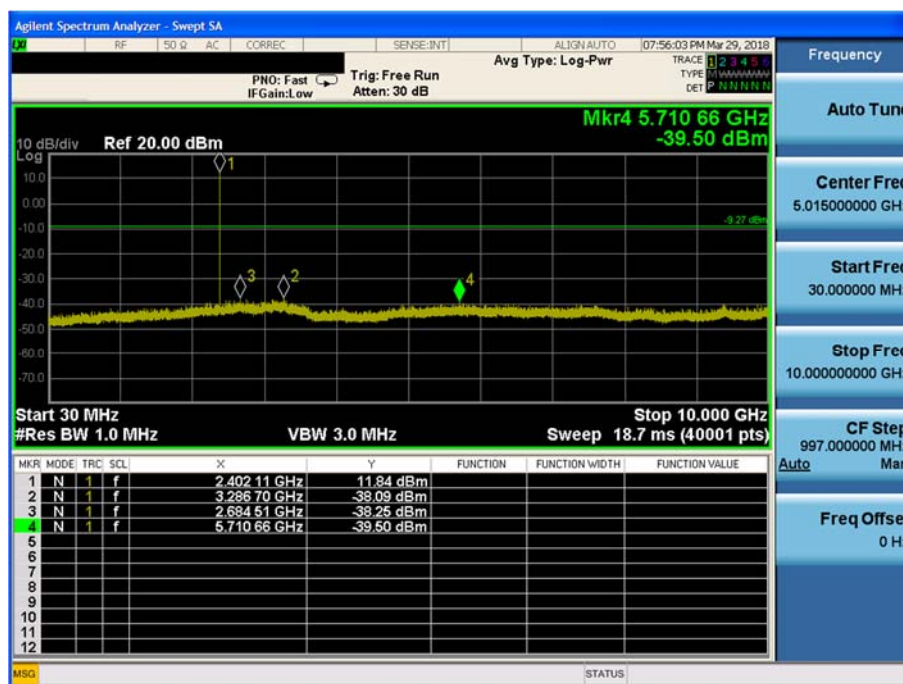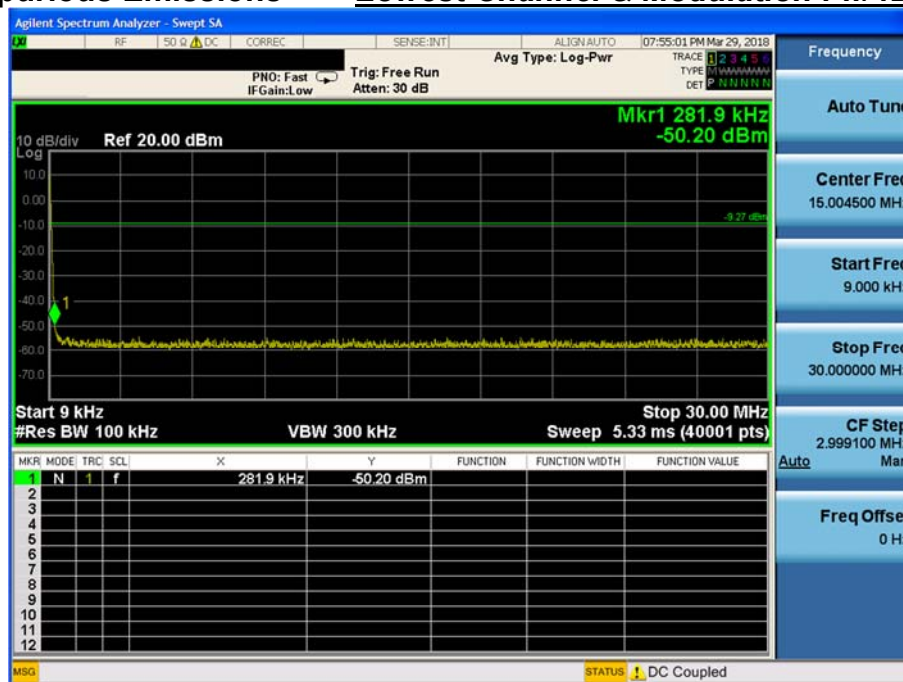

Middle Channel & Modulation : $\pi/4$ DQPSK

Middle Channel & Modulation : $\pi/4$ DQPSK


MFR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	319.7 kHz	-49.21 dBm			
2								
3								
4								
5								
6								
7								
8								
9								
10								
11								
12								

Middle Channel & Modulation : $\pi/4$ DQPSK




High Band-edge

Highest Channel & Modulation : $\pi/4$ DQPSK

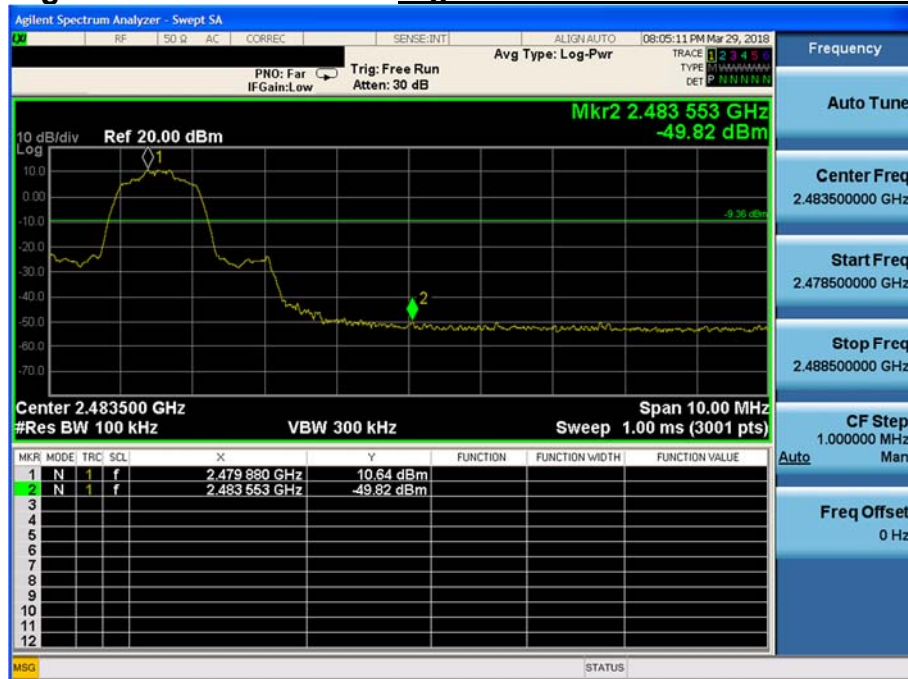


High Band-edge

Hopping mode & Modulation : $\pi/4$ DQPSK

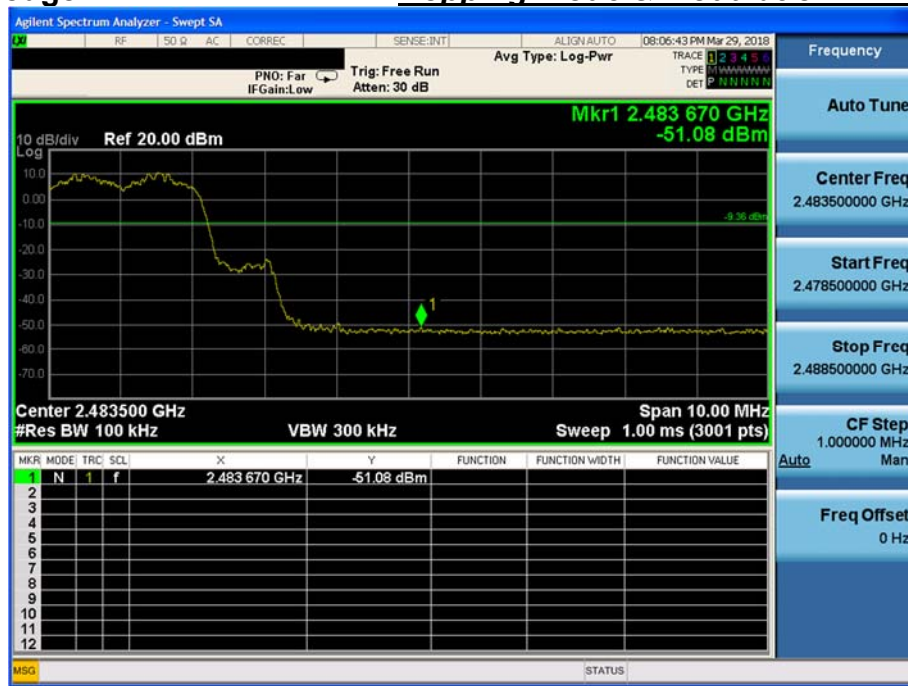


Highest Channel & Modulation : $\pi/4$ DQPSK

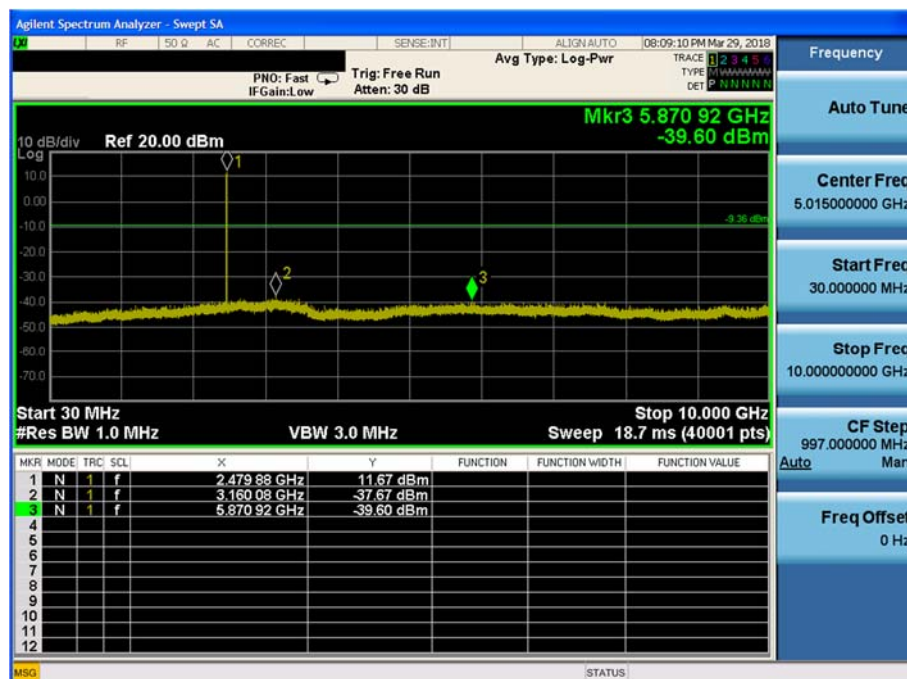


Conducted Spurious Emissions

Highest Channel & Modulation : $\pi/4$ DQPSK

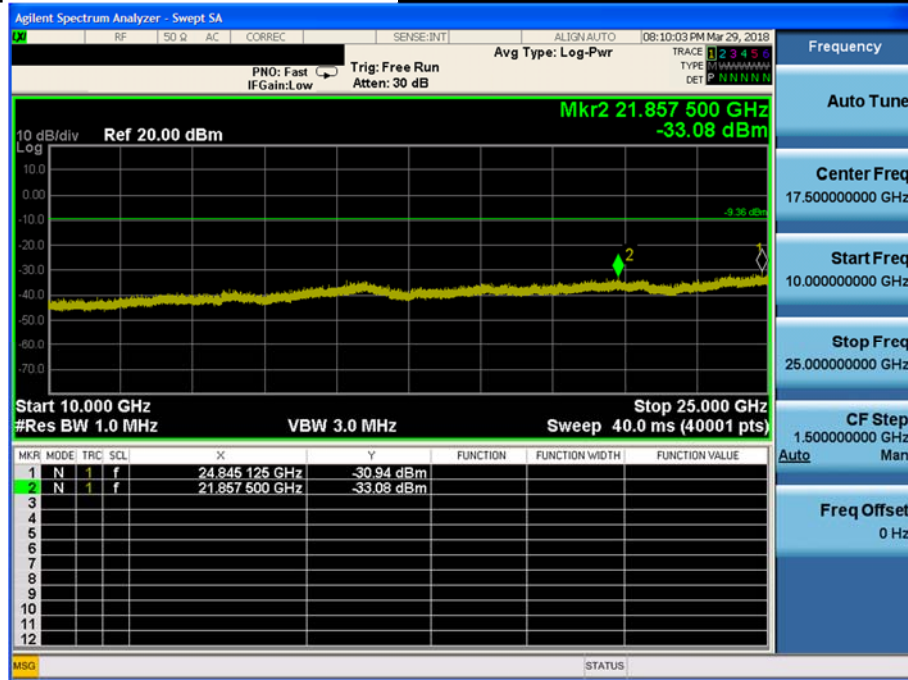


Low Band-edge

Lowest Channel & Modulation : 8DPSK

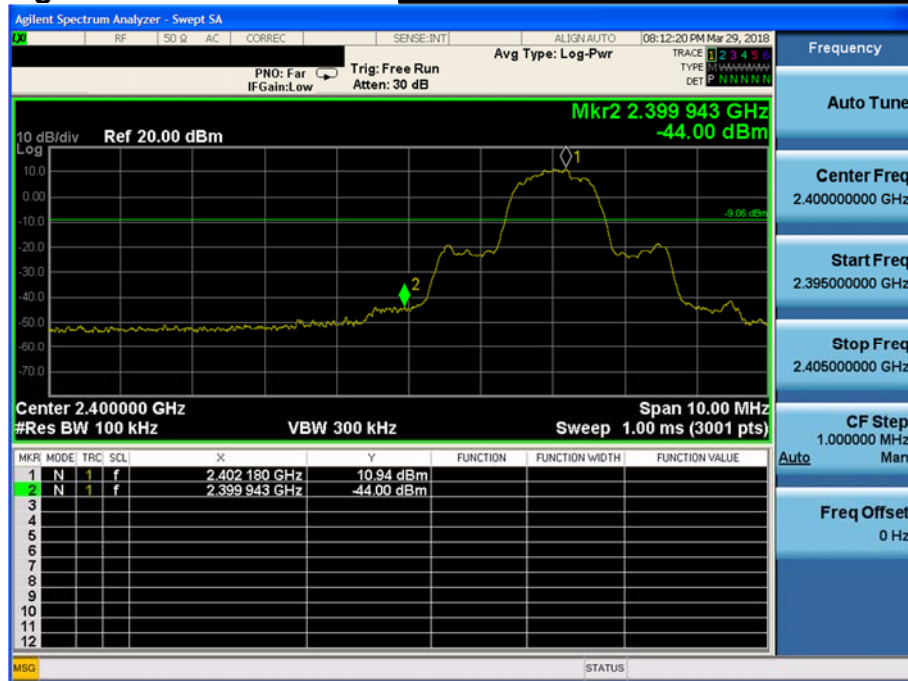


Low Band-edge

Hopping mode & Modulation : 8DPSK

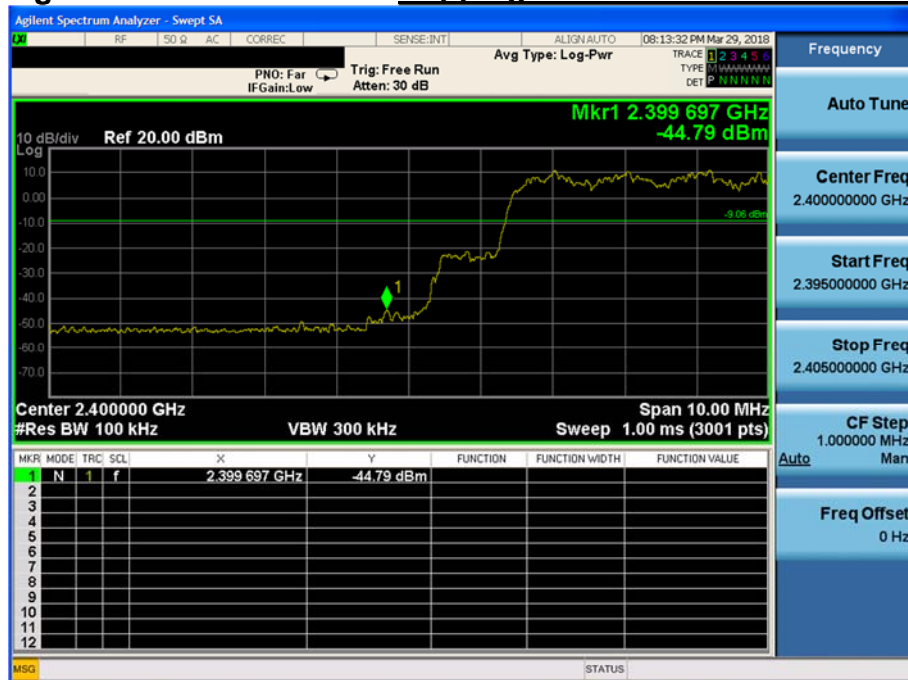


Lowest Channel & Modulation : 8DPSK

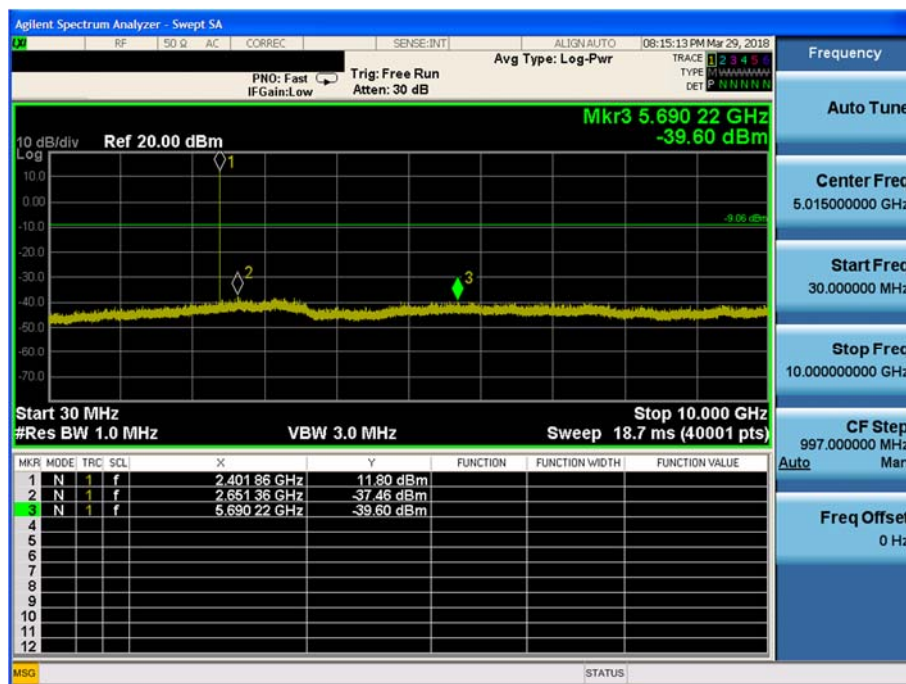


Conducted Spurious Emissions

Lowest Channel & Modulation : 8DPSK

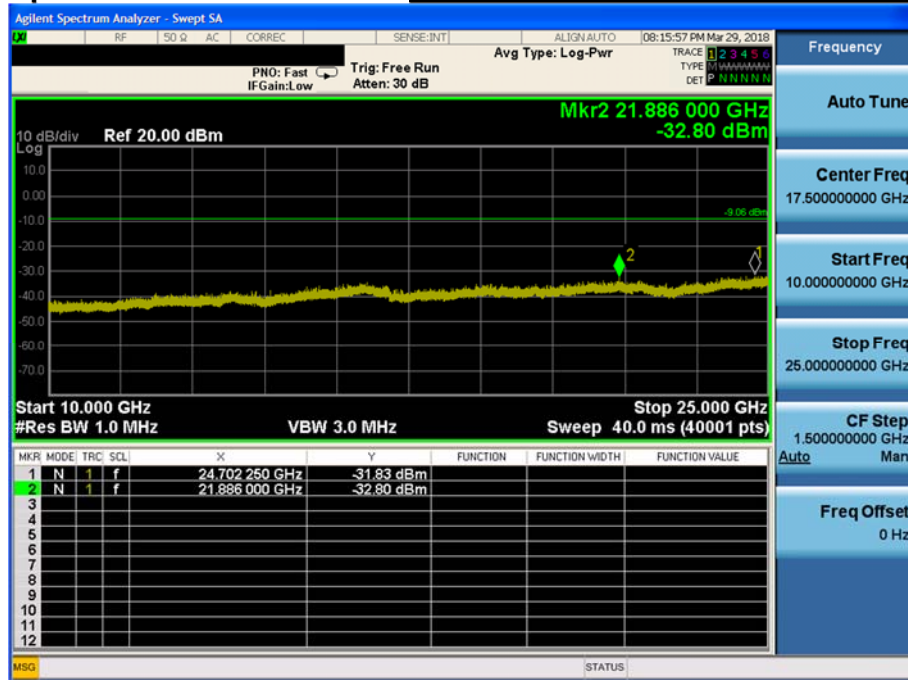


Reference for limit

Middle Channel & Modulation : 8DPSK

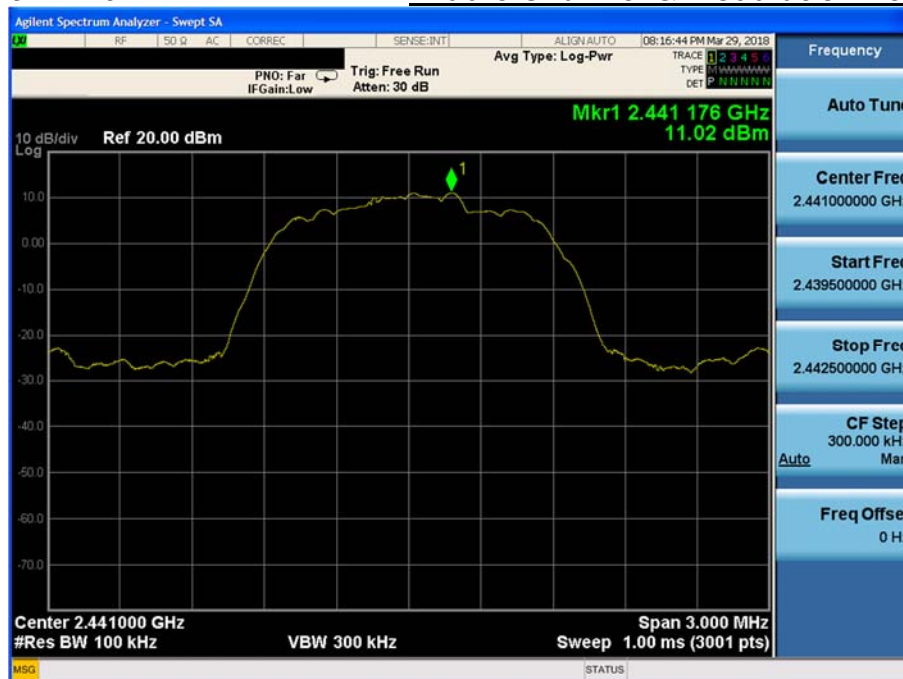



Conducted Spurious Emissions

Middle Channel & Modulation : 8DPSK

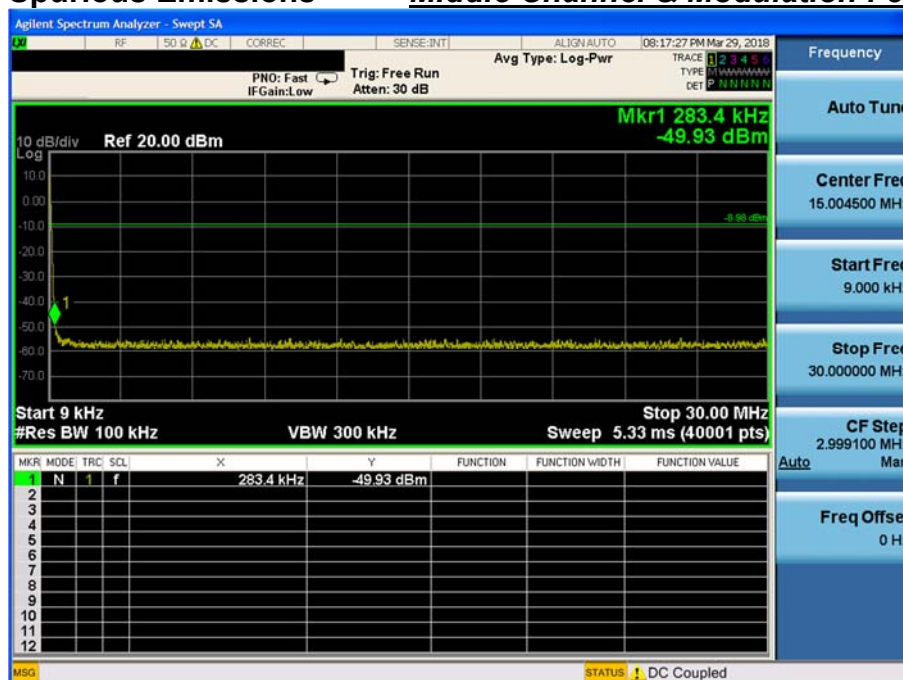


Conducted Spurious Emissions


Middle Channel & Modulation : 8DPSK

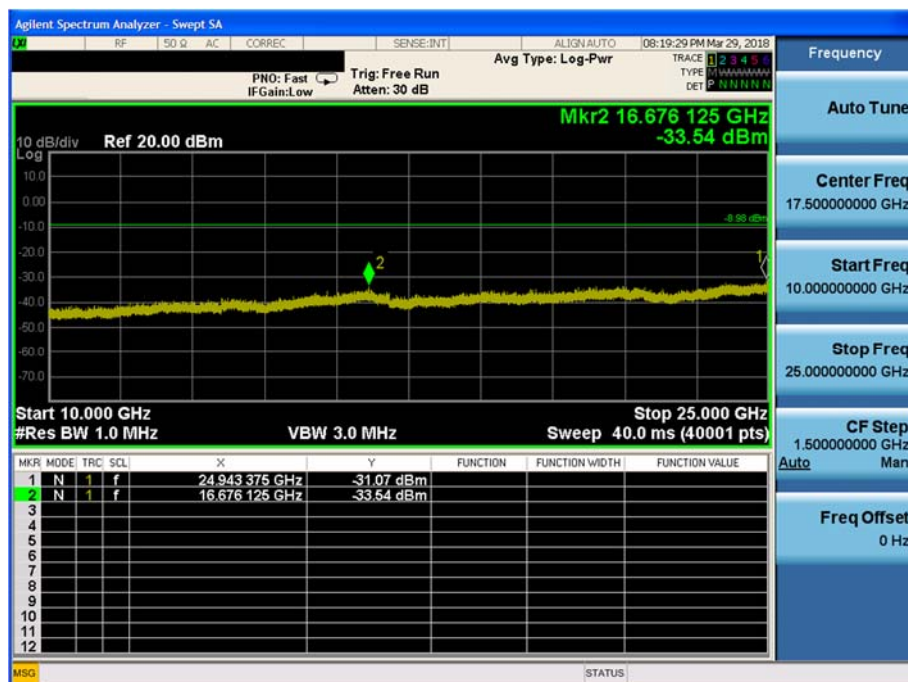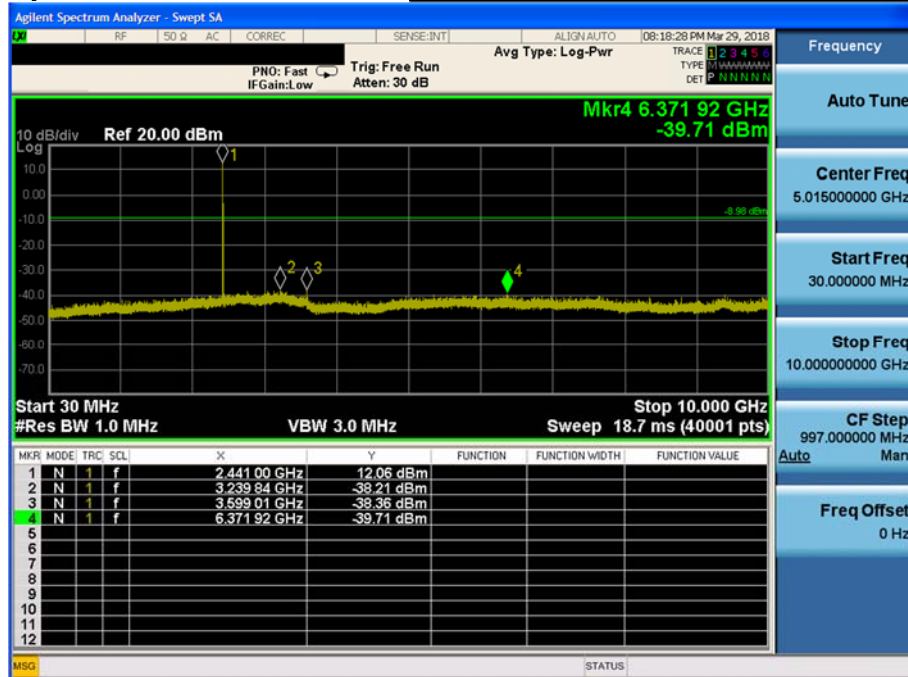

High Band-edge


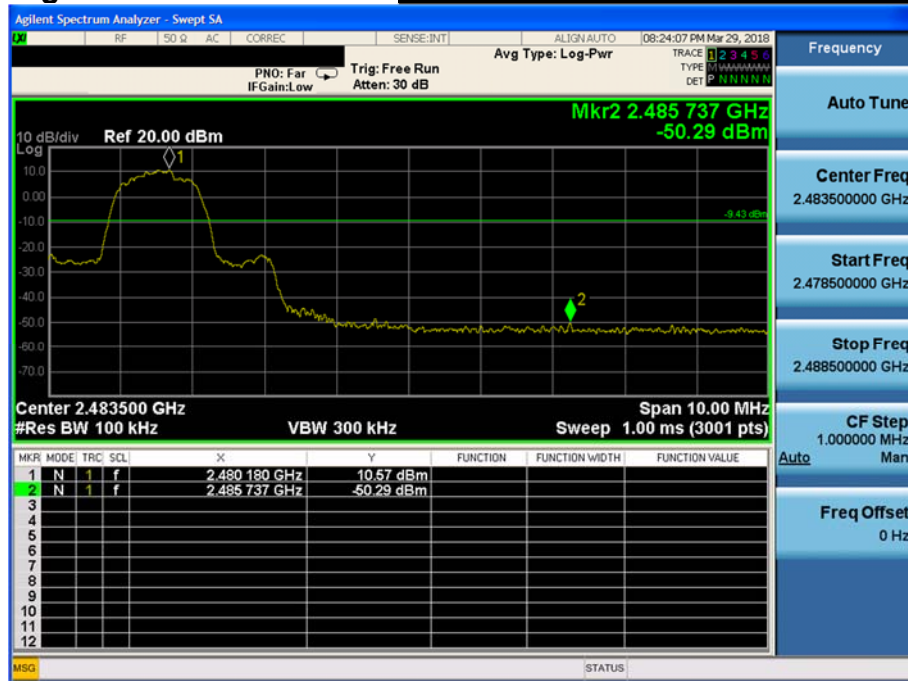
Highest Channel & Modulation : 8DPSK

High Band-edge

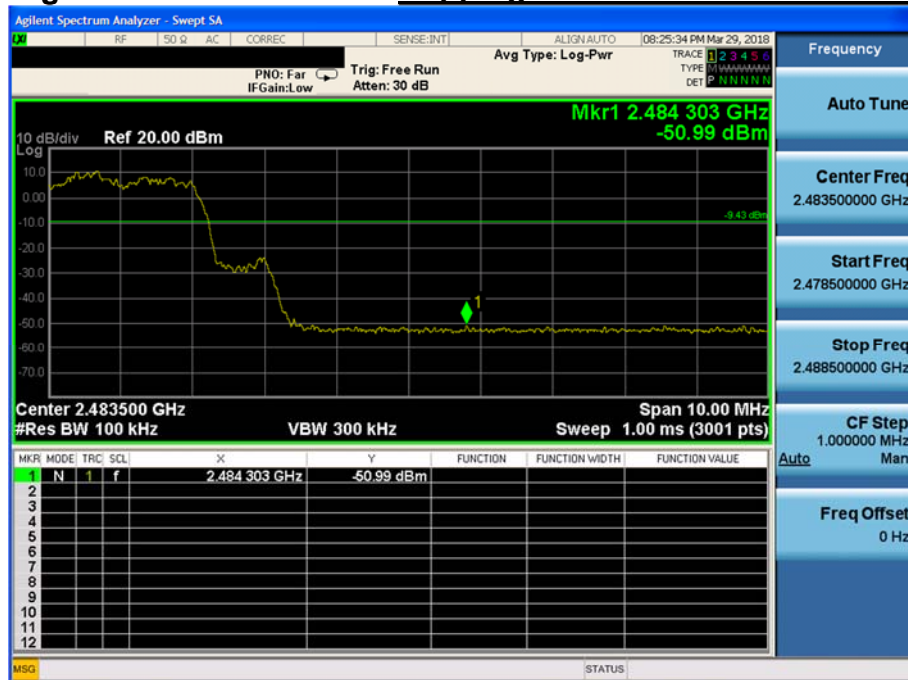Hopping mode & Modulation : 8DPSK

Conducted Spurious Emissions

Highest Channel & Modulation : 8DPSK

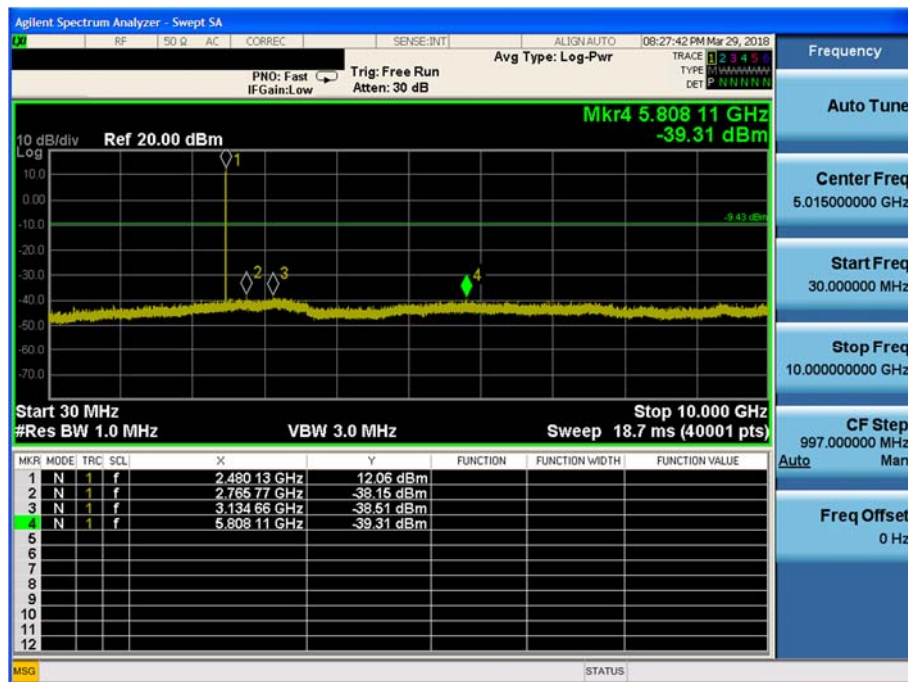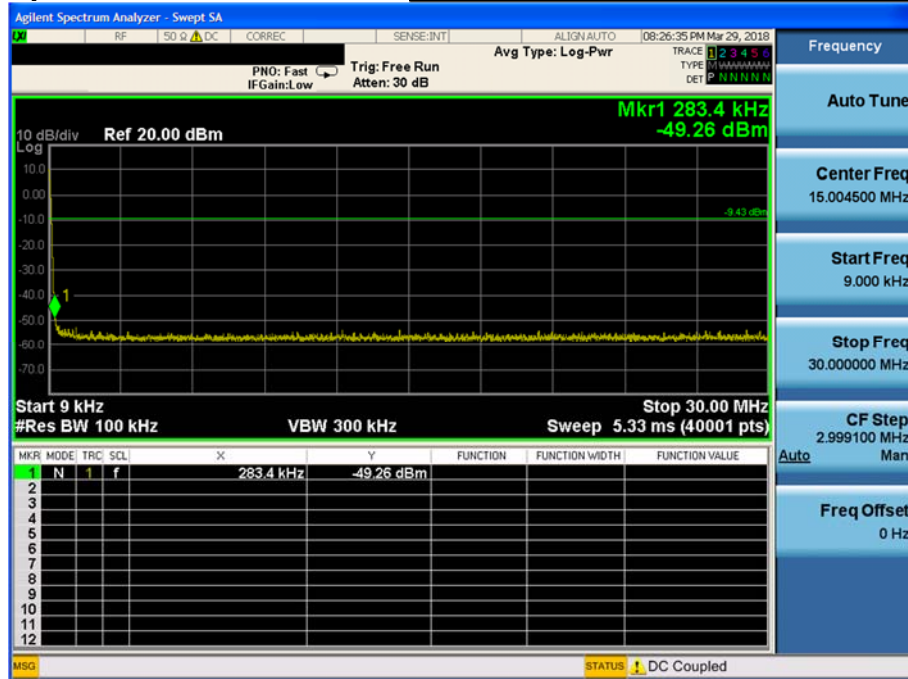

Highest Channel & Modulation : 8DPSK



8. Transmitter AC Power Line Conducted Emission

8.1 Test Setup

See test photographs for the actual connections between EUT and support equipment.

8.2 Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network (LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

8.3 Test Procedures

Conducted emissions from the EUT were measured according to the ANSI C63.10.

1. The test procedure is performed in a 6.5 m × 3.5 m × 3.5 m (L × W × H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) × 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

8.4 Test Results

AC Line Conducted Emissions (Graph) = Modulation : 8DPSK

Results of Conducted Emission


DTNC Date 2018-03-28

Order No. DTNC1803-02408
Model No. LM-G710V
Serial No.
Test Condition BT

Reference No.
Power Supply
Temp/Humi. 24/43
Operator J.J.LEE

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

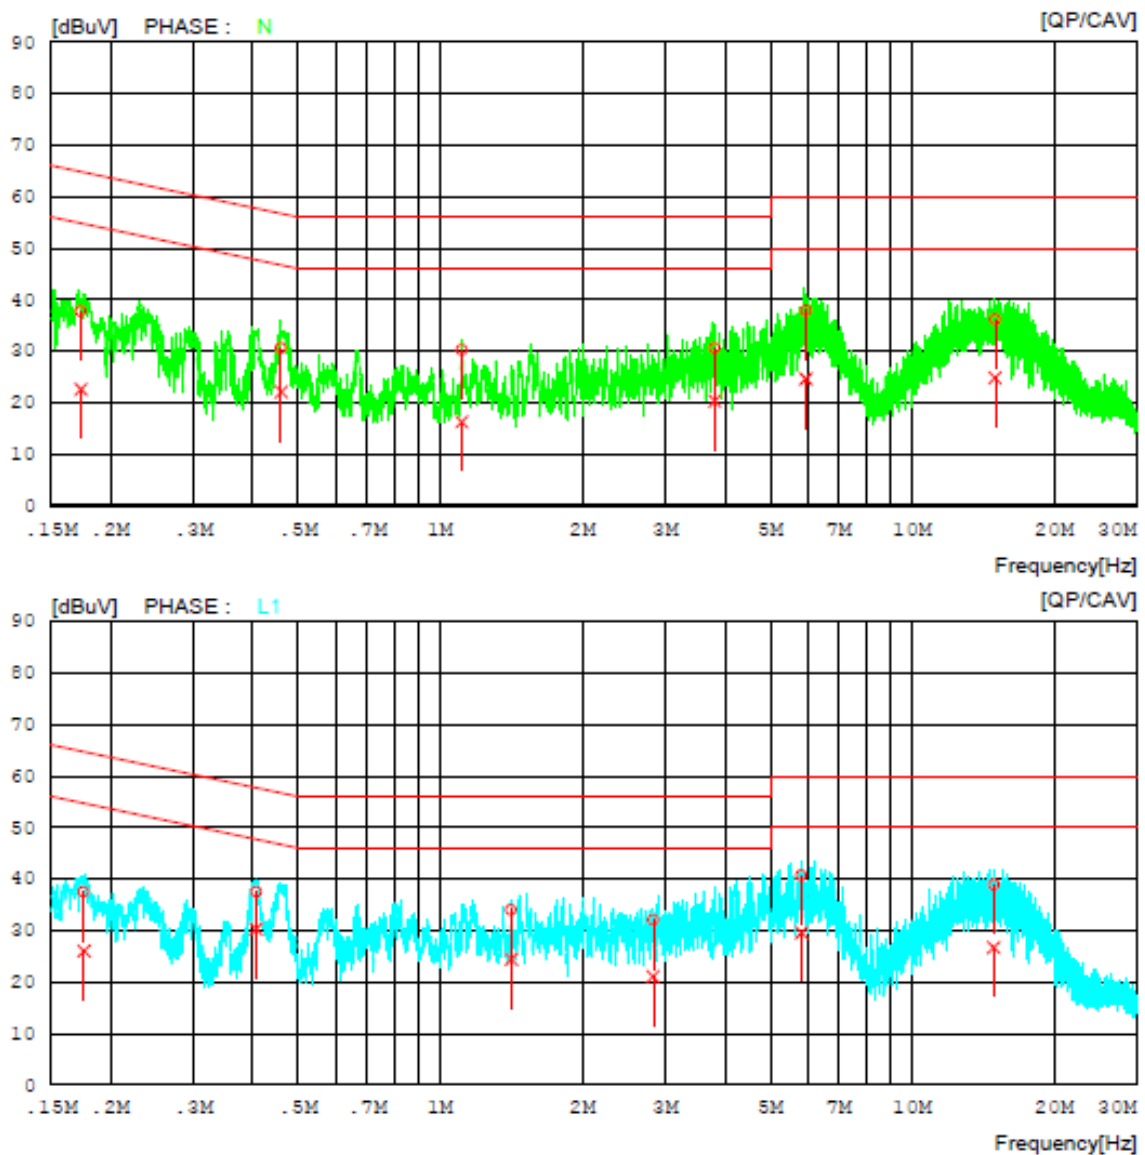

AC Line Conducted Emissions (List) = Modulation : 8DPSK

Results of Conducted Emission

DTNC

Date 2018-03-28

Order No. DTNC1803-02408
Model No. LM-G710V
Serial No.
Test Condition BT

Reference No.
Power Supply
Temp/Humi. 24/43
Operator J.J.LEE

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	
1	0.17310	27.79	12.55	9.97	37.76	22.52	64.81	54.81	27.05	32.29	N
2	0.45975	20.58	12.10	9.98	30.56	22.08	56.70	46.70	26.14	24.62	N
3	1.11080	20.27	6.24	10.00	30.27	16.24	56.00	46.00	25.73	29.76	N
4	3.81520	20.49	10.20	10.06	30.55	20.26	56.00	46.00	25.45	25.74	N
5	5.95240	27.78	14.52	10.11	37.89	24.63	60.00	50.00	22.11	25.37	N
6	14.97600	25.82	14.53	10.31	36.13	24.84	60.00	50.00	23.87	25.16	N
7	0.17572	27.53	16.01	9.96	37.49	25.97	64.69	54.69	27.20	28.72	L1
8	0.40707	27.45	20.22	9.97	37.42	30.19	57.71	47.71	20.29	17.52	L1
9	1.41280	23.91	14.37	10.01	33.92	24.38	56.00	46.00	22.08	21.62	L1
10	2.82480	21.93	11.01	10.05	31.98	21.06	56.00	46.00	24.02	24.94	L1
11	5.82820	30.49	19.48	10.10	40.59	29.58	60.00	50.00	19.41	20.42	L1
12	14.89600	28.51	16.37	10.31	38.82	26.68	60.00	50.00	21.18	23.32	L1

9. Antenna Requirement

Describe how the EUT complies with the requirement that either its antenna is permanently attached, or that it employs a unique antenna connector, for every antenna proposed for use with the EUT.

Conclusion: **Comply**

The internal antenna is attached on the main PCB using the special spring tension.

Therefore this E.U.T Complies with the requirement of §15.203


- Minimum Standard :

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions.


APPENDIX I

Test set up diagrams

▪ Radiated Measurement

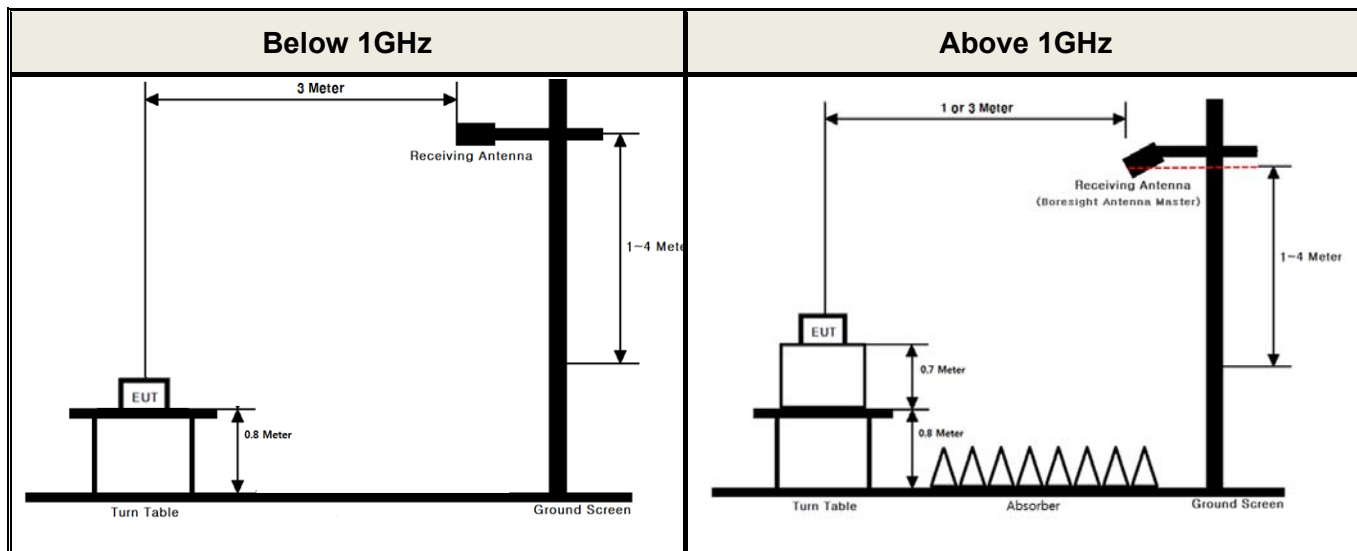

▪ Conducted Measurement

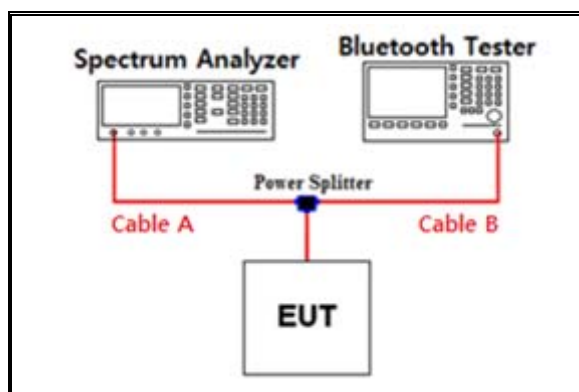


Path loss information

Frequency (GHz)	Path Loss (dB)	Frequency (GHz)	Path Loss (dB)
0.03	6.09	15	8.28
1	6.72	20	8.54
2.402 & 2.441 & 2.480	7.29	25	8.73
5	7.85	-	-
10	8.18	-	-

Note 1: The path loss from EUT to Spectrum analyzer was measured and used for test.
Path loss (S/A's correction factor) = Cable A


$\pi/4$ DQPSK & Lowest & X & Hor

Detector Mode : PK

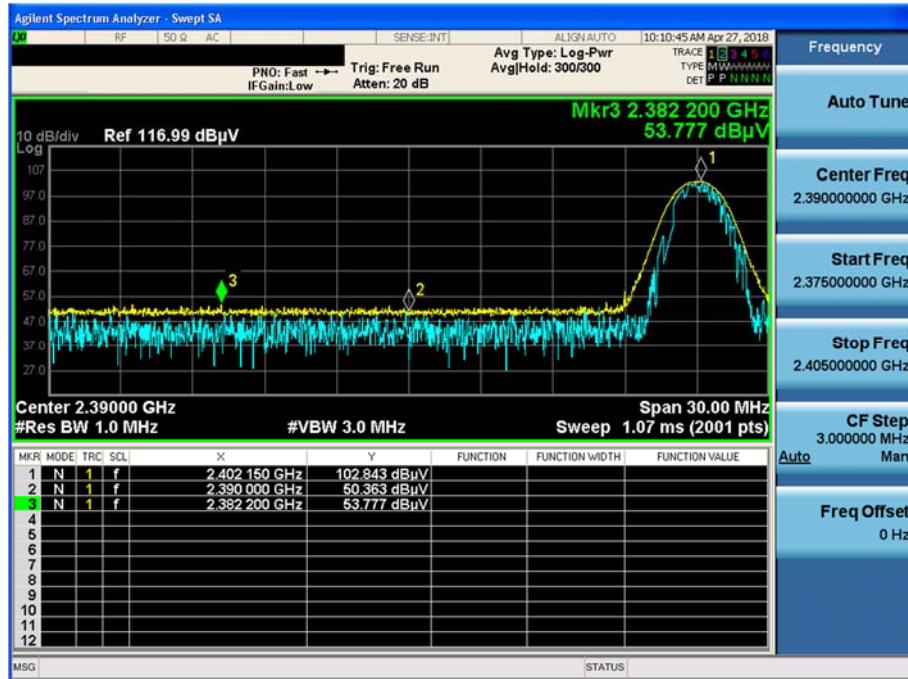


$\pi/4$ DQPSK & Highest & X & Hor

Detector Mode : PK

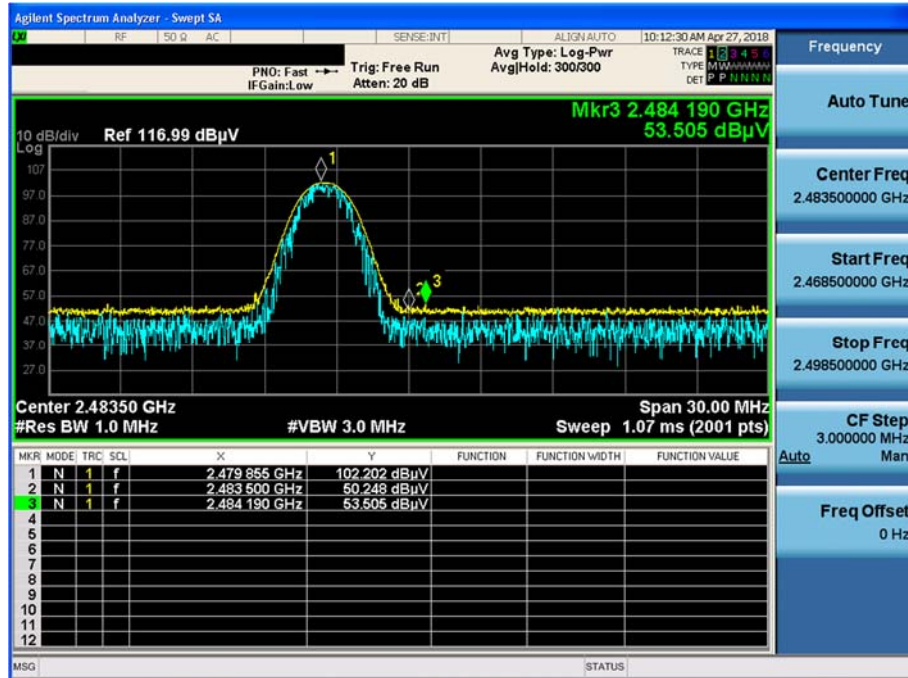


Detector Mode : PK

Detector Mode : PK




GFSK & Lowest & X & Hor

Detector Mode : PK

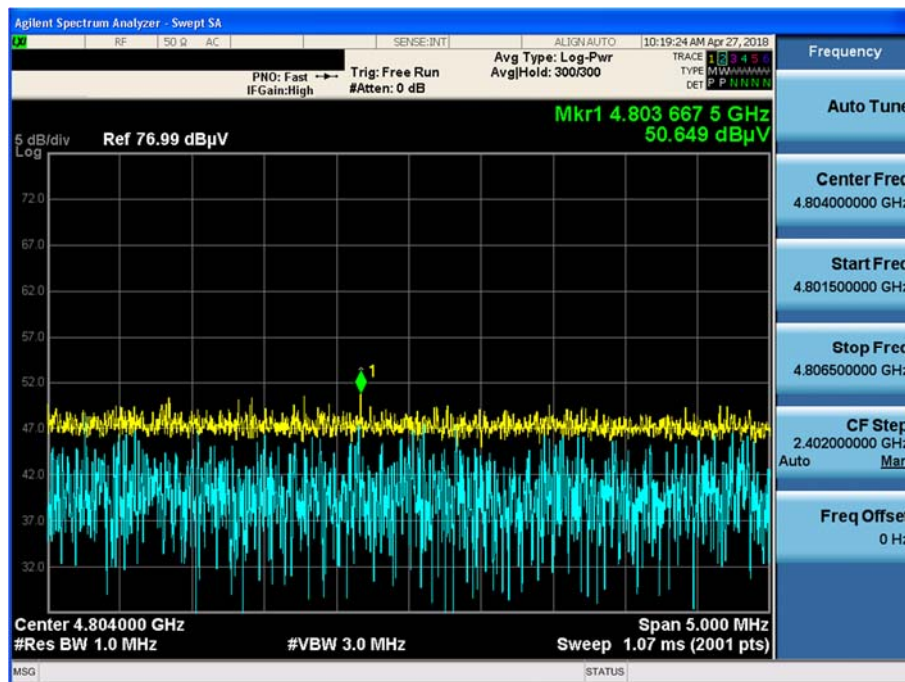

$\pi/4$ DQPSK & Highest & X & Hor

Detector Mode : PK

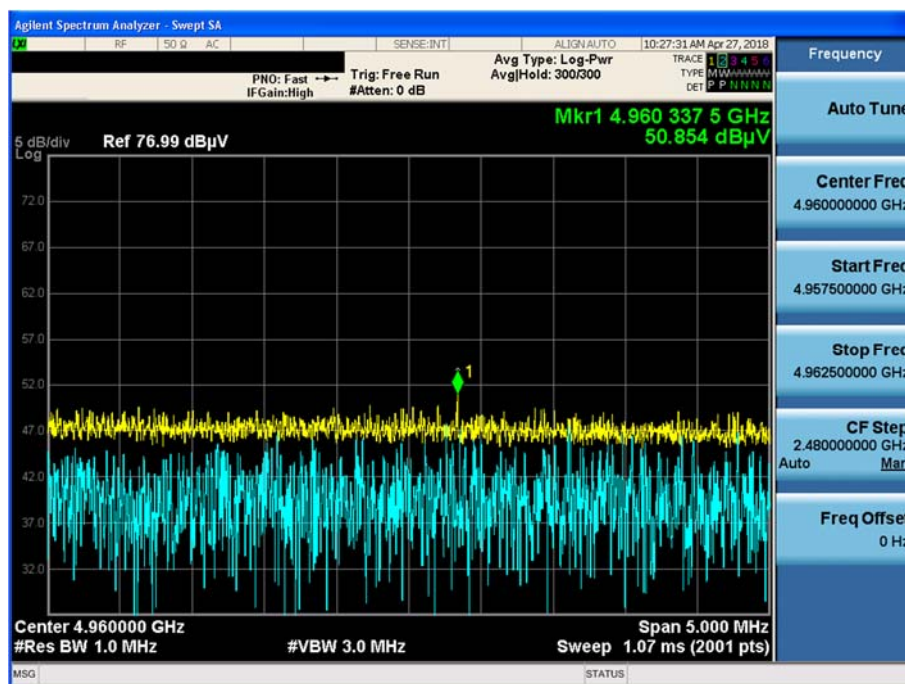

8DPSK & Highest & X & Hor

Detector Mode : PK

