



MEASUREMENT REPORT

FCC Part 15.407 UNII 802.11a/n/ac

Applicant Name:
LG Electronics MobileComm U.S.A
1000 Sylvan Avenue
Englewood Cliffs, NJ 07632
United States

Date of Testing:
1/03 – 1/26, 2/10/2015
Test Site/Location:
PCTEST Lab, Columbia, MD, USA
Test Report Serial No.:
0Y1501120066.ZNF

FCC ID:	ZNFH950
APPLICANT:	LG Electronics MobileComm U.S.A

Application Type: Certification
Model(s): LG-H950, LGH950, H950
EUT Type: Portable Handset
FCC Classification: Unlicensed National Information Infrastructure (UNII)
FCC Rule Part(s): Part 15.407
Test Procedure(s): KDB 789033 D02 v01, KDB 644545 D03

Mode	UNII Band	Channel Bandwidth (MHz)	Tx Frequency (MHz)	Conducted Power	
				Max. Power (mW)	Max. Power (dBm)
802.11a	1	20	5180 - 5240	18.535	12.68
	2A	20	5260 - 5320	19.907	12.99
	2C	20	5500 - 5720	19.907	12.99
802.11n	3	20	5745 - 5825	18.923	12.77
	1	20	5180 - 5240	17.458	12.42
	2A	20	5260 - 5320	17.620	12.46
	2C	20	5500 - 5720	17.100	12.33
802.11ac	3	20	5745 - 5825	19.724	12.95
	1	20	5180 - 5240	18.113	12.58
	2A	20	5260 - 5320	17.989	12.55
	2C	20	5500 - 5720	17.219	12.36
802.11n	3	20	5745 - 5825	19.770	12.96
	1	40	5190 - 5230	13.614	11.34
	2A	40	5270 - 5310	13.243	11.22
	2C	40	5510 - 5710	13.092	11.17
802.11ac	3	40	5755 - 5795	14.191	11.52
	1	40	5190 - 5230	13.032	11.15
	2A	40	5270 - 5310	12.853	11.09
	2C	40	5510 - 5710	13.335	11.25
802.11ac	3	40	5755 - 5795	13.459	11.29
	1	80	5210	14.859	11.72
	2A	80	5290	15.066	11.78
	2C	80	5530 - 5690	13.032	11.15
802.11ac	3	80	5775	13.062	11.16

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02 v01 and KDB 644545 D03. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Randy Ortaez
President



FCC ID: ZNFH950		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 1 of 109

TABLE OF CONTENTS

FCC PART 15.407 MEASUREMENT REPORT	3
1.0 INTRODUCTION	4
1.1 SCOPE	4
1.2 PCTEST TEST LOCATION	4
2.0 PRODUCT INFORMATION	5
2.1 EQUIPMENT DESCRIPTION	5
2.2 DEVICE CAPABILITIES	5
2.3 TEST CONFIGURATION.....	5
2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS.....	5
3.0 DESCRIPTION OF TEST	6
3.1 EVALUATION PROCEDURE	6
3.2 AC LINE CONDUCTED EMISSIONS	6
3.3 RADIATED EMISSIONS.....	7
3.4 ENVIRONMENTAL CONDITIONS	7
4.0 ANTENNA REQUIREMENTS.....	8
5.0 TEST EQUIPMENT CALIBRATION DATA.....	9
6.0 TEST RESULTS	10
6.1 SUMMARY.....	10
6.2 26DB BANDWIDTH MEASUREMENT – 802.11A/N/AC	11
6.3 6DB BANDWIDTH MEASUREMENT – 802.11A/N/AC	28
6.4 UNII OUTPUT POWER MEASUREMENT – 802.11A/N/AC	34
6.5 MAXIMUM POWER SPECTRAL DENSITY – 802.11A/N/AC	37
6.6 FREQUENCY STABILITY	59
6.7 RADIATED SPURIOUS EMISSION MEASUREMENTS.....	63
6.7.1 RADIATED SPURIOUS EMISSION MEASUREMENTS	66
6.7.2 RADIATED BAND EDGE MEASUREMENTS (20MHZ BW)	77
6.7.3 RADIATED BAND EDGE MEASUREMENTS (40MHZ BW)	84
6.7.4 RADIATED BAND EDGE MEASUREMENTS (80MHZ BW)	91
6.8 RADIATED SPURIOUS EMISSIONS MEASUREMENTS – BELOW 1GHZ.....	98
6.9 LINE-CONDUCTED TEST DATA.....	101
7.0 CONCLUSION	109

FCC ID: ZNFH950		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 2 of 109



MEASUREMENT REPORT

FCC Part 15.407



§ 2.1033 General Information

APPLICANT: LG Electronics MobileComm U.S.A

APPLICANT ADDRESS: 1000 Sylvan Avenue
Englewood Cliffs, NJ 07632, United States

TEST SITE: PCTEST ENGINEERING LABORATORY, INC.

TEST SITE ADDRESS: 7185 Oakland Mills Road, Columbia, MD 21046 USA

FCC RULE PART(S): Part 15.407

BASE MODEL: LG-H950

FCC ID: ZNFH950

FCC CLASSIFICATION: Unlicensed National Information Infrastructure (UNII)

Test Device Serial No.: Wifi Conducted #1, ☐ Production ☒ Pre-Production ☐ Engineering
Wifi RSE/BE

DATE(S) OF TEST: 1/03 – 1/26, 2/10/2015

TEST REPORT S/N: 0Y1501120066.ZNF

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: ZNFH950		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 3 of 109

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on February 15, 2012.

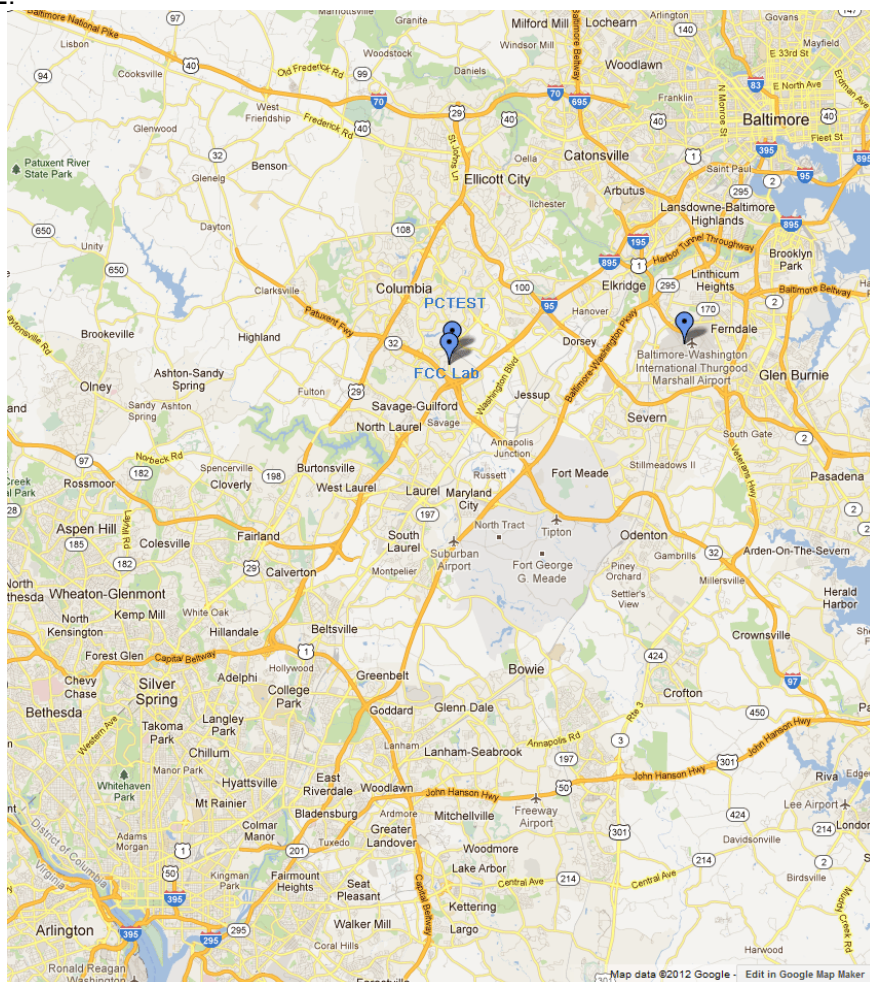


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: ZNFH950		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 4 of 109

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFH950**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GPRS/EDGE, 850/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n/ac WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC

Note: 5GHz WLAN (DTS/NII) operation is possible in 20MHz, and 40MHz, and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of KDB 789033. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Maximum Achievable Duty Cycles		
802.11 Mode/Band		Duty Cycle [%]
		ANT1
5GHz	a	98.62
	n (HT20)	98.52
	n (HT40)	95.53
	ac (HT80)	88.92

Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps (802.11a)
6.5/7.2, 13/14.4, 19.5/21.7, 26/28.9, 39/43.3, 52/57.8, 58.5/65, 65/72.2 (n – 20MHz)
13.5/15, 27/30, 40.5/45, 54/60, 81/90, 108/120, 121.5/135, 135/150 (n – 40MHz BW)
29.3/32.5, 58.5/65, 87.8/97.5, 117/130, 175.5/195, 234/260, 263.3/292.5, 292.5/325,
351/390, 390/433.3 (ac – 80MHz BW)

2.3 Test Configuration

The LG Portable Handset FCC ID: ZNFH950 was tested per the guidance of KDB 789033 D02 v01. ANSI C63.10-2009 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 6.2, 6.4, 6.5, and 6.6 for antenna port conducted emissions test setups.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: ZNFH950		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset	Page 5 of 109	

3.0 DESCRIPTION OF TEST

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2009) and the guidance provided in KDB 789033 D02 v01 were used in the measurement of **LG Portable Handset FCC ID: ZNFH950**.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or resolution, clock or data exchange speed, scrolling H pattern to the EUT and/or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 6.9. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: ZNFH950		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 6 of 109

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Clause 5, Figure 5.7 of ANSI C63.4-2009. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A ¾" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 0.8 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: ZNFH950		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 7 of 109

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the Portable Handset are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The **LG Portable Handset FCC ID: ZNFH950** unit complies with the requirement of §15.203.

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
:	:	:	:	:	:	:	:
42	5210	56	5280	116	5580	157	5785
:	:	:	:	:	:	:	:
48	5240	64	5320	144	5720	165	5825

Table 4-1. 802.11a / 802.11n / 802.11ac (20MHz) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
:	:	:	:	:	:	:	:
46	5230	62	5310	110	5550		
				:	:		
				142	5710	159	5795

Table 4-2. 802.11n / 802.11ac (40MHz BW) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775
				:	:		
				138	5690		

Table 4-3. 802.11ac (80MHz BW) Frequency / Channel Operations

FCC ID: ZNFH950		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)				Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset				Page 8 of 109

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	5/29/2014	Annual	5/29/2015	N/A
-	WL25-1	Conducted Cable Set (25GHz)	10/14/2014	Annual	10/14/2015	N/A
Agilent	8447D	Broadband Amplifier	6/2/2014	Annual	6/2/2015	1937A03348
Agilent	E4448A	PSA (3Hz-50GHz) Spectrum Analyzer	4/16/2014	Annual	4/16/2015	US42510244
Agilent	N9020A	MXA Signal Analyzer	10/27/2014	Annual	10/27/2015	US46470561
Anritsu	MA2411B	Pulse Sensor	4/8/2014	Biennial	4/8/2016	846215
Anritsu	ML2495A	Power Meter	10/31/2013	Biennial	10/31/2015	941001
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	6/26/2013	Biennial	6/26/2015	121034
Emco	3115	Horn Antenna (1-18GHz)	1/30/2014	Biennial	1/30/2016	9704-5182
Emco	3816/2	Line Impedance Stabilization Network	2/12/2013	Biennial	2/12/2015	9709-1077
Espec	ESX-2CA	Environmental Chamber	4/16/2014	Annual	4/16/2015	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	4/8/2014	Biennial	4/8/2016	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	6/17/2014	Biennial	6/17/2016	135427
ETS Lindgren	3160-10	26.5-40 GHz Standard Gain Horn	6/17/2014	Biennial	6/17/2016	130993
Huber+Suhner	Sucoflex 102A	40GHz Radiated Cable	10/15/2014	Annual	10/15/2015	251425001
K & L	11SH10-3075/U18000	High Pass Filter	12/1/2014	Annual	12/1/2015	2
K & L	11SH10-6000/T18000	High Pass Filter	12/1/2014	Annual	12/1/2015	1
Pasternack	NMLC-1	Line Conducted Emissions Cable (NM)	1/28/2014	Annual	1/28/2015	N/A
Rhode & Schwarz	TS-PR18	Pre-Amplifier	6/12/2014	Annual	6/12/2015	101622
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	3/27/2014	Annual	3/27/2015	100342
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	3/5/2014	Annual	3/5/2015	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	3/12/2014	Annual	3/12/2015	100040
Rohde & Schwarz	TS-PR40	26.5-40 GHz Pre-Amplifier	5/15/2014	Annual	5/15/2015	100037
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/28/2014	Biennial	1/28/2016	A051107
VWR	62344-734	Thermometer with Clock	2/20/2014	Biennial	2/20/2016	140140420

Table 5-1. Annual Test Equipment Calibration Schedule

FCC ID: ZNFH950		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 - 1/26, 2/10/2015	EUT Type: Portable Handset		Page 9 of 109

6.0 TEST RESULTS

6.1 Summary

Company Name: LG Electronics MobileComm U.S.A
 FCC ID: ZNFH950
 Method/System: Unlicensed National Information Infrastructure (UNII)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (TX)					
N/A	26dB Bandwidth	N/A	CONDUCTED	PASS	Section 6.2
15.407(e)	6dB Bandwidth	>500kHz(5725-5850MHz)		PASS	Section 6.3
15.407 (a)	Maximum Conducted Output Power	< 250mW (23.98dBm) (5150-5250MHz) < 250mW (23.98dBm) (5250-5350MHz) < 250mW (23.98dBm) (5470-5725MHz) < 1W (5825-5825MHz)		PASS	Section 6.4
15.407 (a)	Peak Power Spectral Density	< 11 dBm/MHz (B1, B2A, B2C) <30 dBm/500kHz (B3)		PASS	Section 6.5
15.407(g)	Frequency Stability	N/A		PASS	Section 6.6
15.407(h)	Dynamic Frequency Selection	See DFS Test Report		PASS	See DFS Test Report
15.407(b)	Undesirable Emissions	< -27 dBm/MHz EIRP (5150-5350MHz, 5470-5725MHz) <-17 dBm/MHz EIRP (5725-5850 MHz) within 10MHz of the band edge, and <-27dBm/MHz EIRP otherwise	RADIATED	PASS	Section 6.7
15.205, 15.407(b)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS	Section 6.7, 6.8
15.407	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits or	LINE CONDUCTED	PASS	Section 6.9

Table 6-1. Summary of Test Results

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "UNII Automation", Version 3.4.

FCC ID: ZNFH950		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset	Page 10 of 109	

6.2 26dB Bandwidth Measurement – 802.11a/n/ac

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle (>98%), at its maximum power control level, as defined in KDB 789033 D02 v01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The 26dB bandwidth is used to determine the conducted power limits.

Test Procedure Used

KDB 789033 D02 v01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 6-1. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: ZNFH950		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 11 of 109


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	a	6	21.56
	5200	40	a	6	21.57
	5240	48	a	6	21.50
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	21.71
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	21.65
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	21.81
	5190	38	n (40MHz)	13.5/15 (MCS0)	40.00
	5230	46	n (40MHz)	13.5/15 (MCS0)	39.92
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	81.45
Band 2A	5260	52	a	6	21.56
	5280	56	a	6	21.47
	5320	64	a	6	21.46
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	21.72
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	21.97
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	21.68
	5270	54	n (40MHz)	13.5/15 (MCS0)	39.79
	5310	62	n (40MHz)	13.5/15 (MCS0)	39.99
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	81.41
Band 2C	5500	100	a	6	21.51
	5580	116	a	6	21.66
	5720	144	a	6	20.85
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	21.67
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	21.61
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	21.18
	5510	102	n (40MHz)	13.5/15 (MCS0)	39.85
	5550	110	n (40MHz)	13.5/15 (MCS0)	39.73
	5710	142	n (40MHz)	13.5/15 (MCS0)	38.71
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	82.21
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	81.62

Table 6-2. Conducted Bandwidth Measurements

FCC ID: ZNFH950		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 12 of 109

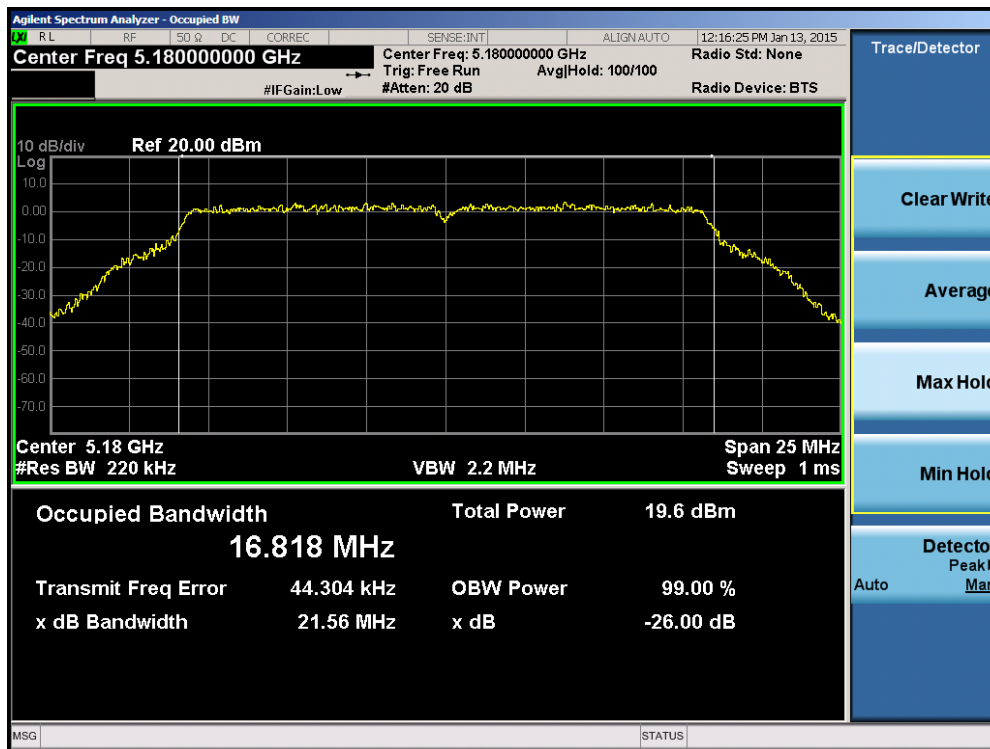


Plot 6-1. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 36)

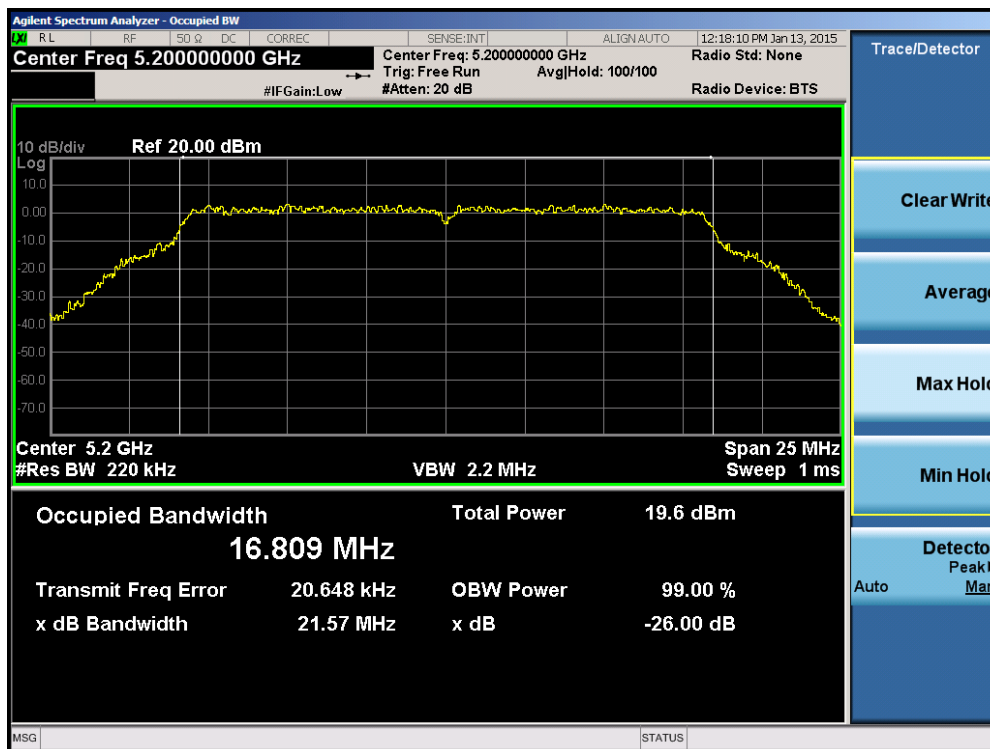


Plot 6-2. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 13 of 109

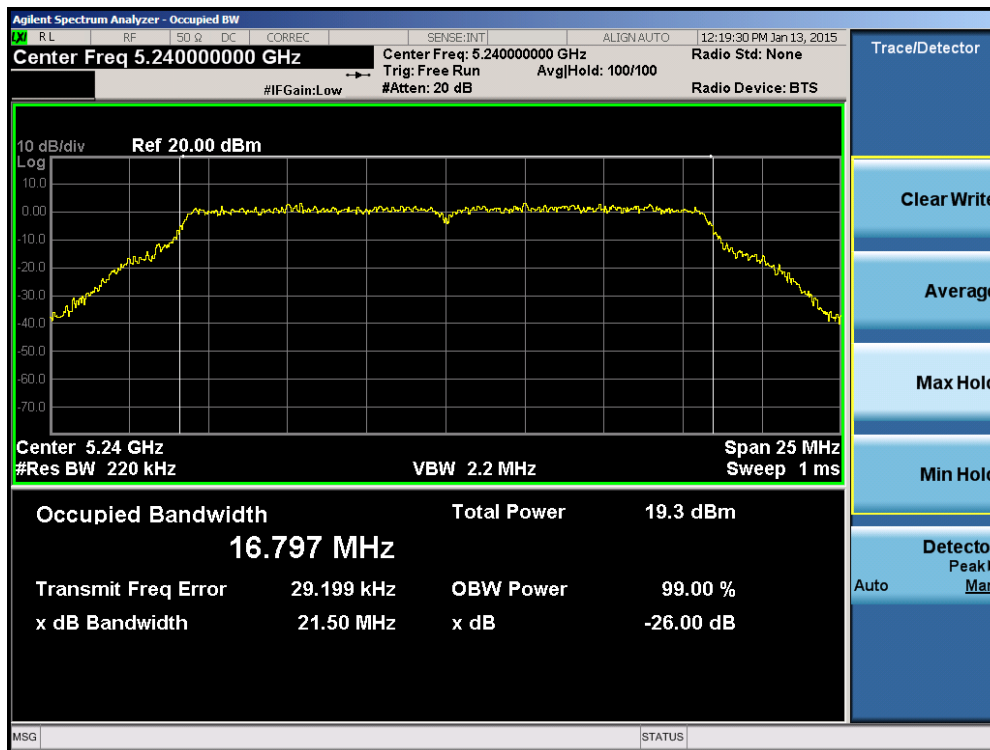


Plot 6-3. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 48)

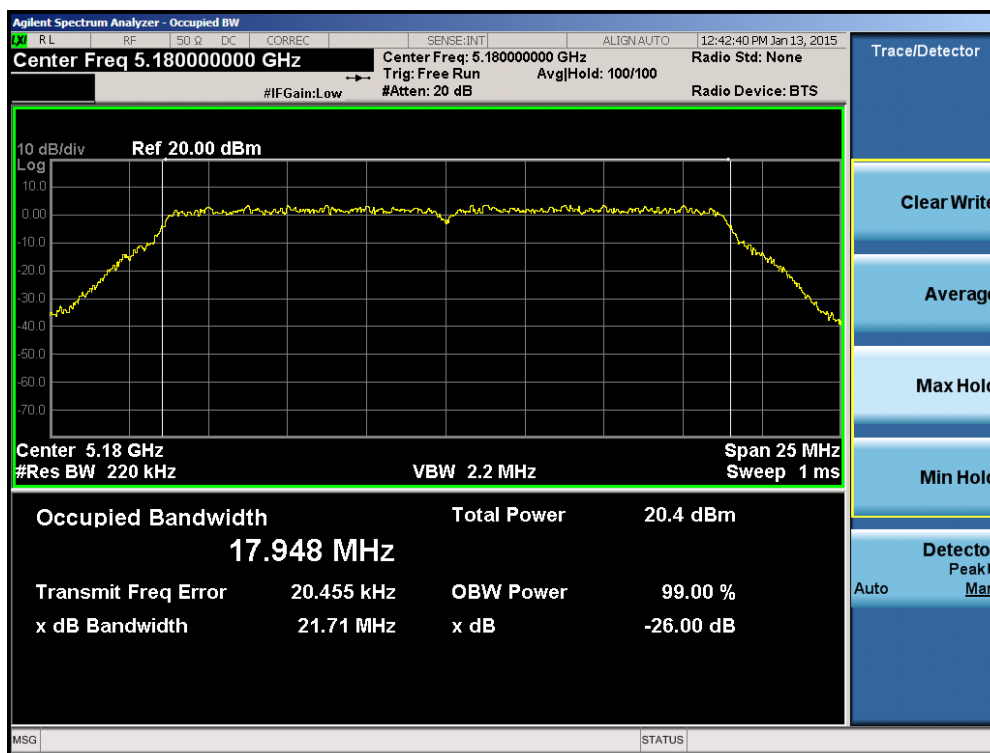


Plot 6-4. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 14 of 109

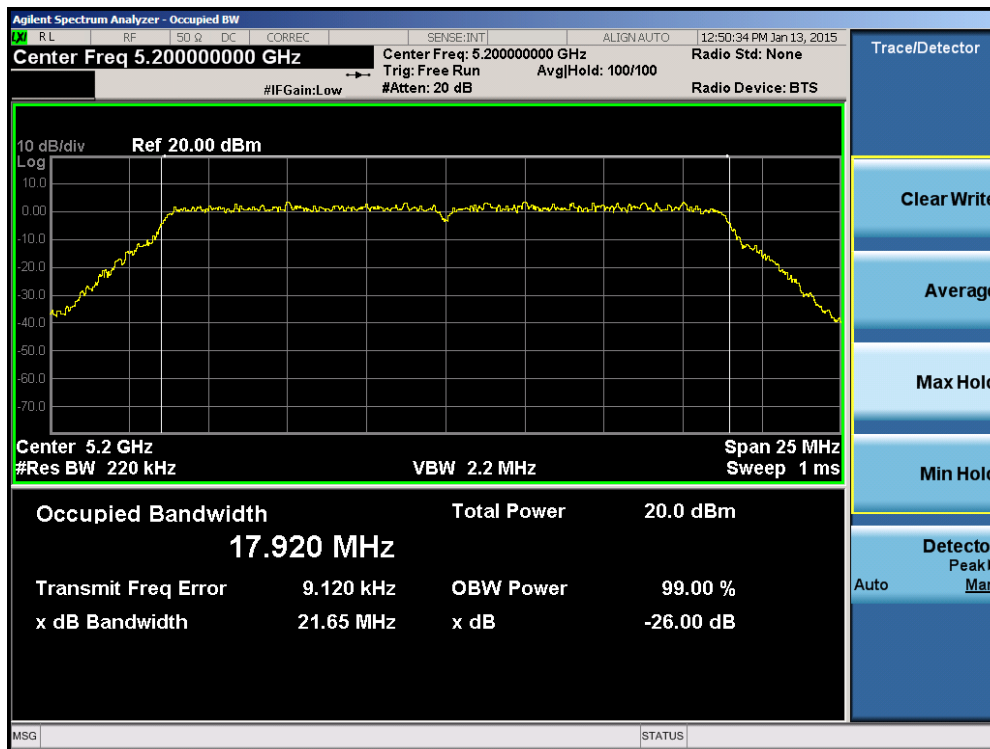


Plot 6-5. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

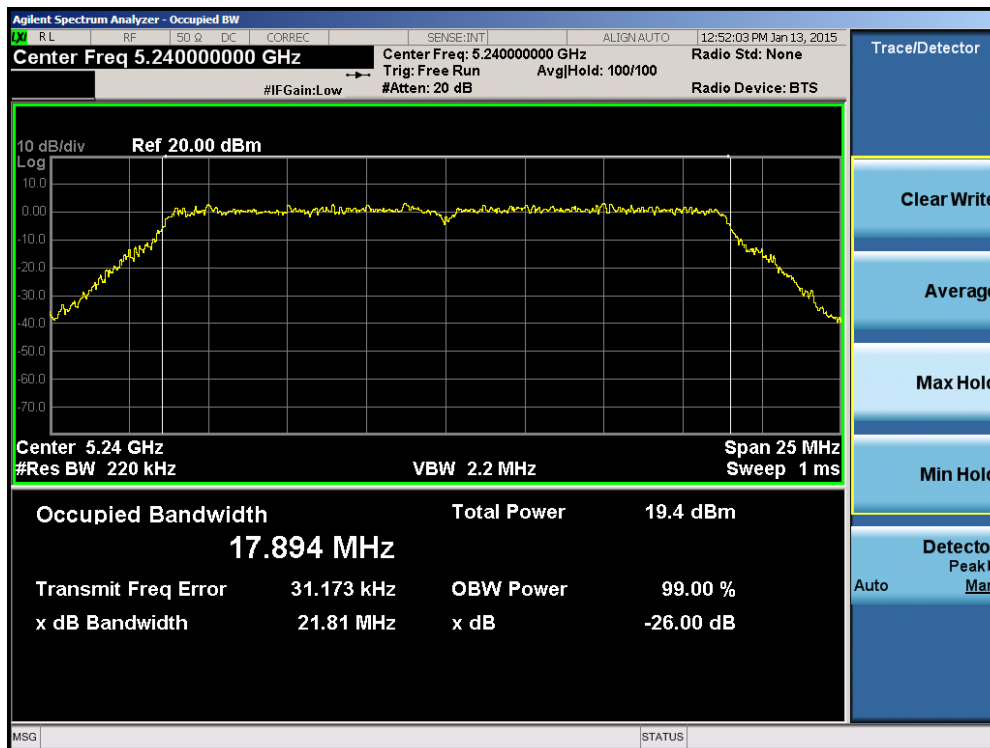


Plot 6-6. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 15 of 109

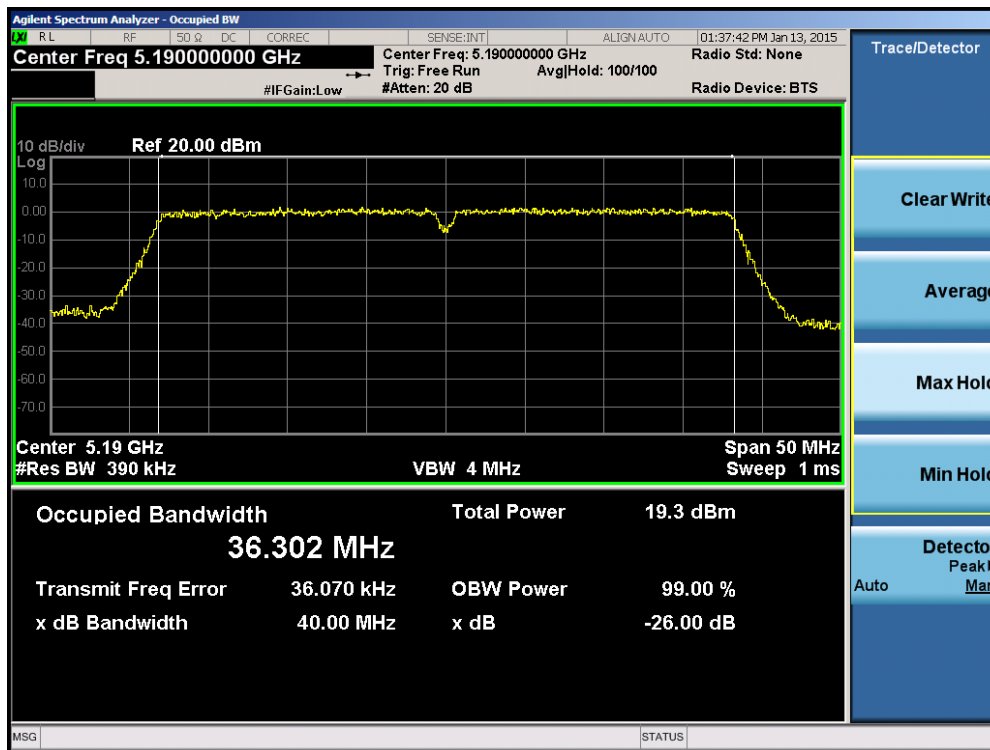


Plot 6-7. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

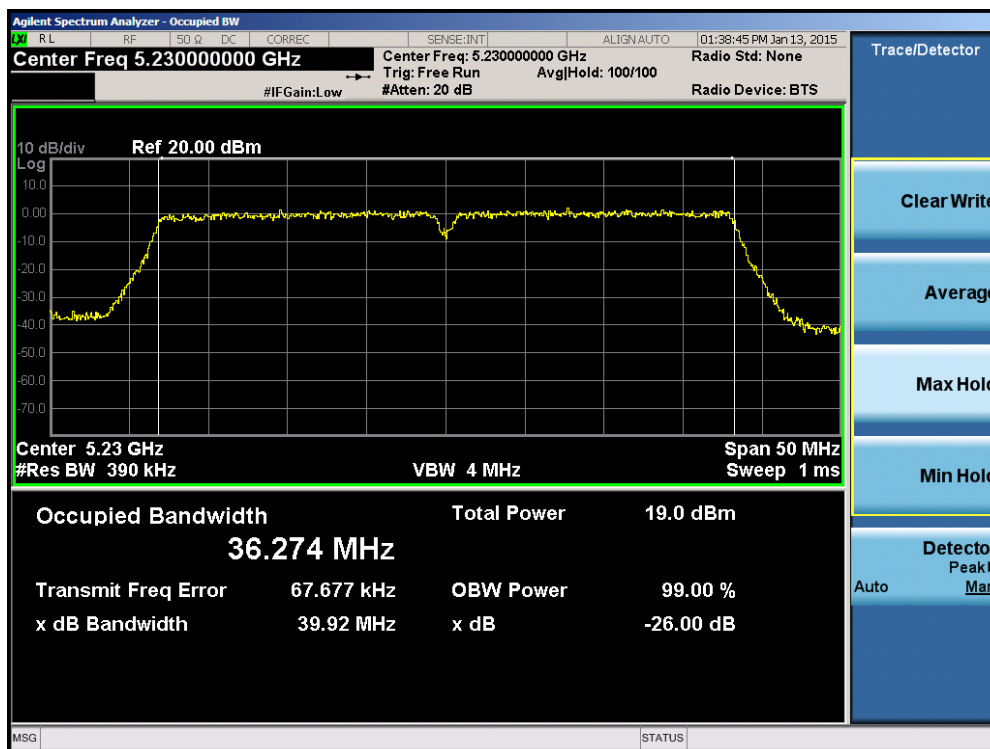


Plot 6-8. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 16 of 109

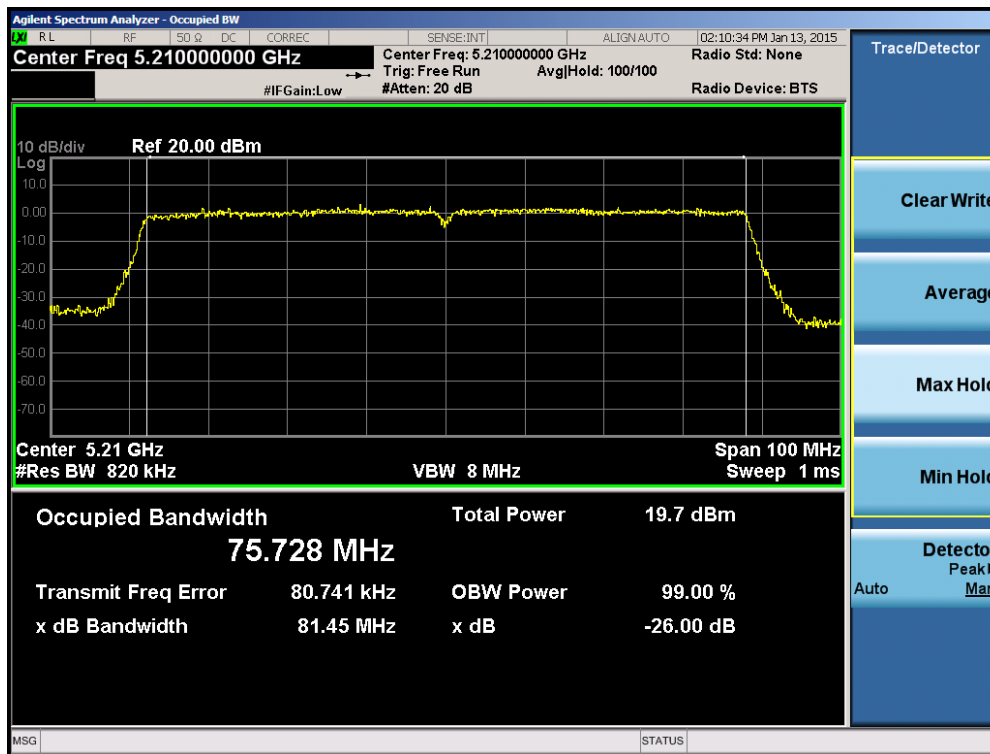


Plot 6-9. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

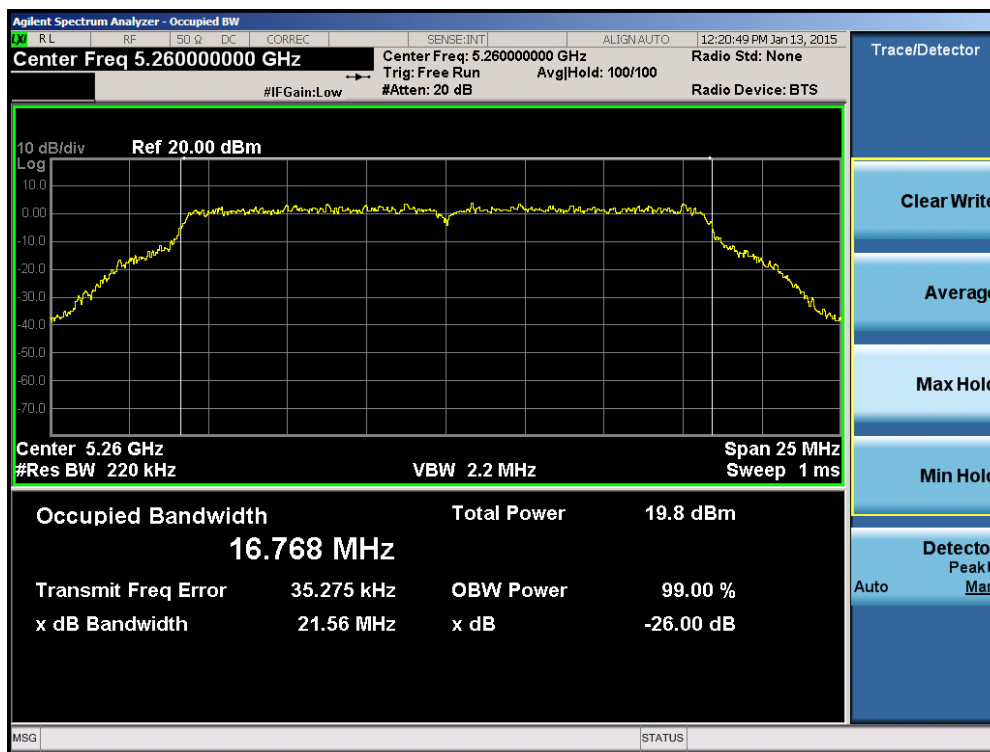


Plot 6-10. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 52)


FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 17 of 109

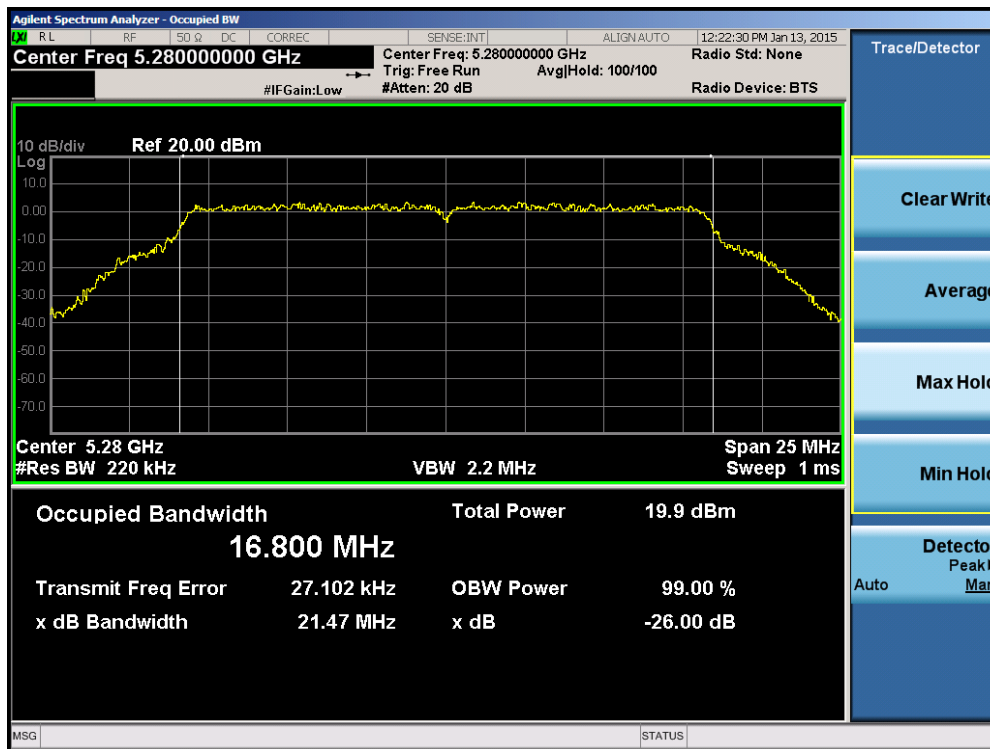


Plot 6-11. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 56)

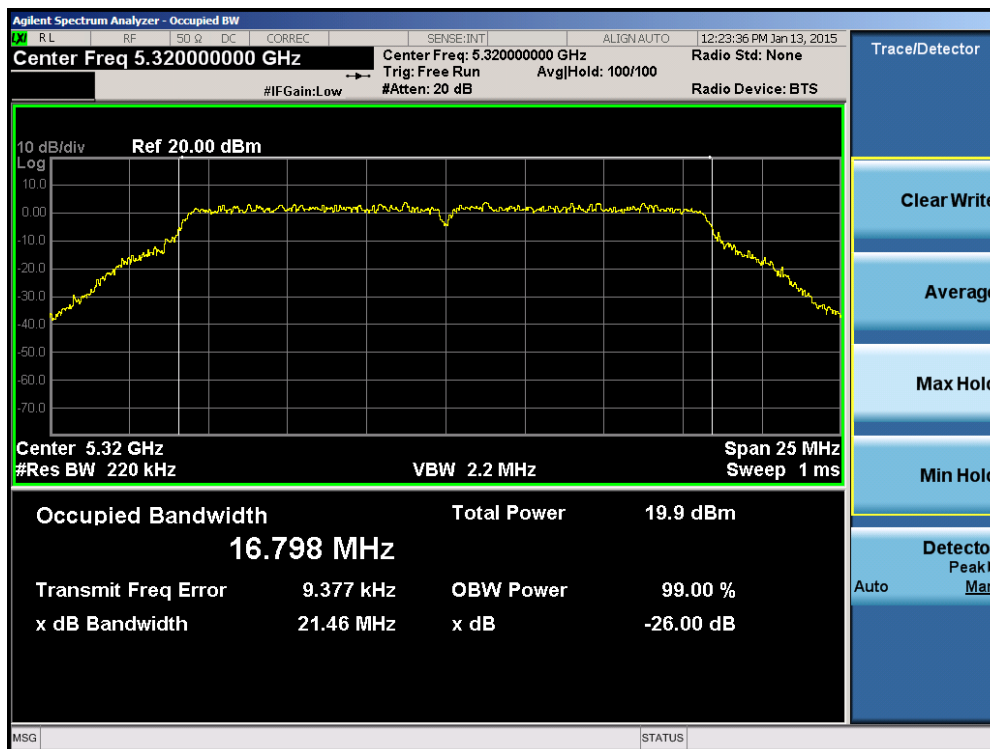

Plot 6-12. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 64)

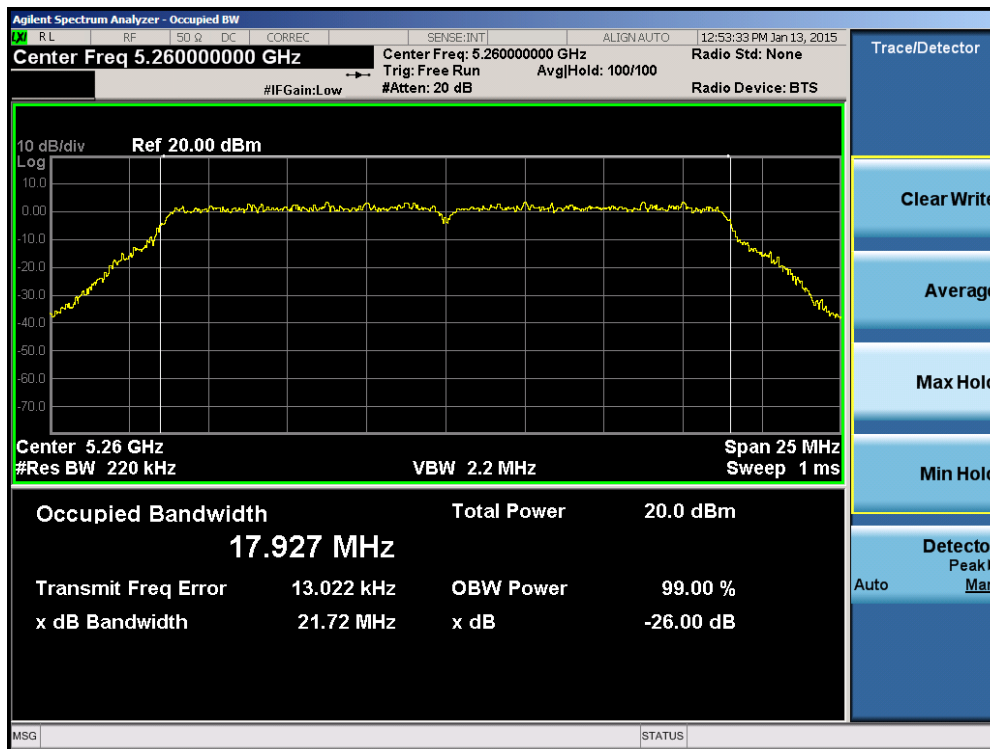


Plot 6-13. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

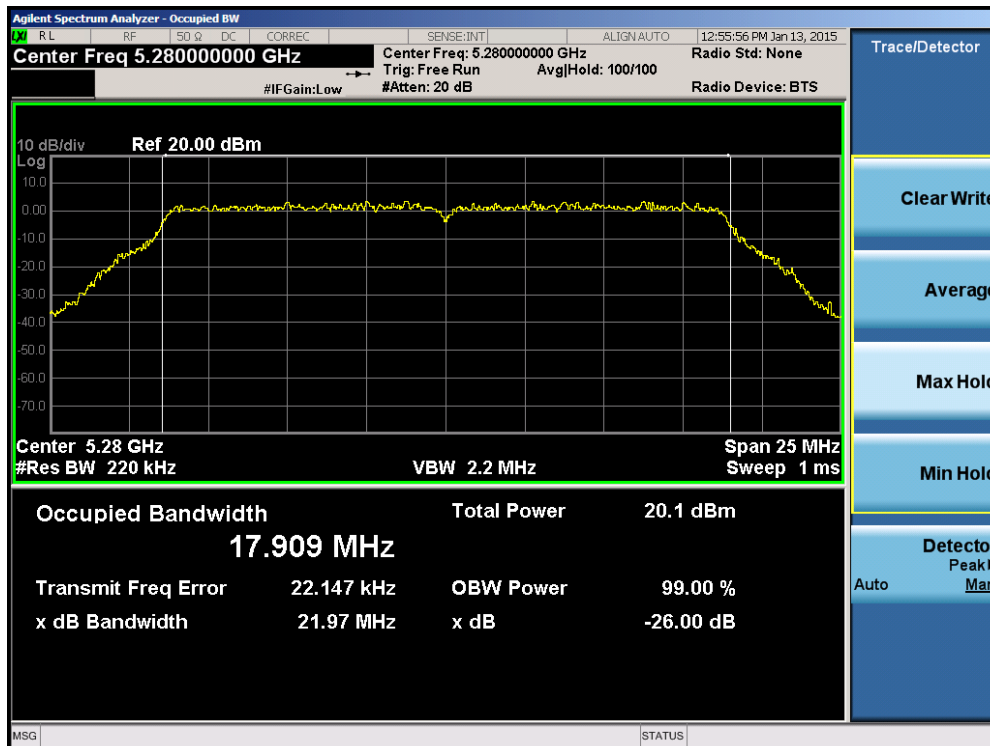


Plot 6-14. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 19 of 109

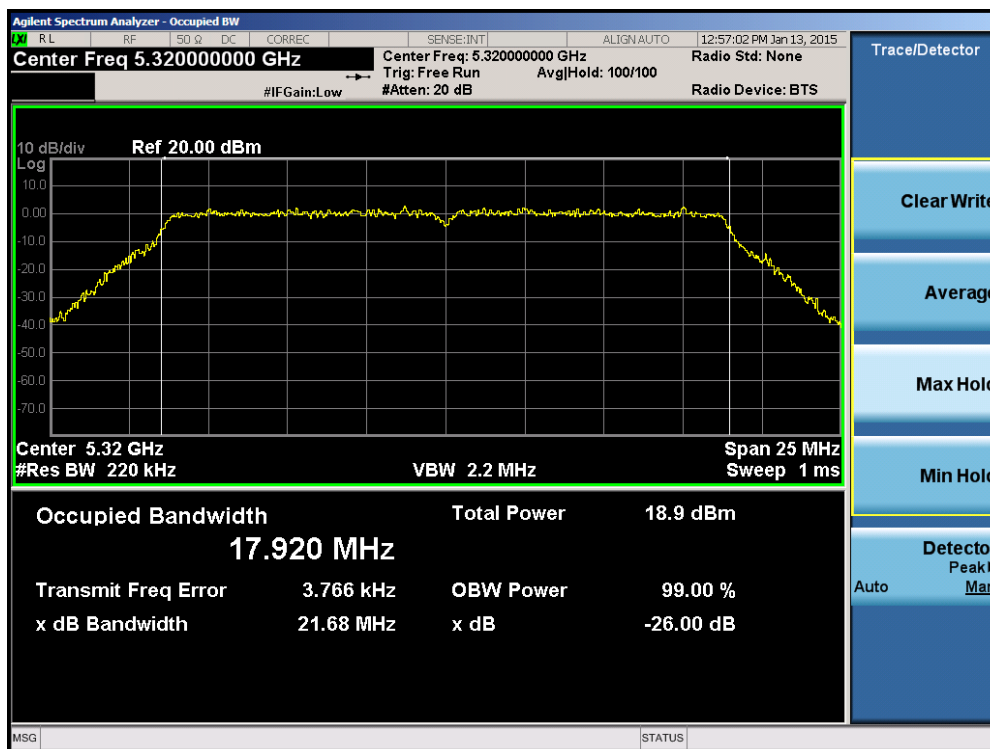


Plot 6-15. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

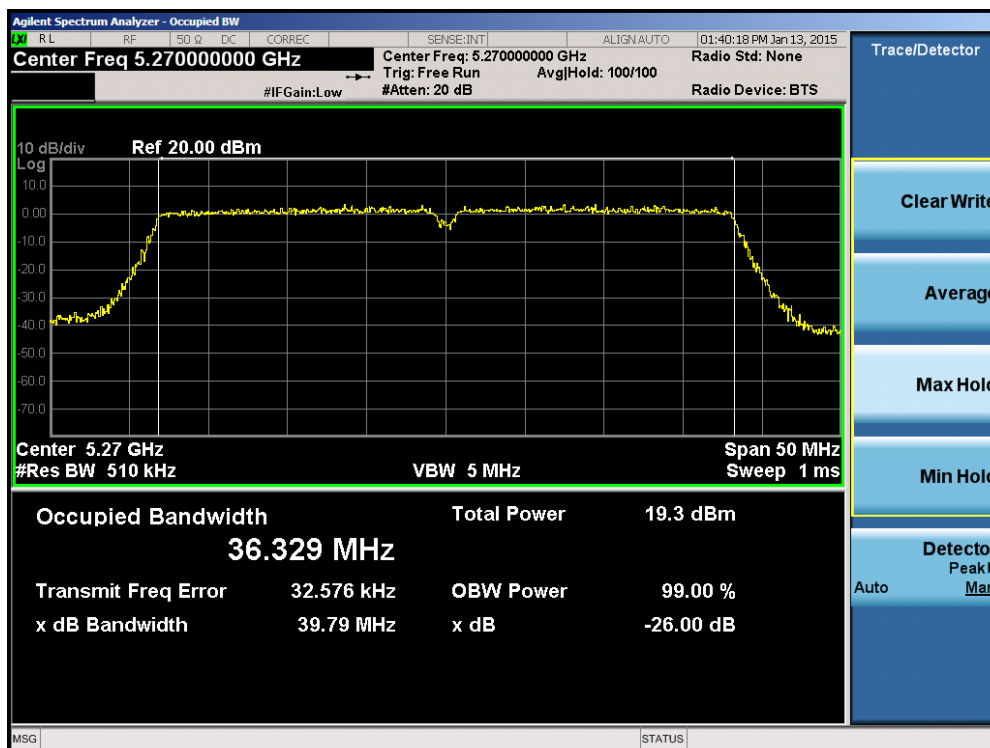


Plot 6-16. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 20 of 109

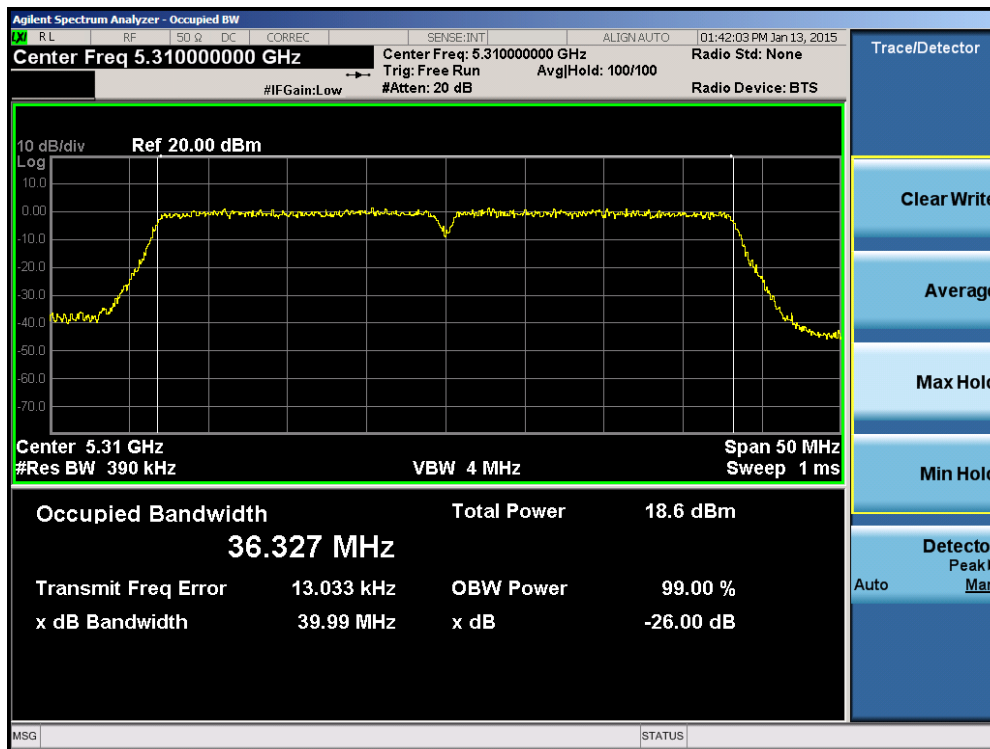


Plot 6-17. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

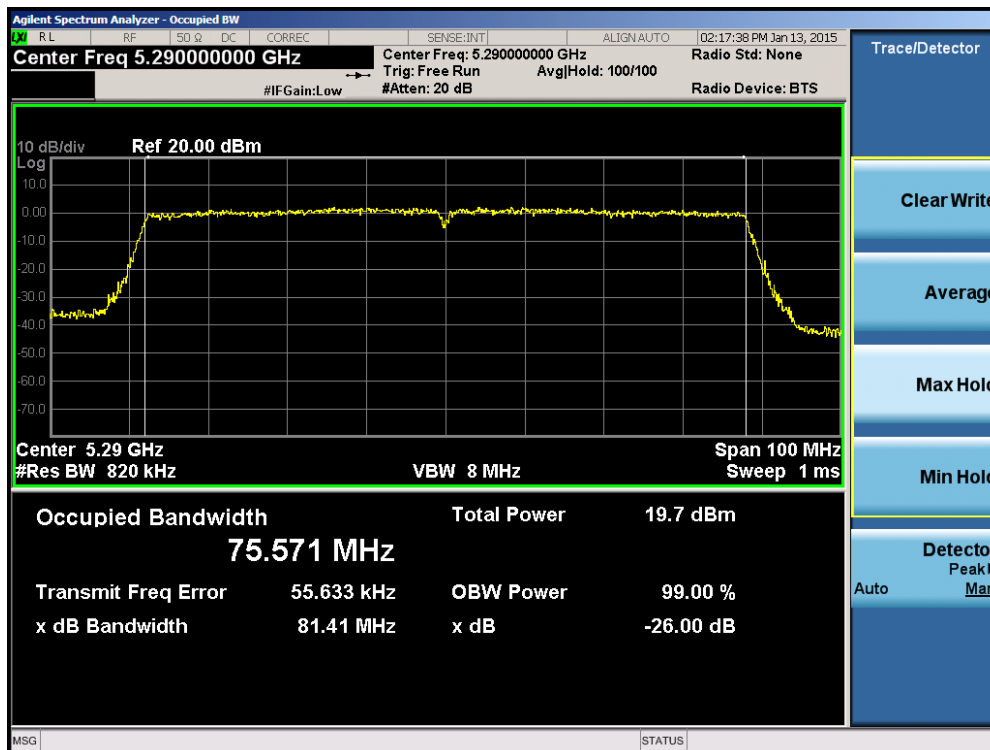


Plot 6-18. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 21 of 109

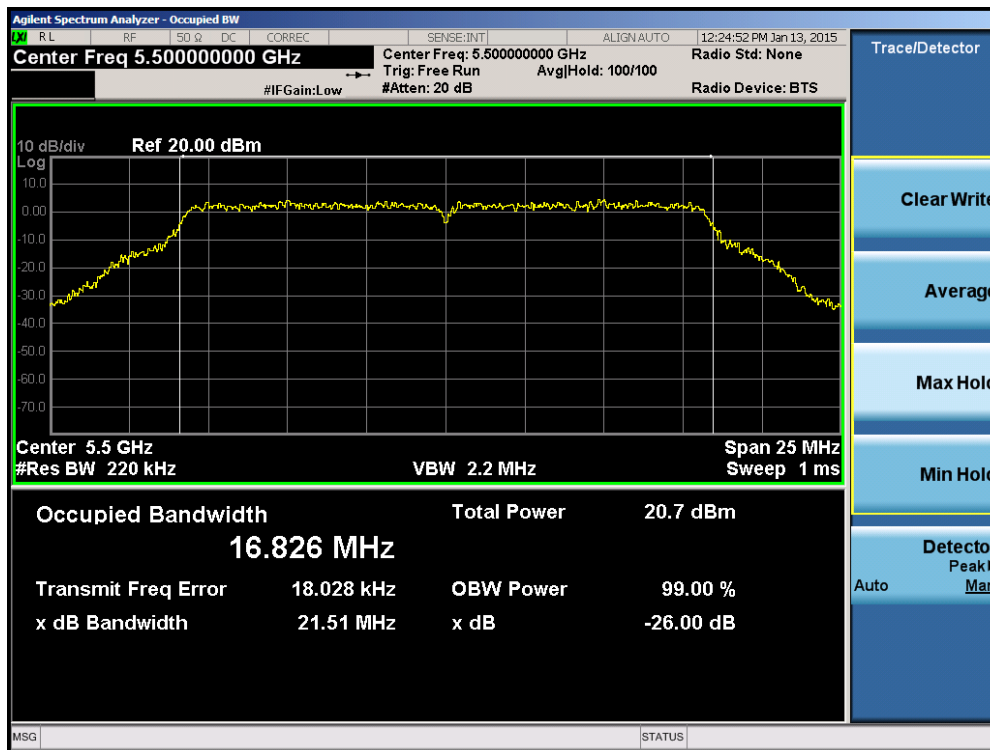


Plot 6-19. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 100)

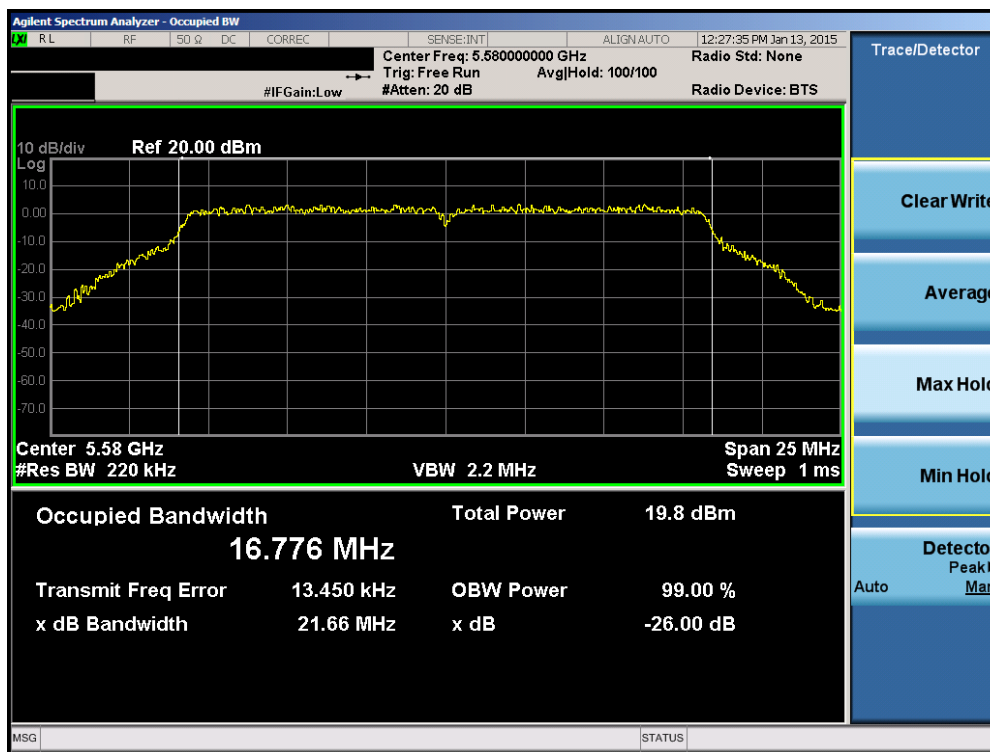


Plot 6-20. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 116)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 22 of 109

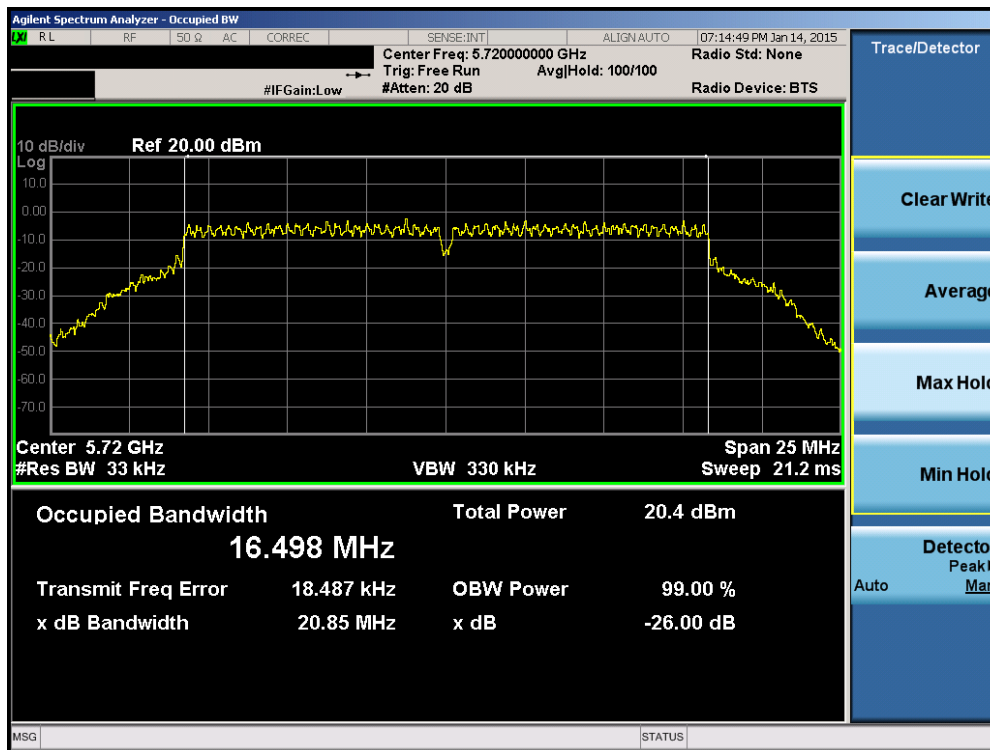


Plot 6-21. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 144)

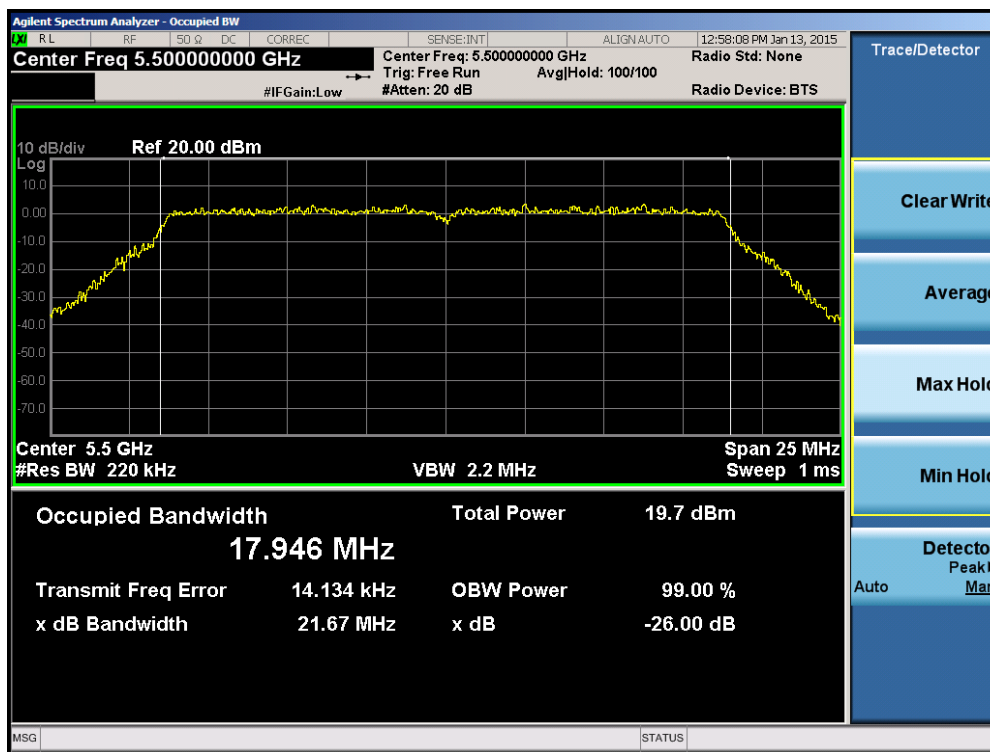


Plot 6-22. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 23 of 109

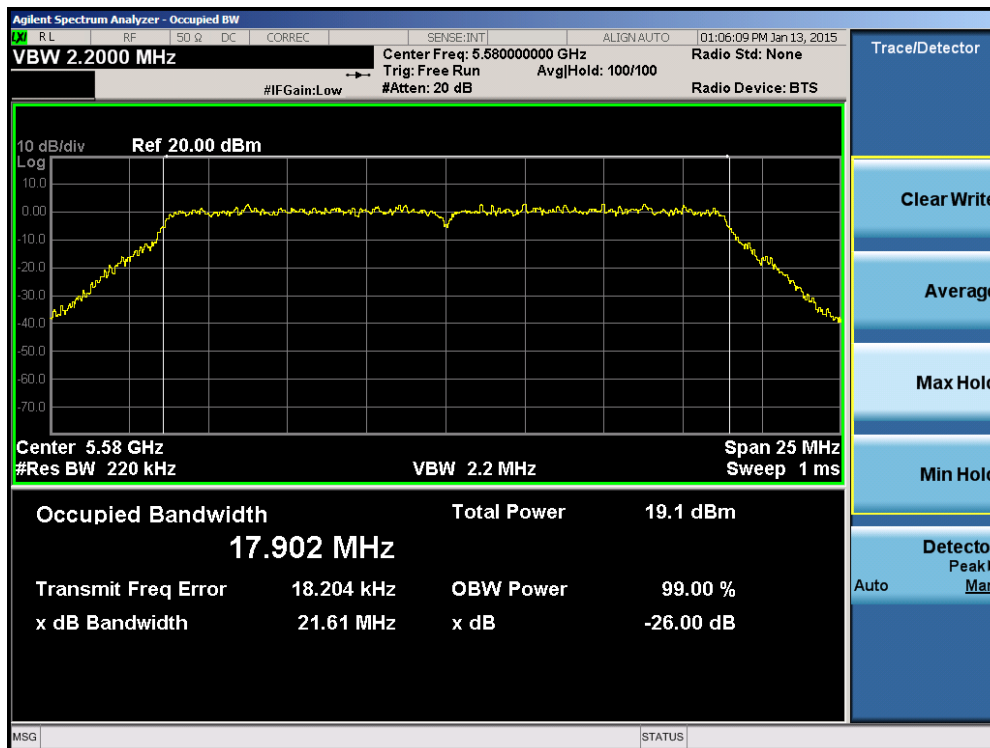


Plot 6-23. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 116)

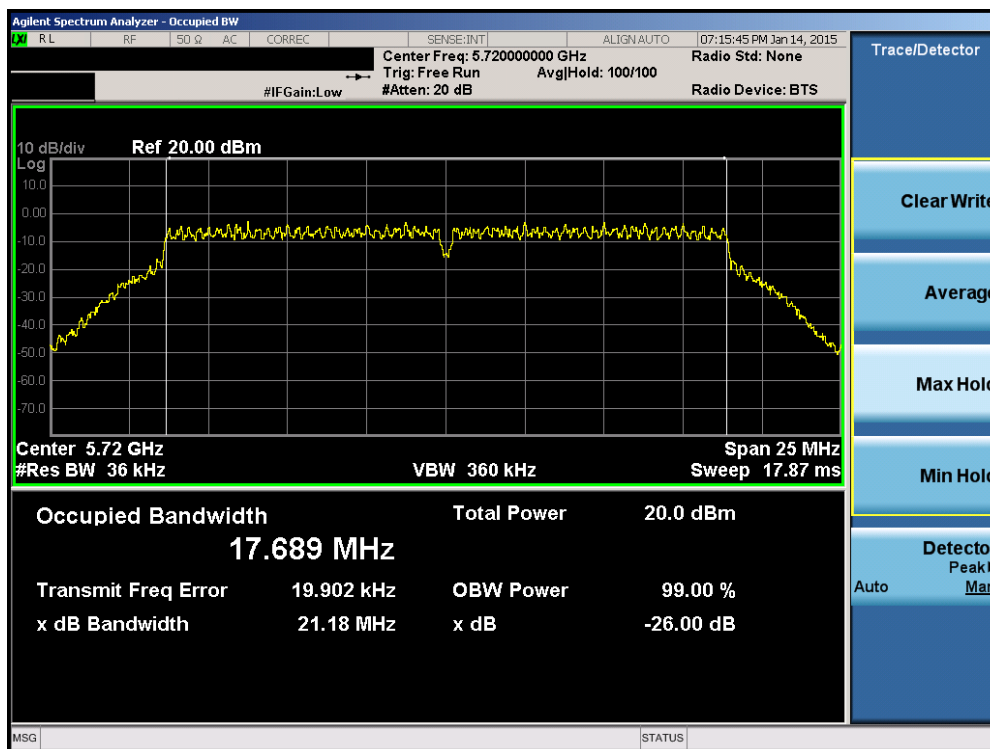


Plot 6-24. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 24 of 109

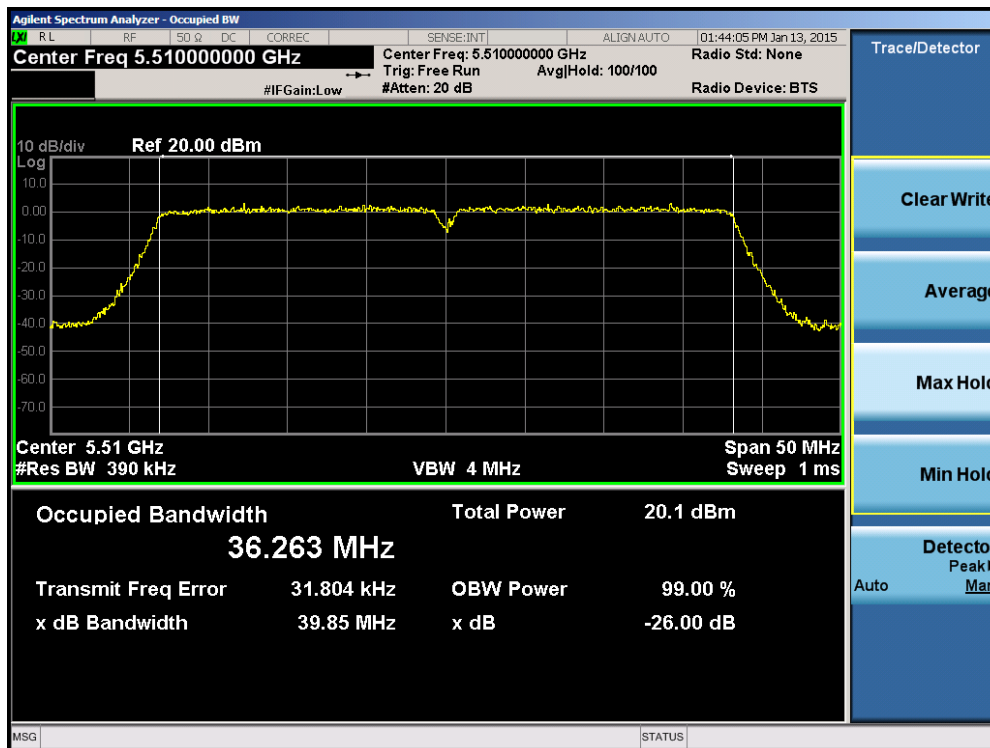


Plot 6-25. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

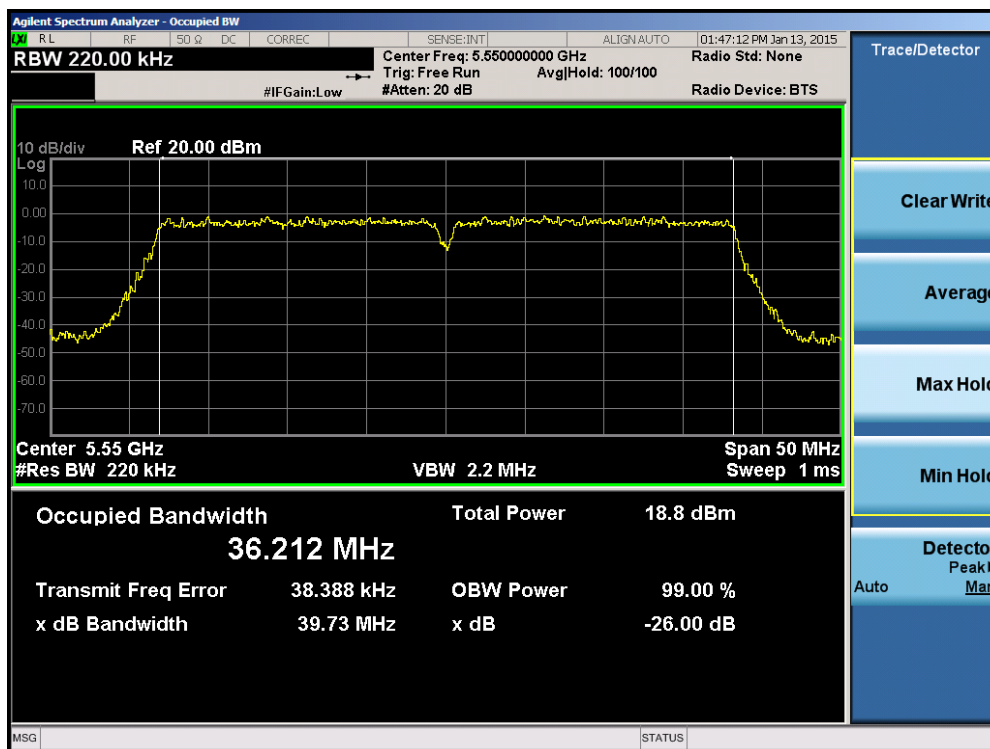


Plot 6-26. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 110)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 25 of 109

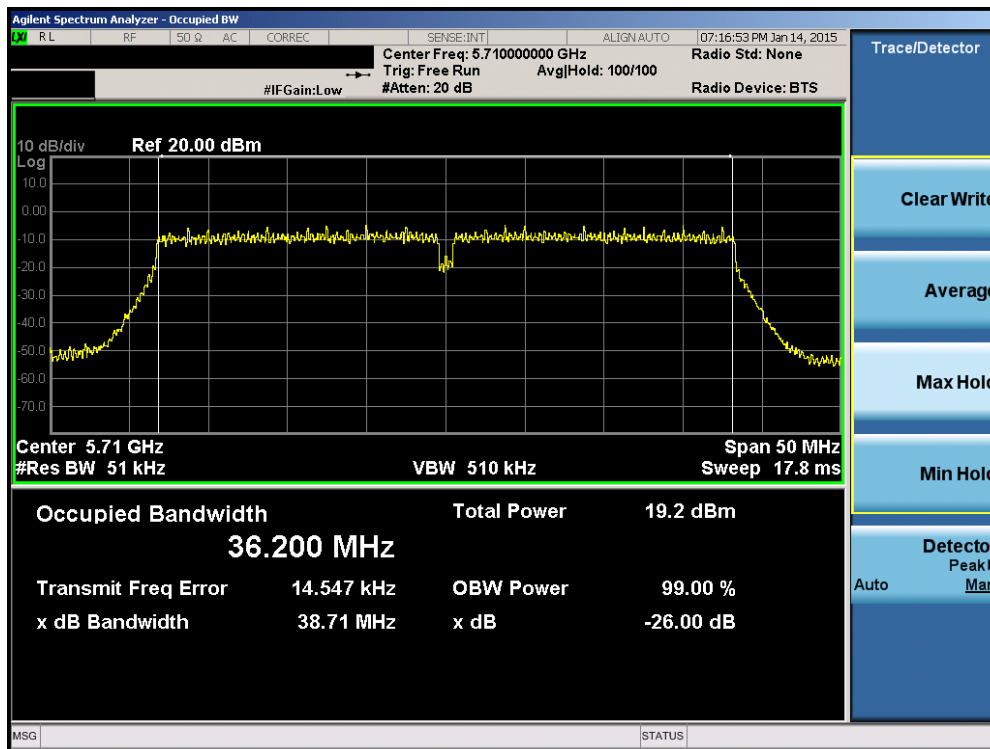


Plot 6-27. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

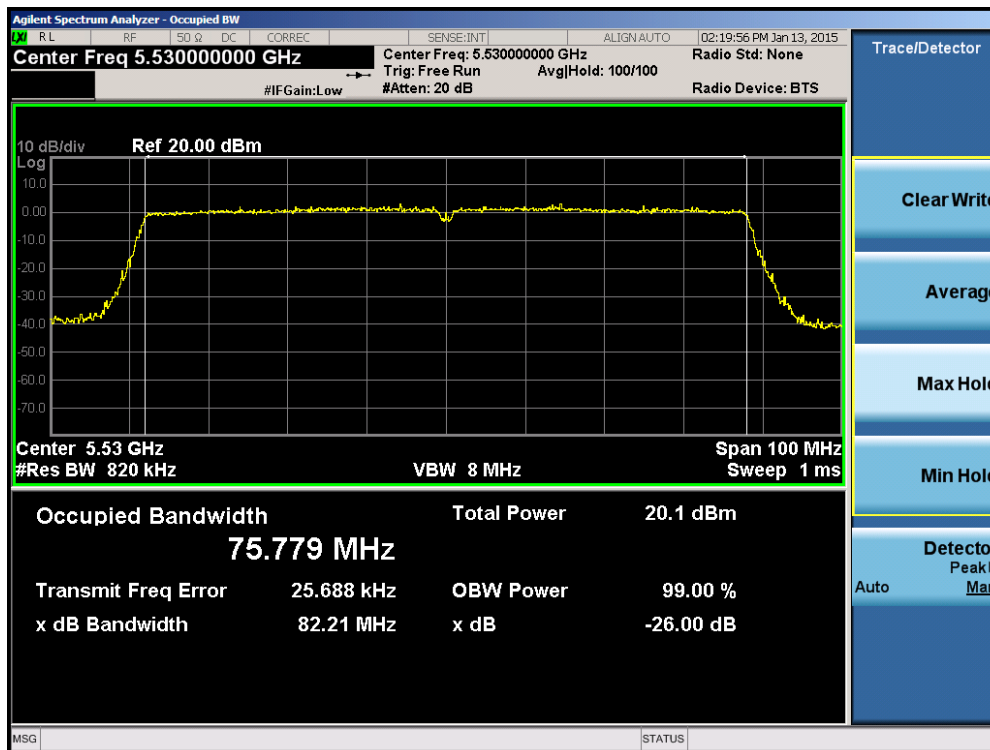

Plot 6-28. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 26 of 109

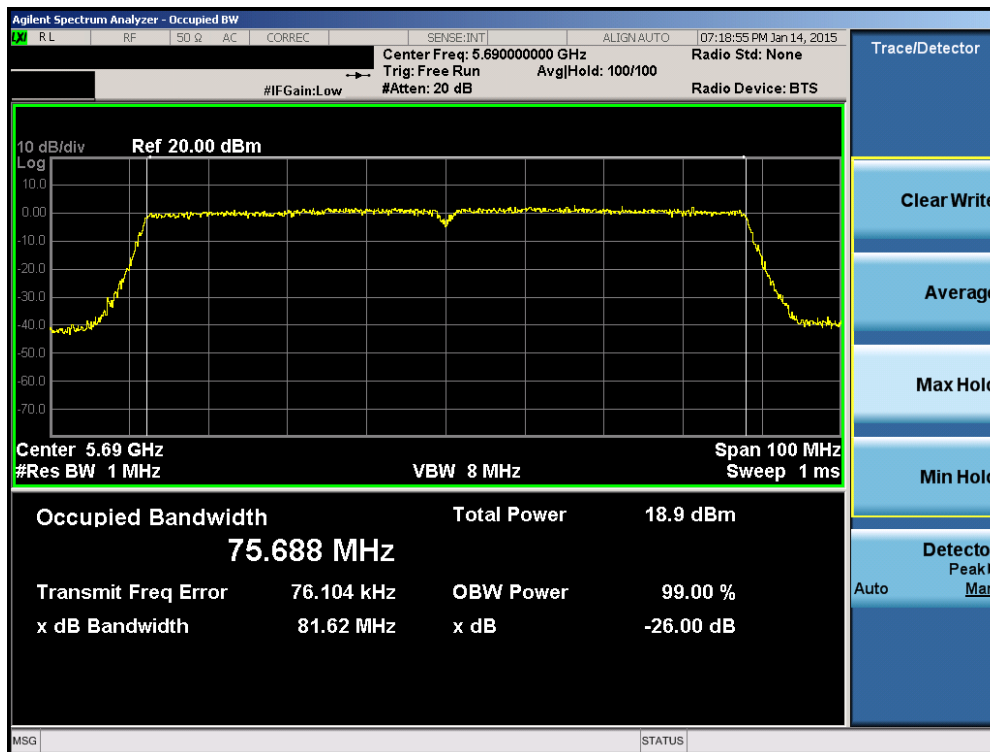

Plot 6-29. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 27 of 109

6.3 6dB Bandwidth Measurement – 802.11a/n/ac 15.407(e)

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle (>98%), at its maximum power control level, as defined in KDB 789033 D02 v01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 6dB bandwidth.

In the 5.725 – 5.850GHz band, the 6dB bandwidth must be ≥ 500 kHz.

Test Procedure Used

KDB 789033 D02 v01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 6. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 6-2. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: ZNFH950		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 28 of 109


Antenna-1 6 dB Bandwidth Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3	5745	149	a	6	16.38
	5785	157	a	6	16.38
	5825	165	a	6	16.38
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	17.59
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	17.62
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	17.61
	5755	151	n (40MHz)	13.5/15 (MCS0)	36.38
	5795	159	n (40MHz)	13.5/15 (MCS0)	36.38
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	75.56


Table 6-3. Conducted Bandwidth Measurements

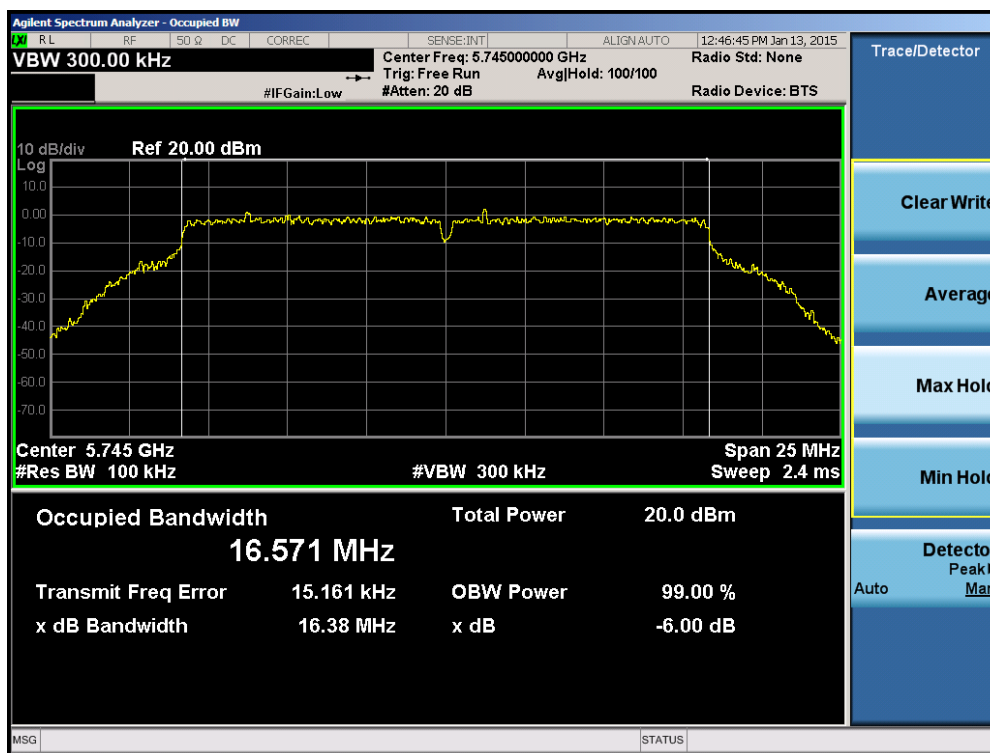

Plot 6-30. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 149)

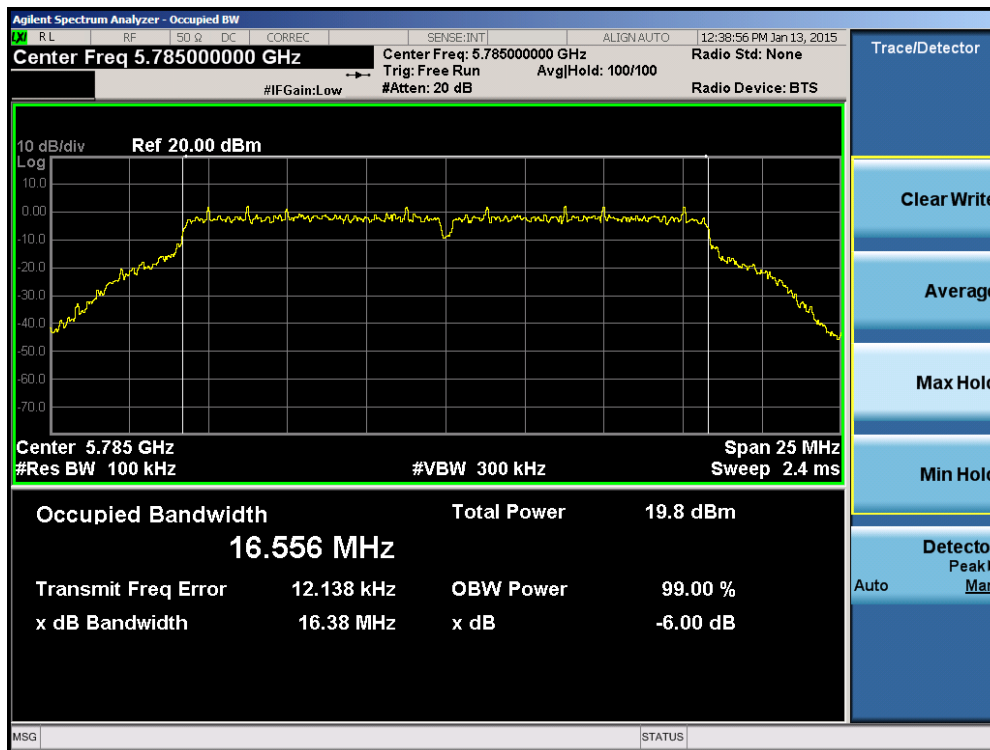


Plot 6-31. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 157)

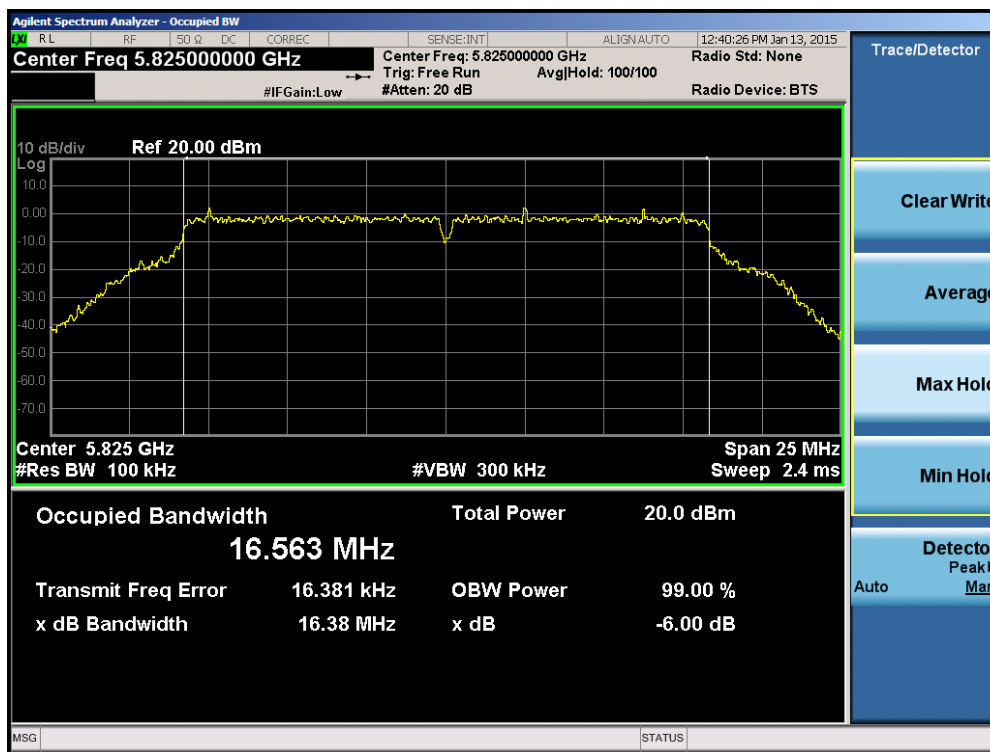


Plot 6-32. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 165)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 30 of 109

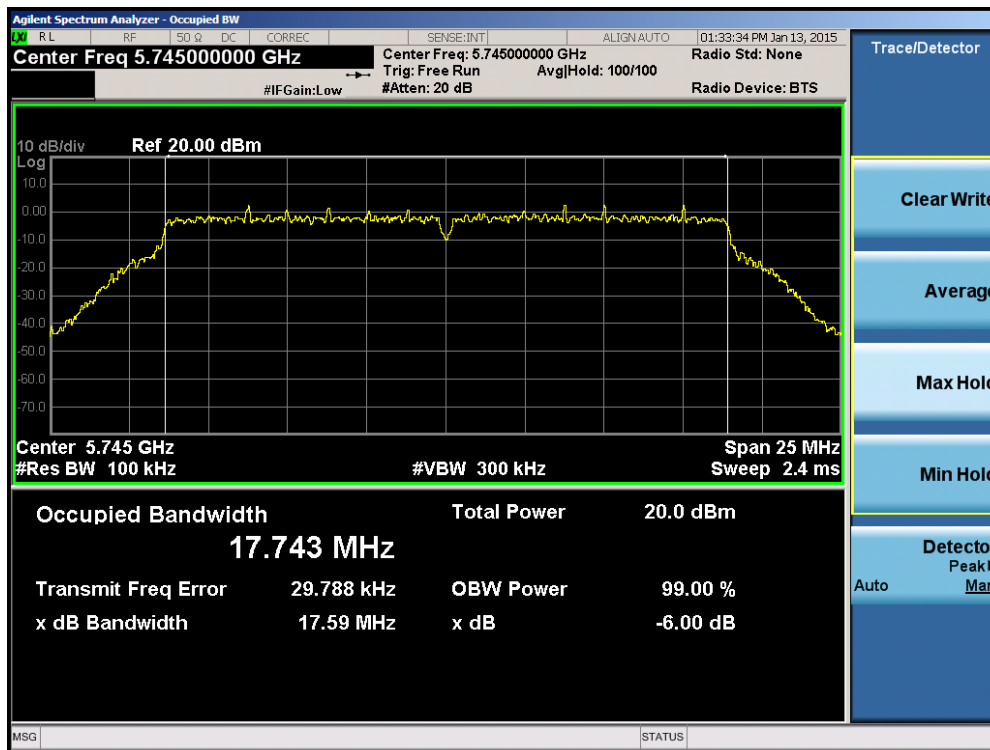


Plot 6-33. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

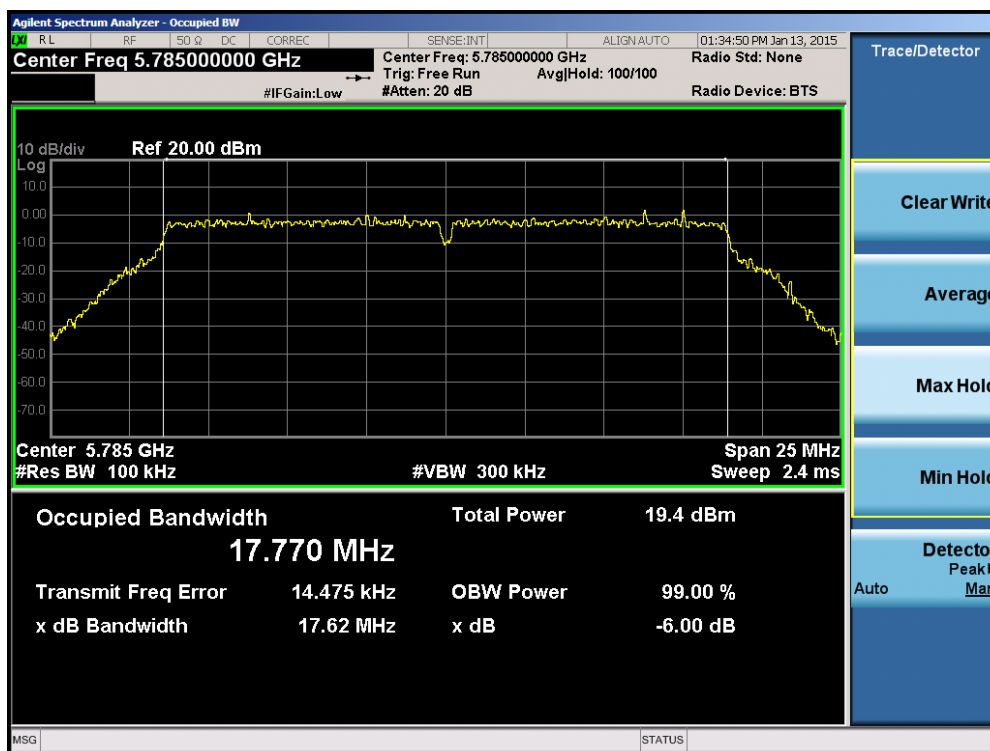


Plot 6-34. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 31 of 109

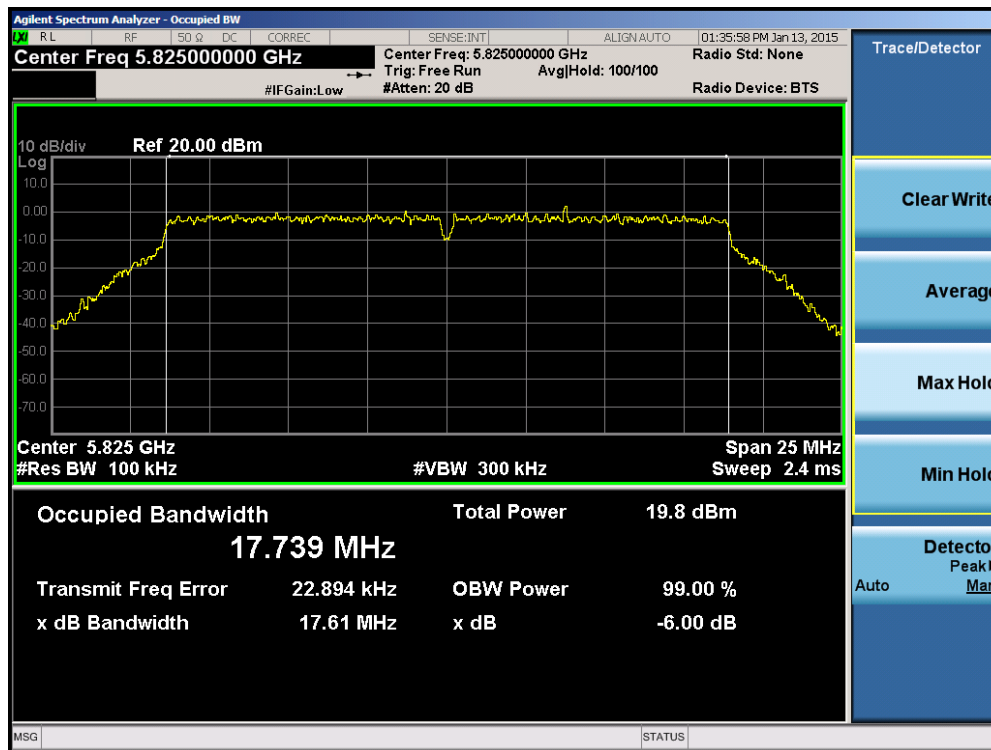


Plot 6-35. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

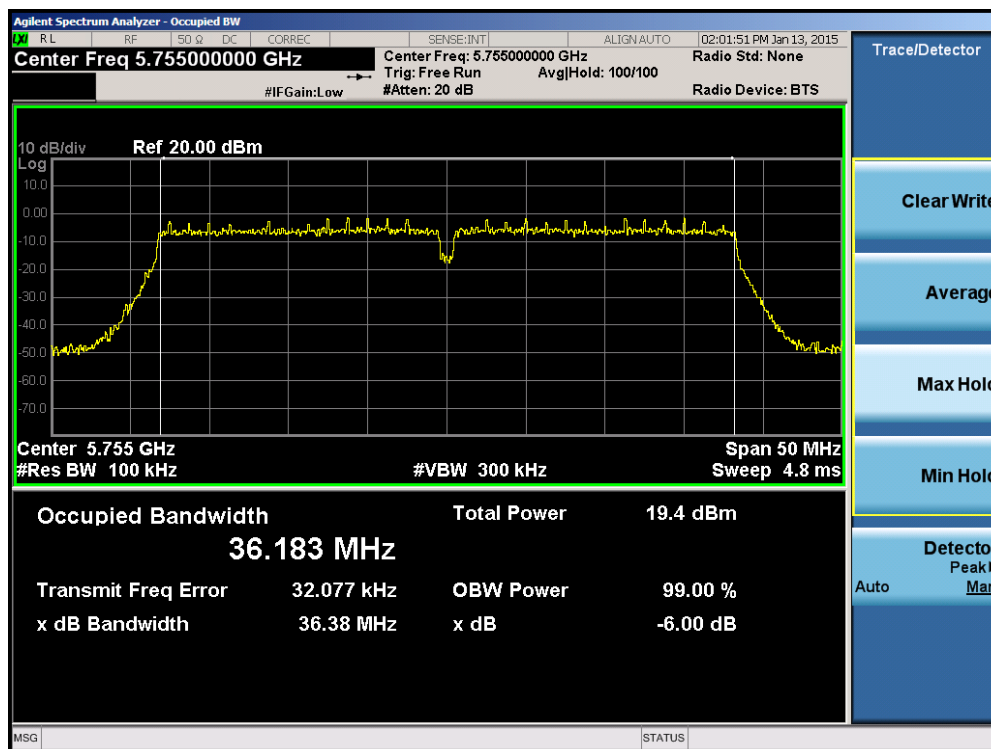

Plot 6-36. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 32 of 109

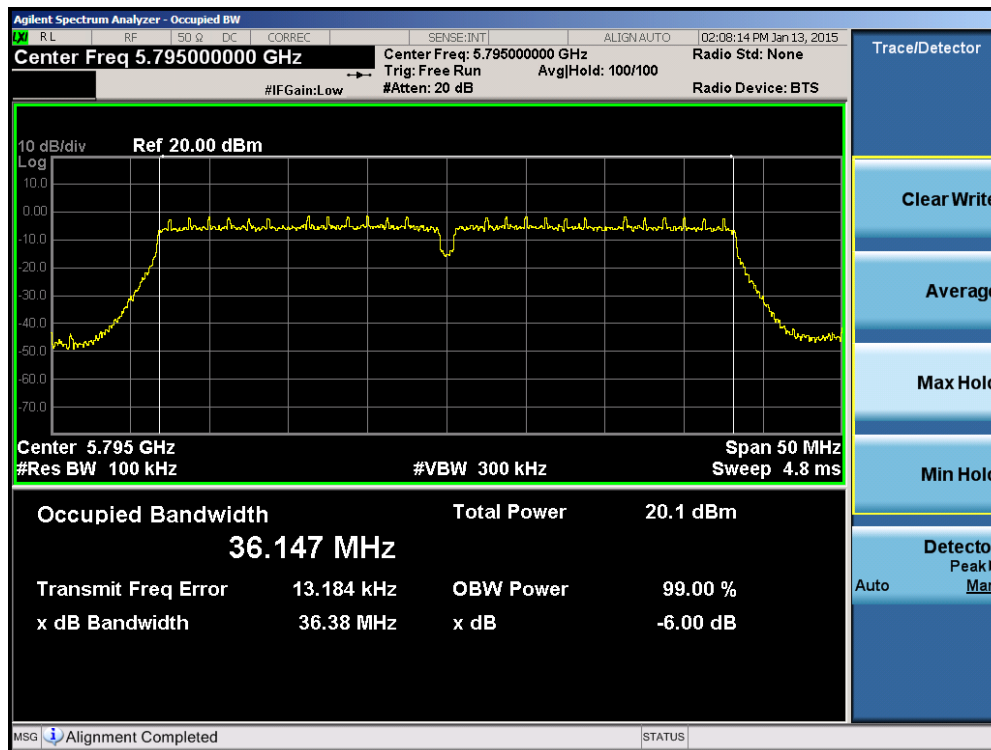

Plot 6-37. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 33 of 109

6.4 UNII Output Power Measurement – 802.11a/n/ac §15.407 (a)

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle (>98%), at its maximum power control level, as defined in KDB 789033 D02 v01, and at the appropriate frequencies.

In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is 250mW (23.98dBm).

In the 5.25 – 5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(21.46) = 24.32\text{dBm}$.

In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(20.85) = 24.19\text{dBm}$.

In the 5.725 – 5.825GHz band, the maximum permissible conducted output power is 1W (30dBm).

Test Procedure Used

KDB 789033 D02 v01 – Section E)3)b) Method PM-G

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

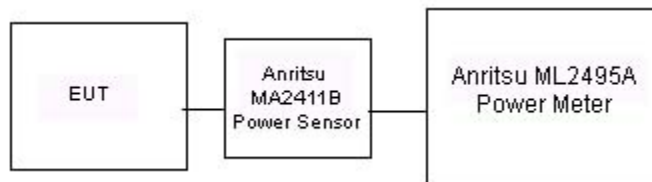


Figure 6-3. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: ZNFH950		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 34 of 109

Freq [MHz]	Channel	802.11a Conducted Power [dBm]							
		Data Rate [Mbps]							
		6	9	12	18	24	36	48	54
5180	36*	12.53	12.47	12.68	12.62	12.57	12.51	12.61	12.53
5200	40	12.45	12.39	12.53	12.56	12.53	12.44	12.49	12.40
5220	44	12.31	12.23	12.52	12.32	12.30	12.24	12.38	12.28
5240	48*	12.36	12.30	12.57	12.46	12.45	12.28	12.47	12.32
5260	52*	12.38	12.53	12.61	12.56	12.60	12.45	12.51	12.68
5280	56	12.47	12.65	12.73	12.62	12.63	12.53	12.56	12.72
5300	60	12.81	12.98	12.99	12.92	12.96	12.82	12.97	12.90
5320	64*	12.83	12.90	12.98	12.98	12.93	12.95	12.99	12.92
5500	100	12.70	12.78	12.75	12.73	12.71	12.74	12.79	12.66
5520	104*	12.40	12.46	12.39	12.38	12.33	12.41	12.45	12.32
5540	108	12.27	12.41	12.37	12.38	12.29	12.34	12.29	12.28
5560	112	12.43	12.48	12.42	12.44	12.47	12.47	12.51	12.33
5580	116*	12.66	12.74	12.74	12.66	12.76	12.74	12.71	12.63
5660	132	12.48	12.52	12.50	12.53	12.52	12.50	12.50	12.45
5680	136*	12.59	12.68	12.66	12.62	12.64	12.64	12.64	12.49
5700	140	12.94	12.94	12.99	12.93	12.99	12.94	12.95	12.92
5720	144	12.81	12.80	12.90	12.82	12.90	12.79	12.86	12.82
5745	149*	12.50	12.35	12.28	12.52	12.35	12.32	12.36	12.43
5765	153	12.77	12.66	12.50	12.83	12.54	12.66	12.64	12.73
5785	157*	12.45	12.33	12.26	12.45	12.22	12.22	12.23	12.37
5805	161	12.65	12.45	12.40	12.60	12.48	12.48	12.48	12.63
5825	165*	12.58	12.45	12.29	12.64	12.48	12.33	12.49	12.55

Table 6-4. 802.11a 20MHz BW (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	20MHz BW 802.11n (5GHz) Conducted Power [dBm]							
		Data Rate [Mbps]							
		6.5	13	19.5	26	39	52	58.5	65
5180	36	12.41	12.34	12.38	12.32	12.31	12.37	12.39	12.42
5200	40	12.32	12.31	12.32	12.27	12.25	12.23	12.29	12.30
5220	44	12.21	12.06	12.15	12.10	12.09	12.20	12.15	12.23
5240	48	12.26	12.15	12.19	12.14	12.09	12.25	12.18	12.26
5260	52	12.41	12.45	12.44	12.46	12.38	12.34	12.44	12.42
5280	56	12.32	12.36	12.37	12.44	12.27	12.18	12.37	12.33
5300	60	12.33	12.31	12.30	12.39	12.40	12.23	12.41	12.40
5320	64	12.16	12.21	12.16	12.19	12.13	12.11	12.19	12.21
5500	100	12.31	12.33	12.23	12.20	12.26	12.24	12.19	12.24
5520	104	12.21	12.28	12.14	12.10	12.21	12.21	12.06	12.11
5540	108	12.23	12.30	12.23	12.05	12.18	12.14	12.11	12.22
5560	112	12.13	12.22	12.04	12.08	12.06	12.08	12.02	12.00
5580	116	12.15	12.23	12.05	12.04	12.05	12.08	11.98	12.08
5660	132	12.05	12.04	11.95	11.93	12.00	11.89	11.94	12.00
5680	136	12.07	12.16	12.03	11.89	12.04	12.02	11.93	11.92
5700	140	12.02	11.98	11.90	11.93	11.99	11.90	11.85	11.98
5720	144	11.99	12.00	12.10	12.02	12.10	11.99	12.06	12.02
5745	149	12.62	12.71	12.69	12.71	12.69	12.54	12.57	12.58
5765	153	12.65	12.81	12.69	12.72	12.72	12.50	12.57	12.63
5785	157	12.73	12.82	12.76	12.81	12.79	12.56	12.61	12.71
5805	161	12.83	12.93	12.95	12.95	12.85	12.80	12.75	12.75
5825	165	12.76	12.87	12.88	12.94	12.77	12.69	12.77	12.73

Table 6-5. 802.11n 20MHz BW (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	Data Rate
		6.5 Mbps
5180	36	12.58
5200	40	12.40
5240	48	12.26
5260	52	12.55
5280	56	12.44
5320	64	12.32
5500	100	12.36
5580	116	12.26
5700	140	12.21
5720	144	12.18
5745	149	12.61
5785	157	12.65
5825	165	12.96

Table 6-6. 802.11ac 20MHz BW (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	40MHz BW 802.11n (5GHz) Conducted Power [dBm]							
		Data Rate [Mbps]							
		13.5	27	40.5	54	81	108	121.5	135
5190	38	11.34	11.21	11.25	11.16	11.17	11.21	11.24	11.22
5230	46	11.13	11.04	11.10	11.01	11.01	11.04	11.03	11.06
5270	54	11.19	11.02	11.06	11.09	11.12	11.10	11.14	11.22
5310	62	11.02	11.01	11.09	11.16	11.13	11.19	11.01	11.05
5510	102	11.03	11.05	11.02	11.03	11.12	11.09	11.04	11.05
5550	110	11.07	11.13	11.10	11.10	11.17	11.09	11.16	11.14
5670	134	11.01	11.01	11.03	11.07	11.08	11.08	11.04	11.07
5710	142	11.02	11.01	11.01	11.05	11.06	11.06	11.02	11.05
5755	151	11.32	11.34	11.31	11.50	11.41	11.35	11.16	11.34
5795	159	11.38	11.41	11.40	11.52	11.44	11.37	11.26	11.41

Table 6-7. 802.11n 40MHz BW (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	Data Rate
		13.5 Mbps
5190	38	11.15
5230	46	11.05
5270	54	11.02
5310	62	11.09
5510	102	11.25
5550	110	11.11
5670	134	11.01
5710	142	11.02
5755	151	11.29
5795	159	11.21

Table 6-8. 802.11ac 40MHz BW (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	80MHz BW 802.11ac (5GHz) Conducted Power [dBm]									
		Data Rate [Mbps]									
		29.3	58.5	87.8	117	175.5	234	263.3	292.5	351	390
5210	42	11.58	11.61	11.53	11.65	11.66	11.65	11.67	11.69	11.72	11.62
5290	58	11.72	11.67	11.63	11.76	11.69	11.66	11.64	11.67	11.78	11.69
5530	106	11.10	11.03	11.01	11.03	11.12	11.03	11.09	11.05	11.15	11.13
5690	138	11.08	11.01	11.03	11.01	11.10	11.04	11.10	11.06	11.12	11.11
5775	155	11.11	11.03	11.07	11.07	11.07	11.05	11.11	11.14	11.13	11.16

Table 6-9. 802.11ac 80MHz BW (UNII) Maximum Conducted Output Power

FCC ID: ZNFH950		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)						Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset					Page 36 of 109	

6.5 Maximum Power Spectral Density – 802.11a/n/ac §15.407(a)

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle (>98%), at its maximum power control level, as defined in KDB 789033 D02 v01, and at the appropriate frequencies. Method SA-1, as defined in KDB 789033 D02 v01, was used to measure the power spectral density.

In the 5.15 – 5.25GHz, 5.25 – 5.35GHz, 5.47 – 5.725GHz bands, the maximum permissible power spectral density is 11dBm/MHz.

In the 5.725 – 5.850GHz band, the maximum permissible power spectral density is 30dBm/500kHz.

Test Procedure Used

KDB 789033 D02 v01 – Section F

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span}/\text{RBW})$
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run since the EUT was operating at a duty cycle $\geq 98\%$
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 6-4. Test Instrument & Measurement Setup


Test Notes

None


FCC ID: ZNFH950		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 37 of 109

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/MHz]	Margin [dB]	Pass / Fail
Band 1	5180	36	a	6	2.27	11.0	-8.73	Pass
	5200	40	a	6	2.35	11.0	-8.66	Pass
	5240	48	a	6	2.06	11.0	-8.94	Pass
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	2.05	11.0	-8.95	Pass
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	1.77	11.0	-9.23	Pass
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	1.88	11.0	-9.12	Pass
	5190	38	n (40MHz)	13.5/15 (MCS0)	-1.57	11.0	-12.57	Pass
	5230	46	n (40MHz)	13.5/15 (MCS0)	-1.39	11.0	-12.39	Pass
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	-5.54	11.0	-16.54	Pass
Band 2A	5260	52	a	6	2.37	11.0	-8.63	Pass
	5280	56	a	6	2.44	11.0	-8.56	Pass
	5320	64	a	6	3.00	11.0	-8.00	Pass
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	2.11	11.0	-8.89	Pass
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	2.14	11.0	-8.86	Pass
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	1.51	11.0	-9.49	Pass
	5270	54	n (40MHz)	13.5/15 (MCS0)	-1.29	11.0	-12.29	Pass
	5310	62	n (40MHz)	13.5/15 (MCS0)	-2.11	11.0	-13.11	Pass
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	-5.12	11.0	-16.12	Pass
Band 2C	5500	100	a	6	3.62	11.0	-7.39	Pass
	5580	116	a	6	2.75	11.0	-8.25	Pass
	5720	144	a	6	1.03	11.0	-9.97	Pass
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	2.42	11.0	-8.58	Pass
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	1.09	11.0	-9.91	Pass
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	0.59	11.0	-10.41	Pass
	5510	102	n (40MHz)	13.5/15 (MCS0)	-1.00	11.0	-12.00	Pass
	5550	110	n (40MHz)	13.5/15 (MCS0)	-2.40	11.0	-13.40	Pass
	5710	142	n (40MHz)	13.5/15 (MCS0)	-3.40	11.0	-14.40	Pass
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	-5.39	11.0	-16.39	Pass
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	-6.76	11.0	-17.76	Pass

Table 6-10. Bands 1, 2A, 2C Conducted Power Spectral Density Measurements

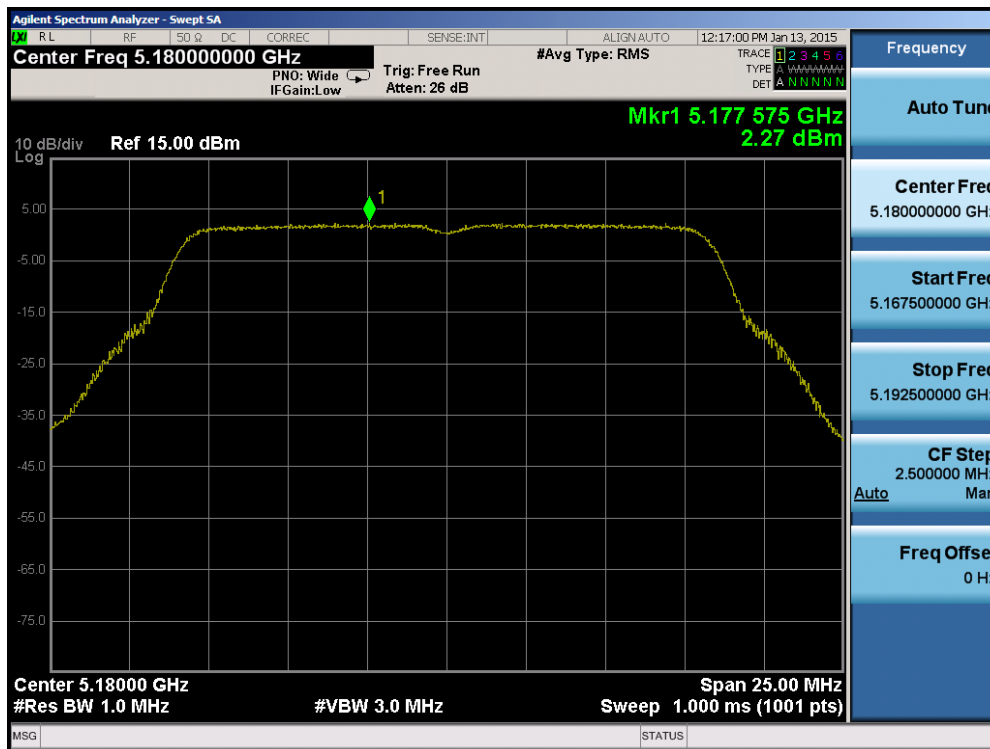


Plot 6-38. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 36)

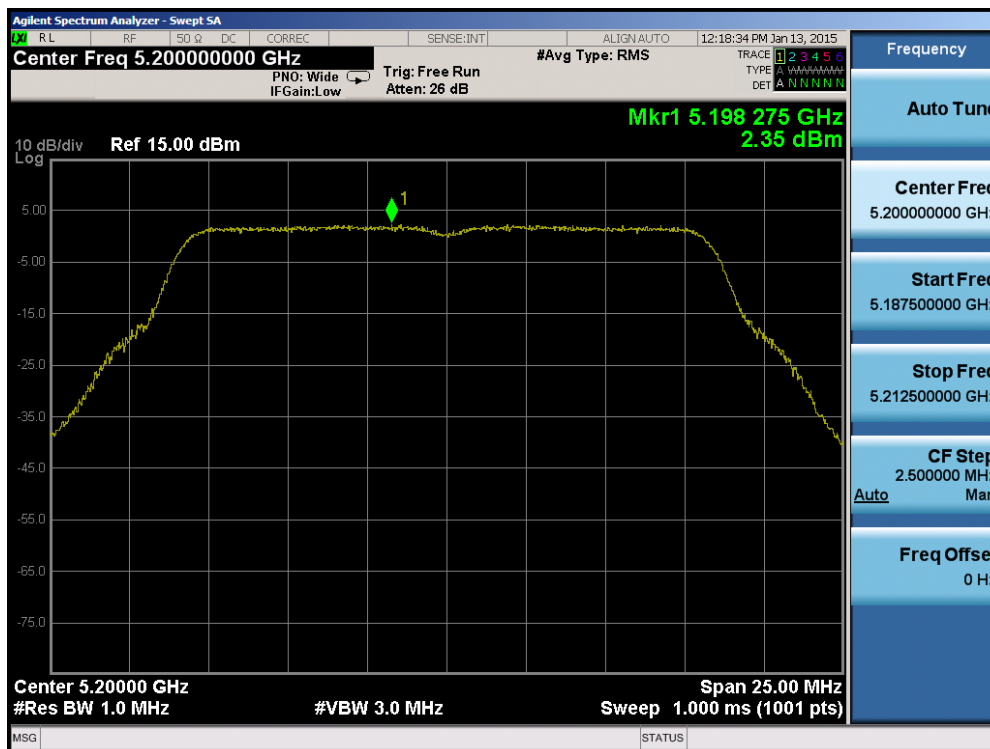


Plot 6-39. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 39 of 109

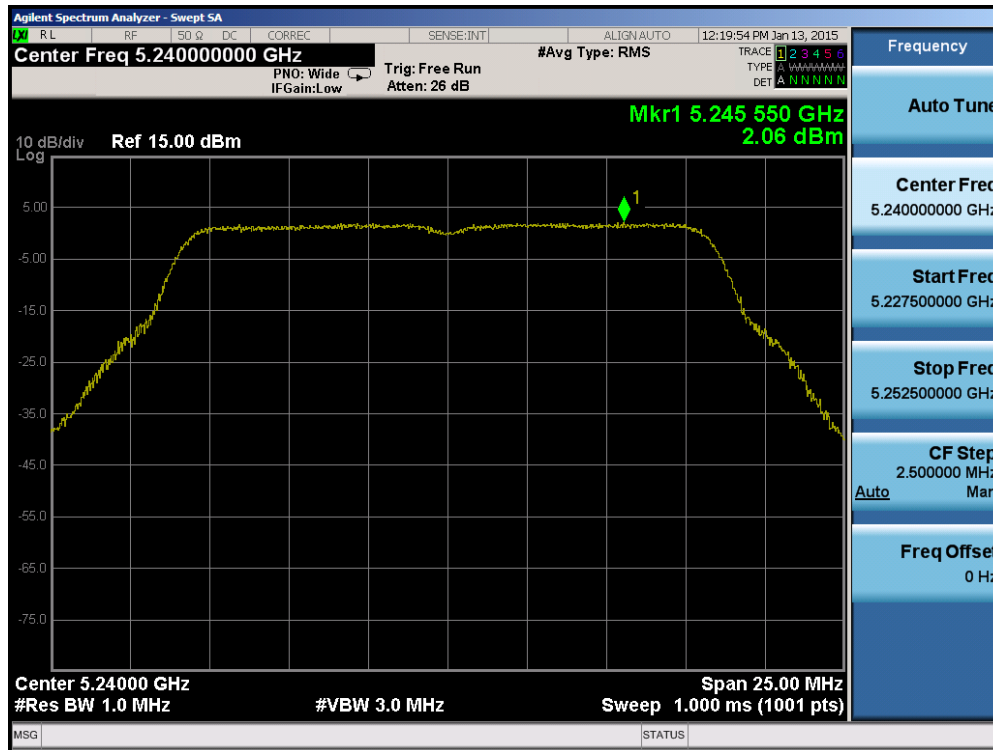


Plot 6-40. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 48)

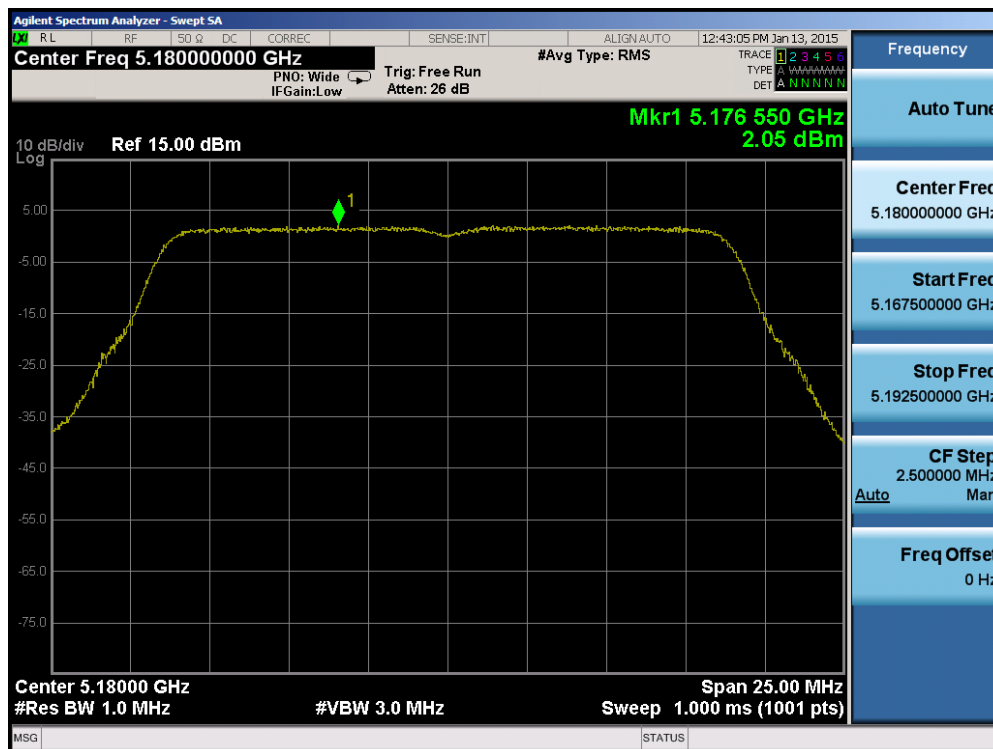


Plot 6-41. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 40 of 109

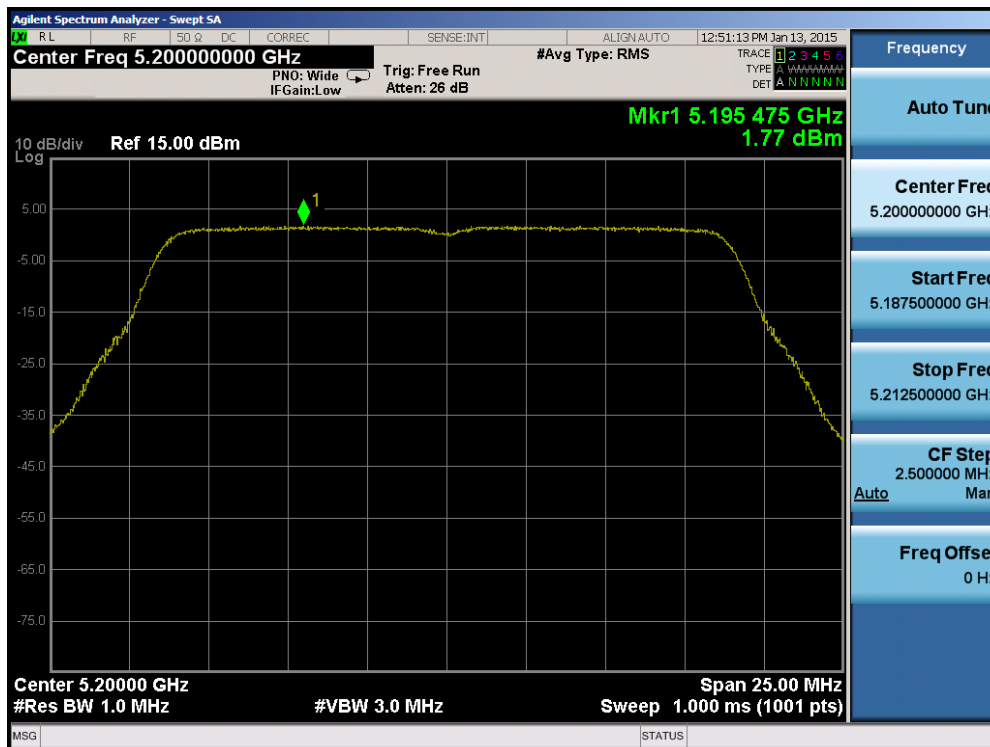


Plot 6-42. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

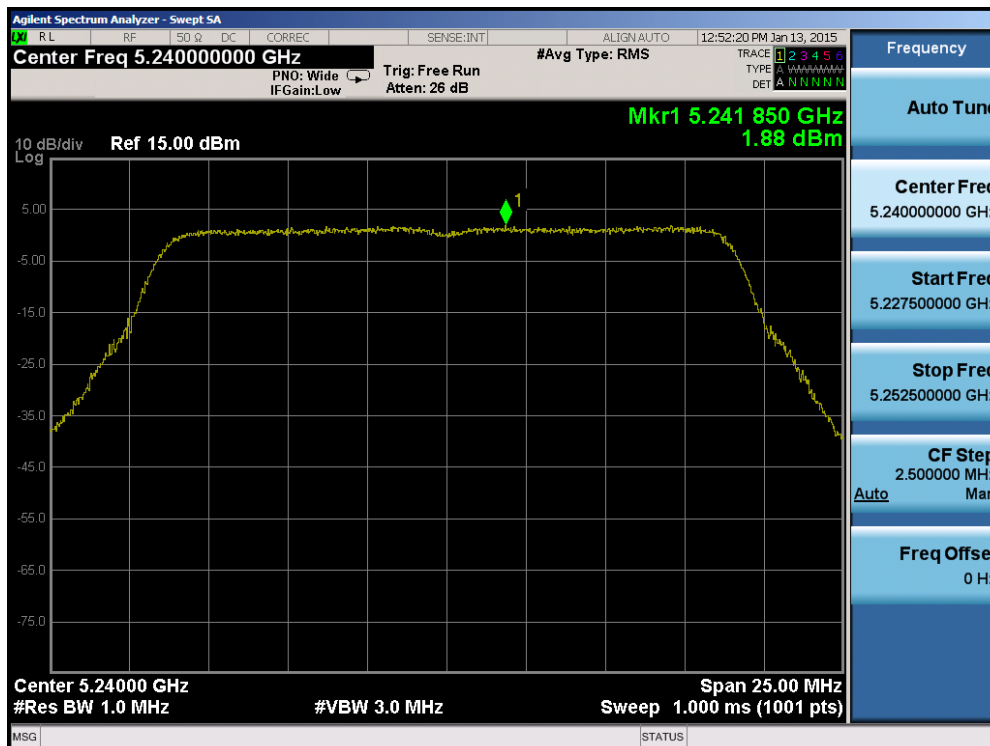


Plot 6-43. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 41 of 109

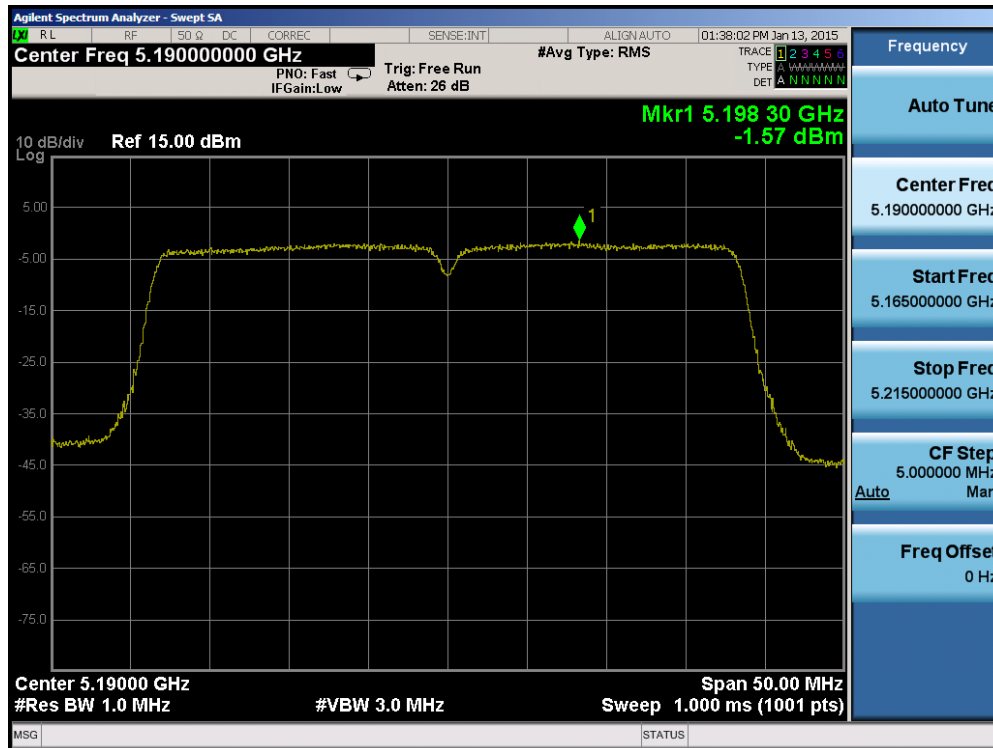


Plot 6-44. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

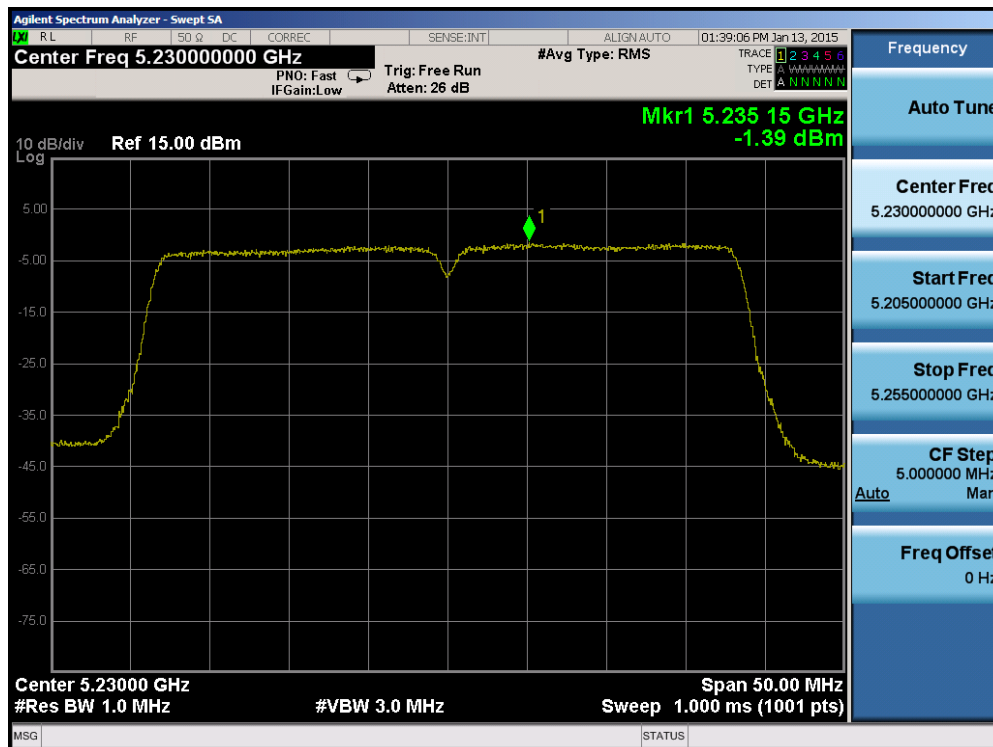


Plot 6-45. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 42 of 109

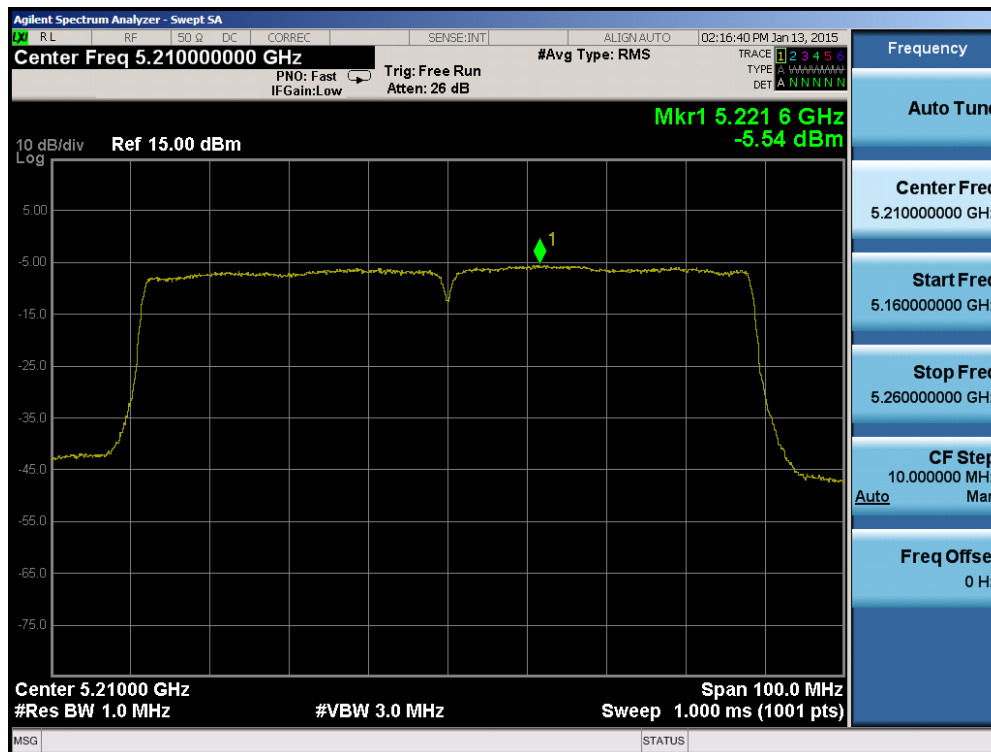


Plot 6-46. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

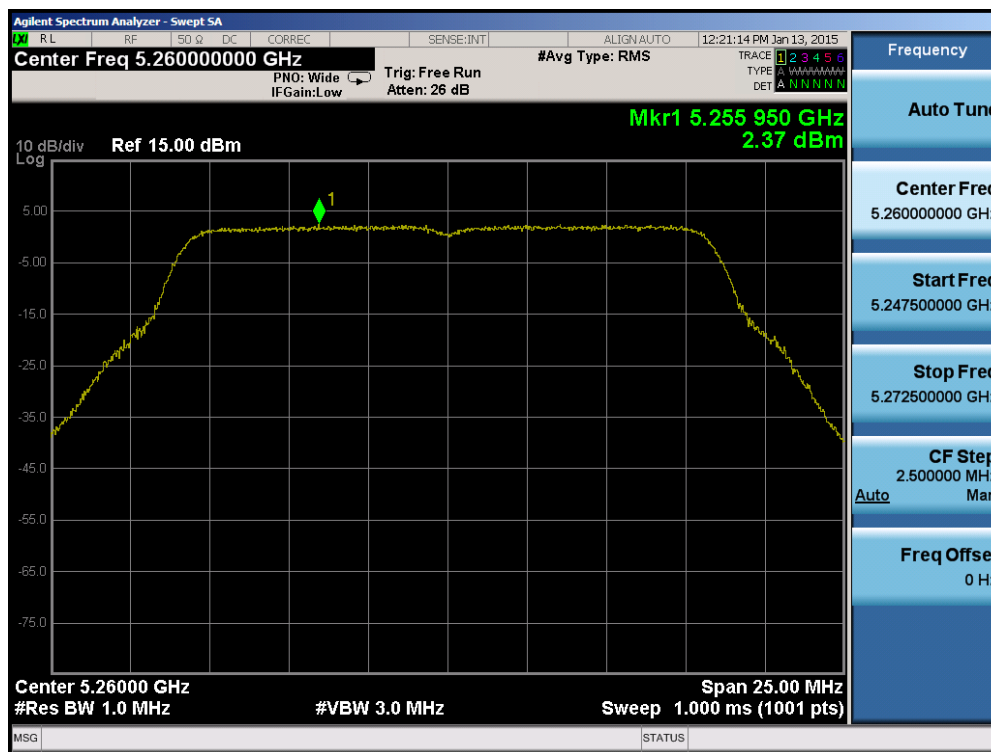


Plot 6-47. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 52)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 43 of 109

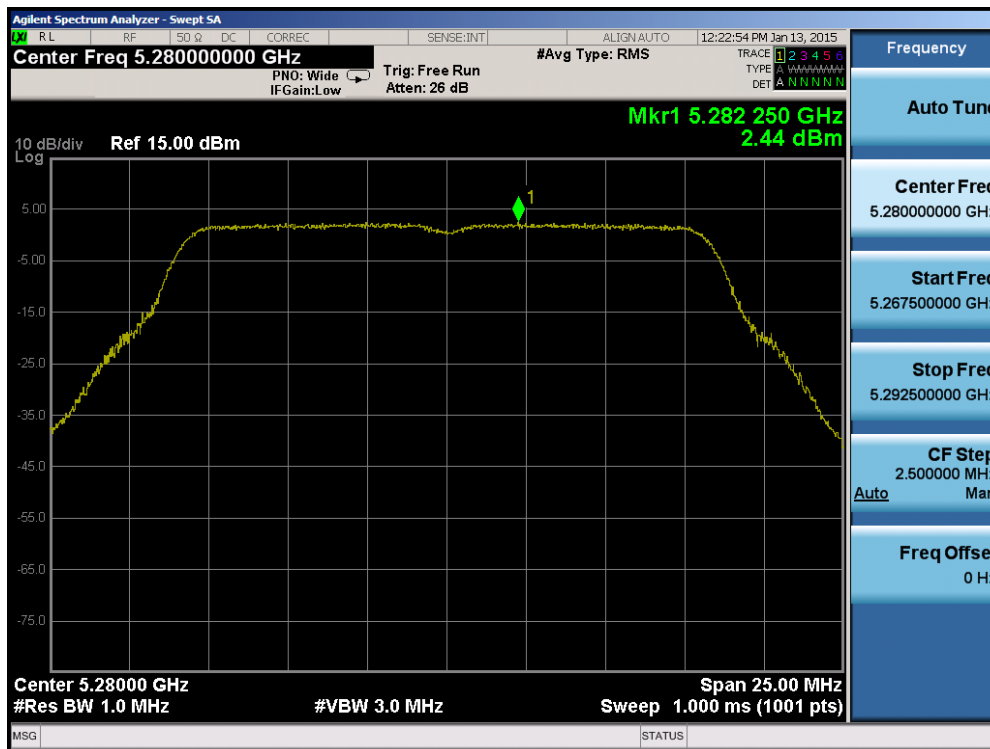


Plot 6-48. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 56)

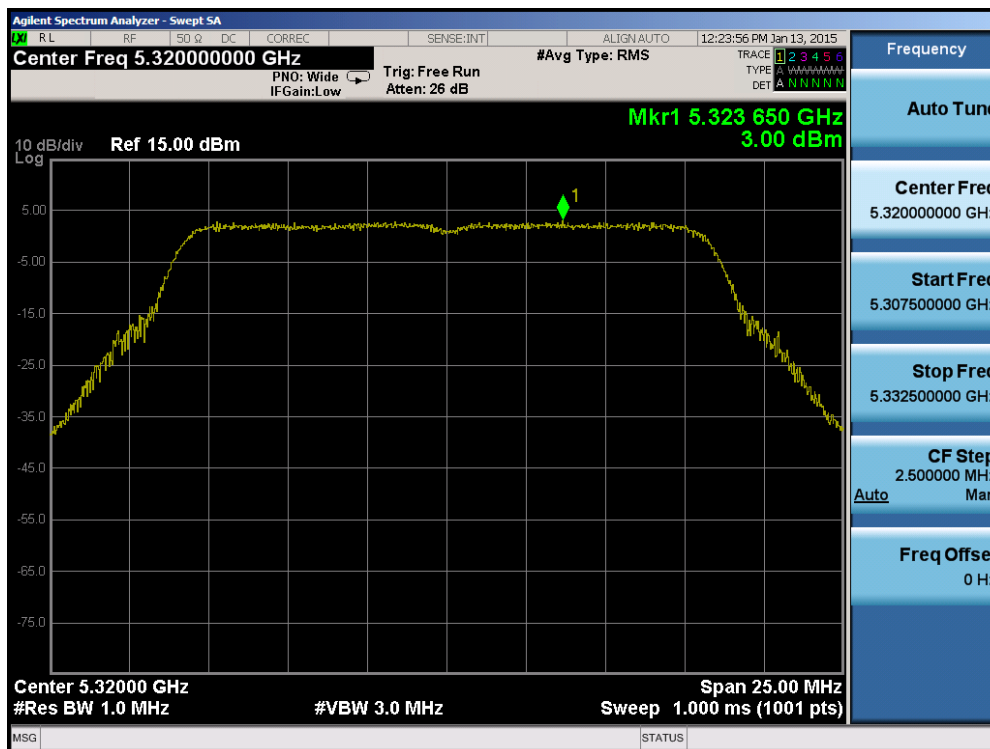


Plot 6-49. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 64)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 44 of 109

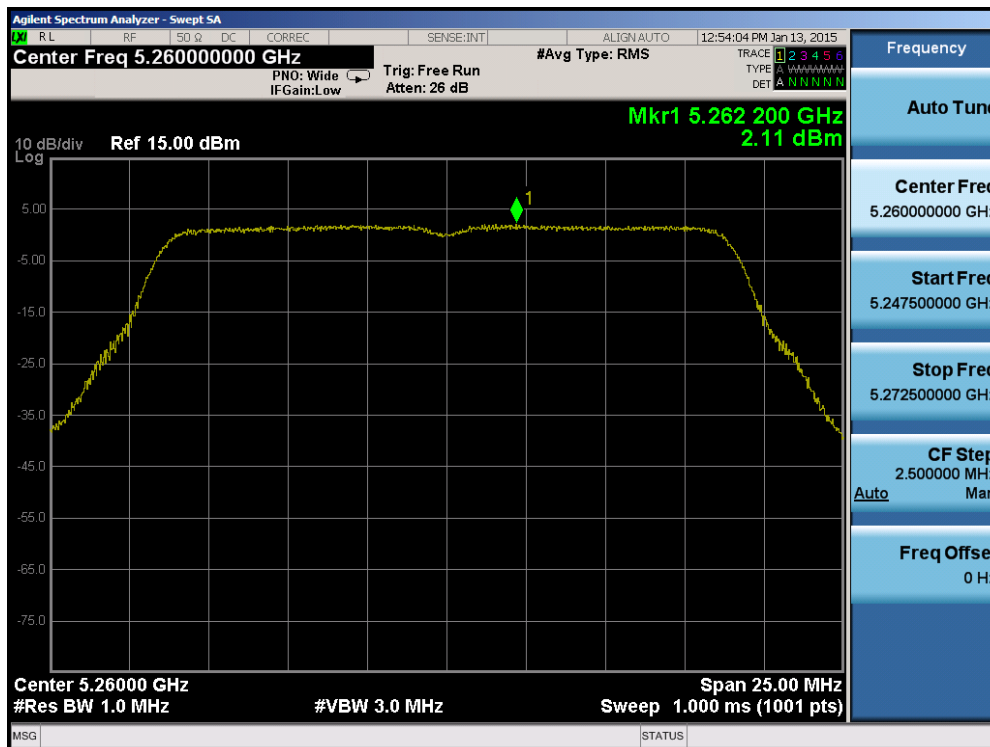


Plot 6-50. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

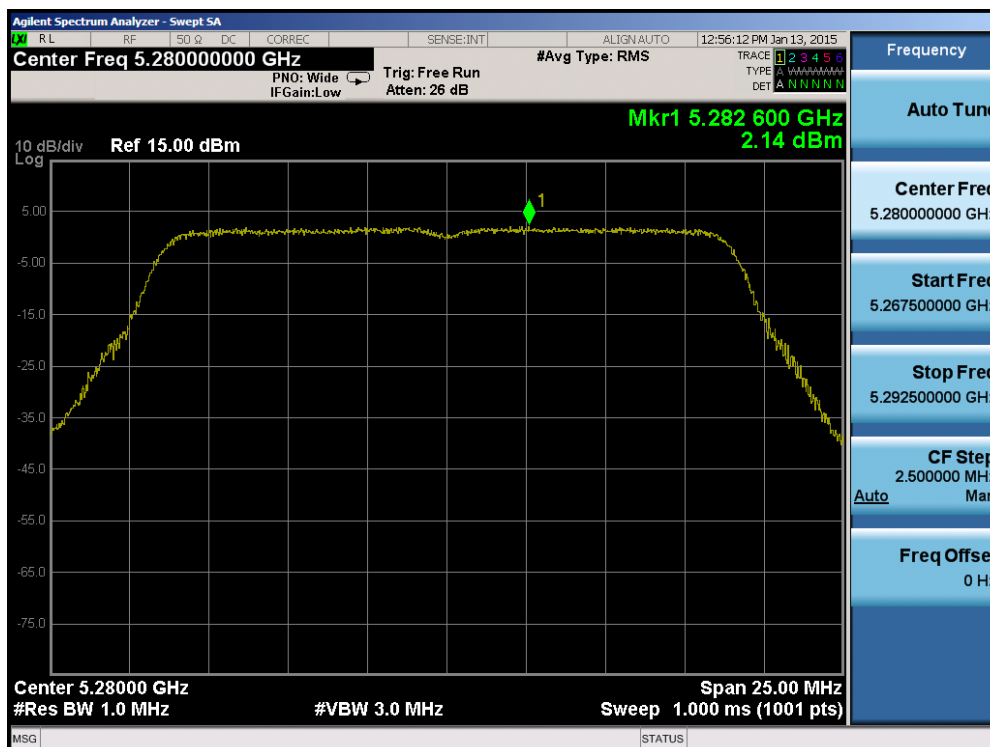


Plot 6-51. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 45 of 109

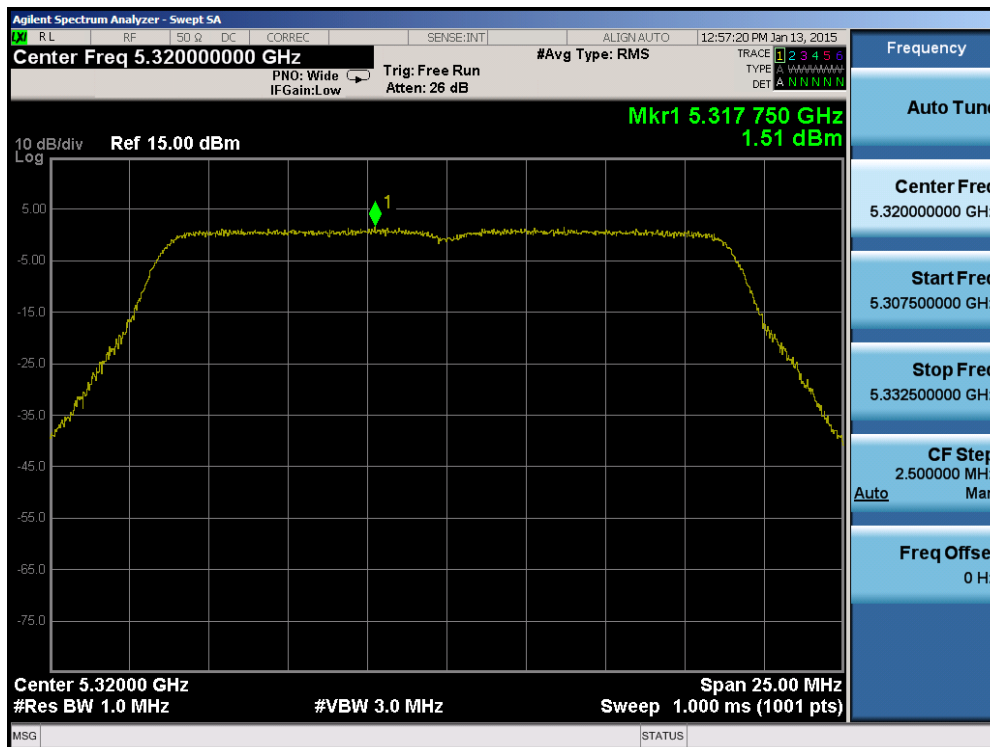


Plot 6-52. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

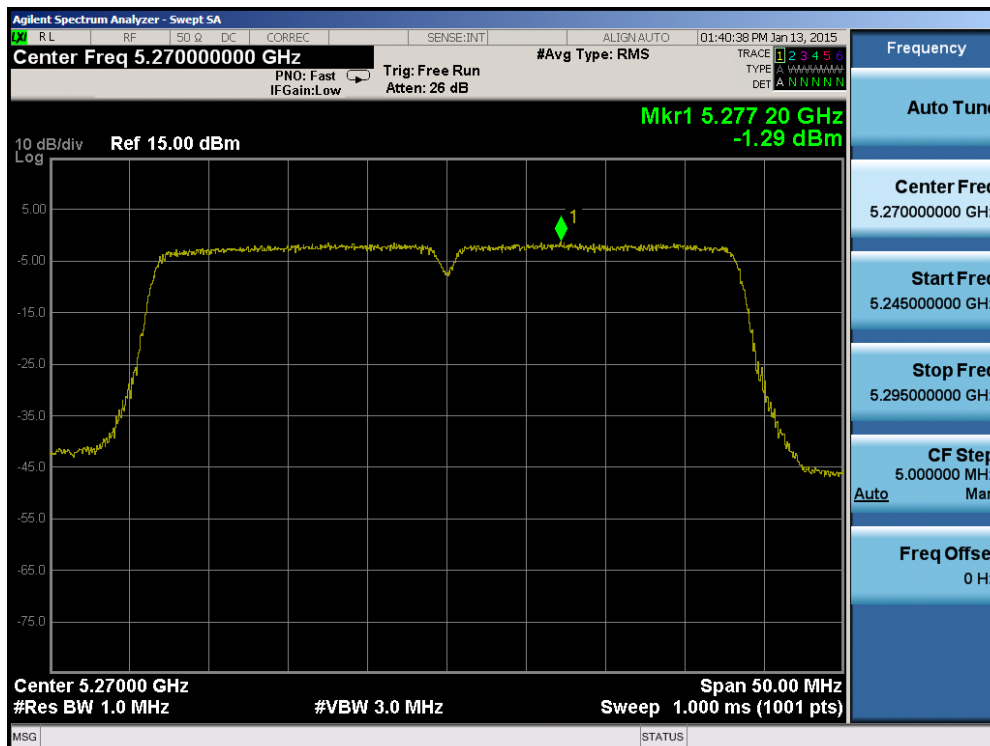


Plot 6-53. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 46 of 109

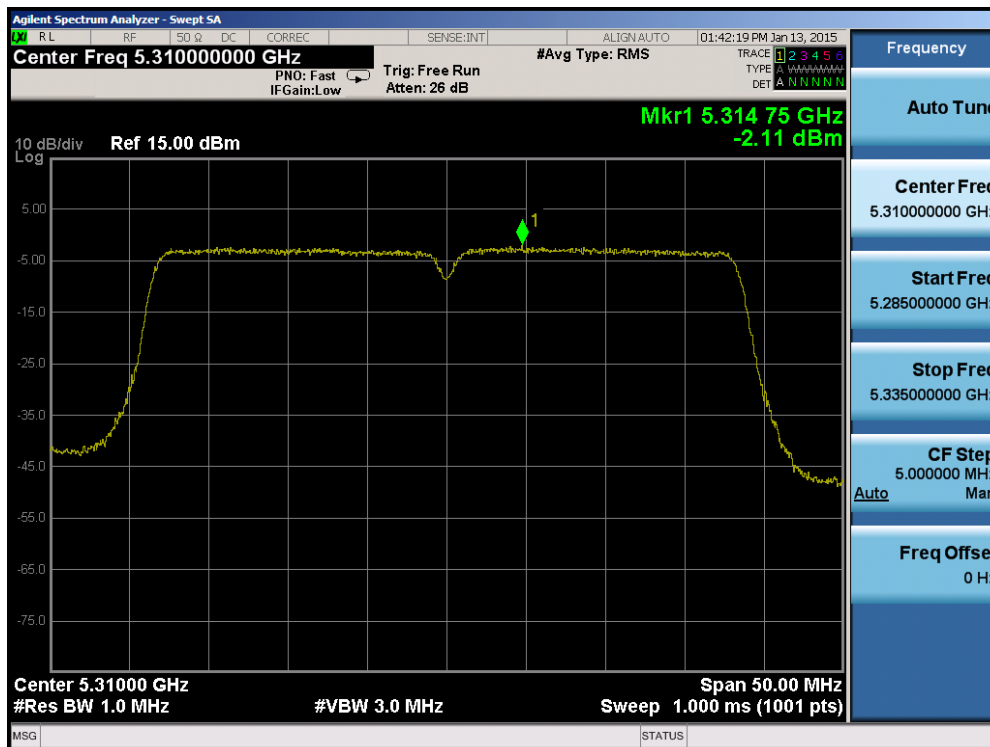


Plot 6-54. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

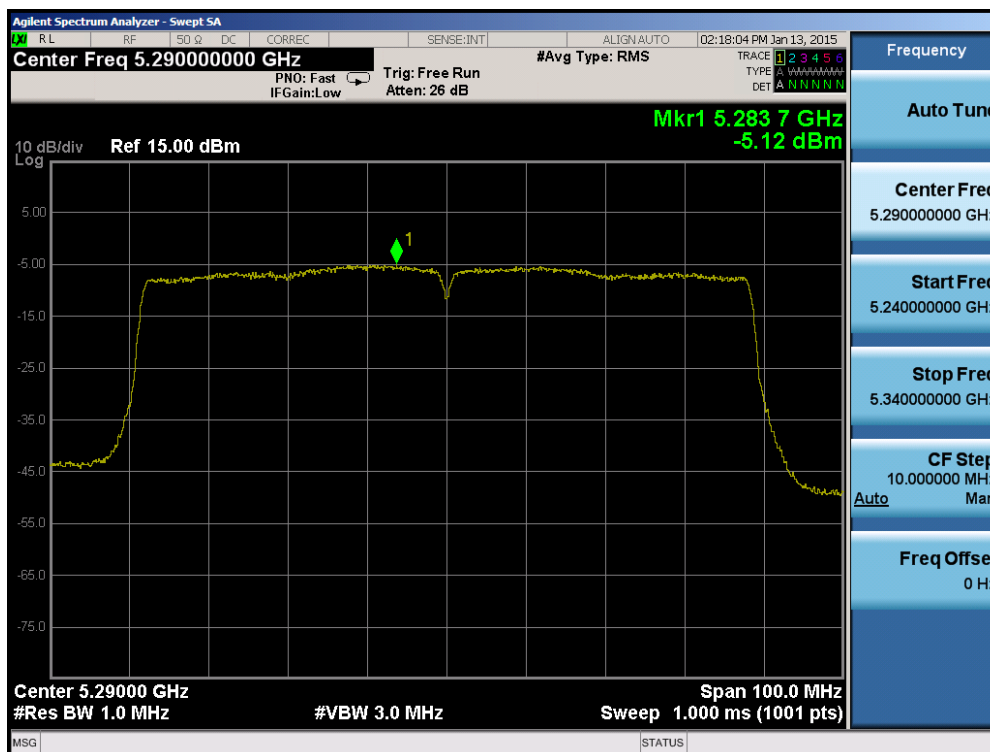


Plot 6-55. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 47 of 109

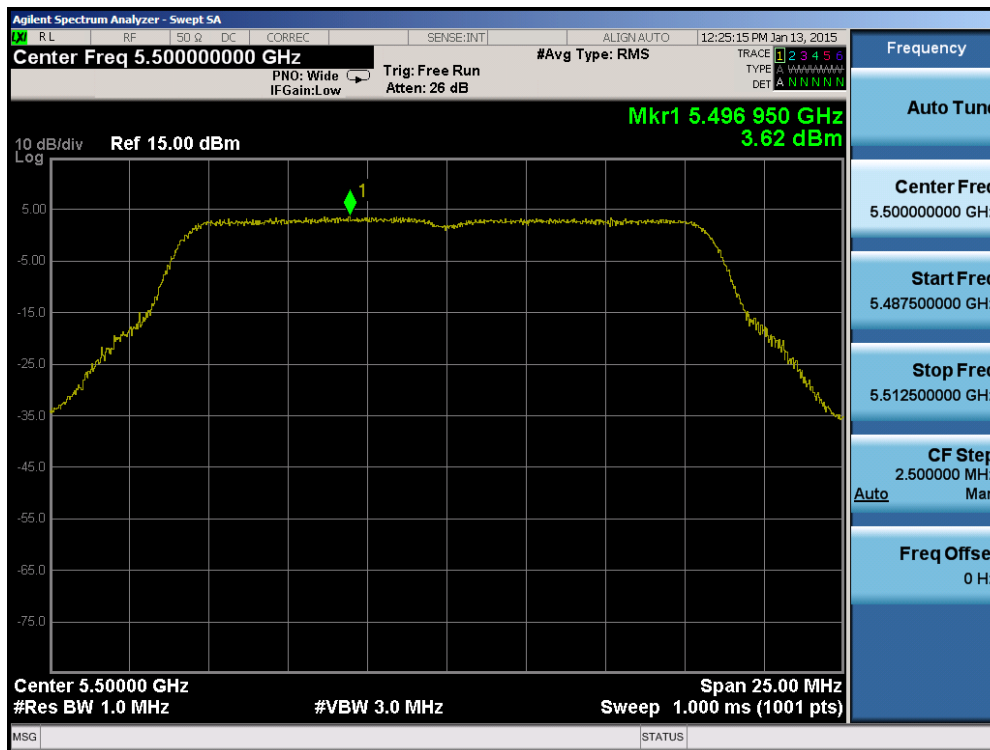


Plot 6-56. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 100)

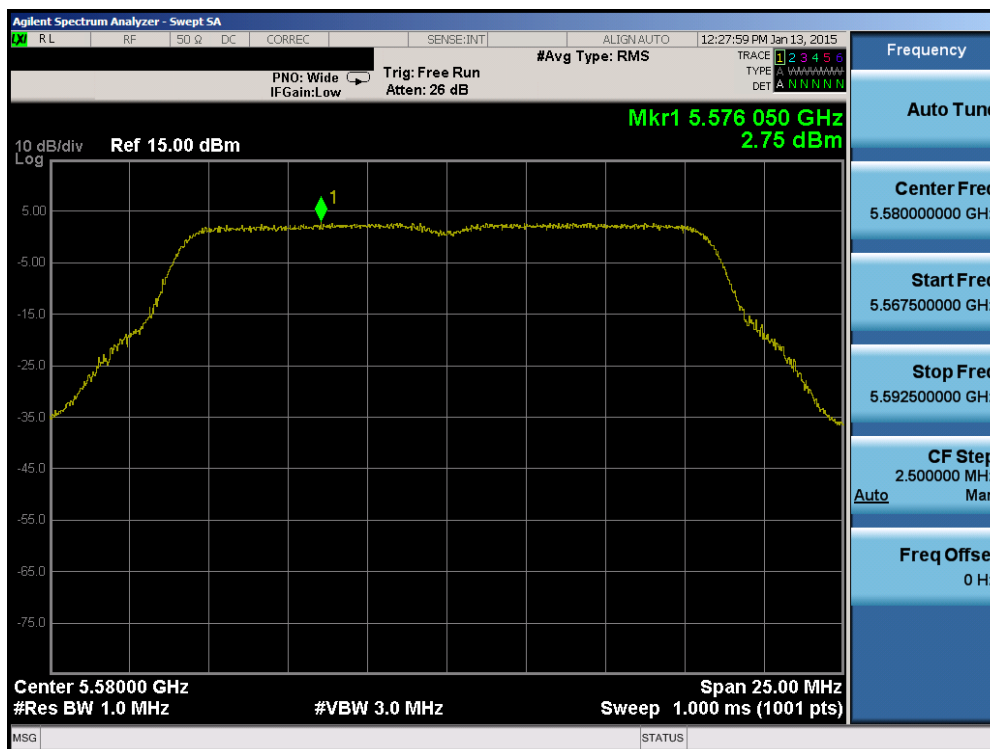


Plot 6-57. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 116)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 48 of 109

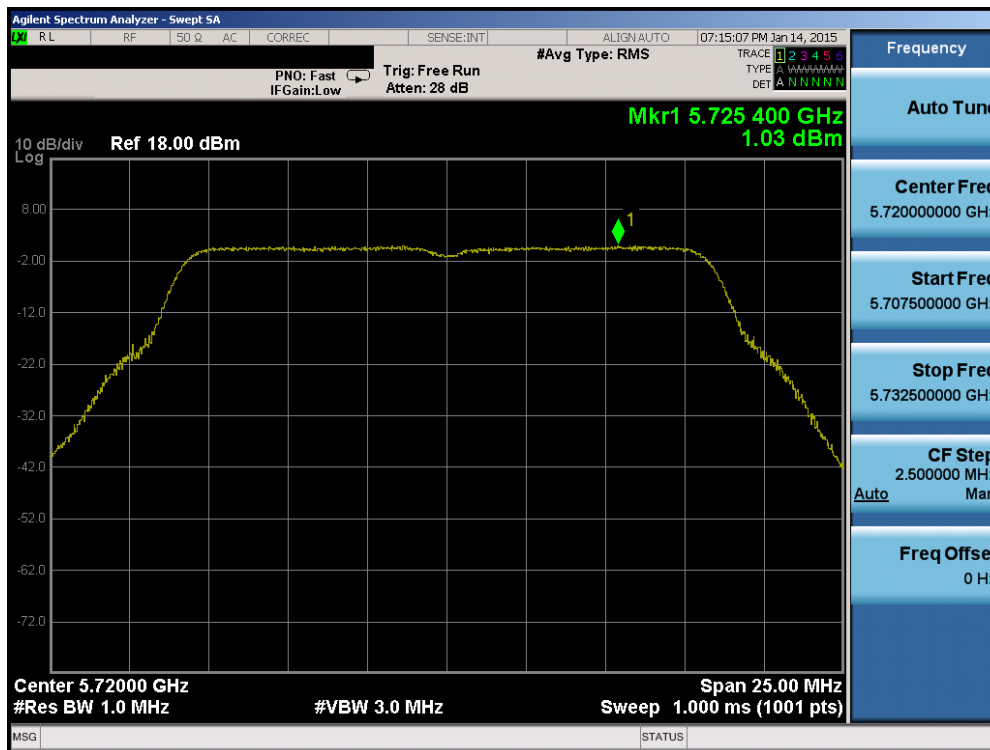


Plot 6-58. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 144)

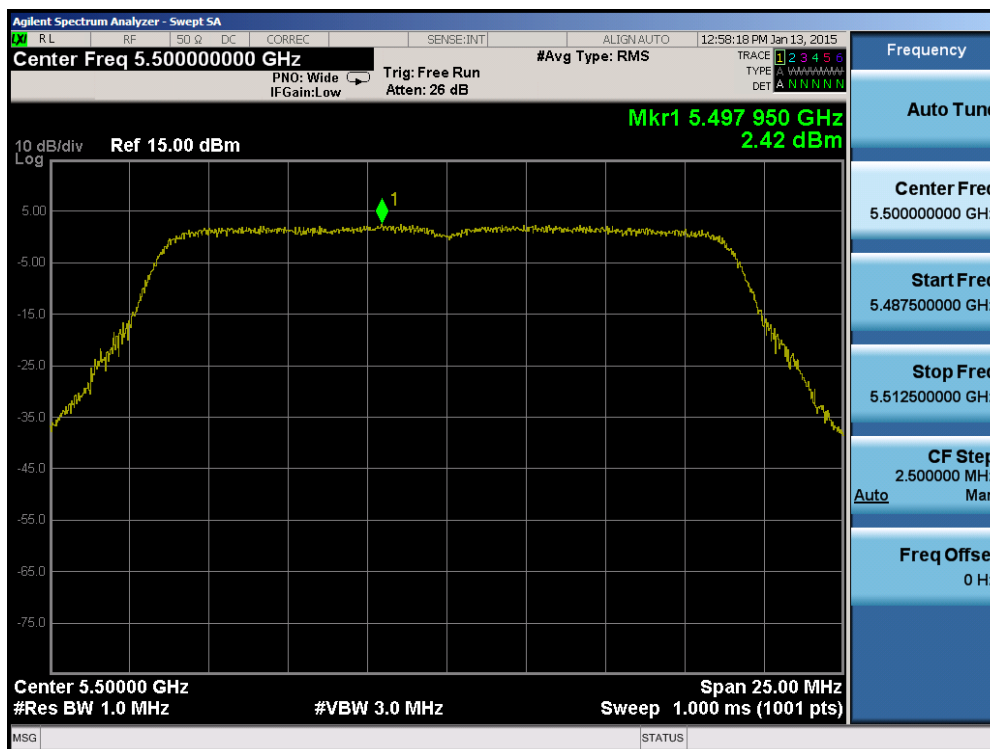


Plot 6-59. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 49 of 109

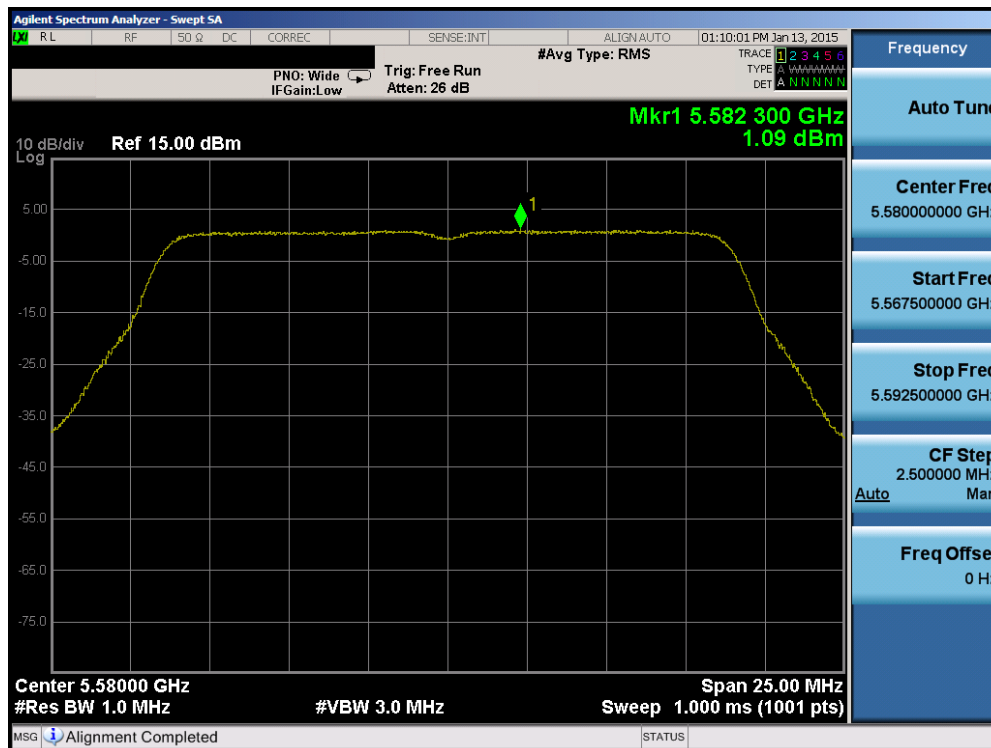


Plot 6-60. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 116)

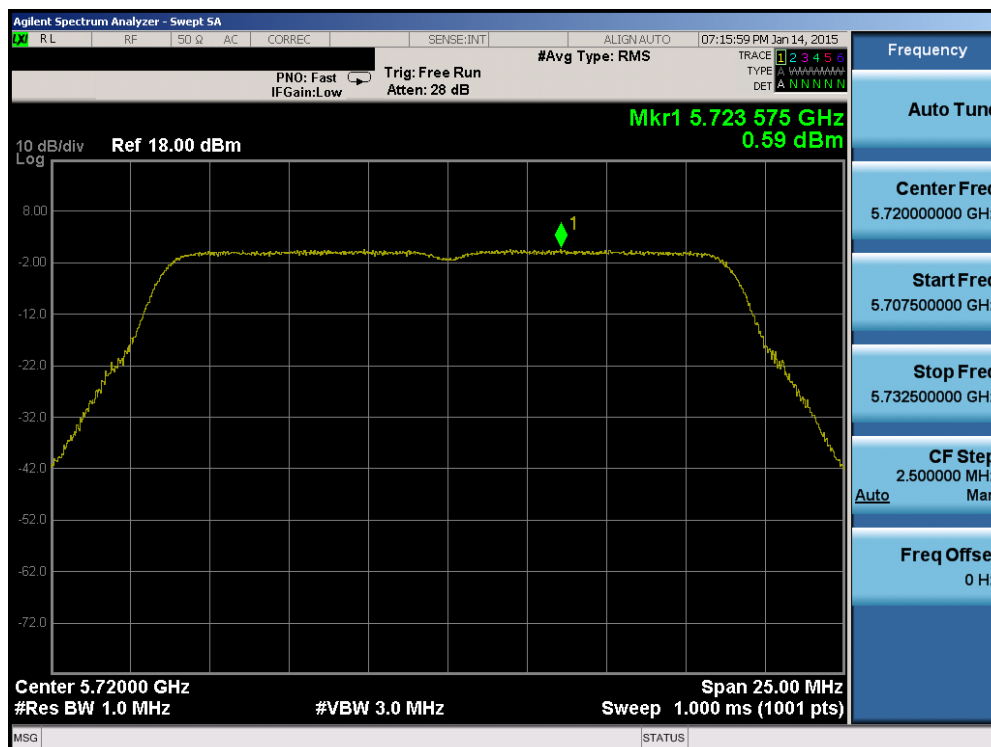


Plot 6-61. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 50 of 109

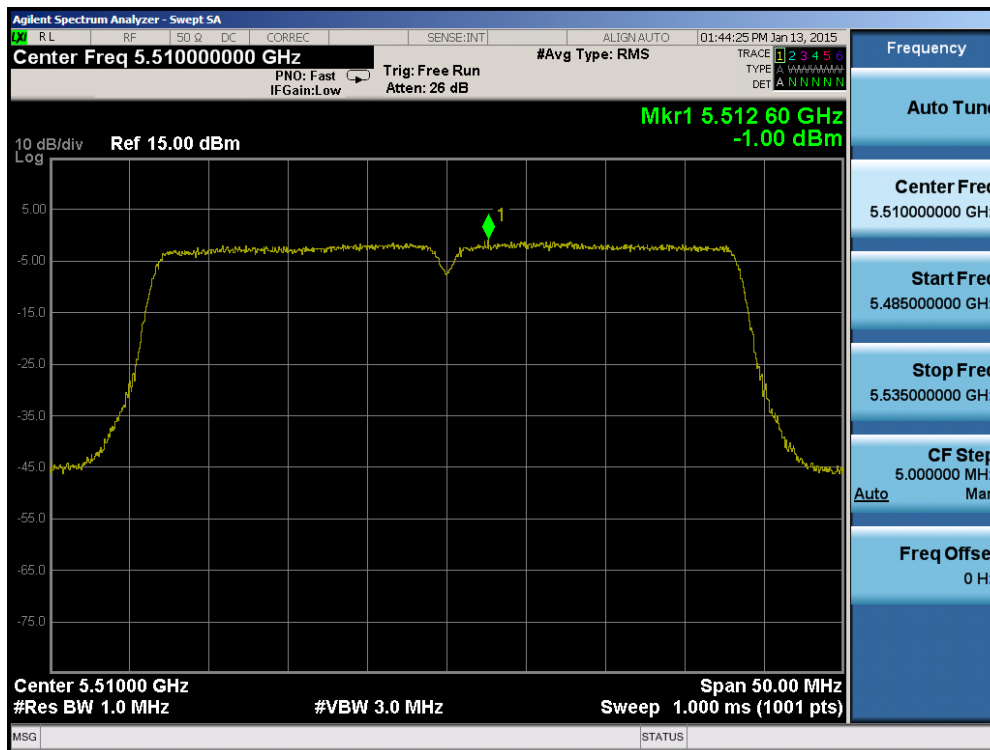


Plot 6-62. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

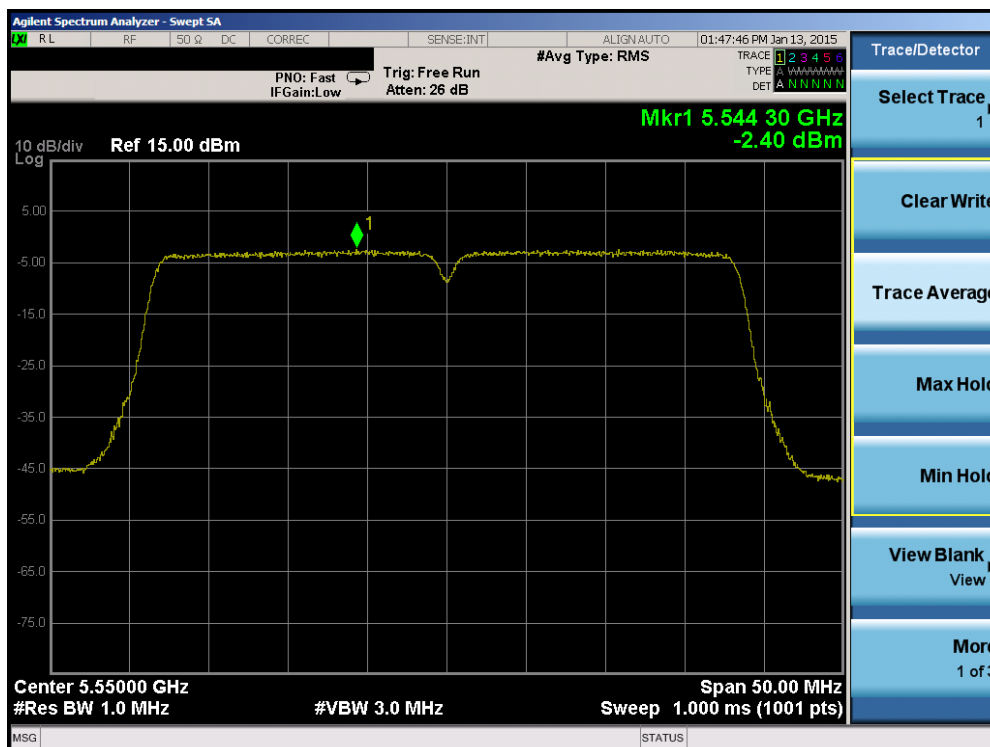


Plot 6-63. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 110)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 51 of 109

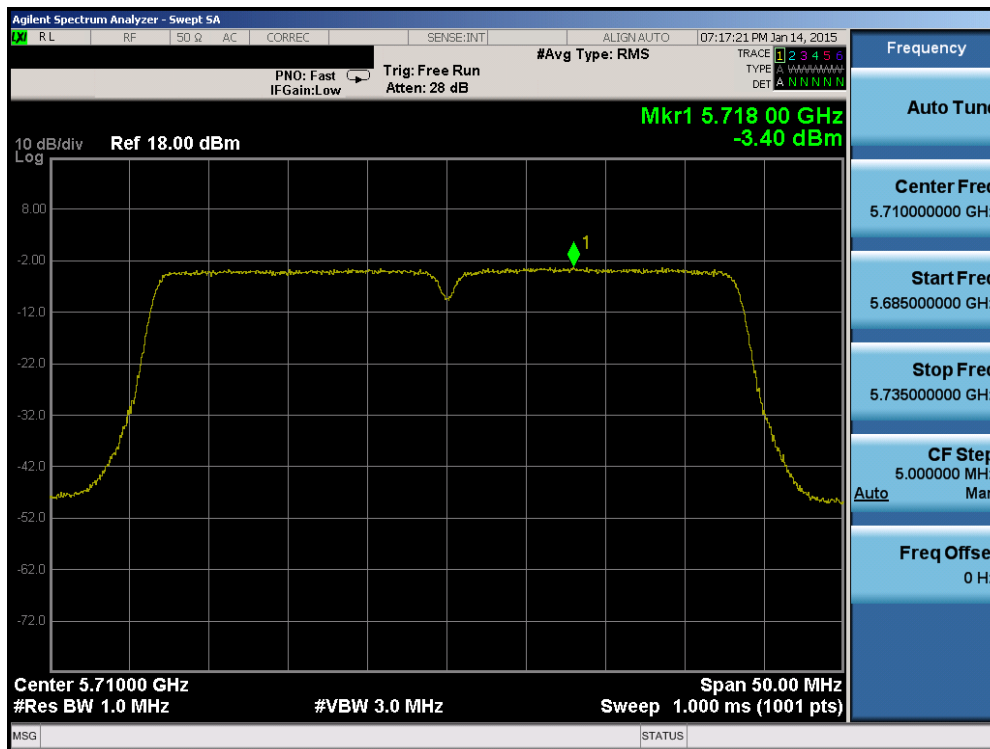

Plot 6-64. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

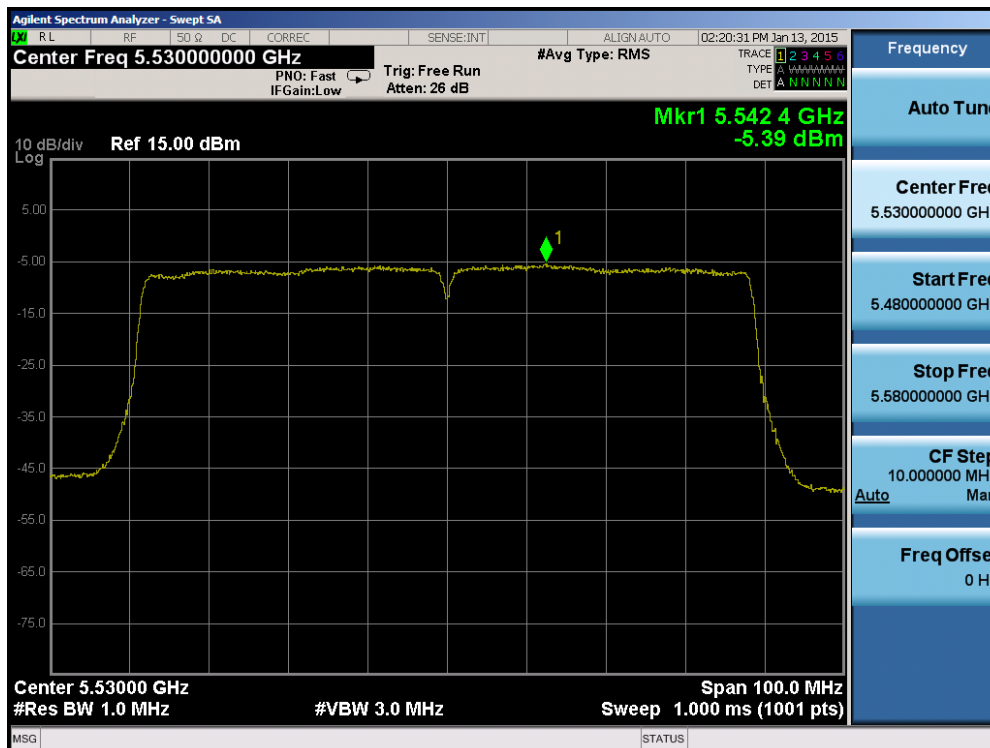


Plot 6-65. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 52 of 109


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]	Pass / Fail
Band 3	5745	149	a	6	-0.42	30.0	-30.42	Pass
	5785	157	a	6	-0.84	30.0	-30.84	Pass
	5825	165	a	6	-0.32	30.0	-30.32	Pass
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	-0.88	30.0	-30.88	Pass
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	-0.88	30.0	-30.88	Pass
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	-0.77	30.0	-30.77	Pass
	5755	151	n (40MHz)	13.5/15 (MCS0)	-4.59	30.0	-34.59	Pass
	5795	159	n (40MHz)	13.5/15 (MCS0)	-4.86	30.0	-34.86	Pass
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	-8.00	30.0	-38.00	Pass

Table 6-11. Band 3 Conducted Power Spectral Density Measurements

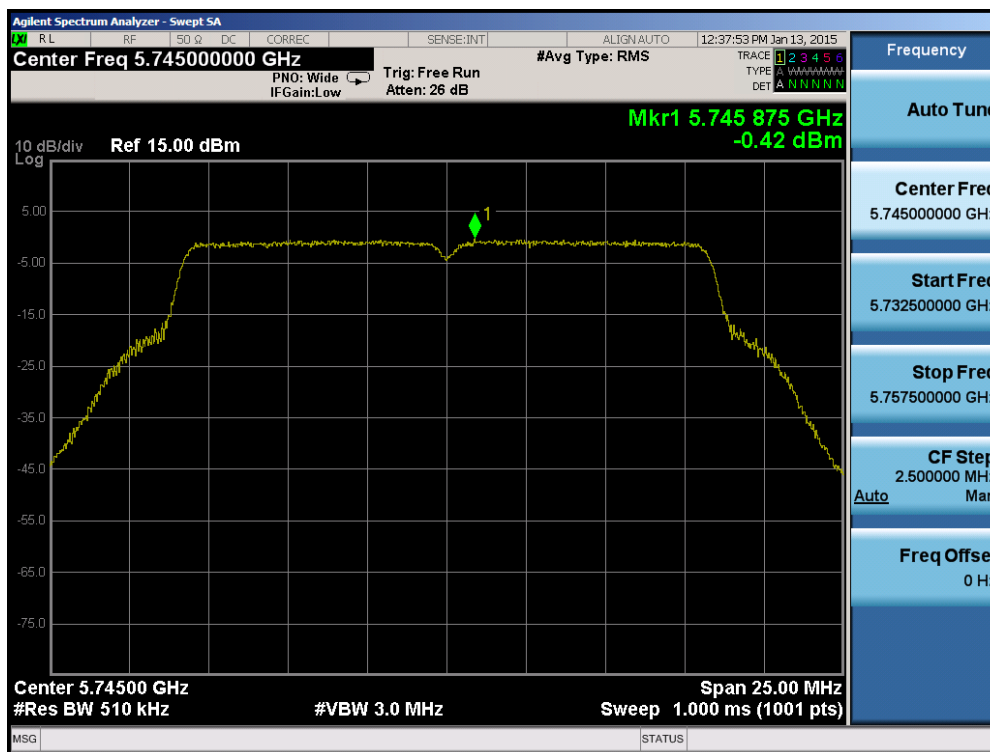


Plot 6-67. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 149)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 54 of 109

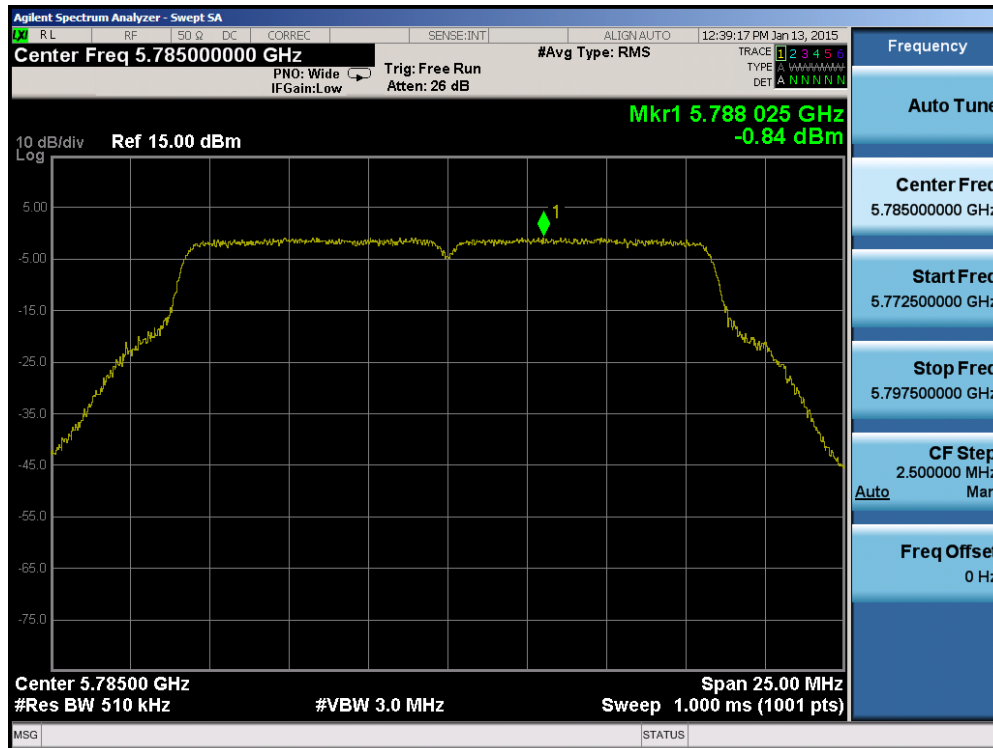


Plot 6-68. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 157)

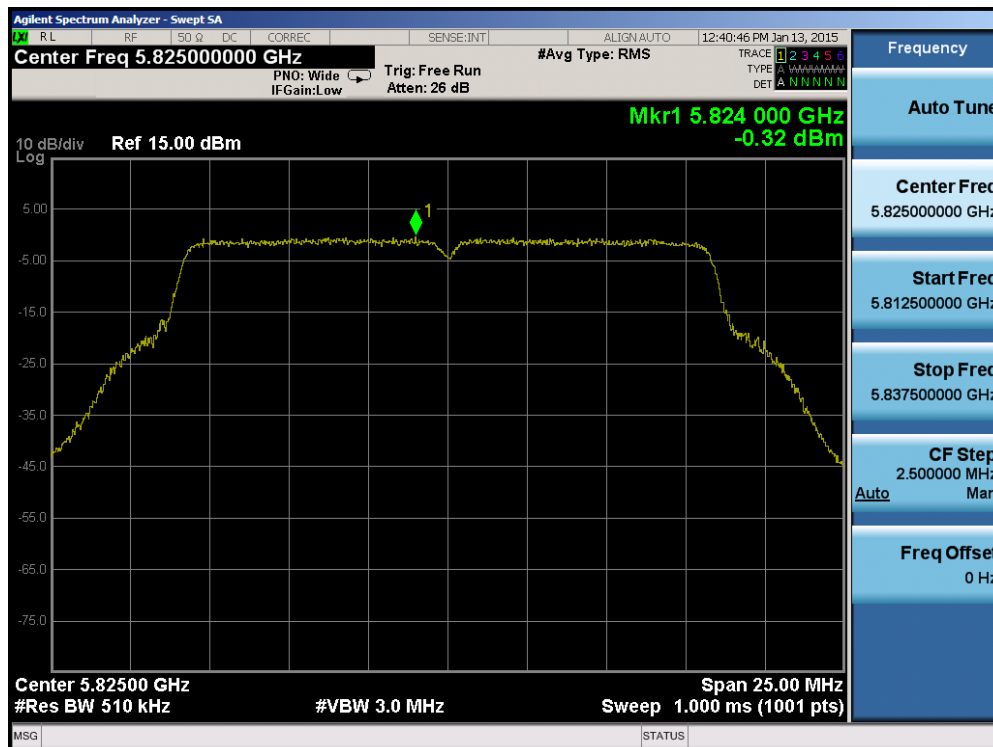


Plot 6-69. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 165)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 55 of 109

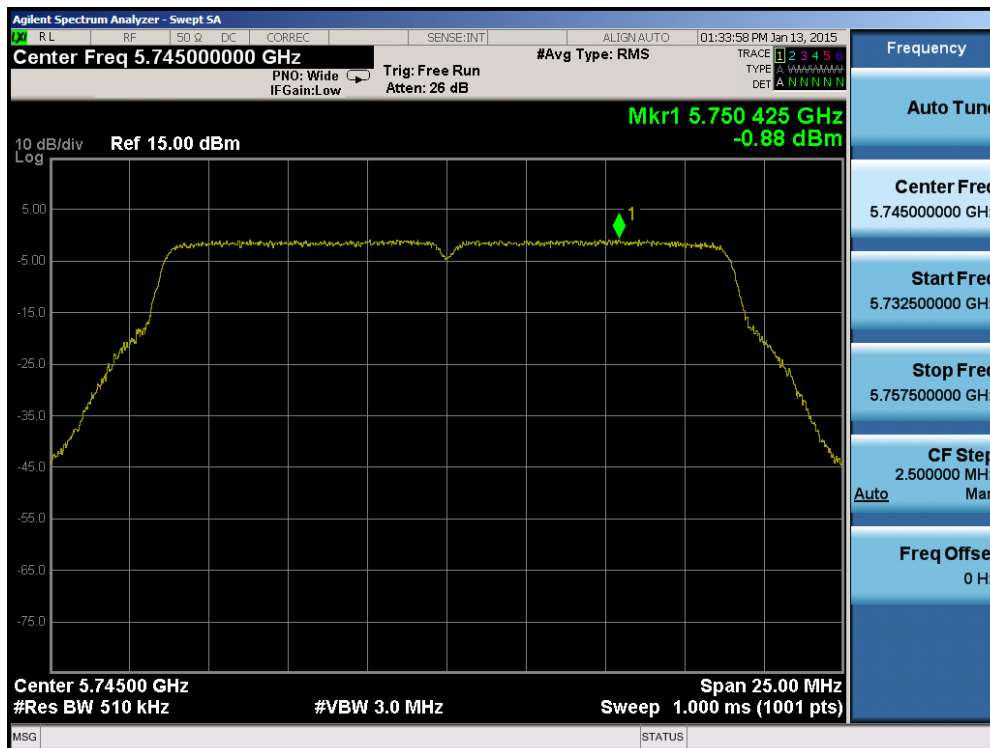


Plot 6-70. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

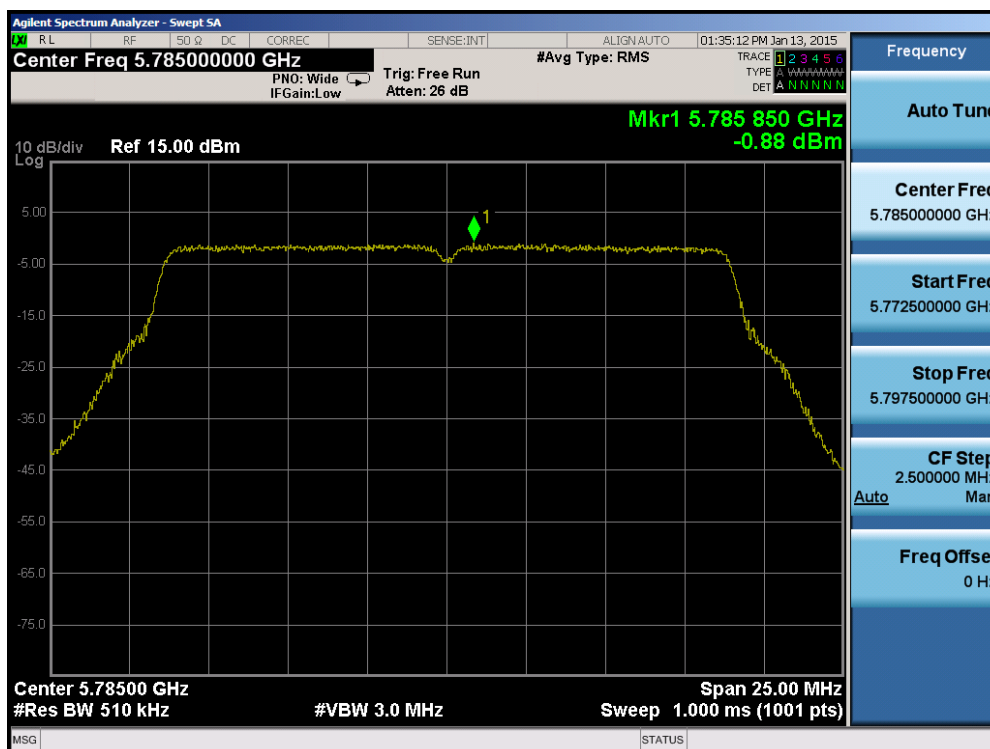


Plot 6-71. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 56 of 109

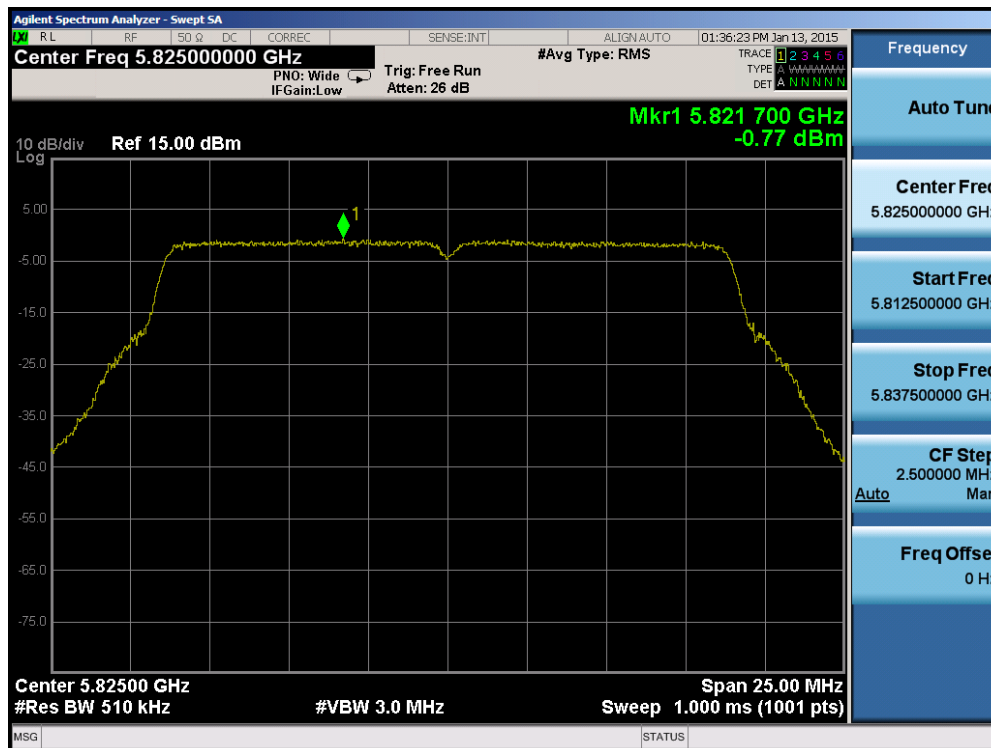


Plot 6-72. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

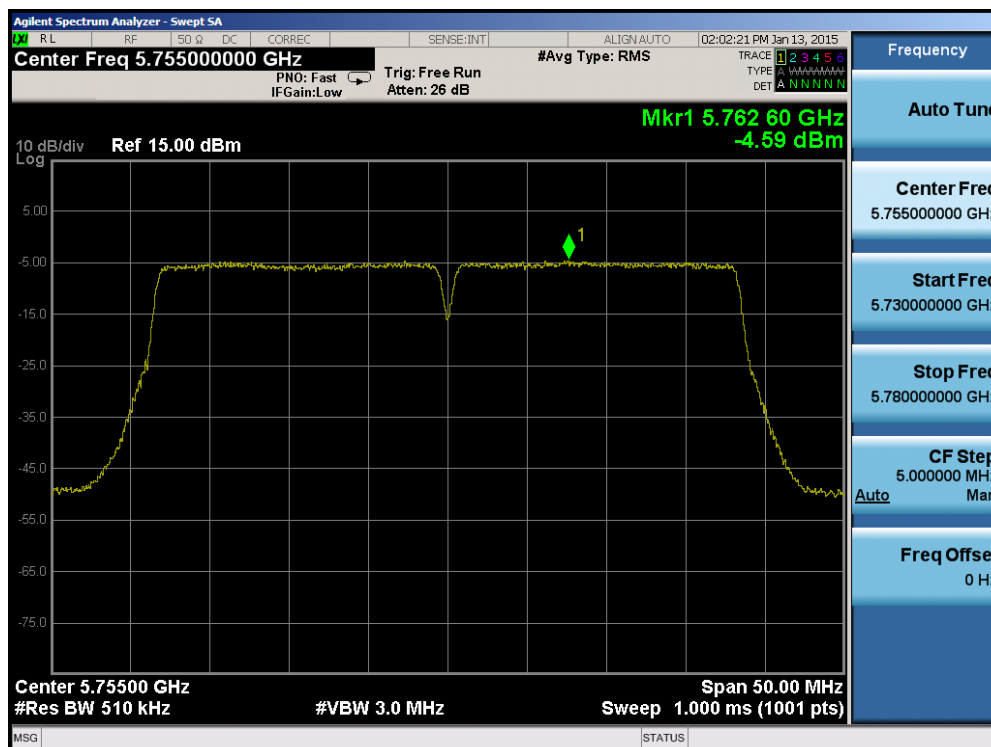


Plot 6-73. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 57 of 109

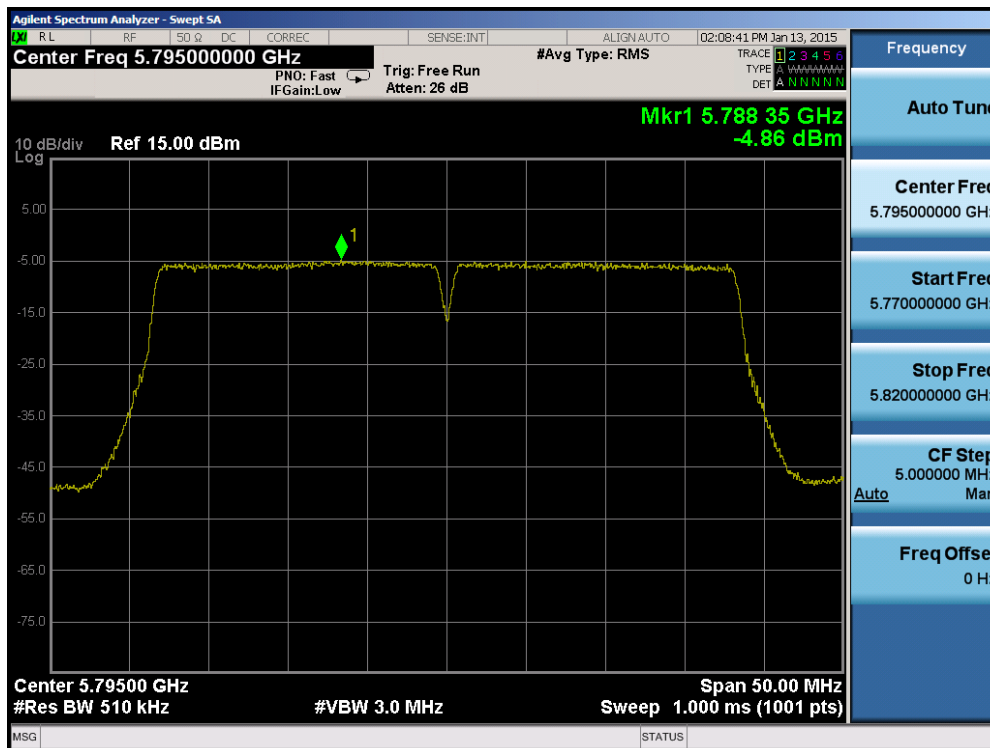

Plot 6-74. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

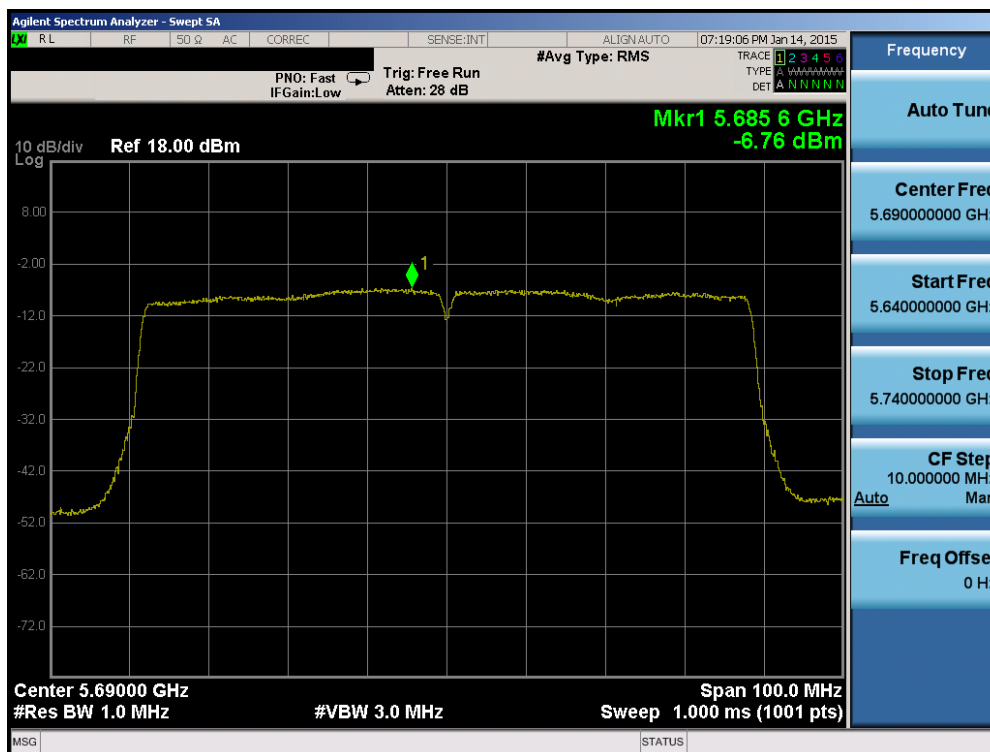

Plot 6-75. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 58 of 109

6.6 Frequency Stability

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,180,000,000 Hz
 CHANNEL: 36
 REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	5,179,999,580	-420	-0.00000811
100 %		- 30	5,180,000,052	52	0.00000100
100 %		- 20	5,180,000,051	51	0.00000098
100 %		- 10	5,179,999,826	-174	-0.00000336
100 %		0	5,179,999,997	-3	-0.00000006
100 %		+ 10	5,179,999,928	-72	-0.00000139
100 %		+ 20	5,180,000,075	75	0.00000145
100 %		+ 30	5,180,000,001	1	0.00000002
100 %		+ 40	5,180,000,206	206	0.00000398
100 %		+ 50	5,179,999,958	-42	-0.00000081
BATT. ENDPOINT	3.50	+ 20	5,180,000,325	325	0.00000627

Table 6-12. Frequency Stability Measurements for UNII Band 1 (Ch. 36)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFH950		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 59 of 109

Frequency Stability

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,260,000,000 Hz
 CHANNEL: 52
 REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	5,259,999,657	-343	-0.00000652
100 %		- 30	5,259,999,739	-261	-0.00000496
100 %		- 20	5,259,999,908	-92	-0.00000175
100 %		- 10	5,259,999,878	-122	-0.00000232
100 %		0	5,260,000,158	158	0.00000300
100 %		+ 10	5,259,999,848	-152	-0.00000289
100 %		+ 20	5,259,999,986	-14	-0.00000027
100 %		+ 30	5,260,000,031	31	0.00000059
100 %		+ 40	5,259,999,884	-116	-0.00000221
100 %		+ 50	5,259,999,940	-60	-0.00000114
BATT. ENDPOINT	3.50	+ 20	5,259,999,901	-99	-0.00000188

Table 6-13. Frequency Stability Measurements for UNII Band 2A (Ch. 52)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

Frequency Stability

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,500,000,000 Hz
 CHANNEL: 100
 REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	5,500,000,041	41	0.00000075
100 %		- 30	5,499,999,869	-131	-0.00000238
100 %		- 20	5,500,000,146	146	0.00000265
100 %		- 10	5,500,000,162	162	0.00000295
100 %		0	5,500,000,240	240	0.00000436
100 %		+ 10	5,499,999,820	-180	-0.00000327
100 %		+ 20	5,499,999,732	-268	-0.00000487
100 %		+ 30	5,499,999,940	-60	-0.00000109
100 %		+ 40	5,500,000,152	152	0.00000276
100 %		+ 50	5,500,000,002	2	0.00000004
BATT. ENDPOINT	3.50	+ 20	5,500,000,052	52	0.00000095

Table 6-14. Frequency Stability Measurements for UNII Band 2C (Ch. 100)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFH950		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset	Page 61 of 109	

Frequency Stability

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,745,000,000 Hz
 CHANNEL: 149
 REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	5,745,000,078	78	0.00000136
100 %		- 30	5,745,000,076	76	0.00000132
100 %		- 20	5,744,999,909	-91	-0.00000158
100 %		- 10	5,744,999,986	-14	-0.00000024
100 %		0	5,744,999,656	-344	-0.00000599
100 %		+ 10	5,745,000,105	105	0.00000183
100 %		+ 20	5,745,000,212	212	0.00000369
100 %		+ 30	5,744,999,973	-27	-0.00000047
100 %		+ 40	5,745,000,099	99	0.00000172
100 %		+ 50	5,744,999,833	-167	-0.00000291
BATT. ENDPOINT	3.50	+ 20	5,745,000,307	307	0.00000534

Table 6-15. Frequency Stability Measurements for UNII Band 3 (Ch. 149)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFH950		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 62 of 109

6.7 Radiated Spurious Emission Measurements

§15.407(b.1)(b.6) §15.205 §15.209

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle (>98%), at its maximum power control level, as defined in KDB 789033 D02 v01, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11n (20MHz BW), 802.11n (40MHz BW), 802.11ac(80MHz BW)), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 6-16 per Section 15.209.

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 6-16. Radiated Limits

Test Procedures Used

KDB 789033 D02 v01 – Section G

Test Settings

Average Measurements above 1GHz (Method AD)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: ZNFH950		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 63 of 109

Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

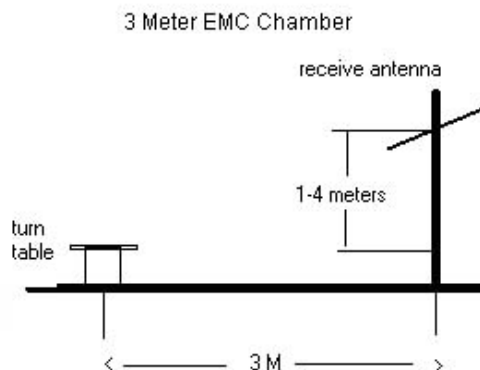


Figure 6-5. Test Instrument & Measurement Setup

Test Notes

1. All radiated spurious emissions levels were measured in a radiated test setup per the guidance of KDB 789033 D02 v01 Section H.
2. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-16.
3. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 6-11. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dBμV/m.
4. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
5. This unit was tested with its standard battery.

FCC ID: ZNFH950		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 64 of 109

6. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
7. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
8. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section. Rohde & Schwarz EMC32, Version 9.15.00 automated test software was used to perform the Radiated Spurious Emissions Pre-Scan testing.

Sample Calculations

Determining Spurious Emissions Levels


- o Field Strength Level $_{[dB_{\mu V/m}]}$ = Analyzer Level $_{[dBm]}$ + 107 + AFCL $_{[dB/m]}$
- o AFCL $_{[dB/m]}$ = Antenna Factor $_{[dB/m]}$ + Cable Loss $_{[dB]}$
- o Margin $_{[dB]}$ = Field Strength Level $_{[dB_{\mu V/m}]}$ – Limit $_{[dB_{\mu V/m}]}$

Radiated Band Edge Measurement Offset


- o The amplitude offset shown in the radiated restricted band edge plots in Section 6.8 was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + 10 dB Attenuator) – Preamplifier Gain

FCC ID: ZNFH950		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 65 of 109

6.7.1 Radiated Spurious Emission Measurements

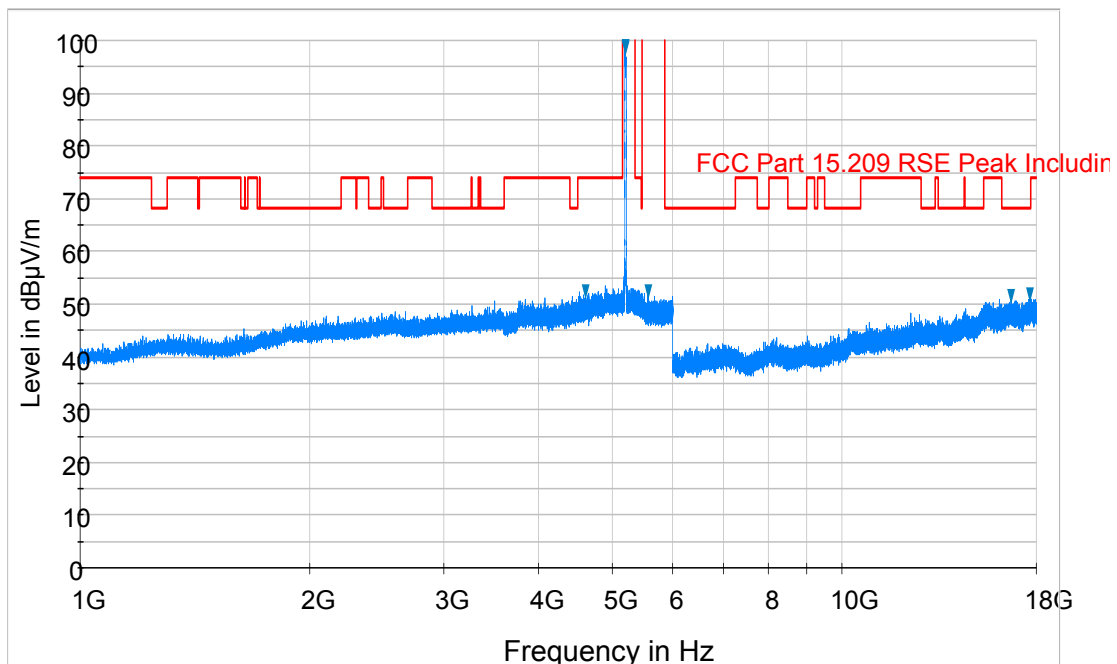


Plot 6-76. Radiated Spurious Plot above 1GHz (802.11a – U1 Ch. 40, Ant. Pol. H)

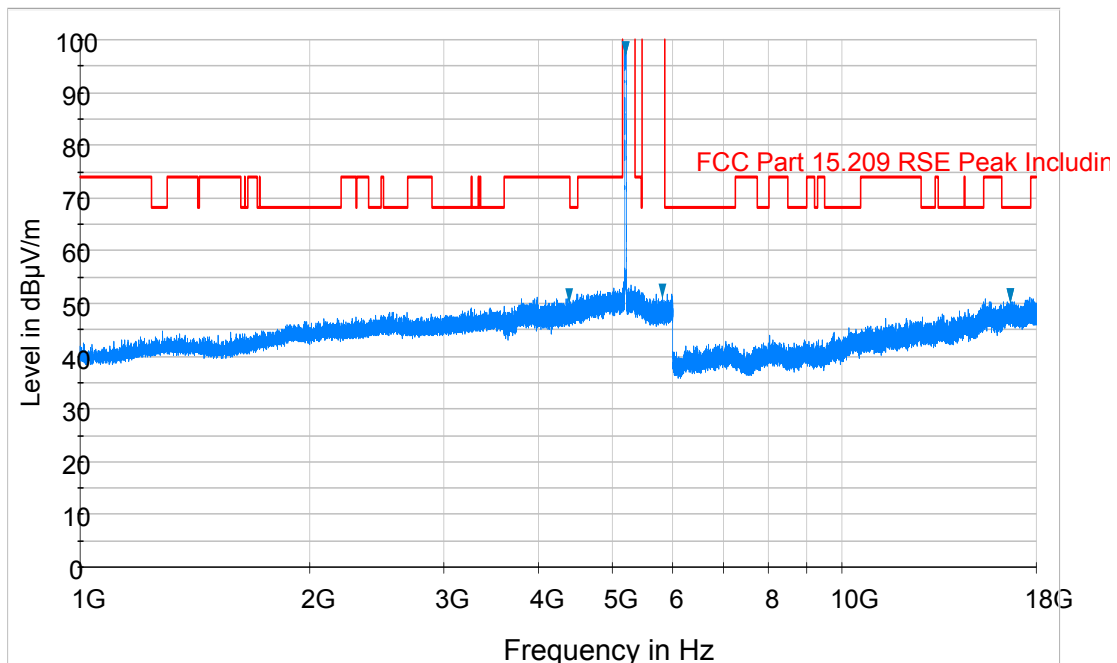


Plot 6-77. Radiated Spurious Plot above 1GHz (802.11a – U1 Ch. 40, Ant. Pol. V)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 66 of 109

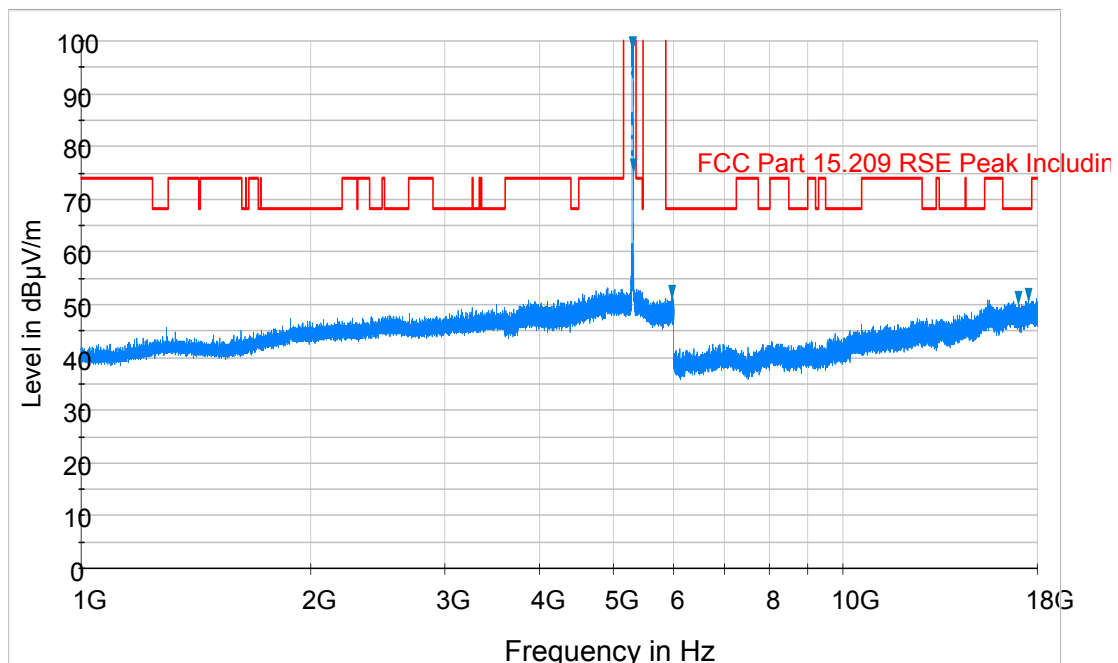


Plot 6-78. Radiated Spurious Plot above 1GHz (802.11a – U2A Ch. 56, Ant. Pol. H)

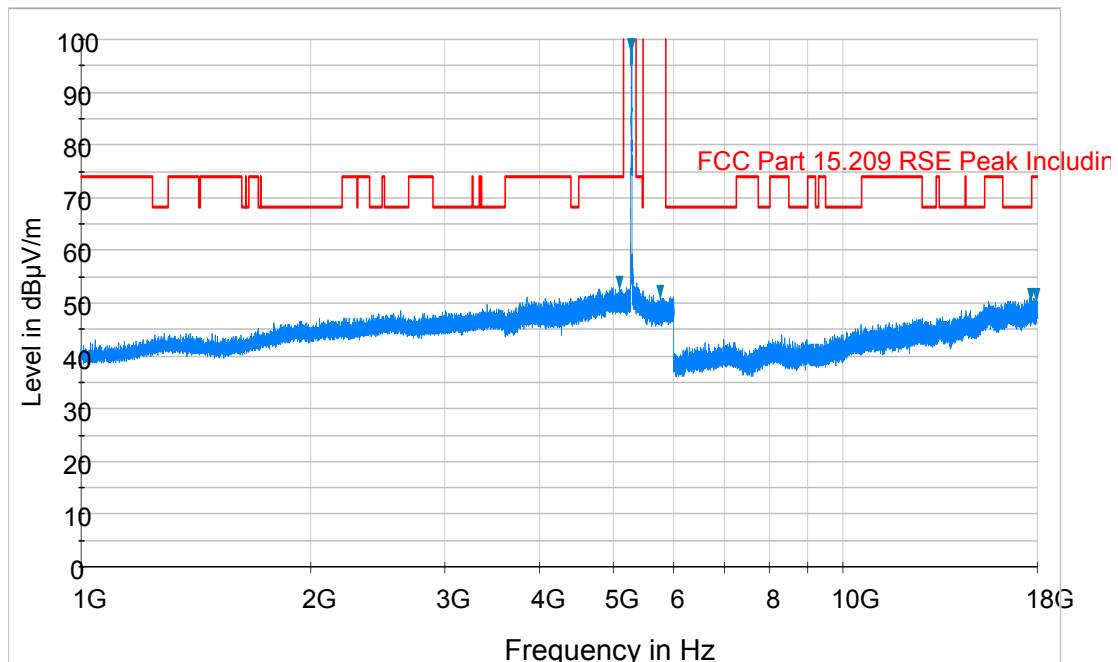


Plot 6-79. Radiated Spurious Plot above 1GHz (802.11a – U2A Ch. 56, Ant. Pol. V)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 67 of 109

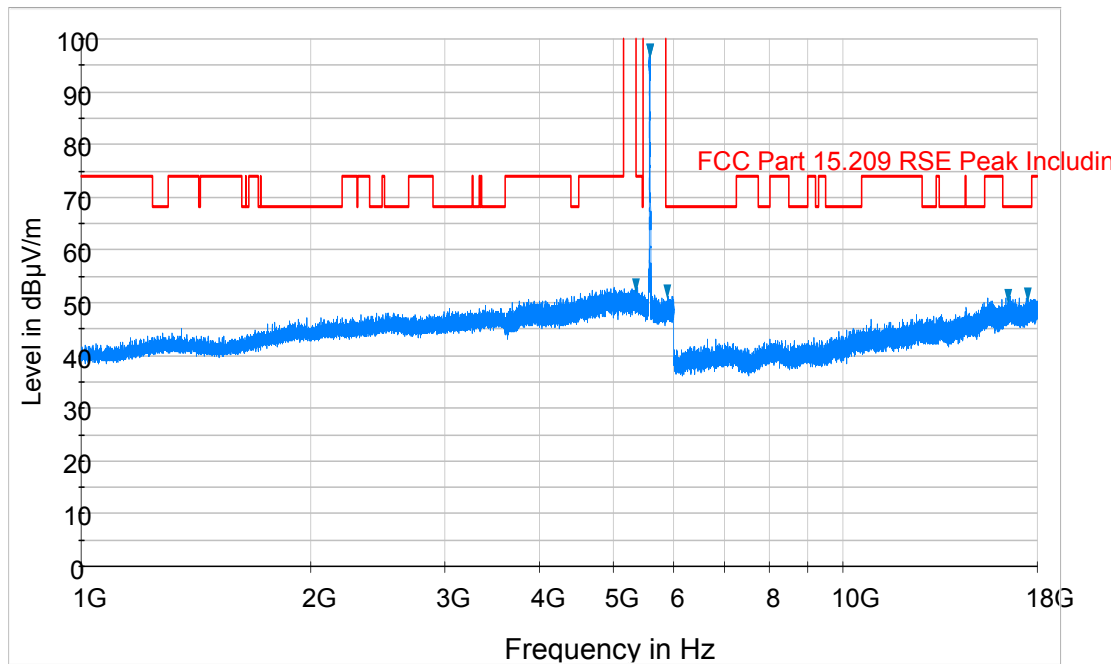


Plot 6-80. Radiated Spurious Plot above 1GHz (802.11a – U2C Ch. 116, Ant. Pol. H)

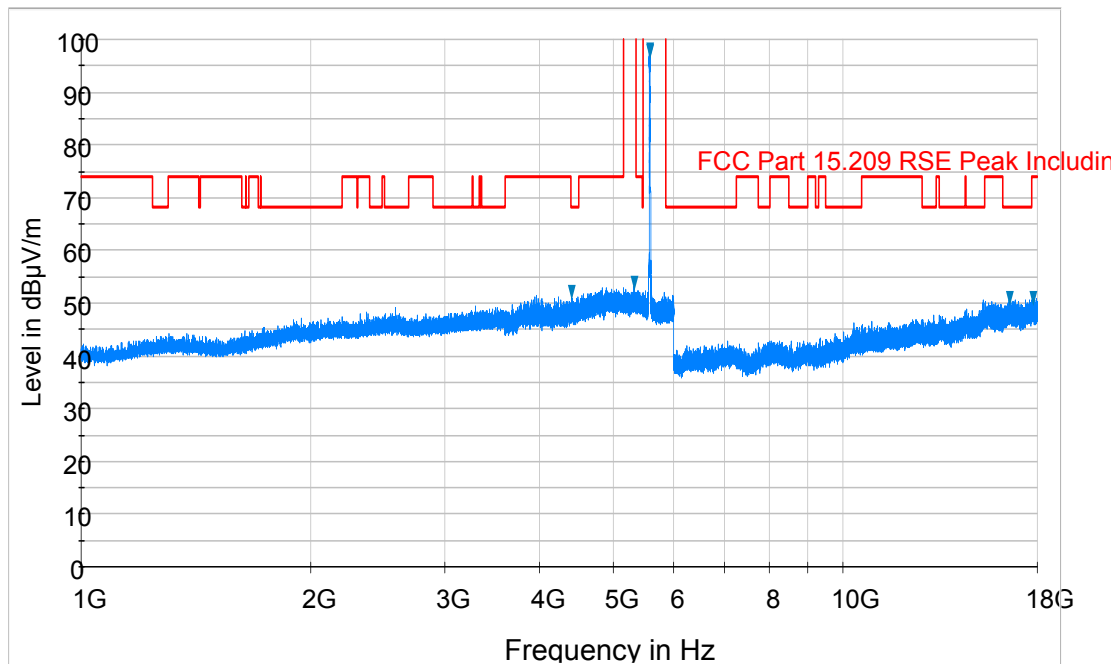


Plot 6-81. Radiated Spurious Plot above 1GHz (802.11a – U2C Ch. 116, Ant. Pol. V)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset	Page 68 of 109

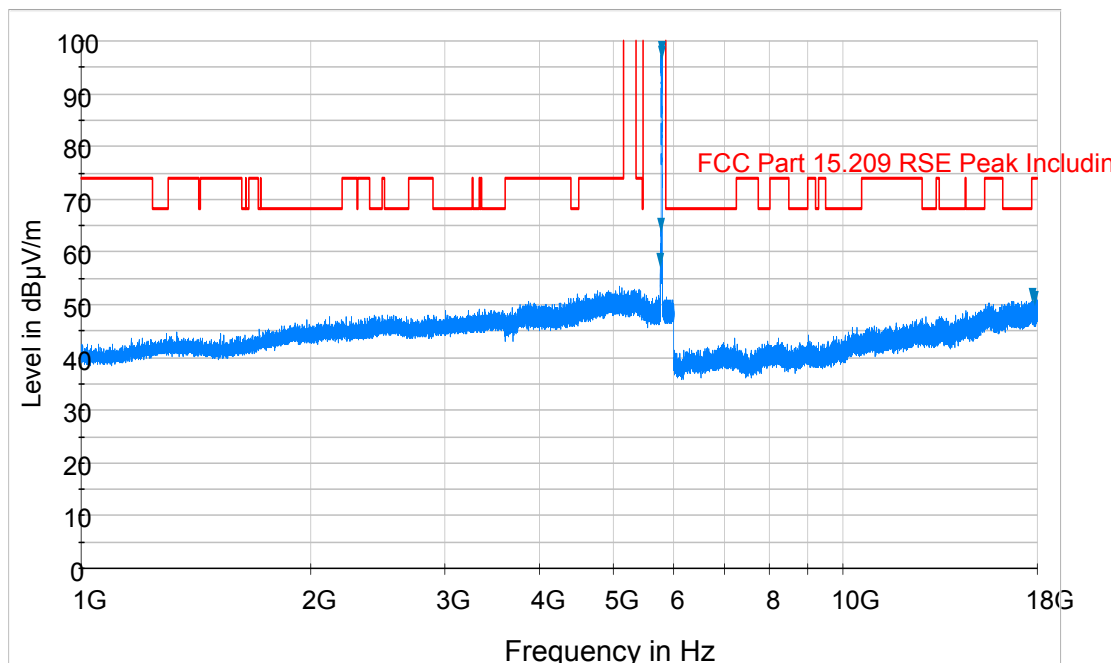

Plot 6-82. Radiated Spurious Plot above 1GHz (802.11a – U3 Ch. 157, Ant. Pol. H)

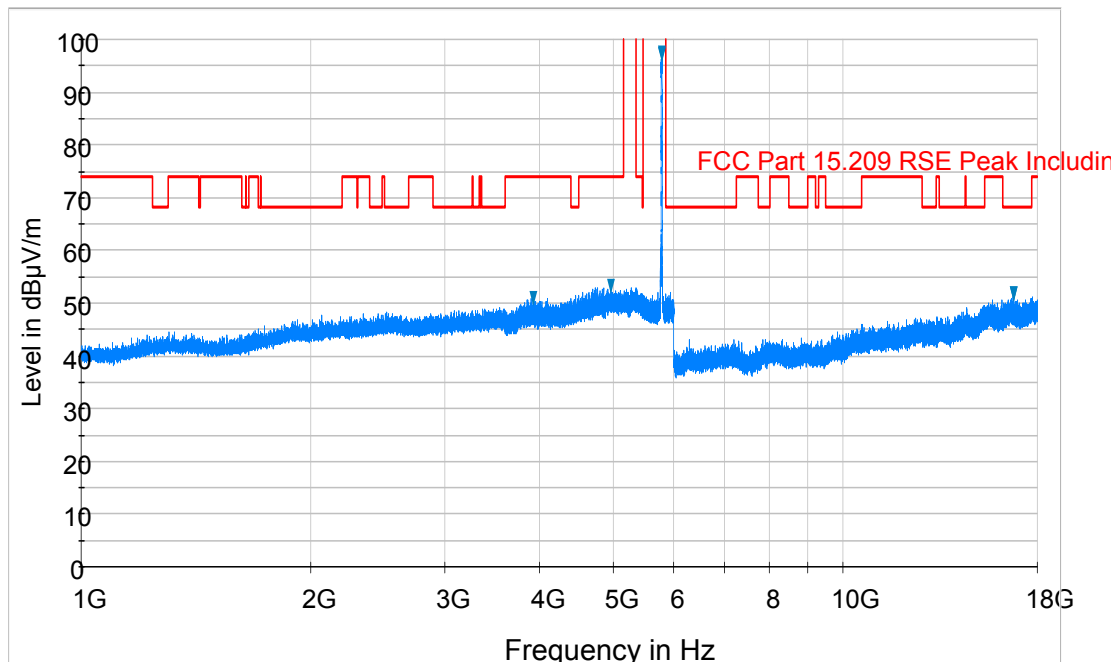

Plot 6-83. Radiated Spurious Plot above 1GHz (802.11a – U3 Ch. 157, Ant. Pol. V)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset	Page 69 of 109

Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	-99.94	Peak	H	46.55	0.00	53.61	68.20	-14.59
* 15540.00	-111.73	Average	H	49.22	0.00	44.49	53.98	-9.49
* 15540.00	-99.55	Peak	H	49.22	0.00	56.67	73.98	-17.31
* 20720.00	-107.65	Average	H	48.73	-9.54	38.54	53.98	-15.44
* 20720.00	-97.00	Peak	H	48.73	-9.54	49.19	73.98	-24.79
25900.00	-96.31	Peak	H	51.07	-9.54	52.22	68.20	-15.98

Table 6-17. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5200MHz
 Channel: 40

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	-99.69	Peak	H	46.56	0.00	53.88	68.20	-14.32
* 15600.00	-111.75	Average	H	49.31	0.00	44.56	53.98	-9.42
* 15600.00	-100.02	Peak	H	49.31	0.00	56.29	73.98	-17.69
* 20800.00	-108.50	Average	H	48.83	-9.54	37.78	53.98	-16.20
* 20800.00	-97.53	Peak	H	48.83	-9.54	48.75	73.98	-25.23
26000.00	-96.88	Peak	H	51.15	-9.54	51.73	68.20	-16.47

Table 6-18. Radiated Measurements

FCC ID: ZNFH950		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 70 of 109

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5240MHz
 Channel: 48

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	-99.78	Peak	H	46.58	0.00	53.80	68.20	-14.40
* 15720.00	-111.76	Average	H	49.58	0.00	44.82	53.98	-9.16
* 15720.00	-100.32	Peak	H	49.58	0.00	56.26	73.98	-17.72
* 20960.00	-107.84	Average	H	48.98	-9.54	38.60	53.98	-15.38
* 20960.00	-98.07	Peak	H	48.98	-9.54	48.37	73.98	-25.61
26200.00	-96.95	Peak	H	51.17	-9.54	51.67	68.20	-16.53

Table 6-19. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5260MHz
 Channel: 52

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	-99.99	Peak	H	46.59	0.00	53.60	68.20	-14.60
* 15780.00	-111.73	Average	H	49.80	0.00	45.07	53.98	-8.91
* 15780.00	-99.88	Peak	H	49.80	0.00	56.92	73.98	-17.06
* 21040.00	-109.38	Average	H	49.04	-9.54	37.11	53.98	-16.87
* 21040.00	-97.90	Peak	H	49.04	-9.54	48.59	73.98	-25.39
26300.00	-95.49	Peak	H	51.24	-9.54	53.21	68.20	-14.99

Table 6-20. Radiated Measurements

FCC ID: ZNFH950		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 71 of 109

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5280MHz
 Channel: 56

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	-99.49	Peak	H	46.61	0.00	54.12	68.20	-14.08
* 15840.00	-111.92	Average	H	50.04	0.00	45.12	53.98	-8.86
* 15840.00	-99.65	Peak	H	50.04	0.00	57.39	73.98	-16.59
* 21120.00	-108.84	Average	H	49.07	-9.54	37.69	53.98	-16.29
* 21120.00	-98.90	Peak	H	49.07	-9.54	47.63	73.98	-26.35
26400.00	-94.21	Peak	H	51.37	-9.54	54.61	68.20	-13.59

Table 6-21. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	-111.72	Average	H	46.64	0.00	41.92	53.98	-12.06
* 10640.00	-99.43	Peak	H	46.64	0.00	54.21	73.98	-19.77
* 15960.00	-112.01	Average	H	50.49	0.00	45.48	53.98	-8.50
* 15960.00	-99.67	Peak	H	50.49	0.00	57.82	73.98	-16.16
* 21280.00	-107.31	Average	H	49.15	-9.54	39.30	53.98	-14.68
* 21280.00	-98.09	Peak	H	49.15	-9.54	48.52	73.98	-25.46
26600.00	-102.90	Peak	H	47.61	-9.54	42.17	68.20	-26.03

Table 6-22. Radiated Measurements

FCC ID: ZNFH950		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 72 of 109

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	-111.50	Average	H	46.98	0.00	42.48	53.98	-11.50
* 11000.00	-100.91	Peak	H	46.98	0.00	53.07	73.98	-20.91
16500.00	-99.91	Peak	H	52.45	0.00	59.54	68.20	-8.67
22000.00	-97.18	Peak	H	49.46	-9.54	49.74	68.20	-18.46
27500.00	-104.30	Peak	H	47.92	-9.54	41.08	68.20	-27.12

Table 6-23. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5580MHz
 Channel: 116

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11160.00	-111.77	Average	H	47.20	0.00	42.44	53.98	-11.54
* 11160.00	-99.56	Peak	H	47.20	0.00	54.65	73.98	-19.33
16740.00	-99.34	Peak	H	53.73	0.00	61.39	68.20	-6.81
* 22320.00	-108.74	Average	H	49.87	-9.54	38.59	53.98	-15.39
* 22320.00	-99.27	Peak	H	49.87	-9.54	48.06	73.98	-25.92
27900.00	-104.76	Peak	H	48.09	-9.54	40.79	68.20	-27.41

Table 6-24. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5720MHz
 Channel: 144

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
11440.00	-111.71	Average	H	47.64	0.00	42.93	53.98	-11.04
11440.00	-99.59	Peak	H	47.64	0.00	55.05	73.98	-18.92
17160.00	-99.37	Peak	H	54.67	0.00	62.30	68.20	-5.90
22880.00	-108.94	Average	H	49.98	-9.54	38.50	53.98	-15.48
22880.00	-99.01	Peak	H	49.98	-9.54	48.43	73.98	-25.55
28600.00	-105.64	Peak	H	48.35	-9.54	40.17	68.20	-28.03

Table 6-25. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5745MHz
 Channel: 149

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11490.00	-111.66	Average	H	47.88	0.00	43.22	53.98	-10.76
* 11490.00	-99.76	Peak	H	47.88	0.00	55.12	73.98	-18.86
17235.00	-110.39	Peak	H	54.99	0.00	51.61	68.20	-16.59
* 22980.00	-109.07	Average	H	49.94	-9.54	38.32	53.98	-15.65
* 22980.00	-98.06	Peak	H	49.94	-9.54	49.33	73.98	-24.64
28725.00	-105.49	Peak	H	48.26	-9.54	40.23	68.20	-27.97

Table 6-26. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5785MHz
 Channel: 157

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11570.00	-111.59	Average	H	48.15	0.00	43.56	53.98	-10.42
* 11570.00	-99.48	Peak	H	48.15	0.00	55.67	73.98	-18.31
17355.00	-109.59	Peak	H	55.40	0.00	52.82	68.20	-15.38
23140.00	-97.45	Peak	H	50.05	-9.54	50.06	68.20	-18.14
28925.00	-105.38	Peak	H	48.28	-9.54	40.35	68.20	-27.85

Table 6-27. Radiated Measurements


Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	-111.51	Average	H	48.38	0.00	43.87	53.98	-10.11
* 11650.00	-99.64	Peak	H	48.38	0.00	55.74	73.98	-18.24
17475.00	-109.26	Peak	H	56.02	0.00	53.77	68.20	-14.43
23300.00	-98.01	Peak	H	50.10	-9.54	49.54	68.20	-18.66
29125.00	-105.24	Peak	H	48.24	-9.54	40.46	68.20	-27.74


Table 6-28. Radiated Measurements

Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209

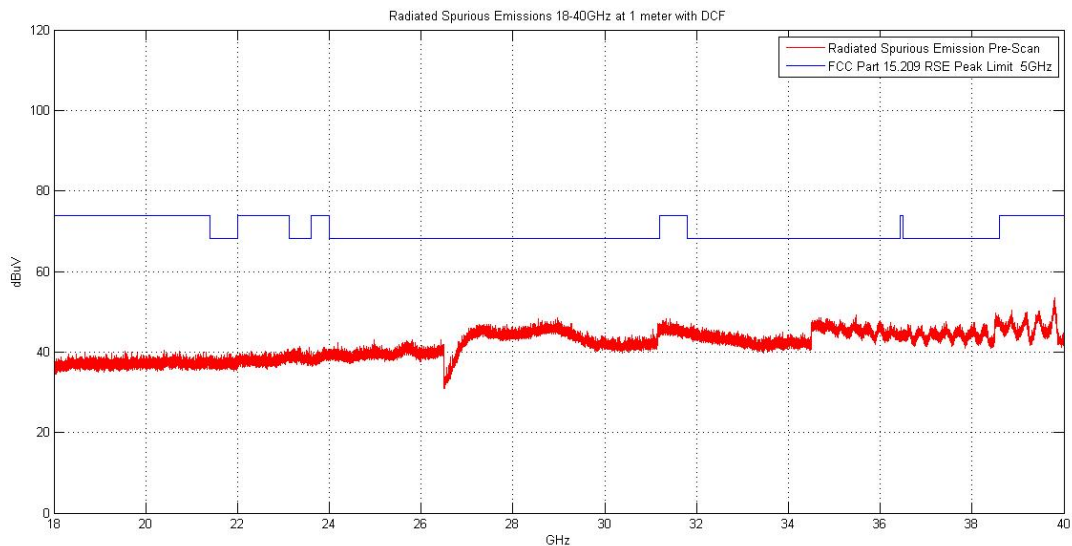

Plot 6-84. Radiated Spurious Plot above 18GHz (802.11a – Ant. Pol. H)

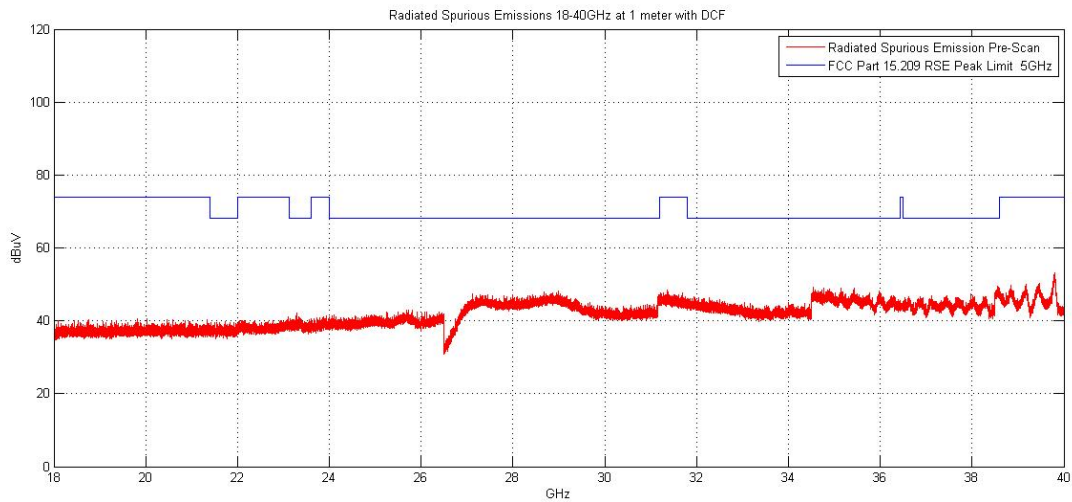

Plot 6-85. Radiated Spurious Plot above 18GHz (802.11a – Ant. Pol. V)

FCC ID: ZNFH950		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset	Page 76 of 109	

6.7.2 Radiated Band Edge Measurements (20MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5180MHz

Channel: 36

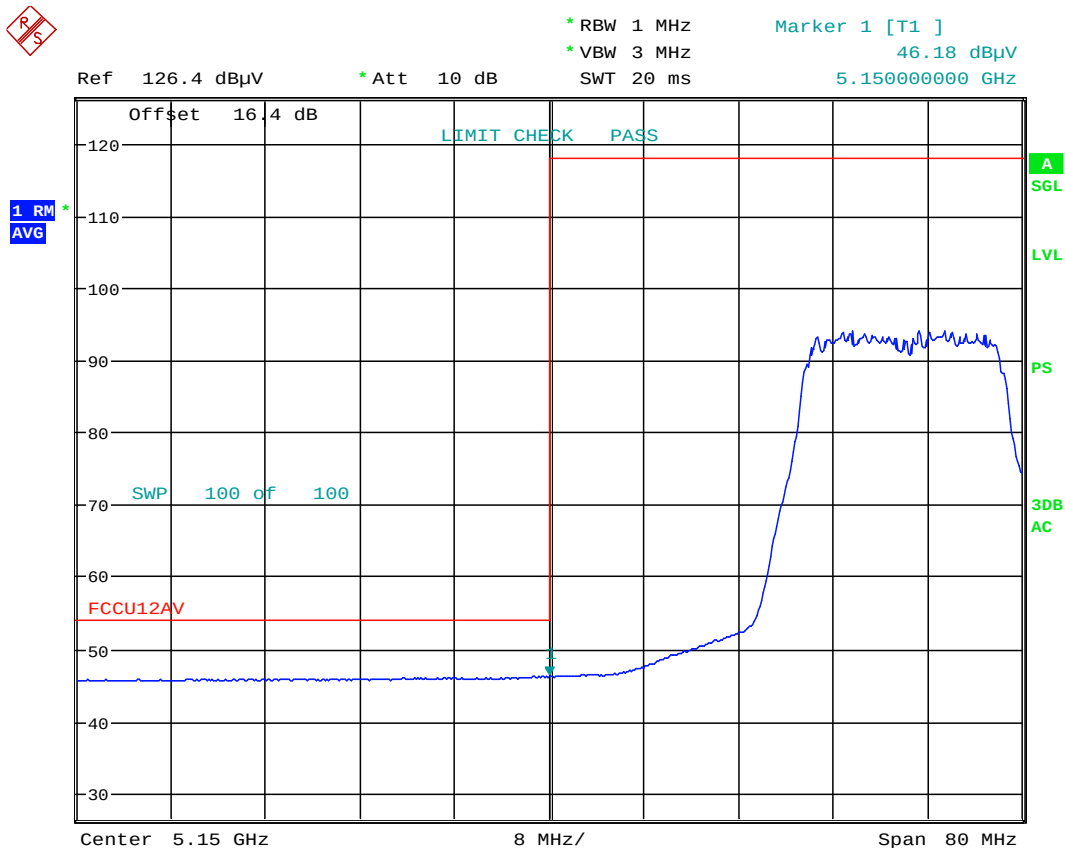


Date: 14.JAN.2015 01:56:48

Plot 6-86. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 77 of 109

Radiated Band Edge Measurements (20MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

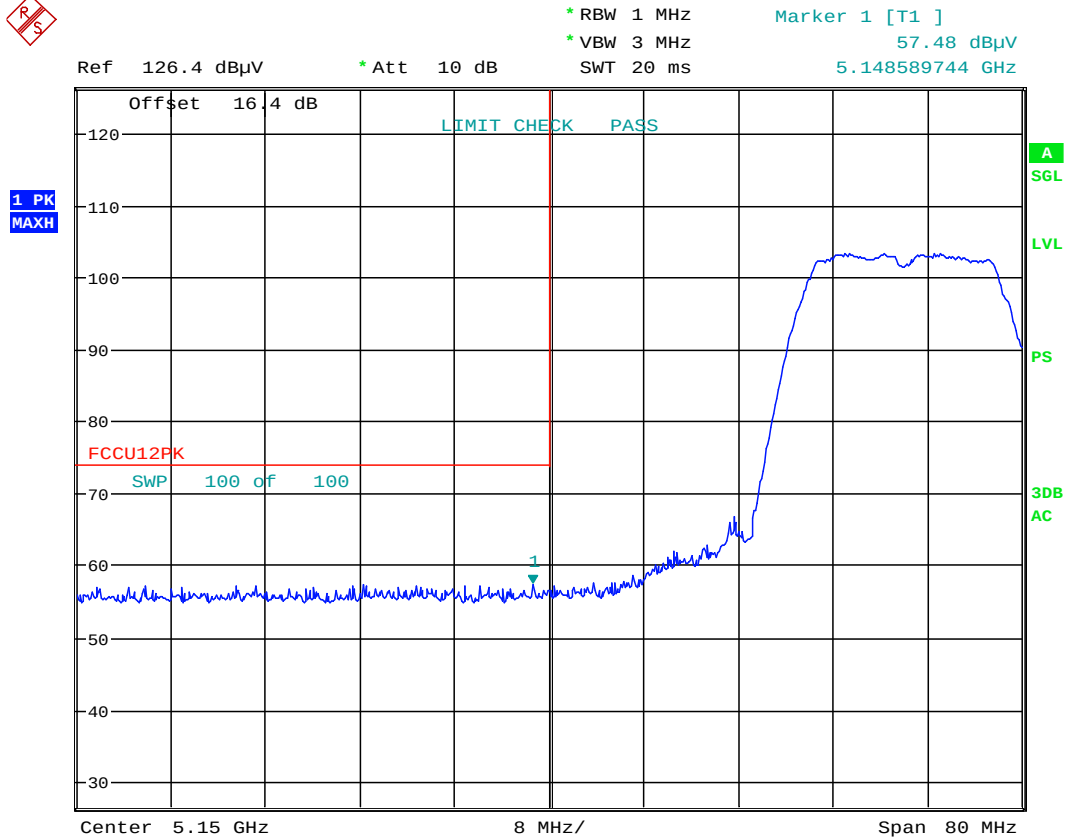

Date: 14.JAN.2015 01:56:14

Plot 6-87. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 78 of 109

Radiated Band Edge Measurements (20MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5320MHz

Channel: 64

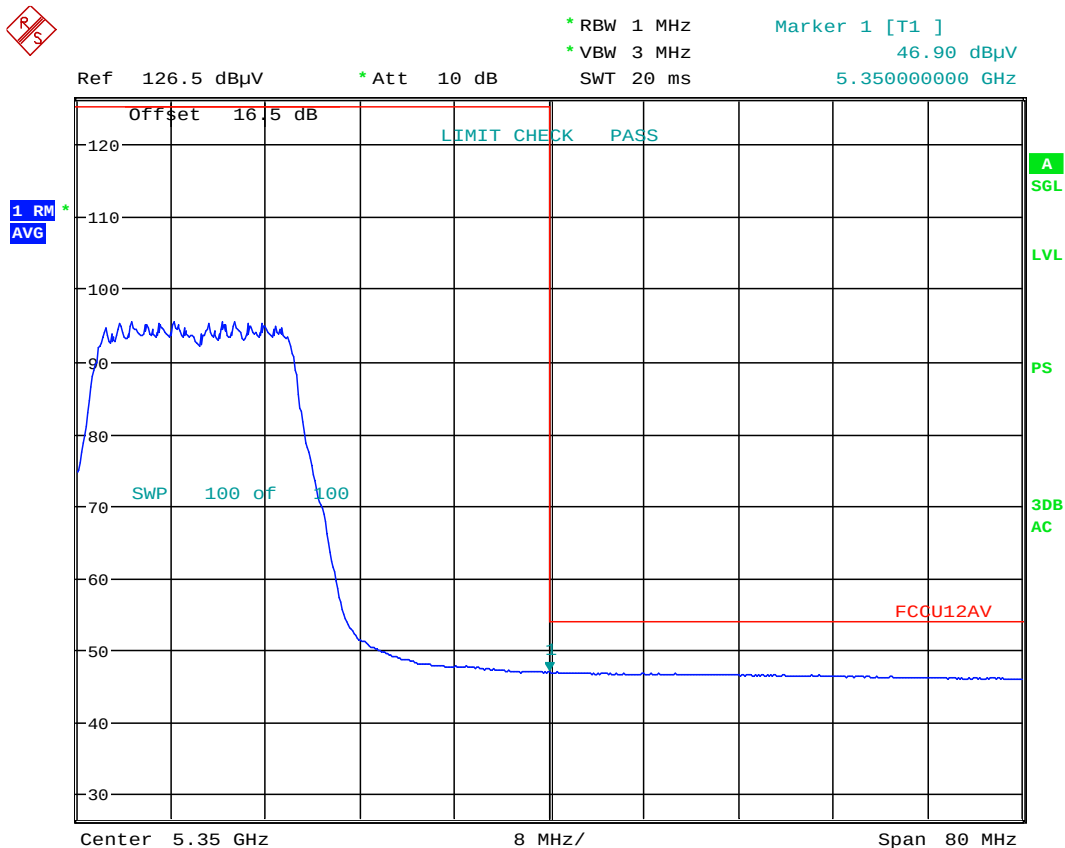


Date: 14.JAN.2015 02:05:47

Plot 6-88. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 79 of 109

Radiated Band Edge Measurements (20MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

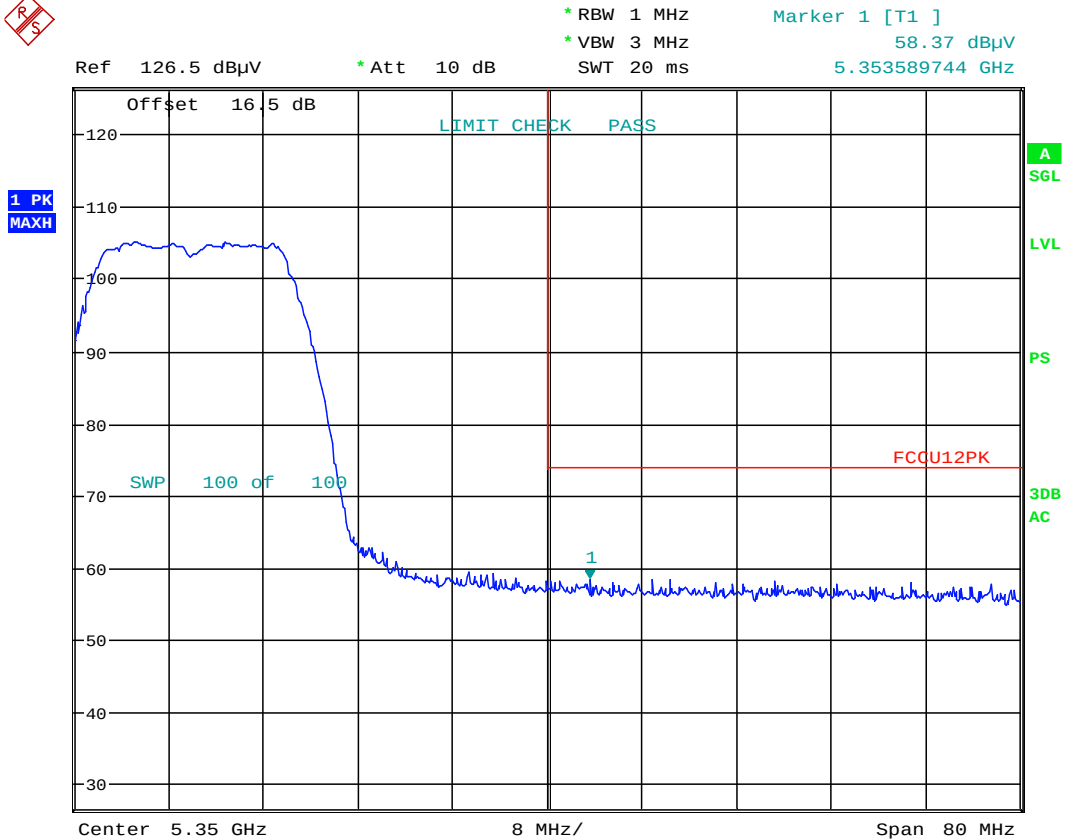

Date: 14.JAN.2015 02:05:18

Plot 6-89. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 80 of 109

Radiated Band Edge Measurements (20MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5500MHz

Channel: 100

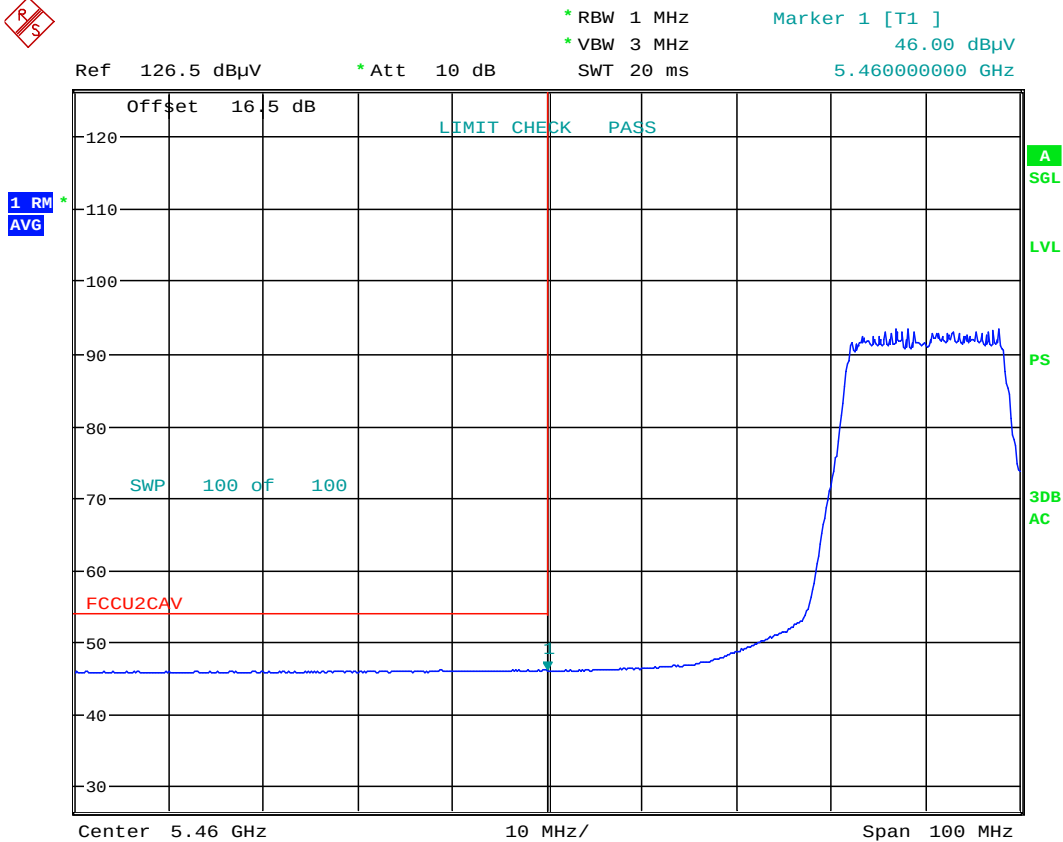


Date: 14.JAN.2015 02:18:31

Plot 6-90. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 81 of 109

Radiated Band Edge Measurements (20MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209

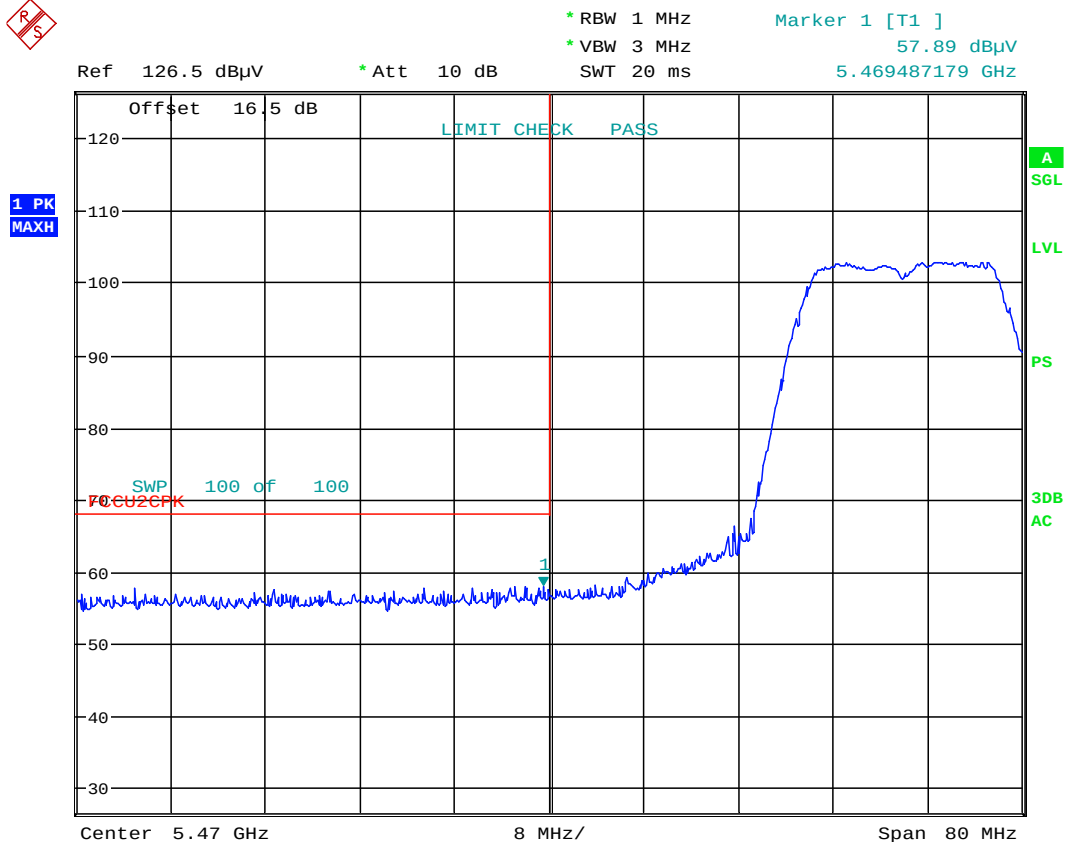

Date: 14.JAN.2015 02:17:49

Plot 6-91. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 82 of 109

Radiated Band Edge Measurements (20MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5825MHz

Channel: 165

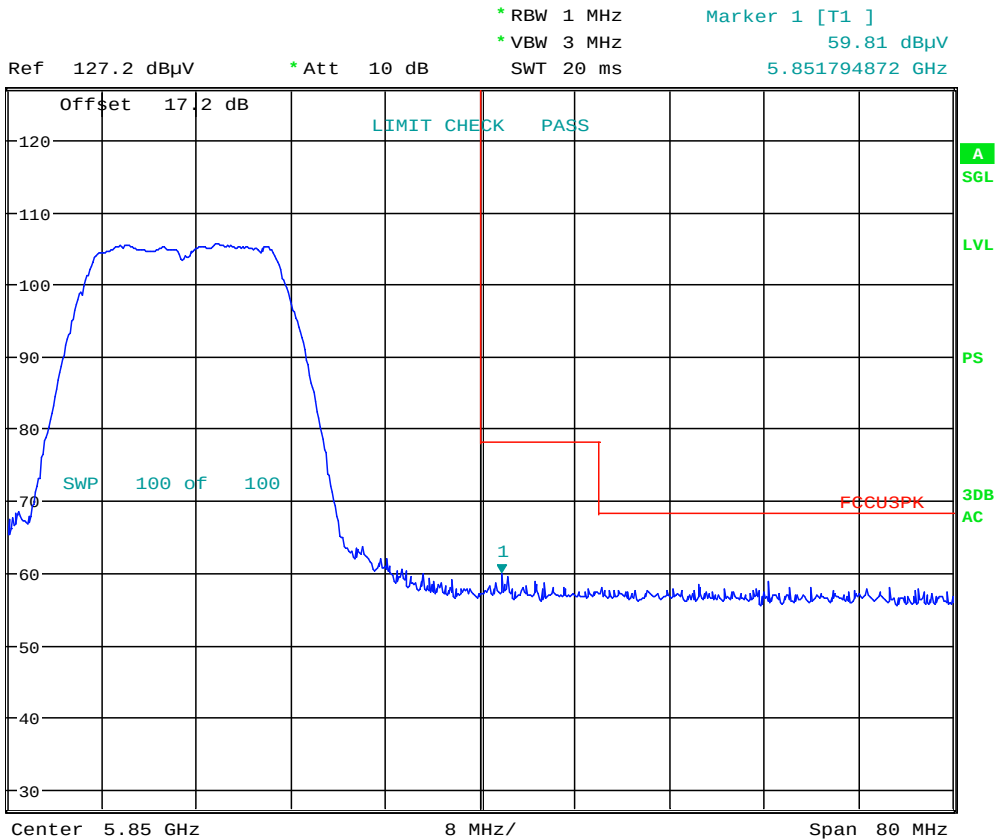


Date: 14.JAN.2015 02:26:53

Plot 6-92. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 83 of 109

6.7.3 Radiated Band Edge Measurements (40MHz BW) §15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5190MHz
Channel: 38

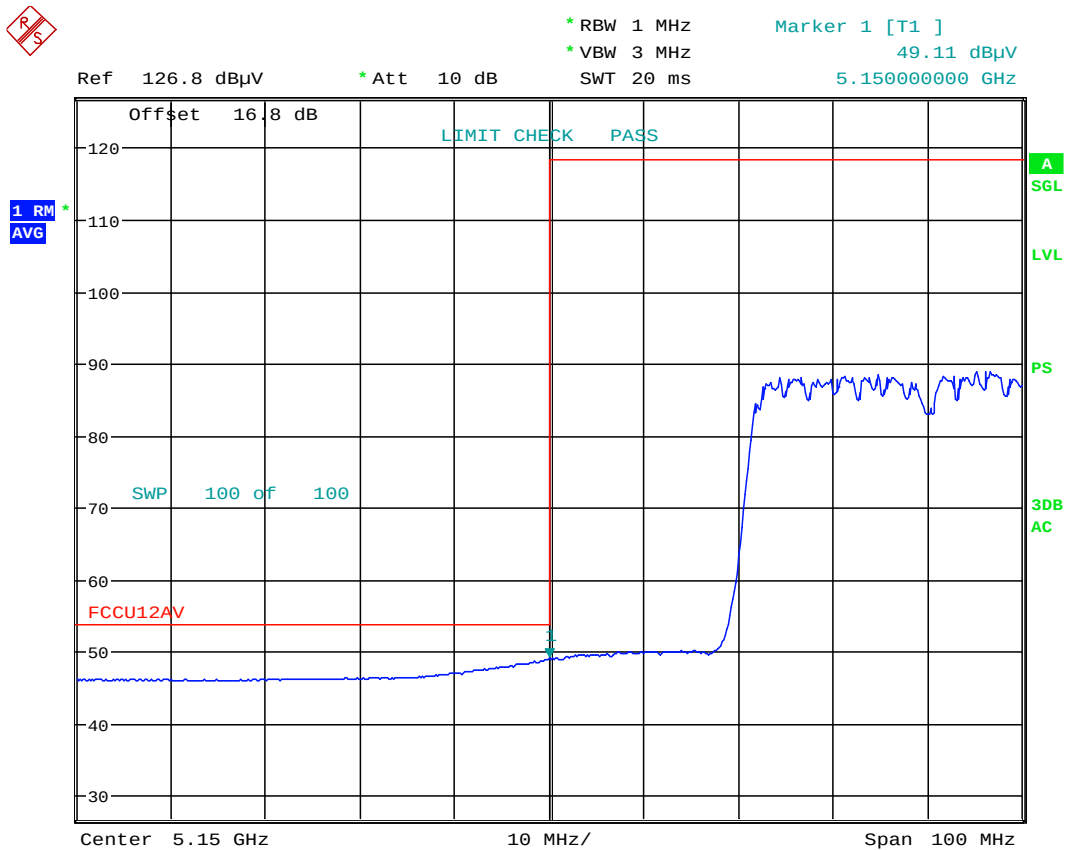


Date: 14.JAN.2015 01:58:21

Plot 6-93. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 84 of 109

Radiated Band Edge Measurements (40MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

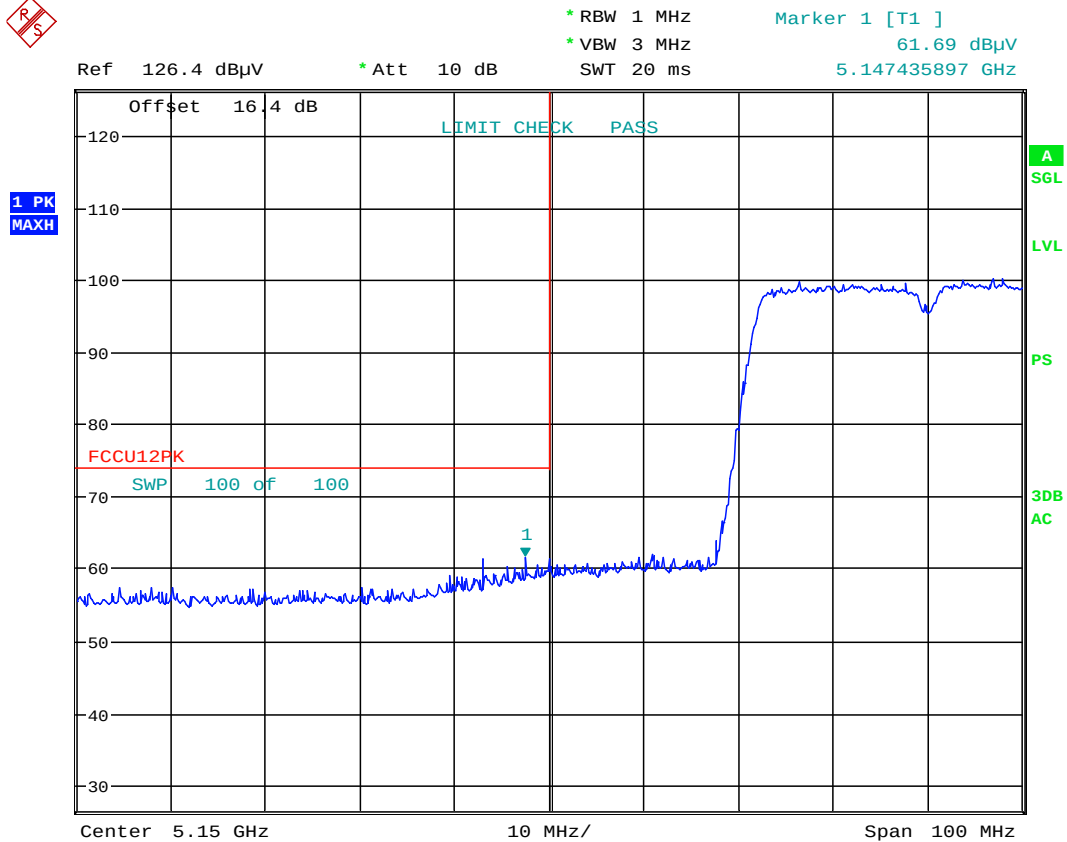


Date: 14.JAN.2015 01:58:57

Plot 6-94. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 85 of 109

Radiated Band Edge Measurements (40MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209

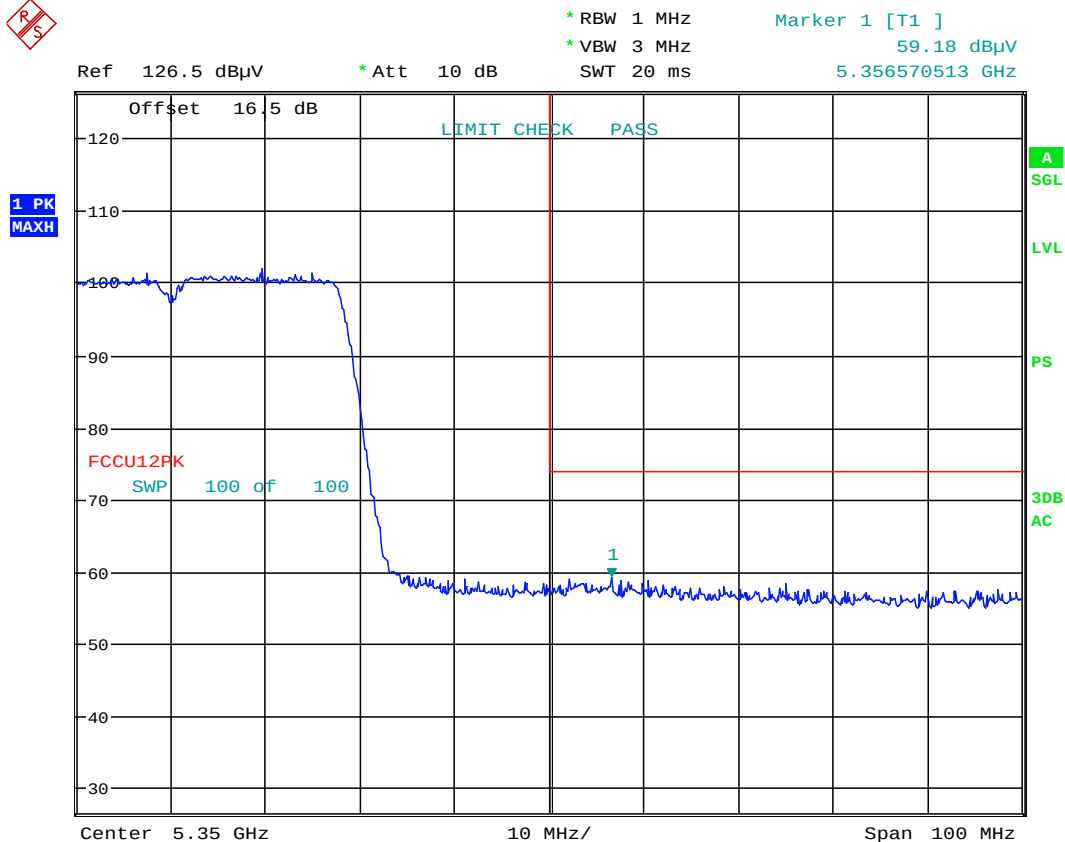

Date: 14.JAN.2015 02:08:05

Plot 6-96. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 87 of 109

Radiated Band Edge Measurements (40MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5510MHz

Channel: 102

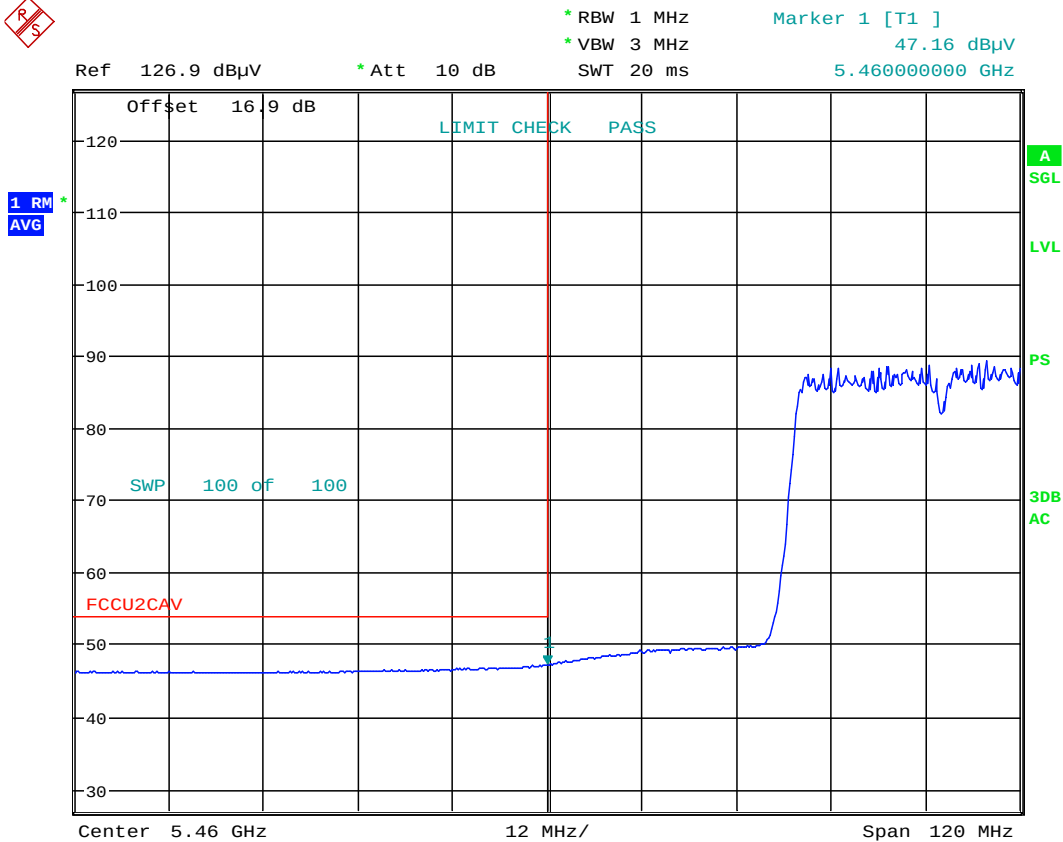


Date: 14.JAN.2015 02:19:52

Plot 6-97. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 88 of 109

Radiated Band Edge Measurements (40MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

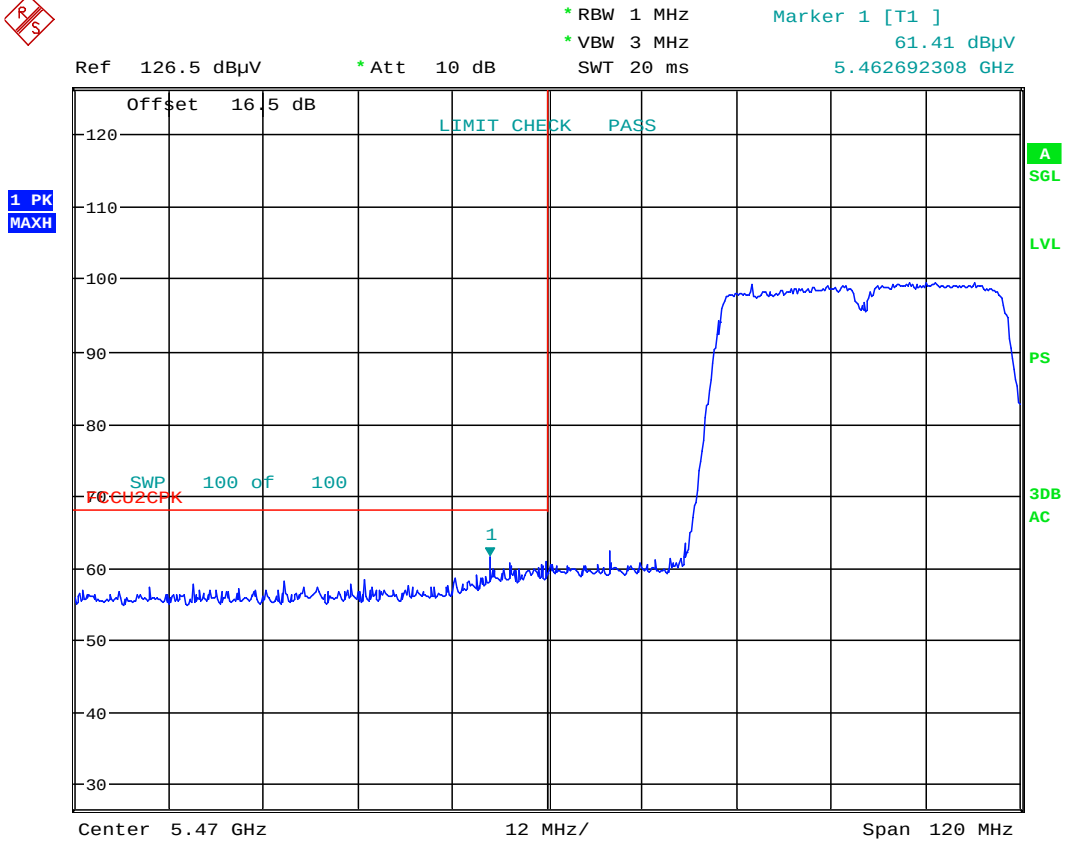

Date: 14.JAN.2015 02:20:32

Plot 6-98. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 89 of 109

6.7.4 Radiated Band Edge Measurements (80MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11n (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5210MHz

Channel: 42

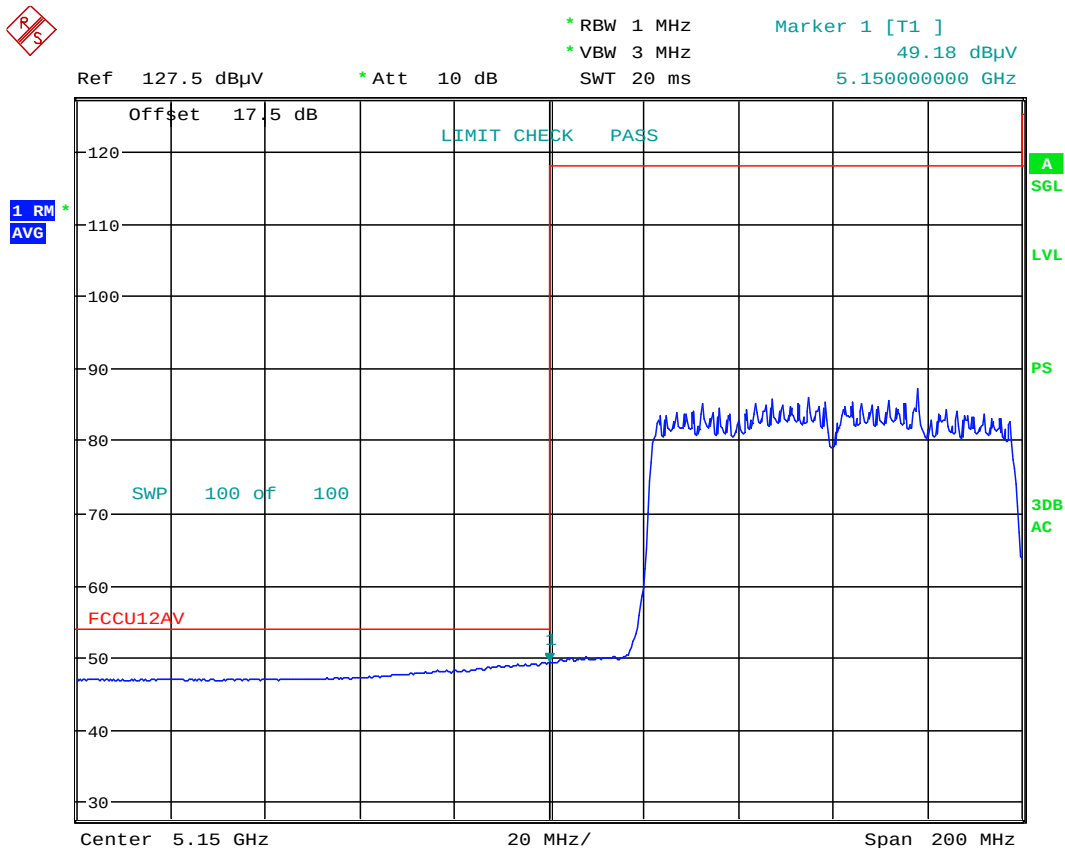


Date: 14.JAN.2015 02:01:09

Plot 6-100. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 91 of 109

Radiated Band Edge Measurements (80MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209

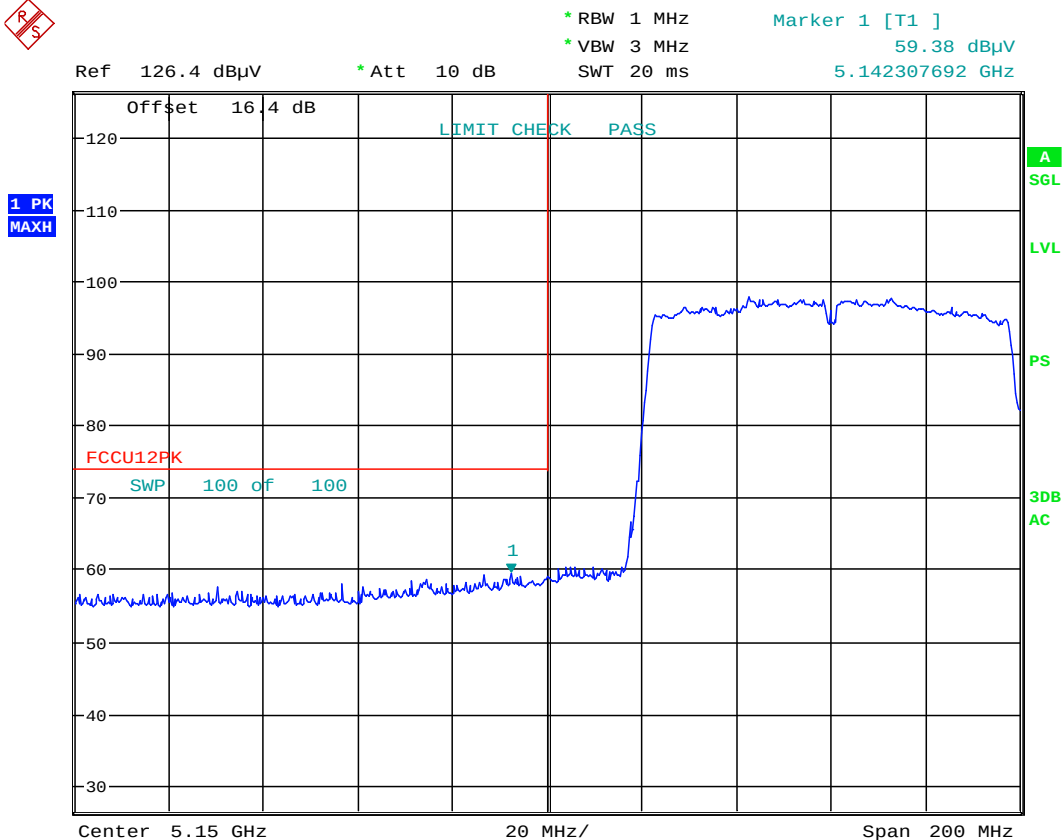

Date: 14.JAN.2015 02:00:24

Plot 6-101. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 92 of 109

Radiated Band Edge Measurements (80MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5290MHz

Channel: 58

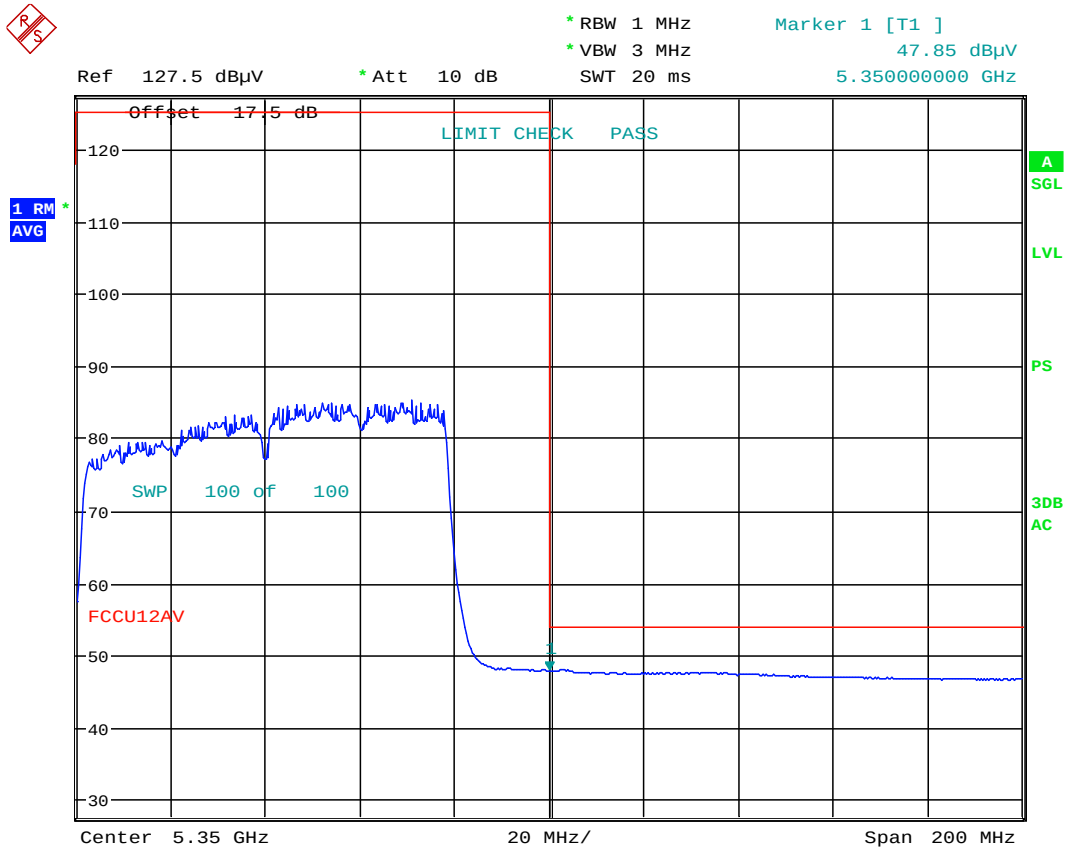


Date: 14.JAN.2015 02:09:59

Plot 6-102. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 93 of 109

Radiated Band Edge Measurements (80MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

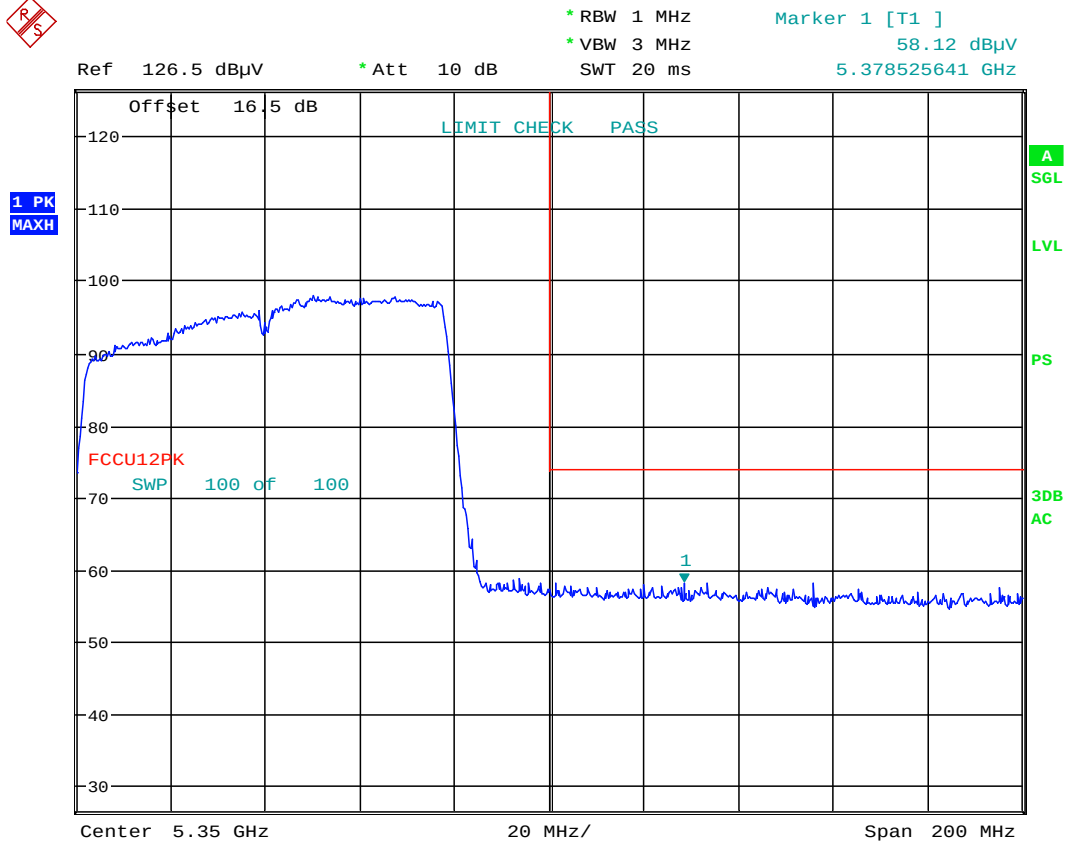

Date: 14.JAN.2015 02:12:27

Plot 6-103. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 94 of 109

Radiated Band Edge Measurements (80MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5530MHz

Channel: 106

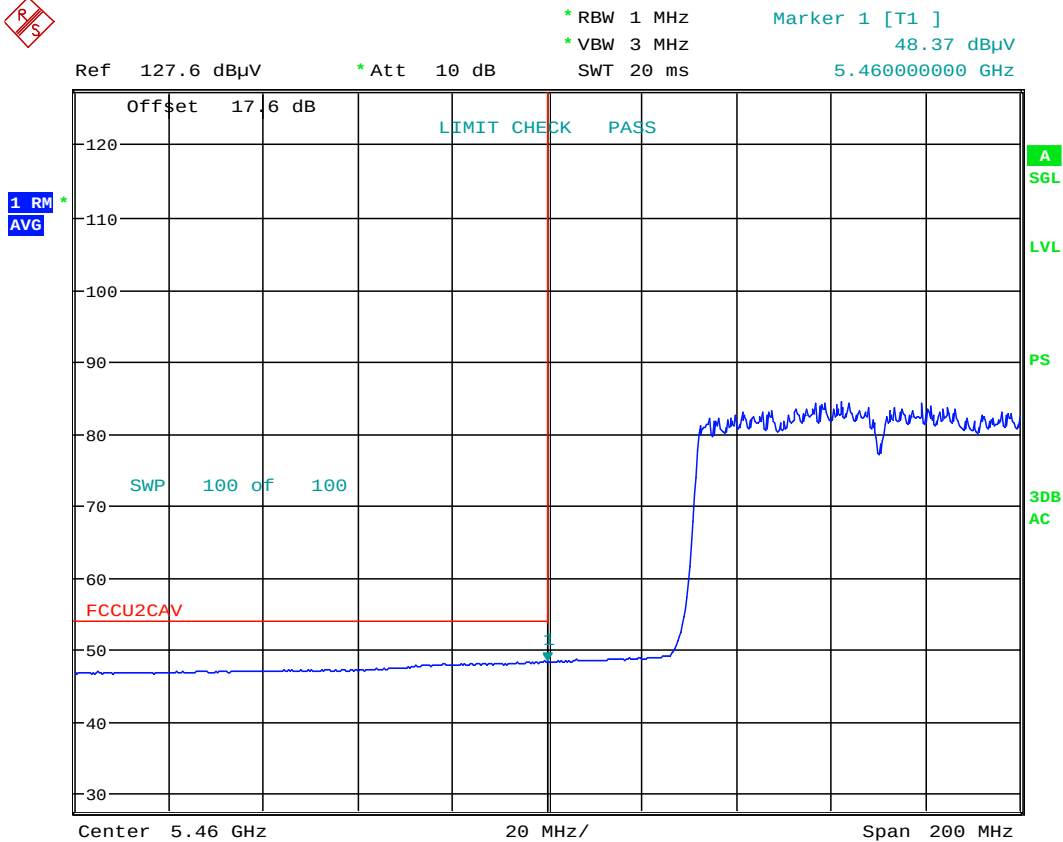


Date: 14.JAN.2015 02:23:06

Plot 6-104. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 95 of 109

Radiated Band Edge Measurements (80MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209

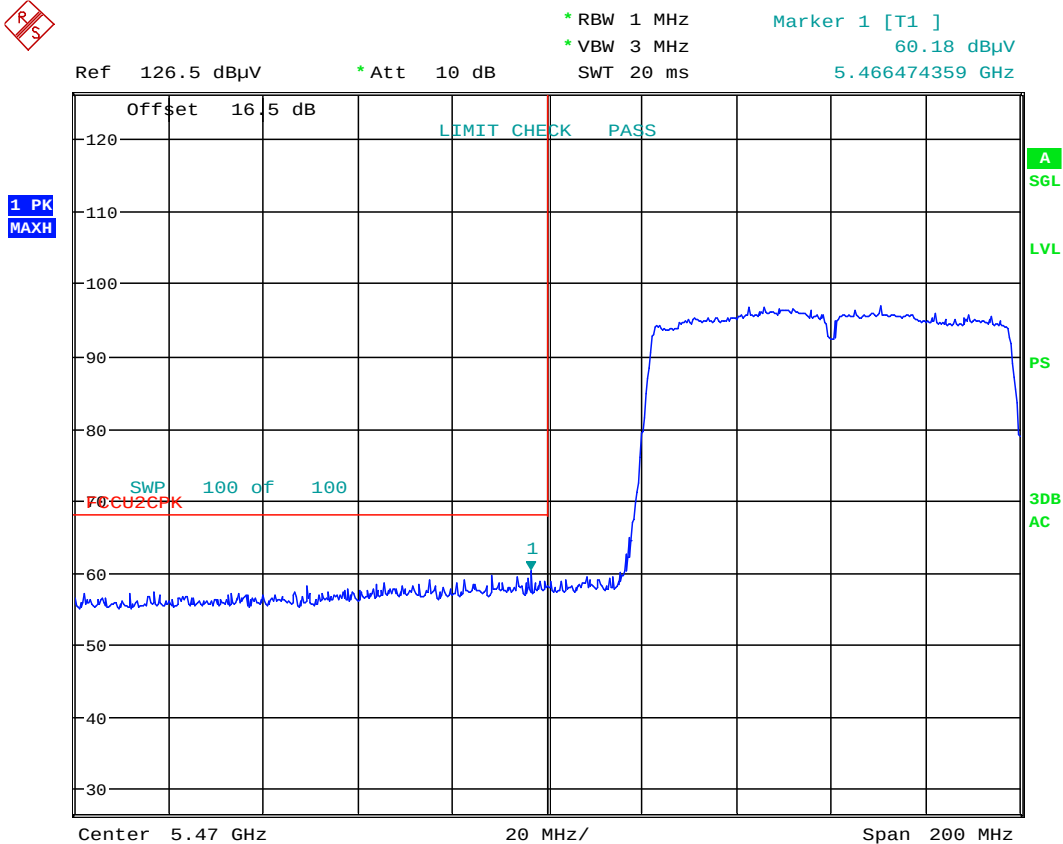

Date: 14.JAN.2015 02:22:14

Plot 6-105. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 96 of 109

Radiated Band Edge Measurements (80MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5775MHz

Channel: 155

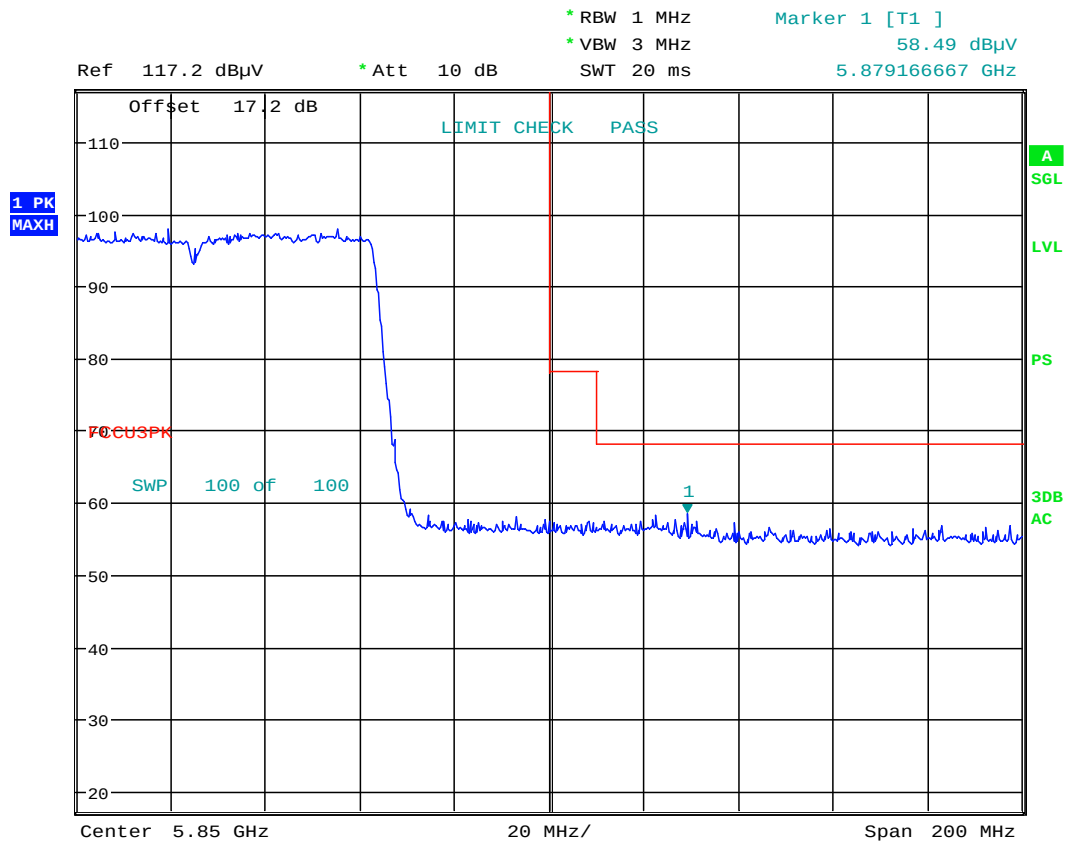

Date: 10.FEB.2015 00:24:40

Plot 6-106. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 97 of 109

6.8 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 6-29 per Section 15.209.

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 6-29. Radiated Limits

Test Procedures Used

ANSI C63.4-2009

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: ZNFH950		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 98 of 109

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

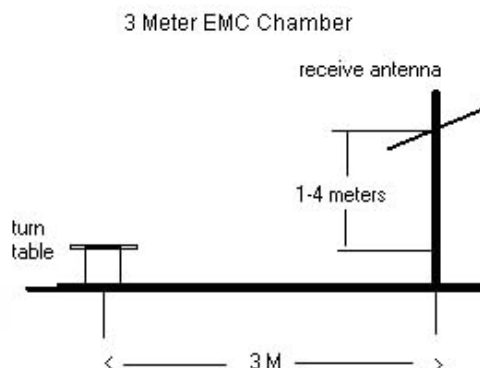


Figure 6-6. Test Instrument & Measurement Setup


Test Notes

1. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 6-10.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots. Rohde & Schwarz EMC32, Version 9.15.00 automated test software was used to perform the Radiated Spurious Emissions Pre-Scan testing.


FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset	Page 99 of 109

Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209

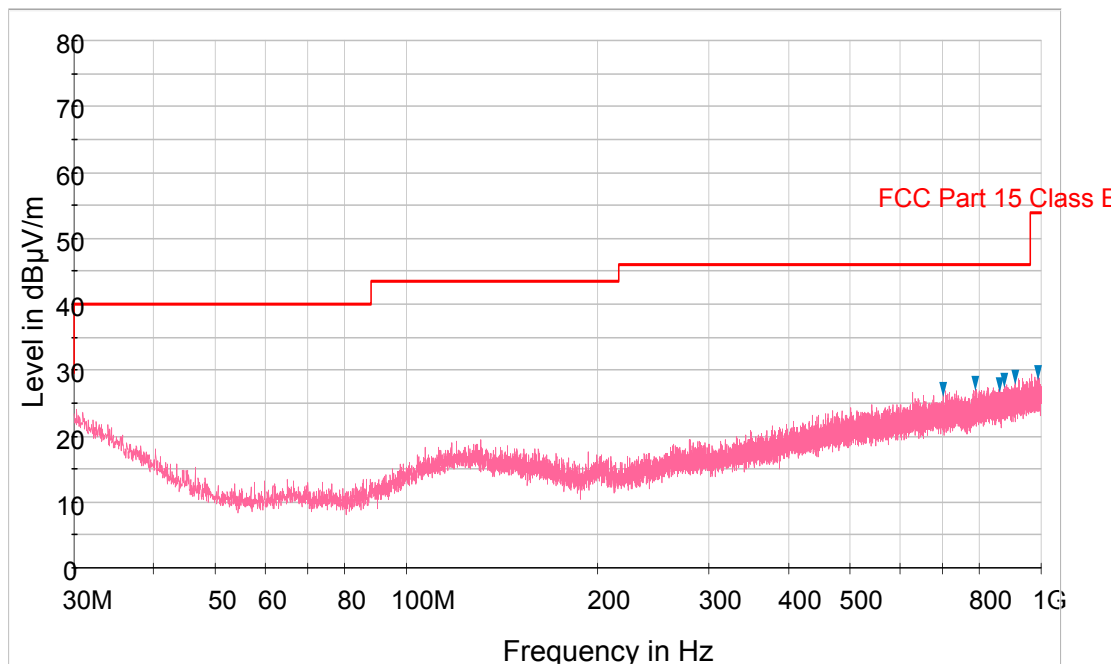

Plot 6-107. Radiated Spurious Plot below 1GHz (802.11a – U3 Ch. 157, Ant. Pol. H)

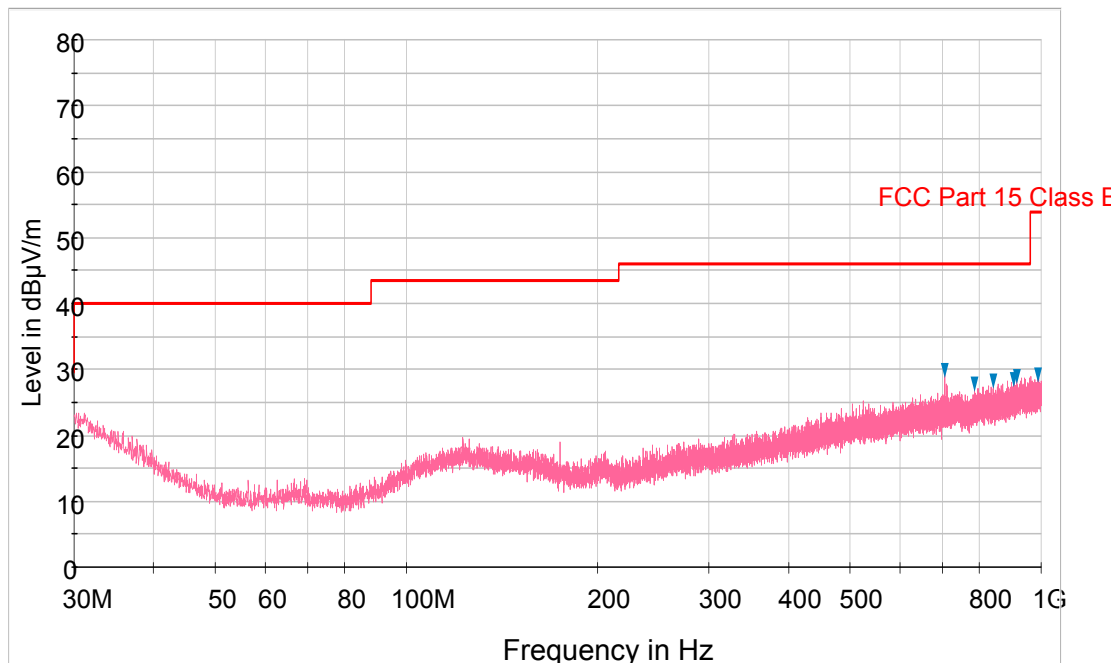


Plot 6-108. Radiated Spurious Plot below 1GHz (802.11a – U3 Ch. 157, Ant. Pol. V)

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset	Page 100 of 109

6.9 Line-Conducted Test Data

\$15.407

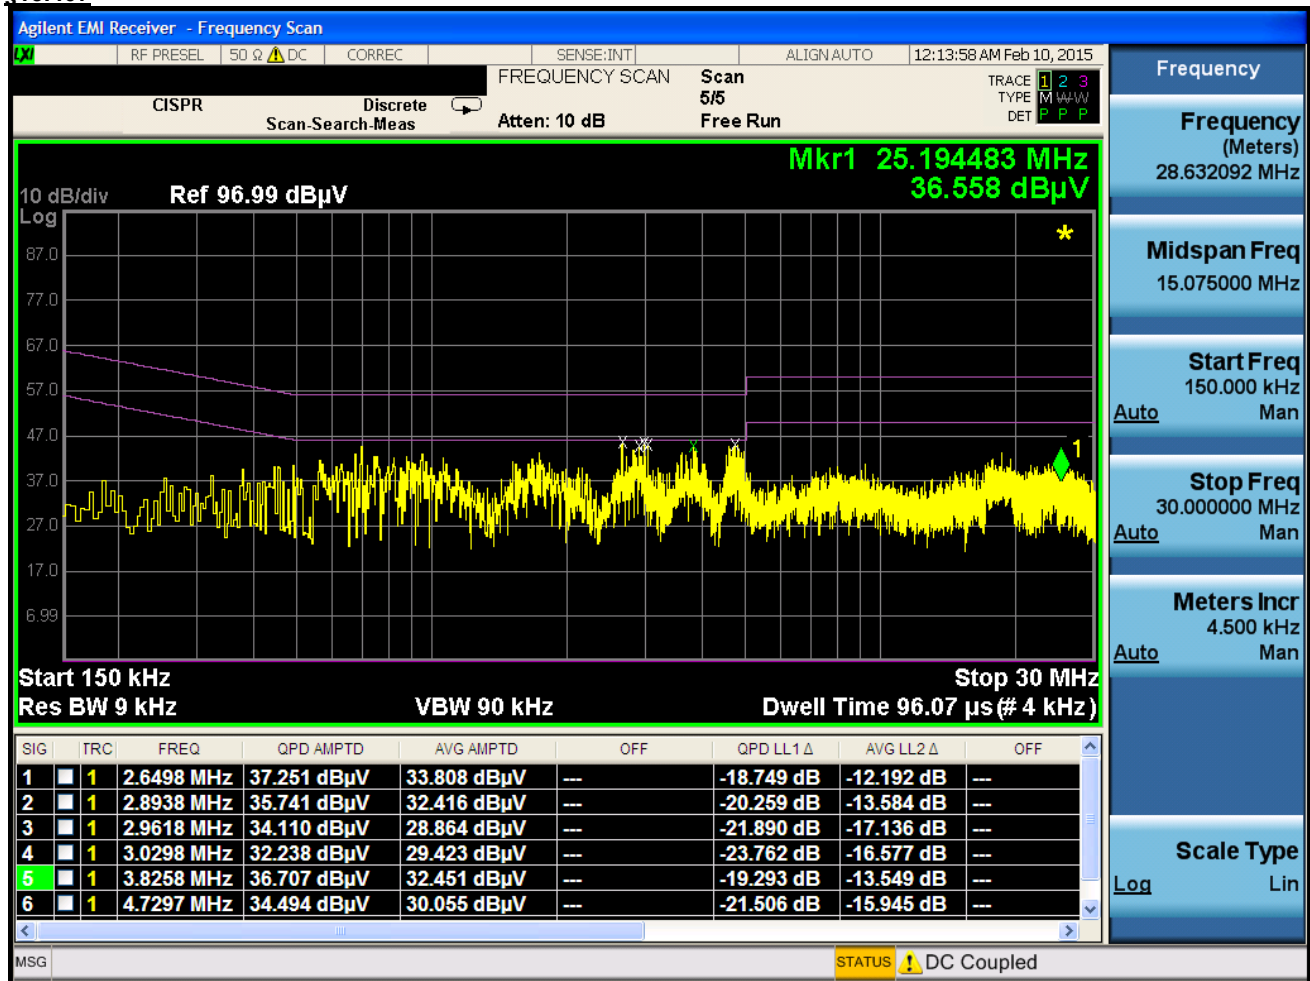

Plot 6-109. Line Conducted Plot with 802.11a UNII Band 1 (L1)


Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 36. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. L1 = Phase; N = Neutral
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
6. Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 - 1/26, 2/10/2015	EUT Type: Portable Handset		Page 101 of 109

Line-Conducted Test Data

\$15.407

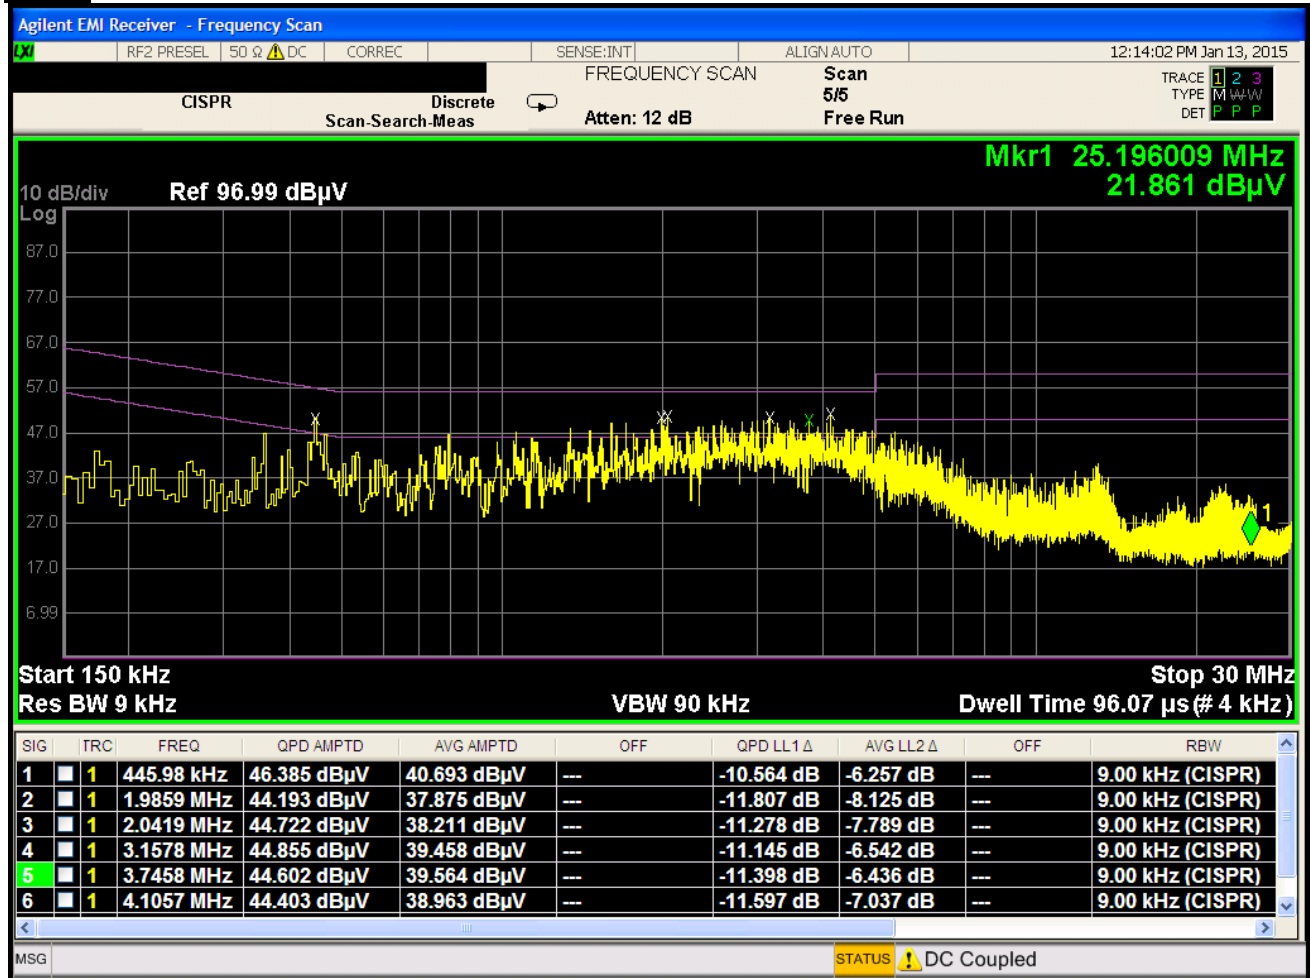

Plot 6-110. Line Conducted Plot with 802.11a UNII Band 1 (N)


Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 36. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. L1 = Phase; N = Neutral
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
6. Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 - 1/26, 2/10/2015	EUT Type: Portable Handset		Page 102 of 109

Line-Conducted Test Data

\$15.407

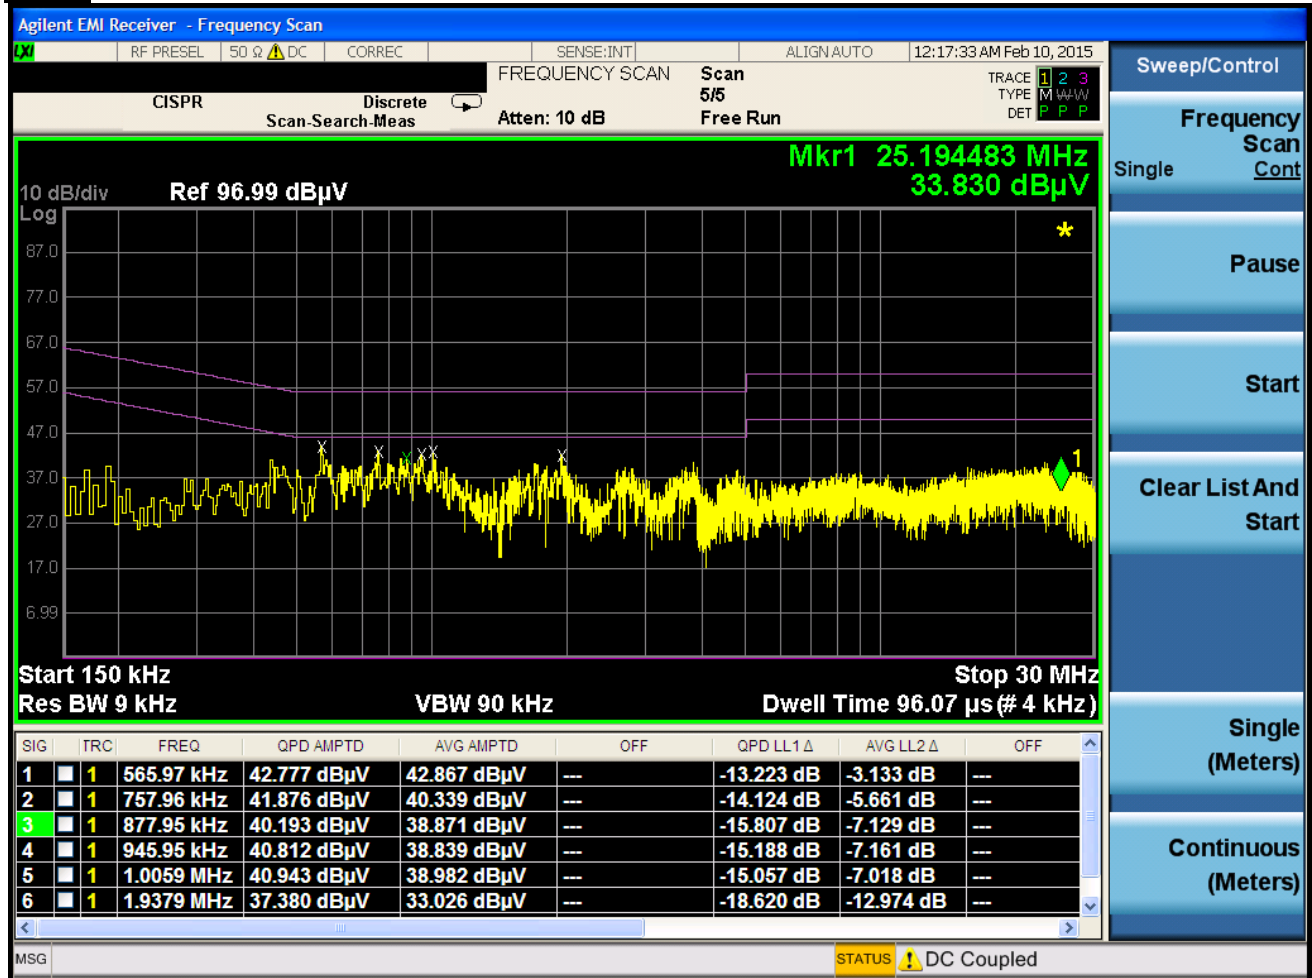

Plot 6-111. Line Conducted Plot with 802.11a UNII Band 2A (L1)


Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 52. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. L1 = Phase; N = Neutral
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
6. Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 - 1/26, 2/10/2015	EUT Type: Portable Handset		Page 103 of 109

Line-Conducted Test Data

\$15.407

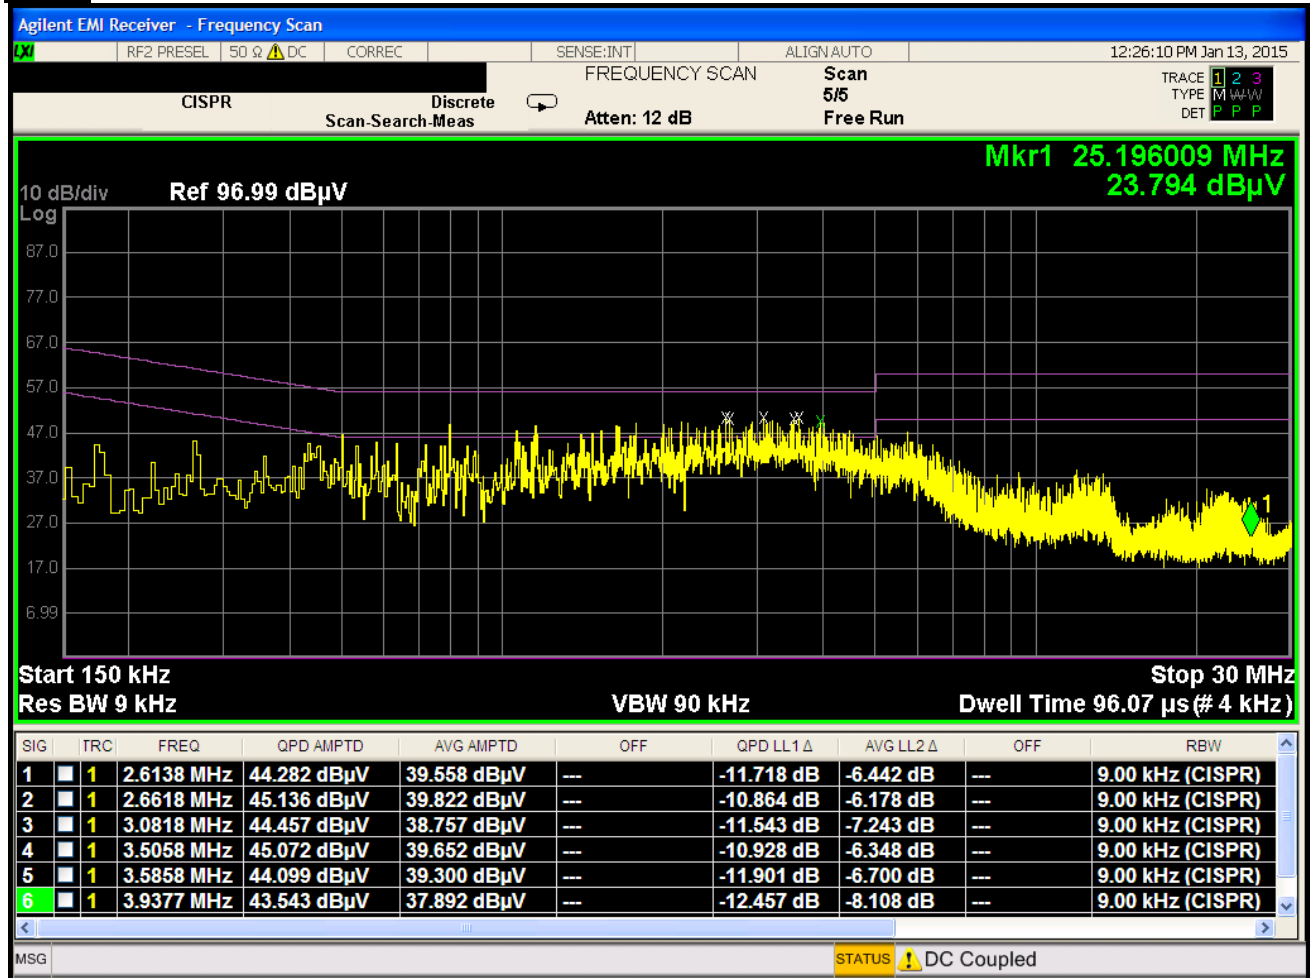

Plot 6-112. Line Conducted Plot with 802.11a UNII Band 2A (N)


Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 52. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. L1 = Phase; N = Neutral
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
6. Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 - 1/26, 2/10/2015	EUT Type: Portable Handset		Page 104 of 109

Line-Conducted Test Data

\$15.407

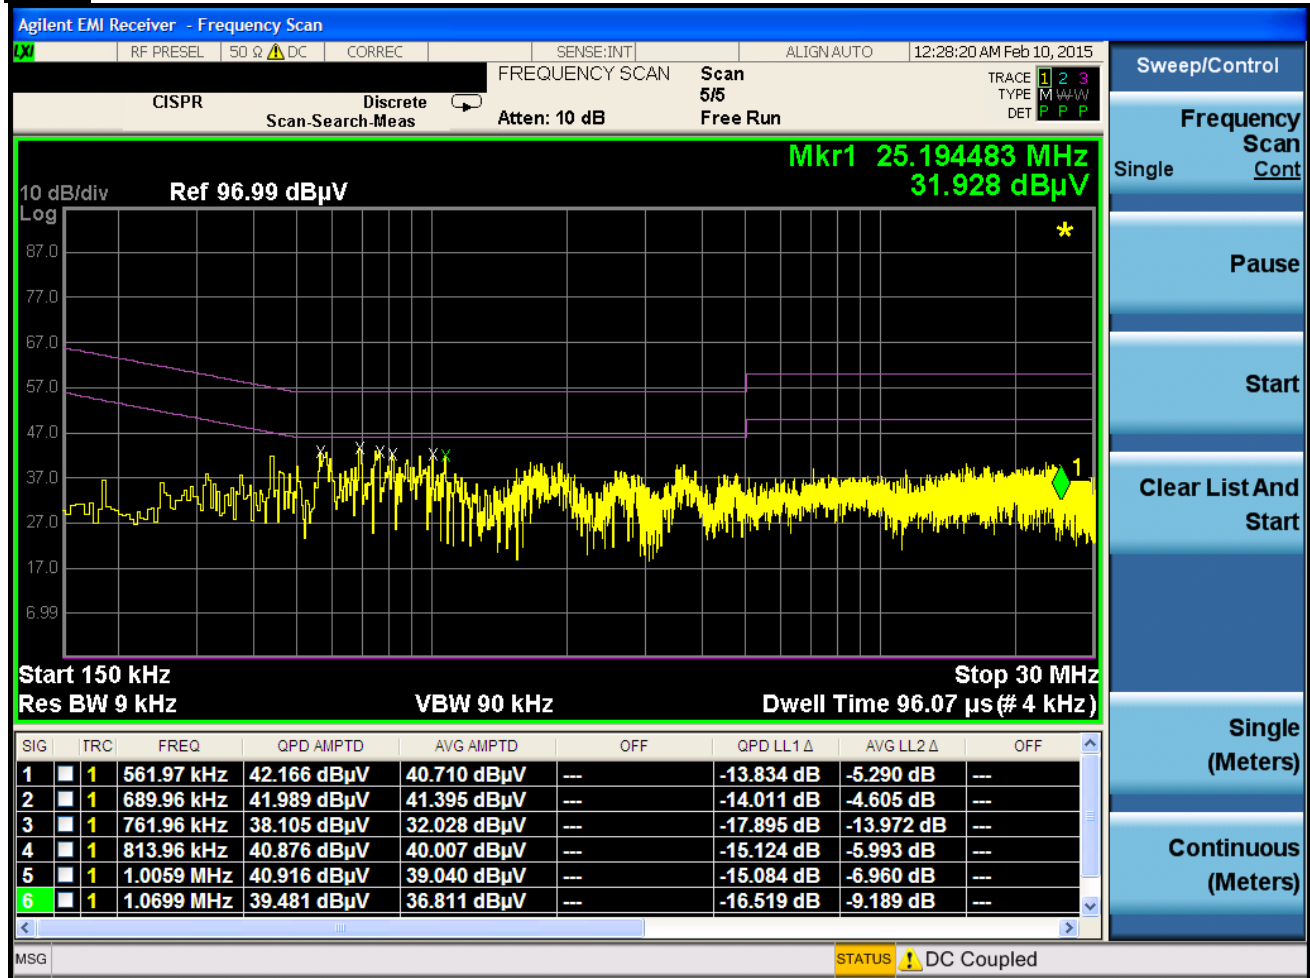

Plot 6-113. Line Conducted Plot with 802.11a UNII Band 2C (L1)


Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 100. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. L1 = Phase; N = Neutral
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
6. Margin (dB) = QP/AV Limit (dBμV) - QP/AV Level (dBμV)
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 - 1/26, 2/10/2015	EUT Type: Portable Handset		Page 105 of 109

Line-Conducted Test Data

\$15.407

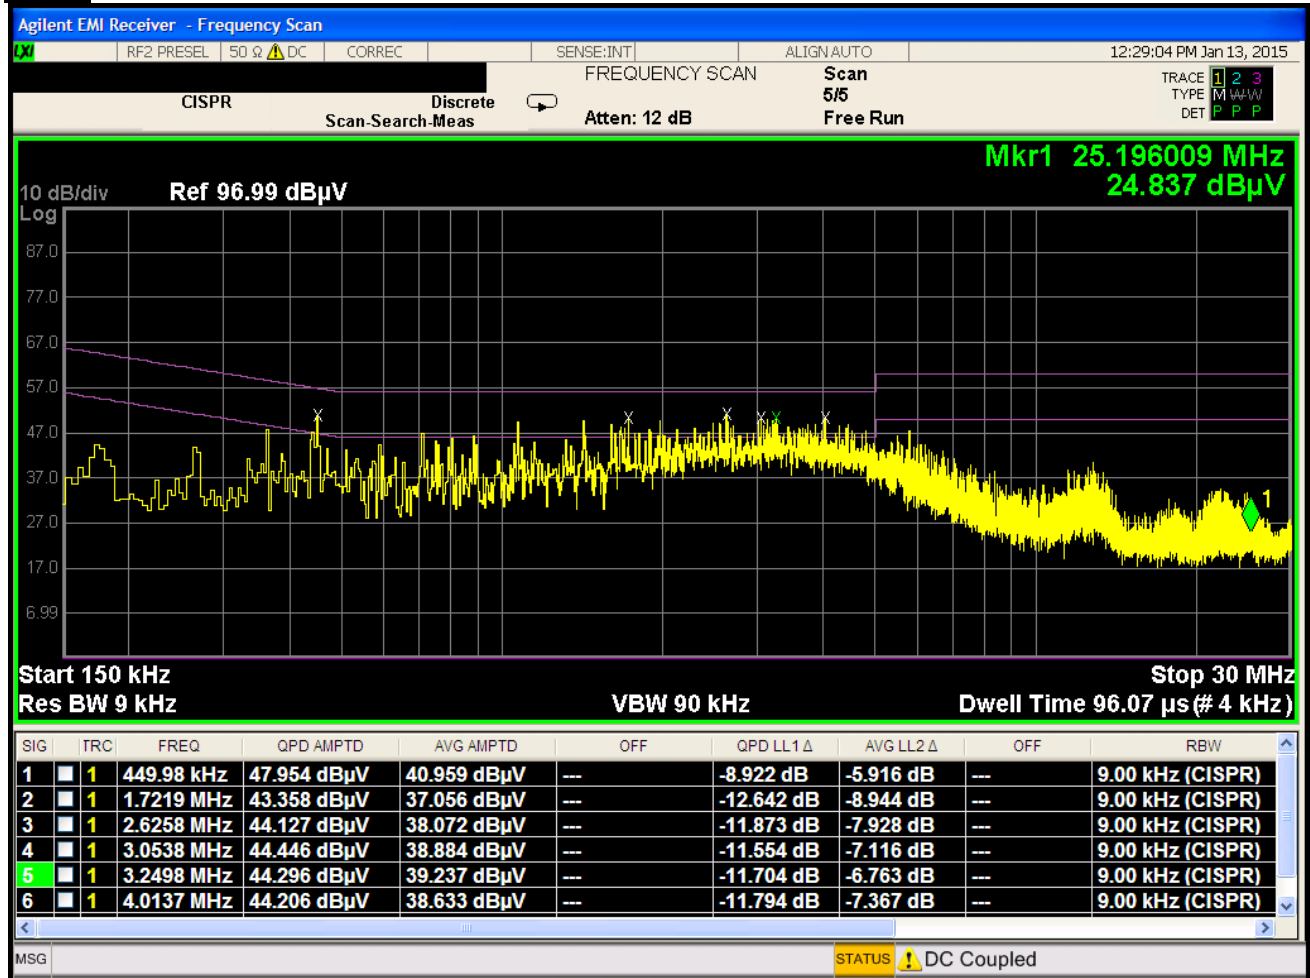

Plot 6-114. Line Conducted Plot with 802.11a UNII Band 2C (N)


Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 100. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. L1 = Phase; N = Neutral
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
6. Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.

FCC ID: ZNFH950		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 - 1/26, 2/10/2015	EUT Type: Portable Handset		Page 106 of 109

Line-Conducted Test Data

\$15.407

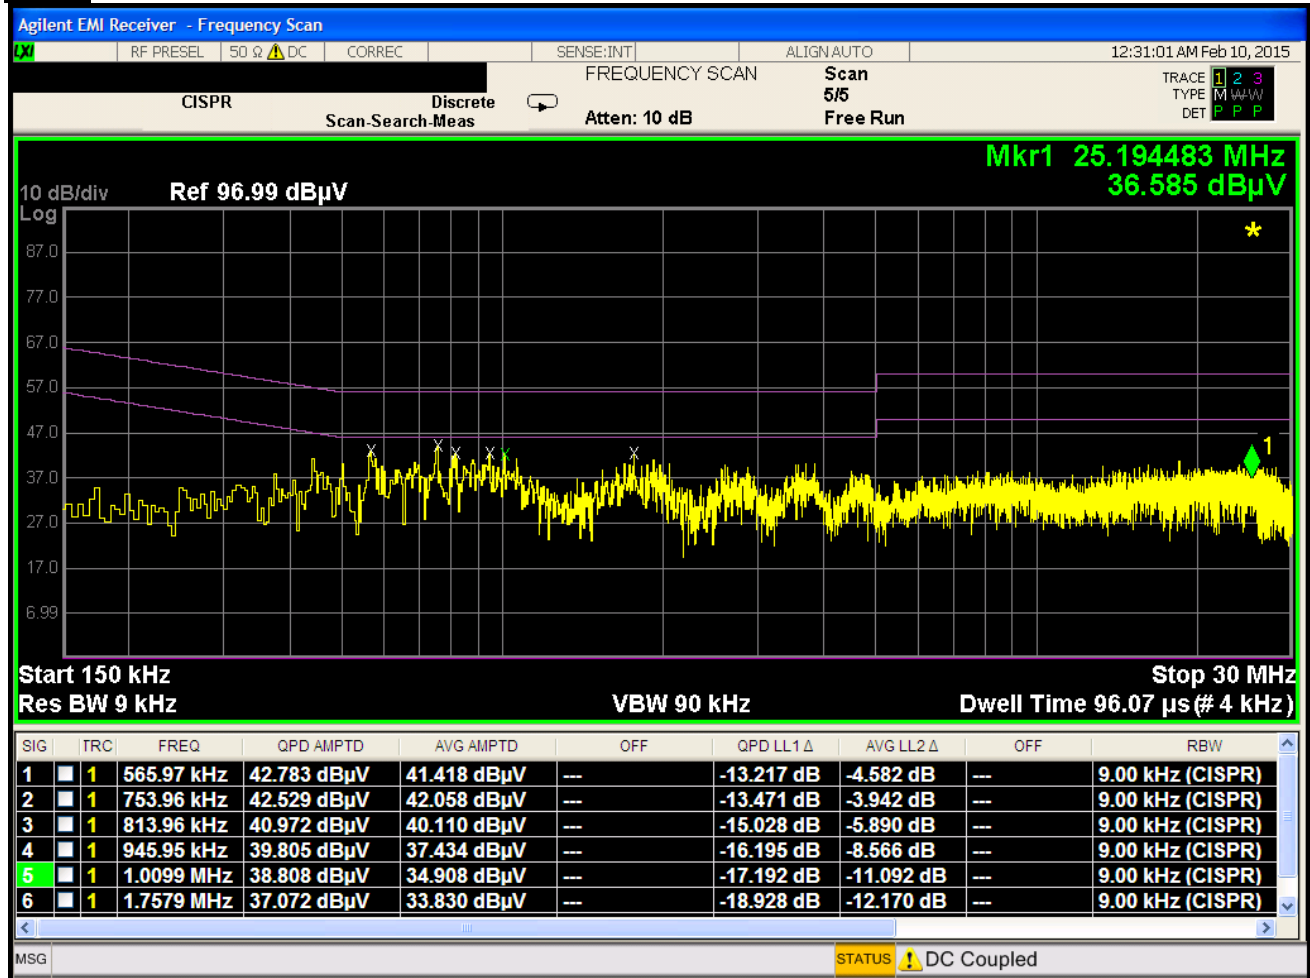

Plot 6-115. Line Conducted Plot with 802.11a UNII Band 3 (L1)


Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 149. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. L1 = Phase; N = Neutral
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
6. Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.

FCC ID: ZNFH950			FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 - 1/26, 2/10/2015	EUT Type: Portable Handset			Page 107 of 109

Line-Conducted Test Data

\$15.407

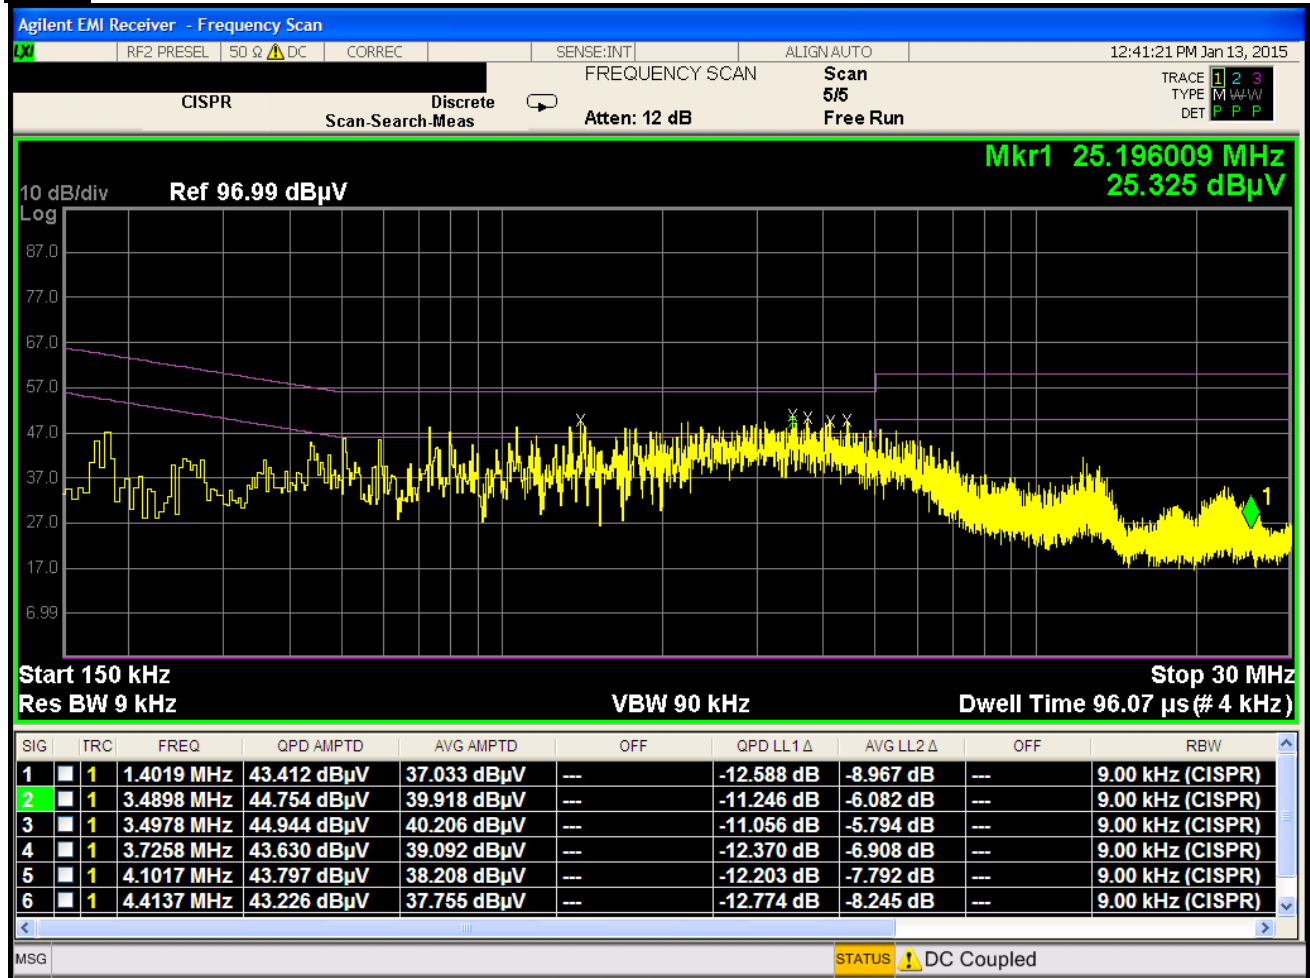

Plot 6-116. Line Conducted Plot with 802.11a UNII Band 3 (N)

Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 149. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: ZNFH950	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 - 1/26, 2/10/2015	EUT Type: Portable Handset		Page 108 of 109

7.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFH950** is in compliance with Part 15E of the FCC Rules.

FCC ID: ZNFH950		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501120066.ZNF	Test Dates: 1/03 – 1/26, 2/10/2015	EUT Type: Portable Handset		Page 109 of 109