

Prüfbericht-Nr.: <i>Test report no.:</i>	CN25ZFF9 001	Auftrags-Nr.: <i>Order no.:</i>	48282155	Seite 1 von 26 Page 1 of 26
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2025-09-18	
Auftraggeber: <i>Client:</i>	CUB ELECPARTS INC. No. 6, Lane 546, Sec. 6, Changlu Road, Fuhsin Township, Changhua County, Taiwan			
Prüfgegenstand: <i>Test item:</i>	TPMS TRK 2.4G Orb Sensor			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	TPM208			
Auftrags-Inhalt: <i>Order content:</i>	FCC Part 15C Test report (BLE)			
Prüfgrundlage: <i>Test specification:</i>	FCC 47CFR Part 15: Subpart C Section 15.247			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2025-09-26			
Prüfmuster-Nr.: <i>Test sample no:</i>	A004105240-010 ~ 012 A004105240-007 ~ 009			
Prüfzeitraum: <i>Testing period:</i>	2025-10-02 - 2025-10-22			
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland Taiwan Ltd. New Taipei Branch			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland Taiwan Ltd. Taipei Testing Laboratories			
Prüfergebnis*: <i>Test result*:</i>	Pass			
zusammengestellt von: <i>compiled by:</i>			genehmigt von: <i>authorized by:</i>	
Datum: <i>Date:</i>	2025-10-30	Ausstellungsdatum: <i>Issue date:</i>	2025-10-30	
Stellung / Position:	Senior Project Manager	Stellung / Position:	Senior Project Manager	
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet * Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.:
Test report no.:

CN25ZFF9 001

Seite 2 von 26
Page 2 of 26

Anmerkungen
Remarks

- | | |
|----------|--|
| 1 | <p>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben.
Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</p> <p><i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i></p> |
| 2 | <p>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature</p> <p><i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i></p> |
| 3 | <p>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben.
Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</p> <p><i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i>
<i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i></p> |
| 4 | <p>Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019.</p> <p><i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i></p> |

Prüfbericht-Nr.: CN25ZFF9 001
Test report no.:Seite 3 von 26
Page 3 of 26

TEST SUMMARY

Report Section	FCC Clause	Test Item	Result
5.1.1	15.247(b) & 15.203	Antenna Requirement	Pass
5.1.2	15.247(b)(3)	Peak Output Power	Pass
5.1.3	15.247(a)(2)	6 dB Bandwidth	Pass
5.1.3	2.1049	99% Occupied Bandwidth	Pass
5.1.4	15.247(e)	Power Spectral Density	Pass
5.1.5	15.247(d)	Conducted Spurious Emissions and Band Edges	Pass
5.1.6	15.247(d) & 15.205 & 15.209	Radiated Spurious Emissions and Band Edges	Pass
-	15.207	Mains Conducted Emission	N/A

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Prüfbericht-Nr.: CN25ZFF9 001
Test report no.:

Seite 4 von 26
Page 4 of 26

Contents

HISTORY OF THIS TEST REPORT	6
1. GENERAL REMARKS	7
1.1 COMPLEMENTARY MATERIALS	7
1.2 DECISION RULE OF CONFORMITY	7
2. TEST SITES	8
2.1 TEST LABORATORY	8
2.2 TEST FACILITY	8
2.3 TRACEABILITY	9
2.4 CALIBRATION	9
2.5 MEASUREMENT UNCERTAINTY	9
3. GENERAL PRODUCT INFORMATION	10
3.1 PRODUCT FUNCTION AND INTENDED USE	10
3.2 SYSTEM DETAILS AND RATINGS	10
3.3 NOISE GENERATING AND NOISE SUPPRESSING PARTS	11
3.4 SUBMITTED DOCUMENTS	11
4. TEST SET-UP AND OPERATION MODES	12
4.1 PRINCIPLE OF CONFIGURATION SELECTION	12
4.2 CARRIER FREQUENCY AND CHANNEL	12
4.3 TEST OPERATION AND TEST SOFTWARE	13
4.4 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	14
4.5 TEST SETUP DIAGRAM	14
4.6 DUTY CYCLE OF TEST SIGNAL	15
5. TEST RESULTS	16
5.1 TRANSMITTER REQUIREMENT & TEST SUITES	16
5.1.1 Antenna Requirement	16
5.1.2 Peak Output Power	17
5.1.3 6 dB Bandwidth and 99% Occupied Bandwidth	19
5.1.4 Power Spectral Density	20
5.1.5 Conducted Spurious Emissions and Frequency Band Edges Measured in 100kHz Bandwidth	21
5.1.6 Radiated Spurious Emissions and Band Edges	22

Prüfbericht-Nr.: **CN25ZFF9 001**
Test report no.:

Seite 5 von 26
Page 5 of 26

APPENDIX A - TEST RESULT OF CONDUCTED

APPENDIX B - TEST RESULT OF RADIATED EMISSIONS

APPENDIX SP - PHOTOGRAPHS OF TEST SETUP

APPENDIX EP - PHOTOGRAPHS OF EUT

Prüfbericht-Nr.: **CN25ZFF9 001**
Test report no.:

Seite 6 von 26
Page 6 of 26

HISTORY OF THIS TEST REPORT

Revision	Description	Date Issued
R01	Original Release	2025-10-30

Prüfbericht-Nr.: CN25ZFF9 001
Test report no.:Seite 7 von 26
Page 7 of 26

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A - Test Result of Conducted

Appendix B - Test Result of Radiated Emissions

Appendix SP - Photographs of Test Setup

Appendix EP - Photographs of EUT

Applied Standard and Test Levels

Radio
FCC 47CFR Part 15: Subpart C Section 15.247
FCC 47CFR Part 2: Subpart J Section 2.1049
ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
KDB 558074 D01 15.247 Meas Guidance v05r02

1.2 Decision Rule of Conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

Prüfbericht-Nr.: **CN25ZFF9 001**
Test report no.:

Seite 8 von 26
Page 8 of 26

2. Test Sites

2.1 Test Laboratory

TÜV Rheinland Taiwan Ltd. Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

2.2 Test Facility

TÜV Rheinland Taiwan Ltd. Taipei Testing Laboratories

No.458-18, Sec. 2, Fenliao Rd., Linkou Dist.,
New Taipei City 244
Taiwan (R.O.C.)
FCC Registration No.: 180491
ISED Registration No.: 25563

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95% level of confidence.

Emission Measurement Uncertainty

Parameter	Uncertainty
Radiated Emission (9 kHz ~ 30 MHz)	± 1.15 dB
Radiated Emission (30 MHz ~ 200 MHz)	± 1.32 dB
Radiated Emission (200 MHz ~ 1 GHz)	± 1.31 dB
Radiated Emission (1 GHz ~ 18 GHz)	± 1.53 dB
Radiated Emission (18 GHz ~ 40 GHz)	± 2.50 dB
Mains Conducted Emission	± 1.65 dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a TPMS TRK 2.4G Orb Sensor. It contains a Bluetooth compatible module enabling the user to communicate data through a Wireless interface.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	TPMS TRK 2.4G Orb Sensor
Type Identification	TPM208
FCC ID	ZPNTPM208

Technical Specification of EUT

Item	EUT information
Operating Frequency	2402 MHz ~ 2480 MHz
Channel Number	40
Data Rate	1Mbps
Operation Voltage	3 Vdc
Modulation	GFSK
Maximum Output Power (mW)	1.08
Antenna Information	Refer to 5.1.1
Accessory Device	Refer to 4.4

Prüfbericht-Nr.: **CN25ZFF9 001**
Test report no.:

Seite 11 von 26
Page 11 of 26

3.3 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.4 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The test modes were adapted accordingly in reference to the instructions for use.

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output expected by the customer and is going to be fixed on the firmware of the final end product.

Table for Parameters of Test Software Setting

Frequency (MHz)	Power Setting
2402	Default
2440	Default
2480	Default

4.2 Carrier Frequency and Channel

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Prüfbericht-Nr.: CN25ZFF9 001
Test report no.:

Seite 13 von 26
Page 13 of 26

4.3 Test Operation and Test Software

Setup for testing: Test samples are provided with modified firmware which makes it possible to continue transmitting when power is on.

The samples were used as follows:

A004105240-010 ~ 012

A004105240-007 ~ 009

Full test was applied on all test modes, but only worst case was shown.

EUT Configure Mode	Applicable To				Description
	Antenna Port Conducted Measurement	Radiated Spurious Emissions above 1 GHz	Radiated Spurious Emissions below 1 GHz	Mains Conducted Emission	
-	√	√	√	-	-

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when position on **Z-plane**.
2. "-" means no effect.

Antenna Port Conducted Measurement

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2402, 2440, 2480	1

Radiated Spurious Emissions (Above 1 GHz)

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2402, 2440, 2480	1

Radiated Spurious Emissions (Below 1 GHz)

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2402	1

Test Condition

Test Item	Ambient Temperature	Relative Humidity	Tested by
Conducted Measurement	22.1-22.5 °C	58.6-60.2 %	Blake Wang
Radiated Spurious Emissions above 1 GHz	23.7-25.4 °C	48-53 %	Andy Chen
Radiated Spurious Emissions below 1 GHz	23.7-25.4 °C	48-53 %	Andy Chen

Prüfbericht-Nr.: CN25ZFF9 001
Test report no.:Seite 14 von 26
Page 14 of 26

4.4 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

Accessory of EUT


None

Support Unit

None

4.5 Test Setup Diagram

<Radiated Spurious Emissions mode>

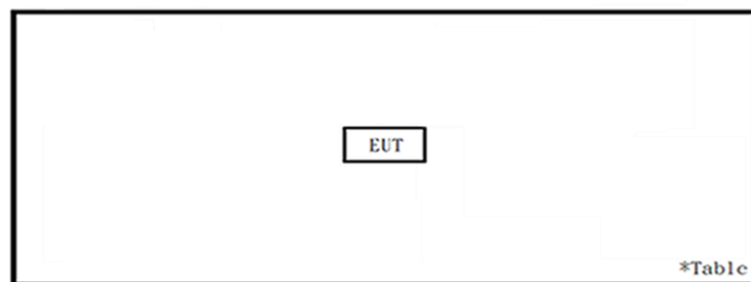


Prüfbericht-Nr.: **CN25ZFF9 001**
Test report no.:

Seite 15 von 26
Page 15 of 26

4.6 Duty Cycle of Test Signal

Mode	On + Off Time (ms)	On Time (ms)	Duty Cycle (%)	Duty Factor (dB)
1Mbps	100	100	100.00	0.00

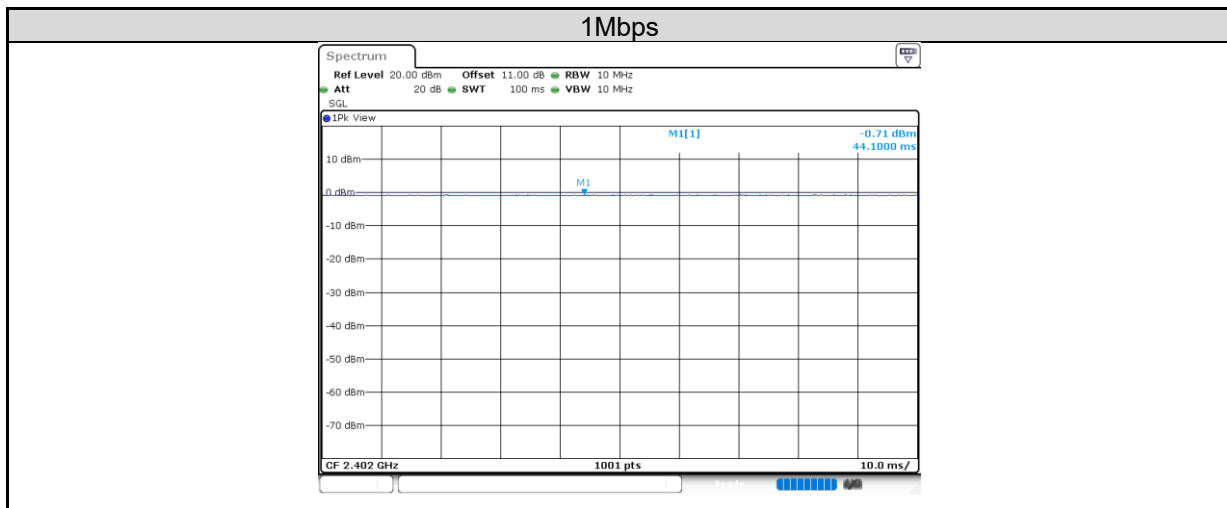

Prüfbericht-Nr.: CN25ZFF9 001
Test report no.:Seite 16 von 26
Page 16 of 26

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

Requirement Use of approved antennas only

According to the manufacturer declaration, the EUT has an antenna with a directional gain of 2 dBi. The antenna is monopole antenna with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.
Refer to EUT photo for details.

Prüfbericht-Nr.: **CN25ZFF9 001**
Test report no.:

Seite 17 von 26
Page 17 of 26

5.1.2 Peak Output Power

Limit 1 watt (30 dBm)

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Power Meter	Anritsu	ML2495A	1901008	2025/02/26	2026/02/25	2025/10/2	2025/10/2
Power Sensor	Anritsu	MA2411B	1725269	2025/02/26	2026/02/25	2025/10/2	2025/10/2


Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

Gate Setup:

1. Select the [Gates] tab in the software.
2. Check the box (e.g., Gate 1) to display it on the trace.
3. Set Gate Position
 - Drag the gate line with the mouse to the desired point on the waveform, or
 - Enter Values using the [Set] button and input start/stop times.
4. Switch to the next measurement channel and repeat the same gate setup procedure.
5. The instrument calculates average/peak power only within the defined gate interval.

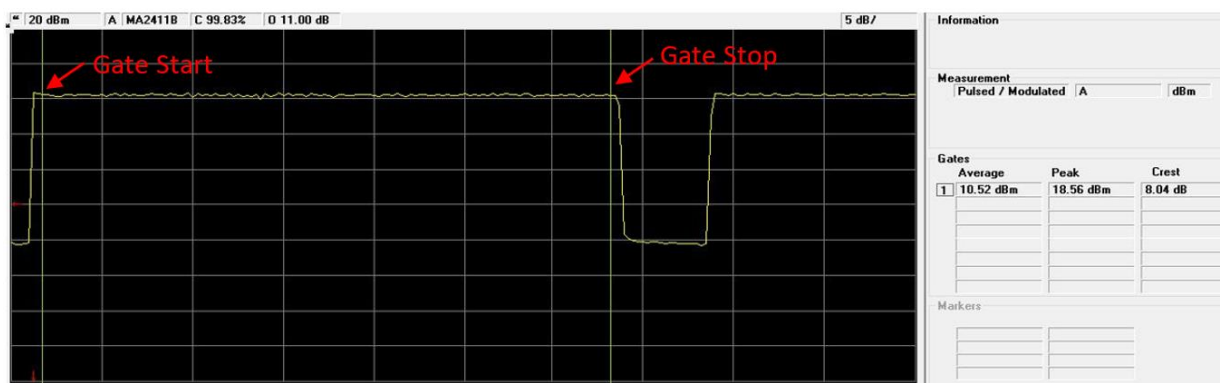

Prüfbericht-Nr.: CN25ZFF9 001
Test report no.:

 Seite 18 von 26
 Page 18 of 26

Test Result
Peak Output Power
<1Mbps>

Channel	Channel Frequency	Peak Output Power		Limit (dBm)
	(MHz)	(dBm)	(mW)	
Low Channel	2402	0.35	1.08	30
Middle Channel	2440	-0.39	0.91	30
High Channel	2480	-0.87	0.82	30

Average Power
<1Mbps>

Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2402	0.21	1.05
Middle Channel	2440	-0.61	0.87
High Channel	2480	-1.16	0.77

Prüfbericht-Nr.: CN25ZFF9 001
Test report no.:


Seite 19 von 26
Page 19 of 26

5.1.3 6 dB Bandwidth and 99% Occupied Bandwidth

Limit The minimum 6 dB bandwidth shall be at least 500 kHz.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV	101512	2025/02/26	2026/02/25	2025/10/2	2025/10/2

Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- For 99% occupied bandwidth measurement, the transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

Test Results

Please refer to Appendix A.

Prüfbericht-Nr.: CN25ZFF9 001
Test report no.:

 Seite 20 von 26
 Page 20 of 26


5.1.4 Power Spectral Density

Limit

The power spectral density shall not be greater than 8 dBm in any 3 kHz band.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV	101512	2025/02/26	2026/02/25	2025/10/2	2025/10/2

Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

Test Results

Please refer to Appendix A.

Prüfbericht-Nr.: **CN25ZFF9 001**
Test report no.:

Seite 21 von 26
Page 21 of 26


5.1.5 Conducted Spurious Emissions and Frequency Band Edges Measured in 100kHz Bandwidth

Limit

20dB (below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.)

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV	101512	2025/02/26	2026/02/25	2025/10/2	2025/10/2

Test Procedure

Measurement procedure REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

Measurement procedure OOBE

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

Test Results

Please refer to Appendix A.

5.1.6 Radiated Spurious Emissions and Band Edges

Limit


Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Emissions radiated outside the restricted and authorized frequency bands must either comply with the radiated emission limits specified for the restricted bands or in §15.247(d).


Kind of Test Site 3m Semi-Anechoic Chamber

Test Setup

<Radiated Emissions below 30 MHz>

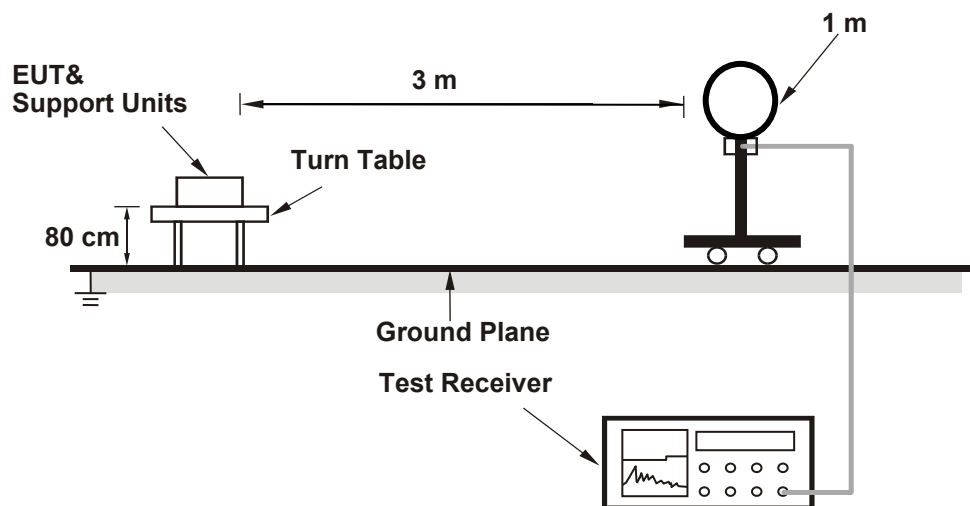


<Radiated Emissions 30 MHz to 1 GHz>

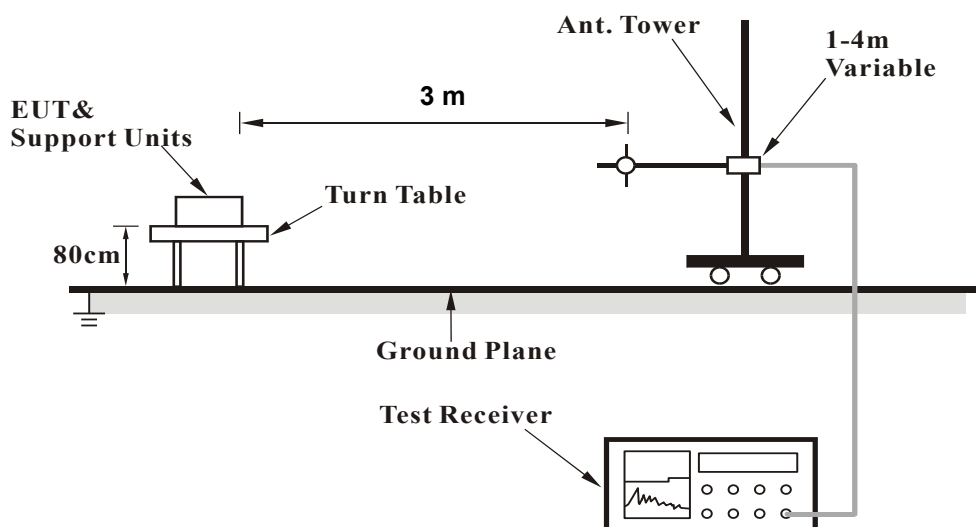

Prüfbericht-Nr.: **CN25ZFF9 001**
Test report no.:

Seite 23 von 26
Page 23 of 26

<Radiated Emissions above 1 GHz>

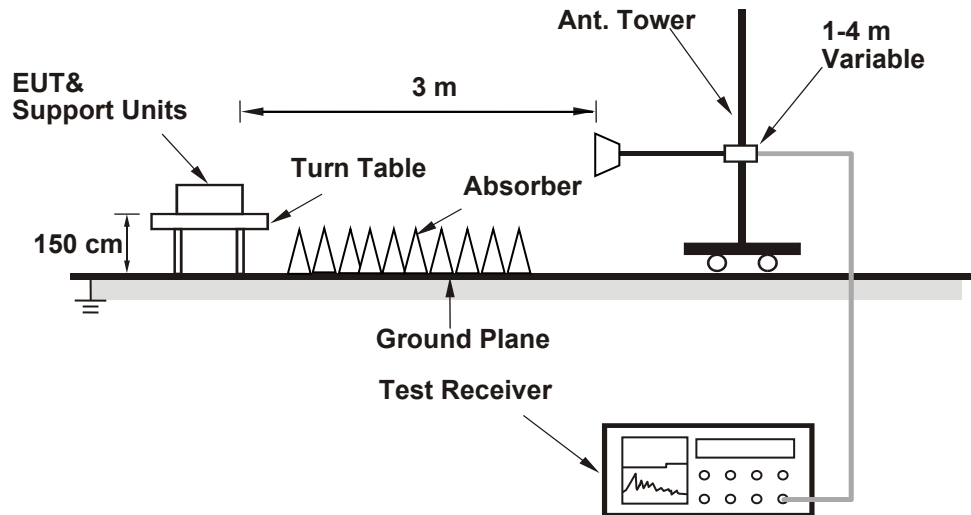

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Prüfbericht-Nr.: CN25ZFF9 001
Test report no.:

Seite 24 von 26
Page 24 of 26

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Above 1 GHz					
Signal Analyzer	R&S	FSV40	101509	2025/5/7	2026/5/6
Horn Antenna	ETS-Lindgren	3117	00218930	2024/12/10	2025/12/9
Amplifier	EM	EM01G18GA	060967	2025/4/2	2026/4/1
HF-AMP + AC source	EMCI	EMC184045SE	980656	2025/1/15	2026/1/14
Horn Antenna	SCHWARZBECK	BBHA 9170	00887	2025/3/28	2026/3/27
Test Software	Audix E3	15914a_20191106 tuv	PK-001087	N/A	N/A
30 MHz ~ 1 GHz					
Receiver	R&S	ESR7	102109	2025/2/13	2026/2/12
Bilog Antenna	SCHWARZBECK	VULB-9168	00951	2025/4/8	2026/4/7
LF-AMP	Agilent	8447D	2727A05146	2025/1/15	2026/1/14
Test Software	Audix E3	15914a_20191106 tuv	PK-001087	N/A	N/A
Below 30 MHz					
Receiver	R&S	ESR7	102109	2025/2/13	2026/2/12
Loop Antenna	SCHWARZBECK	FMZB 1519B	00215	2024/12/11	2025/12/10
Test Software	Audix E3	15914a_20191106 tuv	PK-001087	N/A	N/A

Test Procedures**For Radiated Emissions below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel (OPEN), perpendicular (CLOSE), and ground-parallel (GROUND) orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated Emissions above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The Radiated Emissions testing was performed in the X(E1), Y(H) and Z(E2) axis orientation. The worst-case Axis orientation is recorded in this test report.
6. The emission levels of other frequencies (including the 10th harmonic of the highest fundamental frequency) are very lower than the limit and are not shown in the test report.

Prüfbericht-Nr.: **CN25ZFF9 001**
Test report no.:

Seite 26 von 26
Page 26 of 26

Test Results

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) – Amplifier (dB)

Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)


Please refer to Appendix B.

Appendix A: Test Results of Conducted Test

Test Result of 6 dB Bandwidth

BLE_1M


Channel	Channel Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
Low Channel	2402	0.69	0.5	Pass
Middle Channel	2440	0.70	0.5	Pass
High Channel	2480	0.68	0.5	Pass

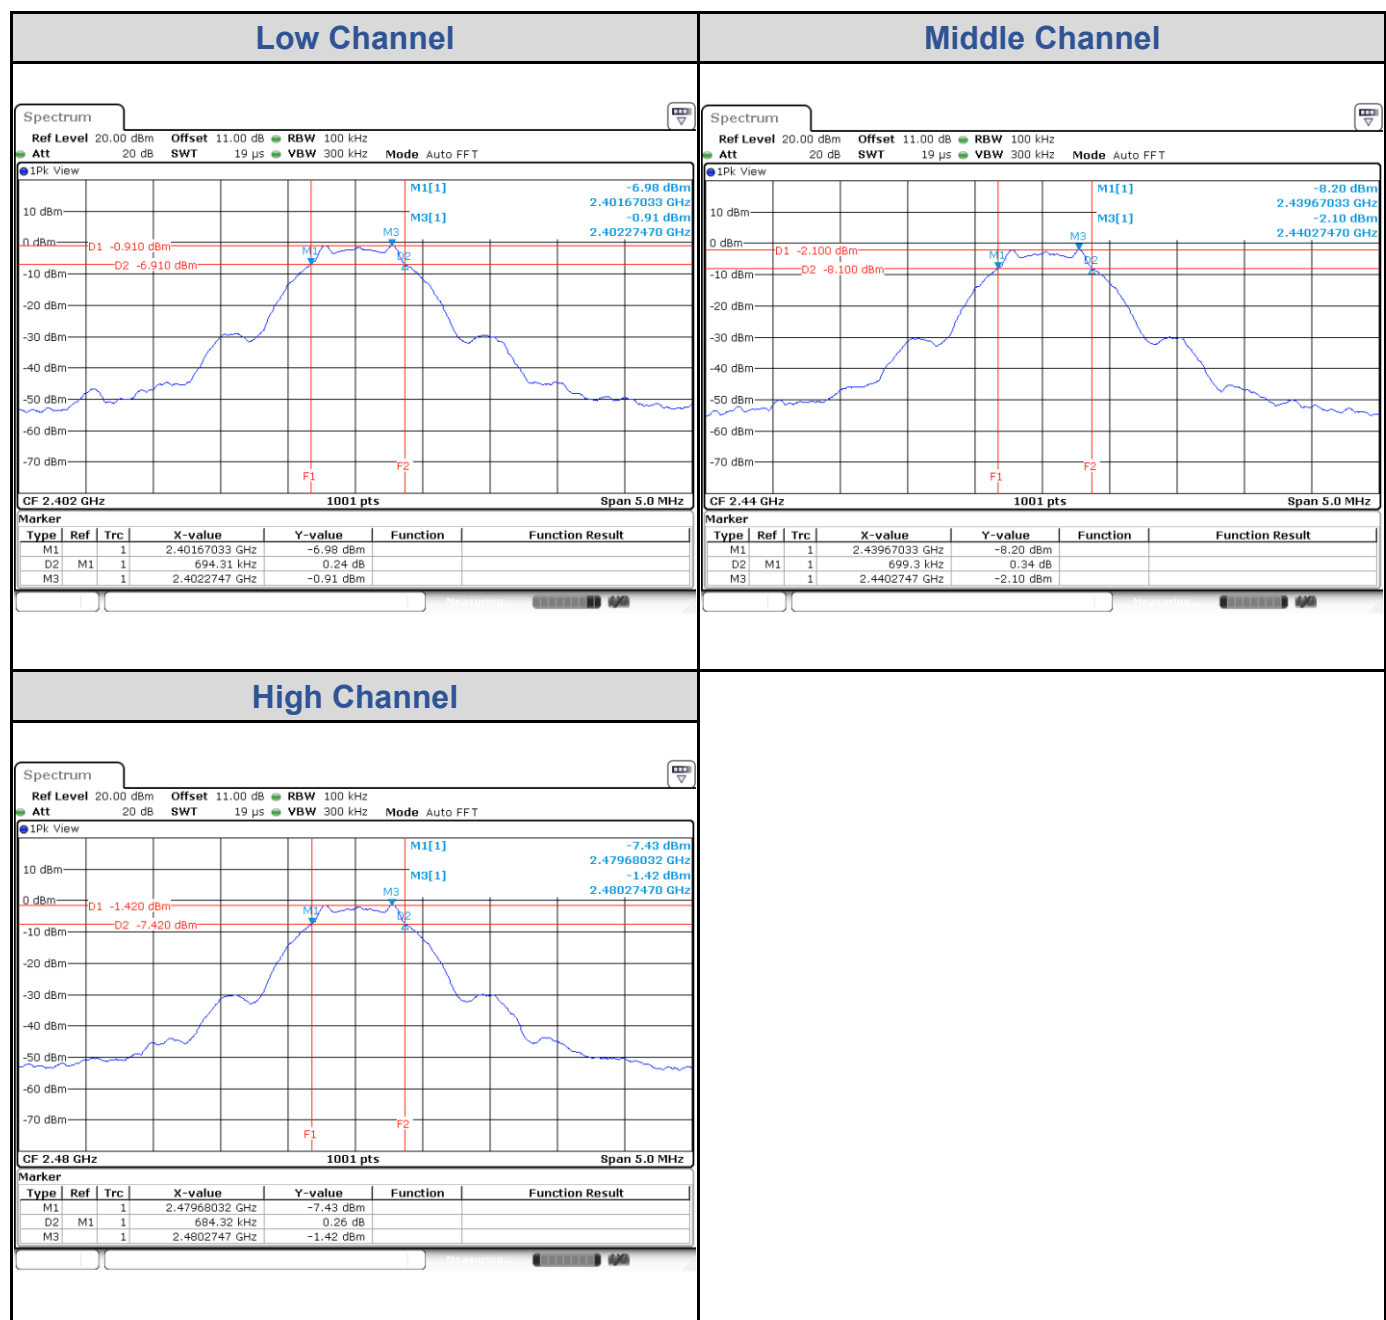

Test Result of 99% Occupied Bandwidth

BLE_1M


Channel	Channel Frequency (MHz)	99% Bandwidth (MHz)
Low Channel	2402	1.08
Middle Channel	2440	1.08
High Channel	2480	1.06

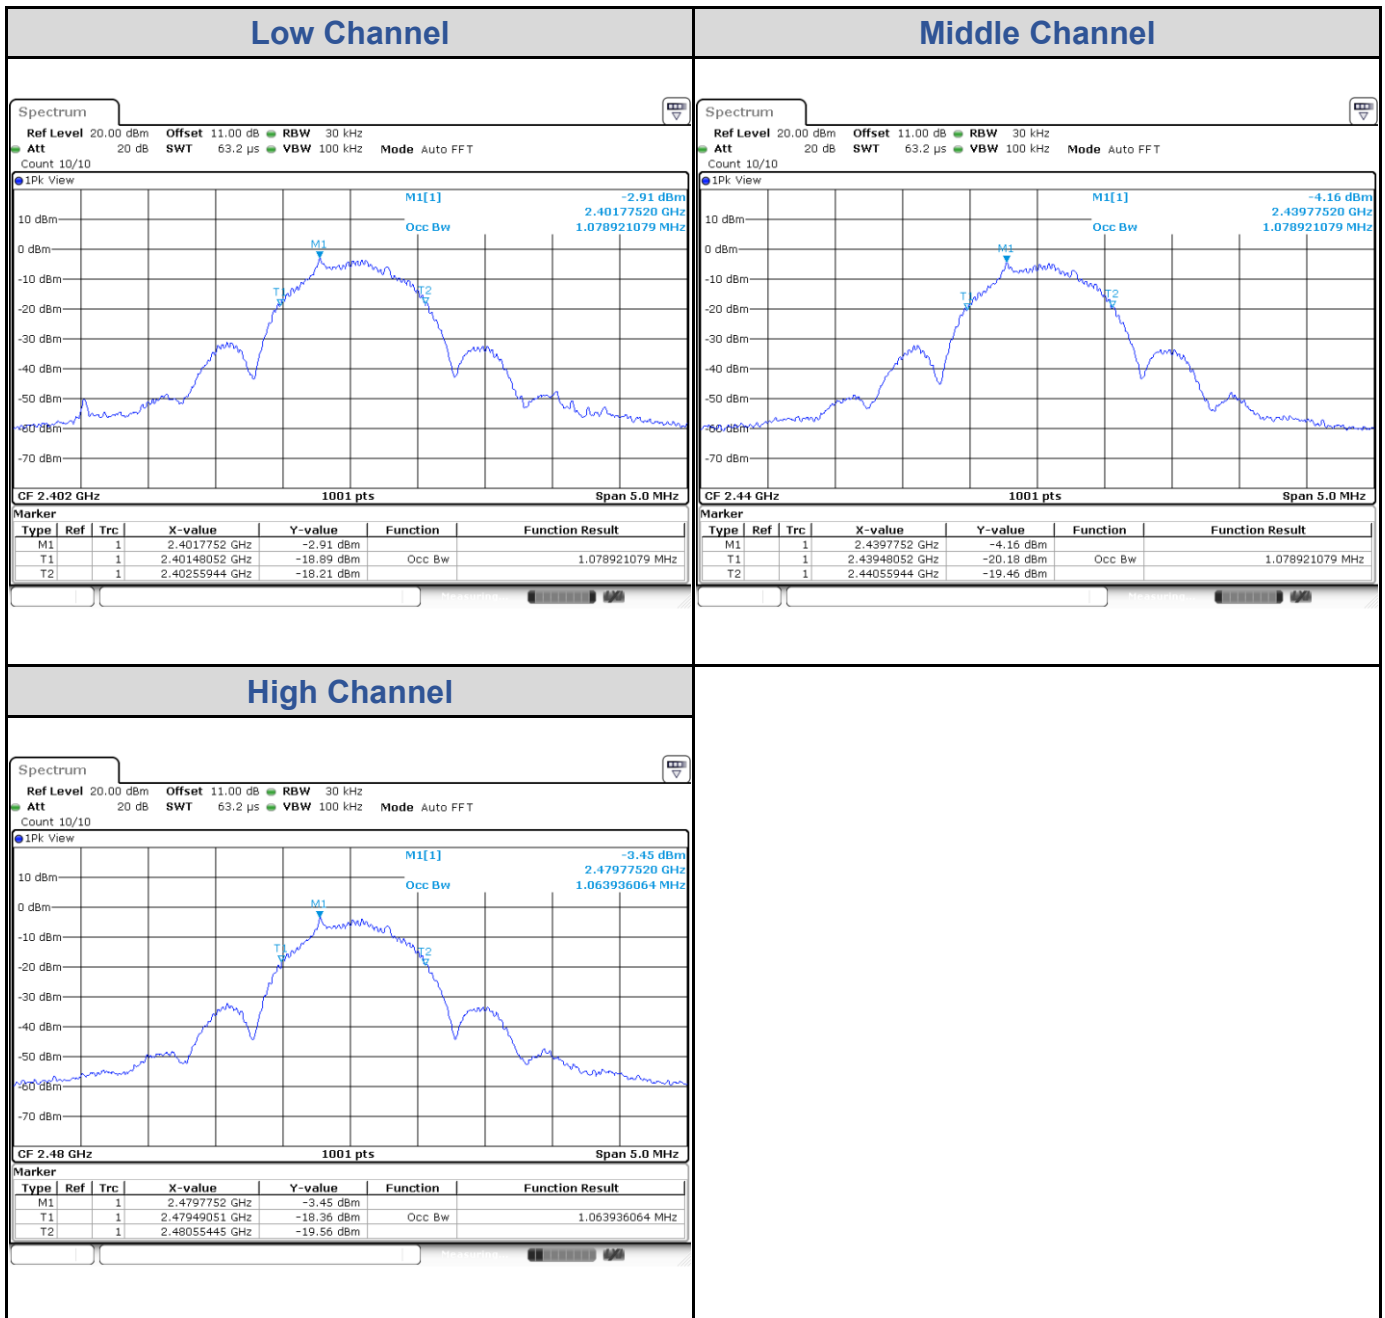

Test Result of Power Spectral Density


BLE_1M

Channel	Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	2402	-10.84	8	Pass
Middle Channel	2440	-11.99	8	Pass
High Channel	2480	-11.43	8	Pass

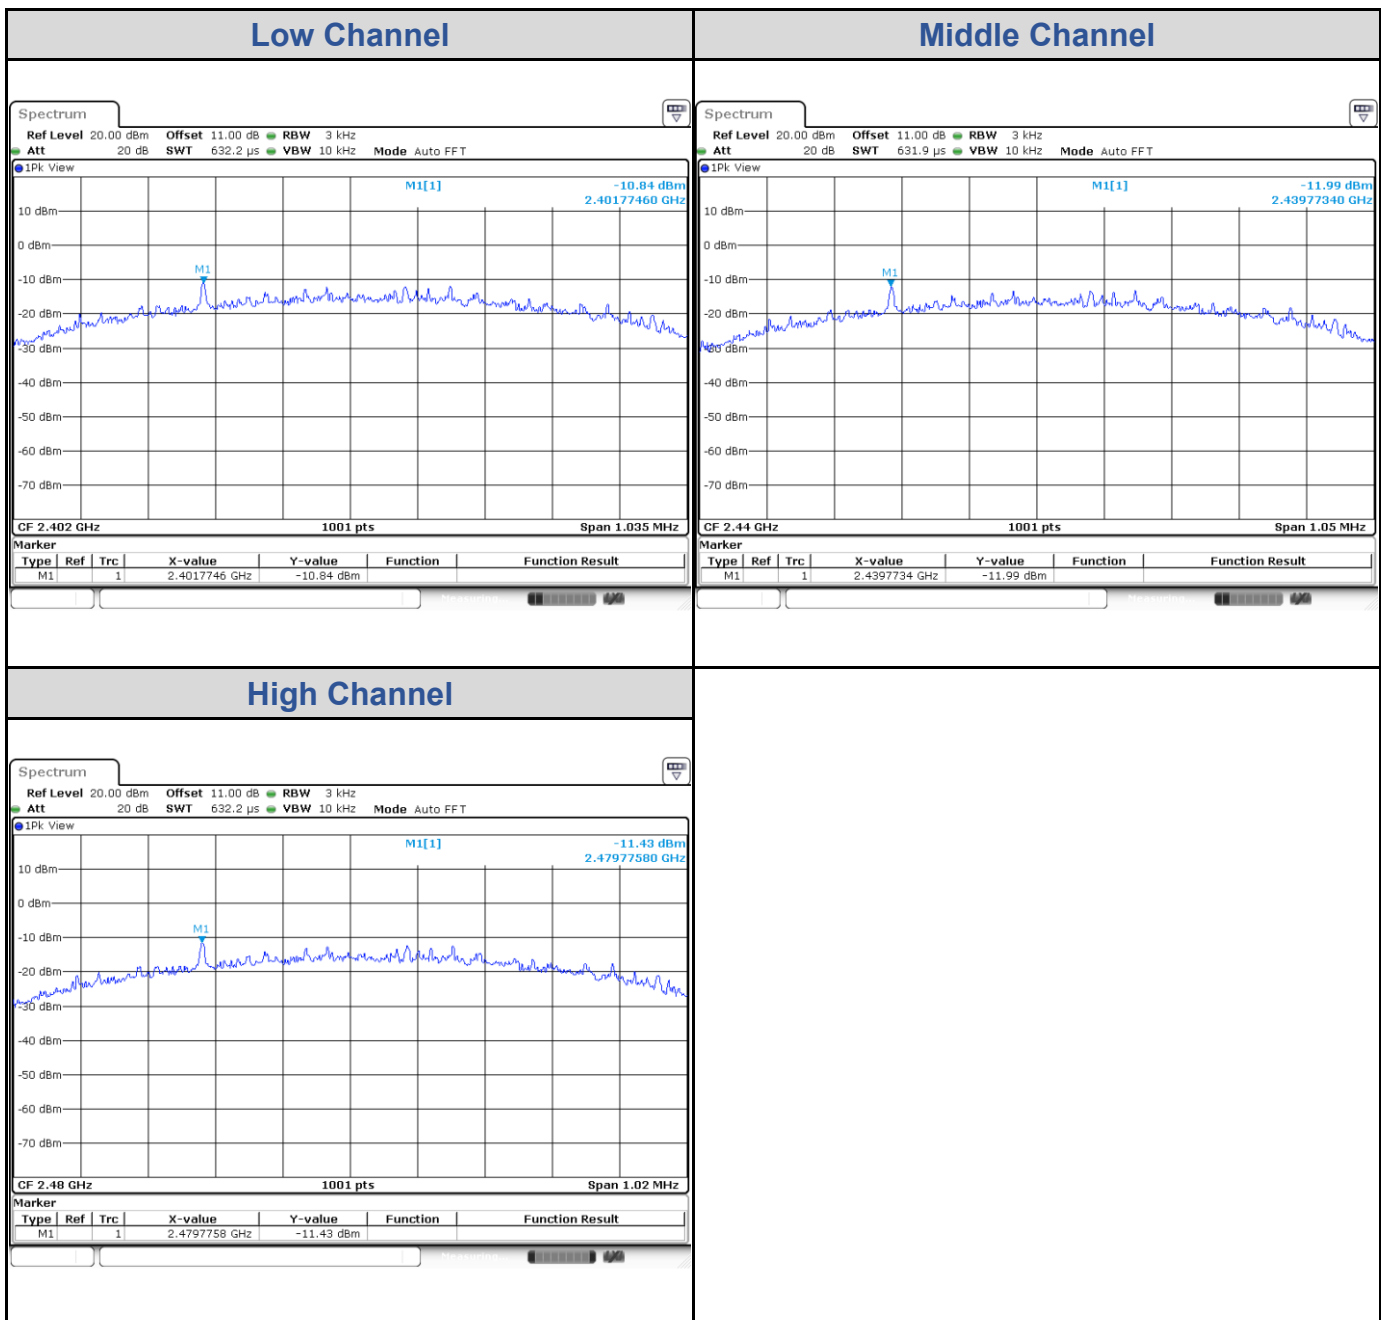


Test Result of Conducted Spurious Emissions

BLE_1M

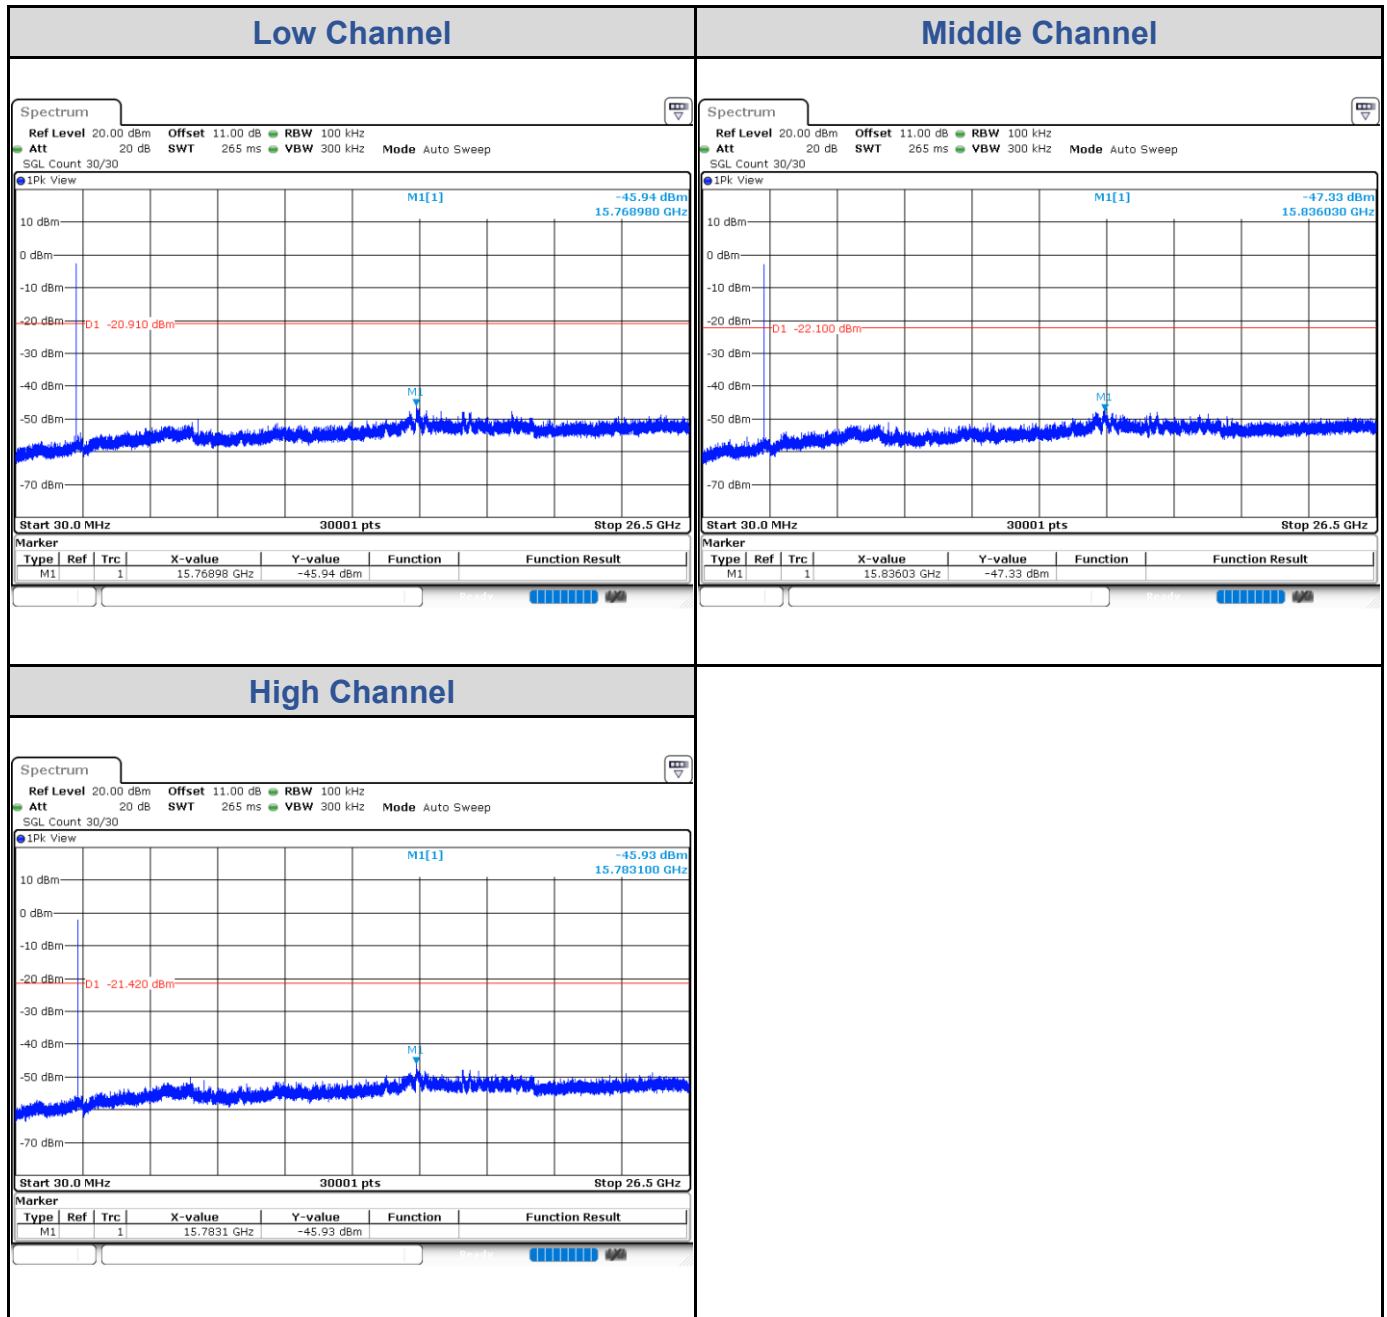

Test Result of Conducted Band Edge

BLE_1M

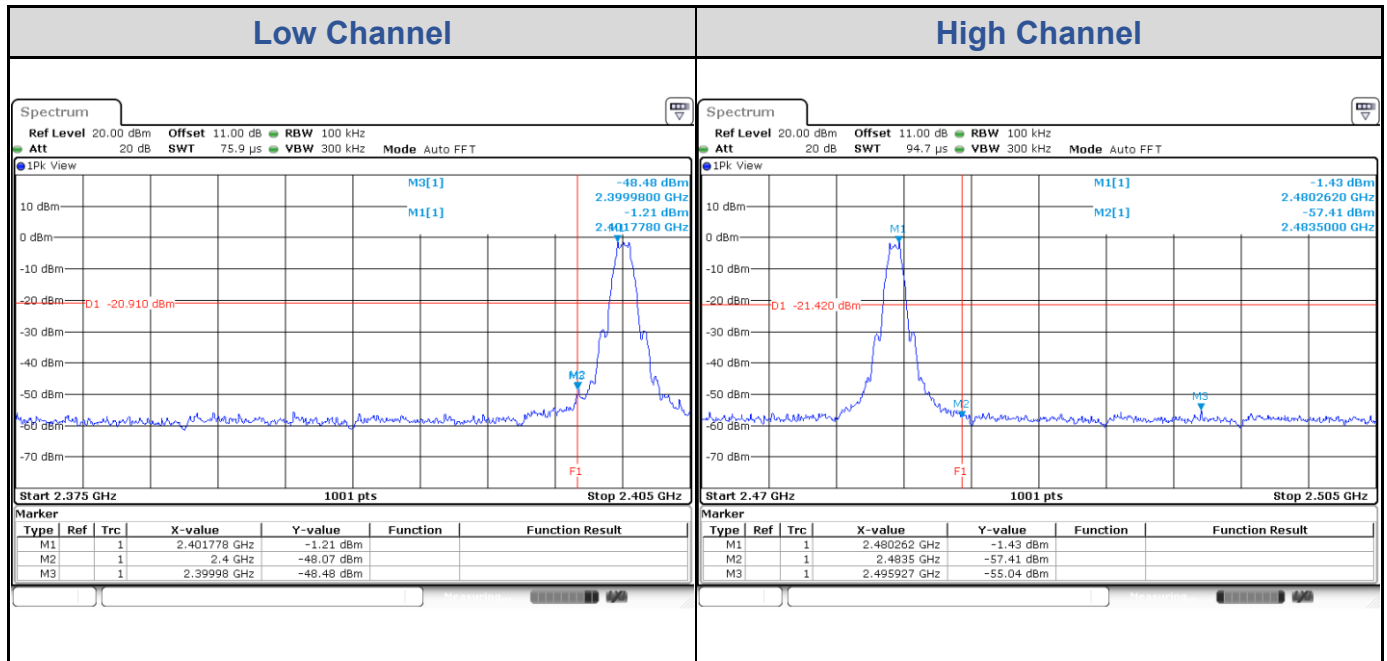

Appendix B: Test Results of Radiated Spurious Emissions

Band Edges, 2.31GHz ~ 2.5GHz

BLE_1M


Low Channel (Horizontal) Peak

BLE_1M

Low Channel (Horizontal) Average



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

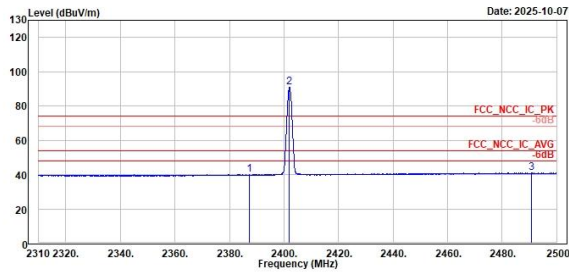


	Freq	Level	Read	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	2387.338	39.91	2.79	37.12	54.00	-14.09	340	250	Average	Horizontal	
2 *	2402.000	90.78	53.54	37.24	54.00	36.78	340	250	Average	Horizontal	
3	2490.738	40.95	3.43	37.52	54.00	-13.05	340	250	Average	Horizontal	

Low Channel (Vertical) Average



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

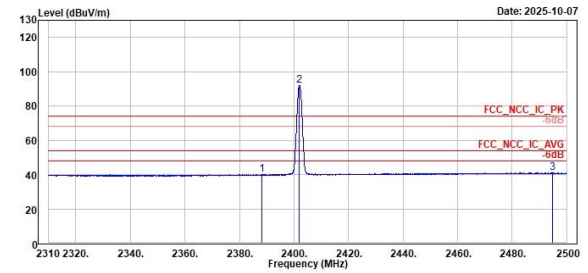


	Freq	Level	Read	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	2388.090	39.96	2.84	37.12	54.00	-14.04	283	341	Average	Vertical	
2 *	2402.000	92.09	54.85	37.24	54.00	38.09	283	341	Average	Vertical	
3	2494.823	41.18	3.66	37.52	54.00	-12.82	283	341	Average	Vertical	

BLE_1M

Middle Channel (Horizontal) Peak



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

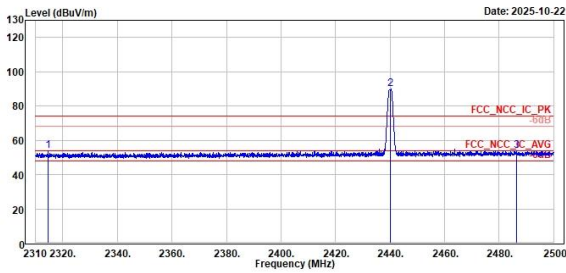


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2314.568	53.71	17.03	36.68	74.00	-20.29		298	259	Peak	Horizontal	
2	* 2440.000	89.74	52.31	37.43	74.00	15.74		298	259	Peak	Horizontal	
3	2486.328	53.76	16.25	37.51	74.00	-20.24		298	259	Peak	Horizontal	

Middle Channel (Vertical) Peak



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

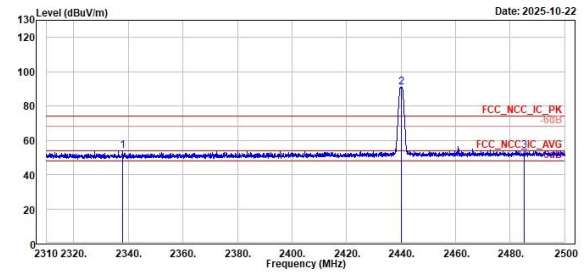


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2337.978	53.76	17.01	36.75	74.00	-20.24		345	353	Peak	Vertical	
2	* 2440.000	90.91	53.48	37.43	74.00	16.91		345	353	Peak	Vertical	
3	2485.228	53.77	16.26	37.51	74.00	-20.23		345	353	Peak	Vertical	

BLE_1M

Middle Channel (Horizontal) Average



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

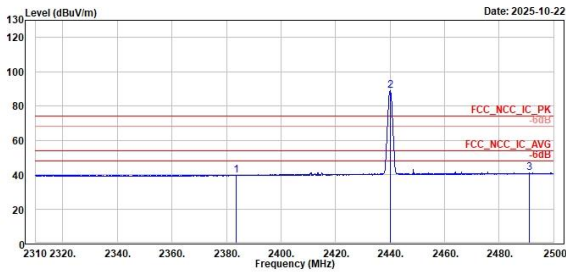


	Freq	Level	Read	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	2383.673	39.77	2.69	37.08	54.00	-14.23	298	259	Average	Horizontal	
2 *	2440.000	88.73	51.30	37.43	54.00	34.73	298	259	Average	Horizontal	
3	2490.975	40.87	3.35	37.52	54.00	-13.13	298	259	Average	Horizontal	

Middle Channel (Vertical) Average



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

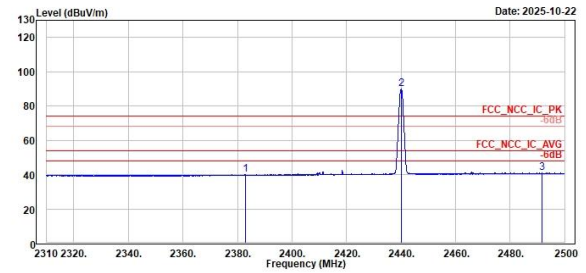


	Freq	Level	Read	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	2382.617	39.91	2.04	37.07	54.00	-14.09	345	353	Average	Vertical	
2 *	2440.000	89.88	52.45	37.43	54.00	35.88	345	353	Average	Vertical	
3	2491.640	40.88	3.36	37.52	54.00	-13.12	345	353	Average	Vertical	

BLE_1M


High Channel (Horizontal) Peak



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

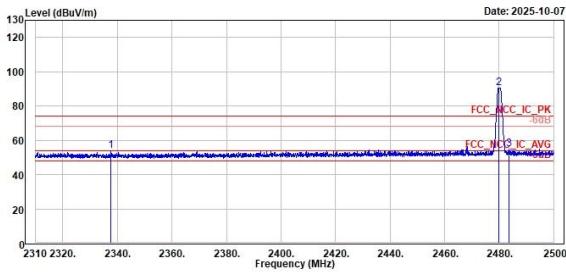

TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

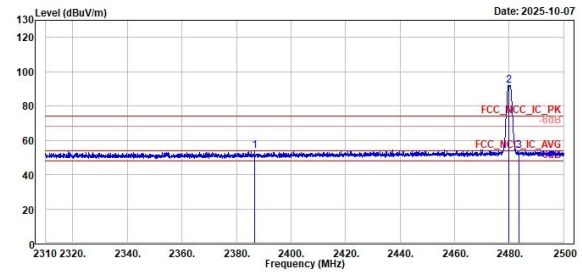


BLE_1M

High Channel (Horizontal) Average




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

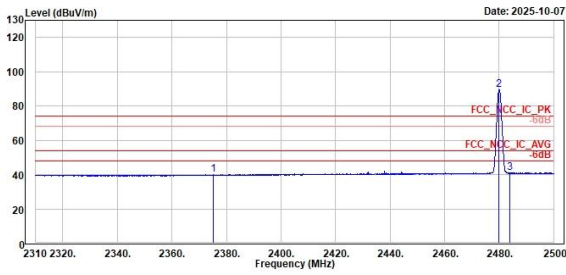

Freq	Level	Read	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1 2375.123	40.02	3.01	37.01	54.00	-13.98	286	258	Average	Horizontal	
2 * 2480.000	89.61	52.10	37.51	54.00	35.61	286	258	Average	Horizontal	
3 2483.897	40.98	3.47	37.51	54.00	-13.02	286	258	Average	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

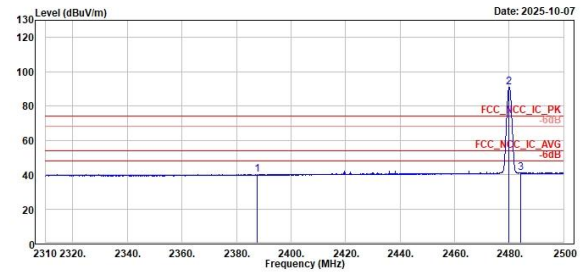

Freq	Level	Read	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1 2387.710	39.97	2.85	37.12	54.00	-14.03	243	351	Average	Vertical	
2 * 2480.000	90.88	53.37	37.51	54.00	36.88	243	351	Average	Vertical	
3 2484.087	41.14	3.63	37.51	54.00	-12.86	243	351	Average	Vertical	


Spurious Emissions, Tx Mode, 9kHz ~ 30MHz

BLE_1M

Low Channel (Open) 9kHz~150kHz




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

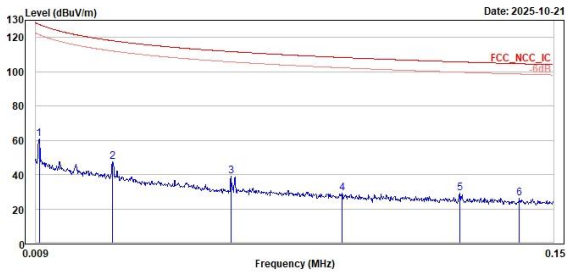

	Freq	Level	Read	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	0.018	60.78	42.67	18.11	127.60	-66.82	100	256	Peak	Open	
2	0.030	47.55	27.54	20.01	118.05	-70.50	100	350	Peak	Open	
3	0.062	38.88	20.83	18.05	111.72	-72.84	100	12	Peak	Open	
4	0.092	29.40	11.38	18.02	108.28	-78.88	100	137	Peak	Open	
5	0.124	29.08	10.91	18.17	105.70	-76.62	100	174	Peak	Open	
6	0.141	26.17	7.90	18.27	104.63	-76.46	100	301	Peak	Open	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

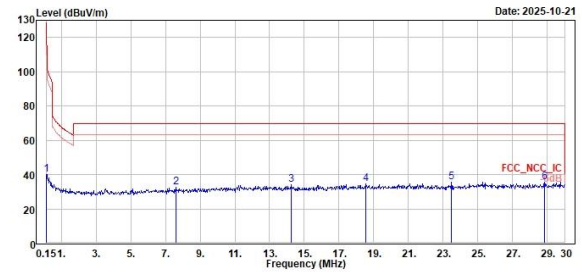

	Freq	Level	Read	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	0.150	40.04	21.71	18.33	104.00	-64.04	100	211	Peak	Open	
2	7.613	32.83	12.07	20.76	69.50	-36.67	100	123	Peak	Open	
3	14.269	34.00	12.44	21.56	69.50	-35.50	100	174	Peak	Open	
4	18.538	34.84	12.18	22.66	69.50	-34.66	100	89	Peak	Open	
5	23.493	35.40	13.24	22.16	69.50	-34.10	100	77	Peak	Open	
6	28.836	35.56	12.37	23.19	69.50	-33.94	100	123	Peak	Open	

Spurious Emissions, Tx Mode, 30MHz ~ 1GHz


BLE_1M

Low Channel (Horizontal)

Low Channel (Vertical)




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

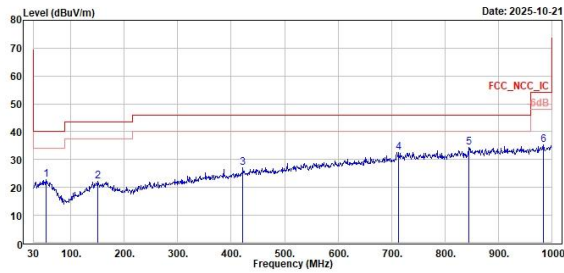

	Freq	Level	Read	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	53.288	22.67	28.63	-5.96	48.00	-17.33	180	73	Peak	Horizontal	
2	150.288	22.30	28.74	-6.44	43.50	-21.20	181	368	Peak	Horizontal	
3	421.888	27.21	30.23	-3.02	46.00	-18.79	180	337	Peak	Horizontal	
4	712.888	32.60	30.46	2.14	46.00	-13.40	178	368	Peak	Horizontal	
5	844.888	34.30	30.48	3.82	46.00	-11.70	180	117	Peak	Horizontal	
6	964.488	35.25	29.40	5.85	54.00	-18.75	280	33	Peak	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

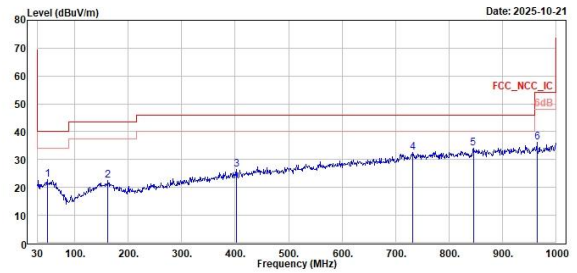

	Freq	Level	Read	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	48.438	22.69	28.72	-6.03	48.00	-17.31	124	368	Peak	Vertical	
2	161.928	22.45	28.59	-6.14	43.50	-21.05	180	15	Peak	Vertical	
3	482.488	26.34	29.76	-3.42	46.00	-19.66	280	192	Peak	Vertical	
4	732.288	32.63	30.10	2.53	46.00	-13.37	280	26	Peak	Vertical	
5	845.778	34.07	30.23	3.84	46.00	-11.93	280	176	Peak	Vertical	
6	965.888	36.12	30.61	5.51	54.00	-17.88	180	67	Peak	Vertical	

Spurious Emissions, Tx Mode, 1GHz ~ 26.5GHz


BLE_1M

Low Channel (Horizontal)

Low Channel (Vertical)




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

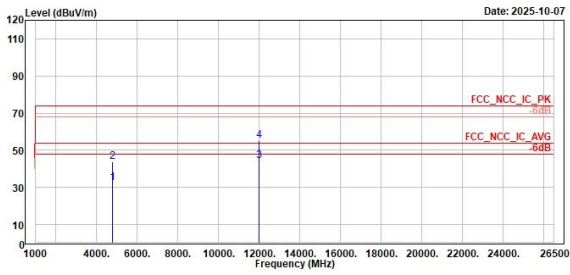

	Freq	Level	Read	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	4884.000	32.39	43.14	-10.75	54.00	-21.61	310	95	Average	Horizontal	
2	4884.000	43.69	54.44	-10.75	74.00	-30.31	310	95	Peak	Horizontal	
3	12010.000	44.46	46.88	-2.42	54.00	-9.54	198	0	Average	Horizontal	
4	12010.000	54.99	57.41	-2.42	74.00	-19.01	198	0	Peak	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

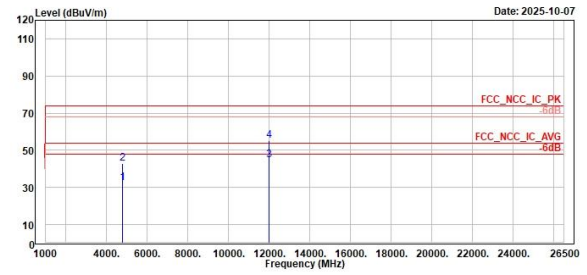


	Freq	Level	Read	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	4884.000	32.34	43.09	-10.75	54.00	-21.66	252	76	Average	Vertical	
2	4884.000	43.02	53.77	-10.75	74.00	-30.98	252	76	Peak	Vertical	
3	12010.000	44.55	46.97	-2.42	54.00	-9.45	212	5	Average	Vertical	
4	12010.000	55.22	57.64	-2.42	74.00	-18.78	212	5	Peak	Vertical	

BLE_1M

Middle Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

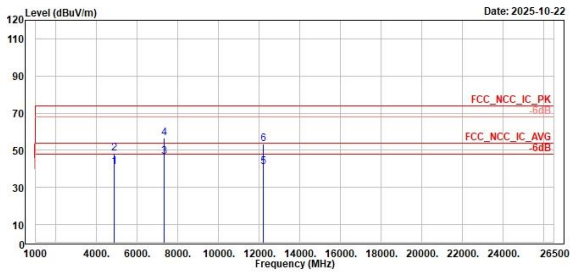


	Freq	Level	Read	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	4880.000	41.03	51.59	-10.56	54.00	-12.97	180	174	Average	Horizontal	
2	4880.000	48.58	59.14	-10.56	74.00	-25.42	180	174	Peak	Horizontal	
3	7320.000	46.52	55.27	-8.75	54.00	-7.48	237	59	Average	Horizontal	
4	7320.000	56.80	65.55	-8.75	74.00	-17.20	237	59	Peak	Horizontal	
5	12200.000	41.26	43.28	-2.02	54.00	-12.74	360	20	Average	Horizontal	
6	12200.000	53.52	55.54	-2.02	74.00	-20.48	360	20	Peak	Horizontal	

Middle Channel (Vertical)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

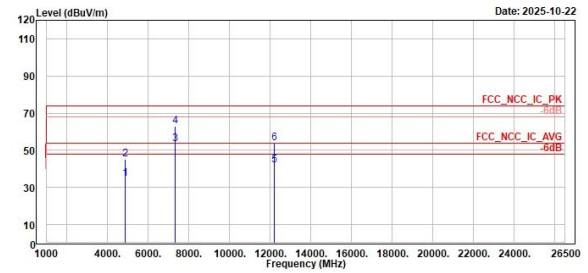

	Freq	Level	Read	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	4880.000	34.76	45.32	-10.56	54.00	-19.24	180	146	Average	Vertical	
2	4880.000	44.96	55.52	-10.56	74.00	-29.04	180	146	Peak	Vertical	
3	7320.000	53.32	62.07	-8.75	54.00	-0.68	100	59	Average	Vertical	
4	7320.000	62.86	71.61	-8.75	74.00	-11.14	100	59	Peak	Vertical	
5	12200.000	41.87	43.89	-2.02	54.00	-12.13	101	274	Average	Vertical	
6	12200.000	53.79	55.81	-2.02	74.00	-20.21	101	274	Peak	Vertical	


BLE_1M

High Channel (Horizontal)

High Channel (Vertical)




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

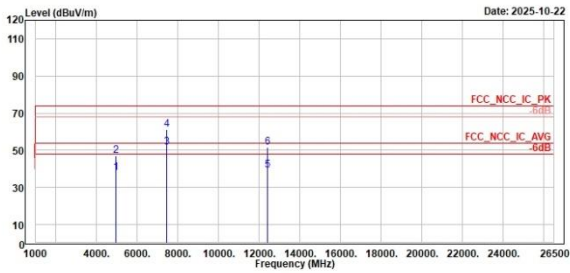

	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level Factor	Line	Limit	dB	cm	deg		
1	4960.000	37.94	48.33	-10.39	54.00	-16.06	347	229 Average	Horizontal	
2	4960.000	47.02	57.41	-10.39	74.00	-26.98	347	229 Peak	Horizontal	
3	7440.000	51.68	60.52	-8.84	54.00	-2.32	205	35 Average	Horizontal	
4	7440.000	61.25	70.09	-8.84	74.00	-12.75	205	35 Peak	Horizontal	
5	12400.000	39.12	40.80	-1.68	54.00	-14.88	400	360 Average	Horizontal	
6	12400.000	51.55	53.23	-1.68	74.00	-22.45	400	360 Peak	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

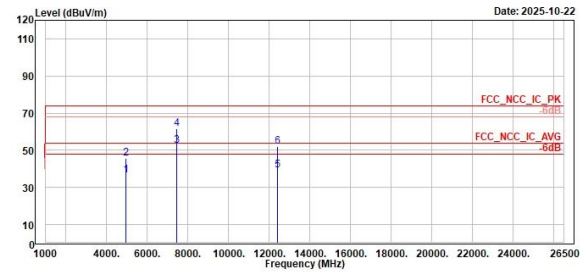

	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level Factor	Line	Limit	dB	cm	deg		
1	4960.000	36.34	46.73	-10.39	54.00	-17.66	323	246 Average	Vertical	
2	4960.000	45.70	56.09	-10.39	74.00	-28.30	323	246 Peak	Vertical	
3	7440.000	52.32	61.16	-8.84	54.00	-1.68	272	28 Average	Vertical	
4	7440.000	61.66	70.50	-8.84	74.00	-12.34	272	28 Peak	Vertical	
5	12400.000	39.39	41.07	-1.68	54.00	-14.61	324	355 Average	Vertical	
6	12400.000	52.11	53.79	-1.68	74.00	-21.89	324	355 Peak	Vertical	