LARA-L6 / LARA-R6 series

Single or multi-mode LTE Cat 4 / LTE Cat 1 modules

AT commands manual

Abstract
Description of standard and proprietary AT commands used with u-blox cellular modules.

UBX-21046719 - R12
C1-Public

www.u-blox.com

Document information		
Title	**LARA-L6 / LARA-R6 series**	
Subtitle	Single or multi-mode LTE Cat 4 / LTE Cat 1 modules	
Document type	AT commands manual	
Document number	UBX-21046719	
Revision and date	R12	19-Jul-2024
Disclosure restriction	C1-Public	

u-blox or third parties may hold intellectual property rights in the products, names, logos, and designs included in this document. Copying, reproduction, or modification of this document or any part thereof is only permitted with the express written permission of u-blox. Disclosure to third parties is permitted for clearly public documents only.
The information contained herein is provided “as is” and u-blox assumes no liability for its use. No warranty, either express or implied, is given, including but not limited to, with respect to the accuracy, correctness, reliability, and fitness for a particular purpose of the information. This document may be revised by u-blox at any time without notice. For the most recent documents, visit www.u blox.com.
Copyright © u-blox AG.

Preface

Applicable products

This document applies to the following products:

Name	Type number
LARA-L6004	LARA-L6004-00B-00 LARA-L6004-01B-00
LARA-L6004D	LARA-L6004D-00B-00 LARA-L6004D-01B-00
LARA-L6404	LARA-L6404-01B-00
LARA-L6404D	LARA-L6404D-01B-00
LARA-L6804D	LARA-L6804D-01B-00
LARA-L6824D	LARA-L6824D-01B-00
LARA-L6824	LARA-L6824-01B-00
LARA-R6001	LARA-R6001-00B-00 LARA-R6001-00B-01 LARA-R6001-01B-00
LARA-R6001D	LARA-R6001D-00B-00 LARA-R6001D-00B-01 LARA-R6001D-01B-00
LARA-R6401	LARA-R6401-00B-00 LARA-R6401-00B-01 LARA-R6401-01B-00
LARA-R6401D	LARA-R6401D-00B-00 LARA-R6401D-00B-01 LARA-R6401D-01B-00
LARA-R6801	LARA-R6801-00B-00 LARA-R6801-00B-01 LARA-R6801-01B-00
LARA-R6801D	LARA-R6801D-01B-00

For firmware version and corresponding notification documents, refer to product data sheet.

How to use this manual

The u-blox Cellular Modules AT Commands Manual provides the necessary information to successfully design in and configure the applicable u-blox cellular modules.

This manual has a modular structure. It is not necessary to read it from the beginning to the end.

The following symbols are used to highlight important information within the manual:

An index finger points out key information pertaining to module integration and performance.

A warning symbol indicates actions that could negatively impact or damage the module.

Summary table

The summary table on the top of each command section is a quick reference for the user.

command_name						
Modules	TOBY-L2 MPCI-L2					
	LISA-U110 LISA-U120 LISA-U130 LISA-U2					
	LEON-G1 SARA-G3					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	-

For satellite products:

command_name						
Modules	SARA-S5					
	LARA-L6					
	SARA-R5 LARA-R6					
Attributes	**Technology**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	Satellite	No	No	No	-	-

It is composed of two sections:

- **Modules**: lists all the modules that support the command. The modules are grouped in rows by cellular standard (i.e. L for LTE high data rate (Cat 3 and above), R for LTE low data rate (Cat 1 and below), U for UMTS/HSPA, G for GSM/GPRS, N for NB-IoT (LTE Cat NB1 / LTE Cat NB2)). In each row the modules are grouped by: form factor (i.e. SARA, LISA), platform technology (e.g. SARA-G), platform generation (e.g. SARA-G3), product name (e.g. SARA-G350) and ordering code (e.g. SARA-G350-00S). In example: if 'LISA-U2' is reported, the command applies to all the modules having LISA form factor, second chipset version provided with any release of firmware.
- **Attributes**
  - **Syntax**
    - **full**: the command syntax is fully compatible among all the products listed in the "Modules" section
    - **partial**: the products support different syntaxes (usually backward compatible with respect to previous cellular standards)
  - **Technology**: This attribute is only used when a product is a cellular/satellite module
    - **Cellular**: the command is supported in Cellular RAT among all the products listed in the "Modules" section
    - **Satellite**: the command is supported in Satellite RAT among all the products listed in the "Modules" section
    - **Cel/Sat**: the command is supported in Cellular and/or Satellite RATs among all the products listed in the "Modules" section supporting the respective RATs
  - **PIN required**
    - **Yes**: it is necessary to insert the PIN before the set and/or read command execution
    - **No**: the PIN insertion is not needed to execute the command
  - **Settings saved**
    - **Profile**: the command setting can be saved in a personal profile as specified in Chapter 1.4
    - **NVM**: the command setting is saved in the non-volatile memory as specified in Chapter 1.4
    - **<command_name>**: the parameter values set with the command are volatile, but the whole profile can be stored in NVM with <command_name> AT command.
    - **OP**: the command setting can be overwritten by the Mobile Network Operator (MNO) profile set with the +UMNOPROF or +UMNOCONF AT commands (if supported)
    - **No**: the current command setting is volatile and cannot be saved
  - **Can be aborted**
    - **Yes**: the command execution can be aborted if a character is sent to the DCE during the command execution
    - **No**: the command cannot be aborted during the command execution
  - **Response time**: estimated maximum time to get the final result code for the AT command execution. It is the time needed to provide the response in the worst case, e.g. when all the steps that have to be run to carry out the operation take the longest time to be performed; it is based on a theoretical estimation,

derived by the the 3GPP specifications in case of AT commands related to cellular modem features (e.g. registration, de-registration, PDP context activation). For additional details on the response time of cellular network related AT command, see Maximum vs typical response time of cellular network related AT commands.
More precisely, the response time considers the time from the complete acquisition of the command line to the issuing of the command result code. This kind of response time is generally lower than the time measured by the application on the DTE, because the issuing of the command on the DTE is influenced by the AT interface characteristics (e.g. the synchronous/asynchronous transfer type, the selected baud rate, etc.), by power saving and flow control, which introduce a variable latency in the command acquisition by the DCE.

For example, the maximum expected response time shall be extended if the communication with the module is carried out on a MUX virtual port, because in this case the command line and the result code are transferred via a specific protocol running on the physical port, that might introduce additional communication delay due to framing and re-transmissions.

Similarly, the maximum expected response time of AT commands accessing the SIM shall be extended if the module is using a remote SIM card via SAP instead of the local SIM card.

If the response time for a command is left blank (actually "-"), it is an "immediate" response. It means that the command is executed without asynchronous requests to the protocol stack or the internal applications, which usually require time to be answered: the command execution is synchronous (implying that no long blocking processing is done) and lasts a negligible time (the command response is issued by the module in typically less than 10 ms, and in any case less than 1 s).

The response time shall be extended if the issued AT command triggers a service that cannot be served immediately due to concurrent access to the same service or resource via AT commands issued on a different communication port or from internal applications; typical examples are registration commands and SIM access, that can be also autonomously triggered by the module (e.g. auto-COPS) and can therefore postpone the execution of the AT commands issued by the user.

- **Error reference**: reference to the error result codes listed in the Appendix A

The attributes listed in the summary table apply by default to all u-blox modules supporting the specific AT command. If a u-blox module or module series does not comply to the default behavior, the exception is highlighted in Chapter 1.4 for the saving of settings, in Chapter 1.3.4 for the abortability, and in a product specific note in the AT command description for the PIN check.

u-blox technical documentation

As part of our commitment to customer support, u-blox maintains an extensive volume of technical documentation for our products. In addition to our product-specific technical data sheets, the following manuals are available to assist u-blox customers in product design and development.

AT Commands Manual: This document provides the description of the AT commands supported by u-blox cellular modules.

System Integration Manual: This document describes u-blox cellular modules from the hardware and the software point of view. It provides hardware design guidelines for the optimal integration of the cellular module in the application device and it provides information on how to set up production and final product tests on application devices integrating the cellular module.

Application Notes: These documents provide guidelines and information on specific u-blox cellular module hardware or software topics.

- For some guidelines when developing applications for LTE Cat 1 technologies, see the LARA-R6 series application development guide [9].
- For some guidelines when developing applications for LTE Cat M1 technologies, see the SARA-R41 application development guide [31] or the LEXI-R4 / SARA-R42 application development guide [32] or the SARA-R5 series application development guide [27].

- For some guidelines when developing applications for NB-IoT technologies, see the SARA-N3 series application development guide [47] or the NB-IoT application development guide [44].
- For more examples of typical scenarios when developing application for LTE Cat 4, LTE Cat 1, UMTS/HSPA and GSM/GPRS technologies, see the AT commands examples application note [49].

See Related documentation for application notes related to your cellular module.

Questions

If you have any questions about u-blox Cellular Hardware Integration, please:

- Read this manual carefully
- Contact our information service on our homepage www.u-blox.com
- Read the questions and answers on our FAQ database

Technical Support

Worldwide Web

Our website (www.u-blox.com) is a rich pool of information. Product information, technical documents and helpful FAQ can be accessed 24h a day.

By email

If you have technical problems or cannot find the required information in the provided documents, contact the nearest of the Technical Support offices by email. Use our service pool email addresses rather than any personal email address of our staff. This makes sure that your request is processed as soon as possible. You will find the contact details at the end of the document.

Helpful Information when Contacting Technical Support

When contacting Technical Support please have the following information ready:

- Module type (e.g. SARA-G350-00S-00) and firmware version (e.g. 08.49)
- Module configuration
- Clear description of your question or the problem
- A short description of the application
- Your complete contact details

Contents

1 AT command settings 15
1.1 Definitions 15
1.2 Operational mode of the AT interface 15
1.3 Command description 16
1.4 Storing of AT commands setting 20
1.5 S-parameters 20
1.6 +UDCONF AT command 20

2 General operation 22
2.1 Start up and initialization 22
2.2 AT commands types 23

3 IPC - Inter Processor Communication 26
3.1 Multiplexing mode +CMUX 26

4 General 28
4.1 Manufacturer identification +CGMI 28
4.2 Manufacturer identification +GMI 28
4.3 Model identification +CGMM 29
4.4 Model identification +GMM 29
4.5 Firmware version identification +CGMR 29
4.6 Firmware version identification +GMR 30
4.7 Request product serial number identification +CGSN 30
4.8 IMEI identification +GSN 32
4.9 Identification information I 32
4.10 TE character set configuration +CSCS 33
4.11 International mobile subscriber identification +CIMI 34
4.12 Card identification +CCID 35
4.13 Request complete capabilities list +GCAP 35

5 Mobile equipment control and status 37
5.1 Phone activity status +CPAS 37
5.2 Module switch off +CPWROFF 37
5.3 Set module functionality +CFUN 38
5.4 Indicator control +CIND 39
5.5 Configuration of indicator control +UCIND 41
5.6 Mobile termination event reporting +CMER 42
5.7 Clock +CCLK 44
5.8 Alert sound mode +CALM 45
5.9 Set greeting text +CSGT 45
5.10 Automatic time zone update +CTZU 46
5.11 Time zone reporting +CTZR 47
5.12 List current calls +CLCC 48
5.13 Report mobile termination error +CMEE 49
5.14 Extended error report +CEER 50

6 Call control 51
6.1 Select type of address +CSTA 51
6.2 Dial command D 51
6.3 Select tone dialling T 53
6.4 Select pulse dialling P 53
6.5 Call answer A 54
6.6 Hook control H 54
6.7 Voice hangup control +CVHU 55
6.8 Monitor speaker loudness L 55

6.9 Voice call mode +CVMOD....56
6.10 Hang up call +CHUP....56
6.11 Set reporting call status +UCALLSTAT....57
6.12 DTMF and tone generation +VTS....58
6.13 Automatic answer S0....59
6.14 Set voice mail number +CSVM....60
7 Network service....61
7.1 Network parameters definition....61
7.2 Subscriber number +CNUM....63
7.3 Signal quality +CSQ....64
7.4 Extended signal quality +CESQ....65
7.5 Operator selection +COPS....67
7.6 Radio Access Technology (RAT) selection +URAT....72
7.7 Full cell scan +UCFSCAN....74
7.8 Preferred PLMN list selection +CPLS....78
7.9 Network registration status +CREG....79
7.10 Preferred operator list +CPOL....82
7.11 Read operator names +COPN....83
7.12 Steering of Roaming configuration +UDCONF=20....84
7.13 No more PS data +CNMPSD....85
7.14 Network selection control +PACSP....85
7.15 Integrity check on test networks configuration +UDCONF=81....86
7.16 Channel and network environment description +UCGED....87
7.17 Wireless service selection +WS46....94
7.18 Smart jamming detection +UJAD....95
7.19 Edit Verizon wireless APN table +VZWAPNE....97
7.20 Read RSRP values +VZWRSRP....98
7.21 Read RSRQ values +VZWRSRQ....99
7.22 Signalling connection status +CSCON....100
7.23 Radio Policy Manager (RPM) activation +URPM....101
7.24 Purging of temporary mobile identities after SIM refresh +UDCONF=56....102
7.25 eDRX setting +CEDRXS....103
7.26 eDRX read dynamic parameters +CEDRXRDP....106
7.27 Set MNO profile +UMNOPROF....107
7.28 Band selection bitmask +UBANDMASK....109
7.29 Device service domain configuration +USVCDOMAIN....111
7.30 Modem features customization +UDCONF=92....112
7.31 EEA0 encryption algorithm configuration+UDCONF=98....116
7.32 Periodic search for higher priority PLMN +UHPPLMN....116
7.33 Network band scan status +USCANSTAT....117
8 IP Multimedia Subsystem (IMS)....120
8.1 Domain configuration for supplementary services +UISS....120
8.2 IMS client configuration +UIMSCFG....120
8.3 IMS client registration / deregistration in network +UIMSREG....130
8.4 IMS registration information +CIREG....131
8.5 Domain configuration for MO SMS messages +UISMS....132
9 Device lock....134
9.1 Enter PIN +CPIN....134
9.2 Facility lock +CLCK....135
9.3 Change password +CPWD....137
10 Phonebook....138
10.1 Select phonebook memory storage +CPBS....138
10.2 Read phonebook entries +CPBR....139
10.3 Find phonebook entries +CPBF....140
10.4 Write phonebook entry +CPBW....142
11 Short Messages Service....144

11.1 Introduction....144
11.2 Select message service +CSMS....145
11.3 Preferred message storage +CPMS....146
11.4 Preferred message format +CMGF....147
11.5 Save settings +CSAS....148
11.6 Restore settings +CRES....148
11.7 Show text mode parameters +CSDH....149
11.8 New message indication +CNMI....149
11.9 New message acknowledgement to MT +CNMA....153
11.10 Select service for MO SMS messages +CGSMS....154
11.11 Send message +CMGS....154
11.12 Send SMS command +CMGC....155
11.13 Write message to memory +CMGW....156
11.14 Send message from storage +CMSS....158
11.15 Delete message +CMGD....158
11.16 Read message +CMGR....159
11.17 List message +CMGL....162
11.18 Read concatenated message +UCMGR....164
11.19 List concatenated message +UCMGL....167
11.20 Send concatenated message +UCMGS....170
11.21 Write concatenated message to memory +UCMGW....171
11.22 Set text mode parameters +CSMP....172
11.23 Service center address +CSCA....173
11.24 Select cell broadcast message types +CSCB....174
11.25 More messages to send +CMMS....174
11.26 Peek message +UCMGP....175

12 Supplementary services....177

12.1 Introduction....177
12.2 Call forwarding +CCFC....177
12.3 Call waiting +CCWA....178
12.4 Calling line identification restriction +CLIR....180
12.5 Calling line identification presentation +CLIP....181
12.6 Connected line identification presentation +COLP....182
12.7 Advice of charge +CAOC....183
12.8 Accumulated call meter +CACM....184
12.9 Accumulated call meter maximum +CAMM....184
12.10 Price per unit and currency table +CPUC....185
12.11 Call related supplementary services +CHLD....186
12.12 Call deflection +CTFR....187
12.13 Supplementary service notifications +CSSN....187
12.14 Unstructured supplementary service data +CUSD....188
12.15 Closed user group +CCUG....189

13 Circuit switched data services....191

13.1 Cellular result codes +CRC....191

14 V24 control and V25ter....192

14.1 Introduction....192
14.2 Circuit 109 behavior &C....192
14.3 Circuit 108/2 and escape sequence behavior &D....193
14.4 DSR override &S....194
14.5 Flow control &K....195
14.6 DTE-DCE character framing +ICF....195
14.7 Set flow control \Q....196
14.8 UART data rate configuration +IPR....197
14.9 Return to on-line data state O....198
14.10 Escape character S2....199
14.11 Command line termination character S3....199
14.12 Response formatting character S4....200
14.13 Command line editing character S5....200

14.14 Pause before blind dialling S6....201
14.15 Connection completion timeout S7....202
14.16 Command dial modifier time S8....202
14.17 Automatic disconnect delay S10....203
14.18 Command echo E....203
14.19 Result code suppression Q....204
14.20 DCE response format V....204
14.21 Result code selection and call progress monitoring control X....205
14.22 Reset to default configuration Z....205

15 SIM management....207
15.1 Generic SIM access +CSIM....207
15.2 Restricted SIM access +CRSM....207
15.3 Read the SIM language +CLAN....210
15.4 Check for UICC card +UUICC....210
15.5 SIM hot insertion configuration +UDCONF=50....211
15.6 UICC application discovery +CUAD....212
15.7 SIM states reporting +USIMSTAT....213

16 SIM toolkit....215
16.1 Introduction....215
16.2 Bearer Independent Protocol status indication +UBIP....215
16.3 Read the USAT profile +CUSATR....216
16.4 Write the USAT profile +CUSATW....217
16.5 Enable USAT terminal URCs +UCUSATA....218

17 Packet switched data services....219
17.1 PDP contexts and parameter definition....219
17.2 PPP LCP handshake behavior....221
17.3 Printing IP address format +CGPIAF....221
17.4 PDP context definition +CGDCONT....222
17.5 IPv6 configuration +UDCONF=66....226
17.6 Default CID and preferred protocol type configuration +UDCONF=19....228
17.7 Quality of service profile (requested) +CGQREQ....228
17.8 Quality of service profile (minimum acceptable) +CGQMIN....230
17.9 PS attach or detach +CGATT....231
17.10 PDP context activate or deactivate +CGACT....232
17.11 Enter data state +CGDATA....235
17.12 Enter PPP state/GPRS dial-up D*....236
17.13 Show PDP address +CGPADDR....237
17.14 Packet switched event reporting +CGEREP....238
17.15 GPRS network registration status +CGREG....242
17.16 Manual deactivation of a PDP context H....244
17.17 PDP context modify +CGCMOD....244
17.18 3G Quality of service profile (requested) +CGEQREQ....245
17.19 3G Quality of service profile (minimum acceptable) +CGEQMIN....249
17.20 Define secondary PDP context +CGDSCONT....253
17.21 EPS network registration status +CEREG....254
17.22 Configure the authentication parameters of a PDP/EPS bearer +UAUTHREQ....258
17.23 Define EPS quality of service +CGEQOS....259
17.24 PDP context read dynamic parameters +CGCONTRDP....260
17.25 Traffic flow template +CGTFT....262
17.26 Read counters of sent or received PS data +UGCNTRD....265
17.27 Set/reset counter of sent or received PS data +UGCNTSET....266
17.28 Uplink user data plane configuration +UDCONF=9....267
17.29 PDP IP configuration when roaming +UDCONF=75....268
17.30 Disable data when roaming +UDCONF=76....268

18 System features....270
18.1 Firmware installation +UFWINSTALL....270
18.2 Firmware update Over AT (FOAT) +UFWUPD....273

18.3 Antenna detection +UANTR ... 275
18.4 RX antenna selection +UANT ... 276
18.5 Rx diversity +URXDIV ... 277
18.6 Antenna dynamic tuner configuration +UTEST=4 ... 278
18.7 Smart temperature supervisor +USTS ... 283
18.8 MSPR profile handling configuration +UDCONF=40 ... 285
18.9 RING line handling +URING ... 286
18.10 USB profiles configuration +UUSBCONF ... 287
18.11 VBUS detection +UUSBDET ... 290
18.12 UART baud rate and flow control NVM management +UUARTCONF ... 291
18.13 Serial interfaces configuration selection +USIO ... 292
18.14 Internal temperature monitor +UTEMP ... 294
18.15 Restore factory configuration +UFACTORY ... 295
18.16 NVM RAM mode management +UNVMCFG ... 296
18.17 NVM/NVM Backup configuration management commit+UNVMW ... 297
18.18 NVM configuration management reset +UNVMR ... 298
18.19 NVM configuration management factory restore +UNVMF ... 299
18.20 Backup and restore the file system +UBKUPDATA ... 300
18.21 Cancel/pause/resume FOTA download +UFOTA ... 301
18.22 Sets FOTA status URCs +UFOTASTAT ... 302
18.23 FOTA LwM2M client configuration +UFOTACONFIG ... 305
18.24 Accept/reject LwM2M FW update request +UFOTAACK ... 306
18.25 Last gasp configuration +ULGASP ... 307
18.26 URC over AT terminal configuration +UURCCONF ... 309

19 Power management ... 311
19.1 Power saving control (Power SaVing) +UPSV ... 311
19.2 Power Saving Mode Setting +CPSMS ... 313
19.3 Power Saving Mode assigned values +UCPSMS ... 316
19.4 Deep-sleep mode options configuration +UPSMVER ... 317
19.5 Deep-sleep mode indication +UPSMR ... 318

20 GPIO ... 320
20.1 Introduction ... 320
20.2 GPIO select configuration command +UGPIOC ... 327
20.3 GPIO read command +UGPIOR ... 330
20.4 GPIO set command +UGPIOW ... 330

21 End user test ... 332
21.1 Toggle test mode +UTEST=0, +UTEST=1 ... 332
21.2 Digital pins testing +UTEST=10 ... 333

22 File System ... 336
22.1 File tags ... 336
22.2 Download file +UDWNFILE ... 338
22.3 List files information +ULSTFILE ... 340
22.4 Read file +URDFILE ... 342
22.5 Partial read file +URDBLOCK ... 342
22.6 Delete file +UDELFILE ... 343
22.7 File system limits ... 343

23 Audio interface ... 345
23.1 Loudspeaker volume level +CLVL ... 345
23.2 Mute control +CMUT ... 346
23.3 Ringer sound level +CRSL ... 347
23.4 Audio path mode setting +USPM ... 347
23.5 I^2S digital interface mode +UI2S ... 348
23.6 Play audio resource +UPAR ... 355
23.7 Stop audio resource +USAR ... 356
23.8 Tone generator +UTGN ... 356
23.9 SMS alert sound mode (Message Sound Muting) +UMSM ... 358

23.10 Master clock control +UMCLK....358
23.11 External device configuration +UEXTDCONF....360
23.12 Speech codec information +USPEECHINFO....362
23.13 Speech codec configuration +UDCONF=30....364
23.14 VoLTE speech codec configuration +USPEECHCFG....365
23.15 Audio configuration +UAUDCFG....367
24 Audio parameters tuning....369
24.1 Introduction....369
24.2 Audio parameters tuning +UTI....370
25 DNS....374
25.1 Resolve name / IP number through DNS +UDNSRN....374
25.2 Dynamic DNS update +UDYNDNS....376
25.3 Override DNS configuration +UDNSCFG....379
26 Internet protocol transport layer....381
26.1 Introduction....381
26.2 IPv4/IPv6 addressing....381
26.3 Create Socket +USOCR....382
26.4 SSL/TLS/DTLS mode configuration on TCP/UDP socket +USOSEC....384
26.5 Set socket option +USOSO....385
26.6 Get Socket Option +USOGO....386
26.7 Socket features configuration +USOCFG....388
26.8 Close Socket +USOCL....389
26.9 Get Socket Error +USOER....390
26.10 Connect Socket +USOCO....390
26.11 Write socket data +USOWR....392
26.12 SendTo command (UDP only) +USOST....394
26.13 Read Socket Data +USORD....395
26.14 Receive From command (UDP only) +USORF....397
26.15 Set Listening Socket +USOLI....398
26.16 HEX mode configuration +UDCONF=1....399
26.17 Set socket in Direct Link mode +USODL....400
26.18 Timer Trigger configuration for Direct Link +UDCONF=5....403
26.19 Data Length Trigger configuration for Direct Link +UDCONF=6....403
26.20 Character trigger configuration for Direct Link +UDCONF=7....404
26.21 Congestion timer configuration for Direct Link +UDCONF=8....404
26.22 Internal IP stack TCP window scaling factor configuration +UDCONF=17....405
26.23 Direct Link disconnect DSR line handling +UDCONF=10....406
26.24 Socket control +USOCTL....406
26.25 IP Change Notification +UIPCHGN....408
27 Device and data security....413
27.1 Introduction....413
27.2 Device security....413
27.3 Data security provided by secure connections (SSL/TLS/DTLS)....421
27.4 Data security provided by Secure Element....443
28 FTP....451
28.1 FTP service configuration +UFTP....451
28.2 FTP command +UFTPC....455
28.3 FTP error +UFTPER....459
29 HTTP....460
29.1 Common parameters definition....460
29.2 HTTP control +UHTTP....460
29.3 HTTP advanced control+UHTTPAC....464
29.4 HTTP command +UHTTPC....466
29.5 HTTP protocol error +UHTTPER....469
30 Ping....470

30.1 Ping command +UPING....470
31 Positioning....473
31.1 NMEA....473
31.2 AssistNow services....473
31.3 Positioning server configuration +UGSRV....475
31.4 GNSS....477
31.5 CellLocate® and hybrid positioning....492
32 DTMF....502
32.1 In-band DTMF and Contact ID tones detection +UDTMFCFG....502
33 I²C....509
33.1 Introduction....509
33.2 I²C open logical channel +UI2CO....509
33.3 I²C write to peripheral +UI2CW....510
33.4 I²C read from peripheral +UI2CR....511
33.5 I²C read from peripheral register +UI2CREGR....512
33.6 I²C close logical channel +UI2CC....512
33.7 Configuration of I²C bus mode +UI2CCFG....513
34 Networking....514
34.1 System networking modes....514
34.2 Interface configuration +UIFCONF....515
34.3 Get the USB IP configuration +UIPADDR....521
34.4 Configure port filtering for embedded applications +UEMBPF....523
35 Constrained Application Protocol (CoAP)....525
35.1 Introduction....525
35.2 CoAP profile configuration +UCOAP....525
35.3 CoAP command +UCOAPC....529
35.4 CoAP error reporting +UCOAPER....531
36 MQTT....532
36.1 Introduction....532
36.2 MQTT profile configuration +UMQTT....533
36.3 Save/Restore MQTT profile from NVM +UMQTTNV....537
36.4 MQTT command +UMQTTC....538
36.5 MQTT error +UMQTTER....542
37 MQTT-SN....544
37.1 Introduction....544
37.2 MQTT-SN profile configuration +UMQTTSN....545
37.3 Save/Restore MQTT-SN profile from NVM +UMQTTSNNV....548
37.4 MQTT-SN command +UMQTTSNC....549
37.5 MQTT-SN error +UMQTTSNER....553
38 Lightweight M2M....555
38.1 LwM2M Objects management....555
38.2 LwM2M connectivity....558
A Appendix: Error result codes....571
A.1 Mobile termination error result codes +CME ERROR....571
A.2 Message service error result codes +CMS ERROR....578
A.3 Firmware install final result codes....583
A.4 FOAT error result codes....584
A.5 Dynamic DNS unsolicited indication codes....584
A.6 Internal TCP/UDP/IP stack class error codes....585
A.7 Internet suite error classes....587
A.8 IP change notification error result codes....595
A.9 Ping error result codes....595

B Appendix: AT Commands List....597
B.1 Parameters stored in profiles....628
B.2 Parameters stored in non volatile memory....630
B.3 Saving AT commands configuration....635
B.4 Estimated maximum command response time....636
B.5 Multiple AT command interfaces....637
C Mobile Network Operator profiles....639
C.1 LARA-L6 / LARA-R6 Introduction....639
C.2 LARA-L6004 / LARA-R6001 Americas MNO and conformance profiles table....640
C.3 LARA-L6004 / LARA-R6001 EMEA and global MNO profiles table....642
C.4 LARA-R6401-00B EMEA and global MNO profiles table....644
C.5 LARA-R6801-00B Americas MNO and conformance profiles table....646
C.6 LARA-R6801-00B EMEA and global MNO profiles table....648
C.7 LARA-L6004D-00B / LARA-R6001D Americas MNO and conformance profiles table....650
C.8 LARA-L6004D-00B / LARA-R6001D EMEA and global MNO profiles table....652
C.9 LARA-R6001D-01B APAC MNO profiles table....654
C.10 LARA-L6004D-01B Americas MNO and conformance profiles table....656
C.11 LARA-L6004D-01B EMEA and global MNO profiles table....658
C.12 LARA-L6004D-01B APAC MNO profiles table....660
C.13 LARA-L6404D / LARA-R6401D Americas MNO and conformance profiles table....662
C.14 LARA-L6404D / LARA-R6401D EMEA and global MNO profiles table....664
C.15 LARA-L6004-01B Americas and conformance profiles table....666
C.16 LARA-L6004-01B EMEA and global MNO profiles table....668
C.17 LARA-L6404 / LARA-R6401 Americas MNO and conformance profiles table....670
C.18 LARA-L6404 / LARA-R6401-01B EMEA and global MNO profiles table....672
C.19 LARA-R6801-01B Americas and conformance profiles table....674
C.20 LARA-R6801-01B EMEA and global MNO profiles table....676
C.21 LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6801D APAC MNO and conformance profiles table....678
C.22 LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6801D EMEA and global MNO profiles table....680
D Appendix: glossary....682
Related documentation....686
Revision history....692
Contact....696

1 AT command settings

u-blox modules provide at least one physical serial interface that is compliant to V.24 [210]. When the module is powered on, it enters the command mode. For more details on command mode, see Chapter 1.1.

For module and hyper terminal connection and settings see the corresponding evaluation kit user guide.

1.1 Definitions

In this document the following naming conventions are used:

- MT (Mobile Terminal) or DCE (Data Communications Equipment): u-blox module
- TE (Terminal Equipment) or DTE (Data Terminal Equipment): terminal that issues the command to the module
- TA (Terminal Adaptor): the function, integrated in the MT, of supporting AT command interface according to the applicable standards
- ME (Mobile Equipment): equivalent to MT, it is used to refer to the device itself regardless of the inserted SIM card

The terms DCE and DTE are used in the serial interface context.

☞ LARA-L6 / LARA-R6
u-blox modules can implement more than one interface between the DTE and the DCE, either virtual interfaces (multiplexer channels) or physical interfaces (UART, USB, SPI, etc., when available). Each interface works as specified by the followings definitions. If not differently stated, all the subsequent descriptions are applicable to each interface. Appendix B.5 describes the different behavior among the interfaces in reference to the AT command interface. It also describes the limitations (if any) in the concurrent use of more than one AT command interface.

☞ See the corresponding module data sheet for the list of available AT command interfaces.

☞ LARA-L6 / LARA-R6
Where supported, two UART AT interfaces can be used at the same time (it is not the default behavior). See +USIO command description for details on how to set such behavior.
According to the terminology used in the data sheet, UART is the main asynchronous serial interface, while AUX UART is the auxiliary asynchronous interface. For more details on supported serial interfaces and their characteristics, see the corresponding module data sheet.
The same naming will be used in the rest of the document (when not clearly specified, the description shall be considered applicable to both the interfaces).

1.2 Operational mode of the AT interface

The DCE/MT interface can operate in these modes:

- **Command mode**: the DCE waits for AT command instructions. The DCE interprets all the characters received as commands to execute. The DCE may send responses back to the DTE indicating the outcome of the command or further information without having received any commands by the DTE (e.g. unsolicited response code - URC). Any communication in the command mode (in both directions) is terminated by the command line termination character.
- **Data mode**: the DCE transfers data after having sent the "CONNECT" string; all the characters sent to the DCE are intended to be transmitted to the remote party. Any further characters received over the serial link are deemed to be from the remote party, and any characters sent are transmitted to the remote party. The DCE enters data mode immediately after it makes a Circuit Switched Data (CSD) or Packet Switched Data (PSD) connection (PPP or DUN connection).
- **Online command mode**: the DCE has a data connection established with a remote party, but treats signals from the DTE as command lines and sends back responses and unsolicited indications to the DTE.

- **Direct link mode**: intermediate state where the DCE transfers data transparently over a connected TCP/UDP socket (e.g. by means of +USODL), after reporting the "CONNECT" string.
- **SMS mode**: AT commands for writing or sending SMSs lead the AT interface into an intermediate state indicated by the ">" (greater-than sign) where SMS text/PDU can be entered (DCD signal shall be in ON state during this operation). <Ctrl-Z> indicates that the SMS editing is completed, while <ESC> indicates aborting of the edited SMS.
- **Raw mode**: special AT commands lead the AT interface into intermediate state where raw data is being exchanged (e.g. during file transfer).
- **AT commands over an IP connection**: the DCE is accepting a TCP connection on a specific TCP port. The DTE can connect via TCP protocol to the port and can send commands over this TCP connection. The DCE may send responses back to the DTE via the same TCP connection. The communication over IP connection is denoted by a set of two ports:
  - AT command port;
  - binary data port. The binary data port is used for the exchange of binary data between the DCE and DTE.

  For more details, on the configuration of the TCP ports see +UIFCONF.

☞ LARA-L6 / LARA-R6
The AT commands over IP connection is not supported.

☞ LARA-L6 / LARA-R6
To establish a PSD connection see the +CGDCONT and +CGACT AT commands.

1.2.1 Switch from data mode to online command mode

When a data connection is established it is possible to switch from data mode to online command mode (OLCM) in the following ways:

- with the escape sequence "+++", which can be configured with the S2 AT command, if supported
- via a DTR transition: during data mode, the current DTR state is not important, but only its transition. Furthermore, only the DTR transition from ON to OFF is detected; it can be used to control the switch to OLCM, or to command mode (the data connection is released). For more details, see the &D AT command description

To switch back to data mode from OLCM the O AT command is used. For more details, see also the &D AT command.

When using the multiplexer and PPP combined, toggling the DTR line (of the physical serial interface where the multiplexer protocol is started) from ON to OFF state does not terminate the PPP session and return the device to the command mode. In this configuration, it is recommended that the host terminates the PPP session, which can be done by sending LCP_TERM REQ or deasserting the DTR virtual line (sending of specific MUX MSC command).

- LARA-L6 / LARA-R6 - For more details, see the u-blox multiplexer implementation application note [50].
- LARA-L6 / LARA-R6 - For more details, see the LARA-R6 series application development guide [9].

1.3 Command description

The AT commands configure and enable the module functionalities according to 3GPP normative and u-blox specifications. The AT commands are issued to the module via a hyper terminal through a command line and are described in the following sections. A general description of each command is provided including the functionalities, the correct syntax to be provided by the TE/DTE, the allowed responses and an example. The command description defines each named parameter with its type, its range (valid / acceptable values), the default value (when available) and the factory-programmed value (when applicable).

For default value it is intended the value automatically set if the parameter is omitted and at the module power-on (if the command setting is not stored in NVM/profile). For factory-programmed value it is intended the value set at the module power-on when the setting is not modified respect with the manufacturer setting; it is valid for the commands that store the setting in NVM/profile.

The summary table on the top of each command section and the Appendix B lists all the u-blox cellular modules that support that command.

☞ The example provided in the command description refers only to the handling provided by the command. It may be not valid for all the products which the document is applied to. The list of allowed values for a specific product is provided in the corresponding "Defined values" section.

☞ In this document <CR><LF> are intentionally omitted in the command syntax.

☞ If a parameter is omitted, no value will be inserted between the two commas indicating the interested parameter in the command line sent by the DTE.

1.3.1 Default values

If the command parameters are optional, they can be left out in the command line. If not otherwise specified, the default values are assumed as follows:

- For parameters of type Number, the default value is 0
- For parameters of type String, the default value is an empty string

1.3.2 Command line

The AT commands are typically issued to the cellular modules using a command line with the following generic syntax:

```
"AT"<command_name><string><S3_character>
```

Where:

- "AT": prefix to be set at the beginning of each command line
- <command_name>: command name string; it can have a "+" character as prefix
- <string>: string consisting of the parameters value following the syntax provided in this manual
  The following rules are used when describing the command syntax:
  - <...>: the name in angle brackets is a parameter. The brackets themselves do not appear in the command line
  - [...]: the square brackets represent the optional parameters of a command or an optional part of the DCE information text response. Brackets themselves do not appear in the command line. When a parameter is not given, the value will be set to the default value provided in the command description

  Parameter types:
  - Number: positive and negative counting numbers, as well as zero {..., -2, -1, 0, 1, 2,...}.
  - String: sequence of characters enclosed within quotation marks (" ").
- <S3_character>: command line termination character; the factory-programmed termination character is <CR>

☞ The maximum length of the command line is the maximum number of characters which can be accepted on a single command line (including the command line termination character).

☞ LARA-L6 / LARA-R6
The command line is not case sensitive.

☞ When writing or sending an SMS, Ctrl-Z or ESC terminates the command; <CR> is used between the two parts of the SMS (address and text).

The serial interface driver generally does not allow a new command until the previous one has been terminated by "OK" final result code or by an error result code. In specific cases (see the abortability attribute), the command execution may be aborted if a character is sent to DCE before the command has ended.

1.3.2.1 Concatenation of AT commands

More than one AT command can be entered on the same command line. The "AT" prefix must be provided only at the beginning of the command line. Each command must be separated by using a semicolon as delimiter only if the command has a "+" character as prefix.

```
Example: ATI;+CGATT?;+COPS?<CR>
```

If a command in the command line causes an error, or is not recognized as a valid command, then the execution is terminated, the remaining commands in the command line are ignored and an error result code is returned.

If all the commands are correctly executed, only the "OK" final result code of the last command is returned.

LARA-L6 / LARA-R6
Not all the commands can be entered with other commands on the same command line: +CMGW, +CMGS, +USOWR, +USOST, +UDWNFILE must be used by themselves.

1.3.3 Notes

LARA-L6 / LARA-R6

- The maximum length of the command line is 2048 characters.
- String parameter type limitations - The following characters are not allowed in the parameter string:
  - 0x00 (NUL)
  - 0x0D (CR)
  - 0x15 (NAK)
  - 0x22 (")
  - 0x2C (,)

LARA-R6001D-00B
The maximum length of the command line is 1024 characters.

1.3.4 Information text responses and result codes

The AT command response comprises an optional information text string and a final result code that can assume the format as follows:

- **Verbose format:**
  Information text response(s): <S3_character><S4_character><text><S3_character><S4_character>
  Final result code: <S3_character><S4_character><verbose code><S3_character><S4_character>
- **Numerical format:**
  Information text response(s): <text><S3_character><S4_character>
  Final result code: <numerical_code><S3_character>

where

- <S3_character> is the command line termination character
- <S4_character> is the linefeed character

LARA-L6 / LARA-R6
The V AT command configures the result code in numeric or verbose format.
The command line termination character can be set with S3 AT command.
The linefeed character can be set with S4 AT command.

Table 1 lists the allowed result codes.

Verbose	Numeric	Result code type	Description
OK	0	Final	Command line successfully processed and the command is correctly executed
CONNECT	1	Intermediate	Data connection established
RING	2	Unsolicited	Incoming call signal from the network
NO CARRIER	3	Final	Connection terminated from the remote part or attempt to establish a connection failed

Verbose	Numeric	Result code type	Description
ERROR	4	Final	General failure. The +CMEE AT command configures the error result format
NO DIALTONE	6	Final	No dialtone detected
BUSY	7	Final	Engaged signal detected (the called number is busy)
NO ANSWER	8	Final	No hang up detected after a fixed network timeout
CONNECT<data rate>	9	Intermediate	Same as CONNECT including also the data rate (data call).
DELAYED	9	Final	Delayed
NOT SUPPORT	10	Final	Operation not supported
INVALID COMMAND LINE	11	Final	Invalid command line
CR	12	Final	Carriage return
SIM DROP	13	Final	SIM not inserted
Command aborted	3000	Final	Command execution aborted issuing a character to the DCE
DISCONNECT	14	Final	Data connection disconnected
ABORTED	18	Final	Aborted terminal

Table 1: Allowed result codes

The following result codes are not supported:

- LARA-L6 / LARA-R6 - `CONNECT<data rate>`, `Command aborted`, `ABORTED`, `NOT SUPPORT`, `INVALID COMMAND LINE`, `CR`, and `SIM DROP`.

AT commands supporting the "Can be aborted" attribute (see the Preface section) can be aborted after having issued them if abortability is supported by the specific u-blox module series.

Intermediate outputs as well as descriptive outputs of a command are formatted as information text responses; if more than one string has to be printed out (see for example the +CGDCONT command description), additional command line termination and linefeed characters may be inserted for sake of readability.

If the command is not accepted by the MT an error result code will be displayed. The +CMEE AT command configures the error result code format as follows:

- "+CMS ERROR: <err>" for SMS-related AT commands
- "+CME ERROR: <err>" for any other AT commands

where <err> represents the verbose or numeric error result code depending on the +CMEE AT command setting.

The most typical error result codes are the following:

- If the command is not supported or unknown, either "+CME ERROR: unknown" or "+CME ERROR: operation not supported" is sent
- If the command syntax is wrong, "+CME ERROR: operation not supported" is sent ("+CMS ERROR: operation not supported" for SMS related commands)

The list of all the possible error result codes is available in Appendix A.1 and Appendix A.2. For some commands only the "ERROR" final result code is displayed and is documented in the command description.

The proprietary AT commands supporting the following features implement a different error management and provide different error result codes:

- LARA-L6 / LARA-R6 - Firmware update Over The Air: see the Appendix A.3
- LARA-L6 / LARA-R6 - Firmware update Over AT command: see the Appendix A.4
- LARA-R6 - DNS: see the Appendix A.5 and Appendix A.6
- LARA-L6 / LARA-R6 - TCP and UDP connections: see the Appendix A.6, Appendix A.7
- LARA-L6 / LARA-R6 - FTP: see the Appendix A.7.1
- LARA-L6 / LARA-R6 - HTTP: see the Appendix A.7.2
- LARA-L6 / LARA-R6 - MQTT: see the Appendix A.7.4
- LARA-L6 / LARA-R6 - MQTT-SN: see the Appendix A.7.5
- LARA-R6 - IP change notification: see the Appendix A.8

- LARA-L6 / LARA-R6 - CoAP: see the Appendix A.7.6
- LARA-L6 / LARA-R6 - Ping: see the Appendix A.9

The corresponding sections provide more details for retrieving the error result codes for these operations.

1.4 Storing of AT commands setting

Several user settings may be stored in the cellular module's memory. Some are directly stored in the non volatile memory (NVM), while the others are organized into two personal profiles (where supported).

Appendix B.2 lists the complete settings that can be directly stored in NVM and the corresponding commands.

LARA-L6 / LARA-R6
The module does not store the AT commands setting in the personal profiles.

1.5 S-parameters

The S-parameters, as specified in ITU-T recommendation V250 [206], constitute a group of commands that begin with the string "ATS". They are generally indicated as S registers and are used to configure the way the module operates. Their syntax is:

```
ATS<parameter_number>?
```

```
ATS<parameter_number>=<value>
```

The number following the "ATS" is the referenced S parameter.

u-blox cellular modules support the following set of S-parameters (<parameter_number>):

AT command	S Number	Description
S0	0	Automatic answer setting
S2	2	Escape character setting
S3	3	Command line termination character setting
S4	4	Response formatting character setting
S5	5	Command line editing character setting
S6	6	Pause before blind dialling setting
S7	7	Connection completion timeout setting
S8	8	Command dial modifier time setting
S10	10	Automatic disconnect delay setting

If a <parameter_number> other than those listed above is introduced, the S command returns an error result code (+CME ERROR: operation not supported).

1.6 +UDCONF AT command

The UDCONF AT commands constitute a group of u-blox proprietary AT commands that allow to configure some features belonging to i.e network services, internet suite, etc. They are indicated by the "+UDCONF=" string followed by an <op_code> (i.e. +UDCONF=20). The allowed <op_code> values depend on the module series.

The generic set command syntax is:

```
AT+UDCONF=<op_code>,<param1>,<param2>,....
```

while the generic read command syntax is

```
AT+UDCONF=<op_code>
```

The test command syntax is defined as follows:

```
+UDCONF: <op_code1>,(supported <op_code1_param1>),(supported <op_code1_param2>),..
+UDCONF: <op_code2>,(supported <op_code2_param1>),(supported <op_code2_param2>),..
+UDCONF: <op_code3>,(supported <op_code3_param1>),(supported <op_code3_param2>),..
OK
```

The test command syntax for <op_code>=110 (NVM RAM mode management) differs respect with the other <op_code> values:

```
+UDCONF: 110,"audio","+CLVL,+CRSL,+UMGC,+USGC,+UMSEL,+UMAFE,+USAFE,+UI2S,+USPM"
```

The string after the <at_group> parameter (i.e. "audio") lists the commands that are impacted by the corresponding "command class". The allowed values for the <at_group> parameter (i.e. AT+UDCONF=110, "audio") are provided by means of the corresponding read command.

2 General operation

2.1 Start up and initialization

The characteristics of the boot of the cellular device vary from module to module and are described in the corresponding system integration manual. During the boot phase the module might not respond to the AT interface until all necessary SW modules have been installed (e.g. USB drivers). Monitoring of the greeting text, where supported, can help in detecting the successful end of the boot phase.

A complete start up including cellular network operation can only take place with a SIM card.

☞ LARA-L6 / LARA-R6
If the SIM card has enabled the PIN check, some commands answer with "+CME ERROR: SIM PIN required" and most cellular functionalities are not started. After entering the required PIN via the +CPIN command, or if booting with a SIM with disabled PIN check, SIM initialization is carried out and a lot of SIM files are read: it is possible that some commands (e.g. phonebook AT commands) are affected by this preliminary phase, resulting in a temporary error response.

☞ LARA-L6 / LARA-R6
If the EF_{CSP} (Customer Service Profile) SIM file is available, the +PACSP URC is issued at module boot after SIM initialization.

2.1.1 Auto-registration

If the +COPS <mode> parameter in the profiles or in NVM is left to its factory-programmed value 0 or is set to 1, then after SIM initialization, all u-blox modules will automatically perform PLMN selection and registration for circuit switched/non EPS services as well as packet switched/EPS services. Auto-registration (also sometimes called "auto-COPS", not to be confused with automatic <mode>=0) will also be triggered at SIM insertion, for modules supporting SIM hot insertion, or at SIM driver recovery, occurring when the communication with the SIM card is re-established by the module after an unrecoverable error, caused e.g. by mechanical vibrations or electrical interference.

☞ LARA-L6 / LARA-R6
During the auto-registration any further network request (by means of AT+COPS=0 or AT+COPS=1) is processed immediately.

☞ LARA-L6 / LARA-R6
The radio access technology selected by the module at start up is defined by the <1stAcT> parameter of the +URAT command; afterwards the module will reselect the RAT based on the requirements of the cellular standards it complies with and it is not possible to force it to remain in a given RAT unless it is locked on it via +URAT.

The user can retrieve the result of the auto-registration by polling the registration status commands (e.g. +CREG/+CGREG/+CEREG/+CIREG) or enabling their unsolicited notifications. If auto-COPS is running, at boot time or at SIM insertion, network service commands issued by the user might have a longer response time than expected; this is particularly visible when the module is switched on in a jammed condition, or with a roaming SIM card that shall perform several registration attempts before gaining access to a VPLMN. If the automatic registration fails and the cause cannot be retrieved via +CEER, it is suggested to disable auto-COPS starting the module in +COPS: 2 or in airplane mode +CFUN: 4 and trigger registration with AT commands.

2.1.2 Operational restrictions

Operational restrictions may derive from several settings: PIN required, SIM lock, invalidation of the IMEI or SIM credentials by the Mobile Network Operator (MNO) during the registration procedure, FDN enabled. Restrictions to access the network are also applied by the module in any one of these conditions:

- In eCall only state (for all modules supporting the eCall feature)

- In minimum functionality power modes (+CFUN: 0, +CFUN: 4, +CFUN: 19, +CFUN: 127), and even if the module is restarted in +CFUN: 4 or +CFUN: 19 modes, because they are persistent

If the module is in operational restricted state, it may reject all or specific service requests (e.g. operator selection, connection establishment).

2.1.3 LARA-L6 / LARA-R6 Maximum vs typical response time of cellular network related AT commands

The AT command manual provides the response time as the maximum delay to get the final result code; the execution of an AT command which requires interaction with the network (e.g. PDP context activation) or with a remote server (e.g. connection of a TCP socket) is affected by several aspects, like the reliability of the radio link, which might introduce packet loss and imply re-transmissions, and the quality of the network coverage, which can force the module to look for a better serving cell or even for a different PLMN or Radio Access Technology. Provided that radio conditions are good (diagnostic commands like +CESQ, +CGED, +UCGED can report that) and the module is already registered, the typical response time is really low (e.g. a few seconds); and if the module is already in RRC connected state (so it does not need to establish the RRC connection) it is even lower. The response time will therefore range between the typical response time in good conditions and the documented maximum response time. The host application usually sets a timer for each AT command issued on the AT interface, at whose timeout it take countermeasures like:

- aborting the current command (if supported),
- triggering a registration cycle to restart the cellular protocol stack from a known state,
- triggering a SW reset.

Such host application timer can be configured as the documented maximum response time of the specific AT command issued, or to a shorter value provided that the module is in a known initial state (e.g. registered). In the latter case the timer duration can be theoretically derived from some frequent abnormal cases like the following:

- loss of one of the module's messages or network response,
- collision between the service request and some mobility procedure

and set to some tens of seconds. When there is no information on the module registration status, like at switch on, it is advisable to wait more, because the mobility procedure might last much longer due to e.g.:

- initial PLMN scan on all supported bands and RATs to find the highest priority PLMN in roaming condition; if NB-IoT is among the supported RATs, 2 minutes might be required to scan each NB-IoT band;
- registration attempts on several PLMNs rejecting the module due to subscription limitation; in legacy RATs (2G, 3G) this occurs within the steering of roaming (SoR) feature and can extend the registration response time to more than the 3 minutes calculated as worst case in a single PLMN (at least 4 minutes are suggested in this case).

If the current command is aborted and re-issued, it might be that the module can never complete the required steps to find a suitable cell and PLMN and register on it. This holds in particular for the registration commands AT+COPS=0 issued in +COPS: 2. So it is suggested to use a larger timeout value at least once, before taking countermeasures like triggering a registration cycle or a SW reset.

2.2 AT commands types

2.2.1 Action command

An action command forces the DCE to print information text or execute a specific action for the command. A typical example of this command type is the provision of the factory-programmed settings of the DCE like manufacturer name, firmware version, etc.

2.2.2 Set command

A set command configures the preferred settings for the specified command. The set command is the only way to set the preferred settings in the DCE. For some commands it is possible to store the current settings in the profile or in the non volatile memory and retrieve them in another connection.

2.2.3 Read command

A read command provides the current setting of the command parameters. It is used to find out the current command configuration.

2.2.4 Test command

A test command provides the list of the values allowed by each parameter of the command.

2.2.5 Unsolicited Result Code (URC)

An unsolicited result code is a string message (provided by the DCE) that is not triggered as an information text response to a previous AT command and can be output, when enabled, at any time to inform the DTE of a specific event or status change.

The URC can have the same name of the command that enables it or can be enabled by another command. Generally the AT commands activate the URC on the present (virtual) AT interface on which they are enabled. If the AT commands settings are stored in the **personal profile**, the related URCs are enabled on all AT interface identifiers once set with AT&W (where supported). If the AT commands settings are stored to the **NVM**, at the module boot the related URCs are enabled on all the AT interfaces.

☞ There are cases where both the AT command setting and the AT interface identifier is stored to NVM, therefore the URC will be enabled only on a specific AT interface. These cases are documented in the related AT commands descriptions.

☞ For more details on the storing of AT command setting, see Storing of AT commands setting.

☞ LARA-L6 / LARA-R6
As default behavior, the generated URCs are issued on all the AT terminals except for +UCPWROFF URC and during a FOAT update. For more details, see the +UFWUPD AT command.
Otherwise, the URC can be issued only on some AT terminals using the +UURCCONF AT command.

2.2.5.1 URCs presentation deferring

Since the URCs are text responses issued by the DCE without being requested by the DTE, their occurrence is completely uncorrelated to an AT command execution. Therefore, a collision between a URC and an AT command response might occur and it may lead the DTE to misunderstand the URC as part of the AT command's text response or vice versa.

The module avoids this collision by delaying the URCs presentation if the AT command interface is busy. The AT command interface can be busy in the following cases:

- During a data call (data mode)
- During the execution of an AT command in command or online command mode

The command execution starts when the command line is completed by the command line termination character and the AT interpreter in the module accepts it; the command execution ends when the final result code for the command is sent out. Inside this period, the module is not allowed to send the not buffered URCs. For most of the messages, the DCE needs to be configured whether or not to send a URC. After enabling, for most of the URCs, if the AT command interface is busy, the pending URCs are buffered and their sending to the DCE is deferred. The RING indication is always generated as an unsolicited result code. The NO CARRIER indication is generated as an unsolicited result code when it has not to be considered the final response for the executing command (e.g.: ATH); if it is handled as an unsolicited result code, it follows the rule of the other URCs.

Generally, the buffered URCs are sent to the terminal as soon as the terminal exits the data mode or the command execution is terminated. An exception to this behavior is implemented for the following URCs classes:

Class	AT command to configure the class
Reception of a new SMS related URCs	+CNMI AT command
+CIEV URCs	+CMER AT command

For the above classes, it is possible to select the presentation strategy when the AT interface is busy, according to the 3GPP TS 27.007 [75]; buffering or discarding are the two possible choices (URCs are lost in the latter case). This is done by means of the corresponding AT command (see the AT commands listed in the table above). If the URCs are enabled or, for the three described classes of URCs, the buffered URCs are sent out only when the AT interface is in idle again, then this occurs as soon as:

- The data mode is released (the data call is disconnected)
- The final result code for an AT command is issued

☞ LARA-L6 / LARA-R6
In data mode (PPP mode) URC presentation deferring is not effective and the URCs are discarded.

☞ To ensure the DCE can transmit the buffered URCs, the DTE should wait some time (the recommended value is at least 20 ms) after the reception of an AT command final result code or URC before issuing a new AT command. Otherwise, the collision of the URCs with the subsequent AT command is possible.

☞ If multiple AT interfaces are available, it is best to use one of the AT interfaces to manage all the user-enabled URCs, while using the other ones to send AT commands and receive their responses.
The URCs related to external causes (e.g., RING) are issued on all interfaces.

2.2.6 Intermediate Result Code (IRC)

An intermediate result code is a string message (provided by the DCE) which provides to the DTE some information about the processing status of the pending AT command.

3 IPC - Inter Processor Communication

3.1 Multiplexing mode +CMUX

+CMUX						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	-	+CME Error

3.1.1 Description

Enables the multiplexing protocol control channel as defined in 3GPP TS 27.010 [104]. The command sets the parameters for the control channel. The result code is returned using the old interface speed. The parameters become active only after sending the OK result code.

The usage of +CMUX set command during the multiplexing is not allowed.

The multiplexer configuration is as follows:

Modules	Control channel	AT commands / data connection	GNSS tunneling	SIM Access Profile (SAP)
LARA-L6 / LARA-R6	Channel 0	Channel 1 - 2	Channel 3	

Table 2: Multiplexer configuration

3.1.2 Syntax

Type	Syntax	Response	Example
Set	AT+CMUX=<mode>[,<subset>[,<port_speed>[,<N1>[,<T1>[,<N2>[,<T2>[,<T3>[,<k>]]]]]]]	OK	AT+CMUX=0,0,,1500,50,3,90 OK
Read	AT+CMUX?	+CMUX: <mode>,[<subset>],<port_speed>,<N1>,<T1>,<N2>,<T2>,<T3>[,<k>] OK	+CMUX: 0,0,0,1500,253,3,254,0,0 OK
Test	AT+CMUX=?	+CMUX: (list of supported <mode>s),(list of supported <subset>s),(list of supported <port_speed>s),(list of supported <N1>s),(list of supported <T1>s),(list of supported <N2>s),(list of supported <T2>s),(list of supported <T3>s),(list of supported <k>s) OK	+CMUX: (0),(0),,(1-1509),(1-255),(0-5),(2-255),, OK

3.1.3 Defined values

Parameter	Type	Description
<mode>	Number	Multiplexer transparency mechanism: • 0: basic option
<subset>	Number	The way in which the multiplexer control channel is set up: • 0 (default value): UIH frames used only • 1: UI frames used only Allowed values: • LARA-L6 / LARA-R6 - 0, 1
<port_speed>	Number	Transmission rate. The allowed range is 0-7.

Parameter	Type	Description
		This parameter is ignored and the value 0 is always displayed in case of read command.
<N1>	Number	Maximum frame size: • Allowed range is 1-1509. • The default value is 31.
<T1>	Number	Acknowledgement timer in units of ten milliseconds. The allowed range is 1-255. This parameter is ignored and the value 253 is always set.
<N2>	Number	Maximum number of re-transmissions: • Allowed range is 0-5. • The default value is 3.
<T2>	Number	Response timer for the multiplexer control channel in units of ten milliseconds. The allowed range is 2-255. This parameter is ignored and the value 254 is always set.
<T3>	Number	Wake up response timer. The allowed range is 0-255. This parameter is ignored and the value 0 is always displayed in case of the read command.
<k>	Number	Window size, for advanced operation with Error Recovery options. The allowed range is 0-255. This parameter is ignored and the value 0 is always displayed in case of the read command.

3.1.4 Notes

- If the multiplexer protocol is not started (the +CMUX set command has not been issued or returned an error result code) and AT+CMEE is set to 2, the +CMUX read command returns the following error result code: +CME ERROR: operation not allowed.
- For complete compatibility between u-blox products, leave the unsupported/unused parameters blank (which are reported as blank by the +CMUX test command).
- <T1> must be lower than or equal to <T2>.

LARA-L6 / LARA-R6

- To enable the GNSS tunneling on the dedicated MUX channel, configure properly the +UGPRF AT command, otherwise there will be no data flow on it.
- <T1> value is ignored, since the related timer is not implemented.
- The command is only supported on the UART interface. It cannot be used on the USB interface and on the AUX UART interface.

LARA-L6 / LARA-R6001 / LARA-R6401 / LARA-R6401D / LARA-R6801

- In case the USB interface is configured as GNSS tunneling (for more details, see +USIO AT command, <requested_variant>=2) and the multiplexing protocol is activated, the multiplexer on the UART interface is configured as follows:
  - Control channel: channel 0
  - AT commands / data connection: channel 1 - 3

LARA-R6001D

- In case the USB interface is configured as GNSS tunneling (for more details, see +USIO AT command, <requested_variant>=2) and the multiplexing protocol is activated, the multiplexer on the UART interface is configured as follows:
  - Control channel: channel 0
  - AT commands / data connection: channel 1 - 2

4 General

4.1 Manufacturer identification +CGMI

+CGMI						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

4.1.1 Description

Text string identifying the manufacturer.

4.1.2 Syntax

Type	Syntax	Response	Example
Action	AT+CGMI	<manufacturer>	u-blox
		OK	OK
Test	AT+CGMI=?	OK	

4.1.3 Defined values

Parameter	Type	Description
<manufacturer>	String	Manufacturer name

4.2 Manufacturer identification +GMI

+GMI						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

4.2.1 Description

Text string identifying the manufacturer.

4.2.2 Syntax

Type	Syntax	Response	Example
Action	AT+GMI	<manufacturer>	u-blox
		OK	OK

4.2.3 Defined values

Parameter	Type	Description
<manufacturer>	String	Manufacturer name

4.3 Model identification +CGMM

+CGMM						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

4.3.1 Description

Text string identifying the product name.

4.3.2 Syntax

Type	Syntax	Response	Example
Action	AT+CGMM	<model> OK	LISA-U200 OK
Test	AT+CGMM=?	OK	

4.3.3 Defined values

Parameter	Type	Description
<model>	String	Name of the product

4.4 Model identification +GMM

+GMM						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

4.4.1 Description

Text string identifying the product name.

4.4.2 Syntax

Type	Syntax	Response	Example
Action	AT+GMM	<model> OK	LISA-U120 OK

4.4.3 Defined values

Parameter	Type	Description
<model>	String	Name of product

4.5 Firmware version identification +CGMR

+CGMR						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

4.5.1 Description

Returns the firmware version of the module.

4.5.2 Syntax

Type	Syntax	Response	Example
Action	AT+CGMR	<version>	11.40
		OK	OK
Test	AT+CGMR=?	OK	

4.5.3 Defined values

Parameter	Type	Description
<version>	String	Firmware version

4.6 Firmware version identification +GMR

+GMR						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

4.6.1 Description

Returns the firmware version of the module.

4.6.2 Syntax

Type	Syntax	Response	Example
Action	AT+GMR	<version>	11.40
		OK	OK

4.6.3 Defined values

Parameter	Type	Description
<version>	String	Firmware version

4.7 Request product serial number identification +CGSN

+CGSN						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	-	+CME Error

4.7.1 Description

Returns the International Mobile station Equipment Identity (IMEI) number and related information to identify the MT that the TE is connected to.

4.7.2 Syntax

Type	Syntax	Response	Example
Generic syntax			
Set	AT+CGSN[=<snt>]	[+CGSN:]<param_val>	AT+CGSN=0
		OK	357520070120767
			OK
Serial number request			
Set	AT+CGSN[=0]	<sn>	AT+CGSN
		OK	357520070120767

Type	Syntax	Response	Example
			OK
IMEI request			
Set	AT+CGSN=1	+CGSN: <imei>	AT+CGSN=1
		OK	+CGSN: "357520070120767"
			OK
IMEISV request			
Set	AT+CGSN=2	+CGSN: <imeisv>	AT+CGSN=2
		OK	+CGSN: "3575200701207601"
			OK
SVN request			
Set	AT+CGSN=3	+CGSN: <svn>	AT+CGSN=3
		OK	+CGSN: "01"
			OK
Full IMEI and SVN request			
Set	AT+CGSN=255	<imei_full>	AT+CGSN=255
		OK	35752007012076701
			OK
Test	AT+CGSN=?	+CGSN: (list of supported <snt>s)	+CGSN: (0-3,255)
		OK	OK

4.7.3 Defined values

Parameter	Type	Description
<snt>	Number	It indicates the requested serial number type. Depending on <snt> value, the <param_val> parameter in the information text response provides different information: • 0 (default value): MT serial number, typically the International Mobile station Equipment Identity (IMEI) • 1: International Mobile station Equipment Identity (IMEI) • 2: International Mobile station Equipment Identity and Software Version Number (IMEISV) • 3: Software Version Number (SVN) • 255: IMEI (not including the spare digit), the check digit and the SVN
<sn>	Number	MT serial number, typically the International Mobile station Equipment Identity (IMEI)
<imei>	String	International Mobile station Equipment Identity (IMEI). IMEI is composed of Type Allocation Code (TAC) (8 digits), Serial Number (SNR) (6 digits) and the Check Digit (CD) (1 digit).
<imeisv>	String	International Mobile station Equipment Identity and Software Version Number (IMEISV). The 16 digits of IMEISV are composed of Type Allocation Code (TAC) (8 digits), Serial Number (SNR) (6 digits) and the software version (SVN) (2 digits).
<svn>	String	Software Version Number (SVN) which is a part of IMEISV.
<imei_full	Number	International Mobile station Equipment Identity (IMEI), Check Digit and Software Version Number.
<param_val>	Number/ String	Type and supported content depend on related <snt> (details are given above)

4.8 IMEI identification +GSN

+GSN						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

4.8.1 Description

The commands handling is the same of +CGSN.

4.8.2 Syntax

Type	Syntax	Response	Example
Action	AT+GSN[=<snt>]	<sn>	004999010640000
		OK	OK
Test	AT+GSN=?	OK	

4.8.3 Defined values

See +CGSN AT command.

4.9 Identification information I

I						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	-	+CME Error

4.9.1 Description

Returns some module information as the module type number and some details about the firmware version.

The information text response of ATI9 contains the modem version and the application version of the module where applicable; it returns "Undefined" where not applicable.

4.9.2 Syntax

Type	Syntax	Response	Example
Action	**Type number request** ATI[0]	<type_number> OK	ATI0 LARA-R6001-00B-00 OK
	Model name ATI7	<model_name> OK	ATI7 LARA-R6001 OK
	Modem and application version request ATI9	<modem_version>,<applications_version> OK	ATI9 00.10,A00.01 OK

4.9.3 Defined values

Parameter	Type	Description
<type_number>	String	Product type number
<model_name>	Number	Model name. For more details on the allowed values, see Notes.
<modem_version>	String	Module modem version

Parameter	Type	Description
<applications_ version>	String	Module application version. Where not applicable the module provides "Undefined".

4.9.4 Notes

LARA-R6

- Table 3 reports the model name of each type number.

Product type number	Model name
LARA-R6001-00B-00	LARA-R6001
LARA-R6001D-00B-00	LARA-R6001D
LARA-R6401-00B-00	LARA-R6401
LARA-R6401D-00B-00	LARA-R6401D
LARA-R6801-00B-00	LARA-R6801
LARA-R6001-01B-00	LARA-R6001
LARA-R6001D-01B-00	LARA-R6001D
LARA-R6401-01B-00	LARA-R6401
LARA-R6401D-01B-00	LARA-R6401D
LARA-R6801-01B-00	LARA-R6801
LARA-R6801D-01B-00	LARA-R6801D

Table 3: Model name (ATI7 response)

LARA-L6

- Table 4 reports the model name of each type number.

Product type number	Model name
LARA-L6004D-00B-00	LARA-L6004D
LARA-L6004-00B-00	LARA-L6004
LARA-L6004D-01B-00	LARA-L6004D
LARA-L6004-01B-00	LARA-L6004
LARA-L6404D-01B-00	LARA-L6404D
LARA-L6404-01B-00	LARA-L6404
LARA-L6804D-01B-00	LARA-L6804D
LARA-L6824D-01B-00	LARA-L6824D
LARA-L6824-01B-00	LARA-L6824

Table 4: Model name (ATI7 response)

4.10 TE character set configuration +CSCS

+CSCS						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	Profile	No	-	+CME Error

4.10.1 Description

Selects the TE character set.

The selected character set is used for encoding/decoding of only the AT commands' string type parameters whose description explicitly references the +CSCS setting itself.

LARA-L6 / LARA-R6

The command setting is not stored in the profile and is volatile.

4.10.2 Syntax

Type	Syntax	Response	Example
Set	AT+CSCS=<chset>	OK	AT+CSCS="IRA" OK
Read	AT+CSCS?	+CSCS: <chset> OK	+CSCS: "IRA" OK
Test	AT+CSCS=?	+CSCS: (list of supported <chset>'s) OK	+CSCS: ("IRA","GSM","PCCP437", "8859-1","UCS2","HEX", "PCCP936") OK

4.10.3 Defined values

Parameter	Type	Description
<chset>	String	Allowed characters set: • "IRA": International Reference Alphabet (ITU-T T.50) • "GSM": GSM default alphabet (3GPP TS 23.038) • "PCCP437": PC character set Code Page 437 • "8859-1": ISO 8859 Latin 1 character set • "UCS2": 16-bit universal multiple-octet coded character set (USO/IEC10646); UCS2 character strings are converted to hexadecimal numbers from 0000 to FFFF; e.g. "004100620063" equals three 16-bit characters with decimal values 65, 98 and 99 • "HEX": character strings consist only of hexadecimal numbers from 00 to FF; e.g. "032FE6" equals three 8-bit characters with decimal values 3, 47 and 230; no conversions to the original MT character set shall be done • "PCCP936": Chinese character set • "UTF-8": octet (8-bit) lossless encoding of UCS characters (see RFC 3629 [205]); UTF-8 encodes each UCS character as a variable number of octets, where the number of octets depends on the integer value assigned to the UCS character. The input format shall be a stream of octets. It shall not be converted to hexadecimal numbers as in "HEX" or "UCS2". This character set requires an 8-bit TA - TE interface. Allowed values: • LARA-L6 / LARA-R6 - "IRA" (default value), "GSM", "UCS2"

4.11 International mobile subscriber identification +CIMI

+CIMI						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	-	+CME Error

4.11.1 Description

Request the IMSI (International Mobile Subscriber Identity).

4.11.2 Syntax

Type	Syntax	Response	Example
Action	AT+CIMI	<IMSI> OK	222107701772423 OK
Test	AT+CIMI=?	OK	

4.11.3 Defined values

Parameter	Type	Description
<IMSI>	Number	International Mobile Subscriber Identity

4.12 Card identification +CCID

+CCID						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

4.12.1 Description

Returns the ICCID (Integrated Circuit Card ID) of the SIM-card. ICCID is a serial number identifying the SIM.

4.12.2 Syntax

Type	Syntax	Response	Example
Action	AT+CCID	+CCID: <ICCID> OK	+CCID: 8939107800023416395 OK
Read	AT+CCID?	+CCID: <ICCID> OK	+CCID: 8939107900010087330 OK
Test	AT+CCID=?	OK	

4.12.3 Defined values

Parameter	Type	Description
<ICCID>	String	ICCID of the SIM card

4.12.4 Notes

- The command requires the SIM to correctly work.

4.13 Request complete capabilities list +GCAP

+GCAP						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

4.13.1 Description

This command requests the list of capabilities, containing the corresponding command names. The Complete Capabilities List command indicates the major capability areas of the MT. Each area is presented by the selection command name of the specific capability area or some other predefined response.

The first response text (+FCLASS) informs that some fax or voice capabilities are present while the second supported area presented with +CGSM shows that all GSM commands of the present document are supported.

4.13.2 Syntax

Type	Syntax	Response	Example
Action	AT+GCAP	+GCAP: <capability_area 1>[, <capability_area 2>[...]] OK	+GCAP: +FCLASS, +CGSM OK
Test	AT+GCAP=?	OK	

4.13.3 Defined values

Parameter	Type	Description
<capability_area>	String	Command name or predefined response of the specific capability area In the example: +FCLASS response text informs that some fax or voice capabilities are present, while +CGSM response text shows that all GSM commands of the present document are supported by the MT

5 Mobile equipment control and status

5.1 Phone activity status +CPAS

+CPAS						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

5.1.1 Description

Returns the activity status <pas> of the MT.

5.1.2 Syntax

Type	Syntax	Response	Example
Action	AT+CPAS	+CPAS: <pas> OK	+CPAS: 0 OK
Test	AT+CPAS=?	+CPAS: (list of supported <pas>s) OK	+CPAS: (0-5) OK

5.1.3 Defined values

Parameter	Type	Description
<pas>	Number	MT activity status: • 0: ready (MT allows commands from DTE) • 1: unavailable (MT does not allow commands from DTE) • 2: unknown (MT is not guaranteed to respond to instructions) • 3: ringing (MT is ready for commands from DTE, but the ringer is active) • 4: call in progress (MT is ready for commands from DTE, but a call is in progress, e.g. call active, hold, disconnecting) • 5: asleep (ME is unable to process commands from DTE because it is in a low functionality state) Allowed values: • LARA-L6 / LARA-R6 - 0, 3, 4

5.2 Module switch off +CPWROFF

+CPWROFF						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	< 40 s	+CME Error

5.2.1 Description

Switches off the MT. During shutdown current settings are saved in module's non-volatile memory.

Using this command can result in the following command line being ignored.

See the corresponding system integration manual for the timing and the electrical details of the module power-off sequence via the AT+CPWROFF command.

5.2.2 Syntax

Type	Syntax	Response	Example
Action	AT+CPWROFF	OK	

Type	Syntax	Response	Example
Test	AT+CPWROFF=?	OK	
URC		+UCPWROFF	+UCPWROFF

5.2.3 Notes

LARA-L6 / LARA-R6

- The +UCPWROFF URC is not supported.

5.3 Set module functionality +CFUN

+CFUN						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	Appendix B.4	+CME Error

5.3.1 Description

Selects the level of functionality <fun> in the MT.

☞ LARA-L6 / LARA-R6
If the syntax AT+CFUN=15 or AT+CFUN=16 (resets) or AT+CFUN=127 is used (where supported), the rest of the command line placed after that will be ignored.

5.3.2 Syntax

Type	Syntax	Response	Example
Set	AT+CFUN=<fun>[,<rst>]	OK	AT+CFUN=1 OK
Read	AT+CFUN?	+CFUN: <power_mode> OK	+CFUN: 1 OK
Test	AT+CFUN=?	+CFUN: (list of supported <fun>'s), (list of supported <rst>'s) OK	+CFUN: (0,1,4,10,11,15,16,19),(0-1) OK
URC		+UUFASTSHUTDOWN: <value>	+UUFASTSHUTDOWN: 0

5.3.3 Defined values

Parameter	Type	Description
<fun>	Number	Selected functionality: • 0: sets the MT to minimum functionality (disable both transmit and receive RF circuits by deactivating both CS and PS services) • 1 (factory-programmed value): sets the MT to full functionality, e.g. from airplane mode or minimum functionality. Full functionality mode is persistent between power cycles triggered by AT+CFUN=15, AT+CFUN=16 or AT+CPWROFF (where supported). • 4: disables both transmit and receive RF circuits by deactivating both CS and PS services and sets the MT into airplane mode. Airplane mode is persistent between power cycles triggered by AT+CFUN=15, AT+CFUN=16 or AT+CPWROFF (where supported). • 10: fast power-off, the command triggers a fast shutdown, without sending a detach request to the network, with storage of current settings in module's non-volatile memory. The "OK" final result code indicates the command request was successful, while the +UUFASTSHUTDOWN URC provides the status of the power-off process.

Parameter	Type	Description
		• 11: safe memory and power-off, the command puts the memory in safe state avoiding further write and erase operations and shuts down the system without performing any controlled shutdown procedure • 15: MT silent reset (with detach from network and saving of NVM parameters), without reset of the SIM card • 16: MT silent reset (with detach from network and saving of NVM parameters), with reset of the SIM card • 19: sets the MT to minimum functionality by deactivating CS and PS services and the SIM card. Re-enable the SIM card by means of <fun>=0, 1, 4. Allowed values: • LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B - 0, 1, 4, 10, 15, 16, 19 • LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D - 0, 1, 4, 10, 11, 15, 16, 19
<rst>	Number	Reset mode: • 0 (default value): do not reset the MT before setting it to the selected <fun> • 1: performs a MT silent reset (with detach from network and saving of NVM parameters) with reset of the SIM card before setting it to the selected <fun> (if persistent at reboot).
<power_mode>	Number	Power mode: • 0: MT is switched on with minimum functionality • 1: MT is switched on • 4: MT is in "airplane mode" • 5: MT is in "test mode" • 19: MT is in minimum functionality with SIM deactivated Allowed values: • LARA-L6 / LARA-R6 - 0, 1, 4, 5, 19
<value>	Number	Allowed values: • 0: fast power-off ongoing • 1: fast power-off completed

5.3.4 Notes

LARA-L6 / LARA-R6

- <fun>=15 resets the SIM card.
- The command will provide an error result code while in Online Command Mode (OLCM).
- Only the +UUFASTSHUTDOWN: 1 URC is provided after the trigger of <gpio_mode>=24 GPIO functionality.
- AT+CFUN=19 does not support the <rst> parameter.

5.4 Indicator control +CIND

+CIND						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	-	+CME Error

5.4.1 Description

Provides indication states related to network status, battery information and so on.

The set command does not allow setting the values for those indications which are set according to module state (see <descr> parameter).

The list of indications for set and read commands follows the indexes reported in the <descr> parameter, so that the first <ind> corresponds to "battchg" and so on.

For more details, see the 3GPP TS 27.007 [75].

5.4.2 Syntax

Type	Syntax	Response	Example
Set	AT+CIND=[<ind>[,<ind>[,...]]]	OK	AT+CIND= OK
Read	AT+CIND?	+CIND: <ind>[,<ind>[,...]] OK	+CIND: 5,0,0,0,0,0,0,0,0,0,0 OK
Test	AT+CIND=?	+CIND: (list of <descr>s) OK	+CIND: ("battchg",(0-5)),("signal",(0-5)),("service",(0,1)),("sounder",(0,1)),("message",(0,1)),("call",(0,1)),("roam",(0,1)),("smsfull",(0,1)),("gprs",(0-2)),("callsetup",(0-3)),("callheld",(0,1)),("simind",(0-2)) OK

5.4.3 Defined values

Parameter	Type	Description
<ind>	Number	Range of corresponding <descr> used to identify the service when an unsolicited indication is provided
<descr>	String	Reserved by the norm and their <ind> ranges; it may have the values: • "battchg": battery charge level (0-5) • "signal": signal level. See mapping in the Notes below • "service": network service availability o 0: not registered to any network o 1: registered to the network o 65535: indication not available • "sounder": sounder activity, indicating when the module is generating a sound o 0: no sound o 1: sound is generated • "message": unread message available in <mem1> storage o 0: no messages o 1: unread message available • "call": call in progress o 0: no call in progress o 1: call in progress • "roam": registration on a roaming network o 0: not in roaming or not registered o 1: roaming o 65535: indication not available • "smsfull": indication that an SMS has been rejected with the cause of SMS storage full o 0: SMS storage not full o 1: SMS storage full • "gprs": PS indication status: o 0: no PS available in the network o 1: PS available in the network but not registered o 2: registered to PS o 65535: indication not available • "callsetup": call set-up: o 0: no call set-up o 1: incoming call not accepted or rejected o 2: outgoing call in dialling state

Parameter	Type	Description
		o 3: outgoing call in remote party alerting state • "callheld": call on hold: o 0: no calls on hold o 1: at least one call on hold • "simind": SIM detection o 0: no SIM detected o 1: SIM detected o 2: not available Allowed <descr> values: • LARA-L6 / LARA-R6 - "battchg", "signal", "service", "call", "roam", "smsfull", "gprs", "callsetup", "simind"

5.4.4 Notes

- If the battery charging is not supported, "battchg" always returns 5 (full charge).
- The <descr> values cannot be changed with +CIND set.
- The following mapping of "signal" value to the power level exists:

"signal" value	Power level
0	(< -105 dBm or unknown)
1	(< -93 dBm)
2	(< -81 dBm)
3	(< -69 dBm)
4	(< -57 dBm)
5	(>= -57 dBm)

5.5 Configuration of indicator control +UCIND

+UCIND						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

5.5.1 Description

Allows the configuration of unsolicited results for indications with +CIEV.

5.5.2 Syntax

Type	Syntax	Response	Example
Set	AT+UCIND=[<conf>]	OK	AT+UCIND=7 OK
Read	AT+UCIND?	+UCIND: <conf> OK	+UCIND: 7 OK
Test	AT+UCIND=?	OK	

5.5.3 Defined values

Parameter	Type	Description
<conf>	Number	The unsigned integer (0 to 4095) is a bitmask representing the list of the indications active for +CIEV URC reporting. The bit position corresponds to the indicator number (see the <descr> parameter of +CMER) minus 1: the least significant bit is used for the first indicator and so on.

Parameter	Type	Description
		The bits corresponding to unused indicator order numbers (greater than 13) must be set to 0 (setting a <conf> greater than 4095 causes an error). The default value is 4095 (all the indications are enabled).

5.6 Mobile termination event reporting +CMER

+CMER						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	-	+CME Error

5.6.1 Description

Configures sending of URCs from MT to DTE for indications. The <mode> parameter controls the processing of URCs specified within this command.

The URC is generated each time an indicator which is defined in +CIND command changes status. The code is actually submitted to MT according to the +CMER settings.

LARA-L6 / LARA-R6
The command +UCIND allows enabling or disabling indicators.

5.6.2 Syntax

Type	Syntax	Response	Example
Set	AT+CMER=[<mode>[,<keyp>[,<disp>[,<ind>[,<bfr>]]]]]	OK	AT+CMER=1,0,0,2,1 OK
Read	AT+CMER?	+CMER: <mode>,<keyp>,<disp>,<ind>,<bfr> OK	+CMER: 1,0,0,0,1 OK
Test	AT+CMER=?	+CMER: (list of supported <mode>'s),(list of supported <keyp>'s),(list of supported <disp>'s),(list of supported <ind>'s),(list of supported <bfr>'s) OK	+CMER: (0-3),(0),(0),(0-2),(0,1) OK
URC		+CIEV: <descr>,<value>	

5.6.3 Defined values

Parameter	Type	Description
<mode>	Number	Allowed values: • 0 (default value): buffer URCs in the MT • 1: discard URCs when the V.24 interface is reserved for data; otherwise directly display them on the DTE • 2: buffer URCs in MT when the V.24 interface is reserved and flush them after reservation; otherwise directly display them on the DTE • 3: same as 1
<keyp>	Number	Allowed values: • 0: no keypad event reporting
<disp>	Number	Allowed values: • 0: no display event reporting
<ind>	Number	Allowed values: • 0: no indicator event reporting • 1: indicator event reporting using the +CIEV URC. Only the indicator events which are not caused by +CIND shall be indicated by the MT to the DTE.

Parameter	Type	Description
		• 2: indicator event reporting using the +CIEV URC. All the indicator events shall be directed from MT to DTE.
<bfr>	Number	Allowed values: • 0: MT buffer of URCs defined within this command is cleared when <mode> 1...3 is entered • 1: MT buffer of URCs defined within this command is flushed to the DTE when <mode> 1...3 is entered (the OK final result code shall be given before flushing the codes).
<descr>	Number	Indicates the indicator order number. The name in the brackets indicates the corresponding <descr> parameter of +CIND; <value> is the new value of indicator: • 1 ("battchg"): <value> provides the battery charge level (0-5) • 2 ("signal"): <value> provides the signal level o 0: < -105 dBm o 1: < -93 dBm o 2: < -81 dBm o 3: < -69 dBm o 4: < - 57 dBm o 5: >= -57 dBm • 3 ("service"): <value> provides the network service availability: o 0: not registered to the network o 1: registered to the network • 4 ("sounder"): <value> provides the sounder activity: o 0: no sound o 1: sound is generated • 5 ("message"): <value> provides the unread message available in <mem1> storage: o 0: no messages o 1: unread message available • 6 ("call"): <value> provides the call in progress: o 0: no call in progress o 1: call in progress • 7 ("roam"): <value> provides the registration on a roaming network: o 0: not in roaming o 1: roaming • 8 ("smsfull"): <value> provides the SMS storage status: o 0: SMS storage not full o 1: SMS Storage full (an SMS has been rejected with the cause of SMS storage full) • 9 ("gprs"): <value> provides the GPRS indication status: o 0: no GPRS available in the network o 1: GPRS available in the network but not registered o 2: registered to GPRS o 65535: PS service indication is not available • 10 ("callsetup"): <value> provides the call set-up: o 0: no call set-up o 1: incoming call not accepted or rejected o 2: outgoing call in dialing state o 3: outgoing call in remote party alerting state • 11 ("callheld"): <value> provides the call on hold: o 0: no calls on hold o 1: at least one call on hold • 12 ("simind"): <value> provides the SIM detection: o 0: no SIM detected o 1: SIM detected

Parameter	Type	Description
		o 2: not available

5.6.4 Notes

LARA-L6 / LARA-R6

- <descr>=4 ("sounder"), 5 ("message") and 11 ("callheld") are not supported.
- <ind>=2 is not supported.

5.7 Clock +CCLK

+CCLK						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	NVM	No	-	+CME Error

5.7.1 Description

Sets and reads the real-time clock of the MT.

5.7.2 Syntax

Type	Syntax	Response	Example
Set	AT+CCLK=<time>	OK	AT+CCLK="14/07/01,15:00:00+01" OK
Read	AT+CCLK?	+CCLK: <time> OK	+CCLK: "14/07/01,15:00:00+01" OK
Test	AT+CCLK=?	OK	

5.7.3 Defined values

Parameter	Type	Description
<time>	String	Format is "yy/MM/dd,hh:mm:ss+TZ". Characters indicate year, month, day, hours, minutes, seconds, time zone. • LARA-L6 / LARA-R6 - The factory-programmed value is "80/01/06,00:00:00+00" Values prior to the factory-programmed value are not allowed.

5.7.4 Notes

- If the parameter value is out of range, then the "+CME ERROR: operation not supported" or "+CME ERROR: 4" will be provided (depending on the +CMEE AT command setting).
- "TZ": The Time Zone information is represented by two digits. The value is updated during the registration procedure when the automatic time zone update is enabled (using +CTZU AT command) and the network supports the time zone information.
- The Time Zone information is expressed in steps of 15 minutes and it can assume a value in the range that goes from -96 to +96.

5.8 Alert sound mode +CALM

+CALM						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	NVM	No	-	+CME Error

5.8.1 Description

Selects the general alert sound mode.

5.8.2 Syntax

Type	Syntax	Response	Example
Set	AT+CALM=<mode>	OK	AT+CALM=0 OK
Read	AT+CALM?	+CALM: <mode> OK	+CALM: 0 OK
Test	AT+CALM=?	+CALM: (list of supported <mode>s) OK	+CALM: (0-1) OK

5.8.3 Defined values

Parameter	Type	Description
<mode>	Number	• 0 (factory-programmed value): normal mode • 1: silent mode (ring tones and SMS tones are muted)

5.8.4 Notes

- If an incorrect number of parameters is provided or the parameter value is out of range, then the error result code "+CME ERROR: operation not supported" will be provided (if +CMEE is set to 2).

5.9 Set greeting text +CSGT

+CSGT						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	NVM	No	-	+CME Error

5.9.1 Description

Configures and activates/deactivates the greeting text. The greeting text configuration's change will be applied at the subsequent boot. If active, the greeting text is shown at boot once, on any AT interface, the first time the TE sets the DTR line to ON state.

5.9.2 Syntax

Type	Syntax	Response	Example
Set	AT+CSGT=<mode>[,<text>]	OK	AT+CSGT=1,"Hello user" OK
Read	AT+CSGT?	+CSGT: <text>,<mode> OK	+CSGT: "Hello",0 OK
Test	AT+CSGT=?	+CSGT: (list of supported <mode>s), <ltext>	+CSGT: (0-1),49 OK

Type	Syntax	Response	Example
		OK	

5.9.3 Defined values

Parameter	Type	Description
<text>	String	Greeting text. The factory-programmed value is: • LARA-L6 / LARA-R6 - an empty string
<mode>	Number	Allowed values: • 0: turn off the greeting text • 1: turn on the greeting text Factory-programmed value: • LARA-L6 / LARA-R6 - 0
<ltext>	Number	Maximum length of the <text> parameter.

5.9.4 Notes

LARA-L6 / LARA-R6

- The read command returns an error result code if the greeting text has not been configured.

5.10 Automatic time zone update +CTZU

+CTZU						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	NVM	No	-	+CME Error

5.10.1 Description

Configures the automatic time zone update via NITZ.

☞ The Time Zone information is provided after the network registration (if the network supports the time zone information).

5.10.2 Syntax

Type	Syntax	Response	Example
Set	AT+CTZU=<on_off>	OK	AT+CTZU=1 OK
Read	AT+CTZU?	+CTZU: <on_off> OK	+CTZU: 0 OK
Test	AT+CTZU=?	+CTZU: (list of supported <on_off>s) OK	+CTZU: (0-2) OK

5.10.3 Defined values

Parameter	Type	Description
<on_off>	Number	Automatic time zone update: • 0: automatic time zone via NITZ disabled • 1: automatic time zone update via NITZ enabled; if the network supports the service, update the local time to the module (not only time zone) • 2: automatic time zone update via NITZ enabled; if the network supports the service, update the GMT time to the module (not only time zone) Allowed values: • LARA-L6 / LARA-R6 - 0, 1 (factory-programmed value)

5.11 Time zone reporting +CTZR

+CTZR						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	NVM	No	-	+CME Error

5.11.1 Description

Configures the time zone change event reporting. If the reporting is enabled, according to the <mode> parameter the MT returns:

- the **+CTZV** URC whenever the time zone changes and additionally the **+CTZDST** URC if the daylight saving time information is available
- the **+CTZE** URC
- the **+CTZEU** URC whenever the universal time reporting is available

5.11.2 Syntax

Type	Syntax	Response	Example
Set	AT+CTZR=<mode>	OK	AT+CTZR=1 OK
Read	AT+CTZR?	+CTZR: <mode> OK	+CTZR: 0 OK
Test	AT+CTZR=?	+CTZR: (list of supported <mode>s) OK	+CTZR: (0-1) OK
URC		+CTZV: <tz>[,<time>]	+CTZV: +04,"12/12/31,23:46:33"
URC		+CTZE: <tz>,<dst>[,<time>]	+CTZE: +04,1,"12/12/31,23:46:33"
URC		+CTZEU: <tz>,<dst>[,<utime>]	+CTZEU: +04,1
URC		+CTZDST: <dst>	+CTZDST: 1

5.11.3 Defined values

Parameter	Type	Description
<mode>	Number	Enables the time zone reporting URCs: • 0: disable the time zone change event reporting • 1: enable the time zone reporting by +CTZV and +CTZDST URCs • 2: enable the time zone reporting by +CTZE URC • 3: enable the time zone reporting and universal time reporting by +CTZEU URC according to 3GPP TS 27.007 Release 13 Allowed values: • LARA-L6 / LARA-R6 - 0 (default value), 1. The +CTZDST URC is not supported.
<tz>	Number	Indicates the time zone. The range goes from -48 to +56.
<time>	String	Current local time in format "yy/MM/dd,hh:mm:ss". The characters indicate year, month, day, hour, minutes, seconds.
<dst>	Number	Indicates the daylight saving time. The allowed values are: • 0: no adjustments • 1: +1 hour adjustment • 2: +2 hours adjustment
<utime>	String	Universal time in format "yyyy/MM/dd,hh:mm:ss". The characters indicate year, month, day, hour, minutes, seconds.

5.11.4 Notes

- The +CTZU AT command (automatic time zone setting) does not affect the time zone reporting.
- The time zone information is expressed in steps of 15 minutes.

- The reported <tz> reflects the <dst> offset: if time zone is +1 hour and the daylight saving time is +1 hour, the reported <tz> is +08.
- For the +CTZE URC, the local time <time> needs to be derived by the MT.

LARA-L6 / LARA-R6

- The command setting is not stored in the NVM.

5.12 List current calls +CLCC

+CLCC						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	-	+CME Error

5.12.1 Description

Returns the list of current calls of MT. If no calls are available, no information text response is sent.

5.12.2 Syntax

Type	Syntax	Response	Example
Action	AT+CLCC	[+CLCC: <id1>,<dir>,<stat>,<mode>,<mpty>[,<number>,<type>[,alpha>[,<priority>[,<CLI_validity>]]]] [+CLCC: <id2>,<dir>,<stat>,<mode>,<mpty>[,<number>,<type>[,<alpha>[,<priority>[,<CLI_validity>]]]] [...]]] OK or OK (if no calls)	+CLCC: 1,0,0,0,0,"0913137880",129 OK
Test	AT+CLCC=?	OK	

5.12.3 Defined values

Parameter	Type	Description
<idx>	Number	Indicates the call identification (see +CHLD x)
<dir>	Number	Direction: • 0: mobile originated (MO) call • 1: mobile terminated (MT) call
<stat>	Number	State of the call: • 0: active • 1: held • 2: dialling (Mobile Originated call) • 3: alerting (Mobile Originated cal) • 4: incoming (Mobile Terminated call) • 5: waiting (Mobile Terminated call) • 7: release (network release this call) • 8: handshake Allowed values: • LARA-L6 / LARA-R6 - 0, 1, 2, 3, 4 ,5
<mode>	Number	Teleservice: • 0: voice • 1: data

Parameter	Type	Description
---	---	• 2: FAX • 3: voice followed by data, voice mode • 4: alternating voice/data, voice mode • 5: alternating voice/fax, voice mode • 6: voice followed by data, data mode • 7: alternating voice/data, data mode • 8: alternating voice/fax, fax mode • 9: unknown Allowed values: • LARA-L6 / LARA-R6 - 0, 1, 2, 9
<mpty>	Number	• 0: call is not one of multiparty (conference) call parties • 1: call is one of multiparty call parties
<number>	String	Indicates the phone number in format specified by <type>
<type>	Number	Type of address octet (phone number)
<alpha>	String	Optional string alphanumeric representation of <number> corresponding to the entry found in phonebook; this parameter is not managed
<priority>	Number	Indicates the eMLPP priority level of the call, values specified in 3GPP TS 22.067 [108].
<CLI_validity>	Number	Provide details why <number> does not contain a calling party BCD number (see the 3GPP TS 24.008 [84] subclause 10.5.4.30). The parameter is not present for MO call types: • 0: CLI valid • 1: CLI has been withheld by the originator (see the 3GPP TS 24.008 [84] table 10 .5.135a/3GPP TS 24.008 code "Reject by user") • 2: CLI is not available due to interworking problems or limitations of originating network (see the 3GPP TS 24.008 [84] table 10.5.135a/3GPP TS 24.008 code "Interaction with other service") • 3: CLI is not available due to calling party being of type payphone (see the 3GPP TS 24.008 [84] table 10.5.135a/3GPP TS 24.008 code "Coin line/payphone") • 4: CLI is not available due to other reasons (see the 3GPP TS 24.008 [84] table 10 .5.135a/3GPP TS 24.008 code "Unavailable") When the CLI is not available (<CLI_validity>=2, <CLI_validity>=3 or <CLI_validity>= 4), the <number> parameter shall be an empty string ("") and <type> value will not be significant. Nevertheless, the MT may return the recommended value 128 for <type> (TON/NPI unknown in accordance with 3GPP TS 24.008 [84] subclause 10.5.4.7). When the CLI has been withheld by the originator, (<CLI_validity>=1) and the CLIP is provisioned with the "override category" option (see the 3GPP TS 22.081 [95] and 3GPP TS 23.081 [96]), <number> and <type> is provided. Otherwise, the MT shall return the same setting for <number> and <type> as if the CLI was not available

5.13 Report mobile termination error +CMEE

+CMEE						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

5.13.1 Description

Configures the formatting of the result code +CME ERROR: <err> as an indication of an error relating to the functionality of the MT. When enabled, MT related errors cause +CME ERROR: <err> final result code instead of the regular ERROR final result code. The error result code is returned normally when an error is related to syntax, invalid parameters or MT functionality.

5.13.2 Syntax

Type	Syntax	Response	Example
Set	AT+CMEE=[<n>]	OK	AT+CMEE=2 OK

Type	Syntax	Response	Example
Read	AT+CMEE?	+CMEE: <n> OK	+CMEE: 0 OK
Test	AT+CMEE=?	+CMEE: (list of supported <n>s) OK	+CMEE: (0-2) OK

5.13.3 Defined values

Parameter	Type	Description
<n>	Number	• 0: +CME ERROR: <err> result code disabled and ERROR used • 1: +CME ERROR: <err> result code enabled and numeric <err> values used • 2: +CME ERROR: <err> result code enabled and verbose <err> values used

5.13.4 Notes

- The following convention is valid:

Numeric error code	Verbose error code	Description
3	"operation not allowed"	The MT is in a state which does not allow performing the entered command.
4	"operation not supported"	The error result code is related to a parameter not covered by the GSM/ETSI or u-blox specification

5.14 Extended error report +CEER

+CEER						
Modules	All products					
Attributes	Syntax	PIN required	Settings saved	Can be aborted	Response time	Error reference
	partial	No	No	No	-	+CME Error

5.14.1 Description

Causes the MT to return one or more lines of the information text response which offer an extended report of the reason for:

- The failure in the last unsuccessful call setup or in-call modification,
- The last call release,
- The last unsuccessful GPRS attach / EPS bearer establishment or unsuccessful PDP context activation,
- The last GPRS / EPS bearer detach or PDP context deactivation.

5.14.2 Syntax

Type	Syntax	Response	Example
Action	AT+CEER	+CEER: <report> OK	+CEER: "ILLEGAL ME" OK
Test	AT+CEER=?	OK	

5.14.3 Defined values

Parameter	Type	Description
<report>	String	The total number of characters, including line terminators, in the information text shall not exceed 2041 characters.

6 Call control

6.1 Select type of address +CSTA

+CSTA						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

6.1.1 Description

Selects the type of number for further dialling commands (D) according to 3GPP specifications.

☞ The type of address is automatically detected from the dialling string thus the +CSTA command has no effect.

6.1.2 Syntax

Type	Syntax	Response	Example
Set	AT+CSTA=[<type>]	OK	AT+CSTA=145 OK
Read	AT+CSTA?	+CSTA: <type> OK	+CSTA: 145 OK
Test	AT+CSTA=?	+CSTA: (list of supported <type>s) OK	+CSTA: (129,145) OK

6.1.3 Defined values

Parameter	Type	Description
<type>	Number	Type of address in integer format • 145: dialing string includes international access code character '+' • 129 (default value): national coded dialing string

6.2 Dial command D

D						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	Yes	Up to 3 min	+CME Error

6.2.1 Description

Lists characters that may be used in a dialling string for making a call (voice, data or fax call) or controlling supplementary services in accordance with 3GPP TS 22.030 [77] and initiates the indicated kind of call. No further commands may follow in the command line in case of data or fax calls.

☞ LARA-L6 / LARA-R6
Supplementary services strings are not supported in the dial command.
Set the DTR line to ON state before making a data call.

☞ LARA-L6004D / LARA-L6404D / LARA-L6824 / LARA-L6824D / LARA-R6001D / LARA-R6401D
Voice calls are not supported.

6.2.2 Syntax

Type	Syntax	Response	Example
Action	ATD<number>[<I>][<G>][;]	See Result codes	**Voice call** ATD123456; OK **Data / fax call** ATD123456 CONNECT 9600 **Supplementary services** ATD*#43# +CCWA: 0,1 +CCWA: 0,2 OK

6.2.3 Defined values

Parameter	Type	Description
<number>	Number	Dial string; the allowed characters are: 1 2 3 4 5 6 7 8 9 0 * # + A B C D , T P ! W @ (see the 3GPP TS 27.007 [75]). The following characters are ignored: , T ! W @. ☞ The first occurrence of P is interpreted as pause and separator between the dialling number and the DTMF string. The following occurrences are interpreted only as pause. The use of P as pause has been introduced for AT&T certification.
<I>	String	Set the CLI status; the allowed values are: • I (ASCII code 49 Hex): CLI presentation restricted • i: CLI presentation allowed ☞ The CLIR supplementary service subscription is overridden for this call.
<G>	String	Configures the CUG supplementary service for the specific call: • G: CUG activated • g: CUG deactivated ☞ LARA-L6 / LARA-R6 The index and the information parameters used during the call will be the same previously set with +CCUG command.

6.2.4 Voice call example

The following diagram illustrates the possible transitions in both Mobile Terminated and Mobile Originated calls. Information text responses and result codes generated by MT are in italic.

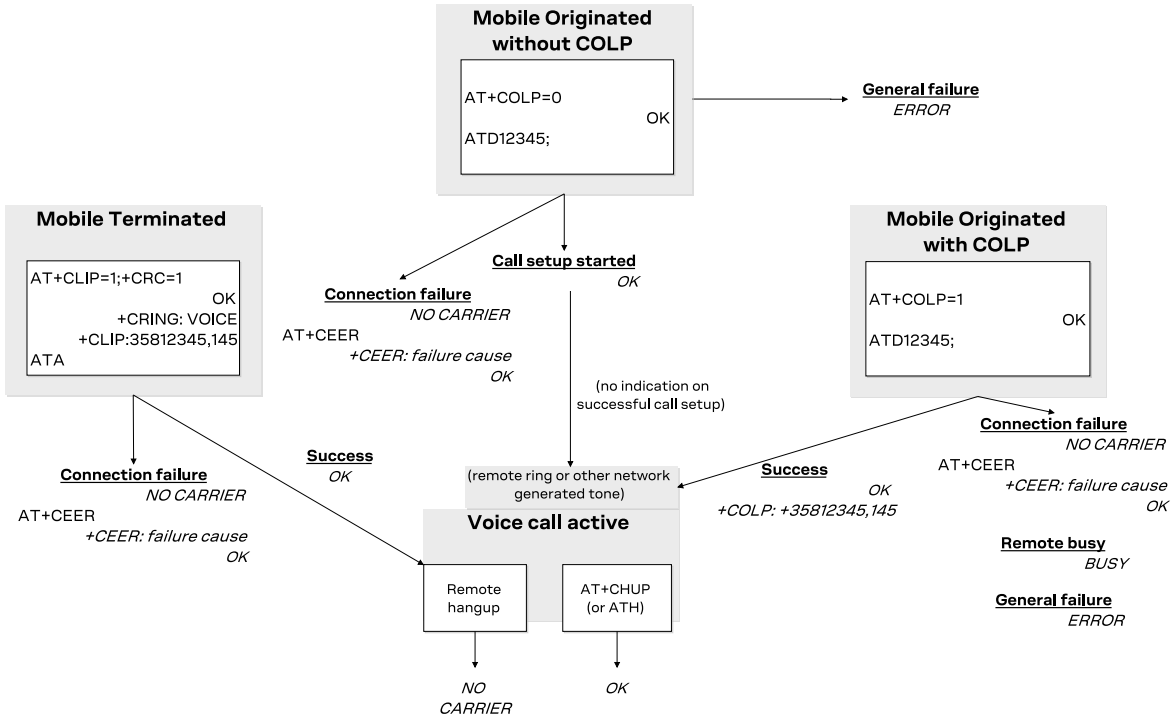


Figure 1: Mobile Terminated and Mobile Originated calls possible transitions

6.3 Select tone dialling T

T						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

6.3.1 Description

Causes subsequent (or previous) D command to assume that DTMF dialling is to be used. Since DTMF dialling is default in GSM, this command has no effect.

6.3.2 Syntax

Type	Syntax	Response	Example
Action	ATT	OK	

6.4 Select pulse dialling P

P						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

6.4.1 Description

Causes subsequent (or previous) D command to assume that pulse dialling is to be used. Since DTMF dialling is default in GSM, this command has no effect.

6.4.2 Syntax

Type	Syntax	Response	Example
Action	ATP	OK	

6.5 Call answer A

A						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	< 20 s	+CME Error

6.5.1 Description

Instructs the DCE to immediately connect to the line and start the answer sequence as specified for the underlying DCE. Any additional command that appears after A on the same command line is ignored. The command is abortable.

6.5.2 Syntax

Type	Syntax	Response	Example
Action	ATA	RING OK	

6.6 Hook control H

H						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	< 20 s	+CME Error

6.6.1 Description

Disconnects the remote user. In case of multiple calls, all the active calls and held calls are released while the waiting calls are not.

☞ In case of dual service calls, the command will switch the call from data (if different from fax) to voice.

☞ LARA-L6 / LARA-R6
Issue the AT+CVHU=0 command in order to make ATH over Online Command Mode (OLCM) work, according to 3GPP requirements. If the module has a DUN/PPP activated and is in OLCM, the command deactivates the PPP and the associated PDP context (if possible).

☞ LARA-L6004 / LARA-L6404 / LARA-R6001-00B / LARA-R6401-00B / LARA-R6801-00B
Issue the AT+CVHU=0 command in order to make ATH release speech calls. By default speech calls are released by +CHUP AT command.

6.6.2 Syntax

Type	Syntax	Response	Example
Action	ATH	OK	

6.7 Voice hangup control +CVHU

+CVHU						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

6.7.1 Description

Sets whether issuing the ATH command or an ON-to-OFF transition on the DTR line causes a voice connection, including alternating mode calls that are currently in voice mode, to be disconnected or not.

6.7.2 Syntax

Type	Syntax	Response	Example
Set	AT+CVHU=[<mode>]	OK	AT+CVHU=0 OK
Read	AT+CVHU?	+CVHU: <mode> OK	+CVHU: 1 OK
Test	AT+CVHU=?	+CVHU: (list of supported <mode>s) OK	+CVHU: (0-1) OK

6.7.3 Defined values

Parameter	Type	Description
<mode>	Number	Allowed values: • 0: the ON-to-OFF transition on the DTR line is ignored, but the "OK" final result code is issued. The ATH command disconnects the remote user. • 1 (default value): both the ON-to-OFF transition on the DTR line and the ATH command are ignored, but the "OK" final result code is issued.

6.8 Monitor speaker loudness L

L						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

6.8.1 Description

This command has no effect. It is implemented for compatibility with ITU-T V.25ter recommendation [207].

6.8.2 Syntax

Type	Syntax	Response	Example
Action	ATL[<value>]	OK	ATL0 OK

6.8.3 Defined values

Parameter	Type	Description
<value>	Number	0-3

6.9 Voice call mode +CVMOD

+CVMOD						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

6.9.1 Description

Selects the voice call mode for making a Mobile Originated voice call from the UE.

☞ The preferences are not applicable for the emergency call.

☞ The preferences are not applicable if operator has set preferences for UE originated calls/sessions, 3GPP TS 24.216 [138] subclause 5.6.

6.9.2 Syntax

Type	Syntax	Response	Example
Set	AT+CVMOD=<voice_mode>	OK	AT+CVMOD=1 OK
Read	AT+CVMOD?	+CVMOD: <voice_mode> OK	+CVMOD: 1 OK
Test	AT+CVMOD=?	+CVMOD: (list of supported <voice_mode>s) OK	+CVMOD: (0-3) OK

6.9.3 Defined values

Parameter	Type	Description
<voice_mode>	Number	Call mode. Allowed values: • 0: CS_ONLY; the ATD command will make a call in CS mode • 1: VOIP_ONLY; the ATD command will make a call in VoIP mode • 2: CS_PREFERRED; the ATD command gives preference for CS based voice call • 3 (factory-programmed value): VOIP_PREFERRED; the ATD command gives preference for VoIP based voice call

6.10 Hang up call +CHUP

+CHUP						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	< 20 s	+CME Error

6.10.1 Description

Causes the MT to hang up the current GSM or UMTS call.

☞ LARA-L6 / LARA-R6
In case of multiple calls, all calls (active and on hold) will be released.

☞ The command does not replace the ITU-T V.250 [206] command H, but gives an assured procedure to terminate an alternating mode call. For further information see the 3GPP TS 27.007 [75].

6.10.2 Syntax

Type	Syntax	Response	Example
Action	AT+CHUP	OK	AT+CHUP OK
Test	AT+CHUP=?	OK	AT+CHUP=? OK

6.11 Set reporting call status +UCALLSTAT

+UCALLSTAT						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

6.11.1 Description

Allows to enable / disable the reporting voice or data call status on the DTE using the URC **+UCALLSTAT**. This URC is generated each time a call status change occurs. When multiple calls change status at the same time (e.g. when all multiparty calls are terminated) a URC +UCALLSTAT is generated for each of them.

6.11.2 Syntax

Type	Syntax	Response	Example
Set	AT+UCALLSTAT=<enable>	OK	AT+UCALLSTAT=1 OK
Read	AT+UCALLSTAT?	+UCALLSTAT: <enable> OK	+UCALLSTAT: 1 OK
Test	AT+UCALLSTAT=?	+UCALLSTAT: (list of supported <enable>'s) OK	+UCALLSTAT: (0-2) OK
URC		+UCALLSTAT: <call_id>,<stat>[,<is_volte>]	+UCALLSTAT: 1,2

6.11.3 Defined values

Parameter	Type	Description
<enable>	Number	• 0: reporting disabled • 1: reporting enabled • 2: extended reporting enabled. <is_volte> flag is reported as well. Allowed values: • LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D - 0, 1, 2 • LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B - 0, 1
<call_id>	Number	Indicates the call identification (see the 3GPP TS 22.030 [77])
<stat>	Number	Indicates the call status: • 0: active • 1: hold • 2: dialling (Mobile Originated call) • 3: alerting (Mobile Originated call; ringing for the remote party) • 4: ringing (Mobile Terminated call) • 5: waiting (Mobile Terminated call) • 6: disconnected

Parameter	Type	Description
		• 7: connected (indicates the completion of a call setup first time for MT and MO calls - this is reported in addition to state active)
<is_volte>	Number	Indicates if the call type is VoLTE or not: • 0: call is not VoLTE • 1: call is VoLTE

6.11.4 Notes

- The URC is displayed on the terminal where the command has been issued.
- For the USB terminals, the <enable> flag is reset when the USB cable is disconnected.

LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B

- During a VOLTE call, the network might implement the alerting phase via early media with forking model. In this scenario no +UCALLSTAT: 1,3 URC will be generated and the audio will play the ringback tone provided by the network.

6.12 DTMF and tone generation +VTS

+VTS						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	Yes	Up to 7 min	+CME Error

6.12.1 Description

Allows the transmission of DTMF tones. These tones may be used e.g. when announcing the start of a recording period. The command can only be used during an active voice call. The command can be aborted if a character is sent to DCE during the command execution; this behavior is not covered by the 3GPP specification.

In GSM and UMTS the tone duration is network dependent; hence the value set with +VTS command is only the desired duration and, in particular for short tone durations, it is not guaranteed. Also the actual maximum DTMF tone duration is network dependent, i.e. the receiver can experience a shorter tone duration than the one specified with +VTS (or with +VTD, if supported). For more information, see the 3GPP TS 23.014 [114] and the 3GPP TS 27.007 [75].

In VoLTE DTMF tone generation is based on RTP events according to RFC 4733 [196].

6.12.2 Syntax

Type	Syntax	Response	Example
Set	AT+VTS=<DTMF>[,<duration>]	OK	AT+VTS=2 OK AT+VTS=2A,10 OK
Test	AT+VTS=?	+VTS: (list of <DTMF>s),(list of supported <duration>s) OK	+VTS: (0-9,#,*,A-D),(0-255) OK

6.12.3 Defined values

Parameter	Type	Description
<DTMF>	String	String (without quotation marks) of ASCII characters from the set 0-9, #, *, A-D.
<duration>	Number	Range 0-255, expressed in <duration>/100 seconds (0.01 s). If left out or set to 0, the tone duration is given by the +VTD setting

6.12.4 Notes

- If the command is invoked when not in a call, an error result code is reported ("+CME ERROR: no connection to phone" if +CMEE: 2).

LARA-L6 / LARA-R6

- The maximum <DTMF> string length is 1.
- The response to set command is sent after that the dual-tone execution is completed.

6.13 Automatic answer S0

S0						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	Profile	No	-	+CME Error

6.13.1 Description

Controls the automatic answering feature of the DCE. If set to 0, the automatic answering is disabled, otherwise it causes the DCE to answer when the incoming call indication (RING) has occurred the number of times indicated by the value.

For an incoming CSD call, if the autoanswering is enabled and the <value> parameter of &D command is set to 2, the autoanswering only works if the DTR line of the AT interface with activated autoanswering is set to ON. Otherwise, if DTR is OFF, then the call is rejected. If the <value> parameter of &D command is not set to 2, the DTR state has no impact on autoanswering.

6.13.2 Syntax

Type	Syntax	Response	Example
Set	ATS0=<value>	OK	ATS0=2 OK
Read	ATS0?	<value> OK	000 OK

6.13.3 Defined values

Parameter	Type	Description
<value>	Number	Value in the range 0-255; the answer to the read command is in "xxx" format. • 0 (factory-programmed value): disables automatic answer mode • 1-255: enables automatic answering after specified number of rings

6.13.4 Notes

LARA-L6 / LARA-R6

- The command setting is stored in the NVM.

6.14 Set voice mail number +CSVM

+CSVM						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	< 20 s	+CME Error

6.14.1 Description

Sets the phone number of the voice mail server.

☞ If the parameter <mode> is set to 0, the remaining parameters are ignored.

☞ The voice number is stored in EF_{CPHS} or EF_{MBDN}. Their presence on the SIM card is not mandatory. If neither are present, then the set and read command returns an error result code.

☞ To call the voice mail number (if possible), use the ATD1; command.

6.14.2 Syntax

Type	Syntax	Response	Example
Set	AT+CSVM=<mode>[,<number>[,<type>]]	OK	AT+CSVM=1,"+1234567890",145 OK
Read	AT+CSVM?	+CSVM: <mode>,<number>,<type> OK	+CSVM: 0,"+1234567890",145 OK
Test	AT+CSVM=?	+CSVM: (list of supported <mode>s),(list of supported <type>s) OK	+CSVM: (0-1),(128-255) OK

6.14.3 Defined values

Parameter	Type	Description
<mode>	Number	• 0: voice mail number disabled • 1: voice mail number enabled
<number>	String	Phone number; see the D command description
<type>	Number	Type of address, octet in number format • 145: <number> string includes '+' • 129: otherwise

6.14.4 Notes

- The <number> and <type> parameters can be left out if the parameter <mode> is set to 0.

7 Network service

7.1 Network parameters definition

Parameter	Type	Description	Commands
<MCC>	Number	Mobile Country Code. The range is 0-999 (3 digits). • LARA-L6 / LARA-R6 - The FFF value is to be considered not known or not detectable	+COPS, +UCGED, +UCFSCAN
<MNC>	Number	Mobile Network Code. The range is 0-999 (1 to 3 digits). • LARA-L6 / LARA-R6 - the FFF value is to be considered not known or not detectable	+COPS, +UCGED, +UCFSCAN
<LAC>	Number	Location Area Code, The range is 0x0-0xFFFF (2 octets)	+COPS, +UCFSCAN
<CI>	Number	Cell identity. • LARA-L6 / LARA-R6 - The range is: o 2G cell: range 0x0-0xFFFF (2 octets) o 3G cell: range 0x0-0xFFFFFFF (28 bits), 0 xFFFFFFFF if invalid o 4G cell: range 0x0-0xFFFFFFF (28 bits).	+COPS, +UCFSCAN
<RxLev>	Number	Received Signal Strength Indicator (RSSI) index as defined in 3GPP TS 45.008 [90]: • 0: less than -110 dBm • 1..62: from -110 to less than -48 dBm with 1 dBm steps • 63: -48 dBm or greater	+COPS, +UCGED, +UCFSCAN
<RAC>	Number	Routing Area Code, range 0x0-0xFF (1 octet); see the 3GPP TS 44.018 [161]	+COPS
<t_adv>	Number	Timing Advance, it is valid during a connection and it will updated during the next connection; see the 3GPP TS 04.18 [101]. The special value -1 means not valid.	+UCGED
<scrambling_code>	Number	Primary scrambling code (PSC). • LARA-L6 / LARA-R6 - The range is 0-511	+COPS, +UCGED, +UCFSCAN
<dl_frequency>	Number	Downlink frequency. The range is 0-16383.	+COPS, +UJAD
<ul_frequency>	Number	Uplink frequency. The range is 0-16383.	+COPS
<arfcn>	Number	Absolute Radio Frequency Channel Number (ARFCN). • LARA-L6 / LARA-R6 - The range is 0-1023, 65535 if not known or not detectable.	+COPS, +UCGED, +UCFSCAN
<rscp_lev>	Number	Received Signal Code Power expressed in dBm levels: • 0: less than -115 dBm • 1..90: from -115 dBm to less than -25 dBm with 1 dBm steps • 91: -25 dBm	+COPS
<ecn0_lev>	Number	Energy per Chip/Noise ratio expressed in dB levels: • 0: less than -24 dB • 1..48: from -24 dB to less than 0 dB with 0.5 dB steps • 49: 0 dB	+COPS, +UCGED
<EARFCN>	Number	E-UTRAN Absolute radio frequency channel number as defined in the 3GPP TS 36.101 [127]. As per 3GPP TS 36.101 [127] the allowed values depend on the module supported bands. See the corresponding module data sheet for the complete list of the bands supported by each module.	+UCGED, +UJAD, +VZWRSRP, +VZWRSRQ, +UCFSCAN

Parameter	Type	Description	Commands
		• LARA-L6 / LARA-R6 - Special value 65535 means not known or not detectable	
<PhysCellID>	Number	Physical cell ID. The range is 0-503.	+COPS, +UJAD, +UCFSCAN
<TAC>	Number	Tracking area code. • LARA-L6 / LARA-R6 - The range is 0-0xFFFF (2 octets), FFFF if not known or not detectable	+COPS, +UCGED, +UCFSCAN
<LcellId>	Number	E-UTRAN CI (cell identifier) in hexadecimal format; the range is 0x0-0xFFFFFFF (28 bits), 0000000 if not known or not detectable.	+UCGED
<dl_EARFCN>	Number	Downlink E-UTRAN absolute radio frequency channel number in decimal format.	+COPS
<ul_EARFCN>	Number	Uplink E-UTRAN absolute radio frequency channel number in decimal format.	+COPS
<RSRP>	Number	Reference Signal Received Power (RSRP) as defined in 3GPP TS 36.133 [132]: • 0: less than -140 dBm • 1..96: from -140 dBm to less than -44 dBm with 1 dBm steps • 97: -44 dBm or greater • LARA-L6 / LARA-R6 - The value 255 is return if not known or not detectable	+COPS, +UCGED
<RSRQ>	Number	• LARA-L6 / LARA-R6 - Reference Signal Received Quality (RSRQ) as defined in 3GPP TS 36.133 [132]: o 0: less than -19.5 dB o 1..33: from -19.5 dB to less than -3 dB with 0 .5 dB steps o 34: -3 dB or greater	+COPS, +UCGED
<RSRP_value>	Number	Current Reference Signal Received Power (RSRP) expressed in dBm, the range goes from -140.00 dBm to -44.00 dBm.	+UCGED, +UCFSCAN
<RSRQ_value>	Number	Current Reference Signal Received Quality (RSRQ) expressed in dB, the range goes from -20.00 dB to -3.00 dB.	+UCGED, +UCFSCAN
<BSIC>	Number	Base Station Identify Code (BSIC) in hexadecimal format, the range is 0x0-0x3F (6 bits).	+COPS, +UCGED, +UCFSCAN
<Lband>	Number	E-UTRAN band (see 3GPP TS 36.101 Table 5.5-1 [127]). Allowed values: • LARA-L6 / LARA-R6 - From 1 to 64, 255 if not known or not detectable	+UCGED, +UJAD
<Requested_eDRX_cycle>	String	Requested eDRX cycle value to be allocated to the UE. Half byte in a 4 bit format: the eDRX cycle value refers to bit 4 to 1 of octet 3 of the extended DRX parameters information element. For the coding and the value range, see the extended DRX parameters information element in 3GPP TS 24.008 table 10.5.5.32/3GPP TS 24.008 [84]. • LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B - The factory-programmed value is 1 ("0001"). • LARA-L6004-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D - The factory-programmed value is 0 ("0000"). • LARA-L6004D-01B / LARA-R6001D-01B - For the factory-programmed value, see Mobile Network Operator profiles.	+CEDRXS, +CEDRXRDP

Parameter	Type	Description	Commands
<Assigned_eDRX_cycle>	String	Assigned eDRX cycle value. Half byte in a 4 bit format: the eDRX cycle value refers to bit 4 to 1 of octet 3 of the extended DRX parameters information element. For the coding and the value range, see the extended DRX parameters information element in 3GPP TS 24.008 table 10 .5.5.32/3GPP TS 24.008 [84].	+CEDRXS, +CEDRXRDP
<Requested_paging_time_window>	String	Requested paging time window value to be allocated to the UE. Half byte in a 4 bit format: the paging time window (PTW) refers to bit 8 to 5 of octet 3 of the extended DRX parameters information element. For the coding and the value range, see the extended DRX parameters information element in 3GPP TS 24.008 table 10 .5.5.32/3GPP TS 24.008 [84]. • LARA-L6004-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D - The factory-programmed value is 0 ("0000"). • LARA-L6004D-01B / LARA-R6001D-01B - For the factory-programmed value, see Mobile Network Operator profiles.	+CEDRXS
<Assigned_paging_time_window>	String	Assigned paging time window value. Half byte in a 4 bit format: the paging time window (PTW) refers to bit 8 to 5 of octet 3 of the extended DRX parameters information element. For the coding and the value range, see the extended DRX parameters information element in 3GPP TS 24.008 table 10.5.5.32/3GPP TS 24.008 [84].	+CEDRXS, +CEDRXRDP
<LTE_rrc>	Number	LTE radio resource control (RRC) state: • 0: null • 1: IDLE • 2: ATTEMPT TO CONNECT • 3: CONNECTED • 4: LEAVING CONNECTED STATE • 5: ATTEMPT LEAVING E-UTRA • 6: ATTEMPT ENTERING E-UTRA • 7: CELL SEARCH • 255: not known or not detectable	+UCGED

7.2 Subscriber number +CNUM

+CNUM						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	< 10 s	+CME Error

7.2.1 Description

Returns the MSISDNs related to this subscriber. If the subscriber has different MSISDN for different services, each MSISDN is returned in a separate line.

☞ MSISDN is read from the SIM.

7.2.2 Syntax

Type	Syntax	Response	Example
Action	AT+CNUM	+CNUM: [<alpha1>],<number1>,<type1>	+CNUM: "Mario Rossi","+39320 821708",145

Type	Syntax	Response	Example
		[+CNUM: [<alpha2>],<number2>,<type2> [...]] OK or OK	+CNUM: "ABCD . AAA","123456789012",129 OK
Test	AT+CNUM=?	OK	

7.2.3 Defined values

Parameter	Type	Description
<alphax>	String	Associated with <numberx>
<numberx>	String	Phone number of format specified by <typex>
<typex>	Number	Type of address, octet in Number format (145 when <numberx> string includes '+', otherwise 129)

7.3 Signal quality +CSQ

+CSQ						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

7.3.1 Description

Returns the radio signal strength <signal_power> and <qual> from the MT.

☞ LARA-L6 / LARA-R6
The radio signal strength <signal_power> will be also used to build and display the indicator "signal" i.e. signal quality in the information text response of +CIND and in the +CIEV URC (see the +CMER command description).

In dedicated mode, during the radio channel reconfiguration (e.g. handover), invalid measurements may be returned for a short transitory because the MT must compute them on the newly assigned channel.

7.3.2 Syntax

Type	Syntax	Response	Example
Action	AT+CSQ	+CSQ: <signal_power>,<qual> OK	+CSQ: 2,5 OK
Test	AT+CSQ=?	+CSQ: (list of supported <signal_power>s),(list of supported <qual>s) OK	+CSQ: (0-31,99),(0-7,99) OK

7.3.3 Defined values

Parameter	Type	Description
<signal_power>	Number	The allowed range is 0-31 and 99. Remapped indication of the following parameters: • the Received Signal Strength Indication (RSSI) in GSM and LTE RATs. For more details on the RSSI values mapping in LTE RAT, see Notes. • the Received Signal Code Power (RSCP) in UMTS RAT. When the RF power level of the received signal is the highest possible, the value 31 is reported. When it is not known, not detectable or currently not available, 99 is returned.

Parameter	Type	Description
<qual>	Number	The allowed range is 0-7 and 99. The information provided depends on the selected RAT: • In 2G RAT CS dedicated and GPRS packet transfer mode indicates the Bit Error Rate (BER) as specified in 3GPP TS 45.008 [155] • In 2G RAT EGPRS packet transfer mode indicates the Mean Bit Error Probability (BEP) of a radio block. 3GPP TS 45.008 [155] specifies the range 0-31 for the Mean BEP which is mapped to the range 0-7 of <qual> • In UMTS RAT indicates the Energy per Chip/Noise (ECN0) ratio in dB levels of the current cell. 3GPP TS 25.133 [133] specifies the range 0-49 for EcN0 which is mapped to the range 0-7 of <qual> • In LTE RAT indicates the Reference Signal Received Quality (RSRQ). TS 36.133 [132] specifies the range 0-34 for RSRQ which is mapped to the range 0-7 of <qual> See Table 5 for the complete parameter mapping.

7.3.4 Notes

<qual>	2G RAT CS and GPRS	2G RAT EGPRS	UMTS RAT	LTE RAT
0	BER < 0.2%	28 <= MEAN_BEP <= 31	ECN0_LEV >= 44	RSRQ_LEV < 5
1	0.2% < BER < 0.4%	24 <= MEAN_BEP <= 27	38 <= ECNO_LEV < 44	5 <= RSRQ_LEV < 10
2	0.4% < BER < 0.8%	20 <= MEAN_BEP <= 23	32 <= ECNO_LEV < 38	10 <= RSRQ_LEV < 14
3	0.8% < BER < 1.6%	16 <= MEAN_BEP <= 19	26 <= ECNO_LEV < 32	14 <= RSRQ_LEV < 18
4	1.6% < BER < 3.2%	12 <= MEAN_BEP <= 15	20 <= ECNO_LEV < 26	18 <= RSRQ_LEV < 22
5	3.2% < BER < 6.4%	8 <= MEAN_BEP <= 11	14 <= ECNO_LEV < 20	22 <= RSRQ_LEV < 26
6	6.4% < BER < 12.8%	4 <= MEAN_BEP <= 7	8 <= ECNO_LEV < 14	26 <= RSRQ_LEV < 30
7	BER > 12.8%	0 <= MEAN_BEP <= 3	ECNO_LEV < 8	RSRQ _LEV >= 30
99	Not known or not detectable			

Table 5: <qual> parameter mapping for each supported RAT

LARA-L6 / LARA-R6

- Table 6 maps <signal_power> values reported from UE and the RSSI. RSSI includes the signal transmitted by the network plus noise.

<signal_power>	RSSI
0	RSSI of the network <= -113 dBm
1	-111 dBm
2...30	-109 dBm <= RSSI of the network <= -53 dBm
31	-51 dBm <= RSSI of the network
99	Not known or not detectable

Table 6: Mapping between <signal_power> reported from UE and the RSSI

LARA-L6 / LARA-R6

- If RAT is UMTS or LTE, the <qual> parameter is not supported, and will be always set to 99.

7.4 Extended signal quality +CESQ

+CESQ						
Modules	All products					
Attributes	Syntax	PIN required	Settings saved	Can be aborted	Response time	Error reference
	full	No	No	No	-	+CME Error

7.4.1 Description

Returns the received signal quality and level:

- If the current serving cell is not a GERAN cell, the <rxlev> and <ber> parameters are set to value 99
- If the current serving cell is not a UTRA FDD cell, the <rscp> and the <ecn0> parameters are set to 255
- If the current serving cell is not an E-UTRA cell, the <rsrq> and <rsrp> parameters are set to 255.

☞ The Reference Signal Received Power (RSRP) is a LTE specific measure that averages the power received on the subcarriers carrying the reference signal. The RSRP measurement bandwidth is equivalent to a single LTE subcarrier: its value is therefore much lower than the total received power usually referred to as RSSI. In LTE the RSSI depends on the currently allocated bandwidth, which is not pre-determined. Therefore the RSSI is not useful to describe the signal level in the cell.

7.4.2 Syntax

Type	Syntax	Response	Example
Action	AT+CESQ	+CESQ: <rxlev>,<ber>,<rscp>,<ecn0>,<rsrq>,<rsrp> OK	+CESQ: 99,99,255,255,20,80 OK
Test	AT+CESQ=?	+CESQ: (list of supported <rxlev>s),(list of supported <ber>s),(list of supported <rscp>s),(list of supported <ecn0>s),(list of supported <rsrq>s),(list of supported <rsrp>s) OK	+CESQ: (0-63,99),(0-7,99),(0-96,255),(0-49,255),(0-34,255),(0-97,255) OK

7.4.3 Defined values

Parameter	Type	Description
<rxlev>	Number	Received Signal Strength Indication (RSSI). • LARA-L6 / LARA-R6 - The allowed values are: o 0: less than -110 dBm o 1..62: from -110 to -49 dBm with 1 dBm steps o 63: -48 dBm or greater o 99: not known or not detectable
<ber>	Number	Bit Error Rate (BER): • 0..7: as RXQUAL values in the table in 3GPP TS 45.008 [155], subclause 8.2.4 • 99: not known or not detectable
<rscp>	Number	Received Signal Code Power (RSCP): • 0: less than -120 dBm • 1..95: from -120 dBm to -26 dBm with 1 dBm steps • 96: -25 dBm or greater • 255: not known or not detectable
<ecn0>	Number	Ratio of received energy per PN chip to the total received power spectral density (see 3GPP TS 25.133 [133] subclause): • 0: less than -24 dB • 1..48: from -24 dB to -0.5 dBm with 0.5 dB steps (i.e. 1: -24 dB <= Ec/Io < -23.5 dB) • 49: 0 dB or greater • 255: not known or not detectable
<rsrq>	Number	Reference Signal Received Quality (RSRQ): • 0: less than -19.5 dB • 1..33: from -19.5 dB to -3.5 dB with 0.5 dB steps • 34: -3 dB or greater • 255: not known or not detectable
<rsrp>	Number	Reference Signal Received Power (RSRP): • 0: less than -140 dBm • 1..96: from -140 dBm to -45 dBm with 1 dBm steps • 97: -44 dBm or greater • 255: not known or not detectable

7.5 Operator selection +COPS

+COPS						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	Profile	Yes	Appendix B.4	+CME Error

7.5.1 Description

Forces an attempt to select and register with the GSM/UMTS/LTE network operator, that can be chosen in the list of network operators returned by the test command, that triggers a PLMN scan on all supported bands. Through <mode> parameter the network selection can automatically be performed or forced by this command: the access technology is indicated in <AcT> parameter (where supported).

By default, u-blox cellular modules support auto-registration, therefore AT+COPS=0 or AT+COPS=1 command are not required at switch on: for more details, see Auto-registration.

The response time refers to the worst case for AT+COPS=0 and AT+COPS=1 command on a specific PLMN, where the AT command can last up to several minutes due to abnormal cases in radio resource and mobility management procedures. In case NB-IoT bands must be scanned to find a suitable cell, or when the module is in roaming and attempts registration on several PLMN before getting access to the cellular services, the response time can dramatically increase: for more details, see Maximum vs typical response time of cellular network related AT commands.

LARA-L6 / LARA-R6
The PIN insertion is mandatory.

LARA-L6 / LARA-R6001 / LARA-R6001D-01B / LARA-R6401 / LARA-R6401D / LARA-R6801 / LARA-R6801D
Manual PLMN selection mode cannot be set in airplane mode (+CFUN: 0/+CFUN: 4), an error result code is returned.

LARA-R6001D-00B
Manual PLMN selection mode shall not be set in airplane mode (+CFUN: 0/+CFUN: 4), as it could block the AT interface.

LARA-L6 / LARA-R6
In manual PLMN selection mode, if the optional <AcT> parameter is not specified, the modules will select the default access technology with the following priority order: LTE, UMTS and GSM (not supported technologies will be ignored).

u-blox cellular modules are certified according to all the capabilities and options stated in the Protocol Implementation Conformance Statement document (PICS) of the module. The PICS, according to 3GPP TS 51.010-2 [117], 3GPP TS 34.121-2 [118], 3GPP TS 36.521-2 [139] and 3GPP TS 36.523-2 [140], is a statement of the implemented and supported capabilities and options of a device. If the user changes the command settings during the certification process, the PICS of the application device integrating a u-blox cellular module must be changed accordingly.

To be able to exploit all command functionalities, the SIM card verification is required. The command is accessible also without an inserted SIM. In this case the command AT+COPS=0 always returns an error result code because the network registration cannot be performed without the SIM, while the configuration (i.e. automatic registration) is correctly set. The set value can be checked with the read command or by verifying the active profile with AT&V command if supported (parameter <format> is then also visible).

The set command handling depends on the <mode> parameter value (for more details on the <mode> parameter allowed values, see Defined values):

- **<mode>=0** and **<mode>=1**: the AT command setting is immediately stored in the current activated profile or in the NVM if the personal profiles are not supported. If the MT is set in automatic selection mode (<mode>= 0), only the mode will be saved. If the MT is set in manual mode (<mode>= 1), also the format (<format>) and operator (<oper>) will be stored.

- **<mode>=4**: the module starts a manual selection of the specified operator; if this operation is not successful, the module will start an automatic network selection and will remain in automatic mode.

LARA-L6 / LARA-R6
A full cell scan can be triggered by means of the +UCFSCAN AT command.

LARA-L6 / LARA-R6
If the MT is set in manual mode (<mode>= 1), the format (<format>) is not stored to NVM and its factory-programmed value will be used at boot.

If the module has already been set in automatic selection mode (+COPS: 0), a further issuing of the command AT+COPS=0 is managed as a user reselection (see the 3GPP TS 23.122 [112]), i.e. the module triggers a search for the HPLMN or a higher order PLMN excluding the previously selected PLMN/access technology combination. This is useful when roaming in areas where the HPLMN or a higher order PLMN is available. If no HPLMN or higher order PLMN is found, the module either selects another PLMN that has the best signal quality or remains in the state it was in prior to the search (e.g. camped and/or registered on the PLMN before the search). Both behaviors are accepted by 3GPP TS 23.122 [112]

The AT+COPS=1,<format>,<oper> command forces the MT to select and register with the network even if the operator currently belongs to the list of the Forbidden Public Land Mobile Networks (FPLMNs).

The PLMN search cannot be performed in RRC connected state when the RAT is 3G or LTE, hence no PLMN list will be returned at the end of the PLMN scan attempt.

The user should not rely only on the set command "OK" final result code as a confirmation that the network selection has been performed. To determine the current network registration status the following AT commands shall be used:

- LARA-L6 / LARA-R6 - Network registration status +CREG
- LARA-L6 / LARA-R6 - GPRS network registration status +CGREG
- LARA-L6 / LARA-R6 - EPS network registration status +CEREG

The user should not enter colliding requests (e.g. AT+COPS=0 and AT+COPS=2) on different communication ports, because this might cause interoperability issues if overlapping registration and deregistration requests are not handled by the network, and could result in an unpredictable registration state. Similarly, when notified of a GPRS mobile terminated detach event (e.g. via +CGEV URC), it is recommended to wait a few seconds before entering AT+COPS=2 in order to let the pending registration procedure (automatically triggered by the module in most cases) successfully end.

The test command returns long and short <oper> strings from the module's ROM PLMN name list (see +COPN). To handle possible mismatches between the PLMN names returned by the test command and the read command, the numeric format should be preferred.

LARA-L6 / LARA-R6
The manual PLMN selection can fail due to the MNO control on the network selection procedure via EF_{CSP} setting; for further details see +PACSP.

LARA-L6 / LARA-R6
The response time of a manual PLMN selection specifying the target network in alphanumeric format can exceed the documented value, because the device tries to register on all PLMNs in the ROM list whose alphanumeric code matches the one specified in the +COPS command.

LARA-L6 / LARA-R6
In +COPS: 2 (module deregistered from the network), the UE is deregistered from the network but RF circuits are not disabled, hence the radio synchronization is retained and the cell selection and reselection procedures run as in limited service state.
If AT+COPS=0 is issued when the module is deregistered from network (+COPS: 2), it triggers a user reselection (see 3GPP TS 23.122 [112]). To perform a registration cycle on the same RPLMN, issue the AT +CFUN=0/AT+CFUN=1 sequence.

7.5.2 Syntax

Type	Syntax	Response	Example
Set	AT+COPS=[<mode>[,<format>[,<oper>[,<AcT>]]]]	**If <mode>=0, 1, 2, 3, 4:** OK	AT+COPS=0,0 OK
		If <mode>=5 and on GSM networks: [MCC:<MCC>, MNC:<MNC>, LAC:<LAC>, CI:<CI>, BSIC:<BSIC>, Arfcn:<arfcn>, RxLev:<RxLev> [MCC:<MCC>, MNC:<MNC>, LAC:<LAC>, CI:<CI>, BSIC:<BSIC>, Arfcn:<arfcn>, RxLev:<RxLev> [...]]] OK	AT+COPS=5 MCC:222, MNC: 88, LAC:55fa, CI:ffff, BSIC:3f, Arfcn:00104, RxLev:037 MCC:222, MNC: 10, LAC:4e54, CI:ffff, BSIC:32, Arfcn:00080, RxLev:032 ... ... MCC:222, MNC: 88, LAC:55fa, CI:1d39, BSIC:3d, Arfcn:00756, RxLev:005 OK
		If <mode>=5 and on UMTS networks: [MCC:<MCC>, MNC:<MNC>, LAC:<LAC>, RAC:<RAC>, CI:<CI>, DLF:<dl_frequency>, ULF:<ul_frequency>, SC:<scrambling_code>, RSCP LEV:<rscp_lev>, ECN0 LEV:<ecn0_lev> [MCC:<MCC>, MNC:<MNC>, LAC:<LAC>, RAC:<RAC>, CI:<CI>, DLF:<dl_frequency>, ULF:<ul_frequency>, SC:<scrambling_code>, RSCP LEV:<rscp_lev>, ECN0 LEV:<ecn0_lev> [...]]] OK	AT+COPS=5 MCC:222, MNC:10, LAC:61ef, RAC:14, CI:07d2088, DLF:10788, ULF: 9838, SC:81, RSCP LEV:23, ECN0 LEV:41 MCC:222, MNC:10, LAC:61ef, RAC:14, CI:07d2085, DLF:10813, ULF: 9863, SC:81, RSCP LEV:26, ECN0 LEV:41 ... ... MCC:222, MNC:01, LAC:ef8d, RAC:0, CI:52d36fb, DLF:10688, ULF: 9738, SC:285, RSCP LEV:16, ECN0 LEV:32 OK
		If <mode>=5 and on LTE networks: [MCC:<MCC>, MNC:<MNC>, TAC:<TAC>, CI:<CI>, DLF:<dl_EARFCN>, ULF:<ul_EARFCN>, PCI:<PhysCellID>, RSRP LEV:<RSRP>, RSRQ LEV:<RSRQ> [MCC:<MCC>, MNC:<MNC>, TAC:<TAC>, CI:<CI>, DLF:<dl_EARFCN>, ULF:<ul_EARFCN>, PCI:<PhysCellID>, RSRP LEV:<RSRP>, RSRQ LEV:<RSRQ> [...]]] OK	AT+COPS=5 MCC:222, MNC:88, TAC:562c, CI:57367043, DLF: 1325, ULF:19325, PCI:163, RSRP LEV:25, RSRQ LEV:1 MCC:222, MNC:10, TAC:5a25, CI:10086944, DLF: 1850, ULF:19850, PCI:287, RSRP LEV:25, RSRQ LEV:6 ... ... MCC:293, MNC:40, TAC:27ec, CI:519425, DLF: 6400, ULF:24400, PCI:393, RSRP LEV:27, RSRQ LEV:9 OK
		If <mode>=6 and on GSM networks: [<AcT>,<MCC>,<MNC>,<LAC>,<CI>, <BSIC>,<arfcn>,<RxLev> [<AcT>,<MCC>,<MNC>,<LAC>,<CI>, <BSIC>,<arfcn>,<RxLev> [...]]] OK	AT+COPS=6 0,222,88,55fa,ffff,3f,00104,037 ... 0,222,10,4e54,ffff,32,00080,032 ... OK
		If <mode>=6 and on UMTS networks:	AT+COPS=6

Type	Syntax	Response	Example
		[<MCC>,<MNC>,<LAC>,<RAC>,<CI>,<dl_frequency>,<ul_frequency>,<scrambling_code>,<RSCP LEV>,<ecn0_lev> [<MCC>,<MNC>,<LAC>,<RAC>,<CI>,<dl_frequency>,<ul_frequency>,<scrambling_code>,<RSCP LEV>,<ecn0_lev> [...]]] OK	222,99,754f,2,03554d7,10713,9763,341,255,14 ... 222,01,ef8d,0,52d2647,10663,9713,453,4,23 ... OK
		If <mode>=6 and on LTE networks: [<AcT>,<MCC>,<MNC>,<TAC>,<CI>,<dl_EARFCN>,<ul_EARFCN>,<PhysCellID>,<RSRP>,<RSRQ> [<AcT>,<MCC>,<MNC>,<TAC>,<CI>,<dl_EARFCN>,<ul_EARFCN>,<PhysCellID>,<RSRP>,<RSRQ> [...]]] OK	AT+COPS=6 7,222,88,562c,57367043,1325,19325,163,35,10 7,222,01,3aa3,179291197,6300,24300,271,48,14 7,222,01,3aa3,179290685,6300,24300,402,27,11 7,293,40,27ec,519425,6400,24400,393,24,1 OK
		If <mode>=8 and on GSM networks: [MCC:<MCC>, MNC:<MNC>, LAC:<LAC>, CI:<CI>, BSIC:<BSIC>, Arfcn:<arfcn>, RxLev:<RxLev>, TA:<TA> [MCC:<MCC>, MNC:<MNC>, LAC:<LAC>, CI:<CI>, BSIC:<BSIC>, Arfcn:<arfcn>, RxLev:<RxLev>, TA:<TA> [...]]] OK	AT+COPS=8 MCC:222, MNC: 10, LAC:4e54, CI:12f1, BSIC:3f, Arfcn:00104, RxLev:037, TA:3 MCC:222, MNC: 10, LAC:4e54, CI:8841, BSIC:32, Arfcn:00080, RxLev:032, TA:5 MCC:222, MNC: 10, LAC:4e54, CI:1ef4, BSIC:31, Arfcn:00082, RxLev:022, TA:255 ... MCC:222, MNC: 10, LAC:55fa, CI:1d39, BSIC:3d, Arfcn:00756, RxLev:005, TA:7 OK
Read	AT+COPS?	+COPS: <mode>[,<format>,<oper>[,<AcT>]] OK	+COPS: 0,0,"vodafone IT" OK
Test	AT+COPS=?	+COPS: [(<stat>, long <oper>, short <oper>, numeric <oper>[,<AcT>])[,(<stat>, long <oper>, short <oper>, numeric <oper>[,<AcT>]),[...]]],(list of supported <mode>s),(list of supported <format>s) OK	+COPS: (2,"vodafone IT","voda IT","22210"),(1,"SI vodafone","vodafone SI","29340"),(1,"I WIND","I WIND","22288"),(1,"I TIM","TIM","22201"),(1,"MOBITEL","MOBITEL","29341"),,(0-4),(0-2) OK

7.5.3 Defined values

Parameter	Type	Description
<mode>	Number	Is used to chose whether the network selection is automatically done by the MT or is forced by this command to the operator <oper> given in the format <format>: • 0 (default value and factory-programmed value): automatic (<oper> field is ignored) • 1: manual • 2: deregister from network • 3: set only <format> • 4: manual/automatic

Parameter	Type	Description
		• 5: extended network search • 6: extended network search without the tags (e.g. MCC, RxLev will not be printed, see the syntax and the command example) • 8: network timing advance search Allowed values: • LARA-L6 / LARA-R6 - 0, 1, 2, 3, 4
<format>	Number	• 0 (factory-programmed value): long alphanumeric <oper> • 1: short format alphanumeric <oper> • 2: numeric <oper>
<oper>	String	Given in format <format> this field may be up to 24 characters long for long alphanumeric format, up to 10 characters for short alphanumeric format and 5 or 6 characters long for numeric format (MCC/MNC codes). The factory-programmed value is FFFFF (undefined). LARA-L6 / LARA-R6 The <oper> string returned by the +COPS read command response is formed by the network alphanumeric name from NITZ information or EONS SIM files or retrieved from module operator list (see +COPN) optionally concatenated with the Service Provider Name (SPN) name retrieved from the SIM card, whose maximum length is 16 characters. The maximum string length in default alphabet (see +CSCS) is therefore 41 characters (40 plus space separation).
<stat>	Number	• 0: unknown • 1: available • 2: current • 3: forbidden
<AcT>	Number	Indicates the radio access technology: • 0: GSM • 1: GSM COMPACT • 2: UTRAN • 3: GSM/GPRS with EDGE availability • 4: UTRAN with HSDPA availability • 5: UTRAN with HSUPA availability • 6: UTRAN with HSDPA and HSUPA availability • 7: LTE • 8: EC-GSM-IoT (A/Gb mode) • 9: E-UTRAN (NB-S1 mode) Allowed values: • LARA-L6404 / LARA-L6404D / LARA-L6824 / LARA-L6824D / LARA-R6401 / LARA-R6401D - 7 • LARA-L6004 / LARA-L6004D / LARA-L6804D / LARA-R6001 / LARA-R6001D / LARA-R6801 / LARA-R6801D - 0, 2, 3, 7
<TA>	Number	Timing Advance; the range is 0-63. If the information is not known or not detectable or currently not available, the value is 255.
<MCC>	Number	See <MCC>.
<MNC>	Number	See <MNC>.
<LAC>	Number	See <LAC>.
<CI>	Number	See <CI>.
<BSIC>	Number	See <BSIC>.
<arfcn>	Number	See <arfcn>.
<RxLev>	Number	See <RxLev>.
<RAC>	Number	See <RAC>.
<dl_frequency>	Number	See <dl_frequency>.
<ul_frequency>	Number	See <ul_frequency>.
<scrambling_code>	Number	See <scrambling_code>.
<rscp_lev>	Number	See <rscp_lev>.
<ecn0_lev>	Number	See <ecn0_lev>.
<TAC>	Number	See <TAC>.

Parameter	Type	Description
<dl_EARFCN>	Number	See <dl_EARFCN>.
<ul_EARFCN>	Number	See <ul_EARFCN>.
<PhysCellID>	Number	See <PhysCellID>.
<RSRP>	Number	See <RSRP>.
<RSRQ>	Number	See <RSRQ>.

7.5.4 Notes

LARA-L6 / LARA-R6

- If no network is available, the test command returns the 'No Network Service' error result code.
- <format> and <oper> parameters are optional only if the <mode> parameter is set to 0, 2 or 3.
- It is not possible to issue the test command if the module is set to minimum functionality (+CFUN: 0) or in the airplane mode (+CFUN: 4).
- When <format> is set to alphanumeric (0 or 1) the read command's <oper> value is retrieved from the first match found in the following "name sources" (from highest to lowest priority):
  - EF_{OPL} and EF_{PNN} files (SIM card dependent, see below)
  - NITZ service (network dependant)
  - Hardcoded list in the module's firmware

  If no match is found in the "name sources" the broadcasted MCC-MNC is displayed. If the PLMN network name and operator name list services are "enabled" in the SIM card, then the EF_{OPL} and EF_{PNN} are used for displaying the <oper> name if a match can be found.
- If there is no opportunity to use the radio, the test command returns the 'Temporary Failure' error result code after three internal retries, separated by 5 s each, are completed with same status. However, in this case, partial results could still be displayed (only if available). The user may retry later on.
- It is not possible to issue the command with <mode> parameter set to 1 or 4 if the module is set to minimum functionality (+CFUN: 0) or in the airplane mode (+CFUN: 4).

LARA-L6 / LARA-R6001 / LARA-R6001D / LARA-R6801 / LARA-R6801D

- Issuing the AT+COPS=1,..,<RAT> command forces the single RAT behavior. Issue the AT+COPS=0 command to restore the multi-RAT and trigger detach and reattach or RAU (depending on target RAT, LTE or legacy respectively).
- In 2G RAT, after a failed registration with a permanent reject cause (e.g. "Illegal UE"), the information text response to the read command is +COPS: 2.

7.6 Radio Access Technology (RAT) selection +URAT

+URAT						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	NVM / OP	No	<10 s	+CME Error

7.6.1 Description

Allows to select the Radio Access Technologies (RAT) to be activated at next registration cycle and, in case of multi-RAT configuration, defines the RAT priority order.

Depending on how many parameters are specified, it is possible to select single or multi-RAT behavior. The order of the RAT parameters defines the priority of the related radio access technologies selected at boot or when entering full functionality from deregistered state. The <1stAcT> parameter identifies the RAT to be selected firstly. If <2ndAcT> parameter is specified, it determines which RAT is selected if no cellular service can be obtained by the module on the <1stAcT>. If <3rdAcT> parameter is specified, it determines the remaining RAT selected when no service can be obtained in the preferred one(s).

☞ LARA-L6 / LARA-R6

In SoftBank configuration (+UMNOPROF: 28) active RATs and bands could be forced, based on serving PLMN, to different values than +URAT and +UBANDMASK configurations.

☞ u-blox cellular modules are certified according to all the capabilities and options stated in the Protocol Implementation Conformance Statement document (PICS) of the module. The PICS, according to 3GPP TS 51.010-2 [117], 3GPP TS 34.121-2 [118], 3GPP TS 36.521-2 [139] and 3GPP TS 36.523-2 [140], is a statement of the implemented and supported capabilities and options of a device. If the user changes the command settings during the certification process, the PICS of the application device integrating a u-blox cellular module must be changed accordingly.

7.6.2 Syntax

Type	Syntax	Response	Example
Set	AT+URAT=<1stAcT>[,<2ndAcT>[,<3rdAcT>]]	OK	AT+URAT=7,8 OK
Read	AT+URAT?	+URAT: <1stAcT>[,<2ndAcT>[,<3rdAcT>]] OK	+URAT: 7 OK
Test	AT+URAT=?	+URAT: (list of the supported <1stAcT>s)[,(list of the supported <2ndAcT>s)[,(list of the supported <3rdAcT>s)]] OK	+URAT: (7-10),(7-9),(7-9) OK

7.6.3 Defined values

Parameter	Type	Description
<1stAcT>	Number	Indicates the single or highest priority RAT enabled and may be: • 0: GSM / GPRS / eGPRS • 2: UMTS • 3: LTE • 7: LTE Cat M1 • 8: NB-IoT • 9: GPRS / eGPRS • 10: Satellite Allowed values depend on the module series: • LARA-L6004 / LARA-L6004D / LARA-L6804D / LARA-R6001 / LARA-R6001D / LARA-R6801 / LARA-R6801D - 0, 2, 3 (factory-programmed value) • LARA-L6404 / LARA-L6404D / LARA-L6824 / LARA-L6824D / LARA-R6401 / LARA-R6401D - 3 (factory-programmed value)
<2ndAcT>	Number	Indicates the second priority RAT enabled and has the same range as <1stAcT>. The factory-programmed value is: • LARA-L6004 / LARA-L6004D / LARA-L6804D / LARA-R6001 / LARA-R6001D / LARA-R6801 / LARA-R6801D - 2 (UMTS) • LARA-L6404 / LARA-L6404D / LARA-L6824 / LARA-L6824D / LARA-R6401 / LARA-R6401D - The parameter is not supported.
<3rdAct>	Number	Indicates the third priority RAT enabled and has the same range as <1stAcT>. The factory-programmed value is: • LARA-L6004 / LARA-L6004D / LARA-L6804D / LARA-R6001 / LARA-R6001D / LARA-R6801 / LARA-R6801D - 0 (GSM / GPRS / eGPRS) • LARA-L6404 / LARA-L6404D / LARA-L6824 / LARA-L6824D / LARA-R6401 / LARA-R6401D - The parameter is not supported.

7.6.4 Notes

- AT&T's EF_{RAT} mode contains the RAT mode setting, that is the mode that the module shall be set to. Thus this setting may override +URAT's parameters loaded at boot time.

- Although the <1stAcT> allowed values are 7 (LTE Cat M1) and 10 (Satellite), only the single-RAT behavior is supported (<2ndAcT> and <3rdAct> are not supported).

7.7 Full cell scan +UCFSCAN

+UCFSCAN						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	Yes	Appendix B.4	+CME Error

7.7.1 Description

Performs an extended network search on the provided radio access technology (RAT). The network search is performed on all the supported bands or only on a subset specified by the <bitmask_1_64> and <bitmask_65_127> parameters. All the cells detected during the PLMN search are reported at the AT interface:

- **GSM/ GSM/GPRS with EDGE availability networks**: all the cells found of any visible PLMNs are reported, including the serving cell and those belonging to the neighbor list of the serving cell.
- **WCDMA networks**: all the cells found of any visible PLMNs are reported, including the serving cell and those belonging to the neighbor list of the serving cell.
- **LTE Cat 1/M1/NB-IoT networks**: all the cells found are reported, including the serving cell and those belonging to the neighbor list of the serving cell.

☞ If the requested <AcT> is not enabled by the +URAT AT command, the +UCFSCAN will return an error result code.

☞ The set command can be aborted. The scan might take many seconds, depending on the network conditions and the module's current activities.

☞ The cell search cannot be performed in RRC connected state when the RAT is 3G or LTE, hence no cell list will be returned at the end of the cell scan attempt.

☞ LARA-L6 / LARA-R6
The command should be issued over the same RAT the device is registered to, otherwise the scan will return 0 cells found.

☞ LARA-L6 / LARA-R6
The maximum number of cells returned by the command depends on the selected RAT. At most 16 cells can be retrieved if the selected RAT is LTE, while 8 cells can be retrieved if the selected RAT is either WCDMA or GSM.
On LTE RAT, cells are reported based on RSSI decreasing order. On WCDMA and GSM RAT, the most powerful cells are reported and the order depends on the sequence in which cells are acquired during the scan.

7.7.2 Syntax

Type	Syntax	Response	Example
Set	AT+UCFSCAN=<AcT>[,<bitmask_band1_64>[,<bitmask_band65_127>]]	**If <AcT>=7 (LTE Cat 1 / LTE Cat M1) or 9 (NB-IoT)** +UCFSCAN: <AcT>,<EARFCN>,<dl_bandwitdh>,<PhysCellID>,<MCC>,<MNC>,<TAC>,<CI>,<cell_barred>,<RSRP_value>,<RSRQ_value>,<RSSI_value> [...] [+UCFSCAN: <AcT>,<EARFCN>,<dl_bandwitdh>,<PhysCellID>,<MCC>,<MNC>,<TAC>,<CI>,<cell_barred>,	AT+UCFSCAN=9 +UCFSCAN: 9,6152,101,353,222,88,584C,3761E87,0,"-81","-10","-70" +UCFSCAN: 9,6290,101,388,222,01,9095,AB431A1,0,"-114","-24","0" OK

Type	Syntax	Response	Example
		<RSRP_value>,<RSRQ_value>,<RSSI_value>] OK	
		If <AcT>=2 (UMTS) +UCFSCAN: <AcT>,<uarfcn>,<band_class>,<scrambling_code>,<MCC>,<MNC>,<LAC>,<CI>,<RSSI_WCDMA> [...] [+UCFSCAN: <AcT>,<uarfcn>,<band_class>,<scrambling_code>,<MCC>,<MNC>,<LAC>,<CI>,<RSSI_WCDMA>] OK	AT+UCFSCAN=2 +UCFSCAN: 2,3063,64,4672,222,88,5FB5,25C1298,-89 +UCFSCAN: 2,10713,1024,1328,222,01,EF8D,52D36FA,-89 OK
		If <AcT>=0 (GSM) +UCFSCAN: <AcT>,<arfcn>,<arfcn_band>,<BSIC>,<MCC>,<MNC>,<LAC>,<CI>,<cell_barred>,<RxLev>,<grps_supported> [...] [+UCFSCAN: <AcT>,<arfcn>,<arfcn_band>,<BSIC>,<MCC>,<MNC>,<LAC>,<CI>,<cell_barred>,<RxLev>,<grps_supported>] OK	AT+UCFSCAN=0 +UCFSCAN: 0,50,0,53,222,10,4E54,209,0,50,1 +UCFSCAN: 0,49,0,49,222,10,4E54,E3D3,0,50,1 OK
		If no cell is found on requested AcT +UCFSCAN: <AcT> OK	AT+UCFSCAN=7 +UCFSCAN: 7 OK
Test	AT+UCFSCAN=?	+UCFSCAN: (list of supported <AcT>s),(1844674407370 9551615,1844674407370 9551615 OK	+UCFSCAN: (0,7,9),(1844674407370 9551615,1844674407370 9551615 OK

7.7.3 Defined values

Parameter	Type	Description
<AcT>	Number	Indicates the radio access technology. Allowed values: • 0: GSM • 2: WCDMA • 7: LTE Cat 1 / LTE Cat M1 • 9: NB-IoT Allowed values: • LARA-L6 / LARA-R6 : 0, 2, 7
<bitmask_1_64>	Number	Depending on the <AcT> parameter values, configures the bitmask for the LTE or GSM bands. When <AcT>=7 (LTE Cat 1 / LTE Cat M1) or <AcT>=9 (NB-IoT), it indicates the bandmask for LTE bands 1 through 64. Each bit enables/disables a band for the scan: • Bit 0: band 1 • Bit 1: band 2 • Bit 2: band 3 • Bit 3: band 4 • ...

Parameter	Type	Description
		• Bit 63: band 64 When <AcT>=0 (GSM), it indicates bandmask for GSM bands 800 / 900 / 1800 / 1900. The following bit enables/disables a band for the scan: • Bit 7: DCS 1800 • Bit 8: ESGM 900 • Bit 19: GSM 850 • Bit 21: PCS 1900 When <AcT>=2 (WCDMA), it indicates bandmask for WCDMA bands. The following bit enables/disables a band for the scan: • Bit 22: WCDMA I (2100 MHz) • Bit 23: WCDMA II (1900 MHz) • Bit 26: WCDMA V (850 MHz) • Bit 49: WCDMA VIII (900 MHz) The special value 0 enables all the bands for the scan. The default value is 0.
<bitmask_65_127>	Number	When <AcT>=7 (LTE Cat 1 / LTE Cat M1) or <AcT>=9 (NB-IoT), it indicates the bandmask for LTE bands 65 through 128. Each bit enables/disables a band for the scan: • Bit 0: band 65 • Bit 1: band 66 • Bit 2: band 67 • Bit 3: band 68 • .. • Bit 63: band 128 The special value 0 enables all the bands for the scan. The default value is 0. If <AcT>=0 (GSM) or <AcT>=2 (WCDMA) the parameter is not supported.
<EARFCN>	Number	See <EARFCN>.
<dl_bandwitdh>	Number	Downlink bandwidth. Allowed values: • 6: NB 6 (1.4 MHz) • 15: NB 15 (3 MHz) • 25: NB 25 (5 MHz) • 50: NB 50 (10 MHz) • 75: NB 75 (15 MHz) • 100: NB 100 (20 MHz) • 101: not known
<PhysCellID>	Number	See <PhysCellID>.
<MCC>	Number	See <MCC>.
<MNC>	Number	See <MNC>.
<TAC>	Number	See <TAC>.
<CI>	Number	See <CI>.
<cell_barred>	Number	Allowed values: • 0: cell not barred • 1: cell barred
<RSRP_value>	Number	See <RSRP_value>.
<RSRQ_value>	Number	See <RSRQ_value>.
<RSSI_value>	Number	Cell received signal strength indication (RSSI) value in dBm. The range goes from -120 .0 dBm to 0 dBm.
<uarfcn>	Number	UTRAN Absolute Radio Frequency Channel Number (UARFCN).
<band_class>	Number	Band class allowed values: • 1024: band I, minimum UARFCN=10562, maximum UARFCN=10838 (IMT band) • 1: band II, minimum UARFCN=9661, maximum UARFCN=9938 (PCS band) • 32: band III, minimum UARFCN=1162, maximum UARFCN=1513 (WCDMA 1800 band) • 256: band IV, minimum UARFCN=1537, maximum UARFCN=1738 (additional frequencies 1887, 1912, 1937, 1962, 1987, 2012, 2037, 2062, 2087) (WCDMA 1700-2100 bands) • 16: band V, minimum UARFCN=4357, maximum UARFCN=4458 (additional frequencies 1007, 1012, 1032, 1037, 1062, 1087) (WCDMA 850 band)

Parameter	Type	Description
		• 8: band VI (Japan), minimum UARFCN=4387, maximum UARFCN=4413 (additional frequencies 1037, 1062) (WCDMA 800 band) • 64: band VIII, minimum UARFCN=2937, maximum UARFCN=3088 (WCDMA 900 band) • 128: band IX, minimum UARFCN=9237, maximum UARFCN=9387 (WCDMA 1700 band) • 512: band XI, minimum UARFCN=3712, maximum UARFCN=3787 (WCDMA 1500 band) • 4: band XIX, minimum UARFCN=363, maximum UARFCN=712 (additional frequencies 787, 812, 837) (WCDMA BC19 band)
<scrambling_code>	Number	See <scrambling_code>.
<RSSI_WCDMA>	Number	Cell received signal strength indication (RSSI) value in dBm. The range goes from -105 dBm to -60 dBm.
<arfcn>	Number	See <arfcn>.
<arfcn_band>	Number	Allowed values: • 0: EGSM 900 • 1: PGSM 900 • 2: PCS 1900 • 3: DCS 1800 • 4: 850
<BSIC>	Number	See <BSIC>.
<LAC>	Number	See <LAC>.
<RxLev>	Number	See <RxLev>.
<gprs_supported>	Number	Allowed values: • 0: PS not supported • 1: PS supported • 2: not known

7.7.4 Notes

LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D

- The PIN insertion is not mandatory before the command execution.

7.7.5 Examples

Command	Response	Description
AT+URAT?	+URAT: 7,8,9 OK	Check the radio access technologies module configuration. The module is configured in LTE, NB-IoT and GSM.
AT+UCFSCAN=9	+UCFSCAN: 9,6152,101,353,222,88,584C, 3761E87,0,-81,-10,-70 +UCFSCAN: 9,6290,101,388,222,01,9095, AB431A1,0,-114,-24,0 OK	Perform a scan on any NB-IoT band.
AT+UCFSCAN=0	+UCFSCAN: 0,50,0,53,222,10,4E54,209,0, 50,1 +UCFSCAN: 0,49,0,49,222,10,4E54,E3D3,0 ,50,1 +UCFSCAN: 0,20,0,22,222,01,D5BD,43A,0 ,26,1 +UCFSCAN: 0,107,0,58,222,88,5FC2,0,0, 28,1 +UCFSCAN: 0,47,0,51,222,10,4E54,0,0,27,1	Perform a scan on any GSM band.

Command	Response	Description
	+UCFSCAN: 0,15,0,19,222,01,D5BD,43B,0,25,1 +UCFSCAN: 0,104,0,60,222,88,5FC2,FCED,0,22,1 +UCFSCAN: 0,5,0,16,222,01,D5BD,548D,0,23,1 OK	
AT+UCFSCAN=7	+UCFSCAN: 7	Perform a scan on any LTE band. No result is found.
AT+UCFSCAN=9		Perform a scan on any NB-IoT band.
<input a character>	OK	The scan is aborted.
AT+URAT=8	OK	Allows the module to register only on NB-IoT network at next reboot.
AT+CFUN=15	OK	Reboot the module.
AT+URAT?	+URAT: 8 OK	The module is configured in NB-IoT only.
AT+UCFSCAN=0	+CME ERROR: operation not allowed	A scan on a disabled access technology (GSM) is triggered, therefore an error result code is returned.

7.8 Preferred PLMN list selection +CPLS

+CPLS						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

7.8.1 Description

Selects one PLMN selector with Access Technology list in the SIM card or active application in the UICC (GSM or USIM), that is used by +CPOL command.

The set command selects a list in the SIM/USIM. The read command returns the selected PLMN selector list from the SIM/USIM.

The test command returns the whole index range supported lists by the SIM/USIM.

7.8.2 Syntax

Type	Syntax	Response	Example
Set	AT+CPLS=<list>	OK	AT+CPLS=1 OK
Read	AT+CPLS?	+CPLS: <list> OK	+CPLS: 1 OK
Test	AT+CPLS=?	+CPLS: (list of supported <list>s) OK	+CPLS: (0-2) OK

7.8.3 Defined values

Parameter	Type	Description
<list>	Number	• 0 (default and factory-programmed value): user controlled PLMN selector with Access Technology $EF_{PLMNwAcT}$, if not found in the SIM/UICC then PLMN preferred list $EF_{PLMNsel}$ (this file is only available in SIM card or GSM application selected in UICC); these files can be read and updated (see the 3GPP TS 31.102 [89]).

Parameter	Type	Description
		• 1: operator controlled PLMN selector with Access Technology $EF_{OPLMNwAcT}$; this file can be read only (see the 3GPP TS 31.102 [89]). • 2: HPLMN selector with Access Technology $EF_{HPLMNwAcT}$; this file can be read only (see the 3GPP TS 31.102 [89]).

7.9 Network registration status +CREG

+CREG						
Modules	All products					
Attributes	Syntax	PIN required	Settings saved	Can be aborted	Response time	Error reference
	partial	Yes	Profile	No	-	+CME Error

7.9.1 Description

Configures the network registration URC related to CS (circuit-switched) domain. Depending on the <n> parameter value, a URC can be issued:

- +CREG: <stat> if <n>=1 and there is a change in the MT's circuit-switched mode network registration status in GERAN/UTRAN/E-UTRAN.
- +CREG: <stat>[,<lac>,<ci>[,<AcTStatus>]] if <n>=2 and there is a change of the network cell in GERAN/UTRAN/E-UTRAN.
- +CREG: <stat>,[<lac>],[<ci>],[<AcTStatus>][,<cause_type>,<reject_cause>] if <n>=3 and the MT registration status (<stat>) changes. The <cause_type> and the <reject_cause> parameters are returned only if the MT is not registered, but it is currently searching a new operator to register to (<stat>=2) or if the registration is denied (<stat>=3).

The parameters <AcTStatus>, <lac>, <ci> are provided only if available.

The read command provides the same information issued by the URC together with the current value of the <n> parameter. The location information elements <lac>, <ci> and <AcTStatus>, if available, are returned only when <n>=2 or <n>=3 and the MT is registered with the network. The <cause_type>, <reject_cause> parameters are returned only if <n>=3 and the MT is not registered, but it is currently searching a new operator to register to (<stat>=2) or if the registration is denied (<stat>=3).

When <n>=2, in UMTS RAT, unsolicited location information can be received if the network sends the UTRAN INFORMATION MOBILITY message during dedicated connections; in the latter cases the reported <ci> might be not correct because the UE in DCH state cannot read broadcast system information before the change of serving cell. In contrast, in GSM RAT no unsolicited location information is received during a CS connection.

The DTE application should set a reasonable timer (10 s) when receiving the +CREG: 3 URC, since this might be due to the fact that the LTE registration was rejected (SIM not enabled for LTE RAT, wrong APN during the initial default bearer setup in the EPS attach procedure and other temporary reject causes).

If the MT also supports GPRS services and/or EPS services in E-UTRAN, the +CGREG / +CEREG set and read command result codes, where supported, apply to the registration status and location information for those services.

LARA-L6 / LARA-R6
The command setting is not stored in the personal profile.

7.9.2 Syntax

Type	Syntax	Response	Example
Set	AT+CREG=[<n>]	OK	AT+CREG=1 OK
Read	AT+CREG?	+CREG: <n>,<stat>[,<lac>,<ci>[,<AcTStatus>]]	+CREG: 0,0 OK

Type	Syntax	Response	Example
		OK	
Test	AT+CREG=?	+CREG: (list of the supported <n>s) OK	+CREG: (0-2) OK
URC		+CREG: <stat>[,[<lac>],[<ci>][,[<AcTStatus>][,<cause_type>,<reject_cause>]]]	+CREG: 1,"4E54","44A5"

7.9.3 Defined values

Parameter	Type	Description
<n>	Number	Network registration URC configuration. Allowed values: • 0 (default value and factory-programmed value): network registration URC disabled • 1: network registration URC enabled • 2: network registration and location information URC enabled • 3: network registration and reject cause URC enabled Allowed values: • LARA-L6 / LARA-R6 - 0, 1, 2
<stat>	Number	Network registration status. Allowed values: • 0: not registered, the MT is not currently searching a new operator to register to • 1: registered, home network • 2: not registered, but the MT is currently searching a new operator to register to • 3: registration denied • 4: unknown (e.g. out of GERAN/UTRAN/E-UTRAN coverage) • 5: registered, roaming • 6: registered for "SMS only", home network (applicable only when <AcTStatus> indicates E-UTRAN) • 7: registered for "SMS only", roaming (applicable only when <AcTStatus> indicates E-UTRAN) • 8: attached for emergency bearer services only (see 3GPP TS 24.008 [84] and 3GPP TS 24.301 [119] that specify the condition when the MS is considered as attached for emergency bearer services) • 9: registered for "CSFB not preferred", home network (applicable only when <AcTStatus> indicates E-UTRAN) • 10: registered for "CSFB not preferred", roaming (applicable only when <AcTStatus> indicates E-UTRAN) Allowed values: • LARA-L6 / LARA-R6 - 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10
<lac>	String	Two bytes location area code or tracking area code (if <AcTStatus>=7) in hexadecimal format (e.g. "00C3"). The value FFFF means that the current <lac> value is invalid.
<ci>	String	From 2 to 4 bytes cell ID in hexadecimal format (e.g. "A13F" or "129080B"). The value FFFFFFFF means that the current <ci> value is invalid.
<AcTStatus>	Number	Indicates the radio access technology: • 0: GSM • 1: GSM COMPACT • 2: UTRAN • 3: GSM/GPRS with EDGE availability • 4: UTRAN with HSDPA availability • 5: UTRAN with HSUPA availability • 6: UTRAN with HSDPA and HSUPA availability • 7: E-UTRAN • 8: EC-GSM-IoT (A/Gb mode) • 9: E-UTRAN (NB-S1 mode) • 255: the current <AcTStatus> value is invalid Allowed values: • LARA-L6004 / LARA-L6004D / LARA-L6804D / LARA-R6001 / LARA-R6001D / LARA-R6801 / LARA-R6801D - 0, 2, 3, 4, 5, 6, 7

Parameter	Type	Description
		• LARA-L6404 / LARA-L6404D / LARA-L6824 / LARA-L6824D / LARA-R6401 / LARA-R6401D - 7
<cause_type>	Number	<reject_cause> type. Allowed values: • 0: indicates that <reject_cause> contains an EMM cause value, see 3GPP TS 24.30 1 [119] Annex A
<reject_cause>	Number	Cause of the failed registration. The value is of type as defined by <cause_type>

7.9.4 Notes

The following is an overview of the values assumed by the <stat> parameter:

- 0: a technical problem could have occurred, the user is requested to intervene. It is still possible to make emergency calls (if supported) if network coverage is available. Possible causes:
  - PIN not entered
  - Invalid HPLMN found on the SIM (SIM read error)
  - SIM card not present

  The registration is not started
- 1: the MT is registered for /non EPS services on the HPLMN (or on one of the equivalent HPLMN's, whose list is provided by the SIM)
- 2: the module is searching a network to register on. Possible causes:
  - No network available
  - Available networks have insufficient Rx level
  - HPLMN or allowed PLMN are available but the registration is rejected, e.g. roaming is not allowed in this Location Area

  It is still possible to make emergency calls (if supported) if network coverage is available
- 3: the registration failed for CS/non-EPS services after a Location Update Reject or an LTE Attach Request rejected, or accepted for EPS services only; possible causes are:
  - Illegal MS
  - Illegal ME
  - IMSI unknown at HLR
  - PLMN not allowed
  - Location area not allowed
  - Roaming not allowed in this location area
  - Network failure
  - Network congestion
  - CS domain not available (LTE specific)

  It is still possible to make emergency calls (if supported) if network coverage is available.

  If the registration type is manual, then no further attempt is made to search for a new PLMN or register with it. If the registration type is automatic, the MS may look for an allowed PLMN if the rejection cause was roaming restriction. In case of illegal MS/ME, there could be possible problems with either the SIM card or with the ME's identity (IMEI): user intervention may be required.
- 4: this value, usually transitory, is returned if the registration state does not belong to any of the following:
  - Normal
  - Limited
  - No service
  - Service detached
  - Service disabled

  It may be issued after the failure of a registration procedure, before starting a PLMN search, when <stat>=2.
- 5: the MT is registered for CS/non EPS services on a VPLMN, in national or international roaming
- 6: in LTE, the MT is registered only for the SMS circuit-switched service on the HPLMN (or on one of the equivalent HPLMN's)

- 7: in LTE, the MT is registered only for the SMS circuit-switched service on a VPLMN, in national or international roaming
- 8: the MT is attached for emergency bearer services only.
- 9: in LTE, the MT is registered only for the SMS circuit-switched service on the HPLMN (or on one of the equivalent HPLMN's). CS fallback is not supported for voice services, therefore if the device is configured as "voice centric" (see +CEMODE) and does not support VoLTE, it will disable LTE and reselect 3G or 2G RAT if supported.
- 10: in LTE, the MT is registered only for the SMS circuit-switched service on a VPLMN, in national or international roaming. CS fallback is not supported for voice services, therefore if the device is configured as "voice centric" (see +CEMODE) and does not support VoLTE, it will disable LTE and reselect 3G or 2G RAT if supported.

7.10 Preferred operator list +CPOL

+CPOL						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	No	No	< 10 s	+CME Error

7.10.1 Description

Edits the user preferred list of networks in the active application on the UICC (GSM or USIM) or preferred list of networks in the SIM card.

The set command can write an entry in the selected list or can delete it if the operator parameter is not provided.

LARA-L6 / LARA-R6
The command accesses the list of preferred PLMNs previously selected by +CPLS, if implemented. If +CPLS is not implemented the command tries to access $EF_{PLMNwAcT}$ and if this file is not present and a UICC GSM application is selected or a SIM card is used then the $EF_{PLMNsel}$ file is accessed.

LARA-L6 / LARA-R6
When an entry is added to the preferred operator list, it should have a correspondence in the ROM PLMN names returned by the +COPN command. If <index> is given but <oper> is left out, the entry is deleted. If only <format> is given, the <oper> format in the read command is changed. The <GSM_AcT>, <GSM_Compact_AcT>, <UTRAN_AcT> and <E-UTRAN_AcT> parameters are required when writing user controlled PLMN selector with Access Technology ($EF_{PLMNwAcT}$).

The read command returns all used entries from the SIM list of preferred PLMNs and the Access Technologies for each PLMN in the list where provided.

If a new PLMN is added in a different format than the one previously set, the <format> parameter always switches to the last used.

7.10.2 Syntax

Type	Syntax	Response	Example
Set	AT+CPOL=[<index>][,<format>[,<oper>[,<GSM_AcT>,<GSM_Compact_AcT>,<UTRAN_AcT>[,<E-UTRAN_AcT>]]]]	OK	AT+CPOL=2,0,"I WIND",1,0,1 OK
Read	AT+CPOL?	+CPOL: <index1>,<format>,<oper1>[,<GSM_AcT1>,<GSM_Compact_AcT1>,<UTRAN_AcT1>[,<E-UTRAN_AcT>]] [+CPOL: <index2>,<format>,<oper2>[,<GSM_AcT2>,<GSM_	+CPOL: 1,0,"F SFR",1,0,1 +CPOL: 2,0,"TIM I",1,0,1 OK

Type	Syntax	Response	Example
		Compact_AcT2>,<UTRAN_AcT2>[, <E-UTRAN_AcT>]]...] OK	
Test	AT+CPOL=?	+CPOL: (list of supported<index>s), (list of supported <format>s) OK	+CPOL: (1-30),(0-2) OK

7.10.3 Defined values

Parameter	Type	Description
<index> / <indexn>	Number	Represents the order number of operator in the SIM preferred operator list. The parameter range depends on the number of entries in SIM card (i.e. its size), but can be further limited by the capabilities of the module.
<format>	Number	See also +COPS command description: • 0: long format alphanumeric <oper> • 1: short format alphanumeric <oper> • 2 (default value): numeric <oper> Allowed values: • LARA-L6 / LARA-R6 - 0, 1, 2 • LARA-L6 / LARA-R6 - 0, 1, 2
<oper> / <opern>	String	Format indicated by <format>
<GSM_AcT>	Number	GSM access technology. Allowed values: • 0: access technology not selected • 1: access technology selected
<GSM_Compact_AcT>	Number	GSM compact access technology. Allowed values: • 0: access technology not selected • 1: access technology selected
<UTRAN_AcT>	Number	UTRA access technology. Allowed values: • 0: access technology not selected • 1: access technology selected
<E-UTRAN_AcT>	Number	E-UTRAN access technology. Allowed values: • 0: access technology not selected • 1: access technology selected

7.10.4 Notes

LARA-L6 / LARA-R6

- When an entry is added to the preferred operator list in alphanumeric format, it shall have a correspondence in the ROM PLMN names returned by the +COPN AT command, otherwise an error result code is returned.
- The <oper> format in the read command is always aligned to the <format> parameter given in the last set command.
- The default value of <format> parameter is 2 (numeric <oper>).

7.11 Read operator names +COPN

+COPN						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	-	+CME Error

7.11.1 Description

Returns the list of operator names from the MT. Each operator code <numeric n> that has an alphanumeric equivalent <alpha n> in the MT memory shall be returned.

7.11.2 Syntax

Type	Syntax	Response	Example
Action	AT+COPN	+COPN: <numeric 1>,<alpha1>	+COPN: "21901","T-Mobile HR"
		[+COPN: <numeric2>,<alpha2> [...]]	+COPN: "21910","HR VIP"
		OK	+COPN: "22201","I TIM"
			+COPN: "22210","vodafone IT"
			OK
Test	AT+COPN=?	OK	OK

7.11.3 Defined values

Parameter	Type	Description
<numeric n>	String	Operator in numeric format (see +COPS AT command)
<alpha n>	String	Operator in long alphanumeric format (see +COPS AT command)

7.12 Steering of Roaming configuration +UDCONF=20

+UDCONF=20						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM / OP	No	-	+CME Error

7.12.1 Description

Enables / disables the Steering of Roaming feature.

The setting can be changed only when the module is not registered to, and not searching for, a network (i.e. when +CREG's <stat> is 0). The new setting is saved in NVM and takes place at the next network registration / search.

7.12.2 Syntax

Type	Syntax	Response	Example
Set	AT+UDCONF=20,<SoR_enable>	OK	AT+UDCONF=20,1
			OK
Read	AT+UDCONF=20	+UDCONF: 20,<SoR_enable>	AT+UDCONF=20
		OK	+UDCONF: 20,1
			OK

7.12.3 Defined values

Parameter	Type	Description
<SoR_enable>	Number	Enables / disables the Steering of Roaming feature: • 0: Steering of Roaming disabled • 1: Steering of Roaming enabled • 2: Steering of Roaming enabled with automatic switch from manual to automatic PLMN selection mode if the maximum number of registration attempts rejected with cause 17 (Network Failure) has been reached Allowed values: • LARA-L6 / LARA-R6 - 0, 1 The factory-programmed value is: • LARA-L6004 / LARA-L6004D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001 / LARA-R6001D / LARA-R6801 / LARA-R6801D - see Mobile Network Operator profiles.

Parameter	Type	Description
		• LARA-L6404 / LARA-L6404D / LARA-R6401 / LARA-R6401D - 0 and does not depend on the MNO profile

7.12.4 Notes

LARA-L6 / LARA-R6

- Reboot the module to make the new setting effective.

7.13 No more PS data +CNMPSD

+CNMPSD						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

7.13.1 Description

In case the external application has no more packets to send, it can use this command to trigger a Fast Dormancy request to the network. The constraints to be satisfied before sending a SCRI are the following:

- The module is currently registered in UMTS RAT
- No RRC procedure (e.g. RRC Connection establishment or cell reselection) is ongoing
- No NAS signaling is ongoing
- Inhibit Timer (T323, set after any SRCI is sent out) is not running

If all above conditions are satisfied a Signaling Connection Release Indication (SCRI) is sent to the network that can eventually release the RRC connection. If the above conditions are not met, an error result code will be returned.

7.13.2 Syntax

Type	Syntax	Response	Example
Action	AT+CNMPSD	OK	AT+CNMPSD OK
Test	AT+CNMPSD=?	OK	OK

7.14 Network selection control +PACSP

+PACSP						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	-	+CME Error

7.14.1 Description

This functionality is used by AT&T mobile network operator to control the PLMN selection mode, e.g. limiting the usage of manual mode and forcing the usage of automatic mode.

If the EF_{CSP} (Customer Service Profile) SIM file is available, the +PACSP URC is provided in the following cases:

- LARA-L6 / LARA-R6 - at the module boot time
- LARA-L6 / LARA-R6 - whenever the SIM/USIM issues the REFRESH proactive command related to the EF_{CSP}

For further information, see the AT&T Device Requirements [223].

LARA-L6 / LARA-R6
The command allows checking whether the EF_{CSP} (Customer Service Profile) is available on the SIM/USIM card and, if available, what is the value of the PLMN mode bit; otherwise an error result code is provided.

7.14.2 Syntax

Type	Syntax	Response	Example
Read	AT+PACSP?	+PACSP<bit_value> OK	+PACSP1 OK
URC		+PACSP<bit_value>	+PACSP0

7.14.3 Defined values

Parameter	Type	Description
<bit_value>	Number	PLMN mode bit value: • 0: automatic network selection is forced (see Notes) • 1: network selection mode unchanged (see Notes)

7.14.4 Notes

- If EF_{CSP} is available, the PLMN mode bit forces the automatic network registration, according to the +COPS <mode> value which is loaded at boot from the selected profile or from the non volatile memory. The following table explains the behavior:

Autoregistration <mode>	PLMN mode bit <bit_value>	Autoregistration behavior
0	0	Automatic network selection
1	0	Automatic network selection
2	0	Disabled
0	1	Automatic network selection
1	1	Manual network selection (search for the PLMN stored in the selected profile)
2	1	Disabled

7.15 Integrity check on test networks configuration +UDCONF=81

+UDCONF=81						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	NVM	No	-	+CME Error

7.15.1 Description

Configures the integrity check on 3G/4G test networks.

Integrity check on 3G/4G test networks shall be disabled only when the authentication and integrity are disabled on the 3G/4G test network on which the module will be registered.

LARA-L6 / LARA-R6
Disabling integrity and security will not affect IMS, thus the command cannot be used when using IMS.

LARA-L6 / LARA-R6
Reboot of the module (e.g. by means of the AT+CFUN=15/AT+CFUN=16 command) to make the change effective.

7.15.2 Syntax

Type	Syntax	Response	Example
Set	AT+UDCONF=81,<integrity_check_enabled>	OK	AT+UDCONF=81,0 OK

Type	Syntax	Response	Example
Read	AT+UDCONF=81	+UDCONF: 81,<integrity_check_enabled> OK	AT+UDCONF=81 +UDCONF: 81,1 OK

7.15.3 Defined values

Parameter	Type	Description
<integrity_check_enabled>	Number	Integrity check on 3G/4G test networks configuration. Allowed values: • 0: integrity check on test networks disabled (MCC/MNC not available in +COPN set command's response) • 1 (factory-programmed value): integrity check on test networks enabled (MCC/MNC not available in +COPN set command's response)

7.16 Channel and network environment description +UCGED

+UCGED						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	-	+CME Error

7.16.1 Description

Enables the protocol stack and network environment information collection.

The information text response of the read command reports only the current RAT (if any) parameters, determined by the <rat> parameter value.

☞ LARA-L6 / LARA-R6
The command provides only the information on the serving cell, unless <mode>=2 (short form reporting enabled) and <rat>=2 or 4 (2G or 4G).
If <mode>=2 (short form reporting enabled) and <rat>=2 or 4 (2G or 4G), where supported, the module returns also the information on the neighbor cells.

☞ LARA-L6 / LARA-R6
In no coverage condition and in deregistered state, if <mode>=2 (short form reporting) is enabled, the module returns unknown <rat> and <srv> to the read command. After the module has lost synchronization with the serving cell, it can temporarily return an error result code ("+CME ERROR: No connection to phone" if +CMEE: 2) to the read command.

Table 7 lists the supported <mode> parameter values:

<mode>	0	2	3	4	5	6	8
LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B	*	*					
LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B /	*	*					

<mode>	0	2	3	4	5	6	8
LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D							

Table 7: <mode> parameter applicability

7.16.2 Syntax

Type	Syntax	Response	Example
Set	AT+UCGED=<mode>	AT+UCGED=2 OK	OK
Read	AT+UCGED?	**<mode>=0:** +UCGED: 0 OK	+UCGED: 0 OK
		<mode>=2, <rat>=2: +UCGED: 2 <rat>,<MCC>,<MNC> <arfcn>,<band1900>,<GcellId>,<BSIC>,<Glac>,<Grac>,<RxLev>,<t_adv>,<C1>,<C2>,<NMO>,<channel_type> [N1: <MCC>,<MNC>,<arfcn>,<GcellId>,<BSIC>,<Glac>,<RxLev>,<C1>,<C2> [N2: <MCC>,<MNC>,<arfcn>,<GcellId>,<BSIC>,<Glac>,<RxLev>,<C1>,<C2> [...]]] OK	+UCGED: 2 2,222,1 1009,0,5265,11,d5bd,00,36,-1,30,30,1,1 N1: 222,1,1023,3a26,16,d5bd,29,23,23 N2: 222,1,13,5266,17,d5bd,28,22,22 OK
		<mode>=2, <rat>=3: +UCGED: 2 3,<svc>,<MCC>,<MNC> <uarfcn>,<Wband>,<WcellId>,<Wlac>,<Wrac>,<scrambling_code>,<Wrrc>,<rssi>,<ecn0_lev>,<Wspeech_mode> OK	+UCGED: 2 3,4,001,01 4400,5,0000000,0000,80,9,4,62,42,255 OK
		<mode>=2, <rat>=4: +UCGED: 2 4,<svc>,<MCC>,<MNC> <EARFCN>,<Lband>,<ul_BW>,<dl_BW>,<TAC>,<LcellId>,<P-CID>,<mTmsi>,<mmeGrId>,<mmeCode>, <RSRP>,<RSRQ>,<Lsinr>,<LTE_rrc>,<RI>,<CQI>,<avg_rsrp>,<totalPuschPwr>,<avgPucchPwr>,<drx>, <l2w>,<volte_mode>[,<meas_gap>,<tti_bundling>] [N1: <MCC>,<MNC>,<EARFCN>,<P-CID>,<RSRP>,<RSRQ>	+UCGED: 2 4,0,001,01 2525,5,25,50,2b67,69f6bc7,111,00000000,ffff,ff,67,19,0.00,255,255,255,67,11,255,0,255,255,0,0 OK

Type	Syntax	Response	Example
		[N2: <MCC>,<MNC>,<EARFCN>,<P-CID>,<RSRP>,<RSRQ> [...]]] OK	
Test	AT+UCGED=?	+UCGED: (list of supported <mode>s) OK	+UCGED: (0,2) OK

7.16.3 Defined values

Parameter	Type	Description
<mode>	Number	Allowed values: • 0: reporting disabled • 2: short form reporting enabled • 3: retrieve the short form text information report • 4: mobility management (MM) transition state reporting enabled • 5: RSRP and RSRQ reporting enabled • 6: short form reporting with mobility management (MM) transition state enabled • 8: active NAS backoff timers information reporting enabled See Table 7 for the list of allowed values by series modules.
<rat>	Number	Current Radio Access Technology: • 2: 2G • 3: 3G • 4: 4G • 5: unknown. The parameter is set to a 5 until a network information update is not successfully performed through the AT+UCGED=2 command or when the MT is set to minimum functionality (+CFUN: 0, +CFUN: 4, +CFUN: 19). • 6: LTE Cat M1 • 7: NB-IoT
<svc>	Number	Current radio service state: • 0: not known or not detectable • 1: radio off • 2: searching • 3: no service • 4: registered The radio service state is updated at each change from a valid network service state (2G, 3G or 4G) to another valid network service state (2G, 3G or 4G). To retrieve the network registration status information refer to +CREG, +CGREG and +CEREG AT commands. ☞ LARA-L6 / LARA-R6 The parameter is not supported, is always reported as 0: "not known or not detectable".
<MCC>	Number	See <MCC>.
<MNC>	Number	See <MNC>.
<EARFCN>	Number	See <EARFCN>.
<Lband>	Number	See <Lband>.
<ul_BW>	Number	Number of Uplink Resource Blocks (see 3GPP TS 36.101 table 5.6-1 [127]), 255 if not known or not detectable.
<dl_BW>	Number	Number of Downlink Resource Blocks (see 3GPP TS 36.101 table 5.6-1 [127]), 255 if not known or not detectable.
<TAC>	Number	See <TAC>.
<LcellId>	Number	See <LcellId>.
<mTmsi>	Number	4 bytes MME Temporary Mobile Subscriber Identity in hexadecimal format; 00000000 if not known or not detectable.

Parameter	Type	Description
		LARA-L6 / LARA-R6 The parameter is not supported, is always reported as 00000000: "not known or not detectable".
<mmeGrId>	Number	2 bytes MME Group Identifier in hexadecimal format; FFFF if not known or not detectable. LARA-L6 / LARA-R6 The parameter is not supported, is always reported as FFFF: "not known or not detectable".
<RSRP>	Number	See <RSRP>.
<RSRQ>	Number	See <RSRQ>.
<mmeCode>	Number	1 byte MME Code in hexadecimal format; FF if not known or not detectable. LARA-L6 / LARA-R6 The parameter is not supported, is always reported as FF: "not known or not detectable".
<Lsinr>	Number	E-UTRAN Signal to Interference and Noise ratio in dB.
<LTE_rrc>	Number	See <LTE_rrc>. LARA-L6 / LARA-R6 The only allowed values are IDLE(1) and CONNECTED(3).
<RI>	Number	Rank Indicator value; 255 if not known or not detectable. It is updated every 480 ms with the value which has been most often reported to the network in the previous 480 ms period. See 3GPP TS 36.213 [146] section 7.2 and 3GPP TS 36.212 [147] section 5.2.2.6 for more details. LARA-L6 / LARA-R6 The parameter is not supported, is always reported as 255: "not known or not detectable".
<CQI>	Number	Channel Quality Indicator value; 255 if not known or not detectable. It is updated every 480 ms with the value which has been most often reported to the network in the previous 480 ms period. See 3GPP TS 36.213 [146] section 7.2 for more details. LARA-L6 / LARA-R6 The parameter is not supported, is always reported as 255: "not known or not detectable".
<avg_rsrp>	Number	Average value of last 10th Reference Signal Received Power (RSRP). LARA-L6 / LARA-R6 The parameter is not supported, is always reported as 255: "not known or not detectable".
<totalPuschPwr>	Number	Mobile output power for PUSCH transmission averaged over 480 ms in dBm. LARA-L6 / LARA-R6 The parameter is not supported, is always reported as 255: "not known or not detectable".
<avgPuschPwr>	Number	Mobile output power for PUSCH transmission averaged over 480 ms in dBm.
<avgPucchPwr>	Number	Mobile output power for PUCCH transmission averaged over 480 ms in dBm. LARA-L6 / LARA-R6 The parameter is not supported, is always reported as 255: "not known or not detectable".
<drx>	Number	Discontinuous Reception "drx-Inactivity-Timer" value in ms; 0 if not known or not detectable.

Parameter	Type	Description
<l2w>	Number	SIB3 LTE to WCDMA reselection criteria: (threshServingLow)x2 +(q-RxLevMin)x2; 255 if not known or not detectable. LARA-L6 / LARA-R6 The parameter is not supported, is always reported as 255: "not known or not detectable".
<volte_mode>	Number	Reserved for future use. LARA-L6 / LARA-R6 The parameter is not supported, is always reported as 255: "not known or not detectable".
<meas_gap>	Number	Measurement gap configuration: • 0: disabled • 40: 40 ms measurement gap repetition period corresponding to the measurement gap pattern ID 0 (see table 8.1.2.1-1 of 3GPP TS 36.133 [132]) • 80: 80 ms measurement gap repetition period corresponding to the measurement gap pattern ID 1 (see table 8.1.2.1-1 of 3GPP TS 36.133 [132]) LARA-L6 / LARA-R6 The parameter is not supported, is always reported as 0: "disabled".
<rai_support>	Number	Indicates if the network supports the release assistance indication (RAI): • 0: RAI not supported • 1: RAI supported
<tti_bundling>	Number	TTi (Transmission Time interval) bundling status: • 0: off • 1: on LARA-L6 / LARA-R6 The parameter is not supported, is always reported as 0: "off".
<NBMsinr>	Number	Logarithmic value of SINR values expressed in 1/5th of a dB. The range goes from 0 to 250 which translates to a range from -20 dB to 30 dB
<esm_cause>	Number	ESM cause value as defined in 3GPP TS 24.301 [119]
<emm_state>	Number	EMM state value as defined in 3GPP TS 24.301 [119]. Allowed values: • 0: EMM-NULL • 1: EMM-DEREGISTERED • 2: EMM-REGISTERED-INITIATED • 3: EMM-REGISTERED • 4: EMM-TRACKING-AREA-UPDATING-INITIATED • 5: EMM-SERVICE-REQUEST-INITIATED • 6: EMM-DEREGISTERED-INITIATED • 7: undefined (or invalid)
<tx_pwr>	Number	TX power value in 1/10 dBm if device is in traffic, 255 otherwise
<drx_cycle_len>	Number	Idle DRX cycle length in 10 ms radio-frame units
<tmsi>	String	TMSI in hexadecimal format, with most significant byte first
<P-CID>	Number	E-UTRAN cell Physical Cell ID; the range is 0-503, 65535 if not known or not detectable.
<ul_BLER>	Number	Uplink Block Error Ratio (BLER); the range is 0-100.
<dl_BLER>	Number	Downlink Block Error Ratio (BLER); the range is 0-100.
<RSRP_value>	Number	See <RSRP_value>.
<RSRQ_value>	Number	See <RSRQ_value>.
<MMtransition>	Number	Mobility management transition state. Allowed values: • 0: no change • 1: handover to UMTS • 2: handover to GSM • 3: handover to LTE • 4: reselection to UMTS

Parameter	Type	Description
		• 5: reselection to GSM • 6: reselection to LTE • 7: cell change order to UMTS • 8: cell change order to GSM • 9: cell change order to LTE • 10: RAT change • 255: unknown
<UL_IPcounter>	Number	Counter of the uplink IP packets; it reports the aggregated value from all active PDP contexts. The counter is reset only with module reset. The range goes from 0 to 4294967295.
<DL_IPcounter>	Number	Counter of the downlink IP packets; it reports the aggregated value from all active PDP contexts. The counter is reset only with module reset. The range goes from 0 to 4294967295.
<timer_name>	String	Active NAS backoff timer.
<timer_value>	Number	NAS backoff timer's remaining value in milliseconds. In case of PLMN back-off timers the value 0 indicates that the PLMN is permanently back-off forbidden.
<timer_state>	Number	Timer state: • 0: timer start • 1: timer stop • 2: timer expiry
<urc_reporting>	Number	Enable/disable URC reporting for timer start/stop/expiry. The default value is 0.

7.16.3.1 2G and 3G RAT parameters

Parameter	Type	Description
<arfcn>	Number	See <arfcn>.
<band1900>	Number	Indicates whether the given <arfcn> in the range 512-810 is part of band 1900 or not, to avoid ambiguity between bands 1800 and 1900: • 0: the given <arfcn> is not part of band 1900 • 1: the given <arfcn> is part of band 1900
<GcellId>	Number	GERAN Cell Identifier (CI) in hexadecimal format; the range is 0h-FFFFh (2 octets).
<BSIC>	Number	See <BSIC>.
<Glac>	Number	Two bytes location area of the GERAN cell in hexadecimal format; FFFF if not known or not detectable.
<Grac>	Number	One byte routing area of the GERAN cell in hexadecimal format; FF if not known or not detectable.
<RxLev>	Number	See <RxLev>.
<grr>	Number	Reserved for future use.
<t_adv>	Number	Reserved for future use.
<Gspeech_mode>	Number	Reports the latest obtained value of the GSM speech code. Allowed values: • 0: GSM Enhanced Full Rate (12.2 kb/s) • 1: GSM Full Rate (13.0 kb/s) • 2: GSM Half Rate (5.6 kb/s) • 3..10: AMR NB FR (from 4.75 kb/s to 12.2 kb/s) the value indicates the first codec type chosen from the DUT; see the corresponding value of <Wspeech_mode> parameter for the baud rate mapping • 3..8: AMR NB HR (from 4.75 kb/s to 7.95 kb/s) the value indicates the first codec type chosen from the DUT; see the corresponding value of <Wspeech_mode> parameter for the baud rate mapping • 11..13: AMR WB FR (from 6.60 kb/s to 12.65 kb/s) the value indicates the first codec type chosen from the DUT; see the corresponding value of <Wspeech_mode> parameter for the baud rate mapping • 255: not known or not detectable See 3GPP TS 26.201 [137] for more details on GSM codecs used during a voice call In case a set of speech codecs is assigned by the network, then the parameter reports the lowest one and this one is not necessary the one used.

Parameter	Type	Description
<uarfcn>	Number	UTRAN Absolute Radio Frequency Channel Number (UARFCN); the range is 1537-10 838, 65535 if not known or not detectable.
<Wband>	Number	UTRAN band: • 1: band 1 (2 GHz) • 2: band 2 (1900 MHz) • 4: band 4 (2100 MHz) • 5: band 5 (800 MHz) • 8: band 8 (900 MHz) • 255: not known or not detectable
<WcellId>	Number	UTRAN CI (cell identifier) in hexadecimal format; the range is 0h-FFFFFFFh (28 bits), 0000000 if not known or not detectable.
<Wlac>	Number	Two bytes location area of the UTRAN cell in hexadecimal format; FFFF if not known or not detectable.
<Wrac>	Number	One byte routing area of the GERAN cell in hexadecimal format; FF if not known or not detectable.
<scrambling_code>	Number	See <scrambling_code>.
<Wrrc>	Number	3G RRC state: • 0: idle • 1: URA_PCH • 2: CELL_PCH • 3: CELL_FACH • 4: CELL_DCH • 255: not known or not detectable
<rssi>	Number	UTRAN cell Received Signal Strength Indicator as defined in 3GPP TS 25.133 [133]: • 0: less than -100 dBm • 1..75: from -100 to -25 dBm with 1 dBm steps • 76: -25 dBm or greater • 255: not known or not detectable
<ecn0_lev>	Number	See <ecn0_lev>.
<Wspeech_mode>	Number	Reports the latest obtained value of the UMTS speech code. Allowed values: • 3: AMR NB (4.75 kb/s) • 4: AMR NB (5.15 kb/s) • 5: AMR NB (5.90 kb/s) • 6: AMR NB (6.70 kb/s) • 7: AMR NB (7.40 kb/s) • 8: AMR NB (7.95 kb/s) • 9: AMR NB (10.2 kb/s) • 10: AMR NB (12.2 kb/s) • 11: AMR WB (6.60 kb/s) • 12: AMR WB (8.85 kb/s) • 13: AMR WB (12.65 kb/s) • 14: AMR WB (14.25 kb/s) • 15: AMR WB (15.85 kb/s) • 16: AMR WB (18.25 kb/s) • 17: AMR WB (19.85 kb/s) • 18: AMR WB (23.05 kb/s) • 19: AMR WB (23.85 kb/s) • 255: not known or not detectable See 3GPP TS 26.201 [137] for more details on UMTS codecs used during a voice call.

Parameter	Type	Description
		In case a set of speech codecs is assigned by the network, then the parameter reports the lowest one and this one is not necessary the one used.

Table 8: 2G and 3G RAT parameters

7.16.3.2 2G parameters

Parameter	Type	Description
<arfcn>	Number	See <arfcn>.
<band1900>	Number	Indicates whether the given <arfcn> in the range 512-810 is part of band 1900 or not, to avoid ambiguity between bands 1800 and 1900: • 0: the given <arfcn> is not part of band 1900 • 1: the given <arfcn> is part of band 1900
<GcellId>	Number	GERAN Cell Identifier (CI) in hexadecimal format; the range is 0h-FFFFh (2 octets).
<BSIC>	Number	See <BSIC>.
<Glac>	Number	Two bytes location area of the GERAN cell in hexadecimal format; FFFF if not known or not detectable.
<Grac>	Number	One byte routing area of the GERAN cell in hexadecimal format; FF if not known or not detectable.
<RxLev>	Number	See <RxLev>.
<t_adv>	Number	See <t_adv>.
<C1>	Number	Value of c1; see the 3GPP TS 05.08 [90]
<C2>	Number	Value of c2; see the 3GPP TS 05.08 [90]
<NMO>	Number	Network Mode of Operation (NMO); see the 3GPP TS 03.60 [171]: • 0: NMO I • 1: NMO II • 2: NMO III • -1: invalid
<channel_type>	Number	Current channel type: • 0: traffic channel / packet data traffic channel (TCH/PDTCH) • 1: broadcast control channel (BCCH)

Table 9: 2G parameters

7.17 Wireless service selection +WS46

+WS46						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

7.17.1 Description

Select the cellular service (Wireless Data Service; WDS) to operate with the MT according to PCCA STD-101 [217]. PCCA calls the WDS-Side Stack Selection. The command may be used when the MT is asked to indicate the wireless services in which it can operate.

☞ u-blox cellular modules are certified according to all the capabilities and options stated in the Protocol Implementation Conformance Statement document (PICS) of the module. The PICS, according to 3GPP TS 51.010-2 [117], 3GPP TS 34.121-2 [118], 3GPP TS 36.521-2 [139] and 3GPP TS 36.523-2 [140], is a statement of the implemented and supported capabilities and options of a device. If the user changes the command settings during the certification process, the PICS of the application device integrating a u-blox cellular module must be changed accordingly.

7.17.2 Syntax

Type	Syntax	Response	Example
Set	AT+WS46=[<n>]	OK	AT+WS46=25 OK
Read	AT+WS46?	+WS46: <n> OK	+WS46: 25 OK
Test	AT+WS46=?	+WS46: (list of supported <n>s) OK	+WS46: (12,22,25) OK

7.17.3 Defined values

Parameter	Type	Description
<n>	Number	WDS-Side stack selection indication and may be: • 12: GERAN only (single mode GSM) • 22: UTRAN only (single mode UMTS) • 25: GERAN, UTRAN and E-UTRAN • 28: E-UTRAN only (single mode LTE) • 29: GERAN and UTRAN • 30: GERAN and E-UTRAN • 31: UTRAN and E-UTRAN

7.17.4 Notes

- It is possible to configure the WDS-Side stack only when is not registered on the wireless service.
- The +URAT command provides extended functionalities with respect to +WS46 command.

LARA-L6 / LARA-R6001 / LARA-R6001D / LARA-R6801 / LARA-R6801D

- The factory-programmed value of <n> is 25.

LARA-R6401 / LARA-R6401D

- <n>=12, 22, 25, 29, 30 and 31 are not supported.
- The factory-programmed value of <n> is 28.

7.18 Smart jamming detection +UJAD

+UJAD						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	NVM	No	-	+CME Error

7.18.1 Description

The feature consists of detecting, at the application level, an anomalous source of interference or jammer installed in the cellular network and signalling it to the client. The jamming condition occurs when simultaneously:

- The synchronization is lost (i.e. the MT is no longer camped on the serving cell and cannot select any other suitable cell)
- An interference is detected (i.e. the band scan reveals radio channels with power levels equal to or higher than a specified threshold)
- On all such carriers, no synchronization is possible

The jamming condition is cleared when any of the above mentioned statements does not hold.

☞ LARA-L6 / LARA-R6

The command automatically sets and adjusts the thresholds for jamming detection based on the environment (number of visible cells and signal levels). For this purpose, the feature periodically performs network scans and signal level measurements on the entire band.

☞ LARA-L6 / LARA-R6
Network scans and signal level measurements are performed on bands enabled in the current MNO profile and the current +UBANDMASK setting.

The feature works independently on the RAT. It is recommended to activate the feature while in full cellular functionality (i.e. +CFUN: 1) and in normal service (i.e. if the module is detached via AT+COPS=2, the smart jamming detection algorithm does not start).

If jamming detection is activated, an unsolicited indication is issued when the jamming condition is entered or released. If the smart jamming detection per carrier is enabled (<op_code>=2, where supported) the +UJAD URC may be generated for each jammed cell detected by the module.

☞ The read command returns the <active> value, if and only if jamming detection has been previously enabled (<op_code>=1 or <op_code>=2).

7.18.2 Syntax

Type	Syntax	Response	Example
Set	AT+UJAD=<op_code>	OK	AT+UJAD=1 OK
Read	AT+UJAD?	+UJAD: <op_code>[,<active>] OK	**If jamming detection disabled:** +UJAD: 0 OK
			If jamming detection enabled: +UJAD: 1,0 OK **Or:** +UJAD: 2,0 OK
Test	AT+UJAD=?	+UJAD: (list of supported <op_code>s) OK	+UJAD: (0-1) OK
Smart jamming detection status (<op_code>=1)			
URC		+UJAD: <active>	+UJAD: 1
Smart jamming detection per carrier status (<op_code>=2)			
URC		+UJAD: <op_code>,<active>,<Lband>,<PhysCellID>,<EARFCN>,<dl_frequency>	+UJAD: 2,"DETECTED",1,1,300,2140

7.18.3 Defined values

Parameter	Type	Description
<op_code>	Number	Jamming detection operation mode: • 0: smart jamming detection disabled • 1: smart jamming detection enabled; the +UJAD URC may be generated • 2: smart jamming detection per carrier enabled; the +UJAD URC may be generated for each jammed cell detected by the module Allowed values: • LARA-L6 / LARA-R6 - 0 (factory-programmed value), 1
<active>	Number / String	Jamming detection status. Allowed values: • LARA-L6 / LARA-R6 o 0: jamming not detected

Parameter	Type	Description
		o 1: jamming detected o 2: jamming unknown
<Lband>	Number	See <Lband>.
<PhysCellID>	Number	See <PhysCellID>.
<EARFCN>	Number	See <EARFCN>.
<dl_frequency>	Number	See <dl_frequency>.

7.18.4 Notes

- An error result code is provided when attempting to enable/disable the smart jamming detection when it is already enabled/disabled.

LARA-L6 / LARA-R6

- When jamming detection is enabled it may be temporarily (the worst case is 180 s) not possible to perform a full cell scan via the +UCFSCAN set command.

7.19 Edit Verizon wireless APN table +VZWAPNE

+VZWAPNE						
Modules	LARA-L6004D-01B LARA-L6404 LARA-L6404D					
	LARA-R6401 LARA-R6401D LARA-R6801D					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	NVM	No	-	+CME Error

7.19.1 Description

Reads and writes the APN table stored in the NVM:

- The set command causes the APN table on the DUT to be overwritten. Only Class 3, 6 and 7 APNs can be overwritten to any customer defined string.
- The read command queries the APN table that is currently on the DUT, starting from the first entry to the last; it returns each APN entry in a new line.

7.19.2 Syntax

Type	Syntax	Response	Example
Set	AT+VZWAPNE=<wapn>,<apncl>,<apnni>,<apntype>,<apnb>,<apned>,<apntime>	OK	AT+VZWAPNE=1,1,"IMS","IPv6","LTE","Enabled",0 OK
Read	AT+VZWAPNE?	[+VZWAPNE: <apncl>,<apnni>,<apntype>,<apnb>,<apned>,<apntime> [..]] OK	+VZWAPNE: 1,"IMS","IPv4v6","LTE","Enabled",0 +VZWAPNE: 2,"VZWADMIN","IPv4v6","LTE","Enabled",0 OK
Test	AT+VZWAPNE=?	+VZWAPNE: (list of supported <wapn>s),(list of supported <apncl>s),,(range of supported <apntype>s),range of supported <apnb>s),(list of supported <apned>s),(list of supported <apntime>s) OK	+VZWAPNE: (0-4),(1-4),,("IPv6","IPv4v6"),("LTE"),("Enabled","Disabled"),(0-1023) OK

7.19.3 Defined values

Parameter	Type	Description
<wapn>	Number	APN list entry
<apncl>	Number	APN class
<apnni>	String	Network identifier: • LARA-L6 / LARA-R6 o "IMS": Verizon IMS PDN, factory-programmed value for <apncl>=1 entry in Verizon profile o "VZWADMIN": Verizon Administrative PDN, factory-programmed for <apncl>=2 entry o "VZWINTERNET": Verizon Internet PDN, factory-programmed for <apncl>=3 entry in Verizon profile o "VZWAPP": Verizon Application PDN, factory-programmed for <apncl>=4 entry o "VZWCLASS6": Verizon Enterprise PDN, factory-programmed for <apncl>=6 entry o "VZWCLASS7": Verizon Thingspace PDN, factory-programmed for <apncl>=7 entry o "VZWEMERGENCY": Verizon Emergency IMS PDN, factory-programmed for <apncl>=0 entry
<apntype>	String	• "IPv6": IPv6 type • "IPv4v6" (factory-programmed value): IPv4 and IPv6 type
<apnb>	String	APN bearer: • "LTE" (factory-programmed value): LTE bearer used
<apned>	String	Enable/disable the APN: • "Enabled" (factory-programmed value): APN enabled • "Disabled": APN disabled
<apntime>	Number	APN inactivity timer value in minutes. • LARA-L6 / LARA-R6 -The range goes from 0 to 122820. The value '0' (factory-programmed value) sets the timer to infinity.

7.19.4 Notes

LARA-L6 / LARA-R6

- If the current MNO profile is not set to Verizon or VZW-Private (see the +UMNOPROF AT command, <MNO>=3) and the command is issued, the module returns an error result code.

7.20 Read RSRP values +VZWRSRP

+VZWRSRP						
Modules	LARA-L6004D-01B LARA-L6404 LARA-L6404D					
	LARA-R6401 LARA-R6401D LARA-R6801D					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

7.20.1 Description

Returns the RSRP (Reference Signal Received Power) values for all LTE cells which the module is measuring.

7.20.2 Syntax

Type	Syntax	Response	Example
Read	AT+VZWRSRP?	+VZWRSRP: [<cellID1>,<EARFCN1>,<RSRP1>[,<cellID2>,<EARFCN2>,<RSRP2>[,...]]] OK	+VZWRSRP: 000,2175,"-61.00" OK

7.20.3 Defined values

Parameter	Type	Description
<cellIDn>	Number	nth cell physical cell identifier in "xxx" format. The range goes from 0 to 503.
<EARFCNn>	Number	nth cell EARFCN in decimal format, see <EARFCN>.
<RSRPn>	String	nth cell RSRP value in dBm/15 kHz where the format is "-XX.XX".

7.20.4 Notes

LARA-L6 / LARA-R6

- If the current MNO profile is not set to Verizon or VZW-Private (see the +UMNOPROF AT command, <MNO>=3) and the command is issued, the module returns an error result code.

7.21 Read RSRQ values +VZWRSRQ

+VZWRSRQ						
Modules	LARA-L6004D-01B LARA-L6404 LARA-L6404D					
	LARA-R6401 LARA-R6401D LARA-R6801D					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

7.21.1 Description

Returns the RSRQ (Reference Signal Received Quality) values for all the LTE cells which the module is measuring.

7.21.2 Syntax

Type	Syntax	Response	Example
Read	AT+VZWRSRQ?	+VZWRSRQ: [<cellID1>,<EARFCN1>,<RSRQ1>[, <cellID2>,<EARFCN2>,<RSRQ2>[, ...]]] OK	+VZWRSRQ: 000,2175,"-11.00" OK

7.21.3 Defined values

Parameter	Type	Description
<cellID>	Number	nth cell physical cell identifier in "xxx" format. The range goes from 0 to 503.
<EARFCNn>	Number	nth cell EARFCN in decimal format, see <EARFCN>.
<RSRQn>	String	nth cell RSRQ value in dB/15 kHz where the format is "-XX.XX".

7.21.4 Notes

LARA-L6 / LARA-R6

- If the current MNO profile is not set to Verizon or VZW-Private (see the +UMNOPROF AT command, <MNO>=3) and the command is issued, the module returns an error result code.

7.22 Signalling connection status +CSCON

+CSCON						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

7.22.1 Description

Returns details of the current terminal's radio connection status (i.e. to the base-station). The set command configures the +CSCON URC. When enabled, the URC is sent from the MT at each change of the MT connection mode.

☞ The state is only updated when radio events, such as send and receive, take place. This means that the current state may be out of date. The terminal may think it is "Connected" yet cannot currently use a base station due to a change in the link quality.

☞ LARA-R6
The URC is sent from the MT each time an RRC connection is activated on LTE RAT.

☞ LARA-L6
The URC is sent from the MT each time an RRC connection is activated on either LTE or WCDMA RAT.

☞ LARA-L6 / LARA-R6
The information text response of the read command returns only the URC configuration (<n>).

7.22.2 Syntax

Type	Syntax	Response	Example
Set	AT+CSCON=<n>	OK	AT+CSCON=1 OK
Read	AT+CSCON?	+CSCON: <n>[,<mode>[,<state>[,<access>[,<coreNetwork>]]]] OK	+CSCON: 1,1 OK
Test	AT+CSCON=?	+CSCON: (list of supported <n>s) OK	+CSCON: (0,1) OK
URC		+CSCON: <mode>[,<state>[,<access>]]	+CSCON: 0

7.22.3 Defined values

Parameter	Type	Description
<n>	Number	URC configuration: • 0: +CSCON URC disabled • 1: URC +CSCON: <mode> enabled • 2: URC +CSCON: <mode>[,<state>] enabled • 3: URC +CSCON: <mode>[,<state>[,<access>]] enabled Allowed values: • LARA-L6 / LARA-R6 - 0 (factory-programmed value), 1
<mode>	Number	Indicates the signaling connection status: • 0: idle • 1: connected
<state>	Number	Allowed values: • 0: UTRAN URA_PCH • 1: UTRAN Cell_PCH • 2: UTRAN Cell_FACH • 3: UTRAN Cell_DCH

Parameter	Type	Description
		• 4: GERAN CS connected • 5: GERAN PS connected • 6: GERAN CS and PS connected • 7: E-UTRAN connected • 8: NG-RAN connected state • 9: NG-RAN inactive state Allowed values: • LARA-L6 / LARA-R6 - the parameter is not supported
<access>	Number	Indicates the radio access technology: • 0: GERAN • 1: UTRAN TDD • 2: UTRAN FDD • 3: E-UTRAN TTD • 4: E-UTRAN FDD • 5: NR Allowed values: • LARA-L6 / LARA-R6 - the parameter is not supported
<coreNetwork>	Number	Indicates the core network type the UE is connected to: • 0: EPC • 1: 5GCND Allowed values: • LARA-L6 / LARA-R6 - the parameter is not supported

7.23 Radio Policy Manager (RPM) activation +URPM

+URPM						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM / OP	No	-	+CME Error

7.23.1 Description

Activates or deactivates the Radio Policy Manager (RPM) feature for SIM cards not belonging to AT&T network operator, where the feature is enabled by default.

Generally a UE can aggressively retry the registration procedure until it is successful and can behave similarly if the PDP context activation procedure fails. This behavior may cause signaling overload and consequently prolonged network outage. To avoid these scenarios and provide a more efficient access to the network, the Radio Policy Manager (RPM) feature controls the number of network accesses per service type over a fixed amount of time. For more details on the RPM feature see AT&T Device Requirements [223] and GSMA Connection Efficiency [174].

Some network reject error causes require specific behaviors which the RPM feature does not alter (see the 3GPP TS 24.008 [84]).

☞ LARA-L6 / LARA-R6
RPM can be configured also for SIM cards belonging to AT&T network operator, where the feature is not enabled by default anymore.

7.23.2 Syntax

Type	Syntax	Response	Example
Set	AT+URPM=<mode>	OK	AT+URPM=1 OK
Read	AT+URPM?	+URPM: <mode> OK	+URPM: 1 OK
Test	AT+URPM=?	+URPM: (list of supported <mode>s)	+URPM: (0,1)

Type	Syntax	Response	Example
		OK	OK

7.23.3 Defined values

Parameter	Type	Description
<mode>	Number	Indicates the action to perform: • 0 (factory-programmed value): RPM feature deactivated • 1: RPM feature activated The factory-programmed value depends on the series module: • LARA-L6 / LARA-R6 - see Mobile Network Operator profiles

7.23.4 Notes

LARA-L6 / LARA-R6

- If enabled by the selected MNO profile factory-programmed configuration (for more details, see Mobile Network Operator profiles) do not change the RPM algorithm enabling status.

7.24 Purging of temporary mobile identities after SIM refresh +UDCONF=56

+UDCONF=56						
Modules	LARA-L6					
	LARA-R6001 LARA-R6001D-01B LARA-R6401 LARA-R6401D LARA-R6801 LARA-R6801D					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

7.24.1 Description

Configures the cleaning of network provided temporary mobile identities used for NAS signaling after the occurrence of a SIM refresh of Type UICC Reset or NAA Session Reset.

☞ The command is persistent and requires a reboot to take effect.

7.24.2 Syntax

Type	Syntax	Response	Example
Set	AT+UDCONF=56,<purge_identities_enabled>	OK	AT+UDCONF=56,0 OK
Read	AT+UDCONF=56	OK	+UDCONF: 56,<purge_identities_enabled> OK

7.24.3 Defined values

Parameter	Type	Description
<purge_identities_enabled>	Number	Allowed values: • 0: purging of temporary mobile identities not enabled • 1: purging of temporary mobile identities enabled • 2: purging of EPS location information (EPSLOCI) in NVM The allowed values are: • LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B - 2 • LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D - 0 (factory-programmed value), 1, 2

7.24.4 Notes

LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D

- On the set command with <purge_identities_enabled> = 2 allows to clear the temporary mobile identites both in the NVM and in the SIM card in a one-shot mode and requires a reboot (e.g. by +CFUN AT command) or an AT+CFUN=0/AT+CFUN=1 cycle to trigger the reading of the updated files.

LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B

- The read command is not supported.

7.25 eDRX setting +CEDRXS

+CEDRXS						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	NVM / OP	No	-	+CME Error

7.25.1 LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D Description

Configures the UEs extended discontinuous reception (eDRX) parameters. The command controls whether the UE wants to apply the eDRX or not, as well as the requested eDRX cycle and paging time window values for each specified type of radio access technology.

The set command also enables the +CEDRXP URC, issued on any change in the eDRX parameters provided by the network.

The set command with <mode>=3 will disable the use of eDRX and reset all parameters to factory-programmed values. Do not set <Requested_eDRX_cycle> and <Requested_paging_time_window> parameters in this form of command.

The read command returns the requested eDRX cycle and paging time window values. See the +CEDRXP URC and the +CEDRXRDP AT command to see if eDRX is used by the current selected cell and to retrieve the network assigned values, if any.

☞ LARA-L6 / LARA-R6
The parameters are omitted in the information text response to the read command when the eDRX is not enabled on any RAT.

☞ LARA-L6 / LARA-R6
The set command can be applied also runtime; if the module is registered in 4G RAT and the parameters are changed with respect to the previously required values, a TAU is performed.

☞ LARA-L6 / LARA-R6
If the set command is issued and any of the optional parameters is omitted, the module applies the last set values.

7.25.2 LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B Description

Configures the UEs extended discontinuous reception (eDRX) parameters. The command controls whether the UE wants to apply the eDRX or not, as well as the requested eDRX cycle value.

☞ The requested paging time window is by factory-programmed configuration 4 s long and it cannot be modified.

☞ Deregister the module from the network to change the command setting. Issue AT+COPS=2 or AT +CFUN=0 to deregister from network, issue the +CEDRXS command and reboot the module (by means of the AT+CFUN=15 command) in order to apply the +CEDRXS settings.

7.25.3 LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D Syntax

Type	Syntax	Response	Example
Set	AT+CEDRXS=<mode>,<AcT_type>[,<Requested_eDRX_cycle>[,<Requested_paging_time_window>]]	OK	AT+CEDRXS=1,4,"0101","0101" OK
Read	AT+CEDRXS?	+CEDRXS: [<AcT_type>, <Requested_eDRX_cycle>, <Requested_paging_time_window> [...] [+CEDRXS: <AcT_type>, <Requested_eDRX_cycle>, <Requested_paging_time_window>]] OK	+CEDRXS: 4,"0101","0001" OK
Test	AT+CEDRXS=?	+CEDRXS: (list of supported <mode>s),(list of supported <AcT_type>s),(list of supported <Requested_eDRX_cycle>s),(list of supported <Requested_paging_time_window>s) OK	+CEDRXS: (0-3),(3,4,5),("0000"-"1111"),("0000"-"1111") OK
URC		+CEDRXP: <AcT_type>[, <Requested_eDRX_cycle>[, <Assigned_eDRX_cycle>[, <Assigned_paging_time_window>]]]	+CEDRXP: 4,"1010","1001","1101"

7.25.4 LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B Syntax

Type	Syntax	Response	Example
Set	AT+CEDRXS=<mode>,<AcT_type>[,<Requested_eDRX_cycle>]	OK	AT+CEDRXS=1,4,"0101" OK
Test	AT+CEDRXS=?	+CEDRXS: (0-3),<AcT-type(2-4)>,<Requested_eDRX_value(0-15) in bits> OK	+CEDRXS: (0-3),<AcT-type(2-4)>,<Requested_eDRX_value(0-15) in bits> OK

7.25.5 LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B /

LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D Defined values

Parameter	Type	Description
<mode>	Number	Indication to disable or enable the use of eDRX in the UE. Allowed values: • 0 (default and factory-programmed value): use of eDRX disabled • 1: use of eDRX enabled • 2: enable the use of eDRX and enable the +CEDRXP URC • 3: disable the use of eDRX and reset all other parameters for eDRX to factory-programmed values Allowed values: • LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D - 0, 1, 2
<AcT_type>	Number	Indicates the type of access technology: • 0: use of eDRX disabled • 2: GPRS/eGPRS • 4: E-UTRAN (WB-S1 mode) • 5: E-UTRAN (NB-S1 mode) Allowed values: • LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D - 4
<Requested_eDRX_cycle>	String	See <Requested_eDRX_cycle>.
<Assigned_eDRX_cycle>	String	See <Assigned_eDRX_cycle>.
<Requested_paging_time_window>	String	See <Requested_paging_time_window>.
<Assigned_paging_time_window>	String	See <Assigned_paging_time_window>.

7.25.6 LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B Defined values

Parameter	Type	Description
<mode>	Number	Indication to disable or enable the use of eDRX in the UE. Allowed values: • 0: use of eDRX disabled • 1: use of eDRX enabled The factory-programmed value does not depend on the MNO profile and is: • LARA-R6001D-00B - 1 • LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B - 0
<AcT_type>	Number	Indicates the type of access technology: • 4: LTE
<Requested_eDRX_cycle>	String	See <Requested_eDRX_cycle>.

7.25.7 Notes

LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B

- The <Requested_eDRX_cycle> parameter is mandatory when enabling eDRX (<mode>=1).

LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D

- <mode>=3 is not supported. To reset all the eDRX parameters to factory-programmed values, follow the procedure described in the +UMNOPROF AT command description.
- The +CEDRXP URC enabling by means of the AT+CEDRXS=2,<AcT_type> commands is not stored in NVM. Issue AT+CEDRXS=2,<AcT_type> to enable the +CEDRXP URC after each power cycle.
- The <Requested_eDRX_cycle> and <Requested_paging_time_window> can only be changed when the UE wants to apply eDRX (<mode>=1 or <mode>=2).

7.26 eDRX read dynamic parameters +CEDRXRDP

+CEDRXRDP						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6001-01B LARA-R6001D-01B LARA-R6401-01B LARA-R6401D-01B LARA-R6801-01B LARA-R6801D					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

7.26.1 Description

If the eDRX is used by the current selected cell the command provides the requested eDRX cycle value (<Requested_eDRX_cycle>), the assigned eDRX cycle value (<Assigned_eDRX_cycle>) and the assigned paging time window value (<Assigned_paging_time_window>). Otherwise, if the eDRX is not used, the +CEDRXRDP: 0 information text response is returned.

7.26.2 Syntax

Type	Syntax	Response	Example
Action	AT+CEDRXRDP	+CEDRXRDP: <AcT_type>[, <Requested_eDRX_cycle>, <Assigned_eDRX_cycle_value>, <Assigned_paging_time_window>] OK	+CEDRXRDP: 5,"0010","1110","0101" OK
Test	AT+CEDRXRDP=?	OK	

7.26.3 Defined values

Parameter	Type	Description
<AcT_type>	Number	Indicates the type of radio access technology: • 0: use of eDRX disabled • 2: GSM (A/Gb mode) • 4: E-UTRAN (WB-S1 mode) • 5: E-UTRAN (NB-S1 mode) Allowed values: • LARA-L6 / LARA-R6 - 4
<Requested_eDRX_cycle>	String	See <Requested_eDRX_cycle>.
<Assigned_eDRX_cycle>	String	See <Assigned_eDRX_cycle>.
<Assigned_paging_time_window>	String	See <Assigned_paging_time_window>.

7.27 Set MNO profile +UMNOPROF

+UMNOPROF						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	NVM	No	-	+CME Error

7.27.1 Description

Automatically configures the module to be compliant to the requirements of various Mobile Network Operators.

Follow this procedure to properly set up the configuration:

- Deregister the module from the network (issue AT+CFUN=0 or AT+COPS=2 command)
- Issue AT+UMNOPROF=<MNO>
  - LARA-L6 / LARA-R6 - the read command will return <MNO>=0 (undefined) until the next reboot.
- To apply the new configuration reboot the module
  - LARA-L6 / LARA-R6 - by the AT+CFUN=15 or AT+CFUN=16AT command

After setting a new MNO profile, the module reconfigures the MNO specific settings, e.g. the PDP context settings (e.g. APN of the initial EPS bearer).

LARA-L6 / LARA-R6
Changing the Mobile Network Operator (MNO) profile with the +UMNOPROF AT command overwrites some AT command settings and applies the default MNO profile values. For the list of AT commands affected by +UMNOPROF AT command, see Mobile Network Operator profiles.

Follow this procedure to restore the profile factory-programmed configuration:

- LARA-L6 / LARA-R6 - Set the <MNO> parameter to the currently selected profile and reboot the module (AT+CFUN=15) to make the change effective

LARA-L6 / LARA-R6
The version of the MNO profiles can be displayed by issuing the set command AT+UMNOPROF=,1 and then the test command AT+UMNOPROF=?. The MNO profile version will be displayed after each profile in the list. AT+UMNOPROF=,0 restores the default response syntax of the test command.

u-blox cellular modules are certified according to all the capabilities and options stated in the Protocol Implementation Conformance Statement document (PICS) of the module. The PICS, according to 3GPP TS 51.010-2 [117], 3GPP TS 34.121-2 [118], 3GPP TS 36.521-2 [139] and 3GPP TS 36.523-2 [140], is a statement of the implemented and supported capabilities and options of a device. If the user changes the command settings during the certification process, the PICS of the application device integrating a u-blox cellular module must be changed accordingly.

The customer is allowed to set only the <MNO> profile of a certified MNO for each product variant. See the corresponding module data sheet for the list of certified MNOs for each product.

7.27.1.1 SIM ICCID selection

If the <MNO> parameter is set to 1 (SIM ICCID select), the mobile network operator profile is selected according to the recognized SIM Issuer Identifier Number (IIN). If the SIM IIN does not match any allowed <MNO>, after the reboot:

- LARA-L6 / LARA-R6 - the global profile (<MNO>=90) configuration is applied.

If the SIM is not inserted, the last valid <MNO> remains active and is consequently shown by the <MNO_detected> parameter.

7.27.2 Syntax

Type	Syntax	Response	Example
Set	AT+UMNOPROF=<MNO>[,<reset>,<urc_notification_enabled>]	OK	AT+UMNOPROF=1,0,1 OK
Read	AT+UMNOPROF?	+UMNOPROF: <MNO>[,[<MNO_detected>],<reset>,<urc_notification_enabled>] OK	+UMNOPROF: 3 OK
URC		+UMNOPROF: <MNO>,<MNO_detected>	+UMNOPROF: 1,2

7.27.3 Defined values

Parameter	Type	Description
<MNO>	Number	Mobile Network Operator (MNO) profile: • 0: undefined / regulatory. For more details, see Notes. • 1: SIM ICCID/IMSI select • 2: AT&T • 3: Verizon • 4: Telstra • 5: T-Mobile US • 6: China Telecom • 8: Sprint • 13: Telefonica • 19: Vodafone • 20: NTT DoCoMo • 21: Telus • 28: SoftBank • 31: Deutsche Telekom • 32: US Cellular • 33: VIVO • 38: LG U+ • 39: SKT • 41: KDDI • 43: Rogers • 44: Claro Brasil • 45: TIM Brasil • 46: Orange France • 47: Bell • 48: KT • 90: global • 100: standard Europe • 101: standard Europe No-ePCO. The factory-programmed configuration of this profile is the same of the standard Europe profile (<MNO>=100), but the ePCO is disabled. • 102: standard JP (global) • 198: AT&T 2-4-12. The factory-programmed configuration of this profile is the same of the AT&T profile (<MNO>=2), but the LTE band 5 is disabled. • 199: Generic voice capable AT&T • 201: GCF-PTCRB. This profile is meant only for conformance testing. • 206: FirstNet • 207: VZW-Private • 208: Verizon Global Allowed values depend on the module series: • LARA-L6004 / LARA-L6004D-00B / LARA-R6001 - 1, 90 (factory-programmed value), 201 • LARA-R6001D-00B - 1, 2, 90 (factory-programmed value), 201

Parameter	Type	Description
		• LARA-R6401-00B / LARA-R6401D-00B - 1, 2, 3, 90 (factory-programmed value), 201, 206 • LARA-R6801 - 1, 90 (factory-programmed value), 201 • LARA-R6001D-01B - 1, 2, 3, 4, 5, 13, 20, 28, 31, 41, 90 (factory-programmed value), 201, 207 • LARA-L6004D-01B - 1, 2, 3, 4, 13, 20, 28, 31, 41, 90 (factory-programmed value), 201, 207 • LARA-L6404 / LARA-L6404D / LARA-R6401-01B / LARA-R6401D-01B - 1, 2, 3, 5, 90 (factory-programmed value), 201, 206, 207 • LARA-L6804D / LARA-R6801D - 1, 20, 28, 41, 90 (factory-programmed value), 201 • LARA-L6824 / LARA-L6824D - 1, 20, 90 (factory-programmed value), 201 • LARA-L6404 / LARA-L6404D - 1, 2, 3, 5, 90 (factory-programmed value), 201, 206, 207
<MNO_detected>	Number	If <MNO>=1 (SIM ICCID/IMSI select) and the SIM is inserted, it specifies the <MNO> value that matches the SIM Issuer Identifier Number (IIN) or the <MNO> retrieved by the IMSI and that is actually applied.
<reset>	Number	Configure the automatic reset. Allowed values: • 0: the automatic reset is disabled; the user shall reboot the module by itself • 1: the automatic reset is enabled It must be issued only if <MNO>=1.
<urc_notification_enabled>	Number	Configure the URC notification. Allowed values: • 0: URC is not issued if the <MNO_detected> value changes • 1: URC is issued any time the <MNO_detected> value changes It must be issued only if <MNO>=1.

7.27.4 Notes

- The standard Europe profile should be used as the basis for all other MNOs in Europe outside of Vodafone and Deutsche Telekom. However, there may be changes that need to be applied to the module for proper operation with any given European MNO such as attach type, RAT preference, band selection, etc. Please consult with the preferred network provider.

LARA-L6 / LARA-R6

- The PIN insertion is not mandatory before the command execution.
- The <reset>, <urc_notification_enabled> parameters are not supported.

7.28 Band selection bitmask +UBANDMASK

+UBANDMASK						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	NVM / OP	No	-	+CME Error

7.28.1 Description

Sets the supported LTE / NB-IoT / GSM bands for different Radio Access Technologies (RATs). The LTE bands supported are set by means of bitmasks where each bit in an 64 bit integer corresponds to a LTE / NB-IoT band (where supported). The GSM bands supported are set by means of a bitmask where specific bits correspond to 850 / 900 / 1800 / 1900 bands.

☞ See the corresponding module data sheet for the bands and RATs supported by each module.

☞ LARA-L6 / LARA-R6
Restart the cellular functionality (e.g. via AT+CFUN=16 or AT+CFUN=0/1 cycle) to make the setting effective.

☞ LARA-L6 / LARA-R6

In SoftBank configuration (+UMNOPROF: 28) active RATs and bands could be forced, based on serving PLMN, to different values than +URAT and +UBANDMASK configurations.

☞ u-blox cellular modules are certified according to all the capabilities and options stated in the Protocol Implementation Conformance Statement document (PICS) of the module. The PICS, according to 3GPP TS 51.010-2 [117], 3GPP TS 34.121-2 [118], 3GPP TS 36.521-2 [139] and 3GPP TS 36.523-2 [140], is a statement of the implemented and supported capabilities and options of a device. If the user changes the command settings during the certification process, the PICS of the application device integrating a u-blox cellular module must be changed accordingly.

☞ LARA-L6 / LARA-R6
In compliance with GCF/PTCRB certification and/or mobile network operator specifications, this command may be disabled for certain mobile network operator profiles. For more details, see +UMNOPROF AT command.

7.28.2 Syntax

Type	Syntax	Response	Example
Set	AT+UBANDMASK=<RAT>, <bitmask1>[,<bitmask2>]	OK	AT+UBANDMASK=0,2074 OK
Read	AT+UBANDMASK?	+UBANDMASK: <RAT>, <bitmask1>[,<bitmask2>][,<RAT>, <bitmask1>[,<bitmask2>][,<RAT>, <bitmask1>]] OK	+UBANDMASK: 0,168761503,1, 168761503 OK
Test	AT+UBANDMASK=?	+UBANDMASK: (list of the supported <RAT>s),<bitmask1>, <bitmask2> OK	+UBANDMASK: (0-1),0 xffffffffffffffff,0xffffffffffffffff OK

7.28.3 Defined values

Parameter	Type	Description
<RAT>	Number	Indicates the Radio Access Technology (RAT): • 2: GSM / UMTS • 3: LTE Allowed values: • LARA-L6004 / LARA-L6004D / LARA-L6804D / LARA-R6001 / LARA-R6001D / LARA-R6801 / LARA-R6801D - 2, 3 • LARA-L6404 / LARA-L6404D / LARA-L6824 / LARA-L6824D / LARA-R6401 / LARA-R6401D - 3
<bitmask1>	Number	Depending on the <RAT> parameter value, configures the bitmask for LTE or GSM/UMTS bands. GSM and UMTS bands are combined into one bitmask. Where bit number 1 to 22 are dedicated for GSM, and, 23 to 64 are dedicated for UMTS according to the list below. When <RAT>=2 (GSM/UMTS), it indicates bandmask for GSM/UMTS bands. The following bit enables/disables a band: • Bit 7: DCS 1800 • Bit 8: ESGM 900 • Bit 19: GSM 850 • Bit 21: PCS 1900 • Bit 22: WCDMA IMT 2000 • Bit 23: WCDMA PCS 1900 • Bit 24: WCDMA III 1700 • Bit 25: WCDMA IV 1700 • Bit 26: WCDMA V 850 • Bit 27: WCDMA VI 800

Parameter	Type	Description
		• Bit 48: WCDMA VII 2600 • Bit 49: WCDMA VIII 900 • Bit 50: WCDMA IX 1700 • Bit 60: WCDMA XIX 850 • Bit 61: WCDMA XI 1500 If any other bit of the bitmask is set to 1, the module return an error result code is issued. When <RAT>=3 (LTE), it indicates the bandmask for LTE bands 1 through 64. Each bit enables/disables a band: • Bit 0: band 1 • Bit 1: band 2 • Bit 2: band 3 • Bit 3: band 4 • .. • Bit 63: band 64 For the factory-programmed value, see Mobile Network Operator profiles.
<bitmask2>	Number	When <RAT>=3 (LTE), it indicates the bandmask for LTE bands 65 through 128. Each bit enables/disables a band: • Bit 0: band 65 • Bit 1: band 66 • Bit 2: band 67 • Bit 3: band 68 • .. • Bit 64: band 128 For the factory-programmed value, see Mobile Network Operator profiles. When <RAT>=2 (UMTS/GSM) the parameter is not supported.

7.28.4 Notes

LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D

- The PIN insertion is not mandatory before the command execution.

7.29 Device service domain configuration +USVCDOMAIN

+USVCDOMAIN						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	NVM / OP	No	-	+CME Error

7.29.1 Description

Configures the service domain (CS/PS) upon network attach.

Setting the Mobile Network Operator (MNO) profile with the +UMNOPROF AT command will overwrite this setting.

Reboot the module in order to apply the new settings.

7.29.2 Syntax

Type	Syntax	Response	Example
Set	AT+USVCDOMAIN=<domain>[,<voice_domain_preference>[,<ue_usage_setting>]]	OK	AT+USVCDOMAIN=2 OK

Type	Syntax	Response	Example
Read	AT+USVCDOMAIN?	+USVCDOMAIN: <domain>[,<voice_domain_preference>[,<ue_usage_setting>]] OK	+USVCDOMAIN: 2,1,1 OK
Test	AT+USVCDOMAIN=?	+USVCDOMAIN: (list of supported <domain>s),(list of supported<voice_domain_preference>s),(list of supported<ue_usage_setting>s) OK	+USVCDOMAIN: (0-2),(0-4),(0-1) OK

7.29.3 Defined values

Parameter	Type	Description
<domain>	Number	Service domain: • 0: CS only • 1: PS only • 2 (factory-programmed value): CS/PS combined Allowed values: • LARA-L6 / LARA-R6 - 0, 1, 2
<voice_domain_preference>	Number	Voice domain preference IE configuration. The parameter setting is ignored if <domain>=0. Allowed values: • 0 (factory-programmed value): IE not present • 1: PS only • 2: CS only • 3: CS preferred • 4: PS preferred Allowed values: • LARA-L6 / LARA-R6 - 0, 1, 2, 3, 4
<ue_usage_setting>	Number	Voice domain preference UE usage setting configuration. The parameter setting is ignored if <domain>=0 or if <voice_domain_preference>=0. Allowed values: • 0: voice centric • 1 (factory-programmed value): data centric

7.29.4 Notes

LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D

- The PIN insertion is not mandatory before the command execution.

7.30 Modem features customization +UDCONF=92

+UDCONF=92						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM / OP	No	-	+CME Error

7.30.1 Description

Configures several customizations available in modem FW. Depending on the <item> value different setting can be configured:

- 2: relaxed monitoring configuration. The feature allows reducing power consumption by enabling measurements only for neighboring cells whose signal level is close to that of the serving cell.
- 3: NAS release compliance configuration. The feature allows setting the NAS release behaviour of the module.

- 5: "SMS only" retry attempts configuration. The feature allows configuring the number of TAU attempts after registration has been successful for "EPS only" and has failed for "SMS only".
- 8: PLMN manual mode exception configuration. This feature allows manual selection of EHPLMN or HPLMN when the selected PLMN is not available.
- 9: SIB2 read timer configuration. This feature allows changing the maximum wait timer for SIB2 acquisition. At timeout, a new candidate cell is considered for cell selection.
- 11: LTE Sub-Band US9i support. The feature enables / disables the support of LTE Sub-Band US9i.
- 19: AS RAI configuration. The feature enables / disables Access Stratum Release Assistance Indication (AS RAI) feature.
- 20: CMM enabling / disabling. The feature allows disabling the relevant FGI and RRC capabilities.
- 50: SIM boot delay time configuration. The feature allows delaying the initialization of SIM card. It is a helpful tool in debugging.

☞ Reboot the module to apply the new configuration.

7.30.2 Syntax

Type	Syntax	Response	Example
Generic syntax			
Set	AT+UDCONF=92,<item>,<param1>[,param2]	OK	AT+UDCONF=92,2,1 OK
Read	AT+UDCONF=92,<item>[,<param1>]	+UDCONF: 92,<item>,<param1>[,<param2>] OK	AT+UDCONF=92,2 +UDCONF: 92,2,1,6 OK
Relaxed monitoring feature			
Set	AT+UDCONF=92,2,<relaxed_monitoring>[,<cell_monitoring_cutoff_threshold>]	OK	AT+UDCONF=92,2,1,6 OK
Read	AT+UDCONF=92,2	+UDCONF: 92,2,<relaxed_monitoring>,<cell_monitoring_cutoff_threshold> OK	AT+UDCONF=92,2 +UDCONF: 92,2,1,6 OK
NAS release compliance			
Set	AT+UDCONF=92,3,<nas_release_compliance>	OK	AT+UDCONF=92,3,4 OK
Read	AT+UDCONF=92,3	+UDCONF: 92,3,<nas_release_compliance> OK	AT+UDCONF=92,3 +UDCONF: 92,3,4 OK
"SMS only" retry attempts			
Set	AT+UDCONF=92,5,<num_retries>	OK	AT+UDCONF=92,5,0 OK
Read	AT+UDCONF=92,5	+UDCONF: 92,5,<num_retries> OK	AT+UDCONF=92,5 +UDCONF: 92,3,4 OK
PLMN manual mode exception feature			
Set	AT+UDCONF=92,8,<man_mode_exception>	OK	AT+UDCONF=92,8,1 OK
Read	AT+UDCONF=92,8	+UDCONF: 92,8,<man_mode_exception> OK	AT+UDCONF=92,8 +UDCONF: 92,8,1 OK

Type	Syntax	Response	Example
SIB2 read timer configuration			
Set	AT+UDCONF=92,9,<sib2_tmr>	OK	AT+UDCONF=92,9,20000 OK
Read	AT+UDCONF=92,9	+UDCONF: 92,9,<sib2_tmr> OK	AT+UDCONF=92,9 +UDCONF: 92,9,10000 OK
LTE Sub-Band US9i support			
Set	AT+UDCONF=92,11,<rat>,<US9i_band_enable>	OK	AT+UDCONF=92,11,2,1 OK
Read	AT+UDCONF=92,11,<rat>	+UDCONF: 92,11,<rat>,<US9i_band_enable> OK	AT+UDCONF=92,11,2 +UDCONF: 92,11,2,1 OK
AS RAI			
Set	AT+UDCONF=92,19,<as_rai_r14>[,<as_rai_catm_tmr>[,<as_rai_nb_tmr>]]	OK	AT+UDCONF=92,19,0 OK
Read	AT+UDCONF=92,19	+UDCONF: 92,19,<as_rai_r14>[,<as_rai_catm_tmr>[,<as_rai_nb_tmr>]] OK	AT+UDCONF=92,19 +UDCONF: 92,19,1 OK
CMM enabling / disabling			
Set	AT+UDCONF=92,20,<CMM_enable>	OK	AT+UDCONF=92,20,0 OK
Read	AT+UDCONF=92,20	+UDCONF: 92,20,<CMM_enable> OK	AT+UDCONF=92,20 +UDCONF: 92,20,1 OK
SIM boot delay configuration			
Set	AT+UDCONF=92,50,<SIM_boot_delay>	OK	AT+UDCONF=92,50,20 OK
Read	AT+UDCONF=92,50	+UDCONF: 92,50,<SIM_boot_delay> OK	AT+UDCONF=92,50 +UDCONF: 92,50,20 OK

7.30.3 Defined values

Parameter	Type	Description
<item>	Number	Modem customization. Allowed values: • 2: Relaxed monitoring feature • 3: NAS release compliance • 5: "SMS only" retry attempts • 8: PLMN manual mode exception feature • 9: SIB2 read timer configuration • 11: LTE Sub-Band US9i support configuration • 19: AS RAI configuration • 20: Connected Mode Mobility (CMM) enabling / disabling • 50: SIM boot delay configuration Allowed values: • LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B - 3, 50 • LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B /

Parameter	Type	Description
		LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D - 3, 11, 50
<relaxed_ monitoring>	Number	Enables/disables the relaxed monitoring feature. Allowed values: • 0 (factory-programmed value): feature disabled • 1: feature enabled
<man_mode_ exception>	Number	Enables/disables the PLMN manual mode exception feature. Allowed values: • 0 (factory-programmed value): feature disabled • 1: feature enabled
<sib2_tmr>	Number	SIB2 maximum read timer value in milliseconds. The range goes from 320 to 60000. The special value 65535 allows to restore the platform default value (40000 ms). For the complete list of the factory-programmed values, see Mobile Network Operator profiles.
<US9i_band_enable>	Number	Enables/disables the US9i band support. Allowed values: • 0 (factory-programmed value): disabled • 1: enabled
<cell_Monitoring_ cutoff_threshold>	Number	Sets the user defined cell monitoring cutoff threshold. This value will be effective when the network does not provide the value. Allowed values: • 0 (default and factory-programmed value): 0 dBm • 6: 6 dBm cell monitoring cutoff threshold • 9: 9 dBm cell monitoring cutoff threshold • 12: 12 dBm cell monitoring cutoff threshold • 15: 15 dBm cell monitoring cutoff threshold
<nas_release_ compliance>	Number	Sets the UE NAS behavior's release version. Allowed values: • 3: UE behaves as 3GPP compliance release 7. Above release version will not work. • 4 (factory-programmed value): UE behaves as 3GPP compliance release 10. Above release version will not work
<num_retries>	Number	Sets the number of retries to do when attach is accepted by the network but without the "SMS only" flag. The range goes from 0 to 4. The factory-programmed value is 4.
<as_rai_r14>	Number	Enables/disables the AS RAI (Access Stratum Release Assistance Indication) feature: • 0: disabled • 1: enabled For the complete list of the factory-programmed values, see Mobile Network Operator profiles.
<as_rai_catm_tmr>	Number	Configures the LTE Cat-M timer value with EFS files. The range goes from 0 (default value) to 65535 (factory-programmed value), where 65535 means EFS file is deleted and the module default configuration is applied. If the parameter is omitted in the set command, its value is not changed. For the complete list of the factory-programmed values, see Mobile Network Operator profiles.
<as_rai_nb_tmr>	Number	Configures the NB1 timer value configuration with EFS files. The range goes from 0 (default value) to 65535 (factory-programmed value), where 65535 means EFS file is deleted and the module default configuration is applied. If the parameter is omitted in the set command, its value is not changed. For the complete list of the factory-programmed values, see Mobile Network Operator profiles.
<CMM_enable>	Number	Enables/disables the UE capabilities required by the Connected Mode Mobility (CMM) feature. Allowed values: • 0: disabled • 1 (factory-programmed value): enabled
<SIM_boot_delay>	Number	SIM boot delay time of UIM driver at boot in seconds. The range goes from 0 to 255. The factory-programmed value is 0.

7.31 EEA0 encryption algorithm configuration+UDCONF=98

+UDCONF=98						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

7.31.1 Description

Configures the EEA0 encryption algorithm.

☞ Reboot the module to apply the new configuration.

7.31.2 Syntax

Type	Syntax	Response	Example
Set	AT+UDCONF=98,<EEA0_enabled>	OK	AT+UDCONF=98,0 OK
Read	AT+UDCONF=98	+UDCONF: 98,<EEA0_enabled> OK	AT+UDCONF=98 +UDCONF: 98,1 OK

7.31.3 Defined values

Parameter	Type	Description
<EEA0_enabled>	Number	Enables/disables the EEA0 encryption algorithm: • 0: EEA0 algorithm not supported • 1 (factory-programmed value): EEA0 algorithm supported

7.32 Periodic search for higher priority PLMN +UHPPLMN

+UHPPLMN						
Modules	LARA-L6					
	LARA-R6001-01B LARA-R6001D-01B LARA-R6401-01B LARA-R6401D-01B LARA-R6801-01B LARA-R6801D					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

7.32.1 Description

Enables or disables the periodic background search for higher priority PLMN (HPPLMN).

By the <uhpplmn_timer> and <urc_mode> parameters the command overwrites the timer which triggers periodic background search, and to enable or disable the URC sent when the search is triggered.

The read command:

- LARA-L6 / LARA-R6 - returns the current HPPLMN search setting in the MT, the period of HPPLMN search timer (<hpplmn_search_timer>) and the status of the HPPLMN search URC reporting (<urc_mode>) parameters only when <mode>=1.

☞ After issuing the set command to enable/disable the periodic search for HPPLMN, reboot the module (e.g. by +CFUN AT command) to make the new setting effective.

7.32.2 Syntax

Type	Syntax	Response	Example
Set	AT+UHPPLMN=<mode>[, <uhpplmn_timer>[,<urc_mode>]]	OK	AT+UHPPLMN=1

Type	Syntax	Response	Example
			OK
Read	AT+UHPPLMN?	+UHPPLMN: <mode>[,<hpplmn_search_timer>[,<urc_mode>]] OK	+UHPPLMN: 1,4320,0 OK
Test	AT+UHPPLMN=?	+UHPPLMN: (list of supported <mode>s),(list of supported <uhpplmn_timer>s),(list of supported <urc_mode>s) OK	+UHPPLMN: (0,1),(1-14400),(0,1) OK
URC		+UHPPLMN: <last_hpplmn_search_timer>	+UHPPLMN: 120

7.32.3 Defined values

Parameter	Type	Description
<mode>	Number	Enable or disable the periodic search for HPPLMN. Allowed values: • 0: disable the periodic search for HPPLMN. • 1 (factory-programmed value): enable the periodic search for HPPLMN according to <uhpplmn_timer> parameter or according to the configuration in SIM file EF_{HPPLMN} (see the 3GPP TS 31.102 [89] subclause 4.2.6) when <uhpplmn_timer> is omitted.
<uhpplmn_timer>	Number	The time period value to overwrite the timer used to schedule a periodic search for higher priority PLMN. The value is in minutes. By factory-programmed configuration no value is specified, so the configuration is defined by the SIM file EF_{HPPLMN} (see the 3GPP TS 31.102 [89] subclause 4.2.6). Allowed range is 1-14400 (1 minute - 240 hours).
<urc_mode>	Number	Enable or disable the URC reporting of HPPLMN search. Allowed values: • 0 (factory-programmed value): disable the URC reporting of HPPLMN search. • 1: enable the URC reporting of HPPLMN search.
<hpplmn_search_timer>	Number	The time period of the timer used to schedule a periodic search for higher priority PLMN. The value is in minutes.
<last_hpplmn_search_timer>	Number	The time period of the last expired timer used to schedule the periodic search for higher priority PLMN. The value is in seconds.

7.33 Network band scan status +USCANSTAT

+USCANSTAT						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6001-01B LARA-R6001D-01B LARA-R6401-01B LARA-R6401D-01B LARA-R6801-01B LARA-R6801D					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

7.33.1 Description

Enables/disables the current band scan status, type and device radio technology reporting; to enable the URC reporting, set the <reporting> parameter to 1. After enabling the URC reporting, the +USCANSTAT URC is issued to return the current band scan status and band scan type along with its radio technology information: thereafter, if either the parameter <scan_state> or <scan_type> changes, a +USCANSTAT URC will be issued.

7.33.2 Syntax

Type	Syntax	Response	Example
Set	AT+USCANSTAT=<reporting>	OK	AT+USCANSTAT=1 OK
Read	AT+USCANSTAT?	+USCANSTAT: <reporting>,<scan_state>,<scan_type>,<scanned_act>[,<scanned_act>[,<scanned_act>[,<oosTimeStep>]]] OK	+USCANSTAT: 1,7,1,1 OK
Test	AT+USCANSTAT=?	+USCANSTAT: (list of supported <reporting>s) OK	+USCANSTAT: (0-1) OK
URC		+USCANSTAT: <scan_state>,<scan_type>,<scanned_act>[,<scanned_act>[,<scanned_act>]]	+USCANSTAT: 1,1,7

7.33.3 Defined values

Parameter	Type	Description
<reporting>	Number	Configure the +USCANSTAT URC. Allowed values: • 0 (default value): disables the URC • 1: enables the URC
<scan_state>	Number	Current RRC band scan state: • LARA-L6 / LARA-R6 o 0: scan started o 1: scan ongoing o 2: scan stopped
<scan_type>	Number	Current RRC band scan type: • LARA-L6 / LARA-R6 o 0: no scan o 1: scan for PLMN search (see +COPS test command) o 2: scan for background PLMN search o 3: scan for high priority PLMN search o 4: scan for network cell search (see +UCFSCAN AT command) o 5: scan for PCI list search o 6: scan for PLMN selection triggered by user (see AT+COPS=1 command) o 7: scan for PLMN selection Allowed values: o LARA-L6 / LARA-R6 : 0, 1, 2, 3, 4, 5
<scanned_act>	Number	Current access technology type: • 0: GSM / GPRS / eGPRS • 2: UMTS • 3: LTE • 7: LTE Cat M1 • 8: NB-IoT • 9: GPRS / eGPRS Allowed values: • LARA-L6 / LARA-R6 : 0, 2, 3
<oosTimeStep>	Number	Remaining time (in seconds) of out of service PLMN search timer. ☞ LARA-L6 / LARA-R6 The <oosTimeStep> is not supported.

7.33.4 Notes

LARA-L6 / LARA-R6

- URCs are only issued at scan start and stop (<scan_state>=0 and <scan_state>=2).

8 IP Multimedia Subsystem (IMS)

8.1 Domain configuration for supplementary services +UISS

+UISS						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6001-01B LARA-R6001D-01B LARA-R6401-01B LARA-R6401D-01B LARA-R6801-01B LARA-R6801D					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

8.1.1 Description

Configures for performing query and set of supplementary services either in PS domain over IMS/XCAP (see Supplementary services introduction) or in CS domain through CSFB to legacy RAT if supported.

☞ LARA-L6 / LARA-R6
The setting is stored to NVM and any change is effective only at the next start-up.

8.1.2 Syntax

Type	Syntax	Response	Example
Set	AT+UISS=<ss_mode>	OK	AT+UISS=1 OK
Read	AT+UISS?	+UISS: <ss_mode> OK	+UISS: 1 OK
Test	AT+UISS=?	+UISS: (list of supported <ss_mode>s) OK	+UISS: (0-2) OK

8.1.3 Defined values

Parameter	Type	Description
<ss_mode>	Number	SS transactions domain selection configuration: • 0: SS transactions are sent only over XCAP • 1: SS transactions are sent via CSFB • 2: SS transactions will go over XCAP if IMS is registered, over CSFB otherwise • 3: SS transactions domain is automatically selected Allowed values: • LARA-L6 / LARA-R6 : 0, 1, 2, 3. For the factory-programmed value, see Mobile Network Operator profiles

8.2 IMS client configuration +UIMSCFG

+UIMSCFG						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM / OP	No	-	+CME Error

8.2.1 Description

Configures the IMS managed objects by proper keys that configure the corresponding functionality. In particular, it allows to disable the IMS client with AT+UIMSCFG=0,1,50,0.

8.2.2 Syntax

Type	Syntax	Response	Example
Generic syntax			
Set / Read	AT+UIMSCFG=<op_code>[,<num_of_Config_items>,<ImsConfig1>[,<data1>[,<ImsConfig2>[,<data2>[...]]]]]	OK	
IMS setting configuration			
Set	AT+UIMSCFG=0[,<num_of_Config_items>,<ImsConfig1>[,<data1>[,<ImsConfig2>[,<data2>[...]]]]]	OK	
IMS setting reading			
Read	AT+UIMSCFG=1[,<num_of_Config_items>,<ImsConfig1>[,<ImsConfig2>[...]]]	[+UIMSCFG :<ImsConfig1>,<data1> [+UIMSCFG :<ImsConfig2>,<data2> [..]]] OK	AT+UIMSCFG=1 +UIMSCFG: 50,0 +UIMSCFG: 51,"ims" +UIMSCFG: 53,2 +UIMSCFG: 253,1 OK
Test	AT+UIMSCFG=?	+UIMSCFG: (list of supported <op_code>'s),(list of supported <num_of_Config_items>),(list of supported <ImsConfig>) OK	+UIMSCFG: (0-1),(1-16),(50,51,53,253) OK

8.2.3 Defined values

Parameter	Type	Description
<op_code>	Number	Allowed values: • 0: sets/configures the corresponding <data> of the IMS configuration data specified in <ImsConfig>. It can be used to set/configure more than one <ImsConfig>s. If the <ImsConfig> parameter is omitted, then the command will set the default <data> of all <ImsConfig>s. • 1: gets the configured <data> value of a specific IMS configuration data mentioned by <ImsConfig>. It can be used to retrieve more than one <ImsConfig>s. If the <ImsConfig> parameter is omitted, then the command will return the <data> of all <ImsConfig>s.
<data>	Number / String	Contains the numeric data if <ImsConfig> is a numeric parameter. Otherwise it will contain the string data if <ImsConfig> is a string parameter.
<num_of_Config_items>	Number	Number of IMS configuration elements to be set or retrieved.
<ImsConfig>	Number	For more details on the values supported by u-blox cellular modules see Notes. IMS object keys: • 9: 3GPP_CONFERENCE_URI <data> is a string parameter and defines the Conference Factory URI. See 3GPP TS 24.166 [148], Conf_Factory_URI; it should be a null terminated string, the maximum size is 255. The default and factory-programmed value differ depending on product version: o LARA-L6 / LARA-R6 - <ImsConfig>=9 is not supported. • LARA-L6 / LARA-R6 48: SMS_over_IP <data> is a string parameter. It configures the support of the "SMS over IP" feature by the IMS client. SMS messages will be sent over IP if both the module and the network support the feature. Allowed values are: o "NO;"

Parameter	Type	Description
		o "YES;+g.3gpp.smsip;" The factory-programmed configuration depends on the MNO profile. Configuration changes will be effective at the subsequent module reboot. For the complete list of the factory-programmed values, see Mobile Network Operator profiles. • 50: AUTOLOGIN_MODE <data> is an integer parameter and set the autologin mode of IMS. The new configuration will be effective at the subsequent module reboot. Allowed values: o 0 (default value): AUTOLOGIN_NEVER o 1: AUTOLOGIN_ALWAYS o 2: AUTOLOGIN_HOME_NETWORK o 3: AUTOLOGIN_LTE_EPS_ONLY. IMS registration starts only if the MT registers to LTE network with EPS services only (CS domain rejected with cause #18). The factory-programmed value differs depending on the product version: o LARA-L6 / LARA-R6 - For the complete list of the factory-programmed values, see Mobile Network Operator profiles. • 51: APN_NAME <data> is a string parameter representing the IMS APN name to be used for the VoLTE; it shall be a null terminated string. The maximum length is 255. The default and factory-programmed value differ depending on product version: o LARA-L6 / LARA-R6 - The default and factory-programmed value is "ims". • 53: PREFFERED_PDPTYPE <data> is an integer parameter and represents the preferred PDP type for IMS. Allowed values: o 0: IPv4 o 1: IPv6 o 2 (default and factory-programmed value): IPv4v6 • 162: IMSI_in_Contact_header <data> is an integer parameter and enables the insertion of the IMSI in the SIP "contact" header. To apply the new setting the module must re-register to the network (AT+COPS=2 / AT+COPS=0 or AT+CFUN=4 / AT+CFUN=1 or AT+CFUN=16). The flag is configured as per operator requirements, and it is also updated by +UMNOCONF AT command. Allowed values are: o 0: IMSI not present in SIP "contact" header o 1: IMSI present in SIP "contact" header The default and factory-programmed value differs depending on product version: o LARA-L6 / LARA-R6 - <ImsConfig>=162 is not supported. • 164: aSRVCC_configuration <data> is an integer parameter and enables/disables the aSRVCC support. To apply the new setting the module must re-register to the network (AT+COPS=2 / AT+COPS=0 or AT+CFUN=4 / AT+CFUN=1 or AT+CFUN=16). The flag is configured as per operator requirements, and it is also updated by +UMNOCONF AT command (<MNO>=0 (regulatory) or <MNO>=2 (AT&T) or <MNO>=5 (T-Mobile) or <MNO>=21 (Telus) enable the feature). In order to be compliant with certification requirements, the feature shall be enabled in AT&T and T-mobile configuration. Allowed values are: o 0: aSRVCC call disabled o 1 (default and factory-programmed value): aSRVCC call enabled • 200: XCAP_APN <data> is a string parameter and represents the APN name to be used for supplementary service provisioning; it should be a null terminated string. The maximum length is 255. The factory-programmed value differs depending on product version:

Parameter	Type	Description
		o LARA-L6 / LARA-R6 - For the complete list of the factory-programmed values, see Notes. • 201: XCAP_ROOT_URI <data> is a string parameter and represents the Root URI of the XCAP server; it should be a null terminated string. The "http//" prefix is required. The maximum length is 255. The default and factory-programmed value is an empty string. • 202: XCAP_AUTH_USER_NAME <data> is a string parameter and represents the username to be used for HTTP authentication of XCAP requests; it should be a null terminated string. The maximum length is 255. The default and factory-programmed value is an empty string. • 203: XCAP_AUTH_PASSWORD <data> is a string parameter and represents the user password to be used for HTTP authentication of XCAP requests; it should be a null terminated string. The maximum length is 255. The default and factory-programmed value is an empty string. • 204: XCAP_TRANSPORT_TYPE <data> is an integer parameter and represents the transport type to be used for XCAP Requests. Allowed values: o 0 (default and factory-programmed value): TRANSPORT_HTTP o 1: TRANSPORT_HTTPS o 2: TRANSPORT_HTTPS_PREFFERED ☞ LARA-L6 / LARA-R6 <data>=2 is not supported. For the complete list of the factory-programmed values, see Notes. • 205: XCAP_Bearer_Deactivation_Timer <data> is an integer parameter and represents the time in seconds after which IMS will automatically deactivate the XCAP bearer with APN defined by <ImsConfig>=200, if it has been activated by IMS itself (i.e. if it was not active during Supplementary Services related AT command execution). According to AT&T <CDR-LTE-1982> requirement (Supplementary Services Configuration), the XCAP shall be used for supplementary services regardless of the RAT and IMS registration status. Allowed values: o The range goes from 0 to 65535 o 0: deactivates the XCAP bearer upon XCAP completion o 65535: never deactivates the XCAP bearer o Default and factory-programmed value: 3 • 253: SIP_URI_FORMAT <data> is an integer parameter and represents the URI format to be used for converting MSISDN numbers into URI's. Allowed values: o 0: URI_NONE o 1: URI_SIP o 2: URI_TEL The default and factory-programmed value differs depending on product version: o LARA-L6 / LARA-R6 - For the complete list of the factory-programmed values, see Notes. • 264: VoPS_registration <data> is an integer parameter and enables the VoPS support check. The IMS will register only if VoPS is declared as supported by the network. Allowed values are: o 0: VoPS support check disabled o 1: VoPS support check enabled The default and factory-programmed value differs depending on product version:

Parameter	Type	Description
		o LARA-L6 / LARA-R6 - For the complete list of the factory-programmed values, see Notes. • 265: Session Expire Timer <data> is an integer parameter representing the value of Session-Expires header field in seconds. See the RFC 4028 [194] Sec.4. The range goes from 90 to 3600. For the complete list of the factory-programmed values, see Notes. • 266: Min SE Timer <data> is an integer parameter representing the value of Min-SE Header field in seconds. See the RFC 4028 [194] Sec.5. The range goes from 90 to 3600. For the complete list of the factory-programmed values, see Notes. • 267: RTP Timer <data> is an integer parameter representing the value of RTP-Inactivity Timer in seconds, meant to detect the aliveness of the far device during a VoLTE call. The range goes from 10 to 300. For the complete list of the factory-programmed values, see Notes. • 268: RTCP Timer <data> is an integer parameter representing the value of RTCP-Inactivity Timer in seconds, meant to detect the aliveness of the far device during an on-hold VoLTE call. The range goes from 10 to 300. For the complete list of the factory-programmed values, see Notes. • 269: VoLTE_conference <data> is an integer parameter and configures the VoLTE conference subscription event. Allowed values are: o 0: disable the subscription event o 1 (default and factory-programmed value): enable the subscription event

8.2.4 Notes

Module	9 (3GPP_CONFERENCE_URI)	50 (AUTOLOGIN_MODE)	51 (APN_NAME)	53 (PREFFERED_PDPTYPE)	162 (IMSI_in_Contact_header)	164 (aSRVCC_configuration)	165 (VoLTE Silent Redial)	200 (XCAP_APN)	201 (XCAP_ROOT_URI)	202 (XCAP_AUTH_USER_NAME)	203 (XCAP_AUTH_PASSWORD)	204 (XCAP_TRANSPORT_TYPE)	205 (XCAP_Bearer_Deactivation_Timer)	253 (SIP_URI_FORMAT)	264 (VoPS_registration)	265 (Session Expire Timer)	266 (Min SE Timer)	267 (RTP Timer)	268 (RTCP Timer)	269 (VoLTE_conference)
LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B		*	*	*				*	*					*	*	*	*	*	*	
LARA-R6001D		*	*	*				*	*					*	*					
LARA-L6404 / LARA-L6404D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B		*	*	*			*	*	*			*		*	*	*	*	*	*	
LARA-L6004-01B / LARA-L6004D-01B / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6801-01B / LARA-R6801D		*	*	*			*	*	*			*		*	*	*	*	*	*	

Table 10: <ImsConfig> allowed values

LARA-L6 / LARA-R6
If <ImsConfig>=50, then <data>=2 and 3 are not supported.

LARA-R6001D-00B

- Table 11 reports the <ImsConfig>=200, 253 and 264 factory-programmed value for each allowed MNO profile (see +UMNOPROF):

	AT&T	Global	GCF-PTCRB
MNO profile			
<MNO>	2	90 (factory-programmed value)	201
Factory-programmed values			
XCAP_APN (200)	"broadband"	""	""
SIP_URI_FORMAT (253)	1	2	2
VoPS_registration (264)	1	1	1

Table 11: LARA-R6001D-00B MNO profiles factory-programmed values

LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001

- Table 12 reports the <ImsConfig>=200, 204, 253, 264, 265, 266, 267, 268 factory-programmed value for each allowed MNO profile (see +UMNOPROF):

	AT&T	Verizon, VZW-Private	Global	GCF-PTCRB
MNO profile				
<MNO>	2[1]	3, 207[1]	90 (factory-programmed value)	201
Factory-programmed values				
XCAP_APN (200)	"nxtgenphone"	""	""	""
XCAP_TRANSPORT_TYPE (204)	0	0	0	0
SIP_URI_FORMAT (253)	1	2	2	2
VoPS_registration (264)	0	1	1	1
Session Expire Timer (265)	1800	300	1800	1800
Min SE Timer (266)	90	300	1800	1800
RTP Timer (267)	20	20	20	20
RTCP Timer (268)	20	20	20	20

Table 12: LARA-L6004D-00B, LARA-L6004-00B, LARA-R6001 MNO profiles factory-programmed values

LARA-R6401D-00B

- Table 13 reports the <ImsConfig>=200, 253, 264, 265, 266, 267, 268 factory-programmed value for each allowed MNO profile (see +UMNOPROF):

[1] <MNO> is not supported by LARA-L6004-00B, LARA-L6004D-00B and LARA-R6001-00B.

	AT&T	Verizon	Global	GCF-PTCRB	FirstNet
MNO profile					
<MNO>	2	3	90 (factory-programmed value)	201	206
Factory-programmed values					
XCAP_APN (200)	"broadband"	""	""	""	"firstnet-broadband"
SIP_URI_FORMAT (253)	1	2	2	2	1
VoPS_registration (264)	0	1	1	1	0
Session Expire Timer (265)	1800	300	1800	1800	1800
Min SE Timer (266)	90	300	1800	1800	90
RTP Timer (267)	20	20	20	20	20
RTCP Timer (268)	20	20	20	20	20

Table 13: LARA-R6401D-00B MNO profiles factory-programmed values

LARA-R6401-00B

- Table 14 reports the <ImsConfig>=200, 253, 264, 265, 266, 267, 268 factory-programmed value for each allowed MNO profile (see +UMNOPROF):

	AT&T	Verizon	Global	GCF-PTCRB	FirstNet
MNO profile					
<MNO>	2	3	90 (factory-programmed value)	201	206
Factory-programmed values					
XCAP_APN (200)	"broadband"	""	""	""	"firstnet-broadband"
SIP_URI_FORMAT (253)	1	2	2	2	1
VoPS_registration (264)	0	1	1	1	0
Session Expire Timer (265)	1800	300	1800	1800	1800
Min SE Timer (266)	90	300	1800	1800	90
RTP Timer (267)	20	20	20	20	20
RTCP Timer (268)	20	20	20	20	20

Table 14: LARA-R6401-00B MNO profiles factory-programmed values

LARA-R6801-00B

- Table 15 reports the <ImsConfig>=200, 253, 264, 265, 266, 267, 268 factory-programmed value for each allowed MNO profile (see +UMNOPROF):

	Global	GCF-PTCRB
MNO profile		
<MNO>	90 (factory-programmed value)	201
Factory-programmed values		
XCAP_APN (200)	""	""

	Global	GCF-PTCRB
SIP_URI_FORMAT (253)	2	2
VoPS_registration (264)	1	1
Session Expire Timer (265)	1800	1800
Min SE Timer (266)	800	1800
RTP Timer (267)	20	20
RTCP Timer (268)	20	20

Table 15: LARA-R6801-00B MNO profiles factory-programmed values

LARA-R6001D-01B

- Table 16 reports the <ImsConfig>=200, 204, 253, 264, 265, 266, 267 and 268 factory-programmed value for each allowed Americas MNO and conformance MNO profile (see +UMNOPROF):

	AT&T	Verizon	T-Mobile US	VZW-Private
MNO profile				
<MNO>	2	3	5	207
Factory-programmed values				
XCAP_APN (200)	"broadband"	""	"fast.t-mobile.com"	""
XCAP_TRANSPORT_TYPE (204)	0	0	1	0
SIP_URI_FORMAT (253)	1	2	1	2
VoPS_registration (264)	0	1	1	1
Session Expire Timer (265)	1800	300	1800	300
Min SE Timer (266)	90	300	90	300
RTP Timer (267)	20	20	30	20
RTCP Timer (268)	20	20	20	20

Table 16: LARA-R6001D-01B MNO profiles factory-programmed values

- Table 17 reports the <ImsConfig>=200, 204, 253, 264, 265, 266, 267 and 268 factory-programmed value for each allowed EMEA and global MNO profile (see +UMNOPROF):

	Telefonica	Deutsche Telekom	Global	GCF-PTCRB
MNO profile				
<MNO>	13	31	90 (factory-programmed value)	201
Factory-programmed values				
XCAP_APN (200)	""	"internet.t-mobile.cz"	""	""
XCAP_TRANSPORT_TYPE (204)	0	0	0	0
SIP_URI_FORMAT (253)	2	1	2	2

	Telefonica	Deutsche Telekom	Global	GCF-PTCRB
VoPS_registration (264)	1	1	1	1
Session Expire Timer (265)	1800	1800	1800	1800
Min SE Timer (266)	1800	600	1800	1800
RTP Timer (267)	20	20	20	20
RTCP Timer (268)	20	20	20	20

Table 17: LARA-R6001D-01B MNO profiles factory-programmed values

- Table 18 reports the <ImsConfig>=200, 204, 253, 264, 265, 266, 267 and 268 factory-programmed value for each allowed APAC MNO profile (see +UMNOPROF):

	Telstra	NTT DoCoMo	SoftBank	KDDI
MNO profile				
<MNO>	4	20	28	41
Factory-programmed values				
XCAP_APN (200)	""	""	""	"xcap"
XCAP_TRANSPORT_TYPE (204)	0	0	1	0
SIP_URI_FORMAT (253)	2	1	1	1
VoPS_registration (264)	1	1	1	1
Session Expire Timer (265)	1800	300	1800	1800
Min SE Timer (266)	1800	90	90	90
RTP Timer (267)	20	12	10	20
RTCP Timer (268)	20	12	20	20

Table 18: LARA-R6001D-01B MNO profiles factory-programmed values

LARA-L6404D / LARA-R6401D-01B

- Table 19 reports the <ImsConfig>=200, 204, 253, 264, 265, 266, 267, 268 factory-programmed value for each allowed MNO profile (see +UMNOPROF):

	AT&T	Verizon, VZW-Private	T-Mobile US	Global	GCF-PTCRB	FirstNet
MNO profile						
<MNO>	2	3, 207	5	90 (factory-programmed value)	201	206
Factory-programmed values						
XCAP_APN (200)	"broadband"	""	"fast.t-mobile.com"	""	""	"firstnet-broadband"
XCAP_TRANSPORT_TYPE (204)	0	0	1	0	0	0
SIP_URI_FORMAT (253)	1	2	1	2	2	1
VoPS_registration (264)	0	1	1	1	1	0

	AT&T	Verizon, VZW-Private	T-Mobile US	Global	GCF-PTCRB	FirstNet
Session Expire Timer (265)	1800	300	1800	1800	1800	1800
Min SE Timer (266)	90	300	90	1800	1800	90
RTP Timer (267)	20	20	30	20	20	20
RTCP Timer (268)	20	20	20	20	20	20

Table 19: LARA-L6404D / LARA-R6401D-01B MNO profiles factory-programmed values

LARA-L6404 / LARA-R6401-01B

- Table 20 reports the <ImsConfig>=200, 204, 253, 264, 265, 266, 267, 268 factory-programmed value for each allowed MNO profile (see +UMNOPROF):

	AT&T	Verizon, VZW-Private	T-Mobile US	Global	GCF-PTCRB	FirstNet
MNO profile						
<MNO>	2	3, 207	5	90 (factory-programmed value)	201	206
Factory-programmed values						
XCAP_APN (200)	"nxtgenphone"	""	"fast.t-mobile.com"	""	""	"firstnet-phone"
XCAP_TRANSPORT_TYPE (204)	0	0	1	0	0	0
SIP_URI_FORMAT (253)	1	2	1	2	2	1
VoPS_registration (264)	0	1	1	1	1	0
Session Expire Timer (265)	1800	300	1800	1800	1800	1800
Min SE Timer (266)	90	300	90	1800	1800	90
RTP Timer (267)	20	20	30	20	20	20
RTCP Timer (268)	20	20	20	20	20	20

Table 20: LARA-L6404 / LARA-R6401-01B MNO profiles factory-programmed values

LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6801D

- Table 21 reports the <ImsConfig>=200, 204, 253, 257, 264, 265, 266, 267, 268 factory-programmed value for each allowed MNO profile (see +UMNOPROF):

	Global	GCF-PTCRB	NTT DoCoMo	KDDI	SoftBank
MNO profile					
<MNO>	90 (factory-programmed value)	201	20	41	28
Factory-programmed values					
XCAP_APN (200)	""	""	""	"xcap"	""
XCAP_TRANSPORT_TYPE (204)	0	0	0	1	0
SIP_URI_FORMAT (253)	2	2	1	1	1
VoPS_registration (264)	1	1	1	1	1

	Global	GCF-PTCRB	NTT DoCoMo	KDDI	SoftBank
Session Expire Timer (265)	1800	1800	300	1800	1800
Min SE Timer (266)	1800	1800	90	90	90
RTP Timer (267)	20	20	12	20	10
RTCP Timer (268)	20	20	12	20	20

Table 21: LARA-L6824 LARA-L6824D, LARA-L6804D, LARA-R6801D-01B MNO profiles factory-programmed values

8.3 IMS client registration / deregistration in network +UIMSREG

+UIMSREG						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

8.3.1 Description

Sends the registration/deregistration request to the network.

The AT+UIMSREG=0 command can be used during certification to trigger an IMS deregistration, but the IMS automatic registration feature (AT+UIMSCFG=0,1,50,1 or AT+UIMSCFG=0,1,50,2) has higher priority: in case of LTE cell reselection the IMS registration will be restarted. When the IMS shall be steadily deregistered, issue AT+UIMSCFG=0,1,50,0 before issuing AT+UIMSREG=0.

☞ Only an IMS client session is possible at any given time. The user must first configure the session's parameters using AT+UIMSCFG command before using AT+UIMSREG.

☞ The final result code to the set command only implies that the request is success/failure. It does not guarantee the IMS client registration. The registration status of the IMS client is provided by means of the +CIREG AT command.

8.3.2 Syntax

Type	Syntax	Response	Example
Set	AT+UIMSREG=<mode>	OK	AT+UIMSREG=1 OK
Test	AT+UIMSREG=?	+UIMSREG: (list of supported <mode>s) OK	+UIMSREG: (0,1) OK

8.3.3 Defined values

Parameter	Type	Description
<mode>	Number	Allowed values: • 0 (default value): deregister the IMS client from network • 1: register the IMS client to network

8.3.4 Notes

LARA-L6 / LARA-R6

- The command is supported only if the IMS is enabled (+UIMSCFG: 50,1).

8.4 IMS registration information +CIREG

+CIREG						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

8.4.1 Description

Configures the IMS registration information. Depending on the <n> parameter value a URC can be issued when the MT's IMS registration information changes:

- +CIREGU: <reg_info> if <n>=1
- +CIREGU: <reg_info>[,<ext_info>] if <n>=2

The read command provides the same information issued by the URC together with the current value of <n> parameter.

8.4.2 Syntax

Type	Syntax	Response	Example
Set	AT+CIREG=[<n>]	OK	AT+CIREG=1 OK
Read	AT+CIREG?	+CIREG: <n>,<reg_info>[,<ext_info>] OK	+CIREG: 1,1 OK
Test	AT+CIREG=?	+CIREG: (list of supported <n>s) OK	+CIREG: (0,1) OK
URC		+CIREGU: <reg_info>[,<ext_info>]	+CIREGU: 0

8.4.3 Defined values

Parameter	Type	Description
<n>	Number	Configures the reporting of changes in the MT's IMS registration information: • 0: reporting URC disabled • 1: reporting URC +CIREGU: <reg_info> enabled • 2: extended reporting URC +CIREGU: <reg_info>,<ext_info> enabled Allowed values: • LARA-L6 / LARA-R6 - 0, 1
<reg_info>	Number	Indicates the IMS registration status. The MT is seen as registered as long as one or more of its public user identities are registered with any of its contact addresses, see 3GPP TS 24.229 [130]. • 0: not registered • 1: registered The parameter shows whether one or more of the public user identities are registered
<ext_info>	Number	Numeric value in hexadecimal format. The range goes from 1 to FFFFFFFF. It is a sum of hexadecimal values, each representing a particular IMS capability of the MT. The MT can have IMS capabilities not covered by the below list. This parameter is not present if <reg_info>=0. • 1: RTP-based transfer of voice according to MMTEL, see 3GPP TS 24.173 [128]. This functionality can not be indicated if the UE is not available for voice over PS, see 3GPP TS 24.229 [130] • 2: RTP-based transfer of text according to MMTEL, see 3GPP TS 24.173 [128] • 4: SMS using IMS functionality, see 3GPP TS 24.341 [129] • 8: RTP-based transfer of video according to MMTEL, see 3GPP TS 24.173 [128] The hexadecimal values 10, 20, 40 and 80000 are reserved. It shows the status of the MT's IMS capabilities. For <ext_info>, all relevant values are always summarized and reported as a complete set of IMS capabilities in the URC.

8.4.4 Notes

LARA-L6 / LARA-R6

- The <ext_info> parameter is not supported.
- The command is supported only if the IMS is enabled (+UIMSCFG: 50,1).

8.5 Domain configuration for MO SMS messages +UISMS

+UISMS						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	NVM / OP	No	-	+CME Error

8.5.1 Description

Configures for routing the outgoing SMS messages either over IMS or not over IMS.

If the selected configuration is IMS, then IMS settings will have higher priority while sending messages, other 2G/3G settings for MO SMS (e.g. +CGSMS settings) will be ignored.

8.5.2 Syntax

Type	Syntax	Response	Example
Set	AT+UISMS=<mode>[,<sms_mandatory>]	OK	AT+UISMS=1 OK
Read	AT+UISMS?	+UISMS: <mode>[,<sms_mandatory>] OK	+UISMS: 1 OK
Test	AT+UISMS=?	+UISMS: (list of supported <mode>s)[,(list of supported <sms_mandatory>s)] OK	+UISMS: (0-1) OK

8.5.3 Defined values

Parameter	Type	Description
<mode>	Number	Allowed values: • 0: SMS messages are not sent over IMS • 1: SMS messages are preferably sent over IMS ☞ LARA-L6 / LARA-R6 For the factory-programmed value, see Mobile Network Operator profiles.
<sms_mandatory>	Number	Allowed values: • 0: SMS service support on current RPLMN (Registered PLMN) is not mandatory • 1: SMS service is required, PLMN reselection is triggered if SMS service is not available on current RPLMN ☞ LARA-L6 / LARA-R6 For the factory-programmed value, see Mobile Network Operator profiles.

8.5.4 Notes

LARA-L6 / LARA-R6

- After changing the <mode> parameter setting, reboot the module to make the new configuration effective.

- In case SMS messages cannot be successfully sent via IMS (e.g. due to interoperability issues), it is recommended to change the <mode> to 0 and retry.

9 Device lock

9.1 Enter PIN +CPIN

+CPIN						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	< 10 s	+CME Error

9.1.1 Description

Enter PIN. If no PIN request is pending, the corresponding error code is returned. If a wrong PIN is given three times, the PUK must be inserted in place of the PIN, followed by the <newpin> which replaces the old pin in the SIM.

9.1.2 Syntax

Type	Syntax	Response	Example
Set	AT+CPIN=<pin>[,<newpin>]	OK	AT+CPIN="0933" OK
Read	AT+CPIN?	+CPIN: <code> OK	+CPIN: SIM PIN OK
Test	AT+CPIN=?	OK	

9.1.3 Defined values

Parameter	Type	Description
<pin>, <newpin>	String	4-to-8 characters long string of decimal digits. If only PIN is required, <newpin> is not to be entered. If PUK is required, <pin> must be the PUK and <newpin>, the new PIN code, must be entered as well.
<code>	String	• READY: MT is not pending for any password • SIM PIN: MT is waiting SIM PIN to be given • SIM PUK: MT is waiting SIM PUK to be given • SIM PIN2: MT is waiting SIM PIN2 to be given • SIM PUK2: MT is waiting SIM PUK2 to be given • PH-NET PIN: MT is waiting network personalization password to be given • PH-NETSUB PIN: MT is waiting network subset personalization password to be given • PH-SP PIN: MT is waiting service provider personalization password to be given • PH-CORP PIN: MT is waiting corporate personalization password to be given • PH-SIM PIN: MT is waiting phone to SIM/UICC card password to be given

9.1.4 Notes

- The command needs the SIM module to work correctly
- If PIN is not inserted the following situation can occur:

Command	Response
AT+CMEE=2	OK
AT+COPS=0	+CME ERROR: SIM PIN required
AT+CMEE=0	OK
AT+COPS=0	ERROR

- To change the PIN the user must use the AT+CPWD="SC",<old_pin>,<new_pin> command (see +CPWD AT command for details). Example:

```
AT+CPWD="SC","1234","4321"
```

9.2 Facility lock +CLCK

+CLCK						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	Yes	Up to 3 min	+CME Error

9.2.1 Description

Locks, unlocks or interrogates an MT or a network facility <fac>. A password is normally needed to do such actions. When querying the status of a network service (<mode>=2) the information text response for "not active" case (<status>=0) is returned only if the service is not active for any <class>. Instead when querying the status of a network service (<mode>=2) asking for a specific <class>, the DUT sends a generic request. The command can be aborted if network facilities are set or interrogated.

For <fac> "PN", "PU", "PP", "PC" and "PS" only <mode>=0 and <mode>=2 (unlock and query status) are always supported.

For <fac> "PN", "PU", "PP", "PC" and "PS" <mode>=1 (lock status) is supported only if proper re-activation characteristic is enabled during personalization.

9.2.2 Syntax

Type	Syntax	Response	Example
Set	AT+CLCK=<fac>,<mode>[,<passwd>[,<class>]]	OK or +CLCK: <status>[,<class1>] [...] [+CLCK: <status>[,<class1>]] OK	AT+CLCK="SC",1,"0933" OK
Test	AT+CLCK=?	+CLCK: (list of supported <fac>s) OK	+CLCK: ("SC","PN","PU","PP","PC","PS","FD","AO","OI","OX","AI","IR","AB","AG","AC") OK

9.2.3 Defined values

Parameter	Type	Description
<fac>	String	Facility values. Allowed values (for the applicability to the module see Table 22): • "SC": SIM (PIN enabled/disabled) • "PN": Network Personalisation (see the 3GPP TS 22.022 [92]) • "PU": network sUbset Personalisation (see the 3GPP TS 22.022 [92]) • "PP": service Provider Personalisation (see the 3GPP TS 22.022 [92]) • "PC": Corporate Personalisation (see the 3GPP TS 22.022 [92]) • "PS": SIM/USIM Personalisation (see the 3GPP TS 22.022 [92]) • "FD": SIM fixed dialling phonebook feature o LARA-L6 / LARA-R6 - PIN2 is required if the PIN2 authentication has not been done during the current session • "AO": BAR (Bar All Outgoing Calls) • "OI": BOIC (Bar Outgoing International Calls)

Parameter	Type	Description
		• "OX": BOIC-exHC(Bar Outgoing International Calls except to Home Country) • "AI": BAIC (Bar All Incoming Calls) • "IR": BIC-Roam (Bar Incoming Calls when Roaming outside the home country) • "AB": All Barring services (applicable only for <mode>=0) • "AG": All outGoing barring services (applicable only for <mode>=0) • "AC": All inComing barring services (applicable only for <mode>=0) • "CS": CNTRL (lock CoNTRoL surface (e.g. phone keyboard)) (see the 3GPP TS 27.007 [75]) • "PF": Lock Phone to the very First inserted SIM/UICC card (see the 3GPP TS 27.007 [75]) • "NT": Barr incoming calls from numbers Not stored to TA memory (see the 3GPP TS 27.007 [75]) • "NM": Barr incoming calls from numbers Not stored to MT memory (see 3GPP TS 27.007 [75]) • "NS": Barr incoming calls from numbers Not stored to SIM/UICC memory (see the 3GPP TS 27.007 [75]) • "NA": Barr incoming calls from numbers Not stored in any memory (see the 3GPP TS 27.007 [75])
<mode>	Number	• 0: unlock • 1: lock • 2: query status
<status>	Number	• 0: not active • 1: active
<passwd>	String	Shall be the same as password specified for the facility from the MT user interface or with the +CPWD command
<class>	Number	Sum of numbers each representing a class of information. The default value is 7 (voice + data + fax): • 1: voice • 2: data • 4: FAX • 8: short message service • 16: data circuit sync • 32: data circuit async • 64: dedicated packet access • 128: dedicated PAD access

9.2.4 Notes

Module series	SC	PN	PU	PP	PC	PS	FD	AO	OI	OX	AI	IR	AB	AG	AC	CS	PF	NT	NM	NS	NA
LARA-L6 / LARA-R6	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x		x				

Table 22: Lock applicability (<fac> allowed values)

LARA-L6 / LARA-R6

- Reboot the module to make effective the lock/unlock configuration.
- The FDN check for PS data calls is not supported.

9.3 Change password +CPWD

+CPWD						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	Yes	Up to 3 min	+CME Error

9.3.1 Description

Sets a new password for the facility lock function defined by the +CLCK AT command. The command is abortable if a character is sent to the DCE during the command execution.

9.3.2 Syntax

Type	Syntax	Response	Example
Set	AT+CPWD=<fac>,<oldpwd>, <newpwd>	OK	AT+CPWD="SC","0933","0934" OK
Test	AT+CPWD=?	+CPWD: list of available (<fac>, <pwdlength>s) OK	+CPWD: ("SC",8),("P2",8),("AO",4), ("OI",4),("OX",4),("AI",4),("IR",4),("AB", 4),("AG",4),("AC",4) OK

9.3.3 Defined values

Parameter	Type	Description
<fac>	String	"P2" SIM PIN2; see the +CLCK command description for other values
<oldpwd>	String	Old password
<newpwd>	String	New password
<pwdlength>	Number	Length of password (digits)

9.3.4 Notes

- An error result code will be provided when attempting to change the PIN code if either the PIN is blocked or the PIN check is disabled through AT+CLCK command.

LARA-L6 / LARA-R6

- A detach from the cellular network is automatically performed in case the PIN is wrongly entered more than 3 times.

10 Phonebook

10.1 Select phonebook memory storage +CPBS

+CPBS						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	No	No	< 35 s	+CME Error

10.1.1 Description

Selects a phonebook memory storage for further use in phonebook related commands.

☞ The information text response of the test command depends on SIM dependent parameters (e.g. "EC").

10.1.2 Syntax

Type	Syntax	Response	Example
Set	AT+CPBS=<storage>[,<password>]	OK	AT+CPBS="SM" OK
Read	AT+CPBS?	+CPBS: <storage>[,<used>,<total>] OK	+CPBS: "SM",25,150 OK
Test	AT+CPBS=?	+CPBS: (list of supported <storages>s) OK	+CPBS: ("SM","FD","LD","SN","EC","ON","BL") OK

10.1.3 Defined values

Parameter	Type	Description
<storage>	String	Phonebook memory storage: • "SM": SIM phonebook (depending on SIM card, it may not be available when the FDN is enabled) • "AP": USIM application phonebook (depending on SIM card, it may not be available when the FDN is enabled) • "FD": SIM fixed dialling phonebook (only valid with PIN2) • "LD": SIM last-dialling phonebook • "BN": SIM barred-dialling-number phonebook (only valid with PIN2) • "SN": SIM service-dialling-number phonebook (read only) • "EC": SIM emergency-call-codes phonebook (read only) • "ON": Own number phone-book (read/write); the content is also shown by +CNUM • "BL": Blacklist phonebook (delete only) • "EN": SIM/USIM (or MT) emergency number • "DC": MT dialed calls list (the +CPBW AT command may not be applicable for this storage) • "MC": missed call list from NV • "ME": ME phonebook • "RC": received call list from NV For the values allowed by each module series, see Table 23.
<password>	String	PIN2-code required when selecting PIN2-code locked <storage>s above (e.g. "FD"), if the PIN2 is applicable
<used>	Number	Indicates the number of used locations in selected memory
<total>	Number	Indicates the total number of locations in selected memory

10.1.4 Notes

Module series	"SM"	"AP"	"FD"	"LD"	"BN"	"SN"	"EC"	"ON"	"BL"	"EN"	"DC"	"MC"	"ME"	"RC"
LARA-L6 / LARA-R6	•									•	•	•	•	•

Table 23: Phonebook memory storage (<storage>) allowed values

- <storage>="SM" and <storage>="AP" definitions from 3GPP TS 27.007 [75]:
  - "SM": SIM/UICC phonebook. In the currently selected card slot, if a SIM card is present or if a UICC with an active GSM application is present, the EF_{ADN} under $DF_{Telecom}$ is selected. If a UICC with an active USIM application is present, the global phonebook, $DF_{PHONEBOOK}$ under $DF_{Telecom}$ is selected.
  - "AP": selected application phonebook. In the currently selected card slot, if a UICC with an active USIM application is present, the application phonebook, $DF_{PHONEBOOK}$ under ADF_{USIM} is selected.

LARA-L6 / LARA-R6

- By default "ME" storage is selected.

10.2 Read phonebook entries +CPBR

+CPBR						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	No	No	< 35 s	+CME Error

10.2.1 Description

Returns phonebook entries in location number range <index1> ... <index2> from the current phonebook memory storage selected with +CPBS. If <index2> is left out, only location <index1> is returned. Entry fields returned are:

- location number <indexn>
- phone number stored there <number> of format <type>
- text <text> associated with the number
- <group> indicating a group the entry may belong to (if the selected phonebook supports it)
- <adnumber> an additional number (of format <adtype>) (if the selected phonebook supports it)
- <secondtext> a second text field associated with the number (if the selected phonebook supports it)
- <email> an email field (if the selected phonebook supports it)

No text lines are returned for empty (but available) locations.

If the set command is issued to retrieve an entry with an empty <number> from the phonebook:

- LARA-L6 / LARA-R6 - the entry is returned and the displayed <type> is always 129.

10.2.2 Syntax

Type	Syntax	Response	Example
Set	AT+CPBR=<index1>[,<index2>]	[+CPBR: <index1>,<number>,<type>,<text>[,<group>[,<adnumber>[,<adtype>[,<secondtext>[,<email>[,<sip_uri>[,<tel_uri>]]]]]] [...] [+CPBR: <index2>,<number>,<type>,<text>[,<group>[,<adnumber>[,<adtype>[,<secondtext>[,<email>[,<sip_uri>[,<tel_uri>]]]]]]] OK	AT+CPBR=1,4 +CPBR: 1,"040123456",129,"RossiCarlo" +CPBR: 2,"040123457",129,"RossiMario" +CPBR: 4,"040123458",129,"RossiGiuseppe" OK

Type	Syntax	Response	Example
Test	AT+CPBR=?	+CPBR: (list of supported <index>s), <nlength>,<tlength>[,<glength>[, <slength>[,<elength>[,<siplength>[, <tellength>]]]]] OK	+CPBR: (1-100),20,18 OK

10.2.3 Defined values

Parameter	Type	Description
<index1>, <index2>, <index>	Number	Range of location numbers of phonebook memory
<number>	String	Phone number of format <type>
<type>	Number	Type of address octet (see the 3GPP TS 24.008 [84] subclause 10.5.4.7)
<text>	String	Text associated with the phone number of maximum length <tlength>
<group>	String	Group the phonebook entry may belong to, of maximum length <glength>
<adnumber>	String	Additional phone number of format <adtype>
<adtype>	Number	Type of address octet (see the 3GPP TS 24.008 [84] subclause 10.5.4.7)
<secondtext>	String	Second text associated with the number, of maximum length <slength>
<email>	String	Email of maximum length <elength>
<sip_uri>	String	Field of maximum length <siplength>; character set as specified by the +CSCS AT command
<tel_uri>	String	Phone number of maximum length <tellength>; character set as specified by the +CSCS AT command
<nlength>	Number	Maximum length of field <number>
<tlength>	Number	Maximum length of field <text>
<glength>	Number	Maximum length of field <group>
<slength>	Number	Maximum length of field <secondtext>
<elength>	Number	Maximum length of field <email>
<siplength>	Number	Maximum length of field <sip_uri>
<tellength>	Number	Maximum length of field <tel_uri>

10.2.4 Notes

- The <sip_uri>, <tel_uri>, <siplength> and <tellength> parameters are not supported.

10.3 Find phonebook entries +CPBF

+CPBF						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	No	No	< 35 s	+CME Error

10.3.1 Description

Returns the phonebook entries from the current phonebook memory storage (previously selected by +CPBS), whose alphanumeric field <text> starts with string <findtext>.

Entry fields returned are:

- location number <indexn>
- phone number stored there <number> of format <type>
- text <text> associated with the number
- <group> indicating a group the entry may belong to (if the selected phonebook supports it)
- <hidden> indicating if the entry is hidden (if the selected phonebook supports hidden entries)
- <adnumber> an additional number (of format <adtype>) (if the selected phonebook supports it)
- <secondtext> a second text field associated with the number (if the selected phonebook supports it)
- <email> an email field (if the selected phonebook supports it)

☞ The string <findtext> is case sensitive.

10.3.2 Syntax

Type	Syntax	Response	Example
Set	AT+CPBF=<findtext>	[+CPBF: <index1>,<number>,<type>,<text>[,<hidden>][,<group>[,<adnumber>[,<adtype>[,<secondtext>[,<email>[,<sip_uri>[,<tel_uri>]]]]]]] [...] [+CPBF: <index2>,<number>,<type>,<text>[,<hidden>][,<group>[,<adnumber>[,<adtype>[,<secondtext>[,<email>[,<sip_uri>[,<tel_uri>]]]]]]] OK	AT+CPBF="u-blox" OK
Test	AT+CPBF=?	+CPBF: [<nlength>],[<tlength>][,<glength>[,<slength>[,<elength>[,<siplength>[,<tellength>]]]]] OK	+CPBF: 40,18 OK

10.3.3 Defined values

Parameter	Type	Description
<index1>, <index2>, <index>	Number	Location numbers of phonebook memory
<number>	String	Phone number of format <type>
<type>	Number	Type of address octet (see the 3GPP TS 24.008 [84] subclause 10.5.4.7)
<findtext>,<text>	String	Maximum length <tlength>
<group>	String	Group the phonebook entry may belong to, of maximum length <glength>
<hidden>	Number	Indicates if the entry is hidden or not: • 0 (default value): phonebook entry not hidden • 1: phonebook entry hidden
<adnumber>	String	Additional phone number of format <adtype>
<adtype>	Number	Type of address octet (see the 3GPP TS 24.008 [84] subclause 10.5.4.7)
<secondtext>	String	Second text associated with the number, of maximum length <slength>
<email>	String	Email of maximum length <elength>
<sip_uri>	String	Field of maximum length <siplength>; character set as specified by the +CSCS AT command
<tel_uri>	String	Phone number of maximum length <tellength>; character set as specified by the +CSCS AT command
<nlength>	Number	Maximum length of field <number>
<tlength>	Number	Maximum length of field <text>
<glength>	Number	Maximum length of field <group>
<slength>	Number	Maximum length of field <secondtext>
<elength>	Number	Maximum length of field <email>
<siplength>	Number	Maximum length of field <sip_uri>
<tellength>	Number	Maximum length of field <tel_uri>

10.3.4 Notes

- The <sip_uri>, <tel_uri>, <siplength> and <tellength> parameters are not supported.
- The <hidden> parameter is not applicable, since "AP" phonebook is not supported by +CPBS command (see the 3GPP TS 27.007 [75]).

10.4 Write phonebook entry +CPBW

+CPBW						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	No	No	< 35 s	+CME Error

10.4.1 Description

Stores the phonebook entry in the current phonebook memory storage (selectable with the +CPBS AT command) at the location specified by the <index> field. Other entry fields are:

- the phone number <number> (in the <type> format)
- <text> text associated with the number
- <group> indicating a group the entry may belong to
- <adnumber> an additional number (of format <adtype>)
- <secondtext> a second text field associated with the number
- <email> an email field

If all the fields are omitted, except for <index>, the corresponding phonebook entry is deleted. If the <index> field is left out, but the <number> is given, the entry is written in the first free location in the current phonebook memory storage.

If no phonebook entries are available the information text response of the test command will be +CPBW: 0 <CR><LF>OK

LARA-L6 / LARA-R6
When trying to add an entry in the SM storage, if the entry includes one or more parameters for which there is no space available in the SIM, the entry will not be stored and an error result code will be returned.

If the <number> and the <type> parameters are omitted but the <index> and at least one other parameter is provided (e.g. <AT+CPBW=<index>,,,<text>):

- LARA-L6 / LARA-R6 - an entry with no number and <type>=129 is stored in the phonebook. Providing an empty string "" instead of omitting the <number> parameter is equivalent.

<group>, <adnumber>, <adtype>, <secondtext>, <email> parameters are not supported by 2G SIM; but they could be supported by USIM. Not all the fields are always supported on the used USIM: to verify which fields are supported see the test command.

When BL (blacklist) phonebook is selected, only <index>=0 is accepted.

The set command is not applicable for the storages "SN", "EC" (read only storages), while it is applicable to "LD" storage only to delete an item.

10.4.2 Syntax

Type	Syntax	Response	Example
Set	AT+CPBW=[<index>][,<number>[,<type>[,<text>[,<group>[,<adnumber>[,<adtype>[,<secondtext>[,<email>[,<sip_uri>[,<tel_uri>[,<hidden>]]]]]]]]]]	[+CPBW: <written_index>] OK	AT+CPBW=5,"091137880",,"u-blox" OK AT+CPBW=,"091137880",,"u-blox" +CPBW: 5 OK
Read	AT+CPBW?	+CPBW: <written_index> OK	+CPBW: 1 OK
Test	AT+CPBW=?	+CPBW: (list of supported <index>s),<nlength>,(list of supported <type>s),<tlength>[,	+CPBW: (1-250),40,(129,145),18 OK

Type	Syntax	Response	Example
		<glength>[,<slength>[,<elength>[,<siplength>[,<tellength>]]]] OK	
		+CPBW: 0 OK	+CPBW: 0 OK

10.4.3 Defined values

Parameter	Type	Description
<index>	Number	Location numbers of phonebook memory
<number>	String	Phone number of format <type>
<type>	Number	Type of address; default is 145 when dialling string includes '+', otherwise 129
<text>	String	Text associated with the number. The maximum length is <tlength>
<group>	String	Group the phonebook entry may belong to, of maximum length <glength>
<adnumber>	String	Additional phone number of format <adtype>
<adtype>	Number	Type of address; default is 145 when dialling string includes '+', otherwise 129
<secondtext>	String	Second text associated with the number, of maximum length <slength>
<email>	String	Email of maximum length <elength>
<hidden>	Number	Indicates if the entry is hidden or not: • 0 (default value): phonebook entry not hidden • 1: phonebook entry hidden
<sip_uri>	String	Field of maximum length <siplength>; character set as specified by the +CSCS AT command
<tel_uri>	String	Phone number of maximum length <tellength>; character set as specified by the +CSCS AT command
<nlength>	Number	Maximum length of field <number>
<tlength>	Number	Maximum length of field <text>
<glength>	Number	Maximum length of field <group>
<slength>	Number	Maximum length of field <secondtext>
<elength>	Number	Maximum length of field <email>
<siplength>	Number	Maximum length of field <sip_uri>
<tellength>	Number	Maximum length of field <tel_uri>
<written_index>	Number	Last location number <index> of the written phonebook entry

10.4.4 Notes

- The <sip_uri>, <tel_uri>, <siplength> and <tellength> parameters are not supported.
- The <hidden> parameter is not applicable, since "AP" phonebook is not supported by +CPBS AT command (see the 3GPP TS 27.007 [75]).

11 Short Messages Service

11.1 Introduction

For a complete overview of SMS, see 3GPP TS 23.040 [80] and 3GPP TS 27.005 [86].

In case of errors all the SMS related AT commands return an error result code as defined in Appendix A.2.

11.1.1 Class 0 SMS

The storing of a class 0 SMS depends on the module series:

- LARA-L6 / LARA-R6 - all incoming SMSes stored in <mem3> (preferred memory for storing the received SMS, see +CPMS) with increasing index.

11.1.2 <index> parameter range

The <index> parameter range depends on the memory storage type:

ME (ME message), **SM** ((U)SIM message) **MT** (ME + SM):

- LARA-L6 / LARA-R6
  - Values between 0 and 255: SMS stored in ME.
  - Values between 0 and n-1: SMS stored in SIM (n is the number of records of the EF_{SMS} file in the SIM card used).
  - MT storage is not supported.

BM (Broadcast Message):

- LARA-L6 / LARA-R6 - Broadcast Message storage is not supported.

SR (Status Report):

- LARA-L6 / LARA-R6 - values between 0 and m-1: Status Report messages stored in the SIM (m is the number of records of the EF_{SMSR} file in the SIM card). A Status Report message is stored in EF_{SMSR} file if, and only if, the EF_{SMSR} file is present on the SIM card and the MO SMS that requested the report is still present in EF_{SMS}. In case the MO SMS is not present in EF_{SMS}, and the <ds> parameter of the +CNMI AT command is set to 2, the URC indication corresponding to an incoming Status Report will always be **+CDSI: "SR",x** but **x** will indicate the position in memory (RAM) where it has been temporarily stored. This memory cannot be recalled for actually reading the Status Reports stored in it, but it is only used to report their reception.

11.1.3 Limitations

The following limitations apply related to the SMS usage:

Single SMS

- 160 characters if <dcs>= "GSM 7 bit default alphabet data"
- 140 octets if <dcs>= "8-bit data"
- 70 UCS2 characters (2 bytes for each one) if <dcs>="16-bit uncompressed UCS2 data"

Concatenated SMS (where supported) - "8-bit reference number" type

- 153 characters if <dcs>= "GSM 7 bit default alphabet data"
- 134 octets if <dcs>= "8-bit data"
- 67 UCS2 characters (2 bytes for each one) if <dcs>="16-bit uncompressed UCS2 data"

Concatenated SMS (where supported) - "16-bit reference number" type

- The limits are the same as the "8-bit reference number" type, but are decreased by one unit.

A concatenated SMS can have as many as 255 parts.

11.2 Select message service +CSMS

+CSMS						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	-	+CMS Error

11.2.1 Description

Selects the <service> message service. It returns the types of messages supported by the MT.

11.2.2 Syntax

Type	Syntax	Response	Example
Set	AT+CSMS=<service>	+CSMS: <mt>,<mo>,<bm> OK	AT+CSMS=1 +CSMS: 1,1,1 OK
Read	AT+CSMS?	+CSMS: <service>,<mt>,<mo>,<bm> OK	+CSMS: 0,1,1,1 OK
Test	AT+CSMS=?	+CSMS: (list of supported <service>s) OK	+CSMS: (0-1) OK

11.2.3 Defined values

Parameter	Type	Description
<service>	Number	Allowed values: • 0: see 3GPP TS 23.040 [80] and 3GPP TS 23.041 [81]; syntax of AT commands is compatible with 3GPP TS 27.005 [86] phase 2; phase 2+ features may be supported if no new command syntax is required • 1: see 3GPP TS 23.040 [80] and 3GPP TS 23.041 [81]; syntax of AT commands is compatible with 3GPP TS 27.005 [86] phase 2+
<mt>	Number	Mobile terminated messages: • 0: not supported • 1: supported
<mo>	Number	Mobile originated messages: • 0: not supported • 1: supported
<bm>	Number	Broadcast messages: • 0: not supported • 1: supported

11.2.4 Notes

LARA-L6 / LARA-R6

- To activate correctly the manual acknowledge (see +CNMA AT command), set <service> to 1 before changing the settings of the +CNMI AT command to route the messages directly to TE.
- Set <service> to 1 to acknowledge an incoming message (either SMS or Status Report) with +CNMA AT command.
- If <service> is changed from 1 to 0 and one or more parameters of the +CNMI command are in phase 2+, switch the +CNMI parameters to phase 2 specific values before entering phase 2.

11.3 Preferred message storage +CPMS

+CPMS						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	NVM	No	< 10 s	+CMS Error

11.3.1 Description

Selects memory storages <mem1>, <mem2> and <mem3>. If the chosen storage is supported by the MT but not suitable, the +CMS ERROR: <err> error result code should be returned.

☞ See the test command for the supported memory types for each memory storage.

11.3.2 Syntax

Type	Syntax	Response	Example
Set	AT+CPMS=<mem1>[,<mem2>[,<mem3>]]	AT+CPMS: <used1>,<total1>,<used2>,<total2>,<used3>,<total3> OK	AT+CPMS="BM","SM","SM" +CPMS: 0,5,0,50,0,50 OK
Read	AT+CPMS?	+CPMS: <mem1>,<used1>,<total1>,<mem2>,<used2>,<total2>,<mem3>,<used3>,<total3> OK	+CPMS: "MT",4,350,"MT",4,350,"MT",4,350 OK
Test	AT+CPMS=?	+CPMS: (list of supported <mem1>s),(list of supported <mem2>s),(list of supported <mem3>s) OK	+CPMS: ("MT","ME","SM","BM","SR"),("MT","ME","SM"),("MT","ME","SM") OK

11.3.3 Defined values

Parameter	Type	Description
<mem1>	String	Memory used to read and delete messages. The supported values may vary: • "ME": ME message storage • "SM": (U)SIM message storage • "MT": "ME"+"SM", "ME" preferred • "BM": Broadcast Message storage • "SR": Status Report storage The default value is the currently set value. The factory-programmed value depends on the module series: see Notes for more details.
<mem2>	String	Memory used to write and send SMS. The supported values may vary: • "ME": ME message storage • "SM": (U)SIM message storage • "MT": "ME"+"SM", "ME" preferred The default value is the currently set value. The factory-programmed value depends on the module series: see Notes for more details.
<mem3>	String	Memory preferred to store the received SMS. The supported values may vary: • "ME": ME message storage • "SM": (U)SIM message storage • "MT": "ME"+"SM", "ME" preferred The default value is the currently set value. The factory-programmed value depends on the module series: see Notes for more details.
<used1>	Number	Number of used message locations in <mem1>
<total1>	Number	Total number of message locations in <mem1>
<used2>	Number	Number of used message locations in <mem2>
<total2>	Number	Total number of message locations in <mem2>

Parameter	Type	Description
<used3>	Number	Number of used message locations in <mem3>
<total3>	Number	Total number of message locations in <mem3>

11.3.4 Notes

- LARA-L6 / LARA-R6 - the factory-programmed value is "ME", "ME" and "ME".

LARA-L6 / LARA-R6

- "MT" message storage is not supported.

11.4 Preferred message format +CMGF

+CMGF						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	Profile	No	-	+CMS Error

11.4.1 Description

Indicates to the MT which input and output format of messages shall be used.

11.4.2 Syntax

Type	Syntax	Response	Example
Set	AT+CMGF=[<mode>]	OK	AT+CMGF=1 OK
Read	AT+CMGF?	+CMGF: <mode> OK	+CMGF: 1 OK
Test	AT+CMGF=?	+CMGF: (list of supported <mode>s) OK	+CMGF: (0-1) OK

11.4.3 Defined values

Parameter	Type	Description
<mode>	Number	Indicates the format of messages used with send, list, read and write commands and URCs resulting from receiving SMSes messages: • 0: PDU mode • 1: text mode The factory-programmed value is: • LARA-L6 / LARA-R6 - 0

11.4.4 Notes

LARA-L6 / LARA-R6

- The command setting is not stored in the personal profile.

11.5 Save settings +CSAS

+CSAS						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CMS Error

11.5.1 Description

Saves active message service settings from the current active memory (RAM) to non-volatile memory (NVM). The settings related to the +CSCA (the current SMSC address stored in RAM), +CSMP and +CSCB commands are stored in a specific SMS profile (only one profile is available).

11.5.2 Syntax

Type	Syntax	Response	Example
Set	AT+CSAS[=<profile>]	OK	AT+CSAS OK
Test	AT+CSAS=?	+CSAS: (list of supported <profile>s) OK	+CSAS: (0) OK

11.5.3 Defined values

Parameter	Type	Description
<profile>	Number	Specific SMS profile index where to store the active message settings. The factory-programmed value is 0.

11.6 Restore settings +CRES

+CRES						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	< 10 s	+CMS Error

11.6.1 Description

Restores message service settings from a non-volatile memory (NVM) to the current active memory (RAM). The settings related to the +CSCA (the SMSC address in the SIM card is also updated), +CSMP and +CSCB commands are read from a specific SMS profile (only one profile is available).

11.6.2 Syntax

Type	Syntax	Response	Example
Set	AT+CRES[=<profile>]	OK	AT+CRES=0 OK
Test	AT+CRES=?	+CRES: (list of supported <profile>s) OK	+CRES: (0) OK

11.6.3 Defined values

Parameter	Type	Description
<profile>	Number	Specific SMS profile index from where to read the message service settings

11.7 Show text mode parameters +CSDH

+CSDH						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	-	+CMS Error

11.7.1 Description

Controls whether detailed SMS header information is shown in text mode (see the AT+CMGF=1 command).

This affects the responses of the +CMGR, +CMGL, +CSMP, +CSCA AT commands and the +CMT, +CMTI, +CDS, +CDSI, +CBM, +CBMI (see +CNMI) URCs.

11.7.2 Syntax

Type	Syntax	Response	Example
Set	AT+CSDH=[<show>]	OK	AT+CSDH=1 OK
Read	AT+CSDH?	+CSDH: <show> OK	+CSDH: 0 OK
Test	AT+CSDH=?	+CSDH: (list of supported <show>s) OK	+CSDH: (0-1) OK

11.7.3 Defined values

Parameter	Type	Description
<show>	Number	Allowed values: • 0 (default): do not show detailed SMS header information • 1: show detailed SMS header information

11.8 New message indication +CNMI

+CNMI						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	Profile	No	-	+CMS Error

11.8.1 Description

Selects the procedure to indicate the reception of a new SMS if the MT is active (the DTR signal is ON). If the MT is inactive (the DTR signal is OFF), the message reception should be done as specified in 3GPP TS 23.038 [79].

The +UCMT URC notifies the SMS-DELIVER status for 3GPP2 Mobile Terminated SMSes; it is equivalent to +CMT but valid only for 3GPP2 SMS (i.e. 3GPP2 SMS over IMS received on Verizon MNO).

11.8.2 Syntax

Type	Syntax	Response	Example
Set	AT+CNMI=[<mode>[,<mt>[,<bm>[,<ds>[,<bfr>]]]]]	OK	AT+CNMI=1,1 OK
Read	AT+CNMI?	+CNMI: <mode>,<mt>,<bm>,<ds>,<bfr> OK	+CNMI: 0,0,0,0,0 OK
Test	AT+CNMI=?	+CNMI: (list of supported <mode>s),(list of supported <mt>s),(list of	+CNMI: (0-2),(0-3),(0-3),(0-2),(0-1) OK

Type	Syntax	Response	Example
		supported <bm>s),(list of supported <ds>s),(list of supported <bfr>s) OK	
URC		+CMTI: <mem>,<index>	+CMTI: "SM",5
URC		**Text mode (+CMGF=1):** +CMT: <oa>,[<alpha>], <scts>[,<tooa>,<fo>,<pid>, <dcs>,<sca>,<tosca>, <length>]<CR><LF><data>	+CMT: "+393475234652",,"14/11/21,11:58:23+01" Hello world
		PDU mode (+CMGF=0): +CMT: ,<length><CR><LF><pdu>	
URC		**Text mode (+CMGF=1):** +UCMT: <message_id>, <oa>,<scts>,[<priority>], [<privacy>],[<callback_number>], <encoding>,[<status>],[<num_ sms>,<part>,<reference>], <length><CR><LF><text>	+UCMT: 1,+1231241241,"18:02:28+08",,,,2,,,,,6 Hello!
		PDU mode (+CMGF=0): +UCMT: <pdu_ length><CR><LF><pdu>	
URC		+CBMI: <mem>,<index>	+CBMI: "BM",48
URC		**Text mode (+CMGF=1):** +CBM: <sn>,<mid>,<dcs>,<page>, <pages><CR><LF><data>	+CBM: 271,1025,1,1,1 The quick brown fox jumps over the lazy dog 0123456789
		PDU mode (+CMGF=0): +CBM: <length><CR><LF><pdu>	
URC		+CDSI: <mem>,<index>	+CDSI: "MT",2
URC		**Text mode (+CMGF=1):** +CDS: <fo>,<mr>,[<ra>],[<tora>], <scts>,<dt>,<st>	+CDS: 6,202,"+393492323583",145,"14/07/25,13:07:16+02","14/07/25,16:35:44+02",0
		PDU mode (+CMGF=0): +CDS: <length><CR><LF><pdu>	

11.8.3 Defined values

Parameter	Type	Description
<mode>	Number	Controls the processing of URCs specified within this command: • 0 (default value): buffer URCs in the MT; if the MT buffer is full, the oldest indication may be discarded and replaced with the new received indications (ring buffer) • 1 (factory-programmed value): discard indication and reject new received message URCs when MT-DTE link is reserved; otherwise forward them directly to the DTE • 2: buffer URCs in the MT when the serial link is busy (e.g. data-transfer); otherwise forward them directly to the DTE • 3: forward URCs directly to the TE. TA-TE link specific inband technique used to embed result codes and data when MT is in on-line data mode
<mt>	Number	Specifies the rules for managing the received SMS according the message's Data Coding Scheme (DCS): • 0 (default and factory-programmed value): No SMS-DELIVER indications are routed to the TE • 1: if SMS-DELIVER is stored in the MT, indication of the memory location is routed to the DTE using the +CMTI URC

Parameter	Type	Description
		• 2: SMS-DELIVER (except class 2 SMS) are routed directly to the DTE (but not saved in the module file system or SIM memory) using the +CMT URC. If MT has its own display device then class 0 SMS and SMS in the message waiting indication group (discard message) may be copied to both MT display and to DTE. In this case MT shall send the acknowledgement to the network. Class 2 SMSs and messages in the message waiting indication group (storage message) result in indication as defined in <mt>=1 • 3: Class 3 SMS-DELIVERs are routed directly to DTE using URCs defined in <mt>=2. Messages of other data coding schemes result in indication as defined in <mt>=1
<bm>	Number	Specifies the rules for managing the received Cell Broadcast messages (CBM): • 0 (default and factory-programmed value): no CBM indications to the DTE • 1: if the CBM is stored in the MT, an indication of the used memory location is routed to DTE using the +CBMI URC • 2: new CBMs are routed directly to the DTE using the +CBM URC • 3: class 3 CBMs are routed directly to DTE using URCs defined in <bm>=2. If CBM storage is supported, messages of other classes result in indication as defined in <bm>=1
<ds>	Number	Specifies the rules for managing the Status Report messages: • 0 (default and factory-programmed value): no SMS-STATUS-REPORTs are routed to the DTE • 1: SMS-STATUS-REPORTs are routed to the DTE using the +CDS URC • 2: if SMS-STATUS-REPORT is stored in the MT, the indication of the memory location is routed to the DTE using the +CDSI URC
<bfr>	Number	Controls the buffering of URCs: • 0 (default and factory-programmed value): MT buffer of URCs defined within this command is flushed to the DTE when <mode> 1...3 is entered (OK final result code shall be given before flushing the codes). • 1: MT buffer of URCs defined within this command is cleared when <mode> 1...3 is entered
<mem>	String	Same as defined in +CPMS Defined Values
<index>	Number	Storage position
<length>	Number	Two meanings: • in text mode: number of characters • in PDU mode: PDU's length in octets without the Service Center's address. In example: 0391214301000381 66F6000004E374F80D: this is a PDU with Service Center's number +1234, that generates the address 03912143 (4 octets). Thus in this case <length>=13.
<pdu>	String	Protocol data unit: each 8-bit octet is presented as two IRA character long hexadecimal numbers, e.g. octet with integer value 42 is presented to TE as two characters 2A (IRA 50 and 65)
<oa>	String	Originator address
<scts>	String	Service center time stamp in time-string format, see the <dt>
<data>	String	In the case of SMS: 3GPP TS 23.040 [80] TP-User-Data in text mode responses; format: • if <dcs> indicates that 3GPP TS 23.038 [79] GSM 7 bit default alphabet is used: o if TE character set other than "HEX" (see the +CSCS command in 3GPP TS 27.007 [75]): ME/TA converts GSM alphabet into current TE character set according to rules of Annex A o if TE character set is "HEX": ME/TA converts each 7-bit character of GSM 7 bit default alphabet into two IRA character long hexadecimal number (e.g. character Æ (GSM 7 bit default alphabet 28) is presented as 1C (IRA 49 and 67)) • if <dcs> indicates that 8-bit or UCS2 data coding scheme is used: ME/TA converts each 8-bit octet into two IRA character long hexadecimal number (e.g. octet with integer value 42 is presented to TE as two characters 2A (IRA 50 and 65)) In the case of CBS: 3GPP TS 23.041 [81] CBM Content of Message in text mode responses; format: • if <dcs> indicates that 3GPP TS 23.038 [79] GSM 7 bit default alphabet is used:

Parameter	Type	Description
		o if TE character set other than "HEX" (see the +CSCS in 3GPP TS 27.007 [75]): ME/TA converts GSM alphabet into current TE character set according to rules of Annex A o if TE character set is "HEX": ME/TA converts each 7-bit character of the GSM 7 bit default alphabet into two IRA character long hexadecimal number • if <dcs> indicates that 8-bit or UCS2 data coding scheme is used: ME/TA converts each 8-bit octet into two IRA character long hexadecimal number
<sn>	Number	CBM serial number
<mid>	Number	CBM message identifier
<dcs>	Number	Data Coding Scheme
<page>	Number	CBM Page Parameter bits 4-7 in integer format as described in 3GPP TS 23.041 [81]
<pages>	Number	CBM Page Parameter bits 0-3 in integer format as described in 3GPP TS 23.041 [81]
<fo>	Number	First octet of the SMS TPDU (see 3GPP TS 23.040 [80])
<mr>	Number	Message reference
<ra>	String	Recipient address field
<tora>	Number	Type of address of <ra> - octet
<dt>	String	Discharge time in format "yy/MM/dd,hh:mm:ss+zz"; the time zone is expressed in steps of 15 minutes. The range goes from -48 to +56
<st>	Number	Status of a SMS STATUS-REPORT
<message_id>	Number	Message-ID of the 3GPP2 SMS
<priority>	Number	3GPP2 priority: • 0: normal • 1: interactive • 2: urgent • 3: emergency
<privacy>	Number	3GPP2 privacy: • 0: not restricted • 1: restrictive • 2: confidential • 3: secret
<callback_number>	String	Callback number
<encoding>	Number	Text encoding: • 0: octet, unspecified • 2: ASCII7 • 3: IA5 • 4: UCS2 • 8: ISO 8859-1 • 9: GSM7
<num_sms>	Number	Total number of SMS
<part>	Number	Fragment part number
<reference>	Number	3GPP2 reference ID

11.8.4 Notes

LARA-L6 / LARA-R6

- The command setting is not stored in the personal profile.
- <mode> = 3 is not supported.
- MT 3GPP2 SMS are not saved, they can only be displayed by +UCMT URC.
- The +UCMT URC is enabled only if <mode>=1 and <mt>=2
- The +UCMT URC parameters <priority>,<privacy>,<callback_number>,<encoding>,<status>,<num_sms>,<part>,<reference> are not supported.
- The <ds> parameter can be set to 1 only if <mode>=1.
- The <mt> parameter can be set to 2 or 3 only if <mode>=1. If <mode>=2 or 3, then the <mt> parameter can only be 0 or 1.
- <bm> = 1 and <bm> = 3 are not supported.

11.9 New message acknowledgement to MT +CNMA

+CNMA						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	Appendix B.4	+CMS Error

11.9.1 Description

Confirms the reception of a new message (SMS-DELIVER or SMS-STATUS-REPORT) which is routed directly to the TE (see the +CNMI command). This acknowledgement command shall be used when +CSMS parameter <service> equals 1. The MT shall not send another +CMT or +CDS (see the +CNMI command) unsolicited result codes to the TE before the previous one is acknowledged. If the MT does not get acknowledgement within required time (network timeout), the MT should respond as specified in 3GPP TS 24.011 [85] to the network. The MT shall automatically disable routing to the TE by setting both <mt> and <ds> values of +CNMI to zero. If the command is executed, but no acknowledgement is expected, or some other MT related error occurs, the +CMS ERROR: <err> error result code is returned.

In PDU mode, it is possible to send either positive (RP-ACK) or negative (RP-ERROR) acknowledgement to the network. The <n> parameter defines which one will be sent. Optionally (when <length> is greater than zero) an acknowledgement TPDU (SMS-DELIVER-REPORT for RP-ACK or RP-ERROR) may be sent to the network. The entering of PDU is done similarly as specified in +CMGS command, except that the format of<ackpdu> is used instead of <pdu> (i.e. SMSC address field is not present). The PDU shall not be bounded by double quotes.

LARA-L6 / LARA-R6
The "+CMS ERROR: no +CNMA acknowledgement expected" error result code is issued upon expiry of TR2M timer.

11.9.2 Syntax

Type	Syntax	Response	Example
Set	**Text mode (+CMGF=1):** AT+CNMA	OK	AT+CNMA OK
	PDU mode (+CMGF=0): AT+CNMA[=<n>[,<length> [PDU is given<Ctrl-Z>/<ESC>]]]	OK	AT+CNMA=1,5 >0007000000 <Ctrl-Z> OK
Test	AT+CNMA=?	**Text mode (+CMGF=1):** OK	OK
		PDU mode (+CMGF=0): +CNMA: (list of supported <n>s) OK	+CNMA: (0-2) OK

11.9.3 Defined values

Parameter	Type	Description
<n>	Number	Allowed values: • 0: the command operates similarly as defined for the text mode • 1: sends RP-ACK (or buffered result code received correctly) • 2: sends RP-ERROR (if PDU is not given, ME/TA shall send SMS-DELIVER-REPORT with 3GPP TS 23.040 [80] TP-FCS value set to 'FF' (unspecified error cause))
<length>	Number	PDU's length in octets without the Service Center's address

11.10 Select service for MO SMS messages +CGSMS

+CGSMS						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	NVM	No	-	+CME Error

11.10.1 Description

Specifies the service (PS or CS) or service preference that the MT will use to send MO SMS messages.

In particular:

- In 2G RAT, PS service means GPRS and CS service means transmission on GSM dedicated channels.
- In 3G RAT, PS service means transmission on PS domain SRB (Signalling Radio Bearer) and CS service means transmission on CS domain SRB; SRB can be mapped to several UMTS transport channels, e.g. RACH/FACH or DCH.
- In 4G RAT, PS service means IMS messaging on EPS bearers and CS service means transmission on SGs (Signalling Gateways).

11.10.2 Syntax

Type	Syntax	Response	Example
Set	AT+CGSMS=[<service>]	OK	AT+CGSMS=1 OK
Read	AT+CGSMS?	+CGSMS: <service> OK	+CGSMS: 1 OK
Test	AT+CGSMS=?	+CGSMS: (list of supported <service>s) OK	+CGSMS: (0-3) OK

11.10.3 Defined values

Parameter	Type	Description
<service>	Number	Service or service preference to be used: • 0 (default value): PS • 1 (factory-programmed value): CS • 2: PS preferred (use CS if PS is not available) • 3: CS preferred (use PS if CS is not available)

11.11 Send message +CMGS

+CMGS						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	Appendix B.4	+CMS Error

11.11.1 Description

Sends a message from a DTE to the network (SMS-SUBMIT). The message reference value <mr> is returned to the DTE for a successful message delivery. Optionally (when enabled by +CSMS AT command and the network supports) <ackpdu> is returned. Values can be used to identify message upon unsolicited delivery status report result code. <Ctrl-Z> indicates that the SMS shall be sent, while <ESC> indicates aborting of the edited SMS.

☞ The entered text/PDU is preceded by a ">" (Greater-Than sign) character, and this indicates that the interface is in "text/PDU enter" mode. The DCD signal shall be in ON state while the text/PDU is entered.

11.11.2 Syntax

Type	Syntax	Response	Example
Set	**Text mode (+CMGF=1):** AT+CMGS=<da>[,<toda>]<CR> > text is entered<Ctrl-Z/ESC>	+CMGS: <mr> OK	AT+CMGS="0171112233"<CR> > This is the text<Ctrl-Z> +CMGS: 2 OK
	PDU mode (+CMGF=0): AT+CMGS=<length><CR> > PDU is given<Ctrl-Z/ESC>	+CMGS: <mr>[,<ackpdu>] OK	AT+CMGS=13<CR> > 039121430100038166F6000004E374F80D<Ctrl-Z> +CMGS: 2 OK
Test	AT+CMGS=?	OK	

11.11.3 Defined values

Parameter	Type	Description
<da>	String	Destination address
<toda>	Number	Type of address of <da> - octet
<text>	String	SMS string
<mr>	Number	Message reference
<length>	Number	Two meanings: • in text mode: number of characters • in PDU mode: PDU's length in octets without the Service Center's address. In example 039121430100038166F6000004E374F80D: is a PDU with Service Center's number +1234, that generates the address 03912143 (4 octets). Thus in this case <length>=13.
<PDU>	String	Protocol Data Unit: each 8-bit octet of the PDU must be written as two IRA character long hexadecimal numbers, e.g. octet with integer value 42 must be written as two characters 2A (IRA 50 and 65)
<ackpdu>	String	See the 3GPP TS 23.040 [80] RP-User-Data element of RP-ACK PDU; the format is same as for <PDU> in case of SMS

11.11.4 Notes

LARA-L6 / LARA-R6

- The <ackpdu> parameter is not supported.

11.12 Send SMS command +CMGC

+CMGC						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	Appendix B.4	+CMS Error

11.12.1 Description

Sends a command message from a DTE to the network (SMS-SUBMIT). The message reference value <mr> is returned to the DTE for a successful message delivery. Optionally (when enabled by +CSMS AT command and network supports) the <ackpdu> parameter is returned. Values can be used to identify message upon unsolicited delivery status report result code. <Ctrl-Z> indicates that the SMS shall be sent, while <ESC> indicates aborting of the edited SMS.

☞ The entered PDU is preceded by a ">" (Greater-Than sign) character, and this indicates that the interface is in "PDU enter" mode. The DCD signal shall be in ON state while the PDU is entered.

☞ The +CMT URC is issued on the reception of the SMS messages.

11.12.2 Syntax

Type	Syntax	Response	Example
Set	**Text mode (+CMGF=1):** AT+CMGC=<fo>,<ct>[,<pid>[,<mn>[,<da>[,<toda>]]]]<CR> > text is entered<Ctrl-Z/ESC>	+CMGC: <mr>[,<scts>] OK	AT+CMGC=17,0<CR> > This is the text<Ctrl-Z> +CMGC: 20 OK
	PDU mode (+CMGF=0): AT+CMGC=<length><CR> > <PDU> is given<Ctrl-Z/ESC>	+CMGC: <mr>[,<ackpdu>] OK	AT+CMGC=13<CR> > 0391214301000381 66F6000004E374F80D<Ctrl-Z> +CMGC: 2 OK
Test	AT+CMGC=?	OK	
URC		+CMT: [<alpha>], <length><CR><LF><pdu>	

11.12.3 Defined values

Parameter	Type	Description
<mr>	Number	Message reference
<length>	Number	PDU's length in octets without the Service Center's address. In example 039121430 100038166F6000004E374F80D: is a PDU with Service Center's number +1234, that generates the address 03912143 (4 octets). Thus in this case <length>=13.
<PDU>	String	Protocol Data Unit: each 8-bit octet of the PDU must be written as two IRA character long hexadecimal numbers, e.g. octet with integer value 42 must be written as two characters 2A (IRA 50 and 65).
<ackpdu>	String	See the 3GPP TS 23.040 [80] RP-User-Data element of RP-ACK PDU; format is same as for <PDU> in case of SMS.
<alpha>	String	Alphanumeric representation of destination or originating address. See the 3GPP TS 27.005 [86].
<fo>	Number	First octet of the SMS TPDU (see 3GPP TS 23.040 [80])
<ct>	Number	TP-Command-Type (default value: 0)
<pid>	Number	TP-Protocol-Identifier (default value: 0); see the 3GPP TS 23.040 [80]
<mn>	Number	See the 3GPP TS 23.040 [80] TP-Message-Number in integer format
<da>	String	Destination address
<toda>	Number	Type of address of <da> - octet

11.13 Write message to memory +CMGW

+CMGW						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	<10 s	+CMS Error

11.13.1 Description

Stores a message (SMS-DELIVER or SMS-SUBMIT) to memory storage <mem2> and returns the memory location <index> of the stored message. <Ctrl-Z> indicates that the SMS shall be stored, while <ESC> indicates aborting of the edited SMS.

☞ The entered text/PDU is preceded by a ">" (Greater-Than sign) character, and this indicates that the interface is in "text/PDU enter" mode. The DCD signal shall be in ON state while the text/PDU is entered.

11.13.2 Syntax

Type	Syntax	Response	Example
Set	**Text mode (+CMGF=1):** AT+CMGW[=<oa/da>[,<tooa/toda>[,<stat>]]]<CR> text is entered<Ctrl-Z/ESC>	+CMGW: <index> OK	AT+CMGW="091137880"<CR> > This is the text<Ctrl-Z> +CMGW: 303 OK
	PDU mode (+CMGF=0): AT+CMGW=<length>[,<stat>]<CR> PDU is given<Ctrl-Z/ESC>	+CMGW: <index> OK	AT+CMGW=13<CR> > 039121430100038166F6000004E374F80D<Ctrl-Z> +CMGW: 303 OK
Test	AT+CMGW=?	OK	

11.13.3 Defined values

Parameter	Type	Description
<da>	String	TP-Destination-Address Address-Value field (see the 3GPP TS 23.040 [80]); BCD numbers (or GSM 7 bit default alphabet characters) are converted to characters of the currently selected TE character set (see the +CSCS AT command); type of address given by <toda>
<oa>	String	TP-Originating-Address Address-Value field (see the 3GPP TS 23.040 [80]); BCD numbers (or GSM 7 bit default alphabet characters) are converted to characters of the currently selected TE character set (see the +CSCS AT command); type of address given by <tooa>
<tooa>	Number	TP-Originating-Address Type-of-Address octet (see the 3GPP TS 24.011 [85]); see the <toda> parameter for the default value
<toda>	Number	TP-Destination-Address Type-of-Address octet (see the 3GPP TS 24.011 [85]); when the first character of <da> is + (IRA 43) the default value is 145, otherwise it is 129)
<stat>	Number or String	Number type in PDU mode (default value: 2), or string type in text mode (default value: "STO UNSENT"); it indicates the message status in memory: • 0: in PDU mode or "REC UNREAD" in text mode: received unread SMS messages • 1: in PDU mode or "REC READ" in text mode: received read SMS messages • 2: in PDU mode or "STO UNSENT" in text mode: stored unsent SMS messages • 3: in PDU mode or "STO SENT" in text mode: stored sent SMS messages
<text>	String	SMS string
<index>	Number	Storage position
<length>	Number	The parameter meaning depends on the message format: • In text mode: number of characters • In PDU mode: PDU's length in octets without the Service Center's address. In example: 039121430100038166F6000004E374F80D is a PDU with Service Center's number +1234, that generates the address 03912143 (4 octets). Thus in this case <length>=13.
<PDU>	String	Protocol Data Unit: each 8-bit octet of the PDU must be written as two IRA character long hexadecimal numbers, e.g. an octet with integer value 42 must be written as two characters 2A (IRA 50 and 65)

11.14 Send message from storage +CMSS

+CMSS						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	Appendix B.4	+CMS Error

11.14.1 Description

Sends message with location value <index> from the preferred message storage <mem2> to the network (SMS-SUBMIT or SMS-COMMAND). If a new recipient address <da> is given for SMS-SUBMIT, it will be used instead of the one stored with the message. Reference value <mr> is returned to the DTE on successful message delivery.

11.14.2 Syntax

Type	Syntax	Response	Example
Set	**Text mode (+CMGF=1):** AT+CMSS=<index>[,<da>[,<toda>]]	+CMSS: <mr>[,<scts>] OK	AT+CMSS=302 +CMSS: 3 OK
	PDU mode (+CMGF=0): AT+CMSS=<index>	+CMSS: <mr>[,<ackpdu>] OK	AT+CMSS=302 +CMSS: 4 OK
Test	AT+CMSS=?	OK	

11.14.3 Defined values

Parameter	Type	Description
<index>	Number	Storage position
<da>	String	Destination address
<toda>	Number	Type of address of <da> - octet
<mr>	Number	Message reference
<scts>	String	3GPP TS 23.040 TP-Service-Centre-Time-Stamp [80] in time-string format (see <dt>).
<ackpdu>	String	See the 3GPP TS 23.040 [80] RP-User-Data element of RP-ACK PDU; format is same as for <PDU> in case of SMS.

11.14.4 Notes

LARA-L6 / LARA-R6

- The <scts> parameter is not supported.
- The <ackpdu> parameter is not supported.

11.15 Delete message +CMGD

+CMGD						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	No	No	Appendix B.4	+CMS Error

11.15.1 Description

Deletes the message from the preferred message storage <mem1>, if <flag>=0 or not present, in location <index>. Otherwise the messages are deleted following the rules specified by <flag>.

☞ If the <index> value is out of range (it depends on AT+CPMS command setting), then the "+CMS ERROR: Invalid memory index" error result code is returned.

☞ LARA-L6 / LARA-R6
When deleting a message from an empty location, the module returns the "+CMS ERROR: Invalid memory index" error result code.

11.15.2 Syntax

Type	Syntax	Response	Example
Set	AT+CMGD=<index>[,<flag>]	OK	AT+CMGD=3 OK
Test	AT+CMGD=?	+CMGD: (list of supported <index>s),(list of supported <flag>s) OK	+CMGD: (1-350),(0-4) OK

11.15.3 Defined values

Parameter	Type	Description
<index>	Number	Storage position
<flag>	Number	Deletion flag. If present, and different from 0, the <index> parameter is ignored: • 0 (default value): delete the message specified in <index> • 1: delete all the read messages from the preferred message storage, leaving unread messages and stored mobile originated messages (whether sent or not) untouched • 2: delete all the read messages from the preferred message storage and sent mobile originated messages, leaving unread messages and unsent mobile originated messages untouched • 3: delete all the read messages from the preferred message storage, sent and unsent mobile originated messages leaving unread messages untouched • 4: delete all the messages from the preferred message storage including unread messages

11.16 Read message +CMGR

+CMGR						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	<10 s	+CMS Error

11.16.1 Description

Returns the message with location value <index> from message storage <mem1> to the DTE.

☞ The parameters <tooa>, <fo>, <pid>, <dcs>, <sca>, <tosca>, <length>, <cdata> shall be displayed only if AT+CSDH=1 is set.

☞ The syntax AT+CMGR=0 allows to display an SMS class 0 if it is signalized to MT, because no MMI is available in the MT (see also the +CNMI AT command notes).

☞ If the <index> value is out of range (it depends on AT+CPMS command setting) or it refers to an empty position, then "+CMS ERROR: invalid memory index" error result code is returned.

11.16.2 Syntax

Type	Syntax	Response	Example
Set	**Text mode (+CMGF=1):** AT+CMGR=<index>	**SMS-DELIVER**	AT+CMGR=303

Type	Syntax	Response	Example
		+CMGR: <stat>,<oa>,[<alpha>], <scts>[,<tooa>,<fo>,<pid>,<dcs>, <sca>,<tosca>,<length>] <data> OK	+CMGR: "REC READ", "+393488535999",,"07/04/05,18:02:28+08",145,4,0,0,"+393492000466",145,93 You have a missed call. Free information provided by your operator. OK
		SMS-SUBMIT +CMGR: <stat>,<da>,[<alpha>][, <toda>,<fo>,<pid>,<dcs>,[<vp>], <sca>,<tosca>,<length>] <data> OK	
		SMS-STATUS-report +CMGR: <stat>,<fo>,<mr>,[<ra>], [<tora>],<scts>,<dt>,<st> OK	
		SMS-COMMAND +CMGR: <stat>,<fo>,<ct>[,<pid>, [<mn>],[<da>],[<toda>],<length> [<cdata>]] OK	
		CBM storage +CMGR: <stat>,<sn>,<mid>,<dcs>, <page>,<pages> <data> OK	
	PDU mode (+CMGF=0): AT+CMGR=<index>	+CMGR: <stat>,[<alpha>],<length> <pdu> OK	AT+CMGR=1 +CMGR: 1,,40 0791934329002000040 C9193230982661400008070 3280452180 18D4F29CFE0 6B5CBF379F87C4EBF41E4340 82E7FDBC3 OK
Test	AT+CMGR=?	OK	

11.16.3 Defined values

Parameter	Type	Description
<index>	Number	Storage position
<stat>	Number	• 0: in PDU mode or "REC UNREAD" in text mode: received unread SMS • 1: in PDU mode or "REC READ" in text mode: received read SMS • 2: in PDU mode or "STO UNSENT" in text mode: stored unsent SMS • 3: in PDU mode or "STO SENT" in text mode: stored sent SMS
<oa>	String	Originator address
<alpha>	String	Alphanumeric representation of <da> or <oa> corresponding to the entry found in the phonebook 3GPP TS 24.008 [84]. The parameter is not managed.
<scts>	String	Service center time stamp in time-string format, see <dt>
<tooa>	Number	Type of address of <oa> - octet
<fo>	Number	First octet of the SMS TPDU (see 3GPP TS 23.040 [80])
<pid>	Number	TP-Protocol-Identifier (default 0); see the 3GPP TS 23.040 [80]
<dcs>	Number	Data Coding Scheme
<sca>	String	Service center address field

Parameter	Type	Description
<tosca>	Number	Type of address of <sca> - octet in Number format (for more details see the 3GPP TS 24.008 [84]); default 145 when string includes '+', otherwise default 129
<length>	Number	Two meanings: • in text mode: number of characters • in PDU mode: PDU's length in octets without the Service Center's address. In example 0391214301000381 66F6000004E374F80D: this is a PDU with Service Center's number +1234, that generates the address 03912143 (4 octets). Thus in this case <length> = 13.
<data>	String	In the case of SMS: 3GPP TS 23.040 [80] TP-User-Data in text mode responses; format: • if <dcs> indicates that 3GPP TS 23.038 [79] GSM 7 bit default alphabet is used: o if TE character set other than "HEX" (see +CSCS command description): ME/TA converts GSM alphabet into current TE character set according to rules of Annex A o if TE character set is "HEX": ME/TA converts each 7-bit character of GSM 7 bit default alphabet into two IRA character long hexadecimal number (e.g. character Æ (GSM 7 bit default alphabet 28) is presented as 1C (IRA 49 and 67)) • if <dcs> indicates that 8-bit or UCS2 data coding scheme is used: ME/TA converts each 8-bit octet into two IRA character long hexadecimal number (e.g. octet with integer value 42 is presented to TE as two characters 2A (IRA 50 and 65)) In the case of CBS: 3GPP TS 23.041 [81] CBM Content of Message in text mode responses; format: • if <dcs> indicates that 3GPP TS 23.038 [79] GSM 7 bit default alphabet is used: o if TE character set other than "HEX" (see +CSCS command description): ME/TA converts GSM alphabet into current TE character set according to rules of Annex A o if TE character set is "HEX": ME/TA converts each 7-bit character of the GSM 7 bit default alphabet into two IRA character long hexadecimal number • if <dcs> indicates that 8-bit or UCS2 data coding scheme is used: ME/TA converts each 8-bit octet into two IRA character long hexadecimal number
<da>	String	Destination address
<toda>	Number	Type of address of <da> - octet
<vp>	Number	Format depending of the <fo> setting: • Relative format: validity period starting from when the SMS is received by the SMSC, in range 0-255 (default value 167); for more details see the 3GPP TS 23.040 [80] <vp> | Validity period value 0 to 143 | (TP-VP + 1) x 5 minutes (i.e. 5 minutes intervals up to 12 hours) 144 to 167 | 12 hours + ((TP-VP -143) x 30 minutes) 168 to 196 | (TP-VP - 166) x 1 day 197 to 255 | (TP-VP - 192) x 1 week • Absolute format: absolute time of the validity period termination in string format ("yy/MM/dd,hh:mm:ss+zz") (see the 3GPP TS 23.040 [80]); the time zone is expressed in steps of 15 minutes. The range goes from -48 to +56
<mr>	Number	Message reference
<ra>	String	Recipient address field
<tora>	Number	Type of address of <ra> - octet
<dt>	String	Discharge time in format "yy/MM/dd,hh:mm:ss+zz"; the time zone is expressed in steps of 15 minutes. The range goes from -48 to +56
<st>	Number	Status of an SMS STATUS-REPORT
<ct>	Number	TP-Command-Type (default 0)
<mn>	Number	See the 3GPP TS 23.040 [80] TP-Message-Number in integer format
<cdata>	String	TP-Command-Data in text mode responses

Parameter	Type	Description
<sn>	Number	CBM serial number
<mid>	Number	CBM message identifier
<page>	Number	3GPP TS 23.041 [81] CBM Page Parameter bits 4-7 in integer format
<pages>	Number	3GPP TS 23.041 [81] CBM Page Parameter bits 0-3 in integer format
<pdu>	String	Protocol data unit: each 8-bit octet is presented as two IRA character long hexadecimal numbers, e.g. octet with integer value 42 is presented to TE as two characters 2A (IRA 50 and 65)

11.16.4 Notes

LARA-L6 / LARA-R6

- The <stat> parameter is blank in **SMS-STATUS-report** displaying case.

11.17 List message +CMGL

+CMGL						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	< 10 s	+CMS Error

11.17.1 Description

Returns SMS messages with status value <stat> from message storage <mem1> to the DTE. If status of the received message is "received unread", status in the storage changes to "received read".

11.17.2 Syntax

Type	Syntax	Response	Example
Set	**Text mode (+CMGF=1):** AT+CMGL[=<stat>]	**Command successful and SMS-DELIVERs:** +CMGL: <index>,<stat>,<oa>, [<alpha>],[<scts>][,<tooa>, <length>] <data> [+CMGL: <index>,<stat>,<oa>, [<alpha>],[<scts>][,<tooa>, <length>]<data>[...]] OK	AT+CMGL +CMGL: 303,"REC READ","+39340 1234999",,"08/08/06,10:01:38+08" You have a missed call. Free information provided by your operator. OK
		Command successful and SMS-SUBMITs: +CMGL: <index>,<stat>,<da>, [<alpha>],[<toda>, <length>] <data> [+CMGL: <index>,<stat>, <da>,[<alpha>],[<toda>, <length>]<data>[...]] OK	
		Command successful and SMS-STATUS-REPORTs: +CMGL: <index>,<stat>,<fo>,<mr>, [<ra>],[<tora>],<scts>,<dt>,<st> [+CMGL: <index>,<stat>,<fo>,<mr>, [<ra>],[<tora>],<scts>,<dt>,<st> [...]]	

Type	Syntax	Response	Example
		OK	
		Command successful and SMS-COMMANDs: +CMGL: <index>,<stat>,<fo>,<ct> [+CMGL: <index>,<stat>,<fo>, <ct>[...]] OK	
		Command successful and CBM storage: +CMGL: <index>,<stat>,<sn>, <mid>,<page>,<pages><data> [+CMGL: <index>,<stat>,<sn>, <mid>,<page>,<pages>,<data>[...]] OK	
	PDU mode (+CMGF=0): AT+CMGL[=<stat>]	**Command successful:** +CMGL: <index>,<stat>,[<alpha>], <length> <pdu> [+CMGL: <index>,<stat>,[<alpha>], <length>] <pdu> [...]	AT+CMGL=1 +CMGL: 305,1,,57 079193432900 1185440ED0D637396C7EBBCB0 000909092708024802A050 003000303DEA0584CE60 205D974791994769BDF3A90 DB759687E9F534FD0DA2C9603419 OK
Test	AT+CMGL=?	+CMGL: (list of supported <stat>s) OK	+CMGL: ("REC UNREAD","REC READ","STO UNSENT","STO SENT", "ALL") OK

11.17.3 Defined values

Parameter	Type	Description
<stat>	Number or String	Number type in PDU mode (default value: 4), or string type in text mode (default value: "ALL"); indicates the status of message in memory: • 0: in PDU mode or "REC UNREAD" in text mode: received unread SMS messages • 1: in PDU mode or "REC READ" in text mode: received read SMS messages • 2: in PDU mode or "STO UNSENT" in text mode: stored unsent SMS messages • 3: in PDU mode or "STO SENT" in text mode: stored sent SMS messages • 4: in PDU mode or "ALL" in text mode: all SMS messages
<index>	Number	Storage position
<oa>	String	Originator address
<alpha>	String	Alphanumeric representation of <da> or <oa> corresponding to the entry found in the phonebook 3GPP TS 24.008 [84]. The parameter is not managed.
<scts>	String	Service center time stamp in time-string format; see the <dt> parameter
<tooa>	Number	Type of address of <oa> - octet
<length>	Number	Two meanings: • in text mode: number of characters • in PDU mode: PDU's length in octets without the Service Center's address. In example 039121430100038166F6000004E374F80D: this is a PDU with Service Center's number +1234, that generates the address 03912143 (4 octets). Thus in this case <length> = 13.
<data>	String	This is the TP-User-Data in text mode; the decoding depends on the DCS (Data Coding Scheme) and the FO (First Octet) of the SMS header 3GPP TS 23.040 [80]; format: • if DCS indicates that 3GPP TS 23.038 [79] GSM 7 bit default alphabet is used:

Parameter	Type	Description
		o if TE character set other than "HEX" (see the +CSCS AT command description): ME/TA converts GSM alphabet into current TE character set according to rules of Annex A o if TE character set is "HEX": ME/TA converts each 7-bit character of GSM 7 bit default alphabet into two IRA character long hexadecimal number (e.g. character Æ (GSM 7 bit default alphabet 28) is presented as 1C (IRA 49 and 67)) • if DCS indicates that 8-bit or UCS2 data coding scheme is used: ME/TA converts each 8-bit octet into two IRA character long hexadecimal number (e.g. octet with integer value 42 is presented to TE as two characters 2A (IRA 50 and 65)) In the case of CBS: 3GPP TS 23.041 [81] CBM Content of Message in text mode responses; format: • if DCS indicates that 3GPP TS 23.038 [79] GSM 7 bit default alphabet is used: o if TE character set other than "HEX" (see the +CSCS AT command description): ME/TA converts GSM alphabet into current TE character set according to rules of Annex A o if TE character set is "HEX": ME/TA converts each 7-bit character of the GSM 7 bit default alphabet into two IRA character long hexadecimal number if DCS indicates that 8-bit or UCS2 data coding scheme is used: ME/TA converts each 8-bit octet into two IRA character long hexadecimal number
<da>	String	Destination address
<toda>	Number	Type of address of <da> - octet
<fo>	Number	First octet of the SMS TPDU (see 3GPP TS 23.040 [80])
<mr>	Number	Message reference
<ra>	String	Recipient address field
<tora>	Number	Type of address of <ra> - octet
<dt>	String	Discharge time in format "yy/MM/dd,hh:mm:ss+zz"; the time zone is expressed in steps of 15 minutes. The range goes from -48 to +56
<st>	Number	Status of an SMS STATUS-REPORT
<ct>	Number	TP-Command-Type (default 0)
<sn>	Number	CBM serial number
<mid>	Number	CBM message identifier
<page>	Number	3GPP TS 23.041 [81] CBM Page Parameter bits 4-7 in integer format
<pages>	Number	3GPP TS 23.041 [81] CBM Page Parameter bits 0-3 in integer format
<pdu>	String	Protocol data unit: each 8-bit octet is presented as two IRA character long hexadecimal numbers, e.g. octet with integer value 42 is presented to TE as two characters 2A (IRA 50 and 65)
<dcs>	Number	Data Coding Scheme

11.17.4 Notes

LARA-L6 / LARA-R6

- When parameter <stat> is omitted, the default value will be 0 (if PDU mode is active) or "REC UNREAD" (if text mode is active).
- The <stat> parameter is blank in **SMS-STATUS-report** displaying case.

11.18 Read concatenated message +UCMGR

+UCMGR						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	<10 s	+CMS Error

11.18.1 Description

Returns the message with location value <index> from message storage <mem1> to the DTE and shows additional information when the message is a segment of a concatenated one:

- SMS-DELIVER: the parameters <tooa>, <fo>, <pid>, <dcs>, <sca>, <tosca>, <length> shall be displayed only if +CSDH: 1.
- SMS-SUBMIT: the parameters <toda>, <fo>, <pid>, <dcs>, <vp>, <sca>, <tosca>, <length> shall be displayed only if +CSDH: 1.
- SMS-COMMAND: <pid>, <mn>, <da>, <toda>, <length>, <cdata> shall be displayed only if +CSDH: 1.

The syntax AT+UCMGR=0 allows to display an SMS class 0 if it is signalized to MT, because no MMI is available in the MT (see also the +CNMI AT command notes).

If the received message status is "received unread", the status in the storage changes to "received read".

The command is supported only for text mode (+CMGF: 1).

If the <index> value is out of range (it depends on the preferred message storage, +CPMS command, settings) or it refers to an empty position, then the "+CMS ERROR: invalid memory index" error result code is returned.

11.18.2 Syntax

Type	Syntax	Response	Example
Set	AT+UCMGR=<index>	**SMS-DELIVER** +UCMGR: <stat>,<oa>,[<alpha>], <scts>[,<tooa>, <fo>,<pid>,<dcs>, <sca>,<tosca>,<length>][,<seq>, <max>,<iei>,<ref>] <data> OK	AT+UCMGR=1 +UCMGR: "REC READ", "+393488535999",,"07/04/05,18:02:28+08",145,4,0,0,"+393492000466",145,153,1,2,0,127 u-blox reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permis OK
		SMS-SUBMIT +UCMGR: <stat>,<da>,[<alpha>] [<toda>,<fo>,<pid>,<dcs>,[<vp>], <sca>,<tosca>,<length>][,<seq>, <max>,<iei>,<ref>] <data> OK	
		SMS-STATUS-report +UCMGR:<stat>,<fo>,<mr>,[<ra>], [<tora>]<scts><dt>,<st> OK	
		SMS-COMMAND +UCMGR: <stat>,<fo>,<ct>[,<pid>, [<mn>],[<da>],[<toda>],<length> [<cdata>]] OK	
		CBM storage +UCMGR: <stat>,<sn>,<mid>, <dcs>,<page>,<pages> <data> OK	
Test	AT+UCMGR=?	OK	

11.18.3 Defined values

Parameter	Type	Description
<index>	Number	Storage position

Parameter	Type	Description
<stat>	String	Indicates the status of message in memory: • "REC UNREAD": received unread SMS • "REC READ": received read SMS • "STO UNSENT": stored unsent SMS • "STO SENT": stored sent SMS
<oa>	String	Originator address
<alpha>	String	Alphanumeric representation of <da> or <oa> corresponding to the entry found in the phonebook 3GPP TS 24.008 [84]. The parameter is not managed.
<scts>	String	Service center time stamp in time-string format, refer to <dt>
<tooa>	Number	Type of address of <oa> - octet
<fo>	Number	First octet of the SMS TPDU (see 3GPP TS 23.040 [80])
<pid>	Number	TP-Protocol-Identifier (default 0); see 3GPP TS 23.040 [80]
<dcs>	Number	Data Coding Scheme
<sca>	String	Service center address field
<tosca>	Number	Type of address of <sca> - octet in Number format (for more details see 3GPP TS 24.008 [84]); default 145 when string includes '+', otherwise default 129
<length>	Number	Number of characters
<seq>	Number	Sequence number of the current short message (1-255)
<max>	Number	Maximum number of short messages in the concatenated short message (1-255)
<iei>	Number	Information Element Identifier, the possible values are the following: • 0: Concatenated short messages, 8-bit reference number • 8: Concatenated short messages, 16-bit reference number
<ref>	Number	Concatenated short message reference number: • 0-255: concatenated short messages, 8-bit reference number case • 0-65535: concatenated short messages, 16-bit reference number case
<data>	String	In the case of SMS: 3GPP TS 23.040 [80] TP-User-Data in text mode responses; format: • if <dcs> indicates that 3GPP TS 23.038 [79] GSM 7 bit default alphabet is used: o if TE character set other than "HEX" (see the +CSCS AT command description): ME/TA converts GSM alphabet into current TE character set according to rules of 3GPP TS 27.005 [86] Annex A o if TE character set is "HEX": ME/TA converts each 7-bit character of GSM 7 bit default alphabet into two IRA character long hexadecimal number (e.g. character Æ (GSM 7 bit default alphabet 28) is presented as 1C (IRA 49 and 67)) • if <dcs> indicates that 8-bit or UCS2 data coding scheme is used: ME/TA converts each 8-bit octet into two IRA character long hexadecimal number (e.g. octet with integer value 42 is presented to TE as two characters 2A (IRA 50 and 65)) In the case of CBS: 3GPP TS 23.041 [81] CBM Content of Message in text mode responses; format: • if <dcs> indicates that 3GPP TS 23.038 [79] GSM 7 bit default alphabet is used: o if TE character set other than "HEX" (see the +CSCS AT command description): ME/TA converts GSM alphabet into current TE character set according to rules of 3GPP TS 27.005 [86] Annex A o if TE character set is "HEX": ME/TA converts each 7-bit character of the GSM 7 bit default alphabet into two IRA character long hexadecimal number if <dcs> indicates that 8-bit or UCS2 data coding scheme is used: ME/TA converts each 8-bit octet into two IRA character long hexadecimal number
<da>	String	Destination address
<toda>	Number	Type of address of <da> - octet
<vp>	Number	Format depending of the <fo> setting: • Relative format: validity period starting from when the SMS is received by the SMSC, in range 0-255 (default value 167); for more details see 3GPP TS 23.040 [80] <vp> Validity period value

Parameter	Type	Description	
		0 to 143	(TP-VP + 1) x 5 minutes (i.e. 5 minutes intervals up to 12 hours)
		144 to 167	12 hours + ((TP-VP -143) x 30 minutes)
		168 to 196	(TP-VP - 166) x 1 day
		197 to 255	(TP-VP - 192) x 1 week
		• Absolute format: absolute time of the validity period termination in string format ("yy/MM/dd,hh:mm:ss+zz") (refer to 3GPP TS 23.040 [80]); the time zone is expressed in steps of 15 minutes. The range goes from -48 to +56	
<mr>	Number	Message reference	
<ra>	String	Recipient address field	
<tora>	Number	Type of address of <ra> - octet	
<scts>	String	Service center time stamp in time-string format, refer to <dt>	
<dt>	String	Discharge time in format "yy/MM/dd,hh:mm:ss+zz"; the time zone is expressed in steps of 15 minutes. The range goes from -48 to +56	
<st>	Number	Status of an SMS STATUS-REPORT	
<ct>	Number	TP-Command-Type (default 0)	
<mn>	Number	3GPP TS 23.040 [80] TP-Message-Number in integer format	
<mid>	Number	CBM message identifier	
<cdata>	String	TP-Command-Data in text mode responses	
<sn>	Number	CBM serial number	
<page>	Number	3GPP TS 23.041 [81] CBM page parameter bits 4-7 in integer format	
<pages>	Number	3GPP TS 23.041 [81] CBM page parameter bits 0-3 in integer format	

11.18.4 Notes

LARA-L6 / LARA-R6

- The <stat> parameter is blank in **SMS-STATUS-report** displaying case.

11.19 List concatenated message +UCMGL

+UCMGL						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	< 10 s	+CMS Error

11.19.1 Description

Returns SMS messages with status value <stat> from message storage <mem1> to the DTE and shows additional information when the message is a segment of a concatenated one:

- SMS-DELIVER: the parameters <tooa>, <length> shall be displayed only if +CSDH: 1.
- SMS-SUBMIT: the parameters <toda>, <length> shall be displayed only if +CSDH: 1.

If status of the received message is "received unread", status in the storage changes to "received read".

The command is supported only for text mode (+CMGF: 1).

11.19.2 Syntax

Type	Syntax	Response	Example
Set	AT+UCMGL[=<stat>]	**SMS-DELIVERs:** +UCMGL: <index>,<stat>,<oa>,[<alpha>],[<scts>][,<tooa>,<length>][,<seq>,<max>,<iei>,<ref>] <data>	AT+UCMGL +UCMGL: 304,"REC READ","+39340 1234999",,"08/08/06,10:01:38+08",145,152,1,2,8,32767 u-blox reserves all rights to this document and the information

Type	Syntax	Response	Example
		[+UCMGL: <index>,<stat>,<oa>, [<alpha>],[<scts>][,<tooa>, <length>][,<seq>,<max>,<iei>, <ref>]<data>[...]] OK	contained herein. Reproduction, use or disclosure to third parties without express permi +UCMGL: 305,"REC READ","+39340 1234999",,"08/08/06,10:01:40+08", 145,29,2,2,8,32767 ssion is strictly prohibited. OK
		SMS-SUBMITs: +UCMGL: <index>,<stat>,<da>, [<alpha>],[<toda>, <length>][, <seq>,<max>,<iei>,<ref>] <data> [+UCMGL: <index>,<stat>,<da>, [<alpha>],[<toda>,<length>][,<seq>, <max>,<iei>,<ref>]<data>[...]] OK	
		SMS-STATUS-REPORTs: +UCMGL: <index>,<stat>,<fo>, <mr>,[<ra>],[<tora>],<scts>,<dt>, <st> [+UCMGL: <index>,<stat>,<fo>, <mr>,[<ra>],[<tora>],<scts>,<dt>, <st> [...]] OK	
		SMS-COMMANDs: +UCMGL: <index>,<stat>,<fo>,<ct> [+UCMGL: <index>,<stat>,<fo>, <ct>[...]] OK	
		CBM storage: +UCMGL: <index>,<stat>,<sn>, <mid>,<page>,<pages><data> [+UCMGL: <index>,<stat>,<sn>, <mid>,<page>,<pages>,<data>[...]] OK	
Test	AT+UCMGL=?	+UCMGL: (list of supported <stat>s) OK	+UCMGL: ("REC UNREAD","REC READ","STO UNSENT","STO SENT", "ALL ") OK

11.19.3 Defined values

Parameter	Type	Description
<stat>	String	Indicates the status of message in memory: • "REC UNREAD": received unread SMS messages • "REC READ": received read SMS messages • "STO UNSENT": stored unsent SMS messages • "STO SENT": stored sent SMS messages • "ALL": all SMS messages (default value)
<index>	Number	Storage position

Parameter	Type	Description
<oa>	String	Originator address
<alpha>	String	Alphanumeric representation of <da> or <oa> corresponding to the entry found in the phonebook 3GPP TS 24.008 [84]. The parameter is not managed.
<scts>	String	Service center time stamp in time-string format; refer to <dt>
<tooa>	Number	Type of address of <oa> - octet
<length>	Number	Number of characters
<seq>	Number	Sequence number of the current short message (1-255)
<max>	Number	Maximum number of short messages in the concatenated short message (1-255)
<iei>	Number	Information Element Identifier, the possible values are the following: • 0: concatenated short messages, 8-bit reference number • 8: concatenated short messages, 16-bit reference number
<ref>	Number	Concatenated short message reference number: • 0-255: concatenated short messages, 8-bit reference number case • 0-65535: concatenated short messages, 16-bit reference number case
<data>	String	In the case of SMS: 3GPP TS 23.040 [80] TP-User-Data in text mode responses; format: • if <dcs> indicates that 3GPP TS 23.038 [79] GSM 7 bit default alphabet is used: o if TE character set other than "HEX" (see the +CSCS AT command description): ME/TA converts GSM alphabet into current TE character set according to rules of 3GPP TS 27.005 Annex A [86] o if TE character set is "HEX": ME/TA converts each 7-bit character of GSM 7 bit default alphabet into two IRA character long hexadecimal number (e.g. character Æ (GSM 7 bit default alphabet 28) is presented as 1C (IRA 49 and 67)) • if <dcs> indicates that 8-bit or UCS2 data coding scheme is used: ME/TA converts each 8-bit octet into two IRA character long hexadecimal number (e.g. octet with integer value 42 is presented to TE as two characters 2A (IRA 50 and 65)) In the case of CBS: 3GPP TS 23.041 [81] CBM Content of Message in text mode responses; format: • if <dcs> indicates that 3GPP TS 23.038 [79] GSM 7 bit default alphabet is used: o if TE character set other than "HEX" (see the +CSCS AT command description): ME/TA converts GSM alphabet into current TE character set according to rules of 3GPP TS 27.005 [86] Annex A • if TE character set is "HEX": ME/TA converts each 7-bit character of the GSM 7 bit default alphabet into two IRA character long hexadecimal number if <dcs> indicates that 8-bit or UCS2 data coding scheme is used: ME/TA converts each 8-bit octet into two IRA character long hexadecimal number
<da>	String	Destination address
<toda>	Number	Type of address of <da> - octet
<fo>	Number	First octet of the SMS TPDU (see 3GPP TS 23.040 [80])
<mr>	Number	Message reference
<ra>	String	Recipient address field
<tora>	Number	Type of address of <ra> - octet
<dt>	String	Discharge time in format "yy/MM/dd,hh:mm:ss+zz"; the time zone is expressed in steps of 15 minutes. The range goes from -48 to +56
<st>	Number	Status of an SMS STATUS-REPORT
<ct>	Number	TP-Command-Type (default 0)
<sn>	Number	CBM serial number
<mid>	Number	CBM message identifier
<page>	Number	3GPP TS 23.041 [81] CBM Page Parameter bits 4-7 in integer format
<pages>	Number	3GPP TS 23.041 [81] CBM Page Parameter bits 0-3 in integer format
<dcs>	Number	Data Coding Scheme

11.19.4 Notes

LARA-L6 / LARA-R6

- When parameter <stat> is omitted, the default value will be 0 (if PDU mode is active) or "REC UNREAD" (if text mode is active).
- The <stat> parameter is blank in **SMS-STATUS-report** displaying case.

11.20 Send concatenated message +UCMGS

+UCMGS						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	Appendix B.4	+CMS Error

11.20.1 Description

Sends one segment of a concatenated message from a DTE to the network (SMS-SUBMIT). The message reference value <mr> is returned to the DTE for a successful message delivery. <Ctrl-Z> indicates that the SMS shall be sent, while <ESC> indicates aborting of the edited SMS.

The command is supported only for text mode (+CMGF: 1).

The entered text is preceded by a ">" (Greater-Than sign) character, and this indicates that the interface is in "text enter" mode. The DCD signal shall be in ON state while the text is entered.

11.20.2 Syntax

Type	Syntax	Response	Example
Set	AT+UCMGS=<da>,[<toda>],<seq>,<max>,<iei>,<ref><CR> text is entered<Ctrl-Z/ESC>	+UCMGS: <mr> OK	AT+UCMGS="0171112233",,1,2,0,127<CR> > u-blox reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permis<Ctrl-Z> +UCMGS:2 OK AT+UCMGS="0171112233",,2,2,0,127<CR> > sion is strictly prohibited.<Ctrl-Z> +UCMGS:3 OK
Test	AT+UCMGS=?	OK	

11.20.3 Defined values

Parameter	Type	Description
<da>	String	Destination address
<toda>	Number	Type of address of <da> - octet
<seq>	Number	Sequence number of the current short message (1-255)
<max>	Number	Maximum number of short messages in the concatenated short message (1-255)
<iei>	Number	Information Element Identifier, the possible values are the following: • 0: concatenated short messages, 8-bit reference number • 8: concatenated short messages, 16-bit reference number
<ref>	Number	Concatenated short message reference number:

Parameter	Type	Description
		• 0-255: concatenated short messages, 8-bit reference number case • 0-65535: concatenated short messages, 16-bit reference number case
<text>	String	SMS string
<mr>	Number	Message reference

11.21 Write concatenated message to memory +UCMGW

+UCMGW						
Modules	All products					
Attributes	Syntax	PIN required	Settings saved	Can be aborted	Response time	Error reference
	full	Yes	No	No	< 10 s	+CMS Error

11.21.1 Description

Stores one segment of a concatenated message (SMS-DELIVER or SMS-SUBMIT) to memory storage <mem2> and returns the memory location <index> of the stored message. <Ctrl-Z> indicates that the SMS shall be stored, while <ESC> indicates aborting of the edited SMS.

The command is supported only for text mode (+CMGF: 1)

The entered text is preceded by a ">" (Greater-Than sign) character, and this indicates that the interface is in "text enter" mode. The DCD signal shall be in ON state while the text is entered.

11.21.2 Syntax

Type	Syntax	Response	Example
Set	AT+UCMGW=[<oa/da>],[<tooa/toda>],[<stat>],<seq>,<max>,<iei>,<ref><CR> text is entered<Ctrl-Z/ESC>	+UCMGW: <index> OK	AT+UCMGW="091137880",,,1,2,8,32767<CR> > u-blox reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permi<Ctrl-Z> +UCMGW:302 OK AT+UCMGW="091137880",,,2,2,8,32767<CR> > ssion is strictly prohibited.<Ctrl-Z> +UCMGW:303 OK
Test	AT+UCMGW=?	OK	

11.21.3 Defined values

Parameter	Type	Description
<da>	String	3GPP TS 23.040 [80] TP-Destination-Address Address-Value field in string format; BCD numbers (or GSM 7 bit default alphabet characters) are converted to characters of the currently selected TE character set (refer command +CSCS in 3GPP TS 27.007 [75]; type of address given by <toda>
<oa>	String	3GPP TS 23.040 [80] TP-Originating-Address Address-Value field in string format; BCD numbers (or GSM 7 bit default alphabet characters) are converted to characters of the currently selected TE character set (refer command +CSCS chapter Chapter 4.10); type of address given by <tooa>

Parameter	Type	Description
<tooa>	Number	3GPP TS 24.011 [85] TP-Originating-Address Type-of-Address octet in integer format (default refer <toda>)
<toda>	Number	3GPP TS 24.011 [85] TP-Destination-Address Type-of-Address octet in integer format (when first character of <da> is + (IRA 43) default is 145, otherwise default is 129)
<stat>	String	Indicates the status of message in memory: • "REC UNREAD": received unread SMS messages • "REC READ": received read SMS messages • "STO UNSENT": stored unsent SMS messages • "STO SENT": stored sent SMS messages (default value)
<seq>	Number	Sequence number of the current short message (1-255)
<max>	Number	Maximum number of short messages in the concatenated short message (1-255)
<iei>	Number	Information Element Identifier, the possible values are the following: • 0: concatenated short messages, 8-bit reference number • 8: concatenated short messages, 16-bit reference number
<ref>	Number	Concatenated short message reference number: • 0-255: concatenated short messages, 8-bit reference number case • 0-65535: concatenated short messages, 16-bit reference number case
<text>	String	SMS string
<index>	Number	Storage position

11.22 Set text mode parameters +CSMP

+CSMP						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	+CSAS	No	< 10 s	+CMS Error

11.22.1 Description

Selects values for additional parameters needed when an SMS is sent to the network or placed in a storage when text format message mode is selected. For more details see the 3GPP TS 23.038 [79] and the 3GPP TS 23.040 [80].

11.22.2 Syntax

Type	Syntax	Response	Example
Set	AT+CSMP=<fo>,<vp>[,<pid>[,<dcs>]]	OK	AT+CSMP=17,167,0,0 OK
Read	AT+CSMP?	+CSMP: <fo>,<vp>,<pid>,<dcs> OK	+CSMP: 17,167,0,0 OK
Test	AT+CSMP=?	OK	

11.22.3 Defined values

Parameter	Type	Description
<fo>	Number	First octet of the SMS TPDU (see 3GPP TS 23.040 [80]). The factory-programmed value is 17.
<vp>	Number	Format depending on the values of the bit3/bit4 of the <fo> (SMS-SUBMIT case):

Bit 3	Bit 4	Format
0	0	Validity period not present
0	1	Validity period present, relative format
1	0	Reserved
1	1	Validity period present, absolute format

Parameter	Type	Description
		• Relative format: validity period, counted from when the SMS-SUBMIT is received by the SMSC, in range 0-255 (the factory-programmed value is 167); for more details see the 3GPP TS 23.040 [80] <vp> — Validity period value 0 to 143 — (TP-VP + 1) x 5 minutes (i.e. 5 minutes intervals up to 12 hours) 144 to 167 — 12 hours + ((TP-VP -143) x 30 minutes) 168 to 196 — (TP-VP - 166) x 1 day 197 to 255 — (TP-VP - 192) x 1 week • Absolute format: absolute time of the validity period termination in string format ("yy/MM/dd,hh:mm:ss+zz") (see the 3GPP TS 23.040 [80]); the time zone is expressed in steps of 15 minutes. The range goes from -48 to +56
<pid>	Number	TP-Protocol-Identifier (factory-programmed value: 0); see the 3GPP TS 23.040 [80]
<dcs>	Number	Data Coding Scheme. The factory-programmed value is 0.

11.23 Service center address +CSCA

+CSCA						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	+CSAS	No	< 10 s	+CMS Error

11.23.1 Description

Updates the SMSC address, through which mobile originated SMSes are transmitted. In text mode the setting is used by send and write commands. In PDU mode the setting is used by the same commands, but only when the length of SMSC address coded into <pdu> parameter equals zero.

LARA-L6 / LARA-R6
This command sets the service center value both in the RAM (this value is actually the SMSC address used) and in the SIM card. Through the read command the value of current service center stored in the RAM is displayed. At the power on, the MT reads the SMSC address in the SIM card and the same value is set in RAM.

11.23.2 Syntax

Type	Syntax	Response	Example
Set	AT+CSCA=<sca>[,<tosca>]	OK	AT+CSCA="0170111000",129 OK
Read	AT+CSCA?	+CSCA: <sca>,<tosca> OK	+CSCA: "",129 OK
Test	AT+CSCA=?	OK	

11.23.3 Defined values

Parameter	Type	Description
<sca>	String	Service center address.
<tosca>	String	Type of address of <sca> (for more details refer to 3GPP TS 24.008 [84]); the default value is 145 when string includes '+', otherwise the default is 129.

11.24 Select cell broadcast message types +CSCB

+CSCB						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	+CSAS	No	< 10 s	+CMS Error

11.24.1 Description

Selects which types of CBM's are to be received by the MT.

11.24.2 Syntax

Type	Syntax	Response	Example
Set	AT+CSCB=[<mode>[,<mids>[,<dcss>]]]	OK	AT+CSCB=0,"1,5,10-11,40","" OK
Read	AT+CSCB?	+CSCB: <mode>,<mids>,<dcss> OK	+CSCB: 0,"",""" OK
Test	AT+CSCB=?	+CSCB: (list of supported <mode>s) OK	+CSCB: (0-1) OK

11.24.3 Defined values

Parameter	Type	Description
<mode>	Number	Allowed values: • 0 (default value and factory-programmed value): message types specified in <mids> and <dcss> accepted • 1: message types specified in <mids> and <dcss> not accepted
<mids>	String	Contains all possible combinations of CBM message identifiers (<mid>). See the 3GPP TS 23.041 [81], chapter 9.4. When RAT is UMTS up to 2048 message identifiers can be set; defining an exceeding combination will not cause an error result code and exceeding values will be ignored.
<dcss>	String	Contains all possible combinations of CBM data coding schemes (<dcs>). See the 3GPP TS 23.038 [79], chapter 5.

11.24.4 Notes

- If <mode>=0 and <mids> is an empty string, receiving of CB SMS is stopped.

LARA-L6 / LARA-R6

- The <mode> parameter is mandatory in the set command.

11.25 More messages to send +CMMS

+CMMS						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	-	+CMS Error

11.25.1 Description

Controls the continuity of SMS relay protocol link. When enabled, multiple SMS messages can be sent much faster as link is kept open.

11.25.2 Syntax

Type	Syntax	Response	Example
Set	AT+CMMS=[<mode>]	OK	AT+CMMS=2

Type	Syntax	Response	Example
			OK
Read	AT+CMMS?	+CMMS: <mode> OK	+CMMS: 2 OK
Test	AT+CMMS=?	+CMMS: (list of supported <mode>s) OK	+CMMS: (0-2) OK

11.25.3 Defined values

Parameter	Type	Description
<mode>	Number	Allowed values: • 0 (default value): disabled • 1: keep enabled until the time between the response of the latest message send command (such as +CMGS) and the next send command exceeds 5 s, then close the link and switch <mode> automatically back to 0 • 2: keep permanently enabled. The link is closed after each send sequence, but <mode> is not switched back to 0

11.25.4 Notes

LARA-L6 / LARA-R6

- The <mode> parameter is mandatory in the set command.

11.26 Peek message +UCMGP

+UCMGP						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	<10 s	+CMS Error

11.26.1 Description

Returns the message with location value <index> from message storage <mem1> to the DTE, the same as +CMGR does.

The SMS message is only 'peeked', i.e. its status is not forced to "received read SMS mode" after reading.

The syntax, defined values and remarks are the same as described for +CMGR.

☞ The PIN verification is not required when the preferred memory storage is "ME".

11.26.2 Syntax

Type	Syntax	Response	Example
Set	**Text mode (+CMGF=1):** AT+UCMGP=<index>	**(SMS-DELIVER)** +UCMGP: <stat>,<oa>,[<alpha>], <scts>[,<tooa>,<fo>,<pid>,<dcs>, <sca>,<tosca>,<length>] <data> OK **(SMS-SUBMIT)** +UCMGP: <stat>,<da>,[<alpha>][, <toda>,<fo>,<pid>,<dcs>,[<vp>], <sca>,<tosca>,<length>] <data>	AT+UCMGP=303 +UCMGP: "REC UNREAD", "+393488535999",,"07/04/05,18:02:28+08",145,4,0,0,"+393492000466",145,93 You have a missed call. Free information provided by your operator. OK

Type	Syntax	Response	Example
		OK	
		(SMS-STATUS-report) +UCMGP: <stat>,<fo>,<mr>,[<ra>],[<tora>],<scts>,<dt>,<st> OK	
		(SMS-COMMAND) +UCMGP: <stat>,<fo>,<ct>[,<pid>,[<mn>],[<da>],[<toda>],<length> [<cdata>]] OK	
		(CBM storage) +UCMGP: <stat>,<sn>,<mid>,<dcs>,<page>,<pages> <data> OK	
	PDU mode (+CMGF=0): AT+UCMGP=<index>	+UCMGP: <stat>,[<alpha>],<length> <pdu> OK	AT+UCMGP=1 +UCMGP: 0,,40 07919343290020000 40C9193230982 66140000807032804521801 8D4F29CF E06B5CBF379F87C4EBF41E434082E7F DBC3 OK
Test	AT+UCMGP=?	OK	

11.26.3 Defined values

Parameter	Type	Description
<index>	Number	Storage position

11.26.4 Notes

LARA-L6 / LARA-R6

- The <stat> parameter is blank in **SMS-STATUS-report** displaying case.

12 Supplementary services

12.1 Introduction

Supplementary services (SS) allow to configure how the incoming or mobile originated voice calls are handled. Cellular standards provide call related supplementary services (CRSS), that operate on calls while they are active (e.g. performing call hold or merge of calls in a multi-party conversation), and others that imply a signalling session with the mobile network to perform query and set of the specific supplementary service (e.g. call barring or call forwarding). Unstructured Supplementary Services Data (USSD) are mobile terminated or originated signalling transactions, where a binary string is transmitted to the network to retrieve information on the subscription (e.g. residual credit) or sent from the NW to notify the subscriber of specific events.

On VoLTE capable modules, supplementary services operate on VoLTE calls in the same way they work on legacy speech calls. Query and set of supplementary services are performed via XCAP (XML Configuration Access Protocol), that is an HTTP-based service that uses a specific default EPS bearer on a specific XCAP APN (see +UIMSCFG, XCAP_APN value of <ImsConfig> parameter) to accomplish the query or the update of the SS. Usually supplementary services via XCAP require IMS registration to be performed; if the device has not yet successfully completed IMS registration, the SS is carried out via CSFB if 2G or 3G RAT is supported.

12.2 Call forwarding +CCFC

+CCFC						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	Yes	Up to 3 min	+CME Error

12.2.1 Description

Controls the call forwarding supplementary service. Registration, erasure, activation, deactivation and status query are supported.

12.2.2 Syntax

Type	Syntax	Response	Example
Set	AT+CCFC=<reason>,<mode>[,<number>[,<type>[,<class>[,<subaddr>[,<satype>[,<time>]]]]]]	OK or when <mode>=2 +CCFC: <status>,<class1>[,<number>,<type> [,<subaddr>, <satype>[,<time>]]] [+CCFC: <status>,<class2> [,<number>, <type>[,<subaddr>, <satype>[,<time>]]]] OK	**Registration:** AT+CCFC=0,3,"01711234" OK **Query status:** AT+CCFC=2,2 +CCFC: 1,1,"+3945112",145,"",,60 OK
Test	AT+CCFC=?	+CCFC: (list of supported <reason>s) OK	+CCFC: (0-5) OK

12.2.3 Defined values

Parameter	Type	Description
<reason>	Number	• 0: unconditional

Parameter	Type	Description
		• 1: mobile busy • 2: no reply • 3: not reachable • 4: all call forwarding • 5: all conditional call forwarding
<mode>	Number	• 0: disable • 1: enable • 2: query status • 3: registration • 4: erasure
<number>	String	Phone number of forwarding address in <type> format
<type>	Number	Type of address; default 145 when dialling string includes '+', otherwise 129
<subaddr>	String	Subaddress; parameter currently ignored after syntax check
<satype>	Number	Type of subaddress; default 128 (TON/NPI unknown); parameter currently ignored after syntax check
<classx>	Number	Sum of Numbers each representing a class of information (default 7 - voice (1), data (2) and FAX (4) - or interpreted by network if not explicitly entered): • 1: voice • 2: data • 4: FAX • 8: SMS • 16: data circuit sync • 32: data circuit async • 64: dedicated packet access • 128: dedicated PAD access
<time>	Number	Time in seconds to wait before call is forwarded (default 60), but only when <reason>=2 (no reply) is enabled; the range goes from 5 to 30 s
<status>	Number	• 0: not active • 1: active

12.2.4 Notes

- When querying the status of a network service (<mode>=2) the response line for "not active" case (<status>=0) is returned only if the service is not active for any <class>. Hence when querying the status of a network service (<mode>=2) asking for a specific <class>, the DUT sends a generic request instead.

12.3 Call waiting +CCWA

+CCWA						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	No	Yes	Up to 3 min	+CME Error

12.3.1 Description

Controls the Call Waiting supplementary service according to 3GPP TS 22.083 [94]. The activation, deactivation and status query are supported. When querying the status of a network service (<mode>=2) the information text response for 'not active' case (<status>=0) should be returned only if the service is not active for any <class>. Instead when querying the status of a network service (<mode>=2) asking for a specific <class>, the DUT sends a generic request.

It is possible to abort the status query sending a character to the DCE during the command execution. If enabled by <n> a URC is presented on TE when a call is signalled.

12.3.2 Syntax

Type	Syntax	Response	Example
Set	AT+CCWA=[<n>[,<mode>[,<class>]]]	OK	AT+CCWA=1,1,32 OK
	AT+CCWA=[<n>[,<mode>]]	+CCWA: <status>,<class1> [+CCWA: <status>,<class2> [...]] OK	AT+CCWA=1,2 +CCWA: 1,1 +CCWA: 1,4 +CCWA: 1,16 +CCWA: 1,32 OK
Read	AT+CCWA?	+CCWA: <n> OK	+CCWA: 0 OK
Test	AT+CCWA=?	+CCWA: (list of supported <n>s) OK	+CCWA: (0-1) OK
URC		+CCWA: <number>,<type>,<class>,[<alpha>][,<CLI validity>[,<subaddr>,<satype>[,<priority>]]]	+CCWA: "+393290286612",145,1,,0

12.3.3 Defined values

Parameter	Type	Description
<n>	Number	URC configuration: • 0 (default value): disabled • 1: enabled
<mode>	Number	If <mode> is not set, no request is sent to the network: • 0: disabled • 1 (default value): enabled • 2: query status
<classx>	Number	Sum of numbers each representing an information class: • 1: voice • 2: data; it comprises all those <classx> values between 16 and 128, that are supported both by the network and the MS. This means, a setting made for <classx> to 2 applies to all remaining data classes (if supported). In addition, it is possible to assign a different setting to a specific class. For example, call waiting can be deactivated only for a specific data class. To understand which classes were actually activated AT+CCWA=1,2 command should be executed • 4: FAX • 8: SMS • 16: data circuit sync • 32: data circuit async • 64: dedicated packet access • 128: dedicated PAD access If <classx> is not set and <mode> is 0 or 1 the default value is 3 The default value is 255 if <classx> is not set and <mode> is 2 e.g. it reports all active classes if any. If no class is active only classes 1 and 2 are reported as inactive: • +CCWA: 0,1 • +CCWA: 0,2 ☞ LARA-L6 / LARA-R6 If no class is active +CCWA: 0,255 is reported.
<status>	Number	Allowed values: • 0: not active • 1: active

Parameter	Type	Description
<number>	String	Phone number of calling address in format specified by <type>
<type>	Number	Type of address
<alpha>	String	Optional string type alphanumeric representation of <number> corresponding to the entry found in phonebook; this parameter is not managed
<CLI validity>	Number	Allowed values: • 0: CLI valid • 1: CLI has been withheld by the originator • 2: CLI is not available
<subaddr>	String	Subaddress of format specified by <satype>
<satype>	Number	Subaddress octet (see the 3GPP TS 24.008 [84] subclause 10.5.4.8)
<priority>	Number	Optional digit type parameter indicating that the eMLPP priority level of the incoming call. The priority level values are as defined in eMLPP specification 3GPP TS 22.067 [108].

12.3.4 Notes

- The call waiting is not handled in uniform mode among all the networks, even if the 3GPP TS 22.004 [76] describes all needed specification: "The applicability of call waiting refers to the telecommunication service of the active call and not of the waiting call. The incoming, waiting, call may be of any kind." Nevertheless, the actual implementation of the service on the networks is different.
- If a sum class is provided in the <classx> parameter the classes will be activated or deactivated in cardinal order (minimum to maximum). If a class is not supported then the procedure ends and any remaining class is not processed. To check which classes were actually activated AT+CCWA=1,2 command should be done.

LARA-L6 / LARA-R6

- The <alpha>, <CLI validity>, <subaddr>, <satype>, <priority> parameters are not supported.

12.4 Calling line identification restriction +CLIR

+CLIR						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	NVM	Yes	Up to 3 min (<1 s for prompt ">" when present)	+CME Error

12.4.1 Description

Controls the Calling Line Identification Restriction (CLIR) supplementary service (3GPP TS 22.081 [95]). The CLIR subscription, when the temporary mode is provisioned by the network, is overidden as a default adjustment for all following outgoing calls (3GPP TS 22.081 [95] specifies how the network will act).

12.4.2 Syntax

Type	Syntax	Response	Example
Set	AT+CLIR=[<n>]	OK	AT+CLIR=2 OK
Read	AT+CLIR?	+CLIR: <n>,<m> OK	+CLIR: 0,2 OK
Test	AT+CLIR=?	+CLIR: (list of supported <n>s) OK	+CLIR: (0-2) OK

12.4.3 Defined values

Parameter	Type	Description
<n>	Number	Sets the adjustment for outgoing calls: • 0 (factory-programmed value): presentation indicator is used according to the subscription of the CLIR service • 1: CLIR invocation • 2: CLIR suppression
<m>	Number	Shows the subscriber CLIR status in the network: • 0: CLIR not provisioned • 1: CLIR provisioned in permanent mode • 2: unknown • 3: CLIR temporary mode presentation restricted • 4: CLIR temporary mode presentation allowed

12.5 Calling line identification presentation +CLIP

+CLIP						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	Yes	Up to 3 min (<1 s for prompt ">" when present)	+CME Error

12.5.1 Description

Controls the Calling Line Identification Presentation (CLIP) supplementary service, but it has no effect on the execution of CLIP service in the network. When the CLI (Calling Line Identification) is enabled, the command response is returned after every RING unsolicited result code. The URC is displayed after RING if the CLI presentation at the TE is enabled.

12.5.2 Syntax

Type	Syntax	Response	Example
Set	AT+CLIP=[<n>]	OK	AT+CLIP=1 OK
Read	AT+CLIP?	+CLIP: <n>,<m> OK	+CLIP: 0,2 OK
Test	AT+CLIP=?	+CLIP: (list of supported <n>s) OK	+CLIP: (0-1) OK
URC		+CLIP: <number>,<type>[,<subaddr>,<satype>[,<alpha>[,<CLI validity>]]]	

12.5.3 Defined values

Parameter	Type	Description
<n>	Number	Optional parameter sets/shows the result code presentation in the TA: • 0 (default value): disable • 1: enable
<m>	Number	Shows the subscriber CLIP service status in the network • 0: CLIP not provisioned • 1: CLIP provisioned • 2: unknown

Parameter	Type	Description
<number>	String	Phone number of calling address in format specified by <type>.
<type>	Number	Type of address octet.
<subaddr>	String	Subaddress of format specified by <satype>.
<satype>	Number	Type of subaddress octet.
<alpha>	String	Optional string type alphanumeric representation of <number> corresponding to the entry found in phonebook; the parameter is not managed.
<CLI validity>	Number	• 0: CLI valid • 1: CLI has been withheld by the originator • 2: CLI is not available

12.5.4 Notes

- When CLI is not available (<CLI validity>=2), the <number> parameter shall be an empty string ("") and <type> value will not be significant. Nevertheless, the TA may return the recommended value 128 for <type> (TON/NPI unknown). When CLI has been withheld by the originator, (<CLI validity>=1) and the CLIP is provisioned with the "override category" option (see the 3GPP TS 22.081 [95] and 3GPP TS 23.081 [96]), <number> and <type> is provided. Otherwise, TA shall return the same setting for <number> and <type> as if the CLI was not available.

12.6 Connected line identification presentation +COLP

+COLP						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	Yes	< 20 s	+CME Error

12.6.1 Description

Controls the COnnected Line identification Presentation (COLP) supplementary service (see the 3GPP TS 22.081 [95]), useful in case of call forwarding of the connected line. It enables a calling subscriber to get the connected line identity (COL) of the called party, after setting up a mobile originated call. The command enables or disables the presentation of the COL at the TE. It has no effect on the execution of the supplementary service COLR in the network.

When enabled (and called subscriber allows), the IRC is sent from TA to TE before any +CR or V.25ter responses.

The read command provides the <n> status, and also triggers an interrogation of the provision status of the COLP service according 3GPP TS 22.081 [95] (given in <m>).

12.6.2 Syntax

Type	Syntax	Response	Example
Set	AT+COLP=[<n>]	OK	AT+COLP=1 OK
Read	AT+COLP?	+COLP: <n>,<m> OK	+COLP: 0,2 OK
Test	AT+COLP=?	+COLP: (list of supported <n>s) OK	+COLP: (0-1) OK
IRC		+COLP: <number>,<type>[,<subaddr>,<satype>[,<alpha>]]	

12.6.3 Defined values

Parameter	Type	Description
<n>	Number	Optional parameter sets/shows the result code presentation status to the TE:

Parameter	Type	Description
		• 0 (default value): disable • 1: enable
<m>	Number	Shows the subscriber COLP status in the network: • 0: COLP not provisioned • 1: COLP provisioned • 2: unknown (e.g. no network, etc.)
<number>, <type>, <subaddr>, <satype>, <alpha>		See +CLIP.

12.7 Advice of charge +CAOC

+CAOC						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	No	No	< 10 s	+CME Error

12.7.1 Description

Allows the subscriber to get the information about the call costs in home units using the advice of charge supplementary service (3GPP TS 22.024 [98] and 3GPP TS 22.086 [97]). If it is enabled, the TE periodically receives the URC containing the corresponding information.

12.7.2 Syntax

Type	Syntax	Response	Example
Set	AT+CAOC[=<mode>]	[+CAOC: <ccm>] OK	AT+CAOC=0 OK
Read	AT+CAOC?	+CAOC: <mode> OK	+CAOC: 1 OK
Test	AT+CAOC=?	+CAOC: (list of supported <mode>s) OK	+CAOC: (0-2) OK
URC		+CCCM: <ccm>	

12.7.3 Defined values

Parameter	Type	Description
<mode>	Number	• 0: queries the CCM value • 1: deactivates the unsolicited reporting of CCM value • 2: activates the unsolicited reporting of CCM value
<ccm>	Number	Current call meter indicated as a string in hexadecimal format

12.8 Accumulated call meter +CACM

+CACM						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	< 10 s	+CME Error

12.8.1 Description

Resets the advice of charge related accumulated call meter value in the SIM file EF_{ACM}. The ACM contains the total number of home units for both the current and preceding calls. The SIM PIN2 is required to reset the value.

☞ If the EF is not available, the read command returns +CME ERROR: SIM failure (verbose result code).

12.8.2 Syntax

Type	Syntax	Response	Example
Set	AT+CACM=[<passwd>]	OK	AT+CACM="0933" OK
Read	AT+CACM?	+CACM: <acm> OK	+CACM: "000000" OK
Test	AT+CACM=?	OK	

12.8.3 Defined values

Parameter	Type	Description
<passwd>	String	SIM PIN2 as string type
<acm>	String	Accumulated call meter value similarly coded as <ccm> under +CAOC

12.8.4 Notes

- The command needs the SIM module to work correctly

12.9 Accumulated call meter maximum +CAMM

+CAMM						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	< 10 s	+CME Error

12.9.1 Description

Sets the advice of charge related accumulated call meter maximum value in the SIM file EF_{ACMmax}. The ACMmax contains the maximum number of home units allowed to be consumed by the subscriber. When the ACM reaches ACMmax, the calls are prohibited. The SIM PIN2 is required to set the value.

☞ If the EF is not available, the read command returns +CME ERROR: SIM failure (verbose result code).

12.9.2 Syntax

Type	Syntax	Response	Example
Set	AT+CAMM=[<acmmax>[,<passwd>]]	OK	AT+CAMM="000300","0933" OK
Read	AT+CAMM?	+CAMM: <acmmax>	+CAMM: "000300"

Type	Syntax	Response	Example
		OK	OK
Test	AT+CAMM=?	OK	

12.9.3 Defined values

Parameter	Type	Description
<acmmax>	String	Contains the accumulated call meter maximum value similarly coded as <ccm> under +CAOC; value zero disables the ACMmax feature
<passwd>	String	Contains SIM PIN2

12.9.4 Notes

- The command needs the SIM module to work correctly

12.10 Price per unit and currency table +CPUC

+CPUC						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	< 10 s	+CME Error

12.10.1 Description

Sets the parameters of advice of charge related price per unit and the currency table in the SIM file EF_{PUCT}. The PUCT information can be used to convert the home units into the currency units. The PIN2 is required to set the parameters.

☞ If the EF is not available, the read command returns +CME ERROR: SIM failure (verbose result code).

12.10.2 Syntax

Type	Syntax	Response	Example
Set	AT+CPUC=<currency>,<ppu>[,<passwd>]	OK	AT+CPUC="USD","0.20","0933" OK
Read	AT+CPUC?	+CPUC: <currency>,<ppu> OK	+CPUC: "USD","0.20" OK
Test	AT+CPUC=?	OK	

12.10.3 Defined values

Parameter	Type	Description
<currency>	String	Contains the three-character currency code (e.g. "GBP", "EUR")
<ppu>	String	Contains the price per unit; the dot is used as a decimal separator
<passwd>	String	Contains SIM PIN2

12.11 Call related supplementary services +CHLD

+CHLD						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	No	No	< 20 s	+CME Error

12.11.1 Description

Call hold and multiparty conversation (conference call). The calls can be put on hold, recovered, released or added to the conversation.

The expected response time depends on the number of calls manipulated by the command (the current value refers to the manipulation of one call): in case of poor radio quality, disconnect, hold and retrieve procedures triggered by the command might require several retransmissions at radio level, thus the expected response time shall be extended accordingly.

12.11.2 Syntax

Type	Syntax	Response	Example
Set	AT+CHLD=[<n>]	OK	AT+CHLD=2 OK
Test	AT+CHLD=?	+CHLD: (list of supported <n>s) OK	+CHLD: (0,1,1x,2,2x,3,4,4*,6,7,8) OK

12.11.3 Defined values

Parameter	Type	Description
<n>	Number	• 0: release all the held calls or set User Determined User Busy for a waiting call; if both exists then only the waiting call will be rejected • 1: release all the active calls and accepts the other (held or waiting) • 1x: release a specific call (x specific call number as indicated by +CLCC) • 2: place all the active calls (if exist) on hold and accepts the other call (held or waiting, if exist) • 2x: place all the active calls on hold except the call x with which communication is supported • 3: adds a held call to the conversation • 4: connects the two calls and disconnects the subscriber from both calls (Explicit Call Transfer) • 4*: call deflection (proprietary feature) • 5: call completion of busy subscriber; this command syntax will be interpreted as an activation request, if the network has previously offered the possibility to activate this function • 6: puts an active call on hold or an held call to active • 7: disconnect the users in multiparty without accepting incoming call • 8: release all the calls (active and held)

12.12 Call deflection +CTFR

+CTFR						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	Up to 3 min	+CME Error

12.12.1 Description

Allows the MT user to respond to an incoming call offered by the network by requesting call deflection, i.e. redirection of this call to another number specified in the response. The call deflection is a supplementary service applicable only to voice calls (teleservice 11).

12.12.2 Syntax

Type	Syntax	Response	Example
Set	AT+CTFR=<number>[,<type>[,<subaddr>[,<satype>]]]	OK	AT+CTFR="09113788" OK
Test	AT+CTFR=?	OK	

12.12.3 Defined values

Parameter	Type	Description
<number>	String	Phone number
<type>	Number	Type of address; default 145 when dialling string includes '+', otherwise 129
<subaddr>	String	Subaddress; parameter currently ignored after syntax check
<satype>	Number	Type of subaddress; default 128 (TON/NPI unknown); parameter currently ignored after syntax check

12.13 Supplementary service notifications +CSSN

+CSSN						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

12.13.1 Description

Refers to supplementary service related network initiated notifications. When <n>=1 and a supplementary service notification is received after a mobile originated call setup, the IRC is sent before any other Mobile Originated call setup result codes. When <m>=1 and a supplementary service notification is received during a call, the URC is sent.

12.13.2 Syntax

Type	Syntax	Response	Example
Set	AT+CSSN=[<n>[,<m>]]	OK	AT+CSSN=0,0 OK
Read	AT+CSSN?	+CSSN: <n>,<m> OK	+CSSN: 0,0 OK
Test	AT+CSSN=?	+CSSN: (list of supported <n>s),(list of supported <m>s) OK	+CSSN: (0-1),(0-1) OK
IRC		+CSSI: <code1>[,<index>]	+CSSI: 4,1

Type	Syntax	Response	Example
URC		+CSSU: <code2>[,<index>[,<number>,<type>[,<subaddr>,<satype>]]]	+CSSU: 0

12.13.3 Defined values

Parameter	Type	Description
<n>	Number	Sets/shows the +CSSI result code presentation status • 0: disabled (default value) • 1: enabled
<m>	Number	Sets/shows the +CSSU result code presentation status • 0: disabled (default value) • 1: enabled
<code1>	Number	• 0: unconditional call forwarding is active • 1: some of the conditional call forwardings are active • 2: call has been forwarded • 3: call is waiting • 4: this is a CUG call (<index> parameter is provided) • 5: outgoing calls are barred • 6: incoming calls are barred • 7: CLIR suppression rejected • 8: calls has been deflected
<index>	Number	Refer +CCUG (Chapter 12.15)
<code2>	Number	• 0: this is a forwarded call (MT call setup) • 1: this is a CUG call (<index> parameter is provided) (MT call setup) • 2: call has been put on hold (during a voice call) • 3: call has been retrieved (during a voice call) • 4: multiparty call entered (during a voice call) • 5: call on hold has been released - this is not an SS notification - (during a voice call) • 6: forward check SS message received (can be received whenever) • 7: call is being connected (alerting) with the remote party in alerting state in explicit call transfer operation (during a voice call) • 8: call has been connected with the other remote party in explicit call transfer operation (during a voice call or MT call setup) • 9: this is a deflected call (MT call setup) • 10: additional incoming call forwarded
<number>	String	Phone number, format specified by <type>
<type>	Number	Type of address octet
<subaddr>, <satype>	String	Not used

12.14 Unstructured supplementary service data +CUSD

+CUSD						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	Yes	Up to 3 min	+CME Error

12.14.1 Description

Control of Unstructured Supplementary Service Data (USSD) is according to 3GPP TS 22.090 [78]. Both network and mobile initiated operations are supported. The parameter <n> disables/enables the URC presentation. Value <n>=2 is used to cancel an ongoing USSD session. When <str> is given, a mobile initiated USSD-string or a response USSD-string to a network initiated operation is sent to the network. The response USSD-string from the network is returned in the URC +CUSD indicated above.

12.14.2 Syntax

Type	Syntax	Response	Example
Set	AT+CUSD=[<n>[,<str>[,<dcs>]]]	[+CUSD: <m>[,<str>,<dcs>]]	AT+CUSD=1,"*100#",15
		OK	+CUSD: 2,"Residual credit: 7,87 Euro",15
			OK
Read	AT+CUSD?	+CUSD: <n>	+CUSD: 0
		OK	OK
Test	AT+CUSD=?	+CUSD: (list of supported <n>s)	+CUSD: (0-2)
		OK	OK
URC		+CUSD: <m>[,<str>,<dcs>]	

12.14.3 Defined values

Parameter	Type	Description
<n>	Number	• 0 (default value): result code presentation disabled • 1: result code presentation enabled • 2: session cancelled (not applicable to the read command response)
<str>	String	USSD-string converted in the current character set in use (see the +CSCS command)
<dcs>	Number	Data coding scheme (see 3GPP TS 23.038 [79]) used for sending the USSD string. 1 byte in decimal format; valid values are 0-255. The default value is 15.
<m>	Number	• 0: no further user action required • 1: further user action required • 2: USSD termination by network • 4: operation not supported • 5: network time out

12.14.4 Notes

- Aborting the command is equivalent to send AT+CUSD=2, that ends the current USSD session.
- When issuing a set command with <n>=1, the module waits for SS transaction to finish before issuing the final result code (e.g. "OK").
- After having sent a +CUSD request, it is recommended to refrain from sending another +CUSD request until the URC of the first one has been received.

12.15 Closed user group +CCUG

+CCUG						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	-	+CME Error

12.15.1 Description

Enables subscribers to form closed user groups to and from which access is restricted (refer to 3GPP TS 22.085 99). The command can be used to:

- Activate/deactivate the control of the CUG information for all following calls
- Select a CUG index
- Suppress the outgoing access (OA). The OA allows a member of a CUG to place calls outside the CUG
- Suppress the preferential CUG

12.15.2 Syntax

Type	Syntax	Response	Example
Set	AT+CCUG=[<n>[,<index>[,<info>]]]	OK	AT+CCUG=1,2,1 OK
Read	AT+CCUG?	+CCUG: <n>,<index>,<info> OK	+CCUG: 0,0,0 OK
Test	AT+CCUG=?	[+CCUG: (list of supported <n>s),(list of supported <index>s),(list of supported <info>s)] OK	+CCUG: (0-1),(0-10),(0-3) OK

12.15.3 Defined values

Parameter	Type	Description
<n>	Number	Allowed values: • 0 (default value): CUG temporary disabled • 1: CUG temporary enabled
<index>	Number	Allowed values: • 0..9: CUG index, (0 default value) • 10: no index (preferred CUG taken from subscriber data)
<info>	Number	Allowed values: • 0: no information (default value) • 1: suppress OA • 2: suppress preferential CUG • 3: suppress OA and preferential CUG

12.15.4 Notes

LARA-L6 / LARA-R6

- The test command returns only the "OK" final result code.

13 Circuit switched data services

13.1 Cellular result codes +CRC

+CRC						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	Profile	No	-	+CME Error

13.1.1 Description

Enables the detailed ring indication for the incoming calls. Instead of RING, the **+CRING: <type>** URC is displayed.

13.1.2 Syntax

Type	Syntax	Response	Example
Set	AT+CRC=[<mode>]	OK	AT+CRC=0 OK
Read	AT+CRC?	+CRC: <mode> OK	
Test	AT+CRC=?	+CRC: (list of supported <mode>s) OK	+CRC: (0-1) OK
URC		+CRING: <type>	

13.1.3 Defined values

Parameter	Type	Description
<mode>	Number	• 0 (default value and factory-programmed setting): extended format disabled • 1: extended format enabled
<type>	String	Ring indication description: • ASYNC: asynchronous transparent • REL ASYNC: asynchronous non-transparent (reliable) • SYNC: synchronous transparent • REL SYNC: synchronous non-transparent (reliable) • FAX: facsimile (TS62) • VOICE: normal voice (TS11) • ALT VOICE / FAX: alternating voice/FAX, voice first (TS61) • ALT FAX / VOICE: alternating voice/FAX, FAX first (TS61) • GPRS <PDP_type>,<PDP_addr>,<L2P>,<APN>: GPRS network request for the PDP context activation

13.1.4 Notes

LARA-L6 / LARA-R6

- The command setting is not stored in the personal profile and therefore are volatile.
- <type>="ASYNC", "REL ASYNC", "SYNC", "REL SYNC", FAX", "ALT VOICE / FAX", "ALT FAX / VOICE" are not supported.

14 V24 control and V25ter

14.1 Introduction

These commands, unless specifically stated, do not implement set syntax using "=", read ("?"), or test ("=?"). If such commands are used, the "+CME ERROR: unknown" or "+CME ERROR: 100" error result code is provided (depending on the +CMEE AT command setting).

14.2 Circuit 109 behavior &C

&C						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	Profile	No	-	+CME Error

14.2.1 Description

Controls how the state of RS232 circuit 109 - Data Carrier Detect (DCD) - relates to the detection of received line signal from the remote end.

☞ LARA-L6 / LARA-R6
On the AUX UART interface the command is not effective.

☞ LARA-L6 / LARA-R6
Setting a 5-wire UART configuration (see the +USIO AT command), the command is not effective.

14.2.2 Syntax

Type	Syntax	Response	Example
Action	AT&C[<value>]	OK	

14.2.3 Defined values

Parameter	Type	Description
<value>	Number	Indicates the behavior of circuit 109 • 0: DCE always presents ON condition on circuit 109 • 1 (default value and factory-programmed value): circuit 109 changes in accordance with the Carrier detect status; ON if the Carrier is detected, OFF otherwise

14.2.4 Notes

- See the corresponding module system integration manual for the DCD behavior during the initialization phase of the module.

LARA-L6 / LARA-R6

- The command setting is stored in the NVM.

14.3 Circuit 108/2 and escape sequence behavior &D

&D						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	Profile	No	-	+CME Error

14.3.1 Description

Controls how the state of RS232 circuit 108/2 - Data Terminal Ready (DTR) - relates to changes from ON-to-OFF transition during on-line data state.

It also controls how the escape sequence may change the on-line data state.

14.3.2 Syntax

Type	Syntax	Response	Example
Action	AT&D[<value>]	OK	

14.3.3 Defined values

Parameter	Type	Description
<value>	Number	Allowed values: • 0: the DCE ignores circuit 108/2 • 1: upon an ON-to-OFF transition of circuit 108/2, the DCE enters online command state and issues the final result code • 2: upon an ON-to-OFF transition of circuit 108/2, the DCE performs an orderly cleardown of the call. The automatic answer is disabled while circuit 108/2 remains OFF The default and factory-programmed value is: • LARA-L6 / LARA-R6 - 2

14.3.4 +++ behavior

- A special meaning of the &D value is provided for the +++ sequence during a PS data transfer with PPP L2 protocol (this is outside the ITU-T V.25ter recommendation [207] scope). Upon +++ sequence the PS data transfer is escaped and the system returns in the on-line command state.
- The ATO command is used to resume the PS data transfer session.
- If the module has a DUN/PPP activated and is in OLCM, the ATH command deactivates the PPP and the associated PDP context (if possible).

For more details, see the ITU-T recommendation V250 [206], ITU-T V.25ter recommendation [207] and ITU-T V.32 recommendation [208].

See the corresponding module system integration manual for the DTR behavior during the initialization phase of the module.

14.3.5 DTR, +++ behavior

PS data mode (PPP L2 protocol case)		
Event	**DTE sends +++**	**DTR ON-to-OFF transition**
&D0	DCE enters online command mode	Context deactivation
&D1	DCE enters online command mode	DCE enters online command mode
&D2	DCE enters online command mode	Context deactivation

Table 24: PS data mode

Direct Link mode		
Event	**DTE sends escape sequence (e.g. +++)**	**DTR ON-to-OFF transition**
&D0	DCE enters command mode	No action

Direct Link mode		
Event	**DTE sends escape sequence (e.g. +++)**	**DTR ON-to-OFF transition**
&D1	DCE enters command mode	DCE enters command mode
&D2	DCE enters command mode	DCE enters command mode

Table 25: Direct Link mode

14.3.6 Notes

- The escape sequence for the PS data mode with a L2 protocol different from the PPP is not ~+++, and it could be not supported. For more information, see the S2 notes if supported.

LARA-L6 / LARA-R6

- The command setting is stored in the NVM.
- On the AUX UART interface, the DTR line is always considered to ON state (even if the AUX UART interface does not support the DTR line).
- Setting a 5-wire UART configuration (for mode details, see the +USIO AT command), on the UART interface the DTR line is always considered to ON state (even if the UART interface does not support the DTR line) unless DTR function is configured using +UGPIOC AT command.

14.4 DSR override &S

&S						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	Profile	No	-	+CME Error

14.4.1 Description

Selects how the module will control RS232 circuit 107 - Data Set Ready (DSR).

☞ LARA-L6 / LARA-R6
On the AUX UART interface the command is not effective.

☞ LARA-L6 / LARA-R6
Setting a 5-wire UART configuration (see the +USIO AT command), the command is not effective.

14.4.2 Syntax

Type	**Syntax**	**Response**	**Example**
Action	AT&S[<value>]	OK	

14.4.3 Defined values

Parameter	**Type**	**Description**
<value>	Number	• 0: sets the DSR line to ON • 1 (default value and factory-programmed value): sets the DSR line to ON in data mode and to OFF in command mode

14.4.4 Notes

- See the corresponding module system integration manual for the DSR behavior during the initialization phase of the module.

LARA-L6 / LARA-R6

- The command setting is stored in the NVM.

14.5 Flow control &K

&K						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	Profile	No	-	+CME Error

14.5.1 Description

Controls the flow control mechanism. The following settings are allowed:

- No flow control
- HW flow control also referred with RTS / CTS flow control
- SW flow control also referred with XON / XOFF flow control

14.5.2 Syntax

Type	Syntax	Response	Example
Action	AT&K[<value>]	OK	

14.5.3 Defined values

Parameter	Type	Description
<value>	Number	• 0: disable DTE flow control • 3 (default and factory-programmed value): enable the RTS/CTS DTE flow control • 4: enable the XON/XOFF DTE flow control • 5: enable the XON/XOFF DTE flow control • 6: enable the XON/XOFF DTE flow control

14.5.4 Notes

- The command handling is the same for <value> parameter 4, 5 or 6.

LARA-L6 / LARA-R6

- The primary UART interface baud rate configuration is stored in the NVM, while the AUX UART interface baud rate configuration is volatile.
- The command is not supported on the multiplexer channels. For more details, see the +CMUX AT command.
- The SW flow control is not supported (<value>=4, 5 and 6 are not allowed).
- The HW flow control cannot be changed when +USIO: 1 and +UPSV: 1; for more details, see the +UPSV AT command.

14.6 DTE-DCE character framing +ICF

+ICF						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	Profile	No	-	+CME Error

14.6.1 Description

Sets the local serial port start-stop (asynchronous) character framing which is used in information interchange between DCE and DTE. Value 0 corresponds to the auto-detect case (if autobauding is supported).

☞ The following restrictions must be reminded:

- If a data frame format refers to a frame without parity (ex. <format>=3), the command is accepted, but the parity value is ignored; it is returned by the +ICF read command (and displayed in the current personal profile configuration where supported) but it has no meaning

- The command setting is ignored when the AT command interface runs on the USB or on the SPI interface

14.6.2 Syntax

Type	Syntax	Response	Example
Set	AT+ICF=[<format>[,<parity>]]	OK	AT+ICF=3,1 OK
Read	AT+ICF?	+ICF: <format>,<parity> OK	+ICF: 3,1 OK
Test	AT+ICF=?	+ICF: (list of supported <format>s), (list of supported <parity>s) OK	+ICF: (0-3,5),(0-1) OK

14.6.3 Defined values

Parameter	Type	Description
<format>	Number	• 0: auto detect • 1: 8 data 2 stop • 2: 8 data 1 parity 1 stop • 3: 8 data 1 stop • 4: 7 data 2 stops • 5: 7 bit, 1 parity, 1 stop • 6: 7 bit, 1 stop Allowed values: • LARA-L6 / LARA-R6 - 3 (default and factory-programmed value)
<parity>	Number	• 0: odd • 1: even Allowed values: • LARA-L6 / LARA-R6 - The parameter is not supported

14.6.4 Notes

LARA-L6 / LARA-R6

- The command setting is not stored in the personal profile.

14.7 Set flow control \Q

\Q						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

14.7.1 Description

Controls the operation of the local flow control between DTE and DCE. It is used when the data are sent or received.

When the software flow control (XON/XOFF) is used, the DC1 (XON, 0x11) and DC3 (XOFF, 0x13) characters are reserved and therefore filtered (e.g. in SMS text mode these two characters can not be input).

Since the DTE-DCE communication relies on the correct reception of DC1/DC3 characters, the UART power saving should be disabled on the module when SW flow control is used. If the UART power saving is active, the DC1/DC3 characters could be used to wake up the module's UART, and therefore lost. In case a DC3 character (XOFF) is correctly received by module's UART and some data is waiting to be transmitted, the module is forced to stay awake until a subsequent DC1 character (XON) is received.

☞ The software flow control (XON/XOFF) setting is not allowed on the USB interfaces, on the SPI interface and on a multiplexer channel. See the Multiple AT command interfaces for all the behavior differences in respect to the supported interfaces.

14.7.2 Syntax

Type	Syntax	Response	Example
Set	AT\Q[<value>]	OK	AT\Q3 OK

14.7.3 Defined values

Parameter	Type	Description
<value>	Number	• 0: no flow control • 1: DC1/DC3 on circuit 103 and 104 (XON/XOFF) • 3 (default value): DCE_by_DTE on circuit 105 (RTS) and DTE_by_DCE on circuit 106 (CTS) Allowed values: • LARA-L6 / LARA-R6 - 0, 1, 3

14.7.4 Notes

LARA-L6 / LARA-R6

- This command has no effect. To change UART flow control settings use AT&K command.

14.8 UART data rate configuration +IPR

+IPR						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	Profile	No	-	+CME Error

14.8.1 Description

Specifies the data rate at which the DCE accepts commands on the UART interface. The full range of data rates depends on HW or other criteria.

☞ LARA-L6 / LARA-R6
The command is not applicable on the USB interface and the DCE returns an error result code if the command is issued.

14.8.2 Syntax

Type	Syntax	Response	Example
Set	AT+IPR=[<rate>]	OK	AT+IPR=9600 OK
Read	AT+IPR?	+IPR: <rate> OK	+IPR: 9600 OK
Test	AT+IPR=?	+IPR: (list of supported autodetectable <rate> values)[,(list of fixed only <rate> values)] OK	+IPR: (0,2400,4800,9600,19200, 38400,57600,115200),() OK

14.8.3 Defined values

Parameter	Type	Description
<rate>	Number	Allowed baud rates expressed in b/s (0, if present, means autobauding): • LARA-L6 / LARA-R6 - 115200 (default and factory-programmed value), 230400, 460 800, 921600, 3000000

14.8.4 Notes

- On the UART AT interface, after the reception of the "OK" result code for the +IPR command, the DTE shall wait for at least 100 ms before issuing a new AT command; this is to guarantee a proper baud rate reconfiguration.

LARA-L6 / LARA-R6

- The primary UART interface baud rate configuration is stored in the NVM, while the AUX UART interface baud rate configuration is volatile.
- This command is not supported in the multiplexer mode. See the +CMUX AT command for more details.
- The <rate> parameter is mandatory.
- Baud rate changes using +IPR may occur asynchronously to the final result code.

14.9 Return to on-line data state O

O						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	-	+CME Error

14.9.1 Description

Causes the DCE to return to online data state and issue a CONNECT intermediate result code on DTE.

ATO command is used to resume both circuit-switched and packet-switched data call. The resume is only possible if the PPP L2 protocol is used.

LARA-L6 / LARA-R6
It allows the DCE to return to online data state, after an ON-to-OFF transition of circuit 108/2 or escape sequence that has caused the DCE to enter in command mode (see &D).

14.9.2 Syntax

Type	Syntax	Response	Example
Action	ATO	<response>	ATO CONNECT

14.9.3 Defined values

Parameter	Type	Description
<response>	String	• CONNECT • NO CARRIER: the online data state cannot be resumed

14.9.4 Notes

- The command provides an error result code ("+CME ERROR: operation not allowed" if +CMEE is set to 2) in the following cases:
  - The DCE is not in online command state
  - It is issued on a DCE different from the one in online command state

- In case of PSD call, any data from the network (downlink data) received by the DCE during the on-line command state is discarded. This means that after the O command and on-line data state resume, any possible data loss has to be recovered by upper layer protocols (e.g. TCP).

14.10 Escape character S2

S2						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	Profile	No	-	+CME Error

14.10.1 Description

Controls the decimal value of the ASCII character used as the escape character. A value greater than 127 disables the escape process, i.e. no escape character will be recognized. The escape sequence contains three escape characters e.g. "+++".

14.10.2 Syntax

Type	Syntax	Response	Example
Set	ATS2=<value>	OK	ATS2=43
			OK
Read	ATS2?	<value>	043
		OK	OK

14.10.3 Defined values

Parameter	Type	Description
<value>	Number	Range 1 to 255. The answer to the read command is in "xxx" format. The default and the factory-programmed value is 43 (ASCII '+').

14.10.4 Notes

LARA-L6 / LARA-R6

- The command has no effect.

14.11 Command line termination character S3

S3						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	Profile	No	-	+CME Error

14.11.1 Description

Sets a value representing the decimal IRA5 value of the character recognized by the DCE from the DTE, to terminate the incoming command line. It is also generated by the DCE as part of the header, trailer and terminator for result codes and information text, along with the S4 setting.

14.11.2 Syntax

Type	Syntax	Response	Example
Set	ATS3=<value>	OK	ATS3=13
			OK
Read	ATS3?	<value>	013
		OK	OK

14.11.3 Defined values

Parameter	Type	Description
<value>	Number	Range 0 to 127. The answer to the read command is in "xxx" format. The default and the factory-programmed value is 13 (ASCII carriage return (CR, IRA5 0/13)).

14.11.4 Notes

LARA-L6 / LARA-R6

- The command setting is not stored in the personal profile.

14.12 Response formatting character S4

S4						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	Profile	No	-	+CME Error

14.12.1 Description

Sets a value representing the decimal IRA5 value of the character generated by the DCE as part of the header, trailer and terminator for result codes and information text, along with the S3 setting.

14.12.2 Syntax

Type	Syntax	Response	Example
Set	ATS4=<value>	OK	ATS4=10 OK
Read	ATS4?	<value> OK	010 OK

14.12.3 Defined values

Parameter	Type	Description
<value>	Number	Range 0 to 127. The answer to the read command is in "xxx" format. The default and the factory-programmed value is 10 (line feed (LF, IRA5 0/10)).

14.12.4 Notes

LARA-L6 / LARA-R6

- The command setting is not stored in the personal profile.

14.13 Command line editing character S5

S5						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	Profile	No	-	+CME Error

14.13.1 Description

Sets a value representing the decimal IRA5 character recognized by the DCE as a request to delete from the command line the immediately preceding character.

14.13.2 Syntax

Type	Syntax	Response	Example
Set	ATS5=<value>	OK	ATS5=8

Type	Syntax	Response	Example
			OK
Read	ATS5?	<value>	008
		OK	OK

14.13.3 Defined values

Parameter	Type	Description
<value>	Number	Range 0 to 127. The answer to the read command is in "xxx" format. The default and the factory-programmed value is 8 (ASCII backspace (BS, IRA5 0/8)).

14.13.4 Notes

LARA-L6 / LARA-R6

- The command setting is not stored in the personal profile.

14.14 Pause before blind dialling S6

S6						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	-	+CME Error

14.14.1 Description

Specifies the time in seconds that the DCE waits between connecting to the line and dialling, when the dial tone is not implemented or enabled. The command is not applicable for signal based mobile phone software.

14.14.2 Syntax

Type	Syntax	Response	Example
Set	ATS6=<value>	OK	ATS6=2
			OK
Read	ATS6?	<value>	002
		OK	OK

14.14.3 Defined values

Parameter	Type	Description
<value>	Number	Range 2 - 10. The answer to the read command is in "xxx" format. The default value is 2 s.

14.14.4 Notes

LARA-L6 / LARA-R6

- The command has no effect.

14.15 Connection completion timeout S7

S7						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	Profile	No	-	+CME Error

14.15.1 Description

Specifies the time in seconds, that the DCE shall allow between either answering a call or completion of dialling and establishment of a connection with a remote site.

14.15.2 Syntax

Type	Syntax	Response	Example
Set	ATS7=<value>	OK	ATS7=30 OK
Read	ATS7?	<value> OK	060 OK

14.15.3 Defined values

Parameter	Type	Description
<value>	Number	Range 1 - 255. The answer to the read command is in "xxx" format. • LARA-L6 / LARA-R6 - The default value is 0

14.15.4 Notes

LARA-L6 / LARA-R6

- The command has no effect.

14.16 Command dial modifier time S8

S8						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	-	+CME Error

14.16.1 Description

Specifies the amount of time, in seconds, that the DCE shall pause during dialling, when a ',' (comma) dial modifier is encountered in a dial string.

☞ The command has no effect.

14.16.2 Syntax

Type	Syntax	Response	Example
Set	ATS8=<value>	OK	ATS8=4 OK
Read	ATS8?	<value> OK	002 OK

14.16.3 Defined values

Parameter	Type	Description
<value>	Number	Range 0 - 255. The answer to the read command is in "xxx" format. The default value is 2.

14.17 Automatic disconnect delay S10

S10						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	-	+CME Error

14.17.1 Description

Specifies the time in tenth of a second, that the DCE will remain connected to the line after the DCE has indicated the absence of received line signal. Not supported for GSM but the OK response is returned.

14.17.2 Syntax

Type	Syntax	Response	Example
Set	ATS10=<value>	OK	ATS10=30 OK
Read	ATS10?	<value> OK	030 OK

14.17.3 Defined values

Parameter	Type	Description
<value>	Number	Range 1 - 254. Default: 1

14.17.4 Notes

LARA-L6 / LARA-R6

- The command has no effect.

14.18 Command echo E

E						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	Profile	No	-	+CME Error

14.18.1 Description

Controls whether or not the MT echoes characters received from the DTE during command state.

14.18.2 Syntax

Type	Syntax	Response	Example
Set	ATE[<value>]	OK	ATE1 OK

14.18.3 Defined values

Parameter	Type	Description
<value>	Number	• 0: echo off

Parameter	Type	Description
		• 1 (default and the factory-programmed value): echo on

14.18.4 Notes

LARA-L6 / LARA-R6

- The command setting is stored in the NVM.

14.19 Result code suppression Q

Q						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	Profile	No	-	+CME Error

14.19.1 Description

Determines if DCE transmits result codes to the DTE or not. When result codes are being suppressed, no portion of any intermediate, final or URC is transmitted. Information text transmitted in response to commands is not affected by this setting.

14.19.2 Syntax

Type	Syntax	Response	Example
Set	ATQ[<value>]	OK	ATQ1 OK

14.19.3 Defined values

Parameter	Type	Description
<value>	Number	• 0 (default and the factory-programmed value): DCE transmits result codes • 1: Result codes are suppressed and not transmitted

14.19.4 Notes

LARA-L6 / LARA-R6

- The command setting is not stored in the personal profile.

14.20 DCE response format V

V						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	Profile	No	-	+CME Error

14.20.1 Description

Control the contents of the header and trailer transmitted with result codes and information text responses. It also determines whether the result code is transmitted in a numeric form or an alphabetic (or verbose) form. The information text response is not affected by this setting. See Information text responses and result codes for description of the result code formats.

14.20.2 Syntax

Type	Syntax	Response	Example
Set	ATV[<value>]	OK	ATV1 OK

14.20.3 Defined values

Parameter	Type	Description
<value>	Number	• 0: DCE transmits limited headers, trailers and numeric text • 1 (default and the factory-programmed value): DCE transmits full headers, trailers and verbose response text

14.20.4 Notes

LARA-L6 / LARA-R6

- The command setting is stored in the NVM.

14.21 Result code selection and call progress monitoring control X

X						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	Profile	No	-	+CME Error

14.21.1 Description

In a CS data call, determines how the DCE transmits to the DTE the CONNECT result code.

14.21.2 Syntax

Type	Syntax	Response	Example
Set	ATX[<value>]	OK	ATX1 OK

14.21.3 Defined values

Parameter	Type	Description
<value>	Number	• 0: CONNECT result code is given upon entering online data state; • 1-4: CONNECT <speed> result code is given upon entering online data state; The default and factory-programmed value is: • LARA-L6 / LARA-R6 - 0
<speed>	Number	Transfer speed for CSD calls configured via the +CBST AT command

14.21.4 Notes

LARA-L6 / LARA-R6

- The command setting is stored in the NVM.

14.22 Reset to default configuration Z

Z						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

14.22.1 Description

Resets the DCE configuration into a known state; the reset includes the loading of the settings stored in the profile identified by the <value> parameter, into the current profile, and the application of the settings.

When the command is issued, any CSD call in progress is released. In case of success, the result code is issued using the format configuration (Q, V, S3, S4 commands) loaded from the requested profile. The other DCE settings are applied after the result code has been sent.

14.22.2 Syntax

Type	Syntax	Response	Example
Action	ATZ[<value>]	OK	

14.22.3 Defined values

Parameter	Type	Description
<value>	Number	Profile index, optional parameter. Allowed values: • LARA-L6 / LARA-R6 - 0 (default value)

15 SIM management

15.1 Generic SIM access +CSIM

+CSIM						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	-	+CME Error

15.1.1 Description

Allows direct control of the SIM by a distant application on the TE. This command transparently transmits the <command> to the SIM via the MT. The <response> is returned in the same manner to the TE.

☞ The command needs the SIM module to work correctly.

☞ It is recommended to wait some seconds after boot (or reset) before using the command.

☞ LARA-L6 / LARA-R6
Operations linked to USIM application can be performed after the ADF USIM selection: issue the AT +CSIM=14,"00A40004027FFF" command to avoid ambiguous behavior.

☞ LARA-L6 / LARA-R6
The PIN insertion is not mandatory before the command execution.

15.1.2 Syntax

Type	Syntax	Response	Example
Set	AT+CSIM=<length>,<command>	+CSIM: <length>,<response> OK	AT+CSIM=14,"A0A40000027F20" +CSIM: 4,"6E00" OK
Test	AT+CSIM=?	OK	OK

15.1.3 Defined values

Parameter	Type	Description
<length>	Number	Length of the characters sent to the TE in <command> or <response> parameters
<command>	String	Command passed on by MT to SIM in hex format; see the 3GPP TS 51.011 [88] and ETSI TS 102 221 [167]
<response>	String	Response to the command passed on by the SIM to the MT (3GPP TS 51.011 [88] and ETSI TS 102 221 [167])

15.2 Restricted SIM access +CRSM

+CRSM						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	< 10 s	+CME Error

15.2.1 Description

Allows easy access to the SIM database. The set command transmits the SIM command and its required parameters to the MT. The MT handles internally all SIM-MT interface locking and file selection routines. As response to the command, the MT sends the actual SIM information parameters and response data. An error

result code may be returned when the command cannot be passed to the SIM, but the failure in the execution of the command in the SIM is reported in <sw1> and <sw2> parameters.

The expected response time shall be increased when using a remote SIM card via SAP and in case of simultaneous access to the SIM by another AT interface or by internal clients (e.g. BIP, IMS).

☞ The command needs the SIM module to work correctly.

☞ LARA-L6 / LARA-R6
The PIN insertion is not mandatory before the command execution.

15.2.2 Syntax

Type	Syntax	Response	Example
Set	AT+CRSM=<command>[,<fileid>[,<P1>,<P2>,<P3>[,<data> [,<pathid>]]]]	+CRSM: <sw1>,<sw2>[,<response>] OK	AT+CRSM=176,28471,0,0,3 +CRSM: 144,0,"989301770020594178F2" OK
Test	AT+CRSM=?	OK	OK

15.2.3 Defined values

Parameter	Type	Description
<command>	Number	Allowed commands: • 176: read binary • 178: read record • 192: get response • 203: retrieve data • 214: update binary • 219: set data • 220: update record • 242: status Allowed values: • LARA-L6 / LARA-R6 - 176, 178, 192, 214, 220, 242
<fileid>	Number	Identifies an elementary datafile on SIM. Mandatory for each command except STATUS (e.g. 28423: meaning IMSI file (6F07)). For a complete description of Elementary Files (EF), see 3GPP TS 31.102 [89].
<P1>, <P2>, <P3>	Number	Defines the request. These parameters are mandatory for each command, except GET RESPONSE and STATUS. The values are described in 3GPP TS 51.011 [88] and ETSI TS 102 221 [167].
<data>	String	Information which shall be written to the SIM (hexadecimal character format; see the +CSCS - string containing hexadecimal characters)
<pathid>	String	Contains the path of an elementary file on the SIM/UICC in hexadecimal format as defined in ETSI TS 102 221 [167] (e.g. "7F205F70" in SIM and UICC case). The <pathid> shall only be used in the mode "select by path from MF" as defined in ETSI TS 102 221 [167].
<sw1>, <sw2>	Number	Contains SIM information about the execution of the actual command and can be (more details in 3GPP TS 51.011 [88] and ETSI TS 102 221 [167]). Status words examples for 2G SIM cards: • 0x90 0x00: normal ending of the command • 0x9F 0xXX: length XX of the response data • 0x92 0x0X: command successful but after using an internal retry routine X times • 0x92 0x40: memory problem • 0x94 0x00: no EF selected • 0x94 0x02: out of range (invalid address) • 0x94 0x04: file ID not found; pattern not found • 0x94 0x08: file is inconsistent with the command • 0x98 0x02: no CHV initialized

Parameter	Type	Description
		• 0x98 0x04: access condition not fullfiled / unsucc. CHV verify / authent.failed • 0x98 0x08: in contradiction with CHV status • 0x98 0x10: in contradiction with invalidation status • 0x98 0x40: unsucc. CHV-verif. or UNBLOCK CHV-verif. / CHV blocked / UNBL.blocked • 0x67 0xXX: incorrect parameter P3 • 0x6A 0x81: function not supported • 0x6A 0x82: file not found • 0x6B 0xXX: incorrect parameter P1 or P2 • 0x6D 0xXX: unknown instruction code given in the command • 0x6E 0xXX: wrong instruction class given in the command • 0x6F 0xXX: technical problem with no diagnostic given Status words examples for 3G SIM cards: • 0x90 0x00: normal ending of the command • 0x91 0xXX: length XX of the response data • 0x63 0xCX: command successful but after using an internal retry routine X times • 0x62 0x00: no information given, state of non volatile memory unchanged • 0x64 0x00: no information given, state of non-volatile memory unchanged • 0x65 0x00: no information given, state of non-volatile memory changed • 0x65 0x81: memory problem • 0x67 0x00: wrong length • 0x69 0x85: conditions of use not satisfied • 0x69 0x86: command not allowed (no EF selected) • 0x69 0x82: security status not satisfied • 0x62 0x81: part of returned data may be corrupted • 0x6A 0x81: function not supported • 0x6A 0x82: file not found • 0x6A 0x83: record not found • 0x6B 0x00: wrong parameter(s) P1, P2 • 0x6D 0x00: instruction code not supported or invalid • 0x6E 0x00: instruction code not supported or invalid • 0x6F 0x00: technical problem, no precise diagnosis
<response>	String	The response of successful completion of the command previously issued (hexadecimal character format; see the +CSCS). STATUS and GET RESPONSE return data, which gives information about the current elementary datafield. This information includes the type of file and its size (see the 3GPP TS 51.011 [88] and the ETSI TS 102 221 [167]). After READ BINARY or READ RECORD command the requested data will be returned. <response> is not returned after a successful UPDATE BINARY or UPDATE RECORD command.

15.2.4 Notes

LARA-L6 / LARA-R6

- The following set command syntax is also allowed: AT+CRSM=<command>,<fileid>,<P1>,<P2>,<P3>,[<data>],<pathid>.

15.3 Read the SIM language +CLAN

+CLAN						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

15.3.1 Description

Reads the language from the SIM.

The read syntax will display the most preferred language from the preferred language list in:

- LARA-L6 / LARA-R6 - the EF_{LI} (6F05) file. If the EF_{LI} file does not exist, the preferred language is read from EF_{PL} (2F05) file.

15.3.2 Syntax

Type	Syntax	Response	Example
Set	AT+CLAN=<code>	OK	AT+CLAN="en" OK
Read	AT+CLAN?	+CLAN: <code> OK	+CLAN: "en" OK
Test	AT+CLAN=?	OK	

15.3.3 Defined values

Parameter	Type	Description
<code>	String	It is a two-letter abbreviation of the language. The language codes, as defined in ISO 639, consists of two characters, e.g. "en", "it" etc

15.3.4 Notes

LARA-L6 / LARA-R6

- The set command is not supported.

15.4 Check for UICC card +UUICC

+UUICC						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

15.4.1 Description

Returns the type of application which is present on the ICC or UICC.

☞ LARA-L6 / LARA-R6
The command needs the SIM module to work correctly.

15.4.2 Syntax

Type	Syntax	Response	Example
Read	AT+UUICC?	+UUICC: <state> OK	+UUICC: 1 OK

15.4.3 Defined values

Parameter	Type	Description
<state>	Number	• 0: 2G SIM (SIM application present) • 1: 3G SIM (USIM application present) • 2: 4G SIM (USIM and ISIM applications present) Allowed values: • LARA-L6 / LARA-R6 - 0, 1, 2

15.5 SIM hot insertion configuration +UDCONF=50

+UDCONF=50						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

15.5.1 Description

Configures the SIM hot insertion feature. The feature enables the SIM interface upon detection of external SIM card physical insertion / removal and behaves accordingly, triggering registration to / deregistration from the cellular network.

LARA-L6 / LARA-R6
The +CIEV URC (see +CMER AT command) and +CIND AT command notify the SIM card detection status.

The command setting is saved in NVM and will be effective at the next power on.

15.5.2 Syntax

Type	Syntax	Response	Example
Set	AT+UDCONF=50,<sim_hot_insertion>	OK	AT+UDCONF=50,1 OK
Read	AT+UDCONF=50	+UDCONF: 50,<sim_hot_insertion> OK	AT+UDCONF=50 +UDCONF: 50,1 OK

15.5.3 Defined values

Parameter	Type	Description
<sim_hot_insertion>	Number	SIM hot insertion setting. Allowed values: • 0 (factory-programmed value): SIM hot insertion disabled • 1: SIM hot insertion enabled

15.5.4 Notes

LARA-L6 / LARA-R6

- For the correct behavior of the SIM hot insertion feature, the "SIM card detection" feature (configurable by means of the +UGPIOC AT command) must be enabled too.
- Beware that the SIM will be in a not-ready state if the SIM hot insertion feature is enabled and the "SIM card detection" feature is disabled.
- The SIM card detection status is notified by means of +CIEV URC (see +CMER AT command) and +CIND AT command only if a GPIO pin is configured as "SIM card detection" (see +UGPIOC AT command, <gpio_mode>=7).
- SIM card detection and SIM hot insertion interoperability provides an overview between the two features depending on +UGPIOC (<gpio_mode>=7) and +UDCONF=50 setting:

<sim_hot_insertion>	+UGPIOC	Remarks
-	Disabled	SIM card detection is disabled, "simind" will return always 2 (see +CIND AT command and +CIEV URC)
Disabled	Enabled	SIM cart detection status provided on GPIO pin configured as SIM card detection
Enabled	Enabled	+CIEV URC and +CIND AT command provide the SIM hot insertion status

Table 26: SIM card detection and SIM hot insertion interoperability

15.6 UICC application discovery +CUAD

+CUAD						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

15.6.1 Description

Asks the MT to discover what applications are available for selection on the UICC. According to ETSI TS 102.221 [167], the ME shall access and read the EF_{DIR} file in the UICC and return the values that are stored in its records. Each record contains the AID and optionally application parameters of one of the applications available on the UICC.

If the optional parameter(s) are requested and the EF_{DIR} file is not present in the UICC, the <response> parameter shall be empty.

15.6.2 Syntax

Type	Syntax	Response	Example
Set	AT+CUAD[=<option>] OK	+CUAD: <response>[,<active_application>[,<AID>]] OK	AT+CUAD=1 +CUAD: 61124F10A0000000871002FFFFFFFF89060400FFFFFFFFFFFFFFFFFFFFFFFF9000,2,A0000000871002FFFFFFFF89060400FF OK
Test	AT+CUAD=?	+CUAD: (list of supported <option>s) OK	+CUAD: (0,1) OK

15.6.3 Defined values

Parameter	Type	Description
<option>	Number	• 0 (default value): no parameters requested in addition to <response> • 1: include <active_application>
<response>	String	Content of the EF_{DIR} in hexadecimal format
<active_application>	Number	Active application: • 0: no SIM or USIM active • 1: active application is SIM • 2: active application is USIM, followed by <AID> • 3: active application is ISIM, followed by <AID>
<AID>	String	AID of active USIM in hexadecimal format

15.6.4 Notes

LARA-L6 / LARA-R6

- The <option> parameter is not supported, therefore the module returns only the <response> parameter in the information text response to the set command.
- The test command is not supported.
- Each EF_{DIR} file record is returned within quotation marks; e.g:

```
+CUAD: "61204F10A0000000871002FF33FFFF8906030100500C47454E45524943205553494DFFFFFFFF""61194F0CA000000063504B43532D313550094D49445066696C6573FFFFFFFFFFFFFFFFFFFFFFFF"
```

15.7 SIM states reporting +USIMSTAT

+USIMSTAT						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	NVM	No	-	+CME Error

15.7.1 Description

Configures the +UUSIMSTAT URC presentation. Based on the configuration, the URC is able to report the SIM card initialization status, the phonebook initialization status and the REFRESH proactive command execution result.

☞ If <state> 9 and 10 are reported, update all SIM card related parameters cached in the DTE's application (e.g. the IMSI retrieved with +CIMI command).

15.7.2 Syntax

Type	Syntax	Response	Example
Set	AT+USIMSTAT=<mode>	OK	AT+USIMSTAT=3 OK
Read	AT+USIMSTAT?	+USIMSTAT: <mode> OK	+USIMSTAT: 3 OK
Test	AT+USIMSTAT=?	+USIMSTAT: (list of supported <mode>s) OK	+USIMSTAT: (0-7) OK
URC		+UUSIMSTAT: <state>	+UUSIMSTAT: 8

15.7.3 Defined values

Parameter	Type	Description
<mode>	Number	Bitmask representing which indications the +UUSIMSTAT URC is allowed to report. See Table 27 for the meaning of each bit. The factory-programmed value is 0.
<state>	Number	Indicates the SIM card initialization status, the phonebook initialization status and the REFRESH proactive command execution result: • 0: SIM card not present • 1: PIN needed • 2: PIN blocked • 3: PUK blocked • 4: (U)SIM not operational • 5: (U)SIM in restricted use (FDN or BDN active) • 6: (U)SIM operational (registration may be initiated) • 7: SIM phonebook ready to be used (when the SIM application is active) • 8: USIM phonebook ready to be used (when the USIM application is active) • 9: (U)SIM toolkit REFRESH proactive command successfully concluded • 10: (U)SIM toolkit REFRESH proactive command unsuccessfully concluded

Parameter	Type	Description
		• 11: PPP connection active, (U)SIM toolkit REFRESH proactive command delayed till PPP deactivation • 12: voice call active, (U)SIM toolkit REFRESH proactive command delayed till call release • 13: CSD call active, (U)SIM toolkit REFRESH proactive command delayed till call release • 14: eSIM operational (registration may be initiated) Allowed values: • LARA-L6 / LARA-R6 - 9, 10

15.7.4 Notes

- <state>=9 and 10 will not be reported when dedicated (+CFUN: 6) or raw (+CFUN: 9) mode is active.
- Table 27 provides the meaning of each bit with the corresponding state:

Bit	States reported
0	Reports the (U)SIM initialization status (<state>'s from 0 to 6 and state 14 may be reported)
1	Reports the (U)SIM phonebook initialization status (<state>'s from 7 to 8 may be reported)
2	Reports the (U)SIM toolkit REFRESH proactive command execution result (<state>'s from 9 to 13 may be reported)

Table 27: <mode> bitmask meaning

LARA-L6 / LARA-R6

- Only <mode>=4 is supported and its factory-programmed value. By factory-programmed configuration the +USIMSTAT URCs are disabled: for more details on enabling / disabling the +USIMSTAT URCs, see the +UCUSATA AT command.

16 SIM toolkit

16.1 Introduction

SIM Application Toolkit (STK) is the 3GPP standard feature that allows the Subscriber Identity Module (SIM) to handle the DCE, by issuing commands such as sending SMS to the network, or triggering a SIM refresh, or asking for local information (e.g. Location, IMEI), and monitor its access to the cellular network, by configuring notifications for relevant events (envelopes).

The processing of SIM Application toolkit commands can be seamlessly performed by the DCE, or can be done by the host application by activating the SIM toolkit AT interface either in dedicated or in raw mode, where supported. In dedicated mode, the DTE is notified of STK commands and events after decoding; in raw mode the DTE is notified with the raw data as received from the SIM. Only one mode can be enabled and function at a time.

Most commands in this section (with the exception of +UBIP, +UCATPROF, +STKPROF, +CUSATW and +CUSATR AT commands, where supported) properly work only if the SIM toolkit interface has been activated by the DTE. Otherwise the SIM toolkit processing will be blocked.

If an AT command related to the dedicated mode is used when the raw mode is enabled (and vice versa), an error result code ("+CME ERROR: operation not allowed" if the +CMEE is set to 2) is usually returned.

For more details on the SIM Application toolkit command description and parameters, see 3GPP TS 51.014 [103] and ETSI TS 102.223 [166].

LARA-L6 / LARA-R6
The SIM toolkit AT interface is not supported: all SIM toolkit commands are autonomously handled by the module.

The setup menu fetched from the SIM card may vary with the terminal profile supported by the MT, which is affected by the capabilities of the module itself (e.g. speech): this implies that different u-blox modules may display different setup menus with the same SIM card.

The SIM card can establish data sessions with a SIM OTA server using the the module's cellular connectivity by means of the Bearer Independent Protocol (BIP) feature.

The STK commands related to the Bearer Independent Protocol, i.e. Open Channel, Close Channel, Receive Data, Send Data, Get Channel Status and the events Data Available and Channel Status, are autonomously managed by the device without the intervention from the TE, unless the dedicated mode is supported and activated and the Open Channel command requires the user intervention (see ETSI TS 102 223 [166]).

16.2 Bearer Independent Protocol status indication +UBIP

+UBIP						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

16.2.1 Description

Configures the Bearer Independent Protocol status indication, i.e. the +UUBIP URC presentation.

The channel status event provides information about the link status and its drop, therefore it is advisable to enable it where available.

16.2.2 Syntax

Type	Syntax	Response	Example
Set	AT+UBIP=<mode>	OK	AT+UBIP=1 OK
Read	AT+UBIP?	+UBIP: <mode> OK	+UBIP: 0 OK
Test	AT+UBIP=?	+UBIP: (list of supported <mode>'s) OK	+UBIP: (0,1) OK
URC		+UUBIP: <ev_cmd>,<val>	+UUBIP: 10,261

16.2.3 Defined values

Parameter	Type	Description
<mode>	Number	Indicates whether the +UUBIP URC is enabled or not: • 0 (factory-programmed value): BIP status indication disabled • 1: BIP status indication enabled • 2: OPEN CHANNEL, CLOSE CHANNEL and CHANNEL STATUS EVENT status indications enabled Allowed values: • LARA-L6 / LARA-R6 - 0, 1
<ev_cmd>	Number	Indicates the event download's tag or proactive command's tag. Allowed values: • 10: Channel status event • 64: Open channel proactive command • 65: Close channel proactive command • 66: Receive data proactive command • 67: Send data proactive command
<val>	Number	Indicates the channel status (in case of the event download channel status) or result in case of a proactive command (see ETSI TS 102 223 [166])

16.3 Read the USAT profile +CUSATR

+CUSATR						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	-	+CME Error

16.3.1 Description

Reads the USAT terminal profile for the given profile storage. If the <profile_storage> parameter is omitted in the set command, the information text response will return the profile for all the supported profile storage values.

16.3.2 Syntax

Type	Syntax	Response	Example
Set	AT+CUSATR[=<profile_storage>]	+CUSATR: <profile_storage>, <profile> OK	AT+CUSATR=1 +CUSATR: 1,"F31FE84A119C00878C00001FE060000043C0000000004000400000000008" OK
Test	AT+CUSATR=?	+CUSATR: (list of supported <profile_storage>s) OK	+CUSATR: (0-5) OK

16.3.3 Defined values

Parameter	Type	Description
<profile_storage>	Number	Allowed values: • 0: the TE profile that can be set with the +CUSATW AT command • 1: the MT profile that can be set with the +CUSATW AT command • 2: MT default profile that reflects the inherent, default supported facilities of the MT • 3: UICC profile that reflects the currently active UICC profile that was sent to the UICC in the last TERMINAL PROFILE command • 4: UICC EF_{UST}. It represents the elementary file that indicates services available in the USIM • 5: list of MT only facilities (facilities that are not allowed to be assigned to the TE, see 3GPP TS 31.111 [142])
<profile>	String	The profile in hexadecimal character format describing the supported facilities of the referenced <profile_storage> as specified for the Terminal Profile in 3GPP TS 31.111 [142] or for the related EF in 3GPP TS 31.102 [89].

16.4 Write the USAT profile +CUSATW

+CUSATW						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	NVM	No	-	+CME Error

16.4.1 Description

Writes a USAT terminal profile to the profile storage location. If the profile storage parameter is omitted in the set command, it resets the profiles for all the supported profile storage values to factory-programmed setting. If only the profile parameter is omitted, it will reset the given profile storage to factory-programmed setting.

16.4.2 Syntax

Type	Syntax	Response	Example
Set	AT+CUSATW[=<profile_storage>[,<profile>]]	OK	AT+CUSATW=1,"F31FE84A119C00878C00001FE060000043C0000000004000400000000008" OK
Test	AT+CUSATW=?	+CUSATW: (list of supported <profile_storage>s) OK	+CUSATW: (0,1) OK

16.4.3 Defined values

Parameter	Type	Description
<profile_storage>	Number	Allowed values: • 0: TE. It refers to the profile storage for the facilities supported by the TE. The default value is a blank profile with all bits set to zero. This value is applicable both in the execution command and in the information text response. • 1: MT. It refers to the profile storage for the facilities to be supported by the MT, which can be a subset of the default MT facilities. The TE can choose to register a subset of the MT default profile, typically omitting facilities also supported by the TE profile. The default value is the MT default profile. This value is applicable both in the execution command and in the information text response.
<profile>	String	The profile in hexadecimal character format describing the supported facilities of the referenced <profile_storage> as specified for the Terminal Profile in 3GPP TS 31.111 [142] or for the related EF in 3GPP TS 31.102 [89].

16.4.4 Notes

LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D

- The PIN insertion is not mandatory before the command execution.

16.5 Enable USAT terminal URCs +UCUSATA

+UCUSATA						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

16.5.1 Description

Enables the USAT terminal URCs to the TE for USAT proactive commands sent from the UICC to the MT.

16.5.2 Syntax

Type	Syntax	Response	Example
Set	AT+UCUSATA=<active_URC>	OK	AT+UCUSATA=0 OK
Read	AT+UCUSATA?	+UCUSATA: <active_URC> OK	+UCUSATA: 0 OK
Test	AT+UCUSATA=?	+UCUSATA: (list of supported <active_URC>s) OK	+UCUSATA: (0-7) OK
URC		+CUSATP: <proactive_command>	
URC		+CUSATEND	

16.5.3 Defined values

Parameter	Type	Description
<active_URC>	Number	Bitmask representing which URCs are activated. See Table 28 for the meaning of each bit. The factory-programmed value is 0.
<proactive_command>	String	Command in hexadecimal character format. Proactive command as defined in 3GPP TS 31.111 [142], consisting of the full BER-TLV data object.

16.5.4 Notes

- The MT issues the +CUSATP URC to forward to the TE proactive commands issued by the UICC.
- The MT issues the +CUSATEND URC when the UICC indicates that the proactive command session is terminated.
- Table 28 provides the meaning of each bit with the corresponding state:

Bit	States reported
0	Enable the +CUSATEND URC
1	Enable the +CUSATP URC
2	Enable the +UUSIMSTAT URC

Table 28: <mode> bitmask meaning

17 Packet switched data services

17.1 PDP contexts and parameter definition

17.1.1 Primary and secondary PDP contexts

A PDP context can be either **primary** or **secondary**. In LTE, PS data connections are referred to as EPS bearers: EPS bearers are conceptually equivalent to the legacy PDP contexts, which are often referred to for sake of simplicity. Similarly to a PDP context, the EPS bearer can be a default (primary) or dedicated (secondary) one. The initial EPS bearer established during LTE attach procedure is actually a default EPS bearer. A secondary PDP context uses the same IP address of a primary PDP context (the usual PDP context activated e.g. via dial-up). The Traffic Flow Filters for such secondary contexts shall be specified according to 3GPP TS 23.060 [82].

The typical usage of the secondary PDP contexts is in VoIP calls, where RTP (speech) packets are conveyed on one PDP context (e.g. the primary one) with a given QoS (e.g. low reliability) whereas SIP signalling is routed on a different PDP context (e.g. the secondary one, with the same IP address but different port numbers) with a more reliable QoS.

A Traffic Flow Template (i.e. a filter based on port number, specifying relative flow precedence) shall be configured for the secondary context to instruct the GGSN to route down-link packets onto different QoS flows towards the TE.

PDP context type	Activation procedure
Primary	Used to establish a logical connection through the network from the UE to the GGSN with a specifically negotiated Quality of Service (QoS). The UE initiates the PDP context activation: it changes the session management state to active, creates the PDP context, obtains the IP address and reserves radio resources. After the activation, the UE is able to send IP packets over the air interface.
Secondary	Used to establish a second PDP context with the same IP address and the same APN as the primary PDP context. The two contexts may have different QoS profiles, which makes the feature useful for applications that have different QoS requirements (e.g. IP multimedia); QoS is applied based on port number addressing.

☞ LARA-L6 / LARA-R6
At most 7 secondary PDP contexts may be associated to a primary PDP context; the maximum number of primary PDP contexts that can be activated are 5, while the total number of PDP contexts, both primary and secondary, that can be activated are 8.

17.1.2 Multiple PDP contexts

Two PDP context types are defined:

- "external" PDP context: IP packets are built by the DTE, the MT's IP instance runs the IP relay function only;
- "internal" PDP context: the PDP context (relying on the MT's embedded TCP/IP stack) is configured, established and handled via the data connection management AT commands.

Multiple PDP contexts are supported. The DTE can access these PDP contexts either alternatively through the physical serial interface, or simultaneously through the virtual serial ports of the multiplexer (multiplexing mode MUX), with the following constraints:

- Using the MT's embedded TCP/IP stack, only an internal PDP context is supported. This IP instance supports up to 7 sockets;
- The sum of active external and internal PDP contexts cannot exceed the maximum number of active PDP contexts indicated in the <cid> parameter description;

- Using external PDP contexts via dial-up, it is usually possible to have at most 3 PPP instances simultaneously active.

17.1.3 Parameter definition

17.1.3.1 <APN>

The Access Point Name (APN) is a string parameter, which is a logical name, valid in the current PLMN's domain, used to select the Gateway GPRS Support Node (GGSN) or the external packet data network to be connected to.

The APN can be omitted: this is the so-called "blank APN" setting, which may be required by some mobile network operators; in this case the APN string is not included in the message sent to the network, which will provide the module with the assigned APN in the message response. When "blank APN" is used by the module, some mobile network operators do not provide a valid APN and assign an "anchor" or "default" APN, which does not allow bi-directional traffic with the packet data network: in these cases the network specific APN shall be known in advance and defined before establishing the PDP context/PDN connection.

The maximum length of the parameter is:

- LARA-L6 / LARA-R6 - 62 characters

LARA-L6 / LARA-R6
Blank APN can be used only for LTE attach.

17.1.3.2 <cid>

PDP context identifier. A numeric parameter specifying a particular PDP context definition. This parameter is valid only locally on the interface DTE-MT.

The maximum number of definable and active PDP contexts depend(s) on the product version:[2]

Product	Max number of definable PDP contexts	Max number of active PDP contexts
LARA-L6 / LARA-R6	16 (see notes)	8

LARA-L6 / LARA-R6
The <cid> range goes from 1 to 24.

17.1.3.3 <PDP_addr>

String parameter identifying the MT in the IP-address space applicable to the PDP service. If the value is null or omitted (dynamic IP addressing), then a value may be provided by the DTE during the PDP startup procedure or, failing that, a dynamic address will be requested via DHCP. It can be read with the command AT+CGPADDR or AT+CGDCONT read command.

To request a static IP address, a fixed IP address shall be specified for the <PDP_addr> parameter of the +CGDCONT set command and the user shall not rely on PPP negotiation via IPCP CONFREQ option.

Depending on the IP-version, the <PDP_addr> consists of 4 octets (IPv4) or 16 octets (IPv6):

- IPv4: "ddd.ddd.ddd.ddd"
- IPv4v6: "ddd.ddd.ddd.ddd ddd.ddd.ddd.ddd.ddd.ddd.ddd.ddd.ddd.ddd.ddd.ddd.ddd.ddd.ddd.ddd"
- IPv6: "ddd.ddd.ddd.ddd.ddd.ddd.ddd.ddd.ddd.ddd.ddd.ddd.ddd.ddd.ddd.ddd"

17.1.3.4 <PDP_type>

The Packet Data Protocol (PDP) type is a string parameter which specifies the type of packet data protocol:

- "IP": Internet Protocol (IETF STD 5)
- "Non-IP": Non IP
- "IPV4V6": virtual <PDP_type> introduced to handle dual IP stack UE capability (see the 3GPP TS 24.301 [119])
- "IPV6": Internet Protocol, version 6 (see RFC 2460 [176])

[2] The maximum number of active PDP contexts may be limited by the MNO

LARA-L6 / LARA-R6
<PDP_type>="Non-IP" is not supported.

17.2 PPP LCP handshake behavior

When a data call is initiated by means of D* AT command, the module switches to PPP mode just after the CONNECT intermediate result code. The first step of the PPP procedure is the LCP handshake, in this phase the behavior of module series differ between them.

LARA-L6 / LARA-R6
The data call can be initiated also by the +CGDATA AT command setting "PPP" as <L2P> protocol.

Entering OnLine Command Mode (OLCM) during LCP handshake phase is strongly discouraged because the handshake procedure could be broken and should be restarted from the beginning.

LARA-L6 / LARA-R6
By default the module starts PPP in silent mode, waiting for the first LCP packet coming from the TE. If a valid LCP packet is received the module continues the LCP handshake by its side, otherwise it remains in wait state. If the module is in wait state, it is possible to make it switch back to:

- the AT command mode by toggling the DTR line (see the &D AT command).
- the online command mode by sending escape sequence "+++" or by toggling the DTR line (see the &D AT command).

17.3 Printing IP address format +CGPIAF

+CGPIAF						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	-	+CME Error

17.3.1 Description

Defines the printing format of IPv6 address parameters of the other AT commands. See RFC 4291 [182] for details of the IPv6 address format.

LARA-L6 / LARA-R6
The affected parameters are:

- In +CGDCONT the <PDP_addr> parameter
- In +CGPADDR the <PDP_addr_1> and <PDP_addr_2> parameters
- In +CGCONTRDP, the <local_address_and_subnet_mask>, <dns_prim_addr>, <dns_sec_addr>, <P_CSCF_prim_addr> and <P_CSCF_sec_addr> parameters

17.3.2 Syntax

Type	Syntax	Response	Example
Set	AT+CGPIAF=[<IPv6_AddressFormat>[,<IPv6_SubnetNotation>[,<IPv6_LeadingZeros>[,<IPv6_CompressZeros>]]]]	OK	AT+CGPIAF=1,1,1,1 OK
Read	AT+CGPIAF?	+CGPIAF: <IPv6_AddressFormat>,<IPv6_SubnetNotation>,<IPv6_LeadingZeros>,<IPv6_CompressZeros> OK	+CGPIAF: 0,0,0,0 OK

Type	Syntax	Response	Example
Test	AT+CGPIAF=?	+CGPIAF: (list of supported <IPv6_AddressFormat>s), (list of supported <IPv6_SubnetNotation>s),(list of supported <IPv6_LeadingZeros>s), (list of supported <IPv6_CompressZeros>s) OK	+CGPIAF: (0-1),(0-1),(0-1),(0-1) OK

17.3.3 Defined values

Parameter	Type	Description
<IPv6_AddressFormat>	Number	Defines the IPv6 address format: • 0 (default value): IPv4-like dot-notation used. IP address and subnetwork mask if applicable, are dot-separated • 1: IPv6-like colon-notation used. IP address and subnetwork mask if applicable and when given explicitly, are separated by a space
<IPv6_SubnetNotation>	Number	Defines the subnet-notation for <remote_address_and_subnet_mask>. The setting does not apply if <IPv6_AddressFormat>=0: • 0 (default value): both IP address and subnet mask are explicitly stated, separated by a space • 1: the printout format is applying / (forward slash) subnet-prefix Classless Inter-Domain Routing (CIDR)
<IPv6_LeadingZeros>	Number	Defines whether leading zeros are omitted or not. The setting does not apply if <IPv6_AddressFormat>=0: • 0 (default value): leading zeros omitted • 1: leading zeros included
<IPv6_CompressZeros>	Number	Defines whether 1-n instances of 16-bit-zero-values are replaced by only "::". This applies only once. The setting does not apply if <IPv6_AddressFormat>=0: • 0 (default value): no zero compression • 1: use zero compression

17.4 PDP context definition +CGDCONT

+CGDCONT						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	NVM / OP	No	-	+CME Error

17.4.1 Description

Defines the connection parameters for a PDP context, identified by the local context identification parameter <cid>. If the command is used only with parameter <cid>, the corresponding PDP context becomes undefined.

Each context is permanently stored so that its definition is persistent over power cycles.

The command is used to set up the PDP context parameters for an external context, i.e. a data connection using the external IP stack (e.g. Windows dial-up) and PPP link over the serial interface.

Usage of static i.e. user defined IP address is possible in UTRAN and GERAN but not in EUTRAN; to prevent inconsistent addressing methods across various RATs, static IP addressing is not recommended for LTE modules: 3GPP TS 23.060 [82] Rel.8 and later releases specify that a UE with EUTRAN/UTRAN/GERAN capabilities shall not include a static PDP address in PDP context activation requests.

The information text response to the read command provides the configuration of all the PDP context / EPS bearers that have already been defined. The test command returns a different row for each <PDP_type> value supported by the module.

☞ LARA-L6 / LARA-R6

After the PDP context activation, the information text response to the read command provides the configuration negotiated with the network (similarly to +CGCONTRDP AT command).

LARA-R6401D
In Verizon configuration (+UMNOPROF: 3) and when attached to roaming PLMN, the class 1 "ims" APN will not be used and the class 3 APN will be defined with <PDP_type> parameter set to IPv4-only and will be used to perform the LTE attach, as per Verizon requirements for data only devices. Such EPS attach bearer shall then be used for data connectivity, paying attention that LTE attach will be done on <cid>= 3 instead of <cid>=1.

17.4.2 Syntax

Type	Syntax	Response	Example
Set	AT+CGDCONT=[<cid>[,<PDP_type>[,<APN>[,<PDP_addr>[,<d_comp>[,<h_comp>[,<IPv4AddrAlloc>[,<emergency_indication>[,<P-CSCF_discovery>[,<IM_CN_Signalling_Flag_Ind>[,<NSLPI>]]]]]]]]]]	OK	**IPv4 example** AT+CGDCONT=1,"IP","APN_name","1.2.3.4",0,0 OK **IPv4v6 example** AT+CGDCONT=1,"IPV4V6","APN","0.0.0.0 0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0",0,0 OK **IPv6 example** AT+CGDCONT=1,"IPV6","APN","0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0",0,0 OK
Read	AT+CGDCONT?	+CGDCONT: <cid>,<PDP_type>,<APN>,<PDP_addr>,<d_comp>,<h_comp>[,<IPv4AddrAlloc>,<emergency_indication>[,<P-CSCF_discovery>,<IM_CN_Signalling_Flag_Ind>[,<NSLPI>]]] [+CGDCONT: <cid>,<PDP_type>,<APN>,<PDP_addr>,<d_comp>,<h_comp>[,<IPv4AddrAlloc>,<emergency_indication>[,<P-CSCF_discovery>,<IM_CN_Signalling_Flag_Ind>[,<NSLPI>]]]] OK	+CGDCONT: 1,"IP","web.omnitel.it","91.80.140.199",0,0,0 OK
Test	AT+CGDCONT=?	+CGDCONT: (list of supported <cid>s),<PDP_type>,,,(list of supported <d_comp>s),(list of supported <h_comp>s)[,(list of supported <IPv4AllocAddr>s),(list of supported <emergency_indication>s)[,(list of supported <P-CSCF_discovery>s),(list of supported <IM_CN_Signalling_Flag_Ind>s)[,(list of supported <NSLPI>s)]]] [+CGDCONT: (list of supported <cid>s),<PDP_type>,,,(list of supported <d_comp>s),(list of supported <h_comp>s)[,(list of	+CGDCONT: (1-3),"IP",,,(0-2),(0-4) +CGDCONT: (1-3),"IPV6",,,(0-2),(0-4) OK

Type	Syntax	Response	Example
		supported <IPv4AllocAddr>s), (list of supported <emergency_ indication>s)[,(list of supported <P-CSCF_discovery>s),(list of supported <IM_CN_Signalling_ Flag_Ind>s)[,(list of supported <NSLPI>s)]]]] OK	

17.4.3 Defined values

Parameter	Type	Description
<cid>	Number	See <cid>. The default value is 1.
<PDP_type>	String	See <PDP_type>. The default value is "IP".
<APN>	String	See <APN>. The default value is "" (blank APN).
<PDP_addr>	Number	See <PDP_addr>. The default value is "0.0.0.0"
<d_comp>	Number	PDP data compression; it can have the values: • 0 (default value): off • 1: on (predefined compression type i.e. V.42bis data compression) • 2: V.42bis data compression • 3: V.44
<h_comp>	Number	PDP header compression; it can have the values: • 0 (default value): off • 1: on (predefined compression type, i.e. RFC1144) • 2: RFC1144 • 3: RFC2507 • 4: RFC3095 ☞ <h_comp>: the available head-compressions are dependent on configuration of the stack (configured via features in the stack)
<IPv4AddrAlloc>	Number	Controls how the MT/TA requests to get the IPv4 address information: • 0 (default value): IPv4 Address Allocation through NAS Signalling • 1: IPv4 Address Allocated through DHCP
<emergency_ indication>	Number	Indicates whether the PDP context is for emergency bearer services or not: • 0 (default value): PDP context is not for emergency bearer services • 1: PDP context is for emergency bearer services
<request_type>	Number	Indicates the type of PDP context activation request for the PDP context: • 0: PDP context is for new PDP context establishment or for handover from a non-3GPP access network (how the MT decides whether the PDP context is for new PDP context establishment or for handover is implementation specific) • 1: PDP context is for emergency bearer services • 2 (default value): PDP context is for new PDP context establishment • 3: PDP context is for handover from a non-3GPP access network
<P-CSCF_discovery>	Number	Influences how the MT/TA requests to get the P-CSCF address, see 3GPP TS 24.229 [130] annex B and annex L: • 0 (default value): preference of P-CSCF address discovery not influenced by +CGDCONT • 1: preference of P-CSCF address discovery through NAS Signalling • 2: preference of P-CSCF address discovery through DHCP
<IM_CN_Signalling_ Flag_Ind>	Number	Shows whether the PDP context is for IM CN subsystem-related signalling only or not: • 0: PDP context is not for IM CN subsystem-related signalling only • 1: PDP context is for IM CN subsystem-related signalling only
<NSLPI>	Number	Indicates the NAS signalling priority requested for the corresponding PDP context: • 0 (default value): indicates that the PDP context has to be activated with the value for the low priority indicator configured in the MT. • 1: indicates that the PDP context has to be activated with the value for the low priority indicator set to "MS is not configured for NAS signalling low priority".

Parameter	Type	Description
		The MT utilises the NSLPI information provided as specified in 3GPP TS 24.301 [119] and 3GPP TS 24.008 [84].
<secure_PCO>	Number	Specifies if security protected transmission of PCO is requested or not (applicable for EPS only): • 0 (default value): Security protected transmission of PCO is not requested. • 1: Security protected transmission of PCO is requested.
<IPv4_MTU_ discovery>	Number	Influences how the MT/TA requests to get the IPv4 MTU size: • 0 (default value): Preference of IPv4 MTU size discovery not influenced by +CGDCONT. • 1: Preference of IPv4 MTU size discovery through NAS signalling.
<Local_Addr_Ind>	Number	Indicates to the network whether or not the MS supports local IP address in TFTs: • 0 (default value): indicates that the MS does not support local IP address in TFTs. • 1: indicates that the MS supports local IP address in TFTs.
<Non_IP_MTU_ discovery>	Number	Influences how the MT/TA requests to get the Non-IP MTU size (for more details, see 3GPP TS 24.008 [84]): • 0 (default value): preference of Non-IP MTU size discovery not influenced by +CGDCONT. • 1: preference of Non-IP MTU size discovery through NAS signalling.

17.4.4 Notes

Additional examples:

Command	Response	Description
		Configure the error result code format by means of the +CMEE AT command
AT+CGDCONT=?	+CGDCONT: (1-3),"IP",,,(0),(0-1) OK	Test command
AT+CGDCONT=4,"IP","internet"	+CME ERROR: operation not allowed	Define out of range PDP contexts
AT+CGDCONT=2,"IP","internet"	OK	Define allowed PDP contexts
AT+CGDCONT=1,"IP","STATREAL"	OK	Define allowed PDP contexts
AT+CGDCONT=3,"IP","tim.ibox.it"	OK	Define allowed PDP contexts
AT+CGDCONT=253,"IP","internet"	+CME ERROR: operation not allowed	Define out of range PDP contexts
AT+CGDCONT?	+CGDCONT: 2,"IP","internet","0.0.0.0",0,0 +CGDCONT: 1,"IP","STATREAL","0.0.0.0",0,0 +CGDCONT: 3,"IP","tim.ibox.it","0.0.0.0",0,0 OK	Read command

LARA-L6 / LARA-R6

- The factory-programmed settings of the initial default EPS bearer mapped to <cid>=1 are:
  - <APN> see Mobile Network Operator profiles.
  - <PDP_addr>="0.0.0.0 0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0"
  - <PDP_type>="IPV4V6"
- If <PDP_type>="IPV6", the <PDP_addr> parameter is mandatory and the allowed values are "" (blank) or a full 8 octets with colon separated format address.
- <d_comp>=1, 2, 3 are not supported.
- The command setting are stored in the NVM at the module switch off.
- The module automatically accepts Mobile Terminated PDP contexts/EPS bearers.
- The <NSLPI> parameter is not supported.
- <h_comp>=1, 2, 3 and 4 are not supported.
- If <PDP_addr> is not assigned or set to all zeros and <PDP_type>="IPV4V6", the read command will only return the all zeros IPV6 address.

- The <P-CSCF_discovery> and <IM_CN_Signalling_Flag_Ind> parameters are not supported.
- It is possible to undefine active PDP contexts, even mapped to <cid>=1. The undefined PDP contexts will not be reported by the +CGDCONT read command but they are not deactivated; the undefined active PDP contexts can be restored by re-defining them with their current <APN> and <PDP_type>.
- Undefining the PDP context associated to <cid>=1 is allowed; if done in deregistered state, it will prevent the LTE registration. In this configuration, in order to trigger LTE registration, the PDP context associated to <cid>=1 shall be re-defined and a registration cycle shall be triggered via e.g. AT+CFUN=0/AT+CFUN=1.
- In Verizon configuration (+UMNOPROF: 3) the EPS bearers with the <cid> parameter in range from 1 to 7 are defined by default and are aligned to the entries of the Verizon APN table (see the +VZWAPNE AT command).
- Synchronization of the +CGDCONT entries to instances of the LwM2M object 11 "APN connection profile":
  - Update of instances in LwM2M database (see Lightweight M2M) will cause update of the +CGDCONT entries. Create / delete / update of EPS bearers by means of the +CGDCONT AT command will cause create / delete / update of instances in LwM2M database (see Lightweight M2M). The synchronization of the +CGDCONT entries can be enabled / disabled by the +ULWM2MCONFIGEXT AT command parameter <apn_sync> which is by default enabled in +UMNOPROF: 2 (AT&T) or +UMNOPROF: 206 (AT&T FirstNet), disabled otherwise.
  - When in +UMNOPROF: 2 (AT&T) or +UMNOPROF: 206 (AT&T FirstNet) it is possible for the LwM2M AT&T server to disable a certain APN by setting resource 3 "APN Enable status" to "false". This will cause the corresponding APN to be deactivated automatically and its activation, triggered by any client including AT+CGACT, will be locally rejected. If the APN was used for EPS attach, it will be replaced by "attm2mglobal" in +UMNOPROF: 2 (AT&T) or "attiotfirstnet.fn" in +UMNOPROF: 206 (AT&T FirstNet).
- The command can temporarily return an error result code during SIM initialization.

LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D

- The PIN insertion is not mandatory before the command execution.

17.5 IPv6 configuration +UDCONF=66

+UDCONF=66						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6001-01B LARA-R6001D-01B LARA-R6401-01B LARA-R6401D-01B LARA-R6801-01B LARA-R6801D					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM / OP	No	-	+CME Error

17.5.1 Description

Configures the IPv6 support. If <IPv6_conf>=3 (IPv6 interface identifier randomization) it is mandatory to provide the <IID_mode> parameter. If <IPv6_conf>=4 (IPv6 CLAT), it is mandatory to provide the <cid> parameter.

If IPv6 is not supported, also IPv4v6 is not supported.

The configuration will be effective at the next module power-on.

17.5.2 Syntax

Type	Syntax	Response	Example
IPv6 configuration			
Set	AT+UDCONF=66,<IPv6_conf>	OK	AT+UDCONF=66,1 OK

Type	Syntax	Response	Example
Read	AT+UDCONF=66	+UDCONF: 66,<IPv6_conf>	AT+UDCONF=66
		OK	+UDCONF: 66,0
			OK
IPv6 IID is used by IPSS/TRECK during Neighbor Discovery Protocol (NDP) for Router Solicitation (RS)			
Set	AT+UDCONF=66,3,<IID_mode>	OK	AT+UDCONF=66,3,1
			OK
Read	AT+UDCONF=66,3	+UDCONF: 66,3,<IID_mode>	AT+UDCONF=66,3
		OK	+UDCONF: 66,3,1
			OK
IPv6 CLAT (Customer-side transLATor) feature for IPv4 traffic over IPv6 only PDP context			
Set	AT+UDCONF=66,4,<cid>,<clat>	OK	AT+UDCONF=66,4,1,1
			OK
Read	AT+UDCONF=66,4,<cid>	+UDCONF: 66,4,<cid>,<clat>	AT+UDCONF=66,4,1
		OK	+UDCONF: 66,4,1,1
			OK

17.5.3 Defined values

Parameter	Type	Description
<IPv6_conf>	Number	IPv6 support enable / disable: • 0: IPv6 support disabled • 1 (factory-programmed value): IPv6 support enabled; IPv6 stateless address autoconfiguration is available only for LTE (the Router Solicitation is transmitted at EPS bearer activation) • 2: IPv6 support enabled; IPv6 stateless address autoconfiguration is available for every RAT (the Router Solicitation is transmitted at PDP context/EPS bearer activation) • 3: IPv6 interface identifier (IID) randomization • 4: IPv6 CLAT (Customer-side transLATor) Allowed values: • LARA-L6 / LARA-R6 - 0, 4
<IID_mode>	Number	IID randomization mode. Allowed values: • 0 (default value): use the network assigned interface identifier (IID). During the IPv6 configuration the IID is received from the network • 1: use a random IID. According the <AT&T> device requirements 13340 [223] (CDR-CDS-183, IPv6 Addressing) a random IID shall be used
<cid>	Number	See <cid>.
<clat>	Number	IPv6 Customer-side transLATor (CLAT) feature for IPv4 traffic over IPv6 only PDP context. Allowed values: • 0 (default value): CLAT feature disabled on <cid> • 1: CLAT feature enabled on <cid>

17.5.4 Notes

LARA-L6 / LARA-R6

- The factory-programmed value of <IPv6_conf> 4 is 0 (CLAT disabled on all <cid>s).

17.6 Default CID and preferred protocol type configuration +UDCONF=19

+UDCONF=19						
Modules	LARA-L6					
	LARA-R6001 LARA-R6401 LARA-R6401D LARA-R6801 LARA-R6801D					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	NVM	No	-	+CME Error

17.6.1 Description

Specifies the default internal PDP context ID and the preferred IP type. If not explicitly specified otherwise, these parameters are used by internal applications that require IP connectivity, e.g., MQTT and HTTP.

Reboot the module (e.g. by means of the AT+CFUN=15/AT+CFUN=16 command) to make the change effective.

The read command reports the current effective setting.

LARA-R6401 / LARA-R6401D
Any active MNO profile change by means of the +UMNOPROF AT command will restore to the factory-programmed configuration for the specified profile.

17.6.2 Syntax

Type	Syntax	Response	Example
Set	AT+UDCONF=19,<cid>,<preferred_protocol_type>	OK	AT+UDCONF=19,1,0 OK
Read	AT+UDCONF=19	+UDCONF: 19,<cid>,<preferred_protocol_type> OK	AT+UDCONF=19 +UDCONF: 19,2,1 OK

17.6.3 Defined values

Parameter	Type	Description
<cid>	Number	Internal PDP context identifier used by default by AT commands. For the parameter allowed range, see <cid>. The factory-programmed value is 1.
<preferred_protocol_type>	Number	Preferred protocol type to be specified when the <cid> protocol type is IPv4v6. Allowed values: • 0 (factory-programmed value): IPv4 • 1: IPv6

17.7 Quality of service profile (requested) +CGQREQ

+CGQREQ						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	NVM	No	-	+CME Error

17.7.1 Description

Allows the DTE to specify the QoS (Quality of Service) profile requested from the Network during the PDP context activation procedure. The set command specifies the QoS profile for the context identified by the <cid> parameter. When set command is used with only <cid> parameter, it sets all requested QoS parameters for the given profile to their default value 0 (subscribed QoS).

☞ The command defines a PDP context having <PDP_type> set to "IP", <apn> set to "" and with the specified <cid>, if a PDP context with the specified <cid> was not already defined by +CGDCONT AT command.

☞ If not specified the following values are assumed:

- <cid>:1
- <precedence>: 0
- <delay>: 0
- <reliability>: 0
- <peak>: 0
- <mean>: 0

17.7.2 Syntax

Type	Syntax	Response	Example
Set	AT+CGQREQ=[<cid>[,<precedence>[,<delay>[,reliability>[,<peak>[,<mean>]]]]]]	OK	AT+CGQREQ=1,1,1,1,1,1 OK
Read	AT+CGQREQ?	+CGQREQ: <cid>,<precedence>,<delay>,<reliability>,<peak>,<mean> OK	+CGQREQ: 1,1,1,1,1,1 OK
Test	AT+CGQREQ=?	+CGQREQ: <PDP_type>,(list of supported <precedence>s),(list of supported <delay>s),(list of supported <reliability>s), (list of supported <peak>s),(list of supported <mean>s) [+CGQREQ: <PDP_type>,(list of supported <precedence>s),(list of supported <delay>s),(list of supported <reliability>s), (list of supported <peak>s),(list of supported <mean>s)] [...]] OK	+CGQREQ: "IP",(0-3),(0-4),(0-5),(0-9),(0-18,31) OK

17.7.3 Defined values

Parameter	Type	Description
<cid>	Number	See <cid>
<PDP_type>	String	See <PDP_type>
<precedence>	Number	Precedence class, it can assume the values: • 0 (default value): network subscribed • 1: high priority • 2: normal priority • 3: low priority
<delay>	Number	QoS delay class according to 3GPP TS 24.008 [84]: • 0 (default value): subscribed • 1: class 1 • 2: class 2 • 3: class 3 • 4: best effort
<reliability>	Number	QoS reliability class: • 0 (default value): subscribed • 1: class 1 (interpreted as class 2)

Parameter	Type	Description
		• 2: class 2 (GTP Unack, LLC Ack and Protected, RLC Ack) • 3: class 3 (GTP Unack, LLC Unack and Protected, RLC Ack) • 4: class 4 (GTP Unack, LLC Unack and Protected, RLC Unack) • 5: class 5 (GTP Unack, LLC Unack and Unprotected, RLC Unack) • 6: class 6 (interpreted as class 3)
<peak>	Number	QoS peak throughput class in range 0-9 according to 3GPP TS 24.008 [84]. The default value is 0.
<mean>	Number	QoS mean throughput class in range 0-18, 31 according to 3GPP TS 24.008 [84]. The default value is 0.

17.8 Quality of service profile (minimum acceptable) +CGQMIN

+CGQMIN						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	NVM	No	-	+CME Error

17.8.1 Description

DTE specifies a minimum acceptable QoS (Quality of Service) profile which is checked by the MT against the negotiated QoS profile returned by the network during the PDP context activation procedure.

The set command specifies a QoS profile for the context identified by the <cid> parameter. The QoS profile consists in a set of parameters, each one is configurable. When the set command is used with only <cid> parameter, the minimum acceptable QoS profile for the given context is undefined. In this case no check is made against the negotiated QoS profile during PDP context activation.

☞ The command defines a PDP context having <PDP_type> set to "IP", <apn> set to "" and with the specified <cid>, if a PDP context with the specified <cid> was not already defined by +CGDCONT AT command.

☞ If not specified the following values are assumed:
- <cid>: 1
- <precedence>: 3
- <delay>: 4
- <reliability>: 5
- <peak>: 1
- <mean>: 1

17.8.2 Syntax

Type	Syntax	Response	Example
Set	AT+CGQMIN=[<cid>[,<precedence>[,<delay>[,reliability>[,<peak>[,<mean>]]]]]]	OK	AT+CGQMIN=1,1,1,1,1,1 OK
Read	AT+CGQMIN?	+CGQMIN: <cid>,<precedence>,<delay>,<reliability>,<peak>,<mean> OK	+CGQMIN: 1,1,1,1,1,1 OK
Test	AT+CGQMIN=?	+CGQMIN: <PDP_type>,(list of supported <precedence>s),(list of supported <delay>s),(list of supported <reliability>s), (list of supported <peak>s),(list of supported <mean>s) [+CGQMIN: <PDP_type>,(list of supported <precedence>s),(list	+CGQMIN: "IP",(0-3),(0-4),(0-5),(0-9),(0-18,31) OK

Type	Syntax	Response	Example
		of supported <delay>s),(list of supported <reliability>s), (list of supported <peak>s),(list of supported <mean>s) [...]] OK	

17.8.3 Defined values

Parameter	Type	Description
<cid>	Number	See <cid>. The default value is 1.
<PDP_type>	String	See <PDP_type>
<precedence>	Number	Precedence class, it can assume the values: • 0: network subscribed • 1: high priority • 2: normal priority • 3 (default value): low priority
<delay>	Number	Minimum acceptable QoS delay class according to 3GPP TS 24.008 [84]: • 0: subscribed • 1: class 1 • 2: class 2 • 3: class 3 • 4 (default value): best effort
<reliability>	Number	Minimum acceptable QoS reliability class: • 0: subscribed • 1: class 1 (interpreted as class 2) • 2: class 2 (GTP Unack, LLC Ack and Protected, RLC Ack) • 3: class 3 (GTP Unack, LLC Unack and Protected, RLC Ack) • 4: class 4 (GTP Unack, LLC Unack and Protected, RLC Unack) • 5 (default value): class 5 (GTP Unack, LLC Unack and Unprotected, RLC Unack) • 6: class 6 (interpreted as class 3)
<peak>	Number	Minimum acceptable QoS peak throughput class in range 0-9 according to 3GPP TS 24.008 [84]. The default value is 1.
<mean>	Number	Minimum acceptable QoS mean throughput class in range 0-18, 31 according to 3GPP TS 24.008 [84]. The default value is 1.

17.9 PS attach or detach +CGATT

+CGATT						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	Yes	Appendix B.4	+CME Error

17.9.1 Description

Register (attach) the MT to, or deregister (detach) the MT from the packet switched (PS) services. After this command the MT remains in AT command mode. If the MT is already in the requested state (attached or detached), the command is ignored and OK result code is returned. If the requested state cannot be reached, an error result code is returned. The command can be aborted if a character is sent to the DCE during the command execution. Any active PDP context will be automatically deactivated when the PS registration state changes to detached.

☞ The user should not enter colliding requests (e.g. AT+CGATT=1 and AT+CGATT=0) on different communication ports, because this might cause interoperability issues if overlapping attach and detach requests are not handled by the network, and could result in an unpredictable registration state. Similarly, when notified of a mobile terminated detach event (e.g. via +CGEV URC), it is recommended to wait a

few seconds before entering AT+CGATT=0 in order to let the pending attach procedure (automatically triggered by the module in most cases) successfully end.

The deregistration action is carried out even if the command is aborted.

17.9.2 Syntax

Type	Syntax	Response	Example
Set	AT+CGATT=[<state>]	OK	AT+CGATT=1 OK
Read	AT+CGATT?	+CGATT: <state> OK	+CGATT: 1 OK
Test	AT+CGATT=?	+CGATT: (list of supported <state>s) OK	+CGATT: (0-1) OK

17.9.3 Defined values

Parameter	Type	Description
<state>	Number	Indicates the state of GPRS attachment: • 0: detached • 1 (default value): attached

17.10 PDP context activate or deactivate +CGACT

+CGACT						
Modules	All products					
Attributes	Syntax	PIN required	Settings saved	Can be aborted	Response time	Error reference
	full	Yes	No	Yes	Appendix B.4	+CME Error

17.10.1 Description

Activates or deactivates the specified PDP context. After the command, the MT remains in AT command mode. If any context is already in the requested state, the state for the context remains unchanged. If the required action cannot succeed, an error result code is returned. If the MT is not GPRS attached when the activation of a PDP context is required, the MT first performs a GPRS attach and then attempts to activate the specified context.

The maximum expected response time is different whenever the activation or the deactivation of a PDP context is performed: for more details, see Estimated command response time.

LARA-L6 / LARA-R6
The command cannot be aborted.
The AT+CGACT=1,<cid> command with blank APN defined for the specified <cid> will fail with a generic error.

LARA-R6401 / LARA-R6401D
In Verizon configuration (+UMNOPROF: 3), always specify the <cid> parameter when activating a context.

17.10.2 Syntax

Type	Syntax	Response	Example
Set	AT+CGACT=[<status>[,<cid>[,...]]]	OK	AT+CGACT=1,1 OK
Read	AT+CGACT?	[+CGACT: <cid>,<status> [+CGACT: <cid>,<status> [...]]]	+CGACT: 1,1 OK

Type	Syntax	Response	Example
		OK	
Test	AT+CGACT=?	+CGACT: (list of supported <status>s) OK	+CGACT: (0-1) OK

17.10.3 Defined values

Parameter	Type	Description
<status>	Number	Indicates the state of PDP context activation: • 0: deactivated • 1: activated
<cid>	Number	See <cid>.

17.10.4 Notes

LARA-L6 / LARA-R6

- If <cid> is not defined, the command activates or deactivates all the defined PDP contexts.

17.10.5 Examples

Examples of usage of +CGDCONT, +CGACT, +CGPADDR command:

Command sent by the DTE	DCE response	Description
AT+CMEE=2	OK	Set the verbose error result codes
AT+COPS=0	OK	
AT+COPS?	+COPS: 0,0,"vodafone IT" OK	
AT+CGDCONT=1,"IP","web.omnitel.it"	OK	Define several PDP contexts
AT+CGDCONT=3,"IP","internet"	OK	
AT+CGDCONT=2,"IP", "mms.vodafone.it"	OK	
AT+CGDCONT?	+CGDCONT: 1,"IP","web.omnitel.it","0.0.0.0",0,0 +CGDCONT: 3,"IP","internet","0.0.0.0",0,0 +CGDCONT: 2,"IP","mms.vodafone.it","0.0.0.0",0,0 OK	Read PDP contexts
AT+CGACT=1,1	OK	Activate the PDP context 1
AT+CGPADDR=1	+CGPADDR: 1, "91.80.104.82" OK	Show address of the PDP context 1
AT+CGPADDR=2	+CGPADDR: 2, "0.0.0.0" OK	Show the address of PDP context 2
AT+CGPADDR=3	+CGPADDR: 3, "0.0.0.0" OK	Show the address of PDP context 3
AT+CGDCONT?	+CGDCONT: 1,"IP","web.omnitel.it","91.80.104.82",0,0 +CGDCONT: 3,"IP","internet","0.0.0.0",0,0 +CGDCONT: 2,"IP","mms.vodafone.it","0.0.0.0",0,0 OK	
AT+CGACT=0,1	OK	Deactivate the PDP context 1
AT+CGDCONT?	+CGDCONT: 1,"IP","web.omnitel.it","0.0.0.0",0,0	

Command sent by the DTE	DCE response	Description
	+CGDCONT: 3,"IP","internet","0.0.0.0",0,0 +CGDCONT: 2,"IP","mms.vodafone.it","0.0.0.0",0,0 OK	
AT+CGACT=1	OK	Activate all of defined PDP contexts
AT+CGDCONT?	+CGDCONT: 1,"IP","web.omnitel.it","91.80.101.207",0,0 +CGDCONT: 3,"IP","internet","83.225.114.136",0,0 +CGDCONT: 2,"IP","mms.vodafone.it","10.159.135.60",0,0 OK	
AT+CGPADDR=1	+CGPADDR: 1, "91.80.101.207" OK	Show the address of PDP context 1
AT+CGPADDR=2	+CGPADDR: 2, "10.159.135.60" OK	Show the address of PDP context 2
AT+CGACT=0	OK	Deactivate all of defined PDP contexts
AT+CGPADDR=2	+CGPADDR: 2, "0.0.0.0" OK	Show the address of PDP context 2
AT+CGPADDR=3	+CGPADDR: 3, "0.0.0.0" OK	Show the address of PDP context 3
AT+CGDCONT?	+CGDCONT: 1,"IP","web.omnitel.it","0.0.0.0",0,0 +CGDCONT: 3,"IP","internet","0.0.0.0",0,0 +CGDCONT: 2,"IP","mms.vodafone.it","0.0.0.0",0,0 OK	
AT+CGACT=1,2	OK	Activate the PDP context 2
AT+CGDCONT?	+CGDCONT: 1,"IP","web.omnitel.it","0.0.0.0",0,0 +CGDCONT: 3,"IP","internet","0.0.0.0",0,0 +CGDCONT: 2,"IP","mms.vodafone.it","10.153.123.229",0,0 OK	
AT+CGACT=1,3	OK	Activate PDP context 3
AT+CGDCONT?	+CGDCONT: 1,"IP","web.omnitel.it","0.0.0.0",0,0 +CGDCONT: 3,"IP","internet","83.225.171.77",0,0 +CGDCONT: 2,"IP","mms.vodafone.it","10.153.123.229",0,0 OK	
AT+CGACT=1,1	OK	Activate the PDP context 1
AT+CGDCONT?	+CGDCONT: 1,"IP","web.omnitel.it","91.80.175.163",0,0 +CGDCONT: 3,"IP","internet","83.225.171.77",0,0 +CGDCONT: 2,"IP","mms.vodafone.it","10.153.123.229",0,0 OK	
AT+CGACT=0	OK	Deactivate all of defined PDP contexts
AT+CGDCONT?	+CGDCONT: 1,"IP","web.omnitel.it","0.0.0.0",0,0 +CGDCONT: 3,"IP","internet","0.0.0.0",0,0	

Command sent by the DTE	DCE response	Description
	+CGDCONT: 2,"IP","mms.vodafone.it","0.0.0.0",0,0 OK	

17.11 Enter data state +CGDATA

+CGDATA						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	See Appendix (<1 s for prompt ">" when present)	+CME Error

17.11.1 Description

Causes the MT to set up a data communication channel between the DTE and the PDP network. For the u-blox specific L2 modes M-HEX and M-RAW_IP, this means performing a GPRS attach and one or more PDP context activations, if not already done.

If the parameters are accepted (and optionally the PDP context is successfully activated), the MT displays the CONNECT IRC on the DTE and enters the online data mode, thus allowing data transfer. Other commands following +CGDATA in the command line will be processed. When the data transfer is completed, the MT re-enters into command mode and the final result code is displayed on DTE.

If an error occurs, the final result code NO CARRIER or +CME ERROR: <error> is displayed.

☞ If not specified, value 1 is assumed for <cid>.

☞ LARA-L6 / LARA-R6
The session is terminated sending **+++**, which may cause the deactivation, if active, of the PDP context depending on DTR line status, i.e. on the AT&D setting (see +++ behavior and DTR, +++ behavior).

☞ When using PPP as L2 protocol, no GPRS attach and no PDP context activation are performed until the PPP on the DTE side starts communication with the PPP on the MT side.

The M-HEX L2 protocol (AT+CGDATA="M-HEX",1) can be used as follows:

```
<int: counter> <int: length[1-1500]> <hex-sequence>[0-9a-fA-F]
cid=<int: cid>
+++<CR>
```

The following table shows some examples:

Example	Description
1 200<CR>	Send 1 packet with 200 0x2B (fill character)
5 5<CR>	Send 5 packets with 5 0x2B (fill character)
1 5 31 32 33 34 35<CR>	Send 1 packet with the given contents
1 5 1 2 3 4 05<CR>	Send 1 packet with the given contents
1 10 31 Q<CR>	Send 1 packet with 10 0x31
cid=2	Send packets on cid 2 (this requires two active PDP contexts and the M-HEX L2 protocol entered on <cid> = 1
+++	Leave the online mode

A packet is sent if one of the following conditions is met:

- the length field is terminated with <CR>
- the length value is equal to # characters of hex-sequence and it is terminated with <CR>
- the input is terminated with a character not equal to a hex digit and <CR>

The PIN insertion is not mandatory for the local dial-up, started with <cid> set to 100.

This syntax of the command is mainly used to perform regulatory and conformance testing.

17.11.2 Syntax

Type	Syntax	Response	Example
Set	AT+CGDATA=[<L2P>[,<cid>]]	CONNECT (data transfer starts)	AT+CGDATA="PPP",1 CONNECT
Test	AT+CGDATA=?	+CGDATA: (list of supported <L2P>s) OK	+CGDATA: ("PPP","M-HEX","M-RAW_IP","M-OPT-PPP") OK

17.11.3 Defined values

Parameter	Type	Description
<L2P>	String	Layer 2 protocol to be used between the DTE and MT; allowed values: • "PPP" (default value) • "M-HEX" • "M-RAW_IP" • "M-OPT-PPP" The application on the remote side must support the selected protocol as well.
<cid>	Number	See <cid>.

17.11.4 Notes

- The cid command, which has not to be confused with the <cid> parameter, can be used while in data mode for switching to a PDP context already active.
- The cid command accepts as parameter a <cid> value corresponding to a PDP context already active and has to be typed in lower-case.

LARA-L6 / LARA-R6

- Only <L2P>= "PPP" value is supported.

17.12 Enter PPP state/GPRS dial-up D*

D*						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	Appendix B.4	+CME Error

17.12.1 Description

The V.24 dial command "D", similar to the command with the syntax AT+CGDATA="PPP",<cid>, causes the MT to perform the necessary actions to establish the communication between the DTE and the external PDP network through the PPP protocol. This can include performing a PS attach and, if the PPP server on the DTE side starts communication, PDP context activation on the specified PDP context identifier (if not already requested by means of +CGATT and +CGACT commands).

If the command is accepted and the preliminary PS procedures have succeeded, the "CONNECT" intermediate result code is returned, the MT enters the V.25ter online data state and the PPP L2 protocol between the MT and the DTE is started.

The data session is terminated by one of the following events:

- Sending the escape sequence "+++" or "~+++" (see &D where supported).

- Via a DTR transition from ON to OFF (see &D where supported).
- Sending an LCP Terminate Request.

17.12.2 Syntax

Type	Syntax	Response	Example
Set	ATD[<dialing_type_char>]*<dialing_number>[*[<address>][*[<L2P>][*[<cid>]]]]#	CONNECT (data transfer starts)	ATD*99***1# CONNECT

17.12.3 Defined values

Parameter	Type	Description
<dialing_type_char>	String	Optional (legacy) "T" or "P" character indicating the tone dialing or pulse dialing respectively
<dialing_number>	Number	List all the supported values
<address>	-	Ignored
<L2P>	String	Layer 2 protocol to be used between the DTE and MT; allowed values: • "PPP" (default value) • "M-HEX" • "M-RAW_IP" • "M-OPT-PPP" ☞ The application on the remote side must support the selected protocol as well.
<cid>	Number	See <cid>

17.12.4 Notes

- Dial-up with PAP/CHAP authentication is not supported on an already active PDP context that was activated without authentication.
- The context identifier <cid> is mapped to 1 if not specified.
- The GPRS dial-up command maps to AT+CGDATA="PPP",<cid>.
- If FDN is enabled and FDN check for PS data call is supported by the module, to perform a GPRS dial-up one of the following entries must be stored in the FDN phonebook: *99#, *99*#, *99**# or *99***#.

LARA-L6 / LARA-R6

- The <L2P> parameter is ignored and automatically set to "PPP".
- ~+++ is not supported.
- +++ is used to switch to online command mode. The O AT command is used to switch back to data mode.
- During a speech call in 2G RAT, if the network does not support dual transfer mode (DTM) the dial command will return an immediate error.
- FDN check for PS data call is not supported.

17.13 Show PDP address +CGPADDR

+CGPADDR						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	-	+CME Error

17.13.1 Description

Returns a list of PDP addresses for the specified context identifiers. Only defined PDP contexts are displayed.

If the <cid> parameter is omitted, the addresses for all defined contexts are returned.

17.13.2 Syntax

Type	Syntax	Response	Example
Set	AT+CGPADDR=[<cid>[,<cid> [,...]]]	+CGPADDR: <cid>,<PDP_addr>	AT+CGPADDR=1
		[+CGPADDR: <cid>,<PDP_addr>	+CGPADDR: 1,"1.2.3.4"
		[...]]	OK
		OK	
Test	AT+CGPADDR=?	+CGPADDR: [(list of defined <cid>s)]	+CGPADDR: 1,3
		OK	OK

17.13.3 Defined values

Parameter	Type	Description
<cid>	Number	See <cid>
<PDP_addr>	Number	See <PDP_addr>

17.13.4 Notes

LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D

- The PIN insertion is not mandatory before the command execution.

17.14 Packet switched event reporting +CGEREP

+CGEREP						
Modules	All products					
Attributes	Syntax	PIN required	Settings saved	Can be aborted	Response time	Error reference
	partial	Yes	Profile	No	-	+CME Error

17.14.1 Description

Configures sending of URCs from MT to the DTE, if certain events occur in the packet switched MT or the network. By the <mode> parameter, it is possible to control the processing of the URCs codes specified within this command. The <bfr> parameter controls the effect on buffered codes when the <mode> parameter is set to 1 (discard URCs when V.24 link is reserved) or 2 (buffer URCs in the MT when link reserved and flush them to the DTE when the link becomes available).

LARA-L6 / LARA-R6
The command setting is not stored in the personal profile.

17.14.2 Syntax

Type	Syntax	Response	Example
Set	AT+CGEREP=[<mode>[,<bfr>]]	OK	AT+CGEREP=1,1
			OK
Read	AT+CGEREP?	+CGEREP: <mode>,<bfr>	+CGEREP: 0,0
		OK	OK
Test	AT+CGEREP=?	+CGEREP: (list of supported <mode>s),(list of supported <bfr>s)	+CGEREP: (0-2),(0-1)
		OK	OK
URC		+CGEV: ME PDN ACT <cid>[,<reason>[,<cid_other>]]	+CGEV: NW CLASS "CC"
		+CGEV: ME ACT <p_cid>,<cid>,<event_type>	

Type	Syntax	Response	Example
		+CGEV: ME PDN DEACT <cid>	
		+CGEV: PDN DEACT <cid>	
		+CGEV: ME DEACT <PDP_type>, <PDP_addr>,[<cid>]	
		+CGEV: ME DEACT,<p_cid>,<cid>,0	
		+CGEV: ME DEACT <p_cid>,<cid>, <event_type>	
		+CGEV: ME MODIFY <cid>, <change_reason>,<event_type>	
		+CGEV: ME DETACH	
		+CGEV: ME CLASS <class>	
		+CGEV: NW PDN ACT <cid>[, <reason>]	
		+CGEV: NW ACT <p_cid>,<cid>, <event_type>	
		+CGEV: NW PDN DEACT <cid>	
		+CGEV: NW DEACT <p_cid>,<cid>,0	
		+CGEV: NW DEACT <p_cid>,<cid>, <event_type>	
		+CGEV: NW DEACT <PDP_type>, <PDP_addr>,[<cid>]	
		+CGEV: NW MODIFY <cid>, <change_reason>,<event_type>	
		+CGEV: NW DETACH	
		+CGEV: NW CLASS <class>	
		+CGEV: VZW_SUBS_ACTION_ NORMAL (0) - No restriction to data traffic	
		+CGEV: REJECT <PDP_type>,<PDP_addr>	
		+CGEV: NW REACT <PDP_type>, <cid>	
		+CGEV: NW ACT <PDP_type>,<cid>	

17.14.3 Defined values

Parameter	Type	Description
<mode>	Number	Controls the processing of URCs specified within this command. Allowed values: • 0 (default value): buffer URCs in the MT; if the buffer is full the oldest ones will be discarded • 1: discard URCs when V.24 link is reserved (online); otherwise forward them directly to the DTE • 2: buffer URCs in the MT when link reserved (online) and flush them to the DTE when the link becomes available; otherwise forward them directly to the DTE
<bfr>	Number	Controls the effect on buffered codes when <mode> 1 or 2 is entered. Allowed values: • 0 (default value): MT buffer of URCs defined within this command is cleared when <mode> 1 or 2 is entered • 1: MT buffer of URCs defined within this command is flushed to the DTE when <mode> 1 or 2 is entered (OK is given before flushing the codes)
<cid>	Number	See <cid>
<reason>	Number	Indicates whether the reason why the context activation request for PDP type IPv4v6 was not granted: • 0: IPv4 only allowed

Parameter	Type	Description
		• 1: IPv6 only allowed • 2: single address bearers only allowed • 3: single address bearers only allowed and MT initiated context activation for a second address type bearer was not successful
<cid_other>	Number	Indicates whether the context identifier allocated by MT for an MT initiated context of a second address type
<p_cid>	Number	Numeric parameter that identifies the particular PDP context definition, specified using +CGDCONT, to which a secondary PDP context definition will be associated using +CGDSCONT. This parameter is only locally valid on the interface TE-MT.
<event_type>	Number	Indicates whether the event is informational or whether the TE has to acknowledge it: • 0: informational event • 1: information request: acknowledgement required
<change_reason>	Number	Indicates what kind of change occurred: • 1: TFT only changed • 2: QoS only changed • 3: both TFT and QoS changed
<PDP_type>	Number	See <PDP_type>
<PDP_addr>	Number	See <PDP_addr>
<class>	String	GPRS mobile class. Allowed values: • "A": class A mode of operation (A/Gb mode), or CS/PS mode of operation (Iu mode) (highest mode of operation) • "B": class B (circuit-switched and packet-switched data alternatively supported) • "CG": class C (one service only) in GPRS mode • "CC": class C (one service only) in circuit-switched (GSM) mode

17.14.4 Notes

LARA-L6 / LARA-R6

- <class>= "A" is not supported.
- There is no distinction between network and user context deactivation. Only +CGEV: PDN DEACT is shown.

17.14.5 Explanation of URCs

URC	Remarks
+CGEV: ME PDN ACT <cid>[,<reason>[,<cid_other>]]	The MT has activated a primary context.
+CGEV: ME ACT <p_cid>,<cid>,<event_type>	The network has responded to a MT initiated secondary context activation.
+CGEV: ME PDN DEACT <cid>	The MT has forced a primary context deactivation. ☞ LARA-L6 / LARA-R6 Not supported.
+CGEV: PDN DEACT <cid>	A primary context deactivation has been forced either by the MT or by the network.
+CGEV: ME DEACT <PDP_type>,<PDP_addr>,[<cid>]	The MT has forced a context deactivation. ☞ LARA-L6 / LARA-R6 <PDP_type> is not supported.
+CGEV: ME DEACT,<p_cid>,<cid>,0	The UE has forced a secondary context deactivation. ☞ LARA-L6 / LARA-R6 Not supported.

URC	Remarks
+CGEV: ME DEACT <p_cid>,<cid>,<event_type>	The MT has forced a secondary context deactivation.
+CGEV: ME MODIFY <cid>,<change_reason>,<event_type>	The MT has forced a context modification.
+CGEV: ME DETACH	The mobile station has forced a GPRS detach
+CGEV: ME CLASS <class>	The mobile station has forced a change of MT class; the highest available class is reported.
+CGEV: NW PDN ACT <cid>[,<reason>]	The network has activated a primary context. ☞ LARA-L6 / LARA-R6 Not supported.
+CGEV: NW ACT <p_cid>,<cid>,<event_type>	The network has forced a secondary context activation. ☞ LARA-L6 / LARA-R6 Not supported.
+CGEV: NW PDN DEACT <cid>	The network has forced a primary context deactivation. ☞ LARA-L6 / LARA-R6 Not supported.
+CGEV: NW DEACT <p_cid>,<cid>,0	The network has forced a secondary context deactivation. ☞ LARA-L6 / LARA-R6 Not supported.
+CGEV: NW DEACT <p_cid>,<cid>,<event_type>	The network has forced a secondary context deactivation. ☞ LARA-L6 / LARA-R6 Not supported.
+CGEV: NW DEACT <PDP_type>,<PDP_addr>,[<cid>]	The network has forced a context deactivation. ☞ LARA-L6 / LARA-R6 <PDP_type> is not supported.
+CGEV: NW MODIFY <cid>,<change_reason>,<event_type>	The network has forced a context modification.
+CGEV: NW DETACH	The network has forced a GPRS detach. ☞ LARA-L6 / LARA-R6 This URC is issued by the module in case of out of service conditions due to e.g. radio link failures or out of coverage. In such condition the +CGATT read command will return +CGATT: 0 but the +CGDCONT read command will still show valid IP address(es).
+CGEV: NW CLASS <class>	The network has forced a change of MT class (e.g. due to service detach); the highest available class is reported.
+CGEV: VZW_SUBS_ACTION_NORMAL (0) - No restriction to data traffic	No restriction to data traffic. The URC is provided only on Verizon network. ☞ LARA-L6 / LARA-R6 Not supported.
+CGEV: REJECT <PDP_type>,<PDP_addr>	The context activation is rejected. ☞ LARA-L6 / LARA-R6 <PDP_type> and <PDP_addr> are not supported.
+CGEV: NW REACT <PDP_type>,<cid>	The network has forced a context re-activation. ☞ LARA-L6 / LARA-R6

URC	Remarks
	Not supported.
+CGEV: NW ACT <PDP_type>,<cid>	The network has forced a context activation. LARA-L6 / LARA-R6 Not supported.

17.15 GPRS network registration status +CGREG

+CGREG						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	No	No	-	+CME Error

17.15.1 Description

Configures the GPRS network registration information. Depending on the <n> parameter value, a URC can be issued:

- +CGREG: <stat> if <n>=1 and there is a change in the GPRS network registration status in GERAN/UTRAN
- +CGREG: <stat>[,<lac>,<ci>[,<AcT>,<rac>]] if <n>=2 and there is a change of the network cell in GERAN/UTRAN
- +CGREG: <stat>[,<lac>,<ci>[,<AcT>,<rac>,,,<Active-Time>,[<Periodic-RAU>,[<GPRS-READY-timer>]]]] if <n>=4 and there is a change of the network cell in GERAN/UTRAN, or in PSM configuration

The parameters <lac>, <ci>, <AcT>, <rac>, <Active-Time>, <Periodic-RAU>, <GPRS-READY-timer>, are provided only if available.

The read command provides the same information issued by the URC together with the current value of the <n> parameter. The location information elements <lac>, <ci> and <AcT>, if available, are returned only when <n>=2 or 4 and the MT is registered with the network.

When <n>=2 or 4, in UMTS RAT, unsolicited location information can be received if the network sends the UTRAN INFORMATION MOBILITY message during dedicated connections; in the latter cases the reported <ci> might be not correct because the UE in DCH state cannot read broadcast system information before the change of serving cell. In contrast, in GSM RAT no unsolicited location information is received during a CS connection.

If the GPRS MT also supports circuit mode services in GERAN/UTRAN and/or EPS services in E-UTRAN, the +CREG / +CEREG commands return the registration status and location information for those services.

17.15.2 Syntax

Type	Syntax	Response	Example
Set	AT+CGREG=[<n>]	OK	AT+CGREG=1 OK
Read	AT+CGREG?	**If <n>=0 or 1:** +CGREG: <n>,<stat> OK	+CGREG: 0,4 OK
		If <n>=2: +CGREG: <n>,<stat>[,<lac>,<ci>[,<AcT>,<rac>]] OK	+CGREG: 2,1,"61EF","7D58A3",2,"14" OK
		If <n>=4: +CGREG: <n>,<stat>[,<lac>,<ci>[,<AcT>,<rac>],,,[<Active-Time>,	+CGREG: 4,1,"5FB7","1298",3,"0",,,"00000000","01100000","00000000"

Type	Syntax	Response	Example
		[<Periodic-RAU>,[<GPRS-READY-timer>]]]]] OK	OK
Test	AT+CGREG=?	+CGREG: (list of supported <n>s) OK	+CGREG: (0-2) OK
URC		**If <n>=1:** +CGREG: <stat>	+CGREG: 1
		If <n>=2: +CGREG: <stat>[,<lac>,<ci>[,<AcT>,<rac>]]	+CGREG: 1,"4E54","44A5"
		If <n>=4: +CGREG: <stat>[,<lac>,<ci>[,<AcT>,<rac>,,,[<Active-Time>,[<Periodic-RAU>,[<GPRS-READY-timer>]]]]]	+CGREG: 1,"5FB7","1298",3,"0",,,"00000000","01100000","00000000"

17.15.3 Defined values

Parameter	Type	Description
<n>	Number	Allowed values: • 0 (default value and factory-programmed value): network registration URC disabled • 1: network registration URC enabled • 2: network registration and location information URC enabled • 4: network registration, location information and PSM URC enabled Allowed values: • LARA-L6 / LARA-R6 - 0, 1, 2
<stat>	Number	Allowed values: • 0: not registered, the MT is not currently searching an operator to register to • 1: registered, home network • 2: not registered, but MT is currently searching a new operator to register to • 3: registration denied • 4: unknown (e.g. out of GERAN/UTRAN coverage) • 5: registered, roaming • 8: attached for emergency bearer services only (see 3GPP TS 24.008 [84] and 3GPP TS 24.301 [119] that specify the condition when the MS is considered as attached for emergency bearer services) (applicable only when <AcT> indicates 2,4,5,6) Allowed values: • LARA-L6 / LARA-R6 - 0, 1, 2, 3, 4, 5, 8
<lac>	String	Two bytes location area in hexadecimal format; it is optionally provided in the URC and in the response to the read command if <n>=2. The value FFFF means that the current <lac> value is invalid.
<ci>	String	From 2 to 4 bytes cell ID in hexadecimal format; it is optionally provided in the URC and in the response to the read command if <n>=2. The value FFFFFFFF means that the current <ci> value is invalid.
<AcT>	Number	Indicates the radio access technology: • 0: GSM • 1: GSM COMPACT • 2: UTRAN • 3: GSM/GPRS with EDGE availability • 4: UTRAN with HSDPA availability • 5: UTRAN with HSUPA availability • 6: UTRAN with HSDPA and HSUPA availability • 7: E-UTRAN • 8: EC-GSM-IoT (A/Gb mode) • 9: E-UTRAN (NB-S1 mode) • 255: the current <AcT> value is invalid Allowed values: • LARA-L6 / LARA-R6001 / LARA-R6001D / LARA-R6801 - 0, 2, 3, 4, 5, 6

Parameter	Type	Description
<rac>	String	One byte routing area in hexadecimal format
<Active-Time>	String	One byte in 8 bit format. Indicates the Active Time value (T3324) allocated to the UE in GERAN/UTRAN. The Active Time value is coded as one byte (octet 3) of the GPRS Timer 2 information element coded as bit format (e.g. "00100100" equals 4 minutes). For the coding and the value range, see the GPRS Timer 2 IE in 3GPP TS 24.008 [84] Table 10.5.163.
<Periodic-RAU>	String	One byte in 8 bit format. Indicates the extended periodic RAU value (T3312) allocated to the UE in GERAN/UTRAN. The extended periodic RAU value s coded as one byte (octet 3) of the GPRS Timer 3 information element coded as bit format (e.g. "01000 111" equals 70 hours). For the coding and the value range, see the GPRS Timer 3 IE in 3GPP TS 24.008 [84] Table 10.5.163a.
<GPRS-READY-timer>	String	One byte in 8 bit format. Indicates the GPRS READY timer value (T3314) allocated to the UE in GERAN/UTRAN. The GPRS READY timer value is coded as one byte (octet 2) of the GPRS Timer information element coded as bit format (e.g. "01000011" equals 3 decihours or 18 minutes). For the coding and the value range, see the GPRS Timer IE in 3GPP TS 24.008 [84] Table 10.5.172.

17.15.4 Notes

- The DTE application should set a reasonable timer (10 s) when receiving the +CGREG: 3 URC, since this might be due to the fact that the LTE registration was rejected (SIM not enabled for LTE RAT, wrong APN during the initial default bearer set-up in the EPS attach procedure and other temporary reject causes).
- If the device does not support 2G or 3G RAT, the command will report only <stat>=0, 2 and 4.

17.16 Manual deactivation of a PDP context H

H						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	< 20 s	+CME Error

17.16.1 Description

Deactivates an active PDP context with PPP L2 protocol in online command mode. The MT responds with a final result code. For a detailed description, see the H command description. For additional information about OLCM, see the AT command settings .

☞ In GPRS online command mode, entered by typing the escape sequence "+++" or "~+++" (see &D), the ATH command is needed to terminate the connection. Alternatively, in data transfer mode, DTE originated DTR toggling or PPP disconnection may be used.

17.16.2 Syntax

Type	Syntax	Response	Example
Action	ATH	OK	

17.17 PDP context modify +CGCMOD

+CGCMOD						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	No	No	Appendix B.4	+CME Error

17.17.1 Description

This execution command is used to modify the specified PDP context(s) with respect to QoS profiles and TFT's. After the command is complete, the MT returns to the V.25 online data state. If the requested modification

for any specified context cannot be achieved, an error result code is returned. If no <cid>s are specified, the activation form of the command modifies all the active contexts.

17.17.2 Syntax

Type	Syntax	Response	Example
Set	AT+CGCMOD=[<cid>[,<cid>[,,...]]]	OK	AT+CGCMOD=1 OK
Test	AT+CGCMOD=?	+CGCMOD: (list of <cid>s with active contexts) OK	

17.17.3 Defined values

Parameter	Type	Description
<cid>	Number	See <cid>.

17.18 3G Quality of service profile (requested) +CGEQREQ

+CGEQREQ						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	NVM	No	-	+CME Error

17.18.1 Description

Allows the TE to specify the QoS profile that is used when the MT sends an Activate PDP Context Request message to the network. The set command specifies a profile for the context identified by the <cid>. The specified profile will be stored in the MT and sent to the network only at activation or MS-initiated modification of the related context. The command is actually an extension of the commands +CGDCONT and +CGDSCONT. The QoS profile consists of a number of parameters, each of which may be set to a separate value. The special form +CGEQREQ=<cid> causes the requested profile related to <cid> to become undefined.

☞ The command defines a PDP context having a <PDP_type> set to "IP", <apn> set to "" and with the specified <cid>, if a PDP context with the specified <cid> was not already defined by +CGDCONT AT command.

17.18.2 Syntax

Type	Syntax	Response	Example
Set	AT+CGEQREQ=[<cid>[,<Traffic_class>[,<Maximum_bitrate_UL>[,<Maximum_bitrate_DL>[,<Guaranteed_bitrate_UL>[,<Guaranteed_bitrate_DL>[,<Delivery_order>[,<Maximum_SDU_size>[,<SDU_error_ratio>[,<Residual_bit_error_ratio>[,<Delivery_of_erroneous_SDUs>[,<Transfer_delay>[,<Traffic_handling_priority> [,<Source_statistics_descriptor> [,<Signalling_indication>]]]]]]]]]]]]]	OK	AT+CGEQREQ=1,2,64,64,,,0,320,"1E4","1E5",1,,3,0,0 OK
Read	AT+CGEQREQ?	+CGEQREQ: <cid>,<Traffic_class>,<Maximum_bitrate_UL>,<Maximum_bitrate_DL>,<Guaranteed_bitrate_UL>,	+CGEQREQ: 1,2,5760,5760,0,0,0,1500,"1E4","1E5",0,1000,1,0,0 OK

Type	Syntax	Response	Example
		<Guaranteed_bitrate_DL>,<Delivery_order>,<Maximum_SDU_size>,<SDU_error_ratio>,<Residual_bit_error_ratio>,<Delivery_of_erroneous_SDUs>,<Transfer_delay>,<Traffic_handling_priority>,<Source_statistics_descriptor>,<Signalling_indication> [+CGEQREQ: <cid>,<Traffic_class>,<Maximum_bitrate_UL>,<Maximum_bitrate_DL>,<Guaranteed_bitrate_UL>,<Guaranteed_bitrate_DL>,<Delivery_order>,<Maximum_SDU_size>,<SDU_error_ratio>,<Residual_bit_error_ratio>,<Delivery_of_erroneous_SDUs>,<Transfer_delay>,<Traffic_handling_priority>,<Source_statistics_descriptor>,<Signalling_indication> [...]] OK	
Test	AT+CGEQREQ=?	+CGEQREQ: <PDP_type>,(list of supported <Traffic_class>s),(list of supported <Maximum_bitrate_UL>s),(list of supported <Maximum_bitrate_DL>s),(list of supported <Guaranteed_bitrate_UL>s),(list of supported <Guaranteed_bitrate_DL>s),(list of supported <Delivery_order>s),(list of supported <Maximum_SDU size>s),(list of supported <SDU_error_ratio>s),(list of supported <Residual_bit_error_ratio>s),(list of supported <Delivery_of_erroneous_SDUs>s),(list of supported <Transfer_delay>s),(list of supported <Traffic_handling_priority>s) [+CGEQREQ: <PDP_type>,(list of supported <Traffic_class>s),(list of supported <Maximum_bitrate_UL>s),(list of supported <Maximum_bitrate_DL>s),(list of supported <Guaranteed_bitrate_UL>s),(list of supported <Guaranteed_bitrate_DL>s),(list of supported <Delivery_order>s),(list of supported <Maximum_SDU_size>s),(list of supported <SDU_error_ratio>s),(list of supported <Residual_bit_error_ratio>s),(list of supported <Delivery_of_erroneous_SDUs>s),(list of supported <Transfer_delay>s),(list of supported <Traffic_handling_priority>s),(list of supported	+CGEQREQ: "IP",(0-4),(1-63 in 1 kbps steps, 64-568 in 8 kbps steps, 576-8640 in 64 kbps steps),(1-63 in 1 kbps steps, 64-568 in 8 kbps steps, 576-8640 in 64 kbps steps, 8700-16000 in 100 kbps steps),(1-63 in 1 kbps steps, 64-568 in 8 kbps steps, 576-8640 in 64 kbps steps),(1-63 in 1 kbps steps, 64-568 in 8 kbps steps, 576-8640 in 64 kbps steps, 8700-16000 in 100 kbps steps),(0-1),(10-1500,1502,1510,1520),("1E6","1E5","1E4","1E3","7E3","1E2","1E1"),("6E8","1E6","1E5","1E4","5E3","4E3","1E3","5E2","1E2"),(0-2),(10-150 in 10 ms steps, 200-950 in 50 ms steps, 1000-4000 in 50 ms steps),(0-3),(0-1),(0-1) OK

Type	Syntax	Response	Example
		<Source_statistics_descriptor>s), (list of supported <Signalling_ indication>s) [...]] OK	

17.18.3 Defined values

Parameter	Type	Description
<cid>	Number	See <cid>
<PDP_type>	String	See <PDP_type>
<Traffic_class>	Number	Indicates the application type for which the UMTS bearer service is optimized (see the 3GPP TS 24.008 [84], subclause 10.5.6.5): • 0: conversational • 1: streaming • 2: interactive • 3: background • 4: subscribed value
<Maximum_bitrate_UL>	Number	Indicates the maximum number of kb/s delivered to UMTS (up-link traffic) at an application processor (see the 3GPP TS 24.008 [84], subclause 10.5.6.5): • Range 1-63 in steps of 1 • Range 64-568 in steps of 8 • Range 576-8640 in steps of 64 • Range 8700-16000 in steps of 100 • Range 17000-128000 in steps of 1000 • Range 130000-256000 in steps of 2000
<Maximum_bitrate_DL>	Number	Indicates the maximum number of kb/s delivered by UMTS (down-link traffic) at an application processor (see the 3GPP TS 24.008 [84], subclause 10.5.6.5): • Range 1-63 in steps of 1 • Range 64-568 in steps of 8 • Range 576-8640 in steps of 64 • Range 8700-16000 in steps of 100 • Range 17000-128000 in steps of 1000 • Range 130000-256000 in steps of 2000
<Guaranteed_bitrate_UL>	Number	Indicates the guaranteed number of kb/s delivered to UMTS (up-link traffic) at an application processor (see the 3GPP TS 24.008 [84], subclause 10.5.6.5): • Range 1-63 in steps of 1 • Range 64-568 in steps of 8 • Range 576-8640 in steps of 64 • Range 8700-16000 in steps of 100 • Range 17000-128000 in steps of 1000 • Range 130000-256000 in steps of 2000
<Guaranteed_bitrate_DL>	Number	Indicates the guaranteed number of kb/s delivered by UMTS (down-link traffic) at an application processor (see the 3GPP TS 24.008 [84], subclause 10.5.6.5): • Range 1-63 in steps of 1 • Range 64-568 in steps of 8 • Range 576-8640 in steps of 64 • Range 8700-16000 in steps of 100 • Range 17000-128000 in steps of 1000 • Range 130000-256000 in steps of 2000
<Delivery_order>	Number	Indicates whether the UMTS bearer shall provide in-sequence SDU (Service Data Unit) delivery or not (see the 3GPP TS 24.008 [84], subclause 10.5.6.5): • 0: no • 1: yes • 2: subscribed value

Parameter	Type	Description
<Maximum_SDU_size>	Number	Indicates the maximum allowed SDU (Service Data Unit) size in octets (see the 3GPP TS 24.008 [84], subclause 10.5.6.5): • 0: subscribed value • Range 10-1500 in steps of 10 octets • 1502 • 1510 • 1520
<SDU_error_ratio>	String	Indicates the target value for the fraction of SDUs (Service Data Unit) lost or detected as erroneous. SDU error ratio is defined only for conforming traffic (see the 3GPP TS 24.008 [84], subclause 10.5.6.5). The value is specified as 'mEe', e.g. a target SDU error ratio of $1*10^{-6}$ would be specified as '1E6': • "1E6": $1*10^{-6}$ • "1E5": $1*10^{-5}$ • "1E4": $1*10^{-4}$ • "1E3": $1*10^{-3}$ • "7E3": $7*10^{-3}$ • "1E2": $1*10^{-2}$ • "1E1": $1*10^{-1}$ • "0E0": subscribed value
<Residual_bit_error_ratio>	String	Indicates the target value for the undetected bit error ratio in the delivered SDUs (Service Data Unit). If no error detection is requested, the parameter indicates the bit error ratio in the delivered SDUs (see the 3GPP TS 24.008 [84], subclause 10.5.6.5). The value is specified as 'mEe', e.g. a target SDU error ratio of $5*10^{-2}$ would be specified as '5E2': • "6E8": $6*10^{-8}$ • "1E6": $1*10^{-6}$ • "1E5": $1*10^{-5}$ • "1E4": $1*10^{-4}$ • "5E3": $5*10^{-3}$ • "4E3": $4*10^{-3}$ • "1E3": $1*10^{-3}$ • "5E2": $5*10^{-2}$ • "1E2": $1*10^{-2}$ • "0E0": subscribed value
<Delivery_of_erroneous_SDUs>	Number	Indicates whether SDUs (Service Data Unit) detected as erroneous shall be delivered or not (see the 3GPP TS 24.008 [84], subclause 10.5.6.5): • 0: no • 1: yes • 2: no detect • 3 (default value): subscribed value
<Transfer_delay>	Number	Indicates the target time, in milliseconds, between a request to transfer an SDU (Service Data Unit) at an application processor and its delivery at the other application processor (see the 3GPP TS 24.008 [84], subclause 10.5.6.5): • Range 10-150 in steps of 10 • Range 200-950 in steps of 50 • Range 1000-4000 in steps of 100
<Traffic_handling_priority>	Number	Specifies the relative importance for handling of all SDUs (Service Data Unit) belonging to the UMTS bearer compared to the SDUs of other bearers (see the 3GPP TS 24.008 [84], subclause 10.5.6.5): • 0: subscribed • 1: priority level 1 • 2: priority level 2 • 3: priority level 3
<Source_statistics_descriptor>	Number	Specifies the characteristics of the source of the submitted SDUs for a PDP context: • 0 (default value): characteristics of the SDUs unknown • 1: characteristics of the SDUs correspond to a speech source
<Signalling_indication>	Number	Specifies signaling content of submitted SDUs for a PDP context: • 0 (default value): PDP context is not optimized for signalling

Parameter	Type	Description
		• 1: PDP context is optimized for signalling <PDP_type>

17.18.4 Notes

- If <Maximum_bitrate_UL>, <Maximum bitrate DL>, <Guaranteed_bitrate_UL>, <Guaranteed_bitrate_DL>, <Maximum_SDU_size> and <Transfer_delay> parameters are set outside the allowed range, an error message will be provided. If the value is selected within the allowed range, it is rounded to the closest allowed value according to the specified steps.
- If <Traffic_class>=0 (conversational) or <Traffic_class>=1 (streaming), <Maximum_bitrate_UL>, <Maximum_bitrate_DL>, <Guaranteed_bitrate_UL> and <Guaranteed_bitrate_DL> must be provided.
- If <Traffic_class>=0 (conversational) or <Traffic_class>=1 (streaming), <Source_statistics_descriptor> must be provided.
- If <Traffic_class>=2 (interactive), <Signalling_indication> must be provided.

17.19 3G Quality of service profile (minimum acceptable) +CGEQMIN

+CGEQMIN						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	NVM	No	-	+CME Error

17.19.1 Description

This command allows the TE to specifiy a minimum acceptable profile, which is checked by the MT against the negotiated profile returned in the Activate/Modify PDP Context Accept message. The set command specifies a profile for the context identified by the <cid>. The specified profile will be stored in the MT and checked against the negotiated profile only at activation or MS initiated modification of the related context. This command is actually an extension to the commands +CGDSCONT and +CGDCONT. The special form of this command +CGEQMIN=<cid> causes the minimum acceptable profile for context number <cid> to become undefined. No check is made against the negotiated profile.

The command defines a PDP context having <PDP_type> set to "IP", <apn> set to "" and with the specified <cid>, if a PDP context with the specified <cid> was not already defined by +CGDCONT AT command.

17.19.2 Syntax

Type	Syntax	Response	Example
Set	AT+CGEQMIN=[<cid>[,<Traffic_class>[,<Maximum_bitrate_UL>[,<Maximum_bitrate_DL>[,<Guaranteed_bitrate_UL>[,<Guaranteed_bitrate_DL>[,<Delivery_order>[,<Maximum_SDU_size>[,<SDU_error_ratio>[,<Residual_bit_error_ratio>[,<Delivery_of_erroneous_SDUs>[,<Transfer_delay>[,<Traffic_handling_priority>[,<Source_statistics_descriptor> [,<Signalling_indication>]]]]]]]]]]]]]]	OK	AT+CGEQMIN=1,2,5760,7168,0,0,0,1480,"1E3","1E5",2,1000,1,0,0 OK
Read	AT+CGEQMIN?	+CGEQMIN: <cid>,<Traffic_class>,<Maximum_bitrate_UL>,<Maximum_bitrate_DL>,<Guaranteed_bitrate_UL>,<Guaranteed_bitrate_DL>,	+CGEQMIN: 1,2,5760,7168,0,0,0,1480,"1E3","1E5",2,1000,1,0,0 OK

Type	Syntax	Response	Example
		<Delivery_order>,<Maximum_SDU_size>,<SDU_error_ratio>,<Residual_bit_error_ratio>,<Delivery_of_erroneous_SDUs>,<Transfer_delay>,<Traffic_handling_priority>,<Source_statistics_descriptor>,<Signalling_indication> [+CGEQMIN: <cid>,<Traffic_class>,<Maximum_bitrate_UL>,<Maximum_bitrate_DL>,<Guaranteed_bitrate_UL>,<Guaranteed_bitrate_DL>,<Delivery_order>,<Maximum_SDU_size>,<SDU_error_ratio>,<Residual_bit_error_ratio>,<Delivery of erroneous SDUs>,<Transfer_delay>,<Traffic_handling_priority>,<Source_statistics_descriptor>,<Signalling_indication> [...]] OK	
Test	AT+CGEQMIN=?	+CGEQMIN: <PDP_type>,(list of supported <Traffic_class>s),(list of supported <Maximum_bitrate_UL>s),(list of supported <Maximum_bitrate_DL>s),(list of supported <Guaranteed_bitrate_UL>s),(list of supported <Guaranteed_bitrate_DL>s),(list of supported <Delivery_order>s),(list of supported <Maximum_SDU_size>s),(list of supported <SDU_error_ratio>s),(list of supported <Residual_bit_error_ratio>s),(list of supported <Delivery_of_erroneous_SDUs>s),(list of supported <Transfer_delay>s),(list of supported <Traffic_handling_priority>s) [+CGEQMIN: <PDP_type>,(list of supported <Traffic_class>s),(list of supported <Maximum_bitrate_UL>s),(list of supported <Maximum_bitrate_DL>s),(list of supported <Guaranteed_bitrate_UL>s),(list of supported <Guaranteed_bitrate_DL>s),(list of supported <Delivery_order>s),(list of supported <Maximum_SDU_size>s),(list of supported <SDU_error_ratio>s),(list of supported <Residual_bit_error_ratio>s),(list of supported <Delivery_of_erroneous_SDUs>s),(list of supported <Transfer_delay>s),(list of supported <Traffic_handling_priority>s),(list of supported <Source_statistics_descriptor>s),	+CGEQMIN: "IP",(0-3),(1-63 in 1 kbps steps, 64-568 in 8 kbps steps, 576-8640 in 64 kbps steps),(1-63 in 1 kbps steps, 64-568 in 8 kbps steps, 576-8640 in 64 kbps steps, 8700-16000 in 100 kbps steps),(1-63 in 1 kbps steps, 64-568 in 8 kbps steps, 576-8640 in 64 kbps steps),(1-63 in 1 kbps steps, 64-568 in 8 kbps steps, 576-8640 in 64 kbps steps, 8700-16000 in 100 kbps steps),(0-1),(10-1500,1502,1510,1520),("1E6","1E5","1E4","1E3","7E3","1E2","1E1"),("6E8","1E6","1E5","1E4","5E3","4E3","1E3","5E2","1E2"),(0-2),(10-150 in 10 ms steps, 200-950 in 50 ms steps, 1000-4000 in 50 ms steps),(0-3),(0-1),(0-1) OK

Type	Syntax	Response	Example
		(list of supported <Signalling_ indication>s) [...]] OK	

17.19.3 Defined values

Parameter	Type	Description
<cid>	Number	See <cid>
<PDP_type>	String	See <PDP_type>
<Traffic_class>	Number	Indicates the application type for which the UMTS bearer service is optimized (see the 3GPP TS 24.008 [84], subclause 10.5.6.5): • 0: conversational • 1: streaming • 2: interactive • 3: background • 4: subscribed value
<Maximum_bitrate_UL>	Number	Indicates the maximum number of kb/s delivered to UMTS (up-link traffic) at an application processor (see the 3GPP TS 24.008 [84], subclause 10.5.6.5): • Range 1-63 in steps of 1 • Range 64-568 in steps of 8 • Range 576-8640 in steps of 64 • Range 8700-16000 in steps of 100 • Range 17000-128000 in steps of 1000 • Range 130000-256000 in steps of 2000
<Maximum_bitrate_DL>	Number	Indicates the maximum number of kb/s delivered by UMTS (down-link traffic) at an application processor (see the 3GPP TS 24.008 [84], subclause 10.5.6.5): • Range 1-63 in steps of 1 • Range 64-568 in steps of 8 • Range 576-8640 in steps of 64 • Range 8700-16000 in steps of 100 • Range 17000-128000 in steps of 1000 • Range 130000-256000 in steps of 2000
<Guaranteed_bitrate_UL>	Number	Indicates the guaranteed the maximum number of kb/s delivered to UMTS (up-link traffic) at an application processor (see the 3GPP TS 24.008 [84], subclause 10.5.6.5): • Range 1-63 in steps of 1 • Range 64-568 in steps of 8 • Range 576-8640 in steps of 64 • Range 8700-16000 in steps of 100 • Range 17000-128000 in steps of 1000 • Range 130000-256000 in steps of 2000
<Guaranteed_bitrate_DL>	Number	Indicates the guaranteed number of kb/s delivered by UMTS (down-link traffic) at an application processor (see the 3GPP TS 24.008 [84], subclause 10.5.6.5): • Range 1-63 in steps of 1 • Range 64-568 in steps of 8 • Range 576-8640 in steps of 64 • Range 8700-16000 in steps of 100 • Range 17000-128000 in steps of 1000 • Range 130000-256000 in steps of 2000
<Delivery_order>	Number	Indicates whether the UMTS bearer shall provide in-sequence SDU (Service Data Unit) delivery or not (see the 3GPP TS 24.008 [84], subclause 10.5.6.5): • 0: no • 1: yes • 2: subscribed value
<Maximum_SDU_size>	Number	Indicates the maximum allowed SDU (Service Data Unit) size in octets (see the 3GPP TS 24.008 [84], subclause 10.5.6.5):

Parameter	Type	Description
		• 0: subscribed value • Range 10-1500 in steps of 10 octets • 1502 • 1510 • 1520
<SDU_error_ratio>	String	Indicates the target value for the fraction of SDUs (Service Data Unit) lost or detected as erroneous. SDU error ratio is defined only for conforming traffic (see the 3GPP TS 24.008 [84], subclause 10.5.6.5). The value is specified as 'mEe', e.g. a target SDU error ratio of $1*10^{-6}$ would be specified as '1E6': • "1E6": $1*10^{-6}$ • "1E5": $1*10^{-5}$ • "1E4": $1*10^{-4}$ • "1E3": $1*10^{-3}$ • "7E3": $7*10^{-3}$ • "1E2": $1*10^{-2}$ • "1E1": $1*10^{-1}$ • "0E0": subscribed value
<Residual_bit_error_ratio>	String	Indicates the target value for the undetected bit error ratio in the delivered SDUs (Service Data Unit). If no error detection is requested, the parameter indicates the bit error ratio in the delivered SDUs (see the 3GPP TS 24.008 [84], subclause 10.5.6.5). The value is specified as 'mEe', e.g. a target SDU error ratio of $5*10^{-2}$ would be specified as '5E2': • "6E8": $6*10^{-8}$ • "1E6": $1*10^{-6}$ • "1E5": $1*10^{-5}$ • "1E4": $1*10^{-4}$ • "5E3": $5*10^{-3}$ • "4E3": $4*10^{-3}$ • "1E3": $1*10^{-3}$ • "5E2": $5*10^{-2}$ • "1E2": $1*10^{-2}$ • "0E0": subscribed value
<Delivery_of_erroneous_SDUs>	Number	Indicates whether SDUs (Service Data Unit) detected as erroneous shall be delivered or not (see the 3GPP TS 24.008 [84], subclause 10.5.6.5): • 0: no • 1: yes • 2: no detect • 3 (default value): subscribed value
<Transfer_delay>	Number	Indicates the target time, in milliseconds, between a request to transfer an SDU (Service Data Unit) at an application processor and its delivery at the other application processor (see the 3GPP TS 24.008 [84], subclause 10.5.6.5): • Range 10-150 in steps of 10 • Range 200-950 in steps of 50 • Range 1000-4000 in steps of 100
<Traffic_handling_priority>	Number	Specifies the relative importance for handling of all SDUs (Service Data Unit) belonging to the UMTS bearer compared to the SDUs of other bearers (see the 3GPP TS 24.008 [84], subclause 10.5.6.5): • 0: subscribed • 1: priority level 1 • 2: priority level 2 • 3: priority level 3
<Source_statistics_descriptor>	Number	Specifies the characteristics of the source of the submitted SDUs for a PDP context: • 0 (default value): characteristics of the SDUs unknown • 1: characteristics of the SDUs correspond to a speech source
<Signalling_indication>	Number	Specifies signaling content of submitted SDUs for a PDP context: • 0 (default value): PDP context is not optimized for signalling • 1: PDP context is optimized for signalling

17.19.4 Notes

- If <Maximum_bitrate_UL>, <Maximum bitrate DL>, <Guaranteed_bitrate_UL>, <Guaranteed_bitrate_DL>, <Maximum_SDU_size> and <Transfer_delay> parameters are set outside the allowed range, an error message will be provided. If the value is selected within the allowed range, it is rounded to the closest allowed value according to the specified steps.
- If <Traffic_class>=0 (conversational) or <Traffic_class>=1 (streaming), <Maximum_bitrate_UL>, <Maximum bitrate DL>, <Guaranteed_bitrate_UL>, <Guaranteed_bitrate_DL>, <Source_statistics_descriptor> must be provided.
- If <Traffic_class>=2 (interactive), <Signalling_indication> must be provided.

17.20 Define secondary PDP context +CGDSCONT

+CGDSCONT						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	-	+CME Error

17.20.1 Description

Configures the PDP context parameter values for a secondary PDP context, identified by the local context identification parameter <cid>, associated to a primary PDP context identified by the local context identification parameter <p_cid>:

- The <p_cid> parameter is mandatory when a secondary context is newly defined.
- The <p_cid> parameter can be omitted only when the context is already defined; in this case the PDP context identified by <cid> becomes undefined.

17.20.2 Syntax

Type	Syntax	Response	Example
Set	AT+CGDSCONT=[<cid>[,<p_cid>[,<d_comp>[,<h_comp>[,<IM_CN_Signalling_Flag_Ind>]]]]]	OK	AT+CGDSCONT=2,1 OK
Read	AT+CGDSCONT?	+CGDSCONT: <cid>,<p_cid>,<d_comp>,<h_comp>[,<IM_CN_Signalling_Flag_Ind>] [+CGDSCONT: <cid>,<p_cid>,<d_comp>,<h_comp>[,<IM_CN_Signalling_Flag_Ind>] [...]] OK	+CGDSCONT: 2,1,0,0,0 OK
Test	AT+CGDSCONT=?	+CGDSCONT: (list of supported <cid>s),(list of <cid>s for defined primary contexts),(list of supported <d_comp>s),(list of supported <h_comp>s)[,(list of supported <IM_CN_Signalling_Flag_Ind>)] OK	+CGDSCONT: (1-8),(4,8),(0-2),(0-2),(0-1) OK

17.20.3 Defined values

Parameter	Type	Description
<cid>	Number	See <cid>
<p_cid>	Number	Numeric parameter that identifies the particular PDP context definition, specified using +CGDCONT, to which a secondary PDP context definition will be associated using +CGDSCONT.

Parameter	Type	Description
		This parameter is only locally valid on the interface TE-MT.
<d_comp>	Number	PDP data compression; it can have the values: • 0 (default value): off • 1: on (predefined compression type i.e. V.42bis data compression) • 2: V.42bis data compression
<h_comp>	Number	PDP header compression; it can have the values: • 0 (default value): off • 1: on (predefined compression type, i.e. RFC1144) • 2: RFC1144 • 3: RFC2507 • 4: RFC3095 ☞ <h_comp> the available head-compressions is depending on configuration of the stack (configured via features in the stack)
<IM_CN_Signalling_Flag_Ind>	Number	Shows whether the PDP context is for IM CN subsystem-related signalling only or not: • 0: PDP context is not for IM CN subsystem-related signalling only • 1: PDP context is for IM CN subsystem-related signalling only

17.20.4 Notes

LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D

- The PIN insertion is not mandatory before the command execution.

17.21 EPS network registration status +CEREG

+CEREG						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	Profile	No	-	+CME Error

17.21.1 Description

Configures the network registration URC related to EPS domain. The URC assumes a different syntax depending on the network and the <n> parameter:

- +CEREG: <stat> when <n>=1 and there is a change in the MT's EPS network registration status in E-UTRAN
- +CEREG: <stat>[,[<tac>],[<ci>],[<AcT>]] when <n>=2 and there is a change of the network cell in EUTRAN
- +CEREG: <stat>[,[<tac>],[<ci>],[<AcT>][,<cause_type>,<reject_cause>]] when <n>=3 and the value of <stat> changes
- +CEREG: <stat>[,[<tac>],[<ci>],[<AcT>][,,[,[<Assigned_Active_Time>,[<Assigned_Periodic_TAU>]]]]] when <n>=4 if there is a change of the network cell in E-UTRAN
- +CEREG: <stat>[,[<tac>],[<ci>],[<AcT>][,[<cause_type>],[<reject_cause>][,[<Assigned_Active_Time>,[<Assigned_Periodic_TAU>]]]]] when <n>=5 and the value of <stat> changes

☞ LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B
When <n>=4 if there is a change of the network cell in E-UTRAN, the +URC assumes the following syntax:

- +CEREG: <stat>[,[<tac>],[<rac_or_mme>],[<ci>],[<AcT>][,,[,[<Assigned_Active_Time>,[<Assigned_Periodic_TAU>]]]]]

The parameters <AcT>, <tac>, <rac_or_mme>, <ci>, <cause_type>, <reject_cause>, <Assigned_Active_Time> and <Assigned_Periodic_TAU> are provided only if available.

The read command returns always at least the mode configuration (<n>), the EPS registration status (<stat>). The location parameters <tac>, <rac_or_mme>, <ci> and <AcT>, if available, are returned only when <n>=2, <n>=3, <n>=4 or <n>=5 and the MT is registered with the network. The parameters <cause_type>, <reject_cause>, if available, are returned when <n>=3 or <n>=5. The PSM related parameter <Assigned_Active_Time> is returned only when <n>=4 or <n>=5, the MT is registered with the network and PSM is granted by the network. The <Assigned_Periodic_TAU> parameter is returned only if when <n>=4 or <n>=5, the MT is registered with the network and an extended periodic TAU value (T3412_ext) is assigned.

☞ LARA-L6 / LARA-R6
If the EPS MT in GERAN/UTRAN/E-UTRAN also supports circuit mode services and/or GPRS services, the +CREG / +CGREG set and read command result codes apply to the registration status and location information for those services.

☞ LARA-L6 / LARA-R6
The command setting is not stored in the personal profile.

17.21.2 LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D Syntax

Type	Syntax	Response	Example
Set	AT+CEREG=[<n>]	OK	AT+CEREG=1 OK
Read	AT+CEREG?	**If <n>=0, 1, 2, 3** +CEREG: <n>,<stat>[,[<tac>],[<ci>],[<AcT>[,[<cause_type>],[<reject_cause>]]]] OK **If <n>=4** +CEREG: <n>,<stat>[,[<tac>],[<ci>],[<AcT>][,,,[<Assigned_Active_Time>],[<Assigned_Periodic_TAU>]]] OK	+CEREG: 2,1,"3a9b","0000c33d",7 OK
Test	AT+CEREG=?	+CEREG: (list of supported <n>s) OK	+CEREG: (0-4) OK
URC		**If <n>=0, 1, 2, 3** +CEREG: <stat>[,[<tac>],[<ci>],[<AcT>][,[<cause_type>],[<reject_cause>]]] **If <n>=4** +CEREG: <stat>[,[<tac>],[<ci>],[<AcT>][,,,[<Assigned_Active_Time>],[<Assigned_Periodic_TAU>]]]	+CEREG: 1,"3a9b","0000c33d",7

17.21.3 LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B Syntax

Type	Syntax	Response	Example
Set	AT+CEREG=[<n>]	OK	AT+CEREG=1

Type	Syntax	Response	Example
			OK
Read	AT+CEREG?	**If <n>=0, 1, 2, 3** +CEREG: <n>,<stat>[,[<tac>],[<ci>],[<AcT>[,[<cause_type>],[<reject_cause>]]]] OK **If <n>=4** +CEREG: <n>,<stat>[,[<tac>],[<rac_or_mme>],[<ci>],[<AcT>][,,,[<Assigned_Active_Time>,[<Assigned_Periodic_TAU>]]]]] OK	+CEREG: 2,1,"3a9b","0000c33d",7 OK
Test	AT+CEREG=?	+CEREG: (list of supported <n>s) OK	+CEREG: (0-4) OK
URC		**If <n>=0, 1, 2, 3** +CEREG: <stat>[,[<tac>],[<ci>],[<AcT>][,[<cause_type>],[<reject_cause>]]] **If <n>=4** +CEREG: <stat>[,[<tac>],[<rac_or_mme>],[<ci>],[<AcT>][,,[,[<Assigned_Active_Time>,[<Assigned_Periodic_TAU>]]]]]	+CEREG: 1,"3a9b","0000c33d",7

17.21.4 Defined values

Parameter	Type	Description
<n>	Number	Mode configuration: • 0: network registration URC disabled • 1: network registration URC +CEREG: <stat> enabled • 2: network registration and location information URC +CEREG: <stat>[,[<tac>],[<ci>],[<AcT>]] enabled • 3: network registration, location information and EMM cause value information URC +CEREG: <stat>[,[<tac>],[<ci>],[<AcT>][,<cause_type>,<reject_cause>]] enabled • 4: PSM, network registration and location information information URC +CEREG: <stat>[,[<tac>],[<ci>],[<AcT>][,,[,[<Assigned_Active_Time>[,<Assigned_Periodic_TAU>]]]]] enabled ☞ LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B The +URC assumes the following syntax: o +CEREG: <stat>[,[<tac>],[<rac_or_mme>],[<ci>],[<AcT>][,,[,[<Assigned_Active_Time>,[<Assigned_Periodic_TAU>]]]]] • 5: PSM, network registration, location information and EMM cause value information URC +CEREG: <stat>[,[<tac>],[<ci>],[<AcT>][,[<cause_type>],[<reject_cause>][,[<Assigned_Active_Time>,[<Assigned_Periodic_TAU>]]]]] enabled Allowed values: • LARA-L6 / LARA-R6 - 0 (default value), 1, 2, 3, 4
<stat>	Number	EPS registration status: • 0: not registered • 1: registered, home network

Parameter	Type	Description
		• 2: not registered, but the MT is currently trying to attach or searching an operator to register to • 3: registration denied • 4: unknown (e.g. out of E-UTRAN coverage) • 5: registered, roaming • 8: attached for emergency bearer services only (see 3GPP TS 24.008 [84] and 3GPP TS 24.301 [119] that specify the condition when the MS is considered as attached for emergency bearer services) Allowed values: • LARA-L6 / LARA-R6 - 0, 1, 2, 3, 4, 5, 8
<tac>	String	Two bytes tracking area code in hexadecimal format
<ci>	String	Four bytes E-UTRAN cell-id in hexadecimal format
<AcT>	Number	Access technology of the serving cell: • 0: GSM • 3: GSM/GPRS with EDGE availability • 7: E-UTRAN (see 3GPP TS 44.060 [120] that specifies the System Information messages which give the information about whether the serving cell supports EGPRS) • 8: E-UTRAN EC-GSM-IoT (A/Gb mode) • 9: E-UTRAN NB-IoT Allowed values: • LARA-L6 / LARA-R6 - 7
<cause_type>	Number	<reject_cause> type: • 0: indicates that <reject_cause> contains an EMM cause value, see 3GPP TS 24.301 [119] Annex A • 1: indicates that <reject_cause> contains a manufacture-specific cause Allowed values: • LARA-L6 / LARA-R6 - 0
<reject_cause>	Number	Cause of the failed registration. The value is of type as defined by <cause_type>
<Assigned_Active_Time>	String	One byte in an 8 bit format. Assigned Active Time value (T3324) allocated to the UE. The assigned Active Time value is coded as one byte (octet 3) of the GPRS Timer 2 information element coded as bit format (e.g. "00100100" equals 4 minutes). For the coding and the value range, see the GPRS Timer 2 IE in 3GPP TS 24.008 table 10.5.163/3GPP TS 24.008 [84]. See also 3GPP TS 23.682 [159], 3GPP TS 23.060 [82]) and 3GPP TS 23.401 [160].
<Assigned_Periodic_TAU>	String	One byte in an 8 bit format. Assigned extended periodic TAU value (T3412_ext) allocated to the UE. The assigned extended periodic TAU value is coded as one byte (octet 3) of the GPRS Timer 3 information element coded as bit format (e.g. "01000111" equals 70 hours). For the coding and the value range, see the GPRS Timer 3 IE in 3GPP TS 24.008 table 10.5.163a/3GPP TS 24.008 [84]. See also 3GPP TS 23.682 [159] and 3GPP TS 23.401 [160].
<rac_or_mme>	String	RAC (Routing Area Code) or MME Code (Mobile Management Entity) in hexadecimal format

17.21.5 Notes

LARA-L6 / LARA-R6

- If <stat>=0 the MT is not registered and it does not search an operator to register to.

17.22 Configure the authentication parameters of a PDP/EPS bearer +UAUTHREQ

+UAUTHREQ						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	NVM	No	-	+CME Error

17.22.1 Description

Configures the authentication parameters of a defined PDP/EPS bearer. The authentication parameters will be sent during the context activation phase as a protocol configuration options (PCO) information element.

LARA-L6 / LARA-R6
The command returns an error result code if the input <cid> is already active or not yet defined.

17.22.2 Syntax

Type	Syntax	Response	Example
Set	AT+UAUTHREQ=<cid>,<auth_type>,<password>,<username>	OK	AT+UAUTHREQ=1,1,"pass","user" OK
Test	AT+UAUTHREQ=?	+UAUTHREQ: (list of supported <cid>s),(list of supported <auth_type>s)[,,] OK	+UAUTHREQ: (1-8),(0-2),, OK

17.22.3 Defined values

Parameter	Type	Description
<cid>	Number	See <cid>.
<auth_type>	Number	Configure the authentication: • 0 (factory-programmed value): no authentication • 1: PAP • 2: CHAP • 3: automatic selection of authentication type (none/CHAP/PAP) Allowed values: • LARA-L6 / LARA-R6 - 0, 1, 2, 3
<username>	String	Username. The factory-programmed value is an empty string: • LARA-L6 / LARA-R6 - The maximum length is 127.
<password>	String	Password. The default value is an empty string: • LARA-L6 / LARA-R6 - The maximum length is 127.

17.22.4 Notes

- In a PPP dial-up scenario, the authentication parameters set by the +UAUTHREQ command are overwritten whenever the host provides a new setting via the PPP authentication protocol (PAP or CHAP).

LARA-L6 / LARA-R6

- The <username> and <password> parameters must be omitted if the authentication type is not set (<auth_type>=0).

17.23 Define EPS quality of service +CGEQOS

+CGEQOS						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	NVM	No	-	+CME Error

17.23.1 Description

Allows the TE to specify the EPS quality of service parameters <cid>, <QCI>, <DL_GBR>, <UL_GBR>, <DL_MBR> and <UL_MBR> for a PDP context or traffic flows (see 3GPP TS 24.301 [119] and 3GPP TS 23.203 [122]). When in UMTS/GPRS the MT applies a mapping function to UTMS/GPRS quality of service.

The read command returns the current settings for each defined QoS.

☞ The set command +CGEQOS=<cid> causes the values for context number <cid> to become undefined.

☞ LARA-L6 / LARA-R6
Before activating a secondary PDP context, issue the +CGEQOS set command to set specific EPS quality of service parameters.

17.23.2 Syntax

Type	Syntax	Response	Example
Set	AT+CGEQOS=[<cid>[,<QCI>[,<DL_GBR>,<UL_GBR>[,<DL_MBR>,<UL_MBR>]]]]	OK	AT+CGEQOS=1,1,2500,7000,2500,7000 OK
Read	AT+CGEQOS?	[+CGEQOS: <cid>,<QCI>,[<DL_GBR>,<UL_GBR>],[<DL_MBR>,<UL_MBR>]] [+CGEQOS: <cid>,<QCI>,[<DL_GBR>,<UL_GBR>],[<DL_MBR>,<UL_MBR>] [...]] OK	+CGEQOS: 1,1,2500,7000,2500,7000 OK
Test	AT+CGEQOS=?	+CGEQOS: (list of supported <cid>s),(list of supported <QCI>s),(list of supported <DL_GBR>s),(list of supported <UL_GBR>s),(list of supported <DL_MBR>s),(list of supported <UL_MBR>s) OK	+CGEQOS: (1-8),(0-9),(0-5000),(0-21000),(0-5000),(0-21000) OK

17.23.3 Defined values

Parameter	Type	Description
<cid>	Number	See <cid>.
<QCI>	Number	Specifies a class of EPS QoS (see 3GPP TS 24.301 [119]): • 0: QCI is selected by network • 1-4: value range for guaranteed bit rate traffic flows • 5-9: value range for non-guaranteed bit rate traffic flows • 75: value for guaranteed bit rate traffic flows • 79: value for non-guaranteed bit rate traffic flows • 128-254: value range for Operator-specific QCIs Allowed values: • LARA-L6 / LARA-R6 - 0, 1-4, 5-9, 128-254

Parameter	Type	Description
<DL_GBR>	Number	Indicates DL guaranteed bit rate (GBR) in case of GBR QCI. The value is expressed in kb/s. This parameter is omitted for a non-GBR QCI (see 3GPP TS 24.301 [119]).
<UL_GBR>	Number	Indicates UL guaranteed bit rate (GBR) in case of GBR QCI. The value is expressed in kb/s. This parameter is omitted for a non-GBR QCI (see 3GPP TS 24.301 [119]).
<DL_MBR>	Number	Indicates DL maximum bit rate (MBR) in case of GBR QCI. The value is expressed in kb/s. This parameter is omitted for a non-GBR QCI (see 3GPP TS 24.301 [119]).
<UL_MBR>	Number	Indicates UL maximum bit rate (MBR) in case of GBR QCI. The value is expressed in kb/s. This parameter is omitted for a non-GBR QCI (see 3GPP TS 24.301 [119]).

17.24 PDP context read dynamic parameters +CGCONTRDP

+CGCONTRDP						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	-	+CME Error

17.24.1 Description

Returns the relevant information <bearer_id>, <APN>, <local_addr_and_subnet_mask>, <gw_addr>, <DNS_prim_addr>, <DNS_sec_addr>, <P-CSCF_prim_addr>, <P-CSCF_sec_addr>, <IM_CN_Signalling_Flag_Ind>, <LIPA_indication>, <IPv4_MTU> and <WLAN_offload> for an active non secondary PDP context with the context identifier <cid>.

If the MT indicates more than two IP addresses of P-CSCF servers or more than two IP addresses of DNS servers, multiple lines of information per <cid> will be returned.

A set command with an undefined <cid> provides an error result code.

LARA-L6 / LARA-R6
If the <pdp_type> parameter is set to "IPV4V6", for each IP address both the IPv4 and the IPv6 addresses are printed. The printing format depends on the parameter:

- <local_addr_and_subnet_mask>, <P-CSCF_prim_addr>, <P-CSCF_sec_addr>: the IPv4 address and the IPv6 addresses are separated by a comma (**<IPv4>,<IPv6>**).
- <gw_addr>, <DNS_prim_addr>, <DNS_sec_addr>: the IPv4 address and the IPv6 addresses are separated by a space (**<IPv4> <IPv6>**).

The command is not effective if the <PDP_type>="Non-IP".

LARA-L6 / LARA-R6
The IPv6 addresses notation depends on the +CGPIAF setting.

17.24.2 Syntax

Type	Syntax	Response	Example
Set	AT+CGCONTRDP[=<cid>]	[+CGCONTRDP: <cid>,<bearer_id>,<APN>[,<local_addr_and_subnet_mask>[,<gw_addr>[,<DNS_prim_addr>[,<DNS_sec_addr>[,<P-CSCF_prim_addr>[,<P-CSCF_sec_addr>[,<IM_CN_Signalling_Flag_Ind>[,<LIPA_indication>[,<IPv4_MTU>[,<WLAN_offload>[,<Local_Addr_Ind>[,<Non_IP_MTU>[,<Serving_PLMN_rate_control_value>]]]]]]]]]]]]] [+CGCONTRDP: <cid>,<bearer_id>,<APN>[,<local_addr_and_subnet_	AT+CGCONTRDP=1 +CGCONTRDP: 1,0,"web.omnitel.it","109.113.62.238.255.255.255.255","109.113.62.201","83.224.70.77","83.224.70.54",,,,0,0,0,0 OK

Type	Syntax	Response	Example
		mask> [,<gw_addr>[,<DNS_prim_addr>[,<DNS_sec_addr>[,<P-CSCF_prim_addr>[,<P-CSCF_sec_addr>[,<IM_CN_Signalling_Flag_Ind>[,<LIPA_indication>[,<IPv4_MTU>[,<WLAN_offload>[,<Local_Addr_Ind>[,<Non_IP_MTU>[,<Serving_PLMN_rate_control_value>]]]]]]]]]]]] [...]] OK	
Test	AT+CGCONTRDP=?	+CGCONTRDP: (list of active non secondary PDP contexts) OK	+CGCONTRDP: 1 OK

17.24.3 Defined values

Parameter	Type	Description
<cid>	Number	See <cid>.
<APN>	String	See <APN>.
<bearer_id>	Number	Identifies the bearer, i.e. the EPS bearer in EPS and the NSAPI in UMTS/GPRS. The range goes from 5 to 16.
<local_addr_and_subnet_mask>	String	IP address and subnet mask of the MT. The string is given as dot-separated numeric (0-255) parameters on the form: • "a1.a2.a3.a4.m1.m2.m3.m4" for IPv4 • "a1.a2.a3.a4.a5.a6.a7.a8.a9.a10 .a11.a12.a13.a14.a15.a16.m1.m2.m3.m4.m5.m6.m7.m8.m9.m10 .m11.m12.m13.m14.m15.m16" for IPv6
<gw_addr>	String	Gateway address of the MT. The string is given as dot-separated numeric (0-255) parameters.
<DNS_prim_addr>	String	IP address of the primary DNS server.
<DNS_sec_addr>	String	IP address of the secondary DNS server.
<P-CSCF_prim_addr>	String	IP address of the primary P-CSCF server.
<P-CSCF_sec_addr>	String	IP address of the secondary P-CSCF server.
<IM_CN_Signalling_Flag_Ind>	Number	Shows whether the PDP context is for IM CN subsystem-related signalling only or not: • 0: PDP context is not for IM CN subsystem-related signalling only • 1: PDP context is for IM CN subsystem-related signalling only
<LIPA_indication>	Number	Indicates that the PDP context provides connectivity using a LIPA PDN connection. This parameter cannot be set by the TE: • 0: indication not received that the PDP context provides connectivity using a LIPA PDN connection • 1: indication received that the PDP context provides connectivity using a LIPA PDN connection
<IPv4_MTU>	Number	Provides the IPv4 MTU size in octets.
<WLAN_offload>	Number	Indicates whether the traffic can be offloaded using the specified PDN connection via a WLAN. This refers to bits 1 and 2 of the WLAN offload acceptability IE as specified in 3GPP TS 24.008 [84] subclause 10.5.6.20. Allowed values: • 0: offloading the traffic of the PDN connection via a WLAN when in S1 mode or when in Iu mode is not acceptable • 1: offloading the traffic of the PDN connection via a WLAN when in S1 mode is acceptable, but not acceptable in Iu mode • 2: offloading the traffic of the PDN connection via a WLAN when in Iu mode is acceptable, but not acceptable in S1 mode • 3: offloading the traffic of the PDN connection via a WLAN when in S1 mode or when in Iu mode is acceptable
<Local_Addr_Ind>	Number	Indicates whether the MS and the network support local IP address in TFTs (see 3GPP TS 24.301 [119] and 3GPP TS 24.008 [84] subclause 10.5.6.3). Allowed values:

Parameter	Type	Description
		• 0: indicates that the MS or the network or both do not support local IP address in TFTs • 1: indicates that the MS and the network support local IP address in TFTs
<Non_IP_MTU>	Number	Non-IP MTU size in octets.
<Serving_PLMN_rate_control_value>	Number	Indicates the maximum number of uplink messages the UE is allowed to send in a 6 minutes interval. This refers to octet 3 to 4 of the Serving PLMN rate control IE as specified in 3GPP TS 24.301 [119].

17.24.4 Notes

LARA-L6 / LARA-R6

- The <IM_CN_Signalling_Flag_Ind>, <LIPA_indication>, <WLAN_offload>, <Local_Addr_Ind>, <Non_IP_MTU> and <Serving_PLMN_rate_control_value> parameters are not supported.
- The <local_addr_and_subnet_mask> do not include the MT subnet mask.

17.25 Traffic flow template +CGTFT

+CGTFT						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	-	+CME Error

17.25.1 Description

Allows the TE to specify a packet filter (PF) for a traffic flow template (TFT) that is used in the gateway GPRS support node (GGSN) for routing of down-link packets onto different QoS flows towards the TE (see the 3GPP TS 23.060 [82] and 3GPP TS 24.008 [84]). A TFT is identified by a <packet filter identifier> and each packet filter also has an <evaluation precedence index>. The set command specifies a Packet Filters to be added to the TFT stored in the MT and used for the context identified by <cid>. This command is effectively an extension of the +CGDCONT and +CGDSCONT AT commands that shall be issued previously.

The syntax AT+CGTFT=<cid> causes all of the Packet Filters in the TFT for the specified <cid> to become undefined.

Not all the parameters combinations are allowed in a Packet Filter, some may coexist but others are mutually exclusive. The possible combinations are specified in 3GPP TS 23.060 [82].

☞ A valid packet filter must contain a unique identifier and a unique evaluation precedence index within all TFTs for one PDP address. The network will reject the activation of a secondary PDP context if the corresponding packet filter contains an identifier or an evaluation precedence index which is not unique within all TFTs for one PDP address.

☞ The command is not effective if the <PDP_type>="Non-IP".

17.25.2 Syntax

Type	Syntax	Response	Example
Set	AT+CGTFT=[<cid>,<packet_filter_identifier>,<evaluation_precedence_index>[,<remote_address_and_subnet_mask>[,<protocol_number_(ipv4)-next_header_(ipv6)>[,<destination_port_range>[,<source_port_range>[,<ipsec_security_parameter_index_(spi)>[,<type_of_service_(tos)_(ipv4)_and_mask-traffic_class_(ipv6)_and_mask>[,<flow_label (ipv6)>[,<direction>[,	OK	AT+CGTFT=2,1,1,"10 9.115.183.216.255.255.0.0" OK

Type	Syntax	Response	Example
	<local_address_and_subnet_mask>]]]]]]]]]]		
Read	AT+CGTFT?	+CGTFT: <cid>,<packet_filter_identifier>,<evaluation_precedence_index>,<remote_address_and_subnet_mask>,<protocol_number_(ipv4)-next_header_(ipv6)>,<destination_port_range>,<source_port_range>,<ipsec_security_parameter_index_(spi)>,<type_of_service_(tos)_(ipv4)_and_mask-traffic_class_(ipv6)_and_mask>,<flow label (ipv6)>,<direction>,<local_address_and_subnet_mask> [+CGTFT: <cid>,<packet_filter_identifier>,<evaluation_precedence_index>,<remote_address_and_subnet_mask>,<protocol_number_(ipv4)-next_header_(ipv6)>,<destination_port_range>,<source_port_range>,<ipsec_security_parameter_index_(spi)>,<type_of_service_(tos)_(ipv4)_and_mask-traffic_class_(ipv6)_and_mask>,<flow_label (ipv6)>,<direction>,<local_address_and_subnet_mask> [...]] OK	+CGTFT: 2,1,1,"10 9.115.183.216.255.255.0.0",0,"0.0","0 .0",00000000,"0.0",00000 OK
Test	AT+CGTFT=?	+CGTFT: <PDP_type>,(list of supported <packet_filter_identifier>s),(list of supported <evaluation_precedence_index>s),(list of supported <remote_address_and_subnet_mask>s),(list of supported <protocol_number_(ipv4)-next_header_(ipv6)>s),(list of supported <destination_port_range>s),(list of supported <source_port_range>s),(list of supported <ipsec_security_parameter_index_(spi)>s),(list of supported <type_of_service_(tos)_(ipv4)_and_mask-traffic_class_(ipv6)_and_mask>s),(list of supported <flow_label (ipv6)>s),(list of supported <direction>s),(list of supported <local_address_and_subnet_mask>s) [+CGTFT: <PDP_type>,(list of supported <packet_filter_identifier>s),(list of supported <evaluation_precedence_index>s),(list of supported <source_address_and_subnet_mask>s),(list of supported <protocol_number_(ipv4)-next_header_(ipv6)>s),(list	+CGTFT: IP,(1-16),(0-255),("0.0.0.0.0.0.0.0-255.255.255.255.255.255.255.255"),(0-255),("0.0-65535.65535"),("0.0-65535.65535"),(00000000-ffffffff),("0.0-255.255"),(00000-FFFFF),("0.0.0.0.0.0.0.0-255.255.255.255.255.255.255.255") OK

Type	Syntax	Response	Example
		of supported <destination_port_ range>s),(list of supported <source_ port_range>s),(list of supported <ipsec_security_parameter_index_ (spi)>s),(list of supported <type_ of_service_(tos)_(ipv4)_and_ mask-traffic_class_(ipv6)_and_ mask>s),(list of supported <flow_ label (ipv6)>s),(list of supported <direction>s),(list of supported <local_address_and_subnet_ mask>s) [...]] OK	

17.25.3 Defined values

Parameter	Type	Description
<cid>	Number	See <cid>
<PDP_type>	String	See <PDP_type>
<packet_filter_identifier>	Number	Packet filter: • LARA-L6 / LARA-R6 - Range: 1-16
<evaluation_precedence_index>	Number	Evaluation precedence index that is unique within all TFTs associated with the PDP contexts that share the same PDP address: • Range: 0-255 (from highest evaluation precedence to lowest evaluation precedence)
<remote_address_and_subnet_mask>	String	Specifies the remote address and subnet mask attribute of a valid packet filter. Consists of dot-separated numeric (0-255) parameters on the form: • "a1.a2.a3.a4.m1.m2.m3.m4" for IPv4 • "a1.a2.a3.a4.a5.a6.a7.a8.a9.a10.a11.a12.a13.a14.a15.a16 .m1.m2.m3.m4.m5.m6.m7.m8.m9.m10 .m11.m12.m13.m14.m15.m16" for IPv6
<protocol_number_(ipv4)-next_header_ (ipv6)>	Number	Specifies the Protocol Number / Next Header attribute of a valid packet filter. It shall contain either an IPv4 Protocol Number or an IPv6 Next Header value: • Range: 0-255
<destination_port_range>	String	String parameter given as dot-separated numbers on the form "f.t" that specifies the destination port range attribute of a valid packet filter: • Range: 0-65535
<source_port_range>	String	Dot-separated numbers on the form "f.t" that specifies the source port range attribute of a valid packet filter: • Range: 0-65535
<ipsec_security_parameter_index_(spi)>	Number	IPSec SPI attribute of a valid packet filter which is a 32-bit field: • Range: 00000000-FFFFFFFF
<type_of_service_(tos)_(ipv4)_and_mask-traffic_class_(ipv6)_and_mask>	String	Dot-separated numbers on the form "t.m" that specifies the Type of Service / Traffic Class and Mask attribute of a valid packet filter. It shall contain either an IPv4 TOS octet or an IPv6 Traffic Class octet along with a mask defining which of the 8 bits should be used for matching. • Range: 0-255
<flow_label(ipv6)>	Number	Specifies the Flow Label attribute of a valid packet filter. It shall contain an IPv6 flow label, which is a 20-bit field. It only is valid for IPv6. • Range: 00000-FFFFF
<direction>	Number	Specifies the transmission direction in which the packet filter shall be applied:

Parameter	Type	Description
		• 0: Pre Release 7 TFT Filter (see 3GPP TS 24.008 [84], table 10.5.162) • 1: uplink • 2: downlink • 3: bidirectional (used for uplink and downlink)
<local_address_and_subnet_mask>	String	Specifies the local address and subnet mask attribute of a valid packet filter. Consists of dot-separated numeric (0-255) parameters on the form: • "a1.a2.a3.a4.m1.m2.m3.m4" for IPv4 • "a1.a2.a3.a4.a5.a6.a7.a8.a9.a10.a11.a12.a13.a14.a15.a16 .m1.m2.m3.m4.m5.m6.m7.m8.m9.m10 .m11.m12.m13.m14.m15.m16" for IPv6

17.25.4 Notes

LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D

- The PIN insertion is not mandatory before the command execution.

17.26 Read counters of sent or received PS data +UGCNTRD

+UGCNTRD						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	-	+CME Error

17.26.1 Description

Allows reading the counters for total sent / received bytes for each defined context; for each <cid> the information is provided on a different row.

LARA-L6 / LARA-R6
The command returns the counters values for total sent / received bytes only for activated contexts.

The sent / received bytes are the gross payload evaluated by the protocol stack, therefore they comprise the TCP and IP header bytes and the packets used to open and close the TCP connection.

17.26.2 Syntax

Type	Syntax	Response	Example
Action	AT+UGCNTRD	+UGCNTRD: <cid>,<sent_sess_bytes>,<received_sess_bytes>,<sent_total_bytes>,<received_total_bytes> [[...] +UGCNTRD: <cid>,<sent_sess_bytes>,<received_sess_bytes>,<sent_total_bytes>,<received_total_bytes>]] OK	AT+UGCNTRD +UGCNTRD: 1,100,0,100,0 OK
Test	AT+UGCNTRD=?	OK	

17.26.3 Defined values

Parameter	Type	Description
<cid>	Number	Local PDP context identifier; the range goes from 0 to 255.

Parameter	Type	Description
<sent_sess_bytes>	Number	Sent bytes for the current PSD session.
<received_sess_bytes>	Number	Received GPRS session bytes for the current PSD session.
<sent_total_bytes>	Number	Total sent bytes.
<received_total_bytes>	Number	Total received bytes.

17.26.4 Notes

LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D

- The PIN insertion is not mandatory before the command execution.

17.27 Set/reset counter of sent or received PS data +UGCNTSET

+UGCNTSET						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	No	No	-	+CME Error

17.27.1 Description

Allows setting the counter for total sent/received bytes for each defined context to zero or any other offset value.

Whenever the total counter for a <cid> is set (to zero or a certain value), the session counter for this <cid> will be set to zero.

LARA-L6 / LARA-R6
If <cid>=0 than the total counter for every defined context is set to zero. The offset parameters are ignored in this case.

LARA-L6 / LARA-R6
The command allows to set the counter for total sent/received bytes only for activated contexts.

17.27.2 Syntax

Type	Syntax	Response	Example
Set	AT+UGCNTSET=<cid>,[<total_bytes_sent_offset>,<total_bytes_received_offset>]	OK	AT+UGCNTSET=0,20,20 OK
Test	AT+UGCNTSET=?	+UGCNTSET: (range of <cid>s),(range of <total_bytes_sent_offset>),(range of <total_bytes_received_offset>) OK	+UGCNTSET: (0-255),(0-2147483646),(0-2147483646) OK

17.27.3 Defined values

Parameter	Type	Description
<cid>	Number	Local PDP context identifier: • LARA-L6 / LARA-R6 - the range goes from 0 to 24
<total_bytes_sent_offset>	Number	Long number containing the offset of total sent bytes used for counting in the range 0-0x7FFFFFFE.

Parameter	Type	Description
<total_bytes_ received_offset>	Number	Long number containing the offset of total received bytes used for counting in the range 0-0x7FFFFFFE.
<sim_id>	Number	SIM identity. Only value 0 is supported.

17.27.4 Notes

LARA-L6 / LARA-R6

- The <sim_id> parameter is not supported.

LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D

- The PIN insertion is not mandatory before the command execution.

17.28 Uplink user data plane configuration +UDCONF=9

+UDCONF=9						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6001-01B LARA-R6001D-01B LARA-R6401-01B LARA-R6401D-01B LARA-R6801-01B LARA-R6801D					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

17.28.1 Description

Enables or disables the uplink user data plane. When the uplink data traffic is disabled, the module will not be able to transmit data to the cellular network.

☞ The AT command is volatile.

17.28.2 Syntax

Type	Syntax	Response	Example
Set	AT+UDCONF=9,<UUDP_enable>[, <drop_rate>]	OK	AT+UDCONF=9,0,50 OK
Read	AT+UDCONF=9	+UDCONF: 9,<UUDP_enable>, <drop_rate> OK	AT+UDCONF=9 +UDCONF: 9,0,50 OK

17.28.3 Defined values

Parameter	Type	Description
<UUDP_enable>	Number	Configures the uplink user data plane feature: • 0: uplink user data plane disabled • 1 (factory-programmed value): uplink user data plane enabled
<drop_rate>	Number	Percentage of dropped packets. To be used in validation mode only. The allowed values are in range 1-100. The parameter can only be set when disabling the data plane (<UUDP_enable>=0), and, if not specified, the percentage of dropped packets is set to 100% by default.

17.28.4 Notes

17.29 PDP IP configuration when roaming +UDCONF=75

+UDCONF=75						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	NVM	No	-	+CME Error

17.29.1 Description

Configures the PDP IP when roaming. When set, the PDP IP can be limited to IPv4, IPv6, or IPv4v6 when roaming on a network.

The configuration will be effective at the next power on.

Only one PDP profile can be set using this command.

17.29.2 Syntax

Type	Syntax	Response	Example
Set	AT+UDCONF=75,<cid>,<PDP_IP_conf>	OK	AT+UDCONF=75,1,0 OK
Read	AT+UDCONF=75	+UDCONF: 75,<cid>,<PDP_IP_conf> OK	AT+UDCONF=75 +UDCONF: 75,1,0 OK

17.29.3 Defined values

Parameter	Type	Description
<cid>	Number	See <cid>.
<PDP_IP_conf>	Number	PDP IP configuration when roaming: • 0: IP • 1: IPv6 • 2: IPv4v6 See <PDP_type>.

17.29.4 Notes

LARA-L6 / LARA-R6

- Set the <PDP_IP_conf> parameter before to read it.

17.30 Disable data when roaming +UDCONF=76

+UDCONF=76						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

17.30.1 Description

Disables the PDP when roaming. When disabled, the PDP will not be able to send data when roaming on a network. The default is value is "off".

The configuration will be effective at the next power on.

Only one PDP profile can be set using this command.

17.30.2 Syntax

Type	Syntax	Response	Example
Set	AT+UDCONF=76,<cid>,<Data_Flag>	OK	AT+UDCONF=76,1,0 OK
Read	AT+UDCONF=76	+UDCONF: 76,<cid>,<Data_Flag> OK	AT+UDCONF=76 +UDCONF: 76,1,0 OK

17.30.3 Defined values

Parameter	Type	Description
<cid>	Number	See <cid>.
<Data_Flag>	Number	PDP data configuration when roaming: • 0 (default value): OFF - PDP is enabled when roaming • 1: ON - PDP is disabled when roaming

17.30.4 Notes

LARA-L6 / LARA-R6

- Set the <Data_Flag> parameter before to read it.
- When <Data_Flag> is set to 1, in case of roaming the specific PDP context will not be activated or PDP context will be deactivated if the specific PDP context mapped to <cid> is already active. In case the restriction of data in roaming applies to the initial default EPS bearer (i.e. if <cid> is set to 1), in LTE the module will not register in roaming condition.

18 System features

18.1 Firmware installation +UFWINSTALL

+UFWINSTALL						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	FW Install Error

18.1.1 Description

Triggers the FW installation procedure, starting from the file (update binary file) stored in the module file system. It could be used as a part of implementation of the FOTA procedure. The command causes a SW system reset with network deregistration.

LARA-L6 / LARA-R6
During the update process, the device cannot be used to make calls, even emergency calls. Do not remove the power supply or reset the module during the installation procedure even if it is fault tolerant!
In case of power loss during the install phase, at the next module wake-up a fault is detected and the module remains in Firmware Install Mode until the end of the procedure (install terminated).

Once the command has been sent correctly, the FW resets and at the next boot-up, the FW install will start.

The command syntax differs depending on the module: see the corresponding subsection for the correct command handling.

LARA-L6 / LARA-R6
Once the +UFWINSTALL AT command has been issued, the FW installation process shall begin. If the firmware update includes a boot code update, then there is relatively small window during the update process of this code section where an interruption, such as the removal or the loss of power supply to the module, can lead to image corruption of the module that is not recoverable.

LARA-L6 / LARA-R6
After having issued the command, the +UUFWPREVAL URC displays the progress indication for the validation package. In case of a successful validation the FW installation procedure will continue with the +UUFWINSTALL URC. Otherwise the FW installation procedure will be suspended and the module exits from firmware update mode and returns to normal mode since the FW is still unchanged and usable. A +UUFWINSTALL URC will be issued stating the unsuccessful FW update.
During the update operations, the +UUFWINSTALL URC displays the progress indication and the result operation on the interface chosen via the +UFWINSTALL command at the baud rate set by the same command as well. The progression of the installation is incremental, but the increment can be different from 1. The last URC with a value greater than 100 indicates the update operation result (e.g. 128 means operation completed with success). For more details about firmware install final result codes, see FWINSTALL error result codes. After this last result code, the device will reset and enter a normal mode of operation with new firmware updated.

LARA-L6 / LARA-R6
At the end of a successful installation, the main firmware software boots up and the SIM is reset (the PIN will be required if enabled).

LARA-L6 / LARA-R6
For information concerning NVM after installing the firmware, see the LARA-R6 Firmware update with uFOTA, FOAT and EasyFlash application note [14].

18.1.2 Syntax

Type	Syntax	Response	Example
Firmware upgrade			
Set	AT+UFWINSTALL[=<Serial_Port_Number>[,<BaudRate>[,<Reserved>,<uFOTA_URC>]]]	OK	AT+UFWINSTALL=1,115200 OK
Configure uFOTA FW update URCs			
Set	AT+UFWINSTALL=<Serial_Port_Number>,<BaudRate>,<Reserved>,<uFOTA_URC>	OK	AT+UFWINSTALL=1,115200,,1 OK
Test	AT+UFWINSTALL=?	+UFWINSTALL: (list of supported <Serial_Port_Number>s),(list of supported <BaudRate>s),,(list of supported <uFOTA_URC>s) OK	+UFWINSTALL: (0,1,2),(9600,19200,38400,57600,115200,230400,460800),,(1) OK
URC		+UUFWPREVAL: <progress_validation>	
URC		+UUFWINSTALL: <progress_install>	

18.1.3 Defined values

Parameter	Type	Description
<Serial_Port_Number>	Number	Serial interface where the progress percentage and the information text responses will be sent: • 0: no info will be shown. In this case the <BaudRate> parameter is ignored • 1: UART interface • 2: AUX UART interface • 4: USB1 • 5: USB2 • 6: USB3 If omitted, the command will take as default value for <Serial_Port_Number> the port where the command is issued. Allowed values: • LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B - 0, 1, 2 • LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D - 0, 1, 2, 4, 5, 6 ☞ LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B The parameter cannot be omitted.
<BaudRate>	Number	Baud rates expressed in b/s: • 9'600 • 19'200 • 38'400 • 57'600 • 115'200 • 230'400 • 460'800 • 921'600 • 3'000'000 If omitted, the command will take the current value set for the <BaudRate> parameter as the baud rate to be used during the FW installation.

Parameter	Type	Description
		Allowed values: • LARA-L6 / LARA-R6 - 115'200, 230'400, 460'800, 921'600 and 3'000'000 ☞ LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B The parameter cannot be omitted.
<Reserved>	String	Reserved for future usage
<uFOTA_URC>	String	Allowed value: • 1: enables the +UUFWINSTALL URCs during the next FW upgrade by means of uFOTA; the URCs will be issued on the specified <Serial_Port_Number> using the specified <BaudRate>. If the <Serial_Port_Number> parameter is omitted, the URCs will be issued on the port where the command has been issued. If the <BaudRate> parameter is omitted, the current value set for the <BaudRate> parameter will be used. The parameter setting is stored in the file system and is persistent across power cycles. ☞ LARA-L6 / LARA-R6 For more details, see the LARA-R6 series Firmware update with uFOTA, FOAT and EasyFlash application note [14].
<progress_validation>	Number	Provides the validation progress from 1 to 100.
<progress_install>	Number	Provides the installation progress from 1 to 100 and the update result (see FWINSTALL error result codes).

18.1.4 Notes

LARA-L6 / LARA-R6

- After the command is issued, the module reboots and starts the install process, which can take up to 35 minutes.
- Store the update file into the module file system before starting the install with +UFWINSTALL AT command. Otherwise the "FFS file not found" error result code is issued. The procedure for FS storing is up to the user (by means of the +UDWNFILE or +UFTPC AT commands). When the new FW has been installed, the update file is deleted from the file system.

Command	Response	Description
AT+UFWINSTALL=1,115200	OK	The "OK" final result code is printed out just before the FW reset.
	+UUFWPREVAL: 0	After the download is complete the module reboots and the firmware package validation starts. The progression of firmware package validation is incremental (the subsequent increment of <progress_validation> can be more than 1).
	+UUFWPREVAL: 3	
	+UUFWPREVAL: 7	
	...	
	+UUFWPREVAL: 90	
	+UUFWPREVAL: 100	
	+UUFWINSTALL: 1	The progression of installation is incremental (the subsequent increment of <progress_install> can be more than 1).
	+UUFWINSTALL: 2	
	+UUFWINSTALL: 3	
	+UUFWINSTALL: 4	
	....	
	+UUFWINSTALL: 9	
	+UUFWINSTALL: 12	
	+UUFWINSTALL: 15	
	....	
	+UUFWINSTALL: 99	

Command	Response	Description
	+UUFWINSTALL: 100	The installation is done when the percentage ends with +UUFWINSTALL: 100.
	+UUFWINSTALL: 128	The last URC with a value greater than 100 indicates the update operation result e.g. 128 means operation completed with success (for more details see the FWINSTALL error result codes).

Table 29: +UFWINSTALL example

LARA-L6 / LARA-R6001-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B

- The +UFWINSTALL AT command without parameters will return an error result code (for more details, see the FW INSTALL error result codes).

18.2 Firmware update Over AT (FOAT) +UFWUPD

+UFWUPD						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	Appendix B.4	FOAT Error

18.2.1 Description

Triggers the download of the update package using the Xmodem or Xmodem-1k protocol. The host can start the download process on the USB interface or on any UART interface at speed set by the +IPR AT command (the factory-programmed value is 115200 b/s). After the successful download, the module starts automatically the firmware update with the downloaded update package. The +UUFWPREVAL URC displays the progress indication for the validation package. In case of a successful validation the firmware update procedure will continue with the +UUFWUPD URC. Otherwise the firmware update procedure will be suspended and the module exits from firmware update mode and returns to normal mode since the firmware is still unchanged and usable. If the updated package validation is successful, the firmware update procedure will start with the +UUFWUPD URCs. Otherwise the update procedure will be suspended, and a proper +UUFWUPD URC error result code will be issued. The module exits from the update procedure mode and returns to the normal mode since the firmware is unchanged and usable. During the update operations, +UUFWUPD URCs display the progress indication and the result operation on the primary UART interface. Progress URCs are issued on the primary UART interface at the 115200 b/s baud rate. When the firmware update is completed, a URC will notify the final result of the operation.

☞ LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D
The relevant URC along with result codes can be received on the specified USB interface.

☞ LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B
The issued URCs are +UUFWPREVAL: n and +UUFWINSTALL: n.

☞ The errors (data corruption, data loss, etc.) during the Update phase are internally handled by the Xmodem protocol itself; for more details about the error result codes, see FOAT error result codes and extended error result codes.

☞ If no data comes to the module after having issued the set command, three 'C' and then ten 'NACK' are sent before timeout and then Firmware Update Mode is dropped out coming back to normal mode; the FW is unchanged and still usable (ERROR1).

Making use of the file triggers the firmware download using the Xmodem or Xmodem-1k protocols.

☞ In case of power loss during the download by the set command or during Xmodem transfer, at the next module wake-up the module is again in normal mode.

☞ For more details, see the LARA-R6 series firmware update with uFOTA, FOAT and EasyFlash application note [14].

18.2.2 Syntax

Type	Syntax	Response	Example
Set	AT+UFWUPD=<filetype>[,<Serial_Port_Number>[,<BaudRate>]]	+UFWUPD: ONGOING CCC<NACK><NACK><NACK><NACK><NACK><NACK><NACK><NACK><NACK><NACK><NACK> OK	AT+UFWUPD=3,1,115200 +UFWUPD: ONGOING CCC<NACK><NACK><NACK><NACK><NACK><NACK><NACK><NACK><NACK><NACK><NACK> OK
Test	AT+UFWUPD=?	+UFWUPD: (list of supported <filetype>s),(list of supported <Serial_Port_Number>s),(list of supported <BaudRate>s) OK	+UFWUPD: (3),(0-6),(115200,230400,460800,921600,3000000) OK
URC		+UUFWPREVAL: <progress_validation>	
URC		+UUFWUPD: <progress_install>	

18.2.3 Defined values

Parameter	Type	Description
<filetype>	Number	Download type: • 3: firmware image update
<Serial_Port_Number>	Number	Serial interface where the progress percentage and the information text responses will be sent: • 0: no info will be shown • 1: main UART interface • 2: AUX UART interface • 4: USB1 • 5: USB2 • 6: USB3 If omitted, the command will take as default value for <Serial_Port_Number> the port where the command is issued. ☞ LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B The parameter is not supported.
<BaudRate>	Number	Available baud rates expressed in b/s: • 115'200 • 230'400 • 460'800 • 921'600 • 3'000'000 When a USB interface is selected, the parameter has no effect. If omitted, the command will take as default value for <BaudRate> the baud rate of the port where the command is issued. ☞ LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B

Parameter	Type	Description
		The parameter is not supported.
<progress_install>	Number	Provide the installation progress from 1 to 100 and the update result (see FWINSTALL error result codes).
<progress_ validation>	Number	Provide the validation progress from 1 to 100.

18.2.4 +UFWUPD URC example

Command	Response	Description
AT+UFWUPD=3	+UFWUPD: ONGOING CCC<NACK><NACK> <NACK><NACK><NACK> <NACK><NACK><NACK> <NACK><NACK>	After the successful download, the module starts automatically the firmware update with the downloaded update package. If the updated package validation is successful, the FW installation procedure will start with the +UUFWUPD URCs.
	OK	Progress URCs are issued on the primary UART interface at the 115200 b/s baud rate.
	+UUFWPREVAL: 0	After the download is complete the module reboots and the firmware package validation starts. The progression of firmware package validation is incremental (the subsequent increment of <progress_validation> can be more than 1).
	+UUFWPREVAL: 3	
	+UUFWPREVAL: 7	
	...	
	+UUFWPREVAL: 90	
	+UUFWPREVAL: 100	
	+UUFWUPD: 1	The progression of installation is incremental (the subsequent increment of <progress_install> can be more than 1).
	+UUFWUPD: 2	
	+UUFWUPD: 3	
	+UUFWUPD: 4	
	....	
	+UUFWUPD: 9	
	+UUFWUPD: 12	
	+UUFWUPD: 15	
	....	
	+UUFWUPD: 99	
	+UUFWUPD: 100	The installation is done when the percentage ends with +UUFWUPD: 100.
	+UUFWUPD: 128	The last URC with a value greater than 100 indicates the update operation result (e.g. 128 means operation completed with success (for more details, see the FWINSTALL error result codes).

Table 30: +UFWUPD example

18.3 Antenna detection +UANTR

+UANTR						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

18.3.1 Description

Measures the DC component of load of the cellular antenna. The antenna load is expressed in kOhm.

18.3.2 Syntax

Type	Syntax	Response	Example
Set	AT+UANTR=[<antenna_id>]	+UANTR: <antenna_id>,<antenna_load> OK	AT+UANTR=0 +UANTR: 0,10 OK
Test	AT+UANTR=?	+UANTR: (list of supported <antenna_id>s) OK	+UANTR: (0) OK

18.3.3 Defined values

Parameter	Type	Description
<antenna_id>	Number	Antenna identifier: • 0 (default value): cellular antenna
<antenna_load>	Number	Measured value in kOhm of the antenna load with a resolution of 1 kOhm. The range goes from -1 to 53 (only integer values can be assumed), where: • -1: open circuit • 0: short circuit • 1: 1 kOhm (minimum limit of the measurement range) • ... • 53: 53 kOhm (maximum limit of the measurement range)

18.3.4 Notes

- The load resistor values below the minimum limit of 1 kOhm are identified as short circuit (<antenna_load>=0), while values above the maximum limit of 53 kOhm are identified as open circuit (<antenna_load>=-1).
- The reported value could differ from the real resistance value of the diagnostic resistor mounted inside the antenna assembly due to antenna cable length, antenna cable capacity and the measurement method.

18.4 RX antenna selection +UANT

+UANT						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	-	+CME Error

18.4.1 Description

Allows user to select the active antenna receiver path. The user can activate the primary antenna receiver only, the secondary antenna receiver only, or both antenna receiver paths together. The command can be used for the execution of receiver sensitivity measurements like the Total Isotropic Sensitivity (TIS) test. The command execution does not affect the antenna transmitting path.

18.4.2 Syntax

Type	Syntax	Response	Example
Set	AT+UANT=<setting>,<value>	OK	AT+UANT=0,1 OK
Test	AT+UANT=?	+UANT: (list of supported <setting>s),(list of supported <value>s) OK	+UANT: (0),(0-2) OK

18.4.3 Defined values

Parameter	Type	Description
<setting>	Number	Setting type: • 0: RX path selection
<value>	Number	Selects which antenna RX path to use: • 0: both antennas • 1: primary antenna RX path only • 2: secondary antenna RX path only

18.4.4 Notes

- To be sure to perform a test in a reliable starting condition, it is suggested to issue AT+CFUN=15 (silent reset) command before each test.

LARA-L6 / LARA-R6

- Select the antenna after silent reset.
- Re-enable the RX diversity after the tests.
- If the module is in real network scenario, when no traffic/connection data mode is active and a deactivation of lower layers is triggered, the command could return error.

18.5 Rx diversity +URXDIV

+URXDIV						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	NVM	No	-	+CME Error

18.5.1 Description

Controls the Rx diversity in LTE and UMTS radio access technologies (RAT).

For more details on UMTS Rx diversity capabilities, see 3GPP TS 25.101 [111].

When only one antenna is connected, the Rx diversity (<RxDiv>=0) must be disabled. It is recommended to change the setting in deregistered state.

u-blox cellular modules are certified according to all the capabilities and options stated in the Protocol Implementation Conformance Statement document (PICS) of the module. The PICS, according to 3GPP TS 51.010-2 [117], 3GPP TS 34.121-2 [118], 3GPP TS 36.521-2 [139] and 3GPP TS 36.523-2 [140], is a statement of the implemented and supported capabilities and options of a device. If the user changes the command settings during the certification process, the PICS of the application device integrating a u-blox cellular module must be changed accordingly.

18.5.2 Syntax

Type	Syntax	Response	Example
Set	AT+URXDIV=<RxDiv>	OK	AT+URXDIV=1 OK
Read	AT+URXDIV?	+URXDIV: <RxDiv> OK	+URXDIV: 1 OK
Test	AT+URXDIV=?	+URXDIV: (list of supported <RxDiv>s) OK	+URXDIV: (0-1) OK

18.5.3 Defined values

Parameter	Type	Description
<RxDiv>	Number	Rx diversity configuration. Allowed values: • 0: Rx diversity disabled • 1 (factory-programmed value): Rx diversity enabled

18.5.4 Notes

LARA-L6 / LARA-R6

- Issue the AT+CFUN=15 (silent reset) command to apply the last RX diversity setting saved inside NVM.

18.6 Antenna dynamic tuner configuration +UTEST=4

+UTEST=4						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6001-01B LARA-R6001D-01B LARA-R6401-01B LARA-R6401D-01B LARA-R6801-01B LARA-R6801D					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	Up to 1 s	+CME Error

18.6.1 Description

Allows enabling, disabling and customizing the antenna dynamic tuner settings. The antenna dynamic tuner control setting is stored in the NVM, and its configuration is effective after exiting the test mode. Enter the test mode to enable or disable the antenna dynamic tuner control (see the antenna dynamic tuner configuration examples). Upon enabling the antenna dynamic tuner function by means of the AT+UTEST=4,1 command, the dedicated pins are automatically configured as antenna dynamic tuning outputs. Therefore, their value is controlled by the RF driver and changes according to the RF band (GSM, UMTS and LTE) used by the module. The relation between the dedicated pins output value and the RF frequency band in use, is reported in the Notes.

If the module has not been set into non-signaling mode (with AT+UTEST=1) prior to using +UTEST=4, this command will return "+CME ERROR: operation not allowed" or "+CME ERROR: 3" error result code, depending on the +CMEE AT command setting.

For more details on signaling and normal mode, see the AT+UTEST=1 AT command.

18.6.2 Syntax

Type	Syntax	Response	Example
Generic syntax			
Set	AT+UTEST=<mode>[,<param_val1>]	[+UTEST: [<param_val1>] OK	AT+UTEST=0 OK
Entering normal mode			
Set	AT+UTEST=0	OK	AT+UTEST=0 OK
Entering test mode			
Set	AT+UTEST=1	OK	AT+UTEST=1 OK
Antenna dynamic tuner control disabling			
Set	AT+UTEST=4,0	OK	AT+UTEST=4,0 OK
Antenna dynamic tuner control enabling			
Set	AT+UTEST=4,1	OK	AT+UTEST=4,1

Type	Syntax	Response	Example
			OK
Antenna dynamic tuner write configuration table			
Set	AT+UTEST=4,2,<atun_0_lte_bitmask0>,<atun_0_lte_bitmask1>,<atun_0_gsm_umts_bitmask0>,<atun_1_lte_bitmask0>,<atun_1_lte_bitmask1>,<atun_1_gsm_umts_bitmask0>,<atun_2_lte_bitmask0>,<atun_2_lte_bitmask1>,<atun_2_gsm_umts_bitmask0>,<atun_1_gsm_umts_bitmask0>,<atun_2_lte_bitmask0>,<atun_2_lte_bitmask1>,<atun_2_gsm_umts_bitmask0>	OK	AT+UTEST=4,2,0,64,0,134232064,1048576,0,34472080,0,0,16777231,2,0 OK
Antenna dynamic tuner read configuration table			
Set	AT+UTEST=4,3	+UTEST: <ant_tuner_enable>,<atun_0_lte_bitmask0>,<atun_0_lte_bitmask1>,<atun_0_gsm_umts_bitmask0>,<atun_1_lte_bitmask0>,<atun_1_lte_bitmask1>,<atun_1_gsm_umts_bitmask0>,<atun_2_lte_bitmask0>,<atun_2_lte_bitmask1>,<atun_2_gsm_umts_bitmask0>,<atun_1_gsm_umts_bitmask0>,<atun_2_lte_bitmask0>,<atun_2_lte_bitmask1>,<atun_2_gsm_umts_bitmask0> OK	AT+UTEST=4,3 +UTEST: 1,0,64,0,134232064,1048576,0,34472080,0,0,16777231,2,0 OK
Read	AT+UTEST?	+UTEST: <mode> OK	+UTEST: 1 OK
Test	AT+UTEST=?	+UTEST: (list of supported <mode>s) OK	+UTEST: (0-3) OK

18.6.3 Defined values

Parameter	Type	Description
<mode>	Number	Test mode setting: • 0: the module returns to the normal mode • 1: the module enters the test mode • 4: antenna dynamic tuner configuration mode (enable, disable antenna dynamic tuner control, write and read NVM configuration table)
<ant_tuner_enable>	Number	Enable/disable antenna dynamic tuner control. Allowed values: • 0 (factory-programmed value): antenna dynamic tuner control disabled • 1: antenna dynamic tuner control enabled • 2: antenna dynamic tuner control write configuration table (enable flag and all LTE/UMTS/GSM bands in use) inside NVM • 3: antenna dynamic tuner control read configuration table from NVM Allowed values: • LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D - 0, 1, 2, 3
<atun_0_lte_bitmask0>	Number	ATUN signal patch value 0 (ATUN2=0, ATUN1=0) bitmasks: it indicates the bandmask for LTE bands 1 through 64. It is created using the same procedure described for the +UBANDMASK AT command.

Parameter	Type	Description
<atun_0_lte_ bitmask1>	Number	ATUN signal patch value 0 (ATUN2=0, ATUN1=0) bitmasks: it indicates the bandmask for LTE bands 65 through 128. It is created using the same procedure described for the +UBANDMASK AT command.
<atun_0_gsm_umts_ bitmask0>	Number	ATUN signal patch value 0 (ATUN2=0, ATUN1=0) bitmasks: it indicates the bandmask for GSM and UMTS bands. The bit number 1 to 22 are dedicated for GSM, and, 23 to 64 are dedicated for UMTS according to the list, which is available inside the description of +UBANDMASK AT command.
<atun_1_lte_ bitmask0>	Number	ATUN signal patch value 1 (ATUN2=0, ATUN1=1) bitmasks: it indicates the bandmask for LTE bands.
<atun_1_lte_ bitmask1>	Number	ATUN signal patch value 1 (ATUN2=0, ATUN1=1) bitmasks: it indicates the bandmask for LTE bands.
<atun_1_gsm_umts_ bitmask0>	Number	ATUN signal patch value 1 (ATUN2=0, ATUN1=1) bitmasks: it indicates the bandmask for GSM and UMTS bands.
<atun_2_lte_ bitmask0>	Number	ATUN signal patch value 1 (ATUN2=1, ATUN1=0) bitmasks: it indicates the bandmask for LTE bands.
<atun_2_lte_ bitmask1>	Number	ATUN signal patch value 1 (ATUN2=1, ATUN1=0) bitmasks: it indicates the bandmask for LTE bands.
<atun_2_gsm_umts_ bitmask0>	Number	ATUN signal patch value 1 (ATUN2=1, ATUN1=0) bitmasks: it indicates the bandmask for GSM and UMTS bands.
<atun_3_lte_ bitmask0>	Number	ATUN signal patch value 1 (ATUN2=1, ATUN1=1) bitmasks: it indicates the bandmask for LTE bands.
<atun_3_lte_ bitmask1>	Number	ATUN signal patch value 1 (ATUN2=1, ATUN1=1) bitmasks: it indicates the bandmask for LTE bands.
<atun_3_gsm_umts_ bitmask0>	Number	ATUN signal patch value 1 (ATUN2=1, ATUN1=1) bitmasks: it indicates the bandmask for GSM and UMTS bands.

18.6.4 Notes

- The same band can not be active for more than one ATUN signal patch value at the same time.

LARA-L6 / LARA-R6

- The antenna tuner configuration persists after updating the FW version or restoring the NVM to the factory-programmed configuration by means of the +UFACTORY AT command.
- Perform a new backup (by the +UBKUPDATA AT command) after writing new antenna tuner values, otherwise the new value will be overwritten when a restore will be performed.
- The new antenna tuner configuration and the enable/disable request will be applied only after SW reboot.

LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-R6001-01B / LARA-R6001D-01B

- The factory-programmed value of <ant_tuner_enable> is 0 and all other default values are highlighted in the table below:

ATUN signal patch value X= 0,1,2,3	ATUN2 - LARA pin 98	ATUN1 - LARA pin 97	atun_X_lte_bitmask0	atun_X_lte_bitmask1	atun_X_gsm_umts_bitmask0	LTE bands	2G/3G bands
0	0	0	2061584564447	0	562950035734912	B1, B2, B3, B4 ,B5, B7, B8, B19, B38, B39, B40, B41	GSM bands ESGM 900, GSM 850, G1800, G1900 and all 3G bands
1	0	1	134223872	0	0	B12, B13, B28	No band is available for this configuration

ATUN signal patch value X= 0,1,2,3	ATUN2 - LARA pin 98	ATUN1 - LARA pin 97	atun_X_lte_bitmask0	atun_X_lte_bitmask1	atun_X_gsm_umts_bitmask0	LTE bands	2G/3G bands
2	1	0	34209792	0	0	B18, B20, B26	No band is available for this configuration
3	1	1	0	0	0	No band is available for this configuration	No band is available for this configuration

Table 31: Default antenna dynamic tuner configuration table

LARA-L6404 / LARA-L6404D / LARA-R6401-01B / LARA-R6401D-01B

- The factory-programmed value of <ant_tuner_enable> is 1 and all other default values are highlighted in the table below:

ATUN signal patch value X= 0,1,2,3	ATUN2 - LARA pin 98	ATUN1 - LARA pin 97	atun_X_lte_bitmask0	atun_X_lte_bitmask1	atun_X_gsm_umts_bitmask0	LTE bands	2G/3G bands
0	0	0	26	2	0	B2, B4, B5, B66	No band is available for this configuration
1	0	1	14336	0	0	B12, B13, B14	No band is available for this configuration
2	1	0	0	0	0	No band is available for this configuration	No band is available for this configuration
3	1	1	0	64	0	B71	No band is available for this configuration

Table 32: Default antenna dynamic tuner configuration table

LARA-L6804D / LARA-R6801-01B / LARA-R6801D

- The factory-programmed value of <ant_tuner_enable> is 0 and all other default values are highlighted in the table below:

ATUN signal patch value X= 0,1,2,3	ATUN2 - LARA pin 98	ATUN1 - LARA pin 97	atun_X_lte_bitmask0	atun_X_lte_bitmask1	atun_X_gsm_umts_bitmask0	LTE bands	2G/3G bands
0	0	0	262367	0	562950035734912	B1, B2, B3, B4 ,B5, B7, B8, B19	GSM bands ESGM 900, GSM 850, G1800, G1900 and all 3G bands
1	0	1	134217728	0	0	B28	No band is available for this configuration
2	1	0	34209792	0	0	B18, B20, B26	No band is available for this configuration
3	1	1	0	0	0	No band is available for this configuration	No band is available for this configuration

Table 33: Default antenna dynamic tuner configuration table

LARA-L6824 / LARA-L6824D

- The factory-programmed value of <ant_tuner_enable> is 0 and all other default values are highlighted in the table below:

ATUN signal patch value X= 0,1,2,3	ATUN2 - LARA pin 98	ATUN1 - LARA pin 97	atun_X_lte_bitmask0	atun_X_lte_bitmask1	atun_X_gsm_umts_bitmask0	LTE bands	2G/3G bands
0	0	0	33947653	0	0	B1, B3, B18, B19, B26	No band is available for this configuration
1	0	1	0	0	0	No band is available for this configuration	No band is available for this configuration
2	1	0	0	0	0	No band is available for this configuration	No band is available for this configuration
3	1	1	0	0	0	No band is available for this configuration	No band is available for this configuration

Table 34: Default antenna dynamic tuner configuration table

18.6.5 Antenna dynamic tuner configuration examples

- LARA-L6 / LARA-R6

Command	Response	Description
Disabling antenna tuner control		
AT+COPS=2	OK	Deregister from the network.
AT+CFUN=0	OK	Disable the protocol stack.

Command	Response	Description
AT+UTEST=1	OK	Enter the test mode.
AT+UTEST=4,0	OK	The module disables the antenna dynamic tuner feature.
AT+UTEST=0	OK	Enter the normal mode.
AT+CFUN=16	OK	Reboot the module.
Enabling antenna tuner control		
AT+COPS=2	OK	Deregister from the network.
AT+CFUN=0	OK	Disable the protocol stack.
AT+UTEST=1	OK	Enter the test mode.
AT+UTEST=4,1	OK	The module enables the antenna dynamic tuner feature.
AT+UTEST=0	OK	Enter the normal mode.
AT+CFUN=16	OK	Reboot the module.
Reading the antenna tuner control table		
AT+COPS=2	OK	Deregister from the network.
AT+CFUN=0	OK	Disable the protocol stack.
AT+UTEST=1	OK	Enter the test mode.
AT+UTEST=4,3	+UTEST: 1,2061584564447,0,562950035734912,134223872,0,0,34209792,0,0,0,0,0 OK	The module reads the antenna dynamic tuner configuration table from NVM. For an explanation of the bit masks see Table 31, Table 32 and Table 33.
AT+UTEST=0	OK	Enter the normal mode.
AT+CFUN=16	OK	Reboot the module.
Writing the antenna tuner control table		
AT+COPS=2	OK	Deregister from the network.
AT+CFUN=0	OK	Disable the protocol stack.
AT+UTEST=1	OK	Enter the test mode.
AT+UTEST=4,2,2061584564447,0,562950035734912,134223872,0,0,34209792,0,0,0,0,0	OK	The module writes the antenna dynamic tuner configuration table inside NVM. For an explanation of the bit masks see Table 31, Table 32 and Table 33.
AT+UTEST=0	OK	Enter the normal mode.
AT+CFUN=16	OK	Reboot the module.

Table 35: antenna dynamic tuner mode test command examples

18.7 Smart temperature supervisor +USTS

+USTS						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	Profile	No	-	+CME Error

18.7.1 Description

Enables/disables the Smart Temperature Supervisor feature.

When the feature is enabled the internal temperature is measured via the internal temperature sensor:

- If the measured value goes over the t_{+1} threshold or below the t_{-1} threshold a URC will be issued to notify a warning: the module is still in a valid and good working condition.
- If the measured value goes over the t_{+2} threshold or below the t_{-2} threshold a URC will be issued to notify the dangerous working condition. After the notification the device will start the shutting down procedure to avoid damaging itself.

The +UUSTS URC will be also issued after having enabled the feature indication (by means of <mode>= 1 or <mode>= 2) and at the module power-on (if the feature indication is enabled).

The shutdown procedure is performed only if <mode>=1 (notified by a URC) or <mode>=3 (without notification).

For security reasons the shutdown is suspended in case of emergency call in progress. In this case the device will switch off at the call termination: a URC will be sent to notify this.

If the feature is disabled (<mode>= 0 and <mode>= 2) there is no embedded protection against not allowed temperature working conditions.

For more details on Smart Temperature Supervisor feature and the thresholds definition, see the corresponding module system integration manual.

18.7.2 Syntax

Type	Syntax	Response	Example
Set	AT+USTS=<mode>	OK	AT+USTS=0 OK
Read	AT+USTS?	+USTS: <mode> OK	+USTS: 0 OK
Test	AT+USTS=?	+USTS: (list of supported <mode>s) OK	+USTS: (0-2) OK
URC		+UUSTS: <mode>,<event>	+UUSTS: 1,1

18.7.3 Defined values

Parameter	Type	Description
<mode>	Number	Enables / disables the smart temperature mode: • 0 (default value and factory-programmed value): smart temperature feature disabled • 1: smart temperature feature enabled; the indication by means of the +UUSTS URC and shutting down (if needed) are performed • 2: smart temperature indication enabled; the +UUSTS URC will be issued to notify the Smart Temperature Supervisor status • 3: smart temperature feature enabled with no indication; the shutdown (if needed) is performed, but without a URC notification Allowed values: • LARA-L6 / LARA-R6 - 0 (default value and factory-programmed value), 1, 2
<event>	Number	Provides the event status: • -2: temperature below t_{-2} threshold • -1: temperature below t_{-1} threshold • 0: temperature inside the allowed range - not close to the limits • 1: temperature above t_{+1} threshold • 2: temperature above the t_{+2} threshold • 10: timer expired and no emergency call is in progress, shutdown phase started • 20: emergency call ended, shutdown phase started • 100: error during measurement

18.8 MSPR profile handling configuration +UDCONF=40

+UDCONF=40						
Modules	LARA-L6					
	LARA-R6001 LARA-R6001D LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	NVM	No	-	+CME Error

18.8.1 Description

The multi-slot transmission power can be reduced according to the 3GPP specifications and set to a defined threshold.

☞ u-blox cellular modules are certified according to all the capabilities and options stated in the Protocol Implementation Conformance Statement document (PICS) of the module. The PICS, according to 3GPP TS 51.010-2 [117], 3GPP TS 34.121-2 [118], 3GPP TS 36.521-2 [139] and 3GPP TS 36.523-2 [140], is a statement of the implemented and supported capabilities and options of a device. If the user changes the command settings during the certification process, the PICS of the application device integrating a u-blox cellular module must be changed accordingly.

In 3G mode (i.e. UMTS radio access), the maximum output power cannot be set through the AT command, but is automatically set by the module according to the UE Maximum Power Reduction for the nominal maximum output power with HS-DPCCH and E-DCH defined by 3GPP specifications.

In 2G mode (i.e. GPRS and EDGE radio access), the maximum output power in GMSK or 8-PSK multi-slot configuration can be set by selecting the active multi-slot power reduction profile within the available profiles defined in Table 36 according to 3GPP specifications.

The maximum output power in GMSK or 8-PSK multislot configuration depends on the active MSPR profile set by the AT command and the number of active Tx slots set by the network, as described in Table 36:

Active Tx slots	MSPR profile 0	MSPR profile 1	MSPR profile 2	MSPR profile 3
1	0	0	0	0
2	3	1	0	0
3	4,8	2,8	0,8	0
4	6	4	2	0

Table 36: Power reduction (dBm)

☞ LARA-L6 / LARA-R6
The changes in the user defined power reduction are effective after reboot.

18.8.2 Syntax

Type	Syntax	Response	Example
Set	AT+UDCONF=40,<GMSK_profile>[,<8PSK_profile>]	OK	AT+UDCONF=40,2,3 OK
Read	AT+UDCONF=40	+UDCONF: 40,<GMSK_profile>,<8PSK_profile> OK	AT+UDCONF=40 +UDCONF: 40,2,2 OK

18.8.3 Defined values

Parameter	Type	Description
<GMSK_profile>	Number	User defined power reduction: MSPR GMSK profile (range 0-3). The factory-programmed value depends on the series module: • LARA-L6 / LARA-R6 - 2

Parameter	Type	Description
<8PSK_profile>	Number	User defined power reduction: MSPR 8-PSK profile (range 0-3). This parameter is optional: if omitted, the MSPR 8-PSK profile is not affected. The factory-programmed value depends on the series module: • LARA-L6 / LARA-R6 - 2. This parameter is optional: if omitted, the MSPR 8-PSK profile is not affected

18.8.4 Notes

- For AT&T certification: the 8-PSK MSPR profile should be limited to values 2 and 3.

LARA-L6 / LARA-R6

- The +UFACTORY AT command cannot be used to restore the factory-programmed values.
- The GCF certification has been done using the factory-programmed values for both MSPR profiles. If a different couple of values is used, the same RF performance could be not guaranteed.

18.9 RING line handling +URING

+URING						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

18.9.1 Description

Configures the RING line handling of the UART interface for other events besides the usual ones, that is the incoming call indication (RING) (linked to the "RING" URC) and the incoming SMS indication (linked to the +CMT and the +CMTI URCs).

The RING line will be asserted when one of the configured events occurs and it remains asserted for 1 s unless another configured event happens (in this case the 1 s timer will be started again). Same behavior will be applied if the events are the incoming call or the incoming SMS.

18.9.2 Syntax

Type	Syntax	Response	Example
Set	AT+URING=<mode>	OK	AT+URING=1 OK
Read	AT+URING?	+URING: <mode> OK	+URING: 1 OK
Test	AT+URING=?	+URING: (list of the supported <mode>s) OK	+URING: (0-3) OK

18.9.3 Defined values

Parameter	Type	Description
<mode>	Number	Configures the RING line handling: • 0 (factory-programmed value): feature disabled (RING line is asserted only on incoming call and incoming SMS) • 1: RING line asserted for all the URCs • 2: RING line asserted for all the incoming data (PPP, sockets in Direct Link mode, FTP in Direct Link mode) • 3: RING line asserted for all URCs and all incoming data (PPP, sockets in Direct Link mode, FTP in Direct Link mode)

18.9.4 Notes

LARA-L6 / LARA-R6

- The physical RING line handling depends on +USIO AT command configuration. In the following cases, it is supported only if RI function is configured using +UGPIOC AT command:
  - When MAIN UART and AUX UART are both enabled as 5-wire configuration (for more details, see +USIO AT command, <active_variant>=1).
  - When MAIN UART is not enabled (for more details, see +USIO AT command, <active_variant>=3, 4).
- The virtual RING line on USB and MUX (if enabled) is handled regardless of +USIO AT command configuration.

18.10 USB profiles configuration +UUSBCONF

+UUSBCONF						
Modules	LARA-L6					
	LARA-R6001-01B LARA-R6001D-01B LARA-R6401-01B LARA-R6401D-01B LARA-R6801-01B LARA-R6801D					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	NVM	No	-	+CME Error

18.10.1 Description

The following terminology will be adopted for the +UUSBCONF command description:

- USB function: a USB capability such as RNDIS, UMS (USB Mass Storage), CDC-ECM, etc. It is implemented within a device class.
- USB profile: a set of available USB functions (where available means that the function is presented to the host during the enumeration process), e.g. RNDIS plus CDC-ACM. An identifier (product id, PID) is assigned for each profile.
- USB product: a set of USB profiles, sharing the same PID, one active at a time. It is possible to switch among USB profiles within the same USB product.

Each u-blox cellular module consists of one or more USB products from the point of view of the USB configuration context. Each USB product includes a certain amount of USB profiles. Each USB profile includes a certain amount of USB endpoints, depending on the overall USB functions of the USB profile.

The command configures the active USB profile. The USB profile selection is performed by the specification of the USB product category, the network USB function (when available), and the audio over USB function configuration (enable/disable, when available).

☞ The USB profile switch is not performed run-time. The settings are saved in NVM at the module power off; the new configuration will be effective at the subsequent module reboot.

18.10.2 Syntax

Type	Syntax	Response	Example
Set	AT+UUSBCONF=[<id>[,<network>[,<audio>]]]	OK	AT+UUSBCONF=0,"AUTO",0 OK
Read	AT+UUSBCONF?	+UUSBCONF: <id>,<network>,<audio>,<pid> OK	+UUSBCONF: 0,"RNDIS",0,"0x1144" OK
Test	AT+UUSBCONF=?	+UUSBCONF: (<id> (Corresponding USB functions (string) for <id>),(list of the supported <network>s for <id>),(list of the supported <audio> values for <id>))[,<id>, (Corresponding USB functions (string) for <id>),(list of the	+UUSBCONF: (0 ("6 CDC-ACM"),(""),()),(2 ("NETWORK, 3 CDC-ACM"),("ECM"),()),(3 ("NETWORK, 1 CDC-ACM"),("RNDIS"),()) OK

Type	Syntax	Response	Example
		supported <network>s for <id>),(list of the supported <audio> values for <id>)[,...]] OK	

18.10.3 Defined values

Parameter	Type	Description
<id>	Number	USB product category number; see Notes for the allowed values and their detailed description.
<network>	String	USB network function: • "AUTO": network autodetection • "ECM": CDC-ECM device class • "NCM": CDC-NCM device class • "MBIM": MBIM device class • "RNDIS": RNDIS device class • "RMNET": RMNET device class Allowed values: • LARA-L6 / LARA-R6 - "RMNET", "ECM"
<audio>	Number	Audio over USB function configuration: • 0: audio over USB disabled • 1: audio over USB enabled
<pid>	String	String in HEX format with 0x prefix, showing the identifier (PID) of the current profile. Assigned range for PID is 0x1102-0x1FFF.

18.10.4 Notes

- <network> value is only considered if the <id> category includes a network USB function.
- <audio> value is only considered if the <id> category includes an audio over USB function.
- When the <id> category does not include a network USB function or an audio over USB function, the information text response of the read command is an empty string and an empty value for <network> and <audio> respectively.
- Table 37 lists the USB product category associated to a <id>.

<id>	USB product category
0	Fairly back-compatible: It is a configuration similar to the one implemented in the u-blox LISA-U2 series, where only CDC-ACMs and, if present, a specific USB function for diagnostic log (e.g. CDC-DIAG) are available.
1	Fairly back-compatible plus audio: It is like the "Fairly back-compatible", but audio over USB function is available; audio over USB function can be enabled or disabled within the same PID.
2	Low/Medium throughput: It is a configuration including a Network USB function, a certain number of CDCs-ACM and, if present, a specific USB for the diagnostic log (e.g. CDC-DIAG). Audio over USB is available, but it can be enabled or disabled. The presence of several USB functions limits the reachable data transfer throughput.
3	High throughput: It is like the "Low/Medium throughput", but only 1 CDC-ACM is available. High throughput data rate can be reached only if the audio over USB function is disabled.
4	High throughput with ethernet over USB: It is a configuration including a Network USB function, a certain number of CDCs-ACM and, if present, a specific USB for the diagnostic log (e.g. CDC-DIAG).

<id>	USB product category
	The presence of several USB functions does not limit the reachable data transfer throughput.
12	Low/Medium throughput plus SAP: It is a configuration including a Network USB function, a certain number of CDCs-ACM and, if present, a specific USB for the diagnostic log (e.g. CDC-DIAG). SAP over USB is available on the first CDC-ACM, but it can be enabled or disabled. The presence of several USB functions limits the reachable data transfer throughput.
13	High throughput plus SAP: It is like the "High throughput", but only 1 CDC-ACM dedicated to SAP communication. ☞ AT commands can be issued only over the UART interface.
99	USB disabled: USB stack if fully disabled and there is no USB enumeration. ☞ AT commands can be issued only over the UART interface.

Table 37: USB product configuration

LARA-L6

- CDC-ACM-QC requires specific host drivers. For more details, see LARA-L6 Linux integration application note [73].
- The allowed USB configurations are listed as follows:

Command	PID	Available USB functions	Remark
AT+UUSBCONF=0	0x1341	3 CDC-ACM-QC + 1 DIAG	Default and factory-programmed value
AT+UUSBCONF=4,"RMNET"	0x1342	RMNET + 3 CDC-ACM-QC + 1 DIAG	
AT+UUSBCONF=4,"ECM"	0x1343	CDC-ECM + 3 CDC-ACM-QC + 1 DIAG	
AT+UUSBCONF=100	0x1349	3 CDC-ACM + DIAG	CDC-ACM ports have single interface ☞ LARA-L6004-00B / LARA-L6004D-00B Not supported.
AT+UUSBCONF=104,"RMNET"	0x134A	RMNET + 3 CDC-ACM + 1 DIAG	CDC-ACM ports have single interface ☞ LARA-L6004-00B / LARA-L6004D-00B Not supported.
AT+UUSBCONF=104,"ECM"	0x134B	CDC-ECM + 3 CDC-ACM + 1 DIAG	CDC-ACM ports have single interface ☞ LARA-L6004-00B / LARA-L6004D-00B Not supported.

Table 38: Supported USB functions

LARA-R6

- CDC-ACM-QC requires specific host drivers. For more details, see LARA-L6/LARA-R6 Linux integration application note [73].

- The allowed USB configurations are listed as follows:

Command	PID	Available USB functions	Remark
AT+UUSBCONF=0	0x1311	3 CDC-ACM-QC + 1 DIAG	Default and factory-programmed value
AT+UUSBCONF=4,"RMNET"	0x1312	RMNET + 3 CDC-ACM-QC + 1 DIAG	
AT+UUSBCONF=4,"ECM"	0x1313	CDC-ECM + 3 CDC-ACM-QC + 1 DIAG	
AT+UUSBCONF=100	0x1319	3 CDC-ACM + DIAG	CDC-ACM ports have single interface
AT+UUSBCONF=104,"RMNET"	0x131A	RMNET + 3 CDC-ACM + 1 DIAG	CDC-ACM ports have single interface
AT+UUSBCONF=104,"ECM"	0x131B	CDC-ECM + 3 CDC-ACM + 1 DIAG	CDC-ACM ports have single interface

Table 39: Supported USB functions

18.11 VBUS detection +UUSBDET

+UUSBDET						
Modules	LARA-L6					
	LARA-R6001 LARA-R6401 LARA-R6401D LARA-R6801 LARA-R6801D					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

18.11.1 Description

Configures how the device handles USB detection.

There are two options: analog detection allows a pretty wide range of voltages to be detected as VBUS (for the operating range, see the data sheet [6] [7]), while hotplug functionality is lost though; digital detection brings hotplug back, sacrificing the voltages range for VBUS.

18.11.2 Syntax

Type	Syntax	Response	Example
Set	AT+UUSBDET=<mode>	OK	AT+UUSBDET=0 OK
Read	AT+UUSBDET?	+UUSBDET: <mode> OK	+UUSBDET: 0 OK
Test	AT+UUSBDET=?	+UUSBDET: (list of the supported <mode>s) OK	+UUSBDET: (0-1) OK

18.11.3 Defined values

Parameter	Type	Description
<mode>	Number	Configures VBUS detection: • 0 (factory-programmed value): analog detection • 1: digital detection

18.11.4 Notes

LARA-L6 / LARA-R6

- The setting is written in a file, which gets read during the boot. After having issued the command, reboot the module to make the change effective.

18.12 UART baud rate and flow control NVM management +UUARTCONF

+UUARTCONF						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

18.12.1 Description

Stores the baud rate and flow control values to NVM (see the +IPR and &K AT commands) for the specified UART interface. The read command returns the NVM setting for all the available UART interfaces.

This command is intended to extend the possibility to have different stored values of +IPR and &K AT commands across the two UART interfaces.

Setting in NVM for AUX UART interface is applied at boot regardless of the +USIO configuration, that is AUX UART mode (AT, binary).

The settings are saved immediately in NVM; the new configuration will be effective at the subsequent module reboot.

18.12.2 Syntax

Type	Syntax	Response	Example
Set	AT+UUARTCONF=<uart_id>[,<rate>[,<fctrl>]]	OK	AT+UUARTCONF=1,115200,3 OK
Read	AT+UUARTCONF?	+UUARTCONF: <uart_id>,<rate>,<fctrl> [[..] +UUARTCONF: <uart_id>,<rate>,<fctrl>] OK	+UUARTCONF: 0,115200,3 +UUARTCONF: 1,115200,3 OK
Test	AT+UUARTCONF=?	+UUARTCONF: (list of supported <uart_id>s),(list of fixed only supported <rate>s),(list of supported <fctrl>s) OK	+UUARTCONF: 1,(300,600,1200,2400,4800,9600,14400,19200,38400,57600,115200,230400,460800,921600,1000000,1200000,1500000,2000000,3000000),(0-3) OK

18.12.3 Defined values

Parameter	Type	Description
<uart_id>	Number	UART identification code: • 0: main UART identification code • 1: auxiliary UART identification code Allowed values: • LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B - 1 • LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D - 0, 1
<rate>	Number	Allowed baud rates expressed in b/s: • LARA-L6 / LARA-R6 - The information text response to the test command returns a list of baud rates; within this list the only supported baud rates are: 115200 (default and factory-programmed value), 230400, 460800, 921600, 3000000.

Parameter	Type	Description
<fctrl>	Number	DTE flow control mode (see the &K AT command): • 0: disable DTE flow control • 3 (default and factory-programmed value): enable the RTS/CTS DTE flow control

18.12.4 Notes

LARA-L6 / LARA-R6

- The HW flow control cannot be changed when +USIO: 1 and +UPSV: 1; for more details, see the +UPSV AT command.

18.13 Serial interfaces configuration selection +USIO

+USIO						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

18.13.1 Description

Selects the serial interfaces' configuration.

The configuration affects how an available (either physical or logical) serial interface is used, i.e. the meaning of the data flowing over it. Possible usages are:

- Modem interface (AT command)
- Trace interface (diagnostic log)
- Raw interface (e.g. GPS/GNSS tunneling or SAP)
- Digital audio interface
- None

A set of configurations, that considers all the available serial interfaces' and their associated usage, is called +USIO's configuration variant.

The serial interfaces' configuration switch is not performed at run-time. The settings are saved in NVM; the new configuration will be effective at the subsequent module reboot.

A serial interface might not support all the usages. For instance, UART cannot be used as digital audio interface.

For the complete list of allowed USIO variants supported by each series modules, see Notes.

18.13.2 Syntax

Type	Syntax	Response	Example
Set	AT+USIO=<requested_variant>	OK	AT+USIO=1 OK
Read	AT+USIO?	+USIO: <requested_variant>, *<active_variant> OK	+USIO: 1, *1 OK
Test	AT+USIO=?	+USIO: Variant=<requested_variant>: [AT=<AT_interface>;] [GNSS=<GNSS_interface>;] [TRACE=<Trace_interface>;] [DIGITAL AUDIO=<Digital_audio_interface>] [+USIO: Variant=<requested_variant>: [AT=<AT_interface>;][GNSS=<GNSS_	+USIO: Variant=0: AT="UART"; AT="AUX UART"; TRACE="EXT UART" +USIO: Variant=1: AT="UART"; TRACE="AUX UART"; DIGITAL AUDIO="I2S" +USIO: Variant=2: AT="UART"; AT="AUX UART"; DIGITAL AUDIO="I2S"

Type	Syntax	Response	Example
		interface>;][TRACE=<Trace_ interface>;][DIGITAL AUDIO= <Digital_audio_interface>] [...]] OK	+USIO: Variant=3: AT="UART"; GNSS="AUX UART"; TRACE="EXT UART" +USIO: Variant=4: AT="UART"; GNSS="AUX UART"; DIGITAL AUDIO="I2S" OK

18.13.3 Defined values

Parameter	Type	Description
<requested_variant>	Number	Requested (stored in NVM for next boot) configuration variant (range 0-255). For the factory-programmed value, see the value in supported USIO variants table in Notes.
<active_variant>	Number	Active (currently used) configuration variant (range 0-255). For the factory-programmed value, see the value in supported USIO variants table in Notes.
<AT_interface>	String	Serial interface configured for AT commands
<GNSS_interface>	String	Serial interface configured for GNSS tunneling
<Trace_interface>	String	Serial interface configured for diagnostic log
<Digital_audio_ interface>	String	Serial interface configured for digital audio

18.13.4 Notes

- Table 40 explains the meaning of <AT_interface>, <GNSS_interface>, <Trace_interface>, <Digital_audio_ interface>.

<AT_interface>, <GNSS_interface>, <Trace_interface>, <Digital_audio_ interface>	Serial interface description
"UART"	Main UART: It is the full featured UART (9-wire), used as main interface to the host.
"AUX UART"	Auxiliary UART: It is the general purpose UART (3-wire or 5-wire), with limited v.24 features.
"EXT UART"	External UART: It is not a real UART, but the SPI interface is used to communicate with an external chip providing SPI to UART conversion. Basically, it is limited to diagnostic log.
"USB"	USB CDC-ACM or Network over USB: USB CDC-ACM is a virtual UART, providing simulated v.24 features over a USB interface. Network over USB is a virtual network interface providing diagnostic logging.
"I2S"	I^2S interface: It can be used for the digital audio. See the Chapter 23 for the required configurations.
"SPI"	SPI interface: It is limited to diagnostic log.
"SDIO"	SDIO interface: It is limited to diagnostic log.

Table 40: Serial interfaces

LARA-L6 / LARA-R6

- The allowed configurations are listed as follows:

<active_variant>	AT instance 1	AT instance 2	AT instance 3	Diagnostic log	GNSS tunneling
0 (factory-programmed value)	UART (9-wire)	USB1	USB2	USB0	Not available
1	UART (5-wire)	USB1	AUX UART (5-wire)	USB0	Not available
2	UART (9-wire)	USB1	-	USB0	USB3
3	USB2	USB1	-	USB0	USB3
4	USB2	USB1	USB3	USB0	Not available
5	UART (5-wire)	USB1	-	AUX UART (5-wire)	Not available

Table 41: Supported USIO variants

- When the <active_variant> is 5, the AUX UART interface is configured as diagnostic port and its baud rate is configured through the +UUARTCONF AT command.
- For more details on how to enable the GNSS tunneling on a MUX channel, see the+CMUX AT command.

LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B

- <active_variant>=5 is not supported.

18.14 Internal temperature monitor +UTEMP

+UTEMP						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	-	+CME Error

18.14.1 Description

Returns the values of internal temperature sensors of the specified unit.

The command handling (sensors position and command syntax) depends on the module series:

- LARA-L6 / LARA-R6 - The AT command returns the value measured by the temperature sensor on the **Die**.

18.14.2 Syntax

Type	Syntax	Response	Example
Set	AT+UTEMP=<unit>	OK	AT+UTEMP=0 OK
Read	AT+UTEMP?	+UTEMP: <die_temp>[,<unit>] OK	+UTEMP: 100,1 OK
Test	AT+UTEMP=?	+UTEMP: (list of supported <unit>) OK	+UTEMP: (0-1) OK

18.14.3 Defined values

Parameter	Type	Description
<unit>	Number	Select the measurement unit for value representation: • 0 (default value): values in tenth of Celsius degrees returned • 1: values in tenth of Fahrenheit degrees returned
<die_temp>	Number	Fetched value of Die temperature of the selected measurement unit; the allowed range, expressed in tenth of degrees, depends on the measurement unit: • LARA-L6 / LARA-R6

Parameter	Type	Description
		o Celsius degrees: [-400; 1400] o Fahrenheit degrees: [-400; 2840]

18.15 Restore factory configuration +UFACTORY

+UFACTORY						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	5 s	+CME Error

18.15.1 Description

Force, at the next module boot, the restore of the factory configuration for FS and/or NVM.

When the command is issued, a flag is written into the NVM: no action is done and it will be triggered to be executed only at the next module boot. If, before the next boot, the triggered operation must be deleted, then it is possible to issue the command with parameter 0,0.

18.15.2 Syntax

Type	Syntax	Response	Example
Set	AT+UFACTORY=<fs_op>,<nvm_op>	OK	AT+UFACTORY=0,1 OK
Read	AT+UFACTORY?	+UFACTORY: <fs_op>,<nvm_op> OK	+UFACTORY: 0,1 OK
Test	AT+UFACTORY=?	+UFACTORY: (list of supported <fs_op>s),(list of supported <nvm_op>s) OK	+UFACTORY: (0-2),(0-2) OK

18.15.3 Defined values

Parameter	Type	Description
<fs_op>	Number	FS factory restore type: • 0 (factory-programmed value): no factory restore • 1: see Notes • 2: all files stored in FS deleted
<nvm_op>	Number	NVM factory restore type: • 0 (factory-programmed value): no factory restore • 1: NVM flash sectors erased • 2: see Notes

18.15.4 Notes

LARA-L6 / LARA-R6

- <fs_op>=1 deletes all user files previously stored with "USER" tag.
- <fs_op>=2 is not supported.
- <nvm_op>=1 deletes all MNO profiles.
- <nvm_op>=2 restores the UART interface and +UPSV AT command settings to the factory-programmed setting.
- After a <nvm_op>=1, it is required a second reboot in order to make the module again ready to properly accept and store new settings to NVM.

18.16 NVM RAM mode management +UNVMCFG

+UNVMCFG						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

18.16.1 Description

Executes the following tasks:

- Sets the NVM RAM mode for AT command settings stored in NVM.
- Lists the AT commands whose settings can be stored on NVM and/or in the NVM backup partition.

Some classes do not support mode change.

AT command settings are stored as UNVM items and are grouped in AT groups. Changing the NVM RAM mode for an AT group will change the behaviour for all AT command settings in that group. The NVM RAM mode is not supported for the UNVM items storable on the NVM backup.

Based on the configured NVM RAM mode the behaviour of UNVM items within an AT group is as follows:

- RAM mode:
  - Changing the AT command settings changes only the RAM mirror (NVM is intact).
  - +UNVMW commits the AT command settings from RAM mirror to NVM.
  - +UNVMR resets the AT command settings RAM mirror to the setting stored in NVM.
  - +UNVMF works the same in both modes - restores the NVM to factory with deleting the NVM.
- NVM mode:
  - Changing the AT command settings changes the NVM setting.
  - +UNVMW does nothing as setting is already in NVM.
  - +UNVMR does nothing as setting is coherent with NVM.
  - +UNVMF works the same in both modes - restores the NVM to factory with deleting the NVM.

RAM mode is useful for customer devices not requiring NVM capabilities on u-blox module (example: audio settings are configured at each boot by the application processor).

The AT groups are product-specific.

Reboot the module in order to apply the new NVM RAM mode.

If the NVM Backup is supported, the following AT commands can be issued to manage also the backup storage:

- +UNVMW commits the settings from NVM to the backup partition.
- +UNVMR commits the settings from backup partition to NVM and RAM
- +UNVMF restores the NVM and the backup partition to factory with deleting the NVM.

18.16.2 Syntax

Type	Syntax	Response	Example
Restore factory			
Action	AT+UNVMCFG=	OK	AT+UNVMCFG= OK
Set	AT+UNVMCFG=<at_group>,<mode>	OK	AT+UNVMCFG="audio",1 OK
Read	AT+UNVMCFG=<at_group>	+UNVMCFG: <at_group>,<mode> OK	AT+UNVMCFG="audio" +UNVMCFG: "audio",1 OK

Type	Syntax	Response	Example
Test	AT+UNVMCFG=?	+UNVMCFG:(list of supported <at_group>es),(list of commands in the at_group) OK	+UNVMCFG: "audio","+calm,+ui2s,+uspm,+clvl,+umclk,+crsl" +UNVMCFG: "generic","+ulwm2m,+utrace,+uring,+upsv,+ulgasp,+usts,+ulog,+ugpio" +UNVMCFG: "gnss","+uloccell,+ulocgnss,+ugsrv,+ugprf" OK

18.16.3 Defined values

Parameter	Type	Description
<at_group>	String	AT group: • "audio"; the group has factory-programmed value 0 for <mode> parameter. • "generic"; the group has factory-programmed value 0 for <mode> parameter. • "gnss"; the group has factory-programmed value 0 for <mode> parameter. • "aonnvm"; the group has factory-programmed value 0 and cannot be changed. • "aonnvmbckp"; the group has factory-programmed value 0 and cannot be changed. Allowed groups: • LARA-L6004 / LARA-L6404 / LARA-R6001 / LARA-R6401 / LARA-R6801 - "audio", "generic", "gnss" • LARA-L6004D / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001D / LARA-R6401D / LARA-R6801D - "generic", "gnss"
<mode>	Number	Mode. Allowed values: • 0: NVM mode • 1: RAM mode • 2: reserved
<setting_name>	String	Setting name: • "urc"; the URC configuration has factory-programmed value 0 for <setting_value> parameter.
<setting_value>	Number	Setting value. Allowed values for "urc": • 0: URCs disabled • 1: URCs enabled
<id>	Number	Event type. Allowed values: • 0: item restored from backup • 1: item restored from factory setting • 2: backup was corrupt and consequently deleted • 3: reserved • 4: raw class item is corrupt
<item_name>	String	Item name for which the event occurred.

18.17 NVM/NVM Backup configuration management commit+UNVMW

+UNVMW						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

18.17.1 Description

Commits RAM configuration changes to NVM or commits NVM configuration changes to NVM backup. The operation done by this command depends on the selected AT group.

The commitment from RAM to NVM has no effect in the NVM operating mode. See +UDCONF=110 or +UNVMCFG for details about the configuration of the mode of operation. In particular for:

- LARA-L6 / LARA-R6 - see +UNVMCFG

18.17.2 Syntax

Type	Syntax	Response	Example
Generic syntax			
Set	AT+UNVMW=<at_group>	OK	AT+UNVMW="audio" OK
Test	AT+UNVMW=?	+UNVMW: (list of supported <at_group>s) OK	+UNVMW: ("audio","generic", "gnss","mqtt","ram_at","nvm_at", "nvmbckp_at") OK

18.17.3 Defined values

Parameter	Type	Description
<at_group>	String	AT group: • "audio": audio configuration. The command commits RAM configuration changes to NVM. • "generic": generic configuration. The command commits RAM configuration changes to NVM. • "gnss": GNSS configuration. The command commits RAM configuration changes to NVM. • "mqtt": UNUSED, reserved. • "ram_at": UNUSED, reserved. • "nvm_at": UNUSED, reserved. • "nvmbckp_at": UNUSED, reserved. • "aon": UNUSED, reserved. • "aonnvm": configuration storable in the NVM file system and cached in always-on RAM. • "aonnvmbckp": configuration storable in the NVM backup and cached in always-on RAM. The command commits NVM configuration changes to NVM backup. Allowed groups: • LARA-L6004 / LARA-L6404 / LARA-R6001 / LARA-R6401 / LARA-R6801 - "audio", "generic", "gnss" • LARA-L6004D / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001D / LARA-R6401D / LARA-R6801D - "generic", "gnss"

18.17.4 Notes

LARA-L6 / LARA-R6

- Some <at_group>s do not contain items and will consequently cannot be backed-up.

18.18 NVM configuration management reset +UNVMR

+UNVMR						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

18.18.1 Description

Resets RAM configuration from NVM and applies it or resets RAM and NVM configuration from NVM backup and applies it. The operation done by this command depends on the selected AT group.

The reset of RAM configuration from NVM has no effect in the NVM operating mode. See +UDCONF=110 or +UNVMCFG for details about the configuration of the mode of operation. In particular for:

- LARA-L6 / LARA-R6 - see +UNVMCFG

18.18.2 Syntax

Type	Syntax	Response	Example
Generic syntax			
Set	AT+UNVMR=<at_group>	OK	AT+UNVMR="audio" OK
Test	AT+UNVMR=?	+UNVMR: (list of supported <at_group>s) OK	+UNVMR: ("audio","nvmbckp") OK

18.18.3 Defined values

Parameter	Type	Description
<at_group>	String	AT group: • "audio": audio configuration. The command resets RAM configuration from NVM. • "nvmbckp": configuration storable in the NVM backup. The command resets NVM and RAM configuration from NVM backup. • "aonnvmbckp": configuration storable in the NVM backup and cached in always-on RAM. The command resets NVM and RAM configuration from NVM backup. Allowed groups: • LARA-L6004 / LARA-L6404 / LARA-R6001 / LARA-R6401 / LARA-R6801 - "audio" • LARA-L6004D / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001D / LARA-R6401D / LARA-R6801D - no groups are supported. The set command provides an error result code.

18.19 NVM configuration management factory restore +UNVMF

+UNVMF						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

18.19.1 Description

Restores the factory-programmed configuration.

Reboot the module to apply the new configuration.

18.19.2 Syntax

Type	Syntax	Response	Example
Generic syntax			
Set	AT+UNVMF=<at_group>	OK	AT+UNVMF="audio" OK
Test	AT+UNVMF=?	+UNVMF: (list of supported <at_group>s) OK	+UNVMF: ("audio","generic","gnss","nvmbckp") OK

18.19.3 Defined values

Parameter	Type	Description
<at_group>	String	AT group: • "audio": audio configuration. The command commits RAM configuration changes to NVM. • "generic": generic configuration. The command commits RAM configuration changes to NVM.

Parameter	Type	Description
		• "gnss": GNSS configuration. The command commits RAM configuration changes to NVM. • "mqtt": UNUSED, reserved for MQTT configuration. • "ram_at": UNUSED, reserved. • "nvm_at": UNUSED, reserved. • "nvmbckp_at": UNUSED, reserved. • "aon": UNUSED, reserved. • "aonnvm": configuration storable in the NVM file system and cached in always-on RAM. • "aonnvmbckp": configuration storable in the NVM backup and cached in always-on RAM. The command commits NVM configuration changes to NVM backup. Allowed groups: • LARA-L6004 / LARA-L6404 / LARA-R6001 / LARA-R6401 / LARA-R6801 - "audio", "generic", "gnss" • LARA-L6004D / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001D / LARA-R6401D / LARA-R6801D - "generic", "gnss"

18.20 Backup and restore the file system +UBKUPDATA

+UBKUPDATA						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

18.20.1 Description

Backs up the file system. Upon receiving the action command and after the backup process is finished, the module performs a reboot. Upon a detection of a file system corruption, the module autonomously triggers a restore of the last backup and immediately performs a reboot; it is possible to manually restore the last backup by means of the set command. If no backup has been performed, the factory-programmed file system image is restored.

The read command displays the backup and restore statistics. The +UUBKUPDATA URC notifies the result of the backup / restore operation.

18.20.2 Syntax

Type	Syntax	Response	Example
Action	AT+UBKUPDATA	OK	OK
Set	AT+UBKUPDATA=<command>	OK	AT+UBKUPDATA=r OK
Read	AT+UBKUPDATA?	+UBKUPDATA: <last_backup>,<last_restore>,<backup_number>,<restore_number>,<failed_op_type>,<last_failed_op>,<failure_code_location> OK	+UBKUPDATA: 172800,20,2,1,1,20,"file: fs_db.c, function: down_find, line: 1168" OK
URC		+UUBKUPDATA: <op_type>,<result>	+UUBKUPDATA: 0,0

18.20.3 Defined values

Parameter	Type	Description
<command>	String	Allowed value: • r: triggers a restore operation The string is not enclosed within quotation marks.
<last_backup>	Number	Time in seconds elapsed since last backup operation
<last_restore>	Number	Time in seconds elapsed since last restore operation

Parameter	Type	Description
<backup_number>	Number	Total number of backup operations performed
<restore_number>	Number	Total number of restored operations performed
<failed_op_type>	Number	Last failed operation type. Allowed values: • 0: no operation failed • 1: backup operation • 2: restore operation
<last_failed_op>	Number	Time in seconds elapsed since last failed operation. If there are no failures (<failed_op_type>=0), value 0 is returned.
<failure_code_location>	String	Filename, function name and line number where the failure was triggered. If there are no failures, no indication regarding filename, function name and line number are provided.
<op_type>	Number	Operation type. Allowed values: • 0: no operation • 1: backup operation • 2: restore operation
<result>	Number	Operation result. Allowed values: • 0: operation failure • 1: operation success • 2: operation start

18.20.4 Notes

LARA-L6 / LARA-R6

- Personalization data for security, calibrations, parameters, profiles and unique data will be restored; user files will not be taken into account.

LARA-R6001D-00B / LARA-R6401D-00B

- Parameters and MNO profiles are not handled and will be brought to the factory-programmed setting.

18.21 Cancel/pause/resume FOTA download +UFOTA

+UFOTA						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	-	+CME Error

18.21.1 Description

Cancels, pauses or resumes the FW download to the device when a FOTA session is in progress. To make use of this command, enable URCs for FOTA sessions (for more details on enabling FOTA URCs, see +UFOTASTAT AT command).

The device does not reboot after cancelling FOTA download. At the next power-on, the module will boot the previous firmware version.

If the FW download is paused and the module is turned off and on, the FW download remains paused.

18.21.2 Syntax

Type	Syntax	Response	Example
Set	AT+UFOTA=<action_type>	OK	AT+UFOTA=0 OK
Read	AT+UFOTA?	+UFOTA: <download_status>,<total_pkg_size>,<curr_written_bytes> OK	+UFOTA: 2,6864144,905216 OK

Type	Syntax	Response	Example
Test	AT+UFOTA=?	+UFOTA: (list of supported<action_type>s) OK	+UFOTA: (0-2) OK

18.21.3 Defined values

Parameter	Type	Description
<action_type>	Number	Action type: • 0: abort FOTA download • 1: pause FOTA download • 2: resume FOTA download Allowed values: • LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B - 0 • LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D - 0, 1, 2
<download_status>	Number	Download status: • 0: no download in progress (no FOTA package download is in progress) • 1: paused download (the FOTA package download has been paused) • 2: download in progress (the FOTA package is downloading) • 3: finished download (the FOTA package has been downloaded but has not been installed yet)
<total_pkg_size>	Number	Total size in bytes of the package to download. 0 in case of no download in progress (<download_status>=0).
<curr_written_bytes>	Number	Number of bytes of the package currently downloaded and written to memory. 0 in case of no download in progress (<download_status>=0).

18.21.4 Notes

LARA-L6 / LARA-R6

- The read command returns ERROR if the LwM2M client is disabled (see the +ULWM2M AT command).

LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B

- <download_status>, <total_pkg_size> and <curr_written_bytes> are not supported.

18.22 Sets FOTA status URCs +UFOTASTAT

+UFOTASTAT						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	65	+CME Error

18.22.1 Description

Enables URC reporting status for FOTA downloads and updates.

18.22.2 Syntax

Type	Syntax	Response	Example
Set	AT+UFOTASTAT=<n>	OK	AT+UFOTASTAT=1 OK
Read	AT+UFOTASTAT?	+UFOTASTAT: <n> OK	+UFOTASTAT: 1 OK

Type	Syntax	Response	Example
Test	AT+UFOTASTAT=?	+UFOTASTAT: (list of supported<n>s) OK	+UFOTASTAT: (0,1) OK
Generic syntax			
URC		+UFOTASTAT: <event>,<param1>[,<param2>] OK	+UFOTASTAT: 3,1,0 OK
Download progress			
URC		+UFOTASTAT: 0,<progress_status>[,<percentage>] OK	+UFOTASTAT: 0,1,10 OK
Download start			
URC		+UFOTASTAT: 1,<start_triggered>,<retry_attempt> OK	+UFOTASTAT: 1,0,0 OK
Download complete			
URC		+UFOTASTAT: 2,<status>,<status_details> OK	+UFOTASTAT: 2,2,100 OK
FOTA status			
URC		+UFOTASTAT: 3,<update_result>,<update_state> OK	+UFOTASTAT: 3,1,0 OK
Registration status			
URC		+UFOTASTAT: 4,<registration_result> OK	+UFOTASTAT: 4,2 OK

18.22.3 Defined values

Parameter	Type	Description
<n>	Number	Enable FOTA status URCs: • 0: FOTA status URC disabled • 1: FOTA status +UFOTASTAT URC enabled The factory-programmed value is: • LARA-L6 / LARA-R6 - 0
<event>	Number	Event type: • 0: download progress • 1: download start • 2: download complete • 3: FOTA status • 4: registration status Allowed values: • LARA-L6 / LARA-R6 - 0, 1, 2, 3
<progress_status>	Number	Provides the download status: • 1: download in progress • 2: download in pause • 3: download is waiting for user ack/reject. See +UFOTAACK AT command Allowed values: • LARA-L6 / LARA-R6 - 1
<percentage>	Number	Download completion in percentage
<start_triggered>	Number	Allowed value: • 0: download start triggered

Parameter	Type	Description
<retry_attempt>	Number	Download attempt currently performed: • 0: initial attempt • 1: first retry attempt • 2: second retry attempt • 3: third retry attempt • 4: fourth retry attempt Allowed values: • LARA-L6 / LARA-R6 - 0
<status>	Number	FOTA completed download status: • 2: success • 3: fail
<status_details>	Number	Provides more information about FOTA completed download status: • 100: success if <status>=2 • 100: user cancel if <status>=3 • 101: memory error. This value can be returned only when <status>=3 • 102: network error. This value can be returned only when <status>=3 • 103: unknown error.This value can be returned only when <status>=3 • 104: bad URL.This value can be returned only when <status>=3 • 105: failure due to connectivity loss.This value can be returned only when <status>=3 Allowed values: • LARA-L6 / LARA-R6 - 100, 101, 102, 103, 104, 105
<update_result>	Number	Provides more information about FOTA update result: • 0: initial • 1: success • 2: memory error • 3: RAM error • 4: connection lost • 5: checksum error • 6: unsupported package • 7: URI error • 8: firmware update fail • 9: unsupported protocol
<update_state>	Number	Provides more information about FOTA update status: • 0: idle • 1: downloading • 2: downloaded • 3: updating Allowed values: • LARA-L6 / LARA-R6 - 0, 1, 2
<registration_result>	Number	Provides more information about registration status: • 0: idle • 1: bootstrap started • 2: bootstrap successful • 3: bootstrap failed • 4: connect successful • 5: connect failed • 6: registration successful • 7: registration failed • 8: registration timeout • 9: client life time timeout • 10: client halted • 11: update successful • 12: update failed • 13: update timeout • 14: response failed • 15: notify failed • 16: deregistration successful

Parameter	Type	Description
		• 17: deregistration failed
<param1>	Number	Contains additional information depending on <event> value.
<param2>	Number	Contains additional information depending on <event> and <param1> values.

18.22.4 Notes

LARA-L6 / LARA-R6

- In case of error only the "ERROR" final result code is returned.

18.23 FOTA LwM2M client configuration +UFOTACONFIG

+UFOTACONFIG						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6001-01B LARA-R6001D-01B LARA-R6401-01B LARA-R6401D-01B LARA-R6801-01B LARA-R6801D					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No / OP	No	-	+CME Error

18.23.1 Description

Configures the LwM2M client behavior upon a FW update request triggered by a LwM2M server. It can be used to edit existing configurations. This command allows specifying parameters used during the FW update package download.

The read command reports the configuration depending on the selected mobile network operator profile (for more details, see the +UMNOPROF AT command).

18.23.2 Syntax

Type	Syntax	Response	Example
Set	AT+UFOTACONFIG= <server_id>, <fota_setting>, <cid>[, <HTTP_snd_to>, <HTTP_rcv_to>]	OK	AT+UFOTACONFIG=721,1,255,2,5 OK
Read	AT+UFOTACONFIG?	+UFOTACONFIG: <server_id>, <fota_setting>, <cid>, <HTTP_snd_to>, <HTTP_rcv_to> OK	+UFOTACONFIG: 721,1,255,2,5 OK
Test	AT+UFOTACONFIG=?	+UFOTACONFIG: (list of supported <server_id>s), (list of supported <fota_setting>s), (list of supported <cid>s), (list of supported <HTTP_snd_to>s), (list of supported <HTTP_rcv_to>s) OK	+UFOTACONFIG: (721),(0-3),(0-7,255),(1-60),(1-60) OK

18.23.3 Defined values

Parameter	Type	Description
<server_id>	Number	Short server ID of the server triggering the FW update. It is defined by LwM2M object 1 resource 0. Allowed values: • 721: u-blox server
<fota_setting>	Number	Specify the behavior upon a FW update request triggered by a LwM2M server. Allowed values: • 0 (factory-programmed value): download FW update package when available and automatically install it immediately

Parameter	Type	Description
		• 1: download FW update package when available and do not install it. Requires user action to install it via +UFWINSTALL AT command • 2: +UFOTASTAT URC informs that the server is triggering FW update, waiting for user approval or reject. See +UFOTAACK AT command • 3: FW update is disabled. The LwM2M client will receive FW update request by the server but it will be automatically rejected
<cid>	Number	See <cid>. ☞ Also value 255 is supported (factory-programmed value), which sets the <general_data_cid> in +ULWM2MCONFIGEXT.
<HTTP_snd_to>	Number	Optional parameter that specifies the number of minutes to set as the timeout for data sending via HTTP during uFOTA download. The range goes from 1 to 60. The factory-programmed value is 2 minutes.
<HTTP_rcv_to>	Number	Optional parameter that specifies the number of minutes to set as the timeout for data receiving via HTTP during uFOTA download. The range goes from 1 to 60. The factory-programmed value is 5 minutes.

18.23.4 Notes

LARA-L6 / LARA-R6

- The <HTTP_snd_to> and <HTTP_rcv_to> parameters are not supported.
- The read command returns ERROR if the LwM2M Client is disabled (see the +ULWM2M AT command).

18.24 Accept/reject LwM2M FW update request +UFOTAACK

+UFOTAACK						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6001-01B LARA-R6001D-01B LARA-R6401-01B LARA-R6401D-01B LARA-R6801-01B LARA-R6801D					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	No	No	-	+CME Error

18.24.1 Description

Accepts or rejects a FW update request triggered by a LwM2M server. To make use of this command, enable URCs for FOTA sessions (for more details on enabling FOTA URCs, see +UFOTASTAT AT command).

The command is required and works only if +UFOTACONFIG AT command has been set with parameter <fota_setting>: 2.

18.24.2 Syntax

Type	Syntax	Response	Example
Set	AT+UFOTAACK=<n>	OK	AT+UFOTAACK=30 OK
Test	AT+UFOTAACK=?	+UFOTAACK: (list of supported <n>s) OK	+UFOTAACK: (0-3600) OK

18.24.3 Defined values

Parameter	Type	Description
<n>	Number	Allowed value: • 0: reject the FW update request • 1-3600: number of seconds after which the FW update package is automatically downloaded and installed after download

18.24.4 Notes

LARA-L6 / LARA-R6

- The <HTTP_snd_to> and <HTTP_rcv_to> parameters are not supported.

18.25 Last gasp configuration +ULGASP

+ULGASP						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	NVM	No	< 10 s	+CME Error

18.25.1 Description

Enables/disables and configures the last gasp feature. The application is automatically triggered by a properly configured GPIO (see GPIO introduction, <gpio_mode>=19). The feature supports the sending of a predefined last notification in case of power outage, just before the power goes off. It is assumed that the cellular module is registered to the network when the alarm is triggered; however the command just configures the feature so it is possible to issue it also if PIN is not inserted. It is possible to enable/disable the +UULGASP URC to be notified about the operation result.

This AT command must be issued after a proper configuration of the GPIO pin via the +UGPIOC command, <gpio_mode>=19. Otherwise, if +UGPIOC is issued after +ULGASP, the last gasp will work only after a reboot.

The parameters will be set to the values stored in the NVM in case they are omitted in the set command.

After having sent the last gasp notification:

- LARA-L6 / LARA-R6 - the module does not automatically shut down and it remains in a pending status until the power supply is removed without performing a clean network detach.

18.25.2 Syntax

Type	Syntax	Response	Example
Set	AT+ULGASP=<GPIO_mode>[,[<text>],[<msg_format>],[<tel_number>],[<cid>],[<IP_protocol>],[<IP_addr:PORT>],[<method>],[<max_pow_red>],[<urc_enable>]]	OK	AT+ULGASP=0,"Power_loss",0,"+39347123456",3,6,"192.168.100.20:8080",2,, OK
Read	AT+ULGASP?	+ULGASP: <GPIO_mode>,<text>,<msg_format>,<tel_number>,<cid>,<IP_protocol>,<IP_addr:PORT>,<method>,<max_pow_red>,<urc_enable> OK	+ULGASP: 0,"Power_loss",0,"+39347123456",3,6,"192.168.100.20:8080",2,0,1 OK
Test	AT+ULGASP=?	+ULGASP: (list of supported <GPIO_mode>'s),,(list of supported <msg_format>'s),,(list of supported <cid>'s),(list of supported <IP_protocol>'s),,(list of supported <method>'s),(list of supported <max_pow_red>'s),(list of supported <urc_enable>'s) OK	+ULGASP: (0-2),,(0-1),,(0-6,255),(6,17),,(0-3),(0-1),(0-1) OK
URC		+UULGASP: <result>,<bearer>	+UULGASP: 0,1

18.25.3 Defined values

Parameter	Type	Description
<GPIO_mode>	Number	Select the interrupt trigger. Allowed values: • 0 (factory-programmed value): trigger disabled; the following arguments will be ignored • 1: falling edge • 2: rising edge
<text>	String	The string that will be sent upon GPIO movement. Text or binary format can be selected with the <msg_format> parameter. When the text format is selected, a maximum of 160 ASCII characters is allowed. When the binary format is selected, every 8-bit octet of the message must be written as two IRA character long hexadecimal numbers, e.g. an octet with integer value 42 (i.e. 0x2A) must be written as a string of two characters "2A" (IRA 50 and 65). The factory-programmed value is "Last Gasp".
<msg_format>	Number	Format of the <text> parameter. Allowed values: • 0 (factory-programmed value): text • 1: binary
<tel_number>	String	Destination number of the SMS, it is mandatory if <method> is 0 or 2. Factory-programmed value: empty string.
<profile_id>	Number	PSD profile identifier, in range 0-6.
<cid>	Number	Specifies the PDP context that will be used for the HTTP data. For the parameter range, see <cid>. • LARA-L6 / LARA-R6 - The special value <cid>=255 (factory-programmed value) can be also selected, in this case the PDP context set by the +UDCONF=19 AT command is used. • LARA-R6001D-00B - The special value <cid>=255 (factory-programmed value) can be also selected, in this case the default PDP context is used.
<IP_protocol>	Number	IP protocol used for socket connection. Allowed values: • 6: TCP • 17 (factory-programmed value): UDP
<IP_addr:PORT>	String	IPv4 server address with the socket port, it is mandatory if <method> is different from 0 (SMS sending). Factory-programmed value: empty string.
<method>	Number	Notification method, it is the way the application send out the <text message>; in case of fail of the preferred bearer the second one is used. Allowed values: • 0 (factory-programmed value): send SMS • 1: use IP (TCP or UDP) connection • 2: SMS preferred • 3: IP (TCP or UDP) preferred
<max_pow_red>	Number	Maximum power reduction. Allowed values: • 0 (factory-programmed value): no power reduction • 1: 3 dB power reduction for UMTS bands (3G RAT); 2 dB power reduction for GSM bands (2G RAT)
<urc_enable>	Number	Flag determining if the URC is to be issued or not. Allowed values: • 0 (factory-programmed value): disabled • 1: enabled
<result>	Number	Operation result. Allowed values: • 0: success • 1: generic fail
<bearer>	Number	Notification used bearer. Allowed values: • 0: SMS • 1: IP (TCP or UDP) connection

18.25.4 Notes

LARA-L6 / LARA-R6

- The <max_pow_red>=1 parameter is not supported.

- Only an IP (TCP or UDP) connection is allowed. Hence, only <method>=1 (send SMS as notification method) and <bearer>=1 (send SMS as notification used bearer) are supported. The factory-programmed value of <method> is 1 (IP (TCP or UDP) connection).

18.26 URC over AT terminal configuration +UURCCONF

+UURCCONF						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

18.26.1 Description

Configures the list of the AT terminals enabled for URC reception.

The AT command should be used by any application that is requiring URCs to be displayed only a specific set of AT terminals.

The example section will show the suggested mode of operation.

☞ The AT command is volatile and it will reset to its factory-programmed setting at each reboot.

18.26.2 Syntax

Type	Syntax	Response	Example
Set	AT+UURCCONF=<conf>	OK	AT+UURCCONF=1 OK
Read	AT+UURCCONF?	+UURCCONF: <conf>,<is_terminal_in_list>,<numbers_of_terminals_in_list> OK	+UURCCONF: 1,1,1 OK
Test	AT+UURCCONF=?	+UURCCONF: (list of the supported <conf> values) OK	+UURCCONF: (0-2) OK

18.26.3 Defined values

Parameter	Type	Description
<conf>	Number	URC over AT terminal configuration values: • 0 (factory-programmed value): the feature is disabled. The list of enabled AT terminal is emptied. The URC will be displayed on all available AT terminals. • 1: the feature is active. The current terminal, meaning the AT terminal on which the AT command was given, will be added to the list of enabled AT terminals. Only the AT terminal belonging to this list will display the URCs. • 2: the feature is active but the list is cleared, hence URC displaying is disabled on all AT terminals. This is useful for example if the user wishes to re-build the list from scratch without incurring in undesired URC.
<is_terminal_in_list>	Number	Flag that returns the status of the AT terminal on which the AT command was given: • 0: current AT terminal is not present in the list of enabled AT terminals • 1: current AT terminal is present in the list of enabled AT terminals
<numbers_of_terminals_in_list>	Number	Number of AT terminals enabled for URC display

18.26.4 Examples

The following section will show +UURCCONF suggested mode of operation.

Command	Response	Description
Enabling the feature at each module reboot		

Command	Response	Description
AT+UURCCONF=2	OK	The feature is active and URCs are disabled on all terminals.
AT+UURCCONF?	+UURCCONF: 2,0,0 OK	The read command confirms that the feature is active and no AT terminal is enabled for URC display.
AT+UURCCONF=1	OK	The AT terminal on which the AT command has been given is now enabled for URC display. ☞ This should be given on all the required AT terminals.
Read examples		
AT+UURCCONF?	+UURCCONF: 1,1,1 OK	The read command given on an URC enabled AT terminal confirms that the latter is in the list.
AT+UURCCONF?	+UURCCONF: 1,0,1 OK	The read command given on a different AT terminal confirms that the latter is not in the list and hence it is not enabled for URC reception.
Disabling the feature		
AT+UURCCONF=0	OK	The feature is disabled, URCs will be displayed on all active AT terminals.
AT+UURCCONF?	+UURCCONF: 0,0,0 OK	The read command confirms that the feature is disabled.

Table 42: +UURCCONF suggested mode of operation

19 Power management

19.1 Power saving control (Power SaVing) +UPSV

+UPSV						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	Profile	No	-	+CME Error

19.1.1 Description

Sets the UART power saving configuration, but it has a global effect on the module power saving configuration:

- If the power saving is disabled (+UPSV: 0), the UART interface is always enabled and the module does not enter idle mode
- If the power saving is enabled (+UPSV: 1), the UART interface is cyclically enabled and the module enters idle mode automatically whenever possible
- If the power saving is controlled by the UART **RTS** line (+UPSV: 2), the UART interface is enabled and the module does not enter idle mode as long as the UART **RTS** line state is ON
- If the power saving is controlled by the UART **DTR** line (+UPSV: 3), the UART interface is enabled and the module does not enter idle mode as long as the UART **DTR** line state is ON
- If the power saving is controlled by the UART **DTR** line (+UPSV: 4), the UART interface is enabled and the module does not enter idle mode as long as the UART **DTR** line state is ON. The TCXO and power supplies voltage level are functional but internal clock network is held at TCXO minimal running frequency.

19.1.2 Syntax

Type	Syntax	Response	Example
Set	AT+UPSV=<mode>[,<Timeout>]	OK	AT+UPSV=1,3000 OK
Read	AT+UPSV?	+UPSV: <mode>[,<Timeout>] OK	+UPSV: 1,3000 OK
Test	AT+UPSV=?	+UPSV: (list of supported <mode>s), (list of supported <Timeout>s) OK	+UPSV: (0-3),(40-65000) OK

19.1.3 Defined values

Parameter	Type	Description
<mode>	Number	Power saving configuration. Allowed values: • 0 (default and factory-programmed value): disabled • 1: enabled o The UART is re-enabled from time to time to allow the DTE to transmit, and the module switches from idle to active mode in a cyclic way. If during the active mode any data is received, the UART (and the module) is forced to stay "awake" for a time specified by the <Timeout> parameter. Any subsequent data reception during the "awake" period resets and restarts the "awake" timer • 2: power saving is controlled by UART **RTS** line: o If the **RTS** line state is set to OFF, the power saving mode is allowed o If the **RTS** line state is set to ON, the module shall exit from power saving mode

Parameter	Type	Description
		<mode>=2 is allowed only if the HW flow control has been previously disabled on the UART interface (e.g. with AT&K0), otherwise the command returns an error result code (+CME ERROR: operation not allowed if +CMEE is set to 2). With <mode>=2 the DTE can start sending data to the module without risk of data loss after having asserted the UART **RTS** line (**RTS** line set to ON state). • 3: power saving is controlled by UART **DTR** line: o If the **DTR** line state is set to OFF, the power saving mode is allowed o If the **DTR** line state is set to ON, the module shall exit from power saving mode <mode>=3 is allowed regardless of the flow control setting on the UART interface. In particular, the HW flow control can be set on UART during this mode. With <mode>=3 the DTE can start sending data to the module without risk of data loss after having asserted the UART **DTR** line (**DTR** line set to ON state). • 4: power saving is controlled by UART **DTR** line: o If the **DTR** line state is set to OFF, the power saving mode is allowed. The TCXO and power supplies voltage level are functional but internal clock network is held at TCXO minimal running frequency o If the **DTR** line state is set to ON, the module shall exit from power saving mode <mode>=4 is allowed regardless of the flow control setting on the UART interface. In particular, the HW flow control can be set on UART during this mode.
<Timeout>	Number	If <mode>=1 and active mode entered, it provides the guard period of no reception of characters on the UART interface before entering idle mode again. It is expressed in GSM frames (4.615 ms) • The range goes from 40 to 65000 (approximately from 184 ms to 300 s); the default value is 2000 GSM frames (ca 9.2 s) • This parameter is accepted only if <mode>=1

19.1.4 Notes

LARA-L6 / LARA-R6

- For a detailed explanation of modules' operating modes, modules and interfaces behavior in reference to the +UPSV command setting, see the corresponding system integration manual.
- <mode>=2 and <mode>=4 are not supported.
- <mode>=1 and <mode>=3 are applicable only in reference to the UART interface, even if the command is accepted by all the serial interfaces (physical and MUX virtual interfaces).
- <mode>=3 is not supported in the two UART configurations (for more details on SIO configuration, see +USIO AT command), unless the DTR function is configured using +UGPIOC AT command.
- There is an extended behavior in case both UART and AUX UART are configured as AT interfaces (for more details, see the +USIO AT command). The command can be issued on either UART or AUX UART interface, and it has a global effect.
  - o If power saving is disabled (+UPSV: 0), both UART and AUX UART interfaces are always enabled and the module does not enter idle mode.
  - o Power saving can be enabled (+UPSV: 1), only if both UART and AUX UART interfaces have the same HW flow control settings, see AT&K and +UUARTCONF.
  - o If power saving is enabled (+UPSV: 1) and HW flow control is enabled, both UART and AUX UART interfaces are cyclically enabled and the module enters idle mode automatically whenever possible. The enabling is synchronous,and the interfaces share the same <Timeout> parameter configuration.

  - o If power saving is enabled (+UPSV: 1) and HW flow control is disabled, both UART and AUX UART are always disabled and they are both enabled when a character is received by one of them.
- The command setting is stored in the NVM.

19.2 Power Saving Mode Setting +CPSMS

+CPSMS						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6001-01B LARA-R6001D-01B LARA-R6401-01B LARA-R6401D-01B LARA-R6801-01B LARA-R6801D					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	NVM / OP	No	< 10 s	+CME Error

19.2.1 Description

Controls the setting of the UEs Power Saving Mode (PSM) parameters. The command controls whether the UE wants to apply PSM or not, as well as:

- The requested extended periodic RAU value in GERAN/UTRAN
- The requested GPRS READY timer value in GERAN/UTRAN
- The requested extended periodic TAU value in E-UTRAN
- The requested Active Time value.

⚠ LARA-L6 / LARA-R6
Do not use a PIN enabled SIM card, otherwise the module does not enter PSM.

The +CPSMS <mode> parameter defines whether the Power Saving Mode (PSM) feature usage is requested to the network.

- If Power Saving Mode (PSM) is requested (+CPSMS: 1) and granted by the network, i.e. Active Time has been assigned, PSM deep-sleep can be entered: after the expiry of the assigned Active Time (T3324) every SW and HW component on the device powers down except for the real time clock (RTC) (notified via the +UUPSMR URC if enabled). It stays powered down until the expiry of the assigned extended periodic TAU value (T3412_ext) or the assigned periodic TAU value (T3412) (if the former has not been assigned) or an early wake-up event (which consists in a proper toggling of the PWR_ON input line).
- PSM deep-sleep is not entered if PSM is disabled (+CPSMS: 0) or not granted by the network.

Check whether the Active Time and the extended periodic TAU have been assigned to the UE by means of the AT+CEREG=4 AT command.

☞ LARA-L6 / LARA-R6
The assigned Active Time, extended periodic TAU value and periodic TAU value can be checked by means of the +UCPSMS AT command.

☞ LARA-L6 / LARA-R6
Only use PSM on E-UTRAN.

☞ LARA-L6 / LARA-R6
To change the command setting issue AT+COPS=2 or AT+CFUN=0 to deregister the module from network, issue the +CPSMS command and reboot (e.g. by means of the AT+CFUN=15 command) the module in order to apply the new configuration.

☞ LARA-L6 / LARA-R6
If the set command is issued and an optional parameter is omitted, the module applies the last set value.

19.2.2 Syntax

Type	Syntax	Response	Example
Set	AT+CPSMS=[<mode>[, <Requested_Periodic_RAU>[, <Requested_GPRS_READY_timer>[, <Requested_Periodic_TAU>, [<Requested_Active_Time>]]]]]	OK	AT+CPSMS=1,,,"01000011","01000011" OK
Read	AT+CPSMS?	+CPSMS: <mode>,[<Requested_Periodic_RAU>],[<Requested_GPRS_READY_timer>],[<Requested_Periodic_TAU>],[<Requested_Active_Time>] OK	+CPSMS: 1,,,"01000011","01000011" OK
Test	AT+CPSMS=?	+CPSMS: (list of supported <mode>s),(list of supported <Requested_Periodic_RAU>s),(list of supported <Requested_GPRS_READY_timer>s),(list of supported <Requested_Periodic_TAU>s),(list of supported <Requested_Active_Time>s) OK	+CPSMS: (0,1,2),,,("00000000"-"11111111"),("00000000"-"11111111") OK

19.2.3 Defined values

Parameter	Type	Description
<mode>	Number	Indication to disable or enable the use of PSM in the UE. Allowed values: • 0 (default value): disable the use of PSM • 1: enable the use of PSM • 2: disable the use of PSM and reset all parameters for PSM to factory-programmed values. Factory-programmed value: • LARA-L6 / LARA-R6 - 0
<Requested_Periodic_RAU>	String	One byte in an 8 bit format. Requested extended periodic RAU value (T3312_ext) to be allocated to the UE in GERAN/UTRAN. The requested extended periodic RAU value is coded as one byte (octet 3) of the GPRS Timer 3 information element coded as bit format (e.g. "01000111" equals 70 hours). For the coding and the value range, see the GPRS Timer 3 IE in 3GPP TS 24.008 table 10.5.163a/3GPP TS 24.008 [84]. See also 3GPP TS 23.682 [84]. See also 3GPP TS 23.682 [159] and 3GPP TS 23.060 [82]. The factory-programmed value is: • LARA-L6 / LARA-R6 - The parameter is not supported.
<Requested_GPRS_READY_timer>	String	One byte in an 8 bit format. Requested GPRS READY timer value (T3314) to be allocated to the UE in GERAN/UTRAN. The requested GPRS READY timer value is coded as one byte (octet 2) of the GPRS Timer information element coded as bit format (e.g. "01000011" equals 3 decihours or 18 minutes). For the coding and the value range, see the GPRS Timer IE in 3GPP TS 24.008 table 10.5.172/3GPP TS 24.008 [84]. See also 3GPP TS 23.060 [82]. The factory-programmed value is: • LARA-L6 / LARA-R6 - The parameter is not supported.
<Requested_Periodic_TAU>	String	One byte in an 8 bit format. Requested extended periodic TAU value (T3412_ext) to be allocated to the UE in E-UTRAN. The requested extended periodic TAU value is coded as one byte (octet 3) of the GPRS Timer 3 information element coded as bit format (e.g. "01000111" equals 70 hours). For the coding and value range, see the GPRS Timer 3 IE in 3GPP TS 24.008 table 10.5.163a/3GPP TS 24.008 [84]. See also 3GPP TS 23.682 [159] and 3GPP TS 23.401 [160]. • LARA-L6 / LARA-R6 - The factory-programmed value is "00111000" (24 hours).
<Requested_Active_Time>	String	One byte in an 8 bit format. Requested Active Time value (T3324) to be allocated to the UE in GERAN/UTRAN or in EUTRAN. The requested Active Time value is coded as one byte (octet 3) of the GPRS Timer 2 information element coded as bit format (e.g. "00100100" equals 4 minutes). For the coding and value range, see the GPRS Timer 2

Parameter	Type	Description
		IE in 3GPP TS 24.008 table 10.5.163/3GPP TS 24.008 [84]. See also 3GPP TS 23.682 [159], 3GPP TS 23.060 [82] and 3GPP TS 23.401 [160]. • LARA-L6 / LARA-R6 - The factory-programmed value is "00011110" (60 s).

19.2.4 Notes

LARA-L6 / LARA-R6

- The <mode>=1 parameter also enables the deep-sleep (RTC-only) mode, entered whenever proper conditions are met.
- <mode>=2 (PSM use disabled and reset all parameters for PSM to factory-programmed values) is not supported.
- To reset all the PSM parameters to factory-programmed values, follow the procedure described in the +UMNOPROF AT command description.
- The <Requested_Periodic_RAU> and <Requested_GPRS_READY_timer> parameters are not supported.
- If the special command AT+CPSMS= (with all parameters omitted) is issued, the use of PSM is disabled (<mode>=0) and all the other parameters are set to the factory-programmed values.
- If <mode>=0 (PSM is not being requested to the network), the <Requested_Periodic_TAU> and <Requested_Active_Time> parameters are displayed as 0 (previously configured values are preserved, visualized and used when re-enabling PSM).
- In the read command, the module converts the <Requested_Periodic_TAU>, <Requested_Active_Time> parameters bitmasks configured with the set command to equivalent ones which represent the same value. The new bitmasks use the smallest unit of measurement possible to represent the timer value. See Table 43 for additional examples.

Command	Response	Description
AT+CPSMS=1,,,"00000010","00000010"	OK	Set <Requested_Periodic_TAU> to "00000010" corresponding to 20 minutes (=10 minutes * 2)
AT+CPSMS?	+CPSMS: 1,,,"10110100","00000010" OK	Check the <Requested_Periodic_TAU> parameter value. The <Requested_Periodic_TAU> bitmask is converted to "10110100" that corresponds to 1 minute * 20 (= 20 minutes)
AT+CPSMS=1,,,"00000001","00000001"	OK	Set <Requested_Periodic_TAU> to "00000001" corresponding to 10 minutes (=10 minutes * 1)
AT+CPSMS?	+CPSMS: 1,,,"10010100","00000001" OK	Check the <Requested_Periodic_TAU> parameter value. The <Requested_Periodic_TAU> bitmask is converted to "10010100" that corresponds to 30 seconds * 20 (= 10 minutes)

Table 43: <Requested_Periodic_TAU> bitmask conversion examples

19.3 Power Saving Mode assigned values +UCPSMS

+UCPSMS						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6001-01B LARA-R6001D-01B LARA-R6401-01B LARA-R6401D-01B LARA-R6801-01B LARA-R6801D					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

19.3.1 Description

Reads the UEs Power Saving Mode (PSM) parameters assigned by the network. The +UCPSMS <mode> parameter provides the information whether the Power Saving Mode (PSM) feature usage is granted by the network, i.e. Active Time has been assigned. It also provides:

- The assigned extended periodic RAU value in GERAN/UTRAN if present
- The assigned GPRS READY timer value in GERAN/UTRAN if present
- The assigned extended periodic TAU value in E-UTRAN or assigned periodic TAU value (if the former is not present)
- The assigned Active Time value if present.

PSM can be granted only if requested to the network (+CPSMS: 1).

- If Power Saving Mode is granted by the network (+UCPSMS: 1), after the expiry of the assigned Active Time (T3324) PSM deep-sleep can be entered: every SW and HW component on the device powers down except for the real time clock (RTC) (notified via the +UUPSMR URC if enabled). It stays powered down until the expiry of the assigned extended periodic TAU value (T3412_ext) or the assigned periodic TAU value (T3412) (if the former has not been assigned) or an early wake-up event (which consists in a proper toggling of the PWR_ON input line).
- If Power Saving Mode is not granted by the network (+UCPSMS: 0), the device will not enter PSM deep-sleep.

19.3.2 Syntax

Type	Syntax	Response	Example
Read	AT+UCPSMS?	+UCPSMS: <mode>,[<Assigned_Periodic_RAU>],[<Assigned_GPRS_READY_timer>],[<Assigned_Periodic_TAU>],[<Assigned_Active_Time>],[<Assigned_Periodic_TAU_Format_Type>] OK	+UCPSMS: 1,,,"01000011","01000011",1 OK

19.3.3 Defined values

Parameter	Type	Description
<mode>	Number	Assigned PSM settings. Allowed values: • 0: Power Saving Mode is not granted by the network • 1: Power Saving Mode is granted by the network
<Assigned_Periodic_RAU>	String	Assigned extended periodic RAU (T3312_ext) value allocated to be allocated to the UE in GERAN/UTRAN, one byte in an 8 bit format. For the coding and the value range, see the GPRS timer 3 IE in 3GPP TS 24.008 [84]
<Assigned_GPRS_READY_timer>	String	Assigned GPRS READY timer (T3314) value allocated to the UE in GERAN/UTRAN, one byte in an 8 bit format. For the coding and the value range, see the GPRS timer 3 IE in 3GPP TS 24.008 [84]
<Assigned_Periodic_TAU>	String	One byte in an 8 bit format. Assigned extended periodic TAU value (T3412_ext), if present, or assigned periodic TAU value (T3412) (if the former is not present) allocated to the UE in E-UTRAN. The assigned periodic TAU value is coded as indicated by the <Assigned_Periodic_TAU_Format_Type> parameter. See also 3GPP TS 23.682 [159], 3GPP TS 23.060 [82] and 3GPP TS 23.401[160].

Parameter	Type	Description
<Assigned_Active_Time>	String	One byte in an 8 bit format. Assigned Active Time value (T3324) allocated to the UE in GERAN/UTRAN or in EUTRAN. The assigned Active Time value is coded as one byte (octet 3) of the GPRS timer 2 information element coded as bit format (e.g. "00100100" equals 4 minutes). For the coding and the value range, see the GPRS timer 2 IE in 3GPP TS 24.008 table 10.5.163/3GPP TS 24.008 [84]. See also 3GPP TS 23.682 [159], 3GPP TS 23.060 [82] and 3GPP TS 23.401 [160].
<Assigned_Periodic_TAU_Format_Type>	Number	Coding type for <Assigned_Periodic_TAU> string. Allowed values: • 0: the assigned periodic TAU value (T3412) is coded as one byte (octet 3) of the GPRS Timer 2 information element coded as bit format (e.g. "00100100" equals 4 minutes). For the coding and value range, see the GPRS Timer 2 IE in 3GPP TS 24.008 table 10.5.163/3GPP TS 24.008 [84]. • 1: the assigned extended periodic TAU value (T3412_ext) is coded as one byte (octet 3) of the GPRS Timer 3 information element coded as bit format (e.g. "01000111" equals 70 hours). For the coding and value range, see the GPRS Timer 3 IE in 3GPP TS 24.008 table 10.5.163a/3GPP TS 24.008 [84].

19.3.4 Notes

LARA-L6 / LARA-R6

- The <Assigned_Periodic_RAU> and <Assigned_GPRS_READY_timer> parameters are not supported.

19.4 Deep-sleep mode options configuration +UPSMVER

+UPSMVER						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6001-01B LARA-R6001D-01B LARA-R6401-01B LARA-R6401D-01B LARA-R6801-01B LARA-R6801D					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	NVM	No	-	+CME Error

19.4.1 Description

Configures the options to enter deep-sleep (RTC-only) mode.

19.4.2 Syntax

Type	Syntax	Response	Example
Set	AT+UPSMVER=[,[,[,[,[<temp_dis>]]]]]	OK	AT+UPSMVER=,,,,1 OK
Read	AT+UPSMVER?	+UPSMVER: ,,,,<temp_dis> OK	+UPSMVER: ,,,,0 OK
Test	AT+UPSMVER=?	+UPSMVER: ,,,,(list of supported <temp_dis>s) OK	+UPSMVER: ,,,,(0-2) OK

19.4.3 Defined values

Parameter	Type	Description
<temp_dis>	Number	Deep-sleep mode temporary disablement. A reboot is not needed after changing <temp_dis> parameter value. Allowed values: • 0 (default value): deep-sleep mode can be entered whenever proper conditions are met. It is persistent. • 1: deep-sleep mode entry is temporarily prevented. It is volatile and should be used to postpone entrance into deep-sleep mode while downloading a file. • 2: deep-sleep mode entry is disabled (used to have PSM without deep-sleep for test purposes). It is persistent.

19.4.4 Notes

LARA-L6 / LARA-R6

- If the set command is issued and any optional parameter is omitted, the module applies the last set value.

19.5 Deep-sleep mode indication +UPSMR

+UPSMR						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6001-01B LARA-R6001D-01B LARA-R6401-01B LARA-R6401D-01B LARA-R6801-01B LARA-R6801D					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

19.5.1 Description

Enables or disables the URC that conveys information on deep-sleep (RTC-only) mode states, i.e. deep-sleep entry, exit and notification if there is some embedded SW client or peripheral activity postponing the entrance into deep-sleep mode. See +UPSMVER to check the available deep-sleep mode options.

19.5.2 Syntax

Type	Syntax	Response	Example
Set	AT+UPSMR=<mode>	OK	AT+UPSMR=1 OK
Read	AT+UPSMR?	+UPSMR: <mode> OK	+UPSMR: 1 OK
Test	AT+UPSMR=?	+UPSMR: (list of supported <mode>s) OK	+UPSMR: (0-1) OK
Generic syntax			
URC		+UUPSMR: <state>[,<param1>]	+UUPSMR: 1
Module exiting deep-sleep mode			
URC		+UUPSMR: 0	+UUPSMR: 0
Module entering deep-sleep mode			
URC		+UUPSMR: 1[,<image>]	+UUPSMR: 1,1
Client preventing deep-sleep mode entry (<state>=2 or <state>=3)			
URC		+UUPSMR: <state>,<client_id>	+UUPSMR: 2,2

19.5.3 Defined values

Parameter	Type	Description
<mode>	Number	Indication to disable or enable the +UUPSMR URC: • 0 (factory-programmed value): the +UUPSMR URC is disabled • 1: the +UUPSMR URC is enabled
<state>	Number	Indication of the state of the module with respect to deep-sleep mode: • 0: the module is out of deep-sleep mode • 1: the module is entering deep-sleep mode. The FW image that will be loaded when exiting deep-sleep mode is indicated by the <image> parameter (where supported) • 2: deep-sleep client identified by <client_id> is preventing module from entering deep-sleep mode • 3: the module entered PSM/eDRX and the protocol stack is in suspension, but the deep-sleep client identified by <client_id> is preventing module from entering the deep-sleep mode Allowed values: • LARA-L6 / LARA-R6 - 0, 1, 2

Parameter	Type	Description
<image>	Number	Identifies the FW image loaded when exiting deep-sleep mode: • 1: full image is being loaded • 2: paging only image is being loaded (only possible in case of eDRX deep-sleep)
<client_id>	Number	Identifies the deep-sleep client that is preventing the module from entering deep-sleep mode: • LARA-L6 / LARA-R6 - Decimal number: o 0: internal arbitration algorithm is temporarily preventing the module from entering deep-sleep o 1: USB interface o 2: UART interface o 3: LwM2M o 4: security o 5: positioning o 6: +UPSMVER deep-sleep mode temporary disablement Supported values: o LARA-L6 / LARA-R6 - 2, 3, 5, 6
<param1>	Number	Supported content depends on the related <state> (details are given above).

19.5.4 Notes

LARA-L6 / LARA-R6

- The <image> parameter is not supported.

20 GPIO

20.1 Introduction

The section describes the AT commands used to configure the GPIO pins provided by u-blox cellular modules.

20.1.1 GPIO functions

On u-blox cellular modules, GPIO pins can be opportunely configured as general purpose input or output. Moreover GPIO pins of u-blox cellular modules can be configured to provide custom functions via +UGPIOC AT command. The custom functions availability can vary depending on the u-blox cellular modules series and version: see Table 44 for an overview of the custom functions supported by u-blox cellular modules.

<gpio_mode>	Output	Input	Network status indication	External GNSS supply enable	External GNSS data ready	External GNSS RTC sharing	Jamming detection indication	SIM card detection	Headset detection	GSM Tx burst indication	Module status indication	Module operating mode indication	I2S digital audio interface	SPI serial interface	Master clock generation	UART (DSR, DTR, DCD and RI) interface	Wi-Fi enable	Ring indicator	Last gasp	External GNSS antenna / LNA control	Time pulse GNSS	Time pulse output	Time stamp of external interrupt	Fast power-off	LwM2M pulse	Hardware flow control (RTS, CTS)	Antenna dynamic tuning	External GNSS time pulse input	External GNSS time stamp of external interrupt	DTR mode for power saving control	32.768 kHz output	Safe memory and power-off	UPSV control	Pad disabled
	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	18	19	20	21	22	23	24	25	26	27	28	29	30	32	33	34	255
LARA-L6004-00B / LARA-R6001-00B / LARA-R6401-00B / LARA-R6801-00B	*	*	*	*	*			*					*			*[3]		*	*						*									*
LARA-L6004D-00B / LARA-R6001D-00B / LARA-R6401D-00B	*	*	*	*	*			*								*[3]		*	*						*									*
LARA-L6004-01B / LARA-L6404 / LARA-R6001-01B / LARA-R6401-01B / LARA-R6801-01B	*	*	*	*	*			*			*		*			*[3]		*	*						*							*		*
LARA-L6004D-01B / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001D-01B / LARA-R6401D-01B / LARA-R6801D	*	*	*	*	*			*			*					*[3]		*	*						*							*		*

Table 44: GPIO custom functions overview

[3] only DTR
[4] only DTR

The configuration of the GPIO pins (i.e. the setting of the parameters of the +UGPIOC AT command) is saved in the NVM and used at the next power-on.

⚠ LARA-L6 / LARA-R6
For more details on the antenna dynamic tuning control feature, see the +UTEST=4 AT command.

20.1.2 GPIO mapping

The number of available GPIO pins and their mapping can vary depending on the u-blox cellular modules series and version. The GPIOs mapping for different u-blox cellular modules is reported in the following tables.

☞ See the corresponding module system integration manual for the functions supported by each GPIO.

20.1.2.1 LARA-L6004D / LARA-L6404D / LARA-L6824 / LARA-L6824D / LARA-R6001D / LARA-R6401D GPIO mapping

<gpio_id>	Pin name	Pin number	Factory-programmed function	Remarks
16	GPIO1	16	Pin disabled	-
23	GPIO2	23	External GNSS supply enable	-
24	GPIO3	24	External GNSS data ready	Only pin 24 can be configured for "GNSS data ready", "Last gasp", "Fast power-off" or "Safe memory and power-off" functionalities
25	GPIO4	25	General purpose output (low)	-
42	GPIO5	42	SIM card detection	Only pin 42 can be configured for "SIM card detection" functionality
34	I2S_WA	34	Pin disabled	-
35	I2S_TXD	35	Pin disabled	-
36	I2S_CLK	36	Pin disabled	-
37	I2S_RXD	37	Pin disabled	-

Table 45: LARA-L6004D LARA-L6404D LARA-L6824 LARA-L6824D LARA-R6001D LARA-R6401D GPIO mapping

20.1.2.2 LARA-L6004 / LARA-L6404 / LARA-R6001 / LARA-R6401 / LARA-R6801 GPIO mapping

<gpio_id>	Pin name	Pin number	Factory-programmed function	Remarks
16	GPIO1	16	Pin disabled	-
23	GPIO2	23	External GNSS supply enable	-
24	GPIO3	24	External GNSS data ready	Only pin 24 can be configured for "GNSS data ready", "Last gasp", "Fast power-off" or "Safe memory and power-off" functionalities
25	GPIO4	25	General purpose output (low)	-
42	GPIO5	42	SIM card detection	Only pin 42 can be configured for "SIM card detection" functionality
34	I2S_WA	34	I2S word alignment input/output	-
35	I2S_TXD	35	I2S transmit data output	-
36	I2S_CLK	36	I2S clock input/output	-
37	I2S_RXD	37	I2S receive data input	-

Table 46: LARA-L6004 LARA-L6404 LARA-R6001 LARA-R6401 LARA-R6801 GPIO mapping

20.1.2.3 Additional notes

☞ LARA-L6 / LARA-R6
When "SIM card detection" functionality is enabled, the status is reported by +CIND AT command.

☞ LARA-L6 / LARA-R6
Both the SIM hot insertion detection feature (configurable through the +UDCONF=50 AT command where supported) and the "SIM card detection" feature must be enabled to allow a correct implementation of these features.
Beware that the SIM will be in a not-ready state if the SIM hot insertion is enabled and the "SIM card detection" feature is disabled.

☞ LARA-L6 / LARA-R6
The "External GNSS supply enable" and "External GNSS data ready" functions can be handled by the +UGPS and the +UGPRF AT commands to manage the u-blox GNSS receiver connected to the cellular module and the embedded GNSS aiding.
After having enabled the "Last gasp" feature reboot the module in order to make the change effective. For more details, see the +ULGASP AT command.
After having enabled or disabled the "SIM card detection" feature (<gpio_mode>=7), reboot the module in order to make the change effective.

☞ See the corresponding module system integration manual for the complete overview of all allowed configurations.

20.1.3 LARA-L6 / LARA-R6 Power-off functionalities

<gpio_mode>=24 (fast power-off) triggers the emergency fast shutdown of the module. The process status is provided by means of the +UUFASTSHUTDOWN URC. For more details about the URC syntax, see +CFUN AT command.

<gpio_mode>=33 (safe memory and power-off) puts the memory in safe state avoiding further write and erase operations, and shuts down the system without performing any controlled shutdown procedure

These functions are triggered only by rising edge.

20.1.4 Network status indication

When a GPIO pin is configured to provide network status indication, its progress depends on the CS network registration state (see +CREG) and on the module transmission state:

- No service: indicates no network coverage or not registered state
- Registered home network 2G: indicates registered state on home network in 2G RAT
- Registered home network 3G: indicates registered state on home network in 3G RAT
- Registered home network 4G: indicates registered state on home network in 4G RAT
- Registered home network NB-IoT: indicates registered state on home network in NB-IoT
- Registered roaming 2G: indicates registered state with visitor 2G network (roaming in 2G RAT)
- Registered roaming 3G: indicates registered state with visitor 3G network (roaming in 3G RAT)
- Registered roaming 4G: indicates registered state with visitor 4G network (roaming in 4G RAT)
- Registered roaming NB-IoT: indicates registered state with visitor NB-IoT network (roaming in NB-IoT)
- Data transmission: indicates voice or data call active either in 2G, 3G or 4G RAT
- Data transmission roaming: indicates voice or data call active either in 2G, 3G or 4G RAT with visitor network

The following figures report the allowed progresses for GPIO pin set as network indication: V_H and V_L values are provided in the corresponding module data sheet in the "Generic Digital Interfaces pins" section.

20.1.4.1 No service (no network coverage or not registered)

- Continuous Output / Low



Figure 2: GPIO pin progress for no service

20.1.4.2 Registered home network 2G

- Cyclic Output / High for 100 ms, Output / Low for 2 s

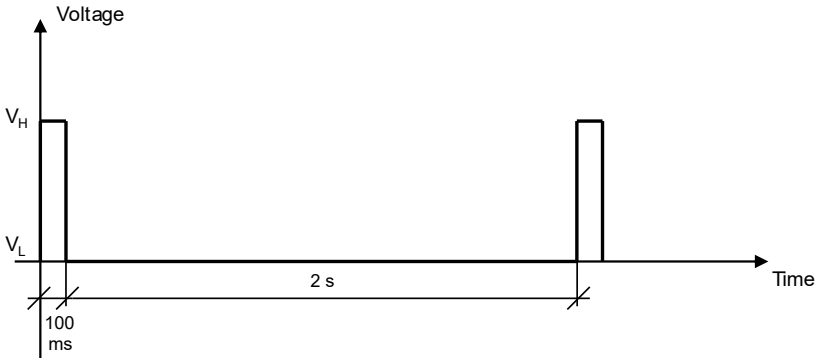


Figure 3: GPIO pin progress for registered home network 2G

20.1.4.3 Registered home network 3G

- Cyclic Output / High for 50 ms, Output / Low for 50 ms, Output / High for 50 ms, Output / Low for 2 s

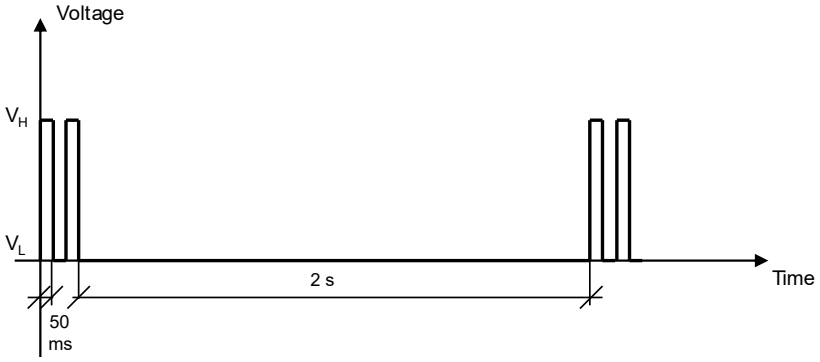


Figure 4: GPIO pin progress for registered home network 3G

20.1.4.4 Registered home network 4G

- Cyclic Output / High for 75 ms, Output / Low for 75 ms, Output / High for 75 ms, Output / Low for 75 ms, Output / High for 75 ms, Output / Low for 3 s

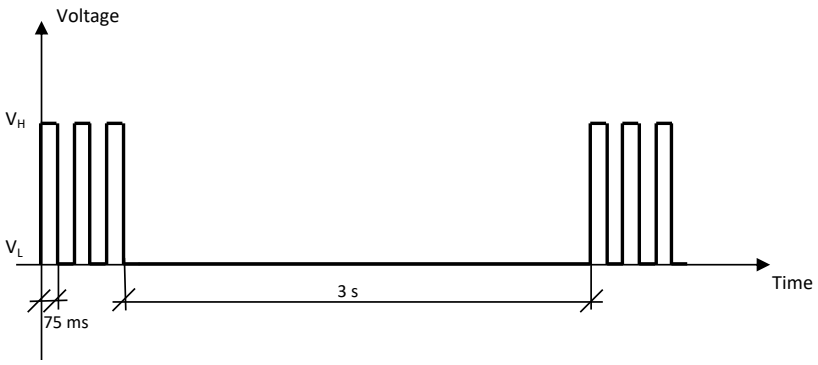


Figure 5: GPIO pin progress for registered home network 4G

20.1.4.5 Registered home network NB-IoT

- Cyclic Output / High for 100 ms, Output / Low for 30 s

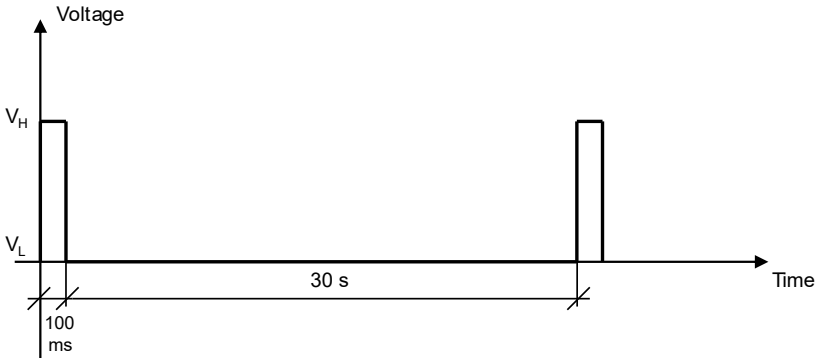


Figure 6: GPIO pin progress for registered home network NB-IoT

20.1.4.6 Registered roaming 2G

- Cyclic Output / High for 100 ms, Output / Low for 100 ms, Output / High for 100 ms, Output / Low for 2 s

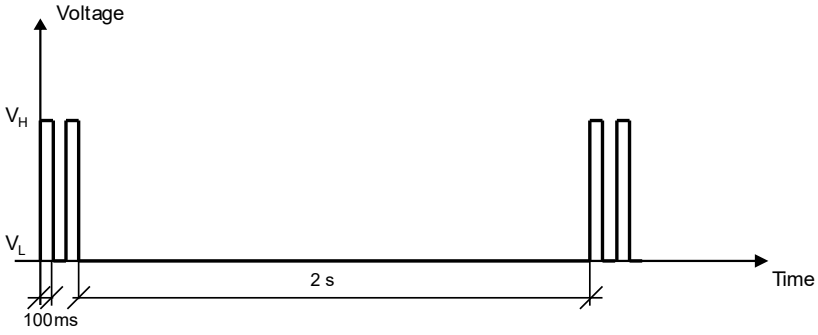


Figure 7: GPIO pin progress for registered roaming 2G

20.1.4.7 Registered roaming 3G

- Cyclic Output / High for 50 ms, Output / Low for 50 ms, Output / High for 50 ms, Output / Low for 100 ms

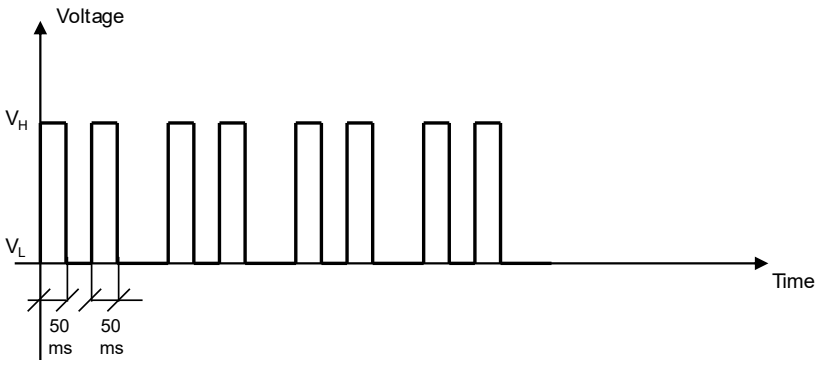


Figure 8: GPIO pin progress for registered roaming 3G

20.1.4.8 Registered roaming 4G

- Cyclic Output / High for 150 ms, Output / Low for 150 ms, Output / High for 150 ms, Output / Low for 3 s

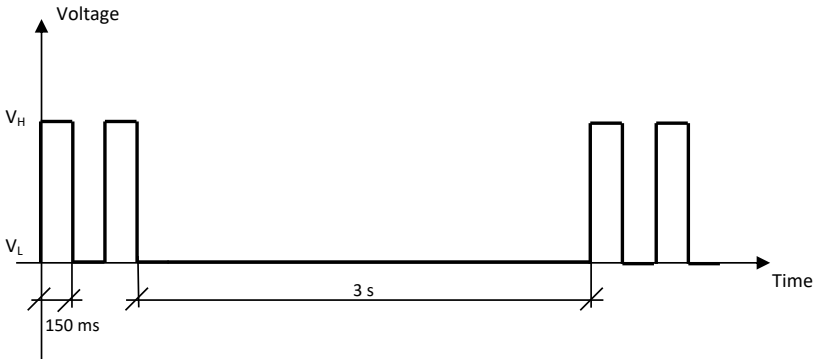


Figure 9: GPIO pin progress for registered roaming 4G

20.1.4.9 Registered roaming NB-IoT

- Cyclic Output / High for 100 ms, Output / Low for 100 ms, Output / High for 100 ms, Output / Low for 30 s

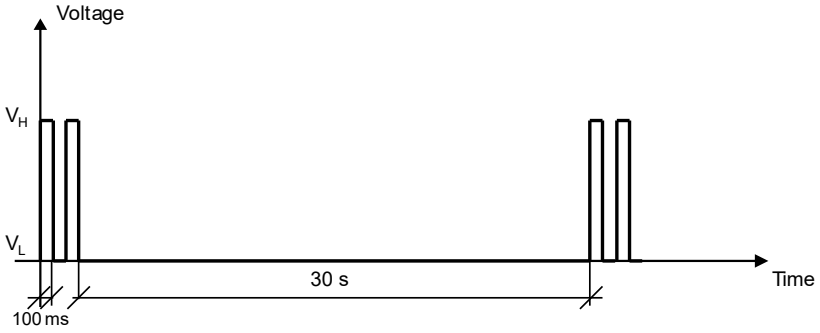


Figure 10: GPIO pin progress for registered roaming NB-IoT

20.1.4.10 Data transmission

- Continuous Output / High

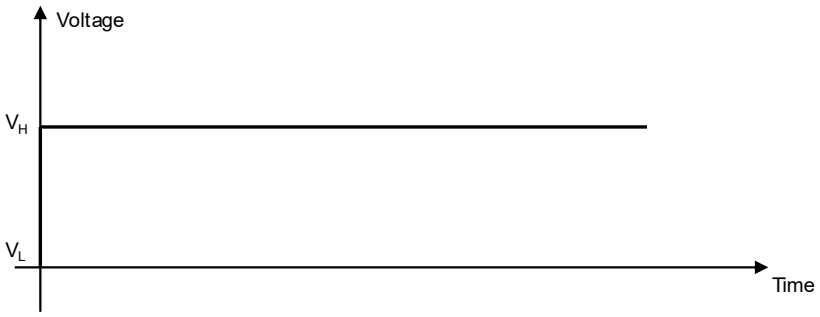


Figure 11: GPIO pin progress for data transmission

20.1.4.11 Data transmission roaming

- Cyclic Output / High for 800 ms, Output / Low for 200 ms

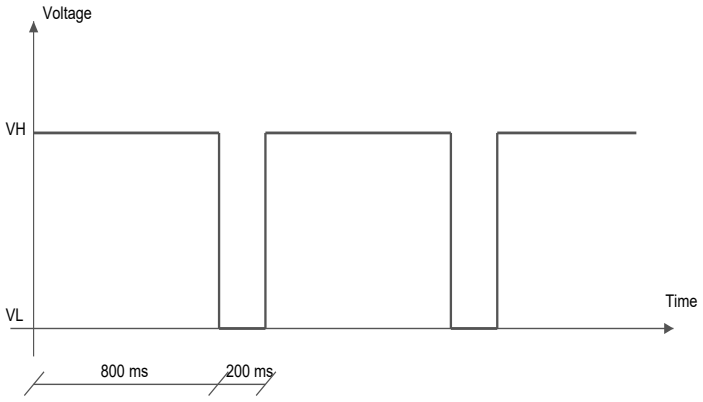


Figure 12: GPIO pin progress for data transmission roaming

LARA-L6 / LARA-R6
When registered on 4G (LTE) network, the GPIO pin progress is the same as for data transmission (Figure 11) because a PDP context/EPS bearer is available.

20.1.5 UART (DSR, DTR, DCD e RI) interface

The UART interface lines (DSR, DTR, DCD and RI) can be set on GPIO pins. For more details, see the corresponding module system integration manual.

LARA-L6 / LARA-R6
When both the UART and AUX UART interfaces are enabled simultaneously (that is the +USIO AT command active variant is 1), the primary UART DTR line can be set on GPIO3 or GPIO4 pin and the primary UART RI line can be set on GPIO1, GPIO2, GPIO3, GPIO4 or GPIO5.
Reboot the module to make the functionality effective.

20.1.6 Module status indication

When a GPIO pin is configured to provide module status indication, its progress depends on the current module status (power-off mode, i.e. module switched off, or deep-sleep mode versus idle, active or connected mode, i.e. module switched on):

- Output / High, when the module is switched on (any operating mode during module normal operation: idle, active or connected mode)
- Output / Low, when the module is switched off (power-off mode)

20.1.7 Module operating mode indication

When a GPIO pin is configured to provide module operating mode indication, its progress depends on the current module operating mode (the low power idle mode versus active or connected mode):

- Output / High, when the module is in active or connected mode
- Output / Low, when the module is in idle mode (that can be reached if the power saving is enabled by the +UPSV AT command)

20.2 GPIO select configuration command +UGPIOC

+UGPIOC						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	NVM	No	< 10 s	+CME Error

20.2.1 Description

Configures the GPIO pins as input, output, or to handle a custom function. When a GPIO pin is configured as an output pin (<gpio_mode>=0), it is possible to set the output value <gpio_out_val> which will be returned in the information text response to +UGPIOR read command (where supported). When a GPIO pin is configured as an input pin (<gpio_mode>=1), it is possible to set the input value <gpio_in_pull> which will be returned in the information text response to +UGPIOR read command (where supported). When the GPIO pin is configured as a SIM card detection (<gpio_mode>=7), it is possible to set the SIM polarity <gpio_sim_det_logic>; the parameter setting will be returned in the information text response to +UGPIOC read command.

The test command provides the list of the supported GPIOs, the supported functions and the status of all the GPIOs.

Not all the GPIO functions can be assigned to each GPIO pin. If the configuration is not allowed, an error result code will be returned (error result code 1502 - "+CME ERROR: Select GPIO mode error").
Where supported, the following custom functions cannot be simultaneously configured on 2 GPIOs:

- Network status indication
- External GNSS supply enable
- External GNSS data ready
- External GNSS RTC sharing
- Jamming detection indication
- SIM card detection
- Headset detection
- GSM Tx burst indication
- Module status indication
- Module operating mode indication
- Ring indicator
- Last gasp
- External GNSS antenna / LNA control
- Time pulse GNSS
- Time pulse output
- Time stamp of external interrupt
- Fast power-off
- External GNSS time pulse input
- External GNSS time stamp of external interrupt
- DTR mode for power saving control
- 32.768 kHz output
- Safe memory and power-off
- UPSV control

- Primary UART DTR line on GPIO pin

For more details regarding the custom functions supported by the u-blox cellular modules and the factory-programmed settings, see GPIO functions and GPIO mapping.

LARA-L6 / LARA-R6
For more details on the antenna dynamic tuning control feature, see the +UTEST=4 AT command.

20.2.2 Syntax

Type	Syntax	Response	Example
Generic syntax			
Set	AT+UGPIOC=<gpio_id>,<gpio_mode>[,<param_val>]	OK	AT+UGPIOC=42,7,1 OK
GPIO output mode			
Set	AT+UGPIOC=<gpio_id>,0[,<gpio_out_val>]	OK	AT+UGPIOC=42,0,1 OK
GPIO input mode			
Set	AT+UGPIOC=<gpio_id>,1[,<gpio_in_pull>]	OK	AT+UGPIOC=42,1,1 OK
SIM card detection mode			
Set	AT+UGPIOC=<gpio_id>,7[,<gpio_sim_det_logic>]	OK	AT+UGPIOC=42,7,1 OK
Other GPIO modes			
Set	AT+UGPIOC=<gpio_id>,<gpio_mode>	OK	AT+UGPIOC=42,2 OK
Read	AT+UGPIOC?	+UGPIOC: <gpio_id>,<gpio_mode> [<gpio_id>,<gpio_mode> [....]] OK	+UGPIOC: 20,255 21,3 23,255 24,255 42,7,1 OK
Test	AT+UGPIOC=?	+UGPIOC: (list of supported <gpio_id>),(list of supported <gpio_mode>),(list of supported <gpio_out_val>\<gpio_in_pull>\<gpio_sim_det_logic>) [<gpio_id1>,<gpio_mode> ... <gpio_idN>,<gpio_mode>] OK	+UGPIOC: (20,21,23,24,42),(0-5,7,9,255),(0-2) OK

20.2.3 Defined values

Parameter	Type	Description
<gpio_id>	Number	GPIO pin identifier: pin number See the GPIO mapping for the available GPIO pins, their mapping and factory-programmed values on different u-blox cellular modules series and product version.
<gpio_mode>	Number	Mode identifier: configured function

Parameter	Type	Description
		See the GPIO functions for custom functions supported by different u-blox cellular modules series and product version. Allowed values: • 0: output • 1: input • 2: network status indication • 3: external GNSS supply enable • 4: external GNSS data ready • 5: external GNSS RTC sharing • 6: jamming detection indication • 7: SIM card detection • 8: headset detection • 9: GSM Tx burst indication • 10: module status indication • 11: module operating mode indication • 12: I^2S digital audio interface • 13: SPI serial interface • 14: master clock generation • 15: UART (DSR, DTR, DCD e RI) interface • 16: Wi-Fi enable • 18: ring indicator • 19: last gasp • 20: external GNSS antenna / LNA control enable • 21: time pulse GNSS • 22: time pulse output • 23: time stamp of external interrupt • 24: fast power-off • 25: LwM2M pulse • 26: hardware flow control (RTS, CTS) • 27: antenna dynamic tuning • 28: external GNSS time pulse input • 29: external GNSS time stamp of external interrupt • 30: DTR mode for power saving control • 32: 32.768 kHz output • 33: safe memory and power-off • 34: UPSV control • 255: pad disabled
<gpio_out_val>	Number	GPIO output value (for output function <gpio_mode>=0 only): • 0 (default value): low • 1: high
<gpio_in_pull>	Number	GPIO input value (for input function <gpio_mode>=1 only): • 0 (default value): no resistor activated • 1: pull up resistor active • 2: pull down resistor active
<gpio_sim_det_logic>	Number	SIM detection polarity (for SIM detection function <gpio_mode>=7 only): • 0 (default value): SIM detection high polarity activated • 1: SIM detection low polarity activated (reverse SIM detection logic)

20.2.4 Notes

LARA-L6 / LARA-R6

- <gpio_in_pull> is not supported.
- <gpio_sim_det_logic> is not supported.

- The network status indication function can be set only on the GPIO1, GPIO2, GPIO3 and GPIO4 pins.
- The ring indicator is supported on all pins.
- The DTR line of main UART on GPIO functionality is supported only when both the main and auxiliary UART interfaces are enabled (that is the +USIO AT command active variant is 1). Reboot the module to make the functionality effective.

20.3 GPIO read command +UGPIOR

+UGPIOR						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	< 10 s	+CME Error

20.3.1 Description

Reads the current value of the specified GPIO pin, no matter whether it is configured as input or output (see the +UGPIOC AT command to define the GPIO function). The parameters range is shown in the information text response to the test command.

20.3.2 Syntax

Type	Syntax	Response	Example
Set	AT+UGPIOR=<gpio_id>	+UGPIOR: <gpio_id>,<gpio_val> OK	AT+UGPIOR=20 +UGPIOR: 20,0 OK
Test	AT+UGPIOR=?	+UGPIOR: (list of supported <gpio_id>s) OK	+UGPIOR: (20, 21) OK

20.3.3 Defined values

Parameter	Type	Description
<gpio_id>	Number	GPIO pin identifier: pin number See the GPIO mapping for the available GPIO pins, their mapping and factory-programmed values on different u-blox cellular modules series and version.
<gpio_val>	Number	GPIO value. Allowed values are 0 and 1.

20.3.4 Notes

- The set command works only if the <gpio_mode> parameter of the +UGPIOC AT command is set to 0 or 1.

20.4 GPIO set command +UGPIOW

+UGPIOW						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	< 10 s	+CME Error

20.4.1 Description

Sets ("writes") the output of the specified GPIO pin, but only if it is configured in output function (see the +UGPIOC AT command to set the pin as output).

20.4.2 Syntax

Type	Syntax	Response	Example
Set	AT+UGPIOW=<gpio_id>,<gpio_out_val>	OK	AT+UGPIOW=20,1 OK
Test	AT+UGPIOW=?	+UGPIOW: (list of supported <gpio_id>s),(list of supported <gpio_out_val>s) OK	+UGPIOW: (20, 21),(0-1) OK

20.4.3 Defined values

Parameter	Type	Description
<gpio_id>	Number	GPIO pin identifier: pin number See the GPIO mapping for the available GPIO pins, their mapping and factory-programmed values on different u-blox cellular modules series and version.
<gpio_out_val>	Number	GPIO value. Allowed values are 0 and 1.

20.4.4 Notes

- The set command works only if the <gpio_mode> parameter of the +UGPIOC AT command is set to 0.

21 End user test

21.1 Toggle test mode +UTEST=0, +UTEST=1

+UTEST=0						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	Up to 1 s	+CME Error

21.1.1 Description

Enables the production test (or non-signaling) mode or returns to the normal (signaling) operating mode. The AT+UTEST=0 command exits production test mode, while AT+UTEST=1 enters it.

Signaling mode is the default operating state after boot: the protocol stack is operating and the module can connect to the cellular network normally. In non-signaling mode, the module switches off the protocol stack for running tests which could not otherwise be performed.

In signaling mode:

- The only allowed +UTEST command is the AT+UTEST=1 used to enable the testing interface
- All other +UTEST commands return an error result code ("+CME ERROR: operation not allowed" or "+CME ERROR: 3" depending on the +CMEE AT command setting)

To enter production test mode:

- LARA-L6 / LARA-R6 - a network deregistration is needed. Issue the AT+COPS=2 followed by AT+CFUN=0 before entering the non-signaling mode.

To return to the normal mode, perform one of these actions:

- LARA-L6 / LARA-R6 - issue `AT+UTEST=0` and then reboot the module by `AT+CFUN=15`. Issue `AT+CFUN?` to verify that the module is in normal mode (+CFUN: 1), otherwise issue `AT+CFUN=0` followed by `AT+CFUN=1` to restore the full MT functionality.

When the module returns the normal mode, the network registration status stored in the profile will be restored. Use the `AT+CFUN=1` command to restore the module full functionality.

21.1.2 Syntax

Type	Syntax	Response	Example
Generic syntax			
Set	AT+UTEST=<mode>	[+UTEST: <mode>] OK	AT+UTEST=0 OK
Entering normal mode			
Set	AT+UTEST=0	OK	AT+UTEST=0 OK
Entering test mode			
Set	AT+UTEST=1	OK	AT+UTEST=1 OK
Read	AT+UTEST?	+UTEST: <mode> OK	+UTEST: 1 OK
Test	AT+UTEST=?	+UTEST: (list of supported <mode>s) OK	+UTEST: (0-4) OK

21.1.3 Defined values

Parameter	Type	Description
<mode>	Number	Test mode setting: • 0: the module returns to the normal mode • 1: the module enters the test mode

21.2 Digital pins testing +UTEST=10

+UTEST=10						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	Up to 1 s	+CME Error

21.2.1 Description

Performs functional testing on the digital pins of the module.

The module pins can be considered as generic digital input / output pins; it is possible to configure one pin as a digital output with "high" logic level and then verify the voltage level present. Conversely, it is possible set a pin as a digital input, externally apply a "high" or "low" logic level, and then check if the module is able to correctly measure the voltage level applied.

This command is intended for production or prototype testing: to check the correct digital pins behavior and to detect possible soldering or functional problems. The execution of these actions is performed only in non-signaling mode. If the module has not been set into non-signaling mode (with AT+UTEST=1) prior to using +UTEST=10, this command will return "+CME ERROR: operation not allowed" or "+CME ERROR: 3" error result code, depending on the +CMEE AT command setting.

⚠ Do not exceed the values reported in the Generic Digital Interface section of the module data sheet when testing a pin as a digital input pin, since stressing the device above the listed ratings may cause a permanent damage to the module.

☞ The command only accepts the parameter set supported by the specific module version. When an unsupported parameter is issued, an error result code will be provided ("+CME ERROR: operation not supported" or "+CME ERROR: 4" depending on the +CMEE AT command setting).

For more details on test command examples, guidance about test equipment setup and more information on module reboot see the application development guide and the corresponding data sheet for pins levels characteristics.

21.2.2 Syntax

Type	Syntax	Response	Example
Digital pins testing generic syntax			
Set	AT+UTEST=10,<op_code>[,[<bit_padding>]<pin_seq>]	OK	AT+UTEST=10,3,"0000001000000300" OK
Restoring original configuration			
Set	AT+UTEST=10,0	OK	AT+UTEST=10,0 OK
Pins set definition			
Set	AT+UTEST=10,2,[<bit_padding>]<pin_seq>	OK	AT+UTEST=10,2,"0000000C300000003000" OK
Pins configuration			
Set	AT+UTEST=10,3,[<bit_padding>]<pin_seq>	OK	AT+UTEST=10,3,"0000000420000001000" OK
Output pins definition			
Set	AT+UTEST=10,4,[<bit_padding>]<pin_seq>	OK	AT+UTEST=10,4,"00000000100000002000" OK
Digital testing execution			
Set	AT+UTEST=10,5	OK	AT+UTEST=10,5 OK
Digital value measurement			
Set	AT+UTEST=10,6	<bit_padding>]<pin_seq> OK	AT+UTEST=10,6 00000004100000003000 OK

21.2.3 Defined values

Parameter	Type	Description
<op_code>	Number	Test mode setting: • 0: restores the pins to the original configuration • 2: defines and initializes a set of pins to be tested. The original pins configuration is kept for final restore. In the [<bit_padding>]<pin_seq> parameter use this notation to represent each module pin with its binary digit: o 0: the pin will not be tested o 1: the pin will be tested (as digital input or output) • 3: configures the logical pins previously enabled for testing as output or input; the command has effect only if AT+UTEST=10,2 has been issued. If a non-enabled pin is set as digital input or output, the command does not return an error and the setting is not applied. In the [<bit_padding>]<pin_seq> parameter use this notation to represent each module pin with its binary digit: o 0: the pin will be set as an output o 1: the pin will be set as an input • 4: configures the value of the output pins under testing; the command has effect only if AT+UTEST=10,3 has been issued; The command is not mandatory if there are no output pins to configure. In the [<bit_padding>]<pin_seq> parameter use this notation to represent each module pin with its binary digit: o 0: the pin will output a "low" logic level

Parameter	Type	Description
		o 1: the pin will output a "high" logic level • 5: applies the setting change defined with <op_code>= 2 / 3 / 4 and triggers the execution of the digital testing. Digital testing of the pins is possible only after the execution of the AT+UTEST=10,5 command. • 6: returns the logic value of pins under testing (both input and output); in the [<bit_padding>]<pin_seq> parameter use this notation to represent each module pin with its binary digit: o 0: "low" logic digital level measured at the module pin o 1: "high" logic digital level measured at the module pin
[<bit_padding>]<pin_seq>	Number	Sequence of hexadecimal digits containing the pin information and the action to execute: • LARA-L6 / LARA-R6 - See the Notes for detailed number description

21.2.4 Notes

- The <op_code>, <bit_padding>, <pin_seq> parameters setting is not stored in the NVM.
- Follow these steps to construct the [<bit_padding>]<pin_seq> sequence:
  1. Consider the number of bits available to select the module's pins
     - LARA-L6 / LARA-R6 - 72 bits
  2. The status of the n-th pin is represented by the corresponding n-th bit; see the <op_code> description for the notation of each mode setting
  3. Convert each group of four binary digits into its hexadecimal representation
- LARA-L6 / LARA-R6 - When a non-testable pin is selected, the command returns an error result code and the value is not considered and not applied.
- LARA-L6 / LARA-R6 - The original status of the pins is not restored by the commands AT+UTEST=0 or AT +UTEST=10,0 but a reboot of the module with AT+CFUN=16 command is required.

22 File System

22.1 File tags

22.1.1 Description

File system commands have the optional <tag> parameter that allows the user to specify a file type when a file system AT command is issued, to inform the system what to do with it. Application specific files must be saved with the correct type tag, otherwise they are treated as common user files.

The file tag applicability depends on the module series: see Table 47 for the allowed tags supported by the interested product. An overview about each file tag is provided in Table 48.

Module	"USER"	"FOAT"	"AUDIO"	"ECALL_EXT"	"FOTA_EXT"	"AUDIO_EXT"	"PROFILE"	"GNSS"	"CALLSRV_EXT"	"XLWM2M"	"MNO"	"UNVM"	"SCM"
LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B	*	*				*	*						
LARA-L6 / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D	*	*				*	*					*	

Table 47: Tag applicabilities to module series

Tag	Name	Specification
"USER"	User file system	This is the default type if the <tag> parameter is omitted in file system AT commands. All generic files can be stored in this manner. Example: `AT+UDWNFILE="foobar",25,"USER"` is the same as `AT+UDWNFILE="foobar",25`
"FOAT"	FOAT file system	This tag is used to specify the file type as a firmware update package. It will place the firmware update package in the proper file cache to be used later by the +UFWINSTALL command.
"AUDIO"	Audio parameters	This tag is used to store audio calibration file "audio_gain_calibration<X>.xml" and "voice<X>.nvm" in the selected profile <X>=0,1. The profile is stored into NVM by using ATZ<X>. ☞ The "audio_gain_calibration<X>.xml" and "voice<X>.nvm" files can be overwritten with AT&W<X> command.
"ECALL_EXT"	eCall controller configuration and custom eCall prompts	This tag is used to read, download and delete the eCall controller configuration (see the eCall implementation in u-blox cellular modules application note [59]) or download and delete custom eCall prompts (see the eCall Prompts section). Reading and downloading commands use a dedicated channel of the USB CDC-ACM interface. To download the eCall controller configuration or custom eCall prompts in the module, use the +UDWNFILE command. To read the eCall controller configuration from the module, use the +URDFILE command. To delete eCall controller configuration or custom eCall prompts from the module, use the +UDELFILE command.
"FOTA_EXT"	Firmware for FOTA procedure	This tag has to be used to store the firmware file for the FOTA procedure using a dedicated channel of the USB CDC-ACM interface.

Tag	Name	Specification
"AUDIO_EXT"	Audio configuration	This tag is used to read or download audio configuration (see Audio parameters tuning section). • LARA-L6 / LARA-R6 The audio configuration file includes the audio profiles selectable by the +USPM AT command. To download the audio configuration in the module, use the +UDWNFILE AT command.
"PROFILE"	Profile files	This tag refers to the profile files that can be loaded on to the module to support Mobile Network Operators (MNOs) specific configurations. For more details on the profiles, see the +UMNOPROF command. The +URDFILE and +ULSTFILE AT commands are not allowed with this tag, the user can only download or delete these files.
"GNSS"	GNSS files	This tag has to be used to store the firmware file for the internal GNSS receiver.

"CALLSRV_EXT"	Emergency Call Number List (ECNL) management	This tag is used to manage the Emergency Call Number List (ECNL) file stored in NVM. All numbers in the list will be treated as emergency numbers when dialled and will result in disabling the thermal daemon software shutdown.
		Some notes about ECNL:
		• If eCall is enabled, the ECNL list is not used and call is treated as any normal call.
		• Conflict manager will not manage these calls, meaning no ongoing calls will be dropped.
		• Maximum allowed numbers in the ECNL list is 20. Numbers after 20 will be ignored.
		• Reboot is required to reload the ECNL list after download.
		File should be composed by text lines consisting of 'type','number' lines that end with carriage return where 'type' is a type of the number in 'number' according to one of the formats supported by 3GPP TS 24.008 [84] sub-clause 10.5.4.7).
		All numbers that start with '00' should be stored with '+' instead in order to keep only one occurrence for international number. In order to manage numbers properly the configuration file should contain the number with international prefix and without it.
		Example of a two line ECNL file:
		`2,+390123456789`
		`2,390123456789`

"XLWM2M"	LwM2M object script files	This tag is used to read or store Lua files defining a LwM2M object for use by the LwM2M client. The file specified with the "XLWM2M" can be only downloaded completely (see +UDWNFILE AT command), deleted (see +UDELFILE AT command), fully or partially read (see +URDFILE or +URDBLOCK) and queried (see +ULSTFILE AT command).
"MNO"	ICCID and MCC/MNC MNO lists	This tag refers to the files containing the ICCID and MCC/MNC MNO lists used by the SIM ICCID/IMSI selection (see the +UMNOPROF AT command). The file specified with the "MNO" tag can be downloaded to the module (see the +UDWNFILE AT command), deleted (see the +UDELFILE AT command), fully or partially read (see the +URDFILE or +URDBLOCK AT commands) and queried (see the +ULSTFILE AT command). Depending on the file name (<filename>) the file contains the ICCID and MCC/MNC MNO lists. The allowed file names are: • "iccid_list": SIM Issuer Identifier Number (IIN) list. The list format is: `MNO1%number of MNO1's iccid%iccid1%iccid2%MNO2%number of MNO2's iccid%iccid3%iccid4...%MNOn%number of MNOn's iccid%iccidm`. By factory-programmed configuration no iccid_list file is stored in the module file system. • "mno_list": MCC and MNC list. The list format: `MNO1%number of MNO1's mccmnc%mcc1mnc1%mcc2mnc2%MNO2%number of MNO2's mccmnc`

Tag	Name	Specification
		%mcc3mnc3...%MNOn%number of MNOn's mccmnc%mcckmnck. By factory-programmed configuration the following mno_list file is stored in the module file system: 2%9%310150%310170%310410%310560%311180%310030%310280 %310950%313790%3%41%310890%311480%311270%310010%310012 %310013%310590%310890%310910%311110%311270%311271 %311272%311273%311274%311275%311276%311277%311278 %311279%311280%311281%311282%311283%311284%311285 %311286%311287%311288%311289%311390%311480%311481 %311482%311483%311484%311485%311486%311487%311488 %311489%4%5%50501%50511%50539%50571%50572%206%6 %313100%312670%313130%313140%313110%313120%5%16 %310160%310200%310210%310220%310230%310240%310250 %310260%310270%310310%310490%310660%310800%311660 %311882%312250%28%4%44000%44020%44021%44101%20%1 %44010%41%12%44050%44051%44052%44053%44054%44070 %44071%44072%44073%44074%44075%44076%39%3%45005 %45011%45012%43%1%302720%21%2%302220%302760%32 %3%310730%311220%311580%47%3%302610%302640%302690 %38%1%45006 Allowed MNO1,..., MNOn values for both iccid_list and mno_list files are the same of <MNO> in +UMNOPROF command. In the previous list 2%9%310150%310170%310410%310560%311180%310030%310280 %310950%313790 2 means AT&T, 9 is the number of the next MCC and MNC. The maximum entries number in the MCC/MNC list and ICCID list is 256 and the file overall maximum size is 2048 bytes.
"UNVM"	Saving in NVM	This tag is used to list or delete the NVM items related to AT commands with parameter configuration saved in the UNVM section. The AT commands with parameters in this section can be listed with the +UNVMCFG test command. Deletion of a UNVM item restores the factory-programmed configuration at next boot. To delete a UNVM item use the +UDELFILE AT command. To list all the UNVM items, use the +ULSTFILE AT command. ☞ If the UNVM item of an AT command is not listed by +ULSTFILE AT command, the factory-programmed settings are in use.
"SCM"	SCM configuration files	This tag is used to read or store SCM configuration files.

Table 48: Tag meanings

22.2 Download file +UDWNFILE

+UDWNFILE						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	-	+CME Error

22.2.1 Description

Stores (writes) a file into the file system:

- The stream of bytes can be entered after the '>' prompt has been provided to the user. The file transfer is terminated exactly when <size> bytes have been entered and either "OK" final result code or an error result code is returned. The feed process cannot be interrupted i.e. the command mode is re-entered once the user has provided the declared the number of bytes.
- If the file already exists, the data will be appended to the file already stored in the file system.

- If the data transfer stops, after 20 s the command is stopped and the "+CME ERROR: FFS TIMEOUT" error result code (if +CMEE: 2) is returned.
- If the module shuts down during the file storing, all bytes of the file will be deleted.
- If an error occurs during the file writing, the transfer is aborted and it is up to the user to delete the file.

LARA-L6 / LARA-R6

- The available free memory space is checked before starting the file transfer. If the file size exceeds the available space, the "+CME ERROR: FFS MEMORY NOT AVAILABLE" error result code will be provided (if +CMEE: 2).
- If the file already exists, the data will be appended to the file already stored in the file system.

LARA-L6 / LARA-R6
For the FOAT file (+UDWNFILE of a "FOAT"-tagged file), new data will be appended to the existing binary.

- Issue the +ULSTFILE AT command with FOAT tag to check FOAT file presence and size.
- Issue the +UDELFILE AT command with FOAT tag to erase and clean all records related to a FOAT, +UFTP and uFOTA downloaded package.
- No need of +UDELFILE if before was issued +UFWINSTALL AT command.

LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B

- FOAT data will always be overwritten.
- The FOAT file is deleted after the FW update, see +UFWINSTALL AT command.

22.2.2 Syntax

Type	Syntax	Response	Example
Set	AT+UDWNFILE=<filename>,<size>[,<tag>] > <text>	OK	AT+UDWNFILE="filename",36,"USER" > The 36 downloaded bytes of the file! OK
Download audio configuration			
Set	AT+UDWNFILE=<filename>,<size>,"AUDIO_EXT"	OK	AT+UDWNFILE="audioconfig",4873,"AUDIO_EXT" OK

22.2.3 Defined values

Parameter	Type	Description
<filename>	String	Filename. For file system filename and data size limits see File system limits.
<size>	Number	File size expressed in bytes. For file system filename and data size limits see File system limits.
<tag>	String	Optional parameter that specifies the application file type. FILE TAGS table lists the allowed <tag> strings. For more details on specific limitations, see Notes.
<text>	String	Stream of bytes.

22.2.4 Notes

- Issue the AT+ULSTFILE=1 command to retrieve the available user space in the file system.
- Two files with different types can have the same name, i.e. AT+UDWNFILE="testfile",20,"USER" and AT +UDWNFILE="testfile",43,"AUDIO".

LARA-L6 / LARA-R6

- The <tag> parameter is mandatory for firmware package transfer. The tag must be given as "FOAT" for FW download, "AUDIO_EXT" for audio configuration file download, and "PROFILE" for carrier profile. For more details, see FILE TAGS.
- "AUDIO_EXT" tag:
  - The tag is used to download the audio configuration database file (i.e. audioconf file) which contains the voice algorithm parameters and I2S settings for all u-blox audio profiles. The audioconf file is part of the delivered u-blox binary package.
  - New audio configuration file will be generated by u-blox on customer request and could be delivered separately by the binary package.
  - After a successful download, the audio configuration is validated. If it is not valid, the configuration is not applied, the "+CME ERROR: operation not supported" error result code will be provided, the downloaded file will be deleted and the acdb.mbn version number verification by AT+UTI="uaud_save_data?" command will show the original version with checksum OK.
  - The download validation procedure is also performing a file checksum verification at the end of the downloading procedure. In case this fail the "+CME ERROR: operation not supported" error result code will be provided and the result of this check is stored in NVM.
  - The checksum result can be always shown by the AT+UTI="uaud_save_data?" command. In case this shows a fail, the audio quality cannot be guaranteed since the downloaded audioconf file is corrupted. In this case is strongly recommended to restore the original firmware (e.g. with FOTA or EasyFlash).
  - After a successful application, reboot the module to activate the new audio configuration.
  - The factory-programmed configuration is not backed up. It can be restored downloading the original firmware.
  - The downloaded file is deleted after the processing is successfully done, thus cannot be read out.
  - Firmware update through FOTA or EasyFlash will overwrite any previous audioconf file downloaded by the +UDWNFILE AT command.
  - When the I2S audio serial interface needs to operate in slave mode, the audio config file named acdb_slave.mbn needs to be downloaded. After downloading the 1st digit of the version number shown by AT+UTI="uaud_save_data?" command will be an odd number in case of slave version, even number in case of master version e.g. 2.07 refers to a slave version while 1.07 refers to master version.
  - Downloading on the module an audio config file (master or slave version) will change coherently the <I2S_master_slave> parameter value for +UI2S AT command.

LARA-L6004-00B / LARA-R6001-00B / LARA-R6401-00B / LARA-R6801-00B

- I2S slave mode is not supported.

22.3 List files information +ULSTFILE

+ULSTFILE						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	-	+CME Error

22.3.1 Description

Retrieves some information about the FS. Depending on the specified <op_code>, it can print:

- List of files stored into the FS
- Remaining free FS space expressed in bytes
- Size of the specified file expressed in bytes

☞ The available free space on FS in bytes reported by the command AT+ULSTFILE=1 is the theoretical free space including the space occupied by the hidden and temporary files which are not displayed by the AT +ULSTFILE=0.

22.3.2 Syntax

Type	Syntax	Response	Example
Generic syntax			
Set	AT+ULSTFILE=[<op_code>[,<param1>[,<param2>]]]	+ULSTFILE: [<param3>,...[,<paramN>]] OK	AT+ULSTFILE= +ULSTFILE: "filename1","filename2" OK
List of files stored into the FS			
Set	AT+ULSTFILE=[0[,<tag>]]	+ULSTFILE: [<filename1>[,<filename2>[,...[,<filenameN>]]]] OK ☞ See notes below	AT+ULSTFILE= +ULSTFILE: "filename1","filename2" OK ☞ See notes below
Remaining free FS space expressed in bytes			
Set	AT+ULSTFILE=1[,<tag>]	+ULSTFILE: <free_fs_space> OK	AT+ULSTFILE=1 +ULSTFILE: 236800 OK
Size of the specified file			
Set	AT+ULSTFILE=2,<filename>[,<tag>]	+ULSTFILE: <file_size> OK	AT+ULSTFILE=2,"filename" +ULSTFILE: 784 OK

22.3.3 Defined values

Parameter	Type	Description
<op_code>	Number	Allowed values are: • 0 (default value): lists the files belonging to <tag> file type • 1: gets the free space for the specific <tag> file type • 2: gets the file size expressed in bytes, belonging to <tag> type (if specified)
<tag>	String	Specifies the application file type. FILE TAGS table lists the allowed <tag> strings.
<filename1>,.., <filenameN>	String	Filename. For file system filename and data size limits see File system limits.
<free_fs_space>	Number	Available free space on FS in bytes.
<file_size>	Number	Size of the file specified with the <filename> parameter.
<param1>	Number / String	Type and supported content depend on related <op_code> (details are given above).
<param2>	Number / String	Type and supported content depend on related <op_code> (details are given above).

22.4 Read file +URDFILE

+URDFILE						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	-	+CME Error

22.4.1 Description

Retrieves a file from the file system.

22.4.2 Syntax

Type	Syntax	Response	Example
Set	AT+URDFILE=<filename>[,<tag>]	+URDFILE: <filename>,<size>,<data> OK	AT+URDFILE="filename" +URDFILE: "filename",36,"these bytes are the data of the file" OK

22.4.3 Defined values

Parameter	Type	Description
<filename>	String	Filename. For file system filename and data size limits, see File system limits.
<tag>	String	The optional parameter <tag> specifies a different application file type. FILE TAGS table lists the allowed <tag> strings.
<size>	Number	File size, in bytes.
<data>	String	File content.

22.4.4 Notes

- The returned file data is displayed as an ASCII string of <size> characters in the range [0x00,0xFF]. At the end of the string, <CR><LF> are provided for user convenience and visualization purposes.

22.5 Partial read file +URDBLOCK

+URDBLOCK						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	-	+CME Error

22.5.1 Description

Retrieves a file from the file system.

Differently from +URDFILE command, this command allows the user to read only a portion of the file, indicating the offset and amount of bytes.

22.5.2 Syntax

Type	Syntax	Response	Example
Set	AT+URDBLOCK=<filename>,<offset>,<size>[,<tag>]	+URDBLOCK: <filename>,<size>,<data> OK	AT+URDBLOCK="filename",0,20 +URDBLOCK: "filename",20,"these bytes are the " OK

22.5.3 Defined values

Parameter	Type	Description
<filename>	String	Filename. For file system filename and data size limits see File system limits.
<offset>	Number	Offset in bytes from the beginning of the file.
<size>	Number	Number of bytes to be read starting from the <offset>.
<data>	String	Content of the file read.
<tag>	String	The optional parameter <tag> specifies a different application file type. FILE TAGS table lists the allowed <tag> strings.

22.5.4 Notes

- The returned file data is displayed as an ASCII string of <length> characters in the range [0x00,0xFF]. At the end of the string, <CR><LF> are provided for user convenience and visualization purposes.
- If a size larger than the whole file size is required the command returns the file size only, indicating the amount of bytes read.
- If an offset larger than the whole file size is required, the "+CME ERROR: FFS file range" error result code is triggered.

22.6 Delete file +UDELFILE

+UDELFILE						
Modules	All products					
Attributes	Syntax	PIN required	Settings saved	Can be aborted	Response time	Error reference
	partial	No	No	No	-	+CME Error

22.6.1 Description

Deletes a stored file from the file system.

LARA-L6 / LARA-R6
If <filename> file is not stored in the file system the following error result code will be provided: "+CME ERROR: FILE NOT FOUND".

22.6.2 Syntax

Type	Syntax	Response	Example
Set	AT+UDELFILE=<filename>[,<tag>]	OK	AT+UDELFILE="filename","USER" OK

22.6.3 Defined values

Parameter	Type	Description
<filename>	String	Filename. For file system filename and data size limits see File system limits.
<tag>	String	The optional parameter <tag> specifies a different application file type. FILE TAGS table lists the allowed <tag> strings.

22.7 File system limits

22.7.1 Allowed characters in filenames

A filename cannot contain the following characters: / * : % | " < > ?

LARA-L6 / LARA-R6
Filenames starting with a dot (.) are not valid.

22.7.2 Limits

Here below are listed the maximum filename length, the maximum data size of the file system and the maximum number of files for the u-blox cellular modules.

Maximum filename length:

- LARA-L6 / LARA-R6 - 248 characters

Maximum file size:

- LARA-L6 / LARA-R6 - File size limited by the available file system space retrieved by AT+ULSTFILE=1 command

Maximum number of files:

- LARA-L6 / LARA-R6 - There is no limit to files that can be stored.

☞ The theoretical maximum file size and the maximum number of files also includes system, hidden and temporary files whose number is not statically predictable, so the actual numbers can be less than stated.

23 Audio interface

This section describes a set of standard and u-blox proprietary AT commands to be used for the audio features configuration:

AT command	Remarks
+CLVL	Speech volume selection
+CMUT	Uplink voice muting configuration during all the voice calls
+USPM	Audio path setting
+UI2S	I^2S interfaces configuration
+UPAR, +USAR	Players management
+UTGN, +UMSM	Players management
+UMCLK, +UEXTDCONF	External codec or other external audio IC management
+UDCONF=30	Speech codecs configuration
+UAUDCFG	Audio configuration

Table 49: AT commands list for audio features configuration

Audio parameters tuning section describes commands for the audio parameters tuning.

Other standard commands available for audio configuration are listed as follows:

- LARA-L6 / LARA-R6 - +CALM
- LARA-L6 / LARA-R6 - +VTS

☞ LARA-L6 / LARA-R6
DTMF section describes commands specific for DTMF detection and generation.

23.1 Loudspeaker volume level +CLVL

+CLVL						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	NVM	No	-	+CME Error

23.1.1 Description

Selects the speech volume.

23.1.2 Syntax

Type	Syntax	Response	Example
Set	AT+CLVL=[<level>]	OK	AT+CLVL=30 OK
Read	AT+CLVL?	+CLVL: <level> OK	+CLVL: 80 OK
Test	AT+CLVL=?	+CLVL: (list of supported <level>s) OK	+CLVL: (0-100) OK

23.1.3 Defined values

Parameter	Type	Description
<level>	Number	• LARA-R6001-00B / LARA-R6401-00B / LARA-R6801-00B - The allowed range is 0-6, where 0 means mute, 1 means -15 dB, 6 means 0 dB and the step size is 3 dB. The default and factory-programmed value is 3.

Parameter	Type	Description
		• LARA-L6 / LARA-R6001-01B / LARA-R6401-01B / LARA-R6801-01B - The allowed range is 0-6, where 0 means mute, 1 means -30 dB, 6 means 0 dB and the step size is 6 dB. The default and factory-programmed value is 4.

23.1.4 Notes

- If an incorrect number of parameters is provided or the parameter value is out of range, then the error result code "+CME ERROR: operation not supported" will be provided (if +CMEE is set to 2).
- The command affects only the speech volume during the call. Other players volume and tone generator volume are not affected.

LARA-L6 / LARA-R6

- The factory-programmed value can be restored by means of AT+CLVL= command (with no parameters).

23.2 Mute control +CMUT

+CMUT						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

23.2.1 Description

Configures the uplink voice muting during all the voice calls.

23.2.2 Syntax

Type	Syntax	Response	Example
Set	AT+CMUT=<n>	OK	AT+CMUT=0 OK
Read	AT+CMUT?	+CMUT: <n> OK	+CMUT: 0 OK
Test	AT+CMUT=?	+CMUT: (list of supported <n>s) OK	+CMUT: (0-1) OK

23.2.3 Defined values

Parameter	Type	Description
<n>	Number	• 0 (default value): mute off • 1: mute on

23.2.4 Notes

- If an incorrect number of parameters is provided or the parameter value is out of range, then the error result code "+CME ERROR: operation not supported" will be provided (if +CMEE is set to 2).

23.3 Ringer sound level +CRSL

+CRSL						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001-01B LARA-R6401-01B LARA-R6801-01B					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	NVM	No	-	+CME Error

23.3.1 Description

Selects the sound level for the ringer of an incoming call and for the player of pre-defined tones (see the +UPAR command).

23.3.2 Syntax

Type	Syntax	Response	Example
Set	AT+CRSL=[<level>]	OK	AT+CRSL=2 OK
Read	AT+CRSL?	+CRSL: <level> OK	+CRSL: 2 OK
Test	AT+CRSL=?	+CRSL: (list of supported <level>s) OK	+CRSL: (0-5) OK

23.3.3 Defined values

Parameter	Type	Description
<level>	Number	Ringer sound level. Allowed values: • LARA-L6 / LARA-R6 - The allowed range is 0-6, where 0 means mute, 1 means -30 dB, 6 means 0 dB and the step size is 6 dB. The default value and factory-programmed is 5.

23.3.4 Notes

- If an incorrect number of parameters is provided or the parameter value is out of range, then the error result code "+CME ERROR: operation not supported" will be provided (if +CMEE is set to 2).

23.4 Audio path mode setting +USPM

+USPM						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

23.4.1 Description

Sets the audio path mode enabling the different audio paths (audio uplink and downlink) of the module for different use cases. For example, the uplink path can be switched from the handset microphone to the headset microphone and the downlink path can be switched from the handset earpiece to the loudspeaker.

Besides the routing via analog or digital interface, the uplink and downlink paths are characterized by a set of audio parameters (gains, digital filters, echo canceller parameters). The uplink paths and downlink paths can be configured through the set of commands described in the Audio parameters tuning section.

The command is used to choose the uplink and downlink path used.

Only one single uplink path and one single downlink path can be used. Parallel paths are not managed.

23.4.2 Syntax

Type	Syntax	Response	Example
Set	AT+USPM=<audio_path>,<profile_type>	OK	AT+USPM=1,1 OK
Read	AT+USPM?	+USPM: <audio_path>,<profile_type> OK	+USPM: 0,0 OK
Test	AT+USPM=?	+USPM: (list of supported <audio_path>s),(list of supported <profile_type>s) OK	+USPM: (0-1),(0-4) OK

23.4.3 Defined values

Parameter	Type	Description
<audio_path>	Number	Specifies the audio path. See Notes for allowed and default values.
<profile_type>	Number	Specifies the profile for selected audio path. See Notes for allowed and default values.

23.4.4 Notes

LARA-L6 / LARA-R6

- Allowed and default values for parameters:
  - **<audio_path>**:
    - 1 (factory-programmed value): digital audio path
  - **<profile_type>**:
    - 0 (factory-programmed value): headset profile
    - 1: hands-free profile
    - 2: flat profile
    - 3: alarm panel profile
- When audio path mode is changed, the following configuration is applied:
  - configuration for I^2S (if using digital audio path see +UI2S for details)
- Flat profile (<profile_type>=2) has all audio path processing blocks disabled.
- Alarm panel profile (<profile_type>=3) is specifically intended for alarm panel use case e.g. strong acoustic mic/speaker coupling.
- The factory-programmed values can be restored by means of AT+USPM= command (with no parameters).

23.5 I^2S digital interface mode +UI2S

+UI2S						
Modules	LARA-L6004 LARA-L6404 LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

23.5.1 Description

Configures the I^2S digital audio interface to be used when digital audio paths are chosen (see the +USPM AT command description, <main_uplink>=I2S RX, <main_downlink>=I2S TX).

The I²S TX and RX data lines can be connected to two different access points of the uplink and downlink audio path (see the module audio block diagram in the Audio parameters tuning introduction).

The digital audio interface is I2S.

The I²S interface can be configured either in Master or in Slave mode through the <I2S_Master_Slave> parameter:

- In Master mode, the module generates the WA (word alignment) and CLK (clock) signals
- In Slave mode, the remote device must generate the WA (word alignment) and CLK (clock) signals

The sample rate of transmitted and received words is configurable through the <I2S_sample_rate> parameter.

Furthermore synchronization between data, clock and word alignment lines can be configured in different modes through the <I2S_mode> parameter:

- PCM modes (short synchronization signal)
- Normal I²S modes (long synchronization signal)

For details about I²S technical features in PCM and Normal I²S mode, see the system integration manual for the corresponding module.

The physical I²S port is composed of 4 pins. The signals are:

- **I2S_WA** (Word Alignment): output signal in Master mode, input signal in Slave mode; it synchronizes the data word; the WA cycle frequency is <I2S_sample_rate>, while WA cycle timing depends on the mode (see PCM modes, PCM modes timing diagrams, Normal I²S modes and Normal I²S modes timing diagrams)
- **I2S_TXD** (Transmitted Data): output signal; sequence of data bits, most significant bit transmitted first. Each word is 16 bits long, in 2's complement format with the configured I²S sample rate
- **I2S_CLK** (Clock): output signal in Master mode, input signal in Slave mode; it synchronizes the bits composing the data words; CLK frequency and edge synchronization with TXD/RXD signals depends on <I2S_mode> and the configured I²S sample rate. See PCM modes and Normal I²S modes
- **I2S_RXD** (Received Data): input signal; sequence of data bits, most significant bit read first. Each word is 16 bits long, in 2's complement format with the configured I²S sample rate

☞ The I²S pins are mapped in the following way:

Product	I2S_WA	I2S_TXD	I2S_CLK	I2S_RXD
	34	35	36	37

Table 50: I²S pins mapping on u-blox cellular modules

23.5.2 Syntax

Type	Syntax	Response	Example
Set	AT+UI2S=<I2S_mode>,<I2S_port>,<I2S_clk_wa>[,<I2S_sample_rate>[,<I2S_Master_Slave>]]	OK	AT+UI2S=10,1,1,5,1 OK
Read	AT+UI2S?	+UI2S: <I2S_mode>,<I2S_port>,<I2S_clk_wa>,<I2S_sample_rate>,<I2S_Master_Slave> [...] (for all the I²S interfaces) OK	+UI2S: 4,1,1,4,1 +UI2S: 10,3,1,5,0 OK
Test	AT+UI2S=?	+UI2S: (list of supported <I2S_mode>s),(list of supported <I2S_port>s),(list of supported <I2S_clk_wa>)[,(list of supported <I2S_sample_rate>),(list of supported <I2S_Master_Slave>)]	+UI2S: (0-13),(1,3),(0-1),(0-8),(0-1) OK

Type	Syntax	Response	Example
		OK	

23.5.3 Defined values

Parameter	Type	Description
<I2S_mode>	Number	Specifies I^2S configurable modes: PCM modes (short synchronization signal) and normal I^2S modes (long synchronization signal) are available. For more details, see: • PCM modes, Normal I^2S modes for modes available on each connection point and for their settings • PCM modes timing diagrams and Normal I^2S modes timing diagrams for the signals timing Allowed values: • LARA-L6 / LARA-R6 - 14, 30
<I2S_port>	Number	Specifies the I^2S physical port (I2S or I2S1) and its connection in the internal audio processing path (I2Sx or I2Sy connection points) when the digital path is selected as audio path (see the +USPM AT command). I^2S connections points positions are showed in the audio paths block diagram in Audio parameters tuning introduction. The allowed values are: • 1: I2S is connected to I2Sx connection point • 2: I2S is connected to I2Sy connection point • 3: I2S1 is connected to I2Sx connection point • 4: I2S1 is connected to I2Sy connection point Allowed values: • LARA-L6 / LARA-R6 - 1
<I2S_clk_wa>	Number	Specifies when CLK and WA signals are active. The allowed values are: • 0: dynamic mode. CLK and WA outputs are active and only running when the audio path is active (audio samples are read on RX line and written on TX line). After the audio path is disabled (i.e. a call is hang up), CLK and WA are disabled too • 1: continuous mode. CLK and WA outputs are always active and running if the +USPM current setting implies the <I2S_port> usage, even when the module is idle and the audio path is disabled (no audio data written on TX line, no audio data read on RX line). This implies the module cannot enter power saving mode Allowed values: • LARA-L6 / LARA-R6 - 0
<I2S_sample_rate>	Number	I^2S sample rate (frame rate). This is the frequency of the word set and received by the I^2S interface. The words are synchronized by the WA (word alignment) signal. Thus the <I2S_sample_rate> parameter matches with the frequency of WA signal. The allowed values are: • 0: 8 kHz sampling rate • 1: 11.025 kHz sampling rate • 2: 12 kHz sampling rate • 3: 16 kHz sampling rate • 4: 22.05 kHz sampling rate • 5: 24 kHz sampling rate • 6: 32 kHz sampling rate • 7: 44.1 kHz sampling rate • 8: 48 kHz sampling rate • 9: 96 kHz sampling rate • 10: 192 kHz sampling rate Allowed values: • LARA-L6004-00B / LARA-R6001-00B / LARA-R6401-00B / LARA-R6801-00B - 3 • LARA-L6004-01B / LARA-L6404 / LARA-R6001-01B / LARA-R6401-01B / LARA-R6801-01B - 3, 8
<I2S_Master_Slave>	Number	Indicates the Master/Slave mode of I^2S interface. The allowed values are: • 0: master mode. CLK, WA, TX are output signals generated by the module. RX is an input signal • 1: slave mode. Only TX signal is an output signal generated by the module. CLK, WA, RX are input signals and must be generated by the remote device.

Parameter	Type	Description
		Allowed values: • LARA-L6004-01B / LARA-L6404 / LARA-R6001-01B / LARA-R6401-01B / LARA-R6801-01B - 0, 1 • LARA-L6004-00B / LARA-R6001-00B / LARA-R6401-00B / LARA-R6801-00B - 0

23.5.4 Notes

LARA-L6 / LARA-R6

- Table 51 describes the allowed combinations of <I2S_mode> and <I2S_port>

	PCM modes	Normal I^2S modes
I2Sx connection of I2S	30	14
I2Sy connection of I2S	Not supported	Not supported
I2Sx connection of I2S1	Not supported	Not supported
I2Sy connection of I2S1	Not supported	Not supported

Table 51: I^2S modes

- The factory-programmed values are as follows:
  - <I2S_mode>=14, <I2S_port>=1, <I2S_clk_wa>=0, <I2S_sample_rate>=3, <I2S_master_slave>=0
- The factory-programmed values can be restored by means of AT+UI2S= command (with no parameters).

LARA-L6004-00B / LARA-R6001-00B / LARA-R6401-00B / LARA-R6801-00B

- If an incorrect number of parameters is provided or the parameter value is out of range, the error result code "+CME ERROR: operation not allowed" will be provided if +CMEE is set to 2:
  - The command can be used run-time during voice call.
  - The command cannot be used run-time during audio loop (see +UPAR AT command).
- I2S slave mode is not supported.

LARA-L6004-01B / LARA-L6404 / LARA-R6001-01B / LARA-R6401-01B / LARA-R6801-01B

- If an incorrect number of parameters is provided or the parameter value is out of range, the error result code "+CME ERROR: operation not allowed" will be provided if +CMEE is set to 2:
  - The command cannot be used run-time during voice call.
  - The command cannot be used run-time during audio loop (see +UPAR AT command).
- When the slave mode has to be applied also the corresponding audio config file (i.e. acdb_slave.mbn) needs to be used. See the +UDWNFILE AT command to download this audio config file.
- Downloading on the module an acdb (master or slave version) will change coherently the <I2S_master_slave> parameter value for +UI2S AT command.
- In PCM slave mode i.e. <I2S_mode>=30, <I2S_Master_Slave>=1 the I2S_RX and I2S_WA change on I2S_CLK rising front, I2S_TX changes on I2S_CLK falling front.


Mode	Master/Slave	CLK EDGE for TX	CLK EDGE for RX	WA pulse length	CLK frequency	WA frequency
30	SLAVE	FALLING	RISING	1 clk	16*<I2S_sample_rate>	<I2S_sample_rate>

23.5.5 PCM modes (short synchronization signal)


Mode	CLK EDGE for TX	CLK EDGE for RX	WA pulse length	CLK frequency	WA frequency
0	RISING	FALLING	2 clks	18*<I2S_sample_rate>	<I2S_sample_rate>
1	RISING	FALLING	1 clk	17*<I2S_sample_rate>	<I2S_sample_rate>
20	RISING	FALLING	2 clks	32*<I2S_sample_rate>	<I2S_sample_rate>
21	RISING	FALLING	1 clk	32*<I2S_sample_rate>	<I2S_sample_rate>
22	FALLING	RISING	2 clks	32*<I2S_sample_rate>	<I2S_sample_rate>
23	FALLING	RISING	1 clk	32*<I2S_sample_rate>	<I2S_sample_rate>
30	RISING	FALLING	1 clk	16*<I2S_sample_rate>	<I2S_sample_rate>

23.5.6 PCM modes timing diagrams


WA (PCM mode 0): pulse is 2 bits wide; 18 clocks / WA cycle

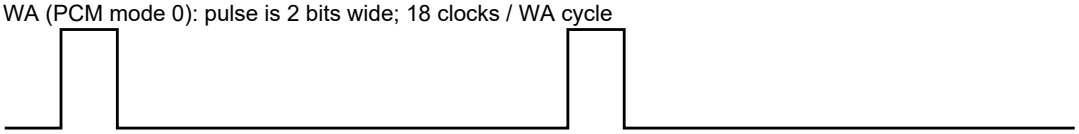


TXD (PCM mode 0): After synchronization bit (0), MSB is transmitted twice and Word is aligned on WA falling edge




WA (PCM mode 1): pulse is 1 bits wide; 17 clocks / WA cycle




TXD (PCM mode 1): After synchronization bit (0), word is aligned on WA falling edge




WA (PCM mode 20): pulse is 2 bits wide; 32 clocks / WA cycle

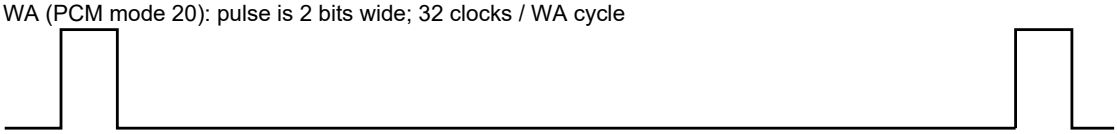


TXD (PCM mode 20): After synchronization bit (0), word is aligned on WA falling edge




WA (PCM mode 21): pulse is 1 bits wide; 32 clocks / WA cycle




TXD (PCM mode 21): After synchronization bit (0), word is aligned on WA falling edge



WA(PCM mode 30):pulse is 1 bit wide; 16 clocks / WA cycle

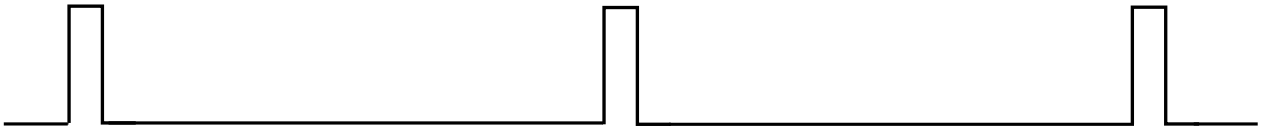


TXD (PCM mode 30): MSB is sent immediately after previous word's LSB

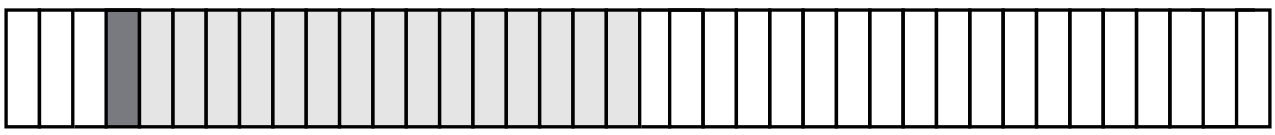

A single transmitted word is marked in grey. MSB is marked darker.

Since RXD bits are read on the falling edge of CLK signal, the RXD word slot starts half bit delayed respect TXD word slot.

Relation between WA and CLK edge for PCM mode is:

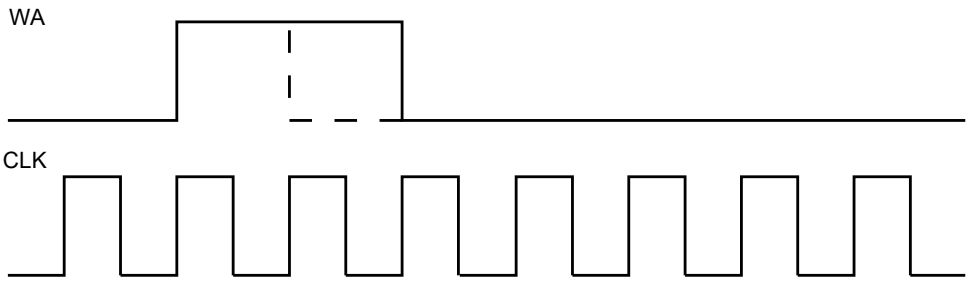


23.5.7 Normal I²S modes (long synchronization signal)

- LARA-L6 / LARA-R6


Mode	CLK edge for TX	CLK edge for RX	MSB delay	TX channel	RX channel	CLK frequency	WA frequency
2	FALLING	RISING	1 bit	WA LOW	WA LOW	32*<I2S_sample_rate>	<I2S_sample_rate>
3	RISING	FALLING	1 bit	WA LOW	WA LOW	32*<I2S_sample_rate>	<I2S_sample_rate>
4	FALLING	RISING	0 bit	WA LOW	WA LOW	32*<I2S_sample_rate>	<I2S_sample_rate>
5	RISING	FALLING	0 bit	WA LOW	WA LOW	32*<I2S_sample_rate>	<I2S_sample_rate>
6	FALLING	RISING	1 bit	WA HIGH	WA HIGH	32*<I2S_sample_rate>	<I2S_sample_rate>
7	RISING	FALLING	1 bit	WA HIGH	WA HIGH	32*<I2S_sample_rate>	<I2S_sample_rate>
8	FALLING	RISING	0 bit	WA HIGH	WA HIGH	32*<I2S_sample_rate>	<I2S_sample_rate>
9	RISING	FALLING	0 bit	WA HIGH	WA HIGH	32*<I2S_sample_rate>	<I2S_sample_rate>
10	FALLING	RISING	1 bit	WA HIGH & LOW	WA HIGH	32*<I2S_sample_rate>	<I2S_sample_rate>
11	RISING	FALLING	1 bit	WA HIGH & LOW	WA HIGH	32*<I2S_sample_rate>	<I2S_sample_rate>
12	FALLING	RISING	0 bit	WA HIGH & LOW	WA HIGH	32*<I2S_sample_rate>	<I2S_sample_rate>
13	RISING	FALLING	0 bit	WA HIGH & LOW	WA HIGH	32*<I2S_sample_rate>	<I2S_sample_rate>
14	FALLING	RISING	1 bit	WA HIGH & LOW	WA LOW	32*<I2S_sample_rate>	<I2S_sample_rate>

23.5.8 Normal I²S modes timing diagrams

- LARA-L6 / LARA-R6
  - o A single transmitted word is marked in grey. MSB is marked darker.

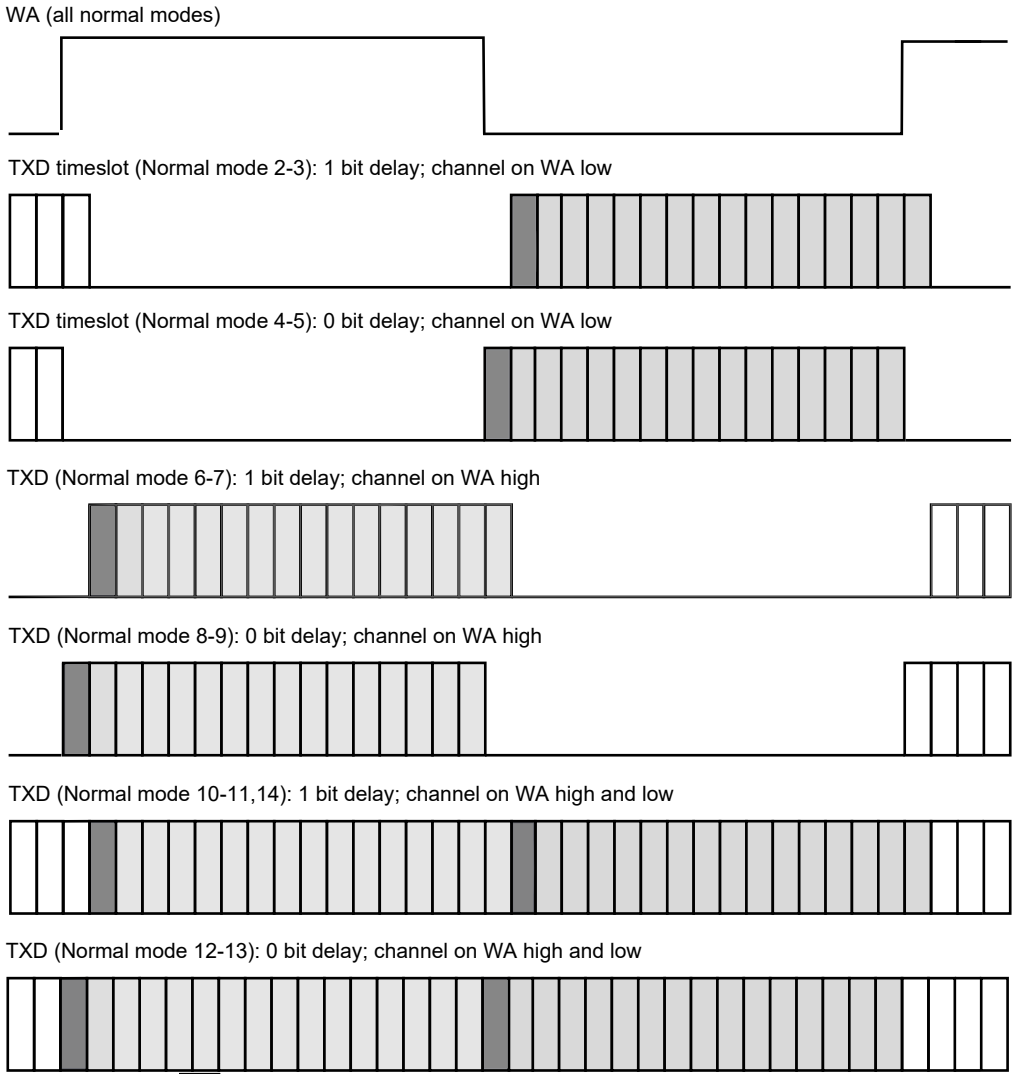

- Since RXD bits are read on the opposite edge of CLK signal respect TXD bits, the RXD word slot starts half bit delayed respect TXD word slot.
- Relation between WA and CLK edge for Normal I^2S depends on mode:

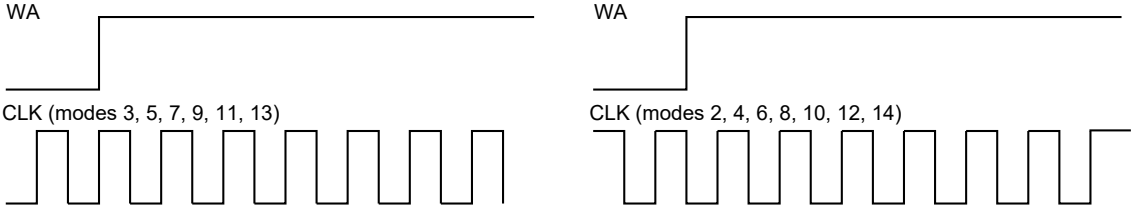

23.6 Play audio resource +UPAR

+UPAR						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	-	+CME Error

23.6.1 Description

Starts the playback of the pre-defined tone of the selected audio resource.

23.6.2 Syntax

Type	Syntax	Response	Example
Set	AT+UPAR=<audio_resource>,<tone_id>,<nof_repeats>	OK	AT+UPAR=0,1,0 OK
Test	AT+UPAR=?	+UPAR: (list of supported <audio_resource>s),(list of supported <tone_id>s),(list of supported <nof_repeats>s) OK	+UPAR: (0-2),(0-66),(0-255) OK

23.6.3 Defined values

Parameter	Type	Description
<audio_resource>	Number	Specifies the audio resource. Allowed values: • 0: player of pre-defined tones • 1: MIDI player • 2: audio loop for test purposes Allowed values: • LARA-L6 / LARA-R6 - 2. <audio_resource>=2 is used to generate an audio loop between the uplink and downlink when not in a call.
<tone_id>	Number	Specifies the pre-defined tone id to be played; the supported values depend by <audio_resource> values according to the Notes
<nof_repeats>	Number	Specifies the number of repeats. Allowed values: • 0: infinite loop • n: n repeats
<error>	Number	The "+CME ERROR: operation not supported" error result code will be provided in these cases (if +CMEE is set to 2): • An incorrect number of parameters is provided • The parameter values are out of range

23.6.4 Notes

LARA-L6 / LARA-R6

- During a speech call the audio loop test is not supported.
- During the audio loop test the speech profile change +USPM is not supported.
- During the audio loop test if MO/MT call is performed then the loop is automatically closed when the call is connected.

23.7 Stop audio resource +USAR

+USAR						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	-	+CME Error

23.7.1 Description

Stops the playback of the selected audio resource.

23.7.2 Syntax

Type	Syntax	Response	Example
Set	AT+USAR=<audio_resource>	OK	AT+USAR=0 OK
Test	AT+USAR=?	+USAR: (list of supported <audio_resource>s) OK	+USAR: (0-2) OK

23.7.3 Defined values

Parameter	Type	Description
<audio_resource>	Number	Specifies the audio resource. Allowed values: • 0: player of pre-defined tones • 1: MIDI player • 2: audio loop for test purposes. Use this command to stop an audio loop between uplink and downlink current path (+USPM). Allowed values: • LARA-L6 / LARA-R6 - 2
<error>	Number	The "+CME ERROR: operation not supported" error result code will be provided in these cases (if +CMEE is set to 2): • An incorrect number of parameters is provided • The parameter values are out of range

23.7.4 Notes

- During fast start / stop test sequence a queue overflow might occur, in this case an error result code (+CME ERROR: memory full) is returned.

LARA-L6 / LARA-R6

- The command AT+USAR=2 stops the audio loop test started by the +UPAR AT command.
- The command AT+USAR=2 is not supported when no audio resource is playing.

23.8 Tone generator +UTGN

+UTGN						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

23.8.1 Description

Starts a tone or a DTMF tone on the module tone generator. The frequency or the DTMF character, duration and volume of the tone must be set.

23.8.2 Syntax

Type	Syntax	Response	Example
Set	AT+UTGN=<freq_or_tone>,<duration>,<volume>[,<UplinkSending>]	OK	AT+UTGN=1000,1000,100,1 OK AT+UTGN="A",1000,100,1 OK
Test	AT+UTGN=?	+UTGN: (list of supported <freq_or_tone>s),(list of supported <duration>s),(list of supported <volume>s)[,(list of supported <UplinkSending>s)] OK	+UTGN: (300-3400),(50-1360),(1-100),(0-2) OK +UTGN: (300-3400,"0"-"9","A"-"D","*","#"),(50-1360),(1-100),(0-1) OK
URC		+UUTGN: <state>	+UUTGN: 0

23.8.3 Defined values

Parameter	Type	Description
<freq_or_tone>	Number or String	If number, it represents the frequency of the sinus waveform in Hz for the tone generator. If string (where supported), it represents the DTMF tone to play: • LARA-L6 / LARA-R6 - If number the range goes from 300 to 3400. If string the valid tones are '0'-'9','A'-'D','*' and '#', maximum length string is 1 character.
<duration>	Number	Duration of the tone in milliseconds: • LARA-L6 / LARA-R6 - The range goes from 50 to 1360.
<volume>	Number	Volume for the tone generator: • LARA-L6 / LARA-R6 - The range goes from 0 to 100, where 0 means muted, 1 means -40 dB and 100 is 0dB.
<UplinkSending>	Number	Enables/disables the connection of the tone generator to uplink and/or downlink path: • 0 (default value): the tone is sent only on downlink path • 1: the tone is sent only on uplink path • 2: the tone is sent both on downlink and uplink path Allowed values: • LARA-L6 / LARA-R6 - 0, 1
<error>	Number	These error result codes will be provided if +CMEE is set to 2: • LARA-L6 / LARA-R6 - "+CME ERROR: operation not allowed": in case the tone generation starts in uplink while the call is not yet established
<state>	Number	The supported tone generator state is: • 0: tone generator is stopped

23.8.4 Notes

- The tone playing can be stopped by means of the set command: AT+UTGN=0,0,0. If no tone is playing an error result code (+CME ERROR: operation not supported) is returned.
- During fast start / stop test sequence a queue overflow might occur, in this case an error result code (+CME ERROR: memory full) is returned.

LARA-L6 / LARA-R6

- The +UUTGN URC is generated when the tone duration timer expires.
- If the "silent mode" is enabled (+CALM: 1) the +UTGN command is fully supported.
- If the "silent mode" is disabled (+CALM: 0), the +UTGN is not supported while SMS alert tones or waiting tones or ringer on MT call are playing. In this case an error result code (+CME ERROR: operation not supported) is returned.
- The command AT+UTGN=0,0,0 stops the tone generated by +UTGN AT command. In this case the +UUTGN URC is not generated. If no tone is playing no error result code is returned.

- In case the +UTGN AT command is issued before the stop of a previous generated tone i.e. before +UUTGN URC generation, current tone generation will stop previous generated tone; no error result code is sent in this case.
- During a speech call the pre-defined tone is not mixed with speech; the speech is muted while the tone is playing.
- The ringer on an incoming call, the alarm tones and service tones (e.g.: Call Waiting tone) have the priority on the tone generator (+UTGN). Since they are never muted and must be played, the tone generator (+UTGN) is stopped and +UUTGN URC will not be generated.
- If waiting tones and SMS tones are playing +UTGN AT command cannot be sent. In this case an error result code (+CME ERROR: operation not supported) is returned.

23.9 SMS alert sound mode (Message Sound Muting) +UMSM

+UMSM						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

23.9.1 Description

Mutes the signalling sound of SMS on the MT.

23.9.2 Syntax

Type	Syntax	Response	Example
Set	AT+UMSM=<mode>	OK	AT+UMSM=0 OK
Read	AT+UMSM?	+UMSM: <mode> OK	+UMSM: 0 OK
Test	AT+UMSM=?	+UMSM: (list of supported <mode>s) OK	+UMSM: (0-1) OK

23.9.3 Defined values

Parameter	Type	Description
<mode>	Number	• 0 (default value): normal mode (the signalling sound of SMS on the MT is not muted) • 1: silent mode (the signalling sound of SMS on the MT is muted)
<error>	Number	If an incorrect number of parameters is provided or the parameter value is out of range the error result code "+CME ERROR: operation not supported" will be provided if +CMEE is set to 2.

23.10 Master clock control +UMCLK

+UMCLK						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

23.10.1 Description

Enables or disables the master clock output signal. This is mainly designed to feed the master clock input of an external audio codec. For more details see the corresponding module system integration manual.

The available output pin configurations are:
- Disabled, set as tristate
- Pin output low
- Generate 13 MHz clock
- Generate 26 MHz clock

Depending on the <enabling_mode> parameter value, the configuration can be applied as soon as the command is issued, or as soon as there is an audio activity (i.e. a digital audio interface is enabled).

23.10.2 Syntax

Type	Syntax	Response	Example
Set	AT+UMCLK=[<mclk_mode>[,<enabling_mode>]]	OK	AT+UMCLK=1,1 OK
Read	AT+UMCLK?	+UMCLK: <mclk_mode>,<enabling_mode> OK	+UMCLK: 1,1 OK
Test	AT+UMCLK=?	+UMCLK: (list of supported <mclk_mode>s),(list of supported <enabling_mode>s) OK	+UMCLK: (0-3),(0-1) OK

23.10.3 Defined values

Parameter	Type	Description
<mclk_mode>	Number	CODEC_CLK pin setting: • 0: disabled pin; 3-state with pull down resistor • 1: pin output steady low • 2: codec master clock at 13 MHz • 3: codec master clock at 26 MHz Allowed values: • LARA-L6 / LARA-R6 - 1 (default and factory-programmed value), 2
<enabling_mode>	Number	Specifies when the <mclk_mode> is enabled on CODEC_CLK pin • 0 (default and factory-programmed value): "Audio dependent" mode <mclk_mode> is applied to the CODEC_CLK pin only when the audio path is active (audio samples are read on the I2S_RX line and written on the I2S_TX line). When the audio path is disabled (i.e. at call end), then the CODEC_CLK pin is disabled too (3-state with pull-down resistor) • 1: "Continuous" mode <mclk_mode> is applied to the CODEC_CLK pin as soon as the AT command is issued, even when the module is in idle and the audio path is disabled (no audio data written on I2S_TX line, no audio data read on I2S_RX line) When <mclk_mode>=0 (pin disabled) and <enabling_mode>=0 ("Audio dependent" mode), the CODEC_CLK pin is disabled both when audio path is enabled or disabled. In this case "Audio dependent" mode matches with "Continuous" mode (the command AT+UMCLK=0,0 and AT+UMCLK=0,1 are equivalent).

23.10.4 Notes

- If <mclk_mode>= 1 ("Continuous" mode) the actual clock generation occurs within 10 ms of the command issuing.
- When the power saving is enabled (i.e. AT+UPSV=1) and the module is in the power saving state, the master clock is disabled even if it is set to "Continuous" mode (+UMCLK=<mclk_mode>,1).

- The command setting is stored in the NVM; to restore the factory-programmed setting issue the AT +UMCLK= (with no parameters).
- If the external audio codec (Maxim MAX9860) is enabled by +UEXTDCONF: 0,1 (i.e.: <device_id>=0 and <configuration_enable>=1) this forces the setting codec master clock at 13 MHz, in "Audio dependent" mode (i.e. +UMCLK=2,0) at boot time. Thus current setting of +UMCLK in NVM will be overwritten at the module boot time. In this case, disable the master clock at 13 MHz, the AT+UMCLK=0 command must be explicitly issued after every startup.

LARA-L6 / LARA-R6001 / LARA-R6401 / LARA-R6801

- The clock supported by the platform is 12.288 MHz.
- The command cannot be issued when the call is ongoing, otherwise the "+CME ERROR: operation not allowed" error result code is returned.
- <enabling_mode> = 1 is not supported.

23.11 External device configuration +UEXTDCONF

+UEXTDCONF						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

23.11.1 Description

Configures an external device, e.g. an audio codec, at the boot time. The setting (on / off) and the configuration string for each supported device is stored in NVM and applied at each module power-on.

The information text response to the read command lists all the configured devices in separated lines.

The only supported external device is the Maxim MAX9860 audio codec. See Maxim datasheet [225].

23.11.2 Syntax

Type	Syntax	Response	Example
Set	AT+UEXTDCONF=<device_id>[,<configuration_enable>[,<hex_data>]]	OK	AT+UEXTDCONF=0,1,"0000000010 1E3F0400000633002500000008A" OK
Read	AT+UEXTDCONF?	+UEXTDCONF: <device_0>,<configuration_enable0>,<hex_data0> [[...] +UEXTDCONF: <device_N>,<configuration_enableN>,hex_dataN>] OK	+UEXTDCONF: 0,0,"0000000010 1E3F0400000633005000000008A" +UEXTDCONF: 1,0,"0000000010 1E3F0400000644002500000008A" +UEXTDCONF: 2,1,"0000000010 1E3F0400000655006A0000008A" OK
Test	AT+UEXTDCONF=?	+UEXTDCONF: (list of supported <device_id>s),(list of supported <configuration_enable>s),"hex data" OK	+UEXTDCONF: (0),(0,2),"hex data" OK

23.11.3 Defined values

Parameter	Type	Description
<device_id>	Number	Device identifier. Allowed value: • 0 (factory-programmed value): Maxim MAX9860 audio codec, connected via I^2C.

Parameter	Type	Description
		When enabled, at every start-up the module sets the external codec master clock at audio dependent 13 MHz (corresponding to the command AT+UMCLK=2,0) and configures the external codec via I²C, see Notes below. Codec Maxim MAX9860 is available on u-blox evaluation boards. ☞ Setting AT+UEXTDCONF=0,1 forces at every start-up +UMCLK: 2,0 in NVM. To undo / remove this setting, explicitly issue the AT+UMCLK=0 command after every start-up with +UEXTDCONF: 0,1. Setting back by means of the command AT+UEXTDCONF=0,0 , the master clock mode (+UMCLK) is not automatically forced back to 0. To fully disable the codec use this AT command sequence: • AT+UMCLK=0,0 • AT+UEXTDCONF=0,0 • AT+CFUN=16
<configuration_enable>	Number	Enables/disables the autoconfiguration of the specified external device: • 0: disabled • 1: enabled with enabling the master clock • 2: enabled without enabling/disabling the master clock Allowed values: • LARA-L6 / LARA-R6 - 0 (default and factory-programmed value), 1, 2
<hex_data>	String	External device configuration expressed in bytes in hexadecimal format: • LARA-L6 - The default and factory-programmed <hex_data> value for <device_id>=0 is "0000000010A000303000183300500000008A". • LARA-R6 - The default and factory-programmed <hex_data> value for <device_id>=0 is "0000000010A000303000063300500000008A". For **<device_id>=0** (Maxim MAX9860 audio codec): the string must be composed of 18 bytes in hexadecimal format, the first being 0x00, otherwise an error result code ("+CME ERROR: operation not supported" if +CMEE is set to 2) will be provided. At every module's start-up the specified bytes sequence is sent, via I²C, for the external codec configuration. • The first byte (0x00) is the address of the first register of the codec to be written (address 0x00). • The following 17 bytes are the values to be written in the codec's register 0x00 to 0x10 (for the meaning of bytes and the writing in the codec's registers, see Maxim MAX9860 datasheet [225].
<error>	String	If an incorrect number of parameters is provided or the parameter values are out of range the error result code "+CME ERROR: operation not supported" will be provided if +CMEE is set to 2.

23.11.4 Notes

LARA-L6 / LARA-R6

- For more examples, see the LARA-R6 series audio application note [12].
- As the I²C bus is shared between all (internal and external) devices the channel is opened with the I²C bus mode that is specified using the +UI2CCFG AT command.
- Here below some remarks about possible command settings:

Command / Action	Meaning
AT+UEXTDCONF=0	o LARA-L6 - It resets parameters to factory-programmed settings: 0,0,"0000000010A000303000183300500000008A" o LARA-R6 - It resets parameters to factory-programmed settings: 0,0,"0000000010A000303000063300500000008A"
AT+UEXTDCONF=0,1	It enables the external device; current <hex_data> string in NVM is maintained.
AT+UEXTDCONF=0,0	It disables the external device; current <hex_data> string in NVM is maintained.

Command / Action	Meaning
AT+UEXTDCONF=0,2	It configures the external device but does not change the state of the master clock (+UMCLK value is not changed).

- AT+UEXTDCONF=0,1,"" is not supported; it returns +CME ERROR: operation not supported.
- When the <configuration_enable> parameter changes from 0 to 1, the external device is initialized immediately with current <hex_data> string and +UMCLK is set to 1. Other <configuration_enable> transitions do not force external device initialization and +UMCLK setting.
- AT+UMCLK=0 is not supported. To disable the master clock issue the command AT+UMCLK=1.

23.12 Speech codec information +USPEECHINFO

+USPEECHINFO						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

23.12.1 Description

Provides the speech codec related information and enables the corresponding +UUSPEECHINFO URC. The URC is issued each time the speech codec changes. The information text response to the read command and the issued URC, depend on the <mode> parameter configuration:

- **<mode>=0**: the information text response to the read command returns only the <mode> parameter configuration; URC reporting is disabled.
- **<mode>=1**: the information text response to the read command returns only the <mode> parameter configuration; the URC provides the codec information.
- **<mode>=2**: the information text response to the read command returns the <mode> parameter configuration and the codec information (in case of a VoLTE call only downlink information are returned); the URC provides the codec information on 2G/3G networks or the VoLTE downlink codec information.
- **<mode>=3**: the information text response to the read command returns the <mode> parameter configuration and the codec information; the URC provides the codec information on 2G/3G networks or the VoLTE downlink and uplink codec information.

The codec information can be read also after the call ends.

23.12.2 Syntax

Type	Syntax	Response	Example
Set	AT+USPEECHINFO=<mode>	OK	AT+USPEECHINFO=1 OK
Read	AT+USPEECHINFO?	**If <mode>=0 or 1:** +USPEECHINFO: <mode> OK	+USPEECHINFO: 1 OK
		If <mode>=2: +USPEECHINFO: <mode>,<codec>,<bitrate>	+USPEECHINFO: 2,21,14 OK
		If <mode>=3: +USPEECHINFO: <mode>,<DL_codec>,<DL_bitrate>,<UL_codec>,<UL_bitrate>	+USPEECHINFO: 3,21,14,21,13 OK
Test	AT+USPEECHINFO=?	+USPEECHINFO: (list of supported <mode>s) OK	+USPEECHINFO: (0,3) OK

Type	Syntax	Response	Example
URC		**If <mode>=1:** +UUSPEECHINFO: <codec>	+UUSPEECHINFO: 0
		If <mode>=2 or 3: +UUSPEECHINFO: <codec>, <bitrate>,<path>	+UUSPEECHINFO: 21,14,1

23.12.3 Defined values

Parameter	Type	Description
<mode>	Number	Configure speech codec reporting: • 0 (default value): disables the reporting of speech codec when it changes • 1: enables the speech codec reporting through the +UUSPECHINFO URC • 2: enables the speech codec reporting also for VoLTE calls (downlink only). The information text response to the read command returns also the codec information (for VoLTE calls only downlink). • 3: enables the speech codec reporting also for VoLTE calls (UL and DL). The information text response to the read command returns also the codec information. Allowed values: • LARA-L6 / LARA-R6001 / LARA-R6401 / LARA-R6801 - 0, 1, 2, 3
<codec>	String	Speech codec. Allowed values: • 0: codec Full Rate Adaptive Multi-Rate • 1: codec GSM Enhanced Full Rate (12.2 kb/s) • 2: codec GSM Full Rate (13.0 kb/s) • 3: codec Half Rate Adaptive Multi-Rate • 4: codec GSM Half Rate (5.6 kb/s) • 5: codec Full Rate Adaptive Multi-Rate Wideband • 9: codec UMTS Adaptive Multi-Rate • 10: codec UMTS Adaptive Multi-Rate 2 • 11: codec UMTS Adaptive Multi-Rate Wideband • 20: codec LTE AMR Narrowband • 21: codec LTE AMR Wideband
<bitrate>	Number	Codec bit rate. Allowed values: • 1: GSMHR, 5.60 kb/s • 2: GSMEFR, 12.20 kb/s • 3: GSMFR, 13.00 kb/s • 4: LTE AMR NB, 4.75 kb/s • 5: LTE AMR NB, 5.15 kb/s • 6: LTE AMR NB, 5.90 kb/s • 7: LTE AMR NB, 6.70 kb/s • 8: LTE AMR NB, 7.40 kb/s • 9: LTE AMR NB, 7.95 kb/s • 10: LTE AMR NB, 10.20 kb/s • 11: LTE AMR NB, 12.20 kb/s • 12: LTE AMR WB, 6.60 kb/s • 13: LTE AMR WB, 8.85 kb/s • 14: LTE AMR WB, 12.65 kb/s • 15: LTE AMR WB, 14.25 kb/s • 16: LTE AMR WB, 15.85 kb/s • 17: LTE AMR WB, 18.25 kb/s • 18: LTE AMR WB, 19.85 kb/s • 19: LTE AMR WB, 23.05 kb/s • 20: LTE AMR WB, 23.85 kb/s • 255: codec bit rate unknown
<DL_codec>	Number	Speech codec on downlink path. For the allowed values, see <codec>.
<DL_bitrate>	Number	Codec bit rate on downlink path. For the allowed values, see <bitrate>.
<UL_codec>	Number	Speech codec on uplink path. For the allowed values, see <codec>.

Parameter	Type	Description
<UL_bitrate>	Number	Codec bit rate on uplink path. For the allowed values, see <bitrate>.
<path>	Number	Speech codec path. Allowed values: • 0: uplink • 1: downlink

23.12.4 Notes

LARA-L6 / LARA-R6

- LTE codec information for uplink path is not available when using <mode>= 3.
- LTE codec bit rates are not available (<bitrate> is always 255: codec bit rate unknown).
- Indication for <codec>=3: the Half Rate Adaptive Multi-Rate codec is not supported and it is always reported as <codec>=0 (Full Rate Adaptive Multi-Rate codec).

23.13 Speech codec configuration +UDCONF=30

+UDCONF=30						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	NVM	No	-	+CME Error

23.13.1 Description

Configures the allowed speech codec to be presented to the network during a voice call setup.

The supported codec list may vary for each product. The <supported_codec_bitmap> must be checked before making any change.

The command does not affect VoLTE calls.

The new setting is saved in NVM and is immediately used.

u-blox cellular modules are certified according to all the capabilities and options stated in the Protocol Implementation Conformance Statement document (PICS) of the module. The PICS, according to 3GPP TS 51.010-2 [117], 3GPP TS 34.121-2 [118], 3GPP TS 36.521-2 [139] and 3GPP TS 36.523-2 [140], is a statement of the implemented and supported capabilities and options of a device. If the user changes the command settings during the certification process, the PICS of the application device integrating a u-blox cellular module must be changed accordingly.

23.13.2 Syntax

Type	Syntax	Response	Example
Set	AT+UDCONF=30,<codec_bitmap>	OK	AT+UDCONF=30,31 OK
Read	AT+UDCONF=30	+UDCONF: 30,<active_codec_bitmap>,<supported_codec_bitmap> OK	AT+UDCONF=30 +UDCONF: 30,31,255 OK

23.13.3 Defined values

Parameter	Type	Description
<codec_bitmap>	Number	Bitmask representing the list of available speech codecs to be presented to the network during voice call setup. The supported speech codecs and the corresponding bit in the bitmask are listed as follows: • 0: Full Rate Adaptive Multi-Rate (FR AMR)

Parameter	Type	Description
		• 1: GSM Enhanced Full Rate (12.2 kb/s) (GSM EFR) • 2: GSM Full Rate (13.0 kb/s) (GSM FR) • 3: Half Rate Adaptive Multi-Rate (HR AMR) • 4: GSM Half Rate (5.6 kb/s) (GSM HR) • 5: Full Rate Adaptive Multi-Rate WideBand (FR AMR WB) • 6: reserved • 7: reserved • 8: reserved • 9: UMTS Adaptive Multi-Rate (UMTS AMR) • 10: UMTS Adaptive Multi-Rate 2 (UMTS AMR 2) • 11: UMTS Adaptive Multi-Rate WideBand (UMTS AMR WB) GSM Full Rate must be always presented to the network, thus is always implicitly set. See Table 52 for the meaning of each bit and codec availability.
<active_codec_bitmap>	Number	The currently active codecs, in the format described for <codec_bitmap>
<supported_codec_bitmap>	Number	The list of currently supported codecs, in the format described for <codec_bitmap>

23.13.4 Notes

Bit	11	10	9	8	7	6	5	4	3	2	1	0
LARA-L6 / LARA-R6	•						•		•			•

Table 52: Speech codec bit availability on modules

- On product supporting 2G RAT the bit 2 (GSM Full Rate) in the <codec_bitmap> parameter is always implicitly set to 1.

LARA-L6 / LARA-R6001 / LARA-R6401 / LARA-R6801

- The factory-programmed value of <active_codec_bitmap> is 2089.
- A power cycle is required to apply the new configuration.

23.14 VoLTE speech codec configuration +USPEECHCFG

+USPEECHCFG						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

23.14.1 Description

Configures the allowed speech codec to be presented to the network during a VoLTE call setup. Also the AMR codec modes (i.e.: bit rate) can be selected: the call starts only if the network accepts at least one of the proposed modes.

If a codec mode is selected for MT calls and the network does not support that mode, any received call is discarded.

23.14.2 Syntax

Type	Syntax	Response	Example
Set	AT+USPEECHCFG=<codec>,[<enable_disable>,<mode_bitmask>]	OK	AT+USPEECHCFG=20,1,255 OK

Type	Syntax	Response	Example
Read	AT+USPEECHCFG?	+USPEECHCFG: 20,<enable_disable>,<mode_bitmask> +USPEECHCFG: 21,<enable_disable>,<mode_bitmask> OK	+USPEECHCFG: 20,1,255 +USPEECHCFG: 21,1,255 OK
Test	AT+USPEECHCFG=?	+USPEECHCFG: (list of supported <codec>s),(list of supported <enable_disable>s),(list of supported <mode_bitmask>s) OK	+USPEECHCFG: (20,21),(0-2),(0-511) OK

23.14.3 Defined values

Parameter	Type	Description
<codec>	Number	Select AMR codec narrowband (NB) or wideband (WB): • 20: AMR NB • 21: AMR WB Allowed values: • LARA-L6 / LARA-R6 - 21
<enable_disable>	Number	Enable or disable the codec, on MO calls only or both MO and MT: • 0: disable the codec • 1: enable the codec and select bit rate for MO calls • 2: enable the codec and select bit rate for MO and MT calls Allowed values: • LARA-L6 / LARA-R6 - 0 (default value), 2
<mode_bitmask>	Number	Bitmask representing the list of available speech codecs modes (i.e. bit rate) to be presented to the network during voice call setup. The supported speech codec modes and the corresponding bit in the bitmask are listed as follows: For AMR narrowband (the maximum supported value is 255, corresponding to all bit rates enabled): • 0: 4.75 kbit/s • 1: 5.15 kbit/s • 2: 5.90 kbit/s • 3: 6.70 kbit/s • 4: 7.40 kbit/s • 5: 7.95 kbit/s • 6: 10.20 kbit/s • 7: 12.20 kbit/s For AMR wideband (the maximum supported value is 511, corresponding to all bit rates enabled): • 0: 6.60 kbit/s • 1: 8.85 kbit/s • 2: 12.65 kbit/s • 3: 14.25 kbit/s • 4: 15.85 kbit/s • 5: 18.25 kbit/s • 6: 19.85 kbit/s • 7: 23.05 kbit/s • 8: 23.85 kbit/s When the <mode_bitmask> parameter is set to 0, it means that no specific bit rate is required, therefore the network can assign any bit rate.

23.14.4 Notes

LARA-L6 / LARA-R6

- The <enable_disable> factory-programmed value is 2 for all <codec>s.
- <mode_bitmask> configures codec modes for MO calls only.
- The <mode_bitmask> factory-programmed value is 0 for all <codec>s.
- The changes are effective after a module reboot.

23.15 Audio configuration +UAUDCFG

+UAUDCFG						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001-01B LARA-R6401-01B LARA-R6801-01B					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	NVM	No	-	+CME Error

23.15.1 Description

Configures the volume of local tones. The configured local tones are:

- Free tone
- Waiting tone
- SMS tone
- Busy tone
- RTP DTMF local tone

Reboot the module to make the configuration effective.

23.15.2 Syntax

Type	Syntax	Response	Example
Set	AT+UAUDCFG=<op_name>,<param1>,<param2>,<param3>,<param4>,<param5>	OK	AT+UAUDCFG="tones_volume",1024,1024,1024,1024,1024 OK
Read	AT+UAUDCFG=<op_name>	+UAUDCFG=<op_name>,<param1>,<param2>,<param3>,<param4>,<param5> OK	AT+UAUDCFG="tones_volume" +UAUDCFG="tones_volume",1024,1024,1024,1024,1024 OK
Test	AT+UAUDCFG=?	+UAUDCFG: (list of supported <op_name>s),(list of supported <param1>s),(list of supported <param2>s),(list of supported <param3>s),(list of supported <param4>s),(list of supported <param5>s) OK	+UAUDCFG: ("tones_volume"),(0-8192),(0-8192),(0-8192),(0-8192),(0-8192)

23.15.3 Defined values

Parameter	Type	Description
<op_name>	String	Allowed string: • "tones_volume": local tones volume configuration
<param1>	Number	Free tone volume. The range goes from 0 to 8192. The factory-programmed value is 4096.
<param2>	Number	Waiting tone volume. The range goes from 0 to 8192. The factory-programmed value is 4096.

Parameter	Type	Description
<param3>	Number	SMS tone volume. The range goes from 0 to 8192. The factory-programmed value is 4096.
<param4>	Number	Busy tone volume. The range goes from 0 to 8192. The factory-programmed value is 4096.
<param5>	Number	RTP DTMF local tone volume. The range goes from 0 to 8192. The factory-programmed value is 4096.

23.15.4 Notes

LARA-L6 / LARA-R6

- The factory-programmed values can be restored by means of AT+UAUDCFG= command (with no parameters).

24 Audio parameters tuning

24.1 Introduction

All audio-featured u-blox modules integrate a speech processing system, which is a set of voiceband filters required for transducer equalisation (external microphone and speaker), and a Speech Enhancement System (SES) dedicated to echo cancellation and noise reduction. The speech processing system can be tuned on different series modules as follows:

- LARA-L6 / LARA-R6 - An audio interface for tuning of the speech processing system is not supported. Tuning is performed by u-blox on customer request. The speech processing system includes the SES/EQ, SES, EQ, DRP and MDRP blocks as shown in Figure 13. The blocks configuration is saved in the audio profiles. There is a single path and 4 predefined profiles selectable by +USPM AT command, suitable for hands-free and headset devices (for more information, see the +USPM AT command). The factory flat profile disables all the above mentioned blocks.

24.1.1 LARA-L6 / LARA-R6

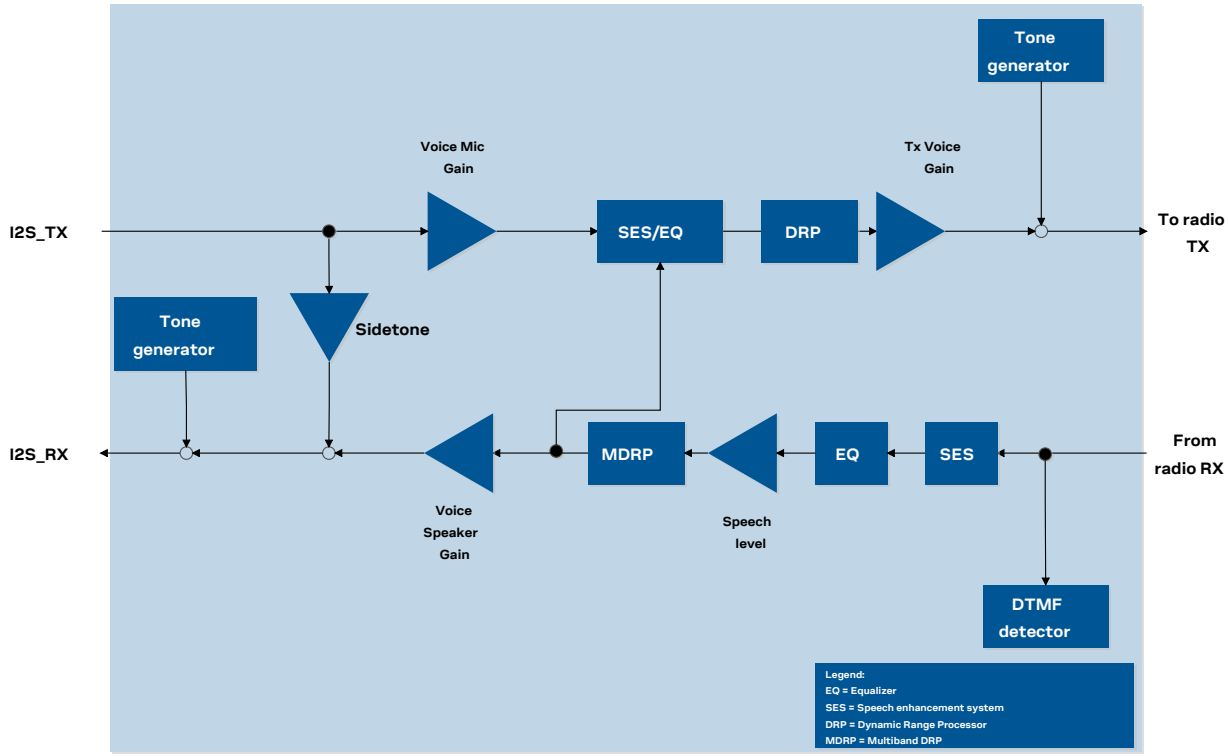


Figure 13: LARA-L6004 / LARA-R6001 / LARA-R6401 / LARA-R6801 speech processing system

- Profile selection, gains control, I2S interface configuration and other resources control is done by the following interfaces:
  - +USPM (select the profile)
  - +UI2S (set I2S audio digital interface)
  - +CLVL (downlink speech level control by **Speech level**)
  - +CMUT (uplink speech muting control by **Tx Voice Gain**)
  - +UTGN (tone generator module used to generate both tones and single DTMF digit in downlink or uplink)
  - +UPAR (to start audio loop test resource on the I2S digital audio serial interface)
  - +USAR (to stop audio loop test resource on the I2S digital audio serial interface)

- Specific audio tuning for customers (for more details, see LARA-R6 series audio interface application note [12]):
  - The audio parameters configuration for all the audio profiles stored in the audioconf file delivered with binary packaged can be downloaded by +UDWNFILE AT command. The downloaded audio parameters version as well as the validity of the stored file can be shown by +UTI AT command.
  - If specific tuning of speech processing blocks (SES/EQ, SES, EQ, DRP, and MDRP) or customization of +UI2S mode is needed, u-blox will support it and will release a new version of audioconf file which could be downloaded by customer using +UDWNFILE AT command with AUDIO_EXT tag.
  - EasyFlash updates will overwrite any audioconf file previously downloaded by +UDWNFILE AT command.
  - FOTA updates will overwrite any audioconf file previously downloaded by +UDWNFILE AT command.
- The module supports the following speech codecs for GSM:
  - Full Rate speech codec (8 kHz sampling rate)
  - Enhanced Full Rate speech codec (8 kHz sampling rate)
  - Half Rate speech codec (8 kHz sampling rate)
  - NB-AMR speech codec (8 kHz sampling rate)
  - WB-AMR speech codec (16 kHz sampling rate)
- The module supports the following speech codecs for UMTS and VoLTE:
  - NB-AMR speech codec (8 kHz sampling rate)
  - WB-AMR speech codec (16 kHz sampling rate)

24.1.2 Notes

☞ The tone generator can be routed toward downlink and/or uplink path by <UplinkSending> parameter of +UTGN command.

The audio parameters in the factory-programmed profile are stored in static NVM and the user cannot change them.

24.2 Audio parameters tuning +UTI

+UTI						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	Profile	No	-	-

24.2.1 Description

Labels with a version number the audioconf file downloaded on the module by +UDWNFILE AT command with AUDIO_EXT tag. Reads the current version number. For more details, see LARA-R6 series audio interface application note [12].

⚠ FOTA FW update restores the factory-programmed audioconf file (factory audio profiles) without restoring the label to factory-programmed value.

☞ LARA-L6004-00B / LARA-R6001-00B / LARA-R6401-00B / LARA-R6801-00B
The audio parameter tuning interface is not supported.

24.2.2 Syntax

Type	Syntax	Response	Example
Generic syntax			
Set	AT+UTI=<cmd_string>	OK	AT+UTI="uaud_save_data?"
			Parameters label: 1.16, Checksum: 1
			OK

Type	Syntax	Response	Example
Audio package storing			
Set	"AT+UTI=uaud_save_data:<label>"	OK	"AT+UTI=uaud_save_data:VERSION" OK
Audio package version reading			
Read	AT+UTI="uaud_save_data?"	OK	AT+UTI="uaud_save_data?" Parameters label: VERSION OK
Audio parameter reading			
Read	AT+UTI="acdb_read_mem=<param_offset>"	acdb_read_mem: location acdb RAM +<param_offset> has value PARAM_VALUE OK	AT+UTI="acdb_read_mem=297DC" acdb_read_mem: location 0x87CF97DC has value 0x00000333 OK
Audio parameter writing			
Set	AT+UTI="acdb_write_mem=<param_offset>,<param_value>"	acdb_write_mem: value <param_value> written in location acdb RAM +<param_offset> OK	AT+UTI="acdb_write_mem=297DC,00000333" acdb_write_mem: value 0x00000333 written in location 0x87CF97DC OK
Audio parameter saving in FS			
Set	AT+UTI="acdb_ram_save=<file_name>"	OK	AT+UTI="acdb_ram_save=audioconf_v1_10.bin" OK

24.2.3 Defined values

Parameter	Type	Description
<cmd_string>	String	Product specific UTI command string.

24.2.4 Notes

LARA-R6

- Supported SMM commands:

Command (<cmd_string>)	Description
uaud_save_data:<label>	Save audio configuration version number for audioconf file
uaud_save_data?	Display the current audio configuration version number and checksum result of downloaded audioconf file by +UDWNFILE AT command.
acdb_read_mem=<param_offset>	Read and display on AT terminal the parameter loaded in audio config (i.e. ACDB file) RAM at offset address specified by <param_offset>. ☞ LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B The command is not supported.
acdb_write_mem=<param_offset>, <param_value>	Write and display on AT terminal the parameter <param_value> into the audio config (i.e. ACDB file) RAM at offset address specified by <param_offset>. The

Command (<cmd_string>)	Description
	written parameter will be effective only at next call or restarting the audio DSP while the call is established e.g. sending +USPM AT command. ☞ LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B The command is not supported.
acdb_ram_save=<file_name>	Store in the module file system the file named <file_name> containing all the audio config (i.e. ACDB file) RAM values. ☞ LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B The command is not supported.

- Any version number updated by "AT+UTI=uaud_save_data:<label>" needs to be consistent with used audio config file and by <I2S_Master_Slave> parameter in +UI2S AT command.
- In case "AT+UTI=uaud_save_data:<label>" is not consistent with used audio config file and <I2S_Master_Slave> parameter in +UI2S AT command, the "ERROR: Wrong parameters for UTI function" error result code will be reported.

☞ Audio config version number starting with odd number identifies master version while even is for slave version e.g. 1.10 is a master version, 2.10 is a slave version.

LARA-L6

- Supported SMM commands:

Command (<cmd_string>)	Description
uaud_save_data:<label>	Save audio configuration version number for audioconf file
uaud_save_data?	Display the current audio configuration version number and checksum result of downloaded audioconf file by +UDWNFILE AT command.
acdb_read_mem=<param_offset>	Read and display on AT terminal the parameter loaded in audio config (i.e. ACDB file) RAM at offset address specified by <param_offset>. ☞ LARA-L6004-00B / LARA-L6004D-00B The command is not supported.
acdb_write_mem=<param_offset>, <param_value>	Write and display on AT terminal the parameter <param_value> into the audio config (i.e. ACDB file) RAM at offset address specified by <param_offset>. The written parameter will be effective only at next call or restarting the audio DSP while the call is established e.g. sending +USPM AT command. ☞ LARA-L6004-00B / LARA-L6004D-00B The command is not supported.
acdb_ram_save=<file_name>	Store in the module file system the file named <file_name> containing all the audio config (i.e. ACDB file) RAM values. If the audioconf RAM values have been changed by AT+UTI="acdb_write_mem=<param_offset>,<param_value>" AT command, this file can be used to build a new audioconf file with the changed values using the build system once provided to u-blox. ☞ LARA-L6004-00B / LARA-L6004D-00B The command is not supported.

- Any version number updated by "AT+UTI=uaud_save_data:<label>" needs to be consistent with used audio config file and by <I2S_Master_Slave> parameter in +UI2S AT command.

- In case "AT+UTI=uaud_save_data:<label>" is not consistent with used audio config file and <I2S_Master_Slave> parameter in +UI2S AT command, the "ERROR: Wrong parameters for UTI function" error result code will be reported.

Audio config version number starting with odd number identifies master version while even is for slave version e.g. 1.10 is a master version, 2.10 is a slave version.

25 DNS

DNS service requires the user to define and activate a connection profile, either PSD or CSD.

LARA-L6 / LARA-R6
If not specified, the <cid> and the <preferred_protocol_type> parameters set by means of the +UDCONF=19 AT command are used.
See +CGACT AT command for activating a PDP context.

LARA-R6001D-00B
If not specified the default CID (<cid>=1) is used. If not specified and the protocol type is IPv4v6, then the preferred protocol type is IPv4.
See +CGACT AT command for activating a PDP context.

LARA-L6 / LARA-R6
When these command report an error which is not a +CME ERROR, the error class and code is provided through +USOER AT command.

25.1 Resolve name / IP number through DNS +UDNSRN

+UDNSRN						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	Appendix B.4	TCP/UDP/IP Error

25.1.1 Description

Translates a domain name to an IP address or an IP address to a domain name by using an available DNS. There are two available DNSs, primary and secondary. The network usually provides them after a GPRS activation or a CSD establishment. They are automatically used in the resolution process if available. The resolver will use first the primary DNS, otherwise if there is no answer, the second DNS will be involved.

LARA-L6 / LARA-R6
The user can replace each network provided DNS by setting its own DNS for a PSD context by means of the +UDNSCFG AT command.

The DNS resolution timeout depends on the number of DNS servers available to the DNS resolution system. The response time for the DNS resolution is estimated if 8 servers are used to perform this task.

25.1.2 Syntax

Type	Syntax	Response	Example
Set	AT+UDNSRN=<resolution_type>, <domain_ip_string>[,<async>[, <cid>[,<preferred_protocol_type>]]]	+UDNSRN: <resolved_ip_address> OK or +UDNSRN: <resolved_domain_name> OK or OK	AT+UDNSRN=0,"www.google.com" +UDNSRN: "216.239.59.147" OK AT+UDNSRN=0,"www.dau.dau",1,1,0 OK +UUDNSRN: 0,"172.22.1.201" AT+UDNSRN=0,"www.rs-ipv6-test.com",1,1,1 OK

Type	Syntax	Response	Example
			+UUDNSRN: 0,"FC01:CAFE::1"
			AT+UDNSRN=0,"www.google.com",1 OK +UUDNSRN: "216.239.59.147"
			AT+UDNSRN=0,"www.google.com",0 +UDNSRN: "216.239.59.147" OK
Test	AT+UDNSRN=?	+UDNSRN: (list of supported <resolution_type>s),"remote_host",(list of supported <async>s),(list of supported <cid>s),(list of supported <preferred_protocol_type>s) OK	+UDNSRN: (0),"remote_host",(1),(1-15),(0,1) OK
URC		+UUDNSRN: <result_code>[,<resolved_ip_address>[,<ttl>]]	+UUDNSRN: 0,"216.239.59.147,60"
		+UUDNSRN: <result_code>[,<resolved_domain_name>]	+UUDNSRN: 0,"somedomain.com"
		+UUDNSRN: -1	+UUDNSRN: -1

25.1.3 Defined values

Parameter	Type	Description
<resolution_type>	Number	Type of resolution operation: • 0: domain name to IP address • 1: IP address to domain name (host by name)
<domain_ip_string>	String	Domain name (<resolution_type>=0) or the IP address in (<resolution_type>=1) to be resolved. The maximum string length is 128 characters.
<async>	Number	Asynchronous DNS resolution flag. Allowed values: • 0 (default value): the final result code is returned only once the DNS response is available, locking the AT interface until the DNS activity is running • 1: a final result code (OK or an error result code) is returned immediately unlocking the AT interface and making it available for the execution of other AT commands. Once the result of DNS resolution becomes available, it is notified to the AT interface through the +UUDNSRN URC
<cid>	Number	See <cid>. For more details on the default value of the parameter (where supported), see DNS.
<preferred_protocol_type>	Number	Select the specific IP type between IPv4 and IPv6. Allowed values: • 0: IPv4 • 1: IPv6 For more details on the default value of the parameter (where supported), see DNS.
<resolved_ip_address>	String	Resolved IP address corresponding to the specified domain name
<resolved_domain_name>	String	Resolved domain name corresponding to the provided IP address
<result_code>	Number	Result code of DNS resolution: • 0: no error • -1: DNS resolution failed. In this case the <resolved_ip_address> or the <resolved_domain_name> fields are not present
<ttl>	Number	The value of TTL received in the incoming packet.

25.1.4 Notes

LARA-R6001D-00B

- <resolution_type>=1 is not supported.

LARA-L6 / LARA-R6

- The test command is not supported.
- The <ttl> parameter is not reported in the URC.

25.2 Dynamic DNS update +UDYNDNS

+UDYNDNS						
Modules	LARA-R6001-00B LARA-R6001D-00B LARA-R6401-00B LARA-R6401D-00B LARA-R6801-00B					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	- (except URC)	+CME Error

25.2.1 Introduction

The IP address assigned to a module by the network provider is often dynamic; this means the IP address changes every time a PDP context is enabled.

This could be a problem when it is needed to identify an internet host with a domain name, because they are usually used with static IP address that never changes (or rarely changes).

To solve this problem, the dynamic DNS services provide a way to assign a domain name to a host that owns a dynamic IP address, but they require a client that sends the latest IP given by the network to these services, to update their DNS tables.

With the +UDYNDNS command u-blox cellular modules can access to dynamic DNS services.

This functionality is disabled by default, but once configured and enabled it automatically sends updates to the configured Dynamic DNS service every time the module IP address changes. The functionality only works for internal PDP context (see Multiple PDP contexts).

25.2.2 Description

Sets up the dynamic DNS client functionality.

The command configuration is stored into the NVM: if enabled, it automatically works after a reboot.

The following dynamic DNS providers are supported:

- TZO.com
- DynDNS.org
- DynDNS.it
- No-IP.org
- DNSDynamic.org

During the service subscription phase the dynamic DNS provider gives a domain name, a username and a password that the AT application will use later.

If the DYNDNS client is enabled when an internal PDP connection is already active, the DYNDNS client starts working on the next PDP context activation.

☞ Before changing the dynamic DNS client configuration it is required to stop (deactivate) it. Any attempt to reconfigure an already running DNS client raises an error.

☞ The dynamic DNS update is not allowed during the first 60 s after module power on. If a PDP connection is established before this time, a URC notifies that the update has been delayed. In this case the update is performed once the 60 s are elapsed.

☞ The dynamic DNS protocol does not allow more than one update every 60 s, anyhow the module's DYNDNS client will respect specific timing rules depending on the selected provider policies.

☞ Due to the various caches involved in the DNS resolution process, the time since the DNS update is done until it is available for a user, can significantly change among different internet providers.

25.2.3 Syntax

Type	Syntax	Response	Example
Set	AT+UDYNDNS=<on_off>[,<service_id>,<domain_name>,<username>,<password>[,<cid>[,<protocol_type>]]]	OK	**Enable the dynamic DNS client using the TZO DNS service and the domain name "remote001.tzo.net".** AT+UDYNDNS=1,0,"remote001.tzo.net","dummy_username","dummy_password" OK
			Disable the dynamic DNS client: AT+UDYNDNS=0 OK
Read	AT+UDYNDNS?	+UDYNDNS: <on_off>,<service_id>,<domain_name>,<username>,<password>,<[cid]>,<protocol_type> OK	+UDYNDNS: 1,0,"remote001.tzo.net","dummy_username","dummy_password",1,0 OK
Test	AT+UDYNDNS=?	+UDYNDNS: (list of supported <on_off>),(list of supported <service_id>),<domain_name>,<username>,<password>,(list of supported <cid>s),(list of supported <preferred_protocol_type>s) OK	+UDYNDNS: (0-1),(0-4),"domain_name","username","password",(1,24),(0,1) OK
URC		+UUDYNDNS: <status>,<code>	+UUDYNDNS: 1,0

25.2.4 Defined values

Parameter	Type	Description
<on_off>	Number	Enable / disable the dynamic DNS client: • 0 (factory-programmed value): disable the client • 1: enable the client
<service_id>	Number	Indicates which dynamic DNS service provider to use: • 0 (factory-programmed value): TZO.com • 1: DynDNS.org • 2: DynDNS.it • 3: No-IP.org • 4: DynamicDNS.org Mandatory parameter with <on_off>=1, not allowed with <on_off>=0.
<domain_name>	String	Indicates which domain name should be associated with the module IP address. The dynamic DNS service provider provides this value. Maximum length: 64 bytes. Mandatory parameter with <on_off>=1, not allowed with <on_off>=0. The factory-programmed value is an empty string.
<username>	String	The username used for the client authentication. Maximum length: 64 characters. Mandatory parameter with <on_off>=1, not allowed with <on_off>=0. The factory-programmed value is an empty string.
<password>	String	The password used for the client authentication. Maximum length: 32 characters. Mandatory parameter with <on_off>=1, not allowed with <on_off>=0.

Parameter	Type	Description
		The factory-programmed value is an empty string.
<cid>	Number	PDP context identifier used for the DNS communication. The allowed range is product specific, see <cid>. For more details on the default value of the parameter (where supported), see DNS.
<preferred_protocol_type>	Number	Preferred protocol type to be specified when the <cid> protocol type is IPv4v6. Allowed values: • 0: IPv4 • 1: IPv6 For more details on the default value of the parameter (where supported), see DNS.
<status>	Number	This is the internal status of the dynamic DNS client. Each time the internal status changes or there is an error the URC +UUDYNDNS is issued: • 0: client inactive/stopped • 1: client enabled/active • 2: DNS update successfully executed • 3: DNS update failed • 4: DNS update delayed • 5: No DNS update is required • 6: Self deactivation: the dynamic DNS client will stop due to internal error or DynDNS protocol specification
<code>	Number	This is the code returned by the +UUDYNDNS URC. The meaning of the <code> value is described in Dynamic DNS unsolicited indication codes (see Dynamic DNS unsolicited indication codes).

25.2.5 Notes

- In case of self deactivation (+UUDYNDNS <status> = 6), the client is disabled (saving the disabled setting into the NVM); the customer has then to identify the cause (usually bad configuration of the client) and manually re-activate it. After a self deactivation it is always required to re-activate the client.
- If UDYNDNS is enabled and properly configured an +UUDYNDNS URC (+UUDYNDNS: 1,0) will be displayed at the "system power on" on AT terminal. The +UUDYNDNS URC (+UUDYNDNS: 1,0) notifies that the UDYNDNS service is enabled and that an dynamic IP address update will occur when an Internal PDP context will be activated or when an Internal PDP context IP address will change.

25.2.6 DynDNS client behavior in case of error

When the error result code is in range 1-10 and 100-108 the client waits for 60 s before allowing any update operation.

In all the other cases (error in range from 40 to 57) the following behaviors are applied:

- LARA-R6 - For TZO.com:

DynDNS client error code	Provider error code	Client action
40	200	Next update will be possible after 60 s
41	304	Next update will be possible after 10 minutes
45	401	Client self deactivation
53	403	Client self deactivation
55	414	Next update will be possible after 60 s
46	405	Client self deactivation
54	407	Client self deactivation
56	415	Client self deactivation
57	480	Next update will be possible after 24 hours

- LARA-R6 - For DynDNS.org, DynDNS.it, No-IP.org and DNSDynamic.org:

DynDNS client error code	Provider error code	Client action
40	good	Next update will be possible after 60 s
41	nochg	Next update will be possible after 10 minutes
45	badauth	Next update will be possible after 24 hours

DynDNS client error code	Provider error code	Client action
47	!donator	Next update will be possible after 24 hours
42	notfqdn	Client self deactivation
43	nohost	Client self deactivation
44	numhost	Client self deactivation
48	abuse	Client self deactivation
46	badagent	Client self deactivation
49	dnserr	Next update will be possible after 30 minutes
50	911	Next update will be possible after 30 minutes
51	badsys	Client self deactivation
52	!yours	Client self deactivation

25.3 Override DNS configuration +UDNSCFG

+UDNSCFG						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

25.3.1 Description

Overrides the primary and/or the secondary DNS defined for a selected context identifier.

It is also possible to delete an overridden DNS or list all overridden DNS, the list is empty in case no overridden DNSs are defined.

LARA-L6 / LARA-R6
The actual configuration of DNS servers for internal contexts can be retrieved using the +UIPADDR AT command.

LARA-L6 / LARA-R6
Although the +UDNSCFG AT command allows setting the primary and secondary DNS servers with the same IP address, in this case the current configuration of DNS servers for the specified internal context takes effect only on the primary server while the secondary is set as empty. This is valid for both IPv4 and IPv6 DNS server.

25.3.2 Syntax

Type	Syntax	Response	Example
Generic syntax			
Set	AT+UDNSCFG=<cid>[,<index>,<ip_type>[,<ipv4_or_ipv6_address>]]	OK	AT+UDNSCFG=1,1,0,"8.8.8.8" OK
Read all the overridden DNS for a selected <cid>			
Set	AT+UDNSCFG=<cid>	+UDNSCFG: <cid>,<index>,<ip_type>,<ipv4_or_ipv6_address> [[...] +UDNSCFG: <cid>,<index>,<ip_type>,<ipv4_or_ipv6_address>] OK	AT+UDNSCFG=2 +UDNSCFG: 2,1,0,"8.8.8.8" +UDNSCFG: 2,2,0,"9.9.9.9" OK
Delete an overridden DNS			
Set	AT+UDNSCFG=<cid>,<index>,<ip_type>	OK	AT+UDNSCFG=1,1,0 OK

Type	Syntax	Response	Example
Override a DNS			
Set	AT+UDNSCFG=<cid>,<index>,<ip_type>,<ipv4_or_ipv6_address>	OK	AT+UDNSCFG=2,2,0,"8.8.8.8" OK
Read all overridden DNS			
Read	AT+UDNSCFG?	+UDNSCFG: <cid>,<index>,<ip_type>,<ipv4_or_ipv6_address> [[...] +UDNSCFG: <cid>,<index>,<ip_type>,<ipv4_or_ipv6_address>] OK	+UDNSCFG: 1,1,0,"8.8.8.8" +UDNSCFG: 2,1,0,"8.8.8.8" OK
Test	AT+UDNSCFG=?	+UDNSCFG: (list of supported <cid>),(list of supported <index>),(0,1),<ipv4_or_ipv6_address> OK	+UDNSCFG: (1-24),(1-2),(0-1),"ipv4_or_ipv6_address" OK

25.3.3 Defined values

Parameter	Type	Description
<cid>	Number	PDP context identifier used for the DNS communication. The allowed range is product specific, see <cid>.
<index>	Number	Index of the DNS to be overridden: • 1: primary DNS • 2: secondary DNS • 3: tertiary DNS Allowed values: • LARA-L6 / LARA-R6 - 1, 2
<ip_type>	Number	Allowed values: • 0: IPv4 • 1: IPv6
<ipv4_or_ipv6_address>	String	DNS IP address, see IPv4/IPv6 addressing.

26 Internet protocol transport layer

26.1 Introduction

TCP and UDP sockets are independently and simultaneously managed via dedicated AT commands over the same EPS bearer/PDP context. AT commands for both reading and writing data on sockets are provided, and incoming data and transmission result are notified to the external application via URCs, therefore polling is not needed.

When socket commands report an error result code which is not a +CME ERROR, the error result code can be queried using the +USOER or +USOCTL (specifying the socket ID and with <param_id>=1) AT commands.

LARA-L6 / LARA-R6
If not specified, the <cid> and the <preferred_protocol_type> parameters set by the +UDCONF=19 AT command are used. In LTE there is no need to establish a packet data connection explicitly, as the device automatically establishes it as part of the network registration procedure. See +CGACT AT command for activating a PDP context on a <cid> different from 1 and in 2G and 3G RAT.

LARA-R6001D-00B
If not specified the default CID (<cid>=1) is used. If not specified and the protocol type is IPv4v6, then the preferred protocol type is IPv4.
See +CGACT AT command for activating a PDP context.

The UDP protocol has no flow control mechanism and uplink packets might be lost in the following scenarios:

- No network signal is available
- Unreliable radio interface (e.g. mobility with radio link failures, which can lead to data loss, that in GPRS can be contrasted with the usage of LLC ack reliability QoS parameter)

LARA-L6 / LARA-R6
Some network operators close dynamic NATs after few minutes if there is no activity on the connection (no data transfer in the period). To solve this problem enable the TCP keep alive option with 1 minute delay (see the +USOSO AT command).

When both TCP and UDP sockets are used at the same time at the maximum throughput (downlink and uplink at the maximum allowed baud rate) it is possible to lose some incoming UDP packets due to internal buffer limitation. A possible workaround is provided as follows:

- If it is possible, adopt an application layer UDP acknowledge system

26.1.1 <socket>

The <socket> parameter sets the socket identifier to be used for any future operation on that socket. <socket> range lists the allowed range:

Product	Maximum number of sockets	Allowed range
LARA-L6 / LARA-R6	7	0-6

Table 53: <socket> range

26.2 IPv4/IPv6 addressing

26.2.1 Introduction

The section describes the IP addressing formats and IP address rules used by TCP/IP UDP/IP enabled applications.

26.2.2 IPv4

Format:

- 32 bits long in dot-decimal notation (without leading 0 notation).
- All the decimal numbers must be in range 0-255.
- The dot-octal notation is not supported.
- The dot-hexadecimal notation is not supported.

Examples:

IPv4 address	Remarks
254.254.254.254	Valid address
010.228.76.34	Invalid address; first decimal number prefixed with a leading zero
257.228.76.34	Invalid address; first decimal number greater than 255
0010.0344.0114.0042	Invalid address; dot-octal notation; decimals given as octal numbers
0x10.0xE4.0x4C.0x22	Invalid address; dot-hexadecimal notation; decimals given as hexadecimal numbers

Table 54: IPv4 address format examples

26.3 Create Socket +USOCR

+USOCR						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	-	+CME Error

26.3.1 Description

Creates a socket and associates it with the specified protocol (TCP or UDP), returns a number identifying the socket. Such command corresponds to the BSD socket routine; for the maximum number of sockets that can be created, see the <socket> parameter description. It is possible to specify the local port to bind within the socket in order to send data from a specific port. The bind functionality is supported for both TCP and UDP sockets. When the PDP context is IPv4v6, it is possible to set the preferred address type (IPv4 or IPv6) using the <preferred_protocol_type> parameter. A socket can select the PDP context to be used via the <cid> parameter; if <cid> is not supported or not specified, created sockets are mapped to the default CID. Where supported, the read command reports the open sockets.

☞ The socket creation can be performed only after the PDP context activation of the default or specified CID.

26.3.2 Syntax

Type	Syntax	Response	Example
Set	AT+USOCR=<protocol>[,<local_port>[,<preferred_protocol_type>[,<cid>[,<report_AoN>]]]]	+USOCR: <socket>[,<AoN_state>] OK	AT+USOCR=17 +USOCR: 2 OK
Read	AT+USOCR?	+USOCR: <socket>,<protocol>,<AoN_state> [[...] +USOCR: <socket>,<protocol>,<AoN_state>] OK	+USOCR: 0,6,1 +USOCR: 1,6,0 +USOCR: 2,17,1 +USOCR: 3,17,0 OK
Test	AT+USOCR=?	+USOCR: (list of supported <protocol>s),(list of supported	+USOCR: (6,17),(1-65535),(0,1),(1-24) OK

Type	Syntax	Response	Example
		<local_port>s),(list of supported <preferred_protocol_type>s)[,(list of supported <cid>s)[,(list of supported <report_AoN>s)]] OK	

26.3.3 Defined values

Parameter	Type	Description
<protocol>	Number	Allowed values: • 6: TCP • 17: UDP
<local_port>	Number	Local port to be used while sending data. The range goes from 1 to 65535. If the parameter is omitted it will be set to 0; in this case a random port will be used while sending data.
<socket>	Number	See <socket>.
<preferred_protocol_type>	Number	Selects the specific IP type (for the required <socket>) between IPv4 and IPv6 when <PDP_type> is set to "IPV4V6" while the PDP context is created by means of +CGDCONT AT command. Allowed values: • 0: IPv4 • 1: IPv6 For more details on the default value of the parameter (where supported), see Internet protocol transport layer.
<cid>	Number	Specifies the PDP context that will be used for the socket operations. For the parameter range, see <cid>. For more details on the default value of the parameter (where supported), see Internet protocol transport layer.
<report_AoN>	Number	Specifies if the set command response shall report if the created socket is configured as Always On (AoN). • 0 (default value): do not report the AoN attribute • 1: report the AoN attribute
<AoN_state>	Number	Specifies if the socket is configured as Always On (AoN). • 0: socket is not AoN • 1: socket is AoN

26.3.4 Notes

LARA-L6 / LARA-R6

- The <local_port> parameter must be set in a range that respects the setting of the +UEMBPF AT command to avoid filtering of socket data when the PDN context to which the socket is bound is shared between embedded applications and dial-up connection. If the parameter is omitted, the random port is automatically chosen in the range of ports defined by the +UEMBPF AT command.
- The <report_AoN> parameter and the read command syntax are not supported.

26.4 SSL/TLS/DTLS mode configuration on TCP/UDP socket +USOSEC

+USOSEC						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	Appendix B.4	+CME Error

26.4.1 Description

Enables or disables the use of SSL/TLS/DTLS connection (where supported) on a TCP/UDP socket. The configuration of the SSL/TLS/DTLS properties is provided with an SSL/TLS/DTLS profile managed by USECMNG.

The <usecprf_profile_id> parameter is listed in the information text response to the read command only if the SSL/TLS/DTLS is enabled on the interested socket.

☞ The enable or disable operation can be performed only after the socket has been created with +USOCR AT command.

☞ The SSL/TLS/DTLS is supported only with +USOCO command (socket connect command). The SSL/TLS/DTLS is not supported with +USOLI command (socket set listen command is not supported and the +USOSEC settings will be ignored).

☞ The command response time may vary depending on the module series. For more details, see the Appendix B.4.

26.4.2 Syntax

Type	Syntax	Response	Example
Set	AT+USOSEC=<socket>,<ssl_tls_dtls_status>[,<usecprf_profile_id>]	OK	AT+USOSEC=0,1,1 OK
Read	AT+USOSEC=<socket>	+USOSEC: <socket>,<ssl_tls_dtls_status>[,<usecprf_profile_id>] OK	AT+USOSEC=0 +USOSEC: 0,1,1 OK
Test	AT+USOSEC=?	+USOSEC: (list of supported <socket>s),(list of supported <ssl_tls_dtls_status>s),(list of supported <usecprf_profile_id>s) OK	+USOSEC: (0-6),(0,1),(0-4) OK

26.4.3 Defined values

Parameter	Type	Description
<socket>	Number	See <socket>.
<ssl_tls_dtls_status>	Number	• 0 (default value): disable the SSL/TLS/DTLS on the socket. • 1: enable the socket security; a USECMNG profile can be specified with the <usecprf_profile_id> parameter.
<usecprf_profile_id>	Number	Defines the USECMNG profile which specifies the SSL/TLS/DTLS properties to be used for the SSL/TLS/DTLS connection. The range goes from 0 to 4. If no profile is set a default USECMNG profile is used (see USECMNG section).

26.5 Set socket option +USOSO

+USOSO						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

26.5.1 Description

Sets the specified standard option (type of service, local address re-use, linger time, time-to-live, etc.) for the specified socket, like the BSD setsockopt routine.

☞ Issue a set command to set each parameter.

26.5.2 Syntax

Type	Syntax	Response	Example
Set	AT+USOSO=<socket>,<level>,<opt_name>,<opt_val>[,<opt_val2>]	OK	AT+USOSO=2,6,1,1 OK
Test	AT+USOSO=?	+USOSO: (list of supported <socket>s),(list of supported <level>s) OK	+USOSO: (0-6),(0,6,65535) OK

26.5.3 Defined values

Parameter	Type	Description
<socket>	Number	See <socket>.
<level>	Number	Allowed values: • 0: IP protocol <opt_name> for IP protocol level may be: o 1: type of service (TOS) <opt_val>: 8 bitmask that represents the flags of IP TOS. The range is 0-255 (the default value is 0). For more information, see the RFC 791 [175] o 2: time-to-live (TTL) <opt_val>: unsigned 8 bit value representing the TTL. The range is 0-255 (the default value is 255) • 6: TCP protocol <opt_name> for TCP protocol level may be: o 1: no delay option; do not delay send to coalesce packets; <opt_val>: numeric parameter, it enables/disables the "no delay" option: - 0 (default value): disabled - 1: enabled o 2: keepidle option: send keepidle probes when it is idle for <opt_val> milliseconds <opt_val>: signed 32 bit numeric parameter representing the milliseconds for "keepidle" option. The range is 0-2147483647. The default value is 7200000 (2 hours) • 65535: socket <opt_name> for socket level options may be: o 4: local address re-use. <opt_val>: numeric parameter, it configures the "local address re-use" option. - 0 (default value): disabled - 1: enabled o 8: keep connections alive.

Parameter	Type	Description
		<opt_val>: numeric parameter, it configures "keep connections alive" option. - 0 (default value): disabled - 1: enabled o 32: sending of broadcast messages. <opt_val>: numeric parameter, it configures "sending of broadcast messages". - 0 (default value): disabled - 1: enabled o 128: linger on close if data present. <opt_val>: numeric parameter, it configures the "linger" option. - 0 (default value): disabled - 1: enabled <opt_val2>: signed 16 bit numeric parameter, it sets the linger time, the range goes from 0 to 32767 in seconds. The default value is 0. o 512: local address and port re-use. <opt_val>: numeric parameter, it configures the "local address and port re-use". - 0 (default value): disabled - 1: enabled
<opt_name>	Number	Type and supported content depend on the related <level> parameter value (details are given above).
<opt_val>	Number	Type and supported content depend on the related <level> parameter value (details are given above).
<opt_val2>	Number	Type and supported content depend on the related <level> parameter value (details are given above).

26.5.4 Notes

LARA-L6 / LARA-R6

- If <level>=6 (TCP protocol) and <opt_name>=2 (keepidle option), the keepidle option range is 1000-2147483647.
- <level>=65535 (socket), <opt_name>=32 (sending of broadcast messages) is not supported.
- <level>=65535 (socket) and <opt_name>=128 (linger on close if data present) whatever the value of the <opt_val> option is, the <opt_val2> (linger time) option is still required even though it has no effect.

26.6 Get Socket Option +USOGO

+USOGO						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

26.6.1 Description

Retrieves the specified standard option (type of service, local address re-use, linger time, time-to-live, etc) for the specified socket, like the BSD getsockopt routine.

26.6.2 Syntax

Type	Syntax	Response	Example
Set	AT+USOGO=<socket>,<level>,<opt_name>	+USOGO: <opt_val>[,<opt_val2>] OK	AT+USOGO=0,0,2 +USOGO: 255 OK

Type	Syntax	Response	Example
Test	AT+USOGO=?	+USOGO: (list of supported <socket>s),(list of supported <level>s) OK	+USOGO: (0-6),(0,6,65535) OK

26.6.3 Defined values

Parameter	Type	Description
<socket>	Number	See <socket>.
<level>	Number	• 0: IP Protocol <opt_name> for IP protocol level may be: o 1: type of service <opt_val>: 8 bit mask that represents the flags of IP TOS. For more information see the RFC 791 [175]. The range is 0-255. The default value is 0 o 2: time-to-live <opt_val>: unsigned 8 bit value representing the TTL. The range is 0-255. The default value is 0. • 6: TCP Protocol <opt_name> for TCP protocol level may be: o 1: no delay option: do not delay send to coalesce packets <opt_val>: numeric parameter, it enables/disables the "no delay" option - 0 (default value): disabled - 1: enabled o 2: keepidle option: send keepidle probes when idle for <opt_val> milliseconds <opt_val>: signed 32 bit number value representing the milliseconds for "keepidle" option. The range 0-2147483647. The default value is 7200000 (2 hours) • 65535: socket <opt_name> for the socket level options may be: o 4: local address re-use <opt_val>: numeric parameter, it configures the "local address re-use" option: - 0 (default value): disabled - 1: enabled o 8: keep connections alive <opt_val>: numeric parameter, it configures the "keep connections alive" option: - 0 (default value): disabled - 1: enabled o 32: sending of broadcast messages <opt_val>: numeric parameter, it configures the "sending of broadcast messages": - 1: enabled - 0 (default value): disabled o 128: linger on close if data present <opt_val>: numeric parameter, it sets on/off the "linger" option. - 0 (default value): disabled - 1: enabled <opt_val2>: signed 16 bit numeric value, linger time, the range goes from 0 to 32767 in seconds. The default value is 0. o 512: local address and port re-use <opt_val>: numeric parameter, it enables/disables "local address and port re-use": - 0 (default value): disabled - 1: enabled

26.6.4 Notes

LARA-L6 / LARA-R6

- <level>=65535 (socket), <opt_name>=32 (sending of broadcast messages) is not supported.

LARA-R6001D-00B

- <level>=65535 (socket) and <opt_name>=128 (linger on close if data present), the <opt_val2> (linger time) value is expressed in milliseconds.

26.7 Socket features configuration +USOCFG

+USOCFG						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

26.7.1 Description

Configures system socket features such as TCP selective acknowledge (TCP S-ACK).

☞ After issuing the set command, reboot the module (e.g. by the AT+CFUN=15/AT+CFUN=16 command) to make the change effective. The read command reports the last value configured by the set command.

26.7.2 Syntax

Type	Syntax	Response	Example
Generic syntax			
Set	AT+USOCFG=<op_code>,<param1>	OK	AT+USOCFG="tcp_sack",1 OK
Read	AT+USOCFG=<op_code>	+USOCFG: <op_code>,<param1> OK	AT+USOCFG="tcp_sack" +USOCFG: "tcp_sack",1 OK
TCP S-ACK socket feature			
Set	AT+USOCFG="tcp_sack",<enable_tcp_sack>	OK	AT+USOCFG="tcp_sack",1 OK
Read	AT+USOCFG="tcp_sack"	+USOCFG: "tcp_sack",<enable_tcp_sack> OK	AT+USOCFG="tcp_sack" +USOCFG: "tcp_sack",1 OK
Test	AT+USOCFG=?	+USOCFG: "tcp_sack",(list of supported <enable_tcp_sack>s) OK	AT+UDCONF=? +USOCFG: "tcp_sack",(0-1) OK

26.7.3 Defined values

Parameter	Type	Description
Common parameters		
<op_code>	String	System socket feature to configure: • "tcp_sack": configures the TCP S-ACK option
<param1>	Number	Supported content depend on the related <op_code> parameter (details are given above).
TCP S-ACK socket feature		
<enable_tcp_sack>	Number	Enable/disable the TCP S-ACK socket feature: • 0: disabled

Parameter	Type	Description
		• 1: enabled The factory-programmed value is: • LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B - 0. • LARA-L6 / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D - 1.

26.8 Close Socket +USOCL

+USOCL						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	Appendix B.4	+CME Error

26.8.1 Description

Closes the specified socket, like the BSD close routine. In case of remote socket closure the user is notified via the URC.

By default the command blocks the AT command interface until the completion of the socket close operation. By enabling the <async_close> flag, the final result code is sent immediately. The following +UUSOCL URC will indicate the closure of the specified socket.

☞ The command response time may vary depending on the module series. For more details, see the Appendix B.4.

26.8.2 Syntax

Type	Syntax	Response	Example
Set	AT+USOCL=<socket>[,<async_close>]	OK	AT+USOCL=2 OK
Test	AT+USOCL=?	+USOCL: (list of supported <socket>s) OK	+USOCL: (0-6),(0-1) OK
URC		+UUSOCL: <socket>	+UUSOCL: 2

26.8.3 Defined values

Parameter	Type	Description
<socket>	Number	See <socket>.
<async_close>	Number	Asynchronous close flag. The flag has effect for TCP connections only. Allowed values: • 0 (default value): the operation result is returned only once the result of the TCP close becomes available, locking the AT interface until the connection closes. • 1: the final result code is returned immediately unlocking the AT interface and making it available for the execution of other AT commands. Once the result of TCP close becomes available, it is notified to the AT interface through the +UUSOCL URC.

26.8.4 Notes

LARA-L6 / LARA-R6

- The <async_close> parameter is not supported.

26.9 Get Socket Error +USOER

+USOER						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	TCP/UDP/IP Error +CME Error

26.9.1 Description

Retrieves the last error occurred in the last socket operation, stored in the BSD standard variable error.

26.9.2 Syntax

Type	Syntax	Response	Example
Action	AT+USOER	+USOER: <socket_error> OK	+USOER: 104 OK
Set	AT+USOER=<cid>	+USOER: <socket_error> OK	+USOER: 104 OK

26.9.3 Defined values

Parameter	Type	Description
<cid>	Number	Retrieve error on the specific <cid> listed using +CGDCONT AT command. Minimum and maximum values depends on platform specification.
<socket_error>	Number	Code of the last error occurred in a socket operation. The allowed values are listed in Appendix A.6: • 0: no error

26.10 Connect Socket +USOCO

+USOCO						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	Appendix B.4	+CME Error

26.10.1 Description

Establishes a peer-to-peer connection of the socket to the specified remote host on the given remote port, like the BSD connect routine. If the socket is a TCP socket, the command will actually perform the TCP negotiation (3-way handshake) to open a connection. If the socket is a UDP socket, this function will just declare the remote host address and port for later use with other socket operations (e.g. +USOWR, +USORD). This is important to note because if <socket> refers to a UDP socket, errors will not be reported prior to an attempt to write or read data on the socket.

The estimated response time depends also by the DNS resolution. For further details about the estimated response time related to the DNS resolution, see the +UDNSRN AT command.

26.10.2 Syntax

Type	Syntax	Response	Example
Set	AT+USOCO=<socket>,<remote_addr>,<remote_port>[,<async_connect>]	OK	AT+USOCO=3,"151.63.16.9",1200 OK
			AT+USOCO=2,"151.63.16.9",8200,1 OK +UUSOCO: 2,0
			AT+USOCO=2,"151.63.16.9",8230,0 OK
Test	AT+USOCO=?	+USOCO: (list of supported <socket>s),"remote_host",(list of supported <remote_port>s),(list of supported <async_connect>s) OK	+USOCO: (0-6),"remote_host",(1-65535),(0-1) OK
URC		+UUSOCO: <socket>,<socket_error>	+UUSOCO: 2,0

26.10.3 Defined values

Parameter	Type	Description
<socket>	Number	See <socket>.
<remote_addr>	String	Remote host IP address or domain name of the remote host. For IP address format reference see the IP addressing.
<remote_port>	Number	Remote host port, in range 1-65535
<async_connect>	Number	Asynchronous connect flag. The flag has effect for TCP connections only. Allowed values: • 0 (default value): the operation result is returned only once the TCP connection is established, locking the AT interface until the connection activity is running • 1: the final result code is returned immediately unlocking the AT interface and making it available for the execution of other AT commands. Once the result of TCP connection becomes available, it is notified to the AT interface through the +UUSOCO URC.
<socket_error>	Number	Code of the last error occurred in a socket operation. The allowed values are listed in Appendix A.6: • 0: no error, connection successful

26.10.4 Notes

- In case of the socket connection with the asynchronous flag:
  - the socket will be closed if a further +USOCO AT command is issued before having received the +UUSOCO URC of the first AT command.
  - it is not possible to connect a second socket before the reception of the +UUSOCO URC related to the pending socket connection.

LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B

- The time to establish the secure session (when using +USOSEC: <socket>,1[,<usecprf_profile_id>]) could require up to 150 s in one of these cases:
  - RoT generated PSK (+USECPRF: <profile_id>,11)
  - encrypted session resumption (+USECPRF: <profile_id>,13,2,10)

  This is due to "security heartbeat" message operation. For more details on when this scenario occurs, see the +USECCONN AT command.

26.11 Write socket data +USOWR

+USOWR						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	Appendix B.4	+CME Error

26.11.1 Description

Writes the specified amount of data to the specified socket, like the BSD write routine, and returns the number of bytes of data actually written. The command applies to UDP sockets too, after a +USOCO command.

There are three kinds of syntax:

- Base syntax normal: writing simple strings to the socket, some characters are forbidden
- Base syntax HEX: writing hexadecimal strings to the socket, the string will be converted in binary data and sent to the socket; see the AT+UDCONF=1 command description to enable it
- Binary extended syntax: mandatory for writing any character in the ASCII range [0x00, 0xFF]

Regarding the **TCP socket**:

- If no network signal is available, the TCP packets are enqueued until the network will become available again. If the TCP queue is full the +USOWR command will return an error result code. To get the last socket error use the +USOCTL=1 command. If the error code returned is 11, it means that the queue is full.
- If the connection is closed by the remote host, the +UUSOCL URC is not sent until all received data is read using the AT+USORD command. If AT+USOWR command is used in this situation, an error result code is returned. See also the Notes section about the specific product behavior
- If the connection is closed by the remote host and binary interface started with AT+USOWR command is still waiting for data, an error result code is returned indicating that the binary interface was closed. After the error result code a +UUSOCL URC is reported indicating that the socket was closed.

Regarding the **UDP socket**:

- Due to the UDP specific AT commands, it is preferred to use the +USOST command to send data via UDP socket. This command does not require the usage of +USOCO before sending data.
- If no network signal is available, out going UDP packet may be lost.

The information text response indicates that data has been sent to lower level of protocol stack. This is not an indication of an acknowledgment received by the remote server the socket is connected to.

The command response time may vary depending on the module series. For more details, see the Appendix B.4.

26.11.2 Syntax

Type	Syntax	Response	Example
Base syntax			
Set	AT+USOWR=<socket>,<length>,<data>	+USOWR: <socket>,<length> OK	AT+USOWR=3,12,"Hello world!" +USOWR: 3,12 OK
Binary syntax			
Set	AT+USOWR=<socket>,<length>	@<data> +USOWR: <socket>,<length> OK	AT+USOWR=3,16 @16 bytes of data +USOWR: 3,16 OK

Type	Syntax	Response	Example
Test	AT+USOWR=?	+USOWR: (list of supported <socket>s),(list of supported <length>s),"HEX data" +USOWR: (list of supported <socket>s),(list of supported <length>s),"data" +USOWR: (list of supported <socket>s),(list of supported <length>s) OK	+USOWR: (0-6),(0-512),"HEX data" +USOWR: (0-6),(0-1024),"data" +USOWR: (0-6),(0-1024) OK

26.11.3 Defined values

Parameter	Type	Description
<socket>	Number	See <socket>.
<length>	Number	Number of data bytes to write: • Base syntax normal mode: range 1-1024 • Base syntax HEX mode: range 1-512 • Binary extended syntax: range 1-1024
<data>	String	Data bytes to be written. Not all of the ASCII charset can be used.

26.11.4 Notes

- For base syntax:
  - The value of <length> and the actual length of <data> must match
- For base syntax HEX mode:
  - Only the ASCII characters 0-9, A-F and a-f are allowed.
  - The length of the <data> parameter must be two times the <length> parameter.
- For binary syntax:
  - After the command is sent, the user waits for the @ prompt. When it appears the stream of bytes can be provided. After the specified amount of bytes has been sent, the system provides the final result code. The feed process cannot be interrupted i.e. the return in the command mode can be effective only when the number of bytes provided is the declared one.
  - After the @ prompt reception, wait for a minimum of 50 ms before sending data.
  - The binary extended syntax is the only way for the system to accept control characters as data; for the AT command specifications 3GPP TS 27.005 [86], characters like <CR>, <CTRL-Z>, quotation marks, etc. have a specific meaning and they cannot be used like data in the command itself. The command is so extended with a specific acceptance state identified by the @ prompt.
  - This feature can be successfully used when there is need to send a byte stream which belongs to a protocol that has any kind of characters in the ASCII range [0x00,0xFF].
  - In binary mode the module does not display the echo of data bytes.
  - Binary syntax is not affected by HEX mode option.
- For <data> parameter not all of the ASCII charset can be used.

26.12 SendTo command (UDP only) +USOST

+USOST						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	Appendix B.4	+CME Error

26.12.1 Description

Writes the specified amount of data to the remote address, like the BSD sendto routine, and returns the number of bytes of data actually written. It can be applied to UDP sockets only. This command allows the reuse of the same socket to send data to many different remote hosts.

There are three kinds of syntax:

- **Base syntax normal**: writing simple strings to the socket, there are characters which are forbidden.
- **Base syntax HEX**: writing hexadecimal strings to the socket, the string will be converted in binary data and sent to the socket. To enable it, see the AT+UDCONF=1 command description.
- **Binary extended syntax**: mandatory for writing any character in the ASCII range [0x00, 0xFF].

☞ If no network signal is available, outcoming UDP packet may be lost.

☞ The information text response to the test command provides the information about the binary extended syntax only where supported.

☞ The command response time may vary depending on the module series. For more details, see the Appendix B.4.

☞ In binary mode the command will never return if less characters than the expected length are issued after the prompt.

26.12.2 Syntax

Type	Syntax	Response	Example
Base syntax			
Set	AT+USOST=<socket>,<remote_addr>,<remote_port>,<length>,<data>,[<seq_no>]	+USOST: <socket>,<length> OK	AT+USOST=3,"151.9.34.66",449,16,"16 bytes of data" +USOST: 3,16 OK
Binary syntax			
Set	AT+USOST=<socket>,<remote_addr>,<remote_port>,<length> After the"@" prompt <length> bytes of data are entered	@<data> +USOST: <socket>,<length> OK	AT+USOST=3,"151.9.34.66",449,16 @16 bytes of data +USOST: 3,16 OK
Test	AT+USOST=?	+USOST: (list of supported <socket>s),"remote_host",(list of supported <remote_port>s),(list of supported <length>s),(list of supported <seq_no>s),"HEX data" +USOST: (list of supported <socket>s),"remote_host",(list of supported <remote_port>s),(list of supported <length>s),(list of supported <seq_no>s),"data"	+USOST: (1-8),"remote_host",(1-65535),(1-512),(1-255),"HEX data" +USOST: (1-8),"remote_host",(1-65535),(1-1024),(1-255),"data" OK

Type	Syntax	Response	Example
		[+USOST: (list of supported <socket>s),"remote_host",(list of supported <remote_port>s),(list of supported <length>s)] OK	

26.12.3 Defined values

Parameter	Type	Description
<socket>	Number	See <socket>.
<remote_addr>	String	Remote host IP address or domain name of the remote host. For IP address format reference, see the IP addressing.
<remote_port>	Number	Remote host port, in range 1-65535
<length>	Number	Number of data bytes to write: • LARA-L6 / LARA-R6 o Base syntax normal mode: range 1-1024 o Base syntax HEX mode: range 1-512 o Binary syntax mode: range 1-1024
<data>	String	Data bytes to be written (not all of the ASCII charset can be used)

26.12.4 Notes

- For base syntax:
  - The value of <length> and the actual length of <data> must match
  - For base syntax HEX mode, only ASCII characters 0-9, A-F and a-f are allowed. The length of the <data> parameter must be two times the <length> parameter
- For binary syntax:
  - After the command is sent, the user waits for the @ prompt. When it appears the stream of bytes can be provided. After the specified amount of bytes has been sent, the system returns with final result code. The feed process cannot be interrupted i.e. the return in the command mode can be effective only when the number of bytes provided is the declared one
  - That binary extended syntax is the only way for the system to accept control characters as data; for the AT command specifications [86], characters like <CR>, <CTRL-Z>, quotation marks, etc. have a specific meaning and they cannot be used like data in the command itself. The command is so extended with a specific acceptance state identified by the @ prompt
  - This feature can be successfully used when there is need to send a byte stream which belongs to a protocol that has any kind of characters in the ASCII range [0x00,0xFF]
  - In binary mode the module does not display the echo of data bytes
  - Binary syntax is not affected by HEX mode option
  - In binary mode the command response time value specified in Estimated command response time takes effect after the last expected character has been issued

26.13 Read Socket Data +USORD

+USORD						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	Appendix B.4	+CME Error

26.13.1 Description

Reads the specified amount of data from the specified socket, like the BSD read routine. This command can be used to know the total amount of unread data.

For the TCP socket type the URC **+UUSORD: <socket>,<length>** notifies the data bytes available for reading, either when buffer is empty and new data arrives or after a partial read by the user.

For the UDP socket type the URC **+UUSORD: <socket>,<length>** notifies that a UDP packet has been received, either when buffer is empty or after a UDP packet has been read and one or more packets are stored in the buffer.

In case of a partial read of a UDP packet **+UUSORD: <socket>,<length>** will show the remaining number of data bytes of the packet the user is reading.

☞ If the UART interface of the application processor has a RX FIFO of only 1 character, it is highly recommended to set the <length> parameter lower than 64.

☞ (about UDP socket) Due to the UDP specific AT command, it is preferred to use the +USORF command to read data from UDP socket. +USORF command does not require the usage of +USOCO before reading data.

☞ When applied to UDP active sockets if the UDP socket is not set in listening mode (see +USOLI) it will not be possible to receive any packet if a previous write operation is not performed.

☞ If the HEX mode is enabled (refer to AT+UDCONF=1 command) the received data will be displayed using an hexadecimal string.

26.13.2 Syntax

Type	Syntax	Response	Example
Set	AT+USORD=<socket>,<length>	+USORD: <socket>,<length>,<data in the ASCII [0x00,0xFF] range> OK	AT+USORD=3,16 +USORD: 3,16,"16 bytes of data" OK
Test	AT+USORD=?	+USORD: (list of supported <socket>s),(list of supported <length>s) OK	+USORD: (0-6),(0-1024) OK
URC		+UUSORD: <socket>,<length>	+UUSORD: 3,16

26.13.3 Defined values

Parameter	Type	Description
<socket>	Number	See <socket>.
<length>	Number	Number of data bytes • to read stored in buffer, in range 0-1024 in the set command • read from buffer, in range 0-1024 • stored in buffer for the URC
<data>	String	Data bytes to be read

26.13.4 Notes

- The returned data may be any ASCII character in the range [0x00,0xFF] i.e. control characters. The starting quotation marks shall not be taken into account like data; the first byte of data starts after the first quotation marks. Then the other characters are provided for a <length> amount. An application should rely on the <length> info to count the received number of characters (after the starting quotation marks) especially if any protocol control characters are expected.
- If an application deals with letter and number characters only i.e. all of the expected characters are outside the [0x00, 0x1F] range and are not quotation marks, the AT+USORD response quotation marks can be assumed to identify the start and the end of the received data packet. Always check <length> to identify the valid data stream.
- If the number of data bytes requested to be read from the buffer is bigger than the number of bytes stored in the buffer only the available amount of data bytes will be read.

- When <length>= 0, the command returns the total amount of data present in the network buffer.
  Example: 23 unread bytes in the socket.

```
AT+USORD=3,0
+USORD: 3,23
OK
```

- If the HEX mode is enabled, the length of <data> will be 2 times <length>.

26.14 Receive From command (UDP only) +USORF

+USORF						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	< 1 s (except URC)	+CME Error

26.14.1 Description

Reads the specified amount of data from the specified UDP socket, like the BSD recvfrom routine. The URC **+UUSORF: <socket>,<length>** (or also +UUSORD: <socket>,<length>) notifies that new data is available for reading, either when new data arrives or after a partial read by the user for the socket. This command can also return the total amount of unread data.

This command can be applied to UDP sockets only, and it can be used to read data after both +UUSORD and +UUSORF unsolicited indication.

☞ If the HEX mode is enabled (see +UDCONF=1) the received data will be displayed using an hexadecimal string.

26.14.2 Syntax

Type	Syntax	Response	Example
Set	AT+USORF=<socket>,<length>	+USORF: <socket>,<remote_ip_addr>,<remote_port>,<length>,<data in the ASCII [0x00,0xFF] range> OK	AT+USORF=3,16 +USORF: 3,"151.9.34.66",2222,16,"16 bytes of data" OK
Test	AT+USORF=?	+USORF: (list of supported <socket>s),(list of supported <length>s) OK	+USORF: (0-6),(0-1024) OK
URC		+UUSORF: <socket>,<length>	+UUSORF: 3,16

26.14.3 Defined values

Parameter	Type	Description
<socket>	Number	See <socket>.
<remote_ip_addr>	String	Remote host IP address. For IP address format reference see the IP addressing.
<remote_port>	Number	Remote host port, in range 1-65535
<length>	Number	Number of data bytes to read stored in buffer (if in the set command), or read from the buffer (if in the information text response to the set command), or stored in the buffer (for the URC). The allowed range when issued in the set command or returned in the information text response is: • LARA-L6 / LARA-R6 - 0-1024
<data>	String	Data bytes to be read

26.14.4 Notes

- Each packet received from the network is stored in a separate buffer and the command is capable to read only a packet (or e portion of it) at time. This means that if <length> is greater than the packet size, the command will return a maximum amount of data equal to the packet size, also if there are other packets in the buffer. The remaining data (i.e. the remaining UDP packets) can be read with further reads.
- The returned data may have any kind of ASCII character in the range [0x00,0xFF] i.e. control characters too. The starting quotation marks shall not be taken into account like data; the first byte of data starts after the first quotation marks. Then the other characters are provided for a <length> amount. At the end of the length byte stream, another quotation marks followed by <CR><LF> are provided for user convenience and visualization purposes. An application should rely on the <length> info to count the received number of characters (after the starting quotation marks) especially if any protocol control characters are expected.
- If an application deals with letter and number characters only i.e. all of the expected characters are outside the [0x00, 0x1F] range and are not quotation marks, the AT+USORD response quotation marks can be assumed to identify the start and the end of the received data packet, anyway the <length> field usage to identify the valid data stream is recommended.
- When <length>= 0, the command returns the total amount of data present in the network buffer.
  Example: 23 unread bytes in the socket.

```
AT+USORF=3,0
+USORF: 3,23
OK
```

- If the HEX mode is enabled, the length of <data> will be 2 times <length>.

LARA-L6 / LARA-R6

- The +USORF AT command should not be used for a DTLS connection, that is when the connection has been configured using the +USOCO and the +USOSEC AT commands. For DTLS connections the +USOCO, +USOSEC, +USORD and +USOWR AT commands need to be used.

26.15 Set Listening Socket +USOLI

+USOLI						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	Appendix B.4	+CME Error

26.15.1 Description

Sets the specified socket in listening mode on the specified port of service, waiting for incoming connections (TCP) or data (UDP):

- For **TCP sockets**, incoming connections will be automatically accepted and notified via the URC **+UUSOLI: <socket>,<ip_address>,<port>,<listening_socket>,<local_ip_address>,<listening_port>,** carrying the connected socket identifier, the remote IP address and port.
- For **UDP sockets**, incoming data will be notified via URC **+UUSORF: <listening_socket>,<length>.** To know from which remote IP address and port the data is coming from, use the AT+USORF command.

26.15.2 Syntax

Type	Syntax	Response	Example
Set	AT+USOLI=<socket>,<port>	OK	**TCP sockets** AT+USOLI=2,1200 OK

Type	Syntax	Response	Example
			+UUSOLI: 3,"151.63.16.7",1403,2,"82.89.67.164",1200
			UDP sockets AT+USOLI=0,1182 OK +UUSORF: 0,1024
Test	AT+USOLI=?	+USOLI: (list of supported <socket>s),(list of supported <port>s) OK	+USOLI: (0-6),(1-65535) OK
URC (TCP)		+UUSOLI: <socket>,<ip_address>,<port>,<listening_socket>,<local_ip_address>,<listening_port>	+UUSOLI: 3,"151.63.16.7",1403,0,"82.89.67.164",200
URC (UDP)		+UUSORF: <listening_socket>,<length>	+UUSORF: 1,967

26.15.3 Defined values

Parameter	Type	Description
<socket>	Number	See <socket>.
<port>	Number	Port of service, range 1-65535. Port numbers below 1024 are not recommended since they are usually reserved
<ip_address>	String	Remote host IP address (only in URC +UUSOLI). For IP address format reference see the IP addressing.
<listening_socket>	Number	Socket identifier specified within the AT+USOLI command, indicates on which listening socket the connection has been accepted (only in +UUSOLI URC)
<local_ip_address>	String	TE IP address (only in +UUSOLI URC). For IP address format reference see the IP addressing.
<listening_port>	Number	Listening port that has accepted the connection. This port is specified within the AT +USOLI command (only in +UUSOLI URC)
<length>	Number	Data length received on the UDP listening socket (only in +UUSORF unsolicited indication). In order to know the sender IP address and port, use the AT+USORF command.

26.15.4 Notes

- In case of notification via the URC +UUSOLI <port> is intended as the remote port.

26.16 HEX mode configuration +UDCONF=1

+UDCONF=1						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

26.16.1 Description

Enables/disables the HEX mode for +USOWR, +USOST, +USORD and +USORF AT commands.

26.16.2 Syntax

Type	Syntax	Response	Example
Set	AT+UDCONF=1,<enable_hex_mode>	OK	AT+UDCONF=1,0

Type	Syntax	Response	Example
			OK
Read	AT+UDCONF=1	+UDCONF: 1,<enable_hex_mode>	AT+UDCONF=1
		OK	+UDCONF: 1,1
			OK

26.16.3 Defined values

Parameter	Type	Description
<enable_hex_mode>	Number	Enables/disables the HEX mode for +USOWR, +USOST, +USORD and +USORF AT commands. Allowed values: • 0 (factory-programmed value): HEX mode disabled • 1: HEX mode enabled

26.17 Set socket in Direct Link mode +USODL

+USODL						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	< 1 s	+CME Error

26.17.1 Description

Establishes a transparent end-to-end communication with an already connected TCP or UDP socket via the serial interface. The data can be sent to the socket and can be received via the serial interface: the HW flow control usage is strongly recommended to avoid data loss.

The transparent TCP/UDP connection mode can be exited via the +++ sequence, entered after at least 2 s of suspension of transmission to the port or via the DTR line transition according the &D configuration. The socket will remain connected and communication can be re-established any time.

When the transparent communication is exited, the DISCONNECT intermediate result code is sent to the terminal to notify the disconnection. The DISCONNECT intermediate result code is preceeded and followed by a <CR><LF> (ASCII 0x0D 0x0A) sequence.

⚠ The host application shall monitor the serial port for the complete <CR><LF>DISCONNECT<CR><LF> sequence to detect unexpected termination of the transparent communication. When the direct link mode is exited due to abnormal cases like the elapsing of the congestion timer (see Congestion timer), or a failed registration due to mobility, the DISCONNECT intermediate result code is followed by an ERROR final result code.

⚠ The DSR line is moved from LOW to HIGH when the module enters the transparent mode. When the module exits from the transparent mode, the DSR line is moved again to LOW state. There is a fine tuning of the DSR line transition from HIGH to LOW (make it happen before or after the DISCONNECT sequence), which can be configured via +UDCONF=10 AT command.

The number of sockets that can be connected in direct link mode is usually limited by the number of AT terminals that can be used in parallel; exceptions are specified in the Notes.

☞ LARA-L6 / LARA-R6
Escape sequence +++ is detected when it is received by the module in a single separate frame of 3 bytes length: to avoid missed detection of the escape sequence, it is suggested to send +++ when the COM port has CTS asserted/flow control disabled. For more details, see the LARA-R6 / LARA-L6 series Internet applications development guide [10].

☞ LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B

There is no need to wait for 2 s of suspension of transmission to exit the direct link using the escape sequence "+++". Nevertheless, to avoid undesired misbehaviors, it is always suggested to wait 2 s before sending the escape sequence.

LARA-L6 / LARA-R6
The +UDCONF=5, +UDCONF=6, +UDCONF=7, +UDCONF=8 commands allow the configuration of UDP and TCP direct link triggers.

When using Direct Link with UDP sockets, if no network signal is available, outgoing UDP packet may be lost.

26.17.2 Syntax

Type	Syntax	Response	Example
Set	AT+USODL=<socket>	**Normal exit** CONNECT DISCONNECT OK	AT+USODL=0 CONNECT ... data ... +++ (user terminates the direct link) DISCONNECT OK
		Abnormal exit CONNECT DISCONNECT ERROR	AT+USODL=0 CONNECT Abnormal event (congestion, NW detach) DISCONNECT ERROR
Test	AT+USODL=?	+USODL: (list of supported <socket>s) OK	+USODL: (0-6) OK

26.17.3 Defined values

Parameter	Type	Description
<socket>	Number	See <socket>.

26.17.4 Notes

LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B

- Only one socket can be connected in direct link, see Multiple AT command interfaces appendix.

LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D

- At most 3 sockets can be simultaneously connected in direct link, see Multiple AT command interfaces appendix.

26.17.5 Enhanced Direct Link

The enhanced DL functionality allows the user set up to three kinds of trigger for data transmission:

- Timer Trigger
- Data Length Trigger
- Character Trigger

The triggers can be applied independently to each socket. A socket may be set with more than one trigger.

The trigger must be set after the socket creation and before switching to direct link mode.

By default Timer Trigger and Data Length Trigger are enabled for UDP sockets.

By default no triggers are enabled for TCP sockets.

☞ LARA-L6 / LARA-R6
See the +UDCONF=5, +UDCONF=6, +UDCONF=7, +UDCONF=8 commands description for the transmission triggers configuration.

26.17.5.1 Timer Trigger (TT)

The user can configure a timeout for sending the data. The timer starts every time a character is read from the serial interface. When the timer expires, buffered data is sent.

The timer range is between 100 and 120000 ms.

☞ LARA-L6 / LARA-R6
The special value 0 (zero) means that the timer is disabled. By default the timer trigger is disabled for TCP sockets and enabled with a value of 500 ms for UDP sockets.

The +UDCONF=5 command can configure the timer trigger.

26.17.5.2 Data Length Trigger (DLT)

The user can configure a maximum buffered data length to reach before sending the data. When this length is reached the data is sent.

The minimum data length is 3, the maximum data length is 2048 bytes for TCP and 1472 bytes for UDP.

☞ LARA-L6 / LARA-R6
If the data length is set to 0 (zero) the trigger is disabled (every data chunk received from the serial port is immediately sent to the network). By default the data length trigger is disabled for TCP sockets and set to 1024 for UDP sockets.

The +UDCONF=6 command can configure the data length trigger.

26.17.5.3 Character Trigger (CT)

The user can configure a character that will trigger the data transmission. When the character is detected the data (including the trigger character) is sent.

If the specified character is -1, the character trigger is disabled.

By default it is disabled for both TCP and UDP sockets.

The +UDCONF=7 command can configure the character trigger.

26.17.5.4 Combined Triggers

The user can enable multiple triggers together. The triggers work with an OR logic. This means that the first trigger reached fires the data transmission.

26.17.5.5 About serial data chunks

A data chunk is the amount of data that SIO recognizes as a single data transmission.

☞ If the baud rate is lower than 115200 b/s the time to receive 255 characters is always calculated with timings for 115200 b/s.

26.17.5.6 Data from the network

The data received from the network is immediately forwarded to the serial interface.

26.17.5.7 Congestion timer

The congestion timer represents the time after which, in case of network congestion, the module exits from direct link.

- LARA-L6 / LARA-R6 - The timer range is between 1000 and 720000 ms, the special value 0 (zero) means that the timer is disabled. By default the congestion timer is set to 60000 (60 s) for both TCP and UDP sockets. The +UDCONF=8 command can configure the congestion timer.

26.18 Timer Trigger configuration for Direct Link +UDCONF=5

+UDCONF=5						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

26.18.1 Description

Sets the timer trigger of the interested socket identifier for the data transmission enhanced Direct Link.

26.18.2 Syntax

Type	Syntax	Response	Example
Set	AT+UDCONF=5,<socket_id>,<timer_trigger>	OK	AT+UDCONF=5,0,500 OK
Read	AT+UDCONF=5,<socket_id>	+UDCONF: 5,<socket_id>,<timer_trigger> OK	AT+UDCONF=5,0 +UDCONF: 5,0,500 OK

26.18.3 Defined values

Parameter	Type	Description
<socket>	Number	See <socket>. To be used when changing the UDP Direct Link settings.
<timer_trigger>	Number	Enhanced Direct Link sending timer trigger (in milliseconds); valid range is 0 (trigger disabled), 100-120000; • LARA-L6 / LARA-R6 - the factory-programmed value is 500 ms for UDP, 0 ms for TCP.

26.19 Data Length Trigger configuration for Direct Link +UDCONF=6

+UDCONF=6						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

26.19.1 Description

Sets the data length trigger of the interested socket identifier for the data transmission enhanced Direct Link.

26.19.2 Syntax

Type	Syntax	Response	Example
Set	AT+UDCONF=6,<socket_id>,<data_length_trigger>	OK	AT+UDCONF=6,0,1024 OK
Read	AT+UDCONF=6,<socket_id>	+UDCONF: 6,<socket_id>,<data_length_trigger>	AT+UDCONF=6,0

Type	Syntax	Response	Example
		OK	+UDCONF: 6,0,1024 OK

26.19.3 Defined values

Parameter	Type	Description
<socket>	Number	See <socket>. To be used when changing the UDP Direct Link settings.
<data_length_trigger>	Number	Enhanced Direct Link data length trigger in bytes, valid range is 0, 3-1472 for UDP and 0, 3-2048 for TCP, the factory-programmed value is 1024 for UDP, 0 for TCP, 0 means trigger disabled.

26.20 Character trigger configuration for Direct Link +UDCONF=7

+UDCONF=7						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

26.20.1 Description

Sets the character trigger of the interested socket identifier for the data transmission enhanced Direct Link.

26.20.2 Syntax

Type	Syntax	Response	Example
Set	AT+UDCONF=7,<socket_id>,<character_trigger>	OK	AT+UDCONF=7,0,13 OK
Read	AT+UDCONF=7,<socket_id>	+UDCONF: 7,<socket_id>,<character_trigger> OK	AT+UDCONF=7,0 +UDCONF: 7,0,13 OK

26.20.3 Defined values

Parameter	Type	Description
<socket>	Number	See <socket>. To be used when changing the Direct Link settings.
<character_trigger>	Number	Enhanced Direct Link character trigger, the value represents the ASCII code (in base 10) of the character to be used as character trigger. The allowed range is -1, 0-255, the factory-programmed value is -1; -1 means trigger disabled.

26.21 Congestion timer configuration for Direct Link +UDCONF=8

+UDCONF=8						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

26.21.1 Description

Sets the congestion timer of the interested socket identifier for the data transmission enhanced Direct Link.

26.21.2 Syntax

Type	Syntax	Response	Example
Set	AT+UDCONF=8,<socket_id>, <congestion_timer>	OK	AT+UDCONF=8,0,120000 OK
Read	AT+UDCONF=8,<socket_id>	+UDCONF: 8,<socket_id>, <congestion_timer> OK	AT+UDCONF=8,0 +UDCONF: 8,0,120000 OK

26.21.3 Defined values

Parameter	Type	Description
<socket>	Number	See <socket>. To be used when changing the Direct Link settings.
<congestion_timer>	Number	Enhanced Direct Link congestion timer (in milliseconds); valid range is 0, 1000-72000 0; the factory-programmed value is 60000, 0 means trigger disabled.

26.22 Internal IP stack TCP window scaling factor configuration +UDCONF=17

+UDCONF=17						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

26.22.1 Description

Configures the flow control for the internal IP stack, which applies to socket-related, embedded TCP/IP application related AT commands (e.g. FTP, uFOTA). The command has no effect on DUN/PPP traffic.

☞ Reboot the module (e.g. by means of AT+CFUN=16 command) to make the change effective.

☞ The set value is saved in NVM for the configured MNO profile. Any active MNO profile change by means of the +UMNOPROF AT command will restore to the factory-programmed configuration.

26.22.2 Syntax

Type	Syntax	Response	Example
Set	AT+UDCONF=17,<tcp_scale_factor>	OK	AT+UDCONF=17,1 OK
Read	AT+UDCONF=17	AT+UDCONF: 17,<tcp_scale_factor>	+UDCONF: 17,1 OK

26.22.3 Defined values

Parameter	Type	Description
<tcp_scale_factor>	Number	TCP window scale factor configured in internal IP stack. The TCP window scale factor is sent as TCP option in SYN segment and it is applied as the exponential of two to calculate the TCP window scale value. This is multiplied for the TCP window size sent in TCP SYN segment in order to retrieve the configured buffer window size at the TCP client side. For more details, see the RFC 7323 [184]. The allowed range goes form 0 to 4, the factory-programmed value is 0.

26.23 Direct Link disconnect DSR line handling +UDCONF=10

+UDCONF=10						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

26.23.1 Description

The Direct Link functionality changes the DSR line state according to the &S configuration. If the &S configuration = 1 (default and factory programmed value), DSR line transitions will occur as follows:

- From LOW to HIGH when the module enters into Direct Link mode
- From HIGH to LOW when the module exits from Direct Link mode

The +UDCONF=10 command allows to configure the behavior of the DSR line when the module exits from Direct Link. In fact, the transition (from HIGH to LOW) can be configured to occur prior to or after the output of the "<CR><LF>DISCONNECT<CR><LF>" string.

This command has no effect when the &S configuration = 0.

26.23.2 Syntax

Type	Syntax	Response	Example
Set	AT+UDCONF=10,<dl_dsr_line_behavior>	OK	AT+UDCONF=10,1 OK
Read	AT+UDCONF=10	+UDCONF: 10,<dl_dsr_line_behavior> OK	AT+UDCONF=10 +UDCONF: 10,1 OK

26.23.3 Defined values

Parameter	Type	Description
<dl_dsr_line_behavior>	Number	Behavior of the DSR transition when the module exits from Direct Link. Allowed values: • 0 (default value): DSR line transition (HIGH to LOW) is performed after the output of the "<CR><LF>DISCONNECT<CR><LF>" string • 1: DSR line transition (HIGH to LOW) is performed before (~20 ms) the output of the "<CR><LF>DISCONNECT<CR><LF>" string

26.24 Socket control +USOCTL

+USOCTL						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	-	+CME Error

26.24.1 Description

Allows interaction with the low level socket layer.

26.24.2 Syntax

Type	Syntax	Response	Example
Set	AT+USOCTL=<socket>,<param_id>	+USOCTL: <socket>,<param_id>,<param_val>[,<param_val2>] OK	AT+USOCTL=0,2 +USOCTL: 0,2,38 OK
Test	AT+USOCTL=?	+USOCTL: (list of supported <socket>s),(list of supported <param_id>s) OK	+USOCTL: (0-6),(0-4,10-11) OK

26.24.3 Defined values

Parameter	Type	Description
<socket>	Number	See <socket>.
<param_id>	Number	Control request identifier: • 0: query for socket type • 1: query for last socket error • 2: get the total amount of bytes sent from the socket • 3: get the total amount of bytes received by the socket • 4: query for remote peer IP address and port • 10: query for TCP socket status (only TCP sockets) • 11: query for TCP outgoing unacknowledged data (only TCP sockets) • 5-9, 12-99: RFU Allowed values: • LARA-L6 / LARA-R6 - 0, 1, 2, 3, 4, 5-9, 10, 11, 12-99
<param_val>	Number / String	This value may assume different means depending on the <param_id> parameter. If <param_id>=0, <param_val> can assume these values: • 6 TCP socket • 17: UDP socket If <param_id>=1, <param_val> can assume these values: • N: last socket error If <param_id>=2, <param_val> can assume these values: • N: the total amount (in bytes) of sent (acknowledged + unacknowledged) data If <param_id>=3, <param_val> can assume these values: • N: the total amount (in bytes) of received (read) data If <param_id>=4, <param_val> can assume these values: • A string representing the remote peer IP address expressed in dotted decimal form If <param_id>=10, <param_val> can assume these values: • 0: the socket is in INACTIVE status (it corresponds to CLOSED status defined in RFC793 "TCP Protocol Specification" [183]) • 1: the socket is in LISTEN status • 2: the socket is in SYN_SENT status • 3: the socket is in SYN_RCVD status • 4: the socket is in ESTABLISHED status • 5: the socket is in FIN_WAIT_1 status • 6: the socket is in FIN_WAIT_2 status • 7: the socket is in CLOSE_WAIT status • 8: the socket is in CLOSING status • 9: the socket is in LAST_ACK status • 10: the socket is in TIME_WAIT status If <param_id>=11, <param_val> can assume these values:

Parameter	Type	Description
		• N: the total amount of outgoing unacknowledged data
<param_val2>	Number	This value is present only when <param_id> is 4. It represents the remote peer IP port. For IP address format reference see the IP addressing.

26.25 IP Change Notification +UIPCHGN

+UIPCHGN						
Modules	LARA-R6001-00B LARA-R6001D-00B LARA-R6401-00B LARA-R6401D-00B LARA-R6801-00B					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

26.25.1 Description

Enable, disables or forces the IP change notification (CN) functionality. This command only works for internal PDP context activation.

LARA-R6
If not specified, the <cid> and the <preferred_protocol_type> parameters set by means of the +UDCONF=19 AT command are used.
See +CGACT AT command for activating a PDP context.

LARA-R6001D-00B
If not specified the default CID (<cid>=1) is used. If not specified and the protocol type is IPv4v6, then the preferred protocol type is IPv4.
See +CGACT AT command for activating a PDP context.

The IP CN notifies a remote server about changes in the module IP address.

The following information is delivered to the destination server:

- Current IP address of the module
- IMEI of the module (optional)
- IMSI of the inserted SIM card (optional)
- Username (optional)
- MD5 hash of user password (hex format) (optional)
- Custom information (up to 128 bytes)

The notification is sent via a HTTP GET request.

The GET request format is the following:

```
GET /<path>?myip=<ip>&imei=<imei>&imsi=<imsi>&user=<username>&pass=<md5paswd>&cust=<cust_info> HTTP/1.0{CRLF}
Host: <domain_name>{CRLF}
User-Agent: u-blox IP Change Notification Agent 1.0{CRLF}
{CRLF}
```

<ip>, <imei> (if enabled) and <imsi> (if enabled) fields inside the HTTP request are automatically inserted by the module, <domain_name>, <path>, <username>, <password> and <cust_info> fields must be provided by the application through the +UIPCHGN AT command.

{CRLF} is a placeholder for hexadecimal character 0x0D (CR) and 0x0A (LF).

The HTTP response from the server is parsed to recognize the HTTP response code and the text between the <ipchgn_r> and the </ipchgn_r> tags inside the response body. This text is not mandatory and can be freely customized by the customer (up to 64 printable characters).

A real world example follows:

Request (from the module)

```
GET        /modemipnotify.php?myip=123.56.214.2&imei=992237050009739&imsi=992105301545971&user=test_user&pass=
16ec1ebb01fe02ded9b7d5447d3dfc65&cust=Product%3A+Tracker+v.1.0 HTTP/1.0{CRLF}

Host: somedomain.com {CRLF}

User-Agent: u-blox IP Change Notification Agent 1.0{CRLF}

{CRLF}
```

Where

Field	Content	Comment
server	somedomain.com	Specified via +UIPCHGN AT command
path	modemipnotify.php	Specified via +UIPCHGN AT command
myip	123.56.214.2	
imei	992237050009739	
imsi	992105301545971	
user	test_user	Specified via +UIPCHGN AT command
pass	16ec1ebb01fe02ded9b7d5447d3dfc65	MD5 hash of "test_password"Specified via +UIPCHGN AT command
cust_info	Product%3A+Tracker+v.1.0	URL encoding of the string "Product: Tracker v.1.0". Specified via +UIPCHGN AT command

Response (from the server)

```
HTTP/1.0 200 OK {CRLF}

Content-Type: text/html {CRLF}

Content-Length: 31 {CRLF}

Connection: close {CRLF}

{CRLF}

<ipchgn_r>IP_UPDATED</ipchgn_r>
```

Another real world example (without custom information, username and password):

```
GET           /modemipnotify.php?myip=123.56.214.2&imei=992237050009739&imsi=992105301545971&user=&pass=&cust=
 HTTP/1.0{CRLF}

Host: somedomain.com {CRLF}

User-Agent: u-blox IP Change Notification Agent 1.0{CRLF}

{CRLF}
```

Where:

Field	Content	Comment
server	somedomain.com	
path	modemipnotify.php	
myip	123.56.214.2	
imei	992237050009739	
imsi	992105301545971	
user		(empty)
pass		(empty)
cust_info		(empty)

Response (from the server)

```
HTTP/1.0 200 OK {CRLF}
Content-Type: text/html {CRLF}
Content-Length: 31 {CRLF}
Connection: close {CRLF}
{CRLF}
<ipchgn_r>IP_UPDATED</ipchgn_r>
```

Password hashing and URL encoding are performed by the module, so parameters < password> and <cust_info> must be inserted in plain text in the +UIPCHGN command (See command parameters below).

The command configuration is stored in the NVM; if enabled, the command automatically works after a reboot and the +UUIPCHGN: 0 URC is sent to all terminals in this case.

If the IP CN feature is enabled, the notification is performed at each PDP context activation. If the client is enabled when a PDP connection is already active, it starts to update IP address on the next PDP context activation.

The custom information field (< cust_info >) is URL encoded into the HTTP request, this means that the final custom information inside the HTTP GET request may be longer than 128 bytes.

The username and password are not compulsory, but it is encouraged to use them for security reasons.

26.25.2 Syntax

Type	Syntax	Response	Example
Set	AT+UIPCHGN=<action>[,<server>,<port>,<path>,<send_imei>,<send_imsi>,<username>,<password>,<cust_info>[,<cid>[,<preferred_protocol_type>]]]	OK	To enable the IP CN feature: AT+UIPCHGN=1,"somedomain.com",80,"modemipnotify.php",1,1,"test_user","test_password","Product: Tracker v.1.0",2,0 OK To force another IP CN to the remote server (CN must be previously enabled): AT+UIPCHGN=2 OK To disable the IP CN feature: AT+UIPCHGN=0 OK
Read	AT+UIPCHGN?	+UIPCHGN: <status>[,<server>,<port>,<path>,<send_imei>,<send_imsi>,<username>,<password>,<cust_info>,<[cid]>,<preferred_protocol_type>] OK	+UIPCHGN: 1,"somedomain.com",80,"/modemipnotify.php",1,1,"test_user","test_password","Product: Tracker v.1.0",2,0 OK
Test	AT+UIPCHGN=?	+UIPCHGN: (list of supported <action>s),<server>,(list of supported <port>s),<path>,(list of supported <send_imei>s),(list of supported <send_imsi>s),<username>,<password>,<cust_	+UIPCHGN: (0 2),"server",(1 65535),"path",(0 1),(0 1),"username","password","cust_info" OK

Type	Syntax	Response	Example
		info>,(list of supported <cid>s),(list of supported <preferred_protocol_type>s) OK	
URC		+UUIPCHGN: <code>[,<reply_str>]	+UUIPCHGN: 200,"IP_UPDATED"

26.25.3 Defined values

Parameter	Type	Description
<action>	Number	Disable / Enable / Force the Update of IP CN feature • 0 (factory-programmed value): disable the feature • 1: enable the feature • 2: force IP notification update Note: <action>= 2 could be used when the +UUIPCHGN URC returns a code different from 200.
<server>	String	Indicates the remote host to which the HTTP GET request must be sent to notify the IP change event. It can be either a domain name (e.g. "somedomain.com") or an IP address in numeric format (e.g. "173.194.35.145"), always between double quotes. Maximum length: 64 characters Mandatory parameter with <action>=1, ignored with <action>=0 or <action>=2
<port>	Number	Indicates the server port to which the HTTP GET request must be sent. Valid range: from 1 to 65535 Mandatory parameter with <action>=1, ignored with <action>=0 or <action>=2
<path>	String	Indicates the server path to be used inside the HTTP GET request. The insertion of the starting "/" is not mandatory (the software automatically adds it if omitted). The string must be enclosed between double quotes. Maximum length: 64 characters Mandatory parameter with <action>=1, ignored with <action>=0 or <action>=2
<username>	String	Indicates the username to be sent inside the HTTP request. The string must be enclosed between double quotes. Max length: 64 characters Mandatory parameter with <action>=1, ignored with <action>=0 or <action>=2 If no username is required, this parameter must be inserted as empty string ("")
<send_imei>	Number	Indicates if the notification must send the modem IMEI inside the notification HTTP GET request • 0: do not send IMEI • 1: send IMEI Mandatory parameter with <action>=1, ignored with <action>=0 or <action>=2
<send_imsi>	Number	Indicates if the notification must send the modem IMSI inside the notification HTTP GET request Valid range: 0-1 • 0: do not send IMSI • 1: send IMSI Mandatory parameter with <action>=1, ignored with <action>=0 or <action>=2
<password>	String	Indicates the password whose MD5 hash is to be sent inside the HTTP request. The string must be enclosed between double quotes. Maximum length: 32 characters Mandatory parameter with <action>=1, ignored with <action>=0 or <action>=2 If no password is required, this parameter must be inserted as empty string ("")

Parameter	Type	Description
<cust_info>	String	Indicates the custom information to send inside the HTTP GET request. The string must be enclosed between double quotes. Maximum length: 128 characters Mandatory parameter with <action>=1, ignored with <action>=0 or <action>=2 If no custom information is required, this parameter must be inserted as empty string ("")
<cid>	Number	PDP context identifier used for the DNS communication. The allowed range is product specific, see <cid>. For more details on the default and factory-programmed value of the parameter (where supported), see Internet protocol transport layer.
<preferred_protocol_type>	Number	Preferred protocol type to be specified when the <cid> protocol type is IPv4v6. Allowed values: • 0: IPv4 • 1: IPv6 For more details on the default and factory-programmed value of the parameter (where supported), see Internet protocol transport layer.
<status>	Number	This value indicates the status of the IP CN feature • 0: disabled • 1: enabled
<code>	Number	This is the code returned by the +UUIPCHGN URC. Values lower than 100 should be interpreted as internal error, see UUIPGHGN Error. <code> values greater than 100 must be interpreted as HTTP server response code. If error is not present the code returned by the +UUIPCHGN should be 200. The +UUIPCHGN: 0 URC is sent to all terminals at boot if the IP CN feature is enabled from a previous working session.
<reply_str>	String	This is the text inserted between the <ipchgn_r> and </ipchgn_r> tags into the response body from the server. The string is enclosed between double quotes. The maximum length of this string is 64 bytes; if the server sends a longer string, it will be truncated. The parameter is only provided when the information is present in the HTTP response from the remote server and not if an internal error occurred.

27 Device and data security

27.1 Introduction

Nowadays the security is very important to secure personal or confidential data from unauthorized access and therefore it is important to secure the IoT devices to protect the business and the data.

In the IoT security, a weak point is a defect which is called a vulnerability and it may become a safety issue; IoT devices connects/links physical objects and so in IoT it is needed to secure of course data traffic and networks but also the network of "things" or physical objects (i.e. medical devices, infrastructure, utility meters, vehicles, etc.) must be secured.

Some definitions are needed to understand the foundations of security:

- **Integrity** is about making sure that some pieces of data have not been altered from some "reference version".
- **Authentication** is about making sure that a given entity (with whom you are interacting) is who the user believes it to be.
- **Authenticity** is a special case of integrity, where the "reference version" is defined as "whatever it was when it was under control of a specific entity".
- **Confidentiality** means no unauthorized access to data (i.e. encryption/cryptography).

The u-blox security solution lets secure the IoT devices from end-to-end:

- **Device security**, the privacy of data is protected from the devices to the cloud (confidentiality, integrity and authenticity).
- **Data security**, the devices are protected from attack, they can be trusted and controlled (identity, authenticity and firmware protection).
- **Access Management**, it can be controlled who has access to data and products (device policies, data policies and feature authorization)

The pillars of the u-blox security are:

- **Unique device identity**, an immutable chip ID and a robust Root-of-Trust (RoT) provides the foundational security.
- **Secure boot sequence and updates**, only authenticated and authorized firmware and updates can run on the device.
- **Hardware-backed crypto functions**, a Secure Client Library (SCL) generates keys and crypto functions to securely connect to the cloud.

The IoT device is secured through different steps:

- **Provision trust**: insert Root-of-Trust at production. An immutable chip ID and hardware-based Root-of-Trust provide foundational security and a unique device identity.
- **Leverage trust**: derive trusted keys. Secure libraries allow generation of hardware-backed crypto functions and keys that securely connect to the cloud.
- **Guarantee trust**: use keys to secure any function. It ensures authenticity, integrity, and confidentiality to maintain control of device and data.

27.2 Device security

27.2.1 Introduction

These AT commands maintain device integrity over the entire lifecycle.

- LARA-L6 / LARA-R6 - The **+USECCHIP** AT command queries the immutable chip ID.
- LARA-L6 / LARA-R6 - The **+USECDEVINFO** AT command allows customer to program the device profile UID into each device along with their own device serial number.

- LARA-L6 / LARA-R6 - The **+USECROTUID** AT command queries the Root of Trust (RoT) public Unique IDentifier (UID).

27.2.2 Read the module chip ID +USECCHIP

+USECCHIP						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

27.2.2.1 Description

Queries the chip ID of the module and returns it.

27.2.2.2 Syntax

Type	Syntax	Response	Example
Action	AT+USECCHIP	+USECCHIP: <chip_id> OK	+USECCHIP: "12345678" OK

27.2.2.3 Defined values

Parameter	Type	Description
<chip_id>	String	Chip ID of the module.

27.2.3 Retrieve the RoT public UID +USECROTUID

+USECROTUID						
Modules	LARA-L6004-00B LARA-L6004D-00B					
	LARA-R6001-00B LARA-R6001D-00B LARA-R6401-00B LARA-R6401D-00B LARA-R6801-00B					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

27.2.3.1 Description

Returns the Root of Trust (RoT) public Unique IDentifier (UID).

LARA-L6 / LARA-R6
The AT command response time can be up to 150 s due to "security heartbeat" message operation. For more details on when this scenario occurs, see the +USECCONN AT command.

27.2.3.2 Syntax

Type	Syntax	Response	Example
Action	AT+USECROTUID	+USECROTUID: <rot_public_UID> OK	+USECROTUID: "00020000 89285555" OK

27.2.3.3 Defined values

Parameter	Type	Description
<rot_public_UID>	String	Root of Trust Public UID

27.2.4 Seal device information +USECDEVINFO

+USECDEVINFO						
Modules	LARA-L6004-00B LARA-L6004D-00B					
	LARA-R6001-00B LARA-R6001D-00B LARA-R6401-00B LARA-R6401D-00B LARA-R6801-00B					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	< 30 s	+CME Error

27.2.4.1 Description

Allows the device to seal the device specific information. This command writes the device information, which will be used by the security application to call the corresponding SCL functions. The read command provides a way to check if the security services registration has been completed.

☞ LARA-L6 / LARA-R6
The AT command response time can be up to 150 s due to "security heartbeat" message operation. For more details on when this scenario occurs, see the +USECCONN AT command.

27.2.4.2 Syntax

Type	Syntax	Response	Example
Set	AT+USECDEVINFO=<device_info>,<device_serial_num>	OK	AT+USECDEVINFO="ZHIN70dVgUWCdfNeXHkQRg","SN#4756" OK
Read	AT+USECDEVINFO?	+USECDEVINFO: <module_registration>,<device_registration>,<device_activation> OK	+USECDEVINFO: 1,0,1 OK

27.2.4.3 Defined values

Parameter	Type	Description
<device_info>	String	Device information structure defined by the SCL library provider; the string is provided by u-blox on request.
<device_serial_num>	String	Device serial number. The maximum length is 16 characters.
<module_registration>	String	Indicates the status of module registration to security services. Allowed values: • 0: not registered • 1: registered
<device_registration>	String	Indicates the status of device registration to security services. Allowed values: • 0: not registered • 1: registered
<device_activation>	String	Device's RoT activation status. Allowed values: • 0: disabled • 1: enabled

27.2.5 Configure secure data suite features +USECMODE

+USECMODE						
Modules	LARA-L6004-00B LARA-L6004D-00B					
	LARA-R6001-00B LARA-R6001D-00B LARA-R6401-00B LARA-R6401D-00B LARA-R6801-00B					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	< 30 s	+CME Error

27.2.5.1 Description

Enables / disables the secure data suite features on the module. It can only be used if the module has not been sealed with the +USECDEVINFO AT command, otherwise an error result code is returned.

☞ After a successful issuance of the command, reboot the module (e.g. by means of the +CFUN AT command) in order to apply the new configuration.

☞ Disabling the security feature by means of the AT+USECMODE=0 command causes the failure of the LwM2M client registration with the LwM2M servers, which require the use the pre-shared key (PSK) generated by the root of trust (for more details see the +ULWM2MCONFIG AT command).

☞ LARA-L6 / LARA-R6
The AT command response time can be up to 150 s due to "security heartbeat" message operation. For more details on when this scenario occurs, see the +USECCONN AT command.

27.2.5.2 Syntax

Type	Syntax	Response	Example
Set	AT+USECMODE=<enable_security>	OK	AT+USECMODE=1 OK
Read	AT+USECMODE?	+USECMODE: <enable_security> OK	+USECMODE: 0 OK

27.2.5.3 Defined values

Parameter	Type	Description
<enable_security>	Number	Disables or enables the security suite features on the module. Allowed values: • 0: turn the security suite features off • 1 (factory-programmed value): turn the security suite features on

27.2.6 Security server trigger +USECCONN

+USECCONN						
Modules	LARA-L6004-00B LARA-L6004D-00B					
	LARA-R6001-00B LARA-R6001D-00B LARA-R6401-00B LARA-R6401D-00B LARA-R6801-00B					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	< 10 s	-

27.2.6.1 Description

Triggers the security server by means of a "security heartbeat". An error result code will be returned if the send attempt fails, or if the server does not acknowledge.

☞ LARA-R6
To prevent flooding the server with "security heartbeats", if the command is issued within 30 minutes of the last sent "security heartbeat", the request will be rejected and an error result code will be returned.

☞ LARA-L6 / LARA-R6

- The "security heartbeat" message operation is required to update the status of the security.
- The "security heartbeat" message operation is for security reasons required to be an atomic message operation using a blocking send/receive cycle.
- The blocking send/receive cycle can execute up to 150 s (before timeout and abort) in case of network issues.
- The blocking send/receive cycle can block (up to 150 s) the execution of the command (affected commands listed below) which triggered the "security heartbeat" message operation.
- Before executing the blocking send/receive cycle, the "security heartbeat" message operation verifies if the "security heartbeat" message shall be sent immediately due to security reasons.
- Before executing the blocking send/receive cycle, the "security heartbeat" message operation verifies if the "security heartbeat" message shall be sent immediately due to server configured time period elapsed.
- The "security heartbeat" message operation (with the verification mentioned above) is triggered:
  - At module boot.
  - When the module resumes operation after exiting power saving mode.
  - Periodically using a 3 hours resolution timer.

- As a completition of the following AT commands:
  - AT+USECROTUID
  - AT+USECDEVINFO?
  - AT+USECDEVINFO=<device_info>,<device_serial_num>
  - AT+USECMODE=<enable_security>
  - AT+USECCONN
  - AT+USECOPCMD="cfgpdn",<apn_name>[,<pdn_ip_type>]
  - AT+USECOPCMD="rotinfo",<info_id>
  - AT+USECOPCMD="secvers"
  - AT+USECDATAENC=<payload_length>[,<filename>]
  - AT+USECDATADEC=<payload_length>[,<filename>]
  - AT+USECFILEENC=<filename>[,<out_file>]
  - AT+USECFILEDEC=<filename>,<out_file>
  - AT+USECE2EDATAENC=<payload_length>[,<filename>]
  - AT+USECE2EFILEENC=<filename>[,<out_file>]
  - AT+USECE2EDATASIGN=<payload_length>[,<filename>]
  - AT+USECE2EFILESIGN=<filename>[,<out_file>]
  - AT+USECE2EDATADEC=<payload_length>[,<filename>]
  - AT+USECE2EFILEDEC=<filename>[,<out_file>]
  - AT+USECE2EDATAAUTHN=<payload_length>[,<filename>]
  - AT+USECE2EFILEAUTHN=<filename>[,<out_file>]
  - AT+USECC2C=<op_code>,<param1>[,<param2>]
  - AT+USECPSK=<psk_size>
  - AT+USECDEVCERT?
  - AT+USECAFA=<afa_id>
  - AT+UFTPC=<op_code>[,<param1>[,<param2>[,<param3>]]]
  - AT+UHTTPC=<profile_id>,<http_command>,<path>,<filename>[,<param1>[,<param2>[,<param3>]]]
  - AT+UMQTTC=<op_code>[,<param1>[,<param2>][,<param3>][,<param4>][,<param5>]]
  - AT+UMQTTSNC=<op_code>[,<param1>[,<param2>[,[<param3>],[<param4>,<param5>,<param6>]]]]
  - AT+USOCO=<socket>,<remote_addr>,<remote_port>[,<async_connect>]
  - AT+UCOAPC=<coap_command>[,<payload>,<identifier>[,<block_number>,<more_block>]]

LARA-L6 / LARA-R6
Modules implements a connection notification fallback address configuration. The fallback address configuration is used once after 4 subsequent connection notification fails. The fallback address configuration is configured by means of the AT+USECOPCMD="cfgipv4" and AT+USECOPCMD="cfgipv6" command.

27.2.6.2 Syntax

Type	Syntax	Response	Example
Action	AT+USECCONN	OK	OK

27.2.7 Security configuration and action command +USECOPCMD

+USECOPCMD						
Modules	LARA-L6004-00B LARA-L6004D-00B					
	LARA-R6001-00B LARA-R6001D-00B LARA-R6401-00B LARA-R6401D-00B LARA-R6801-00B					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	< 30 s	+CME Error

27.2.7.1 Description

Generic security command used to store some configuration values or perform actions.

LARA-L6 / LARA-R6
The AT command response time can be up to 150 s due to "security heartbeat" message operation. For more details on when this scenario occurs, see the +USECCONN AT command.

LARA-L6 / LARA-R6
When the information text response to the AT+USECOPCMD="rotrestore",0 command is +USECOPCMD: "rotrestore",1 the following AT commands, if issued, will return the "+CME ERROR: SEC RoT has been restored and a resync operation is pending" error result code (if +CMEE: 2) until a successful AT +USECOPCMD="rotresync" command is executed:

- AT+USECDEVINFO=<device_info>,<device_serial_num>
- AT+USECCONN
- AT+USECPSK=<psk_size>
- AT+USECDATAENC=<payload_length>[,<filename>]
- AT+USECFILEENC=<filename>[,<out_file>]
- AT+USECDATADEC=<payload_length>[,<filename>]
- AT+USECFILEDEC=<filename>,<out_file>
- AT+USECE2EDATAENC=<payload_length>[,<filename>]
- AT+USECE2EFILEENC=<filename>[,<out_file>]

27.2.7.2 Syntax

Type	Syntax	Response	Example
Generic syntax			
Set	AT+USECOPCMD=<op_code>,<param1>,<param2>	OK	
Read	AT+USECOPCMD=<op_code>	+USECOPCMD: <op_code>,<param1>,<param2> OK	
Configure PDN			
Set	AT+USECOPCMD="cfgpdn",<apn_name>[,<pdn_ip_type>]	OK	AT+USECOPCMD="cfgpdn","internet",0 OK
Read PDN configuration			
Read	AT+USECOPCMD="cfgpdn"	+USECOPCMD: "cfgpdn",<apn_name>,<pdn_ip_type> OK	AT+USECOPCMD="cfgpdn" +USECOPCMD: "cfgpdn","internet",0 OK
Retrieve secure element information			
Read	AT+USECOPCMD="rotinfo",<info_id>	+USECOPCMD: "rotinfo",<info_id>,<info_string> OK	AT+USECOPCMD="rotinfo",0 +USECOPCMD: "rotinfo",0,"30312E30362E3832" OK
Retrieve secure library version and build version in hexadecimal format			

Type	Syntax	Response	Example
Read	AT+USECOPCMD="secvers"	+USECOPCMD: "secvers",<sec_version>,<build_version> OK	AT+USECOPCMD="secvers" +USECOPCMD: "secvers","312E382E33","492D434E57414A2D4245424149" OK
Configure E2E (end-to-end) encryption version			
Set	AT+USECOPCMD="e2e_enc",<version>	OK	AT+USECOPCMD="e2e_enc",0 OK
Retrieve E2E (end-to-end) encryption version			
Read	AT+USECOPCMD="e2e_enc"	+USECOPCMD: "e2e_enc",<version> OK	AT+USECOPCMD="e2e_enc" +USECOPCMD: "e2e_enc",1 OK
Backup and restore of the RoT persistent data generic syntax			
Set	AT+USECOPCMD="rotrestore",<restore_cmd>	[+USECOPCMD: "rotrestore",<restore_pending>] OK	AT+USECOPCMD="rotrestore",0 +USECOPCMD: "rotrestore",1 OK
Check if the restore of RoT persistent data and configuration from backup is pending			
Set	AT+USECOPCMD="rotrestore",0	+USECOPCMD: "rotrestore",<restore_pending> OK	AT+USECOPCMD="rotrestore",0 +USECOPCMD: "rotrestore",1 OK
Restore the RoT persistent data and configuration from backup			
Set	AT+USECOPCMD="rotrestore",1	OK	AT+USECOPCMD="rotrestore",1 OK
Backup the RoT persistent data and configuration			
Set	AT+USECOPCMD="rotbackup"	OK	AT+USECOPCMD="rotbackup" OK
Re-synchronize the RoT persistent data and configuration with the security server			
Set	AT+USECOPCMD="rotresync"	OK	AT+USECOPCMD="rotresync" OK
Configure IPv4 connection properties			
Set	AT+USECOPCMD="cfgipv4",<mode>[,<port>[,<ip_address>[,<dns_ip_address>]]]	OK	AT+USECOPCMD="cfgipv4",0 OK
Read IPv4 connection properties configuration			
Read	AT+USECOPCMD="cfgipv4"	+USECOPCMD: "cfgipv4",<mode>,<port>,<ip_address>,<dns_ip_address> OK	AT+USECOPCMD="cfgipv4" +USECOPCMD: "cfgipv4",0,0,"","" OK
Configure IPv6 connection properties			
Set	AT+USECOPCMD="cfgipv6",<mode>[,<port>[,<ip_address>[,<dns_ip_address>]]]	OK	AT+USECOPCMD="cfgipv6",0 OK
Read IPv6 connection properties configuration			
Read	AT+USECOPCMD="cfgipv6"	+USECOPCMD: "cfgipv6",<mode>,<port>,<ip_address>,<dns_ip_address> OK	AT+USECOPCMD="cfgipv6" +USECOPCMD: "cfgipv6",0,0,"","" OK

27.2.7.3 Defined values

Parameter	Type	Description
<op_code>	String	Type of operation: • "cfgpdn": configure the APN used for the connection • "rotinfo": retrieve secure element information such as locked FW version, FW version, RoT public UID, platform version, HW info and diagnostic data • "secvers": retrieve secure library version and build version in hexadecimal format • "e2e_enc": configure end-to-end (E2E) encryption version • "rotrestore": restore the RoT persistent data and configuration from backup • "rotbackup": backup the RoT persistent data and configuration • "rotresync": re-synchronize the RoT persistent data and configuration with security server • "cfgipv4": configure the IPv4 connection properties to use when connecting to the security server using an IPv4 or IPv4/IPV6 PDN. • "cfgipv6": configure the IPv6 connection properties to use when connecting to the security server using an IPV6 PDN Allowed strings: • LARA-L6 - "cfgpdn", "secvers", "rotrestore", "rotbackup", "rotresync", "cfgipv4", "cfgipv6" • LARA-R6 - "cfgpdn", "secvers", "e2e_enc", "rotrestore", "rotbackup", "rotresync", "cfgipv4", "cfgipv6"
<apn_name>	String	Network identifier. The maximum size is 100 bytes. The factory-programmed value is an empty string.
<pdn_ip_type>	Number	PDN IP type: • 0: (default and factory-programmed value): IPv4 • 1: IPv6 • 2: IPv4 and IPv6
<info_id>	Number	Identifier corresponding to the required information: • 0: version of the locked firmware • 1: version of the application firmware • 2: public UID of the RoT (8 bytes string) • 3: platform version • 4: hardware-specific data • 5: diagnostic data Allowed values: • LARA-L6 / LARA-R6 - 0, 1, 2, 3, 4, 5
<info_string>	String	Requested information according to <info_id>
<sec_version>	String	Secure library version in hexadecimal format
<build_version>	String	Secure build version in hexadecimal format
<version>	Number	E2E encryption version. Allowed values: • 0: E2E encryption V1 • 1 (factory-programmed value): E2E encryption V2
<restore_cmd>	Number	RoT restore persistent data and configuration command. Allowed values: • 0: check if a restore of RoT persistent data and configuration occurred • 1: restore the RoT persistent data and configuration from backup
<restore_pending>	Number	RoT restore persistent data and configuration pending status. Allowed values: • 0: the restore of RoT persistent data and configuration is not pending • 1: the restore of RoT persistent data and configuration is pending. A RoT re-synchronization is required (see the AT+USECOPCMD="rotresync").
<mode>	Number	Connection and fallback (see the +USECCONN AT command) configuration. Allowed values: • 0 (factory-programmed value): DNS, static IPv4/IPv6 address fallback; the handling of remaining parameters is: o The IP address to use is resolved by the DNS configured by means of the <dns_ip_address> parameter o In case of fallback, the <ip_address> value set is used as IP address. If omitted, the <ip_address> parameter will be set to the factory-programmed value. • 1: static IPv4/IPv6 address, DNS fallback

Parameter	Type	Description
		o The IP address is configured by means of the <ip_address> parameter. If omitted, the <ip_address> parameter will be set to the factory-programmed value. o In case of fallback, the <dns_ip_address> value set is used as IP address. If omitted, the <dns_ip_address> parameter will be set to the factory-programmed value. • 2: DNS only o The <ip_address> parameter is not allowed o The IP address to use is resolved by the DNS configured by means of the <dns_ip_address> parameter • 3: u-blox security partner server IPv4/IPv6 address o The IP address is configured by means of the <ip_address> parameter. If omitted, the <ip_address> parameter will be set to the factory-programmed value. o The <dns_ip_address> parameter is not allowed • 4: u-blox security server IPv4/IPv6 address o The IP address is configured by means of the <ip_address> parameter. If omitted, the <ip_address> parameter will be set to the factory-programmed value. o The <dns_ip_address> parameter is not allowed
<port>	Number	Security server port; range 1-65535. It means the security server port to be used; the factory-programmed value is 38292.
<ip_address>	String	Connection IP address configuration. IPv4 or IPv6 address string. The factory-programmed value depends on <mode> value: • when <mode>=0 or 1 or 3 o IPv4: 63.35.25.213 o IPv6: 2A05::D018::0E8C::9701::484A::E62C::0337::2202 • when <mode>=4 o IPv4: 10.7.0.55 o IPv6: not supported
<dns_ip_address>	String	DNS resolver IP address. IPv4 or IPv6 address string.

27.3 Data security provided by secure connections (SSL/TLS/DTLS)

27.3.1 Introduction

SSL/TLS/DTLS (where supported) provides a secure connection between two entities using TCP/UDP socket for communication (i.e. HTTP/FTP server and HTTP/FTP client).

The SSL/TLS/DTLS with digital certificates support provides different connection security aspects:

- **Server authentication**: use of the server certificate verification against a specific trusted certificate or a trusted certificates list;
- **Client authentication**: use of the client certificate and the corresponding private key;
- **Data security and integrity**: data encryption and Hash Message Authentication Code (HMAC) generation.

The security aspects used in the current connection depend on the SSL/TLS/DTLS configuration and features supported by the communicating entities.

u-blox cellular modules support all the described aspects of SSL/TLS/DTLS security protocol with these AT commands:

- AT+USECMNG: import, removal, list and information retrieval of certificates or private keys;
- AT+USECPRF: configuration of USECMNG (u-blox SECurity MaNaGement) profiles used for an SSL/TLS/DTLS connection.

The USECMNG provides a default SSL/TLS/DTLS profile which cannot be modified. The default USECMNG profile provides the following SSL/TLS/DTLS settings:

Setting	Value	Meaning
Certificates validation level	Level 0	The server certificate will not be checked or verified.
Minimum SSL/TLS/DTLS version	Any	The server can use any of the TLS1.0/TLS1.1/TLS1.2/DTLS1.2 versions for the connection.
Cipher suite	Automatic	The cipher suite will be negotiated in the handshake process.
Trusted root certificate internal name	"" (none)	No certificate will be used for the server authentication.
Expected server host-name	"" (none)	No server host-name is expected.
Client certificate internal name	"" (none)	No client certificate will be used.
Client private key internal name	"" (none)	No client private key will be used.
Client private key password	"" (none)	No client private key password will be used.
Pre-shared key	"" (none)	No pre-shared key will be used.
Server certificate pinning	"" (none)	No server certificate will be used.
Server certificate pinning level	Level 0	No server certificate will be used.

For the configuration of the settings listed above, see the +USECPRF AT command.

LARA-L6 / LARA-R6
The secure client initiated re-negotiation is not supported. The secure server re-negotiation is supported. The default USECMNG profile does not provide the client certificate internal name and the client private key internal name; hence, when a mutual authentication is required by the server initiated re-negotiation, the client certificate internal name and the client private key internal name need to be provided.

LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D
During the handshake an inactivity timer is started at every received or transmitted packet. The timeout of the inactivity timer is set to 60 s. At the timer expiration the secure connection is aborted, since the handshake has not been completed successfully.

LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B
During the handshake an inactivity timer is started at every received or transmitted packet. The timeout of the inactivity timer is set to 30 s. At the timer expiration the secure connection is aborted, since the handshake has not been completed successfully.

LARA-L6004-00B / LARA-L6004D-00B
The above notes related to SSL/TLS/DTLS connections are applicable only to embedded applications (LwM2M) which use a dedicated pre-configured USECMNG profile.

27.3.2 SSL/TLS certificates and private keys manager +USECMNG

+USECMNG						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

27.3.2.1 Description

Manages the X.509 certificates and private keys with the following functionalities:

- Import of certificates and private keys
- List and information retrieval of imported certificates and private keys
- Removal of certificates and private keys
- MD5 calculation of imported certificate or private key

For more details on X.509 certificates and private keys see RFC 5280 [202].

The number and the format of the certificates and the private keys accepted depend on the module series:

- LARA-L6 / LARA-R6 - certificates and private keys both in DER (Distinguished Encoding Rules) and in PEM (Privacy-Enhanced Mail) format are accepted. If the provided format is PEM, the imported certificate or private key will be automatically converted in DER format for the internal storage. It is also possible to validate certificates and private keys. Up to 16 certificates or private keys can be imported.

☞ The certificates and private keys are kept in DER format and are not retrievable (i.e. cannot be downloaded from the module); for data validation purposes an MD5 hash string of the stored certificate or private key (stored in DER format) can be retrieved.

☞ LARA-L6 / LARA-R6
The SSL/(D)TLS connection with Server and/or Mutual Authentication can be successfully performed using the following key size:

- for Rivest-Shamir-Adleman (RSA) keys at least 2048-bits.
- for Elliptic Curve Digital Signature Algorithm (ECDSA) keys at least 192-bits.

The same limitation is applied also to the keys used for the certificates generation.

☞ LARA-L6 / LARA-R6
Data for certificate or private key import can be provided with a stream of byte similar to +UDWNFILE or from a file stored on the FS.

☞ When using the stream of byte import functionality:

- If the data transfer is stopped before its completion, a guard timer of 20 s will ensure the termination of the data transmission. In this case the prompt will switch back in AT command mode and an error result code will be returned.
- If the module shuts down during the data transfer, all the bytes are discarded.
- If any error occurs during the data transfer, all bytes are discarded.

☞ All the imported certificates or private keys are listed if the type of the security data is omitted.

☞ LARA-L6 / LARA-R6
The imported certificates and private keys are:

- PRESERVED after the module FW is upgraded using +UFWINSTALL or +UFWUPD AT commands.
- NOT PRESERVED (deleted) after a factory reset using +UFACTORY AT command.
- PRESERVED after the module FW is upgraded using EasyFlash.

☞ The USECMNG import command supports only X.509 certificate format.

☞ The X.509 certificate DN (Distinguished Name) is composed of value fields which uniquely define an entity being authenticated. For security reasons some limitations (related to DN fields) described below are applied:

- The USECMNG import functionality allows the following DN value fields:
  - commonName (http://oid-info.com/get/2.5.4.3)
  - serialNumber (http://oid-info.com/get/2.5.4.5)
  - countryName (http://oid-info.com/get/2.5.4.6)
  - localityName (http://oid-info.com/get/2.5.4.7)
  - stateOrProvinceName (http://oid-info.com/get/2.5.4.8)
  - organizationName (http://oid-info.com/get/2.5.4.10)
  - organizationalUnitName (http://oid-info.com/get/2.5.4.11)
  - userID (http://oid-info.com/get/0.9.2342.19200300.100.1.1)
  - domainComponent (http://oid-info.com/get/0.9.2342.19200300.100.1.25)
  - pkcs9_emailAddress (http://oid-info.com/get/1.2.840.113549.1.9.1)
  - pkcs9_unstructuredName (http://oid-info.com/get/1.2.840.113549.1.9.2)

- The import of an X.509 certificate with DN containing other value fields (not in the above list) will result in an import error (error result code: USECMNG invalid certificate/key format).

☞ The USECMNG private key import command does not support private keys in PEM format with extension headers (i.e. "EC PARAMETERS").

27.3.2.2 Syntax

Type	Syntax	Response	Example
Generic syntax:			
Action	AT+USECMNG=<op_code>,[<type>[,<internal_name>[,<param1>[,<param2>]]]]	OK	-
Import a certificate or private key from serial I/O:			
Action	AT+USECMNG=0,<type>,<internal_name>,<data_size>[,<password>]	> Start transfer of data ... +USECMNG: 0,<type>,<internal_name>,<md5_string> OK	AT+USECMNG=0,0,"AddTrustCA",1327 >-----BEGIN CERTIFICATE----- (...other certificate data bytes...) +USECMNG: 0,0,"AddTrustCA","77107370ec4db40a0 8a6e36a64a1435b" OK
Import a certificate or private key from a file stored on FS:			
Action	AT+USECMNG=1,<type>,<internal_name>,<filename>[,<password>]	+USECMNG: 1,<type>,<internal_name>,<md5_string> OK	AT+USECMNG=1,0,"AddTrustCA","addtrust.cert" +USECMNG: 1,0,"AddTrustCA","7710 7370ec4db40a08a6e36a64a1435b" OK
Remove an imported certificate or private key:			
Action	AT+USECMNG=2,<type>,<internal_name>	OK	AT+USECMNG=2,0,"AddTrustCA" OK
List imported certificates or private keys:			
Read	AT+USECMNG=3[,<type>]	<cert_type>,<internal_name>[,<common_name>,<expiration_date>] ... OK	AT+USECMNG=3 "CA","AddTrustCA","AddTrust External CA Root","2020/05/30" "CA","GlobalSignCA","GlobalSign","2029/03/18" "CC","JohnDoeCC","GlobalSign","2010/01/01" "PK","JohnDoePK" OK
Retrieve the MD5 of an imported certificate or private key:			
Read	AT+USECMNG=4,<type>,<internal_name>	+USECMNG: 4,<type>,<internal_name>,<md5_string> OK	AT+USECMNG=4,0,"AddTrustCA" +USECMNG: 4,0,"AddTrustCA","77107370ec4db40a0 8a6e36a64a1435b" OK
Test	AT+USECMNG=?	+USECMNG: (list of supported <op_code>s),(list of supported <type>s) OK	+USECMNG: (0-4),(0-2) OK

27.3.2.3 Defined values

Parameter	Type	Description
<op_code>	Number	Type of operation: • 0: import a certificate or a private key (data provided by the stream of byte) • 1: import a certificate or a private key (data provided from a file on FS) • 2: remove an imported certificate or private key • 3: list imported certificates or private keys • 4: retrieve the MD5 of an imported certificate or private key
<type>	Number	Type of the security data: • 0: trusted root CA (certificate authority) certificate • 1: client certificate • 2: client private key • 3: server certificate • 4: signature verification certificate • 5: signature verification public key Allowed values: • LARA-L6 / LARA-R6 - 0, 1, 2, 3
<cert_type>	String	Type of the security data in verbose format: • "CA": trusted root CA (certificate authority) certificate • "CC": client certificate • "PK": client private key • "SC": server certificate • "VC": signature verification certificate • "PU": signature verification public key Allowed values: • LARA-L6 / LARA-R6 - "CA", "CC", "PK", "SC"
<internal_name>	String	Unique identifier of an imported certificate or private key. If an existing name is used the data will be overridden. • LARA-L6 / LARA-R6 - The maximum length is 200 characters.
<data_size>	Number	Size in bytes of a certificate or private key being imported. • LARA-L6 / LARA-R6 - The maximum allowed size is 8192 bytes.
<password>	String	Decryption password; applicable only for PKCS8 encrypted client private keys. The maximum length is 128 characters.
<filename>	String	Name of the FS file containing the certificate or private key data to be imported. • LARA-L6 / LARA-R6 - The maximum allowed file size is 8192 bytes.
<md5_string>	String	MD5 formatted string.
<common_name>	String	Certificate subject (issued to) common name; applicable only for trusted root and client certificates.
<expiration_date>	String	Certificate expiration (valid to date); applicable only for trusted root and client certificates.
<param1>	Number/ String	Type and supported content depend on the related <op_code> parameter; see the <op_code> specification.
<param2>	Number/ String	Type and supported content depend on the related <op_code> parameter; see the <op_code> specification.

27.3.2.4 Notes

LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B

- The following certificates are pre-installed on the module and cannot be deleted/changed by the customer via AT commands:

Internal name	Common name	Expiration date
ubx_digicert_global_root_ca	DigiCert Global Root CA	2031/11/10 00:00:00
ubx_digicert_global_root_g2	DigiCert Global Root G2	2038/01/15 12:00:00
ubx_digicert_trusted_root_g4	DigiCert Trusted Root G4	2038/01/15 12:00:00
ubx_verisign_universal_root_certification_authority	VeriSign Universal Root Certification Authority	2037/12/01 23:59:59

Internal name	Common name	Expiration date
ubx_baltimore_cybertrust_root	Baltimore CyberTrust Root	2025/05/12 23:59:00
ubx_tmo_usa_enterprise_root_ca	T-Mobile USA Enterprise Root CA	2040/11/03 20:28:54

LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D

- The following certificates are pre-installed on the module and cannot be deleted/changed by the customer via AT commands:

Internal name	Common name	Expiration date
ubx_digicert_global_root_ca	DigiCert Global Root CA	2031/11/10 00:00:00
ubx_digicert_global_root_g2	DigiCert Global Root G2	2038/01/15 12:00:00
ubx_digicert_trusted_root_g4	DigiCert Trusted Root G4	2038/01/15 12:00:00
ubx_digicert_eccp384_root_g5	DigiCert TLS ECC P384 Root G5	2046/01/14 23:59:59
ubx_digicert_rsa4096_root_g5	DigiCert TLS RSA4096 Root G5	2046/01/14 23:59:59
ubx_baltimore_cybertrust_root	Baltimore CyberTrust Root	2025/05/12 23:59:00
ubx_tmo_usa_enterprise_root_ca	T-Mobile USA Enterprise Root CA	2040/11/03 20:28:54
ubx_starfield_service_root_ca_g2	Starfield Services Root Certificate Authority - G2	2034/06/28 17:39:16

27.3.3 +USECMNG AT command example

LARA-L6 / LARA-R6
Below is an example with a PEM encoded trusted root certificate.

Command	Response	Description
Step 1: Import a trusted root certificate using the stream of byte similar to +UDWNFILE		
AT+USECMNG=0,0,"ThawteCA",1516	>	Start the data transfer using the stream of byte.
PEM encoded trusted root certificate data.	+USECMNG: 1,0,"ThawteCA","8ccadc0b22cef5be72ac411a11a8d812" OK	Input PEM formatted trusted root certificate data bytes. Output MD5 hash string of the stored trusted root certificate DER.
Step 2: List all available certificates and private keys		
AT+USECMNG=3	CA, "ThawteCA","thawte Primary Root CA", "2036/07/17" OK	List all available certificates and private keys.
Step 3: Set the security profile 2 validation level to trusted root		
AT+USECPRF=2,0,1	OK	Security profile 2 has the validation level set to trusted root.
Step 4: Set the security profile 2 trusted root certificate to the CA certificate imported as "ThawteCA"		
AT+USECPRF=2,3,"ThawteCA"	OK	Security profile 2 will use the CA certificate imported as "ThawteCA" for server certificate validation.
Step 5: Use the configured USECMNG profile 2 with the UHTTP application		
AT+UHTTP=0,1,"www.ssl_tls_test_server.com"	OK	Configure the UHTTP server name.
AT+UHTTP=0,6,1,2	OK	Enable the SSL/TLS for the UHTTP profile #0 and specify the SSL/TLS security profile 2.
AT+UHTTPC=0,1,"/","https.resp"	OK	Execute the HTTP GET command.
	+UUHTTPCR: 0,1,1	HTTP GET URC response.

In the above example the following PEM encoded trusted certificate is used:

```
-----BEGIN CERTIFICATE-----
MIIEIDCCAwigAwIBAgIQNE7VVyDV7exJ9C/ON9srbTANBgkqhkiG9w0BAQUFADCB
qTELMAkGA1UEBhMCVVMxFTATBgNVBAoTDHRoYXd0ZSwgSW5jLjEoMCYGA1UECxMf
Q2VydGlmaWNhdGlvbiBTZXJ2aWNlcyBEaXZpc2lvbjE4MDYGA1UECxMvKGMpIDIw
MDYgdGhhd3RlLCBJbmMuIC0gRm9yIGF1dGhvcml6ZWQgdXNlIG9ubHkxHzAdBgNV
BAMTFnRoYXd0ZSBQcmltYXJ5IFJvb3QgQ0EwHhcNMDYxMTE3MDAwMDAwWhcNMzYw
NzE2MjM1OTU5WjCBqTELMAkGA1UEBhMCVVMxFTATBgNVBAoTDHRoYXd0ZSwgSW5j
LjEoMCYGA1UECxMfQ2VydGlmaWNhdGlvbiBTZXJ2aWNlcyBEaXZpc2lvbjE4MDYG
A1UECxMvKGMpIDIwMDYgdGhhd3RlLCBJbmMuIC0gRm9yIGF1dGhvcml6ZWQgdXNl
IG9ubHkxHzAdBgNVBAMTFnRoYXd0ZSBQcmltYXJ5IFJvb3QgQ0EwggEiMA0GCSqG
SIb3DQEBAQUAA4IBDwAwggEKAoIBAQCsoPD7gFnUnMekz52hWXMJEEUMDSxuaPFs
W0hoSVk3/AszGcJ3f8wQLZU0HObrTQmnHNK4yZc2AreJ1CRfBsDMRJSUjQJib+ta
3RGNKJpchJAQeg29dGYvajig4tVUROsdB58Hum/u6f1OCyn1PoSgAfGcq/gcfomk
6KHYcWUNo1F77rzSImANuVud37r8UVsLr5iy6S7pBOhih94ryNdOwUxkHt3Ph1i6
Sk/KaAcdHJ1KxtUvkcx8cXIcxcBn6zL9yZJclNqFwJu/U30rCfSMnZEfl2pSy94J
NqR32HuHUETVPm4pafs5SSYeCaWAe0At6+gnhcn+Yf1+5nyXHdWdAgMBAAGjQjBA
MA8GA1UdEwEB/wQFMAMBAf8wDgYDVR0PAQH/BAQDAgEGMB0GA1UdDgQWBBR7W0XP
r87Lev0xkhpqtvNG61dIUDANBgkqhkiG9w0BAQUFAAOCAQEAeRHAS7ORtvzw6WfU
DW5FvlXok9LOAz/t2iWwHVfLHjp2oEzsUHboZHIMpKnxuIvW1oeEuzLlQRHAd9mz
YJ3rG9XRbkREqaYB7FViHXe4XI5ISXycO1cRrK1zN44veFyQaEfZYGDm/Ac9IiAX
xPcW6cTYcvnIc3zfFi8VqT79aie2oetaupgf1eNNZAqdE8hhuvU5HIe6uL17In/2
/qxAeeWsEG89jxt5dovEN7MhGITlNgDrYyCZuen+MwS7QcjBAvlEYyCegc5C09Y/
LHbTY5xZ3Y+m4Q6gLkH3LpVHz7z9M/P2C2F+fpErgUfCJzDupxBdN49cOSvkBPB7
jVaMaA==
-----END CERTIFICATE-----
```

27.3.4 Notes

Due to significant memory fingerprint of an SSL/TLS connection, the number of concurrent SSL/TLS connections is limited. The USECMNG and the underlying SSL/TLS infrastructure allows 4 concurrent SSL/TLS connections (i.e. 4 HTTPS requests or 2 HTTPS and 2 FTPS request).

27.3.5 SSL/TLS/DTLS security layer profile manager +USECPRF

+USECPRF						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	-	+CME Error

27.3.5.1 Description

Manages security profiles for the configuration of the following SSL/TLS/DTLS connections properties:

- **Certificate validation level:**
  - Level 0: no certificate validation; the server certificate will not be checked or verified. No additional certificates are needed.
  - Level 1: certificate validation against a specific or a list of imported trusted root certificates.
  - Level 2: certificate validation with an additional URL integrity check (the server certificate common name must match the server hostname).
  - Level 3: certificate validation with an additional check on the certificate validity date.

  CA certificates should be imported with the +USECMNG AT command
- **SSL/TLS version to be used:**
  - Any of the TLS versions supported by the module
  - TLS 1.0
  - TLS 1.1
  - TLS 1.2
  - TLS 1.3

- **DTLS version to be used:**
  - DTLS 1.2
- **Cipher suite to be configured using the following methods:**
  - **Legacy cipher suite** to be used. See Syntax description and Table 55 for the supported cipher suites.
  - **Additional cipher suite** to be used with Internet Assigned Numbers Authority (IANA) enumeration set command. See Syntax description and Table 55 for the supported cipher suites.
  - **List of cipher suites** to be used is configured with add / remove commands and using IANA enumeration. See Syntax description and Table 55 for the supported cipher suites.

☞ For the applicability of cipher suite depending on the series module, see Cipher suites applicability.

☞ Cipher suite configuration methods are exclusive and the last configured method is used.

☞ The cipher suite configuration read command response is related to the selected cipher suite type, see Syntax description for more details.

- **Certificate to be used for server and mutual authentication:**
  - The trusted root certificate. The CA certificate should be imported with the +USECMNG AT command.
  - The client certificate that should be imported with the +USECMNG AT command.
  - The client private key that should be imported with the +USECMNG AT command.
  - The server certificate that should be imported with the +USECMNG AT command.
- **Database selection.** Accordingly to the +USECMNG AT command the certificates and keys can be imported in the user database, or can be already present in the pre-installed database. The security profile can be configured to use certificates and clients from all available databases or from a specific database.
- **Expected server hostname, when using certificate validation level 2 or 3.**
- **Password for the client private key, if it is password protected.**
- **Pre-shared key used for connection. Defines a pre-shared key and key-name (PSK), when a TLS_PSK_* cipher suite is used.**
- **SNI (Server Name Indication).** SNI is a feature of SSL/TLS which uses an additional SSL/TLS extension header to specify the server name to which the client is connecting to. The extension was introduced to support the certificate handling used with virtual hosting provided by the various SSL/TLS enabled servers mostly in cloud based infrastructures. With the SNI a server has the opportunity to present a different server certificate (or/and whole SSL/TLS configuration) based on the host indicated by the SNI extension. When SNI is not used the modules might receive a non host specific SSL/TLS configuration (version/cipher suites/certificate) when used with virtual hosts.
- **(D)TLS session resumption.** The session resumption feature allows to reuse the secure session data to reestablish a SSL/(D)TLS secure session. Since the secure session data are available, the full SSL/(D)TLS handshake is not performed during the session resumption. Once the session resumption feature is enabled, the session resumption type and the secure session data (negotiated during the SSL/(D)TLS handshake) are displayed via +UUSECPRF URC message. The session resumption feature configuration and secure session data are not stored in the NVM, hence the session resumption may be performed until power cycle. Once the session data related to the session resumption via session ticket (<sess_type>=1 or <sess_type>=11) or via the session resumption via PSK-based session ticket (<sess_type>=3 or <sess_type>=13) are properly retrieved from the server, they are directly configured in the USECPRF profile and a +UUSECPRF URC message reporting the session resumption status is issued. Conversely, once the session data related to the session resumption via session ID (<sess_type>=0 or <sess_type>=10) are properly retrieved from the server, an +UUSECPRF URC message reporting the session resumption type and an +UUSECPRF URC message reporting the session resumption data are issued, furthermore the session resumption data are not stored in the USECPRF profile.
- **ZTP-provided credentials.** The credentials to establish the secure connection will be provided by Zero Touch Provisioning (ZTP). In the specific case the credentials provided by the ZTP will be the CA certificate, or/and the client certificates and client private key. The CA certificate, and if applicable, the client certificate, are sent to the server during the handshake. The CA certificate and the client certificate are concatenated in a certificate chain.

- **Application Layer Protocol Name (ALPN).** With ALPN the client sends the list of supported application protocols as part of the TLS ClientHello message. The server can select one protocol and send it as part of the TLS ServerHello message. The application protocol negotiation can thus be accomplished within the TLS handshake, without adding network round-trips, and allows the server to associate a different certificate according to the indicated application protocol, if desired. For more details on ALPN, Extension protocol see RFC 7301 [188].

☞ When ZTP-provided credentials feature is enabled (<op_code>=14) for a certain USECPRF profile, the client certificate and client key set by the <op_code>=5 (client certificate internal name) and <op_code>=6 (client private key internal name) are ignored, and the underlying SSL/TLS uses the ZTP provided ones.

☞ To set all the parameters in security profile, a set command for each <op_code> needs to be issued (e.g. certificate validation level, minimum SSL/TLS/DTLS version, ...).

☞ To reset (set to factory-programmed value) all the parameters of a specific security profile, issue the AT +USECPRF=<profile_id> command.

27.3.5.2 Syntax

Type	Syntax	Response	Example
Generic syntax			
Set	AT+USECPRF=<profile_id>[,<op_code>[,<param_val1>[,<param_val2>[,<param_val3>]]]]	OK	AT+USECPRF=0,0,0 OK
Read	AT+USECPRF=<profile_id>,<op_code>	+USECPRF: <profile_id>,<op_code>,<param_val1> OK	AT+USECPRF=0,0 +USECPRF: 0,0,0 OK
URC		+UUSECPRF: <profile_id>,<op_code>[,<param_val1>[,<param_val2>[,<param_val3>]]] OK	+UUSECPRF: 0,13,1,0 OK
Certificate validation level			
Set	AT+USECPRF=<profile_id>,0,<validation_lvl>	OK	AT+USECPRF=0,0,2 OK
SSL/TLS version			
Set	AT+USECPRF=<profile_id>,1,<tls_ver>	OK	AT+USECPRF=0,1,4 OK
Legacy cipher suite selection			
Set	AT+USECPRF=<profile_id>,2,<legacy_cs>	OK	AT+USECPRF=0,2,2 OK
Cipher suite selection using IANA enumeration			
Set	AT+USECPRF=<profile_id>,2,99,<iana_b1>,<iana_b2>	OK	AT+USECPRF=0,2,99,"C0","2B" OK
Read	AT+USECPRF=<profile_id>,2	+USECPRF: <profile_id>,2,99,<iana_b1>,<iana_b2> OK	AT+USECPRF=0,2 +USECPRF: 0,2,99,"C0","2B" OK
Add/remove of IANA cipher suite to the configured cipher suites list			
Set	AT+USECPRF=<profile_id>,2,100,<iana_b1>,<iana_b2>,<operation>	OK	AT+USECPRF=0,2,100,"C0","2A",0 OK
Add an IANA cipher suite to the configured cipher suites list			
Set	AT+USECPRF=<profile_id>,2,100,<iana_b1>,<iana_b2>,0	OK	AT+USECPRF=0,2,100,"C0","2A",0 OK
Remove an IANA cipher suite from the configured cipher suites list			

Type	Syntax	Response	Example
Set	AT+USECPRF=<profile_id>,2,100,<iana_b1>,<iana_b2>,1	OK	AT+USECPRF=0,2,100,"C0","2B",1 OK
Read the list of configured cipher suites			
Read	AT+USECPRF=<profile_id>,2	+USECPRF: <profile_id>,2,100,<list of configured cipher suites separated by ";"> OK	AT+USECPRF=0,2 +USECPRF: 0,2,100,"C02A;C02C" OK
Trusted root certificate internal name			
Set	AT+USECPRF=<profile_id>,3,<root_cert_int_name>	OK	AT+USECPRF=0,3,"ca_iname" OK
Expected server hostname			
Set	AT+USECPRF=<profile_id>,4,<srv_hostname>	OK	AT+USECPRF=0,4,"server_hostname" OK
Client certificate internal name			
Set	AT+USECPRF=<profile_id>,5,<cli_cert_int_name>	OK	AT+USECPRF=0,5,"cc_iname" OK
Client private key internal name			
Set	AT+USECPRF=<profile_id>,6,<cli_priv_key_int_name>	OK	AT+USECPRF=0,6,"pk_iname" OK
Client private key password			
Set	AT+USECPRF=<profile_id>,7,<cli_priv_key_pwd>	OK	AT+USECPRF=0,7,"xxxxx" OK
Pre-shared key configuration			
Set	AT+USECPRF=<profile_id>,8,<preshared_key>[,<preshared_key_str_type>]	OK	AT+USECPRF=0,8,"0sFpZ0AZqE0N6Ti9s0qt40ZP5Eqx" OK
Pre-shared key identity configuration			
Set	AT+USECPRF=<profile_id>,9,<preshared_key_id>[,<preshared_key_id_str_type>]	OK	AT+USECPRF=0,9,"0ceEZ0AZqP0K60i9o04xz0ZP8zyu0Eqx" OK
SNI Server Name Indication			
Set	AT+USECPRF=<profile_id>,10,<SNI>	OK	AT+USECPRF=0,10,"server_sni" OK
PSK and PSK key identity generated by RoT (Root of trust)			
Set	AT+USECPRF=<profile_id>,11,<PSK_val>	OK	AT+USECPRF=0,11,0 OK
Server certificate pinning			
Set	AT+USECPRF=<profile_id>,12,<server_certificate>,<pinning_level>	OK	AT+USECPRF=0,12,"my_srv_cert",0 OK
(D)TLS session resumption generic syntax			
Set	AT+USECPRF=<profile_id>,13,<sess_tag>,<param_val1>[,<param_val2>]	OK	AT+USECPRF=0,13,0,1 OK
Read	AT+USECPRF=<profile_id>,13,<sess_tag>	+USECPRF: <profile_id>,13,<sess_tag>,<param_val1>[,<param_val2>] OK	AT+USECPRF=0,13,0 +USECPRF: 0,13,0,1 OK
URC		+UUSECPRF: <profile_id>,13,<sess_tag>,<param_val1>[,<param_val2>]	+UUSECPRF: 0,13,1,0 OK

Type	Syntax	Response	Example
		OK	
(D)TLS session resumption status			
Set	AT+USECPRF=<profile_id>,13,0,<sess_status>	OK	AT+USECPRF=0,13,0,1 OK
Read	AT+USECPRF=<profile_id>,13,0	+USECPRF: <profile_id>,13,0,<sess_status> OK	AT+USECPRF=0,13,0 +USECPRF: 0,13,0,1 OK
URC		+UUSECPRF: <profile_id>,13,0,<sess_status>	+UUSECPRF: 0,13,0,2
(D)TLS session resumption session type			
Set	AT+USECPRF=<profile_id>,13,1,<sess_type>	OK	AT+USECPRF=0,13,1,0 OK
Read	AT+USECPRF=<profile_id>,13,1	+USECPRF: <profile_id>,13,1,<sess_type> OK	AT+USECPRF=0,13,1 +USECPRF: 0,13,1,0 OK
URC		+UUSECPRF: <profile_id>,13,1,<sess_type>	+UUSECPRF: 0,13,1,0
(D)TLS session resumption session data having session ID as session resumption type			
Set	AT+USECPRF=<profile_id>,13,2,<session_id_b64>,<master_secret_b64>	OK	AT+USECPRF=0,13,2,"VWY5UENs0Hh3VWR1MjB2WTVMYVZ5TTdE0WpMeWZWeHo=","SHVSODByUit0My9OMEtIT2ZsVVFRcUsyTkdvaz0nWVFhRzdQZUpndG9IMzN4ZTBo" OK
Read	AT+USECPRF=<profile_id>,13,2	+USECPRF: <profile_id>,13,2,<session_id_b64>,<master_secret_b64> OK	AT+USECPRF=0,13,2 +USECPRF: 0,13,2,"VWY5UENs0Hh3VWR1MjB2WTVMYVZ5TTdE0WpMeWZWeHo=","SHVSODByUit0My9OMEtIT2ZsVVFRcUsyTkdvaz0nWVFhRzdQZUpndG9IMzN4ZTBo" OK
URC		+UUSECPRF: <profile_id>,13,2,<session_id_b64>,<master_secret_b64>	+UUSECPRF: 0,13,2,"VWY5UENs0Hh3VWR1MjB2WTVMYVZ5TTdE0WpMeWZWeHo=","SHVSODByUit0My9OMEtIT2ZsVVFRcUsyTkdvaz0nWVFhRzdQZUpndG9IMzN4ZTBo"
(D)TLS session resumption session data having session ticket as session resumption type			
Set	AT+USECPRF=<profile_id>,13,3,<session_data_b64>,<session_data_b64_size>	OK	AT+USECPRF=0,13,3,"MIHOAgECAgMAzKgEMDZV [...] NuPf3pFw4tJjU2gjKg2ipCBW0rTrfTyQ==",332 OK
Read	AT+USECPRF=<profile_id>,13,3	+USECPRF: <profile_id>,13,3,<session_data_b64>,<session_data_b64_size> OK	AT+USECPRF=0,13,3 +USECPRF: 0,13,3,"MIHOAgECAgMAzKgEMDZV [...] NuPf3pFw4tJjU2gjKg2ipCBW0rTrfTyQ==",332

Type	Syntax	Response	Example
			OK
(D)TLS session resumption session data having PSK-based session ticket as session resumption type			
Set	AT+USECPRF=<profile_id>,13,5,<session_data_b64_size> > <session_data_b64>	OK	AT+USECPRF=0,13,5,2320 > NjQwM0IwMDEzMDgyMDFB0QzAyMDEwMTAyMDEwMDAy0MDEwMTAyMDIxQzIwMDIw [...] MDAwMDAwMDAwMDAwMDAw0MDAwMDAwMDAwMDAwMDAw0MDAwMDAwMDAyMDIxMzAy OK
Read	AT+USECPRF=<profile_id>,13,5	+USECPRF: <profile_id>,13,5,<session_data_b64>,<session_data_b64_size> OK	AT+USECPRF=0,13,5 +USECPRF: 0,13,5,"Nj0QwM0IwMDEzMDgyMDFBQz0AyMDEwMTAyMDEwMDAyMD [...] AwMDAwMDAwMDAwMDAwMD0AwMDAwMDAwMDAwMDAwMD0AwMDAyMDIxMzAy",2320 OK
(D)TLS session resumption session data having encrypted session ID with local encryption as session resumption type			
Set	AT+USECPRF=<profile_id>,13,12,<enc_session_data_b64>,<enc_session_data_b64_size>	OK	AT+USECPRF=0,13,12, "AAECAwQFBgcICQoLDA0ODxAREhMUFRYXGBkaGxwdHh/Ljgstf1cLaEO2D8IMbxHcQIGfhVxC0in6aGVISJGBWCAAKJo6Qw5Q+ugXaRZFquG0O69WeHnPRBkcwY2SN4bwnDbyR+709i0pt2nIaYMSCL77MAA=",156 OK
Read	AT+USECPRF=<profile_id>,13,12	+USECPRF: <profile_id>,13,12,<enc_session_data_b64>,<enc_session_data_b64_size> OK	AT+USECPRF=0,13,12 +USECPRF: 0,13,12, "AAECAwQFBgcICQoLDA0ODxAREhMUFRYXGBkaGxwdHh/Ljgstf1cLaEO2D8IMbxHcQIGfhVxC0in6aGVISJGBWCAAKJo6Qw5Q+ugXaRZFquG0O69WeHnPRBkcwY2SN4bwnDbyR+709i0pt2nIaYMSCL77MAA=",156 OK
URC		+UUSECPRF: <profile_id>,13,12,<enc_session_data_b64>,<enc_session_data_b64_size>	+UUSECPRF: 0,13,12, "AAECAwQFBgcICQoLDA0ODxAREhMUFRYXGBkaGxwdHh/Ljgstf1cLaEO2D8IMbxHcQIGfhVxC0in6aGVISJGBWCAAKJo6Qw5Q+ugXaRZFquG0O69WeHnPRBkcwY2SN4bwnDbyR+709i0pt2nIaYMSCL77MAA=",156
(D)TLS session resumption session data having encrypted session ticket with local encryption as session resumption type			

Type	Syntax	Response	Example
Set	AT+USECPRF=<profile_id>,13,13,<enc_session_data_b64>,<enc_session_data_b64_size>	OK	AT+USECPRF=0,13,13,"MIHOAgECAgMAzKwsa64L [...] dQE2VcxYvD0VcrR2jKg2ipCBW0rTrfTyQ==",364 OK
Read	AT+USECPRF=<profile_id>,13,13	+USECPRF: <profile_id>,13,13,<enc_session_data_b64>,<enc_session_data_b64_size> OK	AT+USECPRF=0,13,13 +USECPRF: 0,13,13,"MIHOAgECAgMAzKwsa64L [...] QE2VcxYvD0VcrR2jKg2ipCBW0rTrfTyQ==",364 OK
(D)TLS session resumption session data having PSK-based session ticket with local encryption as session resumption type			
Set	AT+USECPRF=<profile_id>,13,15,<enc_session_data_b64_size> > <enc_session_data_b64>	OK	AT+USECPRF=0,13,15,2408 > MDBGMDRCREYwODYwREYw0RDFDNjk1NUU5OUY5NjAw0MDA1QjlCN0QxMUYzM0Qy [...] Njg4MkEzQzJCRjA5NEFF0QzJFQUFFOTNBNjY2RkNE0QzM3RDJERTYyRDIxNQ== OK
Read	AT+USECPRF=<profile_id>,13,15	+USECPRF: <profile_id>,13,15,<enc_session_data_b64>,<enc_session_data_b64_size> OK	AT+USECPRF=0,13,15 +USECPRF: 0,13,15,"M0DBGMDRCREYwODYwREYwR0DFDNjk1NUU5OUY5NjAwM [...] EzQzJCRjA5NEFFQzJFQU0FFOTNBNjY2RkNEQzM3RD0JERTYyRDIxNQ==",2408 OK
ZTP-provided credentials			
Set	AT+USECPRF=<profile_id>,14,<ZTP_tag>	OK	AT+USECPRF=0,14,0 OK
Read	AT+USECPRF=<profile_id>,14	+USECPRF: <profile_id>,14,<ZTP_tag> OK	AT+USECPRF=0,14 +USECPRF: 0,14,2 OK
ALPN extension protocol			
Set	AT+USECPRF=<profile_id>,15,<ALPN_string_type>	OK	AT+USECPRF=0,15,"FTP" OK
Read	AT+USECPRF=<profile_id>,15	+USECPRF: <profile_id>,15,<ALPN_string_type> OK	AT+USECPRF=0,15 +USECPRF: 0,15,"FTP" OK
Database selection			

Type	Syntax	Response	Example
Set	AT+USECPRF=<profile_id>,16,<db_to_use>	OK	AT+USECPRF=0,16,1 OK
Read	AT+USECPRF=<profile_id>,16	+USECPRF: <profile_id>,16,<db_to_use> OK	AT+USECPRF=0,16 +USECPRF: 0,16,2 OK
Test	AT+USECPRF=?	+USECPRF: (list of supported <profile_id>s),(list of supported <op_code>s) OK	+USECPRF: (0-4),(0-16) OK

27.3.5.3 Defined values

Parameter	Type	Description
<profile_id>	Number	USECMNG security profile identifier, in range 0-4; if it is not followed by other parameters the profile settings will be reset (set to factory-programmed value).
<op_code>	Number	• 0: certificate validation level • 1: SSL/TLS version to use • 2: cipher suite • 3: trusted root certificate internal name • 4: expected server hostname • 5: client certificate internal name • 6: client private key internal name • 7: client private key password • 8: pre-shared key • 9: pre-shared key identity • 10: SNI (Server Name Indication) • 11: PSK key and PSK key identity generated by RoT (Root of trust) • 12: server certificate pinning • 13: (D)TLS session resumption; • 14: ZTP-provided credentials • 15: Application-Layer Protocol Negotiation (ALPN) • 16: database selection Allowed values: • LARA-L6004-00B / LARA-L6004D-00B - 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13 • LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B - 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13 • LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D - 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 13, 15, 16 • LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D - 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 13, 15, 16
<validation_lvl>	Number	certificate validation level: • 0: level 0 - No validation; the server certificate will not be checked or verified. The server in this case is not authenticated. • 1: level 1 - Root certificate validation without URL integrity check. The server certificate will be verified with a specific trusted certificates or with each of the imported trusted root certificates. • 2: level 2 - Root certificate validation with URL integrity check. Level 1 validation with an additional URL integrity check. • 3: level 3 - Root certificate validation with check of certificate validity date. Level 2 validation with an additional check of certificate validity date. The factory-programmed value is: • LARA-L6 / LARA-R6 - 1
<tls_ver>	Number	SSL/TLS version to use; allowed values: • 0: any; the server can use any TLS version, which is supported by the module, for the connection. For more details on the supported TLS versions, see Notes. • 1: TLS v1.0; connection allowed only to TLS/SSL servers which support TLS v1.0

Parameter	Type	Description
		• 2: TLS v1.1; connection allowed only to TLS/SSL servers which support TLS v1.1 • 3: TLS v1.2; connection allowed only to TLS/SSL servers which support TLS v1.2 • 4: TLS v1.3; connection allowed only to TLS/SSL servers which support TLS v1.3 The factory-programmed value is: • LARA-L6 / LARA-R6 - 3
<legacy_cs>	Number	Legacy cipher suite enumeration. legacy cipher suites are listed in Table 55. The factory-programmed value is 0. For <legacy_cs>=0 a list of default cipher suites is proposed at the beginning of handshake process, and a cipher suite will be negotiated among the cipher suites proposed in the list. For <legacy_cs>=99 the cipher suite selection is performed with IANA enumeration, <iana_b1> and <iana_b2> are strings containing the 2 bytes that compose the IANA enumeration, see Table 55. For <legacy_cs>=100 the list of cipher suites is configured using IANA enumeration, <iana_b1> and <iana_b2> are strings containing the 2 bytes that compose the IANA enumeration, see Table 55. ☞ The cipher suite configuration read command response is related to the selected cipher suite type. In the case of <legacy_cs>=99 the configured <byte_1> and <byte_2> are reported in the information text response to the read command. In the case of <legacy_cs>=100 a ";" separated list with configured cipher suites is reported in the information text response to the read command. ☞ For <legacy_cs>=100, when all added cipher suites are removed the cipher suite is automatically set to 0 (factory-programmed value). ☞ For the applicability of default cipher suite lists depending on the series module, see Cipher suites applicability.
<iana_b1>	String	First byte of IANA cipher suite enumeration
<iana_b2>	String	Second byte of IANA cipher suite enumeration
<operation>	Number	Operation to execute when using <legacy_cs>=100 configuration using a list of IANA enumeration. Allowed values for <operation>: • 0: add cipher suite defined by <iana_b1> and <iana_b2> to the list • 1: remove cipher suite defined by <iana_b1> and <iana_b2> from the list
<root_cert_int_name>	String	Internal name identifying a trusted root certificate; the maximum length is 200 characters. The factory-programmed value is an empty string.
<srv_hostname>	String	Hostname of the server, used when certificate validation level is set to Level 2; the maximum length is 256 characters. The factory-programmed value is an empty string.
<cli_cert_int_name>	String	Internal name identifying a client certificate to be sent to the server; the maximum length is 200 characters. The factory-programmed value is an empty string.
<cli_priv_key_int_name>	String	Internal name identifying a private key to be used; the maximum length is 200 characters. The factory-programmed value is an empty string.
<cli_priv_key_pwd>	String	Password for the client private key if it is password protected; the maximum length is 128 characters. The factory-programmed value is an empty string.
<preshared_key>	String	Pre-shared key used for connection; the factory-programmed value is an empty string. The accepted string type and length depends on the <preshared_key_str_type> value.
<preshared_key_str_type>	Number	Defines the type and the maximum length of the <preshared_key> string. Allowed values: • 0 (default value): <preshared_key> is an ASCII string and its maximum length is 64 characters • 1: <preshared_key> is an hexadecimal string and its maximum length is 128 characters
<preshared_key_id>	String	Pre-shared key used for connection; the factory-programmed value is an empty string. The accepted string type and length depends on the <preshared_key_id_str_type> value.
<preshared_key_id_str_type>	Number	Defines the type and the maximum length of the <preshared_key_id> string. Allowed values: • 0 (default value): <preshared_key_id> is an ASCII string and its maximum length is 128 characters • 1: <preshared_key_id> is an hexadecimal string and its maximum length is 256 characters
<SNI>	String	Value for the additional negotiation header SNI (Server Name Indication) used in SSL/TLS connection negotiation; the maximum length is 128 characters. The factory-programmed value is an empty string..
<PSK_val>	Number	PSK key and PSK key identity generated by RoT (Root of trust); allowed values: • 0 (factory-programmed value): OFF - The PSK and PSK key ID are NOT generated by RoT • 1: ON - The PSK and PSK key ID are generated by RoT in the process of SSL/TLS connection negotiation

Parameter	Type	Description
<server_certificate>	String	Internal name identifying a certificate configured to be used for server certificate pinning; the maximum length is 200 characters. The factory-programmed value is an empty string.
<pinning_level>	String	Certificate pinning information level. Allowed values: • 0: pinning based on information comparison of received and configured certificate public key • 1: pinning based on binary comparison of received and configured certificate public key • 2: pinning based on binary comparison of received and configured certificate
<sess_tag>	Number	Configures the (D)TLS session resumption. Allowed values: • 0: session resumption status • 1: session resumption type • 2: session resumption data when the session resumption type is session ID • 3: session resumption data when the session resumption type is session ticket. • 5: session resumption data when the session resumption type is PSK-based session ticket. TLS v1.3 must be enabled (+USECPRF: <profile_id>,1,4). • 12: session resumption data when the session resumption type is encrypted session ID with local encryption • 13: session resumption data when the session resumption type is encrypted session ticket with local encryption • 15: session resumption data when the session resumption type is encrypted PSK-based session ticket with local encryption. TLS v1.3 must be enabled (+USECPRF: <profile_id>,1,4). Allowed values: • LARA-L6004-00B / LARA-L6004D-00B - 0, 1, 2, 3, 5, 12, 13, 15 • LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B - 0, 1, 2, 3, 5, 12, 13, 15 • LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D - 0, 1, 2, 3, 5 • LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D - 0, 1, 2, 3, 5
<sess_status>	Number	(D)TLS session resumption status. Allowed values: • 0 (factory-programmed value): disabled • 1: enabled • 2: session data configured Allowed values: • LARA-L6 / LARA-R6 - 0, 1, 2
<sess_type>	Number	(D)TLS session resumption type. Allowed values: • 0: session ID • 1: session ticket • 3: PSK-based session ticket. TLS v1.3 must be enabled (+USECPRF: <profile_id>,1,4) • 10: encrypted session ID with local encryption • 11: encrypted session ticket with local encryption • 13: encrypted PSK-based session ticket with local encryption. TLS v1.3 must be enabled (+USECPRF: <profile_id>,1,4) Allowed values: • LARA-L6004-00B / LARA-L6004D-00B - 0, 1, 3, 10, 11, 13 • LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B - 0, 1, 3, 10, 11, 13 • LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D - 0, 1, 3 • LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D - 0, 1, 3
<session_id_b64>	String	Base64 encoded session ID value. The maximum length is 44 characters.
<master_secret_b64>	String	Base64 encoded session master key. The maximum length is 64 characters.
<session_data_b64_size>	Number	Length of base64 encoded session data value. The maximum size is 8192.
<session_data_b64>	String	Base64 encoded session data value. The string length is determined by <session_data_b64_size>.
<enc_session_data_b64>	String	Base64 encoded session data value encrypted with local encryption. The string length is determined by <enc_session_data_b64_size>

Parameter	Type	Description
<enc_session_data_b64_size>	Number	Length of base64 encoded session data value encrypted with local encryption. The maximum size is 8192.
<ZTP_tag>	Number	ZTP-provided credentials level. Allowed values for: • 0: no credentials are obtained via ZTP • 1: CA certificate and client certificate/key are obtained via ZTP. The CA certificate and client certificate will be concatenated together in a certificate chain and provided to the server • 2: client certificate/key are provided via ZTP. The client certificate will be provided to the server
<ALPN_string_type>	String	value for the protocol name to be added in the Application Layer Protocol Negotiation Extension used in SSL/TLS connection negotiation; the maximum length is 255 characters. It is possible to set a protocol IDs listed at https://www.iana.org/assignments/tls-extensiontype-values/tls-extensiontype-values.xhtml#alpn-protocol-ids or a custom string. The factory-programmed value is an empty string.
<db_to_use>	Number	Database to use, from where to retrieve the certificates and keys to establish the secure connection. Allowed values for: • 0 (factory-programmed value): all available databases are used • 1: only user database is used • 2: only pre-installed database is used
<param_val1>	String	Type and supported content depend on related <op_code> (details are given above).
<param_val2>	String	Type and supported content depend on related <op_code> (details are given above).
<param_val3>	String	Type and supported content depend on related <op_code> (details are given above).

27.3.5.4 Notes

LARA-L6 / LARA-R6

- If <op_code>=1 (SSL/TLS version) and <param_val1>=0 (any) the server can use only TLS v1.2 or TLS v1.3 for the connection.
- If <op_code>=9 (pre-shared key identity) the <string_type> parameter is not supported. The <preshared_key_id> parameter is an ASCII string (maximum length 128 characters).
- The unique minimum SSL/TLS version (<op_code>=1) is not supported when used with UDP connection. With UDP connection only the DTLS version 1.2 is supported and is automatically configured.
- If <op_code>=11 (PSK key and PSK key identity generated by RoT) and the corresponding <param_val1>=1 (ON), the DTLS/TLS subsystem will use the SCL/RoT to generate the PSK secret, therefore the security suite features must be enabled (+USECMODE: 1). The connection time could be up to 150 s due to "security heartbeat" message operation. For more details on when this scenario occurs, see the +USECCONN AT command.
- If <op_code>=13 ((D)TLS session resumption), <sess_tag>=1 (session resumption type) and <sess_type>=10 (encrypted session ID with local encryption), the DTLS/TLS subsystem will use the SCL/RoT to encrypt/decrypt the session resumption data, therefore the security suite features must be enabled (+USECMODE: 1). The connection time could be up to 150 s due to "security heartbeat" message operation. For more details on when this scenario occurs, see the +USECCONN AT command.
- If <op_code>=13 ((D)TLS session resumption) and <sess_tag>=1 (session resumption type), <sess_type>=0 (session ID) and <sess_type>=10 (encrypted session ID with local encryption) are supported.
- If <op_code>=13 ((D)TLS session resumption), <sess_tag>=1 (session resumption type) and <sess_type>=11 (encrypted session ticket with local encryption), the DTLS/TLS subsystem will use the SCL/RoT to encrypt/decrypt the session resumption data, therefore the security suite features must be enabled (+USECMODE: 1). The connection time could be up to 150 s due to "security heartbeat" message operation. For more details on when this scenario occurs, see the +USECCONN AT command.
- If <op_code>=13 ((D)TLS session resumption), <sess_tag>=1 (session resumption type), and <sess_type>=13 (encrypted PSK-based session ticket with local encryption), the DTLS/TLS subsystem will use the SCL/RoT to encrypt/decrypt the session resumption data, therefore the security suite features must be enabled (+USECMODE: 1). The connection time could be up to 150 s due to "security heartbeat" message operation. For more details on when this scenario occurs, see the +USECCONN AT command.

27.3.5.5 List of the supported cipher suites

Cipher suite IANA code	Cipher suite name	Legacy cipher suite configuration	IANA enumeration cipher suite configuration	
		<legacy_cs>	<iana_b1>	<iana_b2>
0x0000	TLS_NULL_WITH_NULL_NULL		"00"	"00"
0x000A	TLS_RSA_WITH_3DES_EDE_CBC_SHA	5	"00"	"0A"
0x0013	TLS_DHE_DSS_WITH_3DES_EDE_CBC_SHA		"00"	"13"
0x0015	TLS_DHE_RSA_WITH_DES_CBC_SHA		"00"	"15"
0x0016	TLS_DHE_RSA_WITH_3DES_EDE_CBC_SHA		"00"	"16"
0x001A	TLS_DH_anon_WITH_DES_CBC_SHA		"00"	"1A"
0x001B	TLS_DH_anon_WITH_3DES_EDE_CBC_SHA		"00"	"1B"
0x002F	TLS_RSA_WITH_AES_128_CBC_SHA	1	"00"	"2F"
0x0032	TLS_DHE_DSS_WITH_AES_128_CBC_SHA		"00"	"32"
0x0033	TLS_DHE_RSA_WITH_AES_128_CBC_SHA		"00"	"33"
0x0034	TLS_DH_anon_WITH_AES_128_CBC_SHA		"00"	"34"
0x0035	TLS_RSA_WITH_AES_256_CBC_SHA	3	"00"	"35"
0x0039	TLS_DHE_RSA_WITH_AES_256_CBC_SHA		"00"	"39"
0x003A	TLS_DH_anon_WITH_AES_256_CBC_SHA		"00"	"3A"
0x003C	TLS_RSA_WITH_AES_128_CBC_SHA256	2	"00"	"3C"
0x003D	TLS_RSA_WITH_AES_256_CBC_SHA256	4	"00"	"3D"
0x0040	TLS_DHE_DSS_WITH_AES_128_CBC_SHA256		"00"	"40"
0x0041	TLS_RSA_WITH_CAMELLIA_128_CBC_SHA		"00"	"41"
0x0045	TLS_DHE_RSA_WITH_CAMELLIA_128_CBC_SHA		"00"	"45"
0x0067	TLS_DHE_RSA_WITH_AES_128_CBC_SHA256		"00"	"67"
0x006B	TLS_DHE_RSA_WITH_AES_256_CBC_SHA256		"00"	"6B"
0x006C	TLS_DH_anon_WITH_AES_128_CBC_SHA256		"00"	"6C"
0x006D	TLS_DH_anon_WITH_AES_256_CBC_SHA256		"00"	"6D"
0x0084	TLS_RSA_WITH_CAMELLIA_256_CBC_SHA		"00"	"84"
0x0088	TLS_DHE_RSA_WITH_CAMELLIA_256_CBC_SHA		"00"	"88"
0x008A	TLS_PSK_WITH_RC4_128_SHA		"00"	"8A"
0x008B	TLS_PSK_WITH_3DES_EDE_CBC_SHA	8	"00"	"8B"
0x008C	TLS_PSK_WITH_AES_128_CBC_SHA	6	"00"	"8C"
0x008D	TLS_PSK_WITH_AES_256_CBC_SHA	7	"00"	"8D"
0x008E	TLS_DHE_PSK_WITH_RC4_128_SHA		"00"	"8E"
0x008F	TLS_DHE_PSK_WITH_3DES_EDE_CBC_SHA		"00"	"8F"
0x0090	TLS_DHE_PSK_WITH_AES_128_CBC_SHA		"00"	"90"
0x0091	TLS_DHE_PSK_WITH_AES_256_CBC_SHA		"00"	"91"
0x0092	TLS_RSA_PSK_WITH_RC4_128_SHA		"00"	"92"
0x0093	TLS_RSA_PSK_WITH_3DES_EDE_CBC_SHA	11	"00"	"93"
0x0094	TLS_RSA_PSK_WITH_AES_128_CBC_SHA	9	"00"	"94"
0x0095	TLS_RSA_PSK_WITH_AES_256_CBC_SHA	10	"00"	"95"
0x009C	TLS_RSA_WITH_AES_128_GCM_SHA256		"00"	"9C"
0x009D	TLS_RSA_WITH_AES_256_GCM_SHA384		"00"	"9D"
0x009E	TLS_DHE_RSA_WITH_AES_128_GCM_SHA256		"00"	"9E"
0x009F	TLS_DHE_RSA_WITH_AES_256_GCM_SHA384		"00"	"9F"
0x00A8	TLS_PSK_WITH_AES_128_GCM_SHA256	16	"00"	"A8"
0x00A9	TLS_PSK_WITH_AES_256_GCM_SHA384	17	"00"	"A9"
0x00AA	TLS_DHE_PSK_WITH_AES_128_GCM_SHA256		"00"	"AA"
0x00AB	TLS_DHE_PSK_WITH_AES_256_GCM_SHA384		"00"	"AB"
0x00AC	TLS_RSA_PSK_WITH_AES_128_GCM_SHA256	18	"00"	"AC"
0x00AD	TLS_RSA_PSK_WITH_AES_256_GCM_SHA384	19	"00"	"AD"
0x00AE	TLS_PSK_WITH_AES_128_CBC_SHA256	12	"00"	"AE"
0x00AF	TLS_PSK_WITH_AES_256_CBC_SHA384	13	"00"	"AF"
0x00B2	TLS_DHE_PSK_WITH_AES_128_CBC_SHA256		"00"	"B2"
0x00B3	TLS_DHE_PSK_WITH_AES_256_CBC_SHA384		"00"	"B3"

Cipher suite IANA code	Cipher suite name	Legacy cipher suite configuration	IANA enumeration cipher suite configuration	
		<legacy_cs>	<iana_b1>	<iana_b2>
0x00B6	TLS_RSA_PSK_WITH_AES_128_CBC_SHA256	14	"00"	"B6"
0x00B7	TLS_RSA_PSK_WITH_AES_256_CBC_SHA384	15	"00"	"B7"
0x00BA	TLS_RSA_WITH_CAMELLIA_128_CBC_SHA256		"00"	"BA"
0x00BE	TLS_DHE_RSA_WITH_CAMELLIA_128_CBC_SHA256		"00"	"BE"
0x00C0	TLS_RSA_WITH_CAMELLIA_256_CBC_SHA256		"00"	"C0"
0x00C4	TLS_DHE_RSA_WITH_CAMELLIA_256_CBC_SHA256		"00"	"C4"
0xC002	TLS_ECDH_ECDSA_WITH_RC4_128_SHA		"C0"	"02"
0xC003	TLS_ECDH_ECDSA_WITH_3DES_EDE_CBC_SHA		"C0"	"03"
0xC004	TLS_ECDH_ECDSA_WITH_AES_128_CBC_SHA		"C0"	"04"
0xC005	TLS_ECDH_ECDSA_WITH_AES_256_CBC_SHA		"C0"	"05"
0xC007	TLS_ECDHE_ECDSA_WITH_RC4_128_SHA		"C0"	"07"
0xC008	TLS_ECDHE_ECDSA_WITH_3DES_EDE_CBC_SHA	20	"C0"	"08"
0xC009	TLS_ECDHE_ECDSA_WITH_AES_128_CBC_SHA	21	"C0"	"09"
0xC00A	TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA	22	"C0"	"0A"
0xC00C	TLS_ECDH_RSA_WITH_RC4_128_SHA		"C0"	"0C"
0xC00D	TLS_ECDH_RSA_WITH_3DES_EDE_CBC_SHA		"C0"	"0D"
0xC00E	TLS_ECDH_RSA_WITH_AES_128_CBC_SHA		"C0"	"0E"
0xC00F	TLS_ECDH_RSA_WITH_AES_256_CBC_SHA		"C0"	"0F"
0xC010	TLS_ECDHE_RSA_WITH_NULL_SHA		"C0"	"10"
0xC011	TLS_ECDHE_RSA_WITH_RC4_128_SHA		"C0"	"11"
0xC012	TLS_ECDHE_RSA_WITH_3DES_EDE_CBC_SHA	23	"C0"	"12"
0xC013	TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA	24	"C0"	"13"
0xC014	TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA	25	"C0"	"14"
0xC017	TLS_ECDH_anon_WITH_3DES_EDE_CBC_SHA		"C0"	"17"
0xC018	TLS_ECDH_anon_WITH_AES_128_CBC_SHA		"C0"	"18"
0xC019	TLS_ECDH_anon_WITH_AES_256_CBC_SHA		"C0"	"19"
0xC023	TLS_ECDHE_ECDSA_WITH_AES_128_CBC_SHA256	26	"C0"	"23"
0xC024	TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA384	27	"C0"	"24"
0xC025	TLS_ECDH_ECDSA_WITH_AES_128_CBC_SHA256		"C0"	"25"
0xC026	TLS_ECDH_ECDSA_WITH_AES_256_CBC_SHA384		"C0"	"26"
0xC027	TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256	28	"C0"	"27"
0xC028	TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA384	29	"C0"	"28"
0xC029	TLS_ECDH_RSA_WITH_AES_128_CBC_SHA256		"C0"	"29"
0xC02A	TLS_ECDH_RSA_WITH_AES_256_CBC_SHA384		"C0"	"2A"
0xC02B	TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256	30	"C0"	"2B"
0xC02C	TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384	31	"C0"	"2C"
0xC02D	TLS_ECDH_ECDSA_WITH_AES_128_GCM_SHA256		"C0"	"2D"
0xC02E	TLS_ECDH_ECDSA_WITH_AES_256_GCM_SHA384		"C0"	"2E"
0xC02F	TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256	32	"C0"	"2F"
0xC030	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	33	"C0"	"30"
0xC031	TLS_ECDH_RSA_WITH_AES_128_GCM_SHA256		"C0"	"31"
0xC032	TLS_ECDH_RSA_WITH_AES_256_GCM_SHA384		"C0"	"32"
0xC033	TLS_ECDHE_PSK_WITH_RC4_128_SHA		"C0"	"33"
0xC034	TLS_ECDHE_PSK_WITH_3DES_EDE_CBC_SHA		"C0"	"34"
0xC035	TLS_ECDHE_PSK_WITH_AES_128_CBC_SHA		"C0"	"35"
0xC036	TLS_ECDHE_PSK_WITH_AES_256_CBC_SHA		"C0"	"36"
0xC037	TLS_ECDHE_PSK_WITH_AES_128_CBC_SHA256		"C0"	"37"
0xC038	TLS_ECDHE_PSK_WITH_AES_256_CBC_SHA384		"C0"	"38"
0xC072	TLS_ECDHE_ECDSA_WITH_CAMELLIA_128_CBC_SHA256		"C0"	"72"
0xC073	TLS_ECDHE_ECDSA_WITH_CAMELLIA_256_CBC_SHA384		"C0"	"73"
0xC074	TLS_ECDH_ECDSA_WITH_CAMELLIA_128_CBC_SHA256		"C0"	"74"

Cipher suite IANA code	Cipher suite name	Legacy cipher suite configuration	IANA enumeration cipher suite configuration	
		<legacy_cs>	<iana_b1>	<iana_b2>
0xC075	TLS_ECDH_ECDSA_WITH_CAMELLIA_256_CBC_SHA384		"C0"	"75"
0xC076	TLS_ECDHE_RSA_WITH_CAMELLIA_128_CBC_SHA256		"C0"	"76"
0xC077	TLS_ECDHE_RSA_WITH_CAMELLIA_256_CBC_SHA384		"C0"	"77"
0xC078	TLS_ECDH_RSA_WITH_CAMELLIA_128_CBC_SHA256		"C0"	"78"
0xC079	TLS_ECDH_RSA_WITH_CAMELLIA_256_CBC_SHA384		"C0"	"79"
0xC07A	TLS_RSA_WITH_CAMELLIA_128_GCM_SHA256		"C0"	"7A"
0xC07B	TLS_RSA_WITH_CAMELLIA_256_GCM_SHA384		"C0"	"7B"
0xC07C	TLS_DHE_RSA_WITH_CAMELLIA_128_GCM_SHA256		"C0"	"7C"
0xC07D	TLS_DHE_RSA_WITH_CAMELLIA_256_GCM_SHA384		"C0"	"7D"
0xC086	TLS_ECDHE_ECDSA_WITH_CAMELLIA_128_GCM_ SHA256		"C0"	"86"
0xC087	TLS_ECDHE_ECDSA_WITH_CAMELLIA_256_GCM_ SHA384		"C0"	"87"
0xC088	TLS_ECDH_ECDSA_WITH_CAMELLIA_128_GCM_SHA256		"C0"	"88"
0xC089	TLS_ECDH_ECDSA_WITH_CAMELLIA_256_GCM_SHA384		"C0"	"89"
0xC08A	TLS_ECDHE_RSA_WITH_CAMELLIA_128_GCM_SHA256		"C0"	"8A"
0xC08B	TLS_ECDHE_RSA_WITH_CAMELLIA_256_GCM_SHA384		"C0"	"8B"
0xC08C	TLS_ECDH_RSA_WITH_CAMELLIA_128_GCM_SHA256		"C0"	"8C"
0xC08D	TLS_ECDH_RSA_WITH_CAMELLIA_256_GCM_SHA384		"C0"	"8D"
0xC08E	TLS_PSK_WITH_CAMELLIA_128_GCM_SHA256		"C0"	"8E"
0xC08F	TLS_PSK_WITH_CAMELLIA_256_GCM_SHA384		"C0"	"8F"
0xC090	TLS_DHE_PSK_WITH_CAMELLIA_128_GCM_SHA256		"C0"	"90"
0xC091	TLS_DHE_PSK_WITH_CAMELLIA_256_GCM_SHA384		"C0"	"91"
0xC092	TLS_RSA_PSK_WITH_CAMELLIA_128_GCM_SHA256		"C0"	"92"
0xC093	TLS_RSA_PSK_WITH_CAMELLIA_256_GCM_SHA384		"C0"	"93"
0xC094	TLS_PSK_WITH_CAMELLIA_128_CBC_SHA256		"C0"	"94"
0xC095	TLS_PSK_WITH_CAMELLIA_256_CBC_SHA384		"C0"	"95"
0xC096	TLS_DHE_PSK_WITH_CAMELLIA_128_CBC_SHA256		"C0"	"96"
0xC097	TLS_DHE_PSK_WITH_CAMELLIA_256_CBC_SHA384		"C0"	"97"
0xC098	TLS_RSA_PSK_WITH_CAMELLIA_128_CBC_SHA256		"C0"	"98"
0xC099	TLS_RSA_PSK_WITH_CAMELLIA_256_CBC_SHA384		"C0"	"99"
0xC09A	TLS_ECDHE_PSK_WITH_CAMELLIA_128_CBC_SHA256		"C0"	"9A"
0xC09B	TLS_ECDHE_PSK_WITH_CAMELLIA_256_CBC_SHA384		"C0"	"9B"
0xC09C	TLS_RSA_WITH_AES_128_CCM		"C0"	"9C"
0xC09D	TLS_RSA_WITH_AES_256_CCM		"C0"	"9D"
0xC09E	TLS_DHE_RSA_WITH_AES_128_CCM		"C0"	"9E"
0xC09F	TLS_DHE_RSA_WITH_AES_256_CCM		"C0"	"9F"
0xC0A0	TLS_RSA_WITH_AES_128_CCM_8		"C0"	"A0"
0xC0A1	TLS_RSA_WITH_AES_256_CCM_8		"C0"	"A1"
0xC0A2	TLS_DHE_RSA_WITH_AES_128_CCM_8		"C0"	"A2"
0xC0A3	TLS_DHE_RSA_WITH_AES_256_CCM_8		"C0"	"A3"
0xC0A4	TLS_PSK_WITH_AES_128_CCM		"C0"	"A4"
0xC0A5	TLS_PSK_WITH_AES_256_CCM		"C0"	"A5"
0xC0A6	TLS_DHE_PSK_WITH_AES_128_CCM		"C0"	"A6"
0xC0A7	TLS_DHE_PSK_WITH_AES_256_CCM		"C0"	"A7"
0xC0A8	TLS_PSK_WITH_AES_128_CCM_8		"C0"	"A8"
0xC0A9	TLS_PSK_WITH_AES_256_CCM_8		"C0"	"A9"
0xC0AA	TLS_PSK_DHE_WITH_AES_128_CCM_8		"C0"	"AA"
0xC0AB	TLS_PSK_DHE_WITH_AES_256_CCM_8		"C0"	"AB"
0xC0AC	TLS_ECDHE_ECDSA_WITH_AES_128_CCM		"C0"	"AC"
0xC0AD	TLS_ECDHE_ECDSA_WITH_AES_256_CCM		"C0"	"AD"
0xC0AE	TLS_ECDHE_ECDSA_WITH_AES_128_CCM_8		"C0"	"AE"
0xC0AF	TLS_ECDHE_ECDSA_WITH_AES_256_CCM_8		"C0"	"AF"

Cipher suite IANA code	Cipher suite name	Legacy cipher suite configuration	IANA enumeration cipher suite configuration	
		<legacy_cs>	<iana_b1>	<iana_b2>
0xCCA8	TLS_ECDHE_RSA_WITH_CHACHA20_POL1305_SHA256		"CC"	"A8"
0xCCA9	TLS_ECDHE_ECDSA_WITH_CHACHA20_POL1305_SHA256		"CC"	"A9"
0xCCAA	TLS_DHE_RSA_WITH_CHACHA20_POL1305_SHA256		"CC"	"AA"
0xCCAB	TLS_PSK_WITH_CHACHA20_POL1305_SHA256		"CC"	"AB"
0xCCAC	TLS_ECDHE_PSK_WITH_CHACHA20_POL1305_SHA256		"CC"	"AC"
0xCCAD	TLS_DHE_PSK_WITH_CHACHA20_POL1305_SHA256		"CC"	"AD"
0xCCAE	TLS_RSA_PSK_WITH_CHACHA20_POL1305_SHA256		"CC"	"AE"
0x1301	TLS_AES_128_GCM_SHA256		"13"	"01"
0x1302	TLS_AES_256_GCM_SHA384		"13"	"02"
0x1303	TLS_CHACHA20_POLY1305_SHA256		"13"	"03"
0x1304	TLS_AES_128_CCM_SHA256		"13"	"04"
0x1305	TLS_AES_128_CCM_8_SHA256		"13"	"05"

Table 55: Supported cipher suite

27.3.6 Cipher suite applicability

27.3.6.1 Cipher suite applicability accordingly to the modules

This section provides a list of cipher suites that are available on the series modules. The allowed cipher suites can be selected when <op_code>=2 (cipher suite) with:

- The <legacy_cs> parameter
- The <legacy_cs>=99 specifying <iana_b1> and <iana_b2> parameters
- The <legacy_cs>=100 specifying <iana_b1> and <iana_b2> parameters

For proper <legacy_cs> value, see the +USECPRF AT command.

The cipher suites marked with (D) are the default cipher suites that are proposed to the server when <op_code>=2 (cipher suite) and <legacy_cs>=0. The secure connection will be established if the server supports at least one of the proposed cipher suites.

LARA-L6 / LARA-R6

The available cipher suites are presented in the following list:

- (0x000A) TLS_RSA_WITH_3DES_EDE_CBC_SHA
- (0x0013) TLS_DHE_DSS_WITH_3DES_EDE_CBC_SHA
- (0x0015) TLS_DHE_RSA_WITH_DES_CBC_SHA
- (0x0016) TLS_DHE_RSA_WITH_3DES_EDE_CBC_SHA
- (0x001A) TLS_DH_anon_WITH_DES_CBC_SHA
- (0x001B) TLS_DH_anon_WITH_3DES_EDE_CBC_SHA
- (0x002F) TLS_RSA_WITH_AES_128_CBC_SHA
- (0x0032) TLS_DHE_DSS_WITH_AES_128_CBC_SHA
- (0x0033) TLS_DHE_RSA_WITH_AES_128_CBC_SHA
- (0x0034) TLS_DH_anon_WITH_AES_128_CBC_SHA
- (0x0035) TLS_RSA_WITH_AES_256_CBC_SHA
- (0x0039) TLS_DHE_RSA_WITH_AES_256_CBC_SHA
- (0x003A) TLS_DH_anon_WITH_AES_256_CBC_SHA
- (0x003C) TLS_RSA_WITH_AES_128_CBC_SHA256
- (0x003D) TLS_RSA_WITH_AES_256_CBC_SHA256
- (0x0040) TLS_DHE_DSS_WITH_AES_128_CBC_SHA256 (D)
- (0x0067) TLS_DHE_RSA_WITH_AES_128_CBC_SHA256
- (0x006B) TLS_DHE_RSA_WITH_AES_256_CBC_SHA256

- (0x006C) TLS_DH_anon_WITH_AES_128_CBC_SHA256
- (0x006D) TLS_DH_anon_WITH_AES_256_CBC_SHA256
- (0x008B) TLS_PSK_WITH_3DES_EDE_CBC_SHA
- (0x008C) TLS_PSK_WITH_AES_128_CBC_SHA
- (0x008D) TLS_PSK_WITH_AES_256_CBC_SHA
- (0x008F) TLS_DHE_PSK_WITH_3DES_EDE_CBC_SHA
- (0x0090) TLS_DHE_PSK_WITH_AES_128_CBC_SHA
- (0x0091) TLS_DHE_PSK_WITH_AES_256_CBC_SHA
- (0x0093) TLS_RSA_PSK_WITH_3DES_EDE_CBC_SHA
- (0x0094) TLS_RSA_PSK_WITH_AES_128_CBC_SHA
- (0x0095) TLS_RSA_PSK_WITH_AES_256_CBC_SHA
- (0x009C) TLS_RSA_WITH_AES_128_GCM_SHA256 (D)
- (0x009D) TLS_RSA_WITH_AES_256_GCM_SHA384 (D)
- (0x009E) TLS_DHE_RSA_WITH_AES_128_GCM_SHA256 (D)
- (0x009F) TLS_DHE_RSA_WITH_AES_256_GCM_SHA384 (D)
- (0x00A8) TLS_PSK_WITH_AES_128_GCM_SHA256 (D)
- (0x00A9) TLS_PSK_WITH_AES_256_GCM_SHA384 (D)
- (0x00AA) TLS_DHE_PSK_WITH_AES_128_GCM_SHA256 (D)
- (0x00AB) TLS_DHE_PSK_WITH_AES_256_GCM_SHA384 (D)
- (0x00AC) TLS_RSA_PSK_WITH_AES_128_GCM_SHA256 (D)
- (0x00AD) TLS_RSA_PSK_WITH_AES_256_GCM_SHA384 (D)
- (0x00AE) TLS_PSK_WITH_AES_128_CBC_SHA256 (D)
- (0x00AF) TLS_PSK_WITH_AES_256_CBC_SHA384 (D)
- (0x00B2) TLS_DHE_PSK_WITH_AES_128_CBC_SHA256 (D)
- (0x00B3) TLS_DHE_PSK_WITH_AES_256_CBC_SHA384 (D)
- (0x00B6) TLS_RSA_PSK_WITH_AES_128_CBC_SHA256 (D)
- (0x00B7) TLS_RSA_PSK_WITH_AES_256_CBC_SHA384 (D)
- (0xC003) TLS_ECDH_ECDSA_WITH_3DES_EDE_CBC_SHA
- (0xC004) TLS_ECDH_ECDSA_WITH_AES_128_CBC_SHA
- (0xC005) TLS_ECDH_ECDSA_WITH_AES_256_CBC_SHA
- (0xC008) TLS_ECDHE_ECDSA_WITH_3DES_EDE_CBC_SHA
- (0xC009) TLS_ECDHE_ECDSA_WITH_AES_128_CBC_SHA
- (0xC00A) TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA
- (0xC00D) TLS_ECDH_RSA_WITH_3DES_EDE_CBC_SHA
- (0xC00E) TLS_ECDH_RSA_WITH_AES_128_CBC_SHA
- (0xC00F) TLS_ECDH_RSA_WITH_AES_256_CBC_SHA
- (0xC012) TLS_ECDHE_RSA_WITH_3DES_EDE_CBC_SHA
- (0xC013) TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA
- (0xC014) TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA
- (0xC017) TLS_ECDH_anon_WITH_3DES_EDE_CBC_SHA
- (0xC018) TLS_ECDH_anon_WITH_AES_128_CBC_SHA
- (0xC019) TLS_ECDH_anon_WITH_AES_256_CBC_SHA
- (0xC023) TLS_ECDHE_ECDSA_WITH_AES_128_CBC_SHA256 (D)
- (0xC024) TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA384
- (0xC025) TLS_ECDH_ECDSA_WITH_AES_128_CBC_SHA256
- (0xC026) TLS_ECDH_ECDSA_WITH_AES_256_CBC_SHA384
- (0xC027) TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256
- (0xC028) TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA384
- (0xC029) TLS_ECDH_RSA_WITH_AES_128_CBC_SHA256

- (0xC02A) TLS_ECDH_RSA_WITH_AES_256_CBC_SHA384
- (0xC02B) TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256
- (0xC02C) TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384
- (0xC02D) TLS_ECDH_ECDSA_WITH_AES_128_GCM_SHA256
- (0xC02E) TLS_ECDH_ECDSA_WITH_AES_256_GCM_SHA384
- (0xC02F) TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256
- (0xC030) TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384
- (0xC031) TLS_ECDH_RSA_WITH_AES_128_GCM_SHA256
- (0xC032) TLS_ECDH_RSA_WITH_AES_256_GCM_SHA384
- (0xC034) TLS_ECDHE_PSK_WITH_3DES_EDE_CBC_SHA
- (0xC035) TLS_ECDHE_PSK_WITH_AES_128_CBC_SHA
- (0xC036) TLS_ECDHE_PSK_WITH_AES_256_CBC_SHA
- (0xC037) TLS_ECDHE_PSK_WITH_AES_128_CBC_SHA256 (D)
- (0xC038) TLS_ECDHE_PSK_WITH_AES_256_CBC_SHA384 (D)
- (0xC0A4) TLS_PSK_WITH_AES_128_CCM (D)
- (0xC0A5) TLS_PSK_WITH_AES_256_CCM (D)
- (0xC0A6) TLS_DHE_PSK_WITH_AES_128_CCM (D)
- (0xC0A7) TLS_DHE_PSK_WITH_AES_256_CCM (D)
- (0xC0A8) TLS_PSK_WITH_AES_128_CCM_8 (D)
- (0xC0A9) TLS_PSK_WITH_AES_256_CCM_8 (D)
- (0xC0AA) TLS_PSK_DHE_WITH_AES_128_CCM_8
- (0xC0AB) TLS_PSK_DHE_WITH_AES_256_CCM_8
- (0xC0AC) TLS_ECDHE_ECDSA_WITH_AES_128_CCM (D)
- (0xC0AD) TLS_ECDHE_ECDSA_WITH_AES_256_CCM (D)
- (0xC0AE) TLS_ECDHE_ECDSA_WITH_AES_128_CCM_8 (D)
- (0xC0AF) TLS_ECDHE_ECDSA_WITH_AES_256_CCM_8 (D)
- (0xCCA8) TLS_ECDHE_RSA_WITH_CHACHA20_POL1305_SHA256 (D)
- (0xCCA9) TLS_ECDHE_ECDSA_WITH_CHACHA20_POL1305_SHA256 (D)
- (0xCCAA) TLS_DHE_RSA_WITH_CHACHA20_POL1305_SHA256 (D)
- (0xCCAB) TLS_PSK_WITH_CHACHA20_POL1305_SHA256 (D)
- (0xCCAC) TLS_ECDHE_PSK_WITH_CHACHA20_POL1305_SHA256 (D)
- (0xCCAD) TLS_DHE_PSK_WITH_CHACHA20_POL1305_SHA256 (D)
- (0xCCAE) TLS_RSA_PSK_WITH_CHACHA20_POL1305_SHA256 (D)
- (0x1301) TLS_AES_128_GCM_SHA256 (D)
- (0x1302) TLS_AES_256_GCM_SHA384 (D)
- (0x1303) TLS_CHACHA20_POLY1305_SHA256 (D)
- (0x1304) TLS_AES_128_CCM_SHA256 (D)
- (0x1305) TLS_AES_128_CCM_8_SHA256 (D)

27.4 Data security provided by Secure Element

27.4.1 Introduction

Data security can be provided within security services offered by the Secure Element. Security services are provided to internal components and through AT commands for the end-user. Those services includes encryption/decryption of data, end-to-end encrypted connection, and end-to-end authentication.

27.4.1.1 LARA-R6 Local encryption and decryption

The **+USECDATAENC**, **+USECDATADEC**, **+USECFILEENC**, **+USECFILEDEC** AT commands provide a method for managing symmetric crypto functions via AT command and to allow device to locally encrypt/decrypt and authenticate critical data (e.g. certificates, tokens) on the device itself.

27.4.1.2 LARA-R6 Pre-Shared Keys (PSK) provisioning

The **+USECPSK** AT command allows to provision and manage a session unique PSK in the module and in the cloud for application layer security. The PSK is generated and protected by the RoT.

27.4.1.3 LARA-R6 End-to-end data encryption

The **+USECE2EDATAENC**, **+USECE2EFILEENC** AT commands allow encrypting data on a device and decrypting asynchronously in the cloud independent of protocols (legacy, etc.), servers, platforms or time before reaching the final destination.

27.4.2 Pre-Shared Key (PSK) generation +USECPSK

+USECPSK						
Modules	LARA-R6001-00B LARA-R6001D-00B LARA-R6401-00B LARA-R6401D-00B LARA-R6801-00B					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	< 30 s	+CME Error

27.4.2.1 Description

Generate a PSK identity and key.

LARA-R6

The AT command response time can be up to 150 s due to "security heartbeat" message operation. For more details on when this scenario occurs, see the the +USECCONN AT command.

27.4.2.2 Syntax

Type	Syntax	Response	Example
Set	AT+USECPSK=<psk_size>	+USECPSK: <psk_id>,<psk> OK	AT+USECPSK=16 +USECPSK: "010203040A0B0C0D0E0F10111213","01020304050607080900A0B0C0D0E0F" OK
Test	AT+USECPSK=?	+USECPSK: (list of supported <psk_size>s) OK	+USECPSK: (16,32) OK

27.4.2.3 Defined values

Parameter	Type	Description
<psk_size>	Number	Size requested for the <psk> parameter expressed in bytes. The allowed values are 16 and 32.
<psk_id>	String	PSK key identity in hexadecimal format. The maximum size is 32 hex (64 bytes). For more details, see the +USECPRF (<op_code>=9) AT command.
<psk>	String	PSK key in hexadecimal format. For more details, see the +USECPRF (<op_code>=8) AT command.

27.4.3 Local encryption from AT interface +USECDATAENC

+USECDATAENC						
Modules	LARA-R6001-00B LARA-R6001D-00B LARA-R6401-00B LARA-R6401D-00B LARA-R6801-00B					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	< 30 s	+CME Error

27.4.3.1 Description

Executes the local encryption of the plain data provided by the AT interface. The <payload_length> parameter defines the data length which will be provided via the AT interface and is limited to 8192 bytes. The stream of bytes can be entered after the '>' prompt has been provided to the user. The data transfer is terminated exactly when <payload_length> bytes have been sent. Once the specified number of bytes have been sent, and the encryption is finished, the AT interface is used to output the encrypted data.

If the <filename> parameter is given then the encrypted data will be written to the file in the file system. If the file already exists the existing file will be overwritten. If the data transfer over the AT interface is stopped or paused for some reason, the interface waits 20 s before aborting the data encryption.

☞ A total of a hundred local encryption/decryption sessions are granted for free as trial period, unless the module has already successfully registered with the security server. If the hundred sessions are used and the module is not registered with the security server, an error result code is returned when local encryption or decryption are used.

27.4.3.2 Syntax

Type	Syntax	Response	Example
Generic syntax			
Set	AT+USECDATAENC=<payload_length>[,<filename>] > <unencrypted_data>	< [+USECDATAENC: <enc_data_length>,<encrypted_data>] OK	AT+USECDATAENC=512 > 512 bytes of data to be encrypted < +USECDATAENC: 512,"512 bytes of encrypted data" OK
AT interface syntax			
Set	AT+USECDATAENC=<payload_length> > <unencrypted_data>	< +USECDATAENC: <enc_data_length>,<encrypted_data> OK	AT+USECDATAENC=512 > 512 bytes of data to be encrypted < +USECDATAENC: 512,"512 bytes of encrypted data" OK
File system syntax			
Set	AT+USECDATAENC=<payload_length>,<filename> > <unencrypted_data>	< OK	AT+USECDATAENC=512,"encfile" > 512 bytes of data to be encrypted < OK
Test	AT+USECDATAENC=?	+USECDATAENC: (list of supported <payload_length>s) OK	+USECDATAENC: (1-8192) OK

27.4.3.3 Defined values

Parameter	Type	Description
<payload_length>	Number	Number of bytes to be sent.
<filename>	String	Filename where to store the encrypted data. See File system limits.
<unencrypted_data>	String	Stream of bytes.
<enc_data_length>	Number	Number of encrypted bytes returned.
<encrypted_data>	String	Stream of the encrypted data of <enc_data_length> bytes.

27.4.4 Local encryption from a file +USECFILEENC

+USECFILEENC						
Modules	LARA-R6001-00B LARA-R6001D-00B LARA-R6401-00B LARA-R6401D-00B LARA-R6801-00B					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	< 30 s	+CME Error

27.4.4.1 Description

Executes the local encryption of the plain data stored in a file. The file size is limited to 8192 bytes. Once the file has been read and the encryption is finished the AT interface is used to output the encrypted data.

If the <out_file> parameter is given then the encrypted data will be written to the file in the file system. If the file already exists the existing file will be overwritten.

☞ A total of a hundred local encryption/decryption sessions are granted for free as trial period, unless the module has already successfully registered with the security server. If the hundred sessions are used and the module is not registered with the security server, an error result code is returned when local encryption or decryption are used.

27.4.4.2 Syntax

Type	Syntax	Response	Example
Generic syntax			
Set	AT+USECFILEENC=<filename>[, <out_file>]	[+USECFILEENC: <enc_data_ length>,<encrypted_data>] OK	AT+USECFILEENC="file_to_ encrypt" +USECFILEENC: 512,"512 bytes of encrypted data" OK
AT interface syntax			
Set	AT+USECFILEENC=<filename>	+USECFILEENC: <enc_data_ length>,<encrypted_data> OK	AT+USECFILEENC="file_to_ encrypt" +USECFILEEC: 512,"512 bytes of encrypted data" OK
File system syntax			
Set	AT+USECFILEENC=<filename>, <out_file>	OK	AT+USECFILEENC="file_to_ encrypt","file_to_store_data" OK

27.4.4.3 Defined values

Parameter	Type	Description
<filename>	String	Filename of the file containing the plain data.
<out_file>	String	Filename where to store the encrypted data. For more details on file system limitations, see File system limits.
<enc_data_length>	Number	Number of encrypted bytes returned.
<encrypted_data>	String	Stream of the encrypted data of <enc_data_length> bytes.

27.4.5 Local decryption from AT interface +USECDATADEC

+USECDATADEC						
Modules	LARA-R6001-00B LARA-R6001D-00B LARA-R6401-00B LARA-R6401D-00B LARA-R6801-00B					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	< 30 s	+CME Error

27.4.5.1 Description

Executes the local decryption of the encrypted data provided by the AT interface. The <payload_length> parameter defines the data length which will be provided via the AT interface and is limited to 8224 bytes.

The stream of bytes can be entered after the '>' prompt has been provided to the user. The data transfer is terminated exactly when <payload_length> bytes have been sent. Once the specified number of bytes have been sent, and the decryption is finished, the AT interface is used to output the decrypted data.

If the <filename> parameter is given then the decrypted data will be written to the file in the file system. If the file already exists the existing file will be overwritten. If the data transfer over the AT interface is stopped or paused for some reason, the interface waits 20 s before aborting the data encryption.

☞ A total of a hundred local encryption/decryption sessions are granted for free as trial period, unless the module has already successfully registered with the security server. If the hundred sessions are used and the module is not registered with the security server, an error result code is returned when local encryption or decryption are used.

27.4.5.2 Syntax

Type	Syntax	Response	Example
Set	AT+USECDATADEC=<payload_length>[,<filename>] > <encrypted_data>	< [+USECDATADEC: <dec_data_length>,<decrypted_data>] OK	AT+USECDATADEC=512 > 512 bytes of data to be decrypted < +USECDATADEC: 512,"512 bytes of decrypted data" OK
AT interface syntax			
Set	AT+USECDATADEC=<payload_length> > <encrypted_data>	< +USECDATADEC: <dec_data_length>,<decrypted_data> OK	AT+USECDATADEC=512 > 512 bytes of data to be decrypted < +USECDATADEC: 512,"512 bytes of decrypted data" OK
File system syntax			
Set	AT+USECDATADEC=<payload_length>,<filename> > <encrypted_data>	< OK	AT+USECDATADEC=512,"decfile" > 512 bytes of data to be decrypted < OK
Test	AT+USECDATADEC=?	+USECDATADEC: (list of supported <payload_length>s) OK	+USECDATADEC: (1-8224) OK

27.4.5.3 Defined values

Parameter	Type	Description
<payload_length>	Number	Number of bytes to be decrypted.
<filename>	String	Filename where to store the decrypted data. For more details on file system limitations, see File system limits.
<encrypted_data>	String	Stream of bytes to be decrypted.
<dec_data_length>	Number	Number of decrypted bytes returned.
<decrypted_data>	String	Stream of the decrypted data of <dec_data_length> bytes.

27.4.6 Local decryption from a file +USECFILEDEC

+USECFILEDEC						
Modules	LARA-R6001-00B LARA-R6001D-00B LARA-R6401-00B LARA-R6401D-00B LARA-R6801-00B					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	< 30 s	+CME Error

27.4.6.1 Description

Executes the local decryption of the encrypted data stored in a file. The file size is limited to 8192 bytes. Once the file has been read and the decryption is finished the AT interface is used to output the decrypted data.

If the <out_file> parameter is given then the decrypted data will be written to the file in the file system. If the file already exists the existing file will be overwritten.

A total of a hundred local encryption/decryption sessions are granted for free as trial period, unless the module has already successfully registered with the security server. If the hundred sessions are used and the module is not registered with the security server, an error result code is returned when the local encryption or decryption are used.

27.4.6.2 Syntax

Type	Syntax	Response	Example
Generic syntax			
Set	AT+USECFILEDEC=<filename>[,<out_file>]	[+USECFILEDEC: <dec_data_length>,<decrypted_data>] OK	AT+USECFILEDEC="file_to_decrypt" +USECFILEDEC: 512,"512 bytes of decrypted data" OK
AT interface syntax			
Set	AT+USECFILEDEC=<filename>	+USECFILEDEC: <dec_data_length>,<decrypted_data> OK	AT+USECFILEDEC="file_to_decrypt" +USECFILEDEC: 512,"512 bytes of decrypted data" OK
File system syntax			
Set	AT+USECFILEDEC=<filename>,<out_file>	OK	AT+USECFILEDEC="file_to_decrypt","file_to_store_data" OK

27.4.6.3 Defined values

Parameter	Type	Description
<filename>	String	Filename of the file containing the encrypted data.
<out_file>	String	Filename where to store the decrypted data. For more details on file system limitations, see File system limits.
<dec_data_length>	Number	Number of decrypted bytes returned.
<decrypted_data>	String	Stream of the decrypted data of <dec_data_length> bytes.

27.4.7 End-to-end encryption from AT interface +USECE2EDATAENC

+USECE2EDATAENC						
Modules	LARA-R6001-00B LARA-R6001D-00B LARA-R6401-00B LARA-R6401D-00B LARA-R6801-00B					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	< 30 s	+CME Error

27.4.7.1 Description

Executes an end-to-end encryption of the plain data provided by the AT interface. The <payload_length> parameter defines the data length which will be provided via the AT interface and is limited to 8192 bytes.

The stream of bytes can be entered after the '>' prompt has been provided to the user. The data transfer is terminated exactly when <payload_length> bytes have been sent. Once the specified number of bytes have been sent, and the encryption is finished, the AT interface is used to output the encrypted data.

If the <filename> parameter is given then the encrypted data is written to the indicated file system file. If the file already exists the existing file will be overwritten.

If the data transfer over the AT interface is stopped or paused for some reasons, the interface waits 20 s before aborting the data encryption.

27.4.7.2 Syntax

Type	Syntax	Response	Example
Generic syntax			
Set	AT+USECE2EDATAENC=<payload_length>[,<filename>] > <unencrypted_data>	< [+USECE2EDATAENC: <enc_data_length>,<encrypted_data>] OK	AT+USECE2EDATAENC=512 > 512 bytes of data to be encrypted < +USECE2EDATAENC: 544,"544 bytes of encrypted data" OK
AT interface syntax			
Set	AT+USECE2EDATAENC=<payload_length> > <unencrypted_data>	< +USECE2EDATAENC: <enc_data_length>,<encrypted_data> OK	AT+USECE2EDATAENC=512 > 512 bytes of data to be encrypted < +USECE2EDATAENC: 544,"544 bytes of encrypted data" OK
File system syntax			
Set	AT+USECE2EDATAENC=<payload_length>,<filename> > <unencrypted_data>	< OK	AT+USECE2EDATAENC=512, "encfile" > 512 bytes of data to be encrypted < OK
Test	AT+USECE2EDATAENC=?	+USECE2EDATAENC: (list of supported <payload_length>s) OK	+USECE2EDATAENC: (1-8192) OK

27.4.7.3 Defined values

Parameter	Type	Description
<payload_length>	Number	Number of bytes to be encrypted.
<filename>	String	Filename where to store the encrypted data. For more details on file system limitations, see File system limits.
<unencrypted_data>	String	Stream of bytes to be encrypted.
<enc_data_length>	Number	Number of encrypted bytes returned.
<encrypted_data>	String	String of the end-to-end encrypted data of <enc_data_length> bytes.

27.4.8 End-to-end encryption from a file +USECE2EFILEENC

+USECE2EFILEENC						
Modules	LARA-R6001-00B LARA-R6001D-00B LARA-R6401-00B LARA-R6401D-00B LARA-R6801-00B					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	< 30 s	+CME Error

27.4.8.1 Description

Executes an end-to-end encryption of the plain data stored in a file. The file size is limited to 8192 bytes. Once the file has been read and the encryption is finished the AT interface is used to output the encrypted data.

If the <out_file> parameter is given then the encrypted data is written to the indicated file system file. If the file already exists the existing file will be overwritten.

27.4.8.2 Syntax

Type	Syntax	Response	Example
Generic syntax			
Set	AT+USECE2EFILEENC=<filename>[,<out_file>]	[+USECE2EFILEENC: <enc_data_length>,<encrypted_data>] OK	AT+USECE2EFILEENC="file_to_encrypt" +USECE2EFILEENC: 512,"512 bytes of encrypted data" OK
AT interface syntax			
Set	AT+USECE2EFILEENC=<filename>	+USECE2EFILEENC: <enc_data_length>,<encrypted_data> OK	AT+USECE2EFILEENC="file_to_encrypt" +USECE2EFILEEC: 512,"512 bytes of encrypted data" OK
File system syntax			
Set	AT+USECE2EFILEENC=<filename>,<out_file>	OK	AT+USECE2EFILEENC="file_to_encrypt","file_to_store_data" OK

27.4.8.3 Defined values

Parameter	Type	Description
<filename>	String	Filename of the file containing the plain data.
<out_file>	String	Filename where to store the encrypted data. For more details on file system limitations, see File system limits.
<enc_data_length>	Number	Number of encrypted bytes returned.
<encrypted_data>	String	String of the end-to-end encrypted data of <enc_data_length> bytes.

28 FTP

Proprietary u-blox AT commands. FTP AT commands set can be used for sending and receiving files over the available bearer, transparently retrieving and storing them in the file system. Standard file and directory management operations on the remote FTP server are as well possible. The FTP client requires an active connection to work. Some products require additional commands to provide connectivity to the application.

LARA-L6 / LARA-R6
If not specified, the <cid> and the <preferred_protocol_type> parameters set by means of the +UDCONF=19 AT command are used.
See +CGACT AT command for activating a PDP context.

LARA-R6001D-00B
If not specified the default CID (<cid>=1) is used. If not specified and the protocol type is IPv4v6, then the preferred protocol type is IPv4.
See +CGACT AT command for activating a PDP context.

Basically, two AT commands are necessary for an FTP client service: one AT command (+UFTP) to configure the FTP profile, a second AT command to execute a specific FTP command (+UFTPC). The final result of an FTP command will be notified through the +UUFTPCR URC whereas data will be provided through +UUFTPCD URC.

When these commands report an error which is not a +CME ERROR, the error code can be queried using the +UFTPER AT command.

28.1 FTP service configuration +UFTP

+UFTP						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	-	+CME Error

28.1.1 Description

Sets up a parameter for FTP service, or resets a parameter to its factory-programmed value. The set/reset command needs to be executed for each single <op_code>. The read command returns the current setting of all the FTP parameters, one per line (i.e. the FTP profile). The FTP parameter values set with this command are all volatile (not stored in non-volatile memory).

If the set command is issued without <param1> parameter, the corresponding <op_code> parameter is reset to the default value.

When the FTP client is using secure connection, only explicit mode is supported (ftpes://). In the explicit mode the secure connection will be established after the FTP connection (before login) on the same port of the control channel.

When the FTP client is using secure connection, the FTPS server may request that the session data of the control channel connection should be reused to establish secure connection on the data channel. In this case the session resumption feature for the FTPS client should be configured via +USECPRF AT command.

28.1.2 Syntax

Type	Syntax	Response	Example
Generic syntax			

Type	Syntax	Response	Example
Set	AT+UFTP=<op_code>[,<param1>[,<param2>]]	OK	AT+UFTP=7,21 OK
FTP server IP address			
Set	AT+UFTP=0[,<IP_address>]	OK	AT+UFTP=0,"192.168.1.0" OK
FTP server name			
Set	AT+UFTP=1[,<server_name>]	OK	AT+UFTP=1,"ftp.server.com" OK
Username			
Set	AT+UFTP=2[,<username>]	OK	AT+UFTP=2,"user_test" OK
Password			
Set	AT+UFTP=3[,<password>]	OK	AT+UFTP=3,"PWD" OK
Account			
Set	AT+UFTP=4[,<account>]	OK	AT+UFTP=4,"test" OK
Inactivity timeout			
Set	AT+UFTP=5,<timeout>[,[<linger_cmd>],[<linger_data>]]	OK	AT+UFTP=5,0,0,0 OK
FTP mode			
Set	AT+UFTP=6[,<FTP_mode>]	OK	AT+UFTP=6,1 OK
FTP server port			
Set	AT+UFTP=7[,<FTP_server_port>]	OK	AT+UFTP=7,30 OK
FTP control connection security			
Set	AT+UFTP=8[,<FTP_secure>[,<usecprf_profile_id>]]	OK	AT+UFTP=8,1,2 OK
Timer trigger configuration for Direct Link			
Set	AT+UFTP=9,<timer_trigger>	OK	AT+UFTP=9,500 OK
Data length trigger configuration for Direct Link			
Set	AT+UFTP=10,<data_length_trigger>	OK	AT+UFTP=10,1024 OK
Character trigger configuration for Direct Link			
Set	AT+UFTP=11,<character_trigger>	OK	AT+UFTP=11,13 OK
FTP data connection security			
Set	AT+UFTP=12[,<FTP_secure>[,<usecprf_profile_id>]]	OK	AT+UFTP=12,1,2 OK
FTP context id			
Set	AT+UFTP=20,<cid>[,<preferred_protocol_type>]	OK	AT+UFTP=20,2 OK
Read	AT+UFTP?	+UFTP: 0,<IP_address> +UFTP: 1,<server_name> +UFTP: 2,<username>	+UFTP: 0,"216.239.59.147" +UFTP: 1,"" +UFTP: 2,"username"

Type	Syntax	Response	Example
		+UFTP: 4,<account>	+UFTP: 4,"account"
		+UFTP: 5,<timeout>,<linger_cmd>,<linger_data>	+UFTP: 5,0,0,0
		+UFTP: 6,<FTP_mode>	+UFTP: 6,0
		+UFTP: 7,<FTP_server_port>	+UFTP: 7,21
		+UFTP: 8,<FTP_secure>[,<usecprf_profile_id>]	+UFTP: 8,0
		+UFTP: 9,<timer_trigger>	+UFTP: 9,500
		+UFTP: 10,<data_length_trigger>	+UFTP: 10,1024
		+UFTP: 11,<character_trigger>	+UFTP: 11,13
		+UFTP: 12,<FTP_secure>[,<usecprf_profile_id>]	+UFTP: 12,0
		+UFTP: 20,<cid>[,<preferred_protocol_type>]	+UFTP: 20,2
		OK	OK
Test	AT+UFTP=?	+UFTP: (list of supported <param_tag>s)	+UFTP: (0-12,20)
		OK	OK

28.1.3 Defined values

Parameter	Type	Description
<op_code>	Number	FTP parameter: • 0: FTP server IP address • 1: FTP server name • 2: FTP username • 3: FTP password • 4: FTP additional user account • 5: FTP inactivity timeout period and linger time • 6: FTP mode • 7: remote FTP server listening port • 8: control connection security • 9: timer trigger • 10: data length trigger • 11: character trigger • 12: data connection security • 20: PDP context id Allowed values: • LARA-L6 / LARA-R6 - 0, 1, 2, 3, 4, 5, 6, 7, 8, 12, 20
<IP_address>	String	FTP server IP address. The default value is an empty string. For IP address format reference see the IP addressing.
<server_name>	String	FTP server name (e.g. "ftp.server.com"). The maximum length is 128 characters. The default value is an empty string.
<username>	String	User name (the maximum length is 30 characters) for the FTP login procedure. The default value is an empty string.
<password>	String	Password (the maximum length is 30 characters) for the FTP login procedure. The default value is an empty string.
<account>	String	Additional user account (if required) for the FTP login procedure. The maximum length is 30 characters. The default value is an empty string.
<timeout>	Number	Inactivity timeout period in seconds. The range goes from 0 to 86400 s; 0 means no timeout (the FTP session will not be terminated in the absence of incoming traffic). The default value is 30 s.
<linger_cmd>	Number	Linger time for command socket in seconds. The range goes from 0 to 120 s; 0 means linger time is not set. The default value is 60 s.

Parameter	Type	Description
<linger_data>	Number	Linger time for data socket in seconds. The range goes from 0 to 120 s; 0 means linger time is not set. The default value is 60 s.
<FTP_mode>	Number	FTP mode: • 0 (default value): active • 1: passive
<FTP_server_port>	Number	Remote FTP server listening port; it must be a valid TCP port value. The range goes from 1 to 65535; the default value is 21.
<FTP_secure>	Number	Enables / disables the secure option of FTP client service: • 0 (default value): no SSL/TLS encryption • 1: enable SSL/TLS encryption of FTP (control channel or data channel).
<usecprf_profile_id>	Number	USECMNG profile (number). Defines the USECMNG profile which specifies the SSL/TLS properties to be used for the SSL/TLS connection. The range goes from 0 to 4. If no profile is set a default USECMNG profile is used (see USECMNG section).
<timer_trigger>	Number	Enhanced direct link sending timer trigger (in milliseconds); valid range is 0 (factory-programmed value), 100-120000; 0 means trigger disabled.
<data_length_trigger>	Number	Enhanced direct link data length trigger in bytes, valid range is 0 (factory-programmed value), 3-2048; 0 means trigger disabled.
<character_trigger>	Number	Enhanced direct link character trigger, the value represents the ASCII code (in base 10) of the character to be used as character trigger. The allowed range is -1, 0-255, the factory-programmed value is -1; -1 means trigger disabled.
<cid>	Number	Specifies the PDP context that will be used for the FTP data. For the parameter range see product <cid> number. For more details on the default value of the parameter (where supported), see FTP.
<preferred_protocol_type>	Number	In the case of a context id with IPv4v6 PDP type, this value specifies which IP protocol type will be used: • 0: IPv4 • 1: IPv6 For more details on the default value of the parameter (where supported), see FTP.
<param1>	Number / String	Type and supported content depend on related <op_code> (details are given above). If <param1> is not specified the value of the corresponding parameter <op_code> is reset to default value.
<param2>	Number / String	Type and supported content depend on related <op_code> (details are given above). If <param2> is not specified the value of the corresponding parameter <op_code> is reset to default value.

28.1.4 Notes

- The information text response to the read command does not display the password.
- The FTP server IP address and the FTP server name are mutually exclusive. If value for <op_code>=0 is specified by user, then value for <op_code>=1 is reset or vice versa.
- Some network operators do not allow incoming connections. Due to these limitations introduced by network operators it is possible to encounter problems using FTP active mode. If the FTP active mode fails to exchange files, try the passive mode to solve the problem.
- Some network operators do not allow FTPS. In this case the AT+UFTPC=1 command (FTP login) will return a failure response via +UUFTPCR URC after an SSL timeout of 30 s.

LARA-L6 / LARA-R6

- <timer_trigger>, <data_length_trigger> and <character_trigger> parameters are not supported.
- Enable the control connection security (<op_code>=8), before enabling the data connection security (<op_code>=12).

28.2 FTP command +UFTPC

+UFTPC						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	-	+CME Error

28.2.1 Description

Triggers the FTP actions corresponding to the <op_code> parameter. The final result code indicates if sending the command request to the FTP process was successful or not. The +UUFTPCR (FTP command result) URC returns to the user the final result of the FTP command previously sent with +UFTPC. As well, the +UUFTPCD FTP unsolicited data URC provides the data requested by the user (e.g. file or directory lists) and received from the FTP server.

LARA-L6 / LARA-R6
If the SSL option is enabled and the network operator does not allow FTPS, the +UUFTPCR URC notifies the command failure after an SSL timeout of 30 s.

LARA-L6 / LARA-R6
The +UUFTPCD URC is displayed only on the AT terminal that issued the +UFTPC related command.

The timing before the +UUFTPCR URC is issued on the AT terminal also depends by the DNS resolution. For further details about the estimated response time related to the DNS resolution, see the +UDNSRN AT command.

28.2.2 Syntax

Type	Syntax	Response	Example
General syntax			
Set	AT+UFTPC=<op_code>[,<param1>[,<param2>[,<param3>]]]	OK	AT+UFTPC=4,"data.zip","data.zip" OK
FTP logout			
Set	AT+UFTPC=0	OK	AT+UFTPC=0 OK
FTP login			
Set	AT+UFTPC=1	OK	AT+UFTPC=1 OK
Delete the file from the FTP server			
Set	AT+UFTPC=2,<filename>	OK	AT+UFTPC=2,"mytest" OK
Rename a file of FTP server			
Set	AT+UFTPC=3,<filename>,<new_filename>	OK	AT+UFTPC=3,"old_name","final_name" OK
Retrieve the file from the FTP server			
Set	AT+UFTPC=4,<remote_filename>,<local_filename>[,<retrieving_mode>]	OK	AT+UFTPC=4,"data.zip","data.zip" OK
Store the file on the FTP server			
Set	AT+UFTPC=5,<local_filename>,<remote_filename>[,<number_of_byte>]	OK	AT+UFTPC=5,"data.zip","data.zip",30 OK

Type	Syntax	Response	Example
Retrieve a file from the FTP server using direct link mode			
Set	AT+UFTPC=6,<remote_filename>[,<number_of_byte>]	CONNECT file content DISCONNECT OK	AT+UFTPC=6,"data.zip",30 CONNECT ...data... DISCONNECT OK
Send a file to the FTP server using the direct link mode			
Set	AT+UFTPC=7,<remote_filename>[,<number_of_byte>]	CONNECT DISCONNECT OK	AT+UFTPC=7,"data.zip",30 ... incoming data ... +++ (user terminates the direct link) DISCONNECT OK
Change the working directory to the specified one			
Set	AT+UFTPC=8,<directory_name>	OK	AT+UFTPC=8,"data_folder" OK
Create a directory on the FTP host			
Set	AT+UFTPC=10,<directory_name>	OK	AT+UFTPC=10,"new_data_folder" OK
Remove the directory from the remote FTP server			
Set	AT+UFTPC=11,<directory_name>	OK	AT+UFTPC=11,"data_folder" OK
Information of a file or a directory			
Set	AT+UFTPC=13[,<file_directory_name>]	OK	AT+UFTPC=13,"data_folder" OK
List the filenames in a specified directory			
Set	AT+UFTPC=14[,<file_directory_name>]	OK	AT+UFTPC=14,"data.zip" OK
Retrieve the FOTA update file			
Set	AT+UFTPC=100,<remote_filename>[,<fw_download_status>]	OK	AT+UFTPC=100,"data.zip" OK
URC		+UUFTPCR: 100,<stored_byte> / <total_byte>	+UUFTPCR: 100,202752 / 1103692
URC		+UUFTPCD: 100,<stored_byte>,<total_byte>	+UUFTPCD: 100,131072,1000000
Test	AT+UFTPC=?	+UFTPC: (list of supported <op_code>s) OK	+UFTPC: (0-5,8,10,11,13,14,100) OK
URC		+UUFTPCD: <op_code>,<ftp_data_len>,<ftp_data>	+UUFTPCD: 13,16,"16 bytes of data"
URC		+UUFTPCR: <op_code>,<ftp_result>[,<md5_sum>]	+UUFTPCR: 1,1

28.2.3 Defined values

Parameter	Type	Description
<op_code>	Number	FTP command request. Allowed values: • 0: FTP logout; terminates the FTP session by performing a logout. • 1: FTP login; connects to the FTP server using the parameters of the current FTP profile (set via AT+UFTP command).

Parameter	Type	Description
		• 2: deletes the file from the FTP server. • 3: renames the file. This AT command just sends requests to the FTP process. • 4: retrieves the file from the FTP server. • 5: stores the file on the FTP server. • 6: retrieves a file from the FTP server using direct link mode. This command handles the initial steps of the FTP protocol for retrieving a file; after that it will establish a transparent end-to-end communication with the data connection TCP socket via the serial interface. After the CONNECT result code, the file content will be directly sent to the serial interface. When the data transfer is completed, the module will automatically exit from direct link mode (no need to send +++ sequence). • 7: sends a file to the FTP server using the direct link mode. This command handles the initial steps of the FTP protocol for sending a file; after that it will establish a transparent end-to-end communication with the data connection TCP socket via the serial interface. After the CONNECT result code, the user can send the file content via the serial interface. Once finished, the user must wait at least 2 s before sending the +++ sequence to switch off the direct link mode. This operation may take a few seconds because the command also handles the final steps of the FTP protocol. • 8: changes the working directory to the specified one. • 9: RFU. • 10: creates a directory on the FTP host. • 11: removes the directory from the remote FTP server. • 12: RFU. • 13: information of a file or a directory. The URC +UUFTPCD returns the information of the specified file or directory from the FTP server. • 14: lists the filenames in a specified directory. The URC +UUFTPCD returns the list of the filenames received from FTP server. If the directory name is omitted, the list of the files names of current working directory is requested. • 100: retrieves the FOTA update file. The downloaded file will not be accessible to the user. During the download of the FOTA update file the +UUFTPCR: 100,<stored_byte> / <total_byte> URC or the +UUFTPCD: 100,<stored_byte>,<total_byte> URC (where supported) will provide the status of the download. At the end of the download file the +UUFTPCR: 100,<ftp_result>[,<md5_sum>] URC will provide the operation result. The <md5_sum> parameter will display the MD5 checksum of the downloaded file.
<filename>	String	Filename to be deleted/renamed from the FTP host. For the limit of the length of the string, see Command line.
<new_filename>	String	New filename. For the limit of the length of the string, see Command line.
<remote_filename>	String	Remote filename to be retrieved from the FTP host or stored in it. The maximum parameter length is 256 characters.
<local_filename>	String	Local filename (module file system) text string to be stored/sent on the file system. For the limit of the length of the string, see the File system limits.
<retrieving_mode>	Number	Allowed values: • 0 (default value): the file is retrieved from beginning. • 1: restart the data retrieving from the last data received during the previous download interrupted due to error.
<number_of_byte>	Number	Represents the number of bytes already sent to the FTP server or received from it. • During a file retrieval the server writes the file from the offset indicated with this parameter. • During a file storing the server sends the data from the value indicated with this parameter.
<directory_name>	String	Directory name on the FTP server. For the limit of the length of the string, see Command line.
<file_directory_name>	String	Path file/directory name to be listed. If not specified, the current directory list is requested. For the limit of the length of the string, see Command line. • <param1> optional parameter; the text string of the path (file or directory) to be name listed. If not specified, the list of the files names of current working directory is requested.
<fw_download_status>	Number	Manages the firmware package download status: • if omitted trigger the firmware package download from an FTP server • 0: suspend the firmware package download from an FTP server

Parameter	Type	Description
		• 1: resume the firmware package download from an FTP server
<ftp_data_len>	Number	Amount of data in bytes
<ftp_data>	String	Data available from the FTP server in the ASCII [0x00,0xFF] range. The starting quotation mark shall not be taken into account like data, the first byte of data starts after the first quotation mark. The total number of bytes is <ftp_data_len>. At the end of the byte stream, another quotation mark is provided for user convenience and visualization purposes.
<ftp_result>	Number	Allowed values: • 0: fail • 1: success
<md5_sum>	String	MD5 checksum of the FOTA update file downloaded via +UFTPC=100 AT command. This parameter is issued only for +UFTPC=100 AT command.
<stored_byte>	Number	Amount of stored bytes
<total_byte>	Number	Amount of total bytes of the FOTA update file to be stored
<param1>	String	Content depend on related <op_code> (details are given above)
<param2>	String	Content depend on related <op_code> (details are given above)
<param3>	String	Content depend on related <op_code> (details are given above)

28.2.4 Notes

- If <op_code>=7 (send a file to the FTP server using the direct link mode) the user must switch off the direct link mode (sending +++ to the serial interface) when the data stream is finished. This operation may take up to 10 s because the command also handles the final steps of the FTP protocol.
- The number of parallel FTP connections in direct link mode is usually limited by the maximum number of AT terminals that can be used in parallel.

LARA-L6 / LARA-R6

- The +UUFTPCR: 100,<stored_byte> / <total_byte> URC and the +UUFTPCD: 100,<stored_byte>,<total_byte> URC are not supported.

LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D

- At most 3 FTP operations on different AT terminals can be simultaneously performed in direct link mode, see Multiple AT command interfaces appendix.

LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B

- Only one FTP operation can be done in direct link mode per time, see Multiple AT command interfaces appendix.
- The +UUFTPCD URCs are sent on all terminals.
- The time to establish the secure session (when using +UFTP: 8,1[,<usecprf_profile_id>] or +UFTP: 12,1[,<usecprf_profile_id>]) could require up to 150 s in one of these cases:
  - RoT generated PSK (+USECPRF: <profile_id>,11)
  - encrypted session resumption (+USECPRF: <profile_id>,13,2,10)

  This is due to "security heartbeat" message operation. For more details on when this scenario occurs, see the +USECCONN AT command.

28.3 FTP error +UFTPER

+UFTPER						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error Appendix A.7.1

28.3.1 Description

This command retrieves the error class and code of the last FTP operation.

28.3.2 Syntax

Type	Syntax	Response	Example
Action	AT+UFTPER	+UFTPER: <error_class>,<error_code> OK	+UFTPER: 1,1 OK

28.3.3 Defined values

Parameter	Type	Description
<error_class>	Number	Value of error class. Values are listed in Appendix A.7.
<error_code>	Number	Value of class-specific error code (reply code if <error_class> is 0). The values are listed in Appendix A.7.1.

29 HTTP

The section describes the u-blox proprietary AT commands that can be used for sending requests to a remote HTTP server, receiving the server response and transparently storing it in the file system. The supported methods are: HEAD, GET, DELETE, PUT, POST file and POST data. The HTTP client requires an active connection to work. Some products require additional commands to provide connectivity to the application.

☞ LARA-L6 / LARA-R6
If not specified, the <cid> and the <preferred_protocol_type> parameters set by means of the +UDCONF=19 AT command are used.
See +CGACT AT command for activating a PDP context.

☞ LARA-R6001D-00B
If not specified, the default CID (<cid>=1) is used. If not specified and the protocol type is IPv4v6, then the preferred protocol type is IPv4.
See +CGACT AT command for activating a PDP context.

When these commands report an HTTP error, the error code of latest failure can be queried using the +UHTTPER AT command.

29.1 Common parameters definition

29.1.1 <profile_id>

The HTTP client can support multiple HTTP profiles, the <profile_id> is a number starting from 0:

- LARA-L6 / LARA-R6 The are 4 profiles values, <profile_id> range is 0-3

29.2 HTTP control +UHTTP

+UHTTP						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	-	+CME Error

29.2.1 Description

Configures, reads or resets (to the factory-programmed values) the HTTP application profile parameters. Up to 4 different HTTP profiles can be defined. To set all the parameters in an HTTP profile a set command for each <op_code> needs to be issued.

☞ The configured HTTP profile parameters are not saved in the non volatile memory.

☞ The read command has two possible usages. The functionality of the command differs with the number of command parameters issued:

- Only the first command parameter (<profile_id>) issued: the module resets all the profile parameters (to the factory-programmed values) for the profile specified with <profile_id>
- Only the first and second command parameters used (<profile_id>, <op_code>): the module returns the current value of the profile parameter specified with <op_code> and related to the profile specified with <profile_id>

29.2.2 Syntax

Type	Syntax	Response	Example
Generic syntax			

Type	Syntax	Response	Example
Set	AT+UHTTP=<profile_id>,<op_code>,<param_val>[,<param_val1>]	OK	AT+UHTTP=2,0,"125.24.51.133" OK
Read	AT+UHTTP=<profile_id>,<op_code>	+UHTTP: <profile_id>,<op_code>,<param_val>[,<param_val1>] OK	AT+UHTTP=2,0 +UHTTP: 2,0,"125.24.51.133" OK
HTTP server IP address			
Set	AT+UHTTP=<profile_id>,0,<HTTP_server_IP_address>	OK	AT+UHTTP=2,0,"125.24.51.133" OK
Read	AT+UHTTP=<profile_id>,0	+UHTTP: <profile_id>,0,<HTTP_server_IP_address> OK	AT+UHTTP=2,0 +UHTTP: 2,0,"125.24.51.133" OK
HTTP server name			
Set	AT+UHTTP=<profile_id>,1,<HTTP_server_name>	OK	AT+UHTTP=2,1,"www.u-blox.com" OK
Read	AT+UHTTP=<profile_id>,1	+UHTTP: <profile_id>,1,<HTTP_server_name> OK	AT+UHTTP=2,1 +UHTTP: 2,1,"www.u-blox.com" OK
Username			
Set	AT+UHTTP=<profile_id>,2,<username>	OK	AT+UHTTP=2,2,"my_user" OK
Read	AT+UHTTP=<profile_id>,2	+UHTTP: <profile_id>,2,<username> OK	AT+UHTTP=2,2 +UHTTP: 2,2,"my_user" OK
Password			
Set	AT+UHTTP=<profile_id>,3,<password>	OK	AT+UHTTP=2,3,"pwd" OK
Read	AT+UHTTP=<profile_id>,3	+UHTTP: <profile_id>,3,<password> OK	AT+UHTTP=2,3 +UHTTP: 2,3,"pwd" OK
Authentication type			
Set	AT+UHTTP=<profile_id>,4,<HTTP_authentication>	OK	AT+UHTTP=2,4,1 OK
Read	AT+UHTTP=<profile_id>,4	+UHTTP: <profile_id>,4,<HTTP_authentication> OK	AT+UHTTP=2,4 +UHTTP: 2,4,1 OK
HTTP server port			
Set	AT+UHTTP=<profile_id>,5,<HTTP_port>	OK	AT+UHTTP=2,5,30 OK
Read	AT+UHTTP=<profile_id>,5	+UHTTP: <profile_id>,5,<HTTP_port> OK	AT+UHTTP=2,5 +UHTTP: 2,5,30 OK
HTTP secure option			
Set	AT+UHTTP=<profile_id>,6,<HTTP_secure>[,<usecprf_profile_id>]	OK	AT+UHTTP=2,6,1 OK

Type	Syntax	Response	Example
Read	AT+UHTTP=<profile_id>,6	+UHTTP: <profile_id>,6,<HTTP_secure>[,<usecprf_profile_id>] OK	AT+UHTTP=2,6 +UHTTP: 2,6,1 OK
HTTP request timeout and TCP socket linger timer			
Set	AT+UHTTP=<profile_id>,7,<HTTP_timeout>[,<linger_timer>]	OK	AT+UHTTP=2,7,150,5 OK
Read	AT+UHTTP=<profile_id>,7	+UHTTP: <profile_id>,7,<HTTP_timeout>,<linger_timer> OK	AT+UHTTP=2,7 +UHTTP: 2,7,150,5 OK
HTTP add custom request headers			
Set	AT+UHTTP=<profile_id>,9,<custom_request_header>	OK	AT+UHTTP=2,9,"0:hdr0:val0" OK
Read	AT+UHTTP=<profile_id>,9	+UHTTP: <profile_id>,9,<custom_request_header> OK	AT+UHTTP=2,9 +UHTTP: 2,9,"0:hdr0:val0" OK
HTTP output mode option			
Set	AT+UHTTP=<profile_id>,10,<output_mode>	OK	AT+UHTTP=0,10,1 OK
Read	AT+UHTTP=<profile_id>,10	+UHTTP: <profile_id>,10,<output_mode> OK	AT+UHTTP=0,10 +UHTTP: 0,10,1 OK
HTTP split mode option			
Set	AT+UHTTP=<profile_id>,11,<split_mode>	OK	AT+UHTTP=0,11,1 OK
Read	AT+UHTTP=<profile_id>,11	+UHTTP: <profile_id>,11,<split_mode> OK	AT+UHTTP=0,11 +UHTTP: 0,11,1 OK
HTTP context id			
Set	AT+UHTTP=<profile_id>,20,<cid>[,<preferred_protocol_type>]	OK	AT+UHTTP=2,20,2 OK
Read	AT+UHTTP=<profile_id>,20	+UHTTP: <profile_id>,20,<cid>,<preferred_protocol_type> OK	AT+UHTTP=2,20 +UHTTP: 2,20,2,0 OK
Read	AT+UHTTP=<profile_id>	OK	AT+UHTTP=2 OK
Test	AT+UHTTP=?	+UHTTP: (list of supported <profile_id>s),(list of supported <op_code>s) OK	+UHTTP: (0-3),(0-11,20) OK

29.2.3 Defined values

Parameter	Type	Description
<profile_id>	Number	See <profile_id>.
<op_code>	Number	Allowed values: • 0: HTTP server IP address • 1: HTTP server name • 2: username

Parameter	Type	Description
		• 3: password • 4: authentication type • 5: HTTP server port • 6: HTTP Secure option (SSL encryption) • 7: HTTP request timeout and TCP socket linger timer • 8: reserved for internal use only • 9: HTTP add custom request headers • 10: HTTP output mode • 11: HTTP split mode • 20: HTTP context id and preferred IP type Allowed values: • LARA-L6 / LARA-R6 - 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 20 • - 0, 1, 2, 3, 4, 5, 6, 7, 9, 10, 11, 20
<HTTP_server_IP_address>	String	HTTP server IP address; The factory-programmed value is an empty text string. For IP address format reference see the IP addressing.
<HTTP_server_name>	String	HTTP server name (e.g. "http.server.com"). The factory-programmed value is an empty text string. The maximum length is: • LARA-L6 / LARA-R6 - 1009 characters
<username>	String	User name; the maximum length is 30 characters; it is used for the HTTP login procedure if the authentication is used. The factory-programmed value is an empty text string.
<password>	String	Password used for the HTTP login procedure if the authentication is used: • LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D - The maximum length is 50 characters • LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B - The maximum length is 30 characters The factory-programmed value is an empty text string.
<HTTP_authentication>	Number	HTTP authentication method; the allowed values are: • 0 (factory-programmed value): no authentication • 1: basic authentication (the password and username must be set)
<HTTP_port>	Number	HTTP server port; range 1-65535. It means the HTTP server port to be used in a HTTP request; the factory-programmed value is 80.
<HTTP_secure>	Number	HTTP Secure option (SSL encryption). It enables or disables the HTTPS (SSL secured connection for HTTP application) usage: • 0 (factory-programmed value): HTTPS (SSL encryption) disabled and the HTTP server port set to 80 • 1: HTTPS (SSL encryption) enabled and the HTTP server port set to 443; an USECMNG profile can be specified with an additional parameter.
<usecprf_profile_id>	Number	Defines the USECMNG profile which specifies the SSL/TLS properties to be used for the SSL/TLS connection. The range goes from 0 to 4. If no profile is set a default USECMNG profile is used
<HTTP_timeout>	Number	HTTP request timeout in seconds (number); the range is 30 - 180. It is the timeout in seconds to be used for all the HTTP requests with the specified profile. The factory-programmed value is 180 s.
<linger_timer>	Number	TCP linger timer for socket close expressed in seconds (number). • LARA-L6 / LARA-R6 - The range is 0 - 120 s, the default value is 30 s. With 0 value the linger option is disabled.
<custom_request_header>	String	Sets/clears the custom request header (string); the custom header option follows a defined format "hdr_id:hdr_name:hdr_value"; the hdr_id is a number in the range [0-4]; the hdr_name and hdr_value are strings (see examples below). • "0:hdr0:val0": set header 0 with name hdr0 and value val0 • "0:": clear header 0 • "1:hdr1:val1": set header 1 with name hdr1 and value val1 • "1:": clear header 1 • "2:hdr2:val2": set header 2 with name hdr2 and value val2 • "2:": clear header 2 • "3:hdr3:val3": set header 3 with name hdr3 and value val3 • "3:": clear header 3

Parameter	Type	Description
		• "4:hdr4:val4": set header 4 with name hdr4 and value val4 • "4:": clear header 4 The following character is not allowed in the <custom_request_header> parameter: • 0x3A (:) The hdr_name and hdr_value each have a maximum length of: • LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B - 512 characters. Sum of hdr_name and hdr_value length can not exeed 1006 characters. • LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D - 512 characters
<output_mode>	Number	HTTP output mode; the allowed values are: • 0 (factory-programmed value): use file system to transmit and receive http request and response • 1: use direct link to transmit and receive data
<split_mode>	Number	HTTP split mode; the allowed values are: • 0 (factory-programmed value): reply http header and body are stored or displayed • 1: only body is stored or displayed
<cid>	Number	Specifies the PDP context that will be used for the HTTP data. For the parameter range, see <cid>. For more details on the default value of the parameter (where supported), see HTTP.
<preferred_protocol_type>	Number	In case of a context id with IPv4v6 PDP type it is possible to select: • 0: IPv4 • 1: IPv6 For more details on the default value of the parameter (where supported), see HTTP.
<param_val>	Number / String	Type and supported content depend on the related <op_code> parameter; details are given above
<param_val1>	Number / String	Type and supported content depend on the related <op_code> parameter; details are given above.

29.2.4 Notes

- HTTP server IP address and HTTP server name are mutually exclusive. If the HTTP server IP address is specified by the user, then the value for the HTTP server name is reset, or vice versa.

LARA-L6 / LARA-R6

- The read command for <op_code>=9 (HTTP add custom request headers) is not supported.

29.3 HTTP advanced control+UHTTPAC

+UHTTPAC						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

29.3.1 Description

Configures, reads or resets (to the factory-programmed values) the HTTP application profile advanced parameters.

The configured HTTP profile advanced parameters are not saved in the non volatile memory.

29.3.2 Syntax

Type	Syntax	Response	Example
Set	AT+UHTTPAC=<profile_id>,<param_tag>,<key>,<value>	OK	AT+UHTTPAC=0,0,0,"UBLX_SESSION_COOKIE_0" OK
Read	AT+UHTTPAC=<profile_id>,<param_tag>,<key>	+UHTTPAC: <profile_id>,<param_tag>,<key>,<value> OK	AT+UHTTPAC=0,0,0 +UHTTPAC: 0,0,0,"UBLX_SESSION_COOKIE_0" OK
Test	AT+UHTTPAC=?	+UHTTPAC: (list of supported <profile_id>s),(list of supported <param_tag>s),(list of supported <key>s) OK	+UHTTPAC: (0-3),(0),(0-3) OK

29.3.3 Defined values

Parameter	Type	Description
<profile_id>	Number	See <profile_id>.
<param_tag>	Number	• 0: HTTP request COOKIES; manage request COOKIES sent to the HTTP server. o <key>: index of the cookie (number); range 0-3. Identifies the cookie to be read if <value> is omitted or configured if <value> is a valid string. o <value>: value of the cookie (string); the maximum length is 512 characters. The cookie values respect the following rules: - Empty string (""): the cookie will be cleared and will not be present in the request; - Simple one-value cookie: the cookie will be set and sent in the request; - Complex multi-value cookie: the cookies will be set and sent in the request. The multiple cookies must be separated by a left-attached semicolon(";") and a space(" ");
<key>	Number/ String	Content depends on the related <param_tag> (see above).
<value>	Number/ String	Content depends on the related <param_tag> (see above).

29.3.4 Examples and use cases

In this section some +UHTTPAC AT command examples and use cases are listed.

Command	Response	Description
Example 1		
AT+UHTTPAC=0,0,0,""	OK	Clear the HTTP request cookie at index 0.
Example 2		
AT+UHTTPAC=0,0,0,"SIMPLE_COOKIE"	OK	Set a simple HTTP request cookie at index 0.
Example 3		
AT+UHTTPAC=0,0,0,"COMPLEX_COOKIE; COMPLEX_COOKIE"	OK	Overwrite the HTTP request cookie at index 0 with a complex cookie.

29.4 HTTP command +UHTTPC

+UHTTPC						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	-	+CME Error

29.4.1 Description

Triggers the HTTP command specified with <http_command> parameter, using the HTTP application profile parameters (previously set up by +UHTTP AT command), specified with <profile_id>. The response indicates if sending the command request to HTTP process was successful or not. The final result of HTTP command will be returned to the user via the +UUHTTPCR URC.

HTTP can be used also in direct link mode when available. In this mode, module will handle the initial steps of the HTTP protocol sending HTTP header for request issued. In this case it will establish a transparent end-to-end communication with the data connection TCP socket via the serial interface. After the CONNECT result code, the user can send the content via the serial interface. Once finished, the server will replies using same serial interface. Every operation can be aborted using the +++ sequence to switch off the direct link mode. When data are send to server, user must wait at least 2 s before sending the +++ abort sequence.

☞ The timing before the +UUHTTPCR URC is issued on the AT terminal also depends by the DNS resolution. For further details about the estimated response time related to the DNS resolution, see the +UDNSRN AT command.

29.4.2 Syntax

Type	Syntax	Response	Example
Generic syntax			
Set	AT+UHTTPC=<profile_id>,<http_command>,<path>,<filename>[,<param1>[,<param2>[,<param3>]]]	OK	AT+UHTTPC=0,1,"/path/file.html","responseFilename" OK
HEAD command			
Set	AT+UHTTPC=<profile_id>,0,<path>,<filename>	OK	AT+UHTTPC=0,0,"/path/file.html","responseFilename" OK
GET command			
Set	AT+UHTTPC=<profile_id>,1,<path>,<filename>	OK	AT+UHTTPC=0,1,"/path/file.html","responseFilename" OK
DELETE command			
Set	AT+UHTTPC=<profile_id>,2,<path>,<filename>	OK	AT+UHTTPC=0,2,"/path/file.html","responseFilename" OK
PUT command			
Set	AT+UHTTPC=<profile_id>,3,<path>,<filename>,<filesystem_name>[,<HTTP_content_type>[,<user_defined_content_type>]]	OK	AT+UHTTPC=0,3,"/path/file.html","responseFilename","filesystemName" OK
POST file command			
Set	AT+UHTTPC=<profile_id>,4,<path>,<filename>,<filesystem_name>,<HTTP_content_type>[,<user_defined_content_type>]	OK	AT+UHTTPC=0,4,"/path/file.html","responseFilename","filesystemName",0

Type	Syntax	Response	Example
			OK
POST data command			
Set	AT+UHTTPC=<profile_id>,5,<path>,<filename>,<data>,<HTTP_content_type>[,<user_defined_content_type>]	OK	AT+UHTTPC=0,5,"/path/file.html","responseFilename","data",0 OK
PUT command in direct link			
Set	AT+UHTTPC=<profile_id>,6,<path>,[<HTTP_content_type>],[<user_defined_content_type>],<data_length>	OK	AT+UHTTPC=0,6,"/path/file.html",1,,30 CONNECT <data> <http_server_reply> DISCONNECT OK
POST command in direct link			
Set	AT+UHTTPC=<profile_id>,7,<path>,[<HTTP_content_type>],[<user_defined_content_type>],<data_length>	OK	AT+UHTTPC=0,7,"/path/file.html",1,,30 <data> <http_server_reply> DISCONNECT OK
GET FOTA update file			
Set	AT+UHTTPC=<profile_id>,100,<path>	OK	AT+UHTTPC=0,100,"/path/file.html" OK
Test	AT+UHTTPC=?	+UHTTPC: (list of supported <profile_id>s),(list of supported <http_command>s) OK	+UHTTPC: (0-3),(0-5,100) OK
URC		+UUHTTPCR: <profile_id>,<http_command>,<http_result>[,<http_status_code>,<md5_sum>]	+UUHTTPCR: 0,1,1

29.4.3 Defined values

Parameter	Type	Description
<profile_id>	Number	See <profile_id>.
<http_command>	Number	• 0: HEAD command; issue an HEAD request to the HTTP server. This command can be used in direct link mode. • 1: GET command; perform a GET request to the HTTP server. This command can be used in direct link mode. • 2: DELETE command; send a DELETE request to the HTTP server. This command can be used in direct link mode. • 3: PUT command; perform a PUT request to the HTTP server. • 4: POST a file command; issue a POST request for sending a file to the HTTP server. • 5: POST data command; send a POST request to the HTTP server using the data specified in <data> parameter. • 6: PUT data in direct link mode. • 7: POST data in direct link mode. • 100: GET FOTA update file; download the FOTA update file. Allowed values: • LARA-L6 / LARA-R6 - 0, 1, 2, 3, 4, 5, 100
<path>	String	Path of HTTP server resource; the maximum length is:

Parameter	Type	Description
		• LARA-L6 / LARA-R6 - 1024 characters
<filename>	String	Filename where the HTTP server response will be stored. If the file already exists, it will be overwritten. If the parameter is an empty string (""), the default "http_last_response_<profile_id>" filename will be used. For file system file name and data size limits see File system limits.
<filesystem_name>	String	File system filename representing the file system filename to be sent to the HTTP server within the POST / PUT request. For file system file name and data size limits see File system limits.
<HTTP_content_type>	Number	HTTP Content-Type identifier. It represents the HTTP Content-Type identifier. Allowed values: • 0: application/x-www-form-urlencoded • 1: text/plain • 2: application/octet-stream • 3: multipart/form-data • 4: application/json (supported only for PUT and POST file command) • 5: application/xml • 6: user defined with <user_defined_content_type>
<user_defined_content_type>	String	Used only when <HTTP_content_type>=6 (user defined Content-Type). The maximum length is • LARA-L6 / LARA-R6 - 512 characters
<data>	String	It represents the data to be sent to the HTTP server with the POST request. The data must be formatted according to the Content-Type specified in <HTTP_content_type> parameter. The maximum length is: • LARA-L6 / LARA-R6 - 1032 characters
<data_length>	String	It represents total data that will be sent with direct link PUT/POST request. After this threshold is achieved, further data will be ignored. User can use abort sequence +++ to stop data transfert waiting at least 2s.
<param1>	String	Content depends on the related <http_command> (see above).
<param2>	Number	Content depends on the related <http_command> (see above).
<param3>	String	Content depends on the related <http_command> (see above).
<http_result>	Number	• 0: fail • 1: success
<http_status_code>	Number	HTTP status code reported in the server response header after a GET FOTA update file request. This parameter is issued only for AT+UHTTPC=<profile_id>,100,<path> AT command.
<md5_sum>	String	MD5 checksum of the FOTA update file. This parameter is issued only for AT +UHTTPC=<profile_id>,100,<path> AT command.

29.4.4 Notes

- The +UHTTPC command has a default timeout setting set to 180 s. The timeout is counted from the last successful network read or send operation performed by the HTTP application, so in a real timeout case the application might be executing a command more than 180 s.
- If <http_command>=4 (POST a file) and the <HTTP_content_type>=3 (multipart/form-data), then the module automatically encapsulates the file content in the following multipart/form-data HTTP request:

```
--U1Blox2Http3Unique4Boundary5\r\n
Content-Disposition: form-data; name="file_post"; filename="<user_defined_content_type>"\r\n
Content-Length: <length of file specified with <user_defined_content_type>>\r\n
Content-Type: application/octet-stream\r\n
\r\n
<content of file specified with <user_defined_content_type>>\r\n
--U1Blox2Http3Unique4Boundary5--\r\n
\r\n
```

- The response headers string (headers received in the HTTP response) must not exceed the maximum length of 255 bytes.
- The response header string limit is extended to 1024 bytes.

LARA-L6 / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D

- The response header string limit is extended to 1024 bytes.

LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B

- The time to establish the secure session (when using +UHTTP: <profile_id>,6,1[,<usecprf_profile_id>]) could require up to 150 s in one of these cases:
  - RoT generated PSK (+USECPRF: <profile_id>,11)
  - encrypted session resumption (+USECPRF: <profile_id>,13,2,10)

  This is due to "security heartbeat" message operation. For more details on when this scenario occurs, see the +USECCONN AT command.

29.5 HTTP protocol error +UHTTPER

+UHTTPER						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error Appendix A.7

29.5.1 Description

Retrieves the error class and code of the latest HTTP operation on the specified HTTP profile.

29.5.2 Syntax

Type	Syntax	Response	Example
Set	AT+UHTTPER=<profile_id>	+UHTTPER: <profile_id>,<error_class>,<error_code> OK	AT+UHTTPER=1 +UHTTPER: 1,0,0 OK

29.5.3 Defined values

Parameter	Type	Description
<profile_id>	Number	See <profile_id>.
<error_class>	Number	List of the allowed values is available in Appendix A.7
<error_code>	Number	Value of class-specific error codes (reply code if class is 0). When <error_class>=10 (wrong HTTP API usage), the allowed <error_code>; values are listed in Appendix A.7.2

30 Ping

The ping service requires the user to define and activate a connection profile before executing the +UPING AT command. Some products require additional commands to provide connectivity to the application.

LARA-L6 / LARA-R6
If not specified, the <cid> and the <preferred_protocol_type> parameters set by means of the +UDCONF=19 AT command are used.
See +CGACT AT command for activating a PDP context.

LARA-R6001D-00B
If not specified the default CID (<cid>=1) is used. If not specified and the protocol type is IPv4v6, then the preferred protocol type is IPv4.
See +CGACT AT command for activating a PDP context.

30.1 Ping command +UPING

+UPING						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error PING Error

30.1.1 Description

The ping command is the common method to know if a remote host is reachable on the internet.

The ping functionality is based on the ICMP protocol (Internet Control Message Protocol), it is part of the Internet Protocol Suite as defined in RFC 792 [178]. ICMP messages are typically generated in response to errors in IP datagrams or for diagnostic / routing purposes.

The ping command sends an ICMP echo request to the remote host and waits for its ICMP echo reply. If the echo reply packet is not received, it might mean that the remote host is not reachable.

The ping command could be used also to measure e.g. the RTT (Round Trip Time, the time needed by a packet to go to the remote host and come back) and the TTL (Time To Live, it is a value to understand how many gateway a packet has gone through).

The set command allows the user to execute a ping command from the module to a remote peer. The results of the ping command execution is notified by means of these URCs:

- **+UUPING**: it reports the +UPING command result when no error occurred.
- **+UUPINGER**: it is raised if an error is occurred while processing the +UPING command. The URC reports the code of occurred error (see Ping error codes to get the meanings of the error result codes).

Some network operators may disallow ICMP packets traffic on their network, this means that the +UPING command may not work.

Some remote hosts might not reply to ICMP echo request for security reasons (e.g. firewall settings).

Some remote hosts might not reply to ICMP echo request if the data size of the echo request is too big.

If a remote peer does not reply to an ICMP echo request, it does not mean that for sure the peer cannot be reached in another way.

30.1.2 Syntax

Type	Syntax	Response	Example
Set	AT+UPING=<remote_host>[,<retry_num>,<p_size>,<timeout>,<ttl>[,<cid>[,<preferred_protocol_type>]]]	OK	AT+UPING="www.google.com" OK
Test	AT+UPING=?	+UPING: "remote_host",(list of supported <retry_num>),(list of supported <p_size>),(list of supported <timeout>),(list of supported <ttl>,(list of supported <cid>),(list of supported <preferred_protocol_type>) OK	+UPING: "remote_host",(1-64),(4-1460),(10-60000),(1-255) OK
URC		+UUPING: <retry_num>,<p_size>,<remote_hostname>,<remote_ip>,<ttl>,<rtt>	+UUPING: 1,32,"www.l-google.com","72.14.234.104",55,768
URC		+UUPINGER: <error_code>	+UUPINGER: 12

30.1.3 Defined values

Parameter	Type	Description
<remote_host>	String	IP address (dotted decimal representation) or domain name of the remote host: • Maximum length: 128 characters
<retry_num>	Number	Indicates how many times iterate the ping command: • Range: 1-64 • Default value: 4
<p_size>	Number	Size in bytes of the echo packet payload: • LARA-L6 / LARA-R6 - The range goes from 4 to 1460. The default value is 32.
<timeout>	Number	The maximum time in milliseconds to wait for an echo reply response: • Range: 10-60000 • Default value: 5000
<ttl>	Number	The value of TTL to be set for the outgoing echo request packet. In the URC it provides the TTL value received in the incoming packet: • Range: 1-255 • Default value: 32
<cid>	Number	PDP context identifier used for the PING communication. The allowed range is product specific, see <cid>. For more details on the default value of the parameter (where supported), see PING.
<preferred_protocol_type>	Number	Preferred protocol type to be specified when the <cid> protocol type is IPv4v6. Allowed values: • 0: IPv4 • 1: IPv6 For more details on the default value of the parameter (where supported), see PING.
<remote_hostname>	String	String representing the domain name (if available) of the remote host. It this information is not available, it will be an empty string (i.e. "").
<remote_ip>	String	String representing the remote host IP address in dotted decimal form.
<rtt>	Number	RTT value, the time elapsed in milliseconds before receiving the echo reply response from the remote host.
<error_code>	Number	The error occurred while processing the +UPING command. See Ping error codes for the list of the allowed error result codes.

30.1.4 Notes

- If the +UUPING URC reports <rtt> = -1 the timeout is elapsed (no response received).
- If the first +UUPING URC reports <rtt> = -2 the TTL used in the ping request is too low.

- Some network operators may return an ICMP time exceeded message when the remote host is not reachable. In these cases the first +UUPING URC reports <rtt> = -1 and the subsequent +UUPING URC report <rtt> = -2.

LARA-L6 / LARA-R6

- The <ttl> parameter is not supported however it must be specified:
  - The set command expects a value either empty or in the defined range.
  - In the +UUPING URC output the value is empty.
- The "+CME ERROR: operation not allowed" error result code (if +CMEE: 2) is returned when the +UPING AT command is entered before a previous +UPING AT command is completed. In a subsequent re-entry of the command the error result code will no longer be present.

31 Positioning

31.1 NMEA

u-blox cellular modules support reading NMEA strings and URCs from the GNSS receiver through AT commands.

The NMEA standard differentiates between GPS, GLONASS, GALILEO, BeiDou and multi-GNSS receivers using a different 'Talker ID'. Depending upon device model and system configuration, the u-blox receiver could output messages using any one of these Talker IDs.

By default, the receivers configured to support GPS, SBAS and QZSS use the 'GP' Talker ID, receivers configured to support GLONASS use the 'GL' Talker ID, receivers configured to support BeiDou use the 'GB' Talker ID, receivers configured to support GALILEO use the 'GA' Talker ID and receivers configured for any combinations of multiple GNSS use the 'GN' Talker ID.

Even if the NMEA specification indicates that the GGA message is GPS specific, u-blox receivers support the output of a GGA message for each of the Talker IDs.

To read a specific NMEA string, it must be activated.

Where supported, the +UGNMEA AT command can activate or deactivate specific NMEA strings at a desired rate. For every NMEA type, strings can be output as URCs, or stored in an internal buffer, or can be routed to the UART of the GNSS receiver. When internal buffer is activated, the NMEA strings are stored there and can be read by +UGNMEA read command. In this case, all the NMEA strings are output and the buffer is then emptied.

Otherwise the legacy NMEA commands, +UGZDA, +UGGGA, +UGGLL, +UGGSV, +UGRMC, +UGVTG, +UGGSA AT commands can be used to activate the storage of the last value of specific types of NMEA strings. If storing a particular NMEA string has not been activated, the information text response to the query will be "0,NULL". The last value of a specific NMEA string is saved in RAM and is available even after the GNSS receiver switch off.

☞ As a factory-programmed setting, the cellular modules configure the GNSS receiver through +UGPS AT command to not provide the NMEA sentences.

☞ Using legacy NMEA commands when reading an NMEA message, if the response value is "1,Not available" then the storing of the NMEA string is activated but this information has not been still sent to the user, if this persists check that the relative NMEA message is enabled. To enable it use the +UGUBX AT command (for further information see the UBX-CFG-MSG message in the u-blox GNSS protocol specification).

☞ LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D
Issue the +UGNMEA AT command to activate or deactivate specific NMEA strings: the legacy NMEA commands, +UGZDA, +UGGGA, +UGGLL, +UGGSV, +UGRMC, +UGVTG, +UGGSA are deprecated.

31.2 AssistNow services

Users would ideally like GNSS receivers to provide accurate position information the moment they are turned on. With standard GNSS receivers there can be a significant delay in providing the first position fix, principally because the receiver needs to obtain data from several satellites and the satellites transmit that data slowly. Under adverse signal conditions, data downloads from the satellites to the receiver can take minutes, hours or even fail altogether.

GNSS AT commands provides the means for delivering assistance data to u-blox receivers obtained from the u-blox AssistNow Online or AssistNow Offline services.

AssistNow Online is u-blox' end-to-end Assisted GNSS solution for use cases that have access to the Internet. Data supplied by the AssistNow Online service can be directly uploaded to a u-blox receiver to substantially reduce Time To First Fix (TTFF), even under poor signal conditions.

AssistNow Offline service is targeted at use cases that only have occasional Internet access and so cannot use AssistNow Online. AssistNow Offline speeds up Time To First Fix (TTFF), typically to considerably less than 10 s. Cellular modules using AssistNow Offline download data from the AssistNow Offline service when an Internet connection is available. Data are stored locally to the cellular module file system and are subsequently uploaded to a u-blox receiver, so that it can estimate the positions of the satellites, when no better data is available. Using these estimates will not provide as accurate a position fix as if current ephemeris data is used, but it will allow much faster TTFFs in nearly all cases.

Both the AssistNow Online and Offline services use a simple, stateless, HTTP interface. Therefore, they work on all standard mobile communication networks that support Internet access.

☞ UDP protocol for the AssistNow Online service is deprecated.

Both the AssistNow Online and Offline services are only available for use by u-blox customers. To use the services, customers will need to obtain an authorization token from u-blox. This token must be issued as a parameter of +UGSRV AT command.

AssistNow Autonomous feature provides a functionality similar to AssistNow Offline without the need for a host and a connection. Based on a broadcast ephemeris downloaded from the satellite the receiver can autonomously generate an accurate satellite orbit representation («AssistNow Autonomous data») that is usable for navigation much longer than the underlying broadcast ephemeris was intended for.

Local Aiding feature provides a functionality so that u-blox receivers is instructed to dump the current state of their internal navigation database to the cellular module file system. This information is sent back to the receiver (e.g. after a period when the receiver was turned off) restoring the database to its former state, and thus allows the receiver to restart rapidly. Local aiding feature does not need for a access to the Internet.

Point Perfect service is targeted at use cases where high precision is the main requirement, such as autonomous vehicles, precision agriculture, or robotic lawn mowers that require far higher accuracy than several meters offered by the above mentioned aiding systems. To achieve this, GNSS correction data is provided over mobile internet and L-band satellite signals to account for satellite clock and orbit errors and signal biases, as well as ionospheric and tropospheric influences. This, combined with the primary GNSS signal, makes it possible to improve accuracy to within centimeters.

The +UGPS AT command allows the activation/deactivation of AssistNow Online, Offline, Autonomous, Local Aiding and Point Perfect features.

☞ The AssistNow Offline and AssistNow Autonomous features are exclusive and should not be used at the same time. Every satellite will be ignored by AssistNow Autonomous if there is AssistNow Offline data available for it.

Table 56 summarizes the GNSS AT commands related with AssistNow services:

AT command	ANow Online	ANow Offline	ANow Autonomous	Local Aiding	Point Perfect
+UGPS	Enable/disable the feature	Enable/disable the feature	Enable/disable the feature	Enable/disable the feature	Enable/disable the feature
+UGAOP	Configure UDP for A-GPS (deprecated)				
+UGAOF		Configure HTTP for A-GPS (deprecated)			
+UGSRV	Configure HTTP for Assisted GNSS Configure Auth Token for Assisted GNSS	Configure HTTP for Assisted GNSS Configure Auth Token for Assisted GNSS			
+UGAOS	Force AssistNow Online data download request	Force AssistNow Offline data download request	Force AssistNow Autonomous operation	Download/Upload of local aiding data from/to GNSS receiver to cellular module	

AT command	ANow Online	ANow Offline	ANow Autonomous	Local Aiding	Point Perfect
+UGLAASZTP					Configure for Zero Touch Provisioning
+UGLAASPRF					Configure Point Perfect features

Table 56: AssistNow services overview

31.3 Positioning server configuration +UGSRV

+UGSRV						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	NVM	No	-	+CME Error

31.3.1 Description

Configures the network connection to a Multi GNSS Assistance (MGA) server used also per CellLocate. The configuration is saved in NVM and applied at the next GNSS power cycle or next CellLocate request. By default, the cellular module connects to u-blox' primary MGA server; if the connection fails then the cellular module connects to u-blox' secondary MGA server. The set command registers a token for gathering assistance data from MGA servers.

Setting up an internet connection and network registration is not part of this command and must be handled by the user separately to this command.

LARA-L6 / LARA-R6
If not specified, the <cid> parameter set by means of the +UDCONF=19 AT command is used.
See +CGACT AT command for activating a PDP context.

LARA-R6001D-00B
If not specified the default CID (<cid>=1) is used. If not specified and the protocol type is IPv4v6, then the preferred protocol type is IPv4.
See +CGACT AT command for activating a PDP context.

For more details about Multi GNSS Assistance (MGA) feature, see to AssistNow services.

31.3.2 Syntax

Type	Syntax	Response	Example
Set	AT+UGSRV=[<mga_primary_server>],[<mga_secondary_server>],<auth_token>[,<days>[,<period>[,<resolution>[,<GNSS_types>[,<mode>[,<datatype>[,<cid>]]]]]]]	OK	AT+UGSRV="cell-live1.services.u-blox.com","cell-live2.services.u-blox.com","123456789abcdefghijklm",14,4,1,65,0,1,1 OK
Read	AT+UGSRV?	+UGSRV: <mga_primary_server>,<mga_secondary_server>,<auth_token>,<days>,<period>,<resolution>,<GNSS_types>,<mode>,<datatype>,<cid> OK	+UGSRV: "cell-live1.services.u-blox.com","cell-live2.services.u-blox.com","123456789abcdefghijklm",14,4,1,65,0,1,1 OK
Test	AT+UGSRV=?	+UGSRV: <mga_primary_server>,<mga_secondary_server>,<auth_token>,(list of supported <days>s),(list of supported <period>s),(list of supported <resolution>s),(list of supported <GNSS_types>s),	+UGSRV: "srv1","srv2","token",(1,2,3,5,7,10,14),(1-5),(1-3),(1-77),(0-2),(0-15),(0,254) OK

Type	Syntax	Response	Example
		(list of supported <mode>s),(list of supported <datatype>s),(list of supported <cid>s) OK	

31.3.3 Defined values

Parameter	Type	Description
<mga_primary_server>	String	Host name of the primary MGA server; the maximum length is 254 characters. Empty string is not allowed. If the primary MGA server is omitted, the current stored value is preserved. • LARA-L6 / LARA-R6 - The default and factory-programmed value is "cell-live1.services.u-blox.com".
<mga_secondary_server>	String	Host name of the secondary MGA server; the maximum length is 254 characters. Empty string is not allowed. The default and factory-programmed value is "cell-live2.services.u-blox.com". If the secondary MGA server is omitted, the current stored value is preserved.
<auth_token>	String	Authentication Token for MGA server access.
<days>	Number	The number of days into the future the Offline data for u-blox 7 and previous version should be valid for. The allowed values are: 1, 2, 3, 5, 7, 10 and 14. The default and factory-programmed value is 14.
<period>	Number	The number of weeks into the future the Offline data for u-blox M8 should be valid for. The range of the allowed values goes from 1 to 5. The default and factory-programmed value is 4.
<resolution>	Number	Resolution of offline data for u-blox M8. Allowed values: • 1 (default and factory-programmed value): every day • 2: every other day • 3: every third day
<GNSS_types>	Number	Bitmask for combining the desired GNSS for the (offline) aiding • 1: GPS • 4: Galileo • 8: BeiDou • 64: GLONASS The default and factory-programmed value is GPS+GLONASS (65). If the parameter is omitted, the current stored value is preserved. Bitmask values: • LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D - 1, 4, 8, 64 • LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B - 1, 64
<mode>	Number	Mode of operation of AssistNow Online data management • 0 (default and factory-programmed value): AssistNow Online data are downloaded at GNSS receiver power up • 1: AssistNow Online data automatically kept alive • 2: manual AssistNow Online data download
<datatype>	Number	Bitmask for combining the desired data types for the (online) aiding • 0: time • 1: position • 2: ephemeris • 4: almanac • 8: auxiliary • 16: ephemeris of satellites which are likely to be visible from the position estimated by current registered network. This flag has no effect if the ephemeris flag is set to 0. The default and factory-programmed value is all aidings without filter on visible satellites (15)

Parameter	Type	Description
<cid>	Number	PDP context identifier. See <cid>. For more details on the default and factory-programmed value, see the command description.

31.4 GNSS

31.4.1 GNSS power management +UGPS

+UGPS						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	< 10 s	+CME Error

31.4.1.1 Description

Switches on or off a u-blox GNSS receiver connected to the cellular module via a dedicated DDC (I^2C) interface. For more details about the connection between cellular module and u-blox GNSS receiver, see the corresponding module system integration manual.

Furthermore the command sets the aiding type to be used to enhance GNSS performance, e.g. decreasing Time To First Fix (TTFF). The supported aiding types are: Local aiding, AssistNow Online, AssistNow Offline, AssistNow Autonomous.

For a more detailed description on aiding modes and possible suggestions, see AssistNow services.

LARA-L6 / LARA-R6
To establish a PSD connection see the +CGDCONT and +CGACT AT commands.
As the I^2C bus is shared between all (internal and external) devices the channel is opened with the I^2C bus mode that is specified using the +UI2CCFG AT command.

The AssistNow Autonomous feature may be not fully supported on all Multi-GNSS receivers. For more details on AssistNow Autonomous feature see the corresponding u-blox-GNSS receiver description.

It is possible to combine different aiding modes: to enable them the sum of the <mode> value of the interested aiding modes is needed (e.g.: aiding <aid_mode>=3 means local aiding plus AssistNow Offline). Moreover it is also possible to switch from one aiding mode to another one without powering off the GNSS receiver. If the following sequence is provided (AT+UGPS=1,1 and then AT+UGPS=1,5) at the beginning the GNSS receiver will power on with local aiding support and after the second command will be added the AssistNow Online. After the second command the local aiding is not restarted, therefore the +UUGIND URC for it will not be sent again.

u-blox concurrent GNSS receivers can acquire and track satellites from more than one GNSS system at the same time. The <GNSS_systems> parameter configures the GNSS receiver into the required mode of operation. It is possible to combine different GNSS systems depending on the receivers capability to receive several carrier frequencies. See the corresponding GNSS receiver data sheet for the supported GNSS systems. If the Assisted GNSS unsolicited indication is enabled, the +UUGIND URC will provide the current activated combinations of systems.

31.4.1.2 Syntax

Type	Syntax	Response	Example
Set	AT+UGPS=<mode>[,<aid_mode>[,<GNSS_systems>]]	OK	AT+UGPS=1,0,1 OK
Read	AT+UGPS?	+UGPS: <mode>[,<aid_mode>[,<GNSS_systems>]] OK	+UGPS: 1,0,1 OK
Test	AT+UGPS=?	+UGPS: (list of supported <mode>s),(list of supported <aid_mode>s),(list of supported <GNSS_systems>s) OK	+UGPS: (0-1),(0-15),(1-511) OK

Type	Syntax	Response	Example
		OK	

31.4.1.3 Defined values

Parameter	Type	Description
<mode>	Number	• 0 (default value): GNSS receiver powered off • 1: GNSS receiver powered on
<aid_mode>	Number	Bitmask for combining the supported aiding modes; the parameter is mandatory if <mode>=1; all these allowed values can be combined together: • 1: automatic local aiding • 2: AssistNow Offline • 4: AssistNow Online • 8: AssistNow Autonomous • 16: Point Perfect If <aid_mode> is set to 0 (default value), all the aiding modes are disabled (no aiding). Bitmask values: • LARA-L6 / LARA-R6 - 1, 2, 4, 8, 16
<GNSS_systems>	Number	Bitmask for combining the supported GNSS types and relative signals (in brackets); the parameter is optional and the allowed values can be combined together. The default value is 3 (GPS+SBAS): • 1: GPS (L1CA) • 2: SBAS (L1CA) • 4: Galileo (E1) • 8: BeiDou (B1I) • 16: IMES (L1) • 32: QZSS (L1CA) • 64: GLONASS (L1) • 128: BEIDOU B1C • 256: QZSS L1S Bitmask values: • LARA-L6 / LARA-R6 - 1, 2, 4, 8, 16, 32, 64

31.4.1.4 Notes

- If <GNSS_systems> type is not supported by the GNSS receiver, the set command turns on the GNSS receiver with built-in supported type. The current <GNSS_systems> can be queried by means of the read command or the +UUGIND URC.
- An error result code is provided in the following cases:
  - <mode>, <aid_mode> or <GNSS_systems> values are out of range
  - <mode> is set to 1 without <aid_mode> value
  - Attempt to power off the GNSS when it is already off
  - The value of <aid_mode> to be set is equal to the current GNSS aiding mode and the value of <GNSS_systems> to be set is equal to the last requested <GNSS_systems>

31.4.2 Assisted GNSS unsolicited indication +UGIND

+UGIND						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

31.4.2.1 Description

Enables or disables sending of URCs from MT to TE in the case of GNSS aiding operations. The <mode> parameter controls the processing of URCs specified within this command.

The URC returns the result of an assisted GNSS operation. This information is sent to all the interfaces. The URC is provided only if one or more aiding modes are enabled (for more details, see the +UGPS and +UGAOP (where supported) command descriptions). A URC is issued for each check in of an MGA server (primary and secondary).

There can be more than a +UUGIND URC for a single aiding operation: the +UUGIND is reported for each error. For instance if the local aiding is enabled and there are no space left in the file system after the AT+UGPS=0 command, there will be an error for every failure writing on FFS.

The AT+UGAOS=0 and AT+UGAOS=1 commands both relate to the GNSS local aiding, so the unsolicited message will be +UUGIND: 1,x in both cases.

Local aiding and AssistNow Autonomous will produce URC both after GNSS power on and before GNSS power off because some data are transferred from the GNSS receiver to the cellular module.

As the GNSS receiver can be configured for multi-GNSS, an additional +UUGIND: 0,<GNSS_systems> URC for the currently activated GNSS systems is displayed.

31.4.2.2 Syntax

Type	Syntax	Response	Example
Set	AT+UGIND=<mode>	OK	AT+UGIND=1 OK
Read	AT+UGIND?	+UGIND: <mode> OK	+UGIND: 1 OK
Test	AT+UGIND=?	+UGIND: (list of supported <mode>'s) OK	+UGIND: (0-1) OK
URC		**Current activated GNSS system:** +UUGIND: 0,<GNSS_systems>	+UUGIND: 0,3
		GNSS aiding status: +UUGIND: <aid_mode>,<result>	+UUGIND: 4,5

31.4.2.3 Defined values

Parameter	Type	Description
<mode>	Number	URC configuration: • 0 (default value): disabled • 1: enabled
<aid_mode>	Number	Provides the supported aiding mode: • 0: GNSS system(s) • 1: automatic local aiding • 2: AssistNow Offline • 4: AssistNow Online • 8: AssistNow Autonomous • 16: Point Perfect
<GNSS_systems>	Number	Current activated GNSS types; the allowed values can be combined together: • 1: GPS • 2: SBAS • 4: Galileo • 8: BeiDou • 16: IMES • 32: QZSS • 64: GLONASS
<result>	Number	Represents the result of the aiding operation: • 0: no error • 1: wrong URL (for AssistNow Offline) • 2: HTTP error (for AssistNow Offline) • 3: create socket error (for AssistNow Online) • 4: close socket error (for AssistNow Online) • 5: write to socket error (for AssistNow Online) • 6: read from socket error (for AssistNow Online) • 7: connection/DNS error (for AssistNow Online)

Parameter	Type	Description
		• 8: file system error • 9: generic error • 10: no answer from GNSS (for local aiding and AssistNow Autonomous) • 11: data collection in progress (for local aiding) • 12: GNSS configuration failed (for AssistNow Autonomous) • 13: RTC calibration failed (for local aiding) • 14: feature not supported (for AssistNow Autonomous) • 15: feature partially supported (for AssistNow Autonomous) • 16: authentication token missing (for HTTP connection with Aiding Server) • 30: cannot Config Region Profile (for PointPerfect) • 31: cannot Config Plan Profile (for PointPerfect) • 32: cannot Config ANow Profile (for PointPerfect) • 33: cannot Configure Point Perfect service • 34: cannot subscribe topic (for PointPerfect) • 35: cannot unsubscribe topic (for PointPerfect) • 36: cannot validate Credentials (for PointPerfect) • 37: security configuration failure (for PointPerfect) • 38: invalid CID used (for PointPerfect) • 39: error in configuring MQTT profile (for PointPerfect) • 40: error to connect to MQTT broker (for PointPerfect) • 41: error in Login to MQTT broker (for PointPerfect) • 42: cannot Disconnect from MQTT broker (for PointPerfect) • 43: error on handling received MQTT message (for PointPerfect) • 44: error on forwarding received MQTT message to GNSS receiver (for PointPerfect) • 45: error in Logout from MQTT broker (for PointPerfect)

31.4.2.4 Notes

LARA-L6 / LARA-R6

- The command setting is not stored in the NVM.

31.4.3 GNSS profile configuration +UGPRF

+UGPRF						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

31.4.3.1 Description

Configures the data flow to and from a u-blox GNSS receiver connected to the cellular module. The data flow is possible to and from the:

- UART (via multiplexer)
- USB (or alternatively AUX UART)
- Over the air to a remote host: To send data over the air an internet connection must be active and there must be at least one free TCP socket (the GNSS shares the socket pool with the other applications). Setting up an internet connection and network registration is not part of this command and must be handled by the user separately from this command.
- Into a file on the cellular module: A file with GNSS data can be accessed via the +ULSTFILE AT command. The filename is automatically chosen by the cellular module as a unique ID based on date and time or a further incremental number (e.g. "GPS_200910061500" or "GPS_20091006_001" according to the used cellular module). When the files size reaches 500 kB the file is closed and no more data is saved. It is possible to save further data by restarting the GNSS (this will create a new file)

☞ LARA-L6 / LARA-R6
To establish a PSD connection see the +CGDCONT and +CGACT AT commands.

It is possible to send GNSS data to multiple destinations at the same time by summing the <GNSS_I/O_ configuration> values of each required destinations (e.g. if AT+UGPRF=6 the data will be sent on multiplexer and stored in a file in the file system).

The messages to be output by the u-blox GNSS receiver need to be activated separately with UBX-CFG-MSG configuration messages according to the GNSS receiver protocol specification.

☞ It is not possible to select the GNSS data flow to and from USB (or alternatively AUX UART) and multiplexer concurrently.

☞ The configuration of the GNSS profile must be performed only when GNSS is switched off, otherwise an error result code will be displayed.

31.4.3.2 Syntax

Type	Syntax	Response	Example
Set	AT+UGPRF=<GNSS_I/O_ configuration>[,<IP Port>,<server address string>]	OK	AT+UGPRF=0 OK
Read	AT+UGPRF?	+UGPRF: <GNSS_I/O_ configuration>,<IP port>,<server address string> OK	+UGPRF: 0,0,"" OK
Test	AT+UGPRF=?	+UGPRF: (list of supported <GNSS_I/O_configuration>),(list of supported <IP port>),<server address string> OK	+UGPRF: (0-512),(0-65535),"addr" OK

31.4.3.3 Defined values

Parameter	Type	Description
<GNSS_IO_ configuration>	Number	• 0: no data flow to multiplexer, file or IP address • 1: GNSS data flow to and from USB (or alternatively AUX UART) • 2: GNSS data flow to and from multiplexer • 4: GNSS data flow saved to file • 8: GNSS data flow over the air to an internet host • 16: GNSS data ready function • 32: GNSS RTC sharing function • 64: reserved • 128: reset the GNSS after the GNSS power on (see AT+UGPS command description) • 256: reserved • 512: AssistNow Online deep scan for DB feeding Allowed values: • LARA-L6 / LARA-R6 - 0 (factory-programmed value), 1, 2, 4, 8, 16, 64, 128, 512
<IP port>	Number	IP port of the server where the GNSS data are sent (default and factory-programmed value: 0). If GNSS data flow over the air is enabled the parameter is mandatory otherwise is forbidden.
<server address string>	String	Address string of the server where the GNSS data are sent (default and factory-programmed value: ""). If GNSS data flow over the air is enabled the parameter is mandatory otherwise is forbidden. The address could be provided in both URL or IP format and the maximum length of the string is 47 characters.

31.4.3.4 Notes

LARA-L6 / LARA-R6

- AUX UART interface cannot be configured as GNSS tunneling. See +USIO AT command description for details.

31.4.4 Configure ZTP parameters for access credentials to Thingstream +UGLAASZTP

+UGLAASZTP						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6001-01B LARA-R6001D-01B LARA-R6401-01B LARA-R6401D-01B LARA-R6801-01B LARA-R6801D					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	< 10 s	+CME Error

31.4.4.1 Description

Configures Zero-Touch-Provisioning parameters to obtain access credentials for a specific service of Thingstream Location As A Service (LaaS) portal

31.4.4.2 Syntax

Type	Syntax	Response	Example
Set	AT+UGLAASZTP=<svcId>,<token>[,<givenName>[,<tag0>[,<tag1>[,<tag2>[,<tag3>[,<tag4>]]]]]]	OK	AT+UGLAASZTP=2,"mytoken","myGivenName","mytag1" OK
Read	AT+UGLAASZTP=<svcId>	+UGLAASZTP: <svcId>,<token>,<givenName>,<tag0>,<tag1>,<tag2>,<tag3>,<tag4> OK	+UGLAASZTP: 2,"mytoken","mygivenName","mytag1" OK
Test	AT+UGLAASZTP=?	+UGLAASZTP: (list of supported <state>s) OK	+UGLAASZTP: (2-2),"token","givenname","tag0",..,"tag4" OK

31.4.4.3 Defined values

Parameter	Type	Description
<svcId>	Number	• 1: Thingstream Point Perfect service • 2: Thingstream SpotNow service
<token>	String	Authentication string to access Thingstream Zero-Touch-Provisioning
<givenName>	String	Friendly name for the device which is displayed in the portal. The name does not need to be unique
<tags>	String	List of tags (up to 5 tags) that can be applied to the Location Thing automatically created in the platform

31.4.5 Configure profile for a specified Location As A Service +UGLAASPRF

+UGLAASPRF						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6001-01B LARA-R6001D-01B LARA-R6401-01B LARA-R6401D-01B LARA-R6801-01B LARA-R6801D					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	< 10 s	+CME Error

31.4.5.1 Description

Configures the features for a specific Location As A Service (LaaS) provided by Thingstream portal.

31.4.5.2 Syntax

Type	Syntax	Response	Example
Set	AT+UGLAASPRF=<svcId>,<opcode>[,<val>]	if <opcode> = 0: +UGLAASPRF: <svcId>,0,<val1>,<val2>,...	+UGLAASPRF: 1,0,"eu","ip",0 OK

Type	Syntax	Response	Example
		OK if <opcode> != 0: OK	AT+UGLAASPRF=1,1,"eu" OK
Test	AT+UGLAASPRF=?	+UGLAASPRF: (list of supported <state>s) OK	+UGLAASPRF: (1-2),(0-3),<param> OK

31.4.5.3 Defined values

Parameter	Type	Description
<svcId>	Number	• 1: Thingstream Point Perfect service • 2: Thingstream SpotNow service
<opcode>	Number	Code to perform specific operation for selected service. • 0: list all parameters set for selected service If <svcId> == 1: • 1: set Point Perfect region. <val> is string to set the region • 2: set Point Perfect plan. <val> is string to set the plan "ip" or "l1" • 3: enable/Disable AssistNow Online aiding download, <val> is a number: 1=Enable, 0=Disable • 9: clear Point Perfect configuration. Next time Point Perfect will be triggered, credentials will be provisioned by ZTP If <svcId> == 2: • 9: clear SpotNow configuration. Next time SpotNow will be triggered, credentials will be provisioned by ZTP

31.4.6 GNSS aiding request command +UGAOS

+UGAOS						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	< 10 s	+CME Error

31.4.6.1 Description

Triggers the manual download of AssistNow Online and AssistNow Offline data from the configured server in case automatic AssistNow operation is not enabled. The command returns only when the received data from the server are valid or an error occurs.

The command is also used to trigger the manual upload of local aiding data (e.g. ephemeris, almanac, last position, time, etc) from a u-blox GNSS receiver prior to shutting it down and to restore it into the receiver after the power up of the GNSS receiver (for more details, see the +UGPS AT command).

31.4.6.2 Syntax

Type	Syntax	Response	Example
Set	AT+UGAOS=<aid_mode>	OK	AT+UGAOS=0 OK
Test	AT+UGAOS=?	AT+UGAOS: (list of supported <aid_mode>s) OK	+UGAOS: (0-8) OK

31.4.6.3 Defined values

Parameter	Type	Description
<aid_mode>	Number	Allowed values: • 0: upload of local aiding data from GNSS receiver to cellular module • 1: download of local aiding data from the cellular module to the GNSS receiver • 2: AssistNow Offline file download request (file loaded into cellular module)

Parameter	Type	Description
		• 4: AssistNow Online data download request (data loaded into the GNSS receiver). This is only needed if AssistNow Online is not used with automatic operation • 8: AssistNow autonomous • Other values are reserved for future use

31.4.7 Send of UBX string +UGUBX

+UGUBX						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	< 10 s	+CME Error

31.4.7.1 Description

Sends UBX protocol messages, embedded in an AT command, to a u-blox GNSS receiver. The command is transparent, that is the data is sent to the GNSS receiver without any check: it is up to the user to control if the UBX data is valid. The checksum in +UGUBX command string is ignored, this is calculated when the data is sent to the GNSS receiver.

When the GNSS receiver is off the UBX string is saved in cellular module RAM and, later, passed to the GNSS as configuration for "GNSS data ready" function when the GNSS receiver is used. In this case the UBX checksum bytes must be filled correctly.

☞ It is recommended to not send UBX messages to reset the GNSS receiver while it is in use, this will cause a misalignment between the cellular system configuration and the one of the GNSS system.

☞ UBX messages of "input" type do not provide back information messages to the cellular module. In this case the information text response to set command is +UGUBX: "no message" followed by the final result code.

☞ Be aware that the navigation/measurement rate of the GNSS receiver can be set via UBX message and this might impact the internal timeout (10 s) of this command, in fact setting a navigation rate higher than 10 s might cause the +UGUBX AT command to go into timeout. For more details on the navigation/measurement rate of GNSS receiver and the corresponding UBX message, see the GNSS receiver protocol specification.

31.4.7.2 Syntax

Type	Syntax	Response	Example
Set	AT+UGUBX=<UBX_string>	+UGUBX: <UBX_string_response> OK	AT+UGUBX="B562012100002267" +UGUBX: "B56201211400F82D140 70F000000C38A0200E60706140 83B05375A6E" OK

31.4.7.3 Defined values

Parameter	Type	Description
<UBX_string>	String	UBX message in hexadecimal format. The messages can include spaces to simplify copy/paste from u-center separated with spaces, e.g. AT+UGUBX="B5 62 0A 09 00 0 0 13 43" (this is important when copying messages from u-center). • LARA-L6 / LARA-R6 - For the limit of the length of the string, see Command line.
<UBX_string_response>	String	The response message depends by the request sent: query/poll UBX messages will return the requested data in hexadecimal format, while the configuration message will return the corresponding acknowledge or not-acknowledge. See the UBX protocol specification

31.4.7.4 Notes

- If a +UGUBX command triggers multiple strings answer only a single UBX string is returned. E. g. polling GPS Aiding Ephemeris Data (AID-EPH) is done by sending a single message to the receiver but returns 32 messages; only the first one is sent to AT interface.
- The answer can be split in multiple information text responses all starting with "+UGUBX:".
- The UBX protocol is slightly different when a UBX-M10 GNSS receiver is addressed, especially if configuration commands (UBX-CFG) are used. To properly set the UBX message, see the proper GNSS receiver interface description.

31.4.8 GNSS indications timer +UGTMR

+UGTMR						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	< 10 s	+CME Error

31.4.8.1 Description

Sets the date and time format. With the <time_zone> parameter is possible to set the time zone value; the time and the date will be updated as the local time. With the action command is possible to synchronize the UTC timing.

31.4.8.2 Syntax

Type	Syntax	Response	Example
Set	AT+UGTMR=<time_zone>	OK	AT+UGTMR=-1 OK
Read	AT+UGTMR?	+UGTMR: <time_zone> OK	+UGTMR: -1 OK
Test	AT+UGTMR=?	+UGTMR: (list of supported <time_zone>s) OK	+UGTMR: (-96 - 96) OK

31.4.8.3 Defined values

Parameter	Type	Description
<time_zone>	Number	Indicates the time zone value set by the user; the module can provide an error result code if the offset has not been calculated. The factory-programmed time zone value is 0. • -96, 96: defined range

31.4.8.4 Notes

- The time zone is expressed in quarters of hour.
- The time is updated with the current UTC time plus the time zone and the time zone is unchanged, for example:

Command	Response	Remarks
AT+UGTMR=-36	OK	The command returns the "OK" final result code and sets the new date and time if the GNSS has this information, otherwise a generic error result code is returned.
AT+CCLK?	+CCLK: "12/05/23,21:54:21+00"	

31.4.9 GNSS NMEA messages configuration +UGNMEA

+UGNMEA						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6001-01B LARA-R6001D-01B LARA-R6401-01B LARA-R6401D-01B LARA-R6801-01B LARA-R6801D					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	< 10 s	+CME Error

31.4.9.1 Description

Configures the rate, storing, URC and output of NMEA strings, gets the current configuration of a specific NMEA string and reads the strings stored in the memory buffer.

31.4.9.2 Syntax

Type	Syntax	Response	Example
Generic syntax			
Set	AT+UGNMEA=<tag>,<rate>[,<output>]	OK	AT+UGNMEA="GSV",2,1 OK
Read configuration of a specific NMEA string			
Set	AT+UGNMEA=<tag>	+UGNMEA: <tag>,<rate>,<output> OK	AT+UGNMEA="RMC" +UGNMEA: "RMC",4,1 OK
Read	AT+UGNMEA?	+UGNMEA: <NMEA msg> [+UGNMEA: <NMEA msg>] [...] OK	+UGNMEA: "$GPGSV,1,1,03,12,,,42,24,,,47,32,,,37,5*66" +UGNMEA: "$GAGSV,1,1,00,2*76" +UGNMEA: "$GPRMC,083559.00,A,4717.11437,N,00833.91522,E,0.004,77.52,091202,,,A,V*57" OK
Test	AT+UGNMEA=?	+UGNMEA: "NMEA Tag",(list of supported <rate>s),(list of supported <output>s) OK	+UGNMEA: "NMEA Tag",(0-255),(1-7) OK
URC		+UUGNMEA: <NMEA msg>	+UUGNMEA: "$GNGGA,172823.00,4542.83630,N,01344.42004,E,1,08,1.76,274.9,M,43.5,M,,*44"

31.4.9.3 Defined values

Parameter	Type	Description
<tag>	String	NMEA string identifier: • "DTM": datum reference • "GBS": satellite fault detection • "GGA": global positioning system fix data • "GLL": latitude and longitude, with time of position fix and status • "GNS": GNSS fix data • "GRS": GNSS range residuals • "GSA": GNSS DOP and active satellites • "GST": GNSS pseudorange error statistics • "GSV": GNSS satellites in view • "RMC": recommended minimum data • "VLW": dual ground/water distance • "VTG": course over ground and ground speed • "ZDA": time and date

Parameter	Type	Description
<rate>	Number	String output rate: • number of navigation solutions needed for the NMEA string • 0: disable NMEA string
<output>	Number (bitmask)	String destination; the allowed values can be combined (optional): • 1 (default value): save NMEA string in memory (RAM) • 2: enable URC for NMEA string • 4: send NMEA string to GNSS UART
<NMEA msg>	String	NMEA $xxx string

31.4.9.4 Notes

NMEA buffer

When memory is set as the destination of an NMEA string, this will be stored in an internal circular buffer. If not emptied, when the buffer is full, the most recent messages will overwrite the oldest ones. By issuing the +UGNMEA read command all stored strings are displayed and the internal buffer is emptied.

URC messages

URCs of enabled NMEA messages are sent to the terminal on which GNSS was started with the AT+UGPS command.

<output> parameter for disabled NMEA strings

When an NMEA string is disabled by setting of the <rate> parameter to 0, the value of the <output> parameter is automatically set to 0.

31.4.10 Get GNSS time and date +UGZDA

+UGZDA						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	< 10 s	+CME Error

31.4.10.1 Description

Enables/disables the storing of the last value of NMEA $ZDA messages, and get the current messaging state. If the <state> parameter is enabled, the last value of NMEA $ZDA messages can be retrieved with the read command even when the GNSS is switched off.

The NMEA $ZDA messages are volatile.

31.4.10.2 Syntax

Type	Syntax	Response	Example
Set	AT+UGZDA=<state>	OK	AT+UGZDA=1 OK
Read	AT+UGZDA?	+UGZDA: <state>,<$ZDA msg> OK	+UGZDA: 1,$GPZDA,142351.00,12,12,2013,00,00*66 OK +UGZDA: 0,NULL OK
Test	AT+UGZDA=?	+UGZDA: (list of supported <state>s) OK	+UGZDA: (0-1) OK

31.4.10.3 Defined values

Parameter	Type	Description
<state>	Number	• 0 (factory-programmed value): disable the NMEA $ZDA messages • 1: enable the NMEA $ZDA messages

Parameter	Type	Description
<$ZDA msg>	String	NMEA $ZDA messages or "Not available" if the NMEA string is enabled, but this information has not been still sent to the user.

31.4.11 Get GNSS fix data +UGGGA

+UGGGA						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	< 10 s	+CME Error

31.4.11.1 Description

Enables/disables the storing of the last value of NMEA $GGA messages, and gets the current messaging state. If the <state> parameter is enabled, the last value of NMEA $GGA messages can be retrieved with the read command even when the GNSS is switched off.

The NMEA $GGA messages are volatile.

31.4.11.2 Syntax

Type	Syntax	Response	Example
Set	AT+UGGGA=<state>	OK	AT+UGGGA=1 OK
Read	AT+UGGGA?	+UGGGA: <state>,<$GGA msg> OK	+UGGGA: 1,$GPGGA,142351.00,,,,,0,00,99.99,,,,,,*66 OK +UGGGA: 0,NULL OK
Test	AT+UGGGA=?	+UGGGA: (list of supported <state>s) OK	+UGGGA: (0-1) OK

31.4.11.3 Defined values

Parameter	Type	Description
<state>	Number	• 0 (factory-programmed value): to disable the NMEA $GGA messages • 1: to enable the NMEA $GGA messages
<$GGA msg>	String	NMEA $GGA messages or "Not available" if the NMEA string is enabled, but this information has not been still sent to the user.

31.4.12 Get geographic position +UGGLL

+UGGLL						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	< 10 s	+CME Error

31.4.12.1 Description

Enables/disables the storing of the last value of NMEA $GLL messages, and gets the current messaging state. If the <state> parameter is enabled, the last value of NMEA $GLL messages can be retrieved with the read command even when the GNSS is switched off.

The NMEA $GLL messages are volatile.

31.4.12.2 Syntax

Type	Syntax	Response	Example
Set	AT+UGGLL=<state>	OK	AT+UGGLL=1

Type	Syntax	Response	Example
			OK
Read	AT+UGGLL?	+UGGLL: <state>,<$GLL msg> OK	+UGGLL: 1,$GPGLL,,,,,142351.00,V,N*4A OK +UGGLL: 0,NULL OK
Test	AT+UGGLL=?	+UGGLL: (list of supported <state>s) OK	+UGGLL: (0-1) OK

31.4.12.3 Defined values

Parameter	Type	Description
<state>	Number	• 0 (factory-programmed value): to disable the NMEA $GLL messages • 1: to enable the NMEA $GLL messages
<$GLL msg>	String	NMEA $GLL messages or "Not available" if the NMEA string is enabled, but this information has not been still sent to the user.

31.4.13 Get number of GNSS satellites in view +UGGSV

+UGGSV						
Modules	All products					
Attributes	Syntax	PIN required	Settings saved	Can be aborted	Response time	Error reference
	full	No	NVM	No	< 10 s	+CME Error

31.4.13.1 Description

Enable/disables the storing of the last value of NMEA $GSV messages, and gets the current messaging state. If the <state> parameter is enabled, the last value of NMEA $GSV messages can be retrieved with the read command even when the GNSS is switched off.

The NMEA $GSV messages are volatile.

31.4.13.2 Syntax

Type	Syntax	Response	Example
Set	AT+UGGSV=<state>	OK	AT+UGGSV=1 OK
Read	AT+UGGSV?	+UGGSV: <state>,<$GSV msg> OK	+UGGSV: 1,$GPGSV,3,1,11,03,67,298,22,06,88,149,29,07,06,302,,08,05,332,25*73 $GPGSV,3,2,11,09,02,334,25,14,02,141,,15,10,041,43,16,46,209,16*7D $GPGSV,3,3,11,18,48,066,35,21,26,070,35,27,80,314,25*40 $GLGSV,1,1,03,73,13,248,,74,23,298,20,75,09,348,19*51 OK +UGGSV: 0,NULL OK
Test	AT+UGGSV=?	+UGGSV: (list of supported <state>s) OK	+UGGSV: (0-1) OK

31.4.13.3 Defined values

Parameter	Type	Description
<state>	Number	• 0 (factory-programmed value): to disable the NMEA $GSV messages • 1: to enable the NMEA $GSV messages
<$GSV msg>	String	NMEA $GSV messages or "Not available" if the NMEA string is enabled, but this information has not been still sent to the user.

31.4.13.4 Notes

- Since the $GSV message reports satellite information, the output of the different GNSS systems is not combined, but it is reported in sequence as in the example above with GPS and GLONASS.

31.4.14 Get recommended minimum GNSS data +UGRMC

+UGRMC						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	< 10 s	+CME Error

31.4.14.1 Description

Enable/disables the storing of the last value of NMEA $RMC messages, and gets the current messaging state. If the <state> parameter is enabled, the last value of NMEA $RMC messages can be retrieved with the read command even when the GNSS is switched off.

The NMEA $RMC messages are volatile.

31.4.14.2 Syntax

Type	Syntax	Response	Example
Set	AT+UGRMC=<state>	OK	AT+UGRMC=1 OK
Read	AT+UGRMC?	+UGRMC: <state>,<$RMC msg> OK	+UGRMC: 1,$GPRMC,142351.00,V,,,,,,,121213,,,N*7F OK +UGRMC: 0,NULL OK
Test	AT+UGRMC=?	+UGRMC: (list of supported <state>s) OK	+UGRMC: (0-1) OK

31.4.14.3 Defined values

Parameter	Type	Description
<state>	Number	• 0 (factory-programmed value): to disable the NMEA $RMC messages • 1: to enable the NMEA $RMC messages
<$RMC msg>	String	NMEA $RMC messages or "Not available" if the NMEA string is enabled, but this information has not been still sent to the user.

31.4.15 Get course over ground and ground speed +UGVTG

+UGVTG						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	< 10 s	+CME Error

31.4.15.1 Description

Enables/disables the storing of the last value of NMEA $VTG messages, and gets know the current messaging state. If the <state> parameter is enabled, the last value of NMEA $VTG messages can be retrieved with the read command even when the GNSS is switched off.

The NMEA $VTG messages are volatile.

31.4.15.2 Syntax

Type	Syntax	Response	Example
Set	AT+UGVTG=<state>	OK	AT+UGVTG=1 OK
Read	AT+UGVTG?	+UGVTG: <state>,<$VTG msg> OK	+UGVTG: 1,$GPVTG,,,,,,,,,N*30 OK +UGVTG: 0,NULL OK
Test	AT+UGVTG=?	+UGVTG: (list of supported <state>s) OK	+UGVTG: (0-1) OK

31.4.15.3 Defined values

Parameter	Type	Description
<state>	Number	• 0 (factory-programmed value): to disable the NMEA $VTG messages • 1: to enable the NMEA $VTG messages
<$VTG msg>	String	NMEA $VTG messages or "Not available" if the NMEA string is enabled, but this information has not been still sent to the user.

31.4.16 Get satellite information +UGGSA

+UGGSA						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	< 10 s	+CME Error

31.4.16.1 Description

Enables/disables the storing of the last value of NMEA $GSA messages, and gets the current messaging state. If <state> parameter is enabled, the last value of NMEA $GSA messages can be retrieved with the read command even when the GNSS is switched off.

The NMEA $GSA messages are volatile.

31.4.16.2 Syntax

Type	Syntax	Response	Example
Set	AT+UGGSA=<state>	OK	AT+UGGSA=1 OK
Read	AT+UGGSA?	+UGGSA: <state>,<$GSA msg> OK	+UGGSA: 1,$GPGSA,A,1,,,,,,,,,,,,99.99,99.99,99.99*30 OK +UGGSA: 0,NULL

Type	Syntax	Response	Example
			OK
Test	AT+UGGSA=?	+UGGSA: (list of supported <state>s) OK	+UGGSA: (0-1) OK

31.4.16.3 Defined values

Parameter	Type	Description
<state>	Number	• 0 (factory-programmed value): to disable the NMEA $GSA messages • 1: to enable the NMEA $GSA messages
<$GSA msg>	String	NMEA $GSA messages or "Not available" if the NMEA string is enabled, but this information has not been still sent to the user.

31.5 CellLocate® and hybrid positioning

31.5.1 Ask for localization information +ULOC

+ULOC						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	< 10 s	+CME Error

31.5.1.1 Description

Requests cellular module to provide the location data; the location can be determined using the supported sensors such as:

- GNSS receiver
- CellLocate® (location based on network cells data)
- SpotNow sensor (location based on GPS signal processed through cellular module)
- Wi-Fi sensor (location based on nearby access points)
- Combination of different technologies (hybrid)

A partial operation can also be performed by starting a scan of the cellular network and saving the data obtained in the file system. In this case, no position request is sent to the CellLocate service. The user's application can separately forward the saved file to the CellLoLocate service to locate its own device.

The final result code indicates if sending the command request to the localization information process was successful or not. The URC is issued to provide the requested information via +ULOC set command.

To use simultaneously GNSS interface and CellLocate® where both are supported, the GNSS shall not be a sensor for +ULOC: if the GNSS sensor is reserved to another interface (e.g. +UGPS) and is selected as a sensor also for +ULOC, an error result code is provided ("+CME ERROR: GPS busy" if +CMEE: 2).

It is possible to configure the hybrid positioning through +ULOCGNSS and +ULOCCELL AT commands (if supported) even if it is running: the parameters are stored in NVM and will be applied at the next +ULOC command.

☞ If the +ULOC command is sent while a previous +ULOC activity is still in progress the previous activity is aborted, the available position is immediately output and the next +ULOC request is served.

☞ The data connection cannot be immediately dropped at the +ULOC timeout expiration. This could lead to a delay in the expected response time.

☞ If no position is available (no GNSS coverage, no network information and no previous data available) then the <lat> latitude and <long> longitude will be set to '0'.

☞ If the previous position degradated by the elapsed time satisfies the desired accuracy then the sensor '0' is reported in the information text response.

☞ If multi-hypothesis is required the GNSS solution and the CellLocate® solutions are reported, if available. If no GNSS, CellLocate® or SpotNow solutions are present, the previous position degradated is used instead.

☞ If a valid GNSS fix with an accuracy below the required value (<accuracy>) occurs before the end of the network scan, the GNSS-only solution will be available, even if multi-hypothesis has been required.

☞ LARA-L6 / LARA-R6
To establish a PSD connection see the +CGDCONT and +CGACT AT commands.
As the I^2C bus is shared between all (internal and external) devices the channel is opened with the I^2C bus mode that is specified using the +UI2CCFG AT command.

31.5.1.2 Syntax

Type	Syntax	Response	Example
Set	AT+ULOC=<mode>,<sensor>,<response_type>,<timeout>,<accuracy>[,<num_hypothesis>]	OK	AT+ULOC=2,3,0,120,1 OK
Read	AT+ULOC?	+ULOC: <mode>,<sensor>,<response_type>,<timeout>,<accuracy>,<num_hypotesis> OK	+ULOC: 2,3,1,0,20,0 OK
Test	AT+ULOC=?	+ULOC: (list of supported <mode>s),(list of supported <sensor>s),(list of supported <response_type>s),(list of supported <timeout>s),(list of supported <accuracy>s),(list of supported <num_hypotesis>s) OK	+ULOC: (0-2),(0-63),(0-2),(1-999),(1-999999),(1-16) OK
URC		**If <response_type>=0:** +UULOC: <date>,<time>,<lat>,<long>,<alt>,<uncertainty>	+UULOC: 13/04/2011,09:54:51.000,45.6334520,13.0618620,49,1
		If <response_type>=1: +UULOC: <date>,<time>,<lat>,<long>,<alt>,<uncertainty>,<speed>,<direction>,<vertical_acc>,<response_source>,<SV_used>,<antenna_status>,<jamming_status>	+UULOC: 25/09/2013,10:13:29.000,45.7140971,13.7409172,266,17,0,0,18,1,6,3,9
		If <response_type>=2, <response_source>= 1 and <num_hypothesis>= N: +UULOC: <sol>,<num>,<response_source>,<date>,<time>,<lat>,<long>,<alt>,<uncertainty>,<speed>,<direction>,<vertical_acc>,<SV_used>,<antenna_status>,<jamming_status>	+UULOC: 1,2,1,08/04/2015,09:02:32.000,45.7141652,13.7410666,266,47,0,0,40,3,0,0
		If <response_type>=2, <response_source> = 2 and <num_hypothesis>=N: +UULOC: <sol>,<num>,<response_source>,<date>,<time>,<lat>,<long>,<alt>,<lat50>,<long50>,<major50>,<minor50>,<orientation50>,<confidence50>[,<lat95>,<long95>,<major95>,	+UULOC: 2,2,2,08/04/2015,09:02:19.000,45.7140665,13.7411681,0,45.7240260,13.7511276,113,10,0,50,45.7240260,13.7511276,143,41,0,95

Type	Syntax	Response	Example
		<minor95>,<orientation95>, <confidence95>]	
		If <response_type>=2, <response_source>= 0: +UULOC: <sol>,<num>,<response_source>,<date>,<time>,<lat>,<long>,<alt>,<uncertainty>	+UULOC: 1,1,0,08/04/2015,09:03:45.000,45.7140290,13.7410695,0,32

31.5.1.3 Defined values

Parameter	Type	Description
<mode>	Number	Allowed values: • 0: reserved • 1: reserved • 2: single shot position
<sensor>	Number	Sensor selection: it is possible to combine different sensors summing <sensor> values of the selected sensors: • 0: use the last fix in the internal database and stop the GNSS receiver • 1: use the GNSS receiver for localization • 2: use cellular CellLocate® location information • 4: use Wi-Fi CellLocate® location information • 8: use external sensor CellLocate® location information • 16: use SpotNow sensor (location based on GPS signal processed through cellular module) • 32: perform a network scan and save the data in file system Allowed sensors: • LARA-L6 / LARA-R6 - 0, 1, 2
<response_type>	Number	Type of response: • 0: standard (single-hypothesis) response • 1: detailed (single-hypothesis) response • 2: multi-hypotheses response
<timeout>	Number	Timeout period in seconds (1 - 999)
<accuracy>	Number	Target accuracy in meters (1 - 999999)
<num_hypothesis>	Number	Maximum desired number of responses from CellLocate® (up to 16): multiple positions followed by their ellipsoidal uncertainties. This value has to be increased by 1 (GNSS solution) to get the maximum number of possible solutions. This optional parameter can be used only if <response_type>=2. The default value is 1.
<date>	String	UTC date[5] (DD/MM/YYYY) of the estimated position
<time>	String	UTC time[5] (hh:mm:ss.sss) of the estimated position
<lat>	String	Estimated latitude, in degrees
<long>	String	Estimated longitude, in degrees
<alt>	Number	Estimated altitude, in meters[6]
<uncertainty>	Number	Estimated 50% confidence level error, in meters (0 - 20000000)
<speed>	Number	Speed over ground m/s[6]
<direction>	Number	Course over ground in degree (0 deg - 360 deg)[(6)]
<vertical_acc>	Number	Vertical accuracy, in meters[6]
<response_source>	Number	Method used for the position calculation: • 0: last known position with updated uncertainty • 1: GNSS position • 2: Received by the MGA server • 16: SpotNow position
<SV_used>	Number	Number of satellite used to calculate the position[6]
<sol>	Number	Solution index (between 1 and <num>)
<num>	Number	Total number of the available hypotheses (less than or equal to <num_hypothesis>)
<lat50>/<lat95>	String	Estimated latitude (50/95% confidence levels), in degrees

[5] Coming either from the CellLocate® server or the GNSS receiver
[6] only for GNSS positioning, 0 in case of CellLocate®

Parameter	Type	Description
<long50>/<long95>	String	Estimated longitude (50/95% confidence levels), in degrees
<major50>/<major95>	Number	Semi-major axis of the ellipse (50/95% confidence levels), in meters
<minor50>/<minor95>	Number	Semi-minor axis of the ellipse (50/95% confidence levels), in meters
<orientation50>/<orientation95>	Number	Orientation of the ellipse (50/95% confidence levels), in degrees
<confidence50>/<confidence95>	Number	50/95% confidence levels, in percentage
<antenna_status>	Number	Antenna status (0 - 4)[6]. For more details, see the u-blox GNSS receiver protocol specification
<jamming_status>	Number	Jamming status[6]. For more details, see the u-blox GNSS receiver protocol specification

31.5.1.4 Notes

- If AssistNow Online aiding data has been configured by means of the <aiding> parameter of +ULOCGNSS AT command, the +ULOC request using <sensor>=1 (GNSS receiver only) can provide a +UULOC URC reporting a CellLocate® solution (<response_source>=2). This can happen if:
  - a GNSS fix is not available.
  - the CellLocate® solution is more accurate (i.e. CellLocate® solution's uncertainty is better than the GNSS's one).
- If <sensor>=1 (use the GNSS receiver for localization), <response_type>=2 (multi-hypotheses response) is not supported.
- The <jamming_status> value must be ignored if the jamming is disabled through +ULOCGNSS command.
- The <date>, <time>, <lat>, <long> values are not enclosed in double quotes in the URC.

31.5.2 Localization information request status unsolicited indication +ULOCIND

+ULOCIND						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

31.5.2.1 Description

Configures sending of URCs from MT to TE in the case of +ULOC operations. The URC provides the result of the steps of an +ULOC operation.

A URC is issued for each check in of an MGA server (primary and secondary).

31.5.2.2 Syntax

Type	Syntax	Response	Example
Set	AT+ULOCIND=<mode>	OK	AT+ULOCIND=1 OK
Read	AT+ULOCIND?	+ULOCIND: <mode> OK	+ULOCIND: 1 OK
Test	AT+ULOCIND=?	+ULOCIND: (list of supported <mode>'s) OK	+ULOCIND: (0-1) OK
URC		**If <mode>=1:** +UULOCIND: <step>,<result>	+UULOCIND: 1,0

31.5.2.3 Defined values

Parameter	Type	Description
<mode>	Number	URC configuration: • 0 (default value): disabled • 1: enabled • 2: reserved Allowed values: • LARA-L6 / LARA-R6 - 0, 1
<step>	Number	Informs the user about the operation in progress: • 0: network scan start • 1: network scan end • 2: requesting data to the server • 3: received data from the server • 4: sending feedback to the server • 5: saving network scan data in filesystem • 6: Wi-Fi scan start • 7: Wi-Fi scan end
<result>	Number	Represents the result of the aiding operation: • 0: no error • 1: wrong URL • 2: HTTP error • 3: create socket error • 4: close socket error • 5: write to socket error • 6: read from socket error • 7: connection/DNS error • 8: authentication token missing or wrong (required for aiding for u-blox M8 and future versions) • 9: generic error • 10: user terminated • 11: no data from server • 13: network scan data file saving error • 14: Wi-Fi scan error

31.5.2.4 Notes

LARA-L6 / LARA-R6

- The command setting is not stored in the NVM.

31.5.3 Specify the device autonomous solution +ULOCAID

+ULOCAID						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

31.5.3.1 Description

The user has the possibility to specify its state (position and velocity) at a given time to select one of the multi-hypothesis provided in the previous +ULOC request (<sol> parameter) or to insert a location estimate provided by other sensors. These information will be sent to the server with the next +ULOC command.

This command influences the amount of data exchanged with the server.

If the parameters of the autonomous solution have to be specified (<index> = 0), the RTC time must have a correct value prior to using the +ULOCAID command.

☞ Speed and direction parameters can be inserted (optionally) also if one of the multi-hypotheses has been selected (<index> > 0). Default values are those contained in the hypothesis selected (equal to 0 for CellLocate® solutions).

31.5.3.2 Syntax

Type	Syntax	Response	Example
Location estimate from other sensors			
Set	AT+ULOCAID=0,<date>,<time>,<lat>,<long>,<major>,<minor>,<orientation>[,<speed>,<direction>]	OK	AT+ULOCAID=0,"10/03/2015","11:37:32.000","45.23456","11.12345",1300,789,34,34,121 OK
Read	AT+ULOCAID?	+ULOCAID: <index>,<date>,<time>,<lat>,<long>,<major>,<minor>,<orientation>[,<speed>,<direction>] OK	If <speed> and <direction> set: +ULOCAID: 0,"10/03/2015","11:37:32.000","45.23456","11.12345",1300,789,34,34,121 OK
			If <speed> and <direction> unknown: +ULOCAID: 0,"10/03/2015","11:37:32.000","45.23456","11.12345",1300,789,34 OK
Location estimate from hypothesis selected (<index> greater than 0)			
Set	AT+ULOCAID=<index>[,,,,,,,,<speed>,<direction>]	OK	If <speed> and <direction> unknown: AT+ULOCAID=1 OK
			If <speed> and <direction> set: AT+ULOCAID=1,,,,,,,,34,121 OK
Read	AT+ULOCAID?	+ULOCAID: <index>,<date>,<time>,<lat>,<long>,<major>,<minor>,<orientation>[,<speed>,<direction>] OK	If <speed> and <direction> unknown: +ULOCAID: 1,"0/0/0","0:0:0.000","0.0000000","0.0000000",0,0,0 OK
			If <speed> and <direction> set: +ULOCAID: 1,"0/0/0","0:0:0.000","0.0000000","0.0000000",0,34,121 OK
Test	AT+ULOCAID=?	+ULOCAID: (list of supported <index>s),(list of supported <date>s),(list of supported <time>),(list of supported <lat>),(list of supported <long>),(list of supported <major>),(list of supported <minor>),(list of supported <orientation>),(list of supported <speed>s),(list of supported <direction>s) OK	+ULOCAID: (0-17),"","","","",(0-6300000),(0-6300000),(0-179),(0-255),(0-359) OK

31.5.3.3 Defined values

Parameter	Type	Description
<index>	Number	Multi-hypotesis index: • 0: location estimate from other sensors (following fields are used) • n: index of the previous CellLocate® solution
<date>	String	Date (DD/MM/YY) of the estimated position.
<time>	String	Time (hh:mm:ss.sss) of the estimated position.
<lat>	String	Estimated latitude expressed in degrees.
<long>	String	Estimated longitude expressed in degrees.
<major>	Number	Semi-major axis of the uncertainty ellipse in meters.
<minor>	Number	Semi-minor axis of the uncertainty ellipse in meters.
<orientation>	Number	Orientation of the semi-major axis of the ellipse in degrees.
<speed>	Number	Estimated speed in meters per second. Default value is 0.
<direction>	Number	Direction of the motion in degrees. Default value is 0.

31.5.4 GNSS sensor configuration +ULOCGNSS

+ULOCGNSS						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

31.5.4.1 Description

Configures the GNSS sensor that can be used with the +ULOC AT command.

31.5.4.2 Syntax

Type	Syntax	Response	Example
Set	AT+ULOCGNSS=<aiding>[,<psv_mode>[,<minSV>[,<minCNO>[,<ini_3d_fix>[,<staticHoldMode>[,<SBAS>[,<jamming>[,<antenna>[,<BBthreshold>[,<CWthreshold>[,<GNSS_system>[,<reserved1>[,<reserved2>]]]]]]]]]]]]]	OK	AT+ULOCGNSS=15 OK
Read	AT+ULOCGNSS?	+ULOCGNSS: <aiding>,<psv_mode>,<minSV>,<minCNO>,<ini_3d_fix>,<staticHoldMode>,<SBAS>,<jamming>,<antenna>,<BBthreshold>,<CWthreshold>,<GNSS_system>,<reserved1>,<reserved2> OK	+ULOCGNSS: 15,1,6,8,0,1,1,1,1,1,1,0,0,0 OK
Test	AT+ULOCGNSS=?	+ULOCGNSS: (list of supported <aiding>s),(list of supported <psv_mode>s),(list of supported <minSV>s),(list of supported <minCNO>s),(list of supported <ini_3d_fix>s),(list of supported <staticHoldMode>s),(list of supported <SBAS>s),(list of supported <jamming>s),(list of supported <antenna>s),(list of supported <BBthreshold>s),(list of supported <CWthreshold>s),(list of supported <GNSS_system>s),(0),(0) OK	+ULOCGNSS: (0-15),(0-1),(3-32),(0-50),(0-1),(0-255),(0-1),(0-1),(0-2),(0-15),(0-31),(1-127),(0),(0) OK

31.5.4.3 Defined values

Parameter	Type	Description
<aiding>	Number	GNSS aiding mode configuration; it is possible the combination of different aiding modes: to enable more aiding modes it is needed to sum the value of the interested aiding modes: • 1: local aiding (including RTC sharing) • 2: AssistNow Offline • 4: AssistNow Online • 8: AssistNow Autonomous If <aiding> is set to 0, all the aiding modes are disabled (no aiding). All the modes (15) are enabled as a factory programmed setting.
<psv_mode>	Number	Power Save Mode (UBX-CFG-RXM): • 0 (factory-programmed value): disabled • 1: enabled
<minSV>	Number	Minimum number of satellites for navigation (UBX-CFG-NAVX5). The range goes from 3 to 32, and the factory-programmed value is 3.
<minCNO>	Number	Minimum satellite signal level for navigation (UBX-CFG-NAVX5). The range goes from 0 to 50, and the factory-programmed value is 7.
<ini_3d_fix>	Number	Initial Fix must be 3D flag (UBX-CFG-NAVX5): • 0 (factory-programmed value): disabled • 1: enabled
<staticHoldMode>	Number	Static Hold Mode (UBX-CFG-NAV5). The range goes from 0 to 255 cm/s. (factory-programmed value: 0). If the parameter is omitted, the Static Hold Mode threshold will not be configured to GNSS.
<SBAS>	Number	SBAS configuration: • 0 (factory-programmed value): disabled • 1: enabled
<jamming>	Number	Jamming indicator (UBX-CFG-ITFM): • 0 (factory-programmed value): disabled • 1: enabled
<antenna>	Number	Antenna setting: • 0 (factory-programmed value): unknown • 1: passive • 2: active
<BBthreshold>	Number	Broadband jamming detection threshold (dB) (UBX-CFG- ITFM). The range goes from 0 to 15. (factory-programmed value: 0)
<CWthreshold>	Number	Continuous wave jamming detection threshold (dB) (UBX-CFG- ITFM). The range goes from 0 to 31. (factory-programmed value: 0)
<GNSS_systems>	Number	Bitmask for combining the supported GNSS types and relative signals (in brackets); the parameter is optional and the allowed values can be combined together. The default value is 3 (GPS+SBAS): • 1 (factory-programmed value): GPS (L1CA) • 2: SBAS (L1CA) • 4: Galileo (E1) • 8: BeiDou (B1I) • 16: IMES (L1) • 32: QZSS (L1CA) • 64: GLONASS (L1) • 128: BEIDOU B1C • 256: QZSS L1S Bitmask values: • LARA-L6 / LARA-R6 - 1, 2, 4, 8, 16, 32, 64
<Reserved1>	Number	0 (reserved value)
<Reserved2>	Number	0 (reserved value)

31.5.4.4 Notes

- To enable SBAS system opportunely configure both <SBAS> and <GNSS_systems> parameters.

- If a parameter is omitted, the current set value is kept.
- For more details on parameter description see the corresponding u-blox-GNSS receiver description.

31.5.5 Configure cellular location sensor (CellLocate®) +ULOCCELL

+ULOCCELL						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

31.5.5.1 Description

Configures the cellular location sensor (CellLocate®) used with the +ULOC command.

☞ This command influences the amount of data exchanged with the server.

☞ LARA-R6001D-00B
The deep scan (<scan_mode>=1) is not supported in UTRAN RAT mode.

31.5.5.2 Syntax

Type	Syntax	Response	Example
Set	AT+ULOCCELL=<scan_mode>[,<reserved1>[,<reserved2>[,<reserved3>[,<reserved4>[,<reserved5>]]]]]	OK	AT+ULOCCELL=0 OK
Read	AT+ULOCCELL?	+ULOCCELL: <scan_mode>,<reserved1>,<reserved2>,<reserved3>,<reserved4>,<reserved5> OK	+ULOCCELL: 0,0,"","",0,0 OK
Test	AT+ULOCCELL=?	+ULOCCELL: (list of supported <scan_mode>s),(list of supported <reserved1>),(list of supported <reserved2>),(list of supported <reserved3>),(list of supported <reserved4>),(list of supported <reserved5>) OK	+ULOCCELL: (0-1),(0),"","",(0),(0) OK

31.5.5.3 Defined values

Parameter	Type	Description
<scan_mode>	Number	Network scan mode: • 0 (factory-programmed value): normal • 1: deep scan Allowed values: • LARA-L6 / LARA-R6 - 0, 1
<reserved1>	Number	RFU
<reserved2>	String	RFU
<reserved3>	String	"" (reserved value)
<reserved4>	Number	0 (reserved value)
<reserved5>	Number	0 (reserved value)

31.5.5.4 Notes

LARA-L6 / LARA-R6

- It is temporarily not possible to perform a network scan via the AT+COPS=? command when a location information +ULOC request is ongoing and the deep scan (<scan_mode>=1) has been enabled.

- The location information +ULOC request may be performed with the normal scan mode (<scan_mode>= 0) despite the deep scan mode (<scan_mode>=1) has been set when jamming detection, enabled via the AT+UJAD=1 AT command, is active.
- When the deep scan (<scan_mode>=1) is enabled its accuracy is affected by any simultaneous +UCFSCAN cell full scan request.

32 DTMF

32.1 In-band DTMF and Contact ID tones detection +UDTMFCFG

+UDTMFCFG						
Modules	LARA-L6004 LARA-L6404					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

32.1.1 Description

Allows to:

- Enable/disable the DTMF detector and the related URCs for the current AT terminal
- Configure the DTMF detector
- Enable/disable the Contact ID (CID) detector
- Enable/disable the BURST detection mode
- Enable/disable support for RTP DTMF events
- Enable/disable DTMF regeneration
- Enable/disable the PCM recording on GNSS binary port
- Enable/disable URCs

During a voice call, the DTMF detector recognizes the presence of DTMF tones in the RX voice channel. The tones are generated by remote party e.g. digit press on a DTMF keypad. The +UUDTMFD URC returns the recognized DTMF digits (set {0-9,#,*A,B,C,D}), also the received RTP DTMF digits in VoLTE. The DTMF detection algorithm can be chosen between the legacy and MODA which has the capability of decoding 50 ms tones with low bit rate NB AMR codecs.

During a voice call, the CID detector recognizes the presence of a handshake sequence tone (HS) or a kiss off tone (KO) in the RX voice channel. The +UUDTMFD URC returns the recognized CID tone(set {H,K}), according to Ademco Contact ID protocol.

During a voice call, the BURST detection mode outputs, with a single URC, a burst of contiguous tones. To output a collection of DTMF digits it uses a DTMF detector therefore it must be enabled.

The DTMF engine is started and stopped automatically at call setup/call drop respectively. URCs are issued at any DTMF digit or CID tone sequence detection on the current AT terminal by default. Furthermore this command can be used to enable/disable the URCs on the current AT terminal. The CID detector allows, together with MODA and BURST, to implement the Contact ID protocol.

The PCM can be recorded on the file system through the GNSS binary port.

The RTP DTMF support can be enabled/disabled for VoLTE calls. If the support is disabled, any sent or received DTMF event will be transmitted as an in-band audio tone.

The DTMF regeneration generates DTMF tones for local playback on loudspeaker at the RTP DTMF event detection.

The URC indication issued when a DTMF digit is detected can show only the DTMF digit (+UUDTMFD: <DTMF_digit>) or the DTMF digit followed by the method used by the network to delivery the DTMF or the DTMF digit followed by the method used by the network to delivery the DTMF and the tone duration for RTP DTMF tones (+UUDTMFD: <DTMF_digit>,<event_info>), according to the <urc_mode> parameter configuration.

☞ **QUICK START for DTMF detection:** AT+UDTMFCFG="algo","moda".

☞ Issue the enabling command for the DTMF decoder, CID decoder and recorder before the call setup, otherwise the detectors and the recorder are not started and the command immediately provides the +UUDTMFDE: 2 URC.

☞ A direct switch between MODA and legacy algorithm is not allowed. To enable one of the DTMF detection algorithms, the other one must be already disabled.

☞ The <smart_decoder> parameter optimizes the DTMF detection performance with respect to the used codec/codec bit rate. When enabled the value of the immunity set from the AT interface is not applied.

☞ The BURST detection mode can be enabled and configured in any state.

☞ For the complete description of the DTMF detection functionality, see the corresponding module audio application note.

32.1.2 Syntax

Type	Syntax	Response	Example
Generic syntax			
Set	AT+UDTMFCFG=<op_name>[,<param1>[,<param2>[,<param3>[,<param4>[,<param5>[,<param6>][,<param7>[,<param8>[,<param9>[,<param10>[,<param11>[,<param12>[,<param13>[,<param14>[,<param15>]]]]]]]]]]]]]]	OK	AT+UDTMFCFG="algo","moda" OK
Test	AT+UDTMFCFG=?	+UDTMFCFG: "algo",(list of supported <algo_type>s) +UDTMFCFG: "moda",(list of supported <scale_cfg>s),(list of supported <threshold>s),(list of supported <immunity>s),(list of supported <tone_length>s),(list of supported <pause_length>s),(list of supported <moda_thr>s),(list of supported <vsc_thr>s),(list of supported <not_moda_thr>s),(list of supported <not_vsc>s),(list of supported <ov_add_factor>s),(list of supported <immunity_dtmf_bank>s),(list of supported <sd_cfg>s),(list of supported <smart_decoder>s) +UDTMFCFG: "legacy",(list of supported <mode>s),(list of supported <scale_cfg>s),(list of supported <threshold>s),(list of supported <immunity>s),(list of supported <max_int>s),(list of supported <sd_cfg>s),(list of supported <immunity_dtmf_bank>s) +UDTMFCFG: "urc",(list of supported <urc_mode>s) +UDTMFCFG: "record",(list of supported <enable_record>s)	+UDTMFCFG: "algo",("moda","legacy","off") +UDTMFCFG: "moda",(0-15),(100-10000),(0-20),(0-100),(0-100),(0-100),(0-100),(0-100),(0-100),(0-100),(0-20),(0-6),(0,1) +UDTMFCFG: "legacy",(0-10),(0-15),(100-10000),(0-20),(0-255),(0-6),(0-20) +UDTMFCFG: "urc",(0-2) +UDTMFCFG: "record",(0-1) +UDTMFCFG: "cid",(0-3) +UDTMFCFG: "cidthr",(0-100000) +UDTMFCFG: "burst",(0-16),(0-32767) +UDTMFCFG: "rtp",(0-1) +UDTMFCFG: "regen",(0-1) OK

Type	Syntax	Response	Example
		+UDTMFCFG: "cid",(list of supported <cid_algo>s) +UDTMFCFG: "cidthr",(list of supported <thr>s) +UDTMFCFG: "burst",(list of supported <burst_mode>s),(list of supported <timeout>s) +UDTMFCFG: "rtp",(list of supported <enable_rtp>s) +UDTMFCFG: "regen",(list of supported <enable_regen>s) OK	
URC		+UUDTMFD: <DTMF_digit>[,<event_info>]	+UUDTMFD: #,1
URC		+UUDTMFD: <CID>	+UUDTMFD: H
URC		+UUDTMFD: <burst>	+UUDTMFD: 1234567890
URC		+UUDTMFDE: <errid>	+UUDTMFDE: 1
Algorithm selection/enable			
Set	AT+UDTMFCFG="algo",<algo_type>	OK	AT+UDTMFCFG="algo","moda" OK
Read	AT+UDTMFCFG="algo"	+UDTMFCFG: "algo",<algo_type> OK	+UDTMFCFG: "algo","moda" OK
MODA algorithm configuration			
Set	AT+UDTMFCFG="moda"[,<scale_cfg>[,<threshold>[,<immunity>[,<tone_length>[,<pause_length>[,<moda_thr>[,<vsc_thr>[,<not_moda_thr>[,<not_vsc>[,<ov_add_factor>[,<immunity_dtmf_bank>[,<sd_cfg>[,<smart_decoder>]]]]]]]]]]]]	OK	AT+UDTMFCFG="moda",3,200,5,23,23,18,14,22,15,10,6,3,1 OK
Read	AT+UDTMFCFG="moda"	+UDTMFCFG: "moda",<scale_cfg>,<threshold>,<immunity>,<tone_length>,<pause_length>,<moda_thr>,<vsc_thr>,<not_moda_thr>,<not_vsc>,<ov_add_factor>,<immunity_dtmf_bank>,<sd_cfg>,<smart_decoder> OK	+UDTMFCFG: "moda",3,200,5,23,23,18,14,22,10,10,6,3,1 OK
Legacy algorithm configuration			
Set	AT+UDTMFCFG="legacy"[,<mode>[,<scale_cfg>[,<threshold>[,<immunity>[,<max_int>[,<sd_cfg>[,<immunity_dtmf_bank>]]]]]]]	OK	AT+UDTMFCFG="legacy",3,800,5,2,3,6 OK
Read	AT+UDTMFCFG= "legacy"	+UDTMFCFG: "legacy",<mode>,<scale_cfg>,<threshold>,<immunity>,<max_int>,<sd_cfg>,<immunity_dtmf_bank>,<att> OK	+UDTMFCFG: "legacy",3,800,5,2,3,6,3 OK
Speech discriminator algorithm configuration			
Set	AT+UDTMFCFG="sd",<sd_algo_type>[,<dft_thr200>[,<dft_thr270	OK	AT+UDTMFCFG="sd","moda",20,15,14,12,8,6,5,-2,15,0,30000,0,32750,3

Type	Syntax	Response	Example
	>[,<dft_thr330>[,<dft_thr375>[,<dft_thr437>[,<dft_thr500>[,<dft_thr545>[,<dft_thr1000>[,<dft_thr50>[,<ar>[,<af>[,<aLf>[,<aLr>[,<ppl>]]]]]]]]]]]]		OK
Read	AT+UDTMFCFG="sd",<sd_algo_type>	+UDTMFCFG: "sd",<sd_algo_type>,<dft_thr200>,<dft_thr270>,<dft_thr330>,<dft_thr375>,<dft_thr437>,<dft_thr500>,<dft_thr545>,<dft_thr1000>,<dft_thr50>,<ar>,<af>,<aLf>,<aLr>,<ppl> OK	+UDTMFCFG: "sd","moda",20,15,14,12,8,6,5,-2,15,0,30000,0,32750,3 OK
CID			
Set	AT+UDTMFCFG="cid",<cid_algo>	OK	AT+UDTMFCFG="cid",3 OK
Read	AT+UDTMFCFG="cid"	+UDTMFCFG: "cid",<cid_algo> OK	+UDTMFCFG: "cid",3 OK
CID threshold			
Set	AT+UDTMFCFG="cidthr",<thr>	OK	AT+UDTMFCFG="cidthr",1000 OK
Read	AT+UDTMFCFG="cidthr"	+UDTMFCFG: "cidthr",<thr> OK	+UDTMFCFG: "cidthr",1000 OK
BURST			
Set	AT+UDTMFCFG="burst",<burst_mode>,<timeout>	OK	AT+UDTMFCFG="burst",16,140 OK
Read	AT+UDTMFCFG="burst"	+UDTMFCFG: "burst",<burst_mode>,<timeout> OK	+UDTMFCFG: "burst",16,140 OK
RTP			
Set	AT+UDTMFCFG="rtp",<enable_rtp>	OK	AT+UDTMFCFG="rtp",1 OK
Read	AT+UDTMFCFG="rtp"	+UDTMFCFG: "rtp",<enable_rtp> OK	+UDTMFCFG: "rtp",1 OK
DTMF regeneration			
Set	AT+UDTMFCFG="regen",<enable_regen>	OK	AT+UDTMFCFG="regen",1 OK
Read	AT+UDTMFCFG="regen"	+UDTMFCFG: "regen",<enable_regen> OK	+UDTMFCFG: "regen",1 OK
PCM recording			
Set	AT+UDTMFCFG="record",<enable_record>	OK	AT+UDTMFCFG="record",1 OK
Read	AT+UDTMFCFG="record"	+UDTMFCFG: "record",<enable_record> OK	+UDTMFCFG: "record",1 OK
URC enabling			
Set	AT+UDTMFCFG="urc",<urc_mode>	OK	AT+UDTMFCFG="urc",1 OK
Read	AT+UDTMFCFG="urc"	+UDTMFCFG: "urc",<urc_mode>	+UDTMFCFG: "urc",1

Type	Syntax	Response	Example
		OK	OK

32.1.3 Defined values

Parameter	Type	Description
Common parameters		
<op_name>	String	Type of operation: • "algo": enables/selects the DTMF decoder • "moda": configures MODA detection algorithm • "legacy": configures legacy detection algorithm • "sd": configures the speech discriminator algorithm • "cid": enable/disable and configure the CID detector • "cidthr": set or get the threshold used by CID decoder • "rtp": enable/disable the support for RTP DTMF events • "regen": enable/disable the support for DTMF regeneration • "record": PCM recording on GNSS binary port • "urc": enables/disables URCs on the current AT terminal
<DTMF_digit>	String	Detected DTMF digits; from the set {0-9,#,*,A-D}
<event_info>	Number	Method used by the network to delivery the DTMF. Allowed values: • 0: DTMF has ben received as RTP event, RTP tone start • 1: DTMF has ben received as In-Band tone • 2: DTMF has ben received as RTP event, RTP tone stop The parameter is returned only if <urc_mode>=2 or 3 (URCs with in band/RTP indication enabled).<event_type> = 2 is returned only if <urc_mode>=3 (URCs with in band/RTP and duration indications enabled).
<errid>	Number	DTMF error code: • 1: arithmetic overflow/DTMF detection failure • 2: enabling the algorithm during a call • 3: parallel enabling of algorithms • 4: RTP timeout • 5: RTP late
<scale_cfg>	Number	Attenuation applied on the signal at decoder input to manage arithmetic operations. The range goes from 0 to 15, 6 dB attenuation each step: • The factory-programmed value is 3 (18 dB attenuation)
<threshold>	Number	Threshold to detect DTMF tones. The range goes from 100 to 10000: • The factory-programmed value for <op_name>="moda" is 200. • The factory-programmed value for <op_name>="legacy" is 800.
<immunity>	Number	Speech immunity level. The higher the level, the higher the immunity to speech. The range goes from 0 (minimum immunity) to 20 (maximum immunity). • The factory-programmed value for <op_name>="moda" is 4. • The factory-programmed value for <op_name>="legacy" is 8.
<immunity_dtmf_bank>	Number	Speech immunity level in each DTMF bank. The higher the level, the higher the immunity to speech. The range goes from 0 (minimum immunity) to 20 (maximum immunity). The factory-programmed value is 6.
<sd_cfg>	Number	Enables/disables the speech discriminator (SD), the analysis of the stationarity (AS) and the noise reduction (NR) algorithms: • 0: SD disabled • 1: SD enabled / NR disabled • 2: SD enabled / NR enabled • 3: (factory-programmed value): SD enabled / NR enabled and configured • 4: SD and AS enabled / NR disabled • 5: SD and AS enabled / NR enabled • 6: SD and AS enabled / NR enabled and configured
Algorithm selection/enable		
<algo_type>	String	Identifies the detection algorithm: • "off" (factory-programmed value): DTMF detector disabled • "moda": MODA algorithm enabled • "legacy": legacy algorithm enabled

Parameter	Type	Description
		• "default": default algorithm enabled
MODA configuration		
<tone_length>	Number	Size of the analysis window for the DTMF digit recognition. The range goes from 0 to 100. The factory-programmed value is 23. For real values of <tone_length>, see TOBY-R2 / LARA-R2 "03B" audio application note [48].
<pause_length>	Number	Size of the analysis window for the pause recognition. The range goes from 0 to 100. The factory-programmed value is 23. For real values of <pause_length>, see TOBY-R2 / LARA-R2 "03B" audio application note [48].
<moda_thr>	Number	Number of equal elements required in the tone analysis window. The range goes from 0 to 100. The factory-programmed value is 18. For real values of <moda_thr>, see TOBY-R2 / LARA-R2 "03B" audio application note [48].
<vsc_thr>	Number	Number of valid elements required in the tone analysis window. The range goes from 0 to 100. The factory-programmed value is 14. For real values of <vsc_thr>, see TOBY-R2 / LARA-R2 "03B" audio application note [48].
<not_moda_thr>	Number	Number of equal elements required in the pause analysis window. The range goes from 0 to 100. The factory-programmed value is 22. For real values of <not_moda_thr>, see TOBY-R2 / LARA-R2 "03B" audio application note [48].
<not_vsc_thr>	Number	Number of valid elements required in the pause analysis window. The range goes from 0 to 100. The factory-programmed value is 15. For real values of <not_vsc_thr>, see TOBY-R2 / LARA-R2 "03B" audio application note [48].
<ov_add_factor>	Number	Sliding window parameter. The range goes from 0 to 100. The factory-programmed value is 10. For real values of <ov_add_factor>, see TOBY-R2 / LARA-R2 "03B" audio application note [48].
<smart_decoder>	Number	Enable/disable the smart decoder. Allowed values: • 0: disabled • 1 (factory-programmed value): enabled
Legacy configuration		
<mode>	Number	DTMF detector configuration: • 0: disabled • 1: not supported • 2 (factory-programmed value): configuration for short tones • 3: configuration for long tones • 4-10: reserved
<max_int>	Number	Maximum interruption that a detected DTMF tone may have, such that it is still interpreted as a single digit. In multiples of 20 ms; the range goes from 1 to 255. The factory-programmed value is 2 (40 ms).
<att>	Number	Actual attenuation applied on the signal at decoder input. The starting value is <scale_cfg>. If an arithmetic overflow occurs, it is automatically increased.
SD configuration		
<sd_algo_type>	String	Configuration for the selected detection algorithm: • "moda": MODA algorithm selected • "legacy": legacy algorithm selected
<dft_thr200>	Number	Immunity applied to the first SD filter. The range goes from 0 to 32767. The factory-programmed value is 20.
<dft_thr270>	Number	Immunity applied to the second SD filter. The range goes from 0 to 32767. The factory-programmed value is 15.
<dft_thr330>	Number	Immunity applied to the third SD filter. The range goes from 0 to 32767. The factory-programmed value is 14.
<dft_thr375>	Number	Immunity applied to the fourth SD filter. The range goes from 0 to 32767. The factory-programmed value is 12.
<dft_thr437>	Number	Immunity applied to the fifth SD filter. The range goes from 0 to 32767. The factory-programmed value is 8.
<dft_thr500>	Number	Immunity applied to the sixth SD filter. The range goes from 0 to 32767. The factory-programmed value is 6.
<dft_thr545>	Number	Immunity applied to the seventh SD filter. The range goes from 0 to 32767. The factory-programmed value is 5.
<dft_thr1000>	Number	Immunity applied to the eighth SD filter. The range goes from 0 to 32767. The factory-programmed value is -2.
<dft_thr50>	Number	Immunity applied to the nineth SD filter. The range goes from 0 to 32767. The factory-programmed value is 15.

Parameter	Type	Description
<ar>	Number	Alpha rising parameter. The range goes from 0 to 32767. The factory-programmed value is 0.
<af>	Number	Alpha falling parameter. The range goes from 0 to 32767. The factory-programmed value is 30000 for MODA and 12055 for legacy.
<aLf>	Number	Alpha falling parameter for long term estimation. The range goes from 0 to 32767. The factory-programmed value is 0.
<aLr>	Number	Alpha rising parameter for long term estimation. The range goes from 0 to 32767. The factory-programmed value is 32750 for MODA and 32604 for legacy.
<ppl>	Number	Parameter for the analysis of the stationarity. The range goes from 0 to 32767. The factory-programmed value is 3.
CID		
<cid_algo>	Number	Configure CID detector: • 0 (factory-programmed value): CID disabled • 1: HS detector enabled • 2: KO detector enabled • 3: HS + KO detector enabled
CID threshold		
<thr>	Number	Threshold to detect CID sequences. The range goes from 0 to 100000. • The factory-programmed value is 1000.
BURST		
<burst_mode>	Number	Number of minimum expected contiguous tones to output a burst: • The range goes from 0 to 16. If 0 it disables the burst mode.
<timeout>	Number	Configures the wait period for next contiguous tone. It shall be set as expected tone duration + expected gap + some lag e.g. 40 ms: • The range goes from 0 to 32767.
RTP		
<enable_rtp>	Number	Enables/disables RTP DTMF support: • 0: disabled • 1 (factory-programmed value): enabled
DTMF regeneration		
<enable_regen>	Number	Enables/disables DTMF regeneration: • 0 (factory-programmed value): disabled • 1: enabled
PCM recording		
<enable_record>	Number	Enables/disables recording: • 0 (factory-programmed value): recording disabled • 1: recording enabled
URC enabling		
<urc_mode>	Number	Enables/disables URCs: • 0: URCs disabled • 1: URCs enabled • 2 (factory-programmed value): URCs with in band/RTP indication enabled • 3: URCs with in band/RTP and duration indications enabled

32.1.4 Notes

- The factory-programmed value of command parameters is set at each module start up.
- If the optional parameters are omitted the settings are left unchanged.

LARA-L6 / LARA-R6001 / LARA-R6401 / LARA-R6801

- Only the DTMF decoder (<op_name>="algo"), enable/disable URCs (<op_name>="urc") and the regenerator (<op_name>="regen") are supported.
- <algo_type>="moda" and <algo_type>="legacy" are not supported.
- <algo_type>="default" can be issued during any call state.
- <op_name>="rtp" is not supported. The RTP DTMF support is enabled by default for VoLTE calls and cannot be disabled.
- +UUDTMFDE: 2 and +UUDTMFDE: 3 are not issued.

33 I²C

33.1 Introduction

The I²C AT commands support communication with more than one connected device via one of the controllers, but require opening and closing a logical channel for each connected device. Only one logical channel at a time can be opened.

☞ The availability and hardware description of the I²C interfaces are out of the scope of this document and are described in a separate document. Refer to the corresponding module System Integration Manual.

The procedure for communicating with two different devices is:

- Open the logical channel for device1 (with AT+UI2CO)
- Read/write to/from device1 (with AT+UI2CR, AT+UI2CW and +UI2CREGR)
- Close the logical channel for device1 (with AT+UI2CC)
- Open the logical channel for device2 (with AT+UI2CO)
- Read/write to/from device2 (with AT+UI2CR, AT+UI2CW and +UI2CREGR)
- Close the logical channel for device2 (with AT+UI2CC)

Once the controller has been configured, it is possible to start I²C communication (read/write) with I²C slave peripherals.

☞ The I²C controllers available on the u-blox cellular modules module work only in Master Mode so they can be connected to slave devices only.

☞ In case of a controller/device malfunction, the command's response is only "ERROR".

33.2 I²C open logical channel +UI2CO

+UI2CO						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

33.2.1 Description

Changes the hardware and logical configuration of the selected I²C controller.

It is only possible to configure the I²C controller in Master Mode.

This command selects:

- The controller available in the u-blox cellular module
- The bus mode type
- The bit rate
- The address size (7-10 bit address)
- The slave device address

Once the selected controller has been configured, a logical channel between it and the selected slave device is set up and there is no need to further specify it. All the following I²C write, read and close commands refer to the currently opened logical channel. It is not possible to use the I²C write, read and open commands for writing or reading to/from a different slave device without first closing the I²C logical channel.

33.2.2 Syntax

Type	Syntax	Response	Example
Set	AT+UI2CO=<I2C_controller_number>,<bus_mode>,<bit_rate>,<device_address>,<address_width>	OK	AT+UI2CO=1,0,0,0x42,0 OK
Test	AT+UI2CO=?	+UI2CO: (list of supported <I2C_controller_number>s),(list of supported <bus_mode>s),(list of supported <bit_rate>),(<device_address> range),(list of supported <address_width>s) OK	+UI2CO: (1),(0-1),(0-1),(0x000-0x3FF),(0-1) OK

33.2.3 Defined values

Parameter	Type	Description
<I2C_controller_number>	Number	I^2C HW controller to use: • 1: controller 1
<bus_mode>	Number	I^2C bus mode type: • 0: Bus Mode Standard (0 - 100 kbit/s) • 1: Bus Mode Fast (0 - 400 kbit/s) If +UI2CCFG is supported, it limits the range of <bus_mode>/ <bit_rate>.
<bit_rate>	Number	I^2C bit rate: • 0: 100 kbit/s • 1: 400 kbit/s If +UI2CCFG is supported, it limits the range of <bus_mode>/ <bit_rate>.
<device_address>	Hex number	Device address in HEX format • LARA-L6 / LARA-R6 - The range goes from 0x00 to 0x7F.
<address_width>	Number	I^2C size of the controller address: • 0: 7 bit address • 1: 10 bit address

33.2.4 Notes

LARA-L6 / LARA-R6

- See +UI2CCFG for the I^2C bus configuration options and limitations.
- If <bus_mode>/ <bit_rate> configuration is set out of the +UI2CCFG limitations, the command immediately provides an error result code ("+CME ERROR: 3" if +CMEE: 1 or "+CME ERROR: operation not allowed" if +CMEE: 2).

33.3 I^2C write to peripheral +UI2CW

+UI2CW						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

33.3.1 Description

Writes the HEX data to the I^2C slave device of the current logical channel. The HEX data formats are without 0x prefix (see example).

33.3.2 Syntax

Type	Syntax	Response	Example
Set	AT+UI2CW=<hex_data>,<nof_byte_to_write>	OK	AT+UI2CW="0011AABBCCDDEEFF",8 OK
Test	AT+UI2CW=?	+UI2CW: (byte to write),(range of supported <nof_byte_to_write>) OK	+UI2CW: "data", (1-100) OK

33.3.3 Defined values

Parameter	Type	Description
<hex_data>	String	Hex data sequence without prefix 0x, enclosed in double quotes, to be written to the I²C slave device
<nof_bytes_to_write>	Number	Number of byte to write to the slave I²C device. Range: 1-100

33.4 I²C read from peripheral +UI2CR

+UI2CR						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

33.4.1 Description

Reads <nof_bytes_to_read> of data from the I²C slave device of the current logical channel and prints them in HEX format in separate rows.

33.4.2 Syntax

Type	Syntax	Response	Example
Read	AT+UI2CR=<nof_bytes_to_read>	+UI2CR: <index_1>: <byte_1> [+UI2CR: <index_n>: <byte_n> [..]] OK	AT+UI2CR=3 +UI2CR: 0: 0xA3 +UI2CR: 1: 0x0F +UI2CR: 2: 0xDB OK
Test	AT+UI2CR=?	+UI2CR: (list of supported <nof_byte_to_read>s) OK	+UI2CR: (1-100) OK

33.4.3 Defined values

Parameter	Type	Description
<nof_bytes_to_read>	Number	Number of bytes to read from the slave I²C device: • LARA-L6 / LARA-R6 - The range goes from 1 to 100.
<index1>,...,<index_n>	Number	Index of the byte being printed.
<byte_1>,...,<byte_n>	Number	n-th byte of the data, in hex mode (unquoted, prefixed by 0x).

33.5 I²C read from peripheral register +UI2CREGR

+UI2CREGR						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

33.5.1 Description

Reads <nof_bytes_to_read> of data from the slave register of the I²C slave device of the current logical channel and prints them in HEX format in separate rows.

33.5.2 Syntax

Type	Syntax	Response	Example
Read	AT+UI2CREGR=<register_address>,<nof_bytes_to_read>	+UI2CREGR: <index_1>: <byte_1> [+UI2CREGR: <index_n>: <byte_n> [..]] OK	AT+UI2CREGR=0x42,3 +UI2CREGR: 0: 0xA3 +UI2CREGR: 1: 0x0F +UI2CREGR: 2: 0xDB OK
Test	AT+UI2CREGR=?	+UI2CREGR: (list of supported <register_address>s),(list of supported <nof_bytes_to_read>s) OK	+UI2CREGR: (0x00-0xFF),(1-100) OK

33.5.3 Defined values

Parameter	Type	Description
<register_address>	Number	Device address in HEX format • LARA-L6 / LARA-R6 - The range goes from 0x00 to 0xFF.
<nof_bytes_to_read>	Number	Number of bytes to read from the slave I²C register. • LARA-L6 / LARA-R6 - The range goes from 1 to 100.
<index1>,...,<index_n>	Number	Index of the byte being printed.
<byte_1>,...,<byte_n>	Number	n-th byte of the data, in hex mode (unquoted, prefixed by 0x).

33.6 I²C close logical channel +UI2CC

+UI2CC						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

33.6.1 Description

Closes the I²C logical channel being used.

☞ The logical channel must be closed before opening a new one.

33.6.2 Syntax

Type	Syntax	Response	Example
Action	AT+UI2CC	OK	AT+UI2CC OK
Test	AT+UI2CC=?	OK	OK

33.6.3 Notes

LARA-L6 / LARA-R6

- The +UI2CC AT command automatically discards any input parameter (e.g. AT+UI2CC=123 is equivalent to AT+UI2CC).

33.7 Configuration of I²C bus mode +UI2CCFG

+UI2CCFG						
Modules	LARA-L6					
	LARA-R6001 LARA-R6401 LARA-R6801					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

33.7.1 Description

Allows configuration of I²C bus mode. Based on the bus mode, appropriate I²C bit rates can be used by I²C clients.

33.7.2 Syntax

Type	Syntax	Response	Example
Set	AT+UI2CCFG=<bus_mode>	OK	AT+UI2CCFG=1 OK
Read	AT+UI2CCFG?	+UI2CCFG: <bus_mode> OK	+UI2CCFG: 1 OK
Test	AT+UI2CCFG=?	+UI2CCFG: (list of supported <bus_mode>s) OK	+UI2CCFG: (0-1) OK

33.7.3 Defined values

Parameter	Type	Description
<bus_mode>	Number	I²C bus mode type: • 0 (default and factory-programmed value): Bus Mode Standard (0 - 100 kbit/s) • 1: Bus Mode Fast (0 - 400 kbit/s)

33.7.4 Notes

LARA-L6 / LARA-R6001 / LARA-R6401 / LARA-R6801

- I²C bus is shared between all internal and external devices connected to it, so changing the bus mode will affect all devices that are using it.
- In case of using standard bus mode (<bus_mode>=0) the only supported bit rate is 100 kbit/s.
- In case of using fast bus mode (<bus_mode>=1) the only supported bit rate is 400 kbit/s.

34 Networking

34.1 System networking modes

34.1.1 LARA-L6 Router mode

In **router mode**, the IP termination of each packet data context is on the module, which acts as a router. The DTE will send its packet to the module which will then use its routing table to perform the routing of the packet over the right context.

A DHCP server will provide to the connected hosts the configuration of the private network provided by the module. Only the IPv4 address is allowed.

☞ LARA-L6

- It supports only one active packet data context.
- The DHCP server can be configured by the +UIFCONF AT command.
- For more details on the router mode configuration, see the +UIFCONF AT command.

34.1.1.1 IPv4

- The DTE will configure its DHCP client over its virtual Ethernet interface and it will assign a private IP and DNS configuration. No public IP address is assigned
- The DTE will access the packet data network using the NAT procedure
- For each active packet data context the module creates an internal IP interface
- In case of multiple packet data contexts (each with an assigned IP address), the module will apply the following routing rules by checking destination IP address of each uplink packet:
  - If the address belongs to the IP subnet of one of the active contexts, then the packet will be sent over that link
  - In all other cases, the packet will be sent over the context which has been activated first (i.e. the default gateway)

☞ In case of multiple contexts the first activated context should be the one associated to the public Internet.

34.1.1.2 IPv6

In general terms, the global connectivity configuration of the network node shall be performed automatically by the IPv6 network through the use of IPv6 Neighbor Discovery Protocol (NDP).

If the mobile network supports the IPv6 auto-configuration then the following steps are performed:

- The Router Advertisement (RA) sent from the mobile network is forwarded to the USB virtual Ethernet interface of the DTE. The Router Advertisement holds the prefix of the activated default bearer.
- The DTE processes the RA message and configures its global address and its routing rules. If the procedure is correctly completed then the host is provided with a global IPv6 address and with the IPv6 address (global or local) of the next-hop router.
- Optionally the RA message can provide DNS server addresses. If present then the DTE shall apply the DNS configuration, otherwise the DTE should perform manual configuration.

34.1.2 LARA-L6 Bridge mode

In **bridge mode**, the IP termination of each context is on the DTE. The module will act as a bridge and forward the IP packets based on the source address.

At the EPS bearer/PDP context activation the module will receive the IP configuration from the cellular network. It will use the received IP configuration to properly set the parameters of the DHCP server. The host will receive within the DHCP protocol the correct configuration to obtain connectivity. The IP configuration consists of the IP address of the activated EPS bearer/PDP context, the IP address of the gateway needed by the host to set the connectivity, and the list of DNS servers provided by the cellular network (additionally a fallback DNS server

is provided). After the PDP context activation it is suggested for the DTE to perform a DHCP request to obtain the updated IP configuration.

LARA-L6

- It supports only one active packet data context.
- For more details on the bridge mode configuration, see the +UIFCONF AT command.

34.1.2.1 IPv4

- For each active context the module creates an IP interface (which takes care of replying to ARP requests); the IP address of such interface can be retrieved via the +UIPADDR AT command
- The module will perform routing over contexts using the IP alias set by the DTE

LARA-L6

- The DTE should use automatic configuration of the virtual interface via the DHCP protocol as the preferred method over manual configuration.
- The DTE can manually configure its virtual interface with the information obtained using the appropriate AT commands:
  - Retrieve the associated public IP address via the +CGDCONT AT command and assign it as IP alias
  - Retrieve the module's local configuration of the bridged interface (IP address and subnet mask) with the +UIPADDR AT command and add the required routing rules. The value of the <ipv4_address> of the ECM interface of the module may be used as the default gateway of the DTE virtual interface.

34.1.2.2 IPv6

In general terms, the global connectivity configuration of the network node shall be performed automatically by the IPv6 network through the use of IPv6 Neighbor Discovery Protocol (NDP).

- The DTE will create its own link local address for the virtual Ethernet interface
- The module will do the same. Its address can be retrieved with the +UIPCONF AT command
- For each active context the module will not create any virtual interface:
  - The DTE will receive RA (Routing Advertisement) messages and it will be able to configure its global address
  - The module will perform routing over contexts using the IP alias set by the DTE

The DTE should prevent the transmission of any NS (Neighbor Solicitment).

34.2 Interface configuration +UIFCONF

+UIFCONF						
Modules	LARA-L6					
	LARA-R6001-01B LARA-R6001D-01B LARA-R6401-01B LARA-R6401D-01B LARA-R6801-01B LARA-R6801D					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	NVM	No	-	+CME Error

34.2.1 Description

Configures the IP settings of a network interface (except for the cellular network interfaces). The settings are related to the configuration of the IP address, network mask, DHCP server service, and of the AT interface over the IP connection.

The changes are stored in NVM and they need a reboot to be applied.

34.2.2 Syntax

Type	Syntax	Response	Example
Generic syntax			

Type	Syntax	Response	Example
Set	AT+UIFCONF=<iftype>,<ifnumber>,<cmd_tag>[,< ... cmd_specific_params ... >]	OK	AT+UIFCONF=0,0,1,0,"192.168.1.1" OK
Read	AT+UIFCONF=<iftype>,<ifnumber>,<cmd_tag>[,< ... cmd_specific_params ... >]	[+UIFCONF: < ... cmd_specific_params ... >] OK	AT+UIFCONF=0,0,1,0 +UIFCONF: "125.24.51.133" OK
Interface connection status configuration			
Set	AT+UIFCONF=<iftype>,<ifnumber>,0,<interface_status>	OK	AT+UIFCONF=1,0,0,1 OK
Read	AT+UIFCONF=<iftype>,<ifnumber>,0	+UIFCONF: <interface_status_report> OK	AT+UIFCONF=1,0,0 +UIFCONF: 1 OK
Interface IPv4 address configuration			
Set	AT+UIFCONF=<iftype>,<ifnumber>,1,0,<interface_IP_address>	OK	AT+UIFCONF=1,0,1,0,"192.168.90.60" OK
Read	AT+UIFCONF=<iftype>,<ifnumber>,1,0	+UIFCONF: <interface_IP_address> OK	AT+UIFCONF=1,0,1,0 +UIFCONF: "192.168.90.60" OK
Interface IPv4 netmask configuration			
Set	AT+UIFCONF=<iftype>,<ifnumber>,1,1,<interface_IP_netmask>	OK	AT+UIFCONF=1,0,1,1,"255.255.255.0" OK
Read	AT+UIFCONF=<iftype>,<ifnumber>,1,1	+UIFCONF: <interface_IP_netmask> OK	AT+UIFCONF=1,0,1,1 +UIFCONF: "255.255.255.0" OK
Interface IPv4 configuration apply generic syntax			
Set	AT+UIFCONF=<iftype>,<ifnumber>,1,<interface_apply_conf>	OK	AT+UIFCONF=1,0,1,100 OK
Interface IPv4 configuration apply			
Set	AT+UIFCONF=<iftype>,<ifnumber>,1,100	OK	AT+UIFCONF=1,0,1,100 OK
Interface IPv4 DHCP server status configuration			
Set	AT+UIFCONF=<iftype>,<ifnumber>,3,0,<interface_DHCP_server_status_conf>	OK	AT+UIFCONF=1,0,3,0,1 OK
Read	AT+UIFCONF=<iftype>,<ifnumber>,3,0	+UIFCONF: <interface_DHCP_server_status_conf> OK	AT+UIFCONF=1,0,3,0 +UIFCONF: 1 OK
Interface IPv4 DHCP server range begin configuration			
Set	AT+UIFCONF=<iftype>,<ifnumber>,3,1,<interface_DHCP_server_range_begin_conf>	OK	AT+UIFCONF=1,0,3,1,"192.168.90.100" OK
Read	AT+UIFCONF=<iftype>,<ifnumber>,3,1	+UIFCONF: <interface_DHCP_server_range_begin_conf> OK	AT+UIFCONF=1,0,3,1 +UIFCONF: "192.168.90.100" OK
Interface IPv4 DHCP server range end configuration			

Type	Syntax	Response	Example
Set	AT+UIFCONF=<iftype>,<ifnumber>,3,2,<interface_DHCP_server_range_end_conf>	OK	AT+UIFCONF=1,0,3,2,"192.168.90.150" OK
Read	AT+UIFCONF=<iftype>,<ifnumber>,3,2	+UIFCONF: <interface_DHCP_server_range_end_conf> OK	AT+UIFCONF=1,0,3,2 +UIFCONF: "192.168.90.150" OK
Interface IPv4 DHCP server configuration apply			
Set	AT+UIFCONF=<iftype>,<ifnumber>,3,100	OK	AT+UIFCONF=1,0,3,100 OK
Router mode configuration			
Set	AT+UIFCONF=<iftype>,<ifnumber>,10,<router_mode_conf>	OK	AT+UIFCONF=2,0,10,1 OK
Read	AT+UIFCONF=<iftype>,<ifnumber>,10	+UIFCONF: <router_mode_conf> OK	AT+UIFCONF=2,0,10 +UIFCONF: 1 OK
Auto connect configuration			
Set	AT+UIFCONF=<iftype>,<ifnumber>,11,<autoconnect_conf>	OK	AT+UIFCONF=2,0,11,0 OK
Read	AT+UIFCONF=<iftype>,<ifnumber>,11	+UIFCONF: <autoconnect_conf> OK	AT+UIFCONF=2,0,11 +UIFCONF: 0 OK
Roaming configuration			
Set	AT+UIFCONF=<iftype>,<ifnumber>,13,<roaming_conf>	OK	AT+UIFCONF=2,0,13,0 OK
Read	AT+UIFCONF=<iftype>,<ifnumber>,13	+UIFCONF: <roaming_conf> OK	AT+UIFCONF=2,0,13 +UIFCONF: 0 OK
DHCP lease value			
Set	AT+UIFCONF=<iftype>,<ifnumber>,14,<dhcp_lease_value>	OK	AT+UIFCONF=2,0,14,43200 OK
Read	AT+UIFCONF=<iftype>,<ifnumber>,14	+UIFCONF: <dhcp_lease_value> OK	AT+UIFCONF=2,0,14 +UIFCONF: 43200 OK
Apps port min			
Set	AT+UIFCONF=<iftype>,<ifnumber>,15,<apps_port_min>	OK	AT+UIFCONF=2,0,15,9999 OK
Read	AT+UIFCONF=<iftype>,<ifnumber>,15	+UIFCONF: <apps_port_min> OK	AT+UIFCONF=2,0,15 +UIFCONF: 9999 OK
Apps port max			
Set	AT+UIFCONF=<iftype>,<ifnumber>,16,<apps_port_max>	OK	AT+UIFCONF=2,0,16,19999 OK
Read	AT+UIFCONF=<iftype>,<ifnumber>,16	+UIFCONF: <apps_port_max> OK	AT+UIFCONF=2,0,16 +UIFCONF: 19999 OK

Type	Syntax	Response	Example
ECM RAT configuration			
Set	AT+UIFCONF=<iftype>,<ifnumber>, 17,<tech_conf>	OK	AT+UIFCONF=2,0,17,0 OK
Read	AT+UIFCONF=<iftype>,<ifnumber>, 17	+UIFCONF: <tech_conf> OK	AT+UIFCONF=2,0,17 +UIFCONF: 0 OK
AT interface over an IP connection configuration			
Set	AT+UIFCONF=<iftype>,<ifnumber>, 90,<terminal_id>[,<tcp_control_port>,<tcp_data_port>]	OK	AT+UIFCONF=1,0,90,0,56090,56091 OK
Read	AT+UIFCONF=<iftype>,<ifnumber>, 90,<terminal_id>	+UIFCONF: <tcp_control_port>, <tcp_data_port> OK	AT+UIFCONF=1,0,90,0 +UIFCONF: 56090,56091 OK
Interface MAC address configuration			
Read	AT+UIFCONF=<iftype>,<ifnumber>, 98	+UIFCONF: <interface_MAC_address> OK	AT+UIFCONF=1,0,98 +UIFCONF: "56:1F:5A:C9:90:E1" OK
Interface name configuration			
Read	AT+UIFCONF=<iftype>,<ifnumber>, 99	+UIFCONF: <interface_name> OK	AT+UIFCONF=1,0,99 +UIFCONF: "eth0" OK
Save settings			
Set	AT+UIFCONF=<iftype>,<ifnumber>, 100	OK	AT+UIFCONF=2,0,100 OK

34.2.3 Defined values

Parameter	Type	Description
<iftype>	Number	Interface type identifier: • 0: NCM • 1: ETH • 2: ECM Supported interface type identifiers: • LARA-L6 / LARA-R6 - 2
<ifnumber>	Number	Interface number identifier. Supported interface type identifiers: • LARA-L6 / LARA-R6 - 0
<cmd_tag>	Number	Command tag: • 0: interface status • 1: IPv4 configuration • 3: IPv4 DHCP configuration • 10: router/bridge mode configuration • 11: autoconnect configuration • 13: roaming configuration • 14: DHCP lease • 15: minimum applications port number • 16: maximum applications port number • 17: ECM RAT value • 90: AT interface over an IP connection • 98: interface MAC address • 99: interface name • 100: save settings Allowed values:

Parameter	Type	Description
		• LARA-L6 / LARA-R6 - 0, 1, 3, 10, 11, 13, 14, 15, 16, 17, 100
<interface_status>	Number	• LARA-L6 / LARA-R6 - Interface connection status. Allowed values: o 0 (factory-programmed value): disconnected o 1: connect (when autoconnect is disabled)
<interface_status_report>	Number	• LARA-L6 / LARA-R6 - Interface connection status report. Allowed values: o 0: disconnected o 1: IPv4 connected o 2: IPv6 connected o 3: IPv4 and IPv6 connected
<interface_IP_address>	String	Interface IPv4 address. The factory-programmed value depends on the series module and of the interface. For IP address format reference see the IP addressing.
<interface_IP_netmask>	String	Interface IPv4 network mask. The factory-programmed value depends on the series module and of the interface. For IP address format reference see the IP addressing.
<interface_DHCP_server_status_conf>	Number	Interface IPv4 DHCP server status configuration. The allowed values are: • 0: disabled • 1 (factory-programmed value): enabled
<interface_DHCP_server_range_begin_conf>	String	The first IPv4 address of the interface DHCP server range. The factory-programmed value depends on the series module and of the interface. For IP address format reference see the IP addressing.
<interface_DHCP_server_range_end_conf>	String	The last IPv4 address of the interface DHCP server range. The factory-programmed value depends on the series module and of the interface. For IP address format reference see the IP addressing.
<router_mode_conf>	Number	Set router or bridge mode: • 0: bridge mode • 1 (factory-programmed value): router mode
<autoconnect_conf>	Number	Enables or disables autoconnect: • 0: autoconnect disabled • 1 (factory-programmed value): autoconnect enabled
<roaming_conf>	Number	Enables or disables roaming: • 0 (factory-programmed value): roaming disabled • 1: roaming enabled
<dhcp_lease_value>	Number	Values in seconds that defines DHCP lease. Allowed values: • LARA-L6 / LARA-R6 - 0-4294967295
<apps_port_min>	Number	Minimum applications port number
<apps_port_max>	Number	Maximum applications port number
<tech_conf>	Number	ECM RAT configuration. ECM will only perform data traffic over the configured RAT. Allowed values: • 0 (factory-programmed value): automatic (any available RAT) • 1: CDMA • 2: UMTS • 3: LTE
<interface_apply_conf>	Number	The value 100 is used to apply the configuration run-time without any power cycle. Allowed values: • LARA-L6 / LARA-R6 - 100
<terminal_id>	Number	Identifier of the AT terminal over the IP interface. The factory-programmed value depends on the series module and of the interface (for more details, see Notes).
<tcp_control_port>	Number	TCP control port number of the AT interface over an IP connection. The factory-programmed value depends on the series module and of the interface (for more details, see Notes).
<tcp_data_port>	Number	TCP data port number of the AT interface over an IP connection. The factory-programmed value depends on the series module and of the interface (for more details, see Notes).
<interface_MAC_address>	String	Physical MAC address of the interface.
<interface_name>	String	Operating system interface name.

34.2.4 Notes

LARA-L6 / LARA-R6

- Changes are applied at next reboot only if <interface_apply_conf>=100 is applied.
- Setting <router_mode_conf>=1 (router mode), automatically enables DHCP server: <interface_DHCP_server_status_conf>=1.
- Setting <router_mode_conf>=0 (bridge mode), automatically disables DHCP server: <interface_DHCP_server_status_conf>=0.
- Table 57 provides the factory-programmed setting for the supported LARA-L6 / LARA-R6 interfaces:

<interface_name>	usb0
<iftype>	2 (ECM)
<ifnumber>	0
<interface_status_report>	0 (disconnected)
<interface_IP_address>	192.168.225.1
<interface_IP_netmask>	255.255.255.0
<interface_DHCP_server_status_conf>	1 (enabled)
<interface_DHCP_server_range_begin_conf>	192.168.225.20
<interface_DHCP_server_range_end_conf>	192.168.225.60
<router_mode_conf>	1 (router mode)
<autoconnect_conf>	0 (autoconnect enabled)
<dhcp_lease_value	43200
<roaming_conf>	0 (roaming disabled)
<apps_port_min>	9999
<apps_port_max>	19999
<tech_conf>	0 (auto)

Table 57: LARA-L6 / LARA-R6 factory-programmed setting

- Here below is reported an example of how to configure the Ethernet interface.

Command	Response	Description
Get the current Ethernet configuration		
AT+UIFCONF=2,0,0	+UIFCONF: 0 OK	Get the connection status of the interface.
AT+UIFCONF=2,0,1,0	+UIFCONF: "192.168.225.1" OK	Get the IP address of the interface.
AT+UIFCONF=2,0,1,1	+UIFCONF: "255.255.255.0" OK	Get the netmask of the interface.
AT+UIFCONF=2,0,3,0	+UIFCONF: 1 OK	Get the status of the DHCP server of the interface.
AT+UIFCONF=2,0,3,1	+UIFCONF: "192.168.225.20" OK	Get the DHCP server range begin of the interface.
AT+UIFCONF=2,0,3,2	+UIFCONF: "192.168.225.60" OK	Get the DHCP server range end of the interface.
AT+UIFCONF=2,0,10	+UIFCONF: 1 OK	Get the router (1) or bridge (0) mode.
AT+UIFCONF=2,0,11	+UIFCONF: 0 OK	Check if autoconnect is enabled (1 value).
AT+UIFCONF=2,0,15	+UIFCONF: 9999 OK	Apps minimum port number.

Command	Response	Description
AT+UIFCONF=2,0,16	+UIFCONF: 19999 OK	Apps maximum port number.
Set the new Ethernet configuration		
AT+UIFCONF=2,0,1,0,"192.168.225.10"	OK	Set the new IP address of the interface.
AT+UIFCONF=2,0,1,1,"255.255.255.0"	OK	Set the new netmask of the interface.
AT+UIFCONF=2,0,3,1,"192.168.225.50"	OK	Set the new DHCP server range begin of the interface.
AT+UIFCONF=2,0,3,2,"192.168.225.90"	OK	Set the new DHCP server range end of the interface.
AT+UIFCONF=2,0,100	OK	Save changes to be applied at next reboot.

34.3 Get the USB IP configuration +UIPADDR

+UIPADDR						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

34.3.1 Description

Returns the current configuration of the network interface mapped to the required active <cid> of the internal context and the USB IP configuration in bridge mode. If the <cid> parameter is omitted, the information text response will display all the active <cid>s.

LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B
The router mode and the bridge mode are not supported.

34.3.2 Syntax

Type	Syntax	Response	Example
Set	AT+UIPADDR=[<cid>]	+UIPADDR: <cid>,<if_name>,<ipv4_address>,<subnet_mask>,<ipv6_global_address>[,<ipv6_link_local_address>][,<ipv4_primary_dns>,<ipv4_secondary_dns>,<ipv6_primary_dns>,<ipv6_secondary_dns>] [...] OK	See Examples
Test	AT+UIPADDR=?	+UIPADDR: (list of <cid>'s active virtual device) OK	+UIPADDR: 1,2 OK

34.3.3 Defined values

Parameter	Type	Description
<cid>	Number	Specifies the active PDP context. By default the active <cid> is reported. If the <cid> parameter is omitted, all the active <cid>s are reported.For the parameter range, see <cid>.
<if_name>	String	Interface name. For more details on interface nomenclature, see Notes.

Parameter	Type	Description
<ipv4_address>	String	IPv4 address of the interface. The IPv4 address consists of 4 octets: "ddd.ddd.ddd.ddd". The default value is "192.168.1.1".
<subnet_mask>	String	The subnet mask consists of 4 octets: "ddd.ddd.ddd.ddd". The default value is "255.255.255.0".
<ipv6_global_address>	String	Global IPv6 address of the interface. It consists of 8 groups of four hexadecimal digits representing 2 octets. The groups are separated by colons. Leading zero suppression and zero compression maybe applied. The network prefix is written in CIDR notation, by appending a slash and the needed decimal digits to the IPv6 address.
<ipv6_link_local_address>	String	Link Local IPv6 address of the interface. It consists of 8 groups of four hexadecimal digits representing 2 octets. The groups are separated by colons. Leading zero suppression and zero compression maybe applied. The network prefix is written in CIDR notation, by appending a slash and the needed decimal digits to the IPv6 address.
<ipv4_primary_dns>	String	IPv4 address of primary DNS used by the interface. The IPv4 address consists of 4 octets: "ddd.ddd.ddd.ddd".
<ipv4_secondary_dns>	String	IPv4 address of secondary DNS used by the interface. The IPv4 address consists of 4 octets: "ddd.ddd.ddd.ddd".
<ipv6_primary_dns>	String	IPv6 address of primary DNS used by the interface. It consists of 8 groups of four hexadecimal digits representing 2 octets. The groups are separated by colons. Leading zero suppression and zero compression maybe applied. The network prefix is written in CIDR notation, by appending a slash and the needed decimal digits to the IPv6 address.
<ipv6_secondary_dns>	String	IPv6 address of secondary DNS used by the interface. It consists of 8 groups of four hexadecimal digits representing 2 octets. The groups are separated by colons. Leading zero suppression and zero compression maybe applied. The network prefix is written in CIDR notation, by appending a slash and the needed decimal digits to the IPv6 address.

34.3.4 Notes

- If the requested <cid> is not active the command will reply with an error result code.

LARA-L6 / LARA-R6

- The <ipv6_link_local_address> parameter is not supported.
- For the **internal context** the interface name (see the <if_name> parameter) is "app_net(x)", where:
  - The "app_net(x)" is the name of the internal network interface mapped to an activated CID.
  - The x parameter is in the range from 1 to 24.
  - Example: "app_net1" interface is mapped to the PDP context with CID 1.
- In the **bridge mode** the interface name (see the <if_name> parameter) is "ECM".
  - The values reported for the USB IP configuration should be used by the DTE to set its interface when it uses the manual configuration (for more details, see the System networking modes section).

34.3.5 Examples

LARA-L6 / LARA-R6

Description	Command	Response
Internal context (IPv4 context)	AT+UIPADDR=1	+UIPADDR: 1,"app_net1","192.168.21.1","255.255.255.0","","185.215.195.114","185.215.195.115","","" OK
Internal context (IPv6 context)	AT+UIPADDR=1	+UIPADDR: 1,"app_net1","","","2A0B:AD40:1:1044:15E3:6CD4:8B8C:84E2","","","2A0B:AD40:1:100::114","" OK
Internal context (IPv4v6 context)	AT+UIPADDR=1	+UIPADDR: 1,"app_net1","192.168.20.34","255.255.255.0","2A0B:AD40:1:1044:15E3:6CD4:8B8C:84E2","185.215.195.114","185.215.195.115","2A0B:AD40:1:100::114","" OK

Description	Command	Response
Bridge mode (IPv4 context)	AT+UIPADDR=1	+UIPADDR: 1,"ECM","10.12.6.148","255.255.255.248","","217.200.201.65","217.200.201.64","",""
		OK
Bridge mode (IPv6 context)	AT+UIPADDR=1	+UIPADDR: 1,"ECM","","","2001:468:3000:1:2C6C:4615:B341:FA8C","","","2A0B:AD40:1:100::114","::"
		OK
Bridge mode (IPv4v6 context)	AT+UIPADDR=1	+UIPADDR: 1,"ECM","192.168.21.1","255.255.255.252","2001:468:3000:1:2C6C:4615:B341:FA8C","185.215.195.114","185.215.195.115","2A0B:AD40:1:100::114","::"
		OK
Wrong CID	AT+UIPADDR=4	ERROR
All contexts (IPv4v6 context)	AT+UIPADDR=	+UIPADDR: 1,"app_net1","192.168.21.1","255.255.255.0","","185.215.195.114","185.215.195.115","",""
		+UIPADDR: 1,"ECM","192.168.21.1","255.255.255.252","2001:468:3000:1:2C6C:4615:B341:FA8C","185.215.195.114","185.215.195.115","2A0B:AD40:1:100::114","::"
		+UIPADDR: 2,"app_net2","","","2A0B:AD40:1:1044:15E3:6CD4:8B8C:84E2","","","2A0B:AD40:1:100::114",""
		OK
IPv4v6 context (check active CID)	AT+UIPADDR=?	+UIPADDR: 1,2
		OK

34.4 Configure port filtering for embedded applications +UEMBPF

+UEMBPF						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

34.4.1 Description

Enables/disables port filtering to allow IP data traffic from embedded applications when a dial-up connection is active. When enabled, the application will pick source port inside the configured range and the incoming traffic to those ports will be directed to embedded application instead of PPP DTE.

☞ Each set command overwrites the previous configuration. Only one port range can be configured.

☞ When set command with <mode>=0 is issued, the parameter <port_range> shall not be inserted otherwise the command will return an error result code.

☞ If <mode>=0 is configured, the read command will not return any range, but only +UEMBPF: 0 as information text response.

34.4.2 Syntax

Type	Syntax	Response	Example
Set	AT+UEMBPF=<mode>[,<port_range>]	OK	AT+UEMBPF=1,"9999-19999;"
			OK
Read	AT+UEMBPF?	+UEMBPF: <mode>[,<port_range>]	+UEMBPF: 1,"9999-19999;"
		OK	OK

34.4.3 Defined values

Parameter	Type	Description
<mode>	Number	Port filtering enable/disable: • 0: disable. The configured range is removed. • 1: enable. The <port_range> parameter is mandatory The factory-programmed value is: • LARA-L6 / LARA-R6 - 1
<port_range>	String	Dash-separated port range to be filtered, in format "max_port-min_port;". The max_port and min_port value goes from 1 to 65535. The factory-programmed value is: • LARA-L6 / LARA-R6 - "9999-19999;"

34.4.4 Examples

Command	Response	Description
AT+UEMBPF=1,"9999-19999;"	OK	Enabled ports from 9999 to 19999 to be used by embedded IP application.
AT+UEMBPF?	+UEMBPF: 1,"9999-19999;" OK	Read the configuration.
AT+UEMBPF=0	OK	Disable port filtering and removes the previously-saved port range.

35 Constrained Application Protocol (CoAP)

35.1 Introduction

The Constrained Application Protocol (CoAP) is a datagram-based client/server application protocol for devices on the constrained network (e.g. low overhead, low-power), designed to easily translate to HTTP for simplified integration with the web. CoAP clients can use the GET, PUT, POST and DELETE methods using requests and responses with a CoAP server.

The CoAP defines the application level Quality of Service (QoS), where requests and response messages may be marked as:

- **"Confirmable" (CON)**: the messages must be acknowledged by the receiver if successfully received.
- **"Non-confirmable" (NON)**: the messages are "fire and forget".

Supported components are:

- **CoAP-AT**: it can be used to send or receive messages (by means of +UCOAPC command) via CoAP.

LARA-L6 / LARA-R6
If not specified, the <cid> and the <preferred_protocol_type> parameters set by means of the +UDCONF=19 AT command are used.
See +CGACT AT command for activating a PDP context.

LARA-R6001D-00B
If not specified the default CID (<cid>=1) is used. If not specified and the protocol type is IPv4v6, then the preferred protocol type is IPv4.
See +CGACT AT command for activating a PDP context.

35.2 CoAP profile configuration +UCOAP

+UCOAP						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	+CME Error

35.2.1 Description

Configures, reads and resets the current profile parameters of the CoAP client. A set command for each <op_code> parameter must be issued to set each CoAP client profile parameter (CoAP server address, CoAP URI, CoAP PDU option mask).

To store in the NVM the configured CoAP client profile parameters issue the AT+UCOAP=6,<profile_number> command where the <profile_number> parameter is the profile number.

To initiate a TCP session, instead of UDP session, in CoAP, provide the "coap+tcp" scheme by means of the <COAP_URI> parameter.

To initiate the secure session in CoAP, provide the "coaps" or "coaps+tcp" scheme by means of the <COAP_URI> parameter. Issue the AT+UCOAP=8,<usecprf_profile_id> command to configure a CoAP secure session; the USECPRF profile number is set by means of the <usecprf_profile_id> parameter.

LARA-L6 / LARA-R6
Command AT+UCOAP=9,<rai_flag> can be configured but is not applicable on this product and it is not used in session configuration.

Up to four profiles can be stored in the NVM and only one can be loaded at a time. The loaded profile will be considered as the current profile and only this one can be stored in the NVM on the requested profile location.

The read command (AT+UCOAP=7) returns the parameter settings for all four profiles. If the profile is not defined, then the "+UCOAP: INVALID PROFILE NUMBER <profile_number>" will be returned in the information text response to the read command.

LARA-L6 / LARA-R6
Parameter <COAP_server_IP_address> is not supported and can be provided as URI-HOST in <COAP_URI>.

35.2.2 Syntax

Type	Syntax	Response	Example
Generic syntax			
Set	AT+UCOAP=<op_code>,<param_val>[,<param_val1>]	OK	AT+UCOAP=1,"coap://10.17.4.27:3456/ublox/testuri?reference=0" OK
Read	AT+UCOAP?	+UCOAP: <param_name>[,<param_val>] [[..] +UCOAP: <param_name>[,<param_val>] OK	+UCOAP: "DST_IP_ADDRESS","134.102.218.18" +UCOAP: "PORT",5683 +UCOAP: "URI_STR","coap://coap.me/test" +UCOAP: "OPT_MASK",23 +UCOAP: "PROFILE_NUM",2 +UCOAP: "STATUS FLAG",1 +UCOAP: "USECPRF PROFILE" +UCOAP: "RAI FLAG",0 +UCOAP: "CID",1,0 OK
CoAP server IP address port			
Set	AT+UCOAP=0,<COAP_server_IP_address>[,<COAP_port>]	OK	AT+UCOAP=0,"192.168.10.25","2481" OK
CoAP URI			
Set	AT+UCOAP=1,<COAP_URI>	OK	AT+UCOAP=1,"coap://10.17.4.27:3456/ublox/testuri?reference=0" OK
CoAP PDU option mask			
Set	AT+UCOAP=2,<PDU_option>[,<value>]	OK	AT+UCOAP=2,0,1 OK
Current profile number			
Set	AT+UCOAP=3,<profile_number>	OK	AT+UCOAP=3,0 OK
Current profile valid flag			
Set	AT+UCOAP=4,<valid_flag>	OK	AT+UCOAP=4,0 OK
Restore profile			
Set	AT+UCOAP=5,<profile_number>	OK	AT+UCOAP=5,0 OK
Store profile			
Set	AT+UCOAP=6,<profile_number>	OK	AT+UCOAP=6,0

Type	Syntax	Response	Example
			OK
Read the stored profiles			
Read	AT+UCOAP=7	+UCOAP: <param_name>,<param_val> [[..] +UCOAP: <param_name>,<param_val>] OK	AT+UCOAP=7 +UCOAP: INVALID PROFILE NUMBER 0 +UCOAP: INVALID PROFILE NUMBER 1 +UCOAP: "DST_IP_ADDRESS","10.56.9.34" +UCOAP: "PORT",3456 +UCOAP: "URI_STR","coap://10.56.9.34:3456/ublox/testuri" +UCOAP: "OPT_MASK",7 +UCOAP: "PROFILE_NUM",2 +UCOAP: "STATUS FLAG",1 +UCOAP: "USECPRF PROFILE" +UCOAP: "RAI FLAG",0 +UCOAP: INVALID PROFILE NUMBER 3 OK
Select USECPRF profile			
Set	AT+UCOAP=8,<usecprf_profile_id>	OK	AT+UCOAP=8,0 OK
RAI configuration			
Set	AT+UCOAP=9,<rai_flag>	OK	AT+UCOAP=9,0 OK
PDP context configuration			
Set	AT+UCOAP=20,<cid>,<preferred_protocol_type>	OK	AT+UCOAP=20,1,0 OK
Test	AT+UCOAP=?	+UCOAP: (list of supported <op_code>s) OK	+UCOAP: (0-9,20) OK

35.2.3 Defined values

Parameter	Type	Description
<op_code>	Number	Specific parameter in profile. Allowed values are: • 0: CoAP server address configuration • 1: CoAP URI configuration • 2: CoAP PDU option mask configuration • 3: current profile number • 4: current profile valid • 5: restore profile from the NVM • 6: store profile to the NVM • 7: read all profiles from the NVM • 8: CoAP secure option (SSL encryption) • 9: release assistance indication (RAI) • 20: PDP context configuration Allowed values: • LARA-L6 / LARA-R6 - 1, 2, 3, 4, 5, 6, 7, 8, 9, 20

Parameter	Type	Description
<COAP_server_IP_address>	String	Remote CoAP server IP address in IPv4 format. For IP address format reference see the IP addressing.
<COAP_port>	String	Remote CoAP server port; the default CoAP port is 5683, in case of secure option the default port is 5684.
<COAP_URI>	String	URI schemes supported are: • UDP connection: "coap://"URI_HOST[":"URI_PORT] [URI_PATH] ["?"URI_QUERY] • DTLS connection: "coaps://"URI_HOST[":"URI_PORT] [URI_PATH] ["?"URI_QUERY] ☞ LARA-L6 / LARA-R6 Optional URI scheme (RFC 8323 [201]) supported are: • TCP connection: "coap+tcp://"URI_HOST[":"URI_PORT] [URI_PATH] ["?"URI_QUERY] • TLS connection: "coaps+tcp://"URI_HOST[":"URI_PORT] [URI_PATH] ["?"URI_QUERY] URI limitations are: • LARA-L6 / LARA-R6 - The maximum supported length of the URI is 785 characters. ☞ LARA-L6 / LARA-R6 URI_HOST, URI_PATH and URI_QUERY options are limited to 255 characters each as per RFC 7252 [200].
<PDU_option>	Number	PDU option to be added in PDU header. Allowed values are: • 0: URI_HOST • 1: URI_PORT • 2: URI_PATH • 3: URI_QUERY • 4: CONTENT_FORMAT (CONTENT_FORMAT option in the PDU by means of the +UCOAPC AT command) • 5: NON_Message. If it is enabled (see the <value> parameter) then the message type will be non-confirmable, otherwise it will be confirmable
<value>	Number	Allowed values are: • 0 (default value): clear the corresponding option flag • 1: set the corresponding option flag
<profile_number>	Number	Profile number to be used: • 0: profile 0 • 1: profile 1 • 2: profile 2 • 3: profile 3
<valid_flag>	Number	Sets the current profile as valid or invalid: • 0: invalid profile • 1: valid profile
<usecprf_profile_id>	Number	Defines the USECPRF profile which specifies the SSL/TLS properties to be used for an SSL/TLS connection. The range goes from 0 to 4. If no profile is set a default USECPRF profile is used
<rai_flag>	Number	Sets the RAI flag. Allowed values: • 0: RAI disabled • 1: release the connection after the uplink data is sent. It can not be selected with confirmable message type. • 2: release the connection after the first data is received in downlink. It can not be selected with non-confirmable message type.
<cid>	Number	Specifies the PDP context that will be used for the CoAP data. For the parameter range, see <cid>. For more details on the default and factory-programmed value of the parameter (where supported), see Constrained Application Protocol (CoAP).
<preferred_protocol_type>	Number	In case of a context id with IPv4v6 PDP type it is possible to select: • 0: IPv4 • 1: IPv6 For more details on the default and factory-programmed value of the parameter (where supported), see Constrained Application Protocol (CoAP).

Parameter	Type	Description
<param_name>	String	Verbose description for the specific parameter, provided with their numeric values for each profile. Supported values: • "DST_IP_ADDRESS" • "PORT" • "URI_STR" • "OPT_MASK" • "PROFILE_NUM" • "STATUS FLAG" • "USECPRF PROFILE" • "RAI FLAG"
<param_val>	String/ Number	Type and supported content depend on the related <op_code> parameter; details are given above.
<param_val1>	String/ Number	Optional parameter; type and supported content depend on the related <op_code> parameter; details are given above.

35.2.4 Notes

- No profiles are defined by factory-programmed setting.

LARA-L6 / LARA-R6

- The <COAP_server_IP_address> and <COAP_port> parameters are not returned while reading CoAP profile.
- The RAI flag can be configured by means of the AT+UCOAP=9,<rai_flag> AT command but is not applicable and it is not used in session configuration.

35.3 CoAP command +UCOAPC

+UCOAPC						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	-	+CME Error

35.3.1 Description

Triggers the CoAP action with the <coap_command> parameter:

- **GET request**: it can be used to get the requested payload. If the payload is larger than the maximum limit (the limit is imposed by the server), the block-wise transfer will be triggered automatically (if supported by the server);
- **PUT or POST requests**: this can be used to send some payload. If the payload is larger than 512 bytes, then it can be sent via block-wise transfer by dividing the payload in blocks up to 512 bytes.

The final result code indicates if sending the command request to the CoAP process was successful or not. The +UCOAPCR (CoAP command result) URC returns to the user the final result of the CoAP command previously sent with +UCOAPC. As well, the +UCOAPCD CoAP unsolicited data URC provides the data requested by the user and received from the CoAP server.

☞ The payload size in downlink is dependent upon the data packeting scheme of the CoAP server.

☞ For more details, see the RFC 7252 [200].

35.3.2 Syntax

Type	Syntax	Response	Example
Set	AT+UCOAPC=<coap_command>[,<payload>,<identifier>[,<block_number>,<more_block>]]	OK	AT+UCOAPC=1 OK
Test	AT+UCOAPC=?	+UCOAPC: (list of supported <coap_command>s) OK	+UCOAPC: (1,4) OK
URC		+UCOAPCD: <response_code>,[<identifier>,][<payload>],<more_block>[,<block_number>,<block_size>][,<urc_left>]	+UCOAPCD: 2,0,"34746E5F31",0
URC		+UCOAPCR: <coap_command>,<coap_result>	+UCOAPCR: 2,1

35.3.3 Defined values

Parameter	Type	Description
<coap_command>	Number	CoAP action. Allowed values: • 1: GET request to the CoAP server; optional parameters are not allowed • 2: DELETE request to the CoAP server; optional parameters are not allowed • 3: PUT request to the CoAP server • 4: POST request to the CoAP server
<payload>	String	Hexadecimal payload to be sent or received. The maximum data size in uplink is 512 bytes for a single block. For PUT (<coap_command>=3) and POST (<coap_command>=4) commands, if <more_block>=1 (more blocks available), allowed length values for payload are 16, 32, 64, 128, 256, 512 bytes. For more details, see RFC 7959 [204].
<identifier>	Number	CoAP Content-Type identifier. Allowed values: • 0: text / plain • 1: application / link format • 2: application / xml • 3: application / octet stream • 4: application / rdf xml • 5: application / exi • 6: application / json • 7: application / cbor
<block_number>	Number	Indicates the block number being requested or provided, starting from 0.
<more_block>	Number	Indicates that the data in the message is the last block or more blocks are available: • 0: last block • 1: more blocks available
<response_code>	Number	Numeric code added in the response from the server. Allowed values: • 0: empty message • 2: success • 4: client error • 5: server error
<block_size>	Number	Size of data to be acknowledged by the server. The maximum size in uplink is 512 bytes.
<urc_left>	Number	Indicates the number of remaining URCs that will be displayed for a data block, when the payload is too long to be displayed in a single URC and therefore it is split in multiple URCs.
<coap_result>	Number	Indicates the result of last CoAP command: • 0: fail • 1: success

35.3.4 Notes

LARA-L6 / LARA-R6

- In case of secure session (i.e. "coaps" or "coaps+tcp" URI scheme), the +UCOAPC command returns the OK final result code only when the secure session handshake is completed successfully.

LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B

- The +UCOAPCD and +UCOAPCR URCs are sent on all terminals.
- The time to establish the secure session (i.e. "coaps" or "coaps+tcp" URI scheme and +UCOAP: 8, <usecprf_profile_id>) could require up to 150 s in one of these cases:
  - RoT generated PSK (+USECPRF: <profile_id>,11)
  - encrypted session resumption (+USECPRF: <profile_id>,13,2,10)

  This is due to "security heartbeat" message operation. For more details on when this scenario occurs, see the +USECCONN AT command.

35.4 CoAP error reporting +UCOAPER

+UCOAPER						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error Appendix A.7

35.4.1 Description

Returns the error code of the latest CoAP operation.

35.4.2 Syntax

Type	Syntax	Response	Example
Action	AT+UCOAPER	+UCOAPER: <error_class>,<error_code> OK	AT+UCOAPER +UCOAPER: 15,4 OK

35.4.3 Defined values

Parameter	Type	Description
<error_class>	Number	List of the allowed values is available in listed in Appendix A.7.
<error_code>	Number	Value of CoAP specific error code, the allowed <error_code> values are listed in Appendix A.7.6.

36 MQTT

36.1 Introduction

☞ MQTT AT commands are implemented according to MQTT version 3.1.1. For a more detailed overview on MQTT protocol, see MQTT version 3.1.1 - OASIS standard [221].

The Message Queueing Telemetry Transport (MQTT) protocol specifies a simple and lightweight messaging protocol, designed for constrained devices and low-bandwidth, high-latency, or unreliable networks. An MQTT client uses publish and subscribe methods to interact over a TCP connection with an MQTT message broker (henceforth referred to as an MQTT server). u-blox modules can be configured to operate as an MQTT client.

To publish or subscribe, the MQTT client must first establish a TCP connection to an MQTT server.

The MQTT protocol specifies case-sensitive topics, with topic names containing topic level separators "/" to which messages will be published. For example, a message of "78 Fahrenheit or 25 Celsius" could be published to the topic name of "/heat/sensor/SD/bldg5/DelMarConfRm". MQTT clients subscribe to topic filters to determine if the client receives messages published to a given topic name.

The topic filters may exactly specify a topic name or may contain either of the following wildcards:

- **'+'** - (single level wildcard) applies to a single topic level;
- **'#'** - (multi-level wildcard) applies to potentially many topic levels (and must be the last character specified in a topic filter).

'#' can be specified on its own or following a topic level separator ('/'). For example, the topic filter, "/heat/sensor/SD/#", would receive any messages published to the "/heat/sensor/SD/bldg5/DelMarConfRm" topic name.

☞ MQTT specification states that topic filters starting with either wildcard will not match any topic name that starts with "$".

The MQTT protocol also specifies a Quality of Service (QoS) level to be applied to message transactions:

- **0** (default setting): at most once delivery
- **1**: at least once delivery
- **2**: exactly once delivery

The MQTT protocol also allows an MQTT client to create a will message, which the MQTT remote server will store and only publish (to the topic name specified as the will topic name) when the MQTT client gets disconnected from the MQTT server, but not if the MQTT client explicitly sends a disconnect command.

A PSD connection must be active before using MQTT AT commands. Some products require additional commands to provide connectivity to the application.

☞ LARA-L6 / LARA-R6
If not specified, the <cid> and the <preferred_protocol_type> parameters set by means of the +UDCONF=19 AT command are used.
See +CGACT AT command for activating a PDP context.

☞ LARA-R6001D-00B
If not specified the default CID (<cid>=1) is used. If not specified and the protocol type is IPv4v6, then the preferred protocol type is IPv4.
See +CGACT AT command for activating a PDP context.

36.2 MQTT profile configuration +UMQTT

+UMQTT						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	+UMQTTNV	No	-	+CME Error

36.2.1 Description

Configures or reads the parameter value of an MQTT client profile. Issue a set command for each <op_code> parameter to set all of the parameters in an MQTT client profile.

36.2.2 Syntax

Type	Syntax	Response	Example
Generic syntax			
Set	AT+UMQTT=<op_code>[,<param1>[,<param2>]]	+UMQTT: <op_code>,<result> OK	AT+UMQTT=12,1 +UMQTT: 12,1 OK
MQTT unique client ID			
Set	AT+UMQTT=0,<client_id>	+UMQTT: 0,<result> OK	AT+UMQTT=0,"352753090041680" +UMQTT: 0,1 OK
MQTT local TCP port number			
Set	AT+UMQTT=1,<local_port>	+UMQTT: 1,<result> OK	AT+UMQTT=1,1883 +UMQTT: 1,1 OK
MQTT server name			
Set	AT+UMQTT=2,<server_name>[,<server_port>]	+UMQTT: 2,<result> OK	AT+UMQTT=2,"www.commercialmqttbroker.com" +UMQTT: 2,1 OK
MQTT server IP address			
Set	AT+UMQTT=3,<IP_address>[,<server_port>]	+UMQTT: 3,<result> OK	AT+UMQTT=3,"192.168.1.0",1883 +UMQTT: 3,1 OK
User name and password			
Set	AT+UMQTT=4,<username>,<password>	+UMQTT: 4,<result> OK	AT+UMQTT=4,"test","abc123" +UMQTT: 4,1 OK
Last will QoS			
Set	AT+UMQTT=6,<will_QoS>	OK	AT+UMQTT=6,1 OK
Last will retain			
Set	AT+UMQTT=7,<will_retain>	OK	AT+UMQTT=7,1 OK
Last will topic			
Set	AT+UMQTT=8,<will_topic>	OK	AT+UMQTT=8,"u-blox/publish"

Type	Syntax	Response	Example
			OK
Last will message			
Set	AT+UMQTT=9,<will_message>[,<hex_mode>]	OK	AT+UMQTT=9,"Unrequested disconnect" OK
Keep alive and linger time			
Set	AT+UMQTT=10,<keep_alive>[,<linger_time>]	+UMQTT: 10,<result> OK	AT+UMQTT=10,3600,20 +UMQTT: 10,1 OK
MQTT secure option			
Set	AT+UMQTT=11,<MQTT_secure>[,<usecprf_profile_id>]	+UMQTT: 11,<result> OK	AT+UMQTT=11,1,2 +UMQTT: 11,1 OK
MQTT clean session			
Set	AT+UMQTT=12,<clean_session>	+UMQTT: 12,<result> OK	AT+UMQTT=12,1 +UMQTT: 12,1 OK
MQTT server response time			
Set	AT+UMQTT=13,<server_response_time>	OK	AT+UMQTT=13,60 OK
MQTT PDP context configuration			
Set	AT+UMQTT=20,<cid>[,<preferred_protocol_type>]	OK	AT+UMQTT=20,2,1 OK
Read	AT+UMQTT=<op_code>	+UMQTT: <op_code>,<param1>[,<param2>] OK	AT+UMQTT=4 +UMQTT: 4,"my_username" OK
Read	AT+UMQTT?	+UMQTT: 0,<client_id> +UMQTT: 2,<server_name>,<server_port> +UMQTT: 3,IP_address>,<server_port> +UMQTT: 4,<username> +UMQTT: 6,<will_QoS> +UMQTT: 7,<will_retain> +UMQTT: 8,<will_topic> +UMQTT: 9,<wm_length>,<will_message> +UMQTT: 10,<keep_alive>,<linger_time> +UMQTT: 11,<MQTT_secure>[,<usecprf_profile_id>] +UMQTT: 13,<server_response_time> +UMQTT: 20,<cid>,<preferred_protocol_type> OK	+UMQTT: 0,"352848080012186" +UMQTT: 2,"",1883 +UMQTT: 3,"",1883 +UMQTT: 4,"" +UMQTT: 6,0 +UMQTT: 7,0 +UMQTT: 8,"" +UMQTT: 9,0,"" +UMQTT: 10,0,10 +UMQTT: 11,0 +UMQTT: 13,30 +UMQTT: 20,1,0 OK

Type	Syntax	Response	Example
Test	AT+UMQTT=?	+UMQTT: (list of supported <op_code>s) OK	+UMQTT: (0,2-4,6-11,13,20) OK
URC		+UUMQTT<op_code>: <param1>[,<param2>]	+UUMQTT0: "352753090041680"

36.2.3 Defined values

Parameter	Type	Description
<op_code>	Number	MQTT parameter: • 0: MQTT unique client id • 1: MQTT local port number • 2: MQTT server name • 3: MQTT IP address • 4: MQTT username and password • 6: MQTT last will QoS value • 7: MQTT last will retain • 8: MQTT last will topic • 9: MQTT last will message • 10: MQTT keep alive time period and linger time • 11: MQTT secure • 12: MQTT clean session • 13: MQTT server response time • 14: MQTT terse/verbose mode; the set command is not supported • 20: MQTT PDP context configuration Allowed values: • LARA-R6001D-00B - 0, 2, 3, 4, 6, 7, 8, 9, 10, 11, 20 • LARA-L6 / LARA-R6001 / LARA-R6001D-01B / LARA-R6401 / LARA-R6401D / LARA-R6801 / LARA-R6801D - 0, 2, 3, 4, 6, 7, 8, 9, 10, 11, 13, 20
<result>	Number	Allowed values: • 0: failure • 1: success
<client_id>	String	Client identifier for the MQTT session. • LARA-L6 / LARA-R6 - The maximum length is 256 characters. The default value is the IMEI of the MT.
<local_port>	Number	MQTT client TCP port. The range goes from 1 to 65535. If the MQTT client port number is not specified, the default port number is the IANA assigned port of 1883 for non-TLS MQTT and 8883 for TLS MQTT.
<server_name>	String	Remote server name. • LARA-L6 / LARA-R6 - The maximum length is 128 characters. The default value is an empty string.
<IP_address>	String	Remote server IP address. The default value is an empty string. For IP address format reference, see the IP addressing.
<server_port>	Number	MQTT server port. The range goes from 1 to 65535. The default value is 1883 for non-TLS MQTT, 8883 for TLS MQTT. • LARA-L6 / LARA-R6 - the set command also accepts 0: it is used to automatically reset the <server_port> to the default value (1883 or 8883).
<username>	String	User name for the MQTT login procedure. The default value is an empty string: • LARA-L6 / LARA-R6 - The maximum length is 512 characters.
<password>	String	Password for the MQTT login procedure. The default value is an empty string: • LARA-L6 / LARA-R6 - The maximum length is 512 characters.
<keep_alive>	Number	Keep alive time expressed in seconds. According to the MQTT specification, an MQTT server must disconnect a client if it receives nothing from the client within 1.5x the keep alive time. If the keep alive value is 0 the server is not required to disconnect. The default value is 0. The maximum value is 65535 (corresponding to 18 hours, 12 minutes and 15 seconds).
<linger_time>	Number	Linger time expressed in seconds. The range goes from 0 to 120 s; 0 means linger time is not set. The default value is 10 s.

Parameter	Type	Description
<will_QoS>	Number	MQTT last will Quality of Service: • 0 (default value): at most once delivery • 1: at least once delivery • 2: exactly once delivery
<will_retain>	Number	Whether or not the last will message will be retained across disconnects: • 0 (default value): the last will message will not be retained by the MQTT broker • 1: the last will message will be retained by the MQTT broker
<will_topic>	String	Last will topic name. The default value is an empty string. • LARA-L6 / LARA-R6 - The maximum length is 256 characters.
<will_message>	String	Last will message: string of characters (ASCII or hexadecimal octets). • LARA-L6 / LARA-R6 - The maximum length is 256 characters. In case of hexadecimal data, the number of characters must be even (one hexadecimal octet is composed of 2 characters).
<hex_mode>	Number	Allowed values: • 0 (default value): ASCII input for <will_message> • 1: hexadecimal input for <will_message>
<wm_length>	Number	Two meanings: • ASCII input: number of ASCII characters in <will_message> • Hexadecimal input: number of octets in <will_message>
<MQTT_secure>	Number	Enables / disables the secure option of MQTT service: • 0 (default value): no TLS encryption • 1: enable the MQTT TLS encryption
<usecprf_profile_id>	Number	USECMNG profile (number). Defines the USECMNG profile which specifies the SSL/TLS properties to be used for the SSL/TLS connection. The range goes from 0 to 4. If no profile is set a default USECMNG profile is used (see +USECMNG AT command description).
<clean_session>	Number	Clean session value. Allowed values: • 0: indicates that the client subscription and delivered messages received by the client should be remembered across disconnects by both the MQTT client and the MQTT server • 1: (default value) indicates that disconnects clean all session state information
<cid>	Number	PDP context identifier used for the MQTT communication. The allowed range is product specific, see <cid>. For more details on the default value of the parameter (where supported), see MQTT.
<preferred_protocol_type>	Number	Preferred protocol type to be specified when the <cid> protocol type is IPv4v6. Allowed values: • 0: IPv4 • 1: IPv6 For more details on the default value of the parameter (where supported), see MQTT.
<server_response_time>	Number	Indicates the maximum waiting time of a server response after a request was sent to the server via +UMQTTC AT command. It is expressed in seconds. The default value is 30 s. The range goes from 5 s to 255 s (corresponding to 4 minutes and 15 seconds).
<param1>	Number / String	Type and supported content depend on the related <op_code> parameter (details are given above). If <param1> is not specified the value of the corresponding parameter <op_code> is reset to the default value.
<param2>	Number / String	Type and supported content depend on the related <op_code> parameter (details are given above). If <param2> is not specified the value of the corresponding parameter <op_code> is reset to the default value.

36.2.4 Notes

- The information text response to the read command does not display the password.
- Some network operators do not allow secure MQTT. In this case the AT+UMQTTC=1 command (MQTT login) will return a failure response by means of the +UUMQTTC URC after an TLS timeout of 30 s.

LARA-L6 / LARA-R6

- The set command does not provide the +UMQTT: <op_code>,<result> information text response: only the final result code is issued.

- The +UUMQTT URC is not supported.
- The MQTT session is always cleaned on disconnection.
- See the Appendix A.1 for the allowed error result codes.
- <op_code>=2 (MQTT server name) and <op_code>=3 (MQTT IP address) are equivalent and mutually exclusive: if value for <op_code>=2 is specified by user, then value for <op_code>=3 is reset or vice versa.

36.3 Save/Restore MQTT profile from NVM +UMQTTNV

+UMQTTNV						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

36.3.1 Description

Either saves all of the MQTT client profile parameters to NVM (non-volatile memory) or sets all of the MQTT client profile parameters to either factory-programmed or non-volatile stored values.

For the complete list of parameters that can be stored in the NVM, see the +UMQTT AT command.

LARA-L6 / LARA-R6
The set command does not provide the information text response: only the final result code is issued.

36.3.2 Syntax

Type	Syntax	Response	Example
Set	AT+UMQTTNV=<NVM_mode>	[+UMQTTNV: <NVM_mode>, <result>] OK	AT+UMQTTNV=2 +UMQTTNV: 2,1 OK
Test	AT+UMQTTNV=?	+UMQTTNV: (list of <NVM_mode>s) OK	+UMQTTNV: (0-2) OK

36.3.3 Defined values

Parameter	Type	Description
<NVM_mode>	Number	Operation to set or save the MQTT client profile parameters as follows: • 0: restore MQTT client profile parameters to the factory-programmed setting • 1: set MQTT client profile parameters to values previously stored in the NVM • 2: store current MQTT client profile parameters to the NVM
<result>	Number	Operation result: • 0: failure • 1: success

36.4 MQTT command +UMQTTC

+UMQTTC						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	Yes	No	No	Appendix B.4	+CME Error

36.4.1 Description

Triggers the MQTT actions corresponding to the <op_code> parameter. The final result code indicates if sending the command request to the MQTT process was successful or not.

The +UUMQTTC URC provides the result of the requested action from the MQTT broker. In addition, the +UUMQTTC URC also provides notification that unread messages are available from the MQTT server. The +UUMQTTC URC is by default enabled.

☞ LARA-L6 / LARA-R6
An MQTT command can be considered completed only after receiving the related +UUMQTTC URC.
The "+CME ERROR: operation not allowed" error result code is returned if an MQTT command is entered before the previous one is completed.

☞ LARA-L6 / LARA-R6
The +UUMQTTC: 0,100 URC is notified when the MQTT broker releases the connection after a period of inactivity (keep alive time expired).
The +UUMQTTC: 0,101 URC is notified when the network connection is lost.

☞ LARA-L6 / LARA-R6
The +UUMQTTC: 0,102 URC is notified when the MT releases the connection because there is a protocol violation in receiving an MQTT message.

36.4.2 Syntax

Type	Syntax	Response	Example
Generic syntax			
Set	AT+UMQTTC=<op_code>[,<param1>[,<param2>][,<param3>][,<param4>][,<param5>]]	OK	AT+UMQTTC=1 OK
URC		+UUMQTTC: <op_code>,<param1>[,<param2>,<param3>]	+UUMQTTC: 4,0,2,"sensor/heat/#"
MQTT logout			
Set	AT+UMQTTC=0	OK	AT+UMQTTC=0 OK
URC		+UUMQTTC: 0,<logout_result>	+UUMQTTC: 0,1
MQTT login			
Set	AT+UMQTTC=1	OK	AT+UMQTTC=1 OK
URC		+UUMQTTC: 1,<MQTT_result>	+UUMQTTC: 1,1
MQTT publish to a topic			
Set	AT+UMQTTC=2,<QoS>,<retain>,[<hex_mode>],<topic_name>,<pub_msg>	OK	AT+UMQTTC=2,0,0,0,"sensor/heat/SD/bldg5/DelMarConfRm","23 degrees Celsius" OK AT+UMQTTC=2,0,0,1,"sensor/heat/SD/bldg5/DelMarConfRm",

Type	Syntax	Response	Example
			"3233206465677265657320 43656C73697573"
			OK
URC		+UUMQTTC: 2,<MQTT_result>	+UUMQTTC: 2,1
MQTT publish a file to a topic			
Set	AT+UMQTTC=3,<QoS>,<retain>, <topic_name>,<filename>	OK	AT+UMQTTC=3,0,0,"home/u-blox", "msg.txt"
			OK
URC		+UUMQTTC: 3,<MQTT_result>	+UUMQTTC: 3,1
MQTT subscribe to the specified topic filter			
Set	AT+UMQTTC=4,<max_QoS>, <topic_filter>	OK	AT+UMQTTC=4,0,"sensor/heat/#"
			OK
URC		+UUMQTTC: 4,<MQTT_result>[, <QoS>,<topic_name>]	+UUMQTTC: 4,1,0,"sensor/heat/#"
		In case of success +UUMQTTC: 4,1,<QoS>,<topic_ name>	
		In case of failure +UUMQTTC: 4,0	
MQTT unsubscribe from the specified topic filter			
Set	AT+UMQTTC=5,<topic_filter>	OK	AT+UMQTTC=5,"sensor/heat/#"
			OK
URC		+UUMQTTC: 5,<MQTT_result>	+UUMQTTC: 5,1
MQTT read message			
Set	AT+UMQTTC=6[,[<one_message>][, <hex_mode_out>]]	+UMQTTC: 6,<QoS>,<topic_msg_ length>,<topic_length>,<topic_ name>,<read_msg_length>,<read_ msg>	AT+UMQTTC=6,1
			+UMQTTC: 6,0,31,13,"sensor/heat/ #",18,"23 degrees Celsius"
		OK	OK
			AT+UMQTTC=6,,1
			+UMQTTC: 6,0,31,13,"sensor/heat/ #",18,"3233206465677265657320 43656C73697573"
			OK
URC		+UUMQTTC: 6,<num_unread_ msgs>,<memory_full>	+UUMQTTC: 6,3,0
Ping MQTT broker			
Set	AT+UMQTTC=8,<ping_ON_OFF>	OK	AT+UMQTTC=8,1
			OK
URC (only in case of no ping response received)		+UUMQTTC: 8,0	+UUMQTTC: 8,0
Publish a binary message to a topic			
Set	AT+UMQTTC=9,<QoS>,<retain>, <topic_name>,<pub_msg_length>	><pub_bin_message>	AT+UMQTTC=9,1,0,"u-blox/test",33
	After the ">" prompt <pub_msg_ length> bytes of data are entered	OK	>AABB--> execute this \nand "this"
			OK
URC		+UUMQTTC: 9,<MQTT_result>	+UUMQTTC: 9,1
Test	AT+UMQTTC=?	+UMQTT: (list of supported <op_ codes>s)	+UMQTTC: (0-9)
		OK	OK

36.4.3 Defined values

Parameter	Type	Description
<op_code>	Number	MQTT command request. • 0: logs out/disconnects from MQTT server. The will message will not be sent • 1: logs in/connects to MQTT server • 2: publish a message to a specific topic to the MQTT message broker • 3: publish a message from a file to a specific topic to the MQTT message broker • 4: subscribe to a topic from the MQTT message broker • 5: unsubscribe to a topic from the MQTT message broker. This should exactly match the Topic Filter used during the Subscribe • 6: read all unread messages received from MQTT message broker, at the terse/verbose mode set at the time of message reception • 7: sets the terse/verbose format for received messages (i.e. the amount of information and headers with each received MQTT message) • 8: ping the MQTT message broker • 9: publish a message in binary mode. It is used for publishing any binary data Allowed values: • LARA-L6 / LARA-R6 - 0, 1, 2, 3, 4, 5, 6, 8, 9
<MQTT_result>	Number	Result of an MQTT command request: • 0: fail; for more details, see the +UMQTTER AT command • 1: success
<login_result>	Number	Result of an MQTT login request. Allowed values: • 0: connection accepted • 1: the server does not support the level of the MQTT protocol requested by the client • 2: the client identifier is correct UTF-8 but not allowed by the server • 3: the network connection has been made but the MQTT service is unavailable • 4: the data in the user name or password is malformed • 5: the client is not authorized to connect • 6-255: reserved for future use
<logout_result>	Number	Result of an MQTT command request: • 0: fail; for more details, see the +UMQTTER AT command • 1: success Result of an unsolicited notification for an MQTT session interruption caused by: • 100: keep alive time expired, the MQTT broker released the connection. • 101: lost network connection. • 102: protocol violation in receiving an MQTT message.
<QoS>	Number	Quality of service: • 0 (default value): at most once delivery • 1: at least once delivery • 2: exactly once delivery
<retain>	Number	Whether or not the message will be retained across disconnects. Allowed values: • 0 (default value): the message will not be retained by the MQTT broker • 1: the message will be retained by the MQTT broker
<hex_mode>	Number	Allowed values: • 0 (default value): ASCII input for <pub_msg>/<message> • 1: hexadecimal input for <pub_msg>/<message>
<pub_msg>	String	ASCII or hexadecimal data. • LARA-L6 / LARA-R6 - The maximum parameter length is 1024 characters if <hex_mode>=0 or 512 octets if <hex_mode>=1.
<message>	String	ASCII or hexadecimal data. The maximum length is 256 characters. The starting quotation mark shall not be taken into account like data. At the end of the byte stream, another quotation mark is provided for user convenience and visualization purposes.
<filename>	String	Filename containing the message to be published. • LARA-L6 / LARA-R6 - The maximum parameter length is 250 characters and the maximum file content depends on the file system, see File system limits.
<max_QoS>	Number	Maximum QoS level at which the MQTT broker can send messages to the MT. For more details, see MQTT version 3.1.1 - OASIS standard [221]. • 0: at most once delivery

Parameter	Type	Description
		• 1: at least once delivery • 2: exactly once delivery
<topic_filter>	String	An expression to indicate an interest in one or more topics, wildcard characters are used to subscribe/unsubscribe to multiple topics at once. See MQTT introduction. • LARA-L6 / LARA-R6 - The maximum length is 256 characters.
<topic_name>	String	Indicates the topic to which the given MQTT message was published. • LARA-L6 / LARA-R6 - The maximum length is 256 characters.
<reason>	Number	Result of an MQTT subscribe request: • 0-2: success • 128: failure
<num_unread_msgs>	Number	• LARA-L6 / LARA-R6 - For values greater than 0 the parameter represents the number of unread received messages. The maximum number of unread messages is 100. Negative values or 0 indicate a failure during message reception; for more details, see the +UMQTTER AT command.
<format>	Number	Specifies the format of the messages when read using the <op_code>=6. Allowed values: • 0: no formatting. All messages will be concatenated into a single line with no separation between messages • 1 (default value): each message will contain the <topic_name> and <message> • 2: each message will contain the <topic_name>, <msg_length>, <QoS> and <message>
<mqtt_server>	String	IP address or URL of MQTT server.
<one_message>	Number	Allowed values: • 0: read all received messages • 1: read only one message
<topic_msg_length>	Number	Sum of topic and message length
<topic_length>	Number	Topic length
<msg_length>	Number	Specifies the number of octets in <message> for <op_code>=6 (MQTT read message)
<read_msg_length>	Number	Specifies the number of octets in <read_msg>
<read_msg>	String	Message received from MQTT server. • LARA-L6 / LARA-R6 - The maximum length is 12288 octets.
<ping_ON_OFF>	Number	Allowed values: • 0 (default value): ping disabled • 1: ping enabled the MT will ping the MQTT broker. The ping is issued when the MQTT keep alive time period expires. See AT+UMQTT=10.
<memory_full>	Number	Indicates the message memory status. Allowed values: • 0: message memory is available • 1: message memory is full
<pub_msg_length>	Number	Specifies the number of octets in <pub_bin_message>. • LARA-L6 / LARA-R6 - The maximum length is 1024 octets.
<pub_bin_message>	String	Data bytes to be published.
<hex_mode_out>	Number	Allowed values: • 0 (default value): ASCII output for <read_msg> • 1: hexadecimal output for <read_msg>

36.4.4 Notes

- The topic name should not include any wildcards for the publish commands.
- The topic filter could include the '+' wildcard to substitute for a single topic folder or the '#' wildcard to substitute for any number of topic folders. The '#' wildcard must be the last character in a topic filter.

LARA-L6 / LARA-R6

- The <memory_full> parameter is not supported.
- If <hex_mode>=1, the publishing message (<pub_msg> parameter) contains a string of hexadecimal nibbles that is transformed into a bytes sequence
- Publish a binary message to a topic:

  - This feature can be successfully used when there is need to send characters like <CR>, <CTRL-Z>, quotation marks, etc. These characters have a specific meaning and they cannot be used like data in the command itself. For more details, see 3GPP TS 27.005 [86].
  - After the command is sent, the user waits for the > prompt. When it appears the stream of bytes can be provided. After the specified amount of bytes has been sent, the system provides the final result code. The feed process cannot be interrupted i.e. the return in the command mode can be effective only when the number of bytes provided is the declared one.
  - In binary mode the module does not display the echo of data bytes.
- If <QoS>=1 or <QoS>=2, the publish command does not automatically retry to send the packet after a timeout failure. Furthermore, it is not possible to manually send an exact duplicate of the original MQTT packet.
- The PING command activates an internal loop of ping requests and responses to and from the MQTT server. The ping requests are sent when the MQTT keep alive time period expires (see MQTT version 3.1.1 - OASIS standard [221]). Before establishing a connection with the server the keep alive time must be set to a non-zero value, see AT+UMQTT=10. Avoid a value of few seconds otherwise the application will be busy in sending ping requests at the expense of other MQTT requests.
- The PING activation fails if the keep alive time is set to 0, see AT+UMQTT=10.

LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B

- The <hex_mode_out> parameter is not supported.
- The +UUMQTTC URCs are sent on all terminals.
- The time to establish the secure session (when using +UMQTT: 11,1[,<usecprf_profile_id>]) could require up to 150 s in one of these cases:
  - RoT generated PSK (+USECPRF: <profile_id>,11)
  - encrypted session resumption (+USECPRF: <profile_id>,13,2,10)

  This is due to "security heartbeat" message operation. For more details on when this scenario occurs, see the +USECCONN AT command.

36.5 MQTT error +UMQTTER

+UMQTTER						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	-	+CME Error MQTT Error

36.5.1 Description

Retrieves the error class and code of the last MQTT operation that provided an error.

36.5.2 Syntax

Type	Syntax	Response	Example
Action	AT+UMQTTER	+UMQTTER: <error_code1>,<error_code2> OK	AT+UMQTTER +UMQTTER: 1,1 OK

36.5.3 Defined values

Parameter	Type	Description
<error_code1>	Number	• LARA-L6 / LARA-R6 - Value of error class. Values are listed in Internet suite error classes.

Parameter	Type	Description
<error_code2>	Number	• LARA-L6 / LARA-R6 - Value of class-specific error code. The values are listed in MQTT class error codes.

37 MQTT-SN

37.1 Introduction

☞ MQTT-SN AT commands are implemented according to MQTT-SN protocol specification version 1.2. For a more detailed overview of the MQTT-SN protocol, see MQTT-SN version 1.2 - standard [222].

The Message Queuing Telemetry Transport for Sensor Network (MQTT-SN) is a lightweight messaging protocol, which is an optimized version of the MQTT IoT communications protocol. MQTT-SN is optimized for low-bandwidth, high-link failures, and low-cost communication environments. It is specifically designed for low overhead mobile devices with constrained resources of storage and management. u-blox cellular modules can be configured to operate as an MQTT-SN client.

To publish or subscribe, the MQTT-SN client must first establish a UDP connection to a MQTT-SN gateway and register itself.

☞ Since MQTT-SN is implemented over UDP protocol, the maximum length of a MQTT-SN message should not exceed the Maximum Transmission Unit supported by the network (to read the MTU, see the +CGCONTRDP AT command). IPv4 fragmentation support depends upon the network operator, not all operators support it, incomplete messages could be received or sent in case their length exceeds the MTU. IPv6 does not support IP fragmentation by design.

The MQTT-SN protocol specifies case-sensitive topics, with topic names containing topic level separators "/" to which messages will be published. For example, a message of "78 Fahrenheit or 25 Celsius" could be published to the topic name of "/heat/sensor/SD/bldg5/DelMarConfRm".

Three types of topic are defined:

- **Topic id** - A long topic name is replaced by a short, two-byte long topic identifier as a result of a client registration procedure made to map a normal topic to a server defined identifier. This identifier will then be used in the following publish commands.
- **Predefined topic id** - Predefined topic ids are a two-byte long replacement of the topic name, their mapping to the topic names is known in advance by both the client and server, no registration is required.
- **Short topic name** - Short topic names are topic names with fixed length of two octets, no registration is required.

MQTT-SN clients subscribe to topic filters to determine if the client receives messages published to a given topic name.

The topic filters may exactly specify a topic name or may contain either of the following wildcards:

- **'+'** - (single level wildcard) applies to a single topic level
- **'#'** - (multi-level wildcard) applies to potentially many topic levels (and must be the last character specified in a topic filter);

'#' can be specified on its own or following a topic level separator ('/'). For example, the topic filter, "/heat/sensor/SD/#", would receive any messages published to the "/heat/sensor/SD/bldg5/DelMarConfRm" topic name.

☞ MQTT-SN specification states that topic filters starting with either wildcard will not match any topic name that starts with "$".

The MQTT-SN protocol also specifies a Quality of Service (QoS) level to be applied to message transactions:

- **-1**: send and forget (value valid only for publish messages)
- **0** (default setting): at most once delivery
- **1**: at least once delivery
- **2**: exactly once delivery

The MQTT-SN protocol also allows an MQTT-SN client to create a will message, which the MQTT-SN remote server will store and only publish (to the topic name specified as the will topic name) when the MQTT-SN client

gets disconnected from the MQTT-SN server, but not if the MQTT-SN client explicitly sends a disconnect command.

LARA-L6 / LARA-R6
Broadcast messages are not supported so it is not possible to send a search gateway message or receive an advertisement from the gateway.

A PSD connection must be active before using MQTT-SN AT commands. Some products require additional commands to provide connectivity to the application.

LARA-L6 / LARA-R6
If not specified, the <cid> and the <preferred_protocol_type> parameters set by means of the +UDCONF=19 AT command are used.
See +CGACT AT command for activating a PDP context.

LARA-R6001D-00B
If not specified the default CID (<cid>=1) is used. If not specified and the protocol type is IPv4v6, then the preferred protocol type is IPv4.
See +CGACT AT command for activating a PDP context.

37.2 MQTT-SN profile configuration +UMQTTSN

+UMQTTSN						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	+UMQTTSNNV	No	-	+CME Error

37.2.1 Description

Configures or reads the parameter value of an MQTT-SN client profile. Issue a set command for each <op_code> parameter to set all of the parameters in an MQTT-SN client profile.

37.2.2 Syntax

Type	Syntax	Response	Example
Generic syntax			
Set	AT+UMQTTSN=<op_code>,<param1>[,<param2>]	OK	AT+UMQTTSN=12,1 OK
MQTT-SN unique client ID			
Set	AT+UMQTTSN=0,<client_id>	OK	AT+UMQTTSN=0,"352753090041680" OK
MQTT-SN server name			
Set	AT+UMQTTSN=1,<server_name>[,<server_port>]	OK	AT+UMQTTSN=1,"www.testMQTTSNbroker.com" OK
MQTT-SN server IP address			
Set	AT+UMQTTSN=2,<IP_address>[,<server_port>]	OK	AT+UMQTTSN=2,"192.168.1.0",1883 OK
MQTT-SN gateway radius			
Set	AT+UMQTTSN=3,<radius>	OK	AT+UMQTTSN=3,1 OK
Last will QoS			
Set	AT+UMQTTSN=4,<will_QoS>	OK	AT+UMQTTSN=4,1

Type	Syntax	Response	Example
			OK
Last will retain			
Set	AT+UMQTTSN=5,<will_retain>	OK	AT+UMQTTSN=5,1 OK
Last will topic			
Set	AT+UMQTTSN=6,<will_topic>	OK	AT+UMQTTSN=6,"u-blox/publish" OK
Last will message			
Set	AT+UMQTTSN=7,<will_message>	OK	AT+UMQTTSN=7,"Unrequested disconnect." OK
MQTT-SN connection duration			
Set	AT+UMQTTSN=8,<duration>	OK	AT+UMQTTSN=8,20 OK
MQTT-SN secure option			
Set	AT+UMQTTSN=9,<secure>[,<usecprf_profile_id>]	OK	AT+UMQTTSN=9,1 OK
MQTT-SN clean session			
Set	AT+UMQTTSN=10,<clean_session>	OK	AT+UMQTTSN=10,1 OK
MQTT-SN server response time			
Set	AT+UMQTTSN=11,<server_response_time>	OK	AT+UMQTTSN=11,30 OK
MQTT-SN PDP context configuration			
Set	AT+UMQTTSN=20,<cid>[,<preferred_protocol_type>]	OK	AT+UMQTTSN=20,2,1 OK
Read	AT+UMQTTSN=<op_code>	+UMQTTSN: <op_code>,<param1>[,<param2>] OK	AT+UMQTTSN=2 +UMQTTSN: 2,"192.168.1.10",8883 OK
Read	AT+UMQTTSN?	+UMQTTSN: 0,<client_id> +UMQTTSN: 1,<server_name>,<server_port> +UMQTTSN: 2,IP_address>,<server_port> +UMQTTSN: 3,<radius> +UMQTTSN: 4,<will_QoS> +UMQTTSN: 5,<will_retain> +UMQTTSN: 6,<will_topic> +UMQTTSN: 7,<will_message> +UMQTTSN: 8,<duration> +UMQTTSN: 9,<secure>[,<usecprf_profile_id>] +UMQTTSN: 10,<clean_session> +UMQTTSN: 11,<server_response_time>	+UMQTTSN: 0,"352753090041680" +UMQTTSN: 1,"www.commercialmqttbroker.com",1884 +UMQTTSN: 2,"192.168.1.0",1884 +UMQTTSN: 3,1 +UMQTTSN: 4,1 +UMQTTSN: 5,1 +UMQTTSN: 6,"u-blox/publish" +UMQTTSN: 7,"unrequested disconnect" +UMQTTSN: 8,20 +UMQTTSN: 9,1,1 +UMQTTSN: 10,1 +UMQTTSN: 11,25 +UMQTTSN: 20,1,0 OK

Type	Syntax	Response	Example
		+UMQTTSN: 20 ,<cid>,<preferred_ protocol_type> OK	
Test	AT+UMQTTSN=?	+UMQTTSN: (list of supported <op_ code>s) OK	+UMQTTSN: (0-2,4-11,20) OK

37.2.3 Defined values

Parameter	Type	Description
<op_code>	Number	MQTT-SN parameter: • 0: MQTT-SN unique client id • 1: MQTT-SN server name • 2: MQTT-SN IP address • 3: MQTT-SN radius • 4: MQTT-SN last will QoS • 5: MQTT-SN last will retain • 6: MQTT-SN last will topic • 7: MQTT-SN last will message • 8: MQTT-SN connection duration • 9: MQTT-SN secure • 10: MQTT-SN clean session • 11: MQTT-SN server response time • 20: MQTT-SN PDP context configuration Allowed values: • LARA-L6 / LARA-R6 - 0, 1, 2, 4, 5, 6, 7, 8, 9, 10, 20
<client_id>	String	Client identifier for the MQTT-SN session. The maximum length is 256 characters and the default value is the IMEI of the MT.
<server_name>	String	Remote server name. The maximum length is 128 characters. The default value is an empty string.
<server_port>	Number	MQTT-SN server port. The range goes from 1 to 65535. The default value is 1884.
<IP_address>	String	Remote server IP address. The default value is an empty string. For IP address format reference, see the IP addressing.
<radius>	Number	The broadcast radius of this message.
<will_QoS>	Number	MQTT-SN last will quality of service: • 0 (default value): at most once delivery • 1: at least once delivery • 2: exactly once delivery
<will_retain>	Number	Whether or not the last will message will be retained across disconnects: • 0 (default value): the last will message will not be retained by the MQTT-SN gateway • 1: the last will message will be retained by the MQTT-SN gateway
<will_topic>	String	Last will topic name. The maximum length is 256 characters. The default value is an empty string.
<will_message>	String	Last will message in ASCII format. The maximum length is 256 characters. The default value is an empty string.
<duration>	Number	Indicates the duration of the keep alive timer, expressed in seconds. According to the MQTT-SN version 1.2 - standard [222], an MQTT-SN server must disconnect a client if it receives nothing from the client within 1.5x the keep alive duration. The allowed values are: • LARA-L6 / LARA-R6 - 0-65535 (corresponding to 18 hours, 12 minutes and 15 seconds). The default value is 0, which indicates no timeout.
<clean_session>	Number	Clean session value. Allowed values: • 0: indicates that the client subscription and delivered messages received by the client should be remembered across disconnections by both the MQTT-SN client and the MQTT-SN server • 1 (default value): indicates that disconnections clean all session state information
<secure>	Number	Enables / disables the secure option of the MQTT-SN service: • 0: (default value): no DTLS encryption

Parameter	Type	Description
		• 1: enable the MQTT-SN DTLS encryption
<usecprf_profile_id>	Number	USECMNG profile. Defines the USECMNG profile which specifies the SSL/TLS/DTLS properties to be used for the SSL/TLS/DTLS connection. The range goes from 0 to 4. If no profile is set a default USECMNG profile is used (see +USECMNG AT command description). The parameter is omitted in the information text response to the read command if <secure>=0.
<cid>	Number	PDP context identifier used for the MQTT-SN communication. The allowed range is product specific, see <cid>. For more details on the default value of the parameter (where supported), see MQTT-SN.
<preferred_protocol_type>	Number	Preferred protocol type to be specified when the <cid> protocol type is IPv4v6. Allowed values: • 0: IPv4 • 1: IPv6 For more details on the default value of the parameter (where supported), see MQTT-SN.
<server_response_time>	Number	Indicates the maximum waiting time of a server response after a request was sent to the server via +UMQTTSNC AT command. It is expressed in seconds. The default value is 15 s. The range goes from 5 s to 255 s (corresponding to 4 minutes and 15 seconds).
<param1>	Number / String	Type and supported content depend on the related <op_code> parameter (details are given above). <param1> is compulsory parameter in set command.
<param2>	Number / String	Type and supported content depend on the related <op_code> parameter (details are given above). If <param2> is not specified the value of the corresponding parameter <op_code> is reset to the default value.

37.2.4 Notes

LARA-L6 / LARA-R6

- <op_code>=1 (server name) and <op_code>=2 (IP address) are mutually exclusive: if value for <op_code>=1 is specified by user, then value for <op_code>=2 is reset or vice versa.
- <op_code>=10 (clean session) is supported only to maintain server-side persistence (subscription and will data persistency).

37.3 Save/Restore MQTT-SN profile from NVM +UMQTTSNNV

+UMQTTSNNV						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

37.3.1 Description

Either saves all of the MQTT-SN client profile parameters to NVM (non-volatile memory) or sets all of the MQTT-SN client profile parameters to either factory-programmed or non-volatile stored values.

For the complete list of parameters that can be stored in the NVM, see the +UMQTTSN AT command.

37.3.2 Syntax

Type	Syntax	Response	Example
Set	AT+UMQTTSNNV=<NVM_mode>	OK	AT+UMQTTSNNV=2 OK
Test	AT+UMQTTSNNV=?	+UMQTTSNNV: (list of <NVM_mode>s) OK	+UMQTTSNNV: (0-2) OK

37.3.3 Defined values

Parameter	Type	Description
<NVM_mode>	Number	Operation to set or save the MQTT-SN client profile parameters as follows: • 0: restore MQTT-SN client profile parameters to the factory-programmed setting • 1: set MQTT-SN client profile parameters to values previously stored in the NVM • 2: store current MQTT-SN client profile parameters to the NVM

37.4 MQTT-SN command +UMQTTSNC

+UMQTTSNC						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	partial	No	No	No	-	+CME Error

37.4.1 Description

Triggers the MQTT-SN actions corresponding to the <op_code> parameter. The final result code indicates if sending the command request to the MQTT-SN process was successful or not.

The +UUMQTTSNC URC provides the result of the requested action from the MQTT-SN gateway. In addition, the +UUMQTTSNC URC also provides the notification that unread messages are available from the MQTT-SN gateway. The +UUMQTTSNC URC is by default enabled.

LARA-L6 / LARA-R6
The +UUMQTTSNC: 0,100 URC is notified when the MQTT-SN gateway releases the connection.
The +UUMQTTSNC: 0,101 URC is notified when the network connection is lost.

LARA-L6 / LARA-R6
The publish command does not automatically retry to send the packet after a failure due to timeout when QoS is other than 0. The DUP flag bit in the publish packet is always set to 0.

37.4.2 Syntax

Type	Syntax	Response	Example
Generic syntax			
Set	AT+UMQTTSNC=<op_code>[,<param1>[,<param2>[,[<param3>],[<param4>,<param5>,<param6>]]]]	[+UMQTTSNC: <op_code>,<param1>[,<param2>,<param3>,<param4>,<param5>,<param6>]] OK	AT+UMQTTSNC=1 +UMQTTSNC: 1,1 OK
MQTT-SN disconnect			
Set	AT+UMQTTSNC=0[,<duration>]	OK	AT+UMQTTSNC=0 OK
URC		+UUMQTTSNC: 0,<logout_result>	+UUMQTTSNC: 0,1
MQTT-SN connect			
Set	AT+UMQTTSNC=1	OK	AT+UMQTTSNC=1 OK
URC		+UUMQTTSNC: 1,<MQTTSN_result>	+UUMQTTSNC: 1,1
MQTT-SN register			
Set	AT+UMQTTSNC=2,<topic_name>	OK	AT+UMQTTSNC=2,"sensor/heat/SD" OK
URC		+UUMQTTSNC: 2,<MQTTSN_result>,<topic_id>	+UUMQTTSNC: 2,1,1

Type	Syntax	Response	Example
MQTT-SN publish			
Set	AT+UMQTTSNC=4,<QoS>,<retain>,<hex_mode>,<topic_type>,<topic_pub>,<message>	OK	AT+UMQTTSNC=4,1,0,0,0,"1","23 degrees Celsius" OK
URC		+UUMQTTSNC: 4,<MQTTSN_result>	+UUMQTTSNC: 4,1
MQTT-SN subscribe			
Set	AT+UMQTTSNC=5,<max_QoS>,<topic_type>,<topic>	OK	AT+UMQTTSNC=5,1,0,"sensor/heat/SD" OK
URC		+UUMQTTSNC: 5,<MQTTSN_result>,<g_QoS>,<topic_id_sub>	+UUMQTTSNC: 5,1,0,1
MQTT-SN unsubscribe			
Set	AT+UMQTTSNC=6,<topic_type>,<topic>	OK	AT+UMQTTSNC=6,1,"1" OK
URC		+UUMQTTSNC: 6,<MQTTSN_result>	+UUMQTTSNC: 6,1
MQTT-SN will topic update			
Set	AT+UMQTTSNC=7,<will_QoS>,<will_retain>,<will_topic>	OK	AT+UMQTTSNC=7,1,0,"sensor/heat/SD/lastwill" OK
URC		+UUMQTTSNC: 7,<MQTTSN_result>	+UUMQTTSNC: 7,1
MQTT-SN will message update			
Set	AT+UMQTTSNC=8,<will_message>	OK	AT+UMQTTSNC=8,"Unrequested disconnect" OK
URC		+UUMQTTSNC: 8,<MQTTSN_result>	+UUMQTTSNC: 8,1
MQTT-SN read message			
Set	AT+UMQTTSNC=9[,<one_message>]	+UMQTTSNC: 9,<QoS>,<topic_type>,<topic_msg_length>,<topic_length>,<topic_pub>,<msg_length>,<message> OK	AT+UMQTTSNC=9,1 +UMQTTSNC: 9,1,0,19,1,"1",18,"23 degrees Celsius" OK
URC		+UUMQTTSNC: 9,<num_unread_msgs>	+UUMQTTSNC: 9,2
MQTT-SN ping			
Set	AT+UMQTTSNC=10,<ping_ON_OFF>	OK	AT+UMQTTSNC=10,1 OK
URC (only in case of no ping response received)		+UUMQTTSNC: 10,0	+UUMQTTSNC: 10,0
MQTT-SN publish a file to a topic			
Set	AT+UMQTTSNC=11,<QoS>,<retain>,<topic_type>,<topic_pub>,<filename>	OK	AT+UMQTTSNC=11,1,0,0,"2","msg.txt" OK
URC		+UUMQTTSNC: 11,<MQTTSN_result>	+UUMQTTSNC: 11,1
MQTT-SN publish a binary message to a topic			
Set	AT+UMQTTSNC=12,<QoS>,<retain>,<topic_type>,<topic_pub>,<pub_msg_length>	OK	AT+UMQTTSNC=12,1,0,0,"1",33 >AABB--> execute this \nand "this"

Type	Syntax	Response	Example
	After the ">" prompt <pub_msg_ length> bytes of data are entered		OK
URC		+UUMQTTSNC: 12,<MQTTSN_ result>	+UUMQTTSNC: 12,1
Test	AT+UMQTTSNC=?	+UMQTTSN: (list of supported <op_ codes>s) OK	+UMQTTSNC: (0-2,4-12) OK
URC		+UUMQTTSNC: <op_code>, <param1>[,<param2>,...,<paramN>]	+UUMQTTSNC: 5,1,0,1

37.4.3 Defined values

Parameter	Type	Description
<op_code>	Number	MQTT-SN command request. Allowed values: • 0: logs out/disconnects from the MQTT-SN server. The will message will not be sent • 1: logs in/connects to the MQTT-SN server • 2: register message to request a topic ID against a normal topic name from the gateway • 3: search gateway message; broadcasted by a client when it searches for a gateway • 4: publish a message to a specific topic to the gateway • 5: subscribe to a topic • 6: unsubscribe to a topic.This should exactly match the topic filter used during the Subscribe • 7: update the will topic name stored in the gateway/server • 8: update the will message stored in the gateway/server • 9: read all unread messages received from the gateway • 10: ping the MQTT-SN gateway • 11: publish a message from a file to a specific topic to the gateway • 12: publish a binary message to a topic Allowed values: • LARA-L6 / LARA-R6 - 0, 1, 2, 4, 5, 6, 7, 8, 9, 10, 11
<duration>	Number	Indicates the value of the sleep timer in seconds; the default value is 0.
<MQTTSN_result>	Number	Result of a MQTT-SN command request: • 0: fail; for more details, see the +UMQTTSNER AT command • 1: success
<login_result>	Number	Result of a MQTT-SN login request. Allowed values: • 0: connection accepted • 1: rejected due to a congestion • 2: rejected due to an invalid topic ID • 3: rejected because not supported • 4-255: reserved for future use
<logout_result>	Number	Result of an MQTT-SN command request: • 0: fail; for more details, see the +UMQTTSNER AT command • 1: success Result of an unsolicited notification for an MQTT-SN session interruption caused by: • 100: timeout, the MQTT-SN gateway released the connection. • 101: lost network connection.
<topic_name>	String	Indicates a topic with variable length. It must be used with the register command and can be used with the subscribe or unsubscribe commands. • LARA-L6 / LARA-R6 - The maximum length is 256 characters.
<topic_id>	Number	Indicates the topic ID value: an unique number generated by the server and sent back to the module as a response to a register request or to a subscribe request.
<gateway_id>	Number	Indicates the gateway ID.
<QoS>	Number	Quality of service: • 0: at most once delivery • 1: at least once delivery • 2: exactly once delivery

Parameter	Type	Description
		• 3: special publish QoS of 3. It is also known as QoS-1 (see MQTT-SN introduction)
<retain>	Number	Whether or not the message will be retained across disconnections. Allowed values: • 0: the message will not be retained by the MQTT broker • 1: the message will be retained by the MQTT broker
<hex_mode>	Number	Allowed values: • 0 (default value): ASCII input for <message> • 1: hexadecimal input for <message>
<topic_type>	Number	Indicates the type of the topic contained in the topic field: • 0: normal • 1: predefined • 2: short
<topic>	String	Contains the topic ID value or the short/normal topic name for which the data is published.
<topic_pub>	String	Contains the topic ID value (a number between 1 and 65535) or the short topic name (a two characters string) for which the data is published.
<message>	String	ASCII or hexadecimal data. The maximum length is: • LARA-L6 / LARA-R6 - 1024 characters if <hex_mode>=0 or 512 octets if <hex_mode>=1. The maximum length can be limited by the maximum packet size supported by the network (for more details, see MQTT-SN introduction).
<publish_result>	Number	Result of a MQTT-SN publish request. Allowed values: • 0: accepted • 1: rejected due to an invalid topic ID • 2: rejected due to congestion
<max_QoS>	Number	Maximum requested QoS level for this topic: • 0: at most once delivery • 1: at least once delivery • 2: exactly once delivery
<sub_result>	Number	Result of a MQTT-SN subscription request. Allowed values: • 0: accepted • 1: rejected due to an invalid topic ID • 2: rejected due to congestion
<g_QoS>	Number	Indicates the granted QoS level.
<topic_id_sub>	Number	Indicates the topic ID when sending publish messages from the gateway to the client. Not relevant in case of subscriptions to a short topic name or a topic name which contains wildcard characters.
<will_QoS>	Number	Indicates the last will QoS level. Allowed values: • 0: at most once delivery • 1: at least once delivery • 2: exactly once delivery
<will_retain>	Number	Whether or not the last will message will be retained across disconnections: • 0: the last will message will not be retained by the MQTT-SN gateway • 1: the last will message will be retained by the MQTT-SN gateway
<will_topic>	String	Indicates the will topic name. Setting it as an empty string will delete <will_topic> and <will_message> stored in the gateway/server.
<will_message>	String	Will message.
<num_unread_msgs>	Number	• LARA-L6 / LARA-R6 - For values greater than 0 the parameter represents the number of unread received messages. The maximum number of unread messages is 100. Negative values or 0 indicate a failure during message reception; for more details, see the +UMQTTSNER AT command.
<msg_length>	Number	Specifies the number of octets in <message>.
<rcv_message>	String	ASCII data. The starting quotation mark shall not be taken into account like data. At the end of the byte stream, another quotation mark is provided for user convenience and visualization purposes.
<topic_length>	Number	Topic length
<topic_msg_length>	Number	Sum of topic and message length
<one_message>	Number	Allowed values:

Parameter	Type	Description
		• 0: read all received messages • 1: read only one message
<ping_ON_OFF>	Number	Allowed values: • 0 (default value): ping disabled • 1: ping enabled; the MT will ping the MQTT-SN gateway. The ping is issued when the MQTT-SN keep alive period expires. See AT+UMQTT=8,<duration>
<paramx>	Number / String	Type and supported content depend on the related <op_code> parameter (details are given above).
<filename>	String	File name containing the payload of the message to be published. The maximum parameter length is 250 characters and the maximum file content is 1024 characters.
<pub_msg_length>	Number	Specifies the number of octets in <pub_bin_message>.
<pub_bin_message>	String	Data bytes to be published.

37.4.4 Notes

LARA-L6 / LARA-R6

- When the module exits from the sleeping mode (with the AT+UMQTTSNC=1 connect command) the received and not read publish messages are deleted.
- Only predefined topic id or short topic name are allowed in case of publishing a message with QoS level -1.
- If <QoS>=1 or <QoS>=2, the publish command does not automatically retry to send the packet after a timeout failure. Furthermore, it is not possible to manually send an exact duplicate of the original MQTT packet.

LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B

- The +UUMQTTSNC URCs are sent on all terminals.
- The time to establish the secure session (when using +UMQTTSN: 11,1[,<usecprf_profile_id>]) could require up to 150 s in one of these cases:
  - RoT generated PSK (+USECPRF: <profile_id>,11)
  - encrypted session resumption (+USECPRF: <profile_id>,13,2,10)

  This is due to "security heartbeat" message operation. For more details on when this scenario occurs, see the +USECCONN AT command.

37.5 MQTT-SN error +UMQTTSNER

+UMQTTSNER						
Modules	LARA-L6004-01B LARA-L6004D-01B LARA-L6404 LARA-L6404D LARA-L6804D LARA-L6824 LARA-L6824D					
	LARA-R6					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error MQTT-SN error

37.5.1 Description

Retrieves the error class and code of the last MQTT-SN operation that provided an error.

37.5.2 Syntax

Type	Syntax	Response	Example
Set	AT+UMQTTSNER	+UMQTTSNER: <error_class>,<error_code> OK	AT+UMQTTSNER +UMQTTSNER: 14,1 OK

37.5.3 Defined values

Parameter	Type	Description
<error_class>	Number	Value of error class. Values are listed in Internet suite error classes.
<error_code>	Number	Value of class-specific error code. The values are listed in MQTT-SN class error codes.

38 Lightweight M2M

38.1 LwM2M Objects management

38.1.1 Introduction

Lightweight M2M is a protocol from the Open Mobile Alliance (OMA) that defines the application layer communication between a LwM2M server and a LwM2M client. LwM2M includes device management and service enablement for LwM2M devices. For more details on LwM2M protocol, see Lightweight Machine to Machine Technical Specification [220].

38.1.1.1 LARA-L6 / LARA-R6 object management

u-blox cellular modules allows querying the available objects and their instances with +ULWM2MLIST AT command. It is not possible to add new LwM2M objects, only new instances can be created.

☞ For all the single instance objects, only Instance ID 0 is valid.

It is possible to modify LwM2M objects, using the following AT commands:

- **+ULWM2MCREATE** creates an object instance associated with a given server ID.
- **+ULWM2MDELETE** deletes an object instance. The delete target must already exist and be listed by the +ULWM2MLIST AT command.
- **+ULWM2MWRITE** writes to an object instance or resource. The instance must already exist and be listed by the +ULWM2MLIST AT command.
- **+ULWM2MREAD** reads an object, object instance, or resource. The read target must already exist and be listed by the +ULWM2MLIST AT command.

38.1.2 List available LwM2M objects +ULWM2MLIST

+ULWM2MLIST						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

38.1.2.1 Description

Lists all the instances of a specific LwM2M object. In order to list all the existing LwM2M objects and instances in the LwM2M object table issue the AT+ULWM2MLIST="/" command. If an object has no current instances, only the object ID is listed.

38.1.2.2 Syntax

Type	Syntax	Response	Example
Set	AT+ULWM2MLIST=<object_URI>	+ULWM2MLIST: [<1st_URI>[,<2nd_URI>[,...[,<nth_URI>]]]] OK	AT+ULWM2MLIST="/" +ULWM2MLIST: "/1/1","/1/2","/2/1","/2/2","/2/3","/2/4","/2/5","/2/6","/2/7","/2/8","/2/0","/3/0","/4/0","/3300" OK
Test	AT+ULWM2MLIST=?	OK	OK

38.1.2.3 Defined values

Parameter	Type	Description
<object_URI>	String	Uniform Resource Identifier (URI) of the LwM2M object to query. The format is "/object_ID". By means of the special value "/" all the existing LwM2M objects and instances are returned.

Parameter	Type	Description
<1st_URI>,...,<nth_URI>	String	Uniform Resource Identifier (URI) to existing object

38.1.2.4 Notes

LARA-L6 / LARA-R6

- The command only accepts the root URI "/" as <object_URI> parameter. This will provide the list of existing object IDs; to get each object instances, the +ULWM2MREAD AT command can be used.

38.1.3 Create new instance of LwM2M object +ULWM2MCREATE

+ULWM2MCREATE						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

38.1.3.1 Description

Creates a new instance of a LwM2M object.

38.1.3.2 Syntax

Type	Syntax	Response	Example
Set	AT+ULWM2MCREATE=<JSON>,<server_id>	OK	AT+ULWM2MCREATE="{\"bn\":\"/16/0\",\"e\":[{\"n\":\"0/0\",\"sv\":\"HMAN0\"},{\"n\":\"0/1\",\"sv\":\"HMOD0\"},{\"n\":\"0/2\",\"sv\":\"HSW0\"},{\"n\":\"0/3\",\"sv\":\"HUID0\"}]}",721 OK
Test	AT+ULWM2MCREATE=?	+ULWM2MCREATE: "JSON",(list of supported <server_id>s) OK	+ULWM2MCREATE: "JSON",(1-65534) OK

38.1.3.3 Defined values

Parameter	Type	Description
<JSON>	String	JSON-formatted LwM2M resource or object instance; for more details, Lightweight Machine to Machine Technical Specification [220]. If the JSON data contains embedded double quotes, they must be properly escaped with a backslash character '\'.
<server_id>	Number	Short server ID of the LwM2M server owner of the associated object instance. The range goes from 1 to 65534.

38.1.4 Delete instance of LwM2M object +ULWM2MDELETE

+ULWM2MDELETE						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

38.1.4.1 Description

Deletes an instance of a LwM2M object.

38.1.4.2 Syntax

Type	Syntax	Response	Example
Set	AT+ULWM2MDELETE=<URI>	OK	AT+ULWM2MDELETE="/14/7" OK

Type	Syntax	Response	Example
Test	AT+ULWM2MDELETE=?	+ULWM2MDELETE: "Object Id/ Resource Id" OK	+ULWM2MDELETE: "Object Id/ Resource Id" OK

38.1.4.3 Defined values

Parameter	Type	Description
<URI>	String	Uniform Resource Identifier (URI) to existing object

38.1.5 Write to LwM2M object +ULWM2MWRITE

+ULWM2MWRITE						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

38.1.5.1 Description

Writes a LwM2M object, object instance, or resource.

Within 60 s after the command execution, the new setting is saved in file system and is persistent across power cycles.

38.1.5.2 Syntax

Type	Syntax	Response	Example
Set	AT+ULWM2MWRITE=<JSON>[, <mode>]	OK	AT+ULWM2MWRITE="{\"bn\":\"/1/1/\",\"e\":[{\"n\":\"1\",\"v\":1000}]}" OK
Test	AT+ULWM2MWRITE=?	+ULWM2MWRITE: "JSON" OK	+ULWM2MWRITE: "JSON" OK

38.1.5.3 Defined values

Parameter	Type	Description
<JSON>	String	JSON-formatted LwM2M resource or object instance; for more details, Lightweight Machine to Machine Technical Specification [220]. If the JSON data contains embedded double quotes, they must be properly escaped with a backslash character '\'. An empty string causes the LwM2M data to be immediately written into the file system.
<mode>	Number	Allowed values: • 0 (default value): partial write that changes only resources given • 1: replace write, overwriting multi-instance resources with the array passed in JSON

38.1.6 Read from LwM2M object +ULWM2MREAD

+ULWM2MREAD						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

38.1.6.1 Description

Displays the value of a LwM2M object, object instance, or resource.

38.1.6.2 Syntax

Type	Syntax	Response	Example
Set	AT+ULWM2MREAD=<URI>	+ULWM2MREAD: <JSON> OK	AT+ULWM2MREAD="/1/1/1" +ULWM2MREAD: {"bn":"/1/1/1/","e":[{"n":"1","v":1000}]}

Type	Syntax	Response	Example
			OK
Test	AT+ULWM2MREAD=?	+ULWM2MREAD: "URI" OK	+ULWM2MREAD: "URI" OK

38.1.6.3 Defined values

Parameter	Type	Description
<URI>	String	Uniform Resource Identifier (URI) to existing object
<JSON>	String	JSON-formatted LwM2M resource or object instance; for more details, Lightweight Machine to Machine Technical Specification [220]. The maximum length is: • LARA-L6 / LARA-R6 - 3072 characters If the returned JSON length exceeds the parameter maximum length an error result code is issued.

38.1.6.4 Notes

LARA-L6 / LARA-R6

- The command AT+ULWM2MREAD="/0" is not allowed in order not to disclose some security parameters.

38.2 LwM2M connectivity

38.2.1 LwM2M URCs configuration +ULWM2MSTAT

+ULWM2MSTAT						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	65	+CME Error

38.2.1.1 Description

Configures the URC reporting status for LwM2M client. The URC assumes a different syntax and meaning depending on the reported <event> value and it may be related to a specific LwM2M server (e.g. <event>=1). According to the <event> parameter value a URC can be issued:

- **<event>=0 (bootstrap status)**: for each phase of the factory bootstrap procedure
- **<event>=1 (registration status)**: when a LwM2M server changes the state of its registration
- **<event>=2 (remaining time until the next registration update)**: to periodically show the remaining time (in seconds) before the next registration update towards each LwM2M server
- **<event>=3 (notification)**: when a LwM2M notification is sent from the LwM2M client to the LwM2M server during a valid observation
- **<event>=4 (LwM2M client status)**: when the overall state of the LwM2M client changes
- **<event>=5 (LwM2M client initialization status)**: for each phase of the initialization of the LwM2M client
- **<event>=6 (LwM2M server connection status)**: when a connection with a LwM2M server starts/stops/pauses/resumes

38.2.1.2 Syntax

Type	Syntax	Response	Example
Set	AT+ULWM2MSTAT=<n>[,<verbosity_mask>]	OK	AT+ULWM2MSTAT=1,1 OK
Read	AT+ULWM2MSTAT?	+ULWM2MSTAT: <n>,<verbosity_mask> OK	+ULWM2MSTAT: 1,1 OK
Test	AT+ULWM2MSTAT=?	+ULWM2MSTAT: (list of supported <n>s),(list of supported <verbosity_mask>s) OK	+ULWM2MSTAT: (0,1),(1-7) OK

Type	Syntax	Response	Example
Generic syntax			
URC		+ULWM2MSTAT: <event>, <param1>[,<param2>[,<param3>[, <param4>]]]	+ULWM2MSTAT: 1,721,2
Bootstrap status			
URC		+ULWM2MSTAT: 0,<server_id>, <status>	+ULWM2MSTAT: 0,721,2
Registration status			
URC		+ULWM2MSTAT: 1,<server_id>, <status>	+ULWM2MSTAT: 1,721,2
Registration interval			
URC		+ULWM2MSTAT: 2,<server_id>, <reg_update_timer>	+ULWM2MSTAT: 2,721,10
Notification			
URC		+ULWM2MSTAT: 3,<server_id>, <URI>	+ULWM2MSTAT: 3,123,"/3300/0 /5700"
LwM2M client status			
URC		+ULWM2MSTAT: 4,<client_status>	+ULWM2MSTAT: 4,7
LwM2M client initialization status			
URC		+ULWM2MSTAT: 5,<client_init_ status>	+ULWM2MSTAT: 5,1
LwM2M server connection status generic syntax			
URC		+ULWM2MSTAT: 6,<server_id>, <server_connection_status>, <param3>[,<param4>]	+ULWM2MSTAT: 6,721,0, "leshan.eclipseprojects.io:5684"
LwM2M server connection created			
URC		+ULWM2MSTAT: 6,<server_id>,0, <server_address>	+ULWM2MSTAT: 6,721,0, "leshan.eclipseprojects.io:5684"
LwM2M server connection suspended			
URC		+ULWM2MSTAT: 6,<server_id>,1, <sent_data>,<received_data>	+ULWM2MSTAT: 6,721,1,1254,4588
LwM2M server connection resumed			
URC		+ULWM2MSTAT: 6,<server_id>,2, <server_address>	+ULWM2MSTAT: 6,721,2, "leshan.eclipseprojects.io:5684"
LwM2M server connection closed			
URC		+ULWM2MSTAT: 6,<server_id>,3, <sent_data>,<received_data>	+ULWM2MSTAT: 6,721,3,2365,5699

38.2.1.3 Defined values

Parameter	Type	Description
<n>	Number	Enables and disables the +ULWM2MSTAT URC: • 0: LwM2M status URC disabled • 1: LwM2M status +ULWM2MSTAT URC enabled The factory-programmed value is: • LARA-L6 / LARA-R6 - 0
<verbosity_mask>	Number	Optional parameter, represents a bitmask. It enables different levels of verbosity in +ULWM2MSTAT URC: • bit 0: enables reporting of <event>s from 0 to 4 • bit 1: enables reporting of <event>: 5 • bit 2: enables reporting of <event>: 6 The factory-programmed value is 1 (only bit 0 enabled)
<event>	Number	Event type: • 0: bootstrap status • 1: registration status • 2: remaining time until the next registration update

Parameter	Type	Description
		• 3: notification. A notify message has been triggered as per Lightweight Machine to Machine Technical Specification [220] • 4: LwM2M client status • 5: LwM2M client initialization status • 6: LwM2M server connection status Allowed values: • LARA-L6 / LARA-R6 - 0, 1, 2, 3, 5, 6
<server_id>	Number	Short server ID corresponding to a server defined by object 1 resource 0.
<status>	Number	Status code corresponding to the server state. • LARA-L6 / LARA-R6 o 0: deregistered o 1: registration hold o 2: registration pending o 3: registration success o 4: registration failed o 5: registration update pending o 6: registration update needed o 7: registration full update needed o 8: deregistration needed o 9: deregistration pending o 10: bootstrap hold off o 11: bootstrap initiated o 12: bootstrap pending o 13: bootstrap finishing o 14: bootstrap finished o 15: bootstrap failing o 16: bootstrap failed o 19: bootstrap retrying Allowed values: o LARA-L6 / LARA-R6 - 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16
<reg_update_timer>	Number	Time in seconds until the next registration update.
<URI>	String	Uniform Resource Identifier (URI) to existing object
<client_status>	Number	LwM2M client status: • 0: initial • 1: bootstrap required • 2: bootstrapping • 3: registration required • 4: registering • 5: ready • 6: command mode only. No server communication occurs. • 7: client shut down Allowed values:
<client_init_status>	Number	LwM2M client initialization status: • 1: initialization started • 2: initialization finished • 3: client start aborted due to production mode • 4: initialization failed Allowed values: • LARA-L6 / LARA-R6 - 1, 2, 3, 4
<server_connection_status>	Number	LwM2M server connection status: • 0: connection created; <param3> is the <server_address> • 1: connection idle; <param3> is <sent_data> and <param4> is the <received_data> • 2: connection restored; <param3> is the <server_address> • 3: connection closed; <param3> is <sent_data> and <param4> is the <received_data> Allowed values:
<server_address>	String	LwM2M server address, corresponding to the resource 0 of the Security Object, in the format "host:port".

Parameter	Type	Description
<sent_data>	Number	Amount of data sent (at the CoAP level) to the LwM2M server so far on this logical connection.
<received_data>	Number	Amount of data received (at the CoAP level) from the LwM2M server so far on this logical connection.
<param1>	Number	The content depends on the related <event> (details are given above).
<param2>	String	Content and type depend on the related <event> (details are given above).
<param3>	Number or String	The content depends on the related <event> (details are given above).
<param4>	Number	The content depends on the related <event> (details are given above).

38.2.2 Activate/deactivate LwM2M client +ULWM2M

+ULWM2M						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	NVM	No	-	+CME Error

38.2.2.1 Description

Activates or deactivates the LwM2M client.

After issuing the AT+ULWM2M=1 (stop the LwM2M client) command or the AT+ULWM2M=2 (reset the LwM2M client) command, the LwM2M features and the FOTA updates are not available.

The AT+ULWM2M=2 command erases the LwM2M object database; it has no effect on the NVM settings regarding LwM2M activation/deactivation.

LARA-L6 / LARA-R6

- The AT+ULWM2M=1 (stop/disable the LwM2M client) or AT+ULWM2M=0 (start/enables the LwM2M client) commands save the <activation_mode> parameter in NVM.
- If the GCF-PTCRB (<MNO>=201) profile is selected (see the +UMNOPROF AT command), the LwM2M client is disabled. Otherwise, if one of the other MNO profile is selected, and <activation_mode>=0, the LwM2M client is enabled at boot.
- It is possible to query the <activation_mode> NVM setting (can be 0 or 1) by issuing the read command.
- After issuing the AT+ULWM2M=1 (stop the LwM2M client) command, reboot the module (e.g. by AT +CFUN=16) to make the setting effective.

38.2.2.2 Syntax

Type	Syntax	Response	Example
Set	AT+ULWM2M=<activation_mode>[, <nvm_saved>]	OK	AT+ULWM2M=1 OK
Read	AT+ULWM2M?	+ULWM2M: <activation_mode> OK	+ULWM2M: 1 OK
Test	AT+ULWM2M=?	+ULWM2M: (list of supported <activation_mode>s),(list of supported <nvm_saved>s) OK	+ULWM2M: (0-2),(0-1) OK

38.2.2.3 Defined values

Parameter	Type	Description
<activation_mode>	Number	Operation type: • 0: activates and enables the LwM2M client • 1: stops or disables the LwM2M client • 2: reset the LwM2M client (erases the LwM2M object database) • 3: communication with NTT DoCoMo servers disabled • 4: communication with NTT DoCoMo servers enabled

Parameter	Type	Description
		Allowed values: • LARA-L6 / LARA-R6 - 0, 1, 2. See Mobile Network Operator profiles for the factory-programmed value.
<nvm_saved>	Number	Enables/disables the storing of <activation_mode>=1 configuration in the NVM. Allowed values: • 0 (default value): do not store the <activation_mode>=1 configuration in the NVM • 1: store the <activation_mode>=1 configuration in the NVM

38.2.2.4 Notes

LARA-L6 / LARA-R6

- The <nvm_saved> parameter is not supported.

38.2.3 Initiate LwM2M server registration +ULWM2MREG

+ULWM2MREG						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No / OP	No	65	+CME Error

38.2.3.1 Description

Forces the bootstrap or the registration for a specific LwM2M server.

38.2.3.2 Syntax

Type	Syntax	Response	Example
Set	AT+ULWM2MREG=<server_id>	OK	AT+ULWM2MREG=123 OK
Read	AT+ULWM2MREG?	+ULWM2MREG: <server_id>, <server_status>[,<registration_interval>] OK	+ULWM2MREG: 721,2,175 OK
Test	AT+ULWM2MREG=?	+ULWM2MREG: (0, list of supported <server_id>s) OK	+ULWM2MREG: (0,721,123) OK

38.2.3.3 Defined values

Parameter	Type	Description
<server_id>	Number	Short server ID corresponding to a server defined by object 1 resource 0. The special value 0 forces the client to perform the bootstrap process. Allowed values:
<server_status>	Number	Status code corresponding to the server state. • LARA-L6 / LARA-R6 o 0: deregistered o 1: registration hold o 2: registration pending o 3: registration success o 4: registration failed o 5: registration update pending o 6: registration update needed o 7: registration full update needed o 8: deregistration needed o 9: deregistration pending o 10: bootstrap hold off o 11: bootstrap initiated o 12: bootstrap pending o 13: bootstrap finishing o 14: bootstrap finished

Parameter	Type	Description
		o 15: bootstrap failing o 16: bootstrap failed o 19: bootstrap retrying Allowed values: o LARA-L6 / LARA-R6 - 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16
<registration_ interval>	Number	For successfully registered servers (see the <server_status> parameter) this is the number of seconds until the next registration update

38.2.3.4 Notes

LARA-L6 / LARA-R6

- The set command, when invoked with the parameter <server_id> corresponding to a specific short server ID, returns immediately the "OK" final result code. The LwM2M registration procedure to the specific target server is scheduled and executed later. The registration is confirmed by +ULWM2MSTAT URC, where the <reg_update_timer> parameter is expected to restart after a successful server registration.
- The set command, when invoked with the parameter <server_id> corresponding to the special value 0, returns immediately the "OK" final result code. The LwM2M bootstrap and the subsequent registration procedures are scheduled and executed later. The server used for the bootstrap procedure is defined in the device configuration. The updates of the bootstrap and the registration procedures are reported by +ULWM2MSTAT URC.

38.2.4 LwM2M server deregistration +ULWM2MDEREG

+ULWM2MDEREG						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No	No	-	+CME Error

38.2.4.1 Description

Forces a deregistration for a specific LwM2M server or for all servers by means of the <server_id> parameter.

Issue a test command to retrieve the list of the available server IDs.

38.2.4.2 Syntax

Type	Syntax	Response	Example
Set	AT+ULWM2MDEREG=<server_id>	OK	AT+ULWM2MDEREG=0 OK
Test	AT+ULWM2MDEREG=?	+ULWM2MDEREG: (0,list of supported <server_id>s) OK	+ULWM2MDEREG: (0,721) OK

38.2.4.3 Defined values

Parameter	Type	Description
<server_id>	Number	Short server ID corresponding to a server defined by object 1 resource 0. The special value 0 means deregister all servers.

38.2.4.4 Notes

- The deregistration will last until reboot. A new registration will be attempted after reboot. To make deregistration persistent, set the <server_disabled>=1 parameter (if supported) in the +ULWM2MCONFIG AT command.

LARA-L6 / LARA-R6

- The set command returns immediately the "OK" final result code and the LwM2M deregistration procedure to the target set server is scheduled and executed later. The deregistration is confirmed by the +ULWM2MSTAT URC, where the <status>=0 parameter confirms a successful server deregistration.

38.2.5 LwM2M server configuration +ULWM2MCONFIG

+ULWM2MCONFIG						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No / OP	No	-	+CME Error

38.2.5.1 Description

Configures connection parameters for a LwM2M server. It can be used to edit existing configurations or to define configurations for additional servers. This command allows specifying parameters used during a server connection and LwM2M client behavior in case of a registration failure.

The information text response to the read command provides the configuration of LwM2M servers connection parameters in separate rows.

LARA-L6 / LARA-R6
The LwM2M client cannot register with the LwM2M server if the connection requires the use of the pre-shared key (PSK) generated by the root of trust (<usec_psk>=1) and the secure data suite features on the module are disabled (+USECMODE: 0). If enabled, the +ULWM2MSTAT URC will report the registration failure.

Allowed values of <server_id> depends on the selected mobile network operator profile (for more details, see the +UMNOPROF AT command). For the list of available servers in each mobile network operator profile, refer to the +ULWM2MREG AT command row of the proper mobile network operator table in Mobile network operator profiles.

38.2.5.2 Syntax

Type	Syntax	Response	Example
Set	AT+ULWM2MCONFIG= <server_id>, <bootstrap_on_failure>, <pdn_ip_type>, <cid>, <usec_psk>, <reg_update_boot>, <dtls_session_resumption>, <full_registration_after_fota>, <DTLS_NAT_timer>, <reg_upd_at_PSM_exit>, <reg_upd_after_DTLS_handshake>, <server_disabled>	OK	AT+ULWM2MCONFIG=721,0,2,1,1,0,0,0,40,0,0,0 OK
Read	AT+ULWM2MCONFIG?	+ULWM2MCONFIG: <server_id>, <bootstrap_on_failure>, <pdn_ip_type>, <cid>, <usec_psk>, <reg_update_boot>, <dtls_session_resumption>, <full_registration_after_fota>, <DTLS_NAT_timer>, <reg_upd_at_PSM_exit>, <reg_upd_after_DTLS_handshake>, <server_disabled> [...] OK	+ULWM2MCONFIG: 721,0,2,1,1,0,0,0,40,0,0,0 +ULWM2MCONFIG: 123,0,1,1,0,0,0,0,40,0,0,0 OK
Test	AT+ULWM2MCONFIG=?	+ULWM2MCONFIG: (list of supported <server_id>s), (list of supported <bootstrap_on_failure>s), (list of supported <pdn_ip_type>s), (list of supported <cid>s), (list of supported <usec_psk>s), (list of supported <reg_update_boot>s), (list of supported <dtls_session_resumption>s), (list of supported <full_registration_	+ULWM2MCONFIG: (1-65535),(0-1),(1-3),(1-8),(0-1),(0-1),(0-1),(0-1),(0-86400),(0-1),(0-2),(0-2) OK

Type	Syntax	Response	Example
		after_fota>s), (list of supported <DTLS_NAT_timer>s), (list of supported <reg_upd_at_PSM_ exit>s), (list of supported <reg_upd_ after_DTLS_handshake>s), (list of supported <server_disabled>s) OK	

38.2.5.3 Defined values

Parameter	Type	Description
<server_id>	Number	Short server ID corresponding to a server defined by object 1 resource 0
<bootstrap_on_ failure>	Number	Enable/disable a bootstrap attempt after a failed registration. Allowed values: • 0: disable a bootstrap attempt after a failed registration • 1: enable a bootstrap attempt after a failed registration
<pdn_ip_type>	Number	Packet data network (PDN) type. Allowed values: • 1: IPv4 • 2: IPv6 • 3: IPv4v6
<cid>	Number	See <cid>. LARA-L6 / LARA-R6 Also value 255 is supported, which sets the <general_data_cid> in +ULWM2MCONFIGEXT.
<usec_psk>	Number	Use the pre-shared key (PSK) generated by the root of trust. Allowed values: • 0: disabled • 1: enabled For more details on data and device security features, see Data and device security.
<reg_update_boot>	Number	Force a registration update with the LwM2M server after a reboot. Allowed values: • 0: disabled • 1: enabled
<dtls_session_ resumption>	Number	Enable the DTLS session resumption. For more details, see RFC 7925 [203]. Allowed values: • 0: disabled • 1: enabled
<full_registration_ after_fota>	Number	Force a full registration with the LwM2M server after a FOTA has been performed. Allowed values: • 0: disabled • 1: enabled
<DTLS_NAT_timer>	Number	Timeout (in seconds) representing the network address translation (NAT) timer for LwM2M DTLS session re-handshake. Timer is restarted after any LwM2M packet is sent or received; if it times out, the next delivery will cause a DTLS handshake. The range goes from 0 to 86400.
<reg_upd_at_PSM_ exit>	Number	Force a full registration with the LwM2M server when module turns ON as a result of PSM exit. Allowed values: • 0: disabled • 1: enabled
<reg_upd_after_ DTLS_handshake>	Number	Force a registration update in the case a new DTLS handshake is performed. Allowed values: • 0: always disabled • 1: always enabled • 2: enabled only during FOTA
<server_disabled>	Number	When disabled, LwM2M client communication to the server is prevented: it will not perform registration updates and no data to the server will be sent. Allowed values: • 0: always enabled • 1: always disabled • 2: disabled only in roaming cell condition

Parameter	Type	Description
		For the list of default enabled servers in each mobile network operator profile, see the "LwM2M capabilities" row of the proper mobile network operator table in Mobile network operator profiles.

38.2.5.4 Notes

LARA-L6 / LARA-R6

- These settings are stored in internal files. Three files are available: one for AT&T, one for Verizon, one for all other MNOs. If the MNO profile is changed via the +UMNOPROF AT command, no change to the settings stored in the file will occur but the corresponding file will be selected.
- A FOTA/FOAT FW upgrade may change these settings. In this case the custom configurations will get lost after the upgrade and must be re-inserted.
- The read command returns ERROR if the LwM2M Client is disabled (see the +ULWM2M AT command).

38.2.6 LwM2M extended configuration +ULWM2MCONFIGEXT

+ULWM2MCONFIGEXT						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	No / OP	No	-	+CME Error

38.2.6.1 Description

Configures several parameters related to LwM2M functionality: idle timer, out of coverage timer, timers and number of retry attempts, <cid> to be used in case no other connection is available, the delay before the device performs a radio reboot following a Verizon Class 3 APN replacement.

38.2.6.2 Syntax

Type	Syntax	Response	Example
Set	AT+ULWM2MCONFIGEXT=<connection_teardown_timer>,<out_of_coverage_timer>,<communication_retry_timer>,<communication_retry_count>,<general_data_cid>,<production_mode>,<production_sim>,<imei_source>,<apn_sync>,<radio_reboot_delay>,<sim_bootstrap_enabled>,<lwm2m_version>	OK	AT+ULWM2MCONFIGEXT=60,3600,120,5,0,1,"00101",0,0,0,0,0 OK
Read	AT+ULWM2MCONFIGEXT?	+ULWM2MCONFIGEXT: <connection_teardown_timer>,<out_of_coverage_timer>,<communication_retry_timer>,<communication_retry_count>,<general_data_cid>,<production_mode>,<production_sim>,<imei_source>,<apn_sync>,<radio_reboot_delay>,<sim_bootstrap_enabled>,<lwm2m_version> OK	+ULWM2MCONFIGEXT: 60,3600,120,5,0,1,"00101",0,0,0,0,0 OK
Test	AT+ULWM2MCONFIGEXT=?	+ULWM2MCONFIGEXT: (list of supported <connection_teardown_timer>s),(list of supported <out_of_coverage_timer>s),(list of supported <communication_retry_timer>s),(list of supported <communication_retry_count>s),(list of supported <general_data_cid>s),(list of	+ULWM2MCONFIGEXT: (0-86400),(0-86400),(1-86400),(0-65535),(0-11),(0-1),("","00000-999999"),(0-1),(0-1),(0,5-60),(0-1),(0-1) OK

Type	Syntax	Response	Example
		supported <production_mode>s),(list of supported <production_sim>s),(list of supported <imei_source>s),(list of supported <apn_sync>s),(list of supported <radio_reboot_delay>s),(list of supported <sim_bootstrap_enabled>s),(list of supported <lwm2m_version>s) OK	

38.2.6.3 Defined values

Parameter	Type	Description
<connection_teardown_timer>	Number	Timeout (in seconds) after which the data connection no longer used by LwM2M is closed. The range goes from 0 to 86400. The factory-programmed value depends on the selected mobile network operator profile (for more details, see Mobile network operator profiles).
<out_of_coverage_timer>	Number	Timeout (in seconds) after which, during an out-of-coverage condition, the LwM2M attempts to communicate again with the server. The range goes from 0 to 86400. The factory-programmed value is 20 s.
<communication_retry_timer>	Number	The delay (in seconds) between successive communication attempts in a communication sequence. This is the value used if there is no corresponding "Communication Retry Timer" resource (/1/x/18) in the LwM2M object database. The range goes from 1 to 86400. The factory-programmed value is 30 s.
<communication_retry_count>	Number	The number of successive communication attempts before which a communication sequence is considered as failed. This is the value used if there is no corresponding "Communication Retry Count" resource (/1/x/17) in the LwM2M object database. The range goes from 0 to 65535. The factory-programmed value is 4.
<general_data_cid>	Number	<cid> that the LwM2M client uses when connecting to a server whose <cid>, as defined by the corresponding parameter of the +ULWM2MCONFIG command, is 255. For the allowed range, see <cid>.
<production_mode>	Number	Enable LwM2M production feature: LwM2M will not start if the <production_sim> parameter values matches the used SIM. Allowed values: • 0: disabled • 1: enabled The factory-programmed value depends on the selected mobile network operator profile (for more details, see Mobile network operator profiles).
<production_sim>	String	String value of 5 or 6 digits for the SIM filtering. If the <production_sim> parameter values matches the first digits of the IMSI, the LwM2M client does not start. Used only if <production_mode> is enabled. Also accepts void string which corresponds to disabled regardless of <production_mode> value. The factory-programmed value depends on the selected mobile network operator profile (for more details, see Mobile network operator profiles).
<imei_source>	Number	Reserved. Fixed value "0" shall be configured in set command.
<apn_sync>	Number	Enable synchronization of APN entries between instances of LwM2M object 11 "APN connection profile" and +CGDCONT entries. Allowed values: • 0: disabled • 1: enabled The factory-programmed value depends on the selected mobile network operator profile (for more details, see Mobile network operator profiles).
<radio_reboot_delay>	Number	Define the delay in seconds before the device performs a radio reboot following a Verizon Class 3 APN replacement, performed by the Verizon LWM2M server. It has sense only in Verizon configuration (+UMNOPROF: 3). Allowed values: • 0 (factory-programmed value): the radio reboot is not performed at all. • Range from 5 to 60.
<sim_bootstrap_enabled>	Number	LwM2M boostrap from Smartcard feature as described in [227], Appendix G "Storage of LwM2M Bootstrap Information on the Smartcard". The bootstrap information contained in the EF_LwM2M_Bootstrap file shall be encoded using the collection of LwM2M Object format. A single security object instance addressing the LwM2M Bootstrap server is expected. If enabled, the LwM2M client will retrieve and process the bootstrap data contained in the Smartcard. Allowed values:

Parameter	Type	Description
		• 0: disabled • 1: enabled The factory-programmed value depends on the selected mobile network operator profile (for more details, see Mobile network operator profiles).
<lwm2m_version>	Number	Indicates the version of the LwM2M Enabler that the LwM2M client supports. Allowed values: • 0: LwM2M Enabler version 1.0 • 1: LwM2M Enabler version 1.1 The factory-programmed value depends on the selected mobile network operator profile (for more details, see Mobile network operator profiles).

38.2.6.4 Notes

LARA-L6 / LARA-R6

- These settings are stored in internal files. Three files are available: one for AT&T, one for Verizon, one for all other MNOs. If the MNO profile is changed via the +UMNOPROF AT command, no change to the settings stored in the file will occur but the corresponding file will be selected.
- A FOTA/FOAT FW upgrade may change these settings. In this case the custom configurations will get lost after the upgrade and must be re-inserted.
- When in Verizon configuration (+UMNOPROF: 3) the <connection_teardown_timer> parameter is set to 60 in compliance to Verizon LWM2M OTADM Requirement Plan. This value shall not be changed.
- At the first module boot the global MNO profile is selected (+UMNOPROF: 90), the <production_mode> is set to 1 and <production_sim> is set to "00101": this means that the LwM2M client will not start if a test SIM with IMSI starting from "00101" is inserted. This option can be disabled with <production_mode> or it can be customized for a different SIM. For more details:
  - LARA-L6 / LARA-R6 - see the LARA-R6 series LwM2M objects and commands application note [13].
- The <sim_bootstrap_enabled> and <lwm2m_version> parameters are not supported.
- The read command returns ERROR if the LwM2M Client is disabled (see the +ULWM2M AT command).

38.2.7 LwM2M object notification +ULWM2MNOTIFY

+ULWM2MNOTIFY						
Modules	LARA-L6					
	LARA-R6001 LARA-R6401 LARA-R6401D LARA-R6801 LARA-R6801D					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	No	NVM	No	-	-

38.2.7.1 Description

Enables or disables the +ULWM2MNOTIFY URC defined in the Lua objects. The trigger which determines when the +ULWM2MNOTIFY URC is issued and the returned message string are custom, according to each object implementation: if Lua script is supported the Lua script will define the URC string, see the corresponding LwM2M objects and commands application note [72]/[13], otherwise the URC will report the changed URI. The +ULWM2MNOTIFY URC can be triggered by the +ULWM2MCREATE, +ULWM2MWRITE, +ULWM2MDELETE, +ULWM2MREAD AT commands.

38.2.7.2 Syntax

Type	Syntax	Response	Example
Set	AT+ULWM2MNOTIFY=<enable>	OK	AT+ULWM2MNOTIFY=1 OK
Read	AT+ULWM2MNOTIFY?	+ULWM2MNOTIFY: <enable>	+ULWM2MNOTIFY: 0 OK
Test	AT+ULWM2MNOTIFY=?	+ULWM2MNOTIFY: (list of supported <enable>s) OK	+ULWM2MNOTIFY: (0,1) OK
URC		+ULWM2MNOTIFY: <notify_string>	**If Lua script is supported:**

Type	Syntax	Response	Example
			+ULWM2MNOTIFY: "write to resource 5750, value Accelerometer" **If Lua script is not supported:** +ULWM2MNOTIFY: "/8/0/0"

38.2.7.3 Defined values

Parameter	Type	Description
<enable>	Number	Allowed values: • 0: +ULWM2MNOTIFY URC disabled • 1: +ULWM2MNOTIFY URC enabled The factory-programmed value is: • LARA-L6 / LARA-R6 - 0
<notify_string>	String	String as passed to the Lua API function lua_send_urc(), called from the Lua scripts, or URI relative to the changed resource.

38.2.7.4 Notes

LARA-L6 / LARA-R6

- Since Lua script is not supported, the URC is displayed upon change of LwM2M Object 8 "Lock and Wipe" resources 0 (Trigger state), 3 (Wipe).

38.2.8 LwM2M host device information +ODIS

+ODIS						
Modules	All products					
Attributes	**Syntax**	**PIN required**	**Settings saved**	**Can be aborted**	**Response time**	**Error reference**
	full	Yes	NVM	No	-	+CME Error

38.2.8.1 Description

Sets the host identification, manufacturer, model number and software version for the LwM2M device management. If the current MNO profile is not set to AT&T (+UMNOPROF: 2), AT&T 2-4-12 (+UMNOPROF: 198) or FirstNet (+UMNOPROF: 206) and the command is issued, the module returns an error result code.

Within 60 s after the command execution, the new setting is saved in file system and is persistent across power cycles.

☞ LARA-L6 / LARA-R6
Issuing AT+ULWM2MWRITE="" causes the LwM2M data to be immediately saved.

☞ LARA-L6 / LARA-R6
If the +UFACTORY AT command is issued, the factory-programmed setting is restored.

38.2.8.2 Syntax

Type	Syntax	Response	Example
Set	AT+ODIS=<Host_Device_ID>,<Host_Device_Manufacturer>,<Host_Device_Model>,<Host_Device_Software_Version>	OK	AT+ODIS="ubx123456-","u-blox","C030-R510","A1.01" OK
Read	AT+ODIS?	+ODIS: <Host_Device_Manufacturer>,<Host_Device_Model>,<Host_Device_Software_Version> OK	+ODIS: "u-blox","C030-R510","A1.01" OK
Test	AT+ODIS=?	+ODIS: (Host Device ID),(Host Device Manufacturer),(Host Device Model),(Host Device Software Version)	+ODIS: (Host Device ID),(Host Device Manufacturer),(Host Device Model),(Host Device Software Version)

Type	Syntax	Response	Example
		OK	OK

38.2.8.3 Defined values

Parameter	Type	Description
<Host_Device_ID>	String	Host identification. For the supported maximum length, see Notes. The factory-programmed value is "HUID0".
<Host_Device_Manufacturer>	String	Host manufacturer name. For the supported maximum length, see Notes. The factory-programmed value is "HMAN0".
<Host_Device_Model>	String	Host model identification. For the supported maximum length, see Notes. The factory-programmed value is "HMOD0".
<Host_Device_Software_Version>	String	Host software version. For the supported maximum length, see Notes. The factory-programmed value is "HSW0".

38.2.8.4 Notes

LARA-L6 / LARA-R6

- The supported maximum length of input string parameters is 2048 characters.

LARA-R6001D-00B

- In LARA-R6001D-00B-00 the supported maximum length of input string parameters is 9 characters.

A Appendix: Error result codes

A.1 Mobile termination error result codes +CME ERROR

Error result code	Description
0	Phone failure
1	No connection to phone
2	Phone-adaptor link reserved
3	Operation not allowed
4	Operation not supported
5	PH-SIM PIN required
6	PH-FSIM PIN required
7	PH-FSIM PUK required
10	SIM not inserted
11	SIM PIN required
12	SIM PUK required
13	SIM failure
14	SIM busy
15	SIM wrong
16	Incorrect password
17	SIM PIN2 required
18	SIM PUK2 required
20	Memory full
21	Invalid index
22	Network not found
23	Memory failure
24	Text string too long
25	Invalid characters in text string
26	Dial string too long
27	Invalid characters in dial string
30	No network service
31	Network timeout
32	Network not allowed - emergency calls only
40	Network personalization PIN required
41	Network personalization PUK required
42	Network subset personalization PIN required
43	Network subset personalization PUK required
44	Service provider personalization PIN required
45	Service provider personalization PUK required
46	Corporate personalization PIN required
47	Corporate personalization PUK required
50	Incorrect parameters
51	Command implemented but currently disabled
52	Command aborted by user
53	Not attached to network due to MT functionality restrictions
54	Modem not allowed - MT restricted to emergency calls only
55	Operation not allowed because of MT functionality restrictions
56	Fixed dial number only allowed - called number is not a fixed dial number
57	Temporarily out of service due to other MT usage

Error result code	Description
100	Unknown
103	Illegal MS
106	Illegal ME
107	GPRS services not allowed
108	GPRS and non GPRS services not allowed
111	PLMN not allowed
112	Location area not allowed
113	Roaming not allowed in this location area
114	GPRS services not allowed in this PLMN
115	No Suitable Cells In Location Area
122	Congestion
125	Not authorized for this CSG
126	Insufficient resources
127	Missing or unknown APN
128	Unknown PDP address or PDP type
129	User authentication failed
130	Request rejected by Serving GW or PDN GW
131	Request rejected, unspecified
132	Service option not supported
133	Requested service option not subscribed
134	Service option temporarily out of order
135	NS-api already used
137	EPS QoS not accepted
138	Network failure
140	Feature not supported
141	Semantic error in the TFT operation
142	Syntactical error in the TFT operation
143	Unknown PDP context
144	Semantic errors in packet filter(s)
145	Syntactical errors in packet filter(s)
146	PDP context without TFT already activated
147	PTI mismatch
148	Unspecified GPRS error
149	PDP authentication failure
150	Invalid mobile class
153	ESM information not received
154	PDN connection does not exist
155	Multiple PDN connections for a given APN not allowed
156	User Busy
159	Uplink Busy/ Flow Control
160	Bearer handling not supported
165	Maximum number of EPS bearers reached
166	Requested APN not supported in current RAT and PLMN combination
168	Network failure
169	IMSI unknown in VLR
170	Congestion
171	Last PDN disconnection not allowed
172	Semantically incorrect message
173	Mandatory information element error

Error result code	Description
174	Information element non-existent or not implemented
175	Conditional IE error
176	Protocol error, unspecified
177	Operator determined barring
178	Maximum number of PDP contexts reached
179	Requested APN not supported in current RAT and PLMN combination
180	Request rejected, bearer control mode violation
181	Invalid PTI value
189	Semantically incorrect message
190	Invalid mandatory IE
191	Message type non existent
192	Message type not compatible
193	IE non existent
194	Conditional IE error
195	Message not compatible
197	Protocol error unspecified
203	Multiple PDN connections for a given APN not allowed
254	Invalid error mapping
255	Internal error
262	SIM blocked
300	ME failure
301	SMS service of ME reserved
302	Operation not allowed
303	Operation not supported
304	Invalid PDU mode parameter
305	Invalid text mode parameter
306	PDN invalid type
307	PDN no parameter
308	UE fail
309	PDP APN and PDP type duplicate used
310	(U)SIM not inserted
311	(U)SIM PIN required
312	PH-(U)SIM PIN required
313	(U)SIM failure
314	(U)SIM busy
315	(U)SIM wrong
316	(U)SIM PUK required
317	(U)SIM PIN2 required
318	(U)SIM PUK2 required
320	Memory failure
321	Invalid memory index
322	Memory full
330	SMSC address unknown
331	No network service
332	Network timeout
340	No +CNMA acknowledgement expected
401	Invalid PLMN
402	PLMN duplicate used
403	PLMN not found

Error result code	Description
404	PLMN table empty
405	PLMN table full
406	No ESM cause
407	Unknown ESM cause
408	Command not successful
500	Unknown error
608	Voice call active
701	Incorrect security code
702	Max attempts reached
1001	Unassigned (unallocated) number
1003	No route to destination
1006	Channel unacceptable
1008	Operator determined barring
1016	Normal call clearing
1017	User busy
1018	No user responding
1019	User alerting, no answer
1021	Call rejected
1022	Number changed
1026	Non selected user clearing
1027	Destination out of order
1028	Invalid number format (incomplete number)
1029	Facility rejected
1030	Response to STATUS ENQUIRY
1031	Normal, unspecified
1034	No circuit/channel available
1038	Network out of order
1041	Temporary failure
1042	Switching equipment congestion
1043	Access information discarded
1044	requested circuit/channel not available
1047	Resources unavailable, unspecified
1049	Quality of service unavailable
1050	Requested facility not subscribed
1055	Incoming calls barred within the CUG
1056	Collision with network initiated request
1057	Bearer capability not authorized
1058	Bearer capability not presently available
1059	Unsupported QCI value
1063	Service or option not available, unspecified
1065	Bearer service not implemented
1068	ACM equal to or greater than ACMmax
1069	Requested facility not implemented
1070	Only restricted digital information bearer capability is available
1079	Service or option not implemented, unspecified
1081	Invalid transaction identifier value
1087	User not member of CUG
1088	Incompatible destination
1091	Invalid transit network selection

Error result code	Description
1095	Semantically incorrect message
1096	Invalid mandatory information
1097	Message type non-existent or not implemented
1098	Message type not compatible with protocol state
1099	Information element non-existent or not implemented
1100	Conditional IE error
1101	Message not compatible with protocol state
1102	Recovery on timer expiry
1111	Protocol error, unspecified
1112	APN restriction value incompatible with active EPS bearer context
1127	Interworking, unspecified
1142	Network Error
1143	Invalid EPS bearer identity
1149	Last PDN disconnection not allowed
1243	Emm Error Unspecified
1244	Esm Error Unspecified
1279	Number not allowed
1283	CCBS possible
1400	Wrong RAT
1500	Wrong GPIO identifier
1501	Set GPIO default error
1502	Select GPIO mode error
1503	Read GPIO error
1504	Write GPIO error
1505	GPIO busy
1520	Wrong ADC identifier
1521	Read ADC error
1530	IPv4 only allowed
1531	IPv6 only allowed
1540	Wrong ringer identifier
1542	LLC or SNDCP failure
1543	Regular deactivation
1544	Reactivation requested
1545	Single address bearers only allowed
1546	Invalid transaction identifier value
1547	APN restriction val incompatible with PDP context
1548	PDP activation rejected
1549	unknown PDP address or PDP type
1550	GPRS generic operation error
1551	GPRS invalid APN
1552	GPRS authentication failure
1553	GPRS QoS parameters inconsistent
1554	GPRS network failure
1555	GPRS context busy
1556	CSD generic operation error
1557	CSD undefined profile
1558	CSD context busy
1559	PLMN scan not allowed
1600	FFS error

Error result code	Description
1560	PDP type IPv4 only allowed
1561	PDP type IPv6 only allowed
1612	FILE NOT FOUND
1613	Cannot open file
1614	TAC value not allowed
1615	OTP failure
1616	Wrong Check Digit
1620	Buffer full
1621	FFS initializing
1622	FFS already open file
1623	FFS not open file
1624	FFS file not found
1625	FFS file already created
1626	FFS illegal id
1627	FFS illegal file handle
1628	FFS illegal type
1629	FFS illegal mode
1630	FFS file range
1631	FFS operation not possible
1632	FFS write error
1633	FFS user id error
1634	FFS internal fatal error
1635	FFS memory resource error
1636	FFS maximum number of files exceeded
1637	FFS memory not available
1638	FFS invalid filename
1639	FFS streaming not enabled
1640	FFS operation not allowed on static file
1641	FFS memory table inconsistency
1642	FFS not a factory default file
1643	FFS requested memory temporary not available
1644	FFS operation not allowed for a directory
1645	FFS directory space not available
1646	FFS too many streaming files open
1647	FFS requested dynamic memory temporary not available
1648	FFS user provided a NULL parameter instead of a suitable buffer
1649	FFS timeout
1650	Command line too long
1660	Call barred - Fixed dialing numbers only
1670	SEC remote object wrong state
1671	SEC ROT not personalized
1672	SEC loss of connectivity
1673	SEC service not authorized
1674	SEC FW package installation required
1675	SEC FW package not valid
1676	SEC resource not available
1677	SEC data not available
1678	SEC timeout
1679	SEC data inconsistent or unsupported

Error result code	Description
1680	SEC pspk lock pending
1681	SEC C2C already paired
1682	SEC C2C channels consumed
1683	SEC C2C pairing not present
1684	SEC busy
1685	SEC connection failed due to a DNS resolution error
1686	SEC restore pending
1687	SEC RoT IO error
1688	SEC RoT IO pending
1689	SEC disabled
1700	GPS GPIO not configured
1701	GPS GPIO ownership error
1702	Invalid operation with GPS ON
1703	Invalid operation with GPS OFF
1704	Invalid GPS aiding mode
1705	Reserved GPS aiding mode
1706	GPS aiding mode already set
1707	Invalid GPS trace mode
1708	Parameter valid only in case of GPS OTA
1709	GPS trace invalid server
1710	Invalid TimeZone
1711	Invalid value
1712	Invalid parameter
1713	Invalid operation with LOC running / GPS Busy
1800	No ongoing call
1801	IBM busy / eCall already armed/active
1802	IBM feature off / eCall feature off
1803	Wrong IBM requested
1804	Audio resource not available
1805	ECALL restriction
1806	eCall invalid dial number
1900	No SAP Server Connection
1901	SAP Protocol Error
1902	SAP Connection failure
1903	SAP Server Disconnection
1904	SAP Other terminal using service
1910	USECMNG import timeout expired (no input for > 20 s)
1911	USECMNG import file size exceeds limit
1912	USECMNG no memory available
1913	USECMNG invalid certificate/key format
1914	USECMNG database full
1915	USECMNG database internal error
1916	USECMNG internal name not found
1917	USECMNG internal name already present
1918	USECMNG private key format error
1919	USECMNG MD5 checksum error
1920	USECMNG PEM DER conversion error
1921	USECMNG certificate date error
1922	USECMNG certificate common name error

Error result code	Description
1950	CDC-ECM is not available
1951	CDC-ECM is busy
1952	No DHCP Packets received from the DTE
2000	Command timeout
3000	Command aborted
4000	APN configuration mismatch
4001	IP type configuration mismatch
5000	FOTA package download state or name mismatch
5001	FOTA package data corrupted
5002	FOTA memory is in use

A.2 Message service error result codes +CMS ERROR

Error result code	Description
1	Unassigned (unallocated) number
5	Delta firmware unavailable on FOTA server
8	Operator determined barring
10	Call barred
17	Network failure
21	Short message transfer rejected
22	Memory capacity exceeded
27	Destination out of service
28	Unidentified subscriber
29	Facility rejected
30	Unknown Subscriber
38	Network out of order
41	Temporary failure
42	Congestion
47	Resources unavailable, unspecified
50	Requested facility not subscribed
69	Requested facility not implemented
81	Invalid short message reference value
95	Invalid message, unspecified
96	invalid mandatory information
97	Message type non-existent or not implemented
98	Message not compatible with short message protocol state
99	Information element non-existent or not implemented
111	Protocol error, unspecified
127	Interworking, unspecified
128	Telematic interworking not supported
129	Short message type 0 not supported
130	Cannot replace short message
143	Unspecified TP-PID error
144	Data coding scheme (alphabet) not supported
145	Message class not supported
159	Unspecified TP-DCS error
160	Command cannot be actioned
161	Command unsupported
175	Unspecified TP-Command error

Error result code	Description
176	TPDU not supported
192	SC busy
193	No SC subscription
194	SC system failure
195	Invalid SME address
196	Destination SME barred
197	SM Rejected-Duplicate SM
198	TP-VPF not supported
199	TP-VP not supported
208	SIM SMS storage full
209	No SMS storage capability in SIM
210	Error in MS
211	Memory Capacity Exceeded
212	SIM Application Toolkit Busy
213	SIM data download error
287	Network failure unspecified
290	Network no resource
296	Radio Resources not Available due to DUAL SIM operation
297	Out of service due to DUAL SIM operation
300	ME failure
301	SMS service of ME reserved
302	Operation not allowed
303	operation not supported
304	Invalid PDU mode parameter
305	Invalid Text mode parameter
310	SIM not inserted
311	SIM PIN required
312	PH-SIM PIN required
313	SIM failure
314	SIM busy
315	SIM wrong
320	memory failure
321	invalid memory index
322	memory full
330	SMSC address unknown
331	no network service
332	network timeout
340	no +CNMA acknowledgement expected
350	Unassigned (unallocated) number
351	Operator determined barring
352	Call barred
353	ME failure
354	Short message transfer rejected
355	Number changed
356	Destination out of order
357	Unidentified subscriber
358	Facility rejected
359	Unknown subscriber
364	Requested facility not subscribed

Error result code	Description
365	Requested facility not implemented
368	Invalid mandatory information
369	Message type non-existent or not implemented
370	Message not compatible with short message protocol state
371	Information element non-existent or not implemented
372	Protocol error, unspecified
373	Interworking, unspecified
360	Network out of order
361	Temporary failure
362	Congestion
363	Resources unavailable, unspecified
366	Invalid short message transfer reference value
367	Invalid message, unspecified
500	unknown error
512	Relay Protocol Acknowledgement
513	SMS timer expired
514	SMS forwarding availability failed
515	SMS forwarding availability aborted
516	MS invalid TP-Message-Type-Indicator
517	MS no TP-Status-Report in Phase 1
518	MS no TP-Reject-Duplicate in phase 1
519	MS no TP-Replay-Path in Phase 1
520	MS no TP-User-Data-Header in Phase 1
521	MS missing TP-Validity-Period
522	MS invalid TP-Service-Centre-Time-Stamp
523	MS missing TP-Destination-Address
524	MS invalid TP-Destination-Address
525	MS missing Service-Centre-Address
526	MS invalid Service-Centre-Address
527	MS invalid alphabet
528	MS invalid TP-User-Data-length
529	MS missing TP-User-Data
530	MS TP-User-Data to long
531	MS no Command-Request in Phase 1
532	MS Cmd-Req invalid TP-Destination-Address
533	MS Cmd-Req invalid TP-User-Data-Length
534	MS Cmd-Req invalid TP-User-Data
535	MS Cmd-Req invalid TP-Command-Type
536	MN MNR creation failed
537	MS CMM creation failed
538	MS network connection lost
539	MS pending MO SM transfer
540	RP-Error OK
541	RP-Error OK no icon display
542	SMS-PP Unspecified
543	SMS rejected By SMS CONTROL
543	FDN check failed
544	Service Centre Address(SCA) FDN failed
545	Destination Address(DA) FDN failed

Error result code	Description
546	BDN check failed
547	Unspecified SMS PP error
548	Undefined Result
548	No Route To Destination
549	Channel Unacceptable
555	No Circuit/Channel Available
556	Access Information Discarded
557	Requested Circuit/Channel Not Available By Other Side
558	Quality Of Service Unavailable
560	Bearer Capability Not Authorized
561	Bearer Capability Not Presently Available
562	Service or Option Not Available, Unspecified
563	Bearer Service Not Implemented
564	ACM Equal to or Greater Than ACMmax
565	Only Restricted Digital Information Bearer Capability Is Available
566	Service or Option Not Implemented, Unspecified
567	User Not Member of CUG
568	Incompatible By Destination
569	Invalid Transit Network Selection
571	Message Not Compatible With Protocol State
572	Recovery On Timer Expiry
576	Data Call Active
577	Speech Call Active
579	MOC Setup Rejected Due to Missing ACM Info
580	Temporary Forbidden Call Attempt
581	Called Party is Blacklisted
583	Temporary Forbidden Call Attempt No Service
584	Temporary Forbidden Call Attempt Limited Service
585	Client Temporary Barred
586	Dual Service Call Active
587	Atc Fclass Not Speech
590	Client Not Registrated
591	Active Client Gone
595	Rejected By Call Control
601	Invalid ALS Line
604	MM No Service (out of coverage)
605	MM Access Class Barred (RR_REL_IND During RR Conn. Establishment)
606	ME Busy -CM Service Request Already Pending
608	Rejected Due To SUP Timer Expiry
609	Rejected Due To USSD Busy
610	Rejected Due To SS Busy
612	SIM Toolkit Request Is Rejected, Because Another SIM Toolkit Request Is Pending
614	Rejected Because SIM Toolkit Request Is Not Yet Answered By The User
615	MN Setup SS Error
616	Call Controller Blocked (Other Call Command Pending)
618	Environment Parameter Not Set Correctly (Fclass/Cmod)
619	Other Blocking Call Present
620	Lower Layer Failure

Error result code	Description
621	The Authentication Procedure Failed
622	The Packet-Switched Registration Procedure Failed
623	CM Service Reject From The Network
624	The ABORT Message Was Received From The Network
625	Timer Expiry
626	IMSI Detach Was Initiated
627	Normal RR Connection Release (2G)
628	Registration Failed
630	Failure Due To Handover
631	Link Establishment Failure
632	Random Access Failure
633	Radio Link Aborted
634	Lower Layer Failure in Layer 1
635	Immediate Assignment Reject
636	Failure Due To Paging
637	Abnormal Release Unspecified
638	Abnormal Release Channel Unacceptable
639	Abnormal Release Timer Expired
640	Abnormal Release No Act On Radio Path
641	Preemptive Release
642	UTRAN Configuration Unknown
643	Handover Impossible
644	Channel Mode Unacceptable
647	Lower Layer Failure From NW
649	Conditional IE Error
650	No Cell Allocation Available
653	Re Establishment Reject
654	Directed Sigconn Re Establishment
656	Release of RRC connection Without Network Activity(3G) Lower Layer Failure Downlink
657	Lower Layer Failure Uplink
658	Cell Barred Due To Authentication Failure
659	Signalling Connection Release
660	CS Connection Release Triggered By MM
661	RRC Connection Establishment Failure
662	RRC Connection Establishment Reject With Redirection
663	Resource Conflict
664	Lower Layer Failure in Layer 2
665	L2 Cause T200 Expiry N200 Plus 1 Times
669	RR Connection Release Due to BAND Change (2G)
670	Release of the RRC Connection Due to Out of Service in Cell_Fach (3G)
671	Release of the RRC Connection Due to Not Matching PLMN in Shared Networks(3G)
672	Error Happens While Call Is Already Disconnected / Late Error
674	SIM Toolkit Cannot Initiate A Call, Because MMI Is Not Registered
675	SIM Toolkit Call Setup Request Is Rejected Due User Did Not Accept
676	Proactive SIM Appl Terminated By User
677	SIM Toolkit Originated SIM Reset (Refresh Request)
680	Dial String/Number Incorrect

A.3 Firmware install final result codes

The +UFWINSTALL AT command issues a final result code providing the result of the FW install procedure. In case the FW install procedure fails, the error result code provides some indication about the error cause (syntax error or issue during the installation procedure).

A.3.1 LARA-L6 / LARA-R6 final result codes from command syntax

Syntax error resulting from the +UFWINSTALL command:

Error result code	Verbose description	Description
4	+CME ERROR: not supported	One of the following cases: • Wrong serial port number • Wrong baud rate • Number of parameters not allowed • Filename too long • LARA-L6/LARA-R6001-00B/LARA-R6401-00B/LARA-R6401D-00B/LARA-R6801-00B - No parameters
1624	+CME ERROR: FFS file not found	The delta file is not stored in the module FS or the filename is wrong

A.3.1.1 LARA-L6 / LARA-R6 final result codes from end of update procedure

A.3.1.1.1 LARA-L6 / LARA-R6 final result codes table

Here below are listed the allowed final result codes that can be issued at the finalization of the install procedure by means of the +UFWINSTALL and +UFWUPD AT commands.

Error result code	Description	+UFWINSTALL: URC UART port and baud rate	+UFWUPD: URC UART port and baud rate
128	Firmware install successfully performed	Set by +UFWINSTALL	Primary UART, 115200 b/s
129	Firmware install generic failure	Set by +UFWINSTALL	Primary UART, 115200 b/s
130	Flash access failure	Default: primary UART, 115200 b/s	Primary UART, 115200 b/s
131	RAM allocation error	Default: primary UART, 115200 b/s	Primary UART, 115200 b/s
132	Retrieve partition table error	Default: primary UART, 115200 b/s	Primary UART, 115200 b/s
134	Bad block flash initialization failure	Set by +UFWINSTALL	Primary UART, 115200 b/s
140	Generic decompression engine error	Set by +UFWINSTALL	Primary UART, 115200 b/s
141	RAM error	Set by +UFWINSTALL	Primary UART, 115200 b/s
144	Requested file does not exist during installation (it could be a working file/ partition in flash or FW file/partition to be updated. It could be a flash error)	Set by +UFWINSTALL	Primary UART, 115200 b/s
145	Attempt to do file operation when file system access is not available	Set by +UFWINSTALL	Primary UART, 115200 b/s
148	Delta file is corrupted	Set by +UFWINSTALL	Primary UART, 115200 b/s
158	Delta file not recognized. It happens trying to update from a non-delta file format	Set by +UFWINSTALL	Primary UART, 115200 b/s
160	Flash writing failure	Set by +UFWINSTALL	Primary UART, 115200 b/s
168	Source firmware in flash mismatch with the one expected by the delta file	Set by +UFWINSTALL	Primary UART, 115200 b/s
173	Calculated digital signature does not match package header value - probably wrong signature or some byte corrupted	Set by +UFWINSTALL	Primary UART, 115200 b/s
174	Delta file version is not supported	Set by +UFWINSTALL	Primary UART, 115200 b/s
178	RAM memory corruption (null pointer assignment)	Set by +UFWINSTALL	Primary UART, 115200 b/s
180	Size of the delta file in flash mismatch with the real delta file size	Set by +UFWINSTALL	Primary UART, 115200 b/s
195	Data corruption found in a component/ partition/file updated in flash. Probably cause by power loss cause or flash problem	Set by +UFWINSTALL	Primary UART, 115200 b/s

Error result code	Description	+UFWINSTALL: URC UART port and baud rate	+UFWUPD: URC UART port and baud rate
224	Generic error in finalizing the end of the install procedure. Last check before exiting install	Set by +UFWINSTALL	Primary UART, 115200 b/s
227	FOTA public key is not found or invalid	Set by +UFWINSTALL	Primary UART, 115200 b/s
230	File operation (write/read/delete) in flash fail	Set by +UFWINSTALL	Primary UART, 115200 b/s
247	Pre-validation of the delta file failed	Set by +UFWINSTALL	Primary UART, 115200 b/s

A.4 FOAT error result codes

See +UFWUPD command description.

A.4.1 LARA-L6 / LARA-R6 error result codes

Error result code	Description
ERROR1	The operation has been interrupted and the actual FW is unchanged; the module drops out from Firmware Update Mode
ERROR2	The operation has been interrupted during FW updating; the actual firmware is corrupted and the module remains in Firmware Update Mode
ERROR3	The signature check fails
ERROR4	The module has received unexpected EOT because not all excepted bytes have been received
ERROR5	The boot does not support the selected baudrate
ERROR6	Invalid AT command sent during boot
FLS header decoding failed	An error occurs during decoding of file header
Buffer Data Overrun	The buffers are not filled at least with a 1029 packet: data comes too slowly
Timeout	The command must be re-sent: no data is coming

A.4.2 LARA-L6 / LARA-R6 extended error result codes

For the allowed final result codes that can be issued at the finalization of the install procedure by means of the +UFWUPD AT command, see Final result codes from end of update procedure.

A.5 Dynamic DNS unsolicited indication codes

The following table lists the available values of <error_code> parameter of the last Dynamic DNS update provided through +UUDYNDNS URC (for more details, see the +UDYNDNS AT command description).

Error result code	Description
0	Success
1	Data connection lost while performing update
2	Cannot update dynamic DNS because a private IP address has been assigned to the module
3	Connection to dynamic DNS server failed
4	Error occurred sending data to dynamic DNS server
5	Error occurred reading response from dynamic DNS server
6	Timeout while waiting response from dynamic DNS server
7	Dynamic DNS server closed connection unexpectedly
8	Unexpected response from dynamic DNS server
9	Dynamic DNS response seems to be incomplete
10	Update has been delayed in order to respect DNS update protocol timing specification

Error result code	Description
40	Dynamic DNS protocol specific: good (TZO code 200)
41	Dynamic DNS protocol specific: nochg (TZO code 304)
42	Dynamic DNS protocol specific: notfqdn
43	Dynamic DNS protocol specific: nohost
44	Dynamic DNS protocol specific: numhost
45	Dynamic DNS protocol specific: badauth (TZO code 401)
46	Dynamic DNS protocol specific: badagent (TZO code 405)
47	Dynamic DNS protocol specific: !donator
48	Dynamic DNS protocol specific: abuse
49	Dynamic DNS protocol specific: dnserr
50	Dynamic DNS protocol specific: 911
51	Dynamic DNS protocol specific: badsys
52	Dynamic DNS protocol specific: !yours
53	Dynamic DNS protocol specific: TZO code 403
54	Dynamic DNS protocol specific: TZO code 407
55	Dynamic DNS protocol specific: TZO code 414
56	Dynamic DNS protocol specific: TZO code 415
57	Dynamic DNS protocol specific: TZO code 480
100-108	Internal errors

☞ The meaning of dynamic DNS protocol specific codes depends on the provider used; see the provider documentation.

☞ Errors 45, 46, 53, 54 and 56 trigger a client self deactivation when the provider is TZO.com.

☞ Errors 42, 43, 44, 46, 48, 51 and 52 trigger a client self deactivation when the selected provider is DynDNS.org or DynDNS.it or No-IP.org or DynamicDNS.org.

A.6 Internal TCP/UDP/IP stack class error codes

A.6.1 LARA-L6 / LARA-R6 series

The following table lists all allowed error classes that can be provided by the internal TCP/UDP/IP stack through +USOER and +USOCTL (with <param_id>=1) AT commands.

Error result code	Description	Resulting from the following commands
0	No error	+USOCR, +USOSO, +USOGO, +USOCO, +USOWR, +USOST, +USORD, +USORF, +USOLI
1	EPERM - Operation not permitted (internal error)	+USOCR, +USOSO, +USOGO, +USOCO, +USOWR, +USOST, +USORD, +USORF, +USOLI
2	ENOENT - No such resource (internal error)	+USOCR, +USOSO, +USOGO, +USOCO, +USOWR, +USOST, +USORD, +USORF, +USOLI
4	EINTR - Interrupted system call (internal error)	+USOCR, +USOSO, +USOGO, +USOCO, +USOWR, +USOST, +USORD, +USORF, +USOLI
5	EIO - I/O error (internal error)	+USOCR, +USOSO, +USOGO, +USOCO, +USOWR, +USOST, +USORD, +USORF, +USOLI

Error result code	Description	Resulting from the following commands
9	EBADF - Bad file descriptor (internal error)	+USOCR, +USOSO, +USOGO, +USOCO, +USOWR, +USOST, +USORD, +USORF, +USOLI
10	ECHILD - No child processes (internal error)	+USOCR, +USOSO, +USOGO, +USOCO, +USOWR, +USOST, +USORD, +USORF, +USOLI
11	EWOULDBLOCK / EAGAIN - Current operation would block, try again	+USOCO, +USOWR
12	ENOMEM - Out of memory (internal error)	+USOCR, +USOSO, +USOGO, +USOCO, +USOWR, +USOST, +USORD, +USORF, +USOLI
14	EFAULT - Bad address (internal error)	+USOCR, +USOSO, +USOGO, +USOCO, +USOWR, +USOST, +USORD, +USORF, +USOLI
22	EINVAL - Invalid argument	+USOCR, +USOSO, +USOGO, +USOCO, +USOWR, +USOST, +USORD, +USORF, +USOLI
32	EPIPE - Broken pipe (internal error)	+USOCR, +USOSO, +USOGO, +USOCO, +USOWR, +USOST, +USORD, +USORF, +USOLI
38	ENOSYS - Function not implemented	+USOSO, +USOGO
64	ENONET - Machine is not on the internet	+USOCR, +USOWR, +USOST, +USORD, +USORF, +USOLI
65	EEOF - End of file	+USOWR, +USOST, +USORD, +USORF
71	EPROTO - Protocol error	+USOWR, +USOST, +USORD, +USORF
77	EBADFD - File descriptor in bad state (internal error)	+USOCR, +USOSO, +USOGO, +USOCO, +USOWR, +USOST, +USORD, +USORF, +USOLI
78	EREMCHG - Remote address changed	+USOWR, +USOST, +USORD, +USORF, +USOCL
89	EDESTADDRREQ - Destination address required	+USOCO, +USOST
91	EPROTOTYPE - Wrong protocol type for socket	+USOCR
92	ENOPROTOOPT - Protocol not available	+USOCR
93	EPROTONOSUPPORT - Protocol not supported	+USOCR
94	ESOCKTNNOSUPPORT - Socket type not supported	+USOCR
95	EOPNOTSUPP - Operation not supported on transport endpoint	+USOWR, +USOST, +USORD, +USORF, +USOCL
96	EPFNOSUPPORT - Protocol family not supported	+USOCR
97	EAFNOSUPPORT - Address family not supported by protocol	+USOCR
98	EADDRINUSE - Address already in use	+USOCR, +USOLI
99	EADDRNOTAVAIL - Cannot assign requested address	+USOCR, +USOLI, +USOCO
100	ENETDOWN - Network is down	+USOCR, +USOLI, +USOCO, +USOWR, +USOST, +USORD, +USORF, +USOCL
101	ENETUNREACH - Network is unreachable	+USOCO, +USOST, +USORF
102	ENETRESET - Network dropped connection because of reset	+USOCR, +USOLI, +USOCO, +USOWR, +USOST, +USORD, +USORF, +USOCL
103	ECONNABORTED - Software caused connection abort	+USOCR, +USOSO, +USOGO, +USOCO, +USOWR, +USOST, +USORD, +USORF, +USOLI
104	ECONNRESET - Connection reset by peer	+USOCR, +USOSO, +USOGO, +USOCO, +USOWR, +USOST, +USORD, +USORF, +USOLI

Error code	result	Description	Resulting from the following commands
105		ENOBUFS - No buffer space available	+USOCR, +USOSO, +USOGO, +USOCO, +USOWR, +USOST, +USORD, +USORF, +USOLI
106		EISCONN - Transport endpoint is already connected	+USOCO
107		ENOTCONN - Transport endpoint is not connected	+USOCR, +USOSO, +USOGO, +USOCO, +USOWR, +USOST, +USORD, +USORF, +USOLI
108		ESHUTDOWN - Cannot send after transport endpoint shutdown	+USOCR, +USOSO, +USOGO, +USOCO, +USOWR, +USOST, +USORD, +USORF, +USOLI
110		ETIMEDOUT - Connection timed out	+USOCO, +USOST, +USORD, +USORF
111		ECONNREFUSED - Connection refused	+USOCO
112		EHOSTDOWN - Host is down	+USOCL, +USOCO, +USOWR, +USOST, +USORD, +USORF
113		EHOSTUNREACH - No route to host	+USOCO, +USOWR, +USOST, +USORD, +USORF
115		EINPROGRESS - Operation now in progress	+USOCR, +USOSO, +USOGO, +USOCO, +USOWR, +USOST, +USORD, +USORF, +USOLI
160		ENSRNODATA - DNS server returned answer with no data	+UDNSRN
161		ENSRFORMERR - DNS server claims query was misformatted	+UDNSRN
162		ENSRSERVFAIL - DNS server returned general failure	+UDNSRN
163		ENSRNOTFOUND - Domain name not found	+UDNSRN
164		ENSRNOTIMP - DNS server does not implement requested operation	+UDNSRN
165		ENSRREFUSED - DNS server refused query	+UDNSRN
166		ENSRBADQUERY - Misformatted DNS query	+UDNSRN
167		ENSRBADNAME - Misformatted domain name	+UDNSRN
168		ENSRBADFAMILY - Unsupported address family	+UDNSRN
169		ENSRBADRESP - Misformatted DNS reply	+UDNSRN
170		ENSRCONNREFUSED - Could not contact DNS servers	+UDNSRN
171		ENSRTIMEOUT - Timeout while contacting DNS servers	+UDNSRN
172		ENSROF - End of file	+UDNSRN
173		ENSRFILE - Error reading file	+UDNSRN
174		ENSRNOMEM - Out of memory	+UDNSRN
175		ENSRDESTRUCTION - Application terminated lookup	+UDNSRN
176		ENSRQUERYDOMAINTOOLONG - Domain name is too long	+UDNSRN
177		ENSRCNAMELOOP - Domain name is too long	+UDNSRN

A.7 Internet suite error classes

The following table lists all allowed error classes that can be provided by the <error_class> parameter for these AT error commands:

- LARA-L6 / LARA-R6 - +UFTPER, +UHTTPER, +UMQTTER, +UMQTTSNER, +UCOAPER that provide the error of the last FTP, HTTP, MQTT, MQTT-SN, COAP operation.

<error_class>	Description	<error_codes>	Resulting from the following commands
0	OK, no error occurred		All
1	FTP protocol error class	See the Appendix A.7.1	+UFTPC, +UFTP
3	HTTP protocol error class	See the Appendix A.7.2	+UHTTP, +UHTTPC

<error_class>	Description	<error_codes>	Resulting from the following commands
4	Flash file system error class	See the Appendix A.7.3	+UFTPC, +UFTPER, +UHTTPC
5	DNS error class		+UFTPC, +UHTTPC, +USMTPC
6	Socket error class	BSD error codes standard	All
7	Dynamic memory error	0	All
8	Wrong FTP API usage (e.g. missing/null parameters)	See the Appendix A.7.1	+UFTPC, +UFTP
10	Wrong HTTP API usage (e.g. missing/null parameters)	See the Appendix A.7.2	+UHTTP, +UHTTPC
11	Syntax error in high layer protocol (wrong/missing/ corrupted data)		+UFTPC, +UHTTPC, +USMTPC
12	Unspecified error	0	All
13	MQTT error class	See the Appendix A.7.4	+UMQTT, +UMQTTC, +UMQTTWTOPIC, +UMQTTWMSG
14	MQTT-SN error class	See the Appendix A.7.5	+UMQTTSN, +UMQTTSNC

A.7.1 FTP class error codes

The following table lists the available values of <error_code> parameter of the last FTP operation provided through +UFTPER AT command if <error_class>=1 or 8 (for more details, see the +UFTP, +UFTPC AT commands description).

Error result code	Description
0	No error
1	User missing
2	Password missing
3	Account missing
4	Server missing
5	Directory name missing
6	Filename missing
7	Null parameter
8	Unknown FTP command
9	Unknown file action
10	Wrong FTP state
11	Wrong parameter
12	PSD or CSD connection not established
13	No memory available for allocation
14	Reserved internal code
15	Length of given web server (address or hostname) too long or too short
16	Hostname of given web server invalid
17	Address of given web server is invalid
18	Username too long or too short
19	Password too long or too short
20	Account too long or too short
21	Operation not allowed because FTP client is busy
22	Not possible to connect to FTP server
23	Error occurred in FTP request
24	Reserved internal code
25	FFS filename pointer is null or its length is 0
26-30	Reserved internal code
31	Timeout elapsed while performing requested operation

Error result code	Description
32	Internal processing error
33	Not logged in
34	Login incorrect
35	File unavailable (not found or no access)
36	File not ready
37	Filename not allowed
38	Folder not found
39	Folder no access
40	Operation aborted by user
41	Permission denied
42	Cannot open FTP data channel
43	Socket invalid parameter
44	Invalid socket
45	No socket available
46	Cannot create socket
47	Cannot bind socket to network interface
48	Cannot resolve hostname
49	Cannot connect socket
50	Cannot get socket name
51	Cannot bind socket to port
52	Socket cannot listen
53	Socket cannot accept
54	Socket would block
55	Socket cannot write
56	Socket cannot read
57	Reserved internal code
58	No socket data to send
59	Socket cannot get available data
60	No socket data to read
61	Socket no response code found
62	Socket not connected
63	Cannot set secure socket
64	Socket cannot decode password
65	Socket cannot get size
66	FFS Invalid parameter
67	FFS invalid handle
68	FFS cannot open file
69	FFS cannot seek file
70	FFS cannot get file size
71	FFS cannot read
72	FFS bad offset
73	FFS cannot write
74	Direct link internal error
75	Failed to open extended passive mode
76	Failed to parse extended passive mode server reply
77	Internal error
78	Client IP protocol not supported - try passive mode
79	Data transfer error. The transferred (received/sent) data is not complete

Error result code	Description
226	Closing data connection; requested file action successful (for example, file transfer or file abort)
250	Requested file action okay, completed
350	Requested file action pending further information
421	Service not available, closing control connection. User limit reached Not authorized to make the connection Maximum connections reached Maximum connections exceeded
425	Cannot open data connection
426	Connection closed; transfer aborted. The command opens a data connection to perform an action, but that action is cancelled, and the data connection is closed
450	Requested file action not taken. File unavailable (e.g. file busy)
451	Requested action aborted: local error in processing
452	Requested action not taken. Insufficient storage space in system
500	Syntax error, command unrecognized, command line too long
501	Syntax error in parameters or arguments
502	Command not implemented
503	Bad sequence of commands
504	Command not implemented for that parameter
530	User not logged in
532	Need account for storing files
550	Requested action not taken. File unavailable, not found, not accessible
552	Requested file action aborted. Exceeded storage allocation
553	Requested action not taken. Filename not allowed
554	Requested action not taken. Invalid REST parameter
555	Requested action not taken. Type mismatch
556	Requested number of byte offset exceeds the remote file size

☞ For all the errors not listed in the table see the RFC 959 [179], RFC 2428 [181] and RFC 1123 [180].

A.7.2 HTTP class error codes

The following table lists the available values of <error_code> parameter of the last HTTP operation provided through +UHTTPER AT command if <error_class>=3 or 10 (for more details, see the +UHTTP and +UHTTPC AT commands description).

Error result code	Description
0	No error
1	Invalid profile ID
2	Invalid input
3	Server hostname too long
4	Invalid server hostname
5	Invalid server IP address
6	Invalid authorization method
7	Server missing
8	Username length exceeded
9	Password length exceeded
10	Internal error

Error result code	Description
11	Server connection error
12	Error occurred in HTTP request
13	Internal error
14	Internal error
15	Invalid POST data size
16	Empty FFS filename
17	Invalid FFS file length
18	Invalid content-type specified
19	Internal error
20	Internal error
21	Internal error
22	PSD or CSD connection not established
23	Server or proxy hostname lookup failed
24	User authentication failed on server
25	User authentication failed on proxy
26	Connection timed out
27	Request prepare timeout expired
28	Response receive timeout expired
29	Request send timeout expired
30	HTTP operation in progress
31	Invalid HTTP parameter TCP port not in range (1-65535)
32	Invalid HTTP parameter secure
33	Invalid HTTP parameter authentication username
34	Invalid HTTP parameter authentication password
35	Invalid HTTP parameter output filename
36	Invalid HTTP parameter output filename length
37	Invalid HTTP parameter server path
38	Invalid HTTP parameter server path length
39	Invalid HTTP parameter content filename length
40	Invalid custom content type string
41	Output file open error
42	Output file close error
43	Output file write error
44	Connection lost
45	Operation not allowed in current state
46 - 72	Internal error
73	Secure socket connect error

A.7.3 File system class error codes

LARA-L6 / LARA-R6
The following table lists the available values of <error_code> parameter of the last FTP or HTTP operation provided through +UFTPER and +UHTTPER AT commands.

Error result code	Description
2	Operation performed with success
3	Initialization in progress
4	File already opened
5	File not opened
6	File not found

Error result code	Description
7	File already created
8	Illegal id
9	Illegal file handle
10	Illegal type
11	Illegal mode
12	File range error
13	The operation is not possible
14	Write error
15	User id error
16	Internal fatal error
17	Memory resource error
18	Maximum number of files exceeded
19	Memory not available
20	Invalid filename
21	Streaming not enabled
22	Operation not allowed on static file
23	Memory table inconsistency
24	Not a factory default file
25	Requested memory temporary not available
26	Operation not allowed for a directory
27	Space in the directory space not available
28	Too many streaming files opened
29	Requested dynamic memory temporary not available
30	The user provided a NULL parameter instead of a suitable buffer

A.7.4 MQTT error codes

A.7.4.1 LARA-L6 / LARA-R6 MQTT class error codes

The following table lists the available values of <error_code> parameter of the last MQTT operation provided through the +UMQTTER AT command.

Error result code	Description
0	Operation performed with success
1	Memory failure
2	Invalid parameter
3	Invalid parameter range
4-7	Internal error
8	Cannot set secure socket
9	Invalid client identifier
10	Client identifier length out of range
11	Syntax error in client identifier
12	Invalid broker
13	Broker length out of range
14	Broker port out of range
15	Invalid username or password
16	Username length out of range
17	Password length out of range
18	Keep alive time out of range
19	Security mode out of range
20	Wrong Security Manager Profile
21	Security Manager Profile out of range
22	Invalid topic

Error result code	Description
23	Topic length out of range
24	Missing message or filename
25	Cannot get file size
26	File size out of range
27	Cannot open file
28	Cannot read file
29	QOS out of range
30	Retain out of range
31	Wrong will message length
32	Wrong publish message length
33	Timeout error
34	No Network service
35	Broker not connected
36	Broker connection refused
37	Broker connection refused, wrong protocol version
38	Broker connection refused, identifier rejected
39	Broker connection refused, server unavailable
40	Broker connection refused, bad user name or password
41	Broker connection refused, not authorized
42	MQTT client out of buffer
43	MQTT client malformed remaining length
44	MQTT client packet type mismatch
45	MQTT client packet Id mismatch
46	MQTT client invalid internal state
47	MQTT client TLS connect error
48	MQTT client STDIN Wake error
49	Incoming message cannot be saved, the buffer is full
50	PSD or CSD connection not established
51	Error in callback
52	Malformed packet
53	MQTT session active, profile configuration not allowed
54	Incoming publish packet too long
55	Keep alive time is 0, ping loop not activated
56	Communication closed by server
57	Cannot enter in binary mode
58	all available sockets are in use, cannot open a new one

A.7.5 LARA-L6 / LARA-R6 MQTT-SN class error codes

The following table lists the available values of <error_code> parameter of the last MQTT-SN operation provided through the +UMQTTSNER AT command.

A.7.5.1 LARA-L6 / LARA-R6 MQTT-SN class error codes

Error result code	Description
0	Operation performed with success
1	Memory failure
2	Invalid parameter
3	Invalid parameter range
4-7	Internal error
8	Cannot set secure socket
9	Invalid client identifier
10	Client identifier length out of range
11	Syntax error in client identifier
12	Invalid gateway
13	Gateway address length out of range

Error result code	Description
14	Gateway port out of range
15	Invalid topic
16	Topic length out of range
17	QOS out of range
18	Retain out of range
19	Will message out of range
20	Publish message out of range
21	Timeout error
22	No Network service
23	Gateway not connected
24	Not specified error returned by gateway
25	Congestion
26	Ivalid topic ID
27	Not supported
28	MQTT-SN client: out of buffer
29	MQTT-SN client: malformed remaining length
30	MQTT-SN client: packet type mismatch
31	MQTT-SN client: packet ID mismatch
32	MQTT-SN client: invalid internal state
33	MQTT-SN client: STDIN Wake
34	Incoming message cannot be saved, the buffer is full
35	PSD or CSD connection not established
36	Incoming publish packet too long
37	Keep alive time is 0, ping loop not activated
38	Security mode out of range
39	Wrong security manager profile
40	Security manager profile out of range
41	Missing message or filename
42	Cannot get file size
43	File size out of range
44	Cannot open file
45	Cannot read file
46	Error receiving a publish message
47	Communication closed by server
48	Cannot enter in binary mode

A.7.6 CoAP error codes

The following table lists the available values of <error_code> parameter of the last CoAP operation provided through +UCOAPER (for more details see, the +UCOAP and +UCOAPC AT commands description).

Error result code	Description
0	No error
1	Internal error
2	Invalid input
3	Invalid 2nd parameter
4	Invalid 3rd parameter
5	Parameter count incomplete
6	Parameter count exceeded
7	Op code invalid
8	Server URI missing
9	Server URI invalid
10	Server URI length exceeded
11	Option mask invalid
12	Option mask value invalid
13	Profile no invalid

Error result code	Description
14	Valid flag incorrect
15	Profile not found
16	CoAP operation invalid
17	Current profile invalid
18	CoAP URI host option missing
19	CoAP URI query missing
20	Payload missing
21	Payload invalid
22	Payload length exceeded
23	Content format invalid
24	Block count invalid
25	More block invalid
26	Payload length incomplete with more block
27	Module not registered
28	NW timeout
29	RAI flag invalid
30	RAI-1 is not allowed with CON message type
31	RAI-2 is not allowed with NON message type
32	CoAP URI path length exceeded
33	CoAP URI query length exceeded
34	CoAP URI host length exceeded

A.8 IP change notification error result codes

The following table lists the available values of <error_code> parameter of the last IP Change Notification provided through +UUIPCHGN URC (for more details, see the +UIPCHGN AT command description).

Error result code	Description
0	The IP CN feature was enabled from a previous working session and is active
10	Internal PSD data connection is not active
11	Invalid IP address assigned to module (e.g. empty string)
12	IMEI could not be retrieved
13	IMSI could not be retrieved
14	Error preparing HTTP GET request for IP CN
15	Error creating socket for HTTP connection
16	Error connecting to remote HTTP server
17	Error sending HTTP GET request to HTTP server
18	Error receiving or parsing HTTP GET response from HTTP server

A.9 Ping error result codes

The following table lists the available values of <error_code> parameter of the last ping operation provided through +UUPINGER URC (for more details, see the +UPING AT command description).

Error result code	Description
0	Success (no error)
1 - 6	Internal error (ping level)
7	Empty remote host
8	Cannot resolve host
9	Unsupported IP version (RFU)
10	Invalid IPv4 address
11	Invalid IPv6 address (RFU)
12	Remote host too long

Error result code	Description
13	Invalid payload size
14	Invalid TTL value
15	Invalid timeout value
16	Invalid retries number
17	PSD or CSD connection not established
100 - 105	Internal error (ICMP level)
106	Error creating socket for ICMP
107	Error settings socket options for ICMP
108	Cannot end ICMP packet
109	Read for ICMP packet failed
110	Received unexpected ICMP packet
111-115	Internal error (socket level)

B Appendix: AT Commands List

	AT command	Audio interface and tuning																
		+CLVL	+CMUT	+CRSL	+UAUDCFG	+UDCONF=30	+UDTMFCFG	+UEXTDCONF	+UI2S	+UMCLK	+UMSM	+UPAR	+USAR	+USPEECHCFG	+USPEECHINFO	+USPM	+UTGN	+UTI	
LARA	L6004-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6004D-00B																		
	L6004-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6004D-01B																		
	L6404-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6404D-01B																		
	L6804D-01B																		
	L6824-01B																		
	L6824D-01B																		
	R6001-00B	•	•			•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6001D-00B																		
	R6401-00B	•	•			•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6401D-00B																		
	R6801-00B	•	•			•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6001-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6001D-01B																		
	R6401-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6401D-01B																		
	R6801-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6801D-01B																		

AT command		Call control													
		+CHUP	+CSTA	+CSVM	+CVHU	+CVMOD	+UCALLSTAT	+VTS	A	D	L	P	S0	T	
LARA	L6004-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6004D-00B						•		•	•					
	L6004-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6004D-01B						•		•	•					
	L6404-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6404D-01B						•		•	•					
	L6804D-01B						•		•	•					
	L6824-01B						•		•	•					
	L6824D-01B						•		•	•					
	R6001-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6001D-00B						•		•	•					
	R6401-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6401D-00B						•		•	•					
	R6801-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6001-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6001D-01B						•		•	•					
	R6401-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6401D-01B						•		•	•					
	R6801-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6801D-01B						•		•	•					

AT command		Circuit switched data services	
		+CRC	
LARA	L6004-00B	•	
	L6004D-00B	•	
	L6004-01B	•	
	L6004D-01B	•	
	L6404-01B	•	
	L6404D-01B	•	
	L6804D-01B	•	
	L6824-01B	•	
	L6824D-01B	•	
	R6001-00B	•	
	R6001D-00B	•	
	R6401-00B	•	
	R6401D-00B	•	
	R6801-00B	•	
	R6001-01B	•	
	R6001D-01B	•	
	R6401-01B	•	
	R6401D-01B	•	
	R6801-01B	•	
	R6801D-01B	•	

AT command		File System					
		+UDELFILE	+UDWNFILE	+ULSTFILE	+URDBLOCK	+URDFILE	
LARA	L6004-00B	•	•	•	•	•	
	L6004D-00B	•	•	•	•	•	
	L6004-01B	•	•	•	•	•	
	L6004D-01B	•	•	•	•	•	
	L6404-01B	•	•	•	•	•	
	L6404D-01B	•	•	•	•	•	
	L6804D-01B	•	•	•	•	•	
	L6824-01B	•	•	•	•	•	
	L6824D-01B	•	•	•	•	•	
	R6001-00B	•	•	•	•	•	
	R6001D-00B	•	•	•	•	•	
	R6401-00B	•	•	•	•	•	
	R6401D-00B	•	•	•	•	•	
	R6801-00B	•	•	•	•	•	
	R6001-01B	•	•	•	•	•	
	R6001D-01B	•	•	•	•	•	
	R6401-01B	•	•	•	•	•	
	R6401D-01B	•	•	•	•	•	
	R6801-01B	•	•	•	•	•	
	R6801D-01B	•	•	•	•	•	

	AT command	General commands													
		+CCID	+CGMI	+CGMM	+CGMR	+CGSN	+CIMI	+CSCS	+GCAP	+GMI	+GMM	+GMR	+GSN	I	
LARA	L6004-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6004D-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6004-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6004D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6404-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6404D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6804D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6824-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6824D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6001-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6001D-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6401-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6401D-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6801-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6001-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6001D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6401-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6401D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6801-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6801D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	

AT command		GPIO interface			
		+UGPIOC	+UGPIOR	+UGPIOW	
LARA	L6004-00B	•	•	•	
	L6004D-00B	•	•	•	
	L6004-01B	•	•	•	
	L6004D-01B	•	•	•	
	L6404-01B	•	•	•	
	L6404D-01B	•	•	•	
	L6804D-01B	•	•	•	
	L6824-01B	•	•	•	
	L6824D-01B	•	•	•	
	R6001-00B	•	•	•	
	R6001D-00B	•	•	•	
	R6401-00B	•	•	•	
	R6401D-00B	•	•	•	
	R6801-00B	•	•	•	
	R6001-01B	•	•	•	
	R6001D-01B	•	•	•	
	R6401-01B	•	•	•	
	R6401D-01B	•	•	•	
	R6801-01B	•	•	•	
	R6801D-01B	•	•	•	

AT command		I2C interface						
		+UI2CC	+UI2CCFG	+UI2CO	+UI2CR	+UI2CREGR	+UI2CW	
LARA	L6004-00B	•	•	•	•	•	•	
	L6004D-00B	•	•	•	•	•	•	
	L6004-01B	•	•	•	•	•	•	
	L6004D-01B	•	•	•	•	•	•	
	L6404-01B	•	•	•	•	•	•	
	L6404D-01B	•	•	•	•	•	•	
	L6804D-01B	•	•	•	•	•	•	
	L6824-01B	•	•	•	•	•	•	
	L6824D-01B	•	•	•	•	•	•	
	R6001-00B	•	•	•	•	•	•	
	R6001D-00B	•		•	•	•	•	
	R6401-00B	•	•	•	•	•	•	
	R6401D-00B	•		•	•	•	•	
	R6801-00B	•	•	•	•	•	•	
	R6001-01B	•	•	•	•	•	•	
	R6001D-01B	•		•	•	•	•	
	R6401-01B	•	•	•	•	•	•	
	R6401D-01B	•		•	•	•	•	
	R6801-01B	•	•	•	•	•	•	
	R6801D-01B	•		•	•	•	•	

AT command		Internet suite											
		+UDNSCFG	+UDNSRN	+UDYNDNS	+UFTP	+UFTPC	+UFTPER	+UHTTP	+UHTTPAC	+UHTTPC	+UHTTPER	+UPING	
LARA	L6004-00B												
	L6004D-00B												
	L6004-01B	•	•		•	•	•	•	•	•	•	•	
	L6004D-01B	•	•		•	•	•	•	•	•	•	•	
	L6404-01B	•	•		•	•	•	•	•	•	•	•	
	L6404D-01B	•	•		•	•	•	•	•	•	•	•	
	L6804D-01B	•	•		•	•	•	•	•	•	•	•	
	L6824-01B	•	•		•	•	•	•	•	•	•	•	
	L6824D-01B	•	•		•	•	•	•	•	•	•	•	
	R6001-00B	•	•	•	•	•	•	•	•	•	•	•	
	R6001D-00B	•	•	•	•	•	•	•	•	•	•	•	
	R6401-00B	•	•	•	•	•	•	•	•	•	•	•	
	R6401D-00B	•	•	•	•	•	•	•	•	•	•	•	
	R6801-00B	•	•	•	•	•	•	•	•	•	•	•	
	R6001-01B	•	•		•	•	•	•	•	•	•	•	
	R6001D-01B	•	•		•	•	•	•	•	•	•	•	
	R6401-01B	•	•		•	•	•	•	•	•	•	•	
	R6401D-01B	•	•		•	•	•	•	•	•	•	•	
	R6801-01B	•	•		•	•	•	•	•	•	•	•	
	R6801D-01B	•	•		•	•	•	•	•	•	•	•	

AT command		Device and data security															
		+USECCHIP	+USECCONN	+USECDATADEC	+USECDATAENC	+USECDEVINFO	+USECE2EDATAENC	+USECE2EFILEENC	+USECFILEDEC	+USECFILEENC	+USECMNG	+USECMODE	+USECOPCMD	+USECPRF	+USECPSK	+USECROTUID	
LARA	L6004-00B	•	•			•						•	•			•	
	L6004D-00B	•	•			•						•	•			•	
	L6004-01B	•									•			•			
	L6004D-01B	•									•			•			
	L6404-01B	•									•			•			
	L6404D-01B	•									•			•			
	L6804D-01B	•									•			•			
	L6824-01B	•									•			•			
	L6824D-01B	•									•			•			
	R6001-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6001D-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6401-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6401D-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6801-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6001-01B	•									•			•			
	R6001D-01B	•									•			•			
	R6401-01B	•									•			•			
	R6401D-01B	•									•			•			
	R6801-01B	•									•			•			
	R6801D-01B	•									•			•			

AT command		IP Multimedia Subsystem (IMS)					
		+CIREG	+UIMSCFG	+UIMSREG	+UISMS	+UISS	
LARA	L6004-00B	•	•	•	•		
	L6004D-00B	•	•	•	•		
	L6004-01B	•	•	•	•	•	
	L6004D-01B	•	•	•	•	•	
	L6404-01B	•	•	•	•	•	
	L6404D-01B	•	•	•	•	•	
	L6804D-01B	•	•	•	•	•	
	L6824-01B	•	•	•	•	•	
	L6824D-01B	•	•	•	•	•	
	R6001-00B	•	•	•	•		
	R6001D-00B	•	•	•	•		
	R6401-00B	•	•	•	•		
	R6401D-00B	•	•	•	•		
	R6801-00B	•	•	•	•		
	R6001-01B	•	•	•	•	•	
	R6001D-01B	•	•	•	•	•	
	R6401-01B	•	•	•	•	•	
	R6401D-01B	•	•	•	•	•	
	R6801-01B	•	•	•	•	•	
	R6801D-01B	•	•	•	•	•	

AT command		Localization features																					
		+UGAOS	+UGGGA	+UGGLL	+UGGSA	+UGGSV	+UGIND	+UGLAASPRF	+UGLAASZTP	+UGNMEA	+UGPRF	+UGPS	+UGRMC	+UGSRV	+UGTMR	+UGUBX	+UGVTG	+UGZDA	+ULOC	+ULOCAID	+ULOCCELL	+ULOCGNSS	+ULOCIND	
LARA	L6004-00B	•	•	•	•	•	•				•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6004D-00B	•	•	•	•	•	•				•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6004-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6004D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6404-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6404D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6804D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6824-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6824D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6001-00B	•	•	•	•	•	•				•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6001D-00B	•	•	•	•	•	•				•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6401-00B	•	•	•	•	•	•				•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6401D-00B	•	•	•	•	•	•				•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6801-00B	•	•	•	•	•	•				•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6001-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6001D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6401-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6401D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6801-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6801D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	

AT command		Mobile equipment control and status														
		+CALM	+CCLK	+CEER	+CFUN	+CIND	+CLCC	+CMEE	+CMER	+CPAS	+CPWROFF	+CSGT	+CTZR	+CTZU	+UCIND	
LARA	L6004-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6004D-00B		•	•	•	•		•	•	•	•	•	•	•	•	
	L6004-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6004D-01B		•	•	•	•		•	•	•	•	•	•	•	•	
	L6404-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6404D-01B		•	•	•	•		•	•	•	•	•	•	•	•	
	L6804D-01B		•	•	•	•		•	•	•	•	•	•	•	•	
	L6824-01B		•	•	•	•		•	•	•	•	•	•	•	•	
	L6824D-01B		•	•	•	•		•	•	•	•	•	•	•	•	
	R6001-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6001D-00B		•	•	•	•		•	•	•	•	•	•	•	•	
	R6401-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6401D-00B		•	•	•	•		•	•	•	•	•	•	•	•	
	R6801-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6001-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6001D-01B		•	•	•	•		•	•	•	•	•	•	•	•	
	R6401-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6401D-01B		•	•	•	•		•	•	•	•	•	•	•	•	
	R6801-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6801D-01B		•	•	•	•		•	•	•	•	•	•	•	•	

	AT command	Network service																					
		+CEDRXRDP	+CEDRXS	+CESQ	+CNMPSD	+CNUM	+COPN	+COPS	+CPLS	+CPOL	+CREG	+CSCON	+CSQ	+PACSP	+UBANDMASK	+UCFSCAN	+UCGED	+UDCONF=20	+UDCONF=56	+UDCONF=81	+UDCONF=92	+UDCONF=98	+UHPPLMN	+UJAD
LARA	L6004-00B		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6004D-00B		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6004-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6004D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6404-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6404D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6804D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6824-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6824D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6001-00B		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•
	R6001D-00B		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•		•
	R6401-00B		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•
	R6401D-00B		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•
	R6801-00B		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•
	R6001-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6001D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6401-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6401D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6801-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6801D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

AT command		Network service									
		+UMNOPROF	+URAT	+URPM	+USCANSTAT	+USVCDOMAIN	+VZWAPNE	+VZWRSRP	+VZWRSRQ	+WS46	
LARA	L6004-00B	•	•	•		•				•	
	L6004D-00B	•	•	•		•				•	
	L6004-01B	•	•	•	•	•				•	
	L6004D-01B	•	•	•	•	•	•	•	•	•	
	L6404-01B	•	•	•	•	•	•	•	•	•	
	L6404D-01B	•	•	•	•	•	•	•	•	•	
	L6804D-01B	•	•	•	•	•				•	
	L6824-01B	•	•	•	•	•				•	
	L6824D-01B	•	•	•	•	•				•	
	R6001-00B	•	•	•		•				•	
	R6001D-00B	•	•	•		•				•	
	R6401-00B	•	•	•		•	•	•	•	•	
	R6401D-00B	•	•	•		•	•	•	•	•	
	R6801-00B	•	•	•		•				•	
	R6001-01B	•	•	•	•	•				•	
	R6001D-01B	•	•	•	•	•				•	
	R6401-01B	•	•	•	•	•	•	•	•	•	
	R6401D-01B	•	•	•	•	•	•	•	•	•	
	R6801-01B	•	•	•	•	•				•	
	R6801D-01B	•	•	•	•	•	•	•	•	•	

AT command		Networking			
		+UEMBPF	+UIFCONF	+UIPADDR	
LARA	L6004-00B	•	•	•	
	L6004D-00B	•	•	•	
	L6004-01B	•	•	•	
	L6004D-01B	•	•	•	
	L6404-01B	•	•	•	
	L6404D-01B	•	•	•	
	L6804D-01B	•	•	•	
	L6824-01B	•	•	•	
	L6824D-01B	•	•	•	
	R6001-00B	•		•	
	R6001D-00B	•		•	
	R6401-00B	•		•	
	R6401D-00B	•		•	
	R6801-00B	•		•	
	R6001-01B	•	•	•	
	R6001D-01B	•	•	•	
	R6401-01B	•	•	•	
	R6401D-01B	•	•	•	
	R6801-01B	•	•	•	
	R6801D-01B	•	•	•	

	AT command	Packet switched data services																					
		+CEREG	+CGACT	+CGATT	+CGCMOD	+CGCONTRDP	+CGDATA	+CGDCONT	+CGDSCONT	+CGEQMIN	+CGEQOS	+CGEQREQ	+CGEREP	+CGPADDR	+CGPIAF	+CGQMIN	+CGQREQ	+CGREG	+CGTFT	+UAUTHREQ	+UDCONF=19	+UDCONF=66	+UDCONF=75	+UDCONF=76
LARA	L6004-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•
	L6004D-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•
	L6004-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6004D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6404-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6404D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6804D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6824-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6824D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6001-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•
	R6001D-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•
	R6401-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•
	R6401D-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•
	R6801-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•
	R6001-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6001D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•
	R6401-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6401D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6801-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6801D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

AT command		Packet switched data services					
		+UDCONF=9	+UGCNTRD	+UGCNTSET	D*	H	
LARA	L6004-00B		•	•	•	•	
	L6004D-00B		•	•	•	•	
	L6004-01B	•	•	•	•	•	
	L6004D-01B	•	•	•	•	•	
	L6404-01B	•	•	•	•	•	
	L6404D-01B	•	•	•	•	•	
	L6804D-01B	•	•	•	•	•	
	L6824-01B	•	•	•	•	•	
	L6824D-01B	•	•	•	•	•	
	R6001-00B		•	•	•	•	
	R6001D-00B		•	•	•	•	
	R6401-00B		•	•	•	•	
	R6401D-00B		•	•	•	•	
	R6801-00B		•	•	•	•	
	R6001-01B	•	•	•	•	•	
	R6001D-01B	•	•	•	•	•	
	R6401-01B	•	•	•	•	•	
	R6401D-01B	•	•	•	•	•	
	R6801-01B	•	•	•	•	•	
	R6801D-01B	•	•	•	•	•	

AT command		Phonebook				
		+CPBF	+CPBR	+CPBS	+CPBW	
LARA	L6004-00B	•	•	•	•	
	L6004D-00B	•	•	•	•	
	L6004-01B	•	•	•	•	
	L6004D-01B	•	•	•	•	
	L6404-01B	•	•	•	•	
	L6404D-01B	•	•	•	•	
	L6804D-01B	•	•	•	•	
	L6824-01B	•	•	•	•	
	L6824D-01B	•	•	•	•	
	R6001-00B	•	•	•	•	
	R6001D-00B	•	•	•	•	
	R6401-00B	•	•	•	•	
	R6401D-00B	•	•	•	•	
	R6801-00B	•	•	•	•	
	R6001-01B	•	•	•	•	
	R6001D-01B	•	•	•	•	
	R6401-01B	•	•	•	•	
	R6401D-01B	•	•	•	•	
	R6801-01B	•	•	•	•	
	R6801D-01B	•	•	•	•	

AT command		Device lock			
		+CLCK	+CPIN	+CPWD	
LARA	L6004-00B	•	•	•	
	L6004D-00B	•	•	•	
	L6004-01B	•	•	•	
	L6004D-01B	•	•	•	
	L6404-01B	•	•	•	
	L6404D-01B	•	•	•	
	L6804D-01B	•	•	•	
	L6824-01B	•	•	•	
	L6824D-01B	•	•	•	
	R6001-00B	•	•	•	
	R6001D-00B	•	•	•	
	R6401-00B	•	•	•	
	R6401D-00B	•	•	•	
	R6801-00B	•	•	•	
	R6001-01B	•	•	•	
	R6001D-01B	•	•	•	
	R6401-01B	•	•	•	
	R6401D-01B	•	•	•	
	R6801-01B	•	•	•	
	R6801D-01B	•	•	•	

	AT command	Serial interface																					
		&C	&D	&K	&S	+CMUX	+ICF	+IPR	E	O	Q	S10	S2	S3	S4	S5	S6	S7	S8	V	X	Z	\Q	
LARA	L6004-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6004D-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6004-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6004D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6404-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6404D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6804D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6824-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6824D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6001-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6001D-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6401-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6401D-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6801-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6001-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6001D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6401-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6401D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6801-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6801D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	

	AT command	Short Messages Service																					
		+CGSMS	+CMGC	+CMGD	+CMGF	+CMGL	+CMGR	+CMGS	+CMGW	+CMMS	+CMSS	+CNMA	+CNMI	+CPMS	+CRES	+CSAS	+CSCA	+CSCB	+CSDH	+CSMP	+CSMS	+UCMGL	+UCMGP	+UCMGR
LARA	L6004-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6004D-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6004-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6004D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6404-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6404D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6804D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6824-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6824D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6001-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6001D-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6401-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6401D-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6801-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6001-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6001D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6401-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6401D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6801-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6801D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

AT command		Short Messages Service		
		+UCMGS	+UCMGW	
LARA	L6004-00B	•	•	
	L6004D-00B	•	•	
	L6004-01B	•	•	
	L6004D-01B	•	•	
	L6404-01B	•	•	
	L6404D-01B	•	•	
	L6804D-01B	•	•	
	L6824-01B	•	•	
	L6824D-01B	•	•	
	R6001-00B	•	•	
	R6001D-00B	•	•	
	R6401-00B	•	•	
	R6401D-00B	•	•	
	R6801-00B	•	•	
	R6001-01B	•	•	
	R6001D-01B	•	•	
	R6401-01B	•	•	
	R6401D-01B	•	•	
	R6801-01B	•	•	
	R6801D-01B	•	•	

AT command		SIM functionalities											
		+CLAN	+CRSM	+CSIM	+CUAD	+CUSATR	+CUSATW	+UBIP	+UCUSATA	+UDCONF=50	+USIMSTAT	+UUICC	
LARA	L6004-00B	•	•	•	•	•	•	•	•	•	•	•	
	L6004D-00B	•	•	•	•	•	•	•	•	•	•	•	
	L6004-01B	•	•	•	•	•	•	•	•	•	•	•	
	L6004D-01B	•	•	•	•	•	•	•	•	•	•	•	
	L6404-01B	•	•	•	•	•	•	•	•	•	•	•	
	L6404D-01B	•	•	•	•	•	•	•	•	•	•	•	
	L6804D-01B	•	•	•	•	•	•	•	•	•	•	•	
	L6824-01B	•	•	•	•	•	•	•	•	•	•	•	
	L6824D-01B	•	•	•	•	•	•	•	•	•	•	•	
	R6001-00B	•	•	•	•	•	•	•	•	•	•	•	
	R6001D-00B	•	•	•	•	•	•	•	•	•	•	•	
	R6401-00B	•	•	•	•	•	•	•	•	•	•	•	
	R6401D-00B	•	•	•	•	•	•	•	•	•	•	•	
	R6801-00B	•	•	•	•	•	•	•	•	•	•	•	
	R6001-01B	•	•	•	•	•	•	•	•	•	•	•	
	R6001D-01B	•	•	•	•	•	•	•	•	•	•	•	
	R6401-01B	•	•	•	•	•	•	•	•	•	•	•	
	R6401D-01B	•	•	•	•	•	•	•	•	•	•	•	
	R6801-01B	•	•	•	•	•	•	•	•	•	•	•	
	R6801D-01B	•	•	•	•	•	•	•	•	•	•	•	

AT command		Supplementary services													
		+CACM	+CAMM	+CAOC	+CCFC	+CCUG	+CCWA	+CHLD	+CLIP	+CLIR	+COLP	+CPUC	+CSSN	+CTFR	+CUSD
LARA	L6004-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6004D-00B														
	L6004-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6004D-01B														
	L6404-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6404D-01B														
	L6804D-01B														
	L6824-01B														
	L6824D-01B														
	R6001-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6001D-00B														
	R6401-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6401D-00B														
	R6801-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6001-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6001D-01B														
	R6401-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6401D-01B														
	R6801-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6801D-01B														

AT command		System features																					
		+UANT	+UANTR	+UBKUPDATA	+UDCONF=40	+UFACTORY	+UFOTA	+UFOTAACK	+UFOTACONFIG	+UFOTASTAT	+UFWINSTALL	+UFWUPD	+ULGASP	+UNVMCFG	+UNVMF	+UNVMR	+UNVMW	+URING	+URXDIV	+USIO	+USTS	+UTEMP	+UTEST=0	+UTEST=10
LARA	L6004-00B	•	•	•	•	•	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6004D-00B	•	•	•	•	•	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6004-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6004D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6404-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6404D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6804D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6824-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6824D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6001-00B	•	•	•	•	•	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6001D-00B	•	•	•	•	•	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6401-00B	•	•	•		•	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6401D-00B	•	•	•		•	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6801-00B	•	•	•	•	•	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6001-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6001D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6401-01B	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6401D-01B	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6801-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6801D-01B	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

AT command		System features						
		+UTEST=2	+UTEST=4	+UUARTCONF	+UURCCONF	+UUSBCONF	+UUSBDET	
LARA	L6004-00B	•		•	•	•	•	
	L6004D-00B	•		•	•	•	•	
	L6004-01B	•	•	•	•	•	•	
	L6004D-01B	•	•	•	•	•	•	
	L6404-01B	•	•	•	•	•	•	
	L6404D-01B	•	•	•	•	•	•	
	L6804D-01B	•	•	•	•	•	•	
	L6824-01B	•	•	•	•	•	•	
	L6824D-01B	•	•	•	•	•	•	
	R6001-00B	•		•	•		•	
	R6001D-00B	•		•	•			
	R6401-00B	•		•	•		•	
	R6401D-00B	•		•	•		•	
	R6801-00B	•		•	•		•	
	R6001-01B	•	•	•	•	•	•	
	R6001D-01B	•	•	•	•	•		
	R6401-01B	•	•	•	•	•	•	
	R6401D-01B	•	•	•	•	•	•	
	R6801-01B	•	•	•	•	•	•	
	R6801D-01B	•	•	•	•	•	•	

AT command		Power management					
		+CPSMS	+UCPSMS	+UPSMR	+UPSMVER	+UPSV	
LARA	L6004-00B					•	
	L6004D-00B					•	
	L6004-01B	•	•	•	•	•	
	L6004D-01B	•	•	•	•	•	
	L6404-01B	•	•	•	•	•	
	L6404D-01B	•	•	•	•	•	
	L6804D-01B	•	•	•	•	•	
	L6824-01B	•	•	•	•	•	
	L6824D-01B	•	•	•	•	•	
	R6001-00B					•	
	R6001D-00B					•	
	R6401-00B					•	
	R6401D-00B					•	
	R6801-00B					•	
	R6001-01B	•	•	•	•	•	
	R6001D-01B	•	•	•	•	•	
	R6401-01B	•	•	•	•	•	
	R6401D-01B	•	•	•	•	•	
	R6801-01B	•	•	•	•	•	
	R6801D-01B	•	•	•	•	•	

AT command		Internet protocol transport layer																					
		+UDCONF=1	+UDCONF=10	+UDCONF=17	+UDCONF=5	+UDCONF=6	+UDCONF=7	+UDCONF=8	+UIPCHGN	+USOCFG	+USOCL	+USOCO	+USOCR	+USOCTL	+USODL	+USOER	+USOGO	+USOLI	+USORD	+USORF	+USOSEC	+USOSO	+USOST	+USOWR
LARA	L6004-00B																							
	L6004D-00B																							
	L6004-01B	•	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6004D-01B	•	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6404-01B	•	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6404D-01B	•	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6804D-01B	•	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6824-01B	•	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	L6824D-01B	•	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6001-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6001D-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6401-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6401D-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6801-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6001-01B	•	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6001D-01B	•	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6401-01B	•	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6401D-01B	•	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6801-01B	•	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	R6801D-01B	•	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

	AT command	MQTT								
		+UMQTT	+UMQTTC	+UMQTTER	+UMQTTNV	+UMQTTSN	+UMQTTSNC	+UMQTTSNER	+UMQTTSNNV	
LARA	L6004-00B									
	L6004D-00B									
	L6004-01B	•	•	•	•	•	•	•	•	
	L6004D-01B	•	•	•	•	•	•	•	•	
	L6404-01B	•	•	•	•	•	•	•	•	
	L6404D-01B	•	•	•	•	•	•	•	•	
	L6804D-01B	•	•	•	•	•	•	•	•	
	L6824-01B	•	•	•	•	•	•	•	•	
	L6824D-01B	•	•	•	•	•	•	•	•	
	R6001-00B	•	•	•	•	•	•	•	•	
	R6001D-00B	•	•	•	•	•	•	•	•	
	R6401-00B	•	•	•	•	•	•	•	•	
	R6401D-00B	•	•	•	•	•	•	•	•	
	R6801-00B	•	•	•	•	•	•	•	•	
	R6001-01B	•	•	•	•	•	•	•	•	
	R6001D-01B	•	•	•	•	•	•	•	•	
	R6401-01B	•	•	•	•	•	•	•	•	
	R6401D-01B	•	•	•	•	•	•	•	•	
	R6801-01B	•	•	•	•	•	•	•	•	
	R6801D-01B	•	•	•	•	•	•	•	•	

	AT command	CoAP			
		+UCOAP	+UCOAPC	+UCOAPER	
LARA	L6004-00B				
	L6004D-00B				
	L6004-01B	•	•	•	
	L6004D-01B	•	•	•	
	L6404-01B	•	•	•	
	L6404D-01B	•	•	•	
	L6804D-01B	•	•	•	
	L6824-01B	•	•	•	
	L6824D-01B	•	•	•	
	R6001-00B	•	•	•	
	R6001D-00B	•	•	•	
	R6401-00B	•	•	•	
	R6401D-00B	•	•	•	
	R6801-00B	•	•	•	
	R6001-01B	•	•	•	
	R6001D-01B	•	•	•	
	R6401-01B	•	•	•	
	R6401D-01B	•	•	•	
	R6801-01B	•	•	•	
	R6801D-01B	•	•	•	

	AT command	Lightweight M2M													
		+ODIS	+ULWM2M	+ULWM2MCONFIG	+ULWM2MCONFIGEXT	+ULWM2MCREATE	+ULWM2MDELETE	+ULWM2MDEREG	+ULWM2MLIST	+ULWM2MNOTIFY	+ULWM2MREAD	+ULWM2MREG	+ULWM2MSTAT	+ULWM2MWRITE	
LARA	L6004-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6004D-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6004-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6004D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6404-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6404D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6804D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6824-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	L6824D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6001-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6001D-00B	•	•	•	•	•	•	•	•		•	•	•	•	
	R6401-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6401D-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6801-00B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6001-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6001D-01B	•	•	•	•	•	•	•	•		•	•	•	•	
	R6401-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6401D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6801-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	
	R6801D-01B	•	•	•	•	•	•	•	•	•	•	•	•	•	

B.1 Parameters stored in profiles

The parameter settings of some commands can be stored in the profiles available in the memory module.

☞ Some AT commands have a unique configuration for all the AT interfaces while for other AT commands it is possible to set a different configuration for each AT interface: the "AT interface configuration sharing" column in the next table provides this information.
Some AT command interfaces have a dynamic activation, which means they are not statically activated at boot time (MUX AT channel is activated when the MUX protocol is established, USB AT channel is activated if/when the USB cable is plugged-in, deactivated when it is removed). Since the activation reloads the AT command profile from NVM for the activated interface, the shared "AT interface configurations" could be overwritten. It is suggested to reconfigure them at the requested value if an AT command interface is dynamically activated.

The following table lists the AT commands which setting can be stored in the profiles with their parameters as well as the factory-programmed values.

AT command	Description	AT interface configuration sharing	Factory-programmed value / Remarks
&C	DCD status	No	1 (DCD enabled) • LARA-L6 / LARA-R6 - The command setting is stored in the NVM
&D	DTR status	No	1 (DTR enabled) • LARA-L6 / LARA-R6 - The command setting is stored in the NVM
&K	Flow control status	No	• LARA-L6 / LARA-R6 - The command setting is stored in the NVM
&S	DSR override	No	1 (DSR line set to ON in data mode and to OFF in command mode) • LARA-L6 / LARA-R6 - The command setting is stored in the NVM
+CEDRXS	eDRX setting	No	
+CEREG	EPS Network registration status reporting	Yes	• LARA-L6 / LARA-R6 - The command setting is not stored in the personal profile
+CGEREP	EPS Network registration status reporting	No	• LARA-L6 / LARA-R6 - The command setting is not stored in the personal profile
+CGREG	GPRS network registration status reporting	Yes	• LARA-L6 / LARA-R6 - The command settings is not stored in the personal profile
+CMEE	Mobile termination error reporting	Yes	• LARA-L6 / LARA-R6 - The command settings is not stored in the personal profile
+CMGF	Preferred message format	Yes	• LARA-L6 / LARA-R6 - 0 (format of messages in PDU mode) • LARA-L6 / LARA-R6 - The command setting is not persistent
+CNMI	New message indication	Yes	• 1 (discard indication and reject new received message URCs when MT-DTE link is reserved) • 0 (no SMS-DELIVER indications are routed to the TE) • 0 (no CBM indications to the DTE) • 0 (no SMS-STATUS-REPORTs are routed to the DTE) • 0 (MT buffer of URCs defined within this command is flushed to the DTE when >mode< 1...3 is entered) • LARA-L6 / LARA-R6 - The command settings is not stored in the personal profile
+COPS	Operator selection	Yes	• LARA-L6 / LARA-R6 - The command setting is stored in the NVM
+CPMS	Preferred message storage	No	• LARA-L6 / LARA-R6 - The command setting is stored in the NVM

AT command	Description	AT interface configuration sharing	Factory-programmed value / Remarks
+CRC	Cellular result code status	No	0 (extended format disabled) • LARA-L6 / LARA-R6 - the command setting is not stored in the personal profile
+CREG	Network registration status reporting	Yes	• LARA-L6 / LARA-R6 - The command settings is not stored in the personal profile
+CSCA	Service center address	No	• LARA-L6 / LARA-R6 - The command setting is not stored in the personal profile
+CSCB	Cell broadcast message types	No	• LARA-L6 / LARA-R6 - The command setting is not stored in the personal profile
+CSMP	Select message service	No	• LARA-L6 / LARA-R6 - The command setting is not stored in the personal profile
+CSCS	Select character set configuration	No	• LARA-L6 / LARA-R6 - The command setting is not stored in the personal profile
+CSMS	Select message service	No	• LARA-L6 / LARA-R6 - The command setting is not stored in the personal profile
+CSDH	Show text mode parameters	No	
+CTZR	Time zone reporting	Yes	• LARA-L6 / LARA-R6 - The command setting is not stored in the personal profile
+ICF	DTE-DCE character framing	No	• LARA-L6 / LARA-R6 - The command setting is not stored in the personal profile
+IPR	Baud rate	No	• LARA-L6 / LARA-R6 - The command settings is stored in the NVM
+UPSV	Power saving control	Yes	• LARA-L6 / LARA-R6 - The command setting is stored in the NVM
+USIO	Serial interfaces configuration	Yes	• LARA-L6 / LARA-R6 - The command setting is stored in the NVM
+USTS	Smart temperature supervisor	Yes	• LARA-L6 / LARA-R6 - 0 (smart temperature feature disabled)
+UTI	Audio parameters tuning	Yes	See product-specific Extended Audio Tuning Application Note for the factory-programmed values stored in the profiles.
E	Echo status	No	1 (echo enabled) • LARA-L6 / LARA-R6 - The command setting is stored in the NVM
Q	Result code suppression	No	0 (DCE transmits result codes) • LARA-L6 / LARA-R6 - The command setting is not stored in the personal profile
S0	Automatic answer	No	• LARA-L6 / LARA-R6 - The command setting is stored in the NVM
S2	Escape character selection	No	43 (043 corresponds the '+' character)
S3	Command line termination character	No	13 (0x0d corresponds to the carriage return character) • LARA-L6 / LARA-R6 - The command setting is not stored in the personal profile
S4	Response formatting character	No	10 (0x0a corresponds to the line feed character) • LARA-L6 / LARA-R6 - The command setting is not stored in the personal profile
S5	Command line editing character	No	8 (008 corresponds to the backspace character) • LARA-L6 / LARA-R6 - The command setting is not stored in the personal profile
S7	Connection completion timeout	No	60 • LARA-L6 / LARA-R6 - The command setting is not stored in the personal profile
V	DCE response format	No	1 (Verbose response text) • LARA-L6 / LARA-R6 - The command setting is stored in the NVM

AT command	Description	AT interface configuration sharing	Factory-programmed value / Remarks
X	Result code selection and call progress monitoring control	No	• LARA-L6 / LARA-R6 - The command setting is stored in the NVM

B.2 Parameters stored in non volatile memory

The following table lists the AT commands which setting can be stored in the non volatile memory with their parameters and the factory-programmed values.

AT command	Description	Factory-programmed value / Comment
E	Echo status	• LARA-L6 / LARA-R6 - 1 (echo enabled)
&C	DCD status	• LARA-L6 / LARA-R6 - 1 (DCD enabled)
&D	DTR status	• LARA-L6 / LARA-R6 - 2 (DTR enabled)
&K	Flow control status	• LARA-L6 / LARA-R6 - 3 (RTS/CTS DTE flow control enabled)
&S	DSR override	• LARA-L6 / LARA-R6 - 1 (DSR line set to ON in data mode and to OFF in command mode)
+CALM	Alert sound mode	• LARA-L6 / LARA-R6 - 0 (mute disabled)
+CCLK	Clock	• LARA-L6 / LARA-R6 - "80/01/06,00:00:00+00"
+CEDRXS	eDRX setting	• LARA-L6 / LARA-R6001 / LARA-R6401 / LARA-R6401D / LARA-R6801 - 0 (use of eDRX disabled) • LARA-R6001D-00B - 1 (use of eDRX enabled), 4 (LTE), "0001" (requested eDRX cycle to be allocated to the UE of 1 s)
+CGDCONT	PDP context definition	• LARA-R6 - all contexts are undefined • LARA-L6 / LARA-R6 - See Mobile Network Operator profiles
+CGEQMIN	3G Quality of service profile (minimum acceptable)	• LARA-L6 / LARA-R6 - all contexts are undefined
+CGEQOS	Define EPS quality of service	• LARA-L6 / LARA-R6 - all contexts are undefined
+CGEQREQ	3G Quality of service profile (requested)	• LARA-L6 / LARA-R6 - all contexts are undefined • LARA-L6 - The command setting is not stored in NVM
+CGQMIN	Quality of service profile (minimum acceptable)	• LARA-L6 / LARA-R6 - all contexts are undefined
+CGQREQ	Quality of service profile (requested)	• LARA-L6 / LARA-R6 - all contexts are undefined
+CGSMS	Select service for MO SMS messages	• 1 (CS service selected)
+CLIR	Calling line identification restriction	• 0 (presentation indicator used according to the subscription of the CLIR service)
+CLVL	Loudspeaker volume level	• LARA-R6001-00B / LARA-R6401-00B / LARA-R6801-00B - 3 (loudspeaker volume level) • LARA-L6 - 4 (loudspeaker volume level)
+COPS	Operator selection	• LARA-L6 / LARA-R6 - 0 (autoregistration enabled), 0 (operator expressed in long alphanumeric format), FFFFF (undefined PLMN to register when +COPS: 1)
+CPMS	Preferred message storage	• LARA-L6 / LARA-R6 - <mem1>, <mem2> and <mem3> are set to "ME"
+CPSMS	Power Saving Mode setting	• LARA-L6 / LARA-R6 - 0 (PSM disabled)
+CRSL	Ringer sound level	• LARA-L6 - 5 (ringer sound level)
+CSCA	Service center address setting	• LARA-L6 / LARA-R6 - The command setting is not stored in NVM
+CSCON	Connection status signalling	• LARA-L6 / LARA-R6 - 0 (URC disabled)
+CSCS	Select character set configuration	• LARA-L6 / LARA-R6 - The command setting is not stored in the NVM
+CSGT	Set greeting text	• LARA-L6 / LARA-R6 - Greeting text is empty
+CSMP	Select message service	• LARA-L6 / LARA-R6 - The command setting is not stored in the NVM

AT command	Description	Factory-programmed value / Comment
+CSMS	Message service configuration	• LARA-L6 / LARA-R6 - The command setting is not stored in NVM
+CNMI	New message indication	
+CTZR	Time zone reporting	• LARA-L6 / LARA-R6 - The command setting is not stored in NVM
+CTZU	Automatic time zone update	• LARA-L6 / LARA-R6 - 1 (automatic time zone via NITZ enabled)
+IPR	Baud rate	• LARA-L6 / LARA-R6 - 115200 (115200 b/s)
+ODIS	LwM2M Host device information	HMAN0 (Host manufacturer name), HMOD0 (Host model identification), HSW0 (Host software version), HUID0 (Host identification)
+UAUTHREQ	Configure the authentication parameters of a PDP/EPS bearer	• LARA-L6 / LARA-R6 - 0 (no authentication), "" (no username), "" (no password)
+UAUDCFG	Audio configuration	"tones_volume", 4096 (free tone volume), 4096 (waiting tone volume), 4096 (SMS tone volume), 4096 (busy tone volume), 4096 (RTP DTMF local tone volume)
+UBANDMASK	Band selection bitmask	LTE bands bitmask (decimal value): • LARA-L6 / LARA-R6 - see Mobile Network Operator profiles NB-IoT bands bitmask (decimal value): • LARA-L6 / LARA-R6 - not supported
+UBIP	Bearer Independent Protocol status indication	0 (BIP status indication disabled)
+UCOAP	CoAP profile configuration	Empty profile
+UCUSATA	Enable USAT terminal URCs	0 (+CUSATEND, +CUSATP and +UUSIMSTAT URC disabled)
+UDCONF=9	Uplink user data plane configuration	• LARA-L6 / LARA-R6 - The AT command setting is volatile
+UDCONF=17	Internal IP stack TCP window scaling factor configuration	0 (exponent of the TCP window scale factor)
+UDCONF=19	Default CID and preferred protocol type configuration	1 (<cid>), 0 (IPv4)
+UDCONF=20	Steering of Roaming configuration	• LARA-R6401 / LARA-R6401D - 0 (SoR is disabled) • LARA-L6 / LARA-R6001 / LARA-R6001D / LARA-R6801 - see Mobile Network Operator profiles
+UDCONF=30	Speech codec configuration	• LARA-L6 / LARA-R6001 / LARA-R6401 / LARA-R6801 - 2089
+UDCONF=40	User defined power reduction	• LARA-L6 / LARA-R6 - 2 (MSPR GPRS and EDGE profile), 2 (MSPR GMSK and EDGE profile)
+UDCONF=50	SIM hot insertion detection	0 (disabled)
+UDCONF=56	Purging of temporary mobile identities after SIM refresh	• LARA-L6 / LARA-R6 - 0 (purging of temporary mobile identities disabled)
+UDCONF=66	IPv6 configuration	• LARA-L6 / LARA-R6 - 4, 1, 0 (CLAT disabled on all <cid>s).
+UDCONF=75	PDP IP configuration when roaming	• LARA-L6 / LARA-R6 - No context is defined
+UDCONF=76	Disable data when roaming	• LARA-L6 / LARA-R6 - No context is defined
+UDCONF=81	Integrity check on test networks configuration	• LARA-L6 / LARA-R6 - 1 (integrity check on test networks enabled)
+UDCONF=92	Modem features customization	• LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B o 3 (NAS release compliance): 4 (3GPP compliance release 10 behavior) o 50 (SIM boot delay configuration): 0 s • LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D o 3 (NAS release compliance): 4 (3GPP compliance release 10 behavior)

AT command	Description	Factory-programmed value / Comment
		o 11 (LTE Sub-Band US9i support): 0 (disabled) o 50 (SIM boot delay configuration): 0 s
+UDCONF=98	EEA0 encryption algorithm configuration	1 (EEA0 enabled)
+UDCONF=121	Disable the deep cells scan for database feeding in AssistNow Online operation	0 (deep cells scan enabled)
+UDYNDNS	Dynamic DNS	0 (Client disabled), 0 (TZO.com as dynamic DNS service provider), "" (Domain name empty), "" (Username empty), "" (Password empty)
+UEXTDCONF	Automatic configuration of the Maxim MAX9860 audio codec	• LARA-L6 - 0 (disabled),"0000000010A000303000183300500000008A"(MAX9860 registers configuration) • LARA-R6 - 0 (disabled),"0000000010A000303000063300500000008A"(MAX9860 registers configuration)
+UFACTORY	Restore factory configuration	0 (no FS factory restore), 0 (no NVM factory restore)
+UFOTASTAT	FOTA reporting	• LARA-L6 / LARA-R6 - 0 (FOTA downloading state URC disabled)
+UGGGA	Get GPS fix data	0 (NMEA $GGA messages disabled)
+UGGLL	Get geographic position	0 (NMEA $GLL messages disabled)
+UGGSA	Get satellite information	0 (NMEA $GSA messages disabled)
+UGGSV	Get number of GNSS satellites in view	0 (NMEA $GSV messages disabled)
+UGIND	Assisted GNSS unsolicited indication	• LARA-L6 / LARA-R6 - The command setting is not stored in the NVM
+UGNMEA	GNSS NMEA messages configuration	0 (rate), 0 (output) for all NMEA messages: all NMEA messages are disabled
+UGPIOC	GPIO functionality setting	• LARA-L6004D / LARA-L6404D / LARA-L6824 / LARA-L6824D / LARA-R6001D / LARA-R6401D - GPIO1: 255, GPIO2: 3, GPIO3: 4, GPIO4: 0, I2S_WA: 255, I2S_TXD: 255, I2S_CLK: 255, I2S_RXD: 255, GPIO5: 7 • LARA-L6004 / LARA-L6404 / LARA-R6001 / LARA-R6401 / LARA-R6801 - GPIO1: 255, GPIO2: 3, GPIO3: 4, GPIO4: 0, I2S_WA: 12, I2S_TXD: 12, I2S_CLK: 12, I2S_RXD: 12, GPIO5: 7
+UGPRF	GNSS profile configuration	0 (No data flow on multiplexer, file and IP address), 0 (IP port not defined), "" (Server address string not defined)
+UGRMC	Get recommended minimum GNSS data	0 (NMEA $RMC messages disabled)
+UGSRV	Aiding server configuration	"cell-live1.services.u-blox.com" (primary MGA server), "cell-live2.services.u-blox.com" (secondary MGA server), 14 (Number of days for validation of Offline data), 4 (Number of weeks for validation of Offline data), 1 (Resolution of offline data for MGA), 65 (Desired GNSS for the (offline) aiding: GPS and GLONASS), 0 (AssistNow Online data are downloaded at GNSS receiver power up), 15 (all the desired data types for the (online) aiding are set), 1 (PDP context identifier)
+UGVTG	Get course over ground and ground speed	0 (NMEA $VTG messages disabled)
+UGZDA	Get GPS time and date	0 (NMEA $ZDA messages disabled)
+UI2S	I^2S digital interface mode	• LARA-L6 / LARA-R6 - 14 (normal mode 14), 1 (I2S is connected to I2Sx connection point), 0 (CLK and WA active in dynamic mode), 3 (sample rate: 16 kHz), 0 (master mode)
+UIFCONF	Interface configuration	• LARA-L6 o eth0: 2 (ECM interface type), 0 (interface number), 0 (interface disconnected), 192.168.225.1 (interface IPv4 address), 255.255.255.0 (interface IPv4 network mask), 1 (interface IPv4 DHCP server status enabled), 192.168.225.20 (first IPv4 address of the interface DHCP server range), 192.168.225.60 (last IPv4 address of the interface DHCP server range), 1 (router mode), 0 (autoconnect disabled), 0 (roaming disabled), 43200

AT command	Description	Factory-programmed value / Comment
		(DHCP lease time), 9999 (apps port start), 19999 (apps port end)
+UIMSCFG	IMS client configuration	• LARA-R6001D o 50: AUTOLOGIN_MODE see Mobile Network Operator profiles o 51: APN_NAME (<data>="ims") o 53: PREFFERED_PDPTYPE (<data>=2) o 200: XCAP_APN (<data>=2) o 201: XCAP_ROOT_URI (<data>= empty string) o 253: SIP_URI_FORMAT (<data>="") o 264: VoPS_registration (<data>=1) • LARA-L6 / LARA-R6001 / LARA-R6401 / LARA-R6401D / LARA-R6801 o 50: AUTOLOGIN_MODE see Mobile Network Operator profiles o 51: APN_NAME (<data>="ims") o 53: PREFFERED_PDPTYPE (<data>=2) o 200: XCAP_APN (<data>=2) o 201: XCAP_ROOT_URI (<data>= empty string) o 253: SIP_URI_FORMAT (<data>="") o 264: VoPS_registration (<data>=1) o 265: Session Expire Timer (<data>=1800) o 266: Min SE Timer (<data>=1800) o 267: RTP Timer (<data>=20) o 268: RTCP Timer (<data>=20)
+UIPCHGN	IP change notification	0 (IP change notification disabled)
+UEMBPF	Port filtering for embedded applications	• LARA-L6 / LARA-R6 - 1 (port filtering enabled), "9999-19999" (port range filtered)"
+UHPPLMN	Periodic search for higher priority PLMN setting	1 (periodic search for higher priority PLMN is enabled according to the configuration in SIM file EF-HPPLMN), (the configuration is defined by the SIM file EF_{HPPLMN}), 0 (URCs disabled)
+UISMS	Domain configuration for MO SMS messages	• LARA-L6 / LARA-R6 - See Mobile Network Operator profiles
+UISS	SS domain configuration	• LARA-L6 / LARA-R6 - See Mobile Network Operator profiles
+UJAD	Smart jamming detection	• LARA-L6 / LARA-R6 - 0 (smart jamming detection disabled)
+ULGASP	Last gasp configuration	• LARA-L6 / LARA-R6 o <GPIO_mode>: 0 (disabled) o <text>: "Last Gasp" o <msg_format>: 0 (text) o <tel_number>: "" (empty) o <cid>: 255 (default socket) o <IP_protocol>: 17 (UDP) o <IP_addr:PORT>: "" (empty) o <method>: 1 (send IP) o <max_pow_red>: 0 (no power reduction) o <urc_enable>: 0 (no URC)
+ULOCCELL	Configure cellular location sensor (CellLocate®)	0 (normal mode enabled)
+ULOCGNSS	Configure GNSS sensor	• 15 (Local aiding, AssistNow online, AssistNow offline, AssistNow autonomous enabled), 0 (power saving disabled), 3 (Minimum number of satellites for navigation), 7 (Minimum satellite signal level for navigation), 0 (Disabled initial Fix must be 3D flag), 0 (Static Hold Mode), 0 (SBAS disabled), 0 (Jamming indicator disabled), 0 (Antenna settings unknown), 0 (Broadband jamming detection threshold: 0 dB), 0 (Continuous wave jamming detection threshold: 0 dB), 1 (GPS), 0, 0

AT command	Description	Factory-programmed value / Comment
+ULOCIND	Localization information request status unsolicited indication	• LARA-L6 / LARA-R6 - The command setting is not stored in the NVM
+ULWM2M	LwM2M client activation/ deactivation	• LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B - 0 (LwM2M client enabled) • LARA-L6 - see Mobile Network Operator profiles
+ULWM2MNOTIFY	LwM2M object notification	• LARA-L6 / LARA-R6 - 0 (+ULWM2MNOTIFY URCs disabled)
+ULWM2MSTAT	LwM2M reporting	• LARA-L6 / LARA-R6 - 0 (LwM2M status +ULWM2MSTAT URC disabled)
+UMCLK	Master clock control	• LARA-L6 / LARA-R6 o 1 (CODEC_CLK mode setting, <mclk_mode>): clock out pin (input for audio codec) is set output steady low. o 0 (setting of dynamic of the application mode, <enabling_mode>): <mclk_mode> setting is applied to CODEC_CLK pin only when audio path is active. After audio path is disabled (i.e. a call is hang up) CODEC_CLK is disabled too
+UMNOPROF	MNO profile configuration	• LARA-L6 / LARA-R6 - 90 (Global)
+UNVMCFG	NVM RAM mode management	• LARA-L6 / LARA-R6 NVM RAM mode management o LARA-L6 / LARA-R6 0 ("audio" class mode) o 0 ("generic" class mode) o 0 ("gnss" class mode)
+UPSV	Power saving control	• LARA-L6 / LARA-R6 - 0 (power saving disabled)
+UPSMR	Deep-sleep mode indication	0 (deep-sleep mode URC disabled)
+UPSMVER	Deep-sleep mode options configuration	• LARA-L6 / LARA-R6 o <psm_ver>: 4 (PSM deep-sleep enabled) o <oos_scans>: 3 (PLMN scans that need to fail for entering deep-sleep in OOS) o <deep_sleep_oos_dur>: 4 (deep-sleep duration in minutes, after the module enters this mode as a consequence of OOS) o <temp_dis>: 0 (deep-sleep temporary prevention disabled)
+URAT	Selection of Radio Access Technology	• LARA-L6 / LARA-R6001 / LARA-R6001D / LARA-R6801 - 3 (LTE RAT), 2 (UMTS RAT), 0 (GSM RAT) • LARA-R6401 / LARA-R6401D - 3 (LTE RAT)
+URING	RING line handling	0 (feature disabled (RING line is only asserted on incoming call and incoming SMS))
+URPM	RPM activation	• LARA-L6 / LARA-R6 - see Mobile Network Operator profiles
+URXDIV	RX diversity	• LARA-L6 / LARA-R6 - 1 (Rx diversity enabled)
+USECMODE	Secure data suite features configuration	1 (secure data suite features enabled)
+USECOPCMD	Security configuration and action command	• <apn_name>: "" • <pdn_ip_type>: 0 (IPv4) • <version>: 1 (E2E encryption V2) • <mode>: 0 (DNS, static IPv4/IPv6 address fallback) • <ip_address>: o IPv4: 63.35.25.213 o IPv6: 2A05::D018::0E8C::9701::484A::E62C::0337::2202 • <port>: 38292
+USIMSTAT	(U)SIM initialization status reporting	0 (URC +UUSIMSTAT disabled)
+USIO	Serial interfaces configuration	• LARA-L6 / LARA-R6 - 0 (AT command on 9-wire UART, USB1 and USB2, diagnostic log on USB0, no AUX UART)
+USOCFG	Socket features configuration	• LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B - TCP S-ACK (<op_name>="tcp_sack"): 0 (disabled).

AT command	Description	Factory-programmed value / Comment
		• LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D - TCP S-ACK (<op_name>="tcp_sack"): 1 (enabled).
+USPEECHCFG	VoLTE speech codec configuration	• LARA-L6 / LARA-R6 - 1 (AMR WB enabled)
+USPM	Audio path mode setting	• LARA-L6 / LARA-R6 - 1 (digital audio path), 0 (headset profile)
+USVCDOMAIN	Configure the device service domain	• LARA-L6 / LARA-R6 - see Mobile Network Operator profiles
+UTEST=4	End user test	Antenna dynamic tuner control: 0 (disabled)
+UUARTCONF	UART baud rate and flow control NVM management	• LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B - 1 (auxiliary UART interface): 115200 (115200 b/s), 3 (RTS/CTS DTE flow control enabled) • LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D o 0 (main UART interface): 115200 (115200 b/s), 3 (RTS/CTS DTE flow control enabled) o 1 (auxiliary UART interface): 115200 (115200 b/s), 3 (RTS/CTS DTE flow control enabled)
+UURCCONF	URC over AT terminal configuration	• LARA-L6 / LARA-R6 - 0 (URC filtering disabled)
+UUSBCONF	USB profiles configuration	• LARA-L6 - 0 (3 CDC-ACM + 1 DIAG)
+UUSBDET	VBUS detection (analog/digital) configuration	• LARA-L6 / LARA-R6 - 0 (analog detection), 1 (digital detection)
+VZWAPNE	Edit Verizon wireless APN table	Verizon wireless APN table (APN list entry, APN class, Network identifier, APN type, APN bearer, APN status, APN inactivity timer) • LARA-L6 / LARA-R6 o 0,0,"VZWEMERGENCY","ipv4v6","LTE","Enabled",0 o 1,1,"IMS","ipv4v6","LTE","Enabled",0 o 2,2,"VZWADMIN","ipv4v6","LTE","Enabled",0 o 3,3,"VZWINTERNET","ipv4v6","LTE","Enabled",0 o 4,4,"VZWAPP","ipv4v6","LTE","Enabled",0 o 6,6,"ENTERPRISE","ipv4v6","LTE","Enabled",0 o 7,7,"THINGSPACE","ipv4v6","LTE","Enabled",0 Class 1, Class 6 and Class 7 Network identifier value in table above may differ from the one here specified. Not all the APN classes may be supported. Refer to +VZWAPNE for details.
S0	Automatic answering	• LARA-L6 / LARA-R6 - 0 (automatic answering disabled)
V	DCE response format	• LARA-L6 / LARA-R6 - 1 (verbose response text)
X	Result code selection and call progress monitoring control	• LARA-L6 / LARA-R6 - 0 (CONNECT result code is given upon entering online data state)

B.3 Saving AT commands configuration

The following procedure can be used to store the AT commands configuration for the AT commands listed in Appendix B.2:

- LARA-L6 / LARA-R6 - Since the permanently saving of NVM content is achieved by a low priority process, the time depends on all the other activities as network procedures, call management, and so on. To be sure to save suddenly the run-time configuration of the commands listed in Appendix B.2, it is advisable to use

+CPWROFF or +CFUN=15 or +CFUN=16. If the +CPWROFF has been issued the module, perform a reboot of the device

B.4 Estimated maximum command response time

After having sent a command to a u-blox cellular module, the time to obtain a result code depends on the SIM and the network. Immediate response is possible, if the command does not interact with either the SIM or the network.

The following table reports the maximum time to get the result code for the AT commands, which are grouped by categories.

Category	Estimated maximum time to get response	Commands
Power off	• LARA-L6 / LARA-R6 - lt; 40 s	+CPWROFF
Set module functionality	• LARA-L6 / LARA-R6 - Up to 3 min	+CFUN
Call control	• LARA-L6 / LARA-R6 - < 20 s	A, H, +CHUP, +CSVM
Dial	• LARA-L6 / LARA-R6 - Up to 3 minutes	D, D*
DTMF and tone generation	Up to 7 minutes	+VTS
Supplementary services	< 20 s	+CHLD, +CHUP, +COLP
Supplementary services	Up to 3 minutes	+CCFC, +CCWA, +CLIP, +CLIR, +CTFR, +CUSD
Data connection commands	• LARA-L6 / LARA-R6 - Up to 3 minutes	+CGATT, +CGDATA
Network commands	• LARA-L6 / LARA-R6 - Up to 3 minutes	+COPS, +UCFSCAN
Network commands	< 10 s	+URAT
Security	• LARA-L6 / LARA-R6 - Up to 3 minutes	+CLCK, +CPWD
Phonebook commands	< 35 s	+CPBF, +CPBR, +CPBS, +CPBW
Delete all SMSes	< 55 s	+CMGD
Send SMS	• LARA-L6 / LARA-R6 - Up to 3 minutes (< 1 s for prompt ">")	+CMGS, +CMGC, +CMSS, +UCMGS
SMS acknowledgement to MT	• LARA-L6 / LARA-R6 - < 150 s	+CNMA
SMS list message	< 10 s	+CMGL, +UCMGL
Preferred message storage	< 10 s	+CPMS
SIM management	< 10 s	+CACM, +CAMM, +CAOC, +CMGW, +UCMGW, +CMGR, +UCMGP, +UCMGR, +CNUM, +CPIN, +CPOL, +CPUC, +CRES, +CRSM, +CSCA, +CSCB, +CSMP
PDP context activation and deactivation	• LARA-L6 / LARA-R6 - < 40 s	+CGACT
PDP context modification	• LARA-L6 / LARA-R6 - Up to 40 s	+CGCMOD
Restore configuration	< 5 s	+UFACTORY
End user test (antenna dynamic tuner control)	Up to 1 s	+UTEST=4
GPIO commands	< 10 s	+UGPIOC, +UGPIOR, +UGPIOW
Internet suite (socket connect)	• LARA-R6 - < 80 s for IP address, < 100 s with an hostname	+USOCO
Internet suite (socket connect with SSL)	• LARA-R6 - < 80 s	+USOSEC
Internet suite (socket write)	• LARA-R6 - < 1 s	+USOWR
Internet suite (UDP socket write)	• LARA-R6 - < 1 s	+USOST

Category	Estimated maximum time to get response	Commands
Internet suite (socket closure)	• LARA-R6 - < 1 s	+USOCL
Internet suite	• LARA-R6 - < 1 s	+USODL, +USOLI, +USORD, +USORF
Resolve name/IP number through DNS	• LARA-R6 - < 20 s	+UDNSRN
Security suite	< 30 s	+USECMODE, +USECOPCMD, +USECDEVINFO, +USECDATAENC, +USECFILEENC, +USECDATADEC, +USECFILEDEC, +USECE2EDATAENC, +USECE2EFILEENC, +USECPSK
Security suite	< 10 s	+USECCONN
GNSS commands	< 10 s (except +UGPS for which timeout is according to the performed operation)	+UGAOS, +UGGGA, +UGGLL, +UGGSA, +UGGSV, +UGPS, +UGRMC, +UGTMR, +UGUBX, +UGVTG, +UGZDA, +ULOC
Last gasp configuration	< 10 s	+ULGASP
MQTT command	• LARA-L6 / LARA-R6 - immediate	+UMQTTC
Firmware update	• LARA-L6 / LARA-R6 - < 20 s	+UFWUPD

B.5 Multiple AT command interfaces

u-blox cellular modules support multiple AT command interfaces, that means a certain number of virtual or physical channels that work as described in Definitions.

Each interface maintains its own run-time AT commands configuration (AT command profile), which can be different among the interfaces.

At the module start-up, since there is only a set of the profiles (not one for each interface), all the interfaces are configured in the same way (AT commands configuration for the commands in the profile is the same for all the interfaces). Subsequently, each interface can change its run-time AT profile (stored in RAM). The commands AT&W, AT&V manage this run-time AT commands configuration for the interface where they are issued.

The USB interface implements multiple AT command interfaces. Unlike the other physical interfaces (e.g. UART, SPI), AT command interfaces over USB only exist when the module is connected to DTE by USB. If the USB connection between the module and the DTE is interrupted (e.g. by USB cable removal), all the AT command interfaces running on it are destroyed. This has two main consequences:

- Any data connection (both circuit switched and packet switched) established over an AT command interface associated to the USB interface is released.
- Whenever the USB connection between the module and the DTE is re-established, the AT command interfaces running on it are created, and for each of these interfaces the AT command profile is reloaded from NVM and applied.

☞ The reload of the AT command profile from the NVM also results in the re-application of the +UPSV setting, which is a shared "AT interface configuration". This must be kept in mind, since the change could have impacts on the communication over the UART interface.

As mentioned in Definitions, generally there is not difference in the execution of an AT command among the interfaces. But, there are some exceptions due to interface restrictions. In particular, the differences relate to AT commands that configure the DCE-DTE interface.

Table 58 provides the major differences.

AT command	UART / AUX UART (where available)	Multiplexer	USB (where available)	SPI (where available)
&K	Effective	When it returns OK (the configuration is allowed), it is effective	When it returns OK (the configuration is allowed), it is not effective (only change the value in the AT command profile)	When it returns OK (the configuration is allowed), it is not effective (only change the value in the AT command profile)

AT command	UART / AUX UART (where available)	Multiplexer	USB (where available)	SPI (where available)
\Q	Effective	When it returns OK (the configuration is allowed), it is effective	When it returns OK (the configuration is allowed), it is not effective (only change the value in the AT command profile)	When it returns OK (the configuration is allowed), it is not effective (only change the value in the AT command profile)
+ICF	Effective	Returns OK, but it is not effective (only change the value in the AT command profile)	Returns OK, but it is not effective (only change the value in the AT command profile)	Returns OK, but it is not effective (only change the value in the AT command profile)
+IPR	Effective	Returns OK, but it is not effective (only change the value in the AT command profile)	Returns OK, but it is not effective (only change the value in the AT command profile)	Returns OK, but it is not effective (only change the value in the AT command profile)
+UPSV	Effective	Returns OK, but it changes UART setting	Returns OK, but it changes UART setting	Returns OK, but it changes UART setting

Table 58: Interface comparison

☞ LARA-L6 / LARA-R6
It is not possible to have parallel AT command processing on two or more AT terminals: for example, when one AT terminal is busy in SMS mode, the AT command interface is blocked on other AT terminals.
This behavior can be detected in the following configurations:

- Double UART availability, i.e. +USIO: 1 (where supported).
- Virtual channels set through the multiplexer (MUX) protocol.
- USB CDC-ACM ports (where supported).

☞ LARA-L6004-01B / LARA-L6004D-01B / LARA-L6404 / LARA-L6404D / LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6001-01B / LARA-R6001D-01B / LARA-R6401-01B / LARA-R6401D-01B / LARA-R6801-01B / LARA-R6801D
Parallel activity on AT terminals is possible when PPP dial-up or direct link is used on one port and AT commands on the other one.

☞ LARA-L6004-00B / LARA-L6004D-00B / LARA-R6001-00B / LARA-R6001D-00B / LARA-R6401-00B / LARA-R6401D-00B / LARA-R6801-00B
Parallel activity on AT terminals is possible when PPP dial-up is used on one port and AT commands on the other one.

C Mobile Network Operator profiles

C.1 LARA-L6 / LARA-R6 Introduction

By means of +UMNOPROF AT command the module is able to manage different MNO profiles that configure the module according to the MNO requirements. Reboot the module by means of the +CFUN AT command to make the MNO profile active. For more details, see +UMNOPROF AT command.

Depending on the module type numbers the MNO profile version can assume different settings. The following tables provide an overview of each MNO profile and the list of AT commands whose setting can be overridden by the MNO profile. Depending on MNO profile the corresponding AT command setting can be locked by the MNO profile (see "Locked" field for more details).

☞ The <MNO>=101 (standard Europe No-ePCO) profile factory-programmed configuration is the same of the <MNO>=100 (standard Europe profile), but the ePCO is disabled.

C.2 LARA-L6004 / LARA-R6001 Americas MNO and conformance profiles table

	AT&T	Verizon	GCF-PTCRB	VZW-Private
MNO profile				
<MNO>	2[7]	3[7]	201	207[7]
+UBANDMASK				
LTE bands [decimal value]	1, 2, 3, 4, 5, 7, 8, 12, 20, 26, 28, 38, 39, 40, 41 [2061752600799, 0]	2, 4, 5, 12, 13 [6170, 0]	1, 2, 3, 4, 5, 7, 8, 12, 13, 18, 19, 20, 26, 28, 38, 39, 40, 41 [2061752998111, 0]	2, 4, 5, 12, 13 [6170, 0]
UMTS/GSM bands [decimal value]	UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [562950035734912]	UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [562950035734912]	UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [562950035734912]	UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [562950035734912]
+URAT				
Allowed values	LTE, UMTS, GSM	LTE, UMTS, GSM	LTE, UMTS, GSM	LTE, UMTS, GSM
Factory-programmed value	LTE, UMTS, GSM	LTE	LTE, UMTS, GSM	LTE
+CGDCONT				
CID (context ID) 1	"IPV4V6","nxtgenphone"	"IPV4V6","ims"	"IPV4V6", ""	"IPV4V6",""
CID (context ID) 2		"IPV4V6","VZWADMIN"		"IPV4V6","VZWADMIN"
CID (context ID) 3		"IPV4V6", "VZWINTERNET"		
CID (context ID) 4		"IPV4V6","VZWAPP"		"IPV4V6","VZWAPP"
CID (context ID) 6		"IPV4V6","VZWCLASS6"		"IPV4V6","VZWCLASS6"
CID (context ID) 7		"IPV4V6","VZWCLASS7"		"IPV4V6","VZWCLASS7"
CID (context ID) 8		"IPV4V6", "VZWEMERGENCY"		"IPV4V6", "VZWEMERGENCY"
CID (context ID) 11	"IPV4V6", "ims"		"IPV4V6", "ims"	
CID (context ID) 12	"IPV4V6", "sos"		"IPV4V6", "sos"	
+UDCONF=20				
SoR	Disabled	Disabled	Disabled	Disabled
LwM2M feature				
Available	No[8]	Yes	No	Yes
LwM2M capabilities	None[9]	VZW[10]	n/a	VZW[10]
uFOTA-LwM2M capabilities	None[11]	VZW FOTA[11]	n/a	VZW FOTA[11]
+ULWM2MREG				
Supported server ID	1,2,3,721	100, 101, 102, 1000, 721	n/a	100, 101, 102, 1000, 721
Locked	No	No	n/a	No
+ULWM2MCONFIGEXT				

[7] Not supported by LARA-L6004-00B, LARA-R6001-00B.

[8] LwM2M client can be enabled via +ULWM2M AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.

[9] u-blox and AT&T servers can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note [13].

[10] u-blox server can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note [13].

[11] uFOTA can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note [13].

	AT&T	Verizon	GCF-PTCRB	VZW-Private
Connection teardown timer	90	60	n/a	60
Production mode	0	0	n/a	0
Production SIM	""	""	n/a	""
APN synchronization	1	0	n/a	0
Locked	No	No	n/a	No
+USVCDOMAIN				
Service Domain	CS/PS	CS/PS	CS/PS	CS/PS
UE usage setting	Data centric	Voice centric	Voice centric	Voice centric
Voice domain preference	PS preferred	PS preferred	PS preferred	PS preferred
+URPM				
Enabled	False	False	False	False
IMS client				
VoLTE	Enabled	Enabled	Enabled	Disabled
SMS over IMS	Enabled	Enabled	Enabled	Disabled
IMS enabled (50)	1	1	1	0
+UISMS				
Mode	1	1	1	1
+UISS				
SS Mode	0	3	3[12]	3
Other preconfigured MNO profile fields				
MTU size	From PCO (1430)	From PCO (1428)	From PCO (1428)	From PCO (1428)

[12] On LARA-L6004-00B, LARA-R6001-00B the command is not supported.

C.3 LARA-L6004 / LARA-R6001 EMEA and global MNO profiles table

	Global
MNO profile	
<MNO>	90 (factory-programmed value)
+UBANDMASK	
LTE bands [decimal value]	1, 2, 3, 4, 5, 7, 8, 12, 13, 18, 19, 20, 26, 28, 38, 39, 40, 41 [2061752998111, 0]
UMTS/GSM bands [decimal value]	UMTS: 1,2,5,8 GSM: DCS1800, EGSM900, 850, PCS1900 0 [562950035734912]
+URAT	
Allowed values	LTE, UMTS, GSM
Factory-programmed value	LTE, UMTS, GSM
+CGDCONT	
CID (context ID) 1	"IPV4V6", ""
CID (context ID) 11	"IPV4V6", "ims"
CID (context ID) 12	"IPV4V6", "sos"
+UDCONF=20	
SoR enable	Enabled
LwM2M feature	
Available	No[13]
LwM2M capabilities	None[14]
uFOTA-LwM2M capabilities	None[15]
+ULWM2MREG	
Supported server ID	721
Locked	No
+ULWM2MCONFIGEXT	
Connection teardown timer	90
Production mode	0
Production SIM	""[16]
APN synchronization	1[16]
Locked	No

[13] LwM2M client can be enabled via +ULWM2M AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note [13]. In LARA-R6001-00B the LwM2M feature is available by default.

[14] u-blox server can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note [13]. In LARA-R6001-00B the LwM2M client will connect to u-blox server by default.

[15] uFOTA can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note [13]. On LARA-R6001-00B and LARA-L6004-00B the uFOTA-LwM2M capabilities is uFOTA.

[16] On LARA-R6001-00B the Production SIM is "00101".

[17] On LARA-R6001-00B the APN synchronization is 0.

	Global
+USVCDOMAIN	
Service Domain	CS/PS
UE usage setting	Voice centric
Voice domain preference	PS preferred
+URPM	
Enabled	False
IMS client	
VoLTE	Enabled
SMS over IMS	Enabled
IMS enabled (50)	1
+UISMS	
Mode	1
SMS mandatory	1
+UISS	
SS Mode	3[18]
Other preconfigured MNO profile fields	
MTU size	From PCO (1428)

[18] On LARA-R6001-00B the command is not supported.

C.4 LARA-R6401-00B EMEA and global MNO profiles table

	Global
MNO profile	
<MNO>	90 (factory-programmed value)
+UBANDMASK	
LTE bands [decimal value]	2, 4, 5, 12, 13, 14, 66, 71 [14362, 66]
UMTS/GSM bands [decimal value]	n/a
+URAT	
Allowed values	LTE
+CGDCONT	
CID (context ID) 1	"IPV4V6", ""
CID (context ID) 2	empty
CID (context ID) 3	empty
CID (context ID) 4	empty
CID (context ID) 6	empty
CID (context ID) 11	"IPV4V6", "ims"
CID (context ID) 12	"IPV4V6", "sos"
+UDCONF=19	
Default CID	1
Preferred IP type	0
LwM2M feature	
Available	Yes
LwM2M capabilities	u-blox
uFOTA-LwM2M capabilities	uFOTA
+ULWM2MREG	
Supported server ID	721
Locked	No
+ULWM2MCONFIGEXT	
Connection teardown timer	90
Production mode	1
Production SIM	"00101"
APN synchronization	0
Locked	No
+USVCDOMAIN	
Service domain	CS/PS
UE usage setting	Data centric
Voice domain preference	PS only
+URPM	
Enabled	False
IMS client	
VoLTE	Enabled
SMS over IMS	Enabled
IMS enabled (50)	1
+UISMS	

	Global
Mode	1
Other preconfigured MNO profile fields	
MTU size	From PCO (1428)

C.5 LARA-R6801-00B Americas MNO and conformance profiles table

	GCF-PTCRB
MNO profile	
<MNO>	201
+UBANDMASK	
LTE bands [decimal value]	1, 2, 3, 4, 5, 7, 8, 12, 13, 18, 19, 20, 26, 28, 38, 39, 40, 41 [2061752998111, 0]
UMTS/GSM bands [decimal value]	UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [562950035734912]
+URAT	
Allowed values	LTE, UMTS, GSM
+CGDCONT	
CID (context ID) 1	"IPV4V6", ""
CID (context ID) 11	"IPV4V6", "ims"
CID (context ID) 12	"IPV4V6", "sos"
+UDCONF=20	
SoR	Disabled
LwM2M feature	
Available	No
LwM2M capabilities	n/a
uFOTA-LwM2M capabilities	n/a
+ULWM2MREG	
Supported server ID	n/a
Locked	n/a
+ULWM2MCONFIGEXT	
Connection teardown timer	n/a
Production mode	n/a
Production SIM	n/a
APN synchronization	n/a
Locked	n/a
+USVCDOMAIN	
Service Domain	CS/PS
UE usage setting	Voice centric
Voice domain preference	PS preferred
+URPM	
Enabled	False
IMS client	
VoLTE	Enabled
SMS over IMS	Enabled

	GCF-PTCRB
IMS enabled (50)	1
+UISMS	
Mode	1
Other preconfigured MNO profile fields	
MTU size	From PCO (1428)

C.6 LARA-R6801-00B EMEA and global MNO profiles table

	Global
MNO profile	
<MNO>	90 (factory-programmed value)
+UBANDMASK	
LTE bands [decimal value]	1, 2, 3, 4, 5, 7, 8, 12, 13, 18, 19, 20, 26, 28, 38, 39, 40, 41 [2061752998111, 0]
UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [562950035734912]	UMTS: 1,2,5,8 GSM: DCS1800, EGSM900, 850, PCS1900 [562950035734912]
+URAT	
Allowed values	LTE, UMTS, GSM
+CGDCONT	
CID (context ID) 1	"IPV4V6", ""
CID (context ID) 11	"IPV4V6", "ims"
CID (context ID) 12	"IPV4V6", "sos"
+UDCONF=20	
SoR enable	Enabled
LwM2M feature	
Available	Yes
LwM2M capabilities	u-blox
uFOTA-LwM2M capabilities	uFOTA
+ULWM2MREG	
Supported server ID	721
Locked	No
+ULWM2MCONFIGEXT	
Connection teardown timer	90
Production mode	0
Production SIM	"00101"
APN synchronization	0
Locked	No
+USVCDOMAIN	
Service Domain	CS/PS
UE usage setting	Voice centric
Voice domain preference	PS preferred
+URPM	
Enabled	False
IMS client	
VoLTE	Enabled
SMS over IMS	Enabled

	Global
IMS enabled (50)	1
+UISMS	
Mode	1
Other preconfigured MNO profile fields	
MTU size	From PCO (1428)

C.7 LARA-L6004D-00B / LARA-R6001D Americas MNO and conformance profiles table

	AT&T	Verizon	T-Mobile US	GCF-PTCRB	VZW-Private
MNO profile					
<MNO>	2[19]	3[20]	5[20]	201	207[20]
+UBANDMASK					
LTE bands [decimal value]	1, 2, 3, 4, 5, 7, 8, 12, 20, 26, 28, 38, 39, 40, 41 [2061752600799, 0][21]	2, 4, 5, 12, 13 [6170, 0]	1, 2, 3, 4, 5, 7, 8, 12, 13, 26, 28, 38, 39, 40, 41 [2061752080607, 0]	1, 2, 3, 4, 5, 7, 8, 12, 13, 18, 19, 20, 26, 28, 38, 39, 40, 41 [2061752998111, 0]	2, 4, 5, 12, 13 [6170, 0]
UMTS/GSM bands [decimal value]	UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [5629500 35734912]	UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [562950035734912]	UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [5629500 35734912]	UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [5629500 35734912]	UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [562950035734912]
+URAT					
Allowed values	LTE, UMTS, GSM	LTE, UMTS, GSM	LTE, UMTS, GSM	LTE, UMTS, GSM	LTE, UMTS, GSM
Factory-programmed values	LTE, UMTS, GSM	LTE	LTE, UMTS, GSM	LTE, UMTS, GSM	LTE
+CGDCONT					
CID (context ID) 1	"IPV4V6", "broadband"	"IPV4V6","ims"	"IPV4V6", "fast.t-mobile.com"[22]	"IPV4V6", ""	"IPV4V6", ""
CID (context ID) 2	empty	"IPV4V6, "VZWADMIN"	empty	empty	"IPV4V6, "VZWADMIN"
CID (context ID) 3	empty	"IPV4V6, "VZWINTERNET"	empty	empty	empty
CID (context ID) 4[23]	empty	"IPV4V6,"VZWAPP"	"IPV4V6", "tmus"	empty	"IPV4V6,"VZWAPP"
CID (context ID) 6	empty	"IPV4V6, "VZWCLASS6"	empty	empty	"IPV4V6, "VZWCLASS6"
CID (context ID) 7	empty	"IPV4V6, "VZWCLASS7"	empty	empty	"IPV4V6, "VZWCLASS7"
CID (context ID) 8	empty	"IPV4V6, "VZWEMERGENCY"	empty	empty	"IPV4V6, "VZWEMERGENCY"
CID (context ID) 11	"IPV4V6", "ims"	empty	"IPV4V6", "ims"	"IPV4V6", "ims"	empty
+UDCONF=20					
SoR	Disabled	Disabled	Enabled	Disabled	Disabled
+CEDRXS					
Paging time window[24]	"0000"	"0000"	"0000"	"0000"	"0000"
eDRX cycle length[24]	"0000"	"0000"	"0000"	"0000"	"0000"
LwM2M feature					
Available	No[25]	Yes	Yes	No	Yes

19 <MNO>=2 (<AT&T>) is not supported by LARA-L6004D-00B.
20 Not supported by LARA-L6004D-00B, LARA-R6001D-00B.
21 On LARA-R6001D-00B the supported LTE bands are 1, 2, 3, 4, 5, 7, 8, 12, 20, 28, 38, 39, 40, 41 [20617190 46367,0].
22 "IPV6", "fast.t-mobile.com" on LARA-L6004D-00B, LARA-R6001D-00B.
23 Context undefined on LARA-L6004D-00B, LARA-R6001D-00B.
24 Does not apply to LARA-L6004D-00B and LARA-R6001D-00B.
25 LwM2M client can be enabled via +ULWM2M AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note. On LARA-R6001D-00B the feature is enabled.

	AT&T	Verizon	T-Mobile US	GCF-PTCRB	VZW-Private
LwM2M capabilities	None[26]	VZW[27]	TMO[27]	n/a	VZW[27]
uFOTA-LwM2M capabilities	None[28]	VZW FOTA[28]	TMO FOTA[26]	n/a	VZW FOTA[28]
+ULWM2MREG					
Supported server ID	1, 2, 3, 721	101, 102, 1000, 721	1, 3, 20, 721	n/a	101, 102, 1000, 721
Locked	No	No	No	n/a	No
+ULWM2MCONFIGEXT					
Connection teardown timer	90	60	90	n/a	60
Production mode	0	0	0	n/a	0
Production SIM	""	""	""	n/a	""
APN synchronization	1	0	1	n/a	0
Locked	No	No	No	n/a	No
+USVCDOMAIN					
Service Domain	CS/PS	CS/PS	CS/PS	CS/PS	CS/PS
UE usage setting	Data centric	Data centric	Data centric	Data centric	Data centric
Voice domain preference	Not present	Not present	Not present	Not present	Not present
+URPM					
Enabled	False	False	False	False	False
IMS client					
VoLTE	Disabled	Disabled	Disabled	Disabled	Disabled
SMS over IMS	Disabled	Enabled	Disabled	Disabled	Enabled
IMS enabled (50)	0	1	0	0	1
+UISMS					
Mode	0	1	0	0	1
SMS mandatory	0	0	0	0	0
+UISS[30]					
SS Mode	0	3	2	3	3
Other preconfigured MNO profile fields					
MTU size	From PCO (1430)	From PCO (1428)	From PCO (1500)	From PCO (1428)	From PCO (1428)

[26] u-blox and AT&T servers can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note. On LARA-R6001D-00B the LwM2M capabilities are set to "u-blox, AT&T".

[27] u-blox server can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.

[28] uFOTA can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note. On LARA-R6001D-00B the uFOTA-LwM2M capabilities are set to "uFOTA".

[29] uFOTA can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.

[30] On LARA-R6001D-00B the command is not supported.

C.8 LARA-L6004D-00B / LARA-R6001D EMEA and global MNO profiles table

	Telefonica	Deutsche Telekom	Global
MNO profile			
<MNO>	13[31]	31[31]	90 (factory-programmed value)
+UBANDMASK			
LTE bands [decimal value]	1, 2, 3, 4, 5, 7, 8, 20, 28, 38, 40 [687329509599, 0]	1, 3, 7, 20, 28, 38 [137573695557, 0]	1, 2, 3, 4, 5, 7, 8, 12, 13, 18, 19, 20, 26, 28, 38, 39, 40, 41 [2061752998111, 0]
UMTS/GSM bands [decimal value]	UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [562950035734912]	UMTS: 1,2,5,8 GSM: DCS1800, PCS1900 0 [384]	UMTS: 1,2,5,8 GSM: DCS1800, EGSM900, 850, PCS1900 [562950035734912]
+URAT			
Allowed values	LTE, UMTS, GSM	LTE, UMTS, GSM	LTE, UMTS, GSM
Factory-programmed values	LTE, UMTS, GSM	LTE, GSM	LTE, UMTS, GSM
+CGDCONT			
CID (context ID) 1	"IP", "mobile.o2.co.uk"	"IPV4V6", ""	"IPV4V6", ""
CID (context ID) 2[32]	empty	"IPV4V6", "INTERNET.TELEKOM"	empty
CID (context ID) 11	"IPV4V6", "ims"	"IPV4V6", "ims"	"IPV4V6", "ims"
+UDCONF=20			
SoR enable	Enabled	Enabled	Enabled
+CEDRXS			
Paging time window[33]	"0000"	"0000"	"0000"
eDRX cycle length[33]	"0000"	"0000"	"0000"
LwM2M feature			
Available	No[34]	No[34]	No[35]
LwM2M capabilities	None[36]	None[36]	None[37]

[31] Not supported by LARA-L6004D-00B, LARA-R6001D-00B.
[32] Undefined on LARA-L6004D-00B, LARA-R6001D-00B.
[33] Does not apply to LARA-L6004D-00B and LARA-R6001D-00B.
[34] LwM2M client can be enabled via +ULWM2M AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.
[35] LwM2M client can be enabled via +ULWM2M AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note. In LARA-R6001D-00B the LwM2M feature is available by default.
[36] u-blox server can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.
[37] u-blox server can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note. In LARA-R6001D-00B the LwM2M client will connect to u-blox server by default.

	Telefonica	Deutsche Telekom	Global
uFOTA-LwM2M capabilities	None[38]	None[38]	None[39]
+ULWM2MREG			
Supported server ID	721	721	721
Locked	No	No	No
+ULWM2MCONFIGEXT			
Connection teardown timer	90	90	90
Production mode	0	0	1[40]
Production SIM	""	""	"00101"
APN synchronization	1	1	0
Locked	No	No	No
+USVCDOMAIN			
Service Domain	CS/PS	CS/PS	CS/PS
UE usage setting	Data centric	Data centric	Data centric
Voice domain preference	IE not present	IE not present	PS only
+URPM			
Enabled	False	False	False
IMS client			
VoLTE	Disabled	Disabled	Disabled
SMS over IMS	Disabled	Enabled	Disabled
IMS enabled (50)	0	1	0
+UISMS			
Mode	0	1	0
SMS mandatory	1	1	0
+UISS[41]			
SS Mode	3	2	3
Other preconfigured MNO profile fields			
MTU size	From PCO (1500)	From PCO (1500)	From PCO (1428)

[38] uFOTA can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.

[39] u-blox server can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note. On LARA-L6004D-00B, LARA-R6001D-00B the uFOTA-LwM2M capabilities is uFOTA.

[40] On LARA-L6004D-00B, LARA-R6001D-00B the factory-programmed value is 0.

[41] On LARA-L6004D-00B, LARA-R6001D-00B the command is not supported.

C.9 LARA-R6001D-01B APAC MNO profiles table

	NTT DoCoMo	SoftBank	KDDI	Telstra
MNO profile				
<MNO>	20	28	41	4
+UBANDMASK				
LTE bands [decimal value]	1,3,19,28 [134479877, 0]	1,3,8 [133, 0]	1,3,18,26,28 [167903237, 0]	1, 3, 7, 26, 28 [167772229, 0]
UMTS/GSM bands [decimal value]	UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [5629500 35734912]	UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [562950035734912]	UMTS: 1,2,5,8 GSM: DCS1800, EGSM900, 850, PCS1900 [5629500 35734912]	UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [5629500 35734912]
+URAT				
Allowed values	LTE, UMTS, GSM	LTE, UMTS, GSM	LTE, UMTS, GSM	LTE, UMTS, GSM
Factory-programmed values	LTE	LTE, UMTS	LTE	LTE
+CGDCONT				
CID (context ID) 1	"IPV4V6", "internet",	"IPV4V6","INTERNET"	"IPV4V6","au.au-net.ne.jp"	"IPV4V6", ""
CID (context ID) 11	"IPV4V6", "ims"	"IPV6", "IMS"	"IPV4V6", "ims"	"IPV4V6", "ims"
+UDCONF=20				
SoR enable	Enabled	Enabled	Enabled	Enabled
+CEDRXS				
Paging time window	"0000"	"0000"	"0000"	"0001"
eDRX cycle length	"0000"	"0000"	"0000"	"0010"
LwM2M feature				
Available	No[42]	Yes	No[42]	Yes
LwM2M capabilities	None[43]	u-blox	None[43]	u-blox
uFOTA-LwM2M capabilities	None[44]	uFOTA	None[44]	uFOTA
+ULWM2MREG				
Supported server ID	721	721	721	721
Locked	No	No	No	No
+ULWM2MCONFIGEXT				
Connection teardown timer	90	90	90	90
Production mode	0	0	0	0
Production SIM	""	""	""	""
APN synchronization	0	1	0	0
Locked	No	No	No	No
+USVCDOMAIN				
Service Domain	CS/PS	CS/PS	CS/PS	CS/PS
UE usage setting	Data centric	Data centric	Data centric	Data centric

[42] LwM2M client can be enabled via +ULWM2M AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.

[43] u-blox server can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.

[44] uFOTA can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.

	NTT DoCoMo	SoftBank	KDDI	Telstra
Voice domain preference	IE not present	IE not present	IE not present	Not present
+URPM				
Enabled	True	False	False	False
IMS client				
VoLTE	Disabled	Disabled	Disabled	Disabled
SMS over IMS	Disabled	Disabled	Enabled	Disabled
IMS enabled (50)	0	0	1	0
+UISMS				
Mode	0	0	1	0
SMS mandatory	0	0	1	1
+UISS				
SS Mode	3	0	3	3
Other preconfigured MNO profile fields				
MTU size	From PCO (1430)	1358	1500	From PCO (1500)

C.10 LARA-L6004D-01B Americas MNO and conformance profiles table

	AT&T	Verizon	T-Mobile US	GCF-PTCRB	VZW-Private
MNO profile					
<MNO>	2	3	5	201	207
+UBANDMASK					
LTE bands [decimal value]	1, 2, 3, 4, 5, 7, 8, 12, 20, 28, 38, 39, 40, 41 [2061719046367, 0]	2, 4, 5, 12, 13 [6170, 0]	1, 2, 3, 4, 5, 7, 8, 12, 13, 26, 28, 38, 39, 40, 41 [2061752080607, 0]	1, 2, 3, 4, 5, 7, 8, 12, 13, 18, 19, 20, 26, 28, 38, 39, 40, 41 [2061752998111, 0]	2, 4, 5, 12, 13 [6170, 0]
UMTS/GSM bands [decimal value]	UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [562950035734912]	UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [562950035734912]	UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [562950035734912]	UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [562950035734912]	UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [562950035734912]
+URAT					
Allowed values	LTE, UMTS, GSM	LTE, UMTS, GSM	LTE, UMTS, GSM	LTE, UMTS, GSM	LTE, UMTS, GSM
Factory-programmed values	LTE, UMTS, GSM	LTE	LTE, UMTS, GSM	LTE, UMTS, GSM	LTE
+CGDCONT					
CID (context ID) 1	"IPV4V6", "broadband"	"IPV4V6","ims"	"IPV4V6", "fast.t-mobile.com"	"IPV4V6",""	"IPV4V6",""
CID (context ID) 2	empty	"IPV4V6", "VZWADMIN"	empty	empty	"IPV4V6", "VZWADMIN"
CID (context ID) 3	empty	"IPV4V6", "VZWINTERNET"	empty	empty	empty
CID (context ID) 4	empty	"IPV4V6", "VZWAPP"	"IPV4V6", "tmus	empty	"IPV4V6", "VZWAPP"
CID (context ID) 6	empty	"IPV4V6", "VZWCLASS6"	empty	empty	"IPV4V6", "VZWCLASS6"
CID (context ID) 7	empty	"IPV4V6", "VZWCLASS7"	empty	empty	"IPV4V6", "VZWCLASS7"
CID (context ID) 8	empty	"IPV4V6", "VZWEMERGENCY"	empty	empty	"IPV4V6", "VZWEMERGENCY"
CID (context ID) 11	"IPV4V6","ims"	empty	"IPV4V6","ims"	"IPV4V6","ims"	empty
+UDCONF=20					
SoR	Disabled	Disabled	Enabled	Disabled	Disabled
+CEDRXS					
Paging time window	"0000"	"0000"	"0000"	"0000"	"0000"
eDRX cycle length	"0000"	"0000"	"0000"	"0000"	"0000"
LwM2M feature					
Available	No[45]	Yes	Yes	No	Yes
LwM2M capabilities	None[46]	VZW[47]	TMO[47]	n/a	VZW[47]

[45] LwM2M client can be enabled via +ULWM2M AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.

[46] u-blox and AT&T servers can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.

[47] u-blox server can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.

[48] u-blox server can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.

	AT&T	Verizon	T-Mobile US	GCF-PTCRB	VZW-Private
uFOTA-LwM2M capabilities	None[49]	VZW FOTA[49]	TMO FOTA[49]	n/a	VZW FOTA[49]
+ULWM2MREG					
Supported server ID	1, 2, 3, 721	100, 101, 102, 1000, 721	1, 3, 20, 721	n/a	100, 101, 102, 1000, 721
Locked	No	No	No	n/a	No
+ULWM2MCONFIGEXT					
Connection teardown timer	90	60	90	n/a	60
Production mode	0	0	0	n/a	0
Production SIM	""	""	""	n/a	""
APN synchronization	1	0	1	n/a	0
Locked	No	No	No	n/a	No
+USVCDOMAIN					
Service Domain	CS/PS	CS/PS	CS/PS	CS/PS	CS/PS
UE usage setting	Data centric	Data centric	Data centric	Data centric	Data centric
Voice domain preference	Not present	Not present	Not present	Not present	Not present
+URPM					
Enabled	False	False	False	False	False
IMS client					
VoLTE	Disabled	Disabled	Disabled	Disabled	Disabled
SMS over IMS	Disabled	Enabled	Disabled	Disabled	Disabled
IMS enabled (50)	0	1	0	0	0
+UISMS					
Mode	0	1	0	0	1
SMS mandatory	0	0	0	0	0
+UISS					
SS Mode	0	3	2	3	3
Other preconfigured MNO profile fields					
MTU size	From PCO (1430)	From PCO (1428)	From PCO (1500)	From PCO (1428)	From PCO (1428)

[49] uFOTA can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.

C.11 LARA-L6004D-01B EMEA and global MNO profiles table

	Telefonica	Deutsche Telekom	Global
MNO profile			
<MNO>	13	31	90 (factory-programmed value)
+UBANDMASK			
LTE bands [decimal value]	1, 2, 3, 4, 5, 7, 8, 20, 28, 38, 40 [687329509599, 0]	1, 3, 7, 20, 28, 38 [137573695557, 0]	1, 2, 3, 4, 5, 7, 8, 12, 13, 18, 19, 20, 26, 28, 38, 39, 40, 41 [2061752998111, 0]
UMTS/GSM bands [decimal value]	UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [5629500 35734912]	UMTS: 1,2,5,8 GSM: DCS1800, PCS1900 [384]	UMTS: 1,2,5,8 GSM: DCS1800, EGSM900, 850, PCS1900 [5629500 35734912]
+URAT			
Allowed values	LTE, UMTS, GSM	LTE, UMTS, GSM	LTE, UMTS, GSM
Factory-programmed values	LTE, UMTS, GSM	LTE, GSM	LTE, UMTS, GSM
+CGDCONT			
CID (context ID) 1	"IP", "mobile.o2.co.uk"	"IPV4V6", ""	
CID (context ID) 2	empty	"IPV4V6", "INTERNET.TELEKOM"	empty
CID (context ID) 11	"IPV4V6", "ims"	"IPV4V6", "ims"	"IPV4V6", "ims"
+UDCONF=20			
SoR enable	Enabled	Enabled	Enabled
+CEDRXS			
Paging time window	"0000"	"0000"	"0000"
eDRX cycle length	"0000"	"0000"	"0000"
LwM2M feature			
Available	No[50]	No[50]	No[50]
LwM2M capabilities	None[51]	None[51]	None[51]
uFOTA-LwM2M capabilities	None[52]	None[52]	None[52]
+ULWM2MREG			
Supported server ID	721	721	721
Locked	No	No	No
+ULWM2MCONFIGEXT			
Connection teardown timer	90	90	90
Production mode	0	0	1

[50] LwM2M client can be enabled via +ULWM2M AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.

[51] u-blox server can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.

[52] uFOTA can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.

	Telefonica	Deutsche Telekom	Global
Production SIM	""	""	"00101"
APN synchronization	1	1	0
Locked	No	No	No
+USVCDOMAIN			
Service Domain	CS/PS	CS/PS	CS/PS
UE usage setting	Data centric	Data centric	Data centric
Voice domain preference	IE not present	IE not present	PS only
+URPM			
Enabled	False	False	False
IMS client			
VoLTE	Disabled	Disabled	Disabled
SMS over IMS	Disabled	Enabled	Disabled
IMS enabled (50)	0	1	0
+UISMS			
Mode	0	1	0
SMS mandatory	1	1	0
+UISS			
SS Mode	3	2	3
Other preconfigured MNO profile fields			
MTU size	From PCO (1500)	From PCO (1500)	From PCO (1428)

C.12 LARA-L6004D-01B APAC MNO profiles table

	NTT DoCoMo	SoftBank	KDDI	Telstra
MNO profile				
<MNO>	20	28	41	4
+UBANDMASK				
LTE bands [decimal value]	1,3,19,28 [134479877, 0]	1,3,8,28 [134217861, 0]	1,3,18,26,28 [167903237, 0]	1, 3, 7, 26, 28 [167772229, 0]
UMTS/GSM bands [decimal value]	UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [5629500 35734912]	UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [562950035734912]	UMTS: 1,2,5,8 GSM: DCS1800, EGSM900, 850, PCS1900 [5629500 35734912]	UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [5629500 35734912]
+URAT				
Allowed values	LTE, UMTS, GSM	LTE, UMTS, GSM	LTE, UMTS, GSM	LTE, UMTS, GSM
Factory-programmed values	LTE	LTE, UMTS	LTE	LTE
+CGDCONT				
CID (context ID) 1	"IPV4V6", "internet",	"IPV4V6","INTERNET"	"IPV4V6","au.au-net.ne.jp"	"IPV4V6",""
CID (context ID) 11	"IPV4V6", "ims"	"IPV6", "IMS"	"IPV4V6", "ims"	"IPV4V6","ims"
+UDCONF=20				
SoR enable	Enabled	Enabled	Enabled	Enabled
+CEDRXS				
Paging time window	"0000"	"0000"	"0000"	"0001"
eDRX cycle length	"0000"	"0000"	"0000"	"0010"
LwM2M feature				
Available	No[53]	Yes	No[53]	Yes
LwM2M capabilities	None[54]	u-blox	None[54]	u-blox
uFOTA-LwM2M capabilities	None[55]	uFOTA	None[55]	uFOTA
+ULWM2MREG				
Supported server ID	721	721	721	721
Locked	No	No	No	No
+ULWM2MCONFIGEXT				
Connection teardown timer	90	90	90	90
Production mode	0	0	0	0
Production SIM	""	""	""	""
APN synchronization	0	1	0	0
Locked	No	No	No	No
+USVCDOMAIN				
Service Domain	CS/PS	CS/PS	CS/PS	CS/PS
UE usage setting	Data centric	Data centric	Data centric	Data centric

[53] LwM2M client can be enabled via +ULWM2M AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.

[54] u-blox server can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.

[55] uFOTA can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.

	NTT DoCoMo	SoftBank	KDDI	Telstra
Voice domain preference	IE not present	IE not present	IE not present	Not present
+URPM				
Enabled	True	False	False	False
IMS client				
VoLTE	Disabled	Disabled	Disabled	Disabled
SMS over IMS	Disabled	Disabled	Enabled	Disabled
IMS enabled (50)	0	0	1	0
+UISMS				
Mode	0	0	1	0
SMS mandatory	0	0	1	1
+UISS				
SS Mode	3	0	3	3
Other preconfigured MNO profile fields				
MTU size	From PCO (1430)	1358	1500	From PCO (1500)

C.13 LARA-L6404D / LARA-R6401D Americas MNO and conformance profiles table

	AT&T	Verizon	T-Mobile US	GCF-PTCRB	FirstNet	VZW-Private
MNO profile						
<MNO>	2	3	5[56]	201	206	207[56]
+UBANDMASK						
LTE bands [decimal value]	2, 4, 5, 12, 14, 66 [10266, 2]	2, 4, 5, 12, 13, 66 [6170, 2]	2, 4, 5, 12, 66, 71 [2074, 66]	2, 4, 5, 12, 13, 14, 66, 71 [14362, 66]	2, 4, 5, 12, 14, 66 [10266, 2]	2, 4, 5, 12, 13, 66 [6170, 2]
UMTS/GSM bands [decimal value]	n/a	n/a	n/a	n/a	n/a	n/a
+URAT						
Allowed values	LTE	LTE	LTE	LTE	LTE	LTE
+CGDCONT						
CID (context ID) 1	"IPV4V6", "broadband"	"IPV4V6", "ims"	"IPV4V6", "fast.t-mobile.com"	"IPV4V6", ""	"IPV4V6", "firstnet-broadband"	"IPV4V6", ""
CID (context ID) 2	empty[57]	"IPV4V6", "VZWADMIN"	empty	empty	empty[58]	"IPV4V6", "VZWADMIN"
CID (context ID) 3	empty	"IPV4V6", "VZWINTERNET"	empty	empty	empty	empty
CID (context ID) 4	empty	"IPV4V6", "VZWAPP"	"IPV4V6", "tmus"	empty	empty	"IPV4V6", "VZWAPP"
CID (context ID) 6	empty	"IPV4V6", "VZWCLASS6"	empty	empty	empty	"IPV4V6", "VZWCLASS6"
CID (context ID) 7	empty	"IPV4V6", "VZWCLASS7"	empty	empty	empty	"IPV4V6", "VZWCLASS7"
CID (context ID) 8	empty	"IPV4V6", "VZWEMERGENCY"	empty	empty	empty	"IPV4V6", "VZWEMERGENCY"
CID (context ID) 11	"IPV4V6", "ims"	empty	"IPV4V6", "ims"	"IPV4V6", "ims"	"IPV4V6", "ims"	empty
+UDCONF=19						
Default CID	1	3	1	1	1	3[59]
Preferred IP type	0	0	0	0	0	0
LwM2M feature						
Available	No[60]	Yes	Yes	No	No[60]	Yes
LwM2M capabilities	None[61]	VZW[62]	TMO[63]	n/a	None[61]	VZW[63]
uFOTA-LwM2M capabilities	None[64]	VZW FOTA[65]	TMO FOTA[66]	n/a	None[65]	VZW FOTA[66]

56 Not supported by LARA-R6401D-00B.
57 "IPV4V6","attm2mglobal" on LARA-R6401D-00B.
58 "IPV4V6","attiotfirstnet.fn" on LARA-R6401D-00B.
59 On LARA-L6404D the factory-programmed value is 1.
60 LwM2M client can be enabled via +ULWM2M AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note. On LARA-R6401D-00B the feature is enabled.
61 u-blox and AT&T servers can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note. On LARA-R6401D-00B the LwM2M capabilities are set to u-blox, AT&T.
62 u-blox server can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note. On LARA-R6401D-00B the LwM2M capabilities are set to u-blox, VZW.
63 u-blox server can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.
64 uFOTA can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note. On LARA-R6401D-00B the uFOTA-LwM2M capabilities are set to uFOTA.
65 uFOTA can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note. On LARA-R6401D-00B the LwM2M capabilities are set to uFOTA, VZW
66 uFOTA can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.

	AT&T	Verizon	T-Mobile US	GCF-PTCRB	FirstNet	VZW-Private
+ULWM2MREG						
Supported server ID	1, 2, 3, 721	100, 101, 102, 1000, 721[66]	1, 3, 20, 721	n/a	1, 2, 3, 721	100, 101, 102, 1000, 721
Locked	No	No	No	n/a	No	No
+ULWM2MCONFIGEXT						
Connection teardown timer	90	60	90	n/a	90	60
Production mode	0	0	0	n/a	0	0
Production SIM	""	""	""	n/a	""	""
APN synchronization	1	0	1	n/a	1	0
Locked	No	No	No	n/a	No	No
+USVCDOMAIN						
Service domain	CS/PS	CS/PS	CS/PS	CS/PS	CS/PS	CS/PS
UE usage setting	Data centric	Data centric	Data centric	Data centric	Data centric	Data centric
Voice domain preference	Not present	Not present	Not present	Not present	Not present	Not present
+URPM						
Enabled	False	False	False	False	False	False
IMS client						
VoLTE	Disabled	Disabled	Disabled	Disabled	Disabled	Disabled
SMS over IMS	Disabled	Enabled	Disabled	Disabled	Disabled	Disabled
IMS enabled (50)	0	1	0	0	0	0
+UISMS						
Mode	0	1	0	0	1[68]	1
SMS mandatory	0	0	0	0	0	0
+UISS						
SS Mode[69]	0	3	2	3	0	3
Other preconfigured MNO profile fields						
MTU size	From PCO (1430)	From PCO (1428)	From PCO (1500)	From PCO (1428)	From PCO (1342)	From PCO (1428)

67 On LARA-R6401D-00B 100 is not supported.
68 On LARA-R6401D-00B and LARA-L6404D the factory-programmed value is 0.
69 On LARA-R6401D-00B the command is not supported.

C.14 LARA-L6404D / LARA-R6401D EMEA and global MNO profiles table

	Global
MNO profile	
<MNO>	90 (factory-programmed value)
+UBANDMASK	
LTE bands [decimal value]	2, 4, 5, 12, 13, 14, 66, 71 [14362, 66]
UMTS/GSM bands [decimal value]	n/a
+URAT	
Allowed values	LTE
+CGDCONT	
CID (context ID) 1	"IPV4V6", ""
CID (context ID) 11	"IPV4V6", "ims"
+UDCONF=19	
Default CID	1
Preferred IP type	0
LwM2M feature	
Available	No[70]
LwM2M capabilities	None[71]
uFOTA-LwM2M capabilities	None[72]
+ULWM2MREG	
Supported server ID	721
Locked	No
+ULWM2MCONFIGEXT	
Connection teardown timer	90
Production mode	1
Production SIM	"00101"
APN synchronization	0
Locked	No
+USVCDOMAIN	
Service domain	CS/PS
UE usage setting	Data centric
Voice domain preference	PS only
+URPM	
Enabled	False
IMS client	

[70] LwM2M client can be enabled via +ULWM2M AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.

[71] u-blox server can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note. On LARA-R6401D-00B the LwM2M capabilities is set to u-blox.

[72] uFOTA can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note. On LARA-R6401D-00B the uFOTA-LwM2M capabilities is set to uFOTA.

	Global
VoLTE	Disabled
SMS over IMS	Disabled
IMS enabled (50)	0
+UISMS	
Mode	0
SMS mandatory	0
+UISS	
SS Mode[73]	3
Other preconfigured MNO profile fields	
MTU size	From PCO (1428)

[73] On LARA-R6401D-00B the command is not supported.

C.15 LARA-L6004-01B Americas and conformance profiles table

	GCF-PTCRB
MNO profile	
<MNO>	201
+UBANDMASK	
LTE bands [decimal value]	1, 2, 3, 4, 5, 7, 8, 12, 13, 18, 19, 20, 26, 28, 38, 39, 40, 41 [2061752998111, 0]
UMTS/GSM bands [decimal value]	UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [5629500 35734912]
+URAT	
Allowed values	LTE, UMTS, GSM
Factory-programmed values	LTE, UMTS, GSM
+CGDCONT	
CID (context ID) 1	"IPV4V6",""
CID (context ID) 11	"IPV4V6","ims"
CID (context ID) 12	"IPV4V6","sos"
+UDCONF=20	
SoR	Disabled
LwM2M feature	
Available	No
LwM2M capabilities	n/a
uFOTA-LwM2M capabilities	n/a
+ULWM2MREG	
Supported server ID	n/a
Locked	n/a
+ULWM2MCONFIGEXT	
Connection teardown timer	n/a
Production mode	n/a
Production SIM	n/a
APN synchronization	n/a
Locked	n/a
+USVCDOMAIN	
Service Domain	CS/PS
UE usage setting	Voice centric
Voice domain preference	PS preferred
+URPM	
Enabled	False
IMS client	

	GCF-PTCRB
VoLTE	Enabled
SMS over IMS	Enabled
IMS enabled (50)	1
+UISMS	
Mode	1
SMS mandatory	1
+UISS	
SS Mode	3
Other preconfigured MNO profile fields	
MTU size	From PCO (1428)

C.16 LARA-L6004-01B EMEA and global MNO profiles table

	Global
MNO profile	
<MNO>	90 (factory-programmed value)
+UBANDMASK	
LTE bands [decimal value]	1, 2, 3, 4, 5, 7, 8, 12, 13, 18, 19, 20, 26, 28, 38, 39, 40, 41 [2061752998111, 0]
UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [562950035734912]	
+URAT	
Allowed values	LTE, UMTS, GSM
Factory-programmed values	LTE, UMTS, GSM
+CGDCONT	
CID (context ID) 1	"IPV4V6", ""
CID (context ID) 11	"IPV4V6", "ims"
CID (context ID) 12	"IPV4V6", "sos"
+UDCONF=20	
SoR enable	Enabled
LwM2M feature	
Available	No[74]
LwM2M capabilities	None[75]
uFOTA-LwM2M capabilities	None[76]
+ULWM2MREG	
Supported server ID	721
Locked	No
+ULWM2MCONFIGEXT	
Connection teardown timer	90
Production mode	0
Production SIM	""
APN synchronization	1
Locked	No
+USVCDOMAIN	
Service Domain	CS/PS
UE usage setting	Voice centric

[74] LwM2M client can be enabled via +ULWM2M AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.

[75] u-blox server can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.

[76] uFOTA can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.

	Global
Voice domain preference	PS preferred
+URPM	
Enabled	False
IMS client	
VoLTE	Enabled
SMS over IMS	Enabled
IMS enabled (50)	1
+UISMS	
Mode	1
SMS mandatory	1
+UISS	
SS Mode	3
Other preconfigured MNO profile fields	
MTU size	From PCO (1428)

C.17 LARA-L6404 / LARA-R6401 Americas MNO and conformance profiles table

	AT&T	Verizon	T-Mobile US	GCF-PTCRB	FirstNet	VZW-Private
MNO profile						
<MNO>	2	3	5[77]	201	206	207[77]
+UBANDMASK						
LTE bands [decimal value]	2, 4, 5, 12, 14, 66 [10266, 2]	2, 4, 5, 12, 13, 66 [6170, 2]	2, 4, 5, 12, 66, 71 [2074, 66]	2, 4, 5, 12, 13, 14, 66, 71 [14362, 66]	2, 4, 5, 12, 14, 66 [10266, 2]	2, 4, 5, 12, 13, 66 [6170, 2]
UMTS/GSM bands [decimal value]	n/a	n/a	n/a	n/a	n/a	n/a
+URAT						
Allowed values	LTE	LTE	LTE	LTE	LTE	LTE
+CGDCONT						
CID (context ID) 1	"IPV4V6", "nxtgenphone"	"IPV4V6", "ims"	"IPV4V6","fast.t-mobile.com"	"IPV4V6", ""	"IPV4V6", "firstnet-phone"	"IPV4V6", ""
CID (context ID) 2	empty[78]	"IPV4V6", "VZWADMIN"	empty	empty	empty[79]	"IPV4V6", "VZWADMIN"
CID (context ID) 3	empty	"IPV4V6", "VZWINTERNET"	empty	empty	empty	empty
CID (context ID) 4	empty	"IPV4V6", "VZWAPP"	"IPV4V6","tmus"	empty	empty	"IPV4V6", "VZWAPP"
CID (context ID) 6	empty	"IPV4V6", "VZWCLASS6"	empty	empty	empty	"IPV4V6", "VZWCLASS6"
CID (context ID) 7	empty	"IPV4V6", "VZWCLASS7"	empty	empty	empty	"IPV4V6", "VZWCLASS7"
CID (context ID) 8	empty	"IPV4V6", "VZWEMERGENCY"	empty	empty	empty	"IPV4V6", "VZWEMERGENCY"
CID (context ID) 11	"IPV4V6", "ims"	empty	"IPV4V6", "ims"	"IPV4V6", "ims"	"IPV4V6", "ims"	empty
CID (context ID) 12	"IPV4V6", "sos"	empty	"IPV4V6", "sos"	"IPV4V6", "sos"	"IPV4V6", "sos"	empty
+UDCONF=19						
Default CID	1	3	1	1	1	3[80]
Preferred IP type	0	0	0	0	0	0
LwM2M feature						
Available	No[81]	Yes	Yes	No	No[81]	Yes
LwM2M capabilities	None[82]	VZW[83]	TMO[84]	n/a	None[82]	VZW[84]
uFOTA-LwM2M capabilities	None[85]	VZW FOTA[86]	TMO FOTA[87]	n/a	None[85]	VZW FOTA[87]

77 <MNO>=5 (T-Mobile US) and <MNO>=207 (VZW-Private) are not supported by LARA-R6401-00B.

78 On LARA-R6401-00B the context ID is "IPV4V6","attm2mglobal".

79 On LARA-R6401-00B the context ID is "IPV4V6","attiotfirstnet.fn".

80 On LARA-L6404 the factory-programmed value is 1.

81 LwM2M client can be enabled via +ULWM2M AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note [13]. On LARA-R6401-00B LwM2M is enabled.

82 u-blox and AT&T servers can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note [13]. On LARA-R6401-00B the LwM2M capabilities is u-blox, AT&T.

83 u-blox server can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note [13]. On LARA-R6401-00B the LwM2M capabilities is u-blox, VZW.

84 u-blox server can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note [13].

85 uFOTA can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note [13]. On LARA-R6401-00B the uFOTA-LwM2M capabilities is uFOTA.

86 uFOTA can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note [13]. On LARA-R6401-00B the uFOTA-LwM2M capabilities is uFOTA, VZW.

87 uFOTA can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note [13].

	AT&T	Verizon	T-Mobile US	GCF-PTCRB	FirstNet	VZW-Private
+ULWM2MREG						
Supported server ID	1, 2, 3, 721	100, 101, 102, 1000, 721[88]	1, 3, 20, 721	n/a	1, 2, 3, 721	100, 101, 102, 1000, 721
Locked	No	No	No	n/a	No	No
+ULWM2MCONFIGEXT						
Connection teardown timer	90	60	90	n/a	90	60
Production mode	0	0	0	n/a	0	0
Production SIM	""	""	""	n/a	""	""
APN synchronization	1	0	1	n/a	1	0
Locked	No	No	No	n/a	No	No
+USVCDOMAIN						
Service domain	CS/PS	CS/PS	CS/PS	CS/PS	CS/PS	CS/PS
UE usage setting	Data centric	Data centric	Data centric	Data centric	Data centric	Data centric
Voice domain preference	PS only	PS only	PS only	PS only	PS only	PS only
+URPM						
Enabled	False	False	False	False	False	False
IMS client						
VoLTE	Enabled	Enabled	Enabled	Enabled	Enabled	Disabled
SMS over IMS	Enabled	Enabled	Enabled	Enabled	Enabled	Disabled
IMS enabled (50)	1	1	1	1	1	0
+UISMS						
Mode	0[89]	1	1	1	0[89]	0
SMS mandatory	1	0	1	1	1	0
+UISS						
SS Mode[89]	0	3	2	3	0	3
Other preconfigured MNO profile fields						
MTU size	From PCO (1430)	From PCO (1428)	From PCO (1500)	From PCO (1428)	From PCO (1342)	From PCO (1428)

[88] On LARA-R6401-00B 100 is not supported.
[89] On LARA-R6401-00B the +UISMS mode is 1.
[90] On LARA-R6401-00B the command is not supported.

C.18 LARA-L6404 / LARA-R6401-01B EMEA and global MNO profiles table

	Global
MNO profile	
<MNO>	90 (factory-programmed value)
+UBANDMASK	
LTE bands [decimal value]	2, 4, 5, 12, 13, 14, 66, 71 [14362, 66]
UMTS/GSM bands [decimal value]	n/a
+URAT	
Allowed values	LTE
+CGDCONT	
CID (context ID) 1	"IPV4V6", ""
CID (context ID) 11	"IPV4V6", "ims"
CID (context ID) 12	"IPV4V6", "sos"
+UDCONF=19	
Default CID	1
Preferred IP type	0
LwM2M feature	
Available	No[91]
LwM2M capabilities	None[92]
uFOTA-LwM2M capabilities	None[93]
+ULWM2MREG	
Supported server ID	721
Locked	No
+ULWM2MCONFIGEXT	
Connection teardown timer	90
Production mode	1
Production SIM	"00101"
APN synchronization	0
Locked	No
+USVCDOMAIN	
Service domain	CS/PS
UE usage setting	Data centric
Voice domain preference	PS only
+URPM	
Enabled	False
IMS client	

[91] LwM2M client can be enabled via +ULWM2M AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.

[92] u-blox server can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.

[93] uFOTA can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.

	Global
VoLTE	Enabled
SMS over IMS	Enabled
IMS enabled (50)	1
+UISMS	
Mode	1
SMS mandatory	1
+UISS	
SS Mode	3
Other preconfigured MNO profile fields	
MTU size	From PCO (1428)

C.19 LARA-R6801-01B Americas and conformance profiles table

	GCF-PTCRB
MNO profile	
<MNO>	201
+UBANDMASK	
LTE bands [decimal value]	1, 2, 3, 4, 5, 7, 8, 18, 19, 20, 26, 28 [168689887, 0]
UMTS/GSM bands [decimal value]	UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [5629500 35734912]
+URAT	
Allowed values	LTE, UMTS, GSM
Factory-programmed values	LTE, UMTS, GSM
+CGDCONT	
CID (context ID) 1	"IPV4V6",""
CID (context ID) 11	"IPV4V6","ims"
CID (context ID) 12	"IPV4V6","sos"
+UDCONF=20	
SoR	Disabled
LwM2M feature	
Available	No
LwM2M capabilities	n/a
uFOTA-LwM2M capabilities	n/a
+ULWM2MREG	
Supported server ID	n/a
Locked	n/a
+ULWM2MCONFIGEXT	
Connection teardown timer	n/a
Production mode	n/a
Production SIM	n/a
APN synchronization	n/a
Locked	n/a
+USVCDOMAIN	
Service Domain	CS/PS
UE usage setting	Voice centric
Voice domain preference	PS preferred
+URPM	
Enabled	False
IMS client	
VoLTE	Enabled
SMS over IMS	Enabled
IMS enabled (50)	1

	GCF-PTCRB
+UISMS	
Mode	1
SMS mandatory	1
+UISS	
SS Mode	3
Other preconfigured MNO profile fields	
MTU size	From PCO (1428)

C.20 LARA-R6801-01B EMEA and global MNO profiles table

	Global
MNO profile	
<MNO>	90 (factory-programmed value)
+UBANDMASK	
LTE bands [decimal value]	1, 2, 3, 4, 5, 7, 8, 18, 19, 20, 26, 28 [168689887, 0]
UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [562950035734912]	
+URAT	
Allowed values	LTE, UMTS, GSM
Factory-programmed values	LTE, UMTS, GSM
+CGDCONT	
CID (context ID) 1	"IPV4V6", ""
CID (context ID) 11	"IPV4V6", "ims"
CID (context ID) 12	"IPV4V6", "sos"
+UDCONF=20	
SoR enable	Enabled
LwM2M feature	
Available	No[94]
LwM2M capabilities	None[95]
uFOTA-LwM2M capabilities	None[96]
+ULWM2MREG	
Supported server ID	721
Locked	No
+ULWM2MCONFIGEXT	
Connection teardown timer	90
Production mode	0
Production SIM	""
APN synchronization	1
Locked	No
+USVCDOMAIN	
Service Domain	CS/PS
UE usage setting	Voice centric
Voice domain preference	PS preferred

[94] LwM2M client can be enabled via +ULWM2M AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.

[95] u-blox server can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.

[96] uFOTA can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.

	Global
+URPM	
Enabled	False
IMS client	
VoLTE	Enabled
SMS over IMS	Enabled
IMS enabled (50)	1
+UISMS	
Mode	1
SMS mandatory	1
+UISS	
SS Mode	3
Other preconfigured MNO profile fields	
MTU size	From PCO (1428)

C.21 LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6801D APAC MNO and conformance profiles table

	NTT DoCoMo	SoftBank	KDDI	GCF-PTCRB
MNO profile				
<MNO>	20	28[97]	41	201
+UBANDMASK				
LTE bands [decimal value]	1, 3, 19, 28 [134479877, 0] [98]	1, 3, 8 [133, 0]	1, 3, 18, 26, 28 [167903237, 0] [99]	1, 2, 3, 4, 5, 7, 8, 18, 19, 20, 26, 28 [168689887, 0][100]
UMTS/GSM bands [decimal value]	UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [5629500 35734912] [101]	UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [5629500 35734912]	UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [5629500 35734912]	UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850 , PCS1900 [5629500 35734912] [101]
+URAT				
Allowed values	LTE, UMTS, GSM[101]	LTE, UMTS, GSM	LTE, UMTS, GSM	LTE, UMTS, GSM[101]
Factory-programmed values	LTE	LTE, UMTS	LTE	LTE, UMTS, GSM[101]
+CGDCONT				
CID (context ID) 1	"IPV4V6", "internet"	"IPV4V6", "INTERNET"	"IPV4V6", "au.au-net.ne.jp"	"IPV4V6", ""
CID (context ID) 11	"IPV4V6", "ims"	"IPV6", "IMS"	"IPV4V6", "ims"	"IPV4V6", "ims"
CID (context ID) 12[102]	"IPV4V6", "sos"		"IPV4V6", "sos"	"IPV4V6", "sos"
+UDCONF=20				
SoR	Enabled	Enabled	Enabled	Disabled
LwM2M feature				
Available	No[103]	Yes	No[103]	No
LwM2M capabilities	None[104]	u-blox	None[104]	n/a
uFOTA-LwM2M capabilities	None[105]	uFOTA	None[105]	n/a
+ULWM2MREG				
Supported server ID	721	721	721	n/a
Locked	No	No	No	n/a
+ULWM2MCONFIGEXT				
Connection teardown timer	90	90	90	n/a
Production mode	0	0	0	n/a

97 Not supported by LARA-L6824D and LARA-L6824.
98 LTE band 28 is not supported ([262149, 0]) by LARA-L6824D and LARA-L6824.
99 LTE band 28 is not supported ([33685509, 0]) by LARA-L6824D and LARA-L6824.
100 LTE band 2, 4, 5, 7, 8, 20 and 28 are not supported ([33947653, 0]) by LARA-L6824D and LARA-L6824.
101 UMTS and GSM are not supported by LARA-L6824D and LARA-L6824.
102 Not defined by LARA-L6804D, LARA-R6801D and LARA-L6824D.
103 LwM2M client can be enabled via +ULWM2M AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.
104 u-blox server can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.
105 uFOTA can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.

	NTT DoCoMo	SoftBank	KDDI	GCF-PTCRB
Production SIM	""	""	""	n/a
APN synchronization	0	1	0	n/a
Locked	No	No	No	n/a
+USVCDOMAIN				
Service Domain	CS/PS	CS/PS	CS/PS	CS/PS
UE usage setting	Data centric	Data centric	Data centric	Data centric
Voice domain preference	Not present	Not present	Not present	Not present
+URPM				
Enabled	True	False	False	False
IMS client				
VoLTE	Disabled	Disabled	Disabled	Disabled
SMS over IMS	Disabled	Disabled	Enabled	Disabled
IMS enabled (50)	0	0	1	0
+UISMS				
Mode	0	0	1	0
SMS mandatory	0	0	1	0
+UISS				
SS Mode	3	0	3	3
Other preconfigured MNO profile fields				
MTU size	From PCO (1430)	1358	1500	1500

C.22 LARA-L6804D / LARA-L6824 / LARA-L6824D / LARA-R6801D EMEA and global MNO profiles table

	Global
MNO profile	
<MNO>	90 (factory-programmed value)
+UBANDMASK	
LTE bands [decimal value]	1, 2, 3, 4, 5, 7, 8, 18, 19, 20, 26, 28 [168689887, 0][106]
UMTS/GSM bands [decimal value]	UMTS: 1, 2, 5, 8 GSM: DCS1800, EGSM900, 850, PCS1900 [5629500 35734912][107]
+URAT	
Allowed values	LTE, UMTS, GSM[107]
Factory-programmed values	LTE, UMTS, GSM[107]
+CGDCONT	
CID (context ID) 1	"IPV4V6", ""
CID (context ID) 11	"IPV4V6", "ims"
CID (context ID) 12[102]	"IPV4V6", "sos"
+UDCONF=20	
SoR enable	Enabled
LwM2M feature	
Available	No[109]
LwM2M capabilities	None[110]
uFOTA-LwM2M capabilities	None[111]
+ULWM2MREG	
Supported server ID	721
Locked	No
+ULWM2MCONFIGEXT	
Connection teardown timer	90
Production mode	1
Production SIM	"00101"
APN synchronization	0

106 LTE band 2, 4, 5, 7, 8, 20 and 28 are not supported ([33947653,0]) by LARA-L6824.
107 UMTS and GSM are not supported by LARA-L6824D and LARA-L6824.
108 Not defined by LARA-L6804D, LARA-R6801D and LARA-L6824D.
109 LwM2M client can be enabled via +ULWM2M AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.
110 u-blox server can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.
111 uFOTA can be enabled via +ULWM2MCONFIG AT command, see LARA-L6 / LARA-R6 series LwM2M objects and commands application note.

	Global
Locked	No
+USVCDOMAIN	
Service Domain	CS/PS
UE usage setting	Data centric
Voice domain preference	PS only
+URPM	
Enabled	False
IMS client	
VoLTE	Disabled
SMS over IMS	Disabled
IMS enabled (50)	0
+UISMS	
Mode	0
SMS mandatory	0
+UISS	
SS Mode	3
Other preconfigured MNO profile fields	
MTU size	From PCO (1428)

D Appendix: glossary

Abbreviation	Definition
2G	2nd Generation
3G	3rd Generation
3GPP	3rd Generation Partnership Project
ADC	Analog to Digital Converter
AIeC	Automatically Initiated eCall
ADN	Abbreviated Dialing Numbers
AMR	Adaptive Multi Rate
AP	Access Point
APN	Access Point Name
ASCII	American Standard Code for Information Interchange
AT	AT Command Interpreter Software Subsystem, or attention
BL	Black List
BSD	Berkley Standard Distribution
CB	Cell Broadcast
CBM	Cell Broadcast Message
CLI	Calling Line Identification
CLIP	Calling Line Identification Presentation
CLIR	Calling Line Identification Restriction
COLP	Connected Line Identification Presentation
COLR	Connected Line Identification Restriction
CM	Connection Management
C/No	Estimated carrier-to-noise-density ratio
CPHS	Common PCN Handset Specification
CR	Carriage Return
CRC	Cyclic Redundancy Check
CS	Circuit Switch
CSD	Circuit-Switched Data
CSG	Closed Subscriber Group
CTS	Clear To Send
CUG	Closed User Group
DA	Destination Address
DARP	Downlink Advanced Receiver Performance
DCD	Data Carrier Detect
DCE	Data Communication Equipment
DCM	Data Connection Management
DHCP	Dynamic Host Configuration Protocol
DM	Device Management
DNS	Domain Name Server
DSR	DSC transponder response
DTE, TE	Data Terminal Equipment
DTMF	Dual Tone Multi Frequency
DTR	Data Terminal Ready
DUT	Device Under Test
EARFCN	E-UTRAN Absolute Radio Frequency Channel Number
eCall	Emergency Call
e-CDRX	Extended Connected Mode DRX

Abbreviation	Definition
eDRX	Extended Discontinuous Reception
EEP	EEPROM Emulation Parameters
EF	Elementary File
EF_{CGST}	Elementary File "Closed Subscriber Group Type"
EF_{HNBN}	Elementary File "Home Node B Number"
$EF_{PLMNwAcT}$	Elementary File "User controlled PLMN Selector with Access Technology"
EF_{HPPLMN}	Elementary File "Higher Priority PLMN search period"
eIM	eCall In-band Modem
EONS	Enhanced Operator Name from SIM-files EF_{OPL} and EF_{PNN}
EPD	Escape Prompt Delay
EPS	Evolved Packet System
eSIM	Embedded Subscriber Identity Module
ETSI	European Telecommunications Standards Institute
E-UTRAN/EUTRAN	Evolved UTRAN
FDN	Fixed Dialling Number
FOAT	Firmware Over AT
FOTA	Firmware Over The Air
FS	File System
FTP	File Transfer Protocol
FW	Firmware
FWINSTALL	Firmware Install
GAS	Grouping information Alpha String
GERAN	GSM/EDGE Radio Access Network
GPIO	General Purpose Input Output
GPRS	General Packet Radio Service
GPS	Global Positioning System
GSM	Global System for Mobile Communications
HDLC	High Level Data Link Control
HNB	Home Node B
HPLMN	Home PLMN
HTTP	HyperText Transfer Protocol
I	Information
I^2C	Inter-Integrated Circuit
I^2S	Inter IC Sound or Integrated Interchip Sound
ICCID	Integrated Circuit Card ID
ICMP	Internet Control Message Protocol
ICP	Inter Processor Communication
IMEI	International Mobile Equipment Identity
IMS	IP Multimedia Subsystem
IMSI	International Mobile Station Identity
InBM	In-Band Modem (generic)
IP	Internet Protocol
IRA	International Reference Alphabet
IRC	Intermediate Result Code
ISDN	Integrated Services Digital Network
ISP	Internet Service Provider
IVS	In-Vehicle System (eCall related)
L3	Layer 3
LCP	Link Control Protocol

Abbreviation	Definition
LF	Line Feed
LNS	Linux Network Subsystem
LwM2M	Lightweight M2M
M2M	Machine-To-Machine
MCC	Mobile Country Code
ME	Mobile Equipment
MIeC	Manually Initiated eCall
MMI	Man Machine Interface
MN	Mobile Network Software Subsystem
MNC	Mobile Network Code
MNO	Mobile Network Operator
MO	Mobile Originated
MS	Mobile Station
MSC	Modem Status Command
MSD	Minimum Set of Data (eCall related)
MSIN	Mobile Subscriber Identification Number
MSISDN	Mobile Systems International Subscriber Identity Number
MSPR	Multi-Slot Power Reduction
MT	Mobile Terminated
MWI	Message Waiting Indication
NAA	Network Access Application
NAS	Non Access Stratum
NITZ	Network Identity and Time Zone
NVM	Non-Volatile Memory
ODIS	OMA-DM IMEI Sync
OLCM	On Line Commands Mode
PAD	Packet Assembler/Disassembler
P-CID	Physical Cell Id
PCN	Personal Communication Network
PDP	Packet Data Protocol
PDU	Protocol Data Unit
PIN	Personal Identification Number
PLMN	Public Land Mobile Network
PPP	Point-to-Point Protocol
PSAP	Public Safety Answering Point (eCall related)
PSD	Packet-Switched Data
PSK	Private Shared Key
PUK	Personal Unblocking Key
QoS	Quality of Service
RAM	Random Access Memory
RDI	Restricted Digital Information
RFU	Reserved for Future Use
RI	Ring Indicator
RNDIS	Remote Network Driver Interface Specification
RRC	Radio resource control
RTC	Real Time Clock
RTP	Real-time Transport Protocol
RTS	Request To Send
Rx	Receiver

Abbreviation	Definition
SAP	SIM Access Profile
SC	Service Centre
SI	SIM Application Part Software Subsystem
SIP	Session Initiation Protocol
SIM	Subscriber Identity Module
SMS	Short Message Service
SMSC	Short Message Service Center
SMTP	Simple Mail Transfer Protocol
SoR	Steering of Roaming
SDIO	Secure Digital Input Output
SES	Speech Enhancement System
STA	station
SSID	Service Set Identifier
TA	Terminal Adaptor
TCP	Transfer Control Protocol
TE	Terminal Equipment
TFT	Traffic Flow Template
TP	Transfer layer Protocol
Tx	Transmitter
TZ	Time Zone
UCS2	Universal Character Set
UDI	Unrestricted Digital Information
UDP	User Datagram Protocol
UI	Unnumbered Information
UICC	Universal Integrated Circuit Card
UIH	Unnumbered Information with header Check
URC	Unsolicited Result Code
USIM	UMTS Subscriber Identity Module
UTRAN	Universal Terrestrial Radio Access Network
UUS1	User-to-User Signalling Supplementary Service 1
UW	Unique Word
WLAN	Wireless Local Area Network
ZTP	Zero Touch Provisioning

Related documentation

1. TOBY-L4 series data sheet, UBX-16009856
2. TOBY-L4 series system integration manual, UBX-16024839
3. TOBY-L2 series data sheet, UBX-13004573
4. MPCI-L2 series data sheet, UBX-13004749
5. TOBY-L2 / MPCI-L2 series system integration manual, UBX-13004618
6. LARA-R6 series data sheet, UBX-21004391
7. LARA-L6 series data sheet, UBX-21047783
8. LARA-L6 / LARA-R6 series system integration manual, UBX-21010011
9. LARA-L6 / LARA-R6 series application development guide, UBX-22001850
10. LARA-R6 series Internet applications development guide, UBX-22001854
11. LARA-R6 end user test application note, UBX-22008644
12. LARA-R6 audio application note, UBX-22001999
13. LARA-L6 / LARA-R6 LwM2M objects and commands application note, UBX-22008379
14. LARA-L6 / LARA-R6 firmware update application note, UBX-22008011
15. LARA-R2 series data sheet, UBX-16005783
16. LARA-R2 series system integration manual, UBX-16010573
17. TOBY-R2 series data sheet, UBX-16005785
18. TOBY-R2 series system integration manual, UBX-16010572
19. LENA-R8 series data sheet, UBX-22003110
20. LENA-R8 series system integration manual, UBX-22015376
21. LENA-R8 series application development guide, UBX-22038374
22. LEXI-R10 series data sheet, UBX-23007594
23. LEXI-R10 system integration manual, UBX-23008149
24. LEXI-R10 series Internet applications development guide, UBXDOC-686885345-2004
25. SARA-R5 series data sheet, UBX-19016638
26. SARA-R5 series system integration manual, UBX-19041356
27. SARA-R5 series application development guide, UBX-20009652
28. LEXI-R422 / SARA-R4 / SARA-R5 series Internet applications development guide, UBX-20032566
29. SARA-R4 series data sheet, UBX-16024152
30. SARA-R4 series system integration manual, UBX-16029218
31. SARA-R41 application development guide, UBX-18019856
32. LEXI-R422 / SARA-R42 application development guide, UBX-20050829
33. SARA-U2 series data sheet, UBX-13005287
34. LISA-U2 series data sheet, UBX-13001734
35. LISA-U1 series data sheet, UBX-13002048
36. LISA-U1 / LISA-U2 series system integration manual, UBX-13001118
37. SARA-G450 data sheet, UBX-18006165
38. SARA-G450 system integration manual, UBX-18046432
39. SARA-G3 series data sheet, UBX-13000993
40. SARA-G3 / SARA-U2 series system integration manual, UBX-13000995
41. LEON-G1 series data sheet, UBX-13004887
42. LEON-G1 series system integration manual, UBX-13004888
43. SARA-N2 series data sheet, UBX-15025564
44. NB-IoT application development guide, UBX-16017368
45. SARA-N3 series data sheet, UBX-18066692
46. SARA-N2 / SARA-N3 series system integration manual, UBX-17005143
47. SARA-N3 series application development guide, UBX-19026709

48. TOBY-R2 / LARA-R2 "03B" audio application note, UBX-20036864
49. AT commands examples application note, UBX-13001820
50. u-blox multiplexer implementation application note, UBX-13001887
51. u-blox firmware update application note, UBX-13001845
52. u-blox Positioning implementation application note, UBXDOC-686885345-1826
53. End user test application note, UBX-13001922
54. Wi-Fi / cellular integration application note, UBX-14003264
55. LTE initial default bearer application note, UBX-20015573
56. eCall / ERA GLONASS Implementation in u-blox cellular modules, UBX-13001924
57. TOBY-L4 series extended audio application note, UBX-17065359
58. TOBY-L4 uCPU series Audio CSD API application note, UBX-18067601
59. TOBY-L4 series eCall implementation in u-blox cellular modules application note, UBX-18019819
60. TOBY-L2 series audio application note, UBX-15015834
61. TOBY-L2 series networking modes application note, UBX-14000479
62. TOBY-L2 / MPCI-L2 series enforced security application note, UBX-19022699
63. SARA-U2 audio application note, UBX-14002981
64. SARA-U2 series audio extended tuning application note, UBX-17012797
65. LISA-U1 / LISA-U2 audio application note, UBX-13001835
66. SARA-G450 audio interface application note, UBX-20028599
67. SARA-G450 audio tuning commands application note, UBX-20013500
68. SARA-G3 audio application note, UBX-13001793
69. LEON-G1 audio application note, UBX-13001890
70. SARA-R5 series firmware update with uFOTA, FOAT and EasyFlash application note, UBX-20033314
71. SARA-R4 series firmware update with uFOTA, FOAT and EasyFlash application note, UBX-17049154
72. LEXI-R422 / SARA-R4 / SARA-R5 LwM2M objects and commands application note, UBX-18068860
73. LARA-L6 / LARA-R6 Linux integration application note, UBX-22026570
74. SCM feature description and commands application note, UBX-21006919
75. 3GPP TS 27.007 - Technical Specification Group Core Network and Terminals; AT command set for User Equipment (UE)
76. 3GPP TS 22.004 - General on supplementary services
77. 3GPP TS 22.030 - Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); Man-Machine Interface (MMI) of the User Equipment (UE)
78. 3GPP TS 22.090 - Unstructured Supplementary Service Data (USSD); Stage 1
79. 3GPP TS 23.038 - Alphabets and language-specific information
80. 3GPP TS 23.040 - Technical realization of Short Message Service (SMS)
81. 3GPP TS 23.041 - Technical realization of Cell Broadcast Service (CBS)
82. 3GPP TS 23.060 - Technical Specification Group Services and System Aspects; General Packet Radio Service (GPRS); Service description
83. 3GPP TS 24.007 - Mobile radio interface signalling layer 3; General aspects
84. 3GPP TS 24.008 - Mobile radio interface layer 3 specification
85. 3GPP TS 24.011 - Point-to-point (PP) Short Message Service (SMS) support on mobile radio interface
86. 3GPP TS 27.005 - Technical Specification Group Terminals; Use of Data Terminal Equipment - Data Circuit terminating Equipment (DTE-DCE) interface for Short Message Services (SMS) and Cell Broadcast Service (CBS)
87. 3GPP TS 27.060 - Technical Specification Group Core Network; Packet Domain; Mobile Station (MS) supporting Packet Switched Services
88. 3GPP TS 51.011 - Digital cellular telecommunications system (Phase 2+); Specification of the Subscriber Identity Module - Mobile Equipment (SIM - ME) interface
89. 3GPP TS 31.102 - Characteristics of the Universal Subscriber Identity Module (USIM) application
90. 3GPP TS 05.08 - Radio subsystem link control

91. 3GPP TS 22.087 - User-to-User Signalling (UUS)
92. 3GPP TS 22.022 - Personalisation of Mobile Equipment (ME)
93. 3GPP TS 22.082 - Call Forwarding (CF) supplementary services
94. 3GPP TS 22.083 - Call Waiting (CW) and Call Holding (HOLD)
95. 3GPP TS 22.081 - Line identification Supplementary Services- Stage 1
96. 3GPP TS 23.081 - Line identification supplementary services- Stage 2
97. 3GPP TS 22.086 - Advice of Charge (AoC) Supplementary Services
98. 3GPP TS 22.024 - Description of Charge Advice Information (CAI)
99. 3GPP TS 22.085 - Closed User Group (CUG) Supplementary Services
100. 3GPP TS 22.096 - Name identification supplementary services
101. 3GPP TS 04.18 - Mobile radio interface layer 3 specification; Radio Resource Control (RRC) protocol
102. 3GPP TS 05.02 - Multiplexing and Multiple Access on the Radio Path
103. 3GPP TS 51.014 - Specification of the SIM Application Toolkit for the Subscriber Identity Module - Mobile Equipment (SIM - ME) interface
104. 3GPP TS 27.010 V3.4.0 - Terminal Equipment to User Equipment (TE-UE) multiplexer protocol (Release 1999)
105. 3GPP TS 22.060 - General Packet Radio Service (GPRS); Service description; Stage 1
106. 3GPP TS 25.306 - UE Radio Access capabilities
107. 3GPP TS 22.002 - Circuit Bearer Services (BS) supported by a Public Land Mobile Network (PLMN)
108. 3GPP TS 22.067 - enhanced Multi Level Precedence and Pre-emption service (eMLPP); Stage 1
109. 3GPP TS 23.972 - Circuit switched multimedia telephony
110. 3GPP TS 24.615 Communication Waiting (CW) using IP Multimedia (IM) Core Network (CN) subsystem; Protocol Specification
111. 3GPP TS 25.101 - User Equipment (UE) radio transmission and reception (FDD)
112. 3GPP TS 23.122 - NAS Functions related to Mobile Station (MS) in idle mode
113. 3GPP TS 45.005 - Radio transmission and reception
114. 3GPP TS 23.014 Support of Dual Tone Multi-Frequency (DTMF) signalling V11.0.0 (2012-09)
115. 3GPP TS 26.267 V12.0.0 (2012-12) eCall Data Transfer; In-band modem solution; General description (Release 12)
116. 3GPP TS 51.010-1 Mobile Station (MS) conformance specification; Part 1: Conformance specification
117. 3GPP TS 51.010-2 Mobile Station (MS) conformance specification; Part 2: Protocol Implementation Conformance Statement (PICS) proforma specification
118. 3GPP TS 34.121-2 User Equipment (UE) conformance specification; Radio transmission and reception (FDD); Part 2: Implementation Conformance Statement (ICS)
119. 3GPP TS 24.301 Non-Access-Stratum (NAS) protocol for Evolved Packet System (EPS); Stage 3
120. 3GPP TS 44.060 General Packet Radio Service (GPRS); Mobile Station (MS) - Base Station System (BSS) interface; Radio Link Control / Medium Access Control (RLC/MAC) protocol
121. 3GPP TS 23.221 Architectural requirements
122. 3GPP TS 23.203 Policy and charging control architecture
123. 3GPP TS 31.101 UICC-terminal interface; Physical and logical characteristics
124. 3GPP TS 25.305 User Equipment (UE) positioning in Universal Terrestrial Radio Access Network (UTRAN); Stage 2
125. 3GPP TS 23.032: Universal Geographical Area Description (GAD)
126. 3GPP TS 25.331 Radio Resource Control (RRC); Protocol specification
127. 3GPP TS 36.101 Evolved Universal Terrestrial Radio Access (E-UTRA); User Equipment (UE) radio transmission and reception
128. 3GPP TS 24.173 IMS Multimedia telephony communication service and supplementary services; Stage 3
129. 3GPP TS 24.341 Support of SMS over IP networks; Stage 3
130. 3GPP TS 24.229 IP multimedia call control protocol based on Session Initiation Protocol (SIP) and Session Description Protocol (SDP); Stage 3

131. 3GPP TS 36.306 Evolved Universal Terrestrial Radio Access (E-UTRA); User Equipment (UE) radio access capabilities

132. 3GPP TS 36.133 Evolved Universal Terrestrial Radio Access (E-UTRA); Requirements for support of radio resource management

133. 3GPP TS 25.133 Requirements for support of radio resource management (FDD)

134. 3GPP TS 22.071 Location Services (LCS); Service description

135. 3GPP TS 36.331 Evolved Universal Terrestrial Radio Access (E-UTRA); Radio Resource Control (RRC); Protocol specification (Release 10)

136. 3GPP TS 24.167 3GPP IMS Management Object (MO); Stage 3

137. 3GPP TS 26.201 Speech codec speech processing functions; Adaptive Multi-Rate - Wideband (AMR-WB) speech codec; Frame structure

138. 3GPP TS 24.216 Communication Continuity Management Object (MO)

139. 3GPP TS 36.521-2 - Evolved Universal Terrestrial Radio Access (E-UTRA); User Equipment conformance specification; Radio transmission and reception; Part 2: Implementation Conformance Statement (ICS)

140. 3GPP TS 36.523-2 - Evolved Universal Terrestrial Radio Access (E-UTRA) and Evolved Packet Core (EPC); User Equipment conformance specification; Part 2: Implementation Conformance Statement (ICS)

141. 3GPP TS 23.003 Numbering, addressing and identification

142. 3GPP TS 31.111 Universal Subscriber Identity Module (USIM) Application Toolkit (USAT)

143. 3GPP TS 22.084 MultiParty (MPTY) supplementary service; Stage 1

144. 3GPP TS 24.607 Originating Identification Presentation (OIP) and Originating Identification Restriction (OIR) using IP Multimedia (IM) Core Network (CN) subsystem; Protocol specification

145. 3GPP TS 24.608 Terminating Identification Presentation (TIP) and Terminating Identification Restriction (TIR) using IP Multimedia (IM) Core Network (CN) subsystem; Protocol specification

146. 3GPP TS 36.213 Evolved Universal Terrestrial Radio Access (E-UTRA); Physical layer procedures

147. 3GPP TS 36.212 Evolved Universal Terrestrial Radio Access (E-UTRA); Multiplexing and channel coding

148. 3GPP TS 24.166 - 3GPP IP Multimedia Subsystem (IMS) conferencing Management Object (MO)

149. 3GPP TS 29.061 - Interworking between the Public Land Mobile Network (PLMN) supporting packet based services and Packet Data Networks (PDN)

150. 3GPP TS 24.303 - Mobility management based on Dual-Stack Mobile IPv6; Stage 3

151. 3GPP TS 24.327 - Mobility between 3GPP Wireless Local Area Network (WLAN) interworking (I-WLAN) and 3GPP systems; General Packet Radio System (GPRS) and 3GPP I-WLAN aspects; Stage 3

152. 3GPP TS 25.367 - Mobility procedures for Home Node B (HNB); Overall description; Stage 2

153. 3GPP TS 25.304 - User Equipment (UE) procedures in idle mode and procedures for cell reselection in connected mode

154. 3GPP TS 36.304 - Evolved Universal Terrestrial Radio Access (E-UTRA); User Equipment (UE) procedures in idle mode

155. 3GPP TS 45.008 - GSM/EDGE Radio Access Network; Radio subsystem link control

156. 3GPP TS 25.401 - Universal Mobile Telecommunications System (UMTS); UTRAN Overall Description

157. 3GPP TS 24.237 - Technical Specification Group Core Network and Terminals; IP Multimedia (IM) Core Network (CN) subsystem IP Multimedia Subsystem (IMS) Service Continuity; Stage 3

158. 3GPP TS 36.211 - Evolved Universal Terrestrial Radio Access (E-UTRA); Physical channels and modulation

159. 3GPP TS 23.682 - Architecture enhancements to facilitate communications with packet data networks and applications

160. 3GPP TS 23.401 - General Packet Radio Service (GPRS) enhancements for Evolved Universal Terrestrial Radio Access Network (E-UTRAN) access

161. 3GPP TS 44.018 - Mobile radio interface layer 3 specification; GSM/EDGE Radio Resource Control (RRC) protocol

162. 3GPP TS 43.064 - General Packet Radio Service (GPRS); Overall description of the GPRS radio interface; Stage 2

163. 3GPP TS 36.321 - Evolved Universal Terrestrial Radio Access (E-UTRA); Medium Access Control (MAC) protocol specification

164. 3GPP TS 22.011 - Service accessibility
165. 3GPP2 C.S0015-0 - Short Message Service
166. ETSI TS 102 223 - Smart cards; Card Application Toolkit (CAT)
167. ETSI TS 102 221 V8.2.0 (2009-06) Smart Cards; UICC-Terminal interface; Physical and logical characteristics (Release 8)
168. ETSI TS 127 007 V10.3.0 (2011-04) AT command set for User Equipment (UE) (3GPP TS 27.007 version 10.3.0 Release 10)
169. ETSI TS 122 101 V8.7.0 (2008-01) Service aspects; Service principles (3GPP TS 22.101 version 8.7.0 Release 8)
170. GSM 02.04 - Digital cellular telecommunications system (Phase 2+); Mobile Stations (MS) features
171. GSM 03.60 - Digital cellular telecommunications system (Phase 2+); General Packet Radio Service (GPRS) Service description; Stage 2
172. GSM 04.12 - Digital cellular telecommunications system (Phase 2+); Short Message Service Cell Broadcast (SMSCB) Support on Mobile Radio Interface.
173. GSM 04.60 - Digital cellular telecommunications system (Phase 2+); General Packet Radio Service (GPRS); Mobile Station (MS) - Base Station System (BSS) interface; Radio Link Control / Medium Access Control (RLC/MAC) protocol
174. GSMA TS.34 - IoT Device Connection Efficiency Guidelines
175. RFC 791 - Internet Protocol - http://www.ietf.org/rfc/rfc791.txt
176. RFC 2460 - Internet Protocol, Version 6 (IPv6) - http://www.ietf.org/rfc/rfc2460.txt
177. RFC 3267 - Real-Time Transport Protocol (RTP) Payload Format and File Storage Format for the Adaptive Multi-Rate (AMR) and Adaptive Multi-Rate Wideband (AMR-WB) Audio Codecs
178. RFC 792 Internet Control Message Protocol (http://tools.ietf.org/html/rfc0792)
179. RFC 959 File Transfer Protocol (http://tools.ietf.org/html/rfc959)
180. RFC 1123 File Transfer Protocol (https://www.rfc-editor.org/rfc/rfc1123.html)
181. RFC 2428 FTP Extensions for IPv6 and NATs (https://tools.ietf.org/html/rfc2428)
182. RFC 4291 - IP Version 6 Addressing Architecture (http://tools.ietf.org/html/rfc4291)
183. RFC 793 - Transmission Control Protocol (TCP) Protocol Specification (https://www.rfc-editor.org/rfc/rfc793.txt)
184. RFC 7323 - TCP Extensions for High Performance - https://www.ietf.org/rfc/rfc7323.txt
185. RFC 3969 - The Internet Assigned Number Authority (IANA) Uniform Resource Identifier (URI) Parameter Registry for the Session Initiation Protocol (SIP)
186. RFC 3261 - SIP: Session Initiation Protocol
187. RFC 5341 - The Internet Assigned Number Authority (IANA) tel Uniform Resource Identifier (URI) Parameter Registry
188. RFC 7301 - Application-Layer Protocol Negotiation Extension (ALPN) Protocol Specification (https://www.rfc-editor.org/rfc/rfc7301.html)
189. RFC 3966 - The tel URI for Telephone Numbers
190. RFC 2141 - URN Syntax
191. RFC 3406 - Uniform Resource Names (URN) Namespace Definition Mechanisms
192. RFC 5031 - A Uniform Resource Name (URN) for Emergency and Other Well-Known Services
193. RFC 4715 - The Integrated Services Digital Network (ISDN) Subaddress Encoding Type for tel URI
194. RFC 4028 - Session Timers in the Session Initiation Protocol (SIP)
195. RFC 5626 - Managing Client-Initiated Connections in the Session Initiation Protocol (SIP)
196. RFC 4867 - RTP Payload Format and File Storage Format for the Adaptive Multi-Rate (AMR) and Adaptive Multi-Rate Wideband (AMR-WB) Audio Codecs
197. RFC 4733 - RTP Payload for DTMF Digits, Telephony Tones, and Telephony Signals
198. RFC 1518 - An Architecture for IP Address Allocation with CIDR (https://tools.ietf.org/html/rfc1518)
199. RFC 1519 - Classless Inter-Domain Routing (CIDR): an Address Assignment and Aggregation Strategy (https://tools.ietf.org/html/rfc1519)
200. RFC 7252 - Constrained Application Protocol (CoAP)

201. RFC 8323 - CoAP (Constrained Application Protocol) over TCP, TLS, and WebSockets - https://www.ietf.org/rfc/rfc8323.txt
202. RFC 5280 - Internet X.509 Public Key Infrastructure Certificate and Certificate Revocation List (CRL) Profile - http://www.ietf.org/rfc/rfc5280.txt
203. RFC 7925 - TLS/DTLS IoT Profiles - https://www.ietf.org/rfc/rfc7925.txt
204. RFC 7959 - Block-Wise Transfers in the Constrained Application Protocol (CoAP) - https://www.ietf.org/rfc/rfc7959.txt
205. RFC 3629 - UTF-8, a transformation format of ISO 10646 - https://www.ietf.org/rfc/rfc3629.txt
206. ITU-T Recommendation V250, 05-99.
207. ITU-T V.25ter - ITU-T V.25 ter Recommendation: Data Communications over the Telephone Network; Serial asynchronous automatic Dialling and control.
208. ITU-T T.32 - ITU-T Recommendation T.32 Asynchronous Facsimile DCE Control - Service Class 2
209. ISO 639 (1988) Code for the representation of names of languages
210. ITU-T Recommendation V24, 02-2000. List of definitions for interchange circuits between Data Terminal Equipment (DTE) and Data Connection Equipment (DCE).
211. ITU-T E.212 - Series E: Overall network operation, telephone service, service operation and human factors
212. IEC 61162 Digital interfaces for navigational equipment within a ship
213. Stevens. TCP/IP Illustrated Volume1 & 2 Addison-Wesley, 1994.
214. SIM Access Profile - Interoperability Specification - Bluetooth Specification V11r00
215. Device terminal access protocol-EDP technical specification, version 1.6
216. BS EN 16062:2015 Intelligent transport systems - ESafety - eCall high level application requirements (HLAP) using GSM/UMTS circuit switched networks, April 2015
217. PCCA standard - Command set extensions for CDPD modems, Revision 2.0, March, 1998
218. OMA Device Management V1.2.1 (http://technical.openmobilealliance.org/Technical/technical-information/release-program/current-releases/dm-v1-2-1)
219. Open Mobile Alliance (OMA) SyncML Common Specification, Version 1.2.2 (http://www.openmobilealliance.org/release/Common)
220. Open Mobile Alliance (OMA) - Lightweight Machine to Machine Technical Specification, Version 1.0
221. MQTT Version 3.1.1 - OASIS Standard
222. MQTT-SN Protocol Specification Version 1.2
223. AT&T: Device Requirements -- Requirements Document -- Document Number 13340 -- Revision 4.6 -- Revision Date 9/2/11
224. Common PCN Handset Specification v4.2
225. maxim integrated MAX9860 16-Bit Mono Audio Voice Codec datasheet, 19-4349; Rev 2; 1/12. Available from the maxim integrated website (http://datasheets.maximintegrated.com/en/ds/MAX9860.pdf)
226. Digital Communication Standard -Ademco Contact ID Protocol -for Alarm System Communications,SIA DC-05-1999.09
227. Open Mobile Alliance (OMA) - Lightweight Machine to Machine Technical Specification, Version 1.1
228. Verizon LTE data retry

For regular updates to u-blox documentation and to receive product change notifications, register on our homepage.

Revision history

Revision	Date	Name	Comments
R01	22-Dec-2021	lpah	Initial release
R02	17-Jan-2022	lpah	New commands: +UDCONF=17. Modified commands: AT command settings, AT Commands Settings Notes, URCs, +UJAD, +CSCON, +CEDRXS, +UISMS, +ICF, \Q, S3, S4, S5, S6, S7, S10, E, Q, V, X, Z, PPP LCP handshake behavior, +CGREG, +CEREG, +UANT, +USTS, +USIO, +UTEMP, +CLVL, +USPM, +USOCR, +USOSO, +USOER, FTP, HTTP introduction, +UHTTP, PING, +UPING, +UGPS, +UGIND, +UGPRF, +UGSRV, +UGUBX, +ULOC, +ULOCIND, +UCOAP, MQTT introduction, +UMQTT, MQTT-SN introduction, +UMQTTSN, LARA-R6001D MNO profiles, LARA-R6401D MNO profiles. Review the command applicability for these commands: +UJAD, +CSCON, +CEDRXS, +UISMS, +ICF, \Q, S3, S4, S5, S6, S7, S8, S10, E, Q, V, X, Z, +CGREG, +CEREG, +UANT, +USTS, +UTEMP, +CLVL, +UGPS, +UGIND, +UGPRF, +UGSRV, +UGAOS, +UGUBX, +UGTMR, +UGZDA, +UGGGA, +UGGLL, +UGGSV, +UGRMC, +UGVTG, +UGGSA, +ULOC, +ULOCIND, +ULOCAID, +ULOCGNSS, +ULOCCELL.
R03	18-Feb-2022	lpah	New commands: +CNMPSD, +UDCONF=98. Modified commands: URCs presentation deferring, +CMUX, I, +CSCS, +CFUN, D, +VTS, +URAT, +UCFSCAN, +UDCONF=20, +UCGED, +VZWAPNE, +VZWRSRP, +VZWRSRQ, +UMNOPROF, +UBANDMASK, +UDCONF=92, +UIMSCFG, +CNMI, +CUSD, +UDCONF=50, +UFWINSTALL, +UFWUPD, +URING, +USIO, +UFACTORY, +UBKUPDATA, +UFOTASTAT, +ULGASP, GPIO introduction, GPIO additional notes, UART (DSR, DTR, DCD e RI) interface, +UGPIOC, File System Introduction, +UDWNFILE, +ULSTFILE, +UDELFILE, File System limits, +CLVL, +USPM, +UPAR, +USAR, +UTGN, Data security introduction, +USECMNG, +USECPRF, Cipher suite applicability, +USOSO, +UHTTP, +UHTTPAC, +UGPRF, +UDTMFCFG, +UMQTT, +UMQTTC, LwM2M objects management, +ULWM2MCONFIGEXT, +ODIS, MQTT class error codes, LARA-R6001D Americas MNO and conformance profiles, LARA-R6001D EMEA and global MNO profiles, LARA-R6001D Americas MNO and conformance profiles, LARA-R6401D EMEA and global MNO profiles. Review the command applicability for these commands: +CGMI, +GMI, +CGMM, +GMM, +CGMR, +GMR, +CGSN, +GSN, I, +GCAP, A, +VTS, +UCFSCAN, +UDCONF=20, +UCGED, +VZWAPNE, +VZWRSRP, +VZWRSRQ, +UIMSCFG, +UFWUPD, +UFACTORY, +UBKUPDATA, +ULGASP, +UDWNFILE, +ULSTFILE, +URDFILE, +URDBLOCK, +UDELFILE, +UPAR, +USAR, +UTGN, +USECMNG, +USECPRF.
R04	07-Apr-2022	lpah	New commands: +UDCONF=19, +UDCONF=40, +UURCCONF, +UDCONF=121. Modified commands: Operational mode of the AT interface, Command line, Concatenation of AT commands, Information text responses and result codes, Storing of AT commands setting, General operation, Auto-registration, Operational restrictions, Maximum vs typical response time of cellular network related AT commands, +CSCS, <MCC>, <MNC>, <CI>, <scrambling_code>, <arfcn>, <EARFCN>, <TAC>, <RSRP>, <RSRQ>, <Lband>, +CSQ, +COPS, +UCFSCAN, +UJAD, +CSCON, +VZWAPNE, +UBANDMASK, +UIMSCFG, +CPWD, +CPBR, +CPBF, +CPBW, +CRC, &K, +ICF, E, X, +CRSM, <APN>, +CGDCONT, +CGQREQ, +CGQMIN, +CGEQREQ, +CGEQMIN, +UAUTHREQ, +CGEQOS, +UFWINSTALL, +UFWUPD, +UANT, +URXDIV, +UDCONF=40, +UUARTCONF, +ULGASP, +UPSV, +UDWNFILE, +UMCLK, +UEXTDCONF, +USPEECHCFG, DNS introduction, +UDNSRN, +UDYNDNS, +UDNSCFG, Internet protocol

Revision	Date	Name	Comments
			transport layer, +USOCR, +UIPCHGN, +USECPRF, FTP introduction, +UFTP, HTTP introduction, +UHTTP, PING introduction, +UPING, +UGSRV, +ULOCCELL, +UIPADDR, CoAP introduction, +UCOAP, MQTT introduction, +UMQTT, MQTT-SN introduction, +UMQTTSN, +UMQTTSNC, Mobile termination error result codes +CME ERROR, MQTT class error codes, MQTT-SN class error codes, Multiple AT command interfaces, LARA-R6001D Americas MNO and conformance profiles, LARA-R6001D EMEA and global MNO profiles, LARA-R6001-00B Americas MNO and conformance profiles table, LARA-R6001-00 B EMEA and global MNO profiles table, LARA-R6401D Americas MNO and conformance profiles, LARA-R6401D EMEA and global MNO profiles, LARA-R6401-00B Americas MNO and conformance profiles , LARA-R6401-00B EMEA and global MNO profiles , LARA-R6801-00B Americas MNO and conformance profiles , LARA-R6801-00B EMEA and global MNO profiles table. Updated estimated response time information for these commands: +UDNSRN, +USOSEC, +USOCL, +USOCO, +USOWR, +USOST, +USORD, +USORF, +USOLI, +USODL. Review the command applicability for these commands: +CGQMIN, +CGEQREQ, +CGEQMIN, +URXDIV, +UMCLK, +USPEECHCFG, +UIPADDR.
R05	11-May-2022	lpah	Modified commands: Command line, +CSCS, +VTS, S0, <scrambling_code>, +UCFSCAN, \Q, +ULGASP, +URING, +UDWNFILE, +UI2S, +UTGN, +UEXTDCONF, +USPEECHCFG, +USPEECHINFO, +UDNSCFG, +ULOCCELL, +UI2CC, MQTT-SN class error codes.
R06	08-Jul-2022	lpah	New commands: +CALM, +UDCONF=56, +CGEREP, +UUSBDET, +UNVMCFG, +UNVMW, +UNVMR, +UNVMF, +UMSM, +USECMNG AT command example, +USOCFG, +ULWM2MNOTIFY. Modified commands: Switch from data mode to online command mode, AT command line, S-parameters, Maximum vs typical response time of cellular network related AT commands, Unsolicited Result Code (URC), +CMUX, +CALM, +UCALLSTAT, <RSRQ>, +COPS, +UCFSCAN, +UDCONF=20, +UCGED, +CEDRXS, +UIMSCFG, +CCWA, &C, &D, &S, V, <APN>, <cid>, +CGDCONT, +UDCONF=19, D*, +CGACT, +CGQREQ, +CGQMIN, +CEREG, +URING, +USIO, +UPSV, UART (DSR, DTR, DCD e RI) interface, File System Introduction, +UDWNFILE, Audio interface introduction, +CLVL, +UPAR, +USAR, +UTGN, +USPEECHCFG, +USOGO, +UFTP, +UHTTP, +UGPRF, +UGUBX, +UI2CREGR, +ULWM2MREG, +UMQTT, +UMQTTC, +UMQTTSN, +UMQTTSNC, LARA-R6 +UFWINSTALL final result codes, MQTT class error codes, MQTT-SN class error codes, Multiple AT command interfaces, LARA-R6401D Americas MNO and conformance profiles, LARA-R6401D EMEA and global MNO profiles, LARA-R6401-00B Americas MNO and conformance profiles , LARA-R6401-00B EMEA and global MNO profiles .
R07	22-Aug-2022	lpah	New commands: +CLCK, +UTI, +UI2CCFG. Modified commands: I, +CMER, +CHUP, +VTS, +CSQ, +COPS, +UCFSCAN, +UIMSCFG, +ICF, +UAUTHREQ, +UDCONF=76, +UFWINSTALL, +UFWUPD, +UANT, +UUSBDET, +UBKUPDATA, +ULGASP, +UTEST=10, Audio interface introduction, +UI2S, +UPAR, +UTGN, Audio parameter tuning introduction, +USECMNG, +USODL, +USOCTL, +UI2CO, +UIPADDR, +UCOAPC, +UMQTTC, MQTT-SN introduction, +UMQTTSNC, +ULWM2MCONFIGEXT, +ODIS, Firmware install final result codes, FTP class error codes, MQTT-SN class error codes, Saving AT commands configuration.
R08	24-Oct-2022	lpah	Extended the document applicability to LARA-L6004-00B, LARA-L6004D-00B.

Revision	Date	Name	Comments
			New commands: +UUSBCONF, +UIFCONF. Modified commands: I, +CIND, +CSGT, +UCFSCAN, +VZWAPNE, +CSCON, +CGREG, +CGATT, +CGCONTRDP, +UFWINSTALL, +USIO, +UNVMCFG, +UNVMW, +UNVMR, +UNVMF, +CLVL, +CRSL, +UDCONF=1, +UGPS, +ULOCCELL, +ULOCGNSS. Review the command applicability for these commands: +UNVMCFG, +UNVMW, +UNVMR, +UNVMF, +USECFILEDEC, +USOCFG, +USOSTF, +UI2CCFG.
R09	05-04-2023	lpah	Extended the applicability to LARA-R6001-00B-01, LARA-R6001D-00B-01, LARA-R6401-00B-01, LARA-R6401D-00B-01, LARA-R6801D-00B-01. New commands: +UHPPLMN, +UAUDCFG. Modified commands: Unsolicited Result Code (URC), +CPWROFF, +UCALLSTAT, +COPS, +UCFSCAN, +UDCONF=20, +CSCON, +UIMSCFG, +CIREG, +UFWINSTALL, +UFWUPD, +UUSBCONF, +USIO, +UTEMP, +UBKUPDATA, +UFOTA, +UFOTASTAT, File system introduction, +UDWNFILE, +UI2S, +UEXTDCONF, +USPEECHCFG, +UTI, +USECROTUID, +USECDEVINFO, +USECMODE, +USECCONN, +USECOPCMD, Data security introduction, +USECPRF, Cipher suite applicability, Data security provided by Secure Element, +USECPSK, Positioning introduction, +UGPS, +UGSRV, +ULOC, +ULOCGNSS, +UI2CCFG, Networking introduction, +UIFCONF, +UIPADDR, +UMQTTC, +ULWM2MSTAT, +ULWM2M, +ULWM2MREG, +ULWM2MDEREG, +ULWM2MCONFIG, Mobile termination error result codes +CME ERROR,LARA-R6001D / LARA-L6004D EMEA and global MNO profiles, LARA-R6001 / LARA-L6004 EMEA and global MNO profiles. Review the command applicability for these commands: +UTI.
R10	01-Mar-2024	mcel	Extended the document applicability to LARA-L6004-01B, LARA-L6004D-01B, LARA-L6804D-01B, LARA-R6001-01B, LARA-R6001D-01B, LARA-R6401-01B, LARA-R6401D-01B, LARA-R6801-01B, LARA-R6801D-01B. New commands: +UDCONF=56, +USCANSTAT, +UTEST=4, +CPSMS, +UCPSMS, +UPSMVER, +UPSMR, +UGNMEA, +UTEST=0, +UGLAASPRF, +UGLAASZTP. Modified commands: +CFUN, +COPS, +URAT, +UCGED, +CSCON, +UMNOPROF, +UBANDMASK, +UIMSCFG, +UISS, +UFWINSTALL, +UFWUPD, +UUSBCONF, +UUARTCONF, +UFACTORY, +UFOTA, +UFOTACONFIG, +UFOTAACK, +CPSMS, +UCPSMS, +UPSMR, +UPSMVER, GPIO introduction, +UGPIOC, +UDWNFILE, +UI2S, +UTI, +USECPRF, Internet protocol transport layer, IPv4/IPv6 addressing, +USOCR, +USOSEC, +USOSO, +USOGO, +USOCFG, +USOCL, +USOER, +USOCO, +USOWR, +USOST, +USORD, +USORF, +USOLI, +USODL, +UDCONF=5, +UDCONF=6, +UDCONF=7, +UDCONF=8, +UIPCHGN, +UFTPC, +UHTTP, +UHTTPAC, Positioning introduction, +UGSRV, +UGIND, +ULOCIND, +ULWM2MCONFIGEXT, +UMQTTC, +UMQTTSN, +UMQTTSNC, +USPEECHCFG, +USPEECHINFO, D, H, S0, +UCALLSTAT, +UCOAP, +UCOAPC, +DYNDNS, +UDNSCFG, +UDNSRN, +UTEST=10, +UDELFILE, +UDWNFILE, +ULSTFILE, +URDBLOCK, +URDFILE, +UFTP, I, +CGMM, +CGSN, +CSCS, +GMM, +UGPIOC, D*, H, +CEREG, +CGACT, +CGCONTRDP, +CGDATA, +CGDCONT, +CGDSCONT, +CGEQOS, +CGEREP, +CGPADDR, +CGPIAF, +CGREG, +CGTFT, +UAUTHREQ, +UDCONF=66, +UDCONF=75, +UDCONF=76, +UGCNTRD, +UGCNTSET, +UGIND, +UGPRF, +UGPS, +UGSRV, +UGUBX, +ULOC, +ULOCCELL, +ULOCGNSS, +ULOCIND, +UHTTP, +UHTTPAC, +UHTTPC, +UI2CCFG, +UI2CO, +UI2CR, +UI2CREGR, +UIMSCFG, +UISMS, +UISS, +CMUX, +ODIS, +ULWM2M, +ULWM2MCONFIG, +ULWM2MCONFIGEXT, +ULWM2MDEREG, +ULWM2MLIST,

Revision	Date	Name	Comments
			+ULWM2MNOTIFY, +ULWM2MREAD, +ULWM2MREG, +ULWM2MSTAT, +ULWM2MWRITE, +UMQTT, +UMQTTC, +UMQTTER, +UMQTTNV, +UMQTTSN, +UMQTTSNC, +CEDRXRDP, +CEDRXS, +CESQ, +CNUM, +COPS, +CPLS, +CPOL, +CREG, +CSCON, +CSQ, +UBANDMASK, +UCFSCAN, +UCGED, +UDCONF=20, +UDCONF=56, +UDCONF=81, +UDCONF=92, +UHPPLMN, +UJAD, +UMNOPROF, +URAT, +URPM, +USVCDOMAIN, +VZWAPNE, +VZWRSRP, +VZWRSRQ, +WS46, +UEMBPF, +UIPADDR, +UPING, +CPSMS, +UCPSMS, +UPSMR, +UPSMVER, +UPSV, +USECMNG, +USECMODE, +USECOPCMD, +USECPRF, +USECPSK, +USECROTUID, +CLCK, +CPIN, +CPWD, +CUSATW, +UBIP, +CLAN, +CRSM, +CSIM, +CUAD, +UDCONF=50, +USIMSTAT, +UUICC, +CMGD, +CMGF, +CMGL, +CMGR, +CMGS, +CMGW, +CMMS, +CMSS, +CNMA, +CNMI, +CPMS, +CSCA, +CSCB, +CSDH, +CSMP, +CSMS, +UCMGL, +UCMGP, +UCMGR, +UCMGS, +UANTR, +UBKUPDATA, +UDCONF=40, +UFACTORY, +UFOTA, +UFOTAACK, +UFOTASTAT, +UFWINSTALL, +UFWUPD, +ULGASP, +UNVMCFG, +UNVMF, +UNVMR, +UNVMW, +URING, +USIO, +USTS, +UTEMP, +UTEST=4, +UUARTCONF, +UUSBCONF, +UUSBDET, +CCLK, +CEER, +CFUN, +CIND, +CMEE, +CMER, +CPAS, +CPWROFF, +CSGT, +CTZR, +CTZU, +UCIND, +UDCONF=1, +UDCONF=5, +UDCONF=6, +UDCONF=7, +UDCONF=8, +UIPCHGN, +USOCFG, +USOCL, +USOCO, +USOCR, +USOCTL, +USODL, +USOER, +USOGO, +USOLI, +USORD, +USORF, +USOSEC, +USOSO, +USOST, +USOWR, E, O, Q, S10, S2, S3, S4, S5, S6, S7, V, X, Z, &C, &D, &K, &S, +ICF, +IPR, /Q, Estimated maximum command response time, LARA-L6004D-01B LARA-R6001D-01B Americas MNO and conformance profiles, LARA-L6004D-01B LARA-R6001D-01B EMEA and global MNO profiles, LARA-L6004D-01B Americas MNO and conformance profiles, LARA-L6004D-01B EMEA and global MNO profiles, LARA-R6401D-01B Americas MNO and conformance profiles, LARA-R6401D-01B EMEA and global MNO profiles, LARA-R6401-01B Americas MNO and conformance profiles, LARA-R6401-01B EMEA and global MNO profiles, LARA-L6804D-01B LARA-R6801D-01B APAC MNO and conformance profiles, LARA-L6804D-01B LARA-R6801D-01B EMEA and global MNO profiles. Review the command applicability for these commands: +UFOTA.
R11	22-Apr-2024	mcel	New products: LARA-L6404-01B, LARA-L6404D-01B, LARA-L6824D-01B-00. New commands: None Modified commands: +UTI, +UI2S, D, H, +UCALLSTAT, +UDWNFILE, +UFTPC, I, +CEREG, +CGDCONT, +CGDSCONT, +CGPADDR, +CGTFT, +UDCONF=9, +UGCNTRD, +UGCNTSET, GPS, +UGSRV, Chapter 2, +UHTTP, +UHTTPC, +UIMSCFG, +CEDRXRDP, +CEDRXS, +COPS, +CREG, +PACSP, +UBANDMASK, +UCFSCAN, +UCGED, +UDCONF=20, +UDCONF=56, +UDCONF=92, +UMNOPROF, +URAT, +USVCDOMAIN, +USECMNG, +USECPRF, Introduction, +CUSATW, +UFOTA, +UFWINSTALL, +UFWUPD, +UNVMCFG, +UNVMF, +UNVMR, +UNVMW, +UTEST=4, +UUARTCONF, +CFUN, +USODL, +USOGO. Updated estimated response time information for these commands: Review the command applicability for these commands:
R12	19-Jul-2024	mcel	New product: LARA-L6824-01B Modified commands: D, +UCALLSTAT, +CEREG, +CGDCONT, +CGDSCONT, +CGPADDR, +CGTFT, +UGCNTRD, +UGCNTSET, GPS, +UGSRV, +UIMSCFG, NETWORK parameters, +CEDRXS, +COPS, +CREG, +UCFSCAN, +UCGED, +UDCONF=20, +UDCONF=56, +UDCONF=92, +USVCDOMAIN, DataSecurity, +USECMNG, +CUSATW, +UFOTA,

Revision	Date	Name	Comments
			+UFWINSTALL, +UFWUPD, +UNVMCFG, +UNVMF, +UNVMR, +UNVMW, +UUARTCONF, +CFUN, +USODL, +USOGO, MNO profiles.

Contact

u-blox AG

Address: Zürcherstrasse 68
8800 Thalwil
Switzerland

For further support and contact information, visit us at www.u-blox.com/support.