



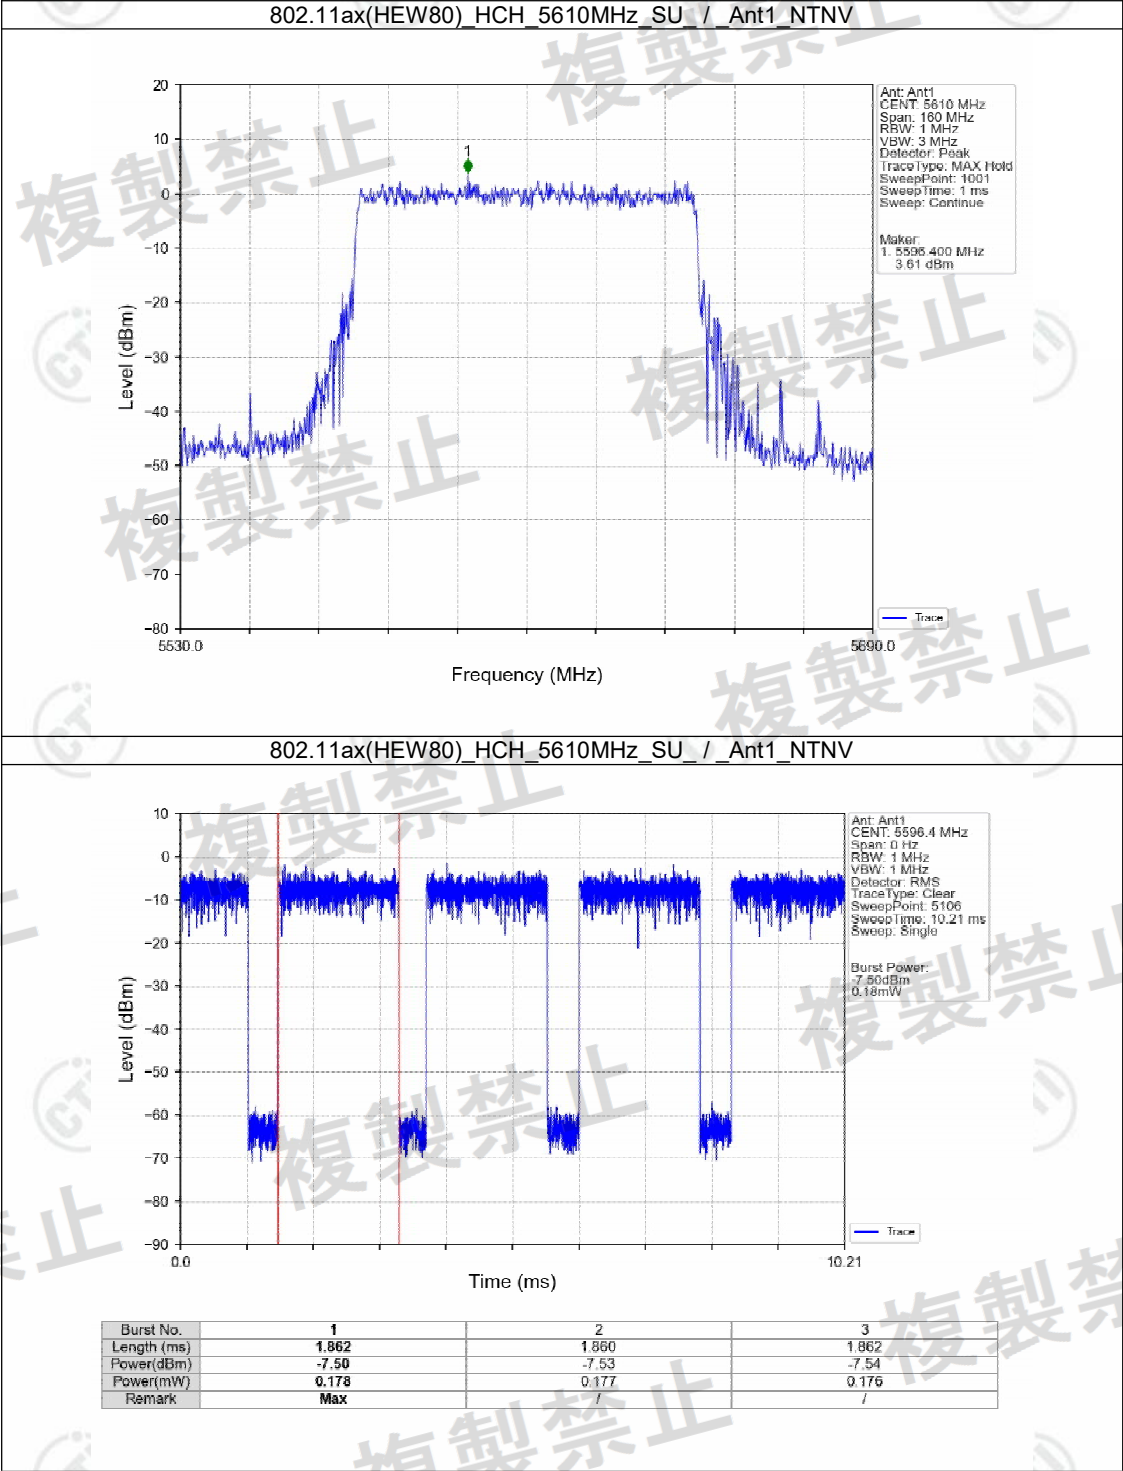

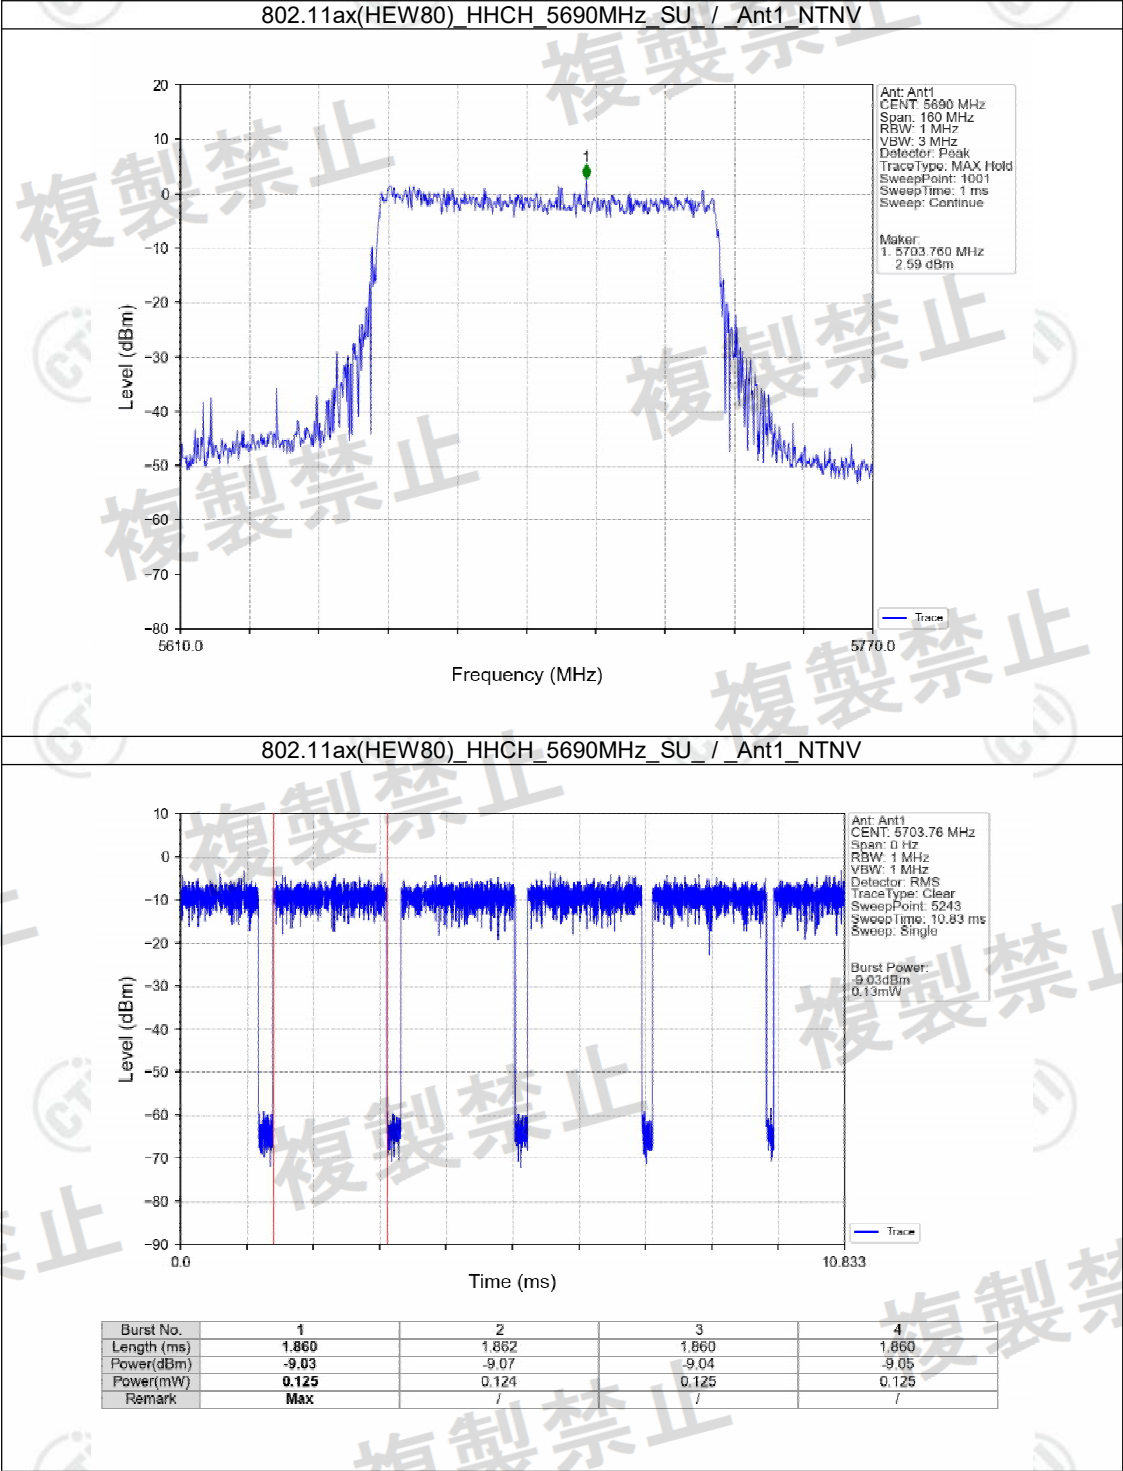

4. Adjacent Channel Leakage Power

4.1 Test Result

4.1.1 ACLR_NTNV_SISO

NTNV											
Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	Offset (MHz)	Integ BW (MHz)	Power (dBm)	Result (dBc)	Limit (dBc)	Verdict
802.11a	SISO	5500	/	/	1	-40	20	-31.66	-50.83	<=-40	Pass
						-20	20	-10.40	-29.57	<=-25	Pass
						0	20	19.17	/	/	/
						20	20	-10.25	-29.42	<=-25	Pass
						40	20	-31.04	-50.21	<=-40	Pass
		5600	/	/	1	-40	20	-30.61	-50.31	<=-40	Pass
						-20	20	-8.56	-28.26	<=-25	Pass
						0	20	19.70	/	/	/
						20	20	-10.76	-30.46	<=-25	Pass
						40	20	-30.72	-50.42	<=-40	Pass
		5700	/	/	1	-40	20	-31.58	-49.76	<=-40	Pass
						-20	20	-9.96	-28.14	<=-25	Pass
						0	20	18.18	/	/	/
						20	20	-11.69	-29.87	<=-25	Pass
						40	20	-32.32	-50.50	<=-40	Pass
		5720	/	/	1	-40	20	-32.25	-50.18	<=-40	Pass
						-20	20	-10.42	-28.35	<=-25	Pass
						0	20	17.93	/	/	/
						20	20	-11.69	-29.62	<=-25	Pass
						40	20	-32.35	-50.28	<=-40	Pass
802.11n (HT20)	SISO	5500	/	/	1	-40	20	-35.41	-52.46	<=-40	Pass
						-20	20	-10.49	-27.54	<=-25	Pass
						0	20	17.05	/	/	/
						20	20	-9.93	-26.98	<=-25	Pass

802.11 n (HT40)	SISO	5600	/	/	1	40	20	-34.71	-51.76	<=-40	Pass
						-40	20	-32.03	-49.64	<=-40	Pass
						-20	20	-9.42	-27.03	<=-25	Pass
						0	20	17.61	/	/	/
						20	20	-10.29	-27.90	<=-25	Pass
						40	20	-32.07	-49.68	<=-40	Pass
		5700	/	/	1	-40	20	-34.62	-50.78	<=-40	Pass
						-20	20	-10.23	-26.39	<=-25	Pass
						0	20	16.16	/	/	/
						20	20	-11.38	-27.54	<=-25	Pass
						40	20	-35.58	-51.74	<=-40	Pass
		5720	/	/	1	-40	20	-34.90	-51.09	<=-40	Pass
						-20	20	-11.29	-27.48	<=-25	Pass
						0	20	16.19	/	/	/
						20	20	-12.24	-28.43	<=-25	Pass
						40	20	-35.17	-51.36	<=-40	Pass
		5510	/	/	1	-80	40	-34.55	-51.69	<=-40	Pass
						-40	40	-14.97	-32.11	<=-25	Pass
						0	40	17.14	/	/	/
						40	40	-14.47	-31.61	<=-25	Pass
						80	40	-33.61	-50.75	<=-40	Pass
		5590	/	/	1	-80	40	-30.13	-47.32	<=-40	Pass
						-40	40	-15.06	-32.25	<=-25	Pass
						0	40	17.19	/	/	/
						40	40	-14.69	-31.88	<=-25	Pass
						80	40	-30.36	-47.55	<=-40	Pass
		5670	/	/	1	-80	40	-33.13	-49.75	<=-40	Pass
						-40	40	-13.76	-30.38	<=-25	Pass
						0	40	16.62	/	/	/
						40	40	-17.22	-33.84	<=-25	Pass
						80	40	-33.68	-50.30	<=-40	Pass

		5710	/	/	1	-80	40	-32.87	-48.65	<=-40	Pass
						-40	40	-16.07	-31.85	<=-25	Pass
						0	40	15.78	/	/	/
						40	40	-17.44	-33.22	<=-25	Pass
						80	40	-33.50	-49.28	<=-40	Pass
802.11 ac (VHT20)	SISO	5500	/	/	1	-40	20	-32.67	-49.93	<=-40	Pass
						-20	20	-11.07	-28.33	<=-25	Pass
						0	20	17.26	/	/	/
						20	20	-9.87	-27.13	<=-25	Pass
						40	20	-32.03	-49.29	<=-40	Pass
		5600	/	/	1	-40	20	-34.67	-52.19	<=-40	Pass
						-20	20	-9.48	-27.00	<=-25	Pass
						0	20	17.52	/	/	/
						20	20	-10.31	-27.83	<=-25	Pass
						40	20	-34.61	-52.13	<=-40	Pass
		5700	/	/	1	-40	20	-34.88	-50.73	<=-40	Pass
						-20	20	-11.12	-26.97	<=-25	Pass
						0	20	15.85	/	/	/
						20	20	-12.82	-28.67	<=-25	Pass
						40	20	-35.75	-51.60	<=-40	Pass
		5720	/	/	1	-40	20	-34.62	-50.94	<=-40	Pass
						-20	20	-10.71	-27.03	<=-25	Pass
						0	20	16.32	/	/	/
						20	20	-11.41	-27.73	<=-25	Pass
						40	20	-35.12	-51.44	<=-40	Pass
802.11 ac (VHT40)	SISO	5510	/	/	1	-80	40	-30.88	-48.00	<=-40	Pass
						-40	40	-14.69	-31.81	<=-25	Pass
						0	40	17.12	/	/	/
						40	40	-14.51	-31.63	<=-25	Pass
						80	40	-29.73	-46.85	<=-40	Pass
		5590	/	/	1	-80	40	-33.68	-51.04	<=-40	Pass


		5670	/	/	1	-40	40	-15.11	-32.47	<=-25	Pass
						0	40	17.36	/	/	/
						40	40	-15.37	-32.73	<=-25	Pass
						80	40	-33.58	-50.94	<=-40	Pass
						-80	40	-33.25	-49.83	<=-40	Pass
						-40	40	-14.70	-31.28	<=-25	Pass
						0	40	16.58	/	/	/
						40	40	-17.01	-33.59	<=-25	Pass
		5710	/	/	1	80	40	-33.73	-50.31	<=-40	Pass
						-80	40	-33.05	-49.17	<=-40	Pass
						-40	40	-15.77	-31.89	<=-25	Pass
						0	40	16.12	/	/	/
						40	40	-16.41	-32.53	<=-25	Pass
						80	40	-33.80	-49.92	<=-40	Pass
802.11 ac (VHT80)	SISO	5530	/	/	1	-80	80	-17.98	-35.11	<=-25	Pass
						0	80	17.13	/	/	/
						80	80	-17.73	-34.86	<=-25	Pass
		5610	/	/	1	-80	80	-17.64	-35.00	<=-25	Pass
						0	80	17.36	/	/	/
						80	80	-17.55	-34.91	<=-25	Pass
		5690	/	/	1	-80	80	-17.78	-33.86	<=-25	Pass
						0	80	16.08	/	/	/
						80	80	-20.14	-36.22	<=-25	Pass
802.11 ax (HEW2 0)	SISO	5500	SU	/	1	-40	20	-33.50	-50.65	<=-40	Pass
						-20	20	-8.95	-26.10	<=-25	Pass
						0	20	17.15	/	/	/
						20	20	-10.70	-27.85	<=-25	Pass
						40	20	-32.71	-49.86	<=-40	Pass
		5600	SU	/	1	-40	20	-34.72	-51.93	<=-40	Pass
						-20	20	-10.77	-27.98	<=-25	Pass
						0	20	17.21	/	/	/
						20	20	-10.33	-27.54	<=-25	Pass


802.11 ax (HEW4 0)	SISO	5700	SU	/	1	40	20	-34.47	-51.68	<=-40	Pass
						-40	20	-35.06	-50.70	<=-40	Pass
						-20	20	-10.62	-26.26	<=-25	Pass
						0	20	15.64	/	/	/
						20	20	-12.34	-27.98	<=-25	Pass
						40	20	-36.31	-51.95	<=-40	Pass
		5720	SU	/	1	-40	20	-35.97	-52.18	<=-40	Pass
						-20	20	-9.67	-25.88	<=-25	Pass
						0	20	16.21	/	/	/
						20	20	-10.95	-27.16	<=-25	Pass
		5510	SU	/	1	40	20	-35.19	-51.40	<=-40	Pass
						-80	40	-34.63	-52.52	<=-40	Pass
						-40	40	-13.76	-31.65	<=-25	Pass
						0	40	17.89	/	/	/
						40	40	-15.72	-33.61	<=-25	Pass
		5590	SU	/	1	80	40	-33.45	-51.34	<=-40	Pass
						-80	40	-33.64	-51.68	<=-40	Pass
						-40	40	-15.30	-33.34	<=-25	Pass
						0	40	18.04	/	/	/
						40	40	-15.16	-33.20	<=-25	Pass
		5670	SU	/	1	80	40	-33.81	-51.85	<=-40	Pass
						-80	40	-33.24	-50.62	<=-40	Pass
						-40	40	-13.51	-30.89	<=-25	Pass
						0	40	17.38	/	/	/
						40	40	-16.16	-33.54	<=-25	Pass
		5710	SU	/	1	80	40	-33.86	-51.24	<=-40	Pass
						-80	40	-32.86	-49.49	<=-40	Pass
						-40	40	-13.88	-30.51	<=-25	Pass
						0	40	16.63	/	/	/
						40	40	-15.63	-32.26	<=-25	Pass
						80	40	-33.50	-50.13	<=-40	Pass

802.11 ax (HEW80)	SISO	5530	SU	/	1	-80	80	-18.20	-35.83	<=-25	Pass
						0	80	17.63	/	/	/
						80	80	-17.81	-35.44	<=-25	Pass
		5610	SU	/	1	-80	80	-18.20	-35.98	<=-25	Pass
						0	80	17.78	/	/	/
						80	80	-19.27	-37.05	<=-25	Pass
		5690	SU	/	1	-80	80	-15.87	-32.92	<=-25	Pass
						0	80	17.05	/	/	/
						80	80	-19.66	-36.71	<=-25	Pass


4.2 Test Graph

4.2.1 ACLR_NTNV_SISO

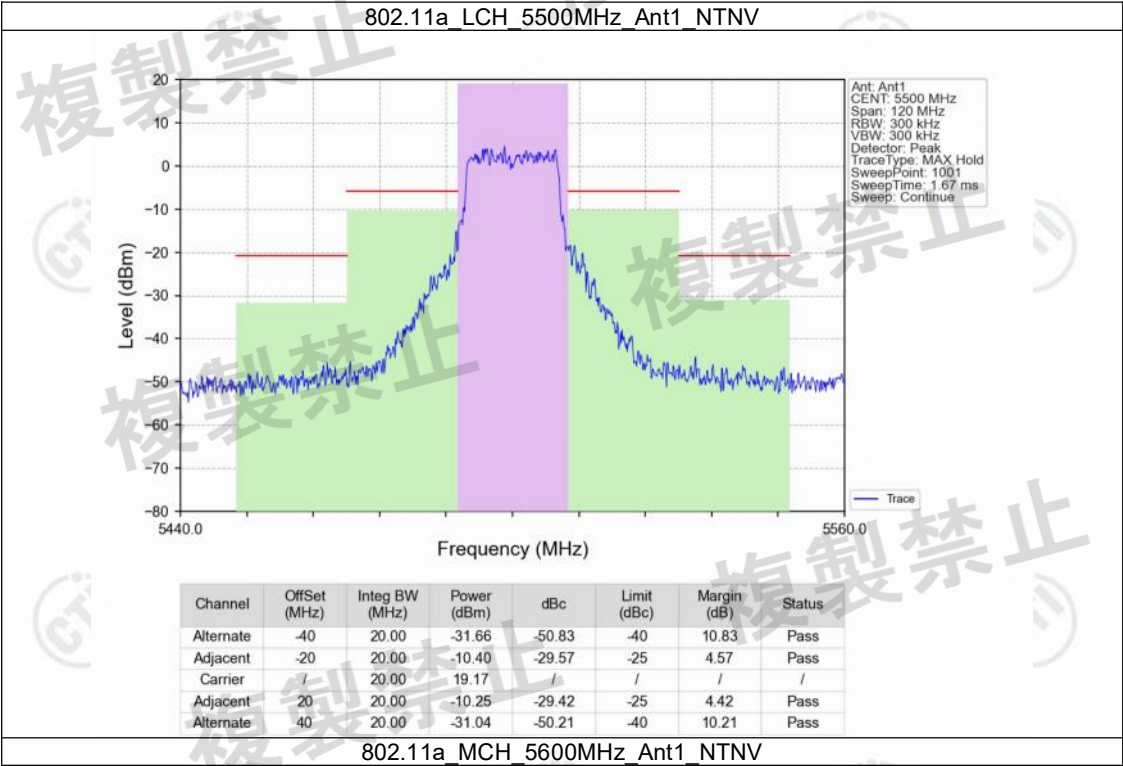

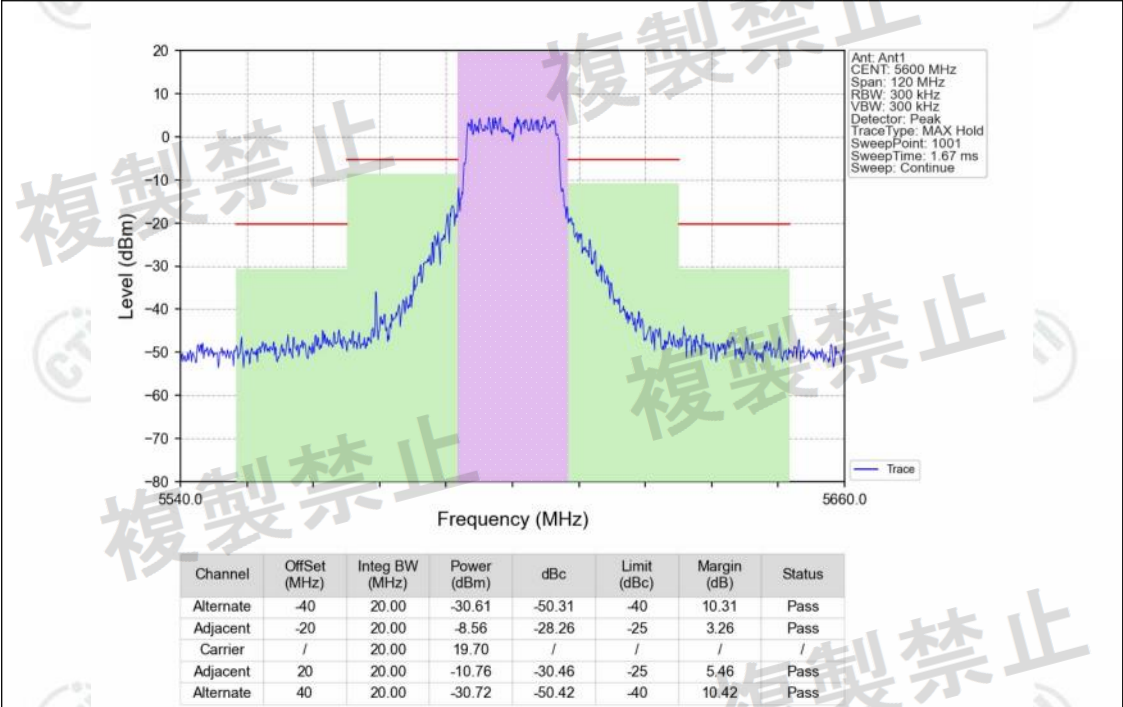


802.11a_HCH_5700MHz_Ant1_NTNV

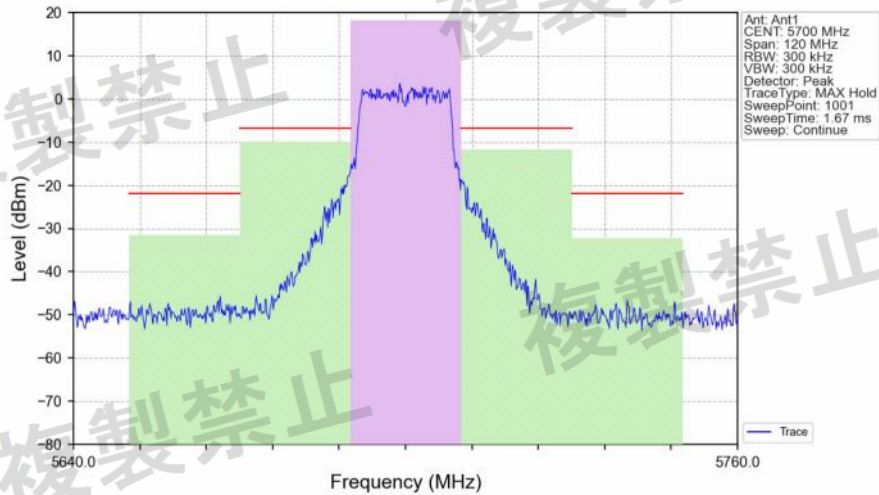


Channel	OffSet (MHz)	Integ BW (MHz)	Power (dBm)	dBc	Limit (dBc)	Margin (dB)	Status
Alternate	-40	20.00	-31.58	-49.76	-40	9.76	Pass
Adjacent	-20	20.00	-9.96	-28.14	-25	3.14	Pass
Carrier	/	20.00	18.18	/	/	/	/
Adjacent	20	20.00	-11.69	-29.87	-25	4.87	Pass
Alternate	40	20.00	-32.32	-50.50	-40	10.50	Pass


802.11a_HHCH_5720MHz_Ant1_NTNV

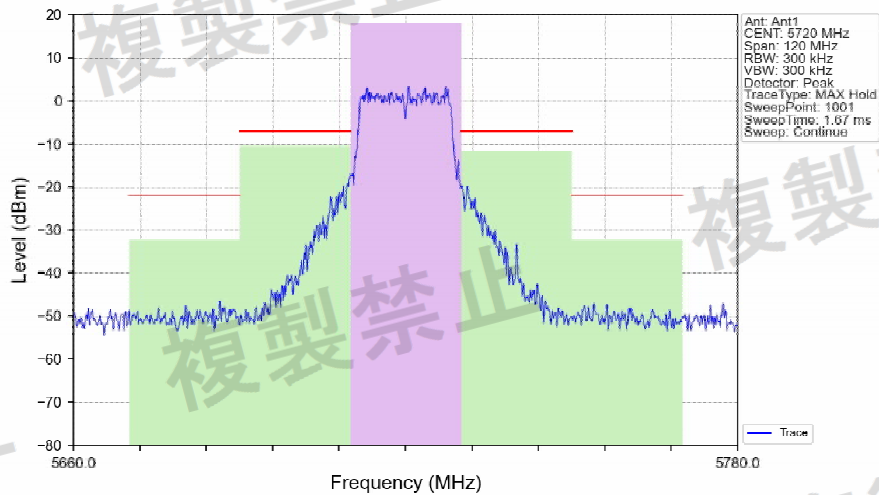

Channel	OffSet (MHz)	Integ BW (MHz)	Power (dBm)	dBc	Limit (dBc)	Margin (dB)	Status
Alternate	-40	20.00	-32.25	-50.18	-40	10.18	Pass
Adjacent	-20	20.00	-10.42	-28.35	-25	3.35	Pass
Carrier	/	20.00	17.93	/	/	/	/
Adjacent	20	20.00	-11.69	-29.62	-25	4.62	Pass
Alternate	40	20.00	-32.35	-50.28	-40	10.28	Pass

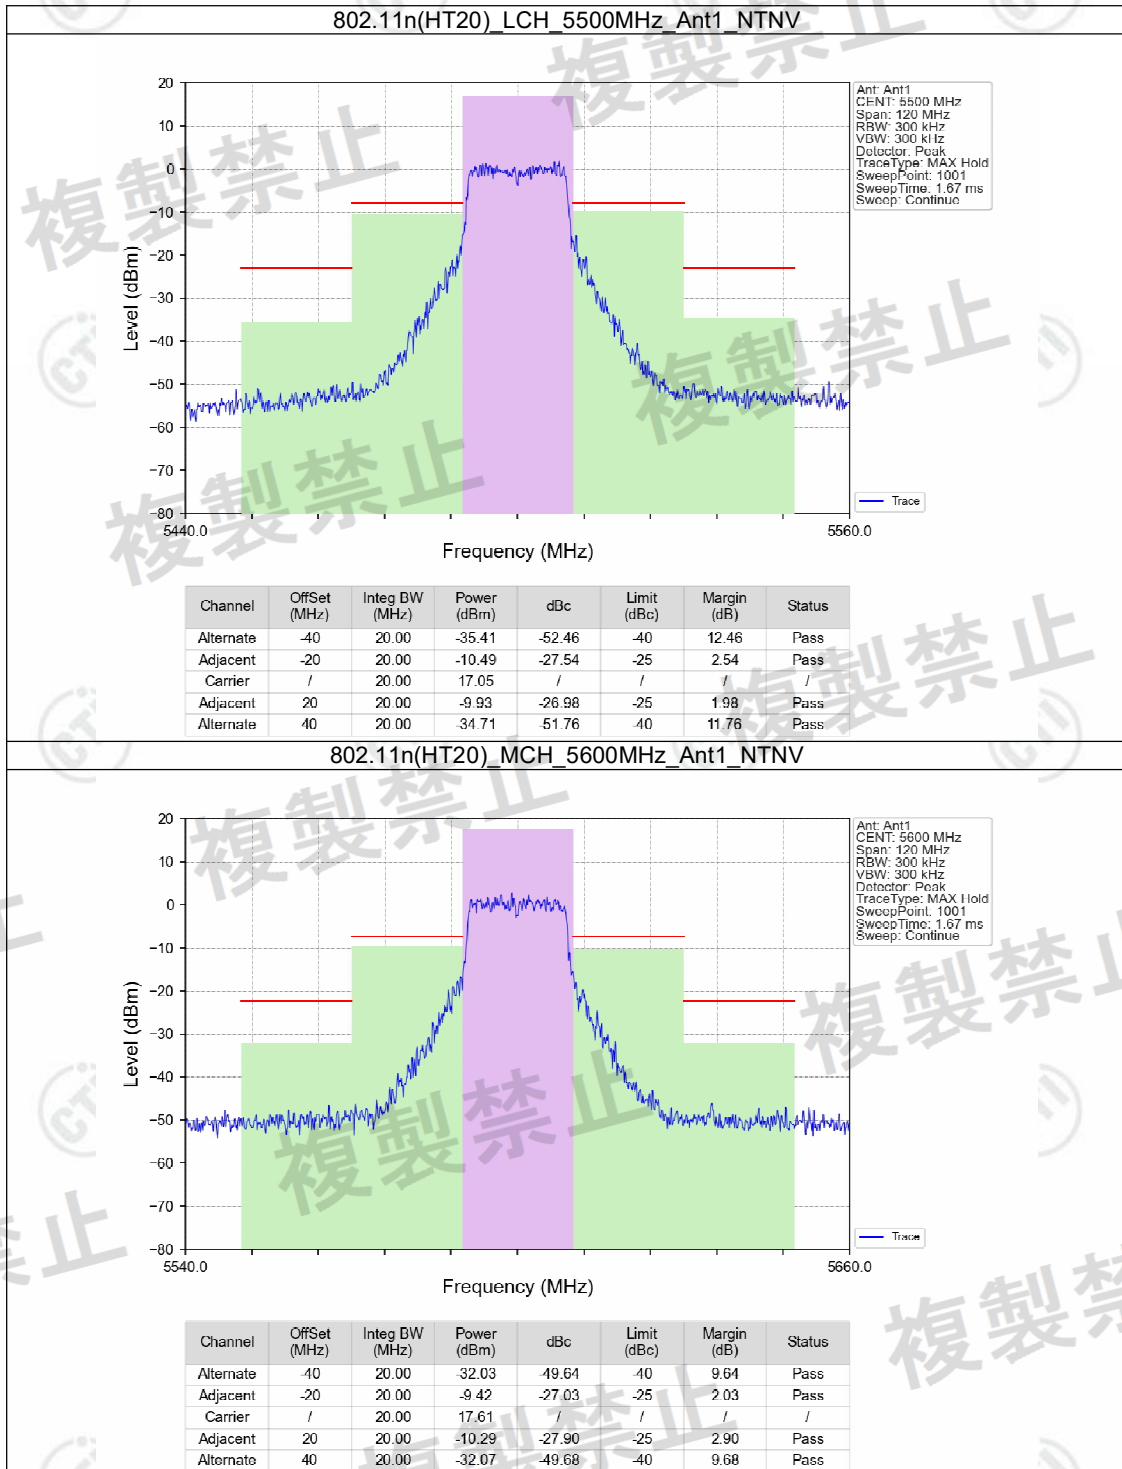


802.11n(HT20)_HCH_5700MHz_Ant1_NTNV

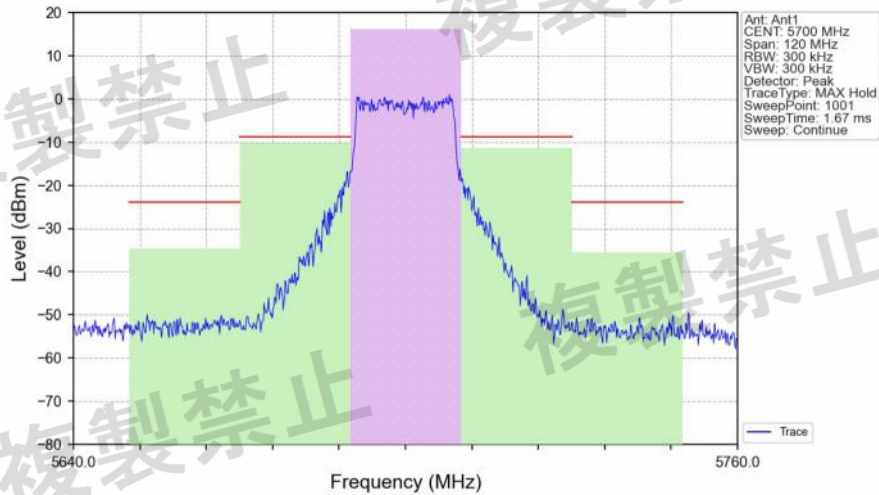


Channel	OffSet (MHz)	Integ BW (MHz)	Power (dBm)	dBc	Limit (dBc)	Margin (dB)	Status
Alternate	-40	20.00	-34.62	-50.78	-40	10.78	Pass
Adjacent	-20	20.00	-10.23	-26.39	-25	1.39	Pass
Carrier	/	20.00	16.16	/	/	/	/
Adjacent	20	20.00	-11.38	-27.54	-25	2.54	Pass
Alternate	40	20.00	-35.58	-51.74	-40	11.74	Pass

802.11n(HT20)_HHCH_5720MHz_Ant1_NTNV

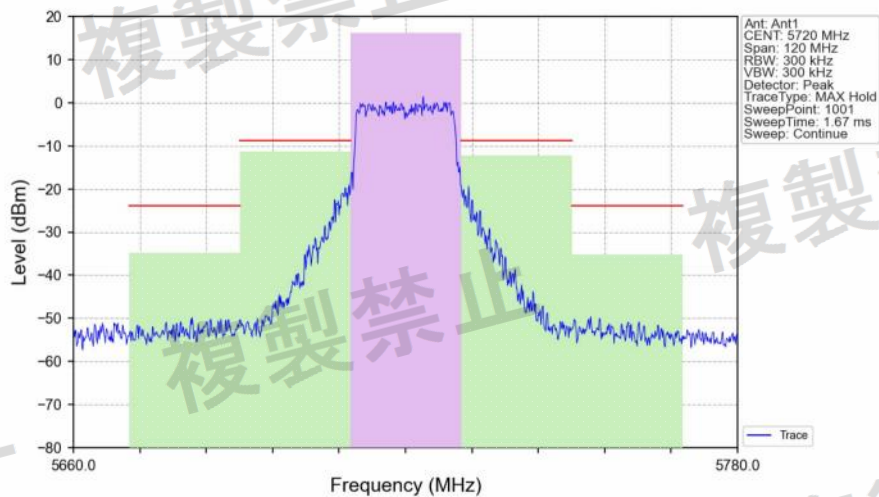


Channel	OffSet (MHz)	Integ BW (MHz)	Power (dBm)	dBc	Limit (dBc)	Margin (dB)	Status
Alternate	-40	20.00	-34.90	-51.09	-40	11.09	Pass
Adjacent	-20	20.00	-11.29	-27.48	-25	2.48	Pass
Carrier	/	20.00	16.19	/	/	/	/
Adjacent	20	20.00	-12.24	-28.43	-25	3.43	Pass
Alternate	40	20.00	-35.17	-51.36	-40	11.36	Pass

802.11n(HT40) LCH 5510MHz_Ant1_NTNV

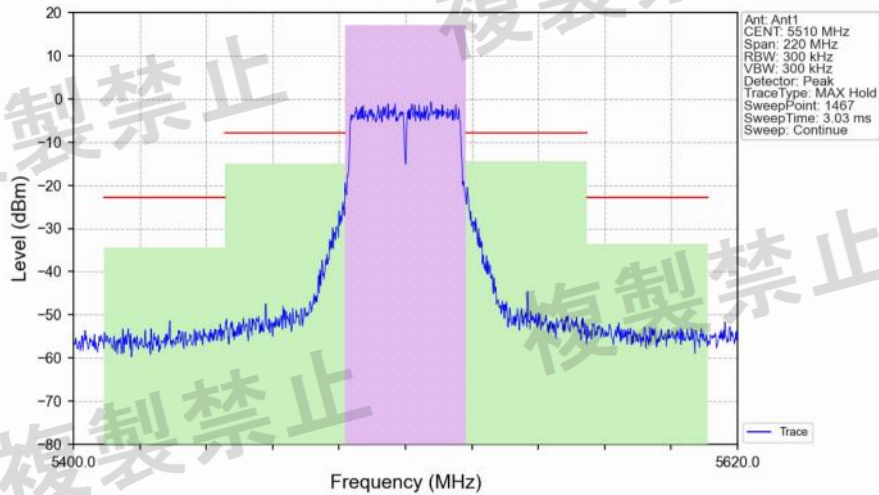


Channel	OffSet (MHz)	Integ BW (MHz)	Power (dBm)	dBc	Limit (dBc)	Margin (dB)	Status
Alternate	-80	40.00	-34.55	-51.69	-40	11.69	Pass
Adjacent	-40	40.00	-14.97	-32.11	-25	7.11	Pass
Carrier	/	40.00	17.14	/	/	/	/
Adjacent	40	40.00	-14.47	-31.61	-25	6.61	Pass
Alternate	80	40.00	-33.61	-50.75	-40	10.75	Pass

802.11n(HT40) MCH 5590MHz_Ant1_NTNV

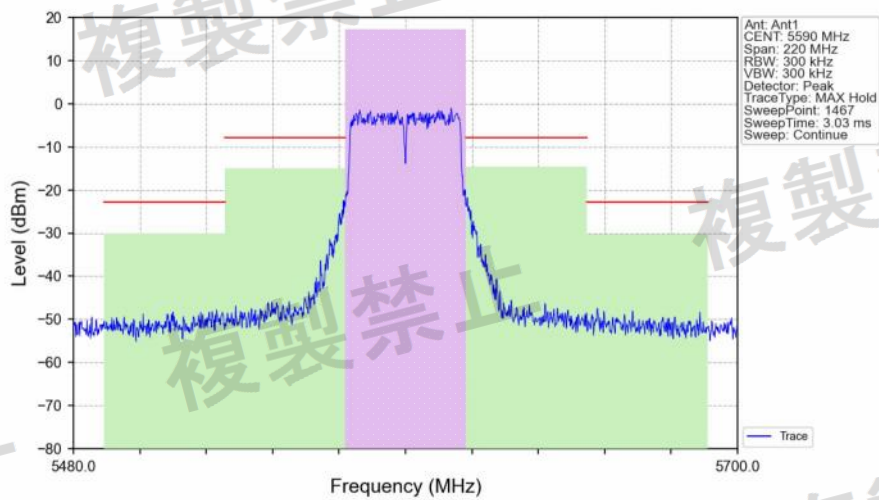


Channel	OffSet (MHz)	Integ BW (MHz)	Power (dBm)	dBc	Limit (dBc)	Margin (dB)	Status
Alternate	-80	40.00	-30.13	-47.32	-40	7.32	Pass
Adjacent	-40	40.00	-15.06	-32.25	-25	7.25	Pass
Carrier	/	40.00	17.19	/	/	/	/
Adjacent	40	40.00	-14.69	-31.88	-25	6.88	Pass
Alternate	80	40.00	-30.36	-47.55	-40	7.55	Pass

802.11n(HT40) HCH 5670MHz_Ant1_NTNV

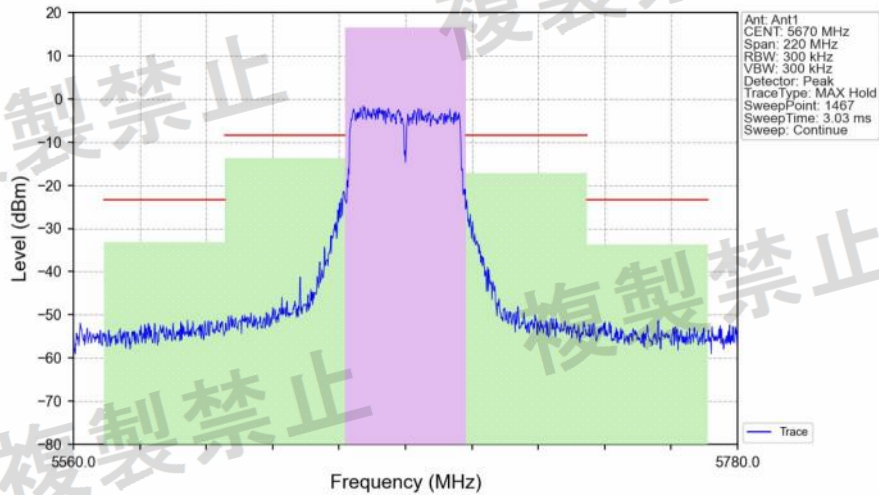


Channel	OffSet (MHz)	Integ BW (MHz)	Power (dBm)	dBc	Limit (dBc)	Margin (dB)	Status
Alternate	-80	40.00	-33.13	-49.75	-40	9.75	Pass
Adjacent	-40	40.00	-13.76	-30.38	-25	5.38	Pass
Carrier	/	40.00	16.62	/	/	/	/
Adjacent	40	40.00	-17.22	-33.84	-25	8.84	Pass
Alternate	80	40.00	-33.68	-50.30	-40	10.30	Pass

802.11n(HT40) HHCH 5710MHz_Ant1_NTNV

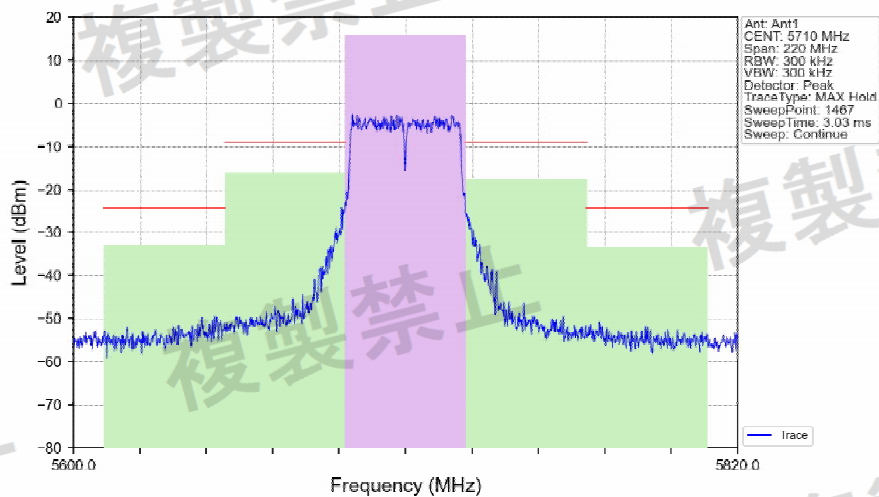


Channel	OffSet (MHz)	Integ BW (MHz)	Power (dBm)	dBc	Limit (dBc)	Margin (dB)	Status
Alternate	-80	40.00	-32.87	-48.65	-40	8.65	Pass
Adjacent	-40	40.00	-16.07	-31.85	-25	6.85	Pass
Carrier	/	40.00	15.78	/	/	/	/
Adjacent	40	40.00	-17.44	-33.22	-25	8.22	Pass
Alternate	80	40.00	-33.50	-49.28	-40	9.28	Pass

802.11ac(VHT20)_LCH_5500MHz_Ant1_NTNV

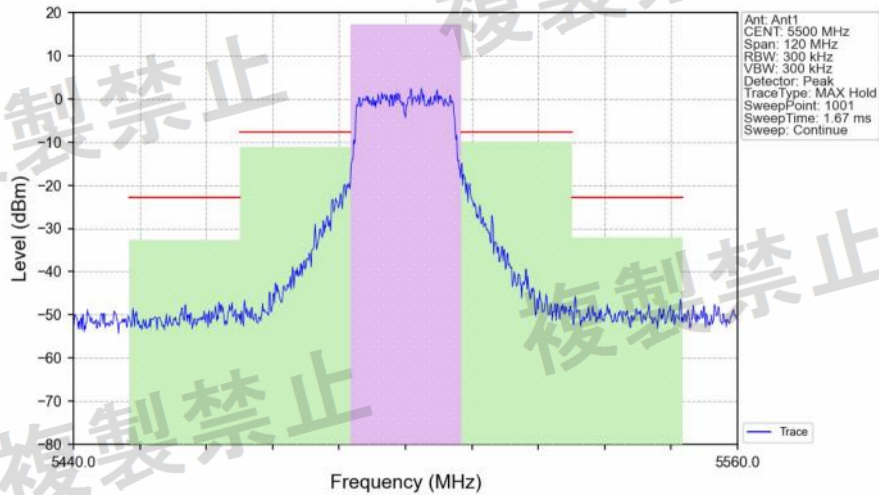


Channel	OffSet (MHz)	Integ BW (MHz)	Power (dBm)	dBc	Limit (dBc)	Margin (dB)	Status
Alternate	-40	20.00	-32.67	-49.93	-40	9.93	Pass
Adjacent	-20	20.00	-11.07	-28.33	-25	3.33	Pass
Carrier	/	20.00	17.26	/	/	/	/
Adjacent	20	20.00	-9.87	-27.13	-25	2.13	Pass
Alternate	40	20.00	-32.03	-49.29	-40	9.29	Pass


802.11ac(VHT20)_MCH_5600MHz_Ant1_NTNV

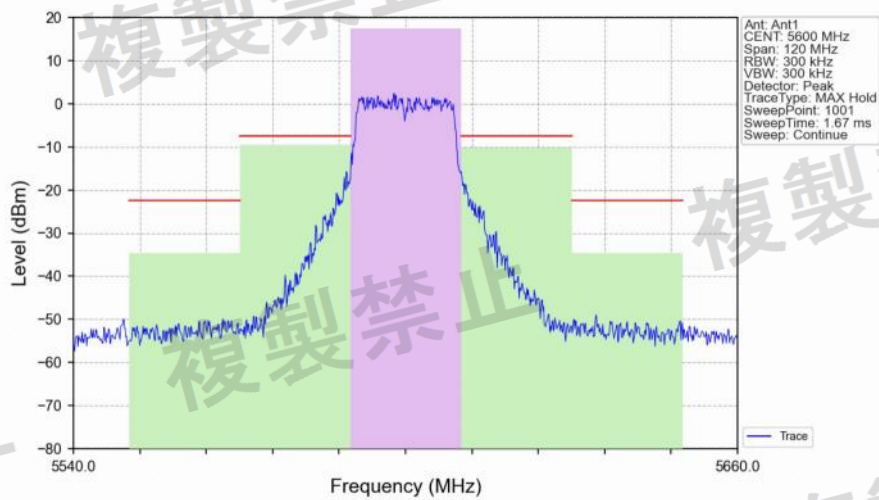

Channel	OffSet (MHz)	Integ BW (MHz)	Power (dBm)	dBc	Limit (dBc)	Margin (dB)	Status
Alternate	-40	20.00	-34.67	-52.19	-40	12.19	Pass
Adjacent	-20	20.00	-9.48	-27.00	-25	2.00	Pass
Carrier	/	20.00	17.52	/	/	/	/
Adjacent	20	20.00	-10.31	-27.83	-25	2.83	Pass
Alternate	40	20.00	-34.61	-52.13	-40	12.13	Pass

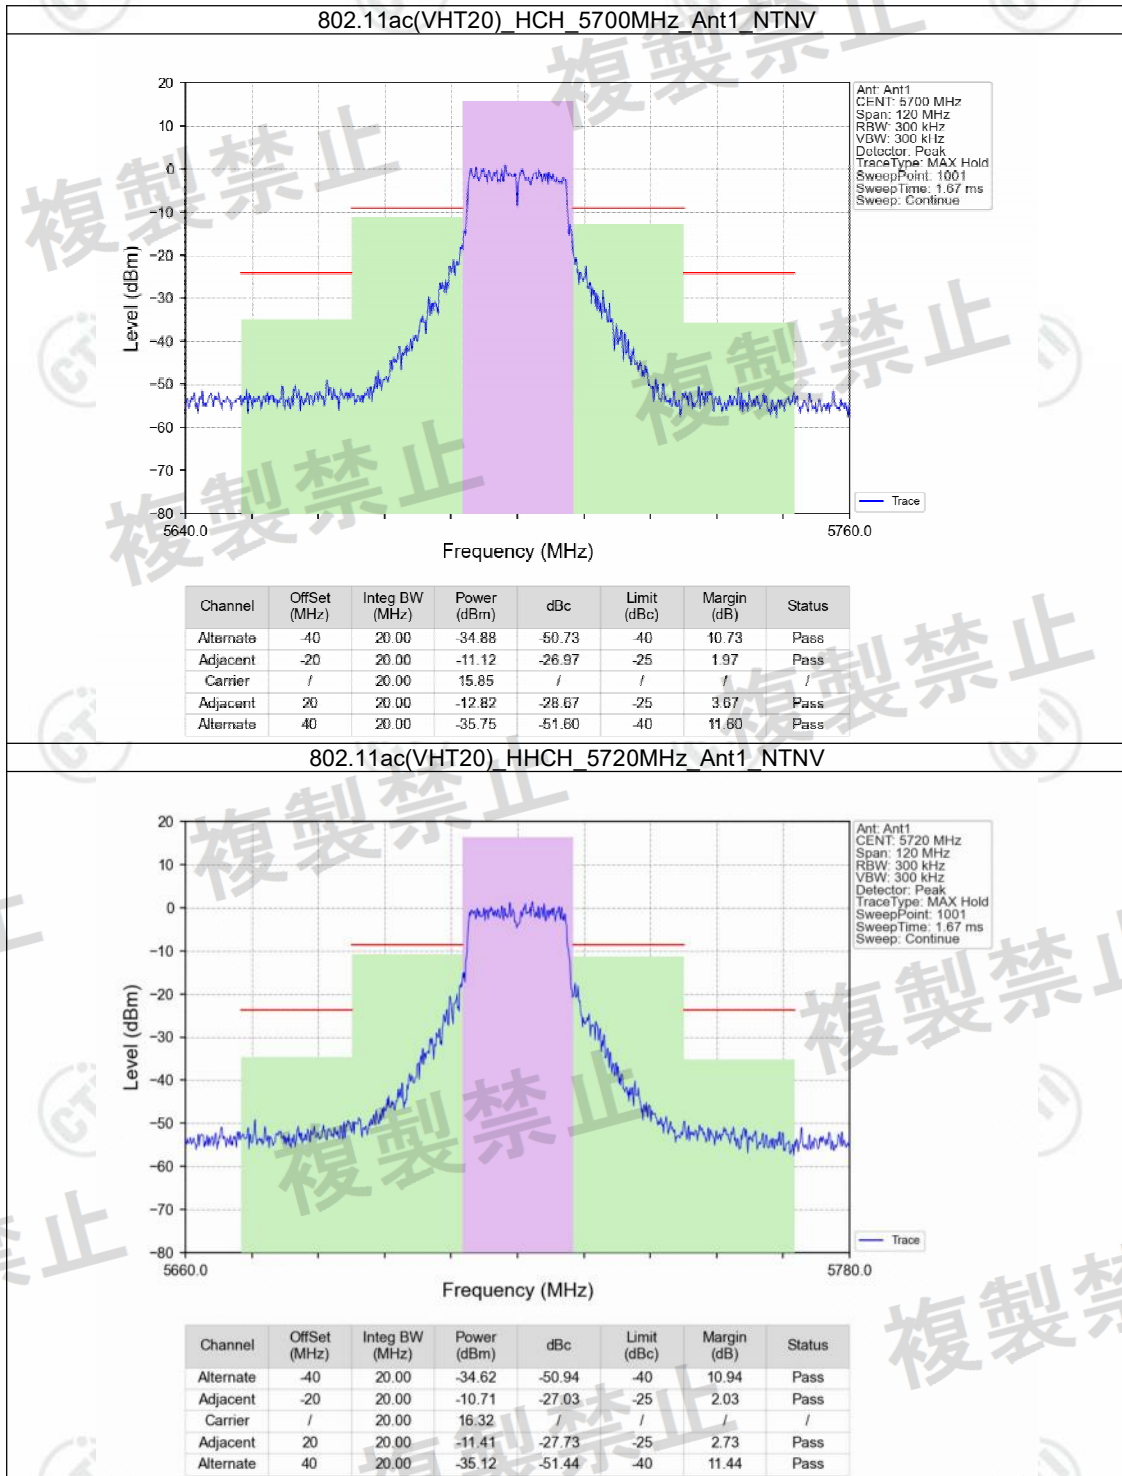


802.11ac(VHT40)_LCH_5510MHz_Ant1_NTNV

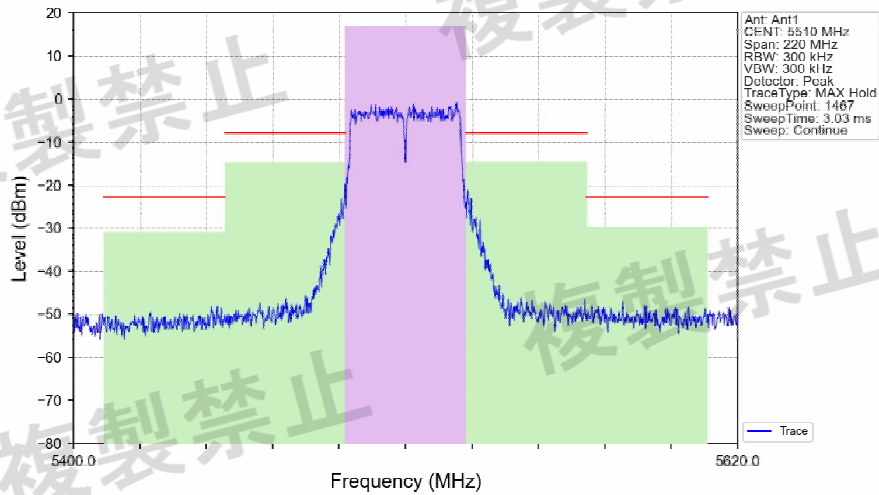



Channel	OffSet (MHz)	Integ BW (MHz)	Power (dBm)	dBc	Limit (dBc)	Margin (dB)	Status
Alternate	80	40.00	-30.88	-48.00	-40	8.00	Pass
Adjacent	-40	40.00	-14.69	-31.81	-25	6.81	Pass
Carrier	/	40.00	17.12	/	/	/	/
Adjacent	40	40.00	-14.51	-31.63	-25	6.63	Pass
Alternate	80	40.00	-29.73	-46.85	-40	6.85	Pass


802.11ac(VHT40)_MCH_5590MHz_Ant1_NTNV

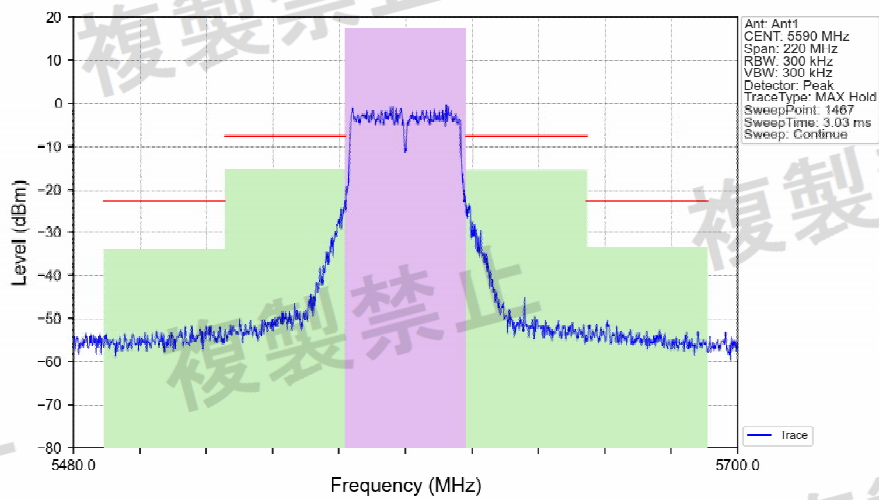


Channel	OffSet (MHz)	Integ BW (MHz)	Power (dBm)	dBc	Limit (dBc)	Margin (dB)	Status
Alternate	80	40.00	-33.68	-51.04	-40	11.04	Pass
Adjacent	-40	40.00	-15.11	-32.47	-25	7.47	Pass
Carrier	/	40.00	17.36	/	/	/	/
Adjacent	40	40.00	-15.37	-32.73	-25	7.73	Pass
Alternate	80	40.00	-33.58	-50.94	-40	10.94	Pass

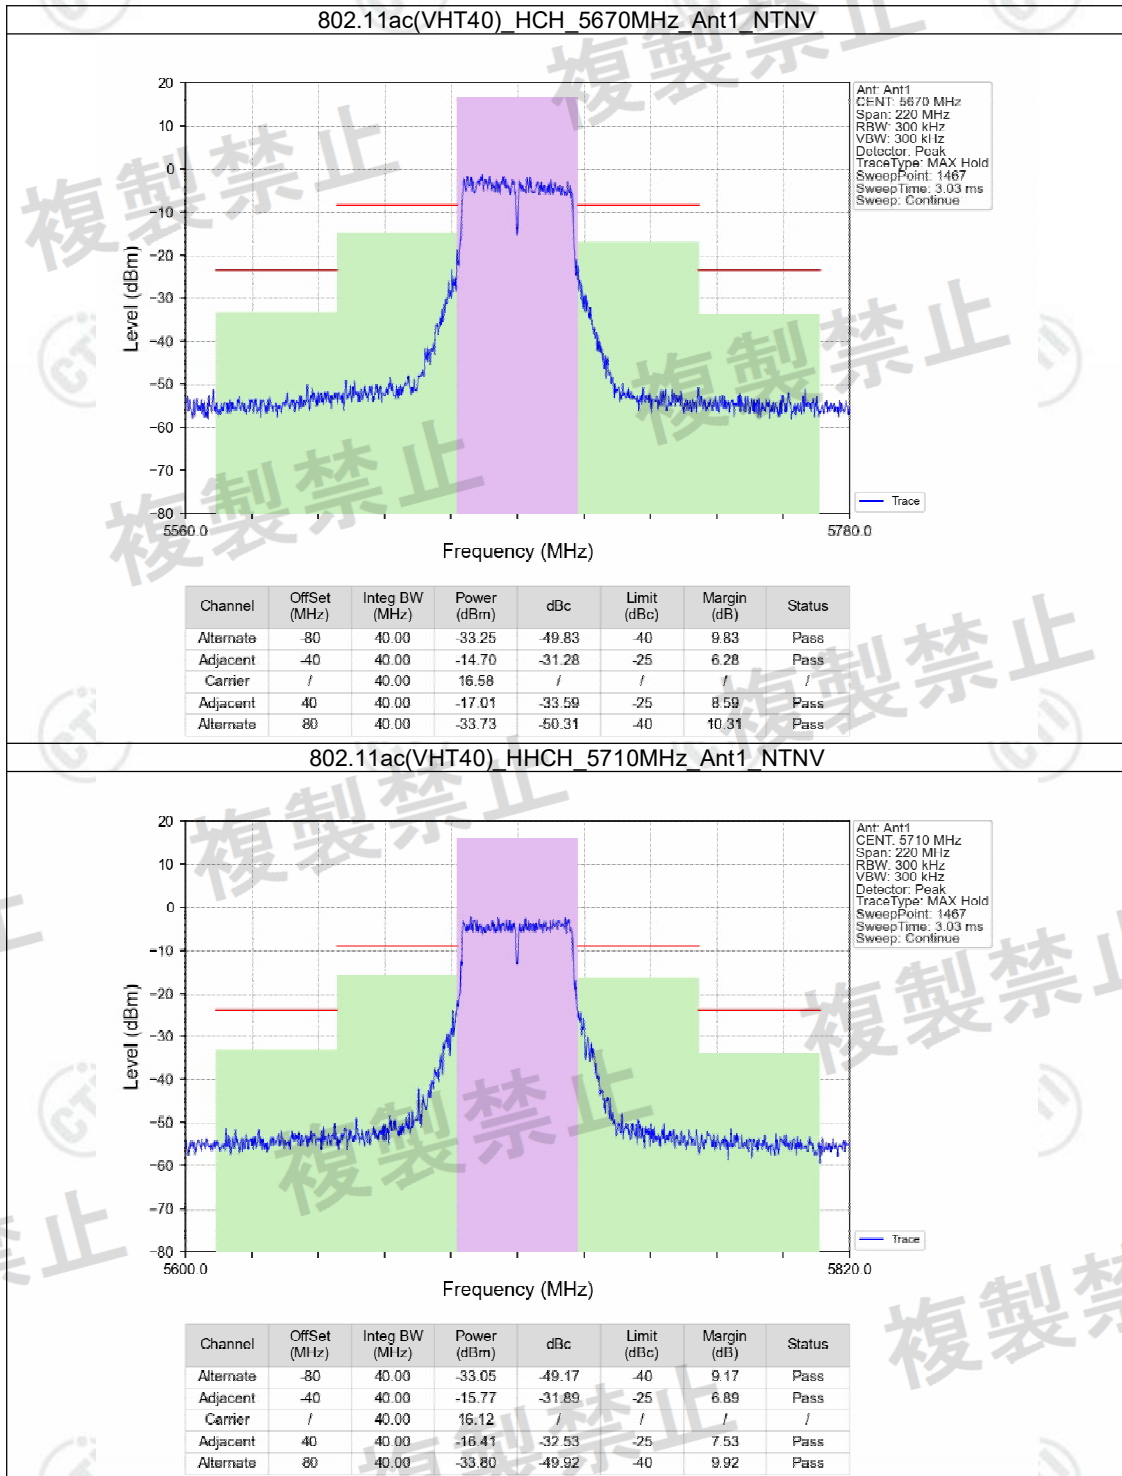

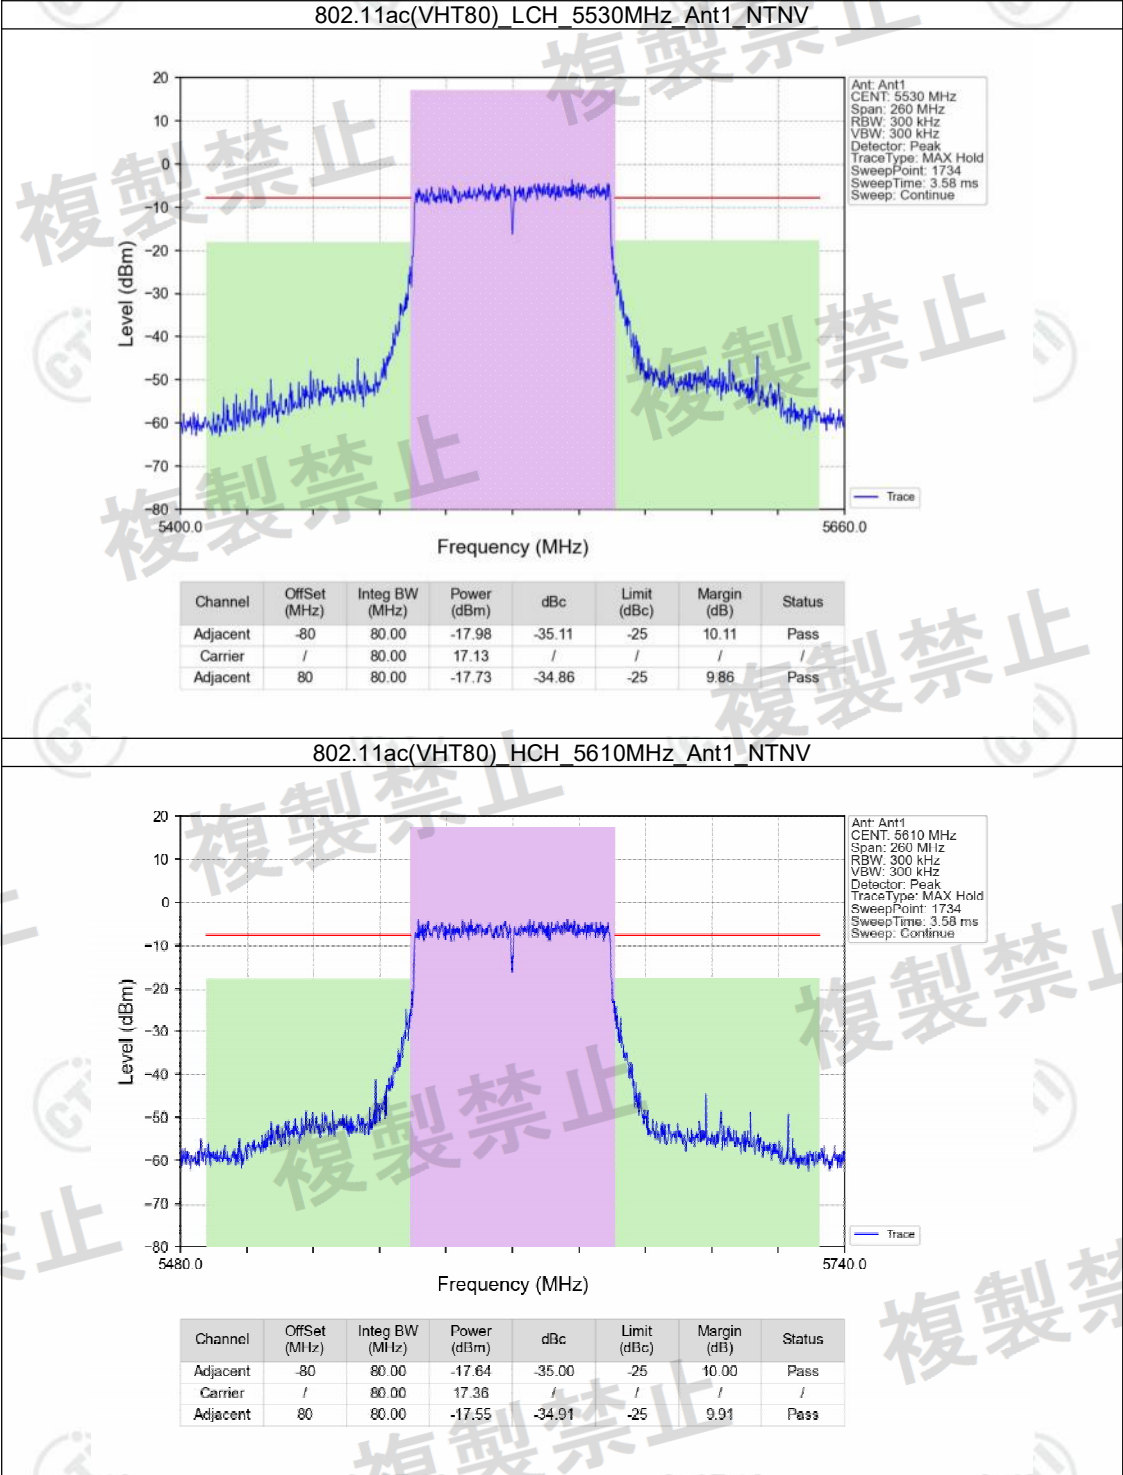

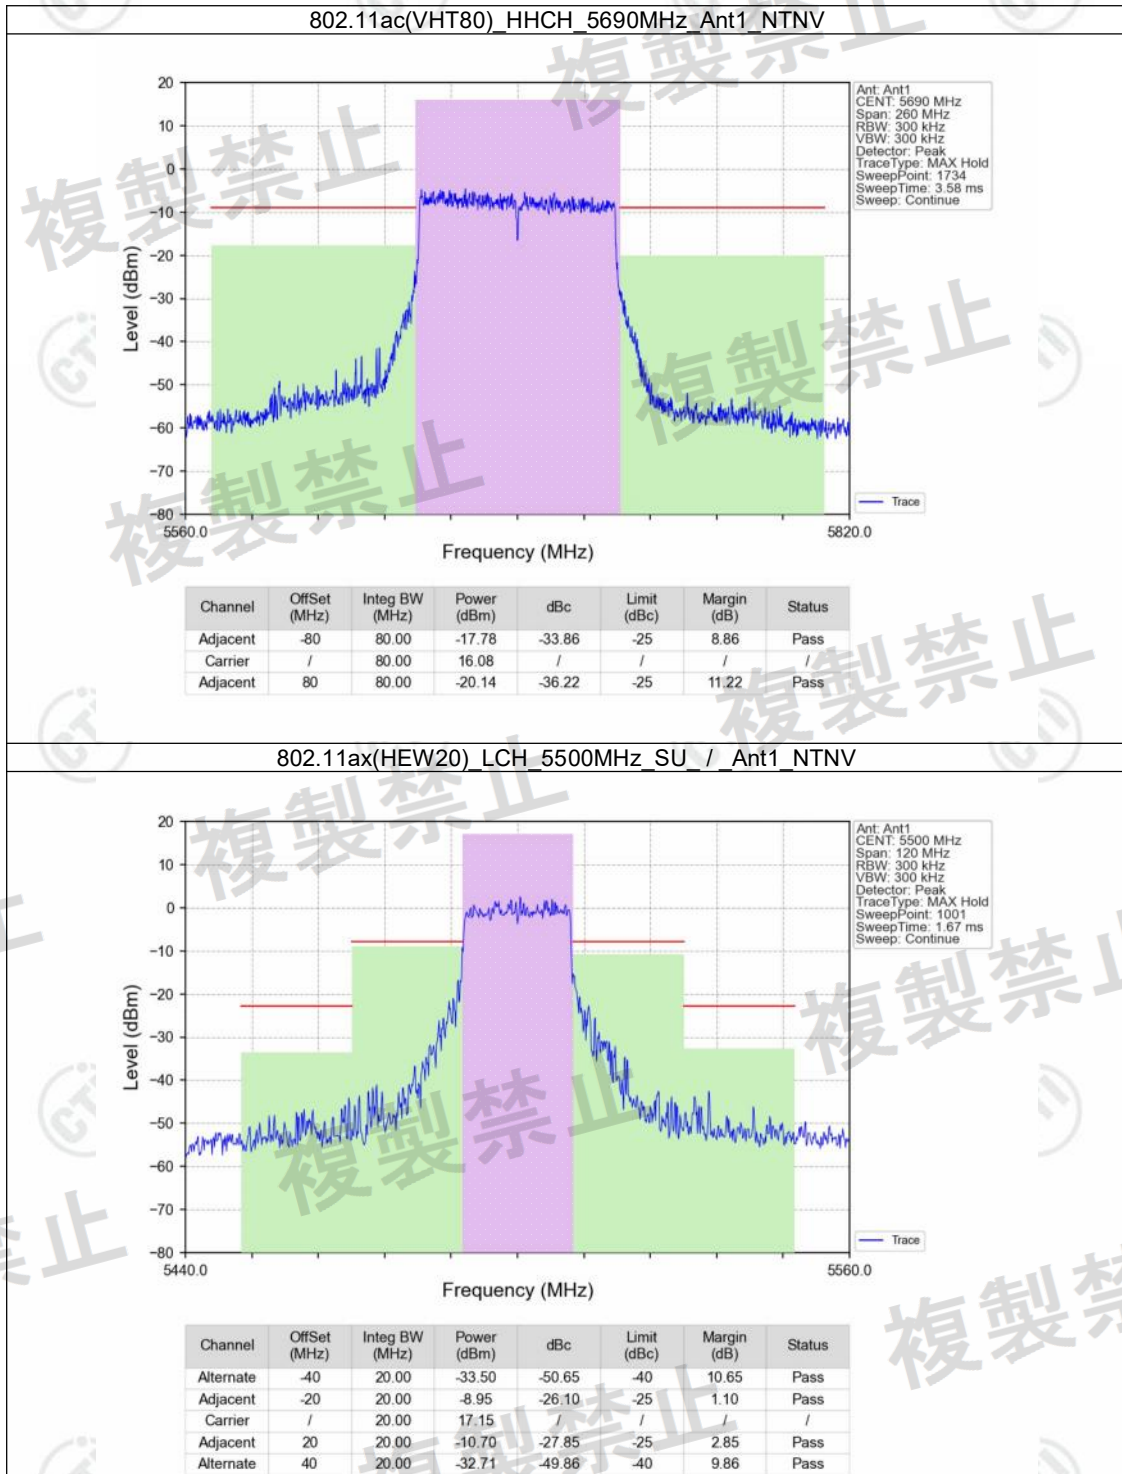


802.11ax(HEW20)_MCH_5600MHz_SU_/_Ant1_NTNV

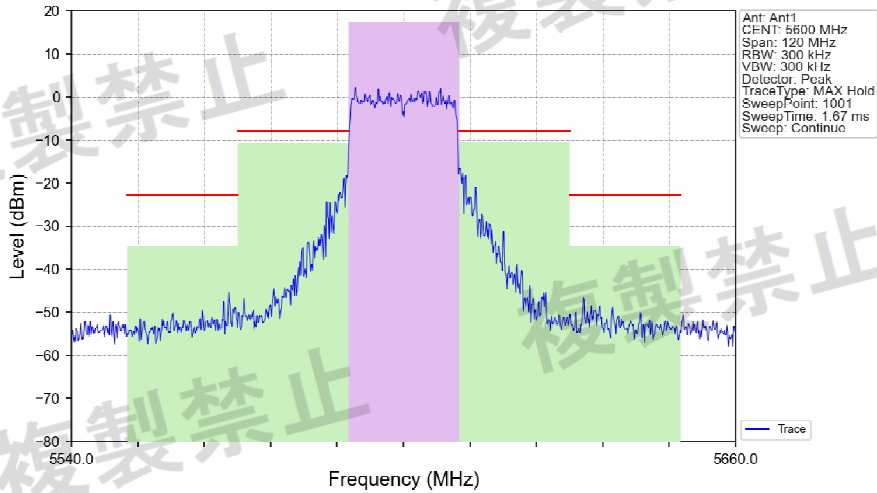


Channel	OffSet (MHz)	Integ BW (MHz)	Power (dBm)	dBc	Limit (dBc)	Margin (dB)	Status
Alternate	-40	20.00	-34.72	-51.93	-40	11.93	Pass
Adjacent	-20	20.00	-10.77	-27.98	-25	2.98	Pass
Carrier	/	20.00	17.21	/	/	/	/
Adjacent	20	20.00	-10.33	-27.54	-25	2.54	Pass
Alternate	40	20.00	-34.47	-51.68	-40	11.68	Pass

802.11ax(HEW20)_HCH_5700MHz_SU_/_Ant1_NTNV

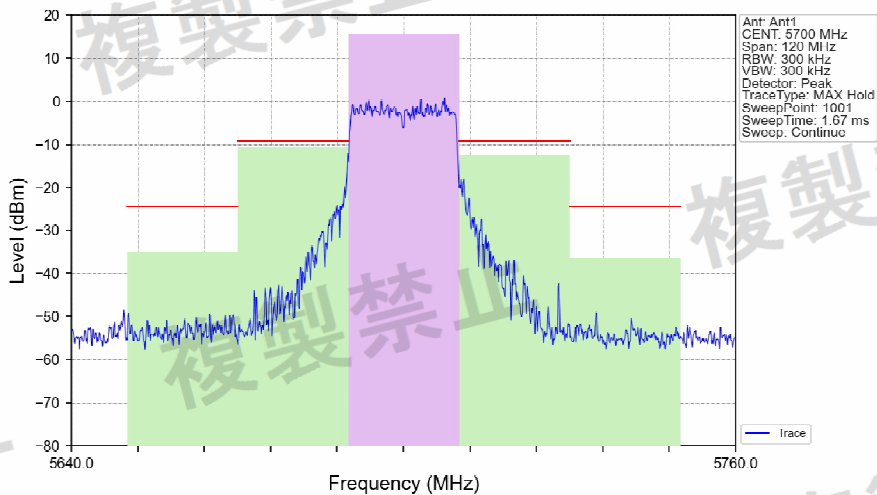


Channel	OffSet (MHz)	Integ BW (MHz)	Power (dBm)	dBc	Limit (dBc)	Margin (dB)	Status
Alternate	-40	20.00	-35.06	-50.70	-40	10.70	Pass
Adjacent	-20	20.00	-10.62	-26.26	-25	1.26	Pass
Carrier	/	20.00	15.64	/	/	/	/
Adjacent	20	20.00	-12.34	-27.98	-25	2.98	Pass
Alternate	40	20.00	-36.31	-51.95	-40	11.95	Pass

802.11ax(HEW20)_HHCH_5720MHz_SU / _Ant1_NTNV

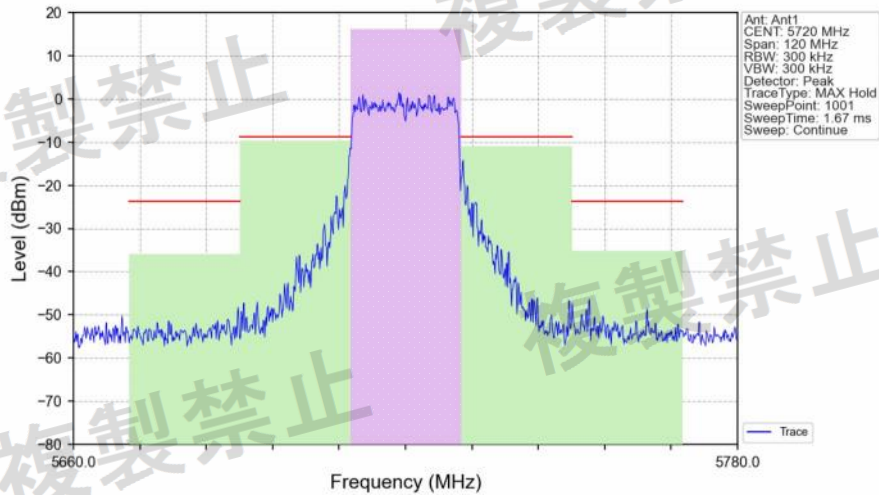



Channel	OffSet (MHz)	Integ BW (MHz)	Power (dBm)	dBc	Limit (dBc)	Margin (dB)	Status
Alternate	-40	20.00	-35.97	-52.18	-40	12.18	Pass
Adjacent	-20	20.00	-9.67	-25.88	-25	0.88	Pass
Carrier	/	20.00	16.21	/	/	/	/
Adjacent	20	20.00	-10.95	-27.16	-25	2.16	Pass
Alternate	40	20.00	-35.19	-51.40	-40	11.40	Pass


802.11ax(HEW40)_LCH_5510MHz_SU / _Ant1_NTNV

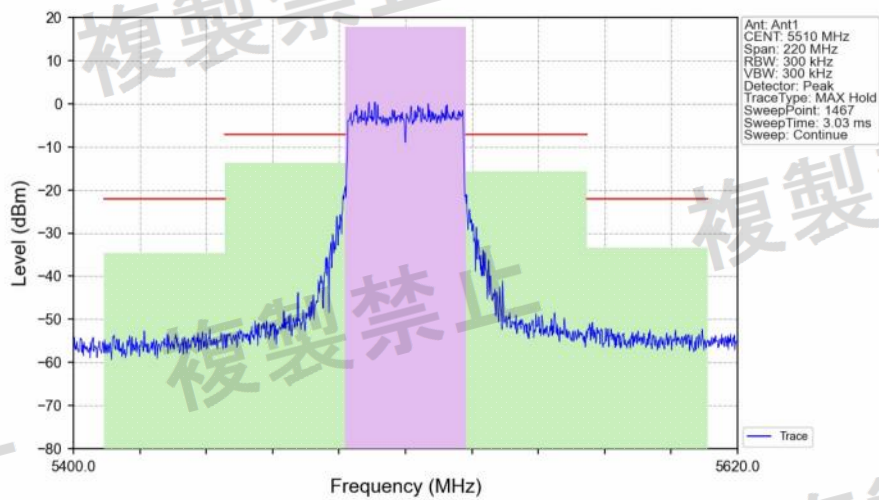

Channel	OffSet (MHz)	Integ BW (MHz)	Power (dBm)	dBc	Limit (dBc)	Margin (dB)	Status
Alternate	-80	40.00	-34.63	-52.52	-40	12.52	Pass
Adjacent	-40	40.00	-13.76	-31.65	-25	6.65	Pass
Carrier	/	40.00	17.89	/	/	/	/
Adjacent	40	40.00	-15.72	-33.61	-25	8.61	Pass
Alternate	80	40.00	-33.45	-51.34	-40	11.34	Pass

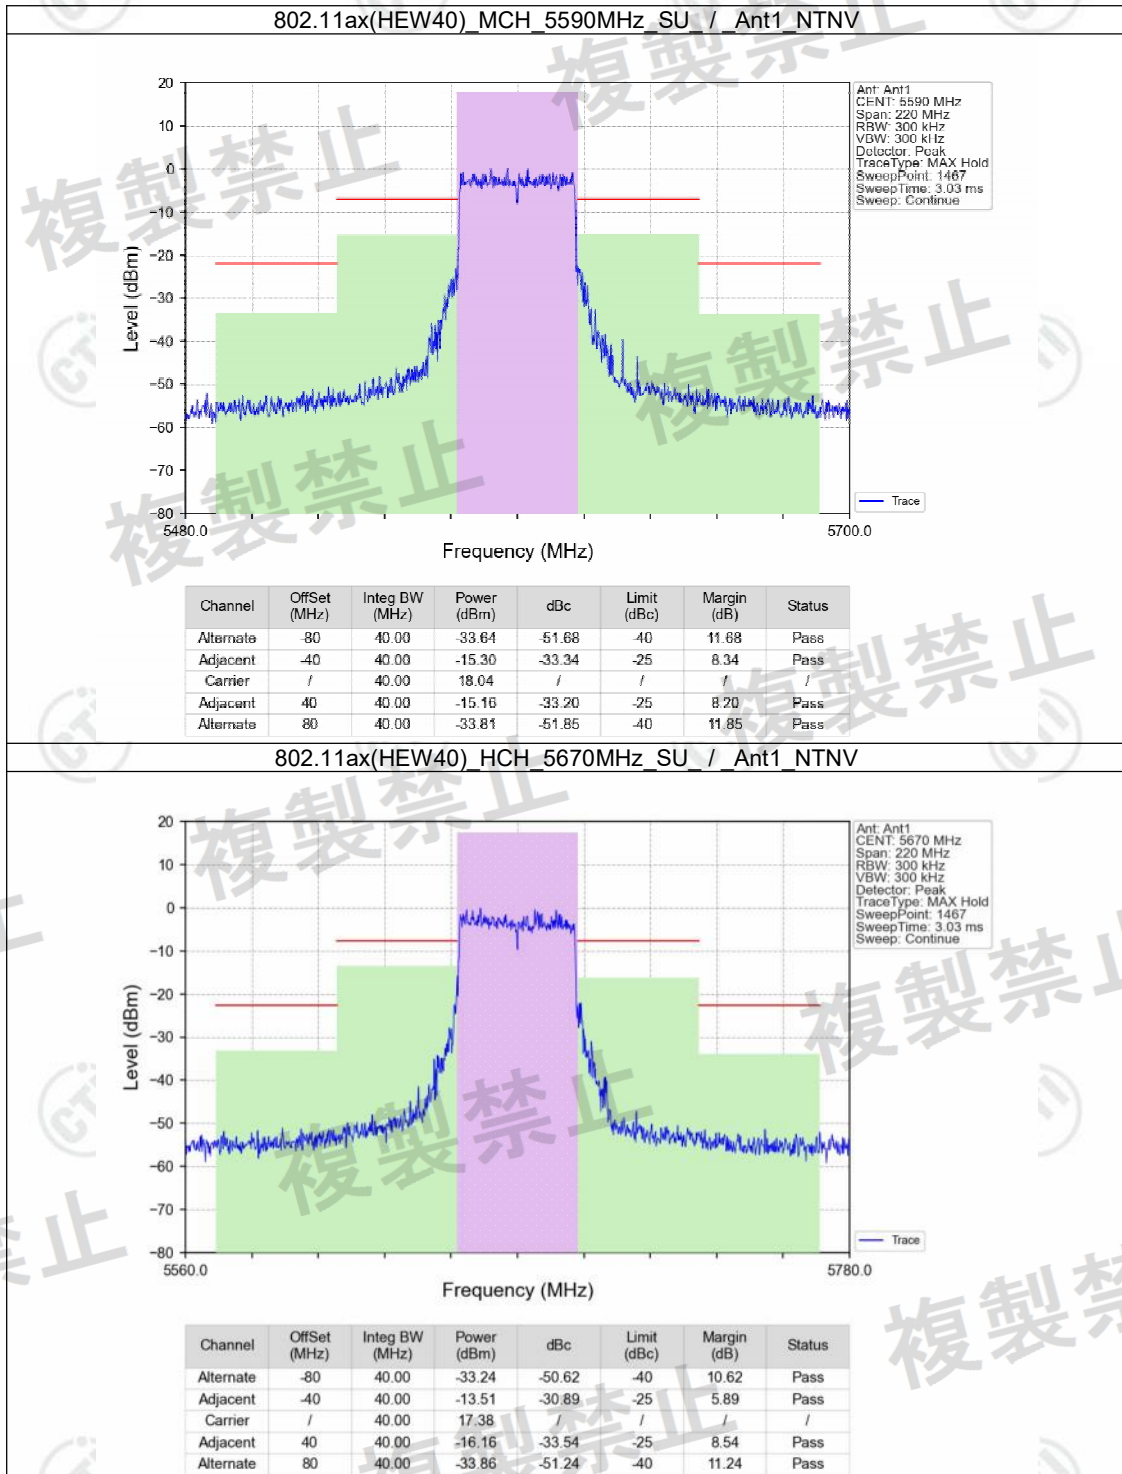

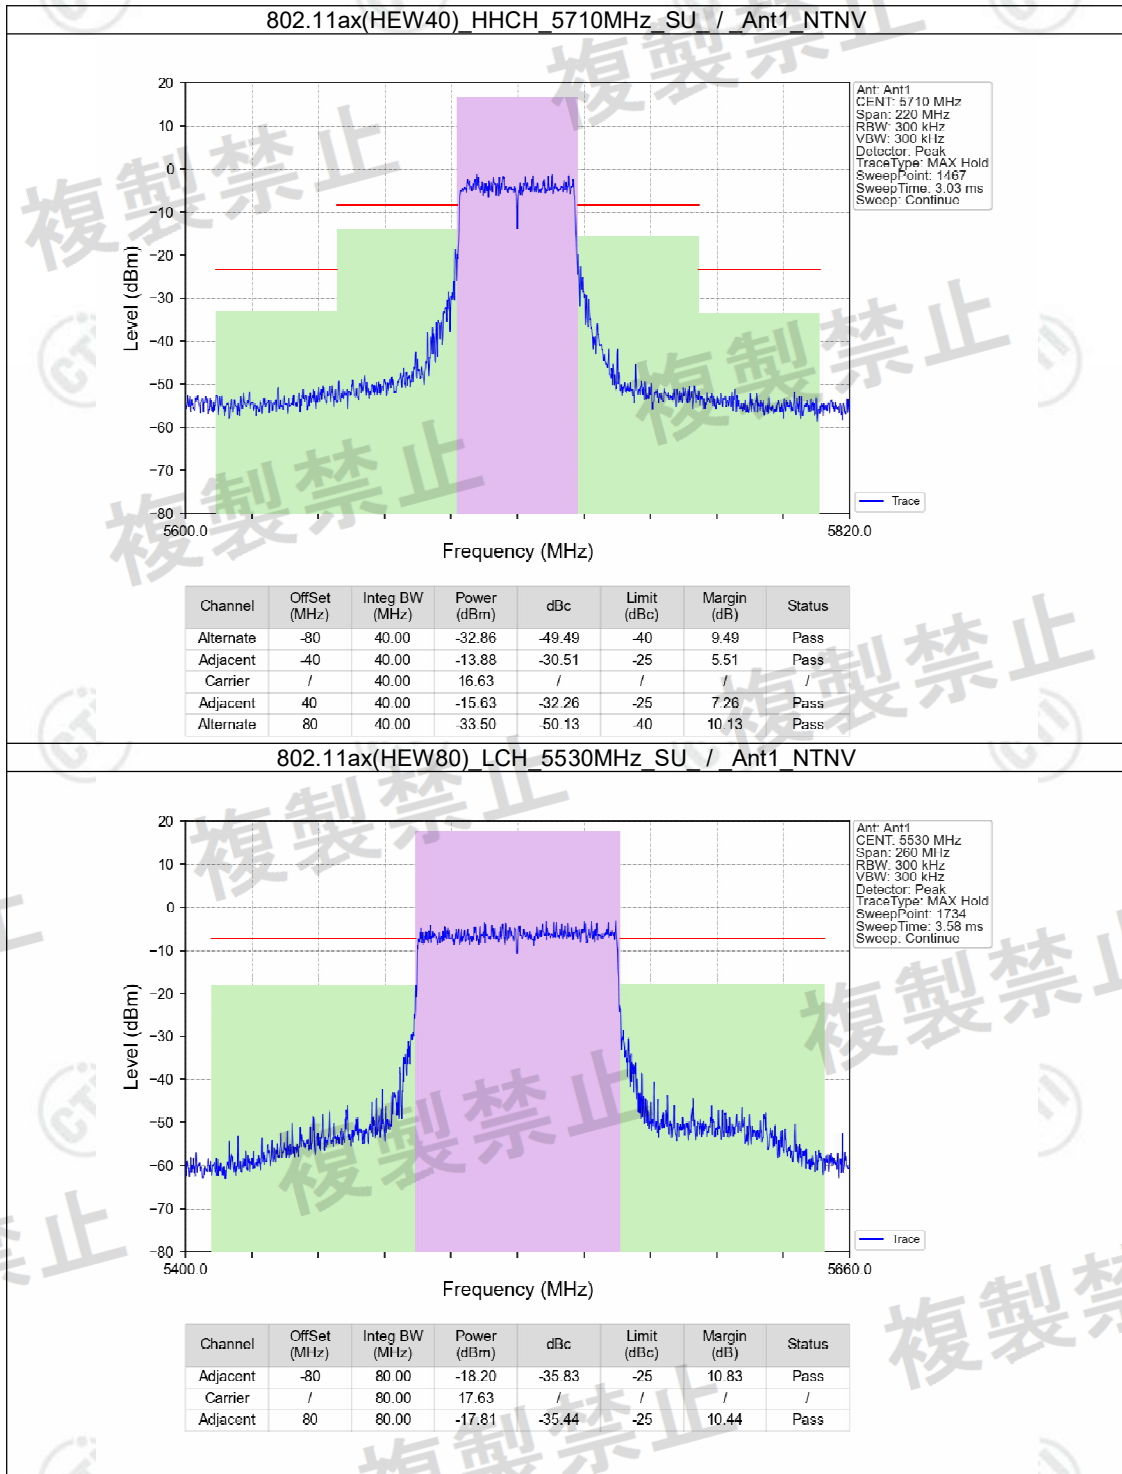

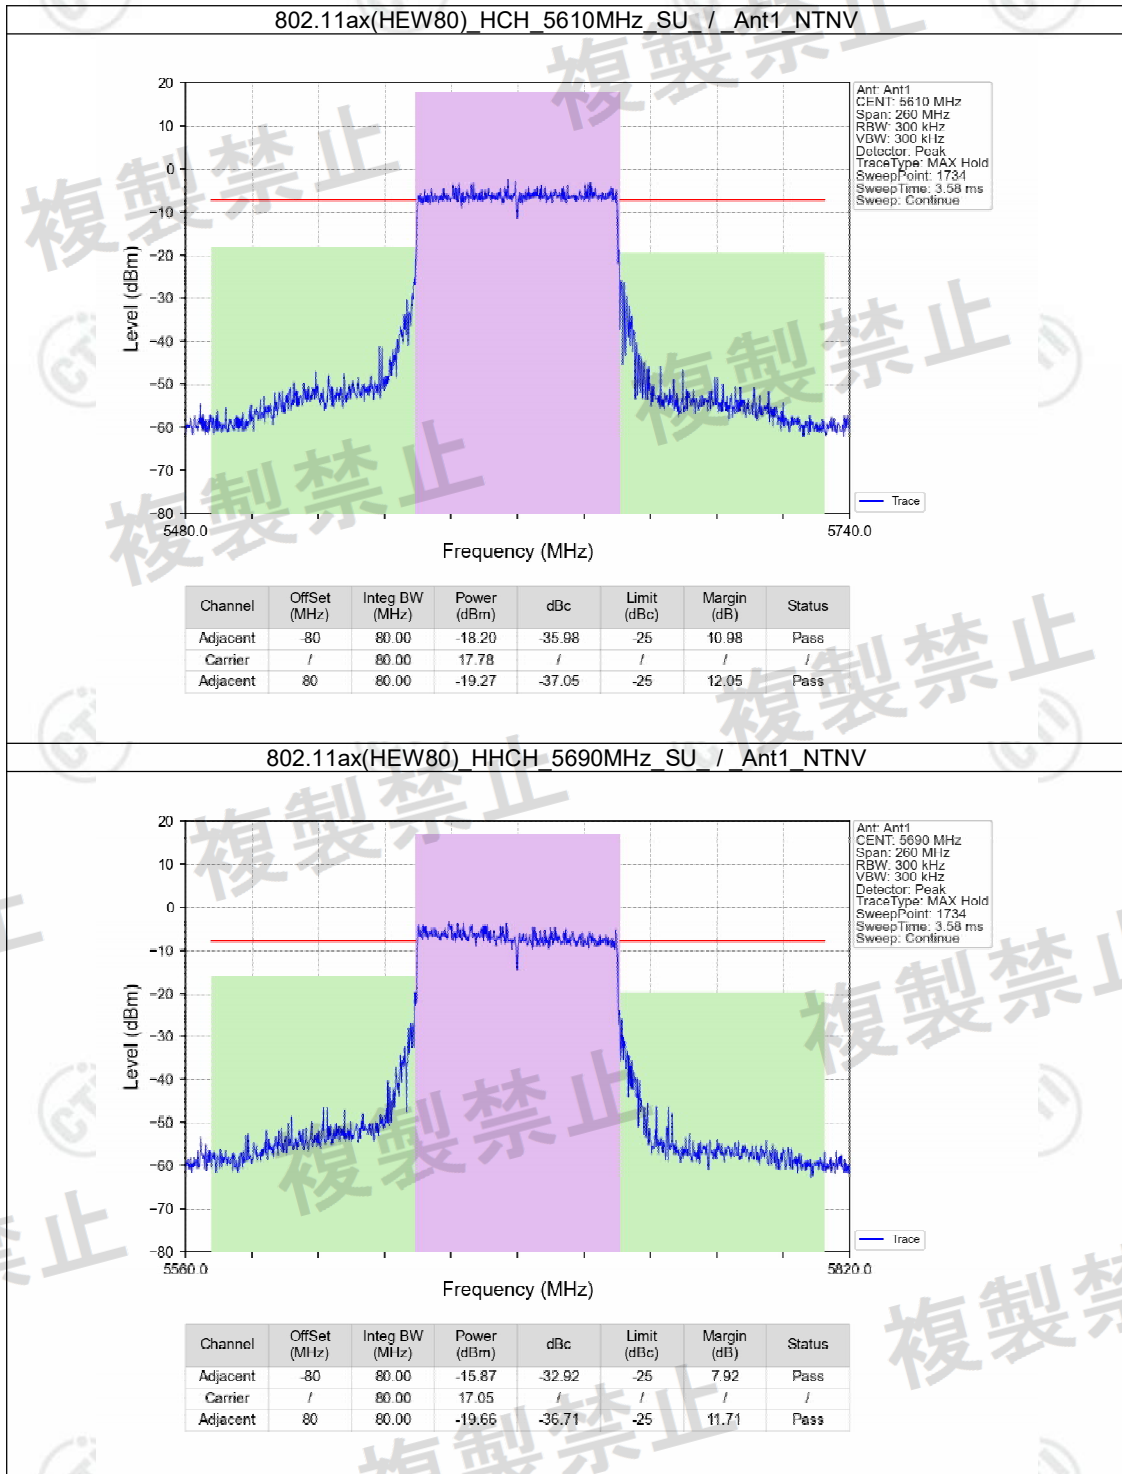

5. Out Of Bands Leakage Power

5.1 Test Result

5.1.1 OOB_NTNV_SISO

NTNV														
Mode	TX Type	Freq. (MHz)	RU	RU Pos	A N T	Freq. Range		Marker					Limit (uW /MHz)	Verdict
						Start (MHz)	Stop (MHz)	Freq. (MHz)	PK EIRP (dBm /MHz)	PK EIRP (uW /MHz)	AV EIRP (dBm /MHz)	AV EIRP (uW /MHz)		
802.11a	SISO	5500	/	/	1	5460	5470	5467.43	-38.19	0.152	/	/	12.5	Pass
						5745	5765	5756.82	-40.35	0.092	/	/	12.5	Pass
		5600	/	/	1	5460	5470	5462.39	-41.32	0.074	/	/	12.5	Pass
						5745	5765	5762.34	-39.68	0.108	/	/	12.5	Pass
		5700	/	/	1	5460	5470	5469.96	-41.41	0.072	/	/	12.5	Pass
						5745	5765	5747.14	-39.16	0.121	/	/	12.5	Pass
		5720	/	/	1	5460	5470	5464.51	-39.88	0.103	/	/	12.5	Pass
						5745	5765	5759.92	-37.70	0.170	/	/	12.5	Pass
802.11n (HT20)	SISO	5500	/	/	1	5460	5470	5462.94	-41.77	0.067	/	/	12.5	Pass
						5745	5765	5751.6	-44.28	0.037	/	/	12.5	Pass
		5600	/	/	1	5460	5470	5466.36	-40.85	0.082	/	/	12.5	Pass
						5745	5765	5755.08	-40.56	0.088	/	/	12.5	Pass
		5700	/	/	1	5460	5470	5465.5	-45.20	0.030	/	/	12.5	Pass

						5745	5765	5748.88	-42.56	0.055	/	/	12.5	Pass
		5720	/	/	1	5460	5470	5461.91	-44.93	0.032	/	/	12.5	Pass
						5745	5765	5745.28	-39.22	0.120	/	/	12.5	Pass
802.1 1n (HT4 0)	SISO	5510	/	/	1	5460	5470	5469.72	-41.13	0.077	/	/	50	Pass
		5590	/	/	1	5460	5470	5469.12	-40.31	0.093	/	/	50	Pass
		5670	/	/	1	5460	5470	5469.34	-45.68	0.027	/	/	50	Pass
		5710	/	/	1	5460	5470	5463.35	-45.38	0.029	/	/	50	Pass
802.1 1ac (VHT 20)	SISO	5500	/	/	1	5460	5470	5464.88	-39.69	0.107	/	/	12.5	Pass
						5745	5765	5758.82	-40.28	0.094	/	/	12.5	Pass
		5600	/	/	1	5460	5470	5466.01	-44.36	0.037	/	/	12.5	Pass
						5745	5765	5761.26	-44.40	0.036	/	/	12.5	Pass
		5700	/	/	1	5460	5470	5468.08	-44.72	0.034	/	/	12.5	Pass
						5745	5765	5754.86	-43.99	0.040	/	/	12.5	Pass
		5720	/	/	1	5460	5470	5466.2	-45.35	0.029	/	/	12.5	Pass
						5745	5765	5745.86	-37.80	0.166	/	/	12.5	Pass
802.1 1ac (VHT 40)	SISO	5510	/	/	1	5460	5470	5468.88	-38.63	0.137	/	/	50	Pass
		5590	/	/	1	5460	5470	5466.8	-44.27	0.037	/	/	50	Pass
		5670	/	/	1	5460	5470	5460.63	-45.34	0.029	/	/	50	Pass
		5710	/	/	1	5460	5470	5462.85	-45.03	0.031	/	/	50	Pass
802.1 1ac	SISO	5530	/	/	1	5460	5469.5	5469.367	-34.36	0.366	/	/	50	Pass

(VHT 80)						5469.5	5470	5469.54 ₄	-34.24	0.377	/	/	51.2	Pass
		5610	/	/	1	5460	5469.5	5467.6	-45.15	0.031	/	/	50	Pass
						5469.5	5470	5469.75 ₁	-43.35	0.046	/	/	51.2	Pass
		5690	/	/	1	5460	5469.5	5461.59 ₆	-49.62	0.011	/	/	50	Pass
						5469.5	5470	5469.90 ₄	-47.09	0.020	/	/	51.2	Pass
802.1 1ax (HE W20)	SISO	5500	SU	/	1	5460	5470	5462.11	-30.42	0.908	/	/	12.5	Pass
						5745	5765	5749.24	-43.85	0.041	/	/	12.5	Pass
		5600	SU	/	1	5460	5470	5463.58	-45.01	0.032	/	/	12.5	Pass
						5745	5765	5747.22	-45.22	0.030	/	/	12.5	Pass
		5700	SU	/	1	5460	5470	5460.8	-45.15	0.031	/	/	12.5	Pass
						5745	5765	5745.02	-40.79	0.083	/	/	12.5	Pass
		5720	SU	/	1	5460	5470	5464.77	-45.45	0.029	/	/	12.5	Pass
						5745	5765	5745.18	-32.16	0.608	/	/	12.5	Pass
802.1 1ax (HE W40)	SISO	5510	SU	/	1	5460	5470	5468.93	-35.48	0.283	/	/	50	Pass
		5590	SU	/	1	5460	5470	5464.13	-44.75	0.033	/	/	50	Pass
		5670	SU	/	1	5460	5470	5469.36	-45.57	0.028	/	/	50	Pass
		5710	SU	/	1	5460	5470	5462.83	-44.75	0.033	/	/	50	Pass
802.1 1ax (HE W80)	SISO	5530	SU	/	1	5460	5469.5	5469.47 ₂	-34.80	0.331	/	/	50	Pass
						5469.5	5470	5469.95 ₅	-34.24	0.377	/	/	51.2	Pass
		5610	SU	/	1	5460	5469.5	5467.91 ₄	-46.73	0.021	/	/	50	Pass

						5469.5	5470	5469.58 3	-43.71	0.043	/	/	51.2	Pass
		5690	SU	/	1	5460	5469.5	5463.77 2	-48.94	0.013	/	/	50	Pass
						5469.5	5470	5469.63 8	-47.37	0.018	/	/	51.2	Pass